



*Michael R. Wigley, AIA, LEED®AP  
W. Zachary Crouch, P.E.  
Michael E. Wheedleton, AIA  
Jason P. Loar, P.E.  
Ring W. Lardner, P.E.*


**DELAWARE ARMY NATIONAL GUARD  
BUILDING ENVELOPE AND KITCHEN PLUMBING UPGRADES  
PIGMAN READINESS CENTER  
601 BRIDGEVILLE HIGHWAY  
SEAFORD, DELAWARE 19973  
DEARNG #20-2016 ❖ DFM #MC7601000092  
JUNE 5, 2017**

**ADDENDUM NO. 3**

The following items shall become a part of the contract documents. Contractor must acknowledge receipt of this addendum on the Bid Form. Failure to do so may subject the Bidder to disqualification.


- Item No. 1      The GC shall remove (4) interior metal cages from the interior side of the window openings and use block filler at the mounting holes.
- Item No. 2      The GC shall protect the aluminum wrapped interior sills during window demolition, the sills shall remain.
- Item No. 3      Refer to Sheet A2 and Item No. 2 & No. 3 from Addendum No. 2: The piping concealment system shall be removed from this project.
- Item No. 4      Clarification - Detail E7/A3: The interior rough opening dimensions are larger than the exterior dimensions noted for window types A, B and D on Sheet A3. The interior rough opening dimensions for types A and D is 3 foot 11 inches wide by 4 foot 5 inches high. The interior rough opening dimension for type B is 13 foot 2 inches by 4 foot 5 inches high. The GC will need to remove a minimum of 1 brick width from each jamb to remove the window and reinstall the brick after the new windows are installed, see attached Sketch SK-2.

**END OF ADDENDUM**

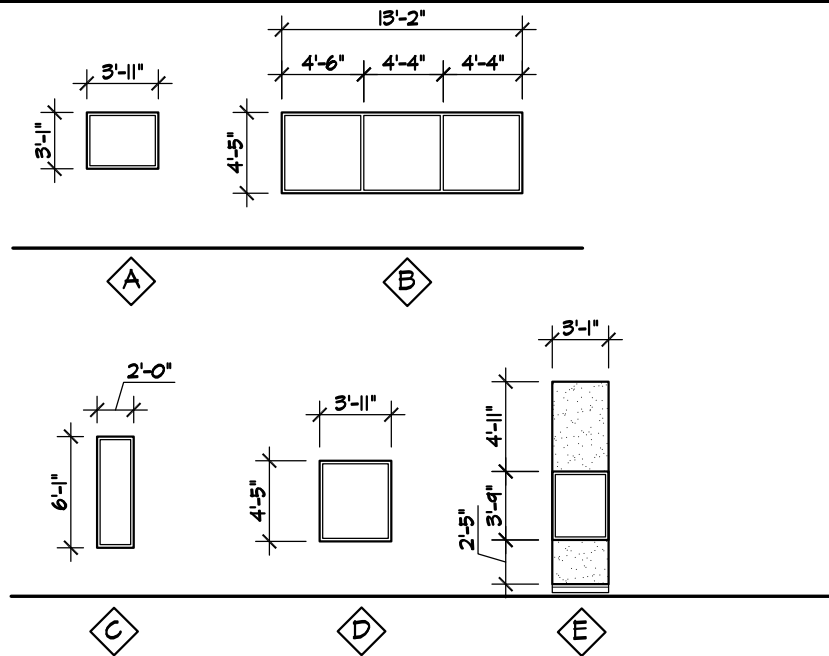

NOTE: GC SHALL FIELD VERIFY ALL ROUGH OPENING DIMENSIONS PRIOR TO ORDERING WINDOWS.

## WINDOW ELEVATIONS

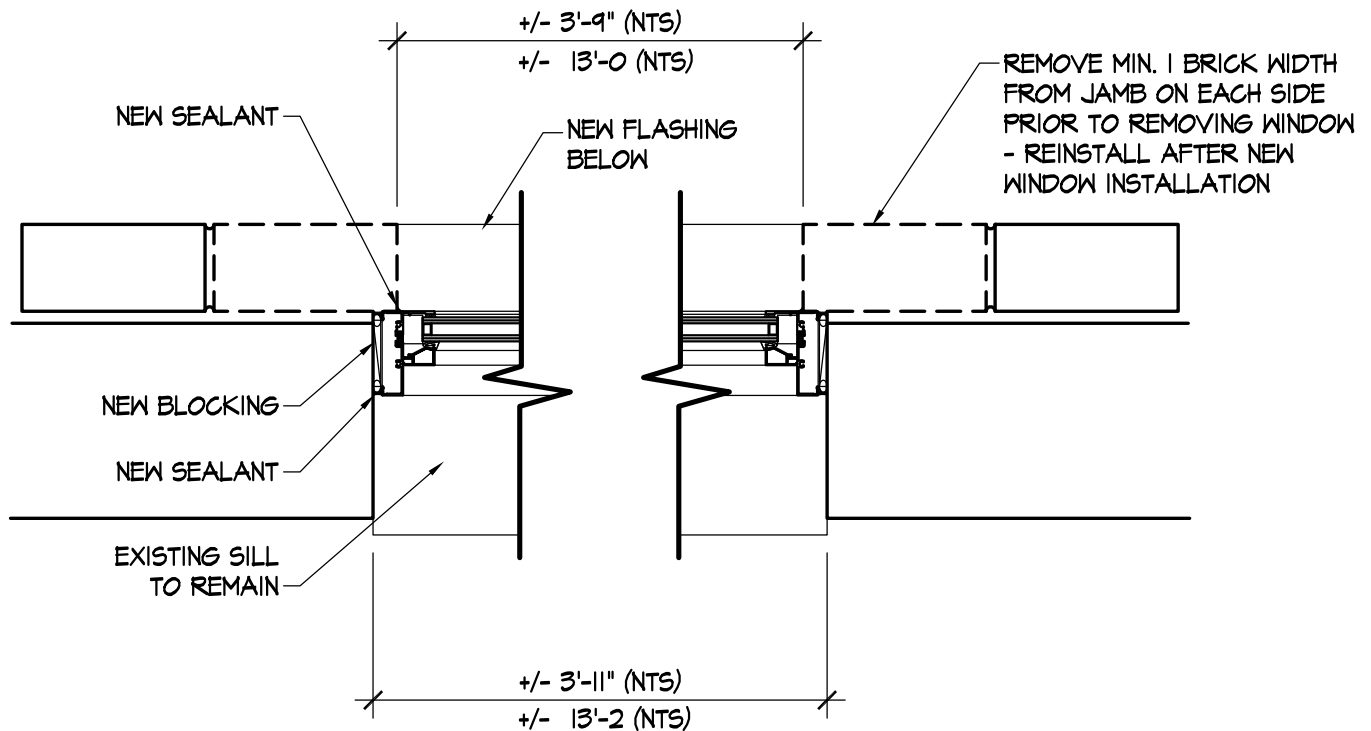

## JAMB DETAIL • WINDOW TYPES AB & D



**DAVIS, BOWEN & FRIEDEL, INC.**  
ARCHITECTS, ENGINEERS & SURVEYORS

SALISBURY, MARYLAND 410-543-9091  
MILFORD, DELAWARE 302-424-1441

**DEARNG PIGMAN ARMORY  
BUILDING ENVELOPE/KITCHEN  
PLUMBING UPGRADES**

**SEAFORD, DELAWARE**

COPYRIGHT © 2009

Draw No.:

**SK-2**

Date: 6-5-17

Scale: NTS

Proj.No.: 0999J011.Q01