

# HIGH SCHOOL TRACK REPLACEMENT

Cape Henlopen School District  
1250 Kings Highway, Lewes, Delaware 19958

240 Continental Drive, Suite 200  
Newark, DE 19713  
Tel: 302.738.7551  
Fax: 302.454.5989  
  
www.tetrattech.com



Sheet Index	
G-000	COVER SHEET
A-001	ABBREVIATIONS, LEGENDS & GENERAL NOTES
A-100	TRACK REPLACEMENT SITE PLAN

**PROJECT LOCATION:**  
1250 Kings Highway, Lewes, Delaware 19958

**CLIENT INFORMATION:**  
Cape Henlopen School District  
1270 Kings Highway  
Lewes, DE 19958  
Tel: 302.654.6686  
Fax: 302.645.7916

**Tt PROJECT No.:**  
200-81485-18001


**PROJECT NAME**  
HIGH SCHOOL TRACK REPLACEMENT  
Cape Henlopen School District

**PROJECT DESCRIPTION:**  
This project consists of the removal and replacement of the high school running track in it's entirety. This project also includes the removal and replacement of the long jump coverboards.



## ISSUED:

04/17/18 ISSUED FOR BID


## VICINITY MAP:

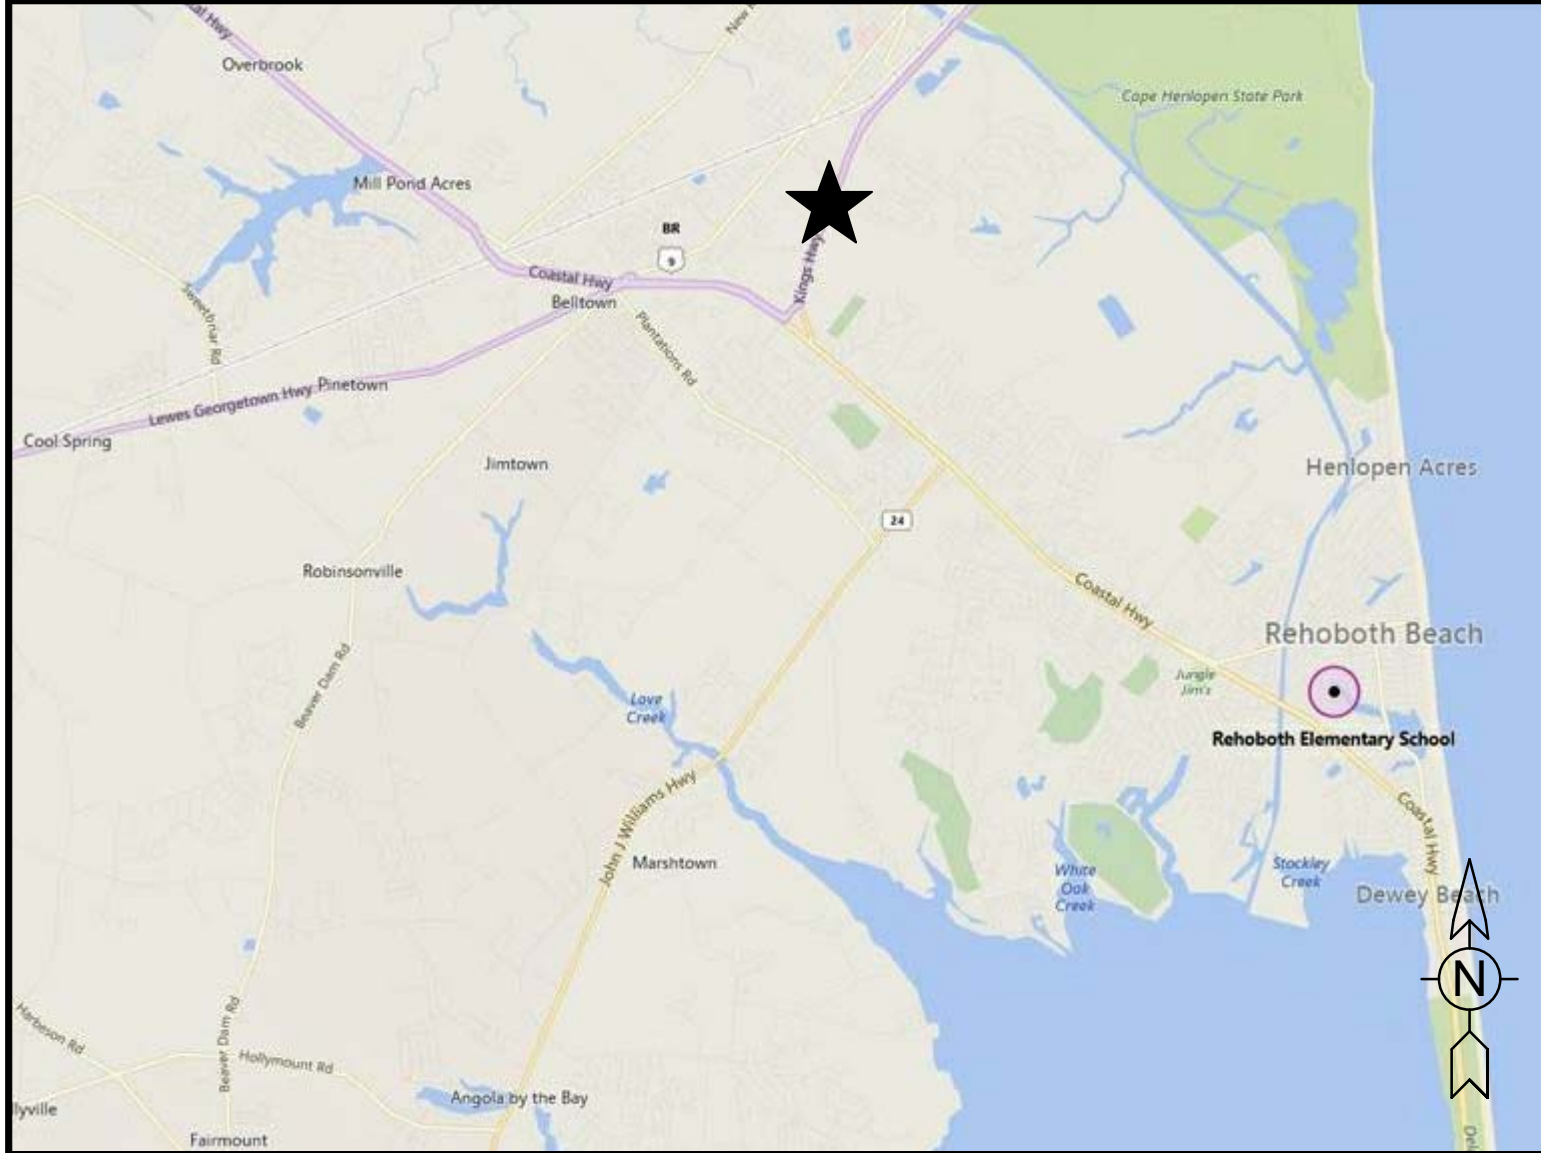

## LOCAL MAP:

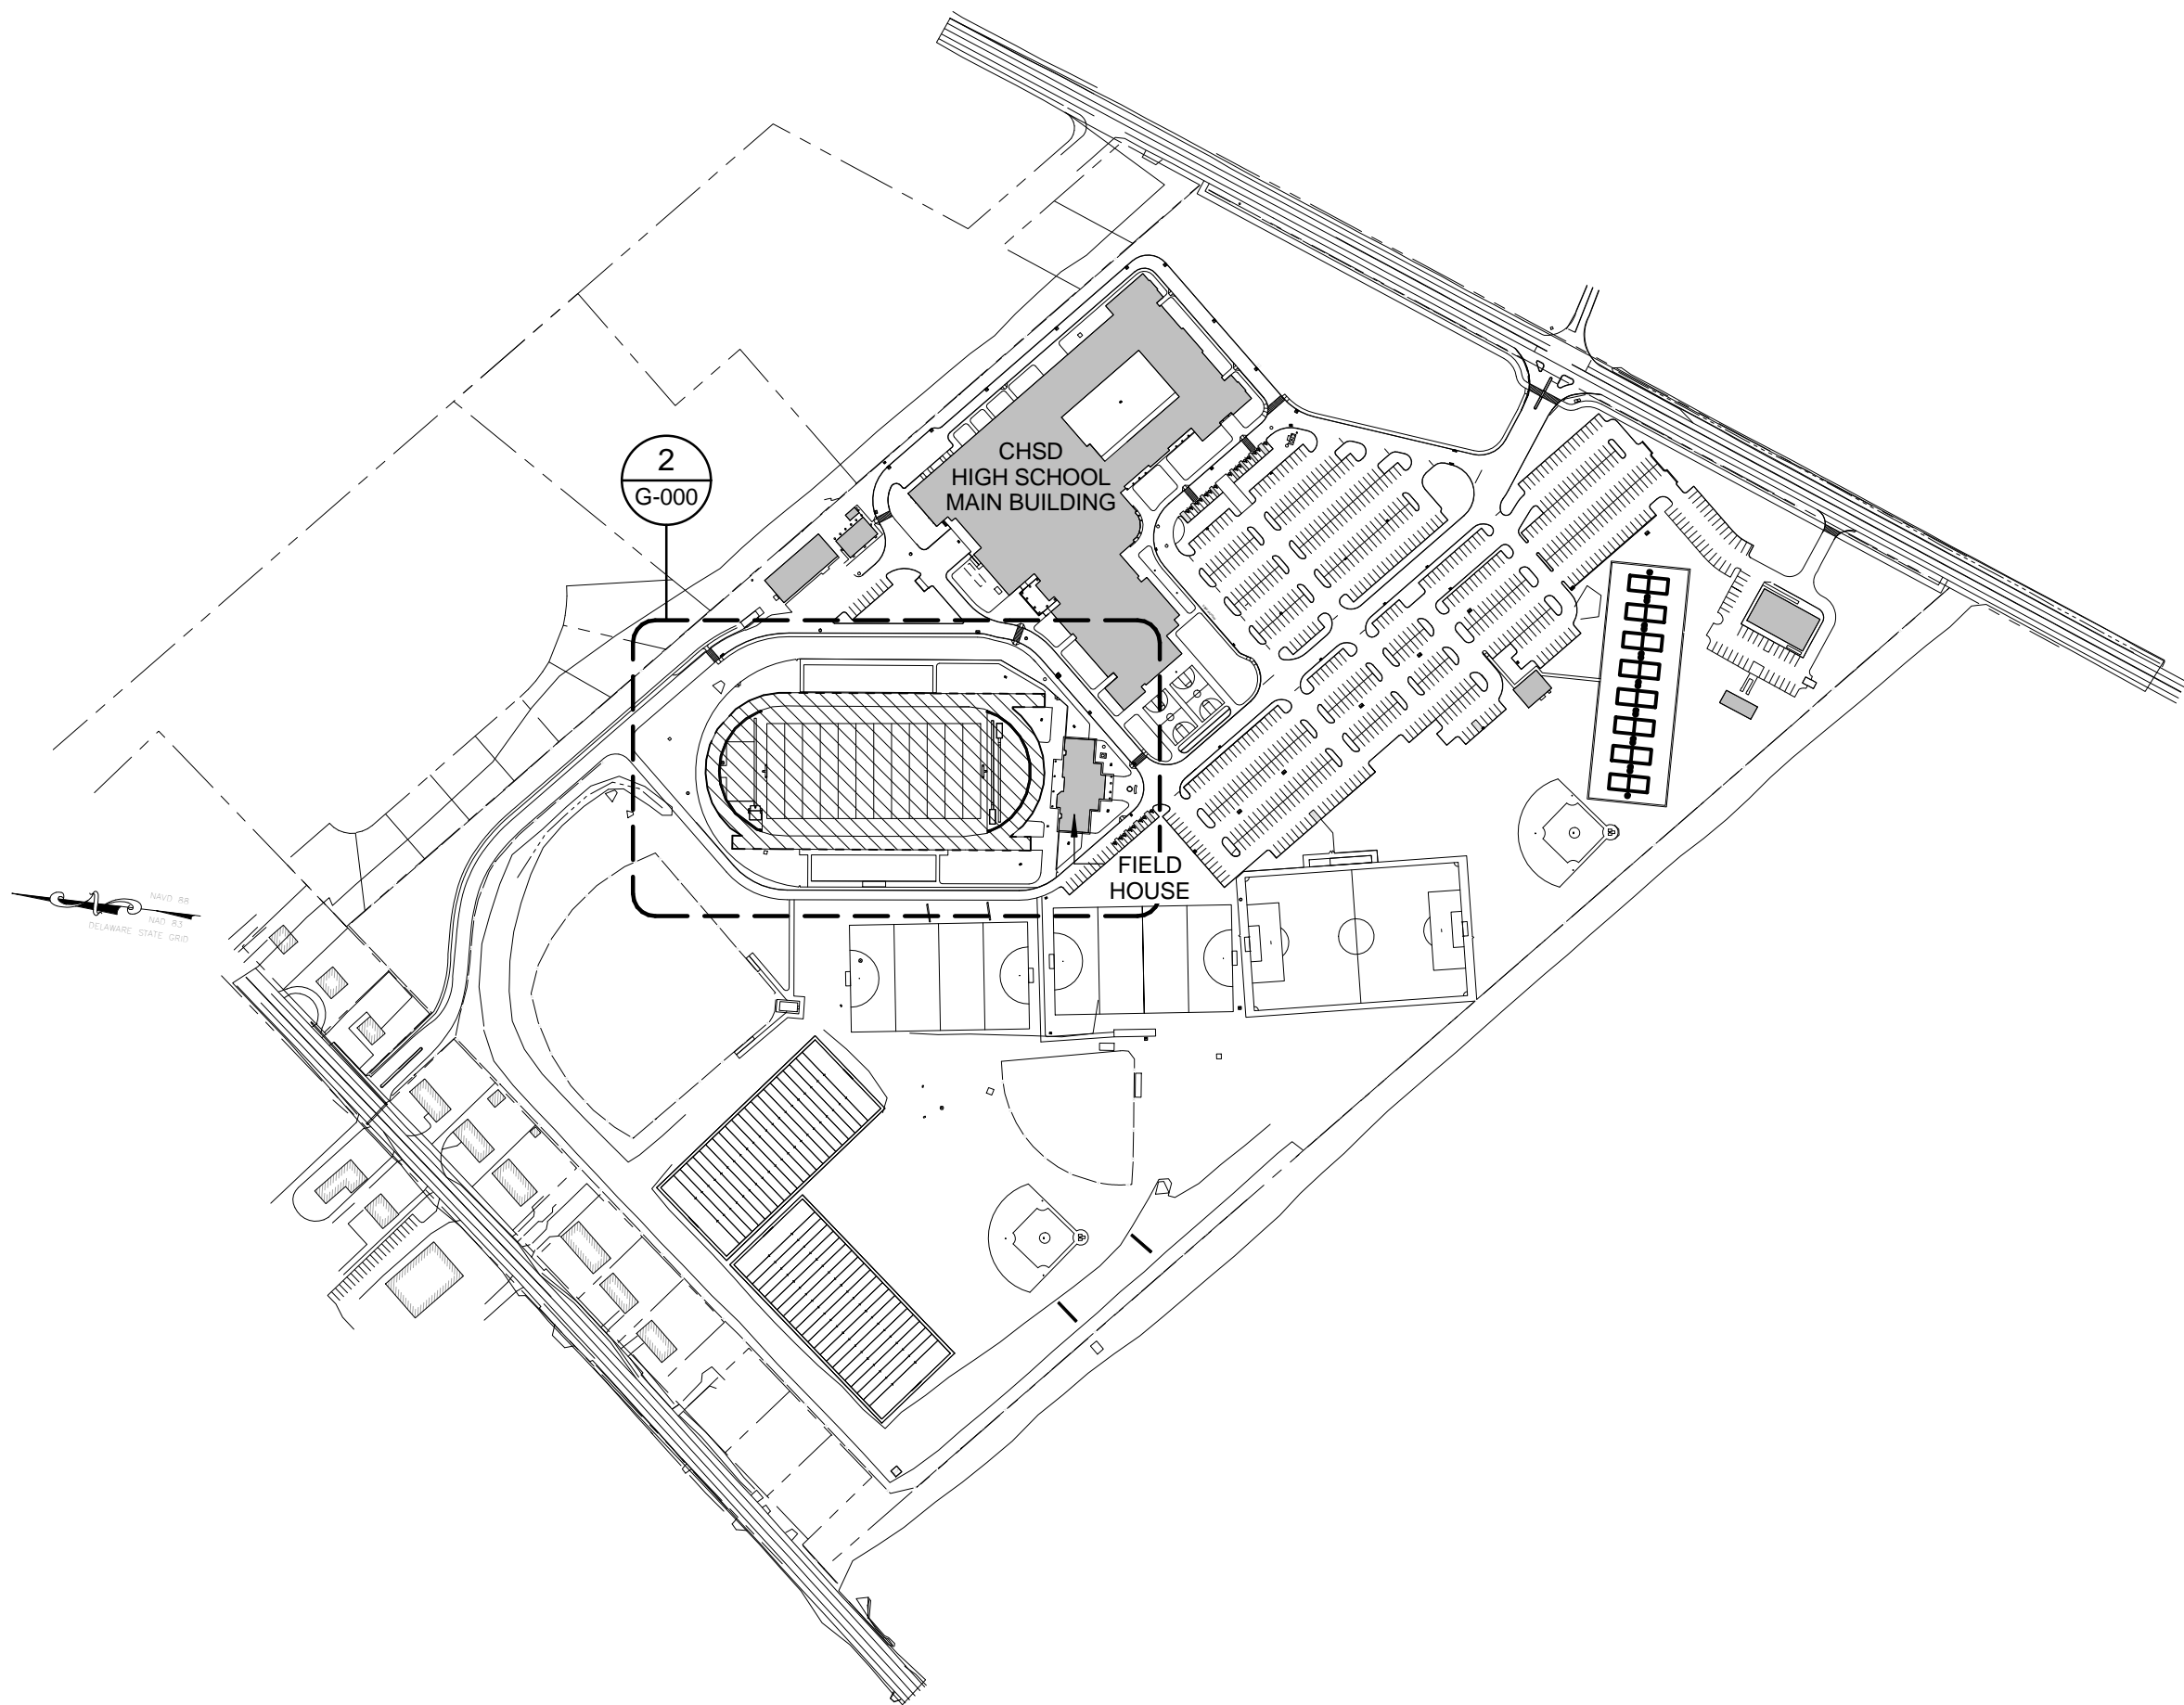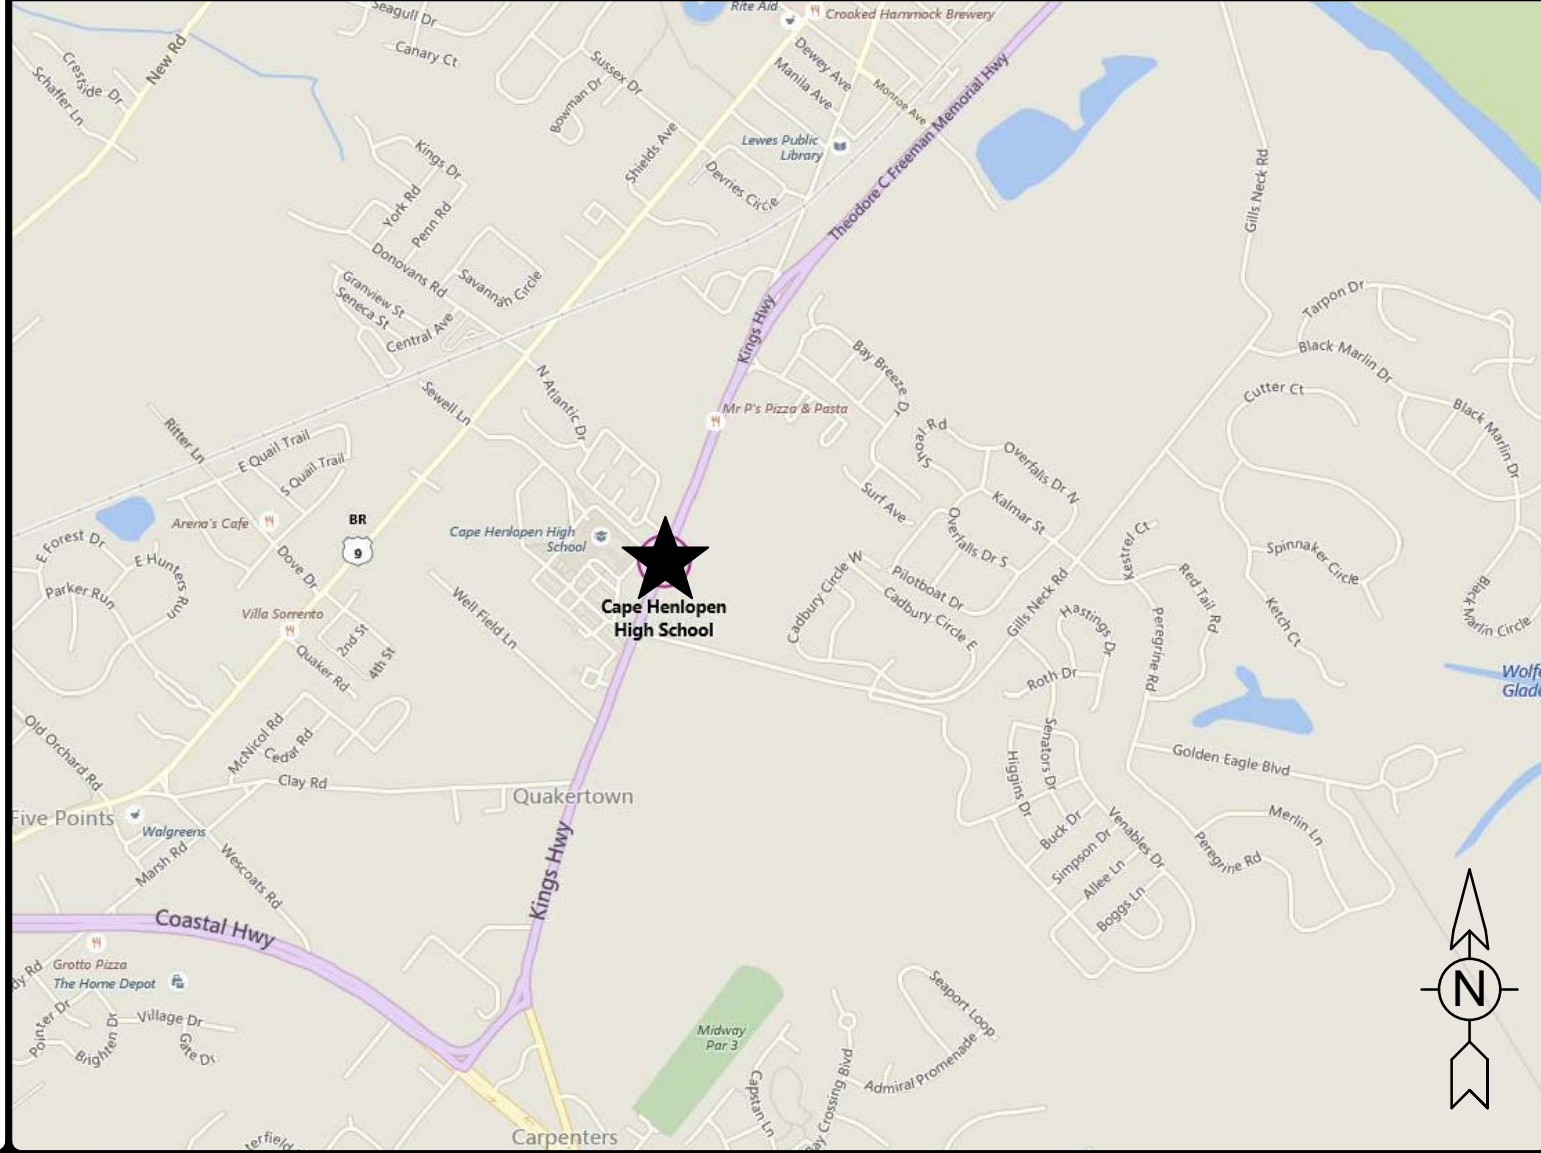

**1 CHSD OVERALL SITE PLAN**  
G-000 SCALE: 1" = 300'-0"  
PROJECT NORTH TRUE NORTH

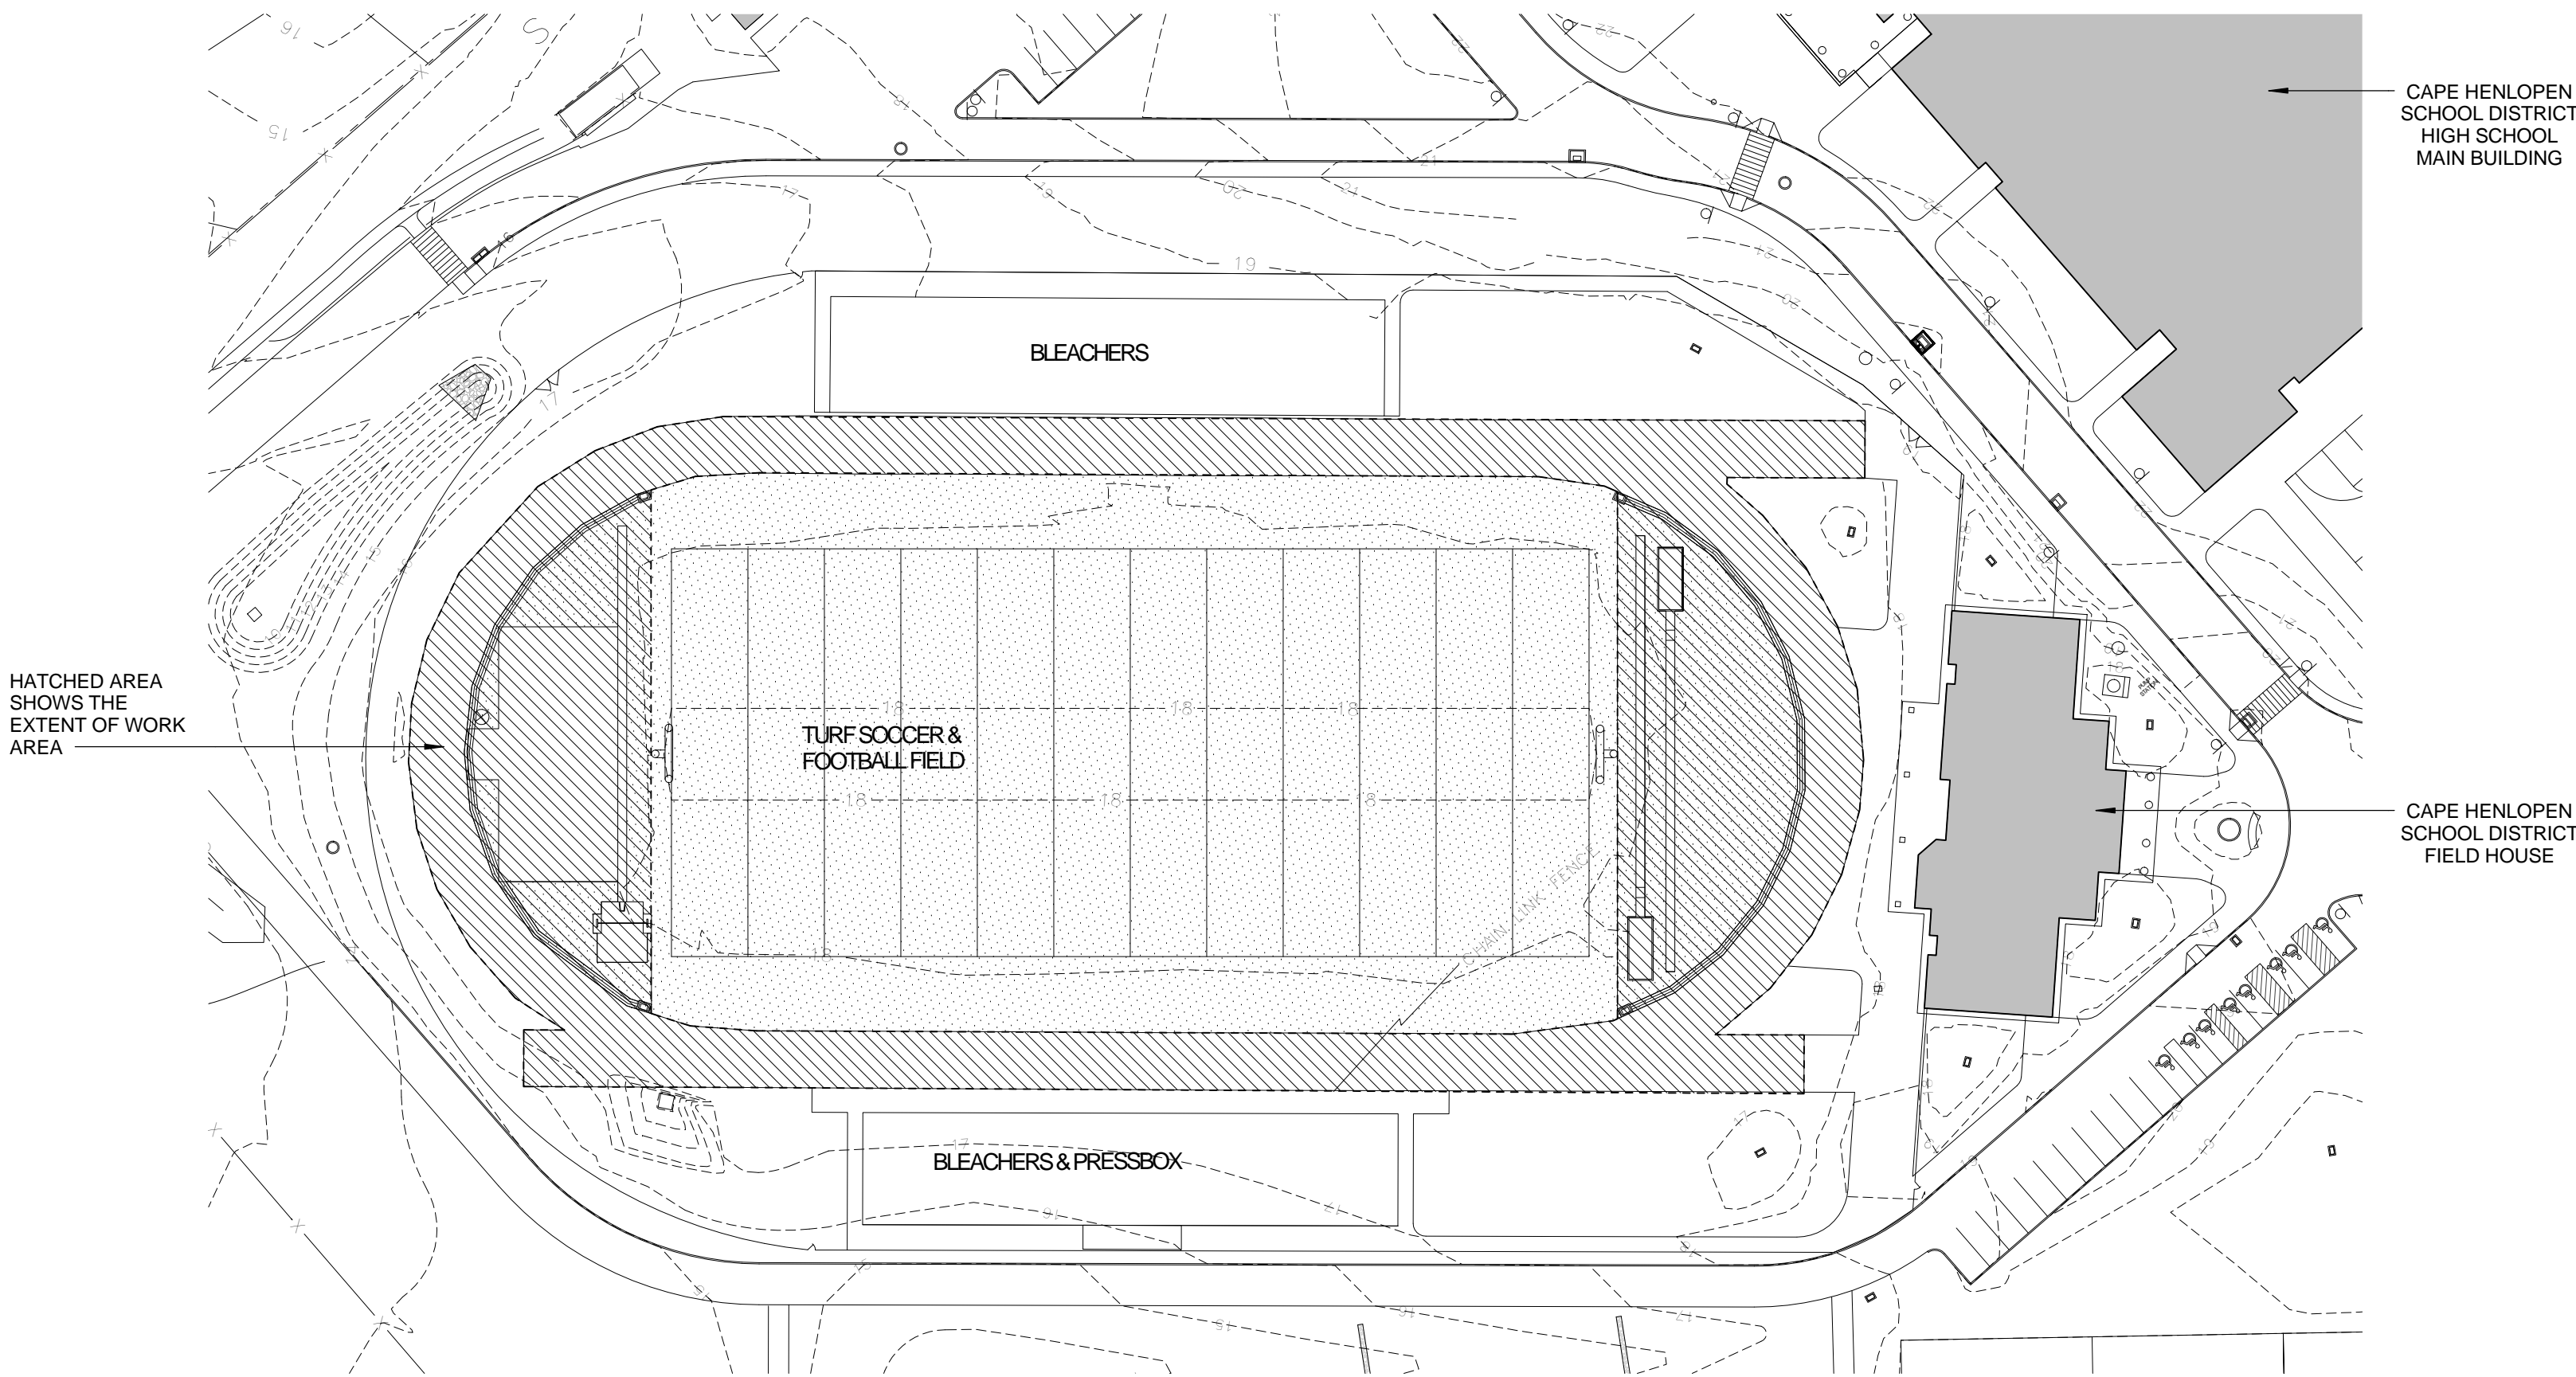


**2 CHSD TRACK KEY PLAN**  
G-000 SCALE: 1" = 60'-0"  
PROJECT NORTH TRUE NORTH




TYPICAL ABBREVIATIONS

ABDN	ABANDON	FIN	FINISH	RM	ROOM
ABV	ABOVE	FF	FINISH FLOOR	RO	ROUGH OPENING
AFF	ABOVE FINISH FLOOR	FEF	FINISHED END PANEL	RS	RUBBER STAIR TREAD AND RISERS
AFG	ABOVE FINISH GRADE	FAAP	FIRE ALARM ANNUCIATOR PANEL	RT	RUBBER TILE
ASC	ABOVE SUSPENDED CEILING	FE	FIRE EXTINGUISHER	RB	RUBBER WALL BASE
ACC	ACCESSIBLE	FEC	FIRE EXTINGUISHER CABINET	S	SAN
ACOUST	ACOUSTICAL	FR	FIRE RESISTANT	SECT	SANITARY
ACP	ACOUSTICAL CEILING PANEL	FRT	FIRE RETARDANT TREATED	SAN ST	SANITARY STACK
ACT	ACOUSTICAL CEILING TILE	FVC	FIRE VALVE CABINET	SCHED	SCHEDULE
AP	ACOUSTICAL PANEL	FIXT	FIXTURE	SJ	SCORED JOINT
AWT	ACOUSTICAL WALL TREATMENT	FLSH	FLASHING	SKLT	SKYLIGHT
ADD	ADDITIONAL	FLR	FLOOR	SLNT	SEALANT
ADH	ADHESIVE	FLOOR	FLOOR CLEAN OUT	S.CONC	SEALED CONCRETE
ADJ	ADJACENT	FD	FLOOR DRAIN	SLR	SEALER
ADMIN	ADMINISTRATION	FLUOR	FLUORESCENT	SLT	SHEET
AC	AIR CONDITIONING	FTG	FOOTING	SV	SHEET VINYL
ACU	AIR CONDITIONING UNIT	FRMG	FRAMING	SHV	SHELVING
AHU	AIR HANDLING UNIT	FA	FRESH AIR	SHR	SHOWER
AIB	AIR INFILTRATION BARRIER	FUR	FURRING	SIM	SIMILAR
ALT	ALTERNATE	G	GAGE, GAUGE	SKLT	SKYLIGHT
ALUM	ALUMINUM	GA	GAGE, GAUGE	SOG	SLAB ON GRADE
ACI	AMERICAN CONCRETE INSTITUTE	GALV	GALVANIZED	SC	SOUND CONTROL
ADA	AMERICANS DISABILITIES ACT	GI	GALVANIZED IRON	SCC	SOUND TRANSMISSION CLASS
AB	ANCHOR BOLT	GL	GLASS	SPEC	SPECIFICATIONS
ANOD	ANODIZE	GR	GRADE	SPLSH BLK	SPLASH BLOCK
ATFP	ANTI-TERRORISM / FORCE PROTECTION	GYP BD	GYPSON BOARD	STC	SOUND TRANSMISSION CLASS
APVD	APPROVED	GWB	GYPSON WALL BOARD	STL	STEEL
APPROX	APPROXIMATE(LY)	H	HANDICAP ACCESSIBLE	STOR	STORAGE
ARCH	ARCHITECT(URAL)	*H*	HANDICAP ACCESSIBLE	STRUT	STRUCTURAL
AR	AS REQUIRED	HDW	HARDWARE	SUSP	SUSPENDED
ASPH	ASPHALT	HDWD	HARDWOOD	SYM	SYMMETRICAL
ASSY	ASSEMBLY	HTR	HEATER	T	TACKBOARD
ATTCHMT	ATTACHMENT	HVAC	HEATING VENTILATION AND AIR CONDITIONING	TEMP	TEMPERED
AUTO	AUTOMATIC	HT	HEIGHT	TER	TERRAZZO
ACS	AUTOMATIC CONTROL SYSTEM	HTC	HIGH PERFORMANCE COATING	THK	THICKNESS
AVG	AVERAGE	HPC	HOLLOW CORE	THRESHOLD	THRESHOLD
B	BACKER BOARD	HM	HOLLOW METAL	THRU	THROUGH
BSPL	BACKSPLASH	HOR	HORIZONTAL	T	TILE
BALC	BALCONY	HB	HOSE BIBB	TBD	TO BE DETERMINED
B	BASE	I	IN LIEU OF	TOILET	TOILET
BL	BASELINE	ILO	IN LIEU OF	TPRT	TOILET PARTITION
BSMT	BASEMENT	INFO	INFORMATION	T&B	TOP AND BOTTOM
BM	BEAM	ID	INSIDE DIAMETER	TFF	TOP OF FINISH FLOOR
BRG	BEARING	ICF	INSULATED CONCRETE FORM	TOF	TOP OF FOOTING
BFF	BELOW FINISH FLOOR	INSUL	INSULATION	TOM	TOP OF MASONRY
BET	BETWEEN	INT	INTERIOR	TOP	TOP OF PARAPET
BTWN	BETWEEN	IBC	INTERNATIONAL BUILDING CODE	TOS	TOP OF SLAB
BIT	BITUMINOUS	INC	INTERNATIONAL BUILDING CODE	T&G	TONGUE AND GROOVE
BLKG	BLOCKING	J	JANITOR	TRN	TRANSOM
BD	BOARD	JAN	JANITOR	TRTD	TREATED
BTM	BOTTOM	JOINT	JOINT	TYP	TYPICAL
BC	BOTTOM OF CURB	K	KITCHEN	UL	UNDERWRITERS LABORATORY
BOF	BOTTOM OF FOOTING	KIT	KITCHEN	UNFIN	UNFINISHED
BOS	BOTTOM OF STEEL	KO	KNOCKOUT	UNO	UNLESS NOTED OTHERWISE
BRKT	BRACKET	L	LAMINATE	UR	URINAL
BRK	BRICK	LAM	LAMINATE	V	V-VENT
BRSH	BRICKSHELF	LAV	LAVATORY	VB	VAPOR RETARDER BARRIER
BHMA	BUILDER'S HARDWARE MANUFACTURER'S ASSOCIATION	LIB	LIBRARY	VNR	VEENEER
BLDG	BUILDING	LT	LIGHT	V	VENT
BP	BUILDING PAPER	MECH	MECHANICAL	VENT	VENTILATE
BUR	BUILT UP ROOF	MEP	MECHANICAL, ELECTRICAL & PLUMBING	VF	VERIFY IN FIELD
BLT IN	BUILT-IN	MC	MEDICINE CABINET	VERT	VERTICAL
BN	BULLNOSE	MEMB	MEMBRANE	VEST	VESTIBULE
C	CABINET	METAL	METAL	VCT	VINYL COMPOSITION TILE
CAB	CABINET	MEZZ	MEZZANINE	VCB	VINYL COVE BASE
CUH	CABINET UNIT HEATER	MIN	MINIMUM	VWC	VINYL WALL COVERING
CPT	CARPET TILE	MIR	MIRROR	VIT	VITREOUS
CSWK	CASEWORK	MISC	MISCELLANEOUS	VOL	VOLUME
CIP	CAST IN PLACE	MTD	MOUNTED	W	WAINSCOT
CI	CAST IRON	MTG	MOUNTING	WSCOT	WAINSCOT
CS	CAST STONE	MOVE	MOVABLE	WOM	WALK OFF MAT
CLKG	CEILING	N	NATIONAL FIRE PROTECTION ASSOCIATION	WM	WALL MOUNTED
CLG	CEILING	NFPA	NATIONAL FIRE PROTECTION ASSOCIATION	WC	WALL COVERING
CEM	CEMENT	NATURAL	NATURAL	WF	WASH FOUNTAIN
CBB	CEMENTITIOUS BACKER BOARD	NRC	NOISE REDUCTION COEFFICIENT	WSHP	WATER SOURCE HEAT PUMP
CTR	CENTER	NP	NO PAINT	WS	WATER STOP
CL	CENTER LINE	NRC	NOISE REDUCTION COEFFICIENT	WP	WATERPROOF
CP	CENTER POINT	NOM	NOMINAL	WT	WEIGHT
C-C	CENTER TO CENTER	N	NORTH	WB	WHITEBOARD
CEI	CERAMIC	NTC	NOT IN CONTRACT	WwH	WIDTH x HEIGHT
CFT	CERAMIC FLOOR TILE	NTS	NOT TO SCALE	W	WIDTH, WIDE, WEST
CT	CERAMIC TILE	NO	NUMBER	WG	WIRE GLASS
CTB	CERAMIC TILE BASE	O	OFFICE	W/O	WITHOUT
CWT	CERAMIC WALL TILE	OFF	OFFICE	WD	WOOD
CLRM	CLASSROOM	OC	ON CENTER	WDB	WOOD BASE
CO	CLEANOUT	OPNG	OPENING	WDF	WOOD FLOORING
CLR	CLEAR	OPPOSITE	OPPOSITE	WK	WORK
CLO	CLOSET	OSH	OPPOSITE HAND	&	AND
CMF	COLD FORM METAL	OD	OUTSIDE DIAMETER	L	ANGLE
COL	COLUMN	OVHD	OVERHEAD	@	AT
COMM	COMMUNICATIONS	P	P	°	DEGREE
CONC	CONCRETE	P	P	Ø	DIAMETER
CMU	CONCRETE MASONRY UNIT	PAINT	P	=	EQUALS
CONF	CONFERENCE	PS	PAINT EXPOSED STRUCTURE / DECK	-	MINUS
CONST	CONSTRUCTION	PTD	PAINTED	%	PERCENT
CD	CONSTRUCTION DOCUMENT(S)	PR	PAIR	+	PLUS
CONT	CONTINUOUS	PNL	PANEL	±, +/-	PLUS OR MINUS
CF	CONTRACTOR FURNISHED	PH	PAPER HOLDER		
CJ	CONTROL JOINT	PRKG	PARKING		
COORD	COORDINATE	PTH	PARTITION		
CG	CORNER GUARD	PLAS	PLASTER		
CORR	CORRIDOR	PLAM	PLASTIC LAMINATE		
COV	COVER	PLBG	PLUMBING		
D	DAMP/PROOF(ING)	PLYWD	PLYWOOD		
D	DEPTH	PTS	POINTS		
DET	DETAIL	POL	POLISHED		
DIA	DIAMETER	PCPL	PORTLAND CEMENT PLASTER		
DIM	DIMENSION	PSF	POUNDS PER SQUARE FOOT		
DW	DISHWASHER	PSI	POUNDS PER SQUARE INCH		
DO	DITTO	PC	PRECAST		
DIV STRIP	DIVIDER STRIP	PREFAB	PREFABRICATED		
DR	DOOR	PT	PRESSURE TREATED		
DBL	DOUBLE	PL	PROPERTY LINE		
DN	DOWN	Q	QUANTITY		
DS	DOWNSPOUT	QTY	QUANTITY		
DT	DRAIN TILE	QT	QUARRY TILE		
DWG(S)	DRAWING(S)	QTB	QUARRY TILE BASE		
DF	DRINKING FOUNTAIN	R	RADIUS		
E	EACH	REC	RECESSED		
EA	ELECTRIC WATER COOLER	RFM	RECESSED FLOOR MAT		
ELEC	ELECTRIC(AL)	RCP	REFLECTED CEILING PLAN		
EL	ELEVATION	REFR	REFRIGERATOR		
ELEV	ELEVATOR	REQD	REQUIRED		
ENCL	ENCLOSURE	RESIL	RESILIENT		
EFS	ENTRANCE FLOORING SYSTEM	RB	RESILIENT BASE		
EQ	EQUAL	RSTRM	RESTROOM		
EQUIP	EQUIPMENT	RET	RETURN		
EXIST	EXISTING	REV	REVISE, REVISION		
EPS	EXPANDED POLYSTYRENE	RD	ROOF DRAIN		
EXP	EXPANSION				
EJ	EXPANSION JOINT				
EJC	EXPANSION JOINT COVER				
EXT	EXTERIOR				
EIFS	EXTERIOR INSULATION FINISH SYSTEM				
XPS	EXTRUDED POLYSTYRENE				
F	FACE OF MASONRY				
FOM	FACE OF MASONRY				
FOS	FACE OF STUD				
FCU	FAN COIL UNIT				
FT	FEET				
FRP	FIBERGLASS REINFORCED PLASTIC				

ANNOTATIONS LEGEND

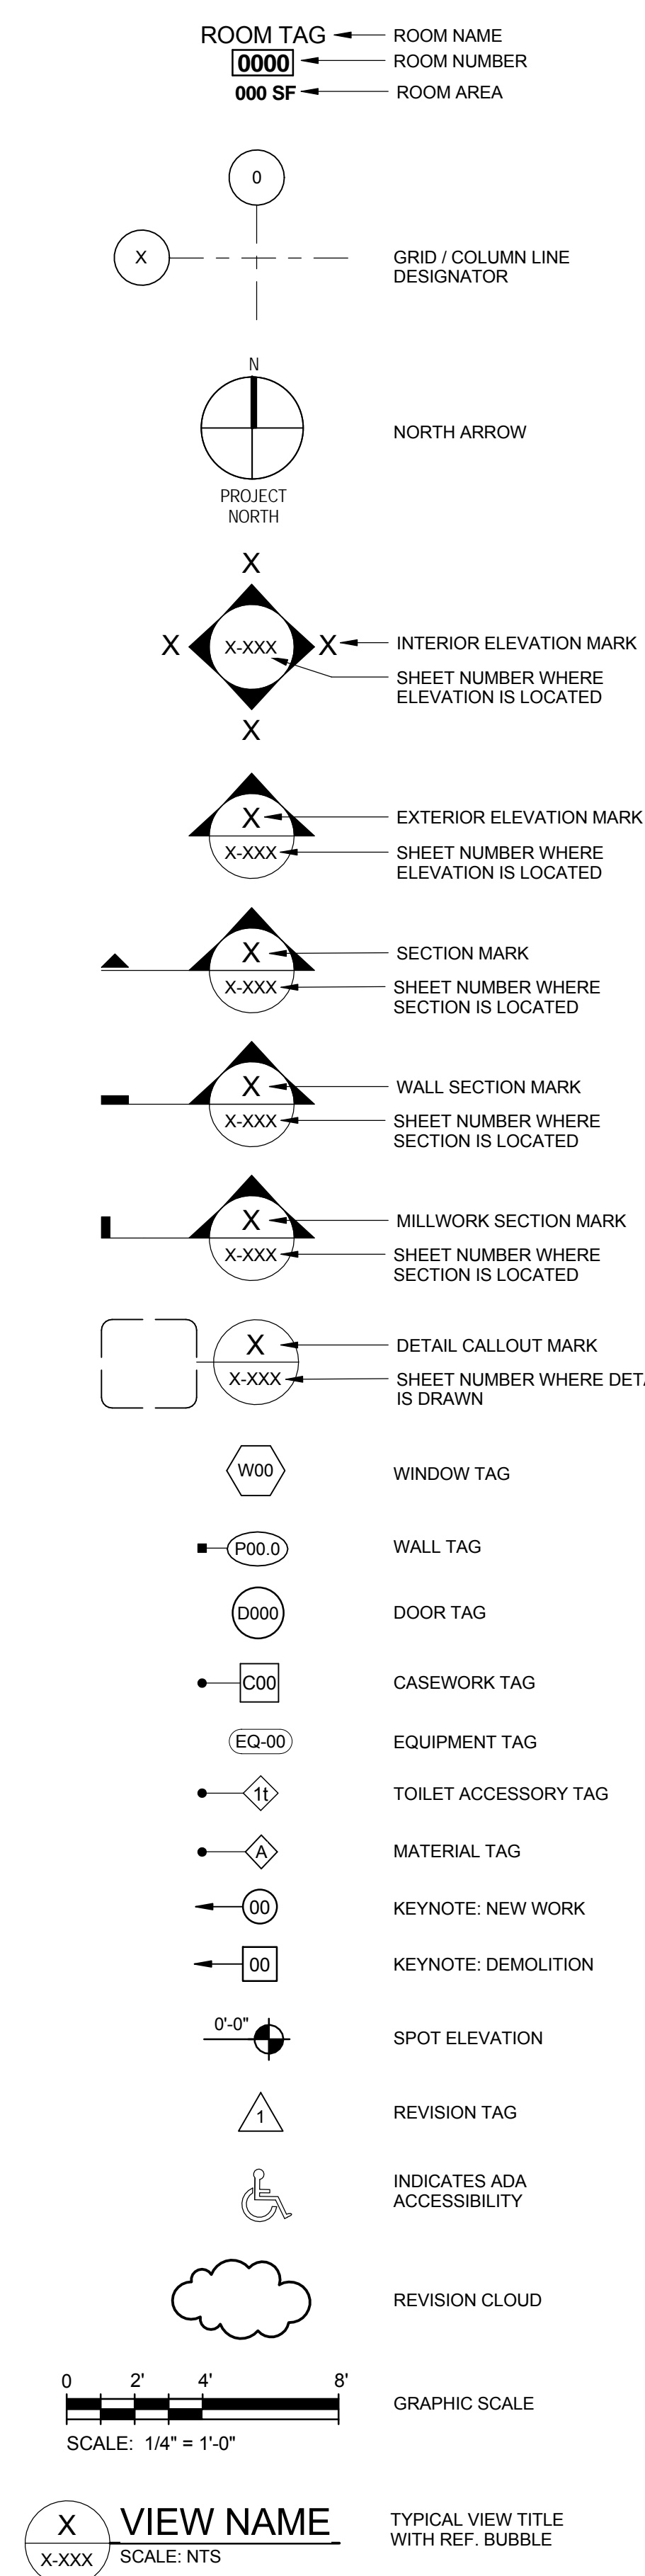

DRAFTING LEGEND

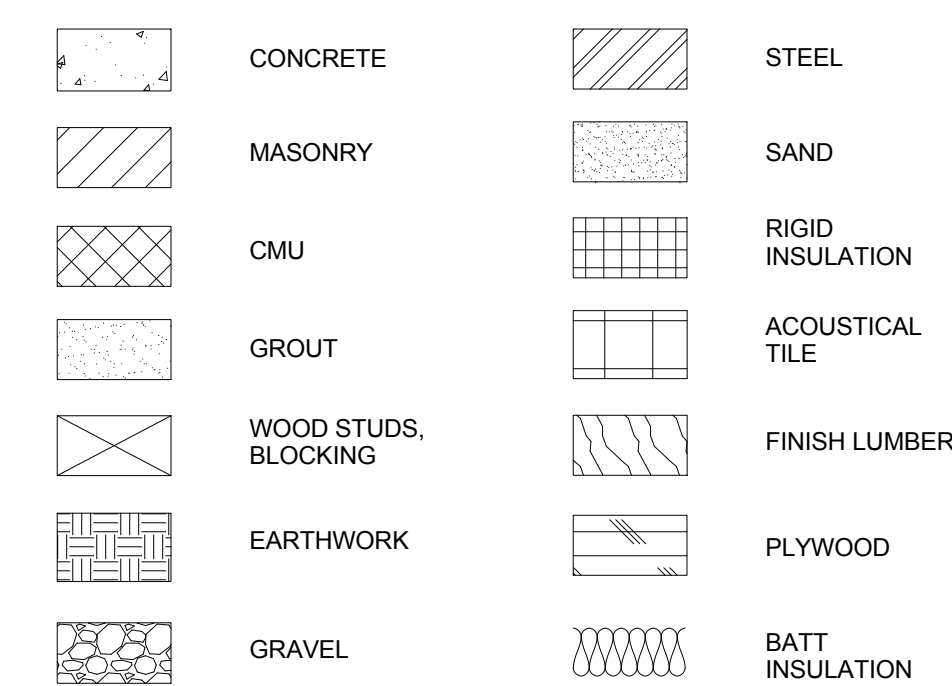

GENERAL NOTES

- GENERAL NOTES**
- ALL WORK SHALL COMPLY WITH APPLICABLE BUILDING CODES, ORDINANCES, AND REGULATORY AGENCIES.
  - CONTRACTOR SHALL FULLY ACQUAINT HIMSELF WITH THE CONDITIONS OF THE CONTRACT, LOCAL CONDITIONS RELATING TO LOCATION, ACCESSIBILITY, AND GENERAL CHARACTER OF THE CONSTRUCTION SITE, AS WELL AS, LOCAL LABOR CONDITIONS SO THAT HE UNDERSTANDS THE NATURE AND EXTENT, DIFFICULTIES, AND RESTRICTIONS RELATED TO THE EXECUTION OF WORK. NOTIFY THE ARCHITECT OF ALL DISCREPANCIES PRIOR TO COMMENCING WORK.
  - THE CONTRACTOR SHALL PROTECT EXISTING, IN-PLACE, AND NEW WORK. THE CONTRACTOR SHALL INVESTIGATE JOB SITE TO COMPARE CONTRACT DOCUMENTS, EXISTING CONDITIONS, AND VERIFY DIMENSIONS SHOWN ON THESE DRAWINGS. THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IN WRITING OF ANY DISCREPANCIES, OMISSIONS, CONFLICTS, AND/OR ANY RESTRICTIONS RELATED TO THE EXECUTION OF WORK, BEFORE COMMENCEMENT OF WORK. COMMENCEMENT OF WORK SHALL CONSTITUTE ACCEPTANCE OF ALL NEW OR EXISTING CONDITIONS.
  - THE CONTRACTOR SHALL COORDINATE SCHEDULING, PROVISIONS FOR INSTALLATION, LOCATIONS, AND THE ACTUAL INSTALLATION OF ITEMS FURNISHED BY OWNER OR BY OTHERS.
  - THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS IN THE FIELD AND IS RESPONSIBLE FOR ALL PHASES, INCLUDING BIDDING, FABRICATION, COORDINATION, AND CONSTRUCTION.
  - THE DRAWINGS INDICATE THE GENERAL EXTENT OF WORK. THE DRAWINGS ARE NOT INTENDED TO INDICATE OR DESCRIBE ALL WORK REQUIRED FOR THE FULL PERFORMANCE AND COMPLETION OF THE REQUIREMENTS OF THE CONTRACT DOCUMENTS. REPETITIVE FEATURES NOT NOTED ON THE DRAWINGS SHALL BE COMPLETELY PROVIDED AS IF DRAWN IN FULL.
  - CIVIL INFORMATION ON THE ARCHITECTURAL DRAWINGS IS PROVIDED FOR CLARITY AND/OR LOCATION PURPOSES ONLY. SEE RELEVANT DISCIPLINE DRAWINGS FOR SPECIFIC INFORMATION.
  - DO NOT SCALE DRAWINGS TO OBTAIN DIMENSIONS. DIMENSIONS GOVERN. LARGE SCALE DRAWINGS GOVERN OVER SMALL SCALE DETAILS.
  - CHANGES IN DRAWINGS OR ACTUAL WORK SHALL BE ISSUED BY THE ARCHITECT.
  - PERFORM ALL WORK AND INSTALL MATERIALS IN STRICT ACCORDANCE TO APPLICABLE INDUSTRY AND MANUFACTURER'S PUBLISHED STANDARDS AND SPECIFICATIONS FOR QUALITY OF MATERIALS AND WORKMANSHIP, AS WELL AS REQUIREMENTS IN THESE DRAWINGS AND SPECIFICATION. ANY CONFLICTING REQUIREMENTS OF THE SOURCES LISTED ABOVE SHALL BE BROUGHT TO THE ARCHITECT'S ATTENTION PRIOR TO PROCEEDING WITH THE WORK.
  - MANUFACTURERS ARE REFERENCED TO ESTABLISH STYLE, SIZE, COLOR, AND MATERIAL CHARACTERISTICS, AND ARE NOT INTENDED TO LIMIT SELECTIONS FROM OTHER MANUFACTURERS. WHEN AN ALTERNATE SELECTION IS SUBMITTED DURING BIDDING, SUBMITTALS SHALL HAVE INCLUDED THE MATERIAL LISTED FOR COMPARISON.
  - THE CONTRACTOR SHALL EXAMINE ALL SURFACES TO DETERMINE THAT THEY ARE SOUND, DRY, CLEAN AND READY TO RECEIVE FINISHES PRIOR TO INSTALLATION. START OF INSTALLATION SHALL IMPLY ACCEPTANCE OF SUBSTRATE AND SHALL NOT BE GROUNDS FOR CLAIMS AGAINST IMPROPER PERFORMANCE OF INSTALLED MATERIALS. ADVISE ARCHITECT OF ANY EXISTING CONSTRUCTION NOT LEVEL, SMOOTH, AND PLUMB WITHIN INDUSTRY STANDARDS PRIOR TO START OF CONSTRUCTION.
  - THE CONTRACTOR SHALL INSTALL AND MAINTAIN ALL NECESSARY COVERINGS, PROTECTIVE ENCLOSURES, AND DUST BARRIERS TO PROTECT ALL OCCUPANTS AND EXISTING WORK AND FINISHES TO REMAIN. LOCATION OF SUCH PROTECTION SHALL BE VERIFIED WITH OWNER AND LOCAL CODE OFFICIAL FOR EGRESS CONFORMANCE. PRIOR TO COMMENCING WORK, AND IN COORDINATION WITH PROGRESSION OF WORK SCHEDULE, PERFORM WORK IN A MANNER THAT WILL AVOID HAZARDS TO PERSONS IN ADJACENT AREAS AND THAT WON'T INTERFERE WITH WORK OR PASSAGE TO ANY OF THESE AREAS. REPAIR AND REPLACE ANY DAMAGES CAUSED BY IMPROPER PROTECTIONS AT NO ADDITIONAL CHARGE TO THE OWNER.
  - WORK DAMAGED DURING CONSTRUCTION OR NOT CONFORMING TO SPECIFIED STANDARDS, TOLERANCES, OR MANUFACTURER'S INSTRUCTIONS FOR INSTALLATION SHALL BE REPLACED, BY THE CONTRACTOR, AT NO ADDITIONAL CHARGE TO THE OWNER.
  - ANY AREA OUTSIDE THE LIMITS OF CONSTRUCTION DISTURBED BY OPERATIONS OF THE CONTRACTOR SHALL BE RESTORED AT THE CONTRACTOR'S EXPENSE.
  - ALL CONCRETE WALKS, ASPHALT, CURBS, AND LANDSCAPING DAMAGED DURING CONSTRUCTION ARE TO BE REPAIRED BY THE CONTRACTOR AT NO ADDITIONAL CHARGE TO THE OWNER.
  - CONTRACTOR SHALL VERIFY FINAL EQUIPMENT LOCATIONS WITH OWNER PRIOR TO INSTALLATION.

DEFINITIONS

- DEFINITIONS**
- "ALIGN" AS USED IN THESE DOCUMENTS SHALL MEAN TO ACCURATELY LOCATE FINISHED FACES IN THE SAME PLANE AND/OR INSTALL NEW CONSTRUCTION ADJACENT TO EXISTING CONSTRUCTION WITHOUT ANY VISIBLE JOINTS OR SURFACE IRREGULARITIES.
  - "CLEAR" AS USED IN THESE DOCUMENTS SHALL MEAN THAT THE CONDITION IS NOT ADJUSTABLE WITHOUT APPROVAL OF THE ARCHITECT. CLEAR DIMENSIONS ARE TYPICALLY TO FINISH FACE.
  - "MAXIMUM" OR "MAX" AS USED IN THESE DOCUMENTS SHALL MEAN THAT THE CONDITION IS SLIGHTLY ADJUSTABLE, BUT MAY NOT VARY TO A DIMENSION OR QUANTITY GREATER THAN THAT INDICATED WITHOUT APPROVAL OF THE ARCHITECT.
  - "MINIMUM" OR "MIN" AS USED IN THESE DOCUMENTS SHALL MEAN THAT THE CONDITION IS SLIGHTLY ADJUSTABLE, BUT MAY NOT VARY TO A DIMENSION OR QUANTITY LESS THAN THAT INDICATED WITHOUT APPROVAL OF THE ARCHITECT.
  - "TYPICAL" AS USED IN THESE DOCUMENTS SHALL MEAN THAT THE CONDITION OR DIMENSION IS THE SAME OR REPRESENTATIVE FOR SIMILAR CONDITIONS THROUGHOUT.
  - "4/D" AS USED IN THESE DOCUMENTS SHALL MEAN THAT THE DIMENSION OR QUALITY IS SLIGHTLY ADJUSTABLE TO ACCOMMODATE ACTUAL CONDITIONS. FIELD VERIFICATION AND COORDINATION WITH OTHER ELEMENTS MAY BE NECESSARY.

01. DEMOLISH OLD AND CRUMBLING TRACK SURFACE IN ITS ENTIRETY THROUGHOUT HATCHED AREA, AND PREP SUB-SURFACE FOR NEW WORK. REFERENCE PROJECT MANUAL FOR MORE INFORMATION ON NEW WORK.
02. PROTECT EXISTING PERIMETER TRENCH DRAINS, BOTH SIDES, DURING DEMOLITION PHASE AND NEW WORK PHASE.
03. REPLACE LONG JUMP SAND PIT COVER WITH READY FIT ALUMINUM SAND PIT COVER. BASIS OF DESIGN MANUFACTURED BY GILL ATHLETICS. APPROX. SIZE: (6' X 24'). VERIFY IN FIELD. SEE PROJECT MANUAL FOR MORE INFORMATION.
04. PROVIDE LANDSCAPE EDGING TO PREVENT MOVEMENT AND SETTLEMENT OF SOIL ONTO TRACK.
05. PROTECT ARTIFICIAL TURF DURING DEMOLITION AND NEW WORK PHASES.
06. REPLACE ALL DAMAGED OR DECAYING RUBBER DRAINAGE COVERS, THROUGHOUT TRACK.

1. CONTRACTOR SHALL REPORT ANY FIELD CONDITIONS THAT VARY FROM THOSE INDICATED ON THE DOCUMENTS. IN ADDITION, CONTRACTOR SHALL REPORT ANY UNDOCUMENTED PLUMBING, ELECTRICAL, TECHNOLOGY, OR HVAC COMPONENTS UNCOVERED WITHIN A DEMOLISHED AREA.
2. THE CONTRACTOR SHALL TEMPORARILY SHORE, BRACE, AND PROTECT EXISTING EQUIPMENT AS REQUIRED DURING DEMOLITION.
3. SELECTIVE DEMOLITION WORK INCLUDES REMOVAL OF NON-STRUCTURAL ITEMS INDICATED THIS DRAWING DOES NOT SHOW ELECTRICAL, WATER, HVAC, AND MOST OTHER SERVICES.
4. THE CONTRACTOR SHALL SAFELY SECURE ANY AND ALL PIPING, WIRING, CABLES, OR DEVICES THAT ARE NOT SCHEDULED FOR DEMOLITION, AND WERE SECURED BY ITEMS THAT HAVING BEEN OR ARE SCHEDULED FOR DEMOLITION.
5. CONTRACTOR IS RESPONSIBLE TO REMOVE SITE DEBRIS, TRASH, AND OTHER DISCARDED MATERIALS AND/OR EQUIPMENT RESULTING FROM DEMOLITION OPERATIONS. TRANSPORT AND LEGALLY DISPOSE OFF SITE.
6. IF HAZARDOUS MATERIALS ARE ENCOUNTERED DURING DEMOLITION OPERATIONS, COMPLY WITH APPLICABLE REGULATIONS, LAWS, AND ORDINANCES CONCERNING REMOVAL, HANDLING, AND PROTECTION AGAINST EXPOSURE OR ENVIRONMENTAL POLLUTION. SEE SPECIFICATION FOR ADDITIONAL REQUIREMENTS.
7. BURNING OF REMOVED MATERIALS IS NOT PERMITTED ON THE PROJECT SITE.
8. COORDINATE ALL DEMOLITION WORK ON THE EXISTING SITE WITH THE OWNER BEFORE PROCEEDING.
9. CONTRACTOR SHALL PROMPTLY PATCH AND REPAIR DAMAGE CAUSED TO ADJACENT CONSTRUCTION BY DEMOLITION WORK. RESTORE EXPOSED FINISHES IN A MANNER THAT ELIMINATES EVIDENCE OF PATCHING AND REFINISHING.
10. REMOVE DECAYED, VERMIN INFESTED, OR OTHERWISE DANGEROUS OR UNSTABLE MATERIALS, AND PROMPTLY DISPOSE OFF SITE.
11. ASSESS THE SUB-SURFACE CONDITION AND NOTIFY OWNER/ARCHITECT OF ANY IMPERFECTIONS THAT WILL REQUIRE THE RE-INSTALLATION OF TRACK SURFACE.
12. COORDINATE WITH OWNER/ARCHITECT ON PATCHING AND REPAIR OF SUB-SURFACE CONDITIONS PRIOR TO RE-INSTALLATION OF TRACK SURFACE.
13. REFER TO PROJECT MANUAL FOR MORE SPECIFIC INFORMATION REGARDING DEMOLITION AND RE-INSTALLATION SPECIFICATIONS.

CAPE HENLOPEN SCHOOL DISTRICT  
HIGH SCHOOL - MAIN BUILDING


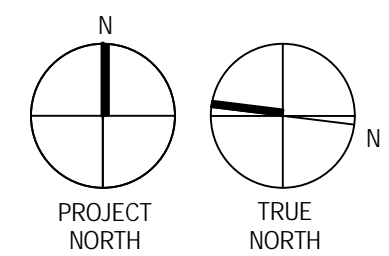
CHSD  
FIELD HOUSE

## BLEACHERS & PRESSBOX

## BLEACHERS

TURF SOCCER &  
FOOTBALL FIELD

1 EXISTING TRACK SITE PLAN  
A-100 SCALE: 1/32" = 1'-0"



TETRA TECH

Cape Henlopen School District  
HIGH SCHOOL TRACK REPLACEMENT  
TRACK REPLACEMENT SITE PLAN

Project No.:	200-81485-18001
Designed By:	BLV
Drawn By:	BLV
Checked By:	MDB

A-100

Bar Measures 1 inch