

PROJECT MANUAL

FOR

**Delaware Technical and Community College
Stanton Campus Roof Replacement – “A” Wing
Newark, Delaware**

**DELAWARE TECHNICAL AND COMMUNITY COLLEGE
400 STANTON-CHRISTIANA ROAD
NEWARK, DELAWARE 19713**

OWNER

**ABHA ARCHITECTS, INC.
1621 N. LINCOLN STREET
WILMINGTON, DELAWARE 19806
(302) 658-6426, FAX (302) 658-8431**

ARCHITECTS

**LARSEN & LANDIS
1615 SUNSET ANE
WILMINGTON, DE 19810
302-475-3175, FAX 302-475-3176**

STRUCTURAL ENGINEERS

**PARAGON ENGINEERING CORP.
708 PHILADELPHIA PIKE
WILMINGTON, DE 19809
(302) 762-6010, FAX (302) 762-0653**

**MECHANICAL/ELECTRICAL AND
PLUMBING ENGINEERS**

ABHA PROJECT NO.: 1218

DATE: August 31, 2012



1621 N. Lincoln St.
Wilmington, DE 19806
(P) 302.658.6426
(F) 302.658.8431

abhagen@ABHA.com
www.ABHA.com

TABLE OF CONTENTS

PROCUREMENT REQUIREMENTS

001150	ADVERTISEMENT FOR BIDS	1
002150	INSTRUCTIONS TO BIDDERS - STATE	10
	PROJECTS	
	STATE OF DELAWARE DEPARTMENT OF LABOR CERTIFIED WAGE RATES	1
004150	BID FORM	5

CONTRACTING REQUIREMENTS

005000	CONTRACTING FORMS AND SUPPLEMENTS	2
005400	AMENDMENT TO THE CONTRACT FOR CONSTRUCTION	3
007100	CONTRACTING DEFINITIONS	2
007200	GENERAL CONDITIONS	1
	AIA A201-2007 – GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION	41
007250	STATE OF DELAWARE GENERAL REQUIREMENTS	15
007350	SUPPLEMENTARY GENERAL CONDITIONS A201-2007	8

SUMMARY

011000	SUMMARY	2
--------	---------------	---

PRICE AND PAYMENT PROCEDURES

012000	PRICE AND PAYMENT PROCEDURES	3
012300	ALTERNATES	2

ADMINISTRATIVE REQUIREMENTS

013000	ADMINISTRATIVE REQUIREMENTS	3
013216	CONSTRUCTION PROGRESS SCHEDULE	2

QUALITY REQUIREMENTS

014000	QUALITY REQUIREMENTS	4
TEMPORARY FACILITIES AND CONTROLS			
015000	TEMPORARY FACILITIES AND CONTROLS	4
PRODUCT REQUIREMENTS			
016000	PRODUCT REQUIREMENTS	5
EXECUTION AND CLOSEOUT REQUIREMENTS			
017000	EXECUTION AND CLOSEOUT REQUIREMENTS	8
017800	CLOSEOUT SUBMITTALS	3
DIVISION 05 - METALS			
055000	METAL FABRICATIONS	4
DIVISION 06 - WOOD, PLASTICS, AND COMPOSITES			
061000	ROUGH CARPENTRY	3
DIVISION 07 - THERMAL AND MOISTURE PROTECTION			
070150.19	PREPARATION FOR RE-ROOFING	1
075300	ELASTOMERIC MEMBRANE ROOFING	7
076200	SHEET METAL FLASHING AND TRIM	3
077100	ROOF SPECIALTIES	3
079005	JOINT SEALERS	3
DIVISION 10 - SPECIALTIES			
108213	EXTERIOR ARCHITECTURAL SCREENS	3

SECTION 001150**ADVERTISEMENT FOR BIDS**

Sealed bids for Delaware Technical and Community College - Stanton Campus Roof Replacement - "A" Wing, will be received by the Delaware Technical and Community College in Room 056 of the West Building at the Wilmington Campus until 10:00AM local time on November 28, 2012, at which time they will be publicly opened and read aloud. Bidder bears the risk of late delivery. Any bids received after the stated time will be returned unopened.

Attention is called to construction schedule as detailed in the Bid Documents.

A MANDATORY Pre-Bid Meeting will be held at 10:00 AM on November 12, 2012, in Room 056 of the West Building at the Wilmington Campus for the purpose of establishing the listing of subcontractors and to answer questions. ATTENDANCE OF THIS MEETING IS A PREREQUISITE FOR BIDDING ON THIS CONTRACT. Representatives of each party to any Joint Venture must attend this meeting.

Sealed bids shall be addressed to Mr. John Fogelgren at the Delaware Technical and Community College. The outer envelope should clearly indicate: "SEALED BID - DO NOT OPEN."

Bid documents will be available beginning October 24, 2012 from the Reproduction Center Inc. 298 Churchman's Rd, New Castle DE (302-328-5019) or view documents online at <http://www.abha.com/ftp.htm> Username: dtccAwingroof Password: Abha1218 (case-sensitive).

Contract documents may also be reviewed at the office of ABHA Architects, 1621 N. Lincoln Street, Wilmington DE 19806. For questions call Scott Lester at 302-658-6426.

Minority Business Enterprises (MBE), Disadvantaged Business Enterprises (DBE) and Women-Owned Business Enterprises (WBE) will be afforded full opportunity to submit bids on this contract and will not be subject to discrimination on the basis of race, color, national origin or sex in consideration of this award.

Each bid must be accompanied by a bid security equivalent to ten percent (10%) of the bid amount and all additive alternates. The successful bidder must post a performance bond and payment bond in a sum equal to 100 percent (100%) of the contract price upon execution of the contract.

The Owner reserves the right to reject any or all bids and to waive any informalities therein. The Owner may extend the time and place for the opening of the bids from that described in the advertisement, with not less than two calendar days notice by certified delivery, facsimile machine or other electronic means to those bidders receiving plans.

END OF SECTION

SECTION 002150**INSTRUCTIONS TO BIDDERS - STATE PROJECTS****TABLE OF ARTICLES**

1.01 ARTICLE 1: GENERAL

A. DEFINITIONS

1. Whenever the following terms are used, their intent and meaning shall be interpreted as follows:

STATE: The State of Delaware.

AGENCY: Contracting State Agency as noted on cover sheet.

DESIGNATED OFFICIAL: The agent authorized to act for the Agency.

ARCHITECT:

ABHA Architects, Inc.
1621 N. Lincoln Street
Wilmington, DE 19806

BIDDING DOCUMENTS: Bidding Documents include the Bidding Requirements and the proposed Contract Documents. The Bidding Requirements consist of the Advertisement for Bid, Invitation to Bid, Instructions to Bidders, Supplementary Instructions to Bidders (if any), General Conditions, Supplementary General Conditions, General Requirements, Special Provisions (if any), the Bid Form (including the Non-collusion Statement), and other sample bidding and contract forms. The proposed Contract Documents consist of the form of Agreement between the Owner and Contractor, as well as the Drawings, Specifications (Project Manual) and all Addenda issued prior to execution of the Contract.

CONTRACT DOCUMENTS: The Contract Documents consist of the, Instructions to Bidders, Supplementary Instructions to Bidders (if any), General Conditions, Supplementary General Conditions, General Requirements, Special Provisions (if any), the form of agreement between the Owner and the Contractor, Drawings (if any), Specifications (Project Manual), and all addenda.

AGREEMENT: The form of the Agreement shall be AIA Document A101, Standard Form of Agreement between Owner and Contractor where the basis of payment is a STIPULATED SUM. In the case of conflict between the instructions contained therein and the General Requirements herein, these General Requirements shall prevail.

GENERAL REQUIREMENTS (or CONDITIONS): General Requirements (or conditions) are instructions pertaining to the Bidding Documents and to contracts in general. They contain, in summary, requirements of laws of the State; policies of the Agency and instructions to bidders.

SPECIAL PROVISIONS: Special Provisions are specific conditions or requirements peculiar to the bidding documents and to the contract under consideration and are supplemental to the General Requirements. Should the Special Provisions conflict with the General Requirements, the Special Provisions shall prevail.

ADDENDA: Written or graphic instruments issued by the Owner/Architect prior to the execution of the contract which modify or interpret the Bidding Documents by additions, deletions, clarifications or corrections.

BIDDER OR VENDOR: A person or entity who formally submits a Bid for the material or Work contemplated, acting directly or through a duly authorized representative who meets the requirements set forth in the Bidding Documents.

SUB-BIDDER: A person or entity who submits a Bid to a Bidder for materials or labor, or both for a portion of the Work.

BID: A complete and properly executed proposal to do the Work for the sums stipulated therein, submitted in accordance with the Bidding Documents.

BASE BID: The sum stated in the Bid for which the Bidder offers to perform the Work described in the Bidding Documents as the base, to which Work may be added or from which Work may be deleted for sums stated in Alternate Bids (if any are required to be stated in the bid).

ALTERNATE BID (or ALTERNATE): An amount stated in the Bid, where applicable, to be added to or deducted from the amount of the Base Bid if the corresponding change in the Work, as described in the Bidding Documents is accepted.

UNIT PRICE: An amount stated in the Bid, where applicable, as a price per unit of measurement for materials, equipment or services or a portion of the Work as described in the Bidding Documents.

SURETY: The corporate body which is bound with and for the Contract, or which is liable, and which engages to be responsible for the Contractor's payments of all debts pertaining to and for his acceptable performance of the Work for which he has contracted.

BIDDER'S DEPOSIT: The security designated in the Bid to be furnished by the Bidder as a guaranty of good faith to enter into a contract with the Agency if the Work to be performed or the material or equipment to be furnished is awarded to him.

CONTRACT: The written agreement covering the furnishing and delivery of material or work to be performed.

CONTRACTOR: Any individual, firm or corporation with whom a contract is made by the Agency.

SUBCONTRACTOR: An individual, partnership or corporation which has a direct contract with a contractor to furnish labor and materials at the job site, or to perform construction labor and furnish material in connection with such labor at the job site.

CONTRACT BOND: The approved form of security furnished by the contractor and his surety as a guaranty of good faith on the part of the contractor to execute the work in accordance with the terms of the contract.

1.02 ARTICLE 2: BIDDER'S REPRESENTATIONS

A. PRE-BID MEETING

1. A pre-bid meeting for this project will be held at the time and place designated. Attendance at this meeting is a pre-requisite for submitting a Bid, unless this requirement is specifically waived elsewhere in the Bid Documents.
2. By submitting a Bid, the Bidder represents that:
3. The Bidder has read and understands the Bidding Documents and that the Bid is made in accordance therewith.
4. The Bidder has visited the site, become familiar with existing conditions under which the Work is to be performed, and has correlated the Bidder's his personal

observations with the requirements of the proposed Contract Documents.

5. The Bid is based upon the materials, equipment, and systems required by the Bidding Documents without exception.

B. JOINT VENTURE REQUIREMENTS

1. For Public Works Contracts, each Joint Venturer shall be qualified and capable to complete the Work with their own forces.
2. Included with the Bid submission, and as a requirement to bid, a copy of the executed Joint Venture Agreement shall be submitted and signed by all Joint Venturers involved.
3. All required Bid Bonds, Performance Bonds, Material and Labor Payment Bonds must be executed by both Joint Venturers and be placed in both of their names.
4. All required insurance certificates shall name both Joint Venturers.
5. Both Joint Venturers shall sign the Bid Form and shall submit a valid Delaware Business License Number with their Bid or shall state that the process of application for a Delaware Business License has been initiated.
6. Both Joint Venturers shall include their Federal E.I. Number with the Bid.
7. In the event of a mandatory Pre-bid Meeting, each Joint Venturer shall have a representative in attendance.
8. Due to exceptional circumstances and for good cause shown, one or more of these provisions may be waived at the discretion of the State.

C. ASSIGNMENT OF ANTITRUST CLAIMS

1. As consideration for the award and execution by the Owner of this contract, the Contractor hereby grants, conveys, sells, assigns and transfers to the State of Delaware all of its right, title and interests in and to all known or unknown causes of action it presently has or may now or hereafter acquire under the antitrust laws of the United States and the State of Delaware, relating to the particular goods or services purchased or acquired by the Owner pursuant to this contract.

1.03 ARTICLE 3: BIDDING DOCUMENTS

A. COPIES OF BID DOCUMENTS

1. Refer to Advertisement (or Invitation) for Bids for information concerning locations where Bidding Documents may be seen or obtained and under what conditions. Deposits for documents are non-refundable.
2. Bidders shall use complete sets of Bidding Documents for preparation of Bids. The issuing Agency nor the Architect assumes no responsibility for errors or misinterpretations resulting from the use of incomplete sets of Bidding Documents.
3. Any errors, inconsistencies or omissions discovered shall be reported to the Architect immediately.
4. The Agency and Architect may make copies of the Bidding Documents available on the above terms for the purpose of obtaining Bids on the Work. No license or grant of use is conferred by issuance of copies of the Bidding Documents.

B. INTERPRETATION OR CORRECTION OF BIDDING DOCUMENTS

1. The Bidder shall carefully study and compare the Bidding Documents with each other, and with other work being bid concurrently or presently under construction to the extent that it relates to the Work for which the Bid is submitted, shall examine the site and local conditions, and shall report any errors, inconsistencies, or ambiguities discovered to the Architect.
2. Bidders or Sub-bidders requiring clarification or interpretation of the Bidding

Documents shall make a written request to the Architect at least seven days prior to the date for receipt of Bids. Interpretations, corrections and changes to the Bidding Documents will be made by written Addendum. Interpretations, corrections, or changes to the Bidding Documents made in any other manner shall not be binding.

3. The apparent silence of the specifications as to any detail, or the apparent omission from it of detailed description concerning any point, shall be regarded as meaning that only the best commercial practice is to prevail and only material and workmanship of the first quality are to be used. Proof of specification compliance will be the responsibility of the Bidder.
4. Unless otherwise provided in the Contract Documents, the Contractor shall provide and pay for all permits, labor, materials, equipment, tools, construction equipment and machinery, water, heat, utilities, transportation, and other facilities and services necessary for the proper execution and completion of the Work.
5. The Owner will bear the costs for all impact and user fees associated with the project.

C. SUBSTITUTIONS

1. The materials, products and equipment described in the Bidding Documents establish a standard of quality, required function, dimension, and appearance to be met by any proposed substitution. The specification of a particular manufacturer or model number is not intended to be proprietary in any way. Substitutions of products for those named will be considered, providing that the Bidder certifies that the function, quality, and performance characteristics of the material offered is equal or superior to that specified. It shall be the Bidder's responsibility to assure that the proposed substitution will not affect the intent of the design, and to make any installation modifications required to accommodate the substitution.
2. Requests for substitutions shall be made in writing to the Architect at least ten days prior to the date of the Bid Opening. Such requests shall include a complete description of the proposed substitution, drawings, performance and test data, explanation of required installation modifications due the substitution, and any other information necessary for an evaluation. The burden of proof of the merit of the proposed substitution is upon the proposer. The Architect's decision of approval or disapproval shall be final. The Architect is to notify Owner prior to any approvals.
3. If the Architect approves a substitution prior to the receipt of Bids, such approval shall be set forth in an Addendum. Approvals made in any other manner shall not be binding.
4. The Architect shall have no obligation to consider any substitutions after the Contract award.
5. Bidders shall conform to requirements in Section 01600 MATERIAL AND EQUIPMENT.

D. ADDENDA

1. Addenda will be mailed or delivered to all who are known by the Architect to have received a complete set of the Bidding Documents.
2. Copies of Addenda will be made available for inspection wherever Bidding Documents are on file for that purpose.
3. No Addenda will be issued later than 4 days prior to the date for receipt of Bids except an Addendum withdrawing the request for Bids or one which extends the

time or changes the location for the opening of bids.

4. Each bidder shall ascertain prior to submitting his Bid that they have received all Addenda issued, and shall acknowledge their receipt in their Bid in the appropriate space. Not acknowledging an issued Addenda could be grounds for determining a bid to be non-responsive.

1.04 ARTICLE 4: BIDDING PROCEDURES

A. PREPARATION OF BIDS

1. Submit the bids on the Bid Forms included with the Bidding Documents.
2. Submit the original Bid Form for each bid. Bid Forms may be removed from the project manual for this purpose.
3. Execute all blanks on the Bid Form in a non-erasable medium (typewriter or manually in ink).
4. Where so indicated by the makeup on the Bid Form, express sums in both words and figures, in case of discrepancy between the two, the written amount shall govern.
5. Interlineations, alterations or erasures must be initialed by the signer of the Bid.
6. BID ALL REQUESTED ALTERNATES AND UNIT PRICES, IF ANY. If there is no change in the Base Bid for an Alternate, enter "No Change". The Contractor is responsible for verifying that they have received all addenda issued during the bidding period. Work required by Addenda shall automatically become part of the Contract.
7. Make no additional stipulations on the Bid Form and do not qualify the Bid in any other manner.
8. Each copy of the Bid shall include the legal name of the Bidder and a statement whether the Bidder is a sole proprietor, a partnership, a corporation, or any legal entity, and each copy shall be signed by the person or persons legally authorized to bind the Bidder to a contract. A Bid by a corporation shall further give the state of incorporation and have the corporate seal affixed. A Bid submitted by an agent shall have a current Power of Attorney attached, certifying agent's authority to bind the Bidder.
9. Bidder shall complete the Non-Collusion Statement form included with the Bid Forms and include it with their Bid.
10. In the construction of all Public Works projects for the State of Delaware or any agency thereof, preference in employment of laborers, workers or mechanics shall be given to bona fide legal citizens of the State who have established citizenship by residence of at least 90 days in the State.

B. BID SECURITY

1. All bids shall be accompanied by a deposit of either a good and sufficient bond to the agency for the benefit of the agency, with corporate surety authorized to do business in this State, the form of the bond and the surety to be approved by the agency, or a security of the bidder assigned to the agency, for a sum equal to at least 10% of the bid plus all add alternates, or in lieu of the bid bond a security deposit in the form of a certified check, bank treasurer's check, cashier's check, money order, or other prior approved secured deposit assigned to the State. The bid bond need not be for a specific sum, but may be stated to be for a sum equal to 10% of the bid plus all add alternates to which it relates and not to exceed a certain stated sum, if said sum is equal to at least 10% of the bid. The Bid Bond form used shall be the standard OMB form (attached).

2. The Agency has the right to retain the bid security of Bidders to whom an award is being considered until either a formal contract has been executed and bonds have been furnished or the specified time has elapsed so the Bids may be withdrawn or all Bids have been rejected.
3. In the event of any successful Bidder refusing or neglecting to execute a formal contract and bond within 20 days of the awarding of the contract, the bid bond or security deposited by the successful bidder shall be forfeited.

C. SUBCONTRACTOR LIST

1. As required by Delaware Code, Title 29, section 6962(d)(10)b, each Bidder shall submit with their Bid a completed List of Sub-Contractors included with the Bid Form. NAME ONLY ONE SUBCONTRACTOR FOR EACH TRADE. A Bid will be considered non-responsive unless the completed list is included.
2. Provide the Name and Address for each listed subcontractor. Addresses by City, Town or Locality, plus State, will be acceptable.
3. It is the responsibility of the Contractor to ensure that their Subcontractors are in compliance with the provisions of this law. Also, if a Contractor elects to list themselves as a Subcontractor for any category, they must specifically name themselves on the Bid Form and be able to document their capability to act as Subcontractor in that category in accordance with this law.

D. EQUALITY OF EMPLOYMENT OPPORTUNITY ON PUBLIC WORKS

1. During the performance of this contract, the contractor agrees as follows:
 - a. The Contractor will not discriminate against any employee or applicant for employment because of race, creed, color, sex or national origin. The Contractor will take affirmative action to ensure the applicants are employed, and that employees are treated during employment, without regard to their race, creed, color, sex or national origin. Such action shall include, but not be limited to, the following: Employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship. The Contractor agrees to post in conspicuous places available to employees and applicants for employment notices to be provided by the contracting agency setting forth this nondiscrimination clause.
 - b. The Contractor will, in all solicitations or advertisements for employees placed by or on behalf of the Contractor, state that all qualified applicants will receive consideration for employment without regard to race, creed, color, sex or national origin."

E. PREVAILING WAGE REQUIREMENT

1. Wage Provisions: In accordance with Delaware Code, Title 29, Section 6960, renovation projects whose total cost shall exceed \$15,000, and \$100,000 for new construction, the minimum wage rates for various classes of laborers and mechanics shall be as determined by the Department of Labor, Division of Industrial Affairs of the State of Delaware.
2. The prevailing wage shall be the wage paid to a majority of employees performing similar work as reported in the Department's annual prevailing wage survey or in the absence of a majority, the average paid to all employees reported.
3. The employer shall pay all mechanics and labors employed directly upon the site of work, unconditionally and not less often than once a week and without

subsequent deduction or rebate on any account, the full amounts accrued at time of payment, computed at wage rates not less than those stated in the specifications, regardless of any contractual relationship which may be alleged to exist between the employer and such laborers and mechanics.

4. The scale of the wages to be paid shall be posted by the employer in a prominent and easily accessible place at the site of the work.
5. Every contract based upon these specifications shall contain a stipulation that sworn payroll information, as required by the Department of Labor, be furnished weekly. The Department of Labor shall keep and maintain the sworn payroll information for a period of 6 months from the last day of the work week covered by the payroll.

F. SUBMISSION OF BIDS

1. Enclose the Bid, the Bid Security, and any other documents required to be submitted with the Bid in a sealed opaque envelope. Address the envelope to the party receiving the Bids. Identify with the project name, project number, and the Bidder's name and address. If the Bid is sent by mail, enclose the sealed envelope in a separate mailing envelope with the notation "BID ENCLOSED" on the face thereof. The State is not responsible for the opening of bids prior to bid opening date and time that are not properly marked.
2. Deposit Bids at the designated location prior to the time and date for receipt of bids indicated in the Advertisement for Bids. Bids received after the time and date for receipt of bids will be marked "LATE BID" and returned.
3. Bidder assumes full responsibility for timely delivery at location designated for receipt of bids.
4. Oral, telephonic or telegraphic bids are invalid and will not receive consideration.
5. Withdrawn Bids may be resubmitted up to the date and time designated for the receipt of Bids, provided that they are then fully in compliance with these Instructions to Bidders.

G. MODIFICATION OR WITHDRAW OF BIDS

1. Prior to the closing date for receipt of Bids, a Bidder may withdraw a Bid by personal request and by showing proper identification to the Architect. A request for withdraw by letter or fax, if the Architect is notified in writing prior to receipt of fax, is acceptable. A fax directing a modification in the bid price will render the Bid informal, causing it to be ineligible for consideration of award. Telephone directives for modification of the bid price shall not be permitted and will have no bearing on the submitted proposal in any manner.
2. Bidders submitting Bids that are late shall be notified as soon as practicable and the bid shall be returned.
3. A Bid may not be modified, withdrawn or canceled by the Bidder during a thirty (30) day period following the time and date designated for the receipt and opening of Bids, and Bidder so agrees in submitting their Bid. Bids shall be binding for 30 days after the date of the Bid opening.

1.05 ARTICLE 5: CONSIDERATION OF BIDS

A. OPENING/REJECTION OF BIDS

1. Unless otherwise stated, Bids received on time will be publicly opened and will be read aloud. An abstract of the Bids will be made available to Bidders.
2. The Agency shall have the right to reject any and all Bids. A Bid not

accompanied by a required Bid Security or by other data required by the Bidding Documents, or a Bid which is in any way incomplete or irregular is subject to rejection.

3. If the Bids are rejected, it will be done within thirty (30) calendar day of the Bid opening.

B. COMPARISON OF BIDS

1. After the Bids have been opened and read, the bid prices will be compared and the result of such comparisons will be made available to the public. Comparisons of the Bids may be based on the Base Bid plus desired Alternates. The Agency shall have the right to accept Alternates in any order or combination.
2. The Agency reserves the right to waive technicalities, to reject any or all Bids, or any portion thereof, to advertise for new Bids, to proceed to do the Work otherwise, or to abandon the Work, if in the judgment of the Agency or its agent(s), it is in the best interest of the State.
3. An increase or decrease in the quantity for any item is not sufficient grounds for an increase or decrease in the Unit Price.
4. The prices quoted are to be those for which the material will be furnished F.O.B. Job Site and include all charges that may be imposed during the period of the Contract.
5. No qualifying letter or statements in or attached to the Bid, or separate discounts will be considered in determining the low Bid except as may be otherwise herein noted. Cash or separate discounts should be computed and incorporated into Unit Bid Price(s).

C. DISQUALIFICATION OF BIDDERS

1. An agency shall determine that each Bidder on any Public Works Contract is responsible before awarding the Contract. Factors to be considered in determining the responsibility of a Bidder include:
 - a. The Bidder's financial, physical, personnel or other resources including Subcontracts;
 - b. The Bidder's record of performance on past public or private construction projects, including, but not limited to, defaults and/or final adjudication or admission of violations of the Prevailing Wage Laws in Delaware or any other state;
 - c. The Bidder's written safety plan;
 - d. Whether the Bidder is qualified legally to contract with the State;
 - e. Whether the Bidder supplied all necessary information concerning its responsibility; and,
 - f. Any other specific criteria for a particular procurement, which an agency may establish; provided however, that, the criteria be set forth in the Invitation to Bid and is otherwise in conformity with State and/or Federal law.
2. If an agency determines that a Bidder is nonresponsive and/or nonresponsible, the determination shall be in writing and set forth the basis for the determination. A copy of the determination shall be sent to the affected Bidder within five (5) working days of said determination.
3. In addition, any one or more of the following causes may be considered as sufficient for the disqualification of a Bidder and the rejection of their Bid or Bids.
 - a. More than one Bid for the same Contract from an individual, firm or corporation under the same or different names.

- b. Evidence of collusion among Bidders.
- c. Unsatisfactory performance record as evidenced by past experience.
- d. If the Unit Prices are obviously unbalanced either in excess or below reasonable cost analysis values.
- e. If there are any unauthorized additions, interlineation, conditional or alternate bids or irregularities of any kind which may tend to make the Bid incomplete, indefinite or ambiguous as to its meaning.
- f. If the Bid is not accompanied by the required Bid Security and other data required by the Bidding Documents.
- g. If any exceptions or qualifications of the Bid are noted on the Bid Form.

D. ACCEPTANCE OF BID AND AWARD OF CONTRACT

1. A formal Contract shall be executed with the successful Bidder within twenty (20) calendar days after the award of the Contract.
2. Per Section 6962(d)(13) a., Title 29, Delaware Code, "The contracting agency shall award any public works contract within thirty (30) days of the bid opening to the lowest responsive and responsible Bidder, unless the Agency elects to award on the basis of best value, in which case the election to award on the basis of best value shall be stated in the Invitation To Bid."
3. Each Bid on any Public Works Contract must be deemed responsive by the Agency to be considered for award. A responsive Bid shall conform in all material respects to the requirements and criteria set forth in the Contract Documents and specifications.
4. The Agency shall have the right to accept Alternates in any order or combination, and to determine the low Bidder on the basis of the sum of the Base Bid, plus accepted Alternates.
5. The successful Bidder shall execute a formal contract, submit the required Insurance Certificate, and furnish good and sufficient bonds, unless specifically waived in the General Requirements, in accordance with the General Requirement, within twenty (20) days of official notice of contract award. Bonds shall be for the benefit of the Agency with surety in the amount of 100% of the total contract award. Said Bonds shall be conditioned upon the faithful performance of the contract. Bonds shall remain in affect for period of one year after the date of substantial completion.
6. If the successful Bidder fails to execute the required Contract and Bond, as aforesaid, within twenty (20) calendar days after the date of official Notice of the Award of the Contract, their Bid guaranty shall immediately be taken and become the property of the State for the benefit of the Agency as liquidated damages, and not as a forfeiture or as a penalty. Award will then be made to the next lowest qualified Bidder of the Work or readvertised, as the Agency may decide.
7. Prior to receiving an award, the successful Bidder shall furnish to the Agency proof of State of Delaware Business Licensure. If the Bidder does not currently have a Business License, they may obtain an application by writing to: Division of Revenue, Carvel State Office Building, 820 French Street, Wilmington, DE 19899. A copy of the letter written to the Division of Revenue, sent with your Bid will be adequate proof for your firm to be considered for award until such time as you receive your license.

8. The Bid Security shall be returned to the successful Bidder upon the execution of the formal contract. The Bid Securities of unsuccessful bidders shall be returned within thirty (30) calendar days after the opening of the Bids.

1.06 ARTICLE 6: POST-BID INFORMATION

A. CONTRACTOR'S QUALIFICATION STATEMENT

1. Bidders to whom award of a Contract is under consideration shall, if requested by the Agency, submit a properly executed AIA Document A305, Contractor's Qualification Statement, unless such a statement has been previously required and submitted.

B. BUSINESS DESIGNATION FORM

1. Successful bidder shall be required to accurately complete an Office of Management and Budget Business Designation Form for Subcontractors.

1.07 ARTICLE 7: PERFORMANCE BOND AND PAYMENT BOND

A. BOND REQUIREMENTS

1. The cost of furnishing the required Bonds, that are stipulated in the Bidding Documents, shall be included in the Bid.
2. If the Bidder is required by the Agency to secure a bond from other than the Bidder's usual sources, changes in cost will be adjusted as provide in the Contract Documents.
3. The Performance and Payment Bond forms used shall be the standard OMB forms (attached).

B. TIME OF DELIVERY AND FORM OF BONDS

1. The bonds shall be dated on or after the date of the Contract.
2. The Bidder shall require the attorney-in-fact who executes the required bonds on behalf of the surety to affix a certified and current copy of the power of attorney.

1.08 ARTICLE 8: FORM OF AGREEMENT BETWEEN AGENCY AND CONTRACTOR

- A. Unless otherwise required in the Bidding Documents, the Agreement for the Work will be written on AIA Document A101, Standard Form of Agreement Between Owner and Contractor Where the Basis of Payment is a Stipulated Sum.

END OF INSTRUCTIONS TO BIDDERS

STATE OF DELAWARE
DEPARTMENT OF LABOR
DIVISION OF INDUSTRIAL AFFAIRS
OFFICE OF LABOR LAW ENFORCEMENT
PHONE: (302) 451-3423

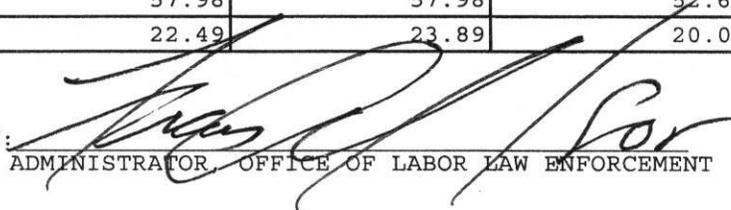
Mailing Address:
225 CORPORATE BOULEVARD
SUITE 104
NEWARK, DE 19702

Located at:
225 CORPORATE BOULEVARD
SUITE 104
NEWARK, DE 19702

PREVAILING WAGES FOR BUILDING CONSTRUCTION EFFECTIVE MARCH 15, 2012

CLASSIFICATION	NEW CASTLE	KENT	SUSSEX
ASBESTOS WORKERS	23.22	29.83	39.20
BOILERMAKERS	65.47	33.22	48.83
BRICKLAYERS	45.63	45.63	45.63
CARPENTERS	49.06	49.06	39.22
CEMENT FINISHERS	40.38	29.11	21.20
ELECTRICAL LINE WORKERS	43.49	37.29	28.44
ELECTRICIANS	59.10	59.10	59.10
ELEVATOR CONSTRUCTORS	73.14	40.93	30.55
GLAZIERS	62.60	62.60	54.20
INSULATORS	50.38	50.38	50.38
IRON WORKERS	58.70	58.70	58.70
LABORERS	37.20	37.20	37.20
MILLWRIGHTS	60.85	60.85	47.42
PAINTERS	40.62	40.62	40.62
PILEDRIVERS	66.42	37.64	30.45
PLASTERERS	21.61	21.61	17.50
PLUMBERS/PIPEFITTERS/STEAMFITTERS	57.95	43.24	46.28
POWER EQUIPMENT OPERATORS	55.81	55.81	24.13
ROOFERS-COMPOSITION	21.01	20.71	17.02
ROOFERS-SHINGLE/SLATE/TILE	17.59	17.50	16.45
SHEET METAL WORKERS	64.39	62.18	62.18
SOFT FLOOR LAYERS	44.92	44.92	44.92
SPRINKLER FITTERS	50.65	50.65	50.65
TERRAZZO/MARBLE/TILE FNRS	50.50	50.50	45.45
TERRAZZO/MARBLE/TILE STRS	57.98	57.98	52.63
TRUCK DRIVERS	22.49	23.89	20.03

CERTIFIED: 9/7/12

BY: 
ADMINISTRATOR, OFFICE OF LABOR LAW ENFORCEMENT

NOTE: THESE RATES ARE PROMULGATED AND ENFORCED PURSUANT TO THE PREVAILING WAGE REGULATIONS ADOPTED BY THE DEPARTMENT OF LABOR ON APRIL 3, 1992.

CLASSIFICATIONS OF WORKERS ARE DETERMINED BY THE DEPARTMENT OF LABOR. FOR ASSISTANCE IN CLASSIFYING WORKERS, OR FOR A COPY OF THE REGULATIONS OR CLASSIFICATIONS, PHONE (302) 451-3423.

NON-REGISTERED APPRENTICES MUST BE PAID THE MECHANIC'S RATE.

PROJECT: Del Tech Stanton Campus Roof Replacement Area A, New Castle County

SECTION 004150

BID FORM

FOR BIDS DUE: _____

TO: DELAWARE TECHNICAL &
COMMUNITY COLLEGE
400 STANTON-CHRISTIANA
ROAD
NEWARK, DE 19713

FOR: STANTON CAMPUS ROOF
REPLACEMENT - AREA "A"
400 STANTON-CHRISTIANA
ROAD
NEWARK, DE 19713

FOR CONTRACT: ROOF REPLACEMENT

NAME OF BIDDER:

DELAWARE BUSINESS LICENSE NO.: _____

TAXPAYER ID NO.: _____

(OTHER LICENSE NOS.): _____

PHONE NO.: () _____ FAX NO.: () _____

EMAIL ADDRESS: _____

The undersigned, representing that he has read and understands the Bidding Documents, including the complete Project Manual and the Drawings as listed in the Table of Contents, all dated _____, 20_____, and that this bid is made in accordance therewith, that he has visited the site and has familiarized himself with the local conditions under which the Work is to be performed, and that his bid is based upon the materials, systems and equipment described in the Bidding Documents without exception, hereby proposes and agrees to provide all labor, materials, plant, equipment, supplies, transport and other facilities required to execute the work described by the aforesaid documents for the lump sum itemized below:

BASE BID:

(expressed in words)

(\$ _____)

(expressed in figures)

BID FORM

ALTERNATES

Alternate prices conform to applicable project specification section. Refer to specifications for a complete description of the following Alternates. An "ADD" or "DEDUCT" amount is indicated by the crossed out part that does not apply.

ALTERNATE NO. 1: BLACK EPDM ROOF MEMBRANE

Add/Deduct: _____
(expressed in words)
(\$ _____)
(expressed in figures)

ALTERNATE NO. 2: ROOF DRAIN REPLACEMENT

Add/Deduct: _____
(expressed in words)
(\$ _____)
(expressed in figures)

ALTERNATE NO. 3: ADDED ROOF LADDERS

Add/Deduct: _____
(expressed in words)
(\$ _____)
(expressed in figures)

BID FORM

SIGNATURE FORM

I / We acknowledge Addendas Numbered _____ .

The price(s) submitted include any cost / schedule impact they may have.

This bid shall remain valid and cannot be withdrawn for 30 days from the date of opening of bids, and the undersigned shall abide by the Bid Security forfeiture provisions. Bid Security is attached to this Bid.

The Owner shall have the right to reject any or all bids, and to waive any informality or irregularity in any bid received. This bid is based upon work being accomplished by the Sub-Contractors named on the list attached to this bid. Should I/We be awarded this contract, I/We pledge to achieve Substantial Completion of the work in conformance with the project schedule.

The undersigned represents and warrants that he has complied and shall comply with all requirements of local, state, and national laws; that no legal requirement has been or shall be violated in making or accepting this bid, in awarding the contract to him or in the prosecution of the work required; that the bid is legal and firm; that he has not, directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken action in restraint of free competitive bidding.

Upon receipt of written notice of the acceptance of this Bid, the Bidder shall, within twenty (20) calendar days, execute the agreement in the required form and deliver the Contract Bonds, and Insurance Certificates, required by the Contract Documents.

I am / We are an Individual / a Partnership / a Corporation

By: _____

Trading as: _____

(Individual's / General Partner's / Corporate Name)

(State of Corporation)

Business Address: _____

Witness: _____ By: _____

(Authorized Signature)

(SEAL)

(Title)

(Date)

I/We have: Completed the Sub-Contractor List.
Completed the Non-Collusion Statement.
Attached the Bid Security.

BID FORM
SUBCONTRACTOR LIST

In accordance with Title 29, Chapter 6962 (d)(10)G Delaware Code, the following sub-contractor listing must accompany the bid submittal. The name and address of the sub-contractor must be listed for each category where the bidder intends to use a sub-contractor to perform that category of work. In order to provide full disclosure and acceptance of the bid by the Owner, it is required that bidders list themselves as being the sub-contractor for all categories where he/she is qualified and intends to perform such work.

SUBCONTRACTOR

CATEGORY STATE)	SUBCONTRACTOR	ADDRESS (CITY &
Roofing	_____	_____
Plumbing	_____	_____
Lightning Protection	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____

BID FORM
NON-COLLUSION STATEMENT

This is to certify that the undersigned bidder has neither directly nor indirectly, entered into any agreement, participated in any collusion or otherwise taken any action in restraint of free competitive bidding in connection with this proposal submitted this date.

All the terms and conditions of this Contract have been thoroughly examined and are understood.

NAME OF BIDDER: _____

AUTHORIZED REPRESENTATIVE
(TYPED): _____

AUTHORIZED REPRESENTATIVE
(SIGNATURE): _____

TITLE: _____

ADDRESS OF BIDDER: _____

PHONE NUMBER: _____

Sworn to and Subscribed before me this _____ day of _____, 20__

My Commission expires : _____ NOTARY PUBLIC _____

THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.

END OF DOCUMENT

SECTION 005000

CONTRACTING FORMS AND SUPPLEMENTS

PART 1 GENERAL

1.01 LICENSES

- A. Contractor is responsible for obtaining a valid license to use all copyrighted documents specified but not included in the Project Manual.

1.02 AGREEMENT AND CONDITIONS OF THE CONTRACT

- A. See Section 007250 for the State of Delaware General Requirements.
- B. See Section 007350 for the Supplementary Conditions.
- C. The Agreement form is AIA A101.
- D. The General Conditions are AIA A201.

1.03 FORMS

- A. Use the following forms for the specified purposes unless otherwise indicated elsewhere in the Contract Documents.
- B. Bond Forms:
 - 1. Performance and Payment Bond Form: Conform to those approved by the State of Delaware Office of Management and Budget (attached to this Section).
- C. Post-Award Certificates and Other Forms:
 - 1. Schedule of Values Form: AIA G703.
 - 2. Application for Payment Form: AIA G702 and G703.
- D. Clarification and Modification Forms:
 - 1. Change Order Form: AIA G701.
- E. Closeout Forms:
 - 1. Certificate of Substantial Completion Form: AIA G704.
 - 2. Affidavit of Payment of Debts and Claims Form: AIA G706.
 - 3. Affidavit of Release of Liens Form: AIA G706a.
 - 4. Consent of Surety to Final Payment Form: AIA G707.

1.04 REFERENCE STANDARDS

- A. AIA A101 - Standard Form of Agreement Between Owner and Contractor where the basis of payment is a Stipulated Sum; 2007.
- B. AIA A201 - General Conditions of the Contract for Construction; 2007.
- C. AIA G701 - Change Order; 2001.
- D. AIA G702 - Application and Certificate for Payment; 1992.
- E. AIA G703 - Continuation Sheet; 1992.
- F. AIA G704 - Certificate of Substantial Completion; 2000.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

**STATE OF DELAWARE
PERFORMANCE BOND**

Bond Number: _____

KNOW ALL PERSONS BY THESE PRESENTS, that we, _____, as principal (“**Principal**”), and _____, a _____ corporation, legally authorized to do business in the State of Delaware, as surety (“**Surety**”), are held and firmly bound unto the _____ (“**Owner**”) (*insert State agency name*), in the amount of _____ (\$ _____), to be paid to **Owner**, for which payment well and truly to be made, we do bind ourselves, our and each and every of our heirs, executors, administrations, successors and assigns, jointly and severally, for and in the whole, firmly by these presents.

Sealed with our seals and dated this _____ day of _____, 20__.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH, that if **Principal**, who has been awarded by **Owner** that certain contract known as Contract No. _____ dated the _____ day of _____, 20__ (the “Contract”), which Contract is incorporated herein by reference, shall well and truly provide and furnish all materials, appliances and tools and perform all the work required under and pursuant to the terms and conditions of the Contract and the Contract Documents (as defined in the Contract) or any changes or modifications thereto made as therein provided, shall make good and reimburse **Owner** sufficient funds to pay the costs of completing the Contract that **Owner** may sustain by reason of any failure or default on the part of **Principal**, and shall also indemnify and save harmless **Owner** from all costs, damages and expenses arising out of or by reason of the performance of the Contract and for as long as provided by the Contract; then this obligation shall be void, otherwise to be and remain in full force and effect.

Surety, for value received, hereby stipulates and agrees, if requested to do so by **Owner**, to fully perform and complete the work to be performed under the Contract pursuant to the terms, conditions and covenants thereof, if for any cause **Principal** fails or neglects to so fully perform and complete such work.

Surety, for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of **Surety** and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition or change in or to the Contract or the work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any work to be performed or any monies due or to become due thereunder; and **Surety** hereby waives notice of any and all such extensions, modifications, omissions, additions, changes, payments, waivers, assignments, subcontracts and transfers and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to assignees, subcontractors, and other transferees shall have the same effect as to **Surety** as though done or omitted to be done by or in relation to **Principal**.

Surety hereby stipulates and agrees that no modifications, omissions or additions in or to the terms of the Contract shall in any way whatsoever affect the obligation of **Surety** and its bond.

Any proceeding, legal or equitable, under this Bond may be brought in any court of competent jurisdiction in the State of Delaware. Notices to **Surety** or Contractor may be mailed or delivered to them at their respective addresses shown below.

IN WITNESS WHEREOF, **Principal** and **Surety** have hereunto set their hand and seals, and such of them as are corporations have caused their corporate seal to be hereto affixed and these presents to be signed by their duly authorized officers, the day and year first above written.

PRINCIPAL

Name: _____

Witness or Attest: Address: _____

Name:

(Corporate Seal)

By: _____ (SEAL)
Name:
Title:

SURETY

Name: _____

Witness or Attest: Address: _____

Name:

(Corporate Seal)

By: _____ (SEAL)
Name:
Title:

**STATE OF DELAWARE
PAYMENT BOND**

Bond Number: _____

KNOW ALL PERSONS BY THESE PRESENTS, that we, _____, as principal (“**Principal**”), and _____, a _____ corporation, legally authorized to do business in the State of Delaware, as surety (“**Surety**”), are held and firmly bound unto the _____ (“**Owner**”) (*insert State agency name*), in the amount of _____ (\$ _____), to be paid to **Owner**, for which payment well and truly to be made, we do bind ourselves, our and each and every of our heirs, executors, administrations, successors and assigns, jointly and severally, for and in the whole firmly by these presents.

Sealed with our seals and dated this _____ day of _____, 20__.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH, that if **Principal**, who has been awarded by **Owner** that certain contract known as Contract No. _____ dated the _____ day of _____, 20__ (the “Contract”), which Contract is incorporated herein by reference, shall well and truly pay all and every person furnishing materials or performing labor or service in and about the performance of the work under the Contract, all and every sums of money due him, her, them or any of them, for all such materials, labor and service for which **Principal** is liable, shall make good and reimburse **Owner** sufficient funds to pay such costs in the completion of the Contract as **Owner** may sustain by reason of any failure or default on the part of **Principal**, and shall also indemnify and save harmless **Owner** from all costs, damages and expenses arising out of or by reason of the performance of the Contract and for as long as provided by the Contract; then this obligation shall be void, otherwise to be and remain in full force and effect.

Surety, for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of **Surety** and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition or change in or to the Contract or the work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any work to be performed or any monies due or to become due thereunder; and **Surety** hereby waives notice of any and all such extensions, modifications, omissions, additions, changes, payments, waivers, things done and omitted to be done by and in relation to assignees, subcontractors, and other transferees shall have the same effect as to **Surety** as though done or omitted to be done by or in relation to **Principal**.

Surety hereby stipulates and agrees that no modifications, omission or additions in or to the terms of the Contract shall in any way whatsoever affect the obligation of **Surety** and its bond.

Any proceeding, legal or equitable, under this Bond may be brought in any court of competent jurisdiction in the State of Delaware. Notices to **Surety** or Contractor may be mailed or delivered to them at their respective addresses shown below.

IN WITNESS WHEREOF, **Principal** and **Surety** have hereunto set their hand and seals, and such of them as are corporations have caused their corporate seal to be hereto affixed and these presents to be signed by their duly authorized officers, the day and year first above written.

PRINCIPAL

Name: _____

Witness or Attest: Address: _____

Name:

(Corporate Seal)

By: _____ (SEAL)
Name:
Title:

SURETY

Name: _____

Witness or Attest: Address: _____

Name:

(Corporate Seal)

By: _____ (SEAL)
Name:
Title:

SECTION 005400

AMENDMENT TO THE CONTRACT FOR CONSTRUCTION

BETWEEN

DELAWARE TECHNICAL & COMMUNITY COLLEGE

AND

< CONTRACTOR NAME >

The parties hereby agree that the AIA Document A101 – 2007 “Standard Form of Agreement between Owner and Contractor” shall govern this transaction as supplemented and amended herein. The parties expressly agree that the terms of this amendment shall govern in the event of a conflict between the terms of the AIA Document or any document referenced or incorporated therein, and that any contrary provision of any such document shall be superseded hereby.

1. By signing this Agreement, Contractor swears that he has not employed or retained any company or person, other than a bona fide employee working primarily for the firm offering professional services, to solicit or secure this agreement, and that he has not been paid or agreed to pay any person, company, corporation, individual, or firm, other than a bona fide employee working primarily for the firm offering professional services, any fee, commission, percentage, gift, or any other consideration, contingent upon or resulting from the award or making of this agreement;
2. All provisions of the Bid Package and Project manual are incorporated herein by reference as though fully set forth.
3. In the event the attached contract or aggregate of contracts is in excess of \$100,000 for new construction (including painting and decorating) or \$15,000 for alteration, repair, renovation, rehabilitation, demolition or reconstruction (including painting and decorating of buildings or works) and requires or involves the employment of mechanics and/or laborers, then the minimum wages to be paid to the various classes of laborers and mechanics shall be based upon the wages that will be determined by the Delaware Department of Labor, Division of Industrial Affairs, to be prevailing in the county in which the work is to be performed.
4. Contractor shall pay all mechanics and laborers employed directly upon the site of the work, unconditionally and not less often than once a week and without subsequent deduction or rebate on any account, the full amounts accrued at time of payment, computed at wage rates not less than the prevailing wages, regardless of any contractual relationship which may be alleged to exist between the employer and such laborers and mechanics, and shall provide sworn payroll information, as required by the Department of Labor, on a weekly basis;
5. All changes to the scope of construction shall be authorized in writing by Owner in advance. Owner shall not be liable for payment of any change order that has not received prior written authorization. The cost of any change order shall be set forth therein. If no such provision is set forth in the change order, then the cost to

- the Owner shall be the Contractor's costs for wages, labor costs other than wages, wage taxes, materiel, equipment rentals, insurance and subcontracts attributable to the additional activity plus a reasonable sum for overhead and profit not to exceed 5%;
6. Preference in employment of laborers, workers or mechanics shall be given to bona fide legal citizens of the State who have established citizenship by residence of at least 90 days in the State. Contractor shall pay a penalty to the Secretary of Finance equal to the amount of compensation paid to any person in violation of this section;
 7. Payments are due 30 days after receipt of a valid Application for Payment. Payments due and unpaid after 30 days shall bear interest of one percent per month not to exceed twelve percent per annum;
 8. Final payment shall not be due until all non-conforming work has been corrected and all other provisions of the agreement have been met, including, but not limited to, all reporting requirements;
 9. Owner may terminate this agreement or suspend work hereunder for any reason authorized by applicable Delaware law;
 10. §6.2 is hereby deleted. The parties reserve all remedies available at law or equity for any dispute not resolved in accordance with §6.1. In the event legal action is instituted to enforce performance hereunder, the prevailing party shall be entitled to an award of attorneys fees and costs in addition to all other relief granted;
 11. Simultaneous with the execution of this contract, Contractor shall also execute a good and sufficient bond for the benefit of Owner, with corporate surety authorized to do business in this State, in a sum equal to 100% of the contract price and the bond form used shall be the standard form issued by the Office of Management and Budget;
 12. The bond shall be conditioned upon the faithful compliance and performance by the successful bidder of each and every term and condition of the contract and the proposal and plans and specifications thereof, at the time and in the manner prescribed by the contract and the plans and specifications, including the payment in full, to every firm furnishing materiel or performing labor in the performance of the contract, of all sums of money due it for such labor or materiel. The bond shall also contain the Contractor's guarantee to indemnify and save harmless the Owner from all costs, damages and expenses growing out of or by reason of Contractor's failure to comply and perform the work and complete the contract in accordance with its terms. No firm or surety, in any action brought under 29 Del C §6962, or any successor law, or on the bond required by such statute, shall assert as a defense to such action the claim that the bond given contained a limitation or restriction not provided for by Chapter 69, Title 29 of the Delaware Code, the provisions of which are incorporated herein by reference as though fully set forth;
 13. Owner may, when it considers that its interests so require, cause judgment to be confessed upon the bond. All sums received through confession of judgment shall be paid for the credit of the Owner to the Secretary of Finance;
 14. During the performance of this contract, the contractor agrees as follows:
 - a. The contractor will not discriminate against any employee or applicant for employment because of race, creed, color, sex, sexual orientation or national origin. The contractor will take positive steps to ensure that applicants are employed and that employees are treated during employment without regard to their race, creed, color, sex, sexual orientation or national origin. Such

action shall include, but not be limited to, the following: employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship. The contractor agrees to post in conspicuous places available to employees and applicants for employment notices to be provided by the contracting agency setting forth this nondiscrimination clause.

- b. The contractor will, in all solicitations or advertisements for employees placed by or on behalf of the contractor, state that all qualified applicants will receive consideration for employment without regard to race, creed, color, sex, sexual orientation or national origin.
15. The parties agree that this agreement shall be governed by and construed pursuant to the laws of The State of Delaware, and that the Delaware courts shall have sole and exclusive jurisdiction of any dispute arising under this agreement.

IN WITNESS WHEREOF, the parties have set their hand and seal on this indenture on this ___ day of _____, 2012.

Delaware Technical & Community College

_____ (Seal)

Orlando J. George, Jr, President

(Contractor)

_____ (Seal)

By:

END OF SECTION

SECTION 007100

CONTRACTING DEFINITIONS

PART 1 GENERAL

1.01 APPLICABILITY: THESE DEFINITIONS ARE INTEGRAL TO THE AGREEMENT.

1.02 DEFINITIONS - DESIGN-BUILD DOCUMENTS

- A. Contract Documents: As defined in the Conditions of the Contract and as follows:
 - 1. At the time of execution of the Agreement, the Contract Documents consist of the following:
 - a. The Agreement and Conditions of the Contract, and other documents listed on the Table of Contents under the heading Contracting Requirements.
 - 2. From time to time after execution of the Agreement, upon approval by the Owner, the following types of documents will be incorporated into the Contract Documents:
 - a. Drawings and other documents documenting the design.
 - b. Construction drawings and specifications detailing the execution of the design.
- B. Project Program: The Owner's requirements for size, arrangement, organization, and location of functional spaces, description of space functions, identification of fittings, equipment, and furnishings, description of the physical and environmental requirements for each space, together with a description of the image, goals, or "mission" of the project.

1.03 DEFINITIONS - TIME PERIODS AND MILESTONE DATES

- A. Preliminary Design: The time period during which the design criteria are finalized and preliminary drawings and written descriptions are prepared to illustrate the proposed design of the work or a portion of the work to the Owner, as described in the Conditions of the Contract.
- B. Design Development: The time period during which the form, arrangement, size, and materials of the work or a portion of the work are determined, as described in the Conditions of the Contract.
- C. Construction Documents: The time period during which process working drawings, specifications, and other documents describing the work or a portion of the work are prepared in sufficient detail to allow accurate and complete construction.
- D. Construction: The time period from the beginning of work on the project site until final payment as defined by the Conditions of the Contract.
- E. Substantial Completion: The date as defined in the Conditions of the Contract. The date of substantial completion is the due date for the following:
 - 1. Design-Builder's complete punchlist of items to be completed.
 - 2. Owner's complete punchlist of items to be completed.
 - 3. Compliance with requirements of governing authorities, for submittals, inspections, and permits.
 - 4. Compliance with Owner's requirements for access to areas occupied by the Owner.

- F. Closeout: The time period during which all details of both construction and commissioning are completed.
 - 1. The Closeout period is the time from the Date of Substantial Completion until final payment, both as defined by the Conditions of the Contract.
 - 2. Before and during the Closeout period, the Owner will ascertain whether the completed project complies with the the Contract Documents.
- G. Occupancy: The time period during which the project is occupied for its intended purpose.
 - 1. The Occupancy period begins at the Date of Substantial Completion, as defined by the Conditions of the Contract.
- H. Correction Period: The time period defined by the Conditions of the Contract.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

SECTION 007200

GENERAL CONDITIONS

GENERAL

1.01 FORM OF GENERAL CONDITIONS

- A. The General Conditions applicable to this contract shall be AIA A201 - General Conditions of the Contract for Construction; 2007.

1.02 RELATED REQUIREMENTS

- A. Document 007250 - State of Delaware General Conditions

1.03 SUPPLEMENTARY CONDITIONS

- A. Refer to Document 007350 for amendments to these General Conditions.

END OF DOCUMENT

SECTION 007250

STATE OF DELAWARE GENERAL REQUIREMENTS

ARTICLE 1: GENERAL

1.01 CONTRACT DOCUMENTS

- A. The intent of the Contract Documents is to include all items necessary for the proper execution and completion of the Work by the Contractor. The Contract Documents are complementary and what is required by one shall be as binding as if required by all. Performance by the Contractor shall be required to an extent consistent with the Contract Documents and reasonably inferable from them as being necessary to produce the intended results.
- B. Work including material purchases shall not begin until the Contractor is in receipt of a bonafide State of Delaware Purchase Order. Any work performed or material purchases prior to the issuance of the Purchase Order is done at the Contractor's own risk and cost.

1.02 EQUALITY OF EMPLOYMENT OPPORTUNITY ON PUBLIC WORKS

- A. For Public Works Projects financed in whole or in part by state appropriation the Contractor agrees that during the performance of this contract:
 - 1. The Contractor will not discriminate against any employee or applicant for employment because of race, creed, color, sex or national origin. The Contractor will take positive steps to ensure that applicants are employed and that employees are treated during employment without regard to their race, creed, color, sex or national origin. Such action shall include, but not be limited to, the following: employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship. The Contractor agrees to post in conspicuous places available to employees and applicants for employment notices to be provided by the contracting agency setting forth this nondiscrimination clause.
 - 2. The Contractor will, in all solicitations or advertisements for employees placed by or on behalf of the Contractor, state that all qualified applicants will receive consideration for employment without regard to race, creed, color, sex or national origin.”

ARTICLE 2: OWNER

(NO ADDITIONAL GENERAL REQUIREMENTS - SEE SUPPLEMENTARY
GENERAL CONDITIONS)

ARTICLE 3: CONTRACTOR

3.01 SCHEDULE OF VALUES

- A. The successful Bidder shall within twenty (20) days after receiving notice to proceed with the work, furnish to the Owner a complete schedule of values on the various items comprising the work.

3.02 SUBCONTRACTS

- A. Upon approval of Subcontractors, the Contractor shall award their Subcontracts as soon as possible after the signing of their own contract and see that all material, their own and those of their Subcontractors, are promptly ordered so that the work will not be delayed by failure of materials to arrive on time.
- B. Before commencing any work or construction, the General Contractor is to consult with the Owner as to matters in connection with access to the site and the allocation of Ground Areas for the various features of hauling, storage, etc.
- C. The Contractor shall supervise and direct the Work, using the Contractor's best skill and attention. The Contractor shall be solely responsible for and have control over construction means, methods, techniques, sequences and procedures and for coordinating all portions of the Work under the Contract, unless the Contract Documents give other specific instructions.
- D. The Contractor shall enforce strict discipline and good order among the Contractor's employees and other persons carrying out the Contract. The Contractor shall not permit employment of unfit persons or persons not skilled in tasks assigned to them.
- E. The Contractor warrants to the Owner that materials and equipment furnished will be new and of good quality, unless otherwise permitted, and that the work will be free from defects and in conformance with the Contract Documents. Work not conforming to these requirements, including substitutions not properly approved, may be considered defective. If required by the Owner, the Contractor shall furnish evidence as to the kind and quality of materials and equipment provided.
- F. Unless otherwise provided, the Contractor shall pay all sales, consumer, use and other similar taxes, and shall secure and pay for required permits, fees, licenses, and inspections necessary for proper execution of the Work.
- G. The Contractor shall comply with and give notices required by laws, ordinances, rules, regulations, and lawful orders of public authorities bearing on performance of the Work. The Contractor shall promptly notify the Owner if the Drawings and Specifications are observed to be at variance therewith.
- H. The Contractor shall be responsible to the Owner for the acts and omissions of the Contractor's employees, Subcontractors and their agents and employees, and other persons performing portions of the Work under contract with the Contractor.
- I. The Contractor shall keep the premises and surrounding area free from accumulation of waste materials or rubbish caused by operations under the Contract. At completion of the Work the Contractor shall remove from and about the Project all waste materials, rubbish, the Contractor's tools, construction equipment, machinery and surplus materials. The Contractor shall be responsible for returning all damaged areas to their original conditions.

3.03 STATE LICENSE AND TAX REQUIREMENTS

- A. Each Contractor and Subcontractor shall be licensed to do business in the State of Delaware and shall pay all fees and taxes due under State laws. In conformance with Section 2503, Chapter 25, Title 30, Delaware Code, "the Contractor shall furnish the State Tax Department within ten (10) days after award of the Contract, a statement of the total values of each contract and Subcontract, together with the names and addresses of the contracting parties "
- B. The Contractor shall comply with all requirements set forth in Section 6962, Chapter 69, Title 29 of the Delaware Code.

ARTICLE 4: ADMINISTRATION OF THE CONTRACT

4.01 CONTRACT SURETY

- A. Performance Bond And Labor And Material Payment Bond
 1. All bonds will be required as follows unless specifically waived elsewhere in the Bidding Documents.
 2. Contents of Performance Bonds - The bond shall be conditioned upon the faithful compliance and performance by the successful bidder of each and every term and condition of the contract and the proposal, plans, specifications, and bid documents thereof. Each term and condition shall be met at the time and in the manner prescribed by the Contract, Bid documents and the specifications, including the payment in full to every person furnishing materiel or performing labor in the performance of the Contract, of all sums of money due the person for such labor and materiel. (The bond shall also contain the successful bidder's guarantee to indemnify and save harmless the State and the agency from all costs, damages and expenses growing out of or by reason of the Contract in accordance with the Contract.)
 3. Invoking a Performance Bond - The agency may, when it considers that the interest of the State so require, cause judgement to be confessed upon the bond.
 4. Within twenty (20) days after the date of notice of award of contract, the Bidder to whom the award is made shall furnish a Performance Bond and Labor and Material Payment Bond, each equal to the full amount of the Contract price to guarantee the faithful performance of all terms, covenants and conditions of the same. The bonds are to be issued by an acceptable Bonding Company licensed to do business in the State of Delaware and shall be issued in duplicate.
 5. Performance and Payment Bonds shall be maintained in full force (warranty bond) for a period of two (2) years after the date of the Certificate for Final Payment. The Performance Bond shall guarantee the satisfactory completion of the Project and that the Contractor will make good any faults or defects in his work which may develop during the period of said guarantees as a result of improper or defective workmanship, material or apparatus, whether furnished by themselves or their Sub-Contractors. The Payment Bond shall guarantee that the Contractor shall pay in full all persons, firms or corporations who furnish labor or material or both labor and material for, or on account of, the work included herein. The bonds shall be paid for by this Contractor. The Owner shall have the right to demand that the proof parties signing the bonds are duly authorized to do so.

4.02 FAILURE TO COMPLY WITH CONTRACT

- A. If any firm entering into a contract with the State, or Agency that neglects or refuses to perform or fails to comply with the terms thereof, the Agency which signed the Contract may terminate the Contract and proceed to award a new contract in accordance with this Chapter 69, Title 29 of the Delaware Code or may require the Surety on the Performance Bond to complete the Contract in accordance with the terms of the Performance Bond. Nothing herein shall preclude the Agency from pursuing additional remedies as otherwise provided by law.

4.03 CONTRACT INSURANCE AND CONTRACT LIABILITY

- A. In addition to the bond requirements stated in the Bid Documents, each successful Bidder shall purchase adequate insurance for the performance of the Contract and, by submission of a Bid, agrees to indemnify and save harmless and to defend all legal or equitable actions brought against the State, any Agency, officer and/or employee of the State, for and from all claims of liability which is or may be the result of the successful Bidder's actions during the performance of the Contract.
- B. The purchase or nonpurchase of such insurance or the involvement of the successful Bidder in any legal or equitable defense of any action brought against the successful Bidder based upon work performed pursuant to the Contract will not waive any defense which the State, its agencies and their respective officers, employees and agents might otherwise have against such claims, specifically including the defense of sovereign immunity, where applicable, and by the terms of this section, the State and all agencies, officers and employees thereof shall not be financially responsible for the consequences of work performed, pursuant to said contract.

4.04 RIGHT TO AUDIT RECORDS

- A. The Owner shall have the right to audit the books and records of a Contractor or any Subcontractor under any Contract or Subcontract to the extent that the books and records relate to the performance of the Contract or Subcontract.
- B. Said books and records shall be maintained by the Contractor for a period of seven (7) years from the date of final payment under the Prime Contract and by the Subcontractor for a period of seven (7) years from the date of final payment under the Subcontract.

ARTICLE 5: SUBCONTRACTORS

5.01 SUBCONTRACTING REQUIREMENTS

- A. All contracts for the construction, reconstruction, alteration or repair of any public building (not a road, street or highway) shall be subject to the following provisions:
 - 1. A contract shall be awarded only to a Bidder whose Bid is accompanied by a statement containing, for each Subcontractor category, the name and address (city or town and State only - street number and P.O. Box addresses not required) of the subcontractor whose services the Bidder intends to use in performing the Work and providing the material for such Subcontractor category.
 - 2. A Bid will not be accepted nor will an award of any Contract be made to any Bidder which, as the Prime Contractor, has listed itself as the Subcontractor for any Subcontractor unless:

- a. It has been established to the satisfaction of the awarding Agency that the Bidder has customarily performed the specialty work of such Subcontractor category by artisans regularly employed by the Bidder's firm;
 - b. That the Bidder is duly licensed by the State to engage in such specialty work, if the State requires licenses; and
 - c. That the Bidder is recognized in the industry as a bona fide Subcontractor or Contractor in such specialty work and Subcontractor category.
- B. The decision of the awarding Agency as to whether a Bidder who list itself as the Subcontractor for a Subcontractor category shall be final and binding upon all Bidders, and no action of any nature shall lie against any awarding agency or its employees or officers because of its decision in this regard.
- C. After such a Contract has been awarded, the successful Bidder shall not substitute another Subcontractor for any Subcontractor whose name was set forth in the statement which accompanied the Bid without the written consent of the awarding Agency.
- D. No Agency shall consent to any substitution of Subcontractors unless the Agency is satisfied that the Subcontractor whose name is on the Bidders accompanying statement:
1. Is unqualified to perform the work required;
 2. Has failed to execute a timely reasonable Subcontract;
 3. Has defaulted in the performance on the portion of the work covered by the Subcontract; or
 4. Is no longer engaged in such business.

5.02 PENALTY FOR SUBSTITUTION OF SUBCONTRACTORS

- A. Should the Contractor fail to utilize any or all of the Subcontractors in the Contractor's Bid statement in the performance of the Work on the public bidding, the Contractor shall be penalized in the amount of one (1) percent of Contract amount not to exceed \$10,000. The Agency may determine to deduct payments of the penalty from the Contractor or have the amount paid directly to the Agency. Any penalty amount assessed against the Contractor may be remitted or refunded, in whole or in part, by the Agency awarding the Contract, only if it is established to the satisfaction of the Agency that the Subcontractor in question has defaulted or is no longer engaged in such business. No claim for the remission or refund of any penalty shall be granted unless an application is filed within one year after the liability of the successful Bidder accrues. All penalty amounts assessed and not refunded or remitted to the contractor shall be reverted to the State.

5.03 ASBESTOS ABATEMENT

- A. The selection of any Contractor to perform asbestos abatement for State-funded projects shall be approved by the Office of Management and Budget/Division of Facilities Management pursuant to Chapter 78 of Title 16.

5.04 STANDARDS OF CONSTRUCTION FOR THE PROTECTION OF THE PHYSICALLY HANDICAPPED

- A. All Contracts shall conform with the standard established by the Delaware Architectural Accessibility Board unless otherwise exempted by the Board.

5.05 CONTRACT PERFORMANCE

- A. Any firm entering into a Public Works Contract that neglects or refuses to perform or fails to comply with its terms, the Agency may terminate the Contract and proceed to award a new Contract or may require the Surety on the Performance Bond to complete the Contract in accordance with the terms of the performance Bond.

ARTICLE 6: CONSTRUCTION BY OWNER OR SEPARATE CONTRACTORS

6.01 CONSTRUCTION BY OWNER OR SEPARATE CONTRACTORS

- A. The Owner reserves the right to simultaneously perform other construction or operations related to the Project with the Owner's own forces, and to award separate contracts in connection with other portions of the Project or other Projects at the same site.
- B. The Contractor shall afford the Owner and other Contractors reasonable opportunity for access and storage of materials and equipment, and for the performance of their activities, and shall connect and coordinate their activities with other forces as required by the Contract Documents.

ARTICLE 7: CHANGES IN THE WORK

7.01 CHANGES IN THE WORK

- A. The Owner, without invalidating the Contract, may order changes in the Work consisting of Additions, Deletions, Modifications or Substitutions, with the Contract Sum and Contract completion date being adjusted accordingly. Such changes in the Work shall be authorized by written Change Order signed by the Professional, as the duly authorized agent, the Contractor and the Owner.
- B. The Contract Sum and Contract Completion Date shall be adjusted only by a fully executed Change Order.
- C. The additional cost, or credit to the Owner resulting from a change in the Work shall be by mutual agreement of the Owner, Contractor and the Architect. In all cases, this cost or credit shall be based on the 'DPE' wages required and the "invoice price" of the materials/equipment needed.
 1. "DPE" shall be defined to mean "direct personnel expense". Direct payroll expense includes direct salary plus customary fringe benefits (prevailing wage rates) and documented statutory costs such as workman's compensation insurance, Social Security/Medicare, and unemployment insurance (a maximum multiplier of 1.35 times DPE).
 2. "Invoice price" of materials/equipment shall be defined to mean the actual cost of materials and/or equipment that is paid by the Contractor, (or subcontractor), to a material distributor, direct factory vendor, store, material provider, or equipment leasing entity. Rates for equipment that is leased and/or owned by the Contractor or subcontractor(s) shall not exceed those listed in the latest version of the "Means Building Construction Cost Data" publication.
 3. In addition to the above, the General Contractor is allowed a fifteen percent (15%) markup for overhead and profit for additional work performed by the General Contractor's own forces. For additional subcontractor work, the Subcontractor is allowed a fifteen percent overhead and profit on change order work above and beyond the direct costs stated previously. To this amount, the General Contractor

will be allowed a mark-up not exceeding seven point five percent (7.5%) on the subcontractors work. These mark-ups shall include all costs including, but not limited to: overhead, profit, bonds, insurance, supervision, etc. No markup is permitted on the work of a Sub-subcontractor. No additional costs shall be allowed for changes related to the Contractor's onsite superintendent/staff, or project manager, unless a change in the work changes the project duration and is identified by the CPM schedule. There will be no other costs associated with the change order.

ARTICLE 8: TIME

8.01 TIME

- A. Time limits, if any, are as stated in the Project Manual. By executing the Agreement, the Contractor confirms that the stipulated limits are reasonable, and that the Work will be completed within the anticipated time frame.
- B. If progress of the Work is delayed at any time by changes ordered by the Owner, by labor disputes, fire, unusual delay in deliveries, abnormal adverse weather conditions, unavoidable casualties or other causes beyond the Contractor's control, the Contract Time shall be extended for such reasonable time as the Owner may determine.
- C. Any extension of time beyond the date fixed for completion of the construction and acceptance of any part of the Work called for by the Contract, or the occupancy of the building by the Owner, in whole or in part, previous to the completion shall not be deemed a waiver by the Owner of his right to annul or terminate the Contract for abandonment or delay in the matter provided for, nor relieve the Contractor of full responsibility.

8.02 SUSPENSION AND DEBARMENT

- A. Per Section 6962(d)(14), Title 29, Delaware Code, "Any Contractor who fails to perform a public works contract or complete a public works project within the time schedule established by the Agency in the Invitation To Bid, may be subject to Suspension or Debarment for one or more of the following reasons: 1) failure to supply the adequate labor supply ratio for the project; 2) inadequate financial resources; or, 3) poor performance on the Project."

- B. "Upon such failure for any of the above stated reasons, the Agency that contracted for the public works project may petition the Director of the Office of Management and Budget for Suspension or Debarment of the Contractor. The Agency shall send a copy of the petition to the Contractor within three (3) working days of filing with the Director. If the Director concludes that the petition has merit, the Director shall schedule and hold a hearing to determine whether to suspend the Contractor, debar the Contractor or deny the petition. The Agency shall have the burden of proving, by a preponderance of the evidence, that the Contractor failed to perform or complete the public works project within the time schedule established by the Agency and failed to do so for one or more of the following reasons: 1) failure to supply the adequate labor supply ratio for the project; 2) inadequate financial resources; or, 3) poor performance on the project. Upon a finding in favor of the Agency, the Director may suspend a Contractor from Bidding on any project funded, in whole or in part, with public funds for up to 1 year for a first offense, up to 3 years for a second offense and permanently debar the Contractor for a third offense. The Director shall issue a written decision and shall send a copy to the Contractor and the Agency. Such decision may be appealed to the Superior Court within thirty (30) days for a review on the record."

8.03 RETAINAGE

- A. Per Section 6962(d)(5) a., Title 29, Delaware Code: The Agency may at the beginning of each public works project establish a time schedule for the completion of the project. If the project is delayed beyond the completion date due to the Contractor's failure to meet their responsibilities, the Agency may hold permanently, at its discretion, all or part of the Contractor's retainage.
- B. This forfeiture of retainage also applies to the timely completion of the punchlist. A punchlist will only be prepared upon the mutual agreement of the Owner, Architect and Contractor. Once the punchlist is prepared, all three parties will by mutual agreement, establish a schedule for its completion. Should completion of the punchlist be delayed beyond the established date due to the Contractor's failure to meet their responsibilities, the Agency may hold permanently, at its discretion, all or part of the Contractor's retainage.

ARTICLE 9: PAYMENTS AND COMPLETION

9.01 APPLICATION FOR PAYMENT

- A. Applications for payment shall be made upon AIA Document G702. There will be a five percent (5%) retainage on all Contractor's monthly invoices until completion of the project. This retainage will become payable upon receipt of all required closeout documentation, provided all other requirements of the Contract Documents have been met.
- B. A date will be fixed for the taking of the monthly account of work done. Upon receipt of Contractor's itemized application for payment, such application will be audited, modified, if found necessary, and approved for the amount. Statement shall be submitted to the Owner.
- C. Article 6516, Chapter 65, Title 29 of the Delaware Code stipulates annualized interest not to exceed 12% per annum beginning thirty (30) days after the "presentment" (as opposed to the date) of the invoice."

9.02 PARTIAL PAYMENTS

- A. Any public works Contract executed by any Agency may provide for partial payments at the option of the Owner with respect to materials placed along or upon the sites or stored at secured locations, which are suitable for use in the performance of the contract.
- B. When approved by the agency, partial payment may include the values of tested and acceptable materials of a nonperishable or noncontaminative nature which have been produced or furnished for incorporation as a permanent part of the work yet to be completed, provided acceptable provisions have been made for storage.
 - 1. Any allowance made for materials on hand will not exceed the delivered cost of the materials as verified by invoices furnished by the Contractor, nor will it exceed the contract bid price for the material complete in place.
- C. If requested by the Agency, receipted bills from all Contractors, Subcontractors, and material, men, etc., for the previous payment must accompany each application for payment. Following such a request, no payment will be made until these receipted bills have been received by the Owner.

9.03 SUBSTANTIAL COMPLETION

- A. When the building has been made suitable for occupancy, but still requires small items of miscellaneous work, the Owner will determine the date when the project has been substantially completed.
- B. If, after the Work has been substantially completed, full completion thereof is materially delayed through no fault of the Contractor, and without terminating the Contract, the Owner may make payment of the balance due for the portion of the Work fully completed and accepted. Such payment shall be made under the terms and conditions governing final payment that it shall not constitute a waiver of claims.
- C. On projects where commissioning is included, the commissioning work as defined in the specifications must be complete prior to the issuance of substantial completion.

9.04 FINAL PAYMENT

- A. Final payment, including the five percent (5%) retainage, shall be made within thirty (30) days after the Work is fully completed and the Contract fully performed and provided that the Contractor has submitted the following closeout documentation (in addition to any other documentation required elsewhere in the Contract Documents):
 - 1. Evidence satisfactory to the Owner that all payrolls, material bills, and other indebtedness connected with the work have been paid,
 - 2. An acceptable RELEASE OF LIENS,
 - 3. Copies of all applicable warranties,
 - 4. As-built drawings,
 - 5. Operations and Maintenance Manuals,
 - 6. Instruction Manuals,
 - 7. Consent of Surety to final payment.
 - 8. The Owner reserves the right to retain payments, or parts thereof, for its protection until the foregoing conditions have been complied with, defective work corrected and all unsatisfactory conditions remedied.

ARTICLE 10: PROTECTION OF PERSONS AND PROPERTY

10.01 PROTECTION OF PERSONS AND PROPERTY

- A. The Contractor shall be responsible for initiating, maintaining, and supervising all safety precautions and programs in connection with the performance of the Contract. The Contractor shall take all reasonable precautions to prevent damage, injury or loss to: workers, persons nearby who may be affected, the Work, materials and equipment to be incorporated, and existing property at the site or adjacent thereto. The Contractor shall give notices and comply with applicable laws ordinances, rules regulations, and lawful orders of public authorities bearing on the safety of persons and property and their protection from injury, damage, or loss. The Contractor shall promptly remedy damage and loss to property at the site caused in whole or in part by the Contractor, a Subcontractor, or anyone directly or indirectly employed by any of them, or by anyone for whose acts they may be liable.
- B. The Contractor shall notify the Owner in the event any existing hazardous material such as lead, PCBs, asbestos, etc. is encountered on the project. The Owner will arrange with a qualified specialist for the identification, testing, removal, handling and protection against exposure or environmental pollution, to comply with applicable regulation laws and ordinances. The Contractor and Architect will not be required to participate in or to perform this operation. Upon completion of this work, the Owner will notify the Contractor and Architect in writing the area has been cleared and approved by the authorities in order for the work to proceed. The Contractor shall attach documentation from the authorities of said approval.
- C. As required in the Hazardous Chemical Information Act of June 1984, all vendors supplying any materials that may be defined as hazardous, must provide Material Safety Data Sheets for those products. Any chemical product should be considered hazardous if it has a warning caution on the label relating to a potential physical or health hazard, if it is known to be present in the work place, and if employees may be exposed under normal conditions or in any foreseeable emergency situation. Material Safety Data Sheets must be provided directly to the Owner along with the shipping slips that include those products.
- D. The Contractor shall certify to the Owner that materials incorporated into the Work are free of all asbestos. This certification may be in the form of Material Safety Data Sheet (MSDS) provided by the product manufacturer for the materials used in construction, as specified or as provided by the Contractor.

ARTICLE 11: INSURANCE AND BONDS

11.01 INSURANCE AND BONDS

- A. The Contractor shall carry all insurance required by law, such as Unemployment Insurance, etc. The Contractor shall carry such insurance coverage as they desire on their own property such as a field office, storage sheds or other structures erected upon the project site that belong to them and for their own use. The Subcontractors involved with this project shall carry whatever insurance protection they consider necessary to cover the loss of any of their personal property, etc.

- B. Upon being awarded the Contract, the Contractor shall obtain a minimum of two (2) copies of all required insurance certificates called for herein, and submit one (1) copy of each certificate, to the Owner, within 20 days of contract award.
- C. Bodily Injury Liability and Property Damage Liability Insurance shall, in addition to the coverage included herein, include coverage for injury to or destruction of any property arising out of the collapse of or structural injury to any building or structure due to demolition work and evidence of these coverages shall be filed with and approved by the Owner.
- D. The Contractor's Property Damage Liability Insurance shall, in addition to the coverage noted herein, include coverage on all real and personal property in their care, custody and control damaged in any way by the Contractor or their Subcontractors during the entire construction period on this project.
- E. Builders Risk (including Standard Extended Coverage Insurance) on the existing building during the entire construction period, shall not be provided by the Contractor under this contract. The Owner shall insure the existing building and all of its contents and all this new alteration work under this contract during entire construction period for the full insurable value of the entire work at the site. Note, however, that the Contractor and their Subcontractors shall be responsible for insuring building materials (installed and stored) and their tools and equipment whenever in use on the project, against fire damage, theft, vandalism, etc.
- F. Certificates of the insurance company or companies stating the amount and type of coverage, terms of policies, etc., shall be furnished to the Owner, within 20 days of contract award.
- G. The Contractor shall, at their own expense, (in addition to the above) carry the following forms of insurance:
 - 1. Contractor's Contractual Liability Insurance
 Minimum coverage to be:

Bodily Injury	\$ 500,000	for each person
	\$1,000,000	for each occurrence
	\$1,000,000	aggregate
Property Damage	\$ 500,000	for each occurrence
	\$1,000,000	aggregate
 - 2. Contractor's Protective Liability Insurance
 Minimum coverage to be:

Bodily Injury	\$ 500,000	for each person
	\$1,000,000	for each occurrence
	\$1,000,000	aggregate
Property Damage	\$ 500,000	for each occurrence
	\$ 500,000	aggregate
 - 3. Automobile Liability Insurance
 Minimum coverage to be:

Bodily Injury	\$ 1,000,000	for each person
	\$ 1,000,000	for each occurrence
Property Damage	\$ 500,000	per accident
 - 4. Prime Contractor's and Subcontractors' policies shall include contingent and contractual liability coverage in the same minimum amounts as 11.7.1 above.

5. Workmen's Compensation (including Employer's Liability):
 - a. Minimum Limit on employer's liability to be as required by law.
 - b. Minimum Limit for all employees working at one site.
6. Certificates of Insurance must be filed with the Owner guaranteeing fifteen (15) days prior notice of cancellation, non-renewal, or any change in coverages and limits of liability shown as included on certificates.
7. Social Security Liability
 - a. With respect to all persons at any time employed by or on the payroll of the Contractor or performing any work for or on their behalf, or in connection with or arising out of the Contractor's business, the Contractor shall accept full and exclusive liability for the payment of any and all contributions or taxes or unemployment insurance, or old age retirement benefits, pensions or annuities now or hereafter imposed by the Government of the United States and the State or political subdivision thereof, whether the same be measured by wages, salaries or other remuneration paid to such persons or otherwise.
 - b. Upon request, the Contractor shall furnish Owner such information on payrolls or employment records as may be necessary to enable it to fully comply with the law imposing the aforesaid contributions or taxes.
 - c. If the Owner is required by law to and does pay any and/or all of the aforesaid contributions or taxes, the Contractor shall forthwith reimburse the Owner for the entire amount so paid by the Owner.

ARTICLE 12: UNCOVERING AND CORRECTION OF WORK

12.01 UNCOVERING AND CORRECTION OF WORK

- A. The Contractor shall promptly correct Work rejected by the Owner or failing to conform to the requirements of the Contract Documents, whether observed before or after Substantial Completion and whether or not fabricated, installed or completed, and shall correct any Work found to be not in accordance with the requirements of the Contract Documents within a period of two years from the date of Substantial Completion, or by terms of an applicable special warranty required by the Contract Documents. The provisions of this Article apply to work done by Subcontractors as well as to Work done by direct employees of the Contractor.
- B. At any time during the progress of the work, or in any case where the nature of the defects shall be such that it is not expedient to have them corrected, the Owner, at their option, shall have the right to deduct such sum, or sums, of money from the amount of the contract as they consider justified to adjust the difference in value between the defective work and that required under contract including any damage to the structure.

ARTICLE 13: MISCELLANEOUS PROVISIONS

13.01 CUTTING AND PATCHING

- A. The Contractor shall be responsible for all cutting and patching. The Contractor shall coordinate the work of the various trades involved.

13.02 DIMENSIONS

- A. All dimensions shown shall be verified by the Contractor by actual measurements at the project site. Any discrepancies between the drawings and specifications and the existing conditions shall be referred to the Owner for adjustment before any work

affected thereby has been performed.

13.03 LABORATORY TESTS

- A. Any specified laboratory tests of material and finished articles to be incorporated in the work shall be made by bureaus, laboratories or agencies approved by the Owner and reports of such tests shall be submitted to the Owner. The cost of the testing shall be paid for by the Contractor.

- B. The Contractor shall furnish all sample materials required for these tests and shall deliver same without charge to the testing laboratory or other designated agency when and where directed by the Owner.

13.04 ARCHAEOLOGICAL EVIDENCE

- A. Whenever, in the course of construction, any archaeological evidence is encountered on the surface or below the surface of the ground, the Contractor shall notify the authorities of the Delaware Archaeological Board and suspend work in the immediate area for a reasonable time to permit those authorities, or persons designated by them, to examine the area and ensure the proper removal of the archaeological evidence for suitable preservation in the State Museum.

13.05 GLASS REPLACEMENT AND CLEANING

- A. The General Contractor shall replace without expense to the Owner all glass broken during the construction of the project. If job conditions warrant, at completion of the job the General Contractor shall have all glass cleaned and polished.

13.06 WARRANTY

- A. For a period of two (2) years from the date of Substantial Completion, as evidenced by the date of final acceptance of the work, the contractor warrants that work performed under this contract conforms to the contract requirements and is free of any defect of equipment, material or workmanship performed by the contractor or any of his subcontractors or suppliers. However, manufacturer's warranties and guarantees, if for a period longer than two (2) years, shall take precedence over the above warranties. The contractor shall remedy, at his own expense, any such failure to conform or any such defect. The protection of this warranty shall be included in the Contractor's Performance Bond.

ARTICLE 14: TERMINATION OF CONTRACT

14.01 TERMINATION OF CONTRACT

- A. If the Contractor defaults or persistently fails or neglects to carry out the Work in accordance with the Contract Documents or fails to perform a provision of the Contract, the Owner, after seven days written notice to the Contractor, may make good such deficiencies and may deduct the cost thereof from the payment then or thereafter due the Contractor. Alternatively, at the Owner's option, and the Owner may terminate the Contract and take possession of the site and of all materials, equipment, tools, and machinery thereon owned by the Contractor and may finish the Work by whatever method the Owner may deem expedient. If the costs of finishing the Work exceed any unpaid compensation due the Contractor, the Contractor shall pay the difference to the Owner.

- B. "If the continuation of this Agreement is contingent upon the appropriation of adequate state, or federal funds, this Agreement may be terminated on the date beginning on the first fiscal year for which funds are not appropriated or at the exhaustion of the appropriation. The Owner may terminate this Agreement by providing written notice to the parties of such non-appropriation. All payment obligations of the Owner will cease upon the date of termination. Notwithstanding the foregoing, the Owner agrees that it will use its best efforts to obtain approval of necessary funds to continue the Agreement by taking appropriate action to request adequate funds to continue the Agreement."

END OF GENERAL REQUIREMENTS

SECTION 007350**SUPPLEMENTARY GENERAL CONDITIONS A201-2007**

THE FOLLOWING SUPPLEMENTS MODIFY THE AIA DOCUMENT A201-2007, GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION. WHERE A PORTION OF THE GENERAL CONDITIONS IS MODIFIED OR DELETED BY THE SUPPLEMENTARY CONDITIONS, THE UNALTERED PORTIONS OF THE GENERAL CONDITIONS SHALL REMAIN IN EFFECT.

ARTICLE 1: GENERAL PROVISIONS

1.1 BASIC DEFINITIONS

1.1.1 THE CONTRACT DOCUMENTS

Delete the last sentence in its entirety and replace with the following:
"The Contract Documents also include Advertisement for Bid, Instructions to Bidder, sample forms, the Bid Form, the Contractor's completed Bid and the Award Letter."

Add the following Paragraph:

1.1.2 In the event of conflict or discrepancies among the Contract Documents, the Documents prepared by the State of Delaware, Division of Facilities Management shall take precedence over all other documents.

1.2 CORRELATION AND INTENT OF THE CONTRACT DOCUMENTS

Add the following Paragraphs:

1.2.4 In the case of an inconsistency between the Drawings and the Specifications, or within either document not clarified by addendum, the better quality or greater quantity of work shall be provided in accordance with the Architect's interpretation.

1.2.5 The word "PROVIDE" as used in the Contract Documents shall mean "FURNISH AND INSTALL" and shall include, without limitation, all labor, materials, equipment, transportation, services and other items required to complete the Work.

1.2.6 The word "PRODUCT" as used in the Contract Documents means all materials, systems and equipment.

1.5 OWNERSHIP AND USE OF DRAWINGS, SPECIFICATIONS AND OTHER INSTRUMENTS OF SERVICE

Delete Paragraph 1.5.1 in its entirety and replace with the following:
"All pre-design studies, drawings, specifications and other documents, including those in electronic form, prepared by the Architect under this Agreement are, and shall remain, the property of the Owner whether the Project for which they are made is executed or not. Such documents may be used by the Owner to construct one or more like Projects without the approval of, or additional compensation to, the Architect. The Contractor, Subcontractors, Sub-subcontractors and Material or Equipment Suppliers are authorized to use and reproduce applicable portions of the Drawings, Specifications and other documents prepared by the Architect and

the Architect's consultants appropriate to and for use in the execution of their Work under the Contract Documents. They are not to be used by the Contractor or any Subcontractor, Sub-subcontractor or Material and Equipment Supplier on other Projects or for additions to this Project outside the scope of the Work without the specific written consent of the Owner, Architect and Architect's consultants.

The Architect shall not be liable for injury or damage resulting from the re-use of drawings and specifications if the Architect is not involved in the re-use Project. Prior to re-use of construction documents for a Project in which the Architect is not also involved, the Owner will remove from such documents all identification of the original Architect, including name, address and professional seal or stamp."

Delete Paragraph 1.5.2 in its entirety.

ARTICLE 2: OWNER

2.2 INFORMATION AND SERVICES REQUIRED OF THE OWNER

To Subparagraph 2.2.3 - Add the following sentence:

"The Contractor, at their expense shall bear the costs to accurately identify the location of all underground utilities in the area of their excavation and shall bear all cost for any repairs required, out of failure to accurately identify said utilities."

Delete Subparagraph 2.2.5 in its entirety and substitute the following:

2.2.5 The Contractor shall be furnished free of charge up to five (5) sets of the Drawings and Project Manuals. Additional sets will be furnished at the cost of reproduction, postage and handling.

ARTICLE 3: CONTRACTOR

3.2 REVIEW OF CONTRACT DOCUMENTS AND FIELD CONDITIONS BY CONTRACTOR

Amend Paragraph 3.2.2 to state that any errors, inconsistencies or omissions discovered shall be reported to the Architect and Owner immediately.

Delete the third sentence in Paragraph 3.2.4.

3.3 SUPERVISION AND CONSTRUCTION PROCEDURES

Add the following Paragraphs:

3.3.2.1 The Contractor shall immediately remove from the Work, whenever requested to do so by the Owner, any person who is considered by the Owner or Architect to be incompetent or disposed to be so disorderly, or who for any reason is not satisfactory to the Owner, and that person shall not again be employed on the Work without the consent of the Owner or the Architect.

3.3.4 The Contractor must provide suitable storage facilities at the Site for the proper protection and safe storage of their materials. Consult the Owner and the Architect before storing any materials.

3.3.5 When any room is used as a shop, storeroom, office, etc., by the Contractor or Subcontractor(s) during the construction of the Work, the Contractor making use of these areas will be held responsible for any repairs, patching or cleaning arising from such use.

3.4 LABOR AND MATERIALS

Add the Following Paragraphs:

3.4.4 Before starting the Work, each Contractor shall carefully examine all preparatory Work that has been executed to receive their Work. Check carefully, by whatever means are required, to insure that its Work and adjacent, related Work, will finish to proper contours, planes and levels. Promptly notify the General Contractor/Construction Manager of any defects or imperfections in preparatory Work which will in any way affect satisfactory completion of its Work. Absence of such notification will be construed as an acceptance of preparatory Work and later claims of defects will not be recognized.

3.4.5 Under no circumstances shall the Contractor's Work proceed prior to preparatory Work having been completely cured, dried and/or otherwise made satisfactory to receive this Work. Responsibility for timely installation of all materials rests solely with the Contractor responsible for that Work, who shall maintain coordination at all times.

3.5 WARRANTY

Add the following Paragraphs:

3.5.1 The Contractor will guarantee all materials and workmanship against original defects, except injury from proper and usual wear when used for the purpose intended, for two years after Acceptance by the Owner, and will maintain all items in perfect condition during the period of guarantee.

3.5.2 Defects appearing during the period of guarantee will be made good by the Contractor at his expense upon demand of the Owner, it being required that all work will be in perfect condition when the period of guarantee will have elapsed.

3.5.3 In addition to the General Guarantee there are other guarantees required for certain items for different periods of time than the two years as above, and are particularly so stated in that part of the specifications referring to same. The said guarantees will commence at the same time as the General Guarantee.

3.5.4 If the Contractor fails to remedy any failure, defect or damage within a reasonable time after receipt of notice, the Owner will have the right to replace, repair, or otherwise remedy the failure, defect or damage at the Contractor's expense.

3.11 DOCUMENTS AND SAMPLES AT THE SITE

Add the following Paragraphs:

3.11.1 During the course of the Work, the Contractor shall maintain a record set of drawings on which the Contractor shall mark the actual physical location of all piping, valves, equipment, conduit, outlets, access panels, controls, actuators, including all appurtenances that will be concealed once construction is complete, etc., including all invert elevations.

3.11.2 At the completion of the project, the Contractor shall obtain a set of reproducible drawings from the Architect, and neatly transfer all information outlined in 3.11.1 to provide a complete record of the as-built conditions.

3.11.3 The Contractor shall provide two (2) prints of the as-built conditions, along with the reproducible drawings themselves, to the Owner and one (1) set to the Architect. In addition, attach one complete set to each of the Operating and Maintenance Instructions/Manuals.

3.17 In the second sentence of the paragraph, insert "indemnify and" between "shall" and "hold".

ARTICLE 4: ADMINISTRATION OF THE CONTRACT

4.2 ADMINISTRATION OF THE CONTRACT

Delete the first sentence of Paragraph 4.2.7 and replace with the following:
The Architect will review and approve or take other appropriate action upon the Contractor's submittals such as Shop Drawings, Product Data and Samples for the purpose of checking for conformance with the Contract Documents.

Delete the second sentence of Paragraph 4.2.7 and replace with the following:
The Architect's action will be taken with such reasonable promptness as to cause no delay in the Work in the activities of the Owner, Contractor or separate Contractors, while allowing sufficient time in the Owner's professional judgment to permit adequate review.

Add the following Subparagraph:
4.2.10.1 There will be no full-time project representative provided by the Owner or Architect on this project.

Add the following to the end of Paragraph 4.2.13:
“and in compliance with all local requirements.”

ARTICLE 5: SUBCONTRACTORS

5.2 AWARD OF SUBCONTRACTS AND OTHER CONTRACTS FOR PORTIONS OF THE WORK

Delete Paragraph 5.2.3 in its entirety and replace with the following:
5.2.3 If the Owner or Architect has reasonable objection to a person or entity proposed by the Contractor, the Contractor shall propose another to whom the Owner or Architect has no reasonable objection, subject to the statutory requirements of 29 Delaware Code § 6962(d)(10)b.3 and 4.

ARTICLE 6: CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS

6.1 OWNER'S RIGHT TO PERFORM CONSTRUCTION AND TO AWARD SEPARATE CONTRACTS

Delete Paragraph 6.1.4 in its entirety.

6.2 MUTUAL RESPONSIBILITY

6.2.3 In the second sentence, strike the word “shall” and insert the word “may”.

ARTICLE 7: CHANGES IN THE WORK

(SEE ARTICLE 7: CHANGES IN WORK IN THE GENERAL REQUIREMENTS)

ARTICLE 8: TIME

8.2 PROGRESS AND COMPLETION

Add the following Paragraphs:
8.2.1.1 Refer to Specification Section SUMMARY OF WORK for Contract time requirements.
8.2.4 If the Work falls behind the Progress Schedule as submitted by the Contractor, the Contractor shall employ additional labor and/or equipment

necessary to bring the Work into compliance with the Progress Schedule at no additional cost to the Owner.

8.3 DELAYS AND EXTENSION OF TIME

8.3.1 Strike "arbitration" and insert "remedies at law or in equity".

Add the following Paragraph:

8.3.2.1 The Contractor shall update the status of the suspension, delay, or interruption of the Work with each Application for Payment. (The Contractor shall report the termination of such cause immediately upon the termination thereof.) Failure to comply with this procedure shall constitute a waiver for any claim for adjustment of time or price based upon said cause.

Delete Paragraph 8.3.3 in its entirety and replace with the following:

8.3.3 Except in the case of a suspension of the Work directed by the Owner, an extension of time under the provisions of Paragraph 8.3.1 shall be the Contractor's sole remedy in the progress of the Work and there shall be no payment or compensation to the Contractor for any expense or damage resulting from the delay.

Add the following Paragraph:

8.3.4 By permitting the Contractor to work after the expired time for completion of the project, the Owner does not waive their rights under the Contract.

ARTICLE 9: PAYMENTS AND COMPLETION

9.2 SCHEDULE OF VALUES

Add the following Paragraphs:

9.2.1 The Schedule of Values shall be submitted using AIA Document G702, Continuation Sheet to G703.

9.2.2 The Schedule of Values is to include a line item for Project Closeout Document Submittal. The value of this item is to be no less than 1% of the initial contract amount.

9.3 APPLICATIONS FOR PAYMENT

Add the following Paragraph:

9.3.1.3 Application for Payment shall be submitted on AIA Document G702 "Application and Certificate for Payment", supported by AIA Document G703 "Continuation Sheet". Said Applications shall be fully executed and notarized.

Add the following Paragraphs:

9.3.4 Until Closeout Documents have been received and outstanding items completed the Owner will pay 95% (ninety-five percent) of the amount due the Contractor on account of progress payments.

9.3.5 The Contractor shall provide a current and updated Progress Schedule to the Architect with each Application for Payment. Failure to provide Schedule will be just cause for rejection of Application for Payment.

9.5 DECISIONS TO WITHHOLD CERTIFICATION

Add the following to 9.5.1:

.8 failure to provide a current Progress Schedule;

.9 a lien or attachment is filed;

.10 failure to comply with mandatory requirements for maintaining Record Documents.

9.6 PROGRESS PAYMENTS

Delete Paragraph 9.6.1 in its entirety and replace with the following:

9.6.1 After the Architect has approved and issued a Certificate for Payment, payment shall be made by the Owner within 30 days after Owner's receipt of the Certificate for Payment.

9.7 FAILURE OF PAYMENT

F. In first sentence, strike "seven" and insert "thirty (30)".
Also strike "binding dispute resolution" and insert "remedies at law or in equity".

9.8 SUBSTANTIAL COMPLETION

To Subparagraph 9.8.3- Add the following sentence:

"If the Architect is required to make more than 2 inspections of the same portion of work, the Contractor shall be responsible for all costs associated with subsequent inspections, including but not limited to any Architect's fees."

9.8.5 In the second sentence, strike "shall" and insert "may".

ARTICLE 10: PROTECTION OF PERSONS AND PROPERTY

10.1 SAFETY PRECAUTIONS AND PROGRAMS

Add the following Paragraphs:

10.1.1 Each Contractor shall develop a safety program in accordance with the Occupational Safety and Health Act of 1970. A copy of said plan shall be furnished to the Owner and Architect prior to the commencement of that Contractor's Work.

10.1.2 Each Contractor shall appoint a Safety Representative. Safety Representatives shall be someone who is on site on a full time basis. If deemed necessary by the Owner or Architect, Contractor Safety meetings will be scheduled. The attendance of all Safety Representatives will be required. Minutes will be recorded of said meetings by the Contractor and will be distributed to all parties as well as posted in all job offices/trailers etc.

10.2 SAFETY OF PERSONS AND PROPERTY

Add the following Paragraph:

10.2.4.1As required in the Hazardous Chemical Act of June 1984, all vendors supplying any material that may be defined as hazardous must provide Material Safety Data Sheets for those products. Any chemical product should be considered hazardous if it has a caution warning on the label relating to a potential physical or health hazard, if it is known to be present in the work place, and if employees may be exposed under normal conditions or in foreseeable emergency situations. Material Safety Data Sheets shall be provided directly to the Owner, along with the shipping slips that include those products.

10.3 HAZARDOUS MATERIALS

Delete Paragraph 10.3.3 in its entirety.

Delete Paragraphs 10.3.6 in its entirety.

ARTICLE 11: INSURANCE AND BONDS

11.1 CONTRACTOR'S LIABILITY INSURANCE

11.1.4 Strike "the Owner" immediately following "(1)"
and strike "and (2) the Owner as an additional insured for claims caused
in whole or in part by the Contractor's negligent acts or omissions during the
Contractor's completed operations."

11.2 OWNER'S LIABILITY INSURANCE

Delete Paragraph 11.2 in its entirety.

11.3 PROPERTY INSURANCE

Delete Paragraph 11.3 in its entirety and replace with the following:
11.3 The State will not provide Builder's All Risk Insurance for the Project.
The Contractor and all Subcontractors shall provide property coverage for their
tools and equipment, as necessary. Any mandatory deductible required by the
Contractor's Insurance shall be the responsibility of the Contractor.

11.4 PERFORMANCE BOND AND PAYMENT BOND

Add the following sentence: "The bonds will conform to those forms approved
by the Office of Management and Budget."

ARTICLE 12: UNCOVERING AND CORRECTION OF WORK

12.2.2 AFTER SUBSTANTIAL COMPLETION

Add the following Paragraph:

12.2.2.1.1 At any time during the progress of the Work, or in any case where
the nature of the defects will be such that it is not expedient to have
corrected, the Owner, at its option, will have the right to deduct such
sum, or sums, of money from the amount of the Contract as it
considers justified to adjust the difference in value between the
defective work and that required under contract including any
damage to the structure.

12.2.2.1 Strike "one" and insert "two".

12.2.2.2 Strike "one" and insert "two".

12.2.2.3 Strike "one" and insert "two".

12.2.5 In second sentence, strike "one" and insert "two".

ARTICLE 13: MISCELLANEOUS PROVISIONS

13.1 GOVERNING LAW

Strike "except that, if the parties have selected arbitration as the method of
binding dispute resolution, the Federal Arbitration Act shall govern Section 15.4"

13.6 INTEREST

Strike "the date payment is due at such rate as the parties may agree upon in
writing or, in the absence thereof, at the legal rate prevailing from time to time at
the place where the Project is located." Insert "30 days of presentment of the
authorized Certificate of Payment at the annual rate of 12% or 1% per month.

13.7 TIME LIMITS ON CLAIMS

Strike the last sentence.

ADD THE FOLLOWING PARAGRAPH:

13.8 CONFLICTS WITH FEDERAL STATUTES OR REGULATIONS

13.8.1 If any provision, specifications or requirement of the Contract Documents conflict or is inconsistent with any statute, law or regulation of the government of the United State of America, the Contractor shall notify the Architect and Owner immediately upon discovery.

ARTICLE 14: TERMINATION OR SUSPENSION OF THE CONTRACT

14.1 TERMINATION BY THE OWNER FOR CONVENIENCE

Delete Paragraph 14.4.3 in its entirety and replace with the following:

14.4.3 In case of such termination for the Owner's convenience, the Contractor shall be entitled to receive payment for Work executed, and cost incurred by reason of such termination along with reasonable overhead.

ARTICLE 15: CLAIMS AND DISPUTES

15.1.2 THROUGHOUT THE PARAGRAPH STRIKE "21" AND INSERT "45."

15.1.6 CLAIMS FOR CONSEQUENTIAL DAMAGES

Delete Paragraph 15.1.6 in its entirety.

15.2 INITIAL DECISION

Delete Paragraph 15.2.5 in its entirety and replace with the following:

15.2.5 The Architect will approve or reject Claims by written decision, which shall state the reasons therefore and shall notify the parties of any change in the Contract Sum or Contract Time or both. The approval or rejection of a Claim by the Architect shall be subject to mediation and other remedies at law or in equity.

Delete Paragraph 15.2.6 and its subparagraphs in their entirety.

15.3 MEDIATION

15.3.1 Strike "binding dispute resolution" and insert "any or all remedies at law or in equity."

15.3.2 In the first sentence, delete "administered by the American Arbitration Association in accordance with its Construction Industry Mediation Procedure in effect on the date of the Agreement," Strike "binding dispute resolution" and insert "remedies at law and in equity".

15.4 ARBITRATION

Delete Paragraph 15.4 and its sub-sections in its entirety.

END OF SUPPLEMENTARY GENERAL CONDITIONS

SECTION 011000

SUMMARY

PART 1 GENERAL

1.01 PROJECT

- A. Project Name: Stanton Campus Roof Replacement - Area "A".
- B. Owner's Name: Delaware Technical and Community College.
- C. Architect's Name: ABHA Architects, Inc..
- D. The Project consists of the tear-off and re-roofing of Roof Area A.

1.02 CONTRACT DESCRIPTION

- A. Contract Type: A single prime contract based on a Stipulated Price.

1.03 DESCRIPTION OF ALTERATIONS WORK

- A. Scope of demolition and removal work is shown on the Drawings and specified in Section 070150.19.
- B. Scope of re-roofing work is shown on Drawings and described in the technical specifications.
- C. Plumbing: Alter existing system and add new construction, keeping existing in operation.
- D. Lightning Protection: Alter existing and add new construction.

1.04 WORK BY OWNER (NOT APPLICABLE)

1.05 OWNER OCCUPANCY

- A. Owner intends to continue to occupy the existing building during the entire construction period.
- B. Cooperate with Owner to minimize conflict and to facilitate Owner's operations.
- C. Schedule the Work to accommodate Owner occupancy.

1.06 CONTRACTOR USE OF SITE AND PREMISES

- A. Contractor shall have complete and exclusive use of the premises for execution of the Work, except as otherwise specified.
- B. Construction Operations: Limited to areas of construction and designated staging area(s) to be coordinated with the Owner.
- C. Arrange use of site and premises to allow:
 - 1. Owner occupancy.
 - 2. Work by Others.
 - 3. Work by Owner.
 - 4. Use of site by the public.
- D. Provide access to and from site as required by law and by Owner:

1. Emergency Building Exits During Construction: Keep all exits required by code open during construction period; provide temporary exit signs if exit routes are temporarily altered.
 2. Do not obstruct roadways, sidewalks, or other public ways without permit.
- E. Existing building spaces may not be used for storage.
- F. Obtain and pay for the use of additional storage or work areas needed for operations.
- G. Assume full responsibility for the protection and safekeeping of Products under this Contract, stored on the site.
- H. Move any stored Products, under Contractor's control, which interfere with operations of the Owner or separate contractor.
- I. Utility Outages and Shutdown:
1. Limit disruption of utility services to hours the building is unoccupied.
 2. Do not disrupt or shut down life safety systems, including but not limited to fire sprinklers and fire alarm system, without 7 days notice to Owner and authorities having jurisdiction.
 3. Prevent accidental disruption of utility services to other facilities.

1.07 WORK SEQUENCE

- A. Coordinate construction schedule and operations with Owner.

1.08 TIME OF COMPLETION

- A. The Work shall be Substantially Complete within 90 calendar days after issuance of Notice to Proceed (if any) or Date of Contract, whichever is earlier.

1.09 LIQUIDATED DAMAGES

- A. There are no Liquidated Damages applying to this Work.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

SECTION 012000

PRICE AND PAYMENT PROCEDURES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Procedures for preparation and submittal of applications for progress payments.
- B. Documentation of changes in Contract Sum and Contract Time.
- C. Change procedures.
- D. Correlation of Contractor submittals based on changes.
- E. Procedures for preparation and submittal of application for final payment.

1.02 RELATED REQUIREMENTS

- A. Section 005000 - Contracting Forms and Supplements: Forms to be used.
- B. Document 007250 - State of Delaware General Requirements: Percentage allowances for Contractor's overhead and profit.
- C. Section 012100 - Allowances: Payment procedures relating to allowances.
- D. Section 012200 - Unit Prices: Monetary values of unit prices, payment and modification procedures relating to unit prices.

1.03 SCHEDULE OF VALUES

- A. Form to be used: See Section 005000.
- B. Electronic media printout including equivalent information will be considered in lieu of standard form specified; submit sample to Architect for approval.
- C. Forms filled out by hand will not be accepted.
- D. Submit Schedule of Values in duplicate within 20 days after date of Owner-Contractor Agreement.

1.04 APPLICATIONS FOR PROGRESS PAYMENTS

- A. Payment Period: Submit at intervals stipulated in the Agreement.
- B. Electronic media printout including equivalent information will be considered in lieu of standard form specified; submit sample to Architect for approval.
- C. Forms filled out by hand will not be accepted.
- D. Execute certification by signature of authorized officer.
- E. Use data from approved Schedule of Values. Provide dollar value in each column for each line item for portion of work performed and for stored Products.
- F. List each executed Change Order as a separate line item, listing Change Order number and dollar amount as for an original item of Work.
- G. Submit three copies of each Application for Payment.

- H. Include the following with the application:
 - 1. Insurance certificates for off-site stored products.

1.05 MODIFICATION PROCEDURES

- A. Submit name of the individual authorized to receive change documents and who will be responsible for informing others in Contractor's employ or subcontractors of changes to the Contract Documents.
- B. For minor changes not involving an adjustment to the Contract Sum or Contract Time, Architect will issue instructions directly to Contractor.
- C. For other required changes, Architect will issue a document signed by Owner instructing Contractor to proceed with the change, for subsequent inclusion in a Change Order.
 - 1. The document will describe the required changes and will designate method of determining any change in Contract Sum or Contract Time.
 - 2. Promptly execute the change.
- D. For changes for which advance pricing is desired, Architect will issue a Contract Modification Request (CMR) that includes a detailed description of a proposed change with supplementary or revised drawings and specifications, a change in Contract Time for executing the change, with a stipulation of any overtime work required and the period of time during which the requested price will be considered valid. Contractor shall prepare and submit a fixed price quotation, including changes in Contract Time, if necessary.
 - 1. Such request is for information only, and is not an instruction to execute the changes, nor to stop work in progress.
 - 2. Format for Contract Modification Requests shall be as issued by the Architect at the Pre-Construction meeting.
- E. Contractor may propose a change by submitting a change order request for change to Architect, describing the proposed change and its full effect on the Work, with a statement describing the reason for the change, and the effect on the Contract Sum and Contract Time with full documentation and a statement describing the effect on Work by separate or other contractors.
- F. Computation of Change in Contract Amount: As specified in the Agreement and Conditions of the Contract.
- G. Substantiation of Costs: Provide full information required for evaluation.
 - 1. Provide following data:
 - a. Quantities of products, labor, and equipment.
 - b. Taxes, insurance, and bonds.
 - c. Overhead and profit.
 - d. Justification for any change in Contract Time.
 - e. Credit for deletions from Contract, similarly documented.
 - 2. Support each claim for additional costs, including time and material work, with additional information:
 - a. Origin and date of claim.
 - b. Dates and times work was performed, and by whom.
 - c. Time records and wage rates paid.

- d. Invoices and receipts for products, equipment, and subcontracts, similarly documented.
- 3. For Time and Material work, submit itemized account and supporting data after completion of change, within time limits indicated in the Conditions of the Contract.
- H. When the information in the Contract Modification Request and Change Order Request is complete, it will be submitted to the Architect for review and forwarded to the Owner. If the change is agreed to by the Owner, the Architect will prepare a Change Order and forward it to the Contractor for signature.
- I. Execution of Change Orders: Architect will issue Change Orders for signatures of parties as provided in the Conditions of the Contract.
- J. After execution of Change Order by all parties, promptly revise Schedule of Values and Application for Payment forms to record each authorized Change Order as a separate line item and adjust the Contract Sum.
- K. Promptly revise progress schedules to reflect any change in Contract Time, revise sub-schedules to adjust times for other items of work affected by the change, and resubmit.
- L. Promptly enter changes in Project Record Documents.

1.06 APPLICATION FOR FINAL PAYMENT

- A. Prepare Application for Final Payment as specified for progress payments, identifying total adjusted Contract Sum, previous payments, and sum remaining due.
- B. Application for Final Payment will not be considered until the following have been accomplished:
 - 1. All closeout procedures specified in Section 017000.
 - 2. All Closeout submittals as specified in Section 017800.
 - 3. Submit Affidavit of Payment of Indebtedness: See General Conditions.
 - 4. Submit Consent of Surety to Final Payment: See General Conditions.
 - 5. Submit Releases of Liens: See General Conditions. Release forms shall conform to State law governing mechanics Liens and shall be transmitted with AIA Document G706A. Note that Document G706A is not a release of liens and must be accompanied by actual releases.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

SECTION 012300**ALTERNATES****PART 1 GENERAL**

1.01 SECTION INCLUDES

- A. Description of alternates.
- B. Procedures for pricing alternates.
- C. Documentation of changes to Contract Sum and Contract Time.

1.02 RELATED REQUIREMENTS

- A. Document 002113 - Instructions to Bidders: Instructions for preparation of pricing for alternatives.

1.03 BASE BID

- A. The Base Bid shall consist of all work shown or specified in the Contract Documents, exclusive of any Additive Alternates specified herein.
- B. The Base Bid shall include all work in any Subtractive Alternates specified herein.

1.04 ACCEPTANCE OF ALTERNATES

- A. Alternates quoted on Bid Forms will be reviewed and accepted or rejected at Owner's option. Accepted alternates will be identified in the Owner-Contractor Agreement.
- B. Coordinate related work and modify surrounding work to integrate the Work of each alternate.

1.05 SCHEDULE OF ALTERNATES

- A. The description of Alternates contained herein is in summary form. Detailed requirements for materials and execution shall be as specified in other Sections and as shown on Drawings.
- B. Alternate No. 1 - Black EPDM Roof Membrane:
 - 1. State in the Bid Form the amount to be added to or deducted from the Base Bid amount for providing 0.060 black non-reinforced EPDM roof membrane and flashings in lieu of white EPDM roof membrane as specified.
 - 2. Note that warranty and other specification requirements are unchanged..
 - 3. See Section 075300 for more information.
- C. Alternate No. 2 - Replace Roof Drains:
 - 1. State in the Bid Form the amount to be added to the Base Bid amount for providing new roof drain assemblies.
 - 2. Remove existing roof drains and replace with new roof drain assemblies as indicated. Refer to plumbing drawings for more information.
 - 3. Note that, in the Base Bid, the existing roof drains are to remain, and that the Base Bid shall include new roof drain extensions and replacement of the existing roof drain domes.
 - 4. See Plumbing Drawings for additional information.

D. Alternate No. 3 - Additional Roof Ladders:

1. State in the Bid Form the amount to be added to the Base Bid amount for providing additional roof access ladders.
2. Provide prefabricated aluminum ladders at locations indicated. Refer to drawings for locations.
3. See Section 055000 for additional information.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

SECTION 013000

ADMINISTRATIVE REQUIREMENTS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Special meetings
- B. Submittals for review, information, and project closeout.
- C. Number of copies of submittals.
- D. Submittal procedures.

1.02 RELATED REQUIREMENTS

- A. Section 013216 - Construction Progress Schedule: Form, content, and administration of schedules.
- B. Section 017000 - Execution and Closeout Requirements: Additional coordination requirements.
- C. Section 017800 - Closeout Submittals: Project record documents.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION

3.01 SPECIAL MEETINGS

- A. Refer to other Sections of the Project Manual for requirements for other meetings, such as pre-roofing meeting and pre-caulking meeting.
- B. It is the responsibility of the Contractor to organize and call these meetings as specified.
- C. Refer to Section 001700 for additional requirements.

3.02 SUBMITTALS FOR REVIEW

- A. When the following are specified in individual sections, submit them for review:
 - 1. Product data.
 - 2. Shop drawings.
 - 3. Samples for selection.
 - 4. Samples for verification.
- B. Submit to Architect for review for the limited purpose of checking for conformance with information given and the design concept expressed in the contract documents.
- C. Samples will be reviewed only for aesthetic, color, or finish selection.
- D. After review, provide copies and distribute in accordance with SUBMITTAL PROCEDURES article below and for record documents purposes described in Section 017800 - CLOSEOUT SUBMITTALS.

3.03 SUBMITTALS FOR INFORMATION

- A. When the following are specified in individual sections, submit them for information:

1. Design data.
2. Certificates.
3. Test reports.
4. Inspection reports.
5. Manufacturer's instructions.
6. Manufacturer's field reports.
7. MSDS sheets.
8. Other types indicated.

- B. Submit for Architect's knowledge as contract administrator or for Owner. No action will be taken.

3.04 SUBMITTALS FOR PROJECT CLOSEOUT

- A. When the following are specified in individual sections, submit them at project closeout:
1. Project record documents.
 2. Operation and maintenance data.
 3. Warranties.
 4. Bonds.
 5. Other types as indicated.

- B. Submit for Owner's benefit during and after project completion.

3.05 NUMBER OF COPIES OF SUBMITTALS

- A. Submittals for Review and Information:
1. Submittals will be reviewed and distributed electronically.
 2. Architect will provide access to FTP site for distribution of submittals.
 3. File format for electronic submittals shall be Adobe .PDF, unless otherwise agreed upon. Coordinate electronic submittal distribution protocol at pre-construction meeting.
- B. Documents for Project Closeout: Make one reproduction of submittal originally reviewed.
- C. Samples: Submit two (2) each; one of which will be retained by Architect.
1. After review, retain one at the job site for reference.
 2. Retained samples will not be returned to Contractor unless specifically stated.

3.06 SUBMITTAL PROCEDURES

- A. Transmit each submittal with approved form or transmittal.
- B. Sequentially number the transmittal form. Revise submittals with original number and a sequential alphabetic suffix.
- C. Identify Project, Contractor, Subcontractor or supplier; pertinent drawing and detail number, and specification section number, as appropriate on each copy.
- D. Apply Contractor's stamp, signed or initialed certifying that review, approval, verification of Products required, field dimensions, adjacent construction Work, and coordination of information is in accordance with the requirements of the Work and Contract Documents.

1. Submittals not reviewed and approved by Contractor will be returned without review.
- E. Schedule submittals to expedite the Project, and coordinate submission of related items.
- F. Identify product(s) to be used. Clearly mark submittal to specifically identify products or models pertinent to project.
- G. Modify drawings and diagrams to delete information which is not applicable to the Work. Supplement standard information to provide information specifically applicable to the Work.
- H. Indicate field dimensions, clearly identified as such.
- I. Show relationship to adjacent or critical features of the Work. Show dimensions and clearances required.
- J. Identify variations from Contract Documents and Product or system limitations that may be detrimental to successful performance of the completed Work.
- K. Provide space for Contractor and Architect review stamps.
- L. When revised for resubmission, identify all changes made since previous submission.
- M. Distribute reviewed submittals as appropriate. Instruct parties to promptly report any inability to comply with requirements.
- N. Submittals not requested will not be recognized or processed.

END OF SECTION

SECTION 013216

CONSTRUCTION PROGRESS SCHEDULE

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Preliminary schedule.
- B. Construction progress schedule, bar chart type.

1.02 RELATED SECTIONS

- A. Section 011000 - Summary: Work sequence.

1.03 SUBMITTALS

- A. Within 14 days after date of Agreement, submit preliminary construction progress schedule.
- B. If preliminary schedule requires revision after review, submit revised schedule within 10 days.
- C. Submit updated schedule with each Application for Payment.

1.04 SCHEDULE FORMAT

- A. Listings: In chronological order according to the start date for each activity. Identify each activity with the applicable specification section number.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION

3.01 PRELIMINARY SCHEDULE

- A. Prepare preliminary schedule in the form of a horizontal bar chart.

3.02 CONTENT

- A. Show complete sequence of construction by activity, with dates for beginning and completion of each element of construction.
- B. Identify each item by specification section number.
- C. Identify work of separate areas and other logically grouped activities.
- D. Provide sub-schedules to define critical portions of the entire schedule.
- E. Show accumulated percentage of completion of each item, and total percentage of Work completed, as of the first day of each month.
- F. Provide separate schedule of submittal dates for shop drawings, product data, and samples, owner-furnished products, Products identified under Allowances, and dates reviewed submittals will be required from Architect. Indicate decision dates for selection of finishes.
- G. Indicate delivery dates for owner-furnished products.
- H. Provide legend for symbols and abbreviations used.

3.03 BAR CHARTS

- A. Include a separate bar for each major portion of Work or operation.
- B. Identify the first work day of each week.

3.04 REVIEW AND EVALUATION OF SCHEDULE

- A. Participate in joint review and evaluation of schedule with Architect at each submittal.
- B. Evaluate project status to determine work behind schedule and work ahead of schedule.
- C. After review, revise as necessary as result of review, and resubmit within 10 days.

3.05 UPDATING SCHEDULE

- A. Maintain schedules to record actual start and finish dates of completed activities.
- B. Indicate progress of each activity to date of revision, with projected completion date of each activity.
- C. Annotate diagrams to graphically depict current status of Work.
- D. Identify activities modified since previous submittal, major changes in Work, and other identifiable changes.
- E. Indicate changes required to maintain Date of Substantial Completion.
- F. Submit reports required to support recommended changes.

3.06 DISTRIBUTION OF SCHEDULE

- A. Distribute copies of updated schedules to Contractor's project site file, to Subcontractors, suppliers, Architect, Owner, and other concerned parties.
- B. Instruct recipients to promptly report, in writing, problems anticipated by projections shown in schedules.

END OF SECTION

SECTION 014000

QUALITY REQUIREMENTS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. References and standards.
- B. Quality assurance submittals.
- C. Control of installation.
- D. Tolerances.
- E. Testing and inspection services.
- F. Manufacturers' field services.

1.02 RELATED REQUIREMENTS

- A. Document 003100 - Available Project Information: Soil investigation data.
- B. Section 013000 - Administrative Requirements: Submittal procedures.
- C. Section 016000 - Product Requirements: Requirements for material and product quality.

1.03 REFERENCE STANDARDS

- A. ASTM C1021 - Standard Practice for Laboratories Engaged in Testing of Building Sealants; 2008.
- B. ASTM C1077 - Standard Practice for Laboratories Testing Concrete and Concrete Aggregates for Use in Construction and Criteria for Laboratory Evaluation; 2011.
- C. ASTM C1093 - Standard Practice for Accreditation of Testing Agencies for Masonry; 2009.
- D. ASTM D3740 - Standard Practice for Minimum Requirements for Agencies Engaged in the Testing and/or Inspection of Soil and Rock as Used in Engineering Design and Construction; 2010.
- E. ASTM E329 - Standard Specification for Agencies Engaged Construction Inspection and/or Testing; 2011.
- F. ASTM E543 - Standard Specification for Agencies Performing Nondestructive Testing; 2009.

1.04 SUBMITTALS

- A. Testing Agency Qualifications:
 - 1. Prior to start of Work, submit agency name, address, and telephone number, and names of full time registered Engineer and responsible officer.
- B. Design Data: Submit for Architect's knowledge as contract administrator for the limited purpose of assessing conformance with information given and the design concept expressed in the contract documents, or for Owner's information.

- C. Test Reports: After each test/inspection, promptly submit two copies of report to Architect and to Contractor.
 - 1. Test report submittals are for Architect's knowledge as contract administrator for the limited purpose of assessing conformance with information given and the design concept expressed in the contract documents, or for Owner's information.
- D. Certificates: When specified in individual specification sections, submit certification by the manufacturer and Contractor or installation/application subcontractor to Architect, in quantities specified for Product Data.
 - 1. Indicate material or product conforms to or exceeds specified requirements. Submit supporting reference data, affidavits, and certifications as appropriate.
 - 2. Certificates may be recent or previous test results on material or product, but must be acceptable to Architect.
- E. Manufacturer's Instructions: When specified in individual specification sections, submit printed instructions for delivery, storage, assembly, installation, start-up, adjusting, and finishing, for the Owner's information. Indicate special procedures, perimeter conditions requiring special attention, and special environmental criteria required for application or installation.
- F. Manufacturer's Field Reports: Submit reports for Architect's benefit as contract administrator or for Owner.
 - 1. Submit for information for the limited purpose of assessing conformance with information given and the design concept expressed in the contract documents.

1.05 REFERENCES AND STANDARDS

- A. For products and workmanship specified by reference to a document or documents not included in the Project Manual, also referred to as reference standards, comply with requirements of the standard, except when more rigid requirements are specified or are required by applicable codes.
- B. Conform to reference standard of date of issue current on date of Contract Documents, except where a specific date is established by applicable code.
- C. Obtain copies of standards where required by product specification sections.
- D. Maintain copy at project site during submittals, planning, and progress of the specific work, until Substantial Completion.
- E. Should specified reference standards conflict with Contract Documents, request clarification from Architect before proceeding.
- F. Neither the contractual relationships, duties, or responsibilities of the parties in Contract nor those of Architect shall be altered from the Contract Documents by mention or inference otherwise in any reference document.

1.06 TESTING AND INSPECTION AGENCIES

- A. Owner will employ and pay for services of an independent testing agency to perform specified testing and inspection.
- B. Employment of agency in no way relieves Contractor of obligation to perform Work in accordance with requirements of Contract Documents.

- C. Contractor shall employ and pay for the services of independent testing laboratories to test and certify certain materials which the contractor proposes to use on the project, where such tests and certification are prerequisites to approval of materials by the Architect.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION

3.01 CONTROL OF INSTALLATION

- A. Monitor quality control over suppliers, manufacturers, products, services, site conditions, and workmanship, to produce Work of specified quality.
- B. Comply with manufacturers' instructions, including each step in sequence.
- C. Should manufacturers' instructions conflict with Contract Documents, request clarification from Architect before proceeding.
- D. Comply with specified standards as minimum quality for the Work except where more stringent tolerances, codes, or specified requirements indicate higher standards or more precise workmanship.
- E. Have Work performed by persons qualified to produce required and specified quality.
- F. Verify that field measurements are as indicated on shop drawings or as instructed by the manufacturer.
- G. Secure products in place with positive anchorage devices designed and sized to withstand stresses, vibration, physical distortion, and disfigurement.

3.02 TOLERANCES

- A. Monitor fabrication and installation tolerance control of products to produce acceptable Work. Do not permit tolerances to accumulate.
- B. Comply with manufacturers' tolerances. Should manufacturers' tolerances conflict with Contract Documents, request clarification from Architect before proceeding.
- C. Adjust products to appropriate dimensions; position before securing products in place.

3.03 TESTING AND INSPECTION

- A. See individual specification sections for testing and inspection required.
- B. Testing Agency Duties:
 - 1. Provide qualified personnel at site. Cooperate with Architect and Contractor in performance of services.
 - 2. Perform specified sampling and testing of products in accordance with specified standards.
 - 3. Ascertain compliance of materials and mixes with requirements of Contract Documents.
 - 4. Promptly notify Architect and Contractor of observed irregularities or non-conformance of Work or products.
 - 5. Perform additional tests and inspections required by Architect.
 - 6. Submit reports of all tests/inspections specified.

- C. Limits on Testing/Inspection Agency Authority:
 - 1. Agency may not release, revoke, alter, or enlarge on requirements of Contract Documents.
 - 2. Agency may not approve or accept any portion of the Work.
 - 3. Agency may not assume any duties of Contractor.
 - 4. Agency has no authority to stop the Work.
- D. Contractor Responsibilities:
 - 1. Deliver to agency at designated location, adequate samples of materials proposed to be used that require testing, along with proposed mix designs.
 - 2. Cooperate with laboratory personnel, and provide access to the Work and to manufacturers' facilities.
 - 3. Provide incidental labor and facilities:
 - a. To provide access to Work to be tested/inspected.
 - b. To obtain and handle samples at the site or at source of Products to be tested/inspected.
 - c. To facilitate tests/inspections.
 - d. To provide storage and curing of test samples.
 - 4. Notify Architect and laboratory 24 hours prior to expected time for operations requiring testing/inspection services.
 - 5. Employ services of an independent qualified testing laboratory and pay for additional samples, tests, and inspections required by Contractor beyond specified requirements.
 - 6. Arrange with Owner's agency and pay for additional samples, tests, and inspections required by Contractor beyond specified requirements.
- E. Re-testing required because of non-conformance to specified requirements shall be performed by the same agency on instructions by Architect.
- F. Re-testing required because of non-conformance to specified requirements shall be paid for by Contractor.

3.04 MANUFACTURERS' FIELD SERVICES

- A. When specified in individual specification sections, require material or product suppliers or manufacturers to provide qualified staff personnel to observe site conditions, conditions of surfaces and installation, quality of workmanship, as applicable, and to initiate instructions when necessary.
- B. Report observations and site decisions or instructions given to applicators or installers that are supplemental or contrary to manufacturers' written instructions.

3.05 DEFECT ASSESSMENT

- A. Replace Work or portions of the Work not conforming to specified requirements.
- B. If, in the opinion of Architect, it is not practical to remove and replace the Work, Architect will direct an appropriate remedy or adjust payment.

END OF SECTION

SECTION 015000

TEMPORARY FACILITIES AND CONTROLS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Temporary utilities.
- B. Temporary sanitary facilities.
- C. Temporary Controls: Barriers and fencing.
- D. Construction Aids
- E. Security requirements.
- F. Vehicular access and parking.
- G. Traffic Regulation
- H. Tree and Plan Protection
- I. Waste removal facilities and services.

1.02 TEMPORARY UTILITIES

- A. Owner will provide the following:
 - 1. Electrical power and metering, consisting of connection to existing facilities.
 - 2. Water supply, consisting of connection to existing facilities.
- B. Existing facilities may be used.
- C. Use trigger-operated nozzles for water hoses, to avoid waste of water.

1.03 TEMPORARY SANITARY FACILITIES

- A. Provide and maintain required facilities and enclosures. Provide at time of project mobilization.
- B. Use of existing facilities is permitted.
- C. Maintain daily in clean and sanitary condition.
- D. At end of construction, return facilities to same or better condition as originally found.

1.04 BARRIERS

- A. Provide barriers to prevent unauthorized entry to construction areas, to prevent access to areas that could be hazardous to workers or the public, to allow for owner's use of site and to protect existing facilities and adjacent properties from damage from construction operations and demolition.
- B. Provide barricades and covered walkways required by governing authorities for public rights-of-way and for public access to existing building.
- C. Protect non-owned vehicular traffic, stored materials, site, and structures from damage.

1.05 FENCING

- A. Construction: Contractor's option.

1.06 CONSTRUCTION AIDS

- A. Provide construction aids and equipment required to facilitate execution of the Work. Examples are scaffolds, staging, ladders, stairs, ramps, runways, platforms, railings, hoists, cranes, chutes and other such facilities and equipment.
- B. Mutual use may be arranged by the Contractor where applicable.
- C. Designated stairs in existing building may be used by construction personnel as follows:
 - 1. Roof access stair in Area 'E'.
- D. Elevators in the existing building and new elevators shall not be used by construction personnel.

1.07 SECURITY

- A. Provide security and facilities to protect Work, existing facilities, and Owner's operations from unauthorized entry, vandalism, or theft.
- B. Security of persons and property in areas under control of the Contractor shall be the Contractor's exclusive responsibility.
- C. The Contractor, at his own expense, shall initiate whatever programs necessary to execute his responsibility.
- D. Control of access to the areas under control of the Contractor shall be maintained. Visitors shall be required to produce full identification to be recorded in the Contractor's Daily Log, along with the purpose of the visit.
- E. Coordinate with Owner's security program.

1.08 VEHICULAR ACCESS AND PARKING

- A. Comply with regulations relating to use of streets and sidewalks, access to emergency facilities, and access for emergency vehicles.
- B. Coordinate access and haul routes with governing authorities and Owner.
- C. Provide and maintain access to fire hydrants, free of obstructions.
- D. Provide means of removing mud from vehicle wheels before entering streets.
- E. Maintain traffic areas free as possible of excavated materials, construction equipment, products, snow, ice and debris.
- F. Designated existing on-site roads may be used for construction traffic.
- G. Designated existing parking areas located at the site may be used for construction parking.

1.09 TRAFFIC REGULATION

- A. Obtain all temporary permits for access to and use of public roads and streets for construction and hauling purposes. Comply with traffic control regulations applying to permit issuance.
- B. Provide all markers, signs, lights and barriers on and near the site to safely control construction traffic and public access.

1.10 TREE AND PLANT PROTECTION

- A. Preserve and protect existing trees and plants at site which are designated to remain, and those adjacent to site.
- B. Consult with Architect, and remove agreed-on roots and branches which interfere with construction. Employ qualified tree surgeon to perform removal and treat cuts.
- C. Provide temporary barriers to a height of six feet, around each, or around each group, of trees and plants.
- D. Protect plants from deleterious liquid and solid droppings from construction operations.
- E. Protect root zones of trees and plants:
 - 1. Do not allow vehicular traffic or parking.
 - 2. Do not store materials or products.
 - 3. Prevent dumping of refuse or chemically injurious materials or liquids.
 - 4. Prevent puddling or continuous running water.
- F. Carefully supervise excavating, grading and filling, and subsequent construction operations, to prevent damage.
- G. Replace, or suitably repair, trees and plants designated to remain which are damaged or destroyed due to construction operations.

1.11 WASTE REMOVAL

- A. Provide waste removal facilities and services as required to maintain the site in clean and orderly condition.
- B. Provide containers with lids. Remove trash from site periodically.
- C. If materials to be recycled or re-used on the project must be stored on-site, provide suitable non-combustible containers; locate containers holding flammable material outside the structure unless otherwise approved by the authorities having jurisdiction.
- D. Open free-fall chutes are not permitted. Terminate closed chutes into appropriate containers with lids.

1.12 REMOVAL OF UTILITIES, FACILITIES, AND CONTROLS

- A. Remove temporary utilities, equipment, facilities, materials, prior to Substantial Completion inspection.
- B. Remove underground installations to a minimum depth of 2 feet (600 mm). Grade site as indicated.
- C. Clean and repair damage caused by installation or use of temporary work.

1. Remove stone from temporary access roads, unless it is to be incorporated into new work.
 2. Grade damaged areas of site to required elevations, spread topsoil, and re-seed.
- D. Restore existing facilities used during construction to original condition.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

SECTION 016000

PRODUCT REQUIREMENTS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. General product requirements.
- B. Re-use of existing products.
- C. Transportation, handling, storage and protection.
- D. Product option requirements.
- E. Substitution limitations and procedures.
- F. Procedures for Owner-supplied products.
- G. Maintenance materials, including extra materials, spare parts, tools, and software.

1.02 RELATED REQUIREMENTS

- A. Document 002150 - Instructions to Bidders: Product options and substitution procedures prior to bid date.

1.03 REFERENCE STANDARDS

- A. SCAQMD 1168 - South Coast Air Quality Management District Rule No.1168; current edition; www.aqmd.gov.

1.04 SUBMITTALS

- A. Proposed Products List: Submit list of major products proposed for use, with name of manufacturer, trade name, and model number of each product.
 - 1. Submit within 21 days after date of Agreement.
 - 2. For products specified only by reference standards, list applicable reference standards.
- B. Product Data Submittals: Submit manufacturer's standard published data. Mark each copy to identify applicable products, models, options, and other data. Supplement manufacturers' standard data to provide information specific to this Project.
- C. Shop Drawing Submittals: Prepared specifically for this Project; indicate utility and electrical characteristics, utility connection requirements, and location of utility outlets for service for functional equipment and appliances.
- D. Sample Submittals: Illustrate functional and aesthetic characteristics of the product, with integral parts and attachment devices. Coordinate sample submittals for interfacing work.
 - 1. For selection from standard finishes, submit samples of the full range of the manufacturer's standard colors, textures, and patterns.

PART 2 PRODUCTS

2.01 EXISTING PRODUCTS

- A. Do not use materials and equipment removed from existing premises unless specifically required or permitted by the Contract Documents.
- B. Unforeseen historic items encountered remain the property of the Owner; notify Owner promptly upon discovery; protect, remove, handle, and store as directed by Owner.
- C. Existing materials and equipment indicated to be removed, but not to be re-used, relocated, reinstalled, delivered to the Owner, or otherwise indicated as to remain the property of the Owner, become the property of the Contractor; remove from site.

2.02 NEW PRODUCTS

- A. Provide new products unless specifically required or permitted by the Contract Documents.
- B. Do not use products having any of the following characteristics:
 - 1. Made using or containing CFC's or HCFC's.
- C. Manufactured and Fabricated Products shall conform to the following requirements:
 - 1. Design, fabricate and assemble in accord with the best engineering and shop practices.
 - 2. Manufacture like parts of duplicate units to standard sizes and gauges, to be interchangeable.
 - 3. Two or more items of the same kind shall be identical, by the same manufacturer.
 - 4. Products shall be suitable for service conditions.
 - 5. Equipment capacities, sizes and dimensions shown or specified shall be adhered to unless variations are specifically approved in writing.
- D. Do not use material or equipment for any purpose other than that for which it is designated or is specified.

2.03 MANUFACTURER'S INSTRUCTIONS

- A. When Contract Documents require that installation of work shall comply with manufacturer's printed instructions, obtain and distribute copies of such instructions to parties involved in the installation, including the Architect.
 - 1. Maintain one set of complete instructions at the job site during installation and until completion.
- B. Handle, install, connect, clean, condition and adjust products in strict accord with such instructions and in conformity with specified requirements.
 - 1. Should job conditions or specified requirements conflict with manufacturer's instructions, consult with Architect for further instructions.
 - 2. Do not proceed with work without clear instructions.
- C. Perform work in accord with manufacturer's instructions. Do not omit any preparatory step or installation procedure unless specifically modified or exempted by Contract Documents.

2.04 PRODUCT OPTIONS

- A. Products Specified by Reference Standards or by Description Only: Use any product meeting those standards or description.
- B. Products Specified by Naming One or More Manufacturers: Use a product of one of the manufacturers named and meeting specifications, no options or substitutions allowed.
- C. Products Specified by Naming One or More Manufacturers with a Provision for Substitutions: Submit a request for substitution for any manufacturer not named.
- D. For Products specified by listing a product or manufacturer as the Basis of Design or standard of construction, select the primary product, or, if approved equivalent manufacturers are listed, an approved equivalent manufacturer.
 - 1. Selection of an approved equivalent manufacturer shall constitute that the Contractor has verified that the equivalent product meets all performance, quality and dimensional requirements and tolerances of the primary product.
 - 2. Where changes are required in other elements of the Work, the Contractor shall be responsible for coordinating such changes and shall waive claims for additional costs that may arise from the substitution of the approved equivalent manufacturer's product.

2.05 MAINTENANCE MATERIALS

- A. Furnish extra materials, spare parts, tools, and software of types and in quantities specified in individual specification sections.
- B. Deliver Owner; obtain receipt prior to final payment.

PART 3 EXECUTION

3.01 SUBSTITUTION PROCEDURES

- A. Instructions to Bidders specify time restrictions for submitting requests for substitutions during the bidding period. Comply with requirements specified in this section.
- B. Document each request with complete data substantiating compliance of proposed substitution with Contract Documents.
- C. A request for substitution constitutes a representation that the submitter:
 - 1. Has investigated proposed product and determined that it meets or exceeds the quality level of the specified product.
 - 2. Will provide the same warranty for the substitution as for the specified product.
 - 3. Will coordinate installation and make changes to other Work that may be required for the Work to be complete with no additional cost to Owner.
 - 4. Waives claims for additional costs or time extension that may subsequently become apparent.
- D. Substitution Submittal Procedure:
 - 1. Submit one copies of request for substitution for consideration. Limit each request to one proposed substitution.
 - 2. Submit drawings, product data, and certified test results attesting to the proposed

product equivalence. Burden of proof is on proposer. Include:

- a. Comparison of the qualities of the proposed substitution with that specified.
 - b. Changes required in other elements of the work because of the substitution.
 - c. Effect on the construction schedule.
 - d. Cost data comparing the proposed substitution with the Product specified.
 - e. Any required license fees or royalties.
 - f. Availability of maintenance service, and source of replacement materials.
3. Architect will review requests and will notify Bidders in an Addendum if the requested substitution is acceptable.

3.02 OWNER-SUPPLIED PRODUCTS

A. Owner's Responsibilities:

1. Arrange for and deliver Owner reviewed shop drawings, product data, and samples, to Contractor.
2. Arrange and pay for product delivery to site.
3. On delivery, inspect products jointly with Contractor.
4. Submit claims for transportation damage and replace damaged, defective, or deficient items.
5. Arrange for manufacturers' warranties, inspections, and service.

B. Contractor's Responsibilities:

1. Review Owner reviewed shop drawings, product data, and samples.
2. Receive and unload products at site; inspect for completeness or damage jointly with Owner.
3. Handle, store, install and finish products.
4. Repair or replace items damaged after receipt.

3.03 TRANSPORTATION AND HANDLING

- A. Coordinate schedule of product delivery to designated prepared areas in order to minimize site storage time and potential damage to stored materials.
- B. Transport and handle products in accordance with manufacturer's instructions.
- C. Transport materials in covered trucks to prevent contamination of product and littering of surrounding areas.
- D. Promptly inspect shipments to ensure that products comply with requirements, quantities are correct, and products are undamaged.
- E. Provide equipment and personnel to handle products by methods to prevent soiling, disfigurement, or damage.
- F. Arrange for the return of packing materials, such as wood pallets, where economically feasible.

3.04 STORAGE AND PROTECTION

- A. Designate receiving/storage areas for incoming products so that they are delivered according to installation schedule and placed convenient to work area in order to minimize waste due to excessive materials handling and misapplication.
- B. Store and protect products in accordance with manufacturers' instructions.
- C. Store with seals and labels intact and legible.

- D. Store sensitive products in weather tight, climate controlled, enclosures in an environment favorable to product.
- E. For exterior storage of fabricated products, place on sloped supports above ground.
- F. Cover products subject to deterioration with impervious sheet covering. Provide ventilation to prevent condensation and degradation of products.
- G. Store loose granular materials on solid flat surfaces in a well-drained area. Prevent mixing with foreign matter.
- H. Prevent contact with material that may cause corrosion, discoloration, or staining.
- I. Provide equipment and personnel to store products by methods to prevent soiling, disfigurement, or damage.
- J. Arrange storage of products to permit access for inspection. Periodically inspect to verify products are undamaged and are maintained in acceptable condition.
- K. Store flammable materials so as to prevent contact with flames and fire. Conform with manufacturer's recommendations and local laws. Pay particular attention to storage of:
 - 1. Roof insulation
 - 2. Roofing materials, including solvents
 - 3. Paint materials
 - 4. Cleaning and other solvents
 - 5. Fuels

END OF SECTION

SECTION 017000

EXECUTION AND CLOSEOUT REQUIREMENTS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Examination, preparation, and general installation procedures.
- B. Requirements for alterations work, including selective demolition.
- C. Pre-installation meetings.
- D. Cutting and patching.
- E. Cleaning and protection.
- F. Starting of systems and equipment.
- G. Demonstration and instruction of Owner personnel.
- H. Closeout procedures, except payment procedures.

1.02 RELATED REQUIREMENTS

- A. Section 011000 - Summary: Limitations on working in existing building; continued occupancy; work sequence; identification of salvaged and relocated materials.
- B. Section 013000 - Administrative Requirements: Submittals procedures.
- C. Section 014000 - Quality Requirements: Testing and inspection procedures.
- D. Section 017800 - Closeout Submittals: Project record documents, operation and maintenance data, warranties and bonds.

1.03 REFERENCE STANDARDS

- A. NFPA 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations; 2009.

1.04 SUBMITTALS

- A. See Section 013000 - Administrative Requirements, for submittal procedures.
- B. Cutting and Patching: Submit written request in advance of cutting or alteration that affects:
 - 1. Structural integrity of any element of Project.
 - 2. Integrity of weather exposed or moisture resistant element.
 - 3. Efficiency, maintenance, or safety of any operational element.
 - 4. Visual qualities of sight exposed elements.
 - 5. Work of Owner or separate Contractor.
- C. Project Record Documents: Accurately record actual locations of capped and active utilities.

1.05 PROJECT CONDITIONS

- A. Use of explosives is not permitted.

- B. Ventilate enclosed areas to assist cure of materials, to dissipate humidity, and to prevent accumulation of dust, fumes, vapors, or gases.
- C. Dust Control: Execute work by methods to minimize raising dust from construction operations. Provide positive means to prevent air-borne dust from dispersing into atmosphere and over adjacent property.
 - 1. Provide dust-proof barriers between construction areas and areas continuing to be occupied by Owner.
- D. Noise Control: Provide methods, means, and facilities to minimize noise produced by construction operations.
 - 1. Coordinate times of excessively noisy interior and exterior work in advance with the Owner.
- E. Pest and Rodent Control: Provide methods, means, and facilities to prevent pests and insects from damaging the work.
- F. Rodent Control: Provide methods, means, and facilities to prevent rodents from accessing or invading premises.
- G. Pollution Control: Provide methods, means, and facilities to prevent contamination of soil, water, and atmosphere from discharge of noxious, toxic substances, and pollutants produced by construction operations. Comply with federal, state, and local regulations.

1.06 COORDINATION

- A. See Section 011000 for occupancy-related requirements.
- B. Coordinate scheduling, submittals, and work of the various sections of the Project Manual to ensure efficient and orderly sequence of installation of interdependent construction elements, with provisions for accommodating items installed later.
- C. Notify affected utility companies and comply with their requirements.
- D. Verify that utility requirements and characteristics of new operating equipment are compatible with building utilities. Coordinate work of various sections having interdependent responsibilities for installing, connecting to, and placing in service, such equipment.
- E. Coordinate space requirements, supports, and installation of mechanical and electrical work that are indicated diagrammatically on Drawings. Follow routing shown for pipes, ducts, and conduit, as closely as practicable; place runs parallel with lines of building. Utilize spaces efficiently to maximize accessibility for other installations, for maintenance, and for repairs.
- F. In finished areas except as otherwise indicated, conceal pipes, ducts, and wiring within the construction. Coordinate locations of fixtures and outlets with finish elements.
- G. Coordinate completion and clean-up of work of separate sections.
- H. After Owner occupancy of premises, coordinate access to site for correction of defective work and work not in accordance with Contract Documents, to minimize disruption of Owner's activities.

PART 2 PRODUCTS

2.01 PATCHING MATERIALS

- A. New Materials: As specified in product sections; match existing products and work for patching and extending work.
- B. Type and Quality of Existing Products: Determine by inspecting and testing products where necessary, referring to existing work as a standard.
- C. Product Substitution: For any proposed change in materials, submit request for substitution described in Section 016000.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that existing site conditions and substrate surfaces are acceptable for subsequent work. Start of work means acceptance of existing conditions.
- B. Verify that existing substrate is capable of structural support or attachment of new work being applied or attached.
- C. Examine and verify specific conditions described in individual specification sections.
- D. Take field measurements before confirming product orders or beginning fabrication, to minimize waste due to over-ordering or misfabrication.
- E. Verify that utility services are available, of the correct characteristics, and in the correct locations.
- F. Prior to Cutting: Examine existing conditions prior to commencing work, including elements subject to damage or movement during cutting and patching. After uncovering existing work, assess conditions affecting performance of work. Beginning of cutting or patching means acceptance of existing conditions.

3.02 PREPARATION

- A. Clean substrate surfaces prior to applying next material or substance.
- B. Seal cracks or openings of substrate prior to applying next material or substance.
- C. Apply manufacturer required or recommended substrate primer, sealer, or conditioner prior to applying any new material or substance in contact or bond.

3.03 PREINSTALLATION MEETINGS

- A. When required in individual specification sections, convene a preinstallation meeting at the site prior to commencing work of the section.
- B. Require attendance of parties directly affecting, or affected by, work of the specific section.
- C. Notify Architect seven days in advance of meeting date.
- D. Prepare agenda and preside at meeting:
 - 1. Review conditions of examination, preparation and installation procedures.
 - 2. Review coordination with related work.

3.04 GENERAL INSTALLATION REQUIREMENTS

- A. In addition to compliance with regulatory requirements, conduct construction operations in compliance with NFPA 241, including applicable recommendations in Appendix A.
- B. Install products as specified in individual sections, in accordance with manufacturer's instructions and recommendations, and so as to avoid waste due to necessity for replacement.
- C. Make vertical elements plumb and horizontal elements level, unless otherwise indicated.
- D. Install equipment and fittings plumb and level, neatly aligned with adjacent vertical and horizontal lines, unless otherwise indicated.
- E. Make consistent texture on surfaces, with seamless transitions, unless otherwise indicated.
- F. Make neat transitions between different surfaces, maintaining texture and appearance.

3.05 ALTERATIONS

- A. Drawings showing existing construction and utilities are based on casual field observation and existing record documents only.
 - 1. Verify that construction and utility arrangements are as shown.
 - 2. Report discrepancies to Architect before disturbing existing installation.
 - 3. Beginning of alterations work constitutes acceptance of existing conditions.
- B. Keep areas in which alterations are being conducted separated from other areas that are still occupied.
- C. Maintain weatherproof exterior building enclosure except for interruptions required for replacement or modifications; take care to prevent water and humidity damage.
 - 1. Where openings in exterior enclosure exist, provide construction to make exterior enclosure weatherproof.
 - 2. Insulate existing ducts or pipes that are exposed to outdoor ambient temperatures by alterations work.
- D. Remove existing work as indicated and as required to accomplish new work.
 - 1. Remove rotted wood, corroded metals, and deteriorated masonry and concrete; replace with new construction specified.
 - 2. Remove items indicated on drawings.
 - 3. Relocate items indicated on drawings.
 - 4. Where new surface finishes are to be applied to existing work, perform removals, patch, and prepare existing surfaces as required to receive new finish; remove existing finish if necessary for successful application of new finish.
 - 5. Where new surface finishes are not specified or indicated, patch holes and damaged surfaces to match adjacent finished surfaces as closely as possible.
- E. Services (Including but not limited to HVAC, Plumbing, Fire Protection, Electrical, and Telecommunications): Remove, relocate, and extend existing systems to accommodate new construction.

1. Maintain existing active systems that are to remain in operation; maintain access to equipment and operational components; if necessary, modify installation to allow access or provide access panel.
 2. Where existing systems or equipment are not active and Contract Documents require reactivation, put back into operational condition; repair supply, distribution, and equipment as required.
 3. Where existing active systems serve occupied facilities but are to be replaced with new services, maintain existing systems in service until new systems are complete and ready for service.
 - a. Disable existing systems only to make switchovers and connections; minimize duration of outages.
 - b. See Section 011000 for other limitations on outages and required notifications.
 - c. Provide temporary connections as required to maintain existing systems in service.
 4. Verify that abandoned services serve only abandoned facilities.
 5. Remove abandoned pipe, ducts, conduits, wiring, and equipment, including those above accessible ceilings; remove back to source of supply where possible, otherwise cap stub and tag with identification; patch holes left by removal using materials specified for new construction.
- F. Protect existing work to remain.
1. Prevent movement of structure; provide shoring and bracing if necessary.
 2. Perform cutting to accomplish removals neatly and as specified for cutting new work.
 3. Repair adjacent construction and finishes damaged during removal work.
- G. Adapt existing work to fit new work: Make as neat and smooth transition as possible.
- H. Patching: Where the existing surface is not indicated to be refinished, patch to match the surface finish that existed prior to cutting. Where the surface is indicated to be refinished, patch so that the substrate is ready for the new finish.
- I. Refinish existing surfaces as indicated:
1. Where rooms or spaces are indicated to be refinished, refinish all visible existing surfaces to remain to the specified condition for each material, with a neat transition to adjacent finishes.
 2. If mechanical or electrical work is exposed accidentally during the work, re-cover and refinish to match.
- J. Clean existing systems and equipment.
- K. Remove demolition debris and abandoned items from alterations areas and dispose of off-site; do not burn or bury.
- L. Do not begin new construction in alterations areas before demolition is complete.
- M. Comply with all other applicable requirements of this section.

3.06 CUTTING AND PATCHING

- A. Whenever possible, execute the work by methods that avoid cutting or patching.
- B. See Alterations article above for additional requirements.

- C. Perform whatever cutting and patching is necessary to:
 - 1. Complete the work.
 - 2. Fit products together to integrate with other work.
 - 3. Provide openings for penetration of mechanical, electrical, and other services.
 - 4. Match work that has been cut to adjacent work.
 - 5. Repair areas adjacent to cuts to required condition.
 - 6. Repair new work damaged by subsequent work.
 - 7. Remove samples of installed work for testing when requested.
 - 8. Remove and replace defective and non-conforming work.
- D. Execute work by methods that avoid damage to other work and that will provide appropriate surfaces to receive patching and finishing. In existing work, minimize damage and restore to original condition.
- E. Employ skilled and experienced installer to perform cutting for weather exposed and moisture resistant elements, and sight exposed surfaces.
- F. Cut rigid materials using masonry saw or core drill. Pneumatic tools not allowed without prior approval.
- G. Restore work with new products in accordance with requirements of Contract Documents.
- H. Fit work air tight to pipes, sleeves, ducts, conduit, and other penetrations through surfaces.
- I. At penetrations of fire rated walls, partitions, ceiling, or floor construction, completely seal voids with fire rated material, to full thickness of the penetrated element.
- J. Patching:
 - 1. Finish patched surfaces to match finish that existed prior to patching. On continuous surfaces, refinish to nearest intersection or natural break. For an assembly, refinish entire unit.
 - 2. Match color, texture, and appearance.
 - 3. Repair patched surfaces that are damaged, lifted, discolored, or showing other imperfections due to patching work. If defects are due to condition of substrate, repair substrate prior to repairing finish.

3.07 PROGRESS CLEANING

- A. Maintain areas free of waste materials, debris, and rubbish. Maintain site in a clean and orderly condition.
- B. Remove debris and rubbish from pipe chases, plenums, attics, crawl spaces, and other closed or remote spaces, prior to enclosing the space.
- C. Broom and vacuum clean interior areas prior to start of surface finishing, and continue cleaning to eliminate dust.
- D. Collect and remove waste materials, debris, and trash/rubbish from site periodically and dispose off-site; do not burn or bury.

3.08 PROTECTION OF INSTALLED WORK

- A. Protect installed work from damage by construction operations.

- B. Provide special protection where specified in individual specification sections.
- C. Provide temporary and removable protection for installed products. Control activity in immediate work area to prevent damage.
- D. Provide protective coverings at walls, projections, jambs, sills, and soffits of openings.
- E. Protect finished floors, stairs, and other surfaces from traffic, dirt, wear, damage, or movement of heavy objects, by protecting with durable sheet materials.
- F. Prohibit traffic or storage upon waterproofed or roofed surfaces. If traffic or activity is necessary, obtain recommendations for protection from waterproofing or roofing material manufacturer.
- G. Remove protective coverings when no longer needed; reuse or recycle plastic coverings if possible.

3.09 DEMONSTRATION AND INSTRUCTION

- A. Demonstrate operation and maintenance of products to Owner's personnel prior to date of final inspection.
- B. Provide a qualified person who is knowledgeable about the Project to perform demonstration and instruction of owner personnel.

3.10 ADJUSTING

- A. Adjust operating products and equipment to ensure smooth and unhindered operation.

3.11 FINAL CLEANING

- A. Use cleaning materials that are nonhazardous.
- B. Remove all labels that are not permanent. Do not paint or otherwise cover fire test labels or nameplates on mechanical and electrical equipment.
- C. Clean equipment and fixtures to a sanitary condition with cleaning materials appropriate to the surface and material being cleaned.
- D. Clean debris from roofs, gutters, downspouts, and drainage systems.
- E. Clean site; sweep paved areas, rake clean landscaped surfaces.
- F. Remove waste, surplus materials, trash/rubbish, and construction facilities from the site; dispose of in legal manner; do not burn or bury.

3.12 CLOSEOUT PROCEDURES

- A. Make submittals that are required by governing or other authorities.
 - 1. Provide copies to Architect and Owner.
- B. Notify Architect when work is considered ready for Substantial Completion.
- C. Submit written certification that Contract Documents have been reviewed, work has been inspected, and that work is complete in accordance with Contract Documents and ready for Architect's review.
- D. Correct items of work listed in executed Certificates of Substantial Completion and comply with requirements for access to Owner-occupied areas.

- E. Notify Architect when work is considered finally complete.
- F. Complete items of work determined by Architect's final inspection.

END OF SECTION

SECTION 017800

CLOSEOUT SUBMITTALS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Project Record Documents.
- B. Operation and Maintenance Data.
- C. Warranties and bonds.

1.02 RELATED REQUIREMENTS

- A. Section 005000: Performance bond and labor and material payment bonds, warranty, and correction of work.
- B. Section 013000 - Administrative Requirements: Submittals procedures, shop drawings, product data, and samples.
- C. Section 017000 - Execution and Closeout Requirements: Contract closeout procedures.
- D. Individual Product Sections: Specific requirements for operation and maintenance data.
- E. Individual Product Sections: Warranties required for specific products or Work.

1.03 SUBMITTALS

- A. Project Record Documents: Submit documents to Architect with claim for final Application for Payment.
- B. Operation and Maintenance Data:
 - 1. Submit two copies of preliminary draft or proposed formats and outlines of contents before start of Work. Architect will review draft and return one copy with comments.
 - 2. For equipment, or component parts of equipment put into service during construction and operated by Owner, submit completed documents within ten days after acceptance.
 - 3. Submit one copy of completed documents 15 days prior to final inspection. This copy will be reviewed and returned, with Architect comments. Revise content of all document sets as required prior to final submission.
 - 4. Submit two sets of revised final documents in final form within 10 days after final inspection.
- C. Warranties and Bonds:
 - 1. For equipment or component parts of equipment put into service during construction with Owner's permission, submit documents within 10 days after acceptance.
 - 2. Make other submittals within 10 days after Date of Substantial Completion, prior to final Application for Payment.
 - 3. For items of Work for which acceptance is delayed beyond Date of Substantial Completion, submit within 10 days after acceptance, listing the date of acceptance as the beginning of the warranty period.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION

3.01 PROJECT RECORD DOCUMENTS

- A. Maintain on site one set of the following record documents; record actual revisions to the Work:
 - 1. Drawings.
 - 2. Addenda.
 - 3. Change Orders and other modifications to the Contract.
- B. Ensure entries are complete and accurate, enabling future reference by Owner.
- C. Store record documents separate from documents used for construction.
- D. Record information concurrent with construction progress.
- E. Record Drawings: Legibly mark each item to record actual construction including:
 - 1. Measured horizontal and vertical locations of underground utilities and appurtenances, referenced to permanent surface improvements.
 - 2. Measured locations of internal utilities and appurtenances concealed in construction, referenced to visible and accessible features of the Work.
 - 3. Field changes of dimension and detail.
 - 4. Details not on original Contract drawings.

3.02 OPERATION AND MAINTENANCE DATA

- A. For Each Product or System: List names, addresses and telephone numbers of Subcontractors and suppliers, including local source of supplies and replacement parts.
- B. Product Data: Mark each sheet to clearly identify specific products and component parts, and data applicable to installation. Delete inapplicable information.
- C. Drawings: Supplement product data to illustrate relations of component parts of equipment and systems, to show control and flow diagrams. Do not use Project Record Documents as maintenance drawings.
- D. Typed Text: As required to supplement product data. Provide logical sequence of instructions for each procedure, incorporating manufacturer's instructions.

3.03 OPERATION AND MAINTENANCE DATA FOR MATERIALS AND FINISHES

- A. For Each Product, Applied Material, and Finish:
 - 1. Product data, with catalog number, size, composition, and color and texture designations.
- B. Instructions for Care and Maintenance: Manufacturer's recommendations for cleaning agents and methods, precautions against detrimental cleaning agents and methods, and recommended schedule for cleaning and maintenance.
- C. Moisture protection and weather-exposed products: Include product data listing applicable reference standards, chemical composition, and details of installation. Provide recommendations for inspections, maintenance, and repair.
- D. Additional information as specified in individual product specification sections.

3.04 OPERATION AND MAINTENANCE MANUALS

- A. Prepare instructions and data by personnel experienced in maintenance and operation of described products.
- B. Prepare data in the form of an instructional manual.
- C. Binders: Commercial quality, 8-1/2 by 11 inch (216 by 280 mm) three D side ring binders with durable plastic covers; 3 inch (____ mm) maximum ring size. When multiple binders are used, correlate data into related consistent groupings.
- D. Cover: Identify each binder with typed or printed title OPERATION AND MAINTENANCE INSTRUCTIONS; identify title of Project; identify subject matter of contents.
- E. Provide tabbed dividers for each separate product and system, with typed description of product and major component parts of equipment.
- F. Arrange content by products and systems under section numbers and sequence of Table of Contents of this Project Manual.
- G. Table of Contents: Provide title of Project; names, addresses, and telephone numbers of Architect, Consultants, and Contractor with name of responsible parties; schedule of products and systems, indexed to content of the volume.

3.05 WARRANTIES AND BONDS

- A. Obtain warranties and bonds, executed in duplicate by responsible Subcontractors, suppliers, and manufacturers, within 10 days after completion of the applicable item of work. Except for items put into use with Owner's permission, leave date of beginning of time of warranty until the Date of Substantial completion is determined.
- B. Verify that documents are in proper form, contain full information, and are notarized.
- C. Co-execute submittals when required.
- D. Retain warranties and bonds until time specified for submittal.
- E. Include originals of each in operation and maintenance manuals, indexed separately on Table of Contents.

END OF SECTION

SECTION 055000

METAL FABRICATIONS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Shop fabricated steel and aluminum items.

1.02 RELATED REQUIREMENTS

- A. See Section 012300 - Alternates, for alternates affecting the work of this section.

1.03 REFERENCE STANDARDS

- A. AAMA 611 - Voluntary Specification for Anodized Architectural Aluminum; American Architectural Manufacturers Association; 1998.
- B. ASTM A36/A36M - Standard Specification for Carbon Structural Steel; 2008.
- C. ASTM A53/A53M - Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless; 2010.
- D. ASTM A123/A123M - Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products; 2009.
- E. ASTM A153/A153M - Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware; 2009.
- F. ASTM A283/A283M - Standard Specification for Low and Intermediate Tensile Strength Carbon Steel Plates; 2003 (Reapproved 2007).
- G. ASTM A325 - Standard Specification for Structural Bolts, Steel, Heat Treated, 120/105 ksi Minimum Tensile Strength; 2009a.
- H. ASTM A325M - Standard Specification for Structural Bolts, Steel, Heat Treated 830 MPa Tensile Strength (Metric); 2009.
- I. ASTM A501 - Standard Specification for Hot-Formed Welded and Seamless Carbon Steel Structural Tubing; 2007.
- J. ASTM B209 - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate; 2007.
- K. ASTM B209M - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate [Metric]; 2007.
- L. ASTM B221 - Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes; 2008.
- M. ASTM B221M - Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes [Metric]; 2007.
- N. AWS A2.4 - Standard Symbols for Welding, Brazing, and Nondestructive Examination; American Welding Society; 2007.
- O. AWS D1.1/D1.1M - Structural Welding Code - Steel; American Welding Society; 2010.

- P. OSHA 1910.27 – Fixed Ladders.
- Q. SSPC-Paint 15 - Steel Joist Shop Primer; Society for Protective Coatings; 1999 (Ed. 2004).
- R. SSPC-Paint 20 - Zinc-Rich Primers (Type I, "Inorganic," and Type II, "Organic"); Society for Protective Coatings; 2002 (Ed. 2004).
- S. SSPC-SP 2 - Hand Tool Cleaning; Society for Protective Coatings; 1982 (Ed. 2004).

1.04 SUBMITTALS

- A. See Section 013000 - Administrative Requirements, for submittal procedures.
- B. Shop Drawings: Indicate profiles, sizes, connection attachments, reinforcing, anchorage, size and type of fasteners, and accessories. Include erection drawings, elevations, and details where applicable.
 - 1. Indicate welded connections using standard AWS A2.4 welding symbols. Indicate net weld lengths.
- C. Welders' Certificates: Submit certification for welders employed on the project, verifying AWS qualification within the previous 12 months.

PART 2 PRODUCTS

2.01 MATERIALS - STEEL

- A. Steel Sections: ASTM A36/A36M.
- B. Steel Tubing: ASTM A501 hot-formed structural tubing.
- C. Plates: ASTM A283.
- D. Pipe: ASTM A53/A53M, Grade B Schedule 40, black finish.
- E. Slotted Channel Framing: ASTM A653, Grade 33.
- F. Bolts, Nuts, and Washers: ASTM A325 (ASTM A325M), Type 1, galvanized to ASTM A153/A153M where connecting galvanized components.
- G. Welding Materials: AWS D1.1/D1.1M; type required for materials being welded.
- H. Shop and Touch-Up Primer: SSPC-Paint 15, complying with VOC limitations of authorities having jurisdiction.
- I. Touch-Up Primer for Galvanized Surfaces: SSPC-Paint 20, Type I - Inorganic, complying with VOC limitations of authorities having jurisdiction.

2.02 MATERIALS - ALUMINUM

- A. Extruded Aluminum: ASTM B221 (ASTM B221M), 6063 alloy, T6 temper.
- B. Sheet Aluminum: ASTM B209 (ASTM B209M), 5052 alloy, H32 or H22 temper.

2.03 FABRICATION

- A. Fit and shop assemble items in largest practical sections, for delivery to site.
- B. Fabricate items with joints tightly fitted and secured.
- C. Continuously seal joined members by continuous welds.

- D. Grind exposed joints flush and smooth with adjacent finish surface. Make exposed joints butt tight, flush, and hairline. Ease exposed edges to small uniform radius.
- E. Supply components required for anchorage of fabrications. Fabricate anchors and related components of same material and finish as fabrication, except where specifically noted otherwise.

2.04 FABRICATED ITEMS

- A. New Exterior Steel Roof Guardrails
 - 1. Provide new exterior steel guardrails as shown. All exterior guardrails shall be hot dipped galvanized.
 - 2. Exterior Steel roof guardrails:
 - a. Fabricate to dimensions and details shown, with smooth bends and welded joints ground smooth and flush.
 - b. Finish and installation shall meet requirements of National Association of Architectural Metal Manufacturers Guide Specification.

2.05 MANUFACTURED PRODUCTS

- A. Wall Mounted Vertical Exterior Roof Ladder with Platform:
 - 1. Vertical aluminum roof ladder with platform: Model 503A manufactured by O'Keeffes Architectural Building Products Inc, San Francisco, CA.
 - a. Substitutions: See Section 016000 - Product Requirements.
 - 2. Finish: All metal shall be clear anodic finish, AA-M10C22A41 Architectural Class I, clear coated, .018 mm or thicker.
 - 3. Provide manufacturer's standard tubular rails, square aluminum rungs, aluminum platform, formed wall brackets, and all other related attachments and accessories for a complete system.
 - 4. Rungs: Not less than 1-1/4 inches (32 mm) in section and 18-3/8 inches (467mm) long, formed from tubular aluminum extrusions. Squared and deeply serrated on all sides.
 - a. Rungs shall withstand a 1,500 pound (454 kg) load without deformation or failure.
 - 5. Channel Side Rails: Not less than 1/8 inch (3 mm) wall thickness by 3 inches (76 mm) wide.
 - 6. Heavy Duty Tubular Side Rails: Assembled from two interlocking aluminum extrusions no less than 1/8 inch (3 mm) wall thickness by 3 inches (76 mm) wide. Construction shall be self-locking stainless steel fasteners, full penetration TIG welds and clean, smooth and burr-free surfaces.
 - 7. Walk-Through Rail and Roof Rail Extension: Not less than 3 feet 6 inches (1067 mm) above the landing and shall be fitted with deeply serrated, square, tubular grab rails.
 - 8. Landing Platform: 1-1/2 inches (38 mm) or greater diameter, tubular aluminum guardrails and decks of serrated aluminum treads.
 - 9. Submit shop drawings.

2.06 FINISHES - STEEL

- A. Prime paint all steel items.
 - 1. Exceptions: Galvanize items to be embedded in concrete, items to be imbedded in masonry, and exterior items.

- B. Prepare surfaces to be primed in accordance with SSPC-SP2.
- C. Clean surfaces of rust, scale, grease, and foreign matter prior to finishing.
- D. Prime Painting: One coat.
- E. Galvanizing of Structural Steel Members: Galvanize after fabrication to ASTM A123/A123M requirements.

2.07 FINISHES - ALUMINUM

- A. Class I Natural Anodized Finish: AAMA 611 AA-M12C22A41 Clear anodic coating not less than 0.7 mils (0.018 mm) thick.

2.08 FABRICATION TOLERANCES

- A. Squareness: 1/8 inch (3 mm) maximum difference in diagonal measurements.
- B. Maximum Offset Between Faces: 1/16 inch (1.5 mm).
- C. Maximum Misalignment of Adjacent Members: 1/16 inch (1.5 mm).
- D. Maximum Bow: 1/8 inch (3 mm) in 48 inches (1.2 m).
- E. Maximum Deviation From Plane: 1/16 inch (1.5 mm) in 48 inches (1.2 m).

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field conditions are acceptable and are ready to receive work.

3.02 INSTALLATION

- A. Install items plumb and level, accurately fitted, free from distortion or defects.
- B. Provide for erection loads, and for sufficient temporary bracing to maintain true alignment until completion of erection and installation of permanent attachments.
- C. Field weld components indicated.
- D. Perform field welding in accordance with AWS D1.1/D1.1M.
- E. Obtain approval prior to site cutting or making adjustments not scheduled.

END OF SECTION

SECTION 061000

ROUGH CARPENTRY

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Sheathing.
- B. Roof-mounted curbs.
- C. Roofing nailers.
- D. Concealed wood blocking, nailers, and supports.

1.02 REFERENCE STANDARDS

- A. ASTM A153/A153M - Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware; 2009.
- B. PS 1 - Structural Plywood; 2007.
- C. PS 20 - American Softwood Lumber Standard; National Institute of Standards and Technology (Department of Commerce); 2005.

1.03 SUBMITTALS

- A. See Section 013000 - Administrative Requirements, for submittal procedures.

1.04 DELIVERY, STORAGE, AND HANDLING

- A. General: Cover wood products to protect against moisture. Support stacked products to prevent deformation and to allow air circulation.

PART 2 PRODUCTS

2.01 GENERAL REQUIREMENTS

- A. Dimension Lumber: Comply with PS 20 and requirements of specified grading agencies.
 - 1. If no species is specified, provide any species graded by the agency specified; if no grading agency is specified, provide lumber graded by any grading agency meeting the specified requirements.
 - 2. Grading Agency: Any grading agency whose rules are approved by the Board of Review, American Lumber Standard Committee (www.alsc.org) and who provides grading service for the species and grade specified; provide lumber stamped with grade mark unless otherwise indicated.
- B. Lumber fabricated from old growth timber is not permitted.

2.02 DIMENSION LUMBER FOR CONCEALED APPLICATIONS

- A. Sizes: Nominal sizes as indicated on drawings, S4S.
- B. Moisture Content: S-dry or MC19.
- C. Miscellaneous Framing, Blocking, Nailers, Grounds, and Furring:
 - 1. Lumber: S4S, No. 2 or Standard Grade.
 - 2. Boards: Standard or No. 3.

2.03 CONSTRUCTION PANELS

- A. Wall Sheathing: Plywood, PS 1, Grade C-C, Exterior Exposure.

2.04 ACCESSORIES

- A. Fasteners and Anchors:
 - 1. Metal and Finish: Hot-dipped galvanized steel per ASTM A 153/A 153M.

PART 3 EXECUTION

3.01 INSTALLATION - GENERAL

- A. Select material sizes to minimize waste.
- B. Reuse scrap to the greatest extent possible; clearly separate scrap for use on site as accessory components, including: shims, bracing, and blocking.

3.02 BLOCKING, NAILERS, AND SUPPORTS

- A. Provide framing and blocking members as indicated or as required to support finishes, fixtures, specialty items, and trim.
- B. In walls, provide blocking attached to studs as backing and support for wall-mounted items, unless item can be securely fastened to two or more studs or other method of support is explicitly indicated.
- C. Where ceiling-mounting is indicated, provide blocking and supplementary supports above ceiling, unless other method of support is explicitly indicated.

3.03 ROOF-RELATED CARPENTRY

- A. Coordinate installation of roofing carpentry with deck construction, framing of roof openings, and roofing assembly installation.
- B. Provide wood curb at all roof openings except where specifically indicated otherwise. Form corners by alternating lapping side members.

3.04 INSTALLATION OF CONSTRUCTION PANELS

- A. Wall Sheathing: Secure with long dimension perpendicular to wall studs, with ends over firm bearing and staggered, using nails, screws, or staples.

3.05 TOLERANCES

- A. Framing Members: 1/4 inch (6 mm) from true position, maximum.
- B. Variation from Plane (Other than Floors): 1/4 inch in 10 feet (2 mm/m) maximum, and 1/4 inch in 30 feet (7 mm in 10 m) maximum.

3.06 CLEANING

- A. Waste Disposal: Comply with the requirements of Section 017000.
 - 1. Comply with applicable regulations.
 - 2. Do not burn scrap on project site.
- B. Do not leave any wood, shavings, sawdust, etc. on the ground or buried in fill.
- C. Prevent sawdust and wood shavings from entering the storm drainage system.

END OF SECTION

SECTION 070150.19

PREPARATION FOR RE-ROOFING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Removal of existing roofing system in preparation for a new roof membrane system.

1.02 ADMINISTRATIVE REQUIREMENTS

- A. Coordinate with affected mechanical and electrical work associated with roof penetrations.
- B. Preinstallation Meeting: Convene one week before starting work of this section.
- C. Schedule work to coincide with commencement of installation of new roofing system.

1.03 FIELD CONDITIONS

- A. Do not remove existing roofing membrane when weather conditions threaten the integrity of the building contents or intended continued occupancy.
- B. Maintain continuous temporary protection prior to and during installation of new roofing system.

PART 2 PRODUCTS

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that existing roof surface is clear and ready for work of this section.

3.02 PREPARATION

- A. Sweep roof surface clean of loose matter.
- B. Remove loose refuse and dispose off site.

3.03 MATERIAL REMOVAL

- A. Remove only existing roofing materials that can be replaced with new materials the same day.
- B. Remove metal counter flashings.
- C. Remove stone ballast and precast walkway pads.
- D. Remove roofing membrane, perimeter base flashings, flashings around roof protrusions, pitch pans and pockets.
- E. Remove insulation and fasteners, cant strips, blocking to metal deck.

3.04 PROTECTION

- A. Do not permit traffic over unprotected or repaired deck surface.

END OF SECTION

SECTION 075300

ELASTOMERIC MEMBRANE ROOFING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Elastomeric roofing membrane, adhered conventional application.
- B. Insulation, flat and tapered.
- C. Flashings.
- D. Roofing stack boots, roofing expansion joints, and walkway pads.

1.02 RELATED REQUIREMENTS

- A. Section 061000 - Rough Carpentry: Wood nailers and curbs.
- B. Section 076200 - Sheet Metal Flashing and Trim: Counterflashings, reglets,.
- C. Section 077100 - Roof Specialties: Fascia, and expansion joint covers to be included in roofing system warranty.

1.03 REFERENCE STANDARDS

- A. ASTM C1289 - Standard Specification for Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board; 2010.
- B. ASTM D4637 - Standard Specification for EPDM Sheet Used in Single-Ply Roof Membrane; 2010.
- C. FM DS 1-28 - Wind Design; Factory Mutual Research Corporation; 2007.
- D. NRCA ML104 - The NRCA Roofing and Waterproofing Manual; National Roofing Contractors Association; Fifth Edition, with interim updates.
- E. UL (RMSD) - Roofing Materials and Systems Directory; Underwriters Laboratories Inc.; current edition.

1.04 PRICE AND PAYMENT PROCEDURES

- A. Alternates: See Section 012300 - Alternates, for product alternatives affecting this section.

1.05 ADMINISTRATIVE REQUIREMENTS

- A. Preinstallation Meeting: Convene a preinstallation meeting two (2) weeks before starting work of this section; require attendance by all affected installers; review preparation and installation procedures and coordination and scheduling necessary for related work.

1.06 SUBMITTALS

- A. See Section 013000 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide data indicating membrane materials, flashing materials, insulation, and fasteners.

- C. Shop Drawings: Indicate tapered insulation layout and profiles.
- D. Manufacturer's Installation Instructions: Indicate membrane seaming precautions and perimeter conditions requiring special attention.
- E. Manufacturer's Field Reports: Indicate procedures followed, ambient temperatures, humidity, wind velocity during application, and supplementary instructions given.
- F. Warranty: Submit manufacturer warranty and ensure forms have been completed in Owner's name and registered with manufacturer.

1.07 PERFORMANCE REQUIREMENTS

- A. General: Provide installed roofing membrane and base flashings that remain watertight; do not permit the passage of water; and resist specified uplift pressures, thermally induced movement, and exposure to weather without failure.
- B. Material Compatibility: Provide roofing materials that are compatible with one another under conditions of service and application required, as demonstrated by roofing membrane manufacturer based on testing and field experience.

1.08 QUALITY ASSURANCE

- A. Perform work in accordance with NRCA Roofing and Waterproofing Manual and manufacturer's instructions.
- B. Applicator Qualifications: Company specializing in performing the work of this section with minimum five (5) years experience and approved by manufacturer.
- C. Source Limitations: Obtain components for membrane roofing system from same manufacturer as roofing membrane.
- D. Fire-Test-Response Characteristics: Provide membrane roofing materials with the fire-test-response characteristics indicated as determined by testing identical products per test method below by UL, FMG, or another testing and inspecting agency acceptable to authorities having jurisdiction.

1.09 DELIVERY, STORAGE, AND HANDLING

- A. Deliver products in manufacturer's original containers, dry, undamaged, with seals and labels intact.
- B. Store products in weather protected environment, clear of ground and moisture.
- C. Protect foam insulation from direct exposure to sunlight.

1.10 FIELD CONDITIONS

- A. Do not apply roofing membrane during unsuitable weather.
- B. Do not apply roofing membrane when ambient temperature is below 40 degrees F (5 degrees C) or above 100 degrees F (37.8 degrees C).
- C. Do not apply roofing membrane to damp or frozen deck surface or when precipitation is expected or occurring.

- D. Do not expose materials vulnerable to water or sun damage in quantities greater than can be weatherproofed the same day.

1.11 WARRANTY

- A. See Section 017800 - Closeout Submittals, for additional warranty requirements.
- B. Special Warranty: Manufacturer's Warranty standard form, without monetary limitation, in which manufacturer agrees to repair or replace components of membrane roofing system that fail in materials or workmanship within specified warranty period. Failure includes roof leaks.
 - 1. Warranty Period: 20 years from date of Substantial Completion.
 - 2. Include edge metal in Roofing System Warranty. See Section 077100.
- C. Special Project Warranty: Submit roofing Installer's warranty, on warranty form at end of this Section, signed by Installer, covering Work of this Section, including all components of membrane roofing system such as roofing membrane, base flashing, roof insulation, and walkway products, for the following warranty period:
 - 1. Warranty Period: Two years from date of Substantial Completion.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. EPDM Membrane and Insulation Materials:
 - 1. Carlisle SynTec: www.carlisle-syntec.com.
 - 2. Firestone Building Products Co: www.firestonebpco.com.
 - 3. Versico Roofing Systems: www.versico.com
 - 4. Substitutions: See Section 016000 - Product Requirements.

2.02 ROOFING

- A. Elastomeric Membrane Roofing: One ply membrane, fully adhered, over insulation.
- B. Roofing Assembly Requirements:
 - 1. Roof Covering External Fire-Resistance Classification: UL Class A.
 - 2. Factory Mutual Classification: Class I and windstorm resistance of I-60, in accordance with FM DS 1-28.
- C. Acceptable Insulation Types - Constant Thickness Application:
 - 1. Minimum 2 layers of polyisocyanurate board.
- D. Acceptable Insulation Types - Tapered Application:
 - 1. Uniform thickness polyisocyanurate board covered with tapered polyisocyanurate board.
 - 2. Refer to drawings for locations to receive tapered roof insulation.

2.03 ROOFING MEMBRANE AND ASSOCIATED MATERIALS

- A. Membrane: Ethylene-propylene-diene-terpolymer (EPDM); non-reinforced; complying with minimum properties of ASTM D 4637.
 - 1. Thickness: .060 inch (1.52 mm).
 - 2. Sheet Width: 120 inch (3048 mm), minimum; factory-fabricate into largest sheets possible.
 - 3. Solar Reflectance: 0.75, minimum, initial, and 0.64, minimum, 3-year, certified

- by Cool Roof Rating Council.
- 4. Thermal Emittance: 0.84, minimum, initial, and 0.87, minimum, 3-year, certified by Cool Roof Rating Council.
- 5. Color: White.
- B. Seaming Materials: standard synthetic-rubber polymer primer and 3-inch- (75 mm-) wide minimum, butyl splice tape with release film..
- C. Membrane Fasteners: As recommended by and approved by membrane manufacturer.
- D. Flexible Flashing Material: EPDM sheet; conforming to the following:
 - 1. Thickness: 60 mil.
 - 2. Tensile Strength: 1,200 psi (8.3 MPa).
 - 3. Elasticity: 50 percent with full recovery without set.
 - 4. Color: White.

2.04 INSULATION

- A. Polyisocyanurate Board Insulation: Rigid cellular foam, complying with ASTM C1289, Type II, Class 1, cellulose felt or glass fiber mat both faces; Grade 1 and with the following characteristics:
 - 1. Compressive Strength: 25 psi
 - 2. Board Size: 48 x 96 inch (1220 x 2440 mm).
 - 3. Board Thickness (base layer): 1-1/2 inch (37.5 mm) minimum.
 - 4. Board Edges: Square.
 - 5. Flat roof insulation thickness: 3-1/2" total thickness, two-layers.
 - 6. Tapered roof insulation:
 - a. Minimum insulation thickness: 2 1/2", two layers.
 - b. Slope: 1/4" per foot.
 - c. Sumps at drains: 4'-0" square; 1/2" per foot slope.
- B. Cover Board:
 - 1. Glass mat faced gypsum panels, ASTM C 1177/C 1177M, 1/2 inch thick, with non- asphaltic coating surfacing.
 - 2. Manufacturer: Georgia-Pacific, DensDeck Prime
 - a. Substitutions: See Section 016000 - Product Requirements

2.05 ACCESSORIES

- A. Prefabricated Roofing Expansion Joint Flashing: Sheet butyl over closed-cell foam backing seamed to stainless steel flanges.
- B. Stack Boots: Prefabricated flexible boot and collar for pipe stacks through membrane; same material as membrane.
- C. Insulation Joint Tape: Glass fiber reinforced type as recommended by insulation manufacturer, compatible with roofing materials; 6 inches (150 mm) wide; self adhering.
- D. Insulation Fasteners: Appropriate for purpose intended and approved by roofing manufacturer.
- E. Membrane Adhesive: As recommended by membrane manufacturer, and:
 - 1. Provide zero-VOC, solvent-free EPDM bonding adhesive that complies with Ozone Transport Commission (OTC) Model Rule, Single Ply Roofing Adhesives;

www.otcair.org.

- F. Membrane Adhesive Primer: As recommended by membrane manufacturer, and:
 - 1. Provide low-VOC, solvent-based EPDM adhesive primer that complies with Ozone Transport Commission (OTC) Model Rule, Single Ply Roofing Adhesive Primers; www.otcair.org.
- G. Insulation Adhesive: As recommended by insulation manufacturer.
- H. Walkway Pads: Black, molded rubber, 30 x 30 x 3/16 inch (762 x 762 x 4.76 mm), with raised "nibs" finish.
- I. Miscellaneous Accessories: Lap sealant, water cutoff mastic, metal termination bars, metal battens, pourable sealers, preformed cone and vent sheet flashings, preformed inside and outside corner sheet flashings, T-joint covers, in-seam sealants, termination reglets, cover strips, and other accessories required.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that surfaces and site conditions are ready to receive work.
- B. Verify deck is supported and secure.
- C. Verify deck is clean and smooth, flat, free of depressions, waves, or projections, properly sloped and suitable for installation of roof system.
- D. Verify deck surfaces are dry and free of snow or ice.
- E. Verify that roof openings, curbs, and penetrations through roof are solidly set, and are in place.

3.02 INSULATION AND COVER BOARD INSTALLATION

- A. Comply with roofing manufacturer's written instructions for installing roof insulation board.
- B. Attachment of Insulation:
 - 1. Mechanically fasten first layer of insulation to deck in accordance with roofing manufacturer's instructions and Factory Mutual requirements.
 - 2. Embed second layer of insulation into full bed of adhesive in accordance with roofing and insulation manufacturers' instructions.
- C. Install insulation with long joints of insulation in a continuous straight line with end joints staggered between rows, abutting edges and ends between boards. Fill gaps exceeding 1/4 inch (6 mm) with insulation.
 - 1. Cut and fit insulation within 1/4 inch (6 mm) of nailers, projections, and penetrations.
- D. Install insulation in two (2) layers. Lay subsequent layers of insulation with joints staggered minimum 6 inch (150 mm) from joints of preceding layer.
- E. Place tapered insulation to the required slope pattern in accordance with manufacturer's instructions.
- F. Lay boards with edges in moderate contact without forcing. Cut insulation to fit neatly to perimeter blocking and around penetrations through roof.

- G. Tape joints of insulation in accordance with roofing and insulation manufacturers' instructions.
- H. At roof drains, use factory-tapered boards to slope down to roof drains over a distance of 24 inches (600 mm).
 - 1. Trim surface of insulation where necessary at roof drains so completed surface is flush and does not restrict flow of water.
- I. Do not apply more insulation than can be covered with membrane in same day.
- J. Install cover board over insulation with long joints in continuous straight lines with end joints staggered between rows. Adhesive attach cover board, following manufacturer recommendations.

3.03 MEMBRANE APPLICATION

- A. Install roofing membrane over area to receive roofing according to membrane roofing system manufacturer's written instructions. Unroll roofing membrane and
- B. Roll out membrane, free from wrinkles or tears, and allow to relax before installing. Place sheet into place without stretching.
- C. Accurately align roofing membrane and maintain uniform side and end laps of minimum dimensions required by manufacturer. Stagger end laps. Shingle joints on sloped substrate in direction of drainage.
- D. Fully Adhered Application: Apply adhesive to substrate at rate required by manufacturer. Fully embed membrane in adhesive except in areas directly over or within 3 inches (75 mm) of expansion joints. Fully adhere one roll before proceeding to adjacent rolls.
 - 1. Protect white surface from discoloration from bonding adhesive.
 - 2. Do not place bonding adhesive containers or lids on white membrane surface.
- E. Tape Seam Installation: Overlap edges and ends and seal seams by contact tape, minimum 3 inches (75 mm). Clean and prime both faces of splice areas, apply splice tape, and firmly roll side and end laps of overlapping roofing membranes according to manufacturer's written instructions to ensure a watertight seam installation. Apply uniform bead of lap sealant to exposed joint edge terminations.
- F. Mechanically or adhesively fasten roofing membrane securely at terminations, penetrations, and perimeter of roofing.
- G. At intersections with vertical surfaces:
 - 1. Extend membrane over cant strips and up a minimum of 8 inches (200 mm) onto vertical surfaces, or as shown.
 - 2. Fully adhere flexible flashing over membrane and up to termination bars.
- H. Around roof penetrations, seal flanges and flashings with flexible flashing.
- I. Install roofing expansion joints where indicated. Make joints watertight.
 - 1. Install prefabricated joint components in accordance with manufacturer's instructions.
- J. Coordinate installation of roof drains and sumps and related flashings.

- K. Coordinate installation of associated counterflashings installed under other sections.
- L. Repair tears, voids, and lapped seams in roofing that does not meet requirements

3.04 BASE FLASHING INSTALLATION

- A. Install sheet flashings and preformed flashing accessories and adhere to substrates according to membrane roofing system manufacturer's written instructions.
- B. Apply bonding adhesive to substrate and underside of sheet flashing at required rate and allow to partially dry.
- C. Flash penetrations and field-formed inside and outside corners with cured or uncured sheet flashing.
- D. Clean splice areas, apply splicing cement, and firmly roll side and end laps of overlapping sheets to ensure a watertight seam installation. Apply lap sealant and seal exposed edges of sheet flashing terminations.
- E. Terminate and seal top of sheet flashings and mechanically anchor to substrate through termination bars.

3.05 ROOF WALKWAY INSTALLATION

- A. Flexible Walkways: Install walkway products in locations indicated. Adhere walkway products to substrate with compatible adhesive according to roofing system manufacturer's written instructions.

3.06 FIELD QUALITY CONTROL

- A. See Section 014000 - Quality Requirements, for general requirements for field quality control and inspection.
- B. Require site attendance of roofing and insulation material manufacturers weekly during installation of the Work.

3.07 CLEANING

- A. Remove markings from finished surfaces.
- B. In areas where finished surfaces are soiled by work of this section, consult manufacturer of surfaces for cleaning advice and conform to their written instructions.
- C. Repair or replace defaced or damaged finishes caused by work of this section.

3.08 PROTECTION

- A. Protect installed roofing and flashings from construction operations.
- B. Where traffic must continue over finished roof membrane, protect surfaces using durable materials.

END OF SECTION

SECTION 076200

SHEET METAL FLASHING AND TRIM

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Fabricated sheet metal items, including flashings, counterflashings, and other items indicated in Schedule.
- B. Reglets and accessories.

1.02 RELATED REQUIREMENTS

- A. Section 061000 - Rough Carpentry: Wood nailers.
- B. Section 075300 - Elastomeric Membrane Roofing: Roofing system.
- C. Section 077100 - Roof Specialties: Metal copings, fascia, fascia extenders, scuppers and associated products..
- D. Section 079005 - Joint Sealers.

1.03 REFERENCE STANDARDS

- A. ASTM A666 - Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar; 2010.
- B. ASTM B32 - Standard Specification for Solder Metal; 2008.
- C. ASTM D226 - Standard Specification for Asphalt-Saturated Organic Felt Used in Roofing and Waterproofing; 2009.
- D. ASTM D4586 - Standard Specification for Asphalt Roof Cement, Asbestos-Free; 2007.
- E. SMACNA (ASMM) - Architectural Sheet Metal Manual; Sheet Metal and Air Conditioning Contractors' National Association; 2003.

1.04 SUBMITTALS

- A. See Section 013000 - Administrative Requirements, for submittal procedures.
- B. Shop Drawings: Indicate material profile, jointing pattern, jointing details, fastening methods, flashings, terminations, and installation details.

1.05 QUALITY ASSURANCE

- A. Perform work in accordance with SMACNA Architectural Sheet Metal Manual requirements and standard details, except as otherwise indicated.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Stack material to prevent twisting, bending, and abrasion, and to provide ventilation. Slope metal sheets to ensure drainage.
- B. Prevent contact with materials that could cause discoloration or staining.

1.07 PROJECT CONDITIONS

- A. Coordinate with the work of Section 075300 for Membrane Roofing.

PART 2 PRODUCTS

2.01 FLASHING TYPES

- A. Flashing Types 1 and 4: Stainless Steel: ASTM A 666 Type 304, soft temper, 0.015 inch (0.4 mm) thick; smooth No. 4 finish.
- B. Flashing Type 3: Membrane roofing base flashing material as specified in Section 075300 Single Ply Elastomeric Membrane Roofing.

2.02 ACCESSORIES

- A. Fasteners: Same material and finish as flashing metal, with soft neoprene washers.
- B. Underlayment: ASTM D226, organic roofing felt, Type I ("No. 15").
- C. Primer: Zinc chromate type.
- D. Protective Backing Paint: Zinc molybdate alkyd.
- E. Sealant: Type 1 specified in Section 079005.
- F. Plastic Cement: ASTM D4586, Type I.
- G. Solder: ASTM B32; Sn50 (50/50) type.
- H. Termination Bars: .050 Aluminum

2.03 FABRICATION

- A. Form sections true to shape, accurate in size, square, and free from distortion or defects.
- B. Fabricate cleats of same material as sheet, interlocking with sheet.
- C. Form pieces in longest possible lengths.
- D. Hem exposed edges on underside 1/2 inch (13 mm); miter and seam corners.
- E. Form material with flat lock seams, except where otherwise indicated. At moving joints, use sealed lapped, bayonet-type or interlocking hooked seams.
- F. Fabricate corners from one piece with minimum 18 inch (450 mm) long legs; seam for rigidity, seal with sealant.
- G. Fabricate vertical faces with bottom edge formed outward 1/4 inch (6 mm) and hemmed to form drip.
- H. Fabricate flashings to allow toe to extend 2 inches (50 mm) over roofing gravel. Return and brake edges.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify roof openings, curbs, pipes, sleeves, ducts, and vents through roof are solidly set, reglets in place, and nailing strips located.
- B. Verify roofing termination and base flashings are in place, sealed, and secure.

3.02 PREPARATION

- A. Install starter and edge strips, and cleats before starting installation.
- B. Install surface mounted reglets true to lines and levels. Seal top of reglets with sealant.
- C. Back paint concealed metal surfaces with protective backing paint to a minimum dry film thickness of 15 mil (0.4 mm).

3.03 INSTALLATION

- A. Conform to drawing details.
 - 1. and: SMACNA Architectural Sheet Metal Manual,
- B. Secure flashings in place using concealed fasteners. Use exposed fasteners only where permitted.
- C. Apply plastic cement compound between metal flashings and felt flashings.
- D. Fit flashings tight in place. Make corners square, surfaces true and straight in planes, and lines accurate to profiles.
- E. Seal metal joints watertight.

3.04 SCHEDULE

- A. Sheet Metal Flashing Schedule
 - 1. Flashing Type 1: New two-piece counterflashing, and new inserts for existing 2-piece counterflashing.
 - 2. Flashing Type 2: Not used.
 - 3. Flashing Type 3: Elastomeric roof membrane flashings - Refer to Section 075300.
 - 4. Flashing Type 4: Miscellaneous roof flashing as indicated.

END OF SECTION

SECTION 077100

ROOF SPECIALTIES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Manufactured roof specialties, including fascias and gravel stops.
- B. Roof expansion joint covers.

1.02 RELATED REQUIREMENTS

- A. Section 075300 - Roof warranty requirements
- B. Section 076200 - Sheet Metal Flashing and Trim
- C. Section 079005 - Joint Sealers.

1.03 REFERENCE STANDARDS

- A. AAMA 2605 - Voluntary Specification, Performance Requirements and Test Procedures for Superior Performing Organic Coatings on Aluminum Extrusions and Panels; 2005.
- B. ASTM D4586 - Standard Specification for Asphalt Roof Cement, Asbestos-Free; 2007.
- C. SMACNA (ASMM) - Architectural Sheet Metal Manual; Sheet Metal and Air Conditioning Contractors' National Association; 2003.
- D. ANSI/SPRI ES-1 Wind Design Standard for Edge Systems Used with Low Slope Roofing Systems.

1.04 SUBMITTALS

- A. See Section 013000 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide data on shape of components, materials and finishes, anchor types and locations.
- C. Shop Drawings: Indicate configuration and dimension of components, adjacent construction, required clearances and tolerances, and other affected work.
- D. Samples: Submit 2 samples, illustrating component shape, finish, and color.
- E. Manufacturer's Installation Instructions: Indicate special procedures and perimeter conditions requiring special attention.

1.05 QUALITY ASSURANCE

- A. Coping and roof edges shall be certified by the manufacturer to meet performance design criteria according to the following test standards:
 - 1. ANSI/SPRI ES-1 Test Method RE-3 for Coping: Wind Design Standard for Edge Systems Used with Low Slope Roofing Systems (current edition). The coping system shall be tested simultaneously on horizontal and vertical surfaces and shall exceed horizontal and vertical design wind pressure as calculated in accord with the ANSI/SPRI ES-1 Test RE-3. Use the current edition of ANSI/SPRI ES-1 Wind Design Standard for Edge Systems Used with Low Slope Roofing Systems.

2. Products shall be listed in current Factory Mutual Research Corporation Approval Guide approved for Class FM 1-90. Consult current FM Approval Guide or contact the factory for wall size, cleat spacing and gauge requirements.

B. Perform work in accordance with SMACNA Architectural Sheet Metal Manual details.

1.06 WARRANTY:

- A. Provide a roofing manufacturer's full system warranty to include roof edge systems.
 1. See Section 075300 for warranty requirements.
- B. Provide a 20 year warranty for painted finish covering color fade, chalk and film integrity.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Copings and Fascia:
 1. Metal-Era, Inc: www.metalera.com., private label systems for roofing manufacturers (basis of specification).
 - a. Fascia: Anchor-Tite Fascia System; Adhered Single Ply Version.
 2. Substitutions: See Section 016000 - Product Requirements.
- B. Control and Expansion Joint Covers:
 1. GAF Materials Corporation: www.gaf.com.
 2. Johns Manville Corporation: www.jm.com.
 3. MM Systems Corp: www.mmsystemscorp.com.
 4. Substitutions: See Section 016000 - Product Requirements.

2.02 COMPONENTS

- A. Fascia: Formed aluminum, 0.063 inch (1.60 mm) thick, shaped as indicated, including continuous extruded aluminum anchor bar. Include splice plates to conceal and weather seal joints and attachment flanges.
 1. Finish: PVDF Coating (Superior Performance).
 2. Color: match existing metal flashing and trim.
 3. Accessories: Provide factory-fabricated corners, end caps, pier caps, etc. Use welded assembly to maintain watertight integrity.
- B. Control and Expansion Joint Covers: Composite construction of 2 inch (50 mm) wide flexible EPDM flashing of white color with closed cell urethane foam backing, each edge seamed to aluminum sheet metal flanges, designed for nominal joint width of 1 inch (25 mm). Include special formed corners, tees, intersections, and wall flashings, each sealed watertight.

2.03 ACCESSORIES

- A. Sealant: Type 1 as specified in Section 079005.
- B. Roof Cement: ASTM D4586, Type II.

2.04 FINISHES

- A. PVDF (Polyvinylidene Fluoride) Coating: Superior Performance Organic Finish, AAMA 2605; multiple coat, thermally cured fluoropolymer finish system; color as selected from manufacturer's standard colors.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that deck, curbs, roof membrane, base flashing, and other items affecting work of this Section are in place and positioned correctly.

3.02 INSTALLATION

- A. Install components in accordance with manufacturer's instructions.
- B. Conform to SMACNA Architectural Sheet Metal Manual and manufacturer's standards :
- C. Coordinate installation of components of this section with installation of roofing membrane and base flashings.
- D. Coordinate installation of sealants and roofing cement with work of this section to ensure water tightness.
- E. Coordinate installation of flashing flanges into reglets.

END OF SECTION

SECTION 079005

JOINT SEALERS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Sealants and joint backing.
- B. Precompressed foam sealers.

1.02 REFERENCE STANDARDS

- A. ASTM C834 - Standard Specification for Latex Sealants; 2010.
- B. ASTM C920 - Standard Specification for Elastomeric Joint Sealants; 2011.
- C. ASTM C1193 - Standard Guide for Use of Joint Sealants; 2010.
- D. ASTM D1667 - Standard Specification for Flexible Cellular Materials--Poly(Vinyl Chloride) Foam (Closed-Cell); 2005 (Reapproved 2011).
- E. SCAQMD 1168 - South Coast Air Quality Management District Rule No.1168; current edition; www.aqmd.gov.

1.03 SUBMITTALS

- A. See Section 013000 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide data indicating sealant chemical characteristics, performance criteria, substrate preparation, limitations, and color availability.
- C. Manufacturer's Installation Instructions: Indicate special procedures, surface preparation, and perimeter conditions requiring special attention.

1.04 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the Products specified in this section with minimum 5 years experience.
- B. Applicator Qualifications: Company specializing in performing the work of this section with minimum 5 years experience.

1.05 FIELD CONDITIONS

- A. Maintain temperature and humidity recommended by the sealant manufacturer during and after installation.

1.06 COORDINATION

- A. Coordinate the work with all sections referencing this section.

1.07 WARRANTY

- A. See Section 017800 - Closeout Submittals, for additional warranty requirements.
- B. Correct defective work within a five year period after Date of Substantial Completion.
- C. Warranty: Include coverage for installed sealants and accessories which fail to achieve airtight seal, exhibit loss of adhesion or cohesion, or do not cure.

PART 2 PRODUCTS

2.01 SEALANTS

- A. Sealants and Primers - General: Provide only products having lower volatile organic compound (VOC) content than required by South Coast Air Quality Management District Rule No.1168.
- B. Type 1 - General Purpose Exterior Sealant: Silicone; ASTM C 920, Grade NS, Class 25, Uses M, G, and A; single component.
 - 1. Color: To be selected by Architect from manufacturer's full range.
 - 2. Joint Movement Range: +/- 50 percent.
 - 3. Product:
 - a. SilPruf NB SCS9000 manufactured by Momentive Performance Materials, Inc (formerly GE Silicones).
 - b. 890FTS manufactured by Pecora Corporation.
 - c. 795 manufactured by Dow Corning.
 - 4. Applications: Use for:
 - a. Joints between concrete and other materials.
 - b. Joints between metal frames and other materials.
- C. Type 2 - NOT USED
- D. Type 3 - NOT USED
- E. Type 4 - NOT USED
- F. Type 5 - NOT USED
- G. Type 6 - NOT USED
- H. Type 7 - Butyl Sealant: ASTM C 1311, Grade NS, +/-7.5% joint movement; single component, solvent release, non-skinning, non-sagging.
 - 1. Color: To be selected by Architect from manufacturer's standard range.
 - 2. Product: Tremco Butyl Sealant manufactured by Tremco.
 - 3. Product: BC-158 manufactured by Pecora.
 - 4. Applications: Use for:
 - a. exterior joints at metal flashings.

2.02 ACCESSORIES

- A. Primer: Non-staining type, recommended by sealant manufacturer to suit application.
- B. Joint Cleaner: Non-corrosive and non-staining type, recommended by sealant manufacturer; compatible with joint forming materials.
- C. Joint Backing: Round foam rod compatible with sealant; open cell polyurethane or reticulated (soft) polyethylene; oversized 33 to 50 percent larger than joint width; Denver Foam manufactured by Backer Rod Manufacturing, Inc.
- D. Fire Rated Joint Filler: Pre-engineered, patented, flexible, textile fiberglass roll material with a fiberglass matt facing, containing approximately 30 percent by weight unexpanded vermiculite; Ultra Block manufactured by Backer Rod Manufacturing, Inc.
- E. Bond Breaker: Pressure sensitive tape recommended by sealant manufacturer to suit application.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that substrate surfaces and joint openings are ready to receive work.
- B. Verify that joint backing and release tapes are compatible with sealant.

3.02 PREPARATION

- A. Remove loose materials and foreign matter that could impair adhesion of sealant.
- B. Clean and prime joints in accordance with manufacturer's instructions.
- C. Perform preparation in accordance with manufacturer's instructions and ASTM C1193.
- D. Protect elements surrounding the work of this section from damage or disfigurement.

3.03 INSTALLATION

- A. Perform work in accordance with sealant manufacturer's requirements for preparation of surfaces and material installation instructions.
- B. Perform installation in accordance with ASTM C1193.
- C. Measure joint dimensions and size joint backers to achieve the following:
 - 1. Width/depth ratio of 2:1.
 - a. Minimum joint depth: 1/4 inch; Maximum joint depth: 1/2 inch, unless otherwise required by manufacturer.
 - 2. Neck dimension no greater than 1/3 of the joint width.
 - 3. Surface bond area on each side not less than 75 percent of joint width.
- D. Install backer rod using blunt or rounded tool to a uniform (+/- 1/8 inch) depth without puncturing the material.
- E. Install bond breaker where joint backing is not used.
- F. Install sealant free of air pockets, foreign embedded matter, ridges, and sags.
- G. Apply sealant within recommended application temperature ranges. Consult manufacturer when sealant cannot be applied within these temperature ranges.
- H. Tool joints concave.

3.04 CLEANING

- A. Clean adjacent soiled surfaces.

3.05 PROTECTION

- A. Protect sealants until cured.

3.06 SCHEDULE

- A. Exterior Joints for Which No Other Sealant Type is Indicated: Type 1; colors as selected.

END OF SECTION

SECTION 108213**EXTERIOR ARCHITECTURAL SCREENS****PART 1 GENERAL**

1.01 SECTION INCLUDES

- A. Exterior Architectural Screens, including mounting clips, subframing, and accessories..

1.02 RELATED REQUIREMENTS

- A. Section 055000: Galvanized roof guards.

1.03 REFERENCE STANDARDS

- A. ASTM B211 - Standard Specification for Aluminum and Aluminum-Alloy Bar, Rod, and Wire; 2003.
- B. AAMA 2605 - Voluntary Specification, Performance Requirements and Test Procedures for Superior Performing Organic Coatings on Aluminum Extrusions and Panels; 2005.
- C. SMACNA (ASMM) - Architectural Sheet Metal Manual; Sheet Metal and Air Conditioning Contractors' National Association; 2003.

1.04 SUBMITTALS

- A. See Section 013000 - Administrative Requirements, for submittal procedures.
- B. Product data: Submit manufacturer's specifications, technical data, and installation instructions for required products, including finishes.
- C. Shop drawings: Submit shop drawings for fabrication and erection of screen units and accessories. Include plans, elevations and details of sections and connections to adjoining work. Indicate materials, finishes, fasteners, joinery and other information to determine compliance with specified requirements.

1.05 QUALITY ASSURANCE

- A. Comply with SMACNA "Architectural Sheet Metal Manual" recommendations for fabrication, construction details and installation procedures, except as otherwise indicated.
- B. Field Measurements: Verify size, location and placement of screen units prior to fabrication.
- C. Shop Assembly: Coordinate field measurements and shop drawings with fabrication and shop assembly to minimize field adjustments, mechanical attachment and field assembly of units.
 - 1. Pre-assemble units in ship to greatest extent possible and disassemble as necessary for shipping and handling limitations. Clearly mark units for re-assembly and coordinated installation.
- D.

1.06 WARRANTY

- A. See Section 017800 - Closeout Submittals, for additional warranty requirements.

- B. Provide a 20 year warranty for painted finish covering color fade, chalk and film integrity.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Construction Specialties, Inc., 49 Meeker Avenue, Cranford, NJ 07016:
www.c-sgroup.com
 - 1. Product: Vert-a-cade 301 Screen
- B. Substitutions: See Section 016000 - Product Requirements.

2.02 MATERIALS

- A. Aluminum extrusions: ASTM B 211, Alloy 6063-T52.
- B. Clip Angles: Structural grade aluminum.
- C. Fastenings: Fasteners shall be aluminum or stainless steel. Provide types, gauges and lengths to suit unit installation conditions.
- D. Anchors and Inserts: Use non-ferrous metal or hot-dip galvanized anchors and inserts for installation and elsewhere as required for corrosion resistance.
 - 1. Use stainless steel or lead expansion bolt devices for drilled-in place anchors.
 - 2. Furnish inserts, as required, to be set into concrete or masonry work.

2.03 FABRICATION, GENERAL:

- A. Provide screen and accessories of design, materials, sizes, depth, arrangement, and metal thickness as indicated or as required for optimum performance with respect to strength; durability; and uniform appearance.
- B. Include supports, anchorages, and accessories required for complete assembly.

2.04 SCREEN CONSTRUCTION:

- A. Aluminum Screen: Blades to be fabricated from extruded aluminum sections in 6063-T52 alloy, minimum .081" thick and spaced approximately 6³/₄" on center. Blades to be nominal 4" deep, supported and lined up with heavy gauge extruded aluminum blade braces positively interlocked to each blade and mechanically secured to extruded aluminum supports.
 - 1. Factory miter blades for field installation without applied corner trim.
- B. Supports: Extruded aluminum, fixed directly to horizontal or vertical steel frame with extruded aluminum clip angles. All fasteners to be stainless steel or aluminum. Material shipped knocked down for field assembly by the installer. Aluminum supports and blade braces to be in mill finish.

2.05 FINISHES:

- A. General: Comply with NAAMM "Metal Finishes Manual" for finish designations and application recommendations, except as otherwise indicated. Apply finishes in factory after products are assembled. Protect finishes on exposed surfaces prior to shipment. Remove scratches and blemishes from exposed surfaces which will be visible after completing finishing process.
- B. Provide color as selected by architect from standard Kynar 500 colors.

- C. Fluorocarbon Coating: Inhibitive thermo-cured primer, 0.2 mil minimum dry film thickness, and thermo-cured fluorocarbon coating containing "Kynar 500" resin, 1.0 mil minimum dry film thickness.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Locate and place screen units plumb, level and in proper alignment with adjacent work.
- C. Use concealed anchorage's wherever possible.
- D. Form tight joints with exposed connections accurately fitted together.
- E. Use isolation tape where aluminum comes in contact with steel or concrete.

END OF SECTION