

ADDENDUM NO. 1
To Drawings and/or Specifications for
Newark High School Tennis Courts - BID#CSD – 2012-05

February 13, 2012

Project Engineer
Ted C. Williams, P.E.

ADDENDUM #1 BY LANDMARK ENGINEERING, INC.
100 W. COMMONS BOULEVARD, NEW CASTLE, DE 19720

NOTICE: Attach this addendum to the Project Manual for this project. It modifies and becomes a part of the Contract Documents. Work for materials not specifically mentioned herein are to be as described in the main body of the specifications and as shown on the Drawings. Acknowledge receipt of this Addendum in the space provided on the Bid Form.

Five (5) sets of shop drawings will be required for review and approval prior to the start of construction.

The construction lay down area will be the lawn area on the north of the existing tennis courts.

Contractor parking will be in the eastern end of the existing parking lot on the northern end of the tennis courts.

The paving sections for the Tennis Court and Full Depth Paving have been revised on the plans. Both sections will receive the Type "D" hot mix.

The Gate Section Detail has been revised to show the concrete post foundation to be set below the final tennis court system.

The limit of existing fence to be removed and the amount of new fence has been revised on the plans.

The existing catch basins and storm drainage pipe within the limits of the tennis courts are shown on the plans to be removed.

Millings from the removal of the existing tennis courts can be utilized in lieu of new GABC provided that the millings meet the gradation requirements of the GABC.

If brick edging exists as part of the existing tennis court, it must be removed as part of the removal of the existing pavement.

The contractor is responsible for all aspects of the removal of the existing light poles as indicated on the plans including any electrical work required for the removal.

Borings of the existing tennis court section are not available.

Asphalt testing is not required. Contractor is responsible to meet all compaction requirements as indicated on the plans.


Supplemental striping for the tennis courts as shown on the plans and the supplemental drawings.

ADDENDUM NO. 1
To Drawings and/or Specifications for
Newark High School Tennis Courts - BID#CSD – 2012-05

February 13, 2012

Project Engineer
Ted C. Williams, P.E.

“BLANK”

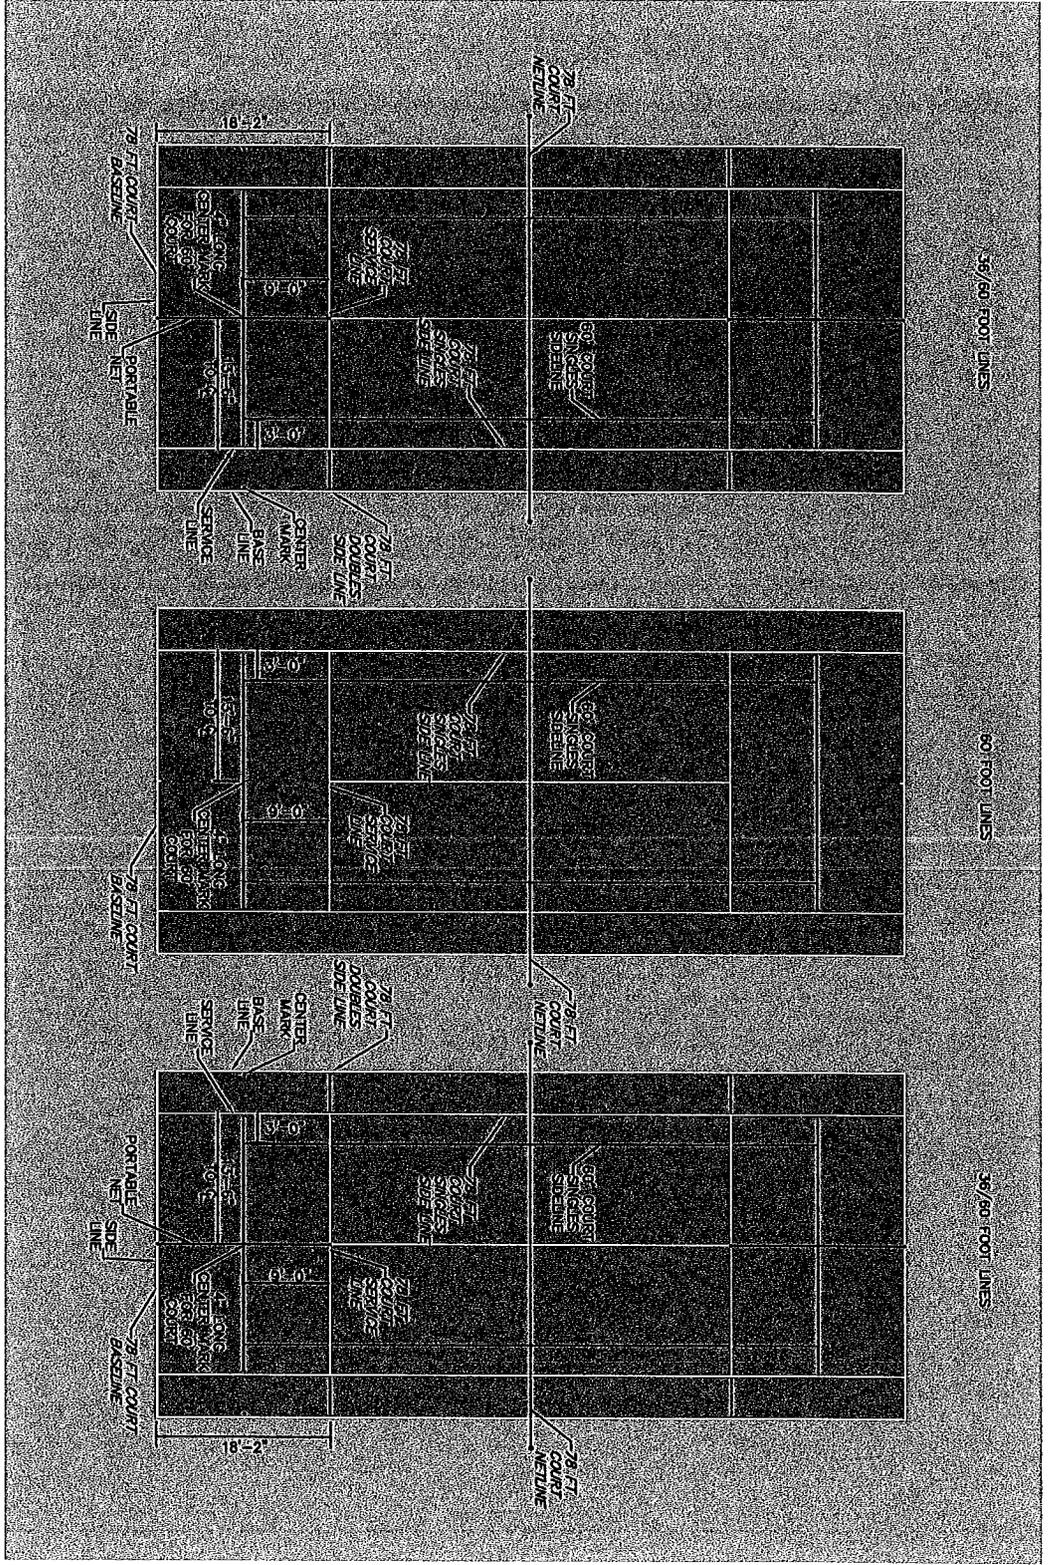

NOTES:

1. 10 AND UNDER TENNIS PLAYING LINES SHALL BE TEXTURED LINE PAINT WITHIN THE SAME FAMILY AS THE 78 FOOT COURT COLOR.
2. ALL 10 AND UNDER TENNIS PLAYING LINES SHALL TERMINATE 3 INCHES FROM THE 78 FOOT COURT LINES.
3. ALL 10 AND UNDER TENNIS PLAYING LINES SHALL BE 1 1/2" WIDE.
4. ALL 10 AND UNDER TENNIS PLAYING LINES SHALL BE MEASURED OUT TO OUT, WITH THE EXCEPTION OF THE CENTER LINES WHICH SHALL BE MEASURED OUT TO CENTER.
5. THE CENTER MARK FOR THE 36 FOOT COURT SHALL BE SET 2 INCHES OFF THE 78 FOOT COURT DOUBLES SIDE LINE AND SHALL BE 2 INCHES LONG BY 1 1/2" WIDE.

10 AND UNDER TENNIS


36 AND 60 FOOT TENNIS STRIPING PLAN

NOVEMBER 4, 2010



60 FOOT LINES

36/60 FOOT LINES

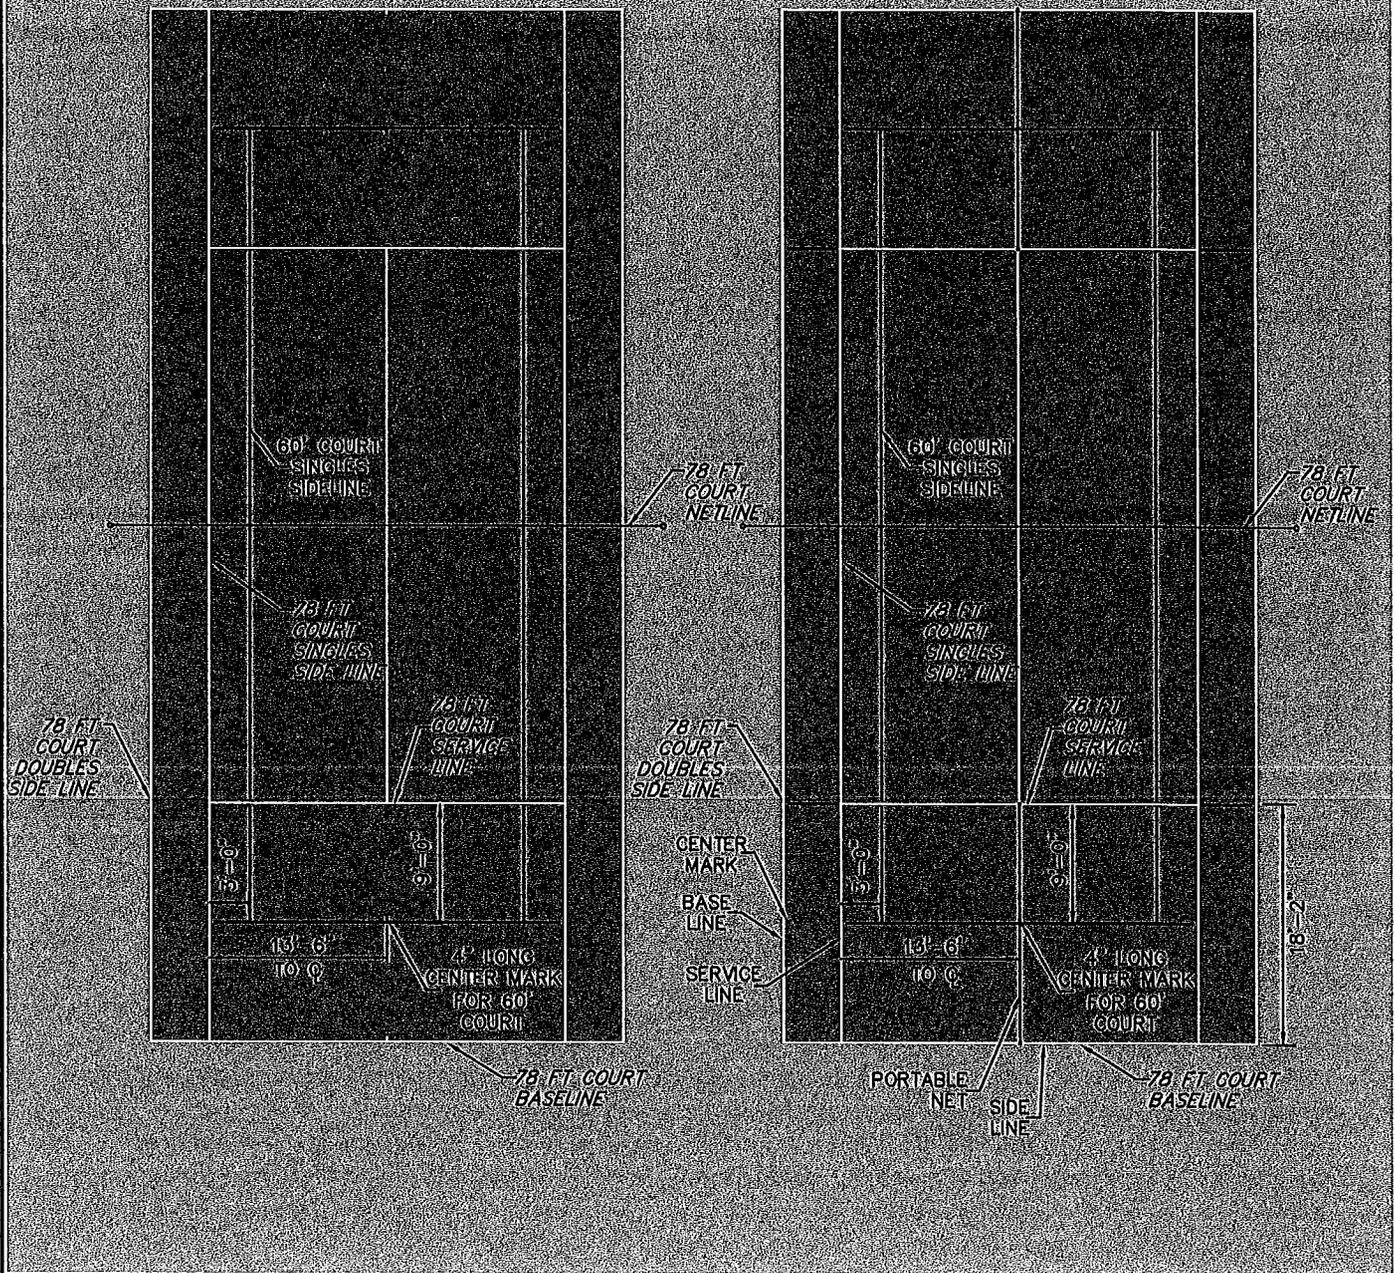

NOTES:

1. 10 AND UNDER TENNIS PLAYING LINES SHALL BE TEXTURED LINE PAINT WITHIN THE SAME FAMILY AS THE 78 FOOT COURT COLOR.
2. ALL 10 AND UNDER TENNIS PLAYING LINES SHALL TERMINATE 3 INCHES FROM THE 78 FOOT COURT LINES.
3. ALL 10 AND UNDER TENNIS PLAYING LINES SHALL BE 1 1/2" WIDE.
4. ALL 10 AND UNDER TENNIS PLAYING LINES SHALL BE MEASURED OUT TO OUT, WITH THE EXCEPTION OF THE CENTER LINES WHICH SHALL BE MEASURED OUT TO CENTER.
5. THE CENTER MARK FOR THE 36 FOOT COURT SHALL BE SET 2 INCHES OFF THE 78 FOOT COURT DOUBLES SIDELINE AND SHALL BE 2 INCHES LONG BY 1 1/2" WIDE.

10 AND UNDER TENNIS

36 AND 60 FOOT TENNIS STRIPING PLAN

NOVEMBER 4, 2010

