

**STATE OF DELAWARE**  
**OMB/DIVISION OF FACILITIES MANAGEMENT**  
**OMB/DFM PROJECT #MJ1002000087A**

**SPECIFICATIONS  
FOR**

**ESCALATOR REPLACEMENT**

**AT**

**LEONARD L. WILLIAMS JUSTICE CENTER**  
**500 N KING ST.**  
**WILMINGTON, DELAWARE, 19801**

**PREPARED BY**



**ISSUED FOR BID**  
**AUGUST 2026**  
**DEDC PROJECT # 25P132**

NOT FOR BIDDING PURPOSES

**STATE OF DELAWARE**  
**OMB/DIVISION OF FACILITIES MANAGEMENT**  
**OMB/DFM PROJECT #MJ1002000087A**

**SPECIFICATIONS  
FOR**

**ESCALATOR REPLACEMENT**

**AT**

**LEONARD L. WILLIAMS JUSTICE CENTER**  
**500 N KING ST.**  
**WILMINGTON, DELAWARE, 19801**

**PREPARED BY**



**ISSUED FOR BID**  
**AUGUST 2026**  
**DEDC PROJECT # 25P132**

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK

**SEALS PAGE**

1.1 DESIGN PROFESSIONALS OF RECORD


SEAL

A. HVAC/Electrical Engineer:

1. **Matt Lano P.E.**
2. **Delaware P.E. # 24393**
3. **Mechanical Engineer**
4. **DEDC, LLC**
5. **315 South Chapel Street  
Newark, Delaware, 19711**
6. **Phone: 302-738-7172, Fax: 302-738-7175**
7. **mlano@dedc-eng.com, 302-738-7172**
8. **Responsible for Div 00-48 Sections except where  
indicated as prepared by other design professionals of record.**

B. Architect:

1. **Brenden D. Frederick**
2. **License No. 0008204**
3. **ARCHITECT**
4. **Becker Morgan Group, Inc.**
5. **312 West Main Street, Suite 200 Salisbury, Maryland 21801**
6. **Phone: 410-546-9106, Fax: 410-546-5824**
7. **bfrederick@beckermorgan.com**
8. **Responsible for Division 03-12 Sections except  
where indicated as prepared by other design  
professionals of record.**

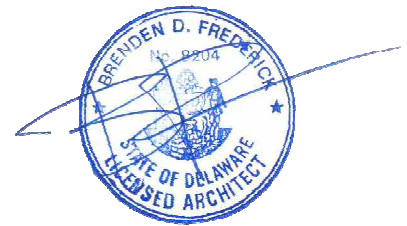

**END OF SECTION**

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING PURPOSES

**SECTION 00 01 10  
TABLE OF CONTENTS**

- A. Specifications for this project are arranged in accordance with the Construction Specification Institute numbering system and format. Section numbering is discontinuous and all numbers not appearing in the Table of Contents are not used for this Project.
- B. DOCUMENTS BOUND HEREWITH

**DIVISION 00 - PROCUREMENT AND CONTRACT REQUIREMENTS**

**INTRODUCTORY INFORMATION**

00 01 01 - PROJECT TITLE PAGE  
00 01 07 – SEALS PAGE  
00 01 10 - TABLE OF CONTENTS  
00 01 15 - LIST OF DRAWING SHEETS

**PROCUREMENT REQUIREMENTS**

00 11 16 - INVITATION TO BID  
00 21 13 - INSTRUCTIONS TO BIDDERS  
00 41 13 - BID FORM  
00 43 13 - BID BOND

**CONTRACTING REQUIREMENTS**

00 52 13 - STANDARD FORM OF AGREEMENT BETWEEN OWNER AND CONTRACTOR  
(SAMPLE AIA A101-2017)  
(SAMPLE AIA A101-2017 EXHIBIT A)  
00 54 13 - SUPPLEMENT TO AGREEMENT BETWEEN OWNER & CONTRACTOR A101-2017  
00 54 14 – SUPPLEMENT TO A101-2017 – EXHIBIT A INSURANCE AND BONDS  
00 61 13.13 - PERFORMANCE BOND  
00 61 13.16 - PAYMENT BOND  
00 62 76 - APPLICATION AND CERTIFICATE FOR PAYMENT FORMS  
(SAMPLE AIA G702(1992) & G703(1992))  
00 63 73 - ALLOWANCE AUTHORIZATION  
00 65 00 – CLOSEOUT FORMS  
(SAMPLE AIA G704-2017)  
(SAMPLE AIA G706-1994)  
(SAMPLE AIA G706A-1994)  
(SAMPLE AIA G707-1994)  
00 72 13 - GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION A201-2017  
(SAMPLE AIA A201-2017)

00 73 13 - SUPPLEMENTARY GENERAL CONDITIONS A201-2017

00 73 46 - WAGE DETERMINATION SCHEDULE

00 81 13 - GENERAL REQUIREMENTS

00 81 14 - DRUG TESTING FORMS

00 81 15 - AFFIDAVIT OF CRAFT TRAINING COMPLIANCE

**DIVISION 01 - GENERAL REQUIREMENTS**

01 10 00 - SUMMARY

01 20 00 - PRICE AND PAYMENT PROCEDURES

01 21 00 - ALLOWANCES

01 26 00 - CONTRACT MODIFICATION PROCEDURES

01 30 00 - ADMINISTRATIVE REQUIREMENTS

01 40 00 - QUALITY REQUIREMENTS

01 60 00 - PRODUCT REQUIREMENTS

01 70 00 - EXECUTION AND CLOSEOUT REQUIREMENTS

01 74 19 - CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL

01 78 00 - CLOSEOUT SUBMITTALS

01 79 00 - DEMONSTRATION AND TRAINING

01 91 13 - GENERAL COMMISSIONING REQUIREMENTS

**DIVISION 06 - WOOD, PLASTICS, AND COMPOSITES**

06 10 00 - ROUGH CARPENTRY

**DIVISION 07 - THERMAL AND MOISTURE PROTECTION**

07 84 00 - FIRESTOPPING

**DIVISION 09 - FINISHES**

09 21 16 - GYPSUM BOARD ASSEMBLIES

09 91 23 - INTERIOR PAINTING

**DIVISION 14 - CONVEYING EQUIPMENT**

14 70 01 - ESCALATORS

**DIVISION 21 - FIRE SUPPRESSION**



21 05 00 – COMMON WORK RESULTS FOR FIRE SUPPRESSION  
21 05 53 – IDENTIFICATION FOR FIRE SUPPRESSION PIPING AND EQUIPMENT  
21 13 00 – FIRE SUPPRESSION SPRINKLER SYSTEMS

**DIVISION 26 – ELECTRICAL**

26 05 05 – SELECTIVE DEMOLITION FOR ELECTRICAL  
26 05 19 - LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES  
26 05 26 - GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS  
26 05 29 - HANGERS AND SUPPORTS FOR ELECTRICAL SYSTEMS  
26 05 33.13 – CONDUIT FOR ELECTRICAL SYSTEMS  
26 05 33.16 – BOXES FOR ELECTRICAL SYSTEMS  
26 05 53 - IDENTIFICATION FOR ELECTRICAL SYSTEMS  
26 05 83 – WIRING CONNECTIONS  
26 09 23 – LIGHTING CONTROL DEVICES  
26 28 16.13 - ENCLOSED CIRCUIT BREAKERS  
26 51 00 – INTERIOR LIGHTING

END OF SECTION

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 00 01 15  
LIST OF DRAWING SHEETS**

COVER SHEET

G101 LIFE SAFETY PLAN AND CODE STUDY

ARCHITECTURAL

A000 CONSTRUCTION TYPES, INTERIOR WALL TYPES, NOTED AND ABBREVIATIONS

A101 LOWER LEVEL 1 AND 2 FLOOR PLANS

A102 LEVEL 1 AND 2 FLOOR PLANS

A401 ENLARGED PLANS, SECTIONS, AND ELEVATIONS

ELECTRICAL

E000 ELECTRICAL SYMBOLS AND ABBREVIATIONS

E100 OVERALL LOWER LEVEL 1 FLOOR PLAN

E201 ELECTRICAL ENLARGED LIGHTING PLAN

E301 ELECTRICAL ENLARGED POWER PLAN

FIRE PROTECTION

FP100 FIRE PROTECTION PLANS – ESCALATORS

**END OF SECTION**

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING PURPOSES

**SECTION 00 11 16  
INVITATION TO BID**

Sealed bids for **OMB/DFM Contract No. MJ1002000087A – LEONARD L. WILLIAMS JUSTICE CENTER - ESCALATOR REPLACEMENT** will be received by the State of Delaware, Office of Management and Budget, Division of Facilities Management, by way of the Bonfire Portal at <https://DFM.bonfirehub.com> until **1:00 PM local time on September 3<sup>rd</sup>, 2026**. Bidder bears the risk of late submission.

Bids will be opened and read aloud at **2:00 PM local time on September 3<sup>rd</sup>, 2026** at the **Haslet Armory in Rm. 133 at 122 Martin Luther King Blvd. S., Dover, DE 19901**.

The project involves the Replacement of (6) existing escalators in their entirety. A temporary partition will be built around the construction area for noise/dust mitigation.

A **MANDATORY** Pre-Bid Meeting will be held on **August 5<sup>th</sup>, 2026 at 11:00 AM local time at the Leonard L Williams Justice Center in the 2LL Conference Room**, for the purpose of establishing the list of subcontractors and to answer questions. Upon arrival, attendees are to check in at front desk for directions to pre-bid meeting room. Representatives of each party to any Joint Venture must attend this meeting. **ATTENDANCE OF THIS MEETING IS A PREREQUISITE FOR BIDDING ON THIS CONTRACT.**

Contract documents may be obtained at the office of DEDC, LLC, 315 S. Chapel Street, Newark, DE 19711, phone: (302) 738-7172, upon receipt of \$100.00 per paper set and/or \$25.00 per electronic set/non-refundable. Checks are to be made payable to "DEDC, LLC."

Bidders will not be subject to discrimination on the basis of race, creed, color, sex, sexual orientation, gender identity or national origin in consideration of this award, and Minority Business Enterprises, Disadvantaged Business Enterprises, Women-Owned Business Enterprises and Veteran-Owned Business Enterprises will be afforded full opportunity to submit bids on this contract. Each bid must be accompanied by a bid security equivalent to ten percent of the bid amount and all additive alternates. The successful bidder must post a performance bond and payment bond in a sum equal to 100 percent of the contract price upon execution of the contract. The Owner reserves the right to reject any or all bids and to waive any informalities therein. The Owner may extend the time and place for the opening of the bids from that described in the advertisement, with not less than two calendar days' notice by certified delivery, facsimile machine or other electronic means to those bidders' receiving plans.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 00 21 13**  
**INSTRUCTIONS TO BIDDERS**

**TABLE OF ARTICLES**

1. GENERAL
2. BIDDER'S REPRESENTATION
3. BIDDING DOCUMENTS
4. BIDDING PROCEDURES
5. CONSIDERATION OF BIDS
6. POST-BID INFORMATION
7. PERFORMANCE BOND AND PAYMENT BOND
8. FORM OF AGREEMENT BETWEEN OWNER AND CONTRACTOR

**ARTICLE 1: GENERAL**

**1.1 DEFINITIONS**

1.1.1 Whenever the following terms are used, their intent and meaning shall be interpreted as follows:

1.2 STATE: The State of Delaware.

1.3 AGENCY: Contracting State Agency as noted on cover sheet.

1.4 DESIGNATED OFFICIAL: The agent authorized to act for the Agency.

1.5 BIDDING DOCUMENTS: Bidding Documents include the Bidding Requirements and the proposed Contract Documents. The Bidding Requirements consist of the Advertisement for Bid, Invitation to Bid, Instructions to Bidders, Supplementary Instructions to Bidders (if any), General Conditions, Supplementary General Conditions, General Requirements, Special Provisions (if any), the Bid Form (including the Non-collusion Statement), and other sample bidding and contract forms. The proposed Contract Documents consist of the form of Agreement between the Owner and Contractor, as well as the Drawings, Specifications (Project Manual) and all Addenda issued prior to execution of the Contract.

1.6 CONTRACT DOCUMENTS: The Contract Documents consist of the, Instructions to Bidders, Supplementary Instructions to Bidders (if any), General Conditions, Supplementary General Conditions, General Requirements, Special Provisions (if any), the form of agreement between the Owner and the Contractor, Drawings (if any), Specifications (Project Manual), and all addenda.

1.7 AGREEMENT: The form of the Agreement shall be AIA Document A101, Standard Form of Agreement between Owner and Contractor where the basis of payment is a STIPULATED SUM. In the case of conflict between the instructions contained therein and the General Requirements herein, the General Requirements shall prevail.

1.8 GENERAL REQUIREMENTS (or CONDITIONS): General Requirements (or conditions) are instructions pertaining to the Bidding Documents and to contracts in general. They contain, in summary, requirements of laws of the State; policies of the Agency and instructions to bidders.

1.9 SPECIAL PROVISIONS: Special Provisions are specific conditions or requirements peculiar to the bidding documents and to the contract under consideration and are supplemental to the General Requirements. Should the Special Provisions conflict with the General Requirements, the Special Provisions shall prevail.

1.10 ADDENDA: Written or graphic instruments issued by the Owner/Architect prior to the execution of the contract which modify or interpret the Bidding Documents by additions, deletions, clarifications or corrections.

1.11 BIDDER OR VENDOR: A person or entity who formally submits a Bid for the material or Work contemplated, acting directly or through a duly authorized representative who meets the requirements set forth in the Bidding Documents.

1.12 SUB-BIDDER: A person or entity who submits a Bid to a Bidder for materials or labor, or both for a portion of the Work.

1.13 BID: A complete and properly executed proposal to do the Work for the sums stipulated therein, submitted in accordance with the Bidding Documents.



- 1.14 BASE BID: The sum stated in the Bid for which the Bidder offers to perform the Work described in the Bidding Documents as the base, to which Work may be added or from which Work may be deleted for sums stated in Alternate Bids (if any are required to be stated in the bid).
- 1.15 ALTERNATE BID (or ALTERNATE): An amount stated in the Bid, where applicable, to be added to or deducted from the amount of the Base Bid if the corresponding change in the Work, as described in the Bidding Documents is accepted.
- 1.16 UNIT PRICE: An amount stated in the Bid, where applicable, as a price per unit of measurement for materials, equipment or services or a portion of the Work as described in the Bidding Documents.
- 1.17 SURETY: The corporate body which is bound with and for the Contract, or which is liable, and which engages to be responsible for the Contractor's payments or all debts pertaining to and for his acceptable performance of the Work for which he has contracted.
- 1.18 BIDDER'S DEPOSIT: The security designated in the Bid to be furnished by the Bidder as a guaranty of good faith to enter into a contract with the Agency if the Work to be performed or the material or equipment to be furnished is awarded to him.
- 1.19 CONTRACT: The written agreement covering the furnishing and delivery of material or work to be performed.
- 1.20 CONTRACTOR: Any individual, firm or corporation with whom a contract is made by the Agency.
- 1.21 SUBCONTRACTOR: An individual, partnership or corporation which has a direct contract with a contractor to furnish labor and materials at the job site, or to perform construction labor and furnish material in connection with such labor at the job site.
- 1.22 CONTRACT BOND: The approved form of security furnished by the contractor and his surety as a guaranty of good faith on the part of the contractor to execute the work in accordance with the terms of the contract.
- 1.23 CUSTOM FABRICATION: As defined in 29 Del. C. § 6902, the term "custom fabrication" means the offsite fabrication, assembly, or other production of non-standard goods or materials, including components, fixtures or parts thereof, specifically for a public works project. Such goods and materials shall include those used in the following trades or systems: (1) Plumbing or pipe fitting systems, including heating, ventilating, air-conditioning, refrigeration systems, sheet metal or other duct systems; (2) Electrical systems; (3) Mechanical insulation work; (4) Ornamental iron work; and (5) Commercial signage that does not attempt or appear to direct the movement of traffic on highways or roadways or interfere with, imitate, or resemble any official traffic sign, signal or device.

## **ARTICLE 2: BIDDER'S REPRESENTATION**

- 2.1 PRE-BID MEETING
- 2.1.1 A pre-bid meeting for this project will be held at the time and place designated. Attendance at this meeting is a pre-requisite for submitting a Bid, unless this requirement is specifically waived elsewhere in the Bid Documents.
- 2.2 By submitting a Bid, the Bidder represents that:

- 2.2.1 The Bidder has read and understands the Bidding Documents and that the Bid is made in accordance therewith.
- 2.2.2 The Bidder has visited the site, become familiar with existing conditions under which the Work is to be performed, and has correlated the Bidder's personal observations with the requirements of the proposed Contract Documents.
- 2.2.3 The Bid is based upon the materials, equipment, and systems required by the Bidding Documents without exception.
- 2.3 JOINT VENTURE REQUIREMENTS
- 2.3.1 For Public Works Contracts, each Joint Venturer shall be qualified and capable to complete the Work with their own forces.
- 2.3.2 Included with the Bid submission, and as a requirement to bid, a copy of the executed Joint Venture Agreement shall be submitted and signed by all Joint Venturers involved.
- 2.3.3 All required Bid Bonds, Performance Bonds, Material and Labor Payment Bonds must be executed by both Joint Venturers and be placed in both of their names.
- 2.3.4 All required insurance certificates shall name both Joint Venturers.
- 2.3.5 Both Joint Venturers shall sign the Bid Form.
- 2.3.6 Both Joint Venturers shall include their Federal E.I. Number with the Bid.
- 2.3.7 In the event of a mandatory Pre-bid Meeting, each Joint Venturer shall have a representative in attendance.
- 2.3.8 Due to exceptional circumstances and for good cause shown, one or more of these provisions may be waived at the discretion of the State.
- 2.4 ASSIGNMENT OF ANTITRUST CLAIMS
- 2.4.1 As consideration for the award and execution by the Owner of this contract, the Contractor hereby grants, conveys, sells, assigns and transfers to the State of Delaware all of its right, title and interests in and to all known or unknown causes of action it presently has or may now or hereafter acquire under the antitrust laws of the United States and the State of Delaware, relating to the particular goods or services purchased or acquired by the Owner pursuant to this contract.

## **ARTICLE 2: BIDDING DOCUMENTS**

- 3.1 COPIES OF BID DOCUMENTS
- 3.1.1 Bidders may obtain complete sets of the Bidding Documents from the Architectural/Engineering firm designated in the Advertisement or Invitation to Bid in the number and for the deposit sum, if any, stated therein.
- 3.1.2 Bidders shall use complete sets of Bidding Documents for preparation of Bids. The issuing Agency nor the Architect assumes no responsibility for errors or misinterpretations resulting from the use of incomplete sets of Bidding Documents.
- 3.1.3 Any errors, inconsistencies or omissions discovered shall be reported to the Architect immediately.

- 3.1.4 The Agency and Architect may make copies of the Bidding Documents available on the above terms for the purpose of obtaining Bids on the Work. No license or grant of use is conferred by issuance of copies of the Bidding Documents.

3.2 INTERPRETATION OR CORRECTION OF BIDDING DOCUMENTS

- 3.2.1 The Bidder shall carefully study and compare the Bidding Documents with each other, and with other work being bid concurrently or presently under construction to the extent that it relates to the Work for which the Bid is submitted, shall examine the site and local conditions, and shall report any errors, inconsistencies, or ambiguities discovered to the Architect.

- 3.2.2 Bidders or Sub-bidders requiring clarification or interpretation of the Bidding Documents shall make a written request to the Architect at least seven days prior to the date for receipt of Bids. Interpretations, corrections and changes to the Bidding Documents will be made by written Addendum. Interpretations, corrections, or changes to the Bidding Documents made in any other manner shall not be binding.

- 3.2.3 The apparent silence of the specifications as to any detail, or the apparent omission from it of detailed description concerning any point, shall be regarded as meaning that only the best commercial practice is to prevail and only material and workmanship of the first quality are to be used. Proof of specification compliance will be the responsibility of the Bidder.

- 3.2.4 Unless otherwise provided in the Contract Documents, the Contractor shall provide and pay for all permits, labor, materials, equipment, tools, construction equipment and machinery, water, heat, utilities, transportation, and other facilities and services necessary for the proper execution and completion of the Work.

- 3.2.5 The Owner will bear the costs for all impact and user fees associated with the project.

3.3 SUBSTITUTIONS

- 3.3.1 The materials, products and equipment described in the Bidding Documents establish a standard of quality, required function, dimension, and appearance to be met by any proposed substitution. The specification of a particular manufacturer or model number is not intended to be proprietary in any way. Substitutions of products for those named will be considered, providing that the Vendor certifies that the function, quality, and performance characteristics of the material offered is equal or superior to that specified. It shall be the Bidder's responsibility to assure that the proposed substitution will not affect the intent of the design, and to make any installation modifications required to accommodate the substitution.

- 3.3.2 Requests for substitutions shall be made in writing to the Architect at least ten days prior to the date of the Bid Opening. Such requests shall include a complete description of the proposed substitution, drawings, performance and test data, explanation of required installation modifications due the substitution, and any other information necessary for an evaluation. The burden of proof of the merit of the proposed substitution is upon the proposer. The Architect's decision of approval or disapproval shall be final. The Architect is to notify Owner prior to any approvals.

- 3.3.3 If the Architect approves a substitution prior to the receipt of Bids, such approval shall be set forth in an Addendum. Approvals made in any other manner shall not be binding.

- 3.3.4 The Architect shall have no obligation to consider any substitutions after the Contract award.

3.4 ADDENDA

- 3.4.1 Addenda will be mailed or delivered to all who are known by the Architect to have received a complete set of the Bidding Documents.
- 3.4.2 Copies of Addenda will be made available for inspection wherever Bidding Documents are on file for that purpose.
- 3.4.3 No Addenda will be issued later than 2 calendar days prior to the date for receipt of Bids except an Addendum withdrawing the request for Bids or one which extends the time or changes the location for the opening of bids.
- 3.4.4 Each bidder shall ascertain prior to submitting his Bid that they have received all Addenda issued, and shall acknowledge their receipt in their Bid in the appropriate space. Not acknowledging an issued Addenda could be grounds for determining a bid to be non-responsive.

**ARTICLE 4: BIDDING PROCEDURES**

**4.1 PREPARATION OF BIDS**

- 4.1.1 Submit the bids on the Bid Forms included with the Bidding Documents.
- 4.1.2 Submit the original Bid Form for each bid. Bid Forms may be removed from the project manual for this purpose.
- 4.1.3 Execute all blanks on the Bid Form in a non-erasable medium (typewriter or manually in ink).
- 4.1.4 Where so indicated by the makeup on the Bid Form, express sums in both words and figures, in case of discrepancy between the two, the written amount shall govern.
- 4.1.5 Interlineations, alterations or erasures must be initialed by the signer of the Bid.
- 4.1.6 BID ALL REQUESTED ALTERNATES AND UNIT PRICES, IF ANY. If there is no change in the Base Bid for an Alternate, enter "No Change". The Contractor is responsible for verifying that they have received all addenda issued during the bidding period. Work required by Addenda shall automatically become part of the Contract.
- 4.1.7 Make no additional stipulations on the Bid Form and do not qualify the Bid in any other manner.
- 4.1.8 Each copy of the Bid shall include the legal name of the Bidder and a statement whether the Bidder is a sole proprietor, a partnership, a corporation, or any legal entity, and each copy shall be signed by the person or persons legally authorized to bind the Bidder to a contract. A Bid by a corporation shall further give the state of incorporation and have the corporate seal affixed. A Bid submitted by an agent shall have a current Power of Attorney attached, certifying agent's authority to bind the Bidder.
- 4.1.9 Bidder shall complete the Non-Collusion Statement form included with the Bid Forms and include it with their Bid.
- 4.1.10 In the construction of all Public Works projects for the State of Delaware or any agency thereof, preference in employment of laborers, workers or mechanics shall be given to bona fide legal citizens of the State who have established citizenship by residence of at least 90 days in the State.

- 4.1.11 Each bidder shall include a signed Affidavit for the Bidder certifying compliance with OMB Regulation 4104 - "Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on "Large Public Works Projects." "Large Public Works" is based upon the current threshold required for bidding Public Works as set by the Purchasing and Contracting Advisory Council.
- 4.2 BID SECURITY
- 4.2.1 All bids shall be accompanied by a deposit of either a good and sufficient bond to the agency for the benefit of the agency, with corporate surety authorized to do business in this State, the form of the bond and the surety to be approved by the agency, or a security of the bidder assigned to the agency, for a sum equal to at least 10% of the bid plus all add alternates, or in lieu of the bid bond a security deposit in the form of a certified check, bank treasurer's check, cashier's check, money order, or other prior approved secured deposit assigned to the State. The bid bond need not be for a specific sum, but may be stated to be for a sum equal to 10% of the bid plus all add alternates to which it relates and not to exceed a certain stated sum, if said sum is equal to at least 10% of the bid. The Bid Bond form used shall be the standard OMB form (attached). The bid bond may be an electronic bond and need not be transmitted as a paper document.
- 4.2.2 The Agency has the right to retain the bid security of Bidders to whom an award is being considered until either a formal contract has been executed and bonds have been furnished or the specified time has elapsed so the Bids may be withdrawn or all Bids have been rejected.
- 4.2.3 In the event of any successful Bidder refusing or neglecting to execute a formal contract and bond within 20 days of the awarding of the contract, the bid bond or security deposited by the successful bidder shall be forfeited.
- 4.3 SUBCONTRACTOR LIST
- 4.3.1 In accordance with Title 29, Chapter 69, Section 6962(d)(10)b of the Delaware Code, each Bidder shall submit with their Bid a completed List of Sub-Contractors included with the Bid Form. **NAME ONLY ONE SUBCONTRACTOR FOR EACH TRADE.** The bidder must list **in each category** the full name and address (City & State) of the sub-contractor that the Bidder will be using to perform the work and provide material for that subcontractor category. Should the Bidder's listed subcontractor intend to provide any of their subcontractor category of work through a third-tier contractor, the Bidder shall list that third-tier contractor's full name and address (City & State). **If the Bidder intends to perform any category of work itself, it must list its full name and address.** For clarification, if the Bidder intends to perform the work themselves, the Bidder **may not** insert "not applicable", "N/A", "self" or anything other than its own full name and address (City & State). To do so shall cause the bid to be rejected. In addition, the failure to produce a completed subcontractor list with the bid submittal shall cause the bid to be rejected. If you have more than three (3) third-tier contractors to report in any subcontractor category, print out additional page(s) containing the appropriate category, complete the rest of your list of third-tier contractors for that category, notate the addition in parentheses as (CONTINUATION) next to the subcontractor category and an asterisk (\*) next to any additional third-tier contractors, and submit it with your bid.
- 4.3.2 It is the responsibility of the Contractor to ensure that their Subcontractors are in compliance with the provisions of this law. Also, if a Contractor elects to list themselves as a Subcontractor for any category, they must specifically name themselves on the Bid Form and be able to document their capability to act as Subcontractor in that category in accordance with this law.

4.4 AFFIDAVIT OF CONTRACTOR QUALIFICATIONS

- 4.4.1 In accordance with Title 29, Chapter 69, Section 6962(d)(10)b.3 of the Delaware Code, each Bidder shall submit with their Bid the Affidavit of Contractor Qualifications certifying that the Bidder will abide by the contractor's qualifications outlined in the construction bid specifications for the duration of the contract term. After a contract has been awarded the successful bidder shall not substitute another subcontractor whose name was submitted on the Subcontractor Form except for the reasons in the statute and not without written consent from the awarding agency. Failure to utilize the subcontractors on the list will subject the successful bidder to penalties as outlined in the General Requirements Section 5.2 of the contract.

4.5 AFFIDAVIT OF CRAFT TRAINING COMPLIANCE

- 4.5.1 In accordance with Title 29, Chapter 69, Section 6962(c)(13) of the Delaware Code, contractors and subcontractors must provide craft training for journeyman and apprentice levels if all of the following apply:

- A. A project meets the prevailing wage requirement under Title 29, Chapter 69, Section 6960 of the Delaware Code.
- B. The contractor employs 10 or more total employees.
- C. The project is not a federal highway project.

Failure to provide required craft training on the project may subject the successful contractor and/or subcontractor(s) to penalties as outlined in Title 29, Chapter 69, Section 6962(c)(13) of the Delaware Code.

Bidders shall submit the Affidavit of Craft Training Compliance prior to contract execution.

4.6 EQUALITY OF EMPLOYMENT OPPORTUNITY ON PUBLIC WORKS

- 4.6.1 During the performance of this contract, the contractor agrees as follows:

- A. The Contractor will not discriminate against any employee or applicant for employment because of race, creed, sex, color, sexual orientation, gender identity or national origin. The Contractor will take affirmative action to ensure the applicants are employed, and that employees are treated during employment, without regard to their race, creed, sex, color, sexual orientation, gender identity or national origin. Such action shall include, but not be limited to, the following: Employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship. The Contractor agrees to post in conspicuous places available to employees and applicants for employment notices to be provided by the contracting agency setting forth this nondiscrimination clause.
- B. The Contractor will, in all solicitations or advertisements for employees placed by or on behalf of the Contractor, state that all qualified applicants will receive consideration for employment without regard to race, creed, sex, color, sexual orientation, gender identity or national origin."

4.7 PREVAILING WAGE REQUIREMENT

- 4.7.1 Wage Provisions: For renovation and new construction projects whose costs exceed the thresholds contained in Delaware Code, Title 29, Section 6960, the minimum wage rates for various classes of laborers and mechanics shall be as determined by the Department of Labor, Division of Industrial Affairs of the State of Delaware.

- 4.7.2 The employer shall pay all mechanics and labors employed directly upon the site of work, or engaged in custom fabrication work, as that term is defined in Article 1.23 herein and as also as defined in 29 Del. C. § 6902 and described in 29 Del. C. § 6960(b), regardless of where the work is performed, unconditionally and not less often than once a week and without subsequent deduction or rebate on any account, the full amounts accrued at time of payment, computed at wage rates not less than those stated in the specifications, regardless of any contractual relationship which may be alleged to exist between the employer and such laborers and mechanics.
- 4.7.3 As per 29 Del. C. § 6960(b), the scale of the wages to be paid must be posted by the employer in a prominent and easily accessible place at the site of the work. There may be withheld from the employer so much of accrued payments as may be considered necessary by the Department of Labor to pay laborers and mechanics employed by the employer the difference between the rates of wages required by the contract to be paid laborers and mechanics on the work and rates of wages received by such laborers and mechanics to be remitted to the Department of Labor for distribution upon resolution of any claims.
- 4.7.4 Every contract based upon these specifications shall contain a stipulation that sworn payroll information, as required by the Department of Labor, be furnished weekly. The Department of Labor shall keep and maintain the sworn payroll information for a period of 6 months from the last day of the work week covered by the payroll.
- 4.8 SUBMISSION OF BIDS
- 4.8.1 Enclose the Bid, the Bid Security, and any other documents required to be submitted with the Bid in a sealed opaque envelope. Address the envelope to the party receiving the Bids. Identify with the project name, project number, and the Bidder's name and address. If the Bid is sent by mail, enclose the sealed envelope in a separate mailing envelope with the notation "BID ENCLOSED" on the face thereof. The State is not responsible for the opening of bids prior to bid opening date and time that are not properly marked.
- 4.8.2 Deposit Bids at the designated location prior to the time and date for receipt of bids indicated in the Advertisement for Bids. Bids received after the time and date for receipt of bids will be marked "LATE BID" and returned.
- 4.8.3 Bidder assumes full responsibility for timely delivery at location designated for receipt of bids.
- 4.8.4 Oral, telephonic or telegraphic bids are invalid and will not receive consideration.
- 4.8.5 Withdrawn Bids may be resubmitted up to the date and time designated for the receipt of Bids, provided that they are then fully in compliance with these Instructions to Bidders.
- 4.9 MODIFICATION OR WITHDRAW OF BIDS
- 4.9.1 Prior to the closing date for receipt of Bids, a Bidder may withdraw a Bid by personal request and by showing proper identification to the Architect. A request for withdraw by letter or fax, if the Architect is notified in writing prior to receipt of fax, is acceptable. A fax directing a modification in the bid price will render the Bid informal, causing it to be ineligible for consideration of award. Telephone directives for modification of the bid price shall not be permitted and will have no bearing on the submitted proposal in any manner.
- 4.9.2 Bidders submitting Bids that are late shall be notified as soon as practicable and the bid shall be returned.

- 4.9.3 A Bid may not be modified, withdrawn or canceled by the Bidder during a thirty (30) day period following the time and date designated for the receipt and opening of Bids, and Bidder so agrees in submitting their Bid. Bids shall be binding for 30 days after the date of the Bid opening.

**ARTICLE 5: CONSIDERATION OF BIDS**

**5.1 OPENING/REJECTION OF BIDS**

- 5.1.1 Unless otherwise stated, Bids received on time will be publicly opened and will be read aloud. An abstract of the Bids will be made available to Bidders.
- 5.1.2 The Agency shall have the right to reject any and all Bids. A Bid not accompanied by a required Bid Security or by other data required by the Bidding Documents, or a Bid which is in any way incomplete or irregular is subject to rejection.
- 5.1.3 If the Bids are rejected, it will be done within thirty (30) calendar day of the Bid opening.

**5.2 COMPARISON OF BIDS**

- 5.2.1 After the Bids have been opened and read, the bid prices will be compared and the result of such comparisons will be made available to the public. Comparisons of the Bids may be based on the Base Bid plus desired Alternates. The Agency shall have the right to accept Alternates in any order or combination.
- 5.2.2 The Agency reserves the right to waive technicalities, to reject any or all Bids, or any portion thereof, to advertise for new Bids, to proceed to do the Work otherwise, or to abandon the Work, if in the judgment of the Agency or its agent(s), it is in the best interest of the State.
- 5.2.3 An increase or decrease in the quantity for any item is not sufficient grounds for an increase or decrease in the Unit Price.
- 5.2.4 The prices quoted are to be those for which the material will be furnished F.O.B. Job Site and include all charges that may be imposed during the period of the Contract.
- 5.2.5 No qualifying letter or statements in or attached to the Bid, or separate discounts will be considered in determining the low Bid except as may be otherwise herein noted. Cash or separate discounts should be computed and incorporated into Unit Bid Price(s).

**5.3 DISQUALIFICATION OF BIDDERS**

- 5.3.1 An agency shall determine that each Bidder on any Public Works Contract is responsible before awarding the Contract. Factors to be considered in determining the responsibility of a Bidder include:
- A. The Bidder's financial, physical, personnel or other resources including Subcontracts;
  - B. The Bidder's record of performance on past public or private construction projects, including, but not limited to, defaults and/or final adjudication or admission of violations of the Prevailing Wage Laws in Delaware or any other state;
  - C. The Bidder's written safety plan;
  - D. Whether the Bidder is qualified legally to contract with the State;



- E. Whether the Bidder supplied all necessary information concerning its responsibility; and,
  - F. Any other specific criteria for a particular procurement, which an agency may establish; provided however, that, the criteria be set forth in the Invitation to Bid and is otherwise in conformity with State and/or Federal law.
- 5.3.2 If an agency determines that a Bidder is nonresponsive and/or nonresponsible, the determination shall be in writing and set forth the basis for the determination. A copy of the determination shall be sent to the affected Bidder within five (5) working days of said determination.
- 5.3.3 In addition, any one or more of the following causes may be considered as sufficient for the disqualification of a Bidder and the rejection of their Bid or Bids.
- 5.3.3.1 More than one Bid for the same Contract from an individual, firm, or corporation under the same or different names.
  - 5.3.3.2 Evidence of collusion among Bidders.
  - 5.3.3.3 Unsatisfactory performance record as evidenced by past experience.
  - 5.3.3.4 If the Unit Prices are obviously unbalanced either in excess or below reasonable cost analysis values.
  - 5.3.3.5 If there are any unauthorized additions, interlineation, conditional or alternate bids or irregularities of any kind which may tend to make the Bid incomplete, indefinite or ambiguous as to its meaning.
  - 5.3.3.6 If the Bid is not accompanied by the required Bid Security and other data required by the Bidding Documents.
  - 5.3.3.7 If any exceptions or qualifications of the Bid are noted on the Bid Form.
- 5.4 ACCEPTANCE OF BID AND AWARD OF CONTRACT
- 5.4.1 A formal Contract shall be executed with the successful Bidder within twenty (20) calendar days after the award of the Contract.
  - 5.4.2 Per Section 6962(d)(13)a., Title 29, Delaware Code, "The contracting agency shall award any public works contract within thirty (30) days of the bid opening to the lowest responsive and responsible Bidder, unless the Agency elects to award on the basis of best value, in which case the election to award on the basis of best value shall be stated in the Invitation To Bid. Any public school district and its board shall award public works contracts in accordance with this section's requirements except it shall award the contract within 60 days of the bid opening."
  - 5.4.3 Each Bid on any Public Works Contract must be deemed responsive by the Agency to be considered for award. A responsive Bid shall conform in all material respects to the requirements and criteria set forth in the Contract Documents and specifications.
  - 5.4.4 The Agency shall have the right to accept Alternates in any order or combination, and to determine the low Bidder on the basis of the sum of the Base Bid, plus accepted Alternates.

- 5.4.5 The successful Bidder shall execute a formal contract, submit the required Insurance Certificate, and furnish good and sufficient bonds, unless specifically waived in the General Requirements, in accordance with the General Requirement, within twenty (20) days of official notice of contract award. The successful Bidder shall provide, at least two business days prior to contract execution, copies of the Employee Drug Testing Program for the Bidder and all listed Subcontractors. Bonds shall be for the benefit of the Agency with surety in the amount of 100% of the total contract award. Said Bonds shall be conditioned upon the faithful performance of the contract. Bonds shall remain in affect for period of two (2) years after the date of the Certificate of Final Payment.
- 5.4.6 If the successful Bidder fails to execute the required Contract, Bond and all required information, as aforesaid, within twenty (20) calendar days after the date of official Notice of the Award of the Contract, their Bid guaranty shall immediately be taken and become the property of the State for the benefit of the Agency as liquidated damages, and not as a forfeiture or as a penalty. Award will then be made to the next lowest qualified Bidder of the Work or readvertised, as the Agency may decide.
- 5.4.7 Each bidder shall supply with its bid its taxpayer identification number (i.e., federal employer identification number or social security number) and should the vendor be awarded a contract, such vendor shall provide to the agency the taxpayer identification license numbers of such subcontractors. Such numbers shall be provided on the later of the date on which such subcontractor is required to be identified or the time the contract is executed. The successful Bidder shall provide to the agency to which it is contracting, within 30 days of entering into such public works contract, copies of all Delaware Business licenses of subcontractors and/or independent contractors that will perform work for such public works contract. However, if a subcontractor or independent contractor is hired or contracted more than 20 days after the Bidder entered the public works contract the Delaware Business license of such subcontractor or independent contractor shall be provided to the agency within 10 days of being contracted or hired.
- 5.4.8 The Bid Security shall be returned to the successful Bidder upon the execution of the formal contract. The Bid Securities of unsuccessful bidders shall be returned within thirty (30) calendar days after the opening of the Bids.

## **ARTICLE 6: POST-BID INFORMATION**

- 6.1 CONTRACTOR'S QUALIFICATION STATEMENT
- 6.1.1 Bidders to whom an award of a Contract is under consideration shall, if requested by the Agency, submit a properly executed AIA Document A305, Contractor's Qualification Statement, unless such a statement has been previously required and submitted.
- 6.2 Bidders to whom an award of a Contract has been made must produce their Delaware Business License before the Contract can be executed.

## **ARTICLE 7: PERFORMANCE BOND AND PAYMENT BOND**

- 7.1 BOND REQUIREMENTS
- 7.1.1 The cost of furnishing the required Bonds, that are stipulated in the Bidding Documents, shall be included in the Bid.
- 7.1.2 If the Bidder is required by the Agency to secure a bond from other than the Bidder's usual sources, changes in cost will be adjusted as provide in the Contract Documents.

7.1.3 The Performance and Payment Bond forms used shall be the standard OMB forms (attached). The Performance Bond and/or the Payment Bond may be electronic bonds and need not be transmitted as paper documents.

7.2 TIME OF DELIVERY AND FORM OF BONDS

7.2.1 The bonds shall be dated on or after the date of the Contract.

7.2.2 The Bidder shall require the attorney-in-fact who executes the required bonds on behalf of the surety to affix a certified and current copy of the power of attorney.

**ARTICLE 8: FORM OF AGREEMENT BETWEEN OWNER AND CONTRACTOR**

8.1 Unless otherwise required in the Bidding Documents, the Agreement for the Work will be written on AIA Document A101, Standard Form of Agreement Between Owner and Contractor Where the Basis of Payment is a Stipulated Sum.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK

# **BID FORM**

**To: Mr. Kyle Anglin**  
**Construction Projects Manager**  
**State of Delaware**  
**Office of Management and Budget**  
**Haslet Armory, 122 Martin Luther King Jr. Blvd. South**  
**Dover, Delaware 19901**

(Other License Nos.): \_\_\_\_\_

**Phone No.:** (        ) \_\_\_\_\_ - \_\_\_\_\_      **Fax No.:** (        ) \_\_\_\_\_ - \_\_\_\_\_

The undersigned, representing that he has read and understands the Bidding Documents and that this bid is made in accordance therewith, that he has visited the site and has familiarized himself with the local conditions under which the Work is to be performed, and that his bid is based upon the materials, systems and equipment described in the Bidding Documents without exception, hereby proposes and agrees to provide all labor, materials, plant, equipment, supplies, transport and other facilities required to execute the work described by the aforesaid documents for the lump sum itemized below:

\$ \_\_\_\_\_  
(\$ \_\_\_\_\_)

## ALLOWANCE

A \$200,000 two hundred-thousand-dollar allowance shall be provided as part of the base bid of this project to cover miscellaneous items found during construction. Contractor shall use Allowance Authorization Form to document any allowance change orders. At closeout of the Contract, funds remaining in the Contingency allowance will be credited to Owner by Change Order.

Confirmed: \_\_\_\_\_  
(Signature)

**BID FORM**

I/We acknowledge Addendums numbered \_\_\_\_\_ and the price(s) submitted include any cost/schedule impact they may have.

This bid shall remain valid and cannot be withdrawn for thirty (30) days from the date of opening of bids (60 days for School Districts and Department of Education), and the undersigned shall abide by the Bid Security forfeiture provisions. Bid Security is attached to this Bid.

The Owner shall have the right to reject any or all bids, and to waive any informality or irregularity in any bid received.

This bid is based upon work being accomplished by the Sub-Contractors named on the list attached to this bid.

Should I/We be awarded this contract, I/We pledge to achieve substantial completion of all the work within \_\_\_\_\_ calendar days of the Notice to Proceed.

The undersigned represents and warrants that he has complied and shall comply with all requirements of local, state, and national laws; that no legal requirement has been or shall be violated in making or accepting this bid, in awarding the contract to him or in the prosecution of the work required; that the bid is legal and firm; that he has not, directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken action in restraint of free competitive bidding.

Upon receipt of written notice of the acceptance of this Bid, the Bidder shall, within twenty (20) calendar days, execute the agreement in the required form and deliver the Contract Bonds, and Insurance Certificates required by the Contract Documents.

I am / We are an Individual / a Partnership / a Corporation

By \_\_\_\_\_ Trading as \_\_\_\_\_  
(Individual's / General Partner's / Corporate Name)  
\_\_\_\_\_  
(State of Corporation)

Business Address: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Witness: \_\_\_\_\_ By: \_\_\_\_\_  
(SEAL) ( Authorized Signature )  
\_\_\_\_\_  
( Title )  
Date: \_\_\_\_\_

**ATTACHMENTS**

Sub-Contractor List  
Non-Collusion Statement  
Affidavit of Employee Drug Testing Program  
Affidavit of Contractor Qualifications  
Bid Security  
(Others as Required by Project Manuals)

## **BID FORM**

### **SUBCONTRACTOR LIST**

In accordance with Title 29, Chapter 69, Section 6962(d)(10)b of the Delaware Code, the following subcontractor listing must accompany any bid submittal. The bidder must list **in each category** the full name and address (City & State) of the sub-contractor that the bidder will be using to perform the work and provide material for that subcontractor category. Should the bidder's listed subcontractor intend to provide any of their subcontractor category of work through a third-tier contractor, the bidder shall list that third-tier contractor's full name and address (City & State). **If the bidder intends to perform any category of work itself, it must list its full name and address.** For clarification, if the bidder intends to perform the work themselves, the bidder **may not** insert "not applicable", "N/A", "self" or anything other than its own full name and address (City & State). To do so shall cause the bid to be rejected. In addition, the failure to produce a completed subcontractor list with the bid submittal shall cause the bid to be rejected. If you have more than three (3) third-tier contractors to report in any subcontractor category, print out additional page(s) containing the appropriate category, complete the rest of your list of third-tier contractors for that category, notate the addition in parentheses as (CONTINUATION) next to the subcontractor category and an asterisk (\*) next to any additional third-tier contractors, and submit it with your bid.

| <b><u>Subcontractor Category</u></b> | <b><u>Subcontractor</u></b> | <b><u>Address (City &amp; State)</u></b> | <b><u>Subcontractors tax-payer ID #<br/>or Delaware Business license #</u></b> |
|--------------------------------------|-----------------------------|------------------------------------------|--------------------------------------------------------------------------------|
| 1.                                   |                             |                                          |                                                                                |
| A.                                   |                             |                                          |                                                                                |
| B.                                   |                             |                                          |                                                                                |
| C.                                   |                             |                                          |                                                                                |
| 2.                                   |                             |                                          |                                                                                |
| A.                                   |                             |                                          |                                                                                |
| B.                                   |                             |                                          |                                                                                |
| C.                                   |                             |                                          |                                                                                |

**BID FORM (Continued)**

|    |  |  |  |
|----|--|--|--|
| 3. |  |  |  |
| A. |  |  |  |
| B. |  |  |  |
| C. |  |  |  |
| 4. |  |  |  |
| A. |  |  |  |
| B. |  |  |  |
| C. |  |  |  |

NOT FOR BIDDING PURPOSES



**BID FORM**  
**NON-COLLUSION STATEMENT**

This is to certify that the undersigned bidder has neither directly nor indirectly, entered into any agreement, participated in any collusion or otherwise taken any action in restraint of free competitive bidding in connection with this proposal submitted this date to the Office of Management and Budget, Division of Facilities Management.

All the terms and conditions of (MJ1002000087A) have been thoroughly examined and are understood.

**NAME OF BIDDER:**

**AUTHORIZED REPRESENTATIVE  
(TYPED):**

**AUTHORIZED REPRESENTATIVE  
(SIGNATURE):**

**TITLE:**

**ADDRESS OF BIDDER:**

**E-MAIL:**

**PHONE NUMBER:**

Sworn to and Subscribed before me this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_.

My Commission expires \_\_\_\_\_. NOTARY PUBLIC \_\_\_\_\_.

**THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.**

**AFFIDAVIT  
OF  
EMPLOYEE DRUG TESTING PROGRAM**

4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects requires that Contractors and Subcontractors implement a program of mandatory drug testing for Employees who work on Large Public Works Contracts funded all or in part with public funds.

We hereby certify that we have in place or will implement during the entire term of the contract a Mandatory Drug Testing Program for our employees on the jobsite, including subcontractors, that complies with this regulation:

**Contractor/Subcontractor Name:** \_\_\_\_\_

**Contractor/Subcontractor Address:** \_\_\_\_\_

**Authorized Representative (typed or printed):** \_\_\_\_\_

**Authorized Representative (signature):** \_\_\_\_\_

**Title:** \_\_\_\_\_

Sworn to and Subscribed before me this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_.

My Commission expires \_\_\_\_\_. NOTARY PUBLIC \_\_\_\_\_.

**THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.**

**AFFIDAVIT  
OF  
CONTRACTOR QUALIFICATIONS**

We hereby certify that we will abide by the contractor's qualifications outlined in the construction bid specifications for the duration of the contract term.

In accordance with Title 29, Chapter 69, Section 6962(d)(10)b.3 of the Delaware Code, after a contract has been awarded the successful bidder shall not substitute another subcontractor whose name was submitted on the Subcontractor Form except for the reasons in the statute and not without written consent from the awarding agency. Failure to utilize the subcontractors on the list will subject the successful bidder to penalties as outlined in the General Requirements Section 5.2 of the contract.

**Contractor Name:**

\_\_\_\_\_

**Contractor Address:**

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

**Authorized Representative (typed or printed):**

\_\_\_\_\_

**Authorized Representative (signature):**

\_\_\_\_\_

**Title:**

\_\_\_\_\_

Sworn to and Subscribed before me this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_.

My Commission expires \_\_\_\_\_. NOTARY PUBLIC \_\_\_\_\_.

**THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.**

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING PURPOSES

**SECTION 00 43 13  
BID BOND**

TO ACCOMPANY PROPOSAL  
(Not necessary if security is used)

KNOW ALL MEN BY THESE PRESENTS That: \_\_\_\_\_  
\_\_\_\_\_ of \_\_\_\_\_ in the County of \_\_\_\_\_  
\_\_\_\_\_ and State of \_\_\_\_\_ as **Principal**, and \_\_\_\_\_  
\_\_\_\_\_ of \_\_\_\_\_ in the County of \_\_\_\_\_  
and State of \_\_\_\_\_ as **Surety**, legally authorized to do business in the State of Delaware  
("State"), are held and firmly unto the **State** in the sum of \_\_\_\_\_  
\_\_\_\_\_ Dollars (\$ \_\_\_\_\_), or \_\_\_\_\_ percent not to exceed \_\_\_\_\_  
\_\_\_\_\_ Dollars (\$ \_\_\_\_\_)  
of amount of bid on Contract No. **MJ1002000087A**, to be paid to the **State** for the use and benefit of the  
Office of Management and Budget for which payment well and truly to be made, we do bind ourselves, our  
and each of our heirs, executors, administrators, and successors, jointly and severally for and in the whole  
firmly by these presents.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH That if the above bonded **Principal**  
who has submitted to the Office of Management and Budget a certain proposal to enter into this contract for  
the furnishing of certain material and/or services within the **State**, shall be awarded this Contract, and if said  
**Principal** shall well and truly enter into and execute this Contract as may be required by the terms of this  
Contract and approved by the Office of Management and Budget this Contract to be entered into within  
twenty days after the date of official notice of the award thereof in accordance with the terms of said  
proposal, then this obligation shall be void or else to be and remain in full force and virtue.

Sealed with \_\_\_\_\_ seal and dated this \_\_\_\_\_ day of \_\_\_\_\_ in the year of our Lord two  
thousand and \_\_\_\_\_ (20\_\_\_\_).

SEALED, AND DELIVERED IN THE  
Presence of \_\_\_\_\_

\_\_\_\_\_  
Name of Bidder (Organization)

Corporate  
Seal

By: \_\_\_\_\_

\_\_\_\_\_  
Authorized Signature

Attest \_\_\_\_\_

\_\_\_\_\_  
Title

\_\_\_\_\_  
Name of Surety

Witness: \_\_\_\_\_

By: \_\_\_\_\_

\_\_\_\_\_  
Title

**END OF SECTION**

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING PURPOSES

**SECTION 00 52 13**  
**STANDARD FORM OF AGREEMENT BETWEEN OWNER AND CONTRACTOR A101-2017**

The contract to be utilized on this project shall be the "Standard Form of Agreement Between Owner and Contractor" AIA Document A101-2017, including AIA Document A101 – 2017 Exhibit A, as well as Supplements to A101-2017 and Exhibit A and the State of Delaware's General Requirements.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING PURPOSES



# DRAFT AIA® Document A101™ – 2017

## Standard Form of Agreement Between Owner and Contractor where the basis of payment is a Stipulated Sum

**AGREEMENT** made as of the « » day of « » in the year « »  
(In words, indicate day, month and year.)

**BETWEEN** the Owner:  
(Name, legal status, address and other information)

« »  
« »  
« »  
« »

and the Contractor:  
(Name, legal status, address and other information)

« »  
« »  
« »  
« »

for the following Project:  
(Name, location and detailed description)

«testing»  
«»  
«»

The Architect:  
(Name, legal status, address and other information)

« »  
« »  
« »  
« »

The Owner and Contractor agree as follows.

**ADDITIONS AND DELETIONS:** The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

The parties should complete A101™-2017, Exhibit A, Insurance and Bonds, contemporaneously with this Agreement. AIA Document A201™-2017, General Conditions of the Contract for Construction, is adopted in this document by reference. Do not use with other general conditions unless this document is modified.

**ELECTRONIC COPYING** of any portion of this AIA® Document to another electronic file is prohibited and constitutes a violation of copyright laws as set forth in the footer of this document.

## TABLE OF ARTICLES

- 1 THE CONTRACT DOCUMENTS
- 2 THE WORK OF THIS CONTRACT
- 3 DATE OF COMMENCEMENT AND SUBSTANTIAL COMPLETION
- 4 CONTRACT SUM
- 5 PAYMENTS
- 6 DISPUTE RESOLUTION
- 7 TERMINATION OR SUSPENSION
- 8 MISCELLANEOUS PROVISIONS
- 9 ENUMERATION OF CONTRACT DOCUMENTS

## EXHIBIT A INSURANCE AND BONDS

### ARTICLE 1 THE CONTRACT DOCUMENTS

The Contract Documents consist of this Agreement, Conditions of the Contract (General, Supplementary, and other Conditions), Drawings, Specifications, Addenda issued prior to execution of this Agreement, other documents listed in this Agreement, and Modifications issued after execution of this Agreement, all of which form the Contract, and are as fully a part of the Contract as if attached to this Agreement or repeated herein. The Contract represents the entire and integrated agreement between the parties hereto and supersedes prior negotiations, representations, or agreements, either written or oral. An enumeration of the Contract Documents, other than a Modification, appears in Article 9.

### ARTICLE 2 THE WORK OF THIS CONTRACT

The Contractor shall fully execute the Work described in the Contract Documents, except as specifically indicated in the Contract Documents to be the responsibility of others.

### ARTICLE 3 DATE OF COMMENCEMENT AND SUBSTANTIAL COMPLETION

§ 3.1 The date of commencement of the Work shall be:

*(Check one of the following boxes.)*

- ☐ The date of this Agreement.
- ☐ A date set forth in a notice to proceed issued by the Owner.
- ☐ Established as follows:  
*(Insert a date or a means to determine the date of commencement of the Work.)*
- ☐

If a date of commencement of the Work is not selected, then the date of commencement shall be the date of this Agreement.

§ 3.2 The Contract Time shall be measured from the date of commencement of the Work.

#### § 3.3 Substantial Completion

§ 3.3.1 Subject to adjustments of the Contract Time as provided in the Contract Documents, the Contractor shall achieve Substantial Completion of the entire Work:

*(Check one of the following boxes and complete the necessary information.)*

- ☐ Not later than  (  ) calendar days from the date of commencement of the Work.

[ « » ] By the following date: « »

§ 3.3.2 Subject to adjustments of the Contract Time as provided in the Contract Documents, if portions of the Work are to be completed prior to Substantial Completion of the entire Work, the Contractor shall achieve Substantial Completion of such portions by the following dates:

| Portion of Work | Substantial Completion Date |
|-----------------|-----------------------------|
|                 |                             |

§ 3.3.3 If the Contractor fails to achieve Substantial Completion as provided in this Section 3.3, liquidated damages, if any, shall be assessed as set forth in Section 4.5.

#### ARTICLE 4 CONTRACT SUM

§ 4.1 The Owner shall pay the Contractor the Contract Sum in current funds for the Contractor's performance of the Contract. The Contract Sum shall be «Zero Dollars and Zero Cents» (\$ «0.00»), subject to additions and deductions as provided in the Contract Documents.

#### § 4.2 Alternates

§ 4.2.1 Alternates, if any, included in the Contract Sum:

| Item | Price |
|------|-------|
|      |       |

§ 4.2.2 Subject to the conditions noted below, the following alternates may be accepted by the Owner following execution of this Agreement. Upon acceptance, the Owner shall issue a Modification to this Agreement. (Insert below each alternate and the conditions that must be met for the Owner to accept the alternate.)

| Item | Price | Conditions for Acceptance |
|------|-------|---------------------------|
|      |       |                           |

§ 4.3 Allowances, if any, included in the Contract Sum: (Identify each allowance.)

| Item | Price |
|------|-------|
|      |       |

§ 4.4 Unit prices, if any: (Identify the item and state the unit price and quantity limitations, if any, to which the unit price will be applicable.)

| Item | Units and Limitations | Price per Unit (\$0.00) |
|------|-----------------------|-------------------------|
|      |                       |                         |

§ 4.5 Liquidated damages, if any: (Insert terms and conditions for liquidated damages, if any.)

« »

§ 4.6 Other: (Insert provisions for bonus or other incentives, if any, that might result in a change to the Contract Sum.)

« »

## ARTICLE 5 PAYMENTS

### § 5.1 Progress Payments

§ 5.1.1 Based upon Applications for Payment submitted to the Architect by the Contractor and Certificates for Payment issued by the Architect, the Owner shall make progress payments on account of the Contract Sum to the Contractor as provided below and elsewhere in the Contract Documents.

§ 5.1.2 The period covered by each Application for Payment shall be one calendar month ending on the last day of the month, or as follows:

« »

§ 5.1.3 Provided that an Application for Payment is received by the Architect not later than the « » day of a month, the Owner shall make payment of the amount certified to the Contractor not later than the « » day of the « » month. If an Application for Payment is received by the Architect after the application date fixed above, payment of the amount certified shall be made by the Owner not later than « » ( « » ) days after the Architect receives the Application for Payment.

*(Federal, state or local laws may require payment within a certain period of time.)*

§ 5.1.4 Each Application for Payment shall be based on the most recent schedule of values submitted by the Contractor in accordance with the Contract Documents. The schedule of values shall allocate the entire Contract Sum among the various portions of the Work. The schedule of values shall be prepared in such form, and supported by such data to substantiate its accuracy, as the Architect may require. This schedule of values shall be used as a basis for reviewing the Contractor's Applications for Payment.

§ 5.1.5 Applications for Payment shall show the percentage of completion of each portion of the Work as of the end of the period covered by the Application for Payment.

§ 5.1.6 In accordance with AIA Document A201™-2017, General Conditions of the Contract for Construction, and subject to other provisions of the Contract Documents, the amount of each progress payment shall be computed as follows:

§ 5.1.6.1 The amount of each progress payment shall first include:

- .1 That portion of the Contract Sum properly allocable to completed Work;
- .2 That portion of the Contract Sum properly allocable to materials and equipment delivered and suitably stored at the site for subsequent incorporation in the completed construction, or, if approved in advance by the Owner, suitably stored off the site at a location agreed upon in writing; and
- .3 That portion of Construction Change Directives that the Architect determines, in the Architect's professional judgment, to be reasonably justified.

§ 5.1.6.2 The amount of each progress payment shall then be reduced by:

- .1 The aggregate of any amounts previously paid by the Owner;
- .2 The amount, if any, for Work that remains uncorrected and for which the Architect has previously withheld a Certificate for Payment as provided in Article 9 of AIA Document A201-2017;
- .3 Any amount for which the Contractor does not intend to pay a Subcontractor or material supplier, unless the Work has been performed by others the Contractor intends to pay;
- .4 For Work performed or defects discovered since the last payment application, any amount for which the Architect may withhold payment, or nullify a Certificate of Payment in whole or in part, as provided in Article 9 of AIA Document A201-2017; and
- .5 Retainage withheld pursuant to Section 5.1.7.

### § 5.1.7 Retainage

§ 5.1.7.1 For each progress payment made prior to Substantial Completion of the Work, the Owner may withhold the following amount, as retainage, from the payment otherwise due:

*(Insert a percentage or amount to be withheld as retainage from each Application for Payment. The amount of retainage may be limited by governing law.)*

« »

§ 5.1.7.1.1 The following items are not subject to retainage:

*(Insert any items not subject to the withholding of retainage, such as general conditions, insurance, etc.)*

<< >>

§ 5.1.7.2 Reduction or limitation of retainage, if any, shall be as follows:

*(If the retainage established in Section 5.1.7.1 is to be modified prior to Substantial Completion of the entire Work, including modifications for Substantial Completion of portions of the Work as provided in Section 3.3.2, insert provisions for such modifications.)*

<< >>

§ 5.1.7.3 Except as set forth in this Section 5.1.7.3, upon Substantial Completion of the Work, the Contractor may submit an Application for Payment that includes the retainage withheld from prior Applications for Payment pursuant to this Section 5.1.7. The Application for Payment submitted at Substantial Completion shall not include retainage as follows:

*(Insert any other conditions for release of retainage upon Substantial Completion.)*

<< >>

§ 5.1.8 If final completion of the Work is materially delayed through no fault of the Contractor, the Owner shall pay the Contractor any additional amounts in accordance with Article 9 of AIA Document A201–2017.

§ 5.1.9 Except with the Owner's prior approval, the Contractor shall not make advance payments to suppliers for materials or equipment which have not been delivered and stored at the site.

## § 5.2 Final Payment

§ 5.2.1 Final payment, constituting the entire unpaid balance of the Contract Sum, shall be made by the Owner to the Contractor when

- .1 the Contractor has fully performed the Contract except for the Contractor's responsibility to correct Work as provided in Article 12 of AIA Document A201–2017, and to satisfy other requirements, if any, which extend beyond final payment; and
- .2 a final Certificate for Payment has been issued by the Architect.

§ 5.2.2 The Owner's final payment to the Contractor shall be made no later than 30 days after the issuance of the Architect's final Certificate for Payment, or as follows:

<< >>

## § 5.3 Interest

Payments due and unpaid under the Contract shall bear interest from the date payment is due at the rate stated below, or in the absence thereof, at the legal rate prevailing from time to time at the place where the Project is located.

*(Insert rate of interest agreed upon, if any.)*

<< >> % << >>

## ARTICLE 6 DISPUTE RESOLUTION

### § 6.1 Initial Decision Maker

The Architect will serve as the Initial Decision Maker pursuant to Article 15 of AIA Document A201–2017, unless the parties appoint below another individual, not a party to this Agreement, to serve as the Initial Decision Maker.

*(If the parties mutually agree, insert the name, address and other contact information of the Initial Decision Maker, if other than the Architect.)*

<< >>

<< >>

<< >>

<< >>

## § 6.2 Binding Dispute Resolution

For any Claim subject to, but not resolved by, mediation pursuant to Article 15 of AIA Document A201–2017, the method of binding dispute resolution shall be as follows:

(Check the appropriate box.)

☐ Arbitration pursuant to Section 15.4 of AIA Document A201–2017

☐ Litigation in a court of competent jurisdiction

☐ Other (Specify)

« »

If the Owner and Contractor do not select a method of binding dispute resolution, or do not subsequently agree in writing to a binding dispute resolution method other than litigation, Claims will be resolved by litigation in a court of competent jurisdiction.

## ARTICLE 7 TERMINATION OR SUSPENSION

§ 7.1 The Contract may be terminated by the Owner or the Contractor as provided in Article 14 of AIA Document A201–2017.

§ 7.1.1 If the Contract is terminated for the Owner’s convenience in accordance with Article 14 of AIA Document A201–2017, then the Owner shall pay the Contractor a termination fee as follows:

(Insert the amount of, or method for determining, the fee, if any, payable to the Contractor following a termination for the Owner’s convenience.)

« »

§ 7.2 The Work may be suspended by the Owner as provided in Article 14 of AIA Document A201–2017.

## ARTICLE 8 MISCELLANEOUS PROVISIONS

§ 8.1 Where reference is made in this Agreement to a provision of AIA Document A201–2017 or another Contract Document, the reference refers to that provision as amended or supplemented by other provisions of the Contract Documents.

§ 8.2 The Owner’s representative:

(Name, address, email address, and other information)

« »

« »

« »

« »

« »

« »

§ 8.3 The Contractor’s representative:

(Name, address, email address, and other information)

« »

« »

« »

« »

« »

« »

§ 8.4 Neither the Owner’s nor the Contractor’s representative shall be changed without ten days’ prior notice to the other party.

## § 8.5 Insurance and Bonds

§ 8.5.1 The Owner and the Contractor shall purchase and maintain insurance as set forth in AIA Document A101™–2017, Standard Form of Agreement Between Owner and Contractor where the basis of payment is a Stipulated Sum, Exhibit A, Insurance and Bonds, and elsewhere in the Contract Documents.

§ 8.5.2 The Contractor shall provide bonds as set forth in AIA Document A101™–2017 Exhibit A, and elsewhere in the Contract Documents.

§ 8.6 Notice in electronic format, pursuant to Article 1 of AIA Document A201–2017, may be given in accordance with AIA Document E203™–2013, Building Information Modeling and Digital Data Exhibit, if completed, or as otherwise set forth below:

*(If other than in accordance with AIA Document E203–2013, insert requirements for delivering notice in electronic format such as name, title, and email address of the recipient and whether and how the system will be required to generate a read receipt for the transmission.)*

« »

§ 8.7 Other provisions:

« »

## ARTICLE 9 ENUMERATION OF CONTRACT DOCUMENTS

§ 9.1 This Agreement is comprised of the following documents:

- .1 AIA Document A101™–2017, Standard Form of Agreement Between Owner and Contractor
- .2 AIA Document A101™–2017, Exhibit A, Insurance and Bonds
- .3 AIA Document A201™–2017, General Conditions of the Contract for Construction
- .4 AIA Document E203™–2013, Building Information Modeling and Digital Data Exhibit, dated as indicated below:

*(Insert the date of the E203-2013 incorporated into this Agreement.)*

« »

- .5 Drawings

| Number | Title | Date |
|--------|-------|------|
|        |       |      |

- .6 Specifications

| Section | Title | Date | Pages |
|---------|-------|------|-------|
|         |       |      |       |

- .7 Addenda, if any:

| Number | Date | Pages |
|--------|------|-------|
|        |      |       |

Portions of Addenda relating to bidding or proposal requirements are not part of the Contract Documents unless the bidding or proposal requirements are also enumerated in this Article 9.

- .8 Other Exhibits:

*(Check all boxes that apply and include appropriate information identifying the exhibit where required.)*

[ « » ] AIA Document E204™–2017, Sustainable Projects Exhibit, dated as indicated below:  
*(Insert the date of the E204-2017 incorporated into this Agreement.)*

« »



[ « » ] The Sustainability Plan:

| Title | Date | Pages |
|-------|------|-------|
|       |      |       |

[ « » ] Supplementary and other Conditions of the Contract:

| Document | Title | Date | Pages |
|----------|-------|------|-------|
|          |       |      |       |

.9 Other documents, if any, listed below:

*(List here any additional documents that are intended to form part of the Contract Documents. AIA Document A201™-2017 provides that the advertisement or invitation to bid, Instructions to Bidders, sample forms, the Contractor's bid or proposal, portions of Addenda relating to bidding or proposal requirements, and other information furnished by the Owner in anticipation of receiving bids or proposals, are not part of the Contract Documents unless enumerated in this Agreement. Any such documents should be listed here only if intended to be part of the Contract Documents.)*

« »

This Agreement entered into as of the day and year first written above.

\_\_\_\_\_  
OWNER (Signature)

« »« »

(Printed name and title)

\_\_\_\_\_  
CONTRACTOR (Signature)

« »« »

(Printed name and title)



# DRAFT AIA® Document A101™ – 2017

## Exhibit A

### Insurance and Bonds

This Insurance and Bonds Exhibit is part of the Agreement, between the Owner and the Contractor, dated the « » day of « » in the year « »  
(In words, indicate day, month and year.)

for the following **PROJECT**:  
(Name and location or address)

« »  
« »

**THE OWNER:**  
(Name, legal status and address)

« »  
« »

**THE CONTRACTOR:**  
(Name, legal status and address)

« »  
« »

#### TABLE OF ARTICLES

- A.1 GENERAL
- A.2 OWNER'S INSURANCE
- A.3 CONTRACTOR'S INSURANCE AND BONDS
- A.4 SPECIAL TERMS AND CONDITIONS

#### ARTICLE A.1 GENERAL

The Owner and Contractor shall purchase and maintain insurance, and provide bonds, as set forth in this Exhibit. As used in this Exhibit, the term General Conditions refers to AIA Document A201™-2017, General Conditions of the Contract for Construction.

#### ARTICLE A.2 OWNER'S INSURANCE

##### § A.2.1 General

Prior to commencement of the Work, the Owner shall secure the insurance, and provide evidence of the coverage, required under this Article A.2 and, upon the Contractor's request, provide a copy of the property insurance policy or policies required by Section A.2.3. The copy of the policy or policies provided shall contain all applicable conditions, definitions, exclusions, and endorsements.

##### § A.2.2 Liability Insurance

The Owner shall be responsible for purchasing and maintaining the Owner's usual general liability insurance.

##### § A.2.3 Required Property Insurance

AIA Document A101™ – 2017 Exhibit A. Copyright © 2017 by The American Institute of Architects. All rights reserved. **WARNING: This AIA® Document is protected by U.S. Copyright Law and International Treaties. Unauthorized reproduction or distribution of this AIA® Document, or any portion of it, may result in severe civil and criminal penalties, and will be prosecuted to the maximum extent possible under the law.** This draft was produced by AIA software at 15:53:16 ET on 11/08/2018 under Order No.5521013211 which expires on 07/19/2019, and is not for resale.  
User Notes: (1933659252)

**ADDITIONS AND DELETIONS:** The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

This document is intended to be used in conjunction with AIA Document A201™-2017, General Conditions of the Contract for Construction. Article 11 of A201™-2017 contains additional insurance provisions.

**ELECTRONIC COPYING** of any portion of this AIA® Document to another electronic file is prohibited and constitutes a violation of copyright laws as set forth in the footer of this document.

**§ A.2.3.1** Unless this obligation is placed on the Contractor pursuant to Section A.3.3.2.1, the Owner shall purchase and maintain, from an insurance company or insurance companies lawfully authorized to issue insurance in the jurisdiction where the Project is located, property insurance written on a builder's risk "all-risks" completed value or equivalent policy form and sufficient to cover the total value of the entire Project on a replacement cost basis. The Owner's property insurance coverage shall be no less than the amount of the initial Contract Sum, plus the value of subsequent Modifications and labor performed and materials or equipment supplied by others. The property insurance shall be maintained until Substantial Completion and thereafter as provided in Section A.2.3.1.3, unless otherwise provided in the Contract Documents or otherwise agreed in writing by the parties to this Agreement. This insurance shall include the interests of the Owner, Contractor, Subcontractors, and Sub-subcontractors in the Project as insureds. This insurance shall include the interests of mortgagees as loss payees.

**§ A.2.3.1.1 Causes of Loss.** The insurance required by this Section A.2.3.1 shall provide coverage for direct physical loss or damage, and shall not exclude the risks of fire, explosion, theft, vandalism, malicious mischief, collapse, earthquake, flood, or windstorm. The insurance shall also provide coverage for ensuing loss or resulting damage from error, omission, or deficiency in construction methods, design, specifications, workmanship, or materials. Sub-limits, if any, are as follows:

*(Indicate below the cause of loss and any applicable sub-limit.)*

| Causes of Loss | Sub-Limit |
|----------------|-----------|
|                |           |

**§ A.2.3.1.2 Specific Required Coverages.** The insurance required by this Section A.2.3.1 shall provide coverage for loss or damage to falsework and other temporary structures, and to building systems from testing and startup. The insurance shall also cover debris removal, including demolition occasioned by enforcement of any applicable legal requirements, and reasonable compensation for the Architect's and Contractor's services and expenses required as a result of such insured loss, including claim preparation expenses. Sub-limits, if any, are as follows:

*(Indicate below type of coverage and any applicable sub-limit for specific required coverages.)*

| Coverage | Sub-Limit |
|----------|-----------|
|          |           |

**§ A.2.3.1.3** Unless the parties agree otherwise, upon Substantial Completion, the Owner shall continue the insurance required by Section A.2.3.1 or, if necessary, replace the insurance policy required under Section A.2.3.1 with property insurance written for the total value of the Project that shall remain in effect until expiration of the period for correction of the Work set forth in Section 12.2.2 of the General Conditions.

**§ A.2.3.1.4 Deductibles and Self-Insured Retentions.** If the insurance required by this Section A.2.3 is subject to deductibles or self-insured retentions, the Owner shall be responsible for all loss not covered because of such deductibles or retentions.

**§ A.2.3.2 Occupancy or Use Prior to Substantial Completion.** The Owner's occupancy or use of any completed or partially completed portion of the Work prior to Substantial Completion shall not commence until the insurance company or companies providing the insurance under Section A.2.3.1 have consented in writing to the continuance of coverage. The Owner and the Contractor shall take no action with respect to partial occupancy or use that would cause cancellation, lapse, or reduction of insurance, unless they agree otherwise in writing.

### **§ A.2.3.3 Insurance for Existing Structures**

If the Work involves remodeling an existing structure or constructing an addition to an existing structure, the Owner shall purchase and maintain, until the expiration of the period for correction of Work as set forth in Section 12.2.2 of the General Conditions, "all-risks" property insurance, on a replacement cost basis, protecting the existing structure against direct physical loss or damage from the causes of loss identified in Section A.2.3.1, notwithstanding the undertaking of the Work. The Owner shall be responsible for all co-insurance penalties.

### **§ A.2.4 Optional Extended Property Insurance.**

The Owner shall purchase and maintain the insurance selected and described below.

(Select the types of insurance the Owner is required to purchase and maintain by placing an X in the box(es) next to the description(s) of selected insurance. For each type of insurance selected, indicate applicable limits of coverage or other conditions in the fill point below the selected item.)

- [ ☐ ] **§ A.2.4.1 Loss of Use, Business Interruption, and Delay in Completion Insurance**, to reimburse the Owner for loss of use of the Owner's property, or the inability to conduct normal operations due to a covered cause of loss.

<< >>

- [ ☐ ] **§ A.2.4.2 Ordinance or Law Insurance**, for the reasonable and necessary costs to satisfy the minimum requirements of the enforcement of any law or ordinance regulating the demolition, construction, repair, replacement or use of the Project.

<< >>

- [ ☐ ] **§ A.2.4.3 Expediting Cost Insurance**, for the reasonable and necessary costs for the temporary repair of damage to insured property, and to expedite the permanent repair or replacement of the damaged property.

<< >>

- [ ☐ ] **§ A.2.4.4 Extra Expense Insurance**, to provide reimbursement of the reasonable and necessary excess costs incurred during the period of restoration or repair of the damaged property that are over and above the total costs that would normally have been incurred during the same period of time had no loss or damage occurred.

<< >>

- [ ☐ ] **§ A.2.4.5 Civil Authority Insurance**, for losses or costs arising from an order of a civil authority prohibiting access to the Project, provided such order is the direct result of physical damage covered under the required property insurance.

<< >>

- [ ☐ ] **§ A.2.4.6 Ingress, Egress Insurance**, for loss due to the necessary interruption of the insured's business due to physical prevention of ingress to, or egress from, the Project as a direct result of physical damage.

<< >>

- [ ☐ ] **§ A.2.4.7 Soft Costs Insurance**, to reimburse the Owner for costs due to the delay of completion of the Work, arising out of physical loss or damage covered by the required property insurance: including construction loan fees; leasing and marketing expenses; additional fees, including those of architects, engineers, consultants, attorneys and accountants, needed for the completion of the construction, repairs, or reconstruction; and carrying costs such as property taxes, building permits, additional interest on loans, realty taxes, and insurance premiums over and above normal expenses.

<< >>

## § A.2.5 Other Optional Insurance.

The Owner shall purchase and maintain the insurance selected below.

(Select the types of insurance the Owner is required to purchase and maintain by placing an X in the box(es) next to the description(s) of selected insurance.)

- [ « » ] **§ A.2.5.1 Cyber Security Insurance** for loss to the Owner due to data security and privacy breach, including costs of investigating a potential or actual breach of confidential or private information. *(Indicate applicable limits of coverage or other conditions in the fill point below.)*

« »

- [ « » ] **§ A.2.5.2 Other Insurance**  
*(List below any other insurance coverage to be provided by the Owner and any applicable limits.)*

Coverage

Limits

## ARTICLE A.3 CONTRACTOR'S INSURANCE AND BONDS

### § A.3.1 General

**§ A.3.1.1 Certificates of Insurance.** The Contractor shall provide certificates of insurance acceptable to the Owner evidencing compliance with the requirements in this Article A.3 at the following times: (1) prior to commencement of the Work; (2) upon renewal or replacement of each required policy of insurance; and (3) upon the Owner's written request. An additional certificate evidencing continuation of commercial liability coverage, including coverage for completed operations, shall be submitted with the final Application for Payment and thereafter upon renewal or replacement of such coverage until the expiration of the periods required by Section A.3.2.1 and Section A.3.3.1. The certificates will show the Owner as an additional insured on the Contractor's Commercial General Liability and excess or umbrella liability policy or policies.

**§ A.3.1.2 Deductibles and Self-Insured Retentions.** The Contractor shall disclose to the Owner any deductible or self-insured retentions applicable to any insurance required to be provided by the Contractor.

**§ A.3.1.3 Additional Insured Obligations.** To the fullest extent permitted by law, the Contractor shall cause the commercial general liability coverage to include (1) the Owner, the Architect, and the Architect's consultants as additional insureds for claims caused in whole or in part by the Contractor's negligent acts or omissions during the Contractor's operations; and (2) the Owner as an additional insured for claims caused in whole or in part by the Contractor's negligent acts or omissions for which loss occurs during completed operations. The additional insured coverage shall be primary and non-contributory to any of the Owner's general liability insurance policies and shall apply to both ongoing and completed operations. To the extent commercially available, the additional insured coverage shall be no less than that provided by Insurance Services Office, Inc. (ISO) forms CG 20 10 07 04, CG 20 37 07 04, and, with respect to the Architect and the Architect's consultants, CG 20 32 07 04.

### § A.3.2 Contractor's Required Insurance Coverage

**§ A.3.2.1** The Contractor shall purchase and maintain the following types and limits of insurance from an insurance company or insurance companies lawfully authorized to issue insurance in the jurisdiction where the Project is located. The Contractor shall maintain the required insurance until the expiration of the period for correction of Work as set forth in Section 12.2.2 of the General Conditions, unless a different duration is stated below:  
*(If the Contractor is required to maintain insurance for a duration other than the expiration of the period for correction of Work, state the duration.)*

« »

### § A.3.2.2 Commercial General Liability

**§ A.3.2.2.1** Commercial General Liability insurance for the Project written on an occurrence form with policy limits of not less than « » (\$ « » ) each occurrence, « » (\$ « » ) general aggregate, and « » (\$ « » ) aggregate for products-completed operations hazard, providing coverage for claims including

- .1 damages because of bodily injury, sickness or disease, including occupational sickness or disease, and death of any person;
- .2 personal injury and advertising injury;
- .3 damages because of physical damage to or destruction of tangible property, including the loss of use of such property;
- .4 bodily injury or property damage arising out of completed operations; and

.5 the Contractor's indemnity obligations under Section 3.18 of the General Conditions.

**§ A.3.2.2.2** The Contractor's Commercial General Liability policy under this Section A.3.2.2 shall not contain an exclusion or restriction of coverage for the following:

- .1 Claims by one insured against another insured, if the exclusion or restriction is based solely on the fact that the claimant is an insured, and there would otherwise be coverage for the claim.
- .2 Claims for property damage to the Contractor's Work arising out of the products-completed operations hazard where the damaged Work or the Work out of which the damage arises was performed by a Subcontractor.
- .3 Claims for bodily injury other than to employees of the insured.
- .4 Claims for indemnity under Section 3.18 of the General Conditions arising out of injury to employees of the insured.
- .5 Claims or loss excluded under a prior work endorsement or other similar exclusionary language.
- .6 Claims or loss due to physical damage under a prior injury endorsement or similar exclusionary language.
- .7 Claims related to residential, multi-family, or other habitational projects, if the Work is to be performed on such a project.
- .8 Claims related to roofing, if the Work involves roofing.
- .9 Claims related to exterior insulation finish systems (EIFS), synthetic stucco or similar exterior coatings or surfaces, if the Work involves such coatings or surfaces.
- .10 Claims related to earth subsidence or movement, where the Work involves such hazards.
- .11 Claims related to explosion, collapse and underground hazards, where the Work involves such hazards.

**§ A.3.2.3** Automobile Liability covering vehicles owned, and non-owned vehicles used, by the Contractor, with policy limits of not less than « » (\$ « ») per accident, for bodily injury, death of any person, and property damage arising out of the ownership, maintenance and use of those motor vehicles along with any other statutorily required automobile coverage.

**§ A.3.2.4** The Contractor may achieve the required limits and coverage for Commercial General Liability and Automobile Liability through a combination of primary and excess or umbrella liability insurance, provided such primary and excess or umbrella insurance policies result in the same or greater coverage as the coverages required under Section A.3.2.2 and A.3.2.3, and in no event shall any excess or umbrella liability insurance provide narrower coverage than the primary policy. The excess policy shall not require the exhaustion of the underlying limits only through the actual payment by the underlying insurers.

**§ A.3.2.5** Workers' Compensation at statutory limits.

**§ A.3.2.6** Employers' Liability with policy limits not less than « » (\$ « ») each accident, « » (\$ « ») each employee, and « » (\$ « ») policy limit.

**§ A.3.2.7** Jones Act, and the Longshore & Harbor Workers' Compensation Act, as required, if the Work involves hazards arising from work on or near navigable waterways, including vessels and docks

**§ A.3.2.8** If the Contractor is required to furnish professional services as part of the Work, the Contractor shall procure Professional Liability insurance covering performance of the professional services, with policy limits of not less than « » (\$ « ») per claim and « » (\$ « ») in the aggregate.

**§ A.3.2.9** If the Work involves the transport, dissemination, use, or release of pollutants, the Contractor shall procure Pollution Liability insurance, with policy limits of not less than « » (\$ « ») per claim and « » (\$ « ») in the aggregate.

**§ A.3.2.10** Coverage under Sections A.3.2.8 and A.3.2.9 may be procured through a Combined Professional Liability and Pollution Liability insurance policy, with combined policy limits of not less than « » (\$ « ») per claim and « » (\$ « ») in the aggregate.

**§ A.3.2.11** Insurance for maritime liability risks associated with the operation of a vessel, if the Work requires such activities, with policy limits of not less than « » (\$ « ») per claim and « » (\$ « ») in the aggregate.



§ A.3.2.12 Insurance for the use or operation of manned or unmanned aircraft, if the Work requires such activities, with policy limits of not less than « » (\$ « » ) per claim and « » (\$ « » ) in the aggregate.

### § A.3.3 Contractor's Other Insurance Coverage

§ A.3.3.1 Insurance selected and described in this Section A.3.3 shall be purchased from an insurance company or insurance companies lawfully authorized to issue insurance in the jurisdiction where the Project is located. The Contractor shall maintain the required insurance until the expiration of the period for correction of Work as set forth in Section 12.2.2 of the General Conditions, unless a different duration is stated below:

*(If the Contractor is required to maintain any of the types of insurance selected below for a duration other than the expiration of the period for correction of Work, state the duration.)*

« »

§ A.3.3.2 The Contractor shall purchase and maintain the following types and limits of insurance in accordance with Section A.3.3.1.

*(Select the types of insurance the Contractor is required to purchase and maintain by placing an X in the box(es) next to the description(s) of selected insurance. Where policy limits are provided, include the policy limit in the appropriate fill point.)*

- [ « » ] § A.3.3.2.1 Property insurance of the same type and scope satisfying the requirements identified in Section A.2.3, which, if selected in this section A.3.3.2.1, relieves the Owner of the responsibility to purchase and maintain such insurance except insurance required by Section A.2.3.1.3 and Section A.2.3.3. The Contractor shall comply with all obligations of the Owner under Section A.2.3 except to the extent provided below. The Contractor shall disclose to the Owner the amount of any deductible, and the Owner shall be responsible for losses within the deductible. Upon request, the Contractor shall provide the Owner with a copy of the property insurance policy or policies required. The Owner shall adjust and settle the loss with the insurer and be the trustee of the proceeds of the property insurance in accordance with Article 11 of the General Conditions unless otherwise set forth below:
- (Where the Contractor's obligation to provide property insurance differs from the Owner's obligations as described under Section A.2.3, indicate such differences in the space below. Additionally, if a party other than the Owner will be responsible for adjusting and settling a loss with the insurer and acting as the trustee of the proceeds of property insurance in accordance with Article 11 of the General Conditions, indicate the responsible party below.)*

« »

- [ « » ] § A.3.3.2.2 Railroad Protective Liability Insurance, with policy limits of not less than « » (\$ « » ) per claim and « » (\$ « » ) in the aggregate, for Work within fifty (50) feet of railroad property.
- [ « » ] § A.3.3.2.3 Asbestos Abatement Liability Insurance, with policy limits of not less than « » (\$ « » ) per claim and « » (\$ « » ) in the aggregate, for liability arising from the encapsulation, removal, handling, storage, transportation, and disposal of asbestos-containing materials.
- [ « » ] § A.3.3.2.4 Insurance for physical damage to property while it is in storage and in transit to the construction site on an "all-risks" completed value form.
- [ « » ] § A.3.3.2.5 Property insurance on an "all-risks" completed value form, covering property owned by the Contractor and used on the Project, including scaffolding and other equipment.
- [ « » ] § A.3.3.2.6 Other Insurance
- (List below any other insurance coverage to be provided by the Contractor and any applicable limits.)*

Coverage

Limits

#### § A.3.4 Performance Bond and Payment Bond

The Contractor shall provide surety bonds, from a company or companies lawfully authorized to issue surety bonds in the jurisdiction where the Project is located, as follows:

*(Specify type and penal sum of bonds.)*

| Type             | Penal Sum (\$0.00) |
|------------------|--------------------|
| Payment Bond     |                    |
| Performance Bond |                    |

Payment and Performance Bonds shall be AIA Document A312™, Payment Bond and Performance Bond, or contain provisions identical to AIA Document A312™, current as of the date of this Agreement.

#### ARTICLE A.4 SPECIAL TERMS AND CONDITIONS

Special terms and conditions that modify this Insurance and Bonds Exhibit, if any, are as follows:

<< >>

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING PURPOSES



**SECTION 00 54 13**  
**SUPPLEMENT TO AGREEMENT BETWEEN OWNER AND CONTRACTOR A101-2017**

The following supplements modify the "Standard Form of Agreement Between Owner and Contractor," AIA Document A101-2017. Where a portion of the Standard Form of Agreement is modified or deleted by the following, the unaltered portions of the Standard Form of Agreement shall remain in effect.

**ARTICLE 3: DATE OF COMMENCEMENT AND SUBSTANTIAL COMPLETION**

3.1 Delete paragraph 3.1 in its entirety and replace with the following:

"The date of Commencement of the Work shall be a date set forth in a notice to proceed issued by the Owner."

**ARTICLE 5: PAYMENTS**

5.1 PROGRESS PAYMENTS

5.1.3 Delete paragraph 5.1.3 in its entirety and replace with the following:

"Provided that a valid Application for Payment is received by the Architect that meets all requirements of the Contract, payment shall be made by the Owner not later than 30 days after the Owner receives the valid Application for Payment."

5.3 Insert the interest rate of "1% per month not to exceed 12% per annum."

**ARTICLE 6: DISPUTE RESOLUTION**

6.2 BINDING DISPUTE RESOLUTION

Check the box "Other" – and add the following sentence:

"Any remedies available in law or in equity."

**ARTICLE 7: TERMINATION or SUSPENSION**

7.1.1.1 Delete paragraph 7.1.1.1 in its entirety.

**ARTICLE 8: MISCELLANEOUS PROVISIONS**

8.4 Delete paragraph 8.4 in its entirety and replace with the following:

"The Contractor's representative shall not be changed without ten days written notice to the Owner."

**END OF SECTION**

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 00 54 14**  
**SUPPLEMENT TO A101-2017 – EXHIBIT A INSURANCE AND BONDS**

The following supplements modify the "Standard Form of Agreement Between Owner and Contractor," AIA Document A101-2017 Exhibit A Insurance and Bonds. Where a portion of the Standard Form of Agreement is modified or deleted by the following, the unaltered portions of the Standard Form of Agreement shall remain in effect.

**ARTICLE A.2 OWNER'S INSURANCE**

**A.2.1 General**

Delete paragraph A.2.1 in its entirety.

**A.2.2 Liability Insurance**

Delete paragraph A.2.2 in its entirety, except in the case of school projects this paragraph shall remain.

**A.2.3 Required Property Insurance**

Delete paragraph A.2.3 in its entirety.

**A.2.4 Optional Extended Property Insurance**

Delete paragraph A.2.4 in its entirety.

**A.2.5 Other Optional Insurance**

Delete paragraph A.2.5 in its entirety.

**ARTICLE A.3 CONTRACTORS INSURANCE AND BONDS**

**A.3.1.1** Strike the last sentence of the paragraph.

**A.3.1.3 Additional Insured Obligations**

In the first sentence after "coverage to include (1)" delete "(1) the Owner,".

Strike the remainder of the first sentence beginning at the semicolon "; and (2) the Owner" through the end of the sentence.

Delete the second sentence in its entirety.

**A.3.2.2.1** Insert "\$1,000,000.00" in the blank for each occurrence.  
Insert "\$3,000,000.00" in the blank for general aggregate.  
Insert "\$3,000,000.00" in the blank for aggregate for products-completed operations hazard.

**A.3.2.3** Insert "\$1,000,000.00" in the blank for per accident.

**A.3.2.6** Insert "\$500,000.00" in the blank for each accident.  
Insert "\$500,000.00" in the blank for each employee.  
Insert "\$500,000.00" in the blank for policy limit.

A.3.2.8 Insert "\$1,000,000.00" in the blank for per claim.  
Insert "\$3,000,000.00" in the blank for in the aggregate.

A.3.2.9 Insert "\$1,000,000.00" in the blank for per claim.  
Insert "\$3,000,000.00" in the blank for in the aggregate.

A.3.2.10 Insert "\$2,000,000.00" in the blank for per claim.  
Insert "\$4,000,000.00" in the blank for in the aggregate.

A.3.2.11 Strike in its entirety.

A.3.2.12 Strike in its entirety.

A.3.3.2.1 Delete paragraph 3.3.2.1 in its entirety

A.3.3.2.2 Strike in its entirety.

A.3.3.2.3 Insert "\$1,000,000.00" in the blanks for per claim.  
Insert "\$3,000,000.00" in the blanks for in the aggregate.

A.3.4 Insert the actual contract price in both the Payment Bond and the Performance Bond Penal Sum blanks. It must be 100% of the contract price.

Strike the last sentence in this section and replace with "Payment and Performance Bonds shall be in the standard form issued by the Delaware Office of Management and Budget."

**END OF SECTION**

**SECTION 00 61 13.13  
PERFORMANCE BOND**

Bond Number: \_\_\_\_\_

KNOW ALL PERSONS BY THESE PRESENTS, that we, \_\_\_\_\_, as principal (“**Principal**”), and \_\_\_\_\_, a \_\_\_\_\_ corporation, legally authorized to do business in the State of Delaware, as surety (“**Surety**”), are held and firmly bound unto the Office of Management and Budget (“**Owner**”), in the amount of \_\_\_\_\_ (\$ \_\_\_\_\_), to be paid to **Owner**, for which payment well and truly to be made, we do bind ourselves, our and each and every of our heirs, executors, administrations, successors and assigns, jointly and severally, for and in the whole, firmly by these presents.

Sealed with our seals and dated this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH, that if **Principal**, who has been awarded by **Owner** that certain contract known as Contract No. **MJ1002000087A** dated the \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_ (the “Contract”), which Contract is incorporated herein by reference, shall well and truly provide and furnish all material, appliances and tools and perform all the work required under and pursuant to the terms and conditions of the Contract and the Contract Documents (as defined in the Contract) or any changes or modifications thereto made as therein provided, shall make good and reimburse **Owner** sufficient funds to pay the costs of completing the Contract that **Owner** may sustain by reason of any failure or default on the part of **Principal**, and shall also indemnify and save harmless **Owner** from all costs, damages and expenses arising out of or by reason of the performance of the Contract and for as long as provided by the Contract; then this obligation shall be void, otherwise to be and remain in full force and effect.

**Surety**, for value received, hereby stipulates and agrees, if requested to do so by **Owner**, to fully perform and complete the work to be performed under the Contract pursuant to the terms, conditions and covenants thereof, if for any cause **Principal** fails or neglects to so fully perform and complete such work.

**Surety**, for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of **Surety** and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition or change in or to the Contract or the work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any work to be performed or any monies due or to become due thereunder; and **Surety** hereby waives notice of any and all such extensions, modifications, omissions, additions, changes, payments, waivers, assignments, subcontracts and transfers and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to assignees, subcontractors, and other transferees shall have the same effect as to **Surety** as though done or omitted to be done by or in relation to **Principal**.

**Surety** hereby stipulates and agrees that no modifications, omissions or additions in or to the terms of the Contract shall in any way whatsoever affect the obligation of **Surety** and its bond.

Any proceeding, legal or equitable, under this Bond may be brought in any court of competent jurisdiction in the State of Delaware. Notices to **Surety** or Contractor may be mailed or delivered to them at their respective addresses shown below.

IN WITNESS WHEREOF, **Principal** and **Surety** have hereunto set their hand and seals, and such of them as are corporations have caused their corporate seal to be hereto affixed and these presents to be signed by their duly authorized officers, the day and year first above written.

PRINCIPAL

Name: \_\_\_\_\_

Witness or Attest: Address: \_\_\_\_\_

\_\_\_\_\_  
Name:

(Corporate Seal)

By: \_\_\_\_\_(SEAL)

Name:

Title:

SURETY

Name: \_\_\_\_\_

Witness or Attest: Address: \_\_\_\_\_

\_\_\_\_\_  
Name:

(Corporate Seal)

By: \_\_\_\_\_(SEAL)

Name:

Title:

END OF SECTION

**SECTION 00 61 13.16  
PAYMENT BOND**

Bond Number: \_\_\_\_\_

KNOW ALL PERSONS BY THESE PRESENTS, that we, \_\_\_\_\_ as principal (“**Principal**”), and \_\_\_\_\_, a \_\_\_\_\_ corporation legally authorized to do business in the State of Delaware, as surety (“**Surety**”), are held and firmly bound unto the Office of Management and Budget (“**Owner**”), in the amount of \_\_\_\_\_ (\$\_\_\_\_\_), to be paid to **Owner**, for which payment well and truly to be made, we do bind ourselves, our and each and every of our heirs, executors, administrations, successors and assigns, jointly and severally, for and in the whole firmly by these presents.

Sealed with our seals and dated this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH, that if **Principal**, who has been awarded by **Owner** that certain contract known as Contract No. **MJ1002000087A** dated the \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_ (the “Contract”), which Contract is incorporated herein by reference, shall well and truly pay all and every person furnishing materials or performing labor or service in and about the performance of the work under the Contract, all and every sums of money due him, her, them or any of them, for all such materials, labor and service for which **Principal** is liable, shall make good and reimburse **Owner** sufficient funds to pay such costs in the completion of the Contract as **Owner** may sustain by reason of any failure or default on the part of **Principal**, and shall also indemnify and save harmless **Owner** from all costs, damages and expenses arising out of or by reason of the performance of the Contract and for as long as provided by the Contract; then this obligation shall be void otherwise to be and remain in full force and effect.

**Surety**, for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of **Surety** and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition or change in or to the Contract or the work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any work to be performed or any monies due or to become due thereunder; and **Surety** hereby waives notice of any and all such extensions, modifications, omissions, additions, changes, payments, waivers, assignments, subcontracts and transfers and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to assignees, subcontractors, and other transferees shall have the same effect as to **Surety** as though done or omitted to be done by or in relation to **Principal**.

**Surety** hereby stipulates and agrees that no modifications, omission or additions in or to the terms of the Contract shall in any way whatsoever affect the obligation of **Surety** and its bond.

Any proceeding, legal or equitable, under this Bond may be brought in any court of competent jurisdiction in the State of Delaware. Notices to **Surety** or Contractor may be mailed or delivered to them at their respective addresses shown below.

IN WITNESS WHEREOF, **Principal** and **Surety** have hereunto set their hand and seals, and such of them as are corporations have caused their corporate seal to be hereto affixed and these presents to be signed by their duly authorized officers, the day and year first above written.

PRINCIPAL

Name: \_\_\_\_\_

Witness or Attest: Address: \_\_\_\_\_

\_\_\_\_\_  
Name:

(Corporate Seal)

By: \_\_\_\_\_(SEAL)  
Name:  
Title:

SURETY

Name: \_\_\_\_\_

Witness or Attest: Address: \_\_\_\_\_

\_\_\_\_\_  
Name:

(Corporate Seal)

By: \_\_\_\_\_(SEAL)  
Name:  
Title:

END OF SECTION



**SECTION 00 62 76  
APPLICATION AND CERTIFICATE FOR PAYMENT**

The Application and Certificate for Payment are as stated in the American Institute of Architects Document AIA G702 & AIA G703 (1992 version) entitled Application and Certificate for Payment and is part of this project manual as if herein written in full. A draft sample has been included for reference.

**END OF SECTION**

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING PURPOSES

**Application and Certificate for Payment**

|                                    |                                        |                            |                                                 |
|------------------------------------|----------------------------------------|----------------------------|-------------------------------------------------|
| <b>TO OWNER:</b> State of Delaware | <b>PROJECT:</b>                        | <b>APPLICATION NO:</b> 001 | <b>Distribution to:</b>                         |
|                                    |                                        | <b>PERIOD TO:</b>          | OWNER: <input checked="" type="checkbox"/>      |
| <b>FROM</b>                        | <b>VIA</b> DEDC, LLC                   | <b>CONTRACT FOR:</b>       | ARCHITECT: <input type="checkbox"/>             |
| <b>CONTRACTOR:</b>                 | <b>ARCHITECT:</b> 315 S. Chapel Street | <b>CONTRACT DATE:</b>      | CONTRACTOR: <input checked="" type="checkbox"/> |
|                                    | Newark, DE 19711                       | <b>PROJECT NOS:</b> / /    | FIELD: <input type="checkbox"/>                 |
|                                    |                                        |                            | OTHER: <input type="checkbox"/>                 |

**CONTRACTOR'S APPLICATION FOR PAYMENT**

Application is made for payment, as shown below, in connection with the Contract.  
Continuation Sheet, AIA Document G703, is attached.

|                                                                    |         |
|--------------------------------------------------------------------|---------|
| 1. ORIGINAL CONTRACT SUM .....                                     | \$ 0.00 |
| 2. Net change by Change Orders .....                               | \$ 0.00 |
| 3. CONTRACT SUM TO DATE (Line 1 ± 2) .....                         | \$ 0.00 |
| 4. TOTAL COMPLETED & STORED TO DATE (Column G on G703) .....       | \$ 0.00 |
| 5. RETAINAGE:                                                      |         |
| a. 0 % of Completed Work<br>(Column D + E on G703)                 | \$ 0.00 |
| b. 0 % of Stored Material<br>(Column F on G703)                    | \$ 0.00 |
| Total Retainage (Lines 5a + 5b or Total in Column I of G703) ..... | \$ 0.00 |
| 6. TOTAL EARNED LESS RETAINAGE .....                               | \$ 0.00 |
| (Line 4 Less Line 5 Total)                                         |         |
| 7. LESS PREVIOUS CERTIFICATES FOR PAYMENT .....                    | \$ 0.00 |
| (Line 6 from prior Certificate)                                    |         |
| 8. CURRENT PAYMENT DUE .....                                       | \$ 0.00 |
| 9. BALANCE TO FINISH, INCLUDING RETAINAGE .....                    |         |
| (Line 3 less Line 6)                                               | \$ 0.00 |

| CHANGE ORDER SUMMARY                               | ADDITIONS      | DEDUCTIONS     |
|----------------------------------------------------|----------------|----------------|
| Total changes approved in previous months by Owner | \$ 0.00        | \$ 0.00        |
| Total approved this Month                          | \$ 0.00        | \$ 0.00        |
| <b>TOTALS</b>                                      | <b>\$ 0.00</b> | <b>\$ 0.00</b> |
| NET CHANGES by Change Order                        | \$             | 0.00           |

The undersigned Contractor certifies that to the best of the Contractor's knowledge, information and belief the Work covered by this Application for Payment has been completed in accordance with the Contract Documents, that all amounts have been paid by the Contractor for Work for which previous Certificates for Payment were issued and payments received from the Owner, and that current payment shown herein is now due.

**CONTRACTOR:**

By: \_\_\_\_\_

Date: \_\_\_\_\_

State of: \_\_\_\_\_

County of: \_\_\_\_\_

Subscribed and sworn to before  
me this \_\_\_\_\_ day of \_\_\_\_\_

Notary Public: \_\_\_\_\_

My Commission expires: \_\_\_\_\_

**ARCHITECT'S CERTIFICATE FOR PAYMENT**

In accordance with the Contract Documents, based on on-site observations and the data comprising this application, the Architect certifies to the Owner that to the best of the Architect's knowledge, information and belief the Work has progressed as indicated, the quality of the Work is in accordance with the Contract Documents, and the Contractor is entitled to payment of the AMOUNT CERTIFIED.

AMOUNT CERTIFIED ..... \$ 0.00

(Attach explanation if amount certified differs from the amount applied. Initial all figures on this Application and on the Continuation Sheet that are changed to conform with the amount certified.)

**ARCHITECT:**

By: \_\_\_\_\_

Date: \_\_\_\_\_

This Certificate is not negotiable. The AMOUNT CERTIFIED is payable only to the Contractor named herein. Issuance, payment and acceptance of payment are without prejudice to any rights of the Owner or Contractor under this Contract

# DRAFT AIA® Document G703™ – 1992

## Continuation Sheet

AIA Document G702, APPLICATION AND CERTIFICATION FOR PAYMENT, containing Contractor's signed certification is attached.

In tabulations below, amounts are stated to the nearest dollar.

Use Column I on Contracts where variable retainage for line items may apply.

APPLICATION NO: 001

APPLICATION DATE: --/--/--

PERIOD TO:

ARCHITECT'S PROJECT NO: N/A

| A        | B                   | C               | D                                 | E           | F                                          | G                                          |          | H                         | I                            |
|----------|---------------------|-----------------|-----------------------------------|-------------|--------------------------------------------|--------------------------------------------|----------|---------------------------|------------------------------|
| ITEM NO. | DESCRIPTION OF WORK | SCHEDULED VALUE | WORK COMPLETED                    |             | MATERIALS PRESENTLY STORED (NOT IN D OR E) | TOTAL COMPLETED AND STORED TO DATE (D+E+F) | %(G ÷ C) | BALANCE TO FINISH (C - G) | RETAINAGE (IF VARIABLE RATE) |
|          |                     |                 | FROM PREVIOUS APPLICATION (D + E) | THIS PERIOD |                                            |                                            |          |                           |                              |
|          |                     |                 |                                   |             |                                            |                                            |          |                           |                              |
|          | GRAND TOTAL         | \$ 0.00         | \$ 0.00                           | \$ 0.00     | \$ 0.00                                    | \$ 0.00                                    | 0.00 %   | \$ 0.00                   | \$ 0.00                      |

**ALLOWANCE AUTHORIZATION**

**Project:**

**Architect:**

**Project No.**

**Contractor:**

**AAA No.:**

**Initiation Date:**

**The Allowance is allocated as follows:**

Total original Contract Allowance was:

\$

Amount of Contract Allowance Access previously authorized:

\$

Adjusted Contract Allowance prior to this authorization is:

\$

The amount of available Allowance will Decrease by this Access Authorization:

\$

The remaining Contract Allowance, after this Access Authorization will be:

\$

**Recommended by:**

**Architect**

By (Signature): \_\_\_\_\_

Date: \_\_\_\_\_

**Accepted by:**

**Contractor**

By (Signature): \_\_\_\_\_

Date: \_\_\_\_\_

**Approved by:**

**Owner**

By (Signature): \_\_\_\_\_

Date: \_\_\_\_\_

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING PURPOSES

## CLOSEOUT FORMS

The Contract Closeout Forms to be used for this Contract are listed below. Draft samples of the AIA forms indicated have been included for reference.

|   |             |                                               |                  |
|---|-------------|-----------------------------------------------|------------------|
| — | 00 65 16    | Certificate of Substantial Completion Form    | (AIA G704-2017)  |
| — | 00 65 19.13 | Affidavit of Payment of Debts and Claims Form | (AIA G705-1994)  |
| — | 00 65 19.16 | Affidavit of Release of Liens Form            | (AIA G706A-1994) |
| — | 00 65 19.19 | Consent of Surety to Final Payment Form       | (AIA G707-1994)  |

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING PURPOSES



# DRAFT AIA® Document G704™ – 2017

## Certificate of Substantial Completion

**PROJECT:** *(name and address)*  
testing

**CONTRACT INFORMATION:**  
Contract For: General Construction  
Date:

**CERTIFICATE INFORMATION:**  
Certificate Number:  
Date:

**OWNER:** *(name and address)*

**ARCHITECT:** *(name and address)*

**CONTRACTOR:** *(name and address)*

The Work identified below has been reviewed and found, to the Architect's best knowledge, information, and belief, to be substantially complete. Substantial Completion is the stage in the progress of the Work when the Work or designated portion is sufficiently complete in accordance with the Contract Documents so that the Owner can occupy or utilize the Work for its intended use. The date of Substantial Completion of the Project or portion designated below is the date established by this Certificate.

*(Identify the Work, or portion thereof, that is substantially complete.)*

**ARCHITECT** *(Firm Name)*

**SIGNATURE**

**PRINTED NAME AND TITLE**

**DATE OF SUBSTANTIAL COMPLETION**

### WARRANTIES

The date of Substantial Completion of the Project or portion designated above is also the date of commencement of applicable warranties required by the Contract Documents, except as stated below.

*(Identify warranties that do not commence on the date of Substantial Completion, if any, and indicate their date of commencement.)*

### WORK TO BE COMPLETED OR CORRECTED

A list of items to be completed or corrected is attached hereto, or transmitted as agreed upon by the parties, and identified as follows:

*(Identify the list of Work to be completed or corrected.)*

The failure to include any items on such list does not alter the responsibility of the Contractor to complete all Work in accordance with the Contract Documents. Unless otherwise agreed to in writing, the date of commencement of warranties for items on the attached list will be the date of issuance of the final Certificate of Payment or the date of final payment, whichever occurs first.

The Contractor will complete or correct the Work on the list of items attached hereto within ( ) days from the above date of Substantial Completion.

Cost estimate of Work to be completed or corrected: \$

The responsibilities of the Owner and Contractor for security, maintenance, heat, utilities, damage to the Work, insurance, and other items identified below shall be as follows:

*(Note: Owner's and Contractor's legal and insurance counsel should review insurance requirements and coverage.)*

The Owner and Contractor hereby accept the responsibilities assigned to them in this Certificate of Substantial Completion:

**CONTRACTOR** *(Firm Name)*

**SIGNATURE**

**PRINTED NAME AND TITLE**

**DATE**

**OWNER** *(Firm Name)*

**SIGNATURE**

**PRINTED NAME AND TITLE**

**DATE**

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK

# DRAFT AIA<sup>®</sup> Document G706<sup>™</sup> - 1994

## Contractor's Affidavit of Payment of Debts and Claims

PROJECT: (Name and address)  
testing

ARCHITECT'S PROJECT NUMBER:

TO OWNER: (Name and address)

CONTRACT FOR: General Construction

CONTRACT DATED:

OWNER: ☐  
ARCHITECT: ☐  
CONTRACTOR: ☐  
SURETY: ☐  
OTHER: ☐

STATE OF:  
COUNTY OF:

The undersigned hereby certifies that, except as listed below, payment has been made in full and all obligations have otherwise been satisfied for all materials and equipment furnished, for all work, labor, and services performed, and for all known indebtedness and claims against the Contractor for damages arising in any manner in connection with the performance of the Contract referenced above for which the Owner or Owner's property might in any way be held responsible or encumbered.

### EXCEPTIONS:

#### SUPPORTING DOCUMENTS ATTACHED HERETO:

1. Consent of Surety to Final Payment. Whenever Surety is involved, Consent of Surety is required. AIA Document G707, Consent of Surety, may be used for this purpose

Indicate Attachment ☐ Yes ☐ No

CONTRACTOR: (Name and address)

BY:

(Signature of authorized representative)

(Printed name and title)

The following supporting documents should be attached hereto if required by the Owner:

1. Contractor's Release or Waiver of Liens, conditional upon receipt of final payment.
2. Separate Releases or Waivers of Liens from Subcontractors and material and equipment suppliers, to the extent required by the Owner, accompanied by a list thereof.
3. Contractor's Affidavit of Release of Liens (AIA Document G706A).

Subscribed and sworn to before me on this date:

Notary Public:

My Commission Expires:

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK

# DRAFT AIA<sup>®</sup> Document G706A<sup>™</sup> – 1994

## Contractor's Affidavit of Release of Liens

PROJECT: (Name and address)  
testing

ARCHITECT'S PROJECT NUMBER:

CONTRACT FOR: General  
Construction

CONTRACT DATED:

TO OWNER: (Name and address)

OWNER: ☐

ARCHITECT: ☐

CONTRACTOR: ☐

SURETY: ☐

OTHER: ☐

STATE OF:  
COUNTY OF:

The undersigned hereby certifies that to the best of the undersigned's knowledge, information and belief, except as listed below, the Releases or Waivers of Lien attached hereto include the Contractor, all Subcontractors, all suppliers of materials and equipment, and all performers of Work, labor or services who have or may have liens or encumbrances or the right to assert liens or encumbrances against any property of the Owner arising in any manner out of the performance of the Contract referenced above.

### EXCEPTIONS:

SUPPORTING DOCUMENTS ATTACHED HERETO:

1. Contractor's Release or Waiver of Liens, conditional upon receipt of final payment
2. Separate Releases or Waivers of Liens from Subcontractors and material and equipment suppliers, to the extent required by the Owner, accompanied by a list thereof.

CONTRACTOR: (Name and address)

BY:

\_\_\_\_\_  
(Signature of authorized  
representative)

\_\_\_\_\_  
(Printed name and title)

Subscribed and sworn to before me on this date:

Notary Public:

My Commission Expires:

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING PURPOSES

# DRAFT AIA® Document G707™ – 1994

## Consent Of Surety to Final Payment

PROJECT: (Name and address)  
testing

ARCHITECT'S PROJECT NUMBER:

CONTRACT FOR: General Construction

TO OWNER: (Name and address)

CONTRACT DATED:

OWNER: ☐

ARCHITECT: ☐

CONTRACTOR: ☐

SURETY: ☐

OTHER: ☐

In accordance with the provisions of the Contract between the Owner and the Contractor as indicated above, the  
(Insert name and address of Surety)

on bond of  
(Insert name and address of Contractor)

hereby approves of the final payment to the Contractor, and agrees that final payment to the Contractor shall not relieve the Surety of any of its obligations to  
(Insert name and address of Owner)

as set forth in said Surety's bond.

IN WITNESS WHEREOF, the Surety has hereunto set its hand on this date:  
(Insert in writing the month followed by the numeric date and year.)

\_\_\_\_\_  
(Surety)

\_\_\_\_\_  
(Signature of authorized representative)

\_\_\_\_\_  
(Printed name and title)

Attest:  
(Seal):

THIS PAGE INTENTIONALLY LEFT BLANK



**SECTION 00 72 13**  
**GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION**  
**A201 - 2017**

The General Conditions of this Contract are as stated in the American Institute of Architects Document AIA A201 (2017 Edition) entitled General Conditions of the Contract for Construction as revised by the Supplementary General Conditions (00 73 13) and is part of this project manual as if herein written in full.

**END OF SECTION**

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING PURPOSES

# DRAFT AIA® Document A201™ – 2017

## General Conditions of the Contract for Construction

for the following PROJECT:

(Name and location or address)

«testing»

«»

THE OWNER:

(Name, legal status and address)

« »« »

« »

THE ARCHITECT:

(Name, legal status and address)

« »« »

« »

### TABLE OF ARTICLES

- |    |                                                  |
|----|--------------------------------------------------|
| 1  | GENERAL PROVISIONS                               |
| 2  | OWNER                                            |
| 3  | CONTRACTOR                                       |
| 4  | ARCHITECT                                        |
| 5  | SUBCONTRACTORS                                   |
| 6  | CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS |
| 7  | CHANGES IN THE WORK                              |
| 8  | TIME                                             |
| 9  | PAYMENTS AND COMPLETION                          |
| 10 | PROTECTION OF PERSONS AND PROPERTY               |
| 11 | INSURANCE AND BONDS                              |
| 12 | UNCOVERING AND CORRECTION OF WORK                |
| 13 | MISCELLANEOUS PROVISIONS                         |
| 14 | TERMINATION OR SUSPENSION OF THE CONTRACT        |
| 15 | CLAIMS AND DISPUTES                              |

**ADDITIONS AND DELETIONS:** The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

For guidance in modifying this document to include supplementary conditions, see AIA Document A503™, Guide for Supplementary Conditions.

**ELECTRONIC COPYING** of any portion of this AIA® Document to another electronic file is prohibited and constitutes a violation of copyright laws as set forth in the footer of this document.

## INDEX

(Topics and numbers in bold are Section headings.)

### Acceptance of Nonconforming Work

9.6.6, 9.9.3, **12.3**

### Acceptance of Work

9.6.6, 9.8.2, 9.9.3, 9.10.1, 9.10.3, 12.3

### Access to Work

**3.16**, 6.2.1, 12.1

### Accident Prevention

10

### Acts and Omissions

3.2, 3.3.2, 3.12.8, 3.18, 4.2.3, 8.3.1, 9.5.1, 10.2.5,  
10.2.8, 13.3.2, 14.1, 15.1.2, 15.2

### Addenda

1.1.1

### Additional Costs, Claims for

3.7.4, 3.7.5, 10.3.2, 15.1.5

### Additional Inspections and Testing

9.4.2, 9.8.3, 12.2.1, **13.4**

### Additional Time, Claims for

3.2.4, 3.7.4, 3.7.5, 3.10.2, 8.3.2, **15.1.6**

### Administration of the Contract

3.1.3, **4.2**, 9.4, 9.5

### Advertisement or Invitation to Bid

1.1.1

### Aesthetic Effect

4.2.13

### Allowances

**3.8**

### Applications for Payment

4.2.5, 7.3.9, 9.2, **9.3**, 9.4, 9.5.1, 9.5.4, 9.6.3, 9.7, 9.10

### Approvals

2.1.1, 2.3.1, 2.5, 3.1.3, 3.10.2, 3.12.8, 3.12.9,  
3.12.10.1, 4.2.7, 9.3.2, 13.4.1

### Arbitration

8.3.1, 15.3.2, **15.4**

## ARCHITECT

**4**

### Architect, Definition of

**4.1.1**

### Architect, Extent of Authority

2.5, 3.12.7, 4.1.2, 4.2, 5.2, 6.3, 7.1.2, 7.3.4, 7.4, 9.2,  
9.3.1, 9.4, 9.5, 9.6.3, 9.8, 9.10.1, 9.10.3, 12.1, 12.2.1,  
13.4.1, 13.4.2, 14.2.2, 14.2.4, 15.1.4, 15.2.1

### Architect, Limitations of Authority and Responsibility

2.1.1, 3.12.4, 3.12.8, 3.12.10, 4.1.2, 4.2.1, 4.2.2, 4.2.3,  
4.2.6, 4.2.7, 4.2.10, 4.2.12, 4.2.13, 5.2.1, 7.4, 9.4.2,  
9.5.4, 9.6.4, 15.1.4, 15.2

### Architect's Additional Services and Expenses

2.5, 12.2.1, 13.4.2, 13.4.3, 14.2.4

### Architect's Administration of the Contract

3.1.3, 3.7.4, 15.2, 9.4.1, 9.5

### Architect's Approvals

2.5, 3.1.3, 3.5, 3.10.2, 4.2.7

### Architect's Authority to Reject Work

3.5, 4.2.6, 12.1.2, 12.2.1

### Architect's Copyright

1.1.7, 1.5

### Architect's Decisions

3.7.4, 4.2.6, 4.2.7, 4.2.11, 4.2.12, 4.2.13, 4.2.14, 6.3,  
7.3.4, 7.3.9, 8.1.3, 8.3.1, 9.2, 9.4.1, 9.5, 9.8.4, 9.9.1,  
13.4.2, 15.2

### Architect's Inspections

3.7.4, 4.2.2, 4.2.9, 9.4.2, 9.8.3, 9.9.2, 9.10.1, 13.4

### Architect's Instructions

3.2.4, 3.3.1, 4.2.6, 4.2.7, 13.4.2

### Architect's Interpretations

4.2.11, 4.2.12

### Architect's Project Representative

4.2.10

### Architect's Relationship with Contractor

1.1.2, 1.5, 2.3.3, 3.1.3, 3.2.2, 3.2.3, 3.2.4, 3.3.1, 3.4.2,  
3.5, 3.7.4, 3.7.5, 3.9.1, 3.9.3, 3.10, 3.11, 3.12, 3.16,  
3.18, 4.1.2, 4.2, 5.2, 6.2.2, 7, 8.3.1, 9.2, 9.3, 9.4, 9.5,  
9.7, 9.8, 9.9, 10.2.6, 10.3, 11.3, 12, 13.3.2, 13.4, 15.2

### Architect's Relationship with Subcontractors

1.1.2, 4.2.5, 4.2.7, 4.2.6, 9.6.3, 9.6.4, 11.3

### Architect's Representations

9.4.2, 9.5.1, 9.10.1

### Architect's Site Visits

3.7.4, 4.2.2, 4.2.9, 9.4.2, 9.5.1, 9.9.2, 9.10.1, 13.4

### Asbestos

10.3.1

### Attorneys' Fees

3.18.1, 9.6.8, 9.10.2, 10.3.3

### Award of Separate Contracts

6.1.1, 6.1.2

### Award of Subcontracts and Other Contracts for Portions of the Work

**5.2**

## Basic Definitions

**1.1**

### Bidding Requirements

1.1.1

### Binding Dispute Resolution

8.3.1, 9.7, 11.5, 13.1, 15.1.2, 15.1.3, 15.2.1, 15.2.5,  
15.2.6.1, 15.3.1, 15.3.2, 15.3.3, 15.4.1

### Bonds, Lien

7.3.4.4, 9.6.8, 9.10.2, 9.10.3

### Bonds, Performance, and Payment

7.3.4.4, 9.6.7, 9.10.3, **11.1.2**, 11.1.3, **11.5**

### Building Information Models Use and Reliance

**1.8**

### Building Permit

3.7.1

## Capitalization

**1.3**

### Certificate of Substantial Completion

9.8.3, 9.8.4, 9.8.5

## **Certificates for Payment**

4.2.1, 4.2.5, 4.2.9, 9.3.3, **9.4**, 9.5, 9.6.1, 9.6.6, 9.7, 9.10.1, 9.10.3, 14.1.1.3, 14.2.4, 15.1.4

Certificates of Inspection, Testing or Approval  
13.4.4

Certificates of Insurance  
9.10.2

## **Change Orders**

1.1.1, 3.4.2, 3.7.4, 3.8.2.3, 3.11, 3.12.8, 4.2.8, 5.2.3, 7.1.2, 7.1.3, **7.2**, 7.3.2, 7.3.7, 7.3.9, 7.3.10, 8.3.1, 9.3.1.1, 9.10.3, 10.3.2, 11.2, 11.5, 12.1.2

**Change Orders**, Definition of  
**7.2.1**

## **CHANGES IN THE WORK**

2.2.2, 3.11, 4.2.8, **7**, 7.2.1, 7.3.1, 7.4, 8.3.1, 9.3.1.1, 11.5

**Claims**, Definition of  
**15.1.1**

Claims, Notice of  
1.6.2, 15.1.3

## **CLAIMS AND DISPUTES**

3.2.4, 6.1.1, 6.3, 7.3.9, 9.3.3, 9.10.4, 10.3.3, **15**, 15.4  
Claims and Timely Assertion of Claims  
15.4.1

## **Claims for Additional Cost**

3.2.4, 3.3.1, 3.7.4, 7.3.9, 9.5.2, 10.2.5, 10.3.2, **15.1.5**

## **Claims for Additional Time**

3.2.4, 3.3.1, 3.7.4, 6.1.1, 8.3.2, 9.5.2, 10.3.2, **15.1.6**

**Concealed or Unknown Conditions**, Claims for  
**3.7.4**

Claims for Damages

3.2.4, 3.18, 8.3.3, 9.5.1, 9.6.7, 10.2.5, 10.3.3, 11.3, 11.3.2, 14.2.4, 15.1.7

Claims Subject to Arbitration  
15.4.1

## **Cleaning Up**

**3.15**, 6.3

Commencement of the Work, Conditions Relating to  
2.2.1, 3.2.2, 3.4.1, 3.7.1, 3.10.1, 3.12.6, 5.2.1, 5.2.3, 6.2.2, 8.1.2, 8.2.2, 8.3.1, 11.1, 11.2, **15.1.5**

**Commencement of the Work**, Definition of  
**8.1.2**

## **Communications**

3.9.1, **4.2.4**

Completion, Conditions Relating to

3.4.1, 3.11, 3.15, 4.2.2, 4.2.9, 8.2, 9.4.2, 9.8, 9.9.1, 9.10, 12.2, 14.1.2, 15.1.2

## **COMPLETION, PAYMENTS AND 9**

Completion, Substantial

3.10.1, 4.2.9, 8.1.1, 8.1.3, 8.2.3, 9.4.2, 9.8, 9.9.1, 9.10.3, 12.2, 15.1.2

Compliance with Laws

2.3.2, 3.2.3, 3.6, 3.7, 3.12.10, 3.13, 9.6.4, 10.2.2, 13.1, 13.3, 13.4.1, 13.4.2, 13.5, 14.1.1, 14.2.1.3, 15.2.8, 15.4.2, 15.4.3

Concealed or Unknown Conditions  
3.7.4, 4.2.8, 8.3.1, 10.3

## **Conditions of the Contract**

1.1.1, 6.1.1, 6.1.4

Consent, Written

3.4.2, 3.14.2, 4.1.2, 9.8.5, 9.9.1, 9.10.2, 9.10.3, 13.2, 15.4.4.2

**Consolidation or Joinder**  
**15.4.4**

## **CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS**

1.1.4, **6**

**Construction Change Directive**, Definition of  
**7.3.1**

## **Construction Change Directives**

1.1.1, 3.4.2, 3.11, 3.12.8, 4.2.8, 7.1.1, 7.1.2, 7.1.3, **7.3**, 9.3.1.1

Construction Schedules, Contractor  
3.10, 3.11, 3.12.1, 3.12.2, 6.1.3, 15.1.6.2

**Contingent Assignment of Subcontracts**  
**5.4**, 14.2.2.2

**Continuing Contract Performance**  
**15.1.4**

**Contract**, Definition of  
**1.1.2**

## **CONTRACT, TERMINATION OR SUSPENSION OF THE**

5.4.1.1, 5.4.2, 11.5, **14**

Contract Administration

3.1.3, 4, 9.4, 9.5

Contract Award and Execution, Conditions Relating to  
3.7.1, 3.10, 5.2, 6.1

Contract Documents, Copies Furnished and Use of  
1.5.2, 2.3.6, 5.3

**Contract Documents**, Definition of  
**1.1.1**

## **Contract Sum**

2.2.2, 2.2.4, 3.7.4, 3.7.5, 3.8, 3.10.2, 5.2.3, 7.3, 7.4, **9.1**, 9.2, 9.4.2, 9.5.1.4, 9.6.7, 9.7, 10.3.2, 11.5, 12.1.2, 12.3, 14.2.4, 14.3.2, 15.1.4.2, **15.1.5**, **15.2.5**

**Contract Sum**, Definition of  
**9.1**

Contract Time

1.1.4, 2.2.1, 2.2.2, 3.7.4, 3.7.5, 3.10.2, 5.2.3, 6.1.5, 7.2.1.3, 7.3.1, 7.3.5, 7.3.6, 7, 7, 7.3.10, 7.4, 8.1.1, 8.2.1, 8.2.3, 8.3.1, 9.5.1, 9.7, 10.3.2, 12.1.1, 12.1.2, 14.3.2, 15.1.4.2, 15.1.6.1, 15.2.5

**Contract Time**, Definition of  
8.1.1

## **CONTRACTOR 3**

Contractor, Definition of

**3.1**, **6.1.2**

## **Contractor's Construction and Submittal Schedules**

**3.10**, 3.12.1, 3.12.2, 4.2.3, 6.1.3, 15.1.6.2

Contractor's Employees

2.2.4, 3.3.2, 3.4.3, 3.8.1, 3.9, 3.18.2, 4.2.3, 4.2.6, 10.2, 10.3, 11.3, 14.1, 14.2.1.1

## **Contractor's Liability Insurance**

### **11.1**

Contractor's Relationship with Separate Contractors and Owner's Forces

3.12.5, 3.14.2, 4.2.4, 6, 11.3, 12.2.4

Contractor's Relationship with Subcontractors

1.2.2, 2.2.4, 3.3.2, 3.18.1, 3.18.2, 4.2.4, 5, 9.6.2, 9.6.7, 9.10.2, 11.2, 11.3, 11.4

Contractor's Relationship with the Architect

1.1.2, 1.5, 2.3.3, 3.1.3, 3.2.2, 3.2.3, 3.2.4, 3.3.1, 3.4.2, 3.5.1, 3.7.4, 3.10, 3.11, 3.12, 3.16, 3.18, 4.2, 5.2, 6.2.2, 7, 8.3.1, 9.2, 9.3, 9.4, 9.5, 9.7, 9.8, 9.9, 10.2.6, 10.3, 11.3, 12, 13.4, 15.1.3, 15.2.1

Contractor's Representations

3.2.1, 3.2.2, 3.5, 3.12.6, 6.2.2, 8.2.1, 9.3.3, 9.8.2

Contractor's Responsibility for Those Performing the Work

3.3.2, 3.18, 5.3, 6.1.3, 6.2, 9.5.1, 10.2.8

Contractor's Review of Contract Documents  
3.2

Contractor's Right to Stop the Work

2.2.2, 9.7

Contractor's Right to Terminate the Contract

14.1

Contractor's Submittals

3.10, 3.11, 3.12, 4.2.7, 5.2.1, 5.2.3, 9.2, 9.3, 9.8.2, 9.8.3, 9.9.1, 9.10.2, 9.10.3

Contractor's Superintendent

3.9, 10.2.6

Contractor's Supervision and Construction Procedures

1.2.2, 3.3, 3.4, 3.12.10, 4.2.2, 4.2.7, 6.1.3, 6.2.4, 7.1.3, 7.3.4, 7.3.6, 8.2, 10, 12, 14, 15.1.4

Coordination and Correlation

1.2, 3.2.1, 3.3.1, 3.10, 3.12.6, 6.1.3, 6.2.1

Copies Furnished of Drawings and Specifications

1.5, 2.3.6, 3.11

Copyrights

1.5, **3.17**

Correction of Work

2.5, 3.7.3, 9.4.2, 9.8.2, 9.8.3, 9.9.1, 12.1.2, **12.2**, 12.3, 15.1.3.1, 15.1.3.2, 15.2.1

**Correlation and Intent of the Contract Documents**

### **1.2**

**Cost**, Definition of

### **7.3.4**

Costs

2.5, 3.2.4, 3.7.3, 3.8.2, 3.15.2, 5.4.2, 6.1.1, 6.2.3, 7.3.3.3, 7.3.4, 7.3.8, 7.3.9, 9.10.2, 10.3.2, 10.3.6, 11.2, 12.1.2, 12.2.1, 12.2.4, 13.4, 14

**Cutting and Patching**

**3.14**, 6.2.5

Damage to Construction of Owner or Separate Contractors

3.14.2, 6.2.4, 10.2.1.2, 10.2.5, 10.4, 12.2.4

Damage to the Work

3.14.2, 9.9.1, 10.2.1.2, 10.2.5, 10.4, 12.2.4

Damages, Claims for

3.2.4, 3.18, 6.1.1, 8.3.3, 9.5.1, 9.6.7, 10.3.3, 11.3.2, 11.3, 14.2.4, 15.1.7

Damages for Delay

6.2.3, 8.3.3, 9.5.1.6, 9.7, 10.3.2, 14.3.2

**Date of Commencement of the Work**, Definition of  
**8.1.2**

**Date of Substantial Completion**, Definition of  
**8.1.3**

**Day**, Definition of  
**8.1.4**

Decisions of the Architect

3.7.4, 4.2.6, 4.2.7, 4.2.11, 4.2.12, 4.2.13, 6.3, 7.3.4, 7.3.9, 8.1.3, 8.3.1, 9.2, 9.4, 9.5.1, 9.8.4, 9.9.1, 13.4.2, 14.2.2, 14.2.4, 15.1, 15.2

**Decisions to Withhold Certification**

9.4.1, **9.5**, 9.7, 14.1.1.3

Defective or Nonconforming Work, Acceptance, Rejection and Correction of

2.5, 3.5, 4.2.6, 6.2.3, 9.5.1, 9.5.3, 9.6.6, 9.8.2, 9.9.3, 9.10.4, 12.2.1

Definitions

1.1, 2.1.1, 3.1.1, 3.5, 3.12.1, 3.12.2, 3.12.3, 4.1.1, 5.1, 6.1.2, 7.2.1, 7.2.2, 8.1, 9.1, 9.8.1, 15.1.1

**Delays and Extensions of Time**

**3.2**, **3.7.4**, 3.2.3, 7.2.1, 7.3.1, **7.4**, **8.3**, 9.5.1, **9.7**, 10.3.2, **10.4**, 14.3.2, **15.1.6**, 15.2.5

**Digital Data Use and Transmission**

**1.7**

Disputes

6.3, 7.3.9, 15.1, 15.2

**Documents and Samples at the Site**

### **3.11**

**Drawings**, Definition of

### **1.1.5**

Drawings and Specifications, Use and Ownership of  
3.11

Effective Date of Insurance

8.2.2

**Emergencies**

**10.4**, 14.1.1.2, **15.1.5**

Employees, Contractor's

3.3.2, 3.4.3, 3.8.1, 3.9, 3.18.2, 4.2.3, 4.2.6, 10.2, 10.3.3, 11.3, 14.1, 14.2.1.1

Equipment, Labor, or Materials

1.1.3, 1.1.6, 3.4, 3.5, 3.8.2, 3.8.3, 3.12, 3.13, 3.15.1, 4.2.6, 4.2.7, 5.2.1, 6.2.1, 7.3.4, 9.3.2, 9.3.3, 9.5.1.3, 9.10.2, 10.2.1, 10.2.4, 14.2.1.1, 14.2.1.2

Execution and Progress of the Work

1.1.3, 1.2.1, 1.2.2, 2.3.4, 2.3.6, 3.1, 3.3.1, 3.4.1, 3.7.1, 3.10.1, 3.12, 3.14, 4.2, 6.2.2, 7.1.3, 7.3.6, 8.2, 9.5.1, 9.9.1, 10.2, 10.3, 12.1, 12.2, 14.2, 14.3.1, 15.1.4

Extensions of Time

3.2.4, 3.7.4, 5.2.3, 7.2.1, 7.3, 7.4, 9.5.1, 9.7, 10.3.2, 10.4, 14.3, 15.1.6, **15.2.5**

**Failure of Payment**

9.5.1.3, **9.7**, 9.10.2, 13.5, 14.1.1.3, 14.2.1.2

Faulty Work  
(See Defective or Nonconforming Work)  
**Final Completion and Final Payment**  
4.2.1, 4.2.9, 9.8.2, **9.10**, 12.3, 14.2.4, 14.4.3  
Financial Arrangements, Owner's  
2.2.1, 13.2.2, 14.1.1.4  
**GENERAL PROVISIONS**  
**1**  
**Governing Law**  
**13.1**  
Guarantees (See Warranty)  
**Hazardous Materials and Substances**  
10.2.4, **10.3**  
Identification of Subcontractors and Suppliers  
5.2.1  
**Indemnification**  
3.17, **3.18**, 9.6.8, 9.10.2, 10.3.3, 11.3  
**Information and Services Required of the Owner**  
2.1.2, **2.2**, 2.3, 3.2.2, 3.12.10.1, 6.1.3, 6.1.4, 6.2.5,  
9.6.1, 9.9.2, 9.10.3, 10.3.3, 11.2, 13.4.1, 13.4.2,  
14.1.1.4, 14.1.4, 15.1.4  
**Initial Decision**  
**15.2**  
**Initial Decision Maker, Definition of**  
1.1.8  
Initial Decision Maker, Decisions  
14.2.4, 15.1.4.2, 15.2.1, 15.2.2, 15.2.3, 15.2.4, 15.2.5  
Initial Decision Maker, Extent of Authority  
14.2.4, 15.1.4.2, 15.2.1, 15.2.2, 15.2.3, 15.2.4, 15.2.5  
**Injury or Damage to Person or Property**  
**10.2.8**, 10.4  
Inspections  
3.1.3, 3.3.3, 3.7.1, 4.2.2, 4.2.6, 4.2.9, 9.4.2, 9.8.3,  
9.9.2, 9.10.1, 12.2.1, 13.4  
Instructions to Bidders  
1.1.1  
Instructions to the Contractor  
3.2.4, 3.3.1, 3.8.1, 5.2.1, 7, 8.2.2, 12, 13.4.2  
**Instruments of Service, Definition of**  
**1.1.7**  
Insurance  
6.1.1, 7.3.4, 8.2.2, 9.3.2, 9.8.4, 9.9.1, 9.10.2, 10.2.5, **11**  
Insurance, Notice of Cancellation or Expiration  
11.1.4, 11.2.3  
**Insurance, Contractor's Liability**  
**11.1**  
Insurance, Effective Date of  
8.2.2, 14.4.2  
**Insurance, Owner's Liability**  
**11.2**  
**Insurance, Property**  
**10.2.5**, 11.2, 11.4, 11.5  
Insurance, Stored Materials  
9.3.2  
**INSURANCE AND BONDS**  
**11**  
Insurance Companies, Consent to Partial Occupancy  
9.9.1

Insured loss, Adjustment and Settlement of  
11.5  
Intent of the Contract Documents  
1.2.1, 4.2.7, 4.2.12, 4.2.13  
**Interest**  
**13.5**  
**Interpretation**  
1.1.8, 1.2.3, **1.4**, 4.1.1, 5.1, 6.1.2, 15.1.1  
Interpretations, Written  
4.2.11, 4.2.12  
Judgment on Final Award  
15.4.2  
**Labor and Materials, Equipment**  
1.1.3, 1.1.6, **3.4**, 3.5, 3.8.2, 3.8.3, 3.12, 3.13, 3.15.1,  
5.2.1, 6.2.1, 7.3.4, 9.3.2, 9.3.3, 9.5.1.3, 9.10.2, 10.2.1,  
10.2.4, 14.2.1.1, 14.2.1.2  
Labor Disputes  
8.3.1  
Laws and Regulations  
1.5, 2.3.2, 3.2.3, 3.2.4, 3.5, 3.7, 3.12.10, 3.13, 9.6.4,  
9.9.1, 10.2.2, 13.1, 13.3.1, 13.4.2, 13.5, 14, 15.2.8,  
15.4  
Liens  
2.1.2, 9.2.1, 9.2.2, 9.6.8, 9.10.2, 9.10.4, 15.2.8  
Limitations, Statutes of  
12.2.5, 15.1.2, 15.4.1.1  
Limitations of Liability  
3.2.2, 3.5, 3.12.10, 3.12.10.1, 3.17, 3.18.1, 4.2.6,  
4.2.7, 6.2.2, 9.4.2, 9.6.4, 9.6.7, 9.6.8, 10.2.5, 10.3.3,  
11.3, 12.2.5, 13.3.1  
Limitations of Time  
2.1.2, 2.2, 2.5, 3.2.2, 3.10, 3.11, 3.12.5, 3.15.1, 4.2.7,  
5.2, 5.3, 5.4.1, 6.2.4, 7.3, 7.4, 8.2, 9.2, 9.3.1, 9.3.3,  
9.4.1, 9.5, 9.6, 9.7, 9.8, 9.9, 9.10, 12.2, 13.4, 14, 15,  
15.1.2, 15.1.3, 15.1.5  
**Materials, Hazardous**  
**10.2.4**, **10.3**  
Materials, Labor, Equipment and  
1.1.3, 1.1.6, 3.4.1, 3.5, 3.8.2, 3.8.3, 3.12, 3.13, 3.15.1,  
5.2.1, 6.2.1, 7.3.4, 9.3.2, 9.3.3, 9.5.1.3, 9.10.2,  
10.2.1.2, 10.2.4, 14.2.1.1, 14.2.1.2  
Means, Methods, Techniques, Sequences and  
Procedures of Construction  
3.3.1, 3.12.10, 4.2.2, 4.2.7, 9.4.2  
Mechanic's Lien  
2.1.2, 9.3.1, 9.3.3, 9.6.8, 9.10.2, 9.10.4, 15.2.8  
**Mediation**  
8.3.1, 15.1.3.2, 15.2.1, 15.2.5, 15.2.6, **15.3**, 15.4.1,  
15.4.1.1  
**Minor Changes in the Work**  
1.1.1, 3.4.2, 3.12.8, 4.2.8, 7.1, **7.4**  
**MISCELLANEOUS PROVISIONS**  
**13**  
**Modifications, Definition of**  
**1.1.1**  
Modifications to the Contract  
1.1.1, 1.1.2, 2.5, 3.11, 4.1.2, 4.2.1, 5.2.3, 7, 8.3.1, 9.7,  
10.3.2

## **Mutual Responsibility**

### **6.2**

#### **Nonconforming Work, Acceptance of**

9.6.6, 9.9.3, **12.3**

Nonconforming Work, Rejection and Correction of  
2.4, 2.5, 3.5, 4.2.6, 6.2.4, 9.5.1, 9.8.2, 9.9.3, 9.10.4,  
12.2

#### **Notice**

**1.6**, 1.6.1, 1.6.2, 2.1.2, 2.2.2., 2.2.3, 2.2.4, 2.5, 3.2.4,  
3.3.1, 3.7.4, 3.7.5, 3.9.2, 3.12.9, 3.12.10, 5.2.1, 7.4,  
8.2.2, 9.6.8, 9.7, 9.10.1, 10.2.8, 10.3.2, 11.5, 12.2.2.1,  
13.4.1, 13.4.2, 14.1, 14.2.2, 14.4.2, 15.1.3, 15.1.5,  
15.1.6, 15.4.1

Notice of Cancellation or Expiration of Insurance  
11.1.4, 11.2.3

#### **Notice of Claims**

1.6.2, 2.1.2, 3.7.4, 9.6.8, 10.2.8, **15.1.3**, 15.1.5, 15.1.6,  
15.2.8, 15.3.2, 15.4.1

Notice of Testing and Inspections  
13.4.1, 13.4.2

Observations, Contractor's  
3.2, 3.7.4

#### **Occupancy**

2.3.1, 9.6.6, 9.8

#### **Orders, Written**

1.1.1, 2.4, 3.9.2, 7, 8.2.2, 11.5, 12.1, 12.2.2.1, 13.4.2,  
14.3.1

## **OWNER**

### **2**

#### **Owner, Definition of**

##### **2.1.1**

#### **Owner, Evidence of Financial Arrangements**

**2.2**, 13.2.2, 14.1.1.4

#### **Owner, Information and Services Required of the**

2.1.2, **2.2**, 2.3, 3.2.2, 3.12.10, 6.1.3, 6.1.4, 6.2.5, 9.3.2,  
9.6.1, 9.6.4, 9.9.2, 9.10.3, 10.3.3, 11.2, 13.4.1, 13.4.2,  
14.1.1.4, 14.1.4, 15.1.4

#### **Owner's Authority**

1.5, 2.1.1, 2.3.32.4, 2.5, 3.4.2, 3.8.1, 3.12.10, 3.14.2,  
4.1.2, 4.2.4, 4.2.9, 5.2.1, 5.2.4, 5.4.1, 6.1, 6.3, 7.2.1,  
7.3.1, 8.2.2, 8.3.1, 9.3.2, 9.5.1, 9.6.4, 9.9.1, 9.10.2,  
10.3.2, 11.4, 11.5, 12.2.2, 12.3, 13.2.2, 14.3, 14.4,  
15.2.7

#### **Owner's Insurance**

##### **11.2**

Owner's Relationship with Subcontractors  
1.1.2, 5.2, 5.3, 5.4, 9.6.4, 9.10.2, 14.2.2

**Owner's Right to Carry Out the Work**  
**2.5**, 14.2.2

#### **Owner's Right to Clean Up**

##### **6.3**

#### **Owner's Right to Perform Construction and to Award Separate Contracts**

##### **6.1**

#### **Owner's Right to Stop the Work**

##### **2.4**

Owner's Right to Suspend the Work  
14.3

#### **Owner's Right to Terminate the Contract**

14.2, 14.4

#### **Ownership and Use of Drawings, Specifications and Other Instruments of Service**

1.1.1, 1.1.6, 1.1.7, **1.5**, 2.3.6, 3.2.2, 3.11, 3.17, 4.2.12,  
5.3

#### **Partial Occupancy or Use**

9.6.6, **9.9**

#### **Patching, Cutting and**

**3.14**, 6.2.5

#### **Patents**

3.17

#### **Payment, Applications for**

4.2.5, 7.3.9, 9.2, **9.3**, 9.4, 9.5, 9.6.3, 9.7, 9.8.5, 9.10.1,  
14.2.3, 14.2.4, 14.4.3

#### **Payment, Certificates for**

4.2.5, 4.2.9, 9.3.3, **9.4**, 9.5, 9.6.1, 9.6.6, 9.7, 9.10.1,  
9.10.3, 14.1.1.3, 14.2.4

#### **Payment, Failure of**

9.5.1.3, **9.7**, 9.10.2, **11.5**, 14.1.1.3, 14.2.1.2

#### **Payment, Final**

4.2.1, 4.2.9, **9.10**, 12.3, 14.2.4, 14.4.3

#### **Payment Bond, Performance Bond and**

7.3.4.4, 9.6.7, 9.10.3, **11.1.2**

#### **Payments, Progress**

9.3, **9.6**, 9.8.5, 9.10.3, 14.2.3, 15.1.4

## **PAYMENTS AND COMPLETION**

### **2**

#### **Payments to Subcontractors**

5.4.2, 9.5.1.3, 9.6.2, 9.6.3, 9.6.4, 9.6.7, 14.2.1.2  
**PCB**

10.3.1

#### **Performance Bond and Payment Bond**

7.3.4.4, 9.6.7, 9.10.3, **11.1.2**

#### **Permits, Fees, Notices and Compliance with Laws**

2.3.1, **3.7**, 3.13, 7.3.4.4, 10.2.2

## **PERSONS AND PROPERTY, PROTECTION OF**

### **10**

#### **Polychlorinated Biphenyl**

10.3.1

#### **Product Data, Definition of**

**3.12.2**

#### **Product Data and Samples, Shop Drawings**

3.11, **3.12**, 4.2.7

#### **Progress and Completion**

4.2.2, **8.2**, 9.8, 9.9.1, 14.1.4, 15.1.4

#### **Progress Payments**

9.3, **9.6**, 9.8.5, 9.10.3, 14.2.3, 15.1.4

#### **Project, Definition of**

**1.1.4**

#### **Project Representatives**

4.2.10

#### **Property Insurance**

10.2.5, **11.2**

#### **Proposal Requirements**

1.1.1

## **PROTECTION OF PERSONS AND PROPERTY**

### **10**



Regulations and Laws  
1.5, 2.3.2, 3.2.3, 3.6, 3.7, 3.12.10, 3.13, 9.6.4, 9.9.1, 10.2.2, 13.1, 13.3, 13.4.1, 13.4.2, 13.5, 14, 15.2.8, 15.4  
Rejection of Work  
4.2.6, 12.2.1  
Releases and Waivers of Liens  
9.3.1, 9.10.2  
Representations  
3.2.1, 3.5, 3.12.6, 8.2.1, 9.3.3, 9.4.2, 9.5.1, 9.10.1  
Representatives  
2.1.1, 3.1.1, 3.9, 4.1.1, 4.2.10, 13.2.1  
Responsibility for Those Performing the Work  
3.3.2, 3.18, 4.2.2, 4.2.3, 5.3, 6.1.3, 6.2, 6.3, 9.5.1, 10  
Retainage  
9.3.1, 9.6.2, 9.8.5, 9.9.1, 9.10.2, 9.10.3  
**Review of Contract Documents and Field Conditions by Contractor**  
**3.2**, 3.12.7, 6.1.3  
Review of Contractor's Submittals by Owner and Architect  
3.10.1, 3.10.2, 3.11, 3.12, 4.2, 5.2, 6.1.3, 9.2, 9.8.2  
Review of Shop Drawings, Product Data and Samples by Contractor  
3.12  
**Rights and Remedies**  
1.1.2, 2.4, 2.5, 3.5, 3.7.4, 3.15.2, 4.2.6, 5.3, 5.4, 6.1, 6.3, 7.3.1, 8.3, 9.5.1, 9.7, 10.2.5, 10.3, 12.2.1, 12.2.2, 12.2.4, **13.3**, 14, 15.4  
**Royalties, Patents and Copyrights**  
**3.17**  
Rules and Notices for Arbitration  
15.4.1  
**Safety of Persons and Property**  
**10.2**, 10.4  
**Safety Precautions and Programs**  
3.3.1, 4.2.2, 4.2.7, 5.3, **10.1**, 10.2, 10.4  
**Samples, Definition of**  
**3.12.3**  
**Samples, Shop Drawings, Product Data and**  
3.11, **3.12**, 4.2.7  
**Samples at the Site, Documents and**  
**3.11**  
**Schedule of Values**  
**9.2**, 9.3.1  
Schedules, Construction  
3.10, 3.12.1, 3.12.2, 6.1.3, 15.1.6.2  
Separate Contracts and Contractors  
1.1.4, 3.12.5, 3.14.2, 4.2.4, 4.2.7, 6, 8.3.1, 12.1.2  
**Separate Contractors, Definition of**  
**6.1.1**  
**Shop Drawings, Definition of**  
**3.12.1**  
**Shop Drawings, Product Data and Samples**  
3.11, **3.12**, 4.2.7  
**Site, Use of**  
**3.13**, 6.1.1, 6.2.1  
Site Inspections  
3.2.2, 3.3.3, 3.7.1, 3.7.4, 4.2, 9.9.2, 9.4.2, 9.10.1, 13.4

Site Visits, Architect's  
3.7.4, 4.2.2, 4.2.9, 9.4.2, 9.5.1, 9.9.2, 9.10.1, 13.4  
Special Inspections and Testing  
4.2.6, 12.2.1, 13.4  
**Specifications, Definition of**  
**1.1.6**  
**Specifications**  
1.1.1, **1.1.6**, 1.2.2, 1.5, 3.12.10, 3.17, 4.2.14  
Statute of Limitations  
15.1.2, 15.4.1.1  
Stopping the Work  
2.2.2, 2.4, 9.7, 10.3, 14.1  
Stored Materials  
6.2.1, 9.3.2, 10.2.1.2, 10.2.4  
**Subcontractor, Definition of**  
**5.1.1**  
**SUBCONTRACTORS**  
**5**  
Subcontractors, Work by  
1.2.2, 3.3.2, 3.12.1, 3.18, 4.2.3, 5.2.3, 5.3, 5.4, 9.3.1.2, 9.6.7  
**Subcontractual Relations**  
**5.3**, 5.4, 9.3.1.2, 1.6, 9.10, 10.2.1, 14.1, 14.2.1  
Submittals  
3.10, 3.11, 3.12, 4.2.7, 5.2.1, 5.2.3, 7.3.4, 9.2, 9.3, 9.8, 9.9.1, 9.10.2, 9.10.3  
Submittal Schedule  
3.10.2, 3.12.5, 4.2.7  
**Subrogation, Waivers of**  
6.1.1, **11.3**  
**Substances, Hazardous**  
**10.3**  
**Substantial Completion**  
4.2.9, 8.1.1, 8.1.3, 8.2.3, 9.4.2, **9.8**, 9.9.1, 9.10.3, 12.2, 15.1.2  
**Substantial Completion, Definition of**  
**9.8.1**  
Substitution of Subcontractors  
5.2.3, 5.2.4  
Substitution of Architect  
2.3.3  
Substitutions of Materials  
3.4.2, 3.5, 7.3.8  
**Sub-subcontractor, Definition of**  
**5.1.2**  
Subsurface Conditions  
3.7.4  
**Successors and Assigns**  
**13.2**  
**Superintendent**  
**3.9**, 10.2.6  
**Supervision and Construction Procedures**  
1.2.2, **3.3**, 3.4, 3.12.10, 4.2.2, 4.2.7, 6.1.3, 6.2.4, 7.1.3, 7.3.4, 8.2, 8.3.1, 9.4.2, 10, 12, 14, 15.1.4  
Suppliers  
1.5, 3.12.1, 4.2.4, 4.2.6, 5.2.1, 9.3, 9.4.2, 9.5.4, 9.6, 9.10.5, 14.2.1

Surety  
5.4.1.2, 9.6.8, 9.8.5, 9.10.2, 9.10.3, 11.1.2, 14.2.2,  
15.2.7

Surety, Consent of  
9.8.5, 9.10.2, 9.10.3

Surveys  
1.1.7, 2.3.4

#### **Suspension by the Owner for Convenience 14.3**

Suspension of the Work  
3.7.5, 5.4.2, 14.3

Suspension or Termination of the Contract  
5.4.1.1, 14

**Taxes**  
3.6, 3.8.2.1, 7.3.4.4

**Termination by the Contractor  
14.1, 15.1.7**

**Termination by the Owner for Cause  
5.4.1.1, 14.2, 15.1.7**

**Termination by the Owner for Convenience  
14.4**

Termination of the Architect  
2.3.3

Termination of the Contractor Employment  
14.2.2

#### **TERMINATION OR SUSPENSION OF THE CONTRACT 14**

##### **Tests and Inspections**

3.1.3, 3.3.3, 3.7.1, 4.2.2, 4.2.6, 4.2.9, 9.4.2, 9.8.3,  
9.9.2, 9.10.1, 10.3.2, 12.2.1, **13.4**

##### **TIME**

##### **8**

##### **Time, Delays and Extensions of**

3.2.4, 3.7.4, 5.2.3, 7.2.1, 7.3.1, 7.4, **8.5**, 9.5.1, 9.7,  
10.3.2, 10.4, 14.3.2, 15.1.6, 15.2.5

##### **Time Limits**

2.1.2, 2.2, 2.5, 3.2.2, 3.10, 3.11, 3.12.5, 3.15.1, 4.2,  
5.2, 5.3, 5.4, 6.2.4, 7.3, 7.4, **8.2**, 9.2, 9.3.1, 9.3.3, 9.4.1,  
9.5, 9.6, 9.7, 9.8, 9.9, 9.10, 12.2, 13.4, 14, 15.1.2,  
15.1.3, 15.4

##### **Time Limits on Claims**

3.7.4, 10.2.8, 15.1.2, 15.1.3

Title to Work  
9.3.2, 9.3.3

#### **UNCOVERING AND CORRECTION OF WORK 12**

##### **Uncovering of Work**

##### **12.1**

Unforeseen Conditions, Concealed or Unknown

3.7.4, 8.3.1, 10.3

Unit Prices

7.3.3.2, 9.1.2

Use of Documents

1.1.1, 1.5, 2.3.6, 3.12.6, 5.3

##### **Use of Site**

**3.13**, 6.1.1, 6.2.1

##### **Values, Schedule of**

**9.2**, 9.3.1

Waiver of Claims by the Architect

13.3.2

Waiver of Claims by the Contractor

9.10.5, 13.3.2, **15.1.7**

Waiver of Claims by the Owner

9.9.3, 9.10.3, 9.10.4, 12.2.2.1, 13.3.2, 14.2.4, **15.1.7**

Waiver of Consequential Damages

14.2.4, **15.1.7**

Waiver of Liens

9.3, 9.10.2, 9.10.4

##### **Waivers of Subrogation**

6.1.1, **11.3**

##### **warranty**

**3.5**, 4.2.9, 9.3.3, 9.8.4, 9.9.1, 9.10.2, 9.10.4, 12.2.2,  
15.1.2

Weather Delays

8.3, 15.1.6.2

##### **Work, Definition of**

##### **1.1.3**

Written Consent

1.5.2, 3.4.2, 3.7.4, 3.12.8, 3.14.2, 4.1.2, 9.3.2, 9.10.3,  
13.2, 13.3.2, 15.4.4.2

Written Interpretations

4.2.11, 4.2.12

Written Orders

1.1.1, 2.4, 3.9, 7, 8.2.2, 12.1, 12.2, 13.4.2, 14.3.1

## **ARTICLE 1 GENERAL PROVISIONS**

### **§ 1.1 Basic Definitions**

#### **§ 1.1.1 The Contract Documents**

The Contract Documents are enumerated in the Agreement between the Owner and Contractor (hereinafter the Agreement) and consist of the Agreement, Conditions of the Contract (General, Supplementary and other Conditions), Drawings, Specifications, Addenda issued prior to execution of the Contract, other documents listed in the Agreement, and Modifications issued after execution of the Contract. A Modification is (1) a written amendment to the Contract signed by both parties, (2) a Change Order, (3) a Construction Change Directive, or (4) a written order for a minor change in the Work issued by the Architect. Unless specifically enumerated in the Agreement, the Contract Documents do not include the advertisement or invitation to bid, Instructions to Bidders, sample forms, other information furnished by the Owner in anticipation of receiving bids or proposals, the Contractor's bid or proposal, or portions of Addenda relating to bidding or proposal requirements.

#### **§ 1.1.2 The Contract**

The Contract Documents form the Contract for Construction. The Contract represents the entire and integrated agreement between the parties hereto and supersedes prior negotiations, representations, or agreements, either written or oral. The Contract may be amended or modified only by a Modification. The Contract Documents shall not be construed to create a contractual relationship of any kind (1) between the Contractor and the Architect or the Architect's consultants, (2) between the Owner and a Subcontractor or a Sub-subcontractor, (3) between the Owner and the Architect or the Architect's consultants, or (4) between any persons or entities other than the Owner and the Contractor. The Architect shall, however, be entitled to performance and enforcement of obligations under the Contract intended to facilitate performance of the Architect's duties.

#### **§ 1.1.3 The Work**

The term "Work" means the construction and services required by the Contract Documents, whether completed or partially completed, and includes all other labor, materials, equipment, and services provided or to be provided by the Contractor to fulfill the Contractor's obligations. The Work may constitute the whole or a part of the Project.

#### **§ 1.1.4 The Project**

The Project is the total construction of which the Work performed under the Contract Documents may be the whole or a part and which may include construction by the Owner and by Separate Contractors.

#### **§ 1.1.5 The Drawings**

The Drawings are the graphic and pictorial portions of the Contract Documents showing the design, location and dimensions of the Work, generally including plans, elevations, sections, details, schedules, and diagrams.

#### **§ 1.1.6 The Specifications**

The Specifications are that portion of the Contract Documents consisting of the written requirements for materials, equipment, systems, standards and workmanship for the Work, and performance of related services.

#### **§ 1.1.7 Instruments of Service**

Instruments of Service are representations, in any medium of expression now known or later developed, of the tangible and intangible creative work performed by the Architect and the Architect's consultants under their respective professional services agreements. Instruments of Service may include, without limitation, studies, surveys, models, sketches, drawings, specifications, and other similar materials.

#### **§ 1.1.8 Initial Decision Maker**

The Initial Decision Maker is the person identified in the Agreement to render initial decisions on Claims in accordance with Section 15.2. The Initial Decision Maker shall not show partiality to the Owner or Contractor and shall not be liable for results of interpretations or decisions rendered in good faith.

### **§ 1.2 Correlation and Intent of the Contract Documents**

**§ 1.2.1** The intent of the Contract Documents is to include all items necessary for the proper execution and completion of the Work by the Contractor. The Contract Documents are complementary, and what is required by one shall be as binding as if required by all; performance by the Contractor shall be required only to the extent consistent with the Contract Documents and reasonably inferable from them as being necessary to produce the indicated results.

**§ 1.2.1.1** The invalidity of any provision of the Contract Documents shall not invalidate the Contract or its remaining provisions. If it is determined that any provision of the Contract Documents violates any law, or is otherwise invalid or unenforceable, then that provision shall be revised to the extent necessary to make that provision legal and enforceable. In such case the Contract Documents shall be construed, to the fullest extent permitted by law, to give effect to the parties' intentions and purposes in executing the Contract.

**§ 1.2.2** Organization of the Specifications into divisions, sections and articles, and arrangement of Drawings shall not control the Contractor in dividing the Work among Subcontractors or in establishing the extent of Work to be performed by any trade.

**§ 1.2.3** Unless otherwise stated in the Contract Documents, words that have well-known technical or construction industry meanings are used in the Contract Documents in accordance with such recognized meanings.

### **§ 1.3 Capitalization**

Terms capitalized in these General Conditions include those that are (1) specifically defined, (2) the titles of numbered articles, or (3) the titles of other documents published by the American Institute of Architects.

### **§ 1.4 Interpretation**

In the interest of brevity the Contract Documents frequently omit modifying words such as "all" and "any" and articles such as "the" and "an," but the fact that a modifier or an article is absent from one statement and appears in another is not intended to affect the interpretation of either statement.

### **§ 1.5 Ownership and Use of Drawings, Specifications, and Other Instruments of Service**

**§ 1.5.1** The Architect and the Architect's consultants shall be deemed the authors and owners of their respective Instruments of Service, including the Drawings and Specifications, and retain all common law, statutory, and other reserved rights in their Instruments of Service, including copyright. The Contractor, Subcontractors, Sub-subcontractors, and suppliers shall not own or claim a copyright in the Instruments of Service. Submittal or distribution to meet official regulatory requirements or for other purposes in connection with the Project is not to be construed as publication in derogation of the Architect's or Architect's consultants' reserved rights.

**§ 1.5.2** The Contractor, Subcontractors, Sub-subcontractors, and suppliers are authorized to use and reproduce the Instruments of Service provided to them, subject to any protocols established pursuant to Sections 1.7 and 1.8, solely and exclusively for execution of the Work. All copies made under this authorization shall bear the copyright notice, if any, shown on the Instruments of Service. The Contractor, Subcontractors, Sub-subcontractors, and suppliers may not use the Instruments of Service on other projects or for additions to the Project outside the scope of the Work without the specific written consent of the Owner, Architect, and the Architect's consultants.

### **§ 1.6 Notice**

**§ 1.6.1** Except as otherwise provided in Section 1.6.2, where the Contract Documents require one party to notify or give notice to the other party, such notice shall be provided in writing to the designated representative of the party to whom the notice is addressed and shall be deemed to have been duly served if delivered in person, by mail, by courier, or by electronic transmission if a method for electronic transmission is set forth in the Agreement.

**§ 1.6.2** Notice of Claims as provided in Section 15.1.3 shall be provided in writing and shall be deemed to have been duly served only if delivered to the designated representative of the party to whom the notice is addressed by certified or registered mail, or by courier providing proof of delivery.

### **§ 1.7 Digital Data Use and Transmission**

The parties shall agree upon protocols governing the transmission and use of Instruments of Service or any other information or documentation in digital form. The parties will use AIA Document E203™-2013, Building Information Modeling and Digital Data Exhibit, to establish the protocols for the development, use, transmission, and exchange of digital data.

### **§ 1.8 Building Information Models Use and Reliance**

Any use of, or reliance on, all or a portion of a building information model without agreement to protocols governing the use of, and reliance on, the information contained in the model and without having those protocols set forth in AIA Document E203™-2013, Building Information Modeling and Digital Data Exhibit, and the requisite AIA Document G202™-2013, Project Building Information Modeling Protocol Form, shall be at the using or relying party's sole risk

and without liability to the other party and its contractors or consultants, the authors of, or contributors to, the building information model, and each of their agents and employees.

## **ARTICLE 2 OWNER**

### **§ 2.1 General**

**§ 2.1.1** The Owner is the person or entity identified as such in the Agreement and is referred to throughout the Contract Documents as if singular in number. The Owner shall designate in writing a representative who shall have express authority to bind the Owner with respect to all matters requiring the Owner's approval or authorization. Except as otherwise provided in Section 4.2.1, the Architect does not have such authority. The term "Owner" means the Owner or the Owner's authorized representative.

**§ 2.1.2** The Owner shall furnish to the Contractor, within fifteen days after receipt of a written request, information necessary and relevant for the Contractor to evaluate, give notice of, or enforce mechanic's lien rights. Such information shall include a correct statement of the record legal title to the property on which the Project is located, usually referred to as the site, and the Owner's interest therein.

### **§ 2.2 Evidence of the Owner's Financial Arrangements**

**§ 2.2.1** Prior to commencement of the Work and upon written request by the Contractor, the Owner shall furnish to the Contractor reasonable evidence that the Owner has made financial arrangements to fulfill the Owner's obligations under the Contract. The Contractor shall have no obligation to commence the Work until the Owner provides such evidence. If commencement of the Work is delayed under this Section 2.2.1, the Contract Time shall be extended appropriately.

**§ 2.2.2** Following commencement of the Work and upon written request by the Contractor, the Owner shall furnish to the Contractor reasonable evidence that the Owner has made financial arrangements to fulfill the Owner's obligations under the Contract only if (1) the Owner fails to make payments to the Contractor as the Contract Documents require; (2) the Contractor identifies in writing a reasonable concern regarding the Owner's ability to make payment when due; or (3) a change in the Work materially changes the Contract Sum. If the Owner fails to provide such evidence, as required, within fourteen days of the Contractor's request, the Contractor may immediately stop the Work and, in that event, shall notify the Owner that the Work has stopped. However, if the request is made because a change in the Work materially changes the Contract Sum under (3) above, the Contractor may immediately stop only that portion of the Work affected by the change until reasonable evidence is provided. If the Work is stopped under this Section 2.2.2, the Contract Time shall be extended appropriately and the Contract Sum shall be increased by the amount of the Contractor's reasonable costs of shutdown, delay and start-up, plus interest as provided in the Contract Documents.

**§ 2.2.3** After the Owner furnishes evidence of financial arrangements under this Section 2.2, the Owner shall not materially vary such financial arrangements without prior notice to the Contractor.

**§ 2.2.4** Where the Owner has designated information furnished under this Section 2.2 as "confidential," the Contractor shall keep the information confidential and shall not disclose it to any other person. However, the Contractor may disclose "confidential" information, after seven (7) days' notice to the Owner, where disclosure is required by law, including a subpoena or other form of compulsory legal process issued by a court or governmental entity, or by court or arbitrator(s) order. The Contractor may also disclose "confidential" information to its employees, consultants, sureties, Subcontractors and their employees, Sub-subcontractors, and others who need to know the content of such information solely and exclusively for the Project and who agree to maintain the confidentiality of such information.

### **§ 2.3 Information and Services Required of the Owner**

**§ 2.3.1** Except for permits and fees that are the responsibility of the Contractor under the Contract Documents, including those required under Section 3.7.1, the Owner shall secure and pay for necessary approvals, easements, assessments and charges required for construction, use or occupancy of permanent structures or for permanent changes in existing facilities.

**§ 2.3.2** The Owner shall retain an architect lawfully licensed to practice architecture, or an entity lawfully practicing architecture, in the jurisdiction where the Project is located. That person or entity is identified as the Architect in the Agreement and is referred to throughout the Contract Documents as if singular in number.

**§ 2.3.3** If the employment of the Architect terminates, the Owner shall employ a successor to whom the Contractor has no reasonable objection and whose status under the Contract Documents shall be that of the Architect.



**§ 2.3.4** The Owner shall furnish surveys describing physical characteristics, legal limitations and utility locations for the site of the Project, and a legal description of the site. The Contractor shall be entitled to rely on the accuracy of information furnished by the Owner but shall exercise proper precautions relating to the safe performance of the Work.

**§ 2.3.5** The Owner shall furnish information or services required of the Owner by the Contract Documents with reasonable promptness. The Owner shall also furnish any other information or services under the Owner's control and relevant to the Contractor's performance of the Work with reasonable promptness after receiving the Contractor's written request for such information or services.

**§ 2.3.6** Unless otherwise provided in the Contract Documents, the Owner shall furnish to the Contractor one copy of the Contract Documents for purposes of making reproductions pursuant to Section 1.5.2.

#### **§ 2.4 Owner's Right to Stop the Work**

If the Contractor fails to correct Work that is not in accordance with the requirements of the Contract Documents as required by Section 12.2 or repeatedly fails to carry out Work in accordance with the Contract Documents, the Owner may issue a written order to the Contractor to stop the Work, or any portion thereof, until the cause for such order has been eliminated; however, the right of the Owner to stop the Work shall not give rise to a duty on the part of the Owner to exercise this right for the benefit of the Contractor or any other person or entity, except to the extent required by Section 6.1.3.

#### **§ 2.5 Owner's Right to Carry Out the Work**

If the Contractor defaults or neglects to carry out the Work in accordance with the Contract Documents and fails within a ten-day period after receipt of notice from the Owner to commence and continue correction of such default or neglect with diligence and promptness, the Owner may, without prejudice to other remedies the Owner may have, correct such default or neglect. Such action by the Owner and amount charged to the Contractor are both subject to prior approval of the Architect and the Architect may, pursuant to Section 9.5.1, withhold or nullify a Certificate for Payment in whole or in part, to the extent reasonably necessary to reimburse the Owner for the reasonable cost of correcting such deficiencies, including Owner's expenses and compensation for the Architect's additional services made necessary by such default, neglect, or failure. If current and future payments are not sufficient to cover such amounts, the Contractor shall pay the difference to the Owner. If the Contractor disagrees with the actions of the Owner or the Architect, or the amounts claimed as costs to the Owner, the Contractor may file a Claim pursuant to Article 15.

### **ARTICLE 3 CONTRACTOR**

#### **§ 3.1 General**

**§ 3.1.1** The Contractor is the person or entity identified as such in the Agreement and is referred to throughout the Contract Documents as if singular in number. The Contractor shall be lawfully licensed, if required in the jurisdiction where the Project is located. The Contractor shall designate in writing a representative who shall have express authority to bind the Contractor with respect to all matters under this Contract. The term "Contractor" means the Contractor or the Contractor's authorized representative.

**§ 3.1.2** The Contractor shall perform the Work in accordance with the Contract Documents.

**§ 3.1.3** The Contractor shall not be relieved of its obligations to perform the Work in accordance with the Contract Documents either by activities or duties of the Architect in the Architect's administration of the Contract, or by tests, inspections or approvals required or performed by persons or entities other than the Contractor.

#### **§ 3.2 Review of Contract Documents and Field Conditions by Contractor**

**§ 3.2.1** Execution of the Contract by the Contractor is a representation that the Contractor has visited the site, become generally familiar with local conditions under which the Work is to be performed, and correlated personal observations with requirements of the Contract Documents.

**§ 3.2.2** Because the Contract Documents are complementary, the Contractor shall, before starting each portion of the Work, carefully study and compare the various Contract Documents relative to that portion of the Work, as well as the information furnished by the Owner pursuant to Section 2.3.4, shall take field measurements of any existing conditions related to that portion of the Work, and shall observe any conditions at the site affecting it. These

obligations are for the purpose of facilitating coordination and construction by the Contractor and are not for the purpose of discovering errors, omissions, or inconsistencies in the Contract Documents; however, the Contractor shall promptly report to the Architect any errors, inconsistencies or omissions discovered by or made known to the Contractor as a request for information in such form as the Architect may require. It is recognized that the Contractor's review is made in the Contractor's capacity as a contractor and not as a licensed design professional, unless otherwise specifically provided in the Contract Documents.

**§ 3.2.3** The Contractor is not required to ascertain that the Contract Documents are in accordance with applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of public authorities, but the Contractor shall promptly report to the Architect any nonconformity discovered by or made known to the Contractor as a request for information in such form as the Architect may require.

**§ 3.2.4** If the Contractor believes that additional cost or time is involved because of clarifications or instructions the Architect issues in response to the Contractor's notices or requests for information pursuant to Sections 3.2.2 or 3.2.3, the Contractor shall submit Claims as provided in Article 15. If the Contractor fails to perform the obligations of Sections 3.2.2 or 3.2.3, the Contractor shall pay such costs and damages to the Owner, subject to Section 15.1.7, as would have been avoided if the Contractor had performed such obligations. If the Contractor performs those obligations, the Contractor shall not be liable to the Owner or Architect for damages resulting from errors, inconsistencies or omissions in the Contract Documents, for differences between field measurements or conditions and the Contract Documents, or for nonconformities of the Contract Documents to applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities.

### **§ 3.3 Supervision and Construction Procedures**

**§ 3.3.1** The Contractor shall supervise and direct the Work, using the Contractor's best skill and attention. The Contractor shall be solely responsible for, and have control over, construction means, methods, techniques, sequences, and procedures, and for coordinating all portions of the Work under the Contract. If the Contract Documents give specific instructions concerning construction means, methods, techniques, sequences, or procedures, the Contractor shall evaluate the jobsite safety thereof and shall be solely responsible for the jobsite safety of such means, methods, techniques, sequences, or procedures. If the Contractor determines that such means, methods, techniques, sequences or procedures may not be safe, the Contractor shall give timely notice to the Owner and Architect, and shall propose alternative means, methods, techniques, sequences, or procedures. The Architect shall evaluate the proposed alternative solely for conformance with the design intent for the completed construction. Unless the Architect objects to the Contractor's proposed alternative, the Contractor shall perform the Work using its alternative means, methods, techniques, sequences, or procedures.

**§ 3.3.2** The Contractor shall be responsible to the Owner for acts and omissions of the Contractor's employees, Subcontractors and their agents and employees, and other persons or entities performing portions of the Work for, or on behalf of, the Contractor or any of its Subcontractors.

**§ 3.3.3** The Contractor shall be responsible for inspection of portions of Work already performed to determine that such portions are in proper condition to receive subsequent Work.

### **§ 3.4 Labor and Materials**

**§ 3.4.1** Unless otherwise provided in the Contract Documents, the Contractor shall provide and pay for labor, materials, equipment, tools, construction equipment and machinery, water, heat, utilities, transportation, and other facilities and services necessary for proper execution and completion of the Work, whether temporary or permanent and whether or not incorporated or to be incorporated in the Work.

**§ 3.4.2** Except in the case of minor changes in the Work approved by the Architect in accordance with Section 3.12.8 or ordered by the Architect in accordance with Section 7.4, the Contractor may make substitutions only with the consent of the Owner, after evaluation by the Architect and in accordance with a Change Order or Construction Change Directive.

**§ 3.4.3** The Contractor shall enforce strict discipline and good order among the Contractor's employees and other persons carrying out the Work. The Contractor shall not permit employment of unfit persons or persons not properly skilled in tasks assigned to them.

### **§ 3.5 Warranty**

**§ 3.5.1** The Contractor warrants to the Owner and Architect that materials and equipment furnished under the Contract will be of good quality and new unless the Contract Documents require or permit otherwise. The Contractor further warrants that the Work will conform to the requirements of the Contract Documents and will be free from defects, except for those inherent in the quality of the Work the Contract Documents require or permit. Work, materials, or equipment not conforming to these requirements may be considered defective. The Contractor's warranty excludes remedy for damage or defect caused by abuse, alterations to the Work not executed by the Contractor, improper or insufficient maintenance, improper operation, or normal wear and tear and normal usage. If required by the Architect, the Contractor shall furnish satisfactory evidence as to the kind and quality of materials and equipment.

**§ 3.5.2** All material, equipment, or other special warranties required by the Contract Documents shall be issued in the name of the Owner, or shall be transferable to the Owner, and shall commence in accordance with Section 9.8.4.

### **§ 3.6 Taxes**

The Contractor shall pay sales, consumer, use and similar taxes for the Work provided by the Contractor that are legally enacted when bids are received or negotiations concluded, whether or not yet effective or merely scheduled to go into effect.

### **§ 3.7 Permits, Fees, Notices and Compliance with Laws**

**§ 3.7.1** Unless otherwise provided in the Contract Documents, the Contractor shall secure and pay for the building permit as well as for other permits, fees, licenses, and inspections by government agencies necessary for proper execution and completion of the Work that are customarily secured after execution of the Contract and legally required at the time bids are received or negotiations concluded.

**§ 3.7.2** The Contractor shall comply with and give notices required by applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities applicable to performance of the Work.

**§ 3.7.3** If the Contractor performs Work knowing it to be contrary to applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of public authorities, the Contractor shall assume appropriate responsibility for such Work and shall bear the costs attributable to correction.

### **§ 3.7.4 Concealed or Unknown Conditions**

If the Contractor encounters conditions at the site that are (1) subsurface or otherwise concealed physical conditions that differ materially from those indicated in the Contract Documents or (2) unknown physical conditions of an unusual nature that differ materially from those ordinarily found to exist and generally recognized as inherent in construction activities of the character provided for in the Contract Documents, the Contractor shall promptly provide notice to the Owner and the Architect before conditions are disturbed and in no event later than 14 days after first observance of the conditions. The Architect will promptly investigate such conditions and, if the Architect determines that they differ materially and cause an increase or decrease in the Contractor's cost of, or time required for, performance of any part of the Work, will recommend that an equitable adjustment be made in the Contract Sum or Contract Time, or both. If the Architect determines that the conditions at the site are not materially different from those indicated in the Contract Documents and that no change in the terms of the Contract is justified, the Architect shall promptly notify the Owner and Contractor, stating the reasons. If either party disputes the Architect's determination or recommendation, that party may submit a Claim as provided in Article 15.

**§ 3.7.5** If, in the course of the Work, the Contractor encounters human remains or recognizes the existence of burial markers, archaeological sites or wetlands not indicated in the Contract Documents, the Contractor shall immediately suspend any operations that would affect them and shall notify the Owner and Architect. Upon receipt of such notice, the Owner shall promptly take any action necessary to obtain governmental authorization required to resume the operations. The Contractor shall continue to suspend such operations until otherwise instructed by the Owner but shall continue with all other operations that do not affect those remains or features. Requests for adjustments in the Contract Sum and Contract Time arising from the existence of such remains or features may be made as provided in Article 15.

### **§ 3.8 Allowances**

**§ 3.8.1** The Contractor shall include in the Contract Sum all allowances stated in the Contract Documents. Items covered by allowances shall be supplied for such amounts and by such persons or entities as the Owner may direct, but the Contractor shall not be required to employ persons or entities to whom the Contractor has reasonable objection.



**§ 3.8.2** Unless otherwise provided in the Contract Documents,

- .1 allowances shall cover the cost to the Contractor of materials and equipment delivered at the site and all required taxes, less applicable trade discounts;
- .2 Contractor's costs for unloading and handling at the site, labor, installation costs, overhead, profit, and other expenses contemplated for stated allowance amounts shall be included in the Contract Sum but not in the allowances; and
- .3 whenever costs are more than or less than allowances, the Contract Sum shall be adjusted accordingly by Change Order. The amount of the Change Order shall reflect (1) the difference between actual costs and the allowances under Section 3.8.2.1 and (2) changes in Contractor's costs under Section 3.8.2.2.

**§ 3.8.3** Materials and equipment under an allowance shall be selected by the Owner with reasonable promptness.

### **§ 3.9 Superintendent**

**§ 3.9.1** The Contractor shall employ a competent superintendent and necessary assistants who shall be in attendance at the Project site during performance of the Work. The superintendent shall represent the Contractor, and communications given to the superintendent shall be as binding as if given to the Contractor.

**§ 3.9.2** The Contractor, as soon as practicable after award of the Contract, shall notify the Owner and Architect of the name and qualifications of a proposed superintendent. Within 14 days of receipt of the information, the Architect may notify the Contractor, stating whether the Owner or the Architect (1) has reasonable objection to the proposed superintendent or (2) requires additional time for review. Failure of the Architect to provide notice within the 14-day period shall constitute notice of no reasonable objection.

**§ 3.9.3** The Contractor shall not employ a proposed superintendent to whom the Owner or Architect has made reasonable and timely objection. The Contractor shall not change the superintendent without the Owner's consent, which shall not unreasonably be withheld or delayed.

### **§ 3.10 Contractor's Construction and Submittal Schedules**

**§ 3.10.1** The Contractor, promptly after being awarded the Contract, shall submit for the Owner's and Architect's information a Contractor's construction schedule for the Work. The schedule shall contain detail appropriate for the Project, including (1) the date of commencement of the Work, interim schedule milestone dates, and the date of Substantial Completion; (2) an apportionment of the Work by construction activity; and (3) the time required for completion of each portion of the Work. The schedule shall provide for the orderly progression of the Work to completion and shall not exceed time limits current under the Contract Documents. The schedule shall be revised at appropriate intervals as required by the conditions of the Work and Project.

**§ 3.10.2** The Contractor, promptly after being awarded the Contract and thereafter as necessary to maintain a current submittal schedule, shall submit a submittal schedule for the Architect's approval. The Architect's approval shall not be unreasonably delayed or withheld. The submittal schedule shall (1) be coordinated with the Contractor's construction schedule, and (2) allow the Architect reasonable time to review submittals. If the Contractor fails to submit a submittal schedule, or fails to provide submittals in accordance with the approved submittal schedule, the Contractor shall not be entitled to any increase in Contract Sum or extension of Contract Time based on the time required for review of submittals.

**§ 3.10.3** The Contractor shall perform the Work in general accordance with the most recent schedules submitted to the Owner and Architect.

### **§ 3.11 Documents and Samples at the Site**

The Contractor shall make available, at the Project site, the Contract Documents, including Change Orders, Construction Change Directives, and other Modifications, in good order and marked currently to indicate field changes and selections made during construction, and the approved Shop Drawings, Product Data, Samples, and similar required submittals. These shall be in electronic form or paper copy, available to the Architect and Owner, and delivered to the Architect for submittal to the Owner upon completion of the Work as a record of the Work as constructed.

### § 3.12 Shop Drawings, Product Data and Samples

§ 3.12.1 Shop Drawings are drawings, diagrams, schedules, and other data specially prepared for the Work by the Contractor or a Subcontractor, Sub-subcontractor, manufacturer, supplier, or distributor to illustrate some portion of the Work.

§ 3.12.2 Product Data are illustrations, standard schedules, performance charts, instructions, brochures, diagrams, and other information furnished by the Contractor to illustrate materials or equipment for some portion of the Work.

§ 3.12.3 Samples are physical examples that illustrate materials, equipment, or workmanship, and establish standards by which the Work will be judged.

§ 3.12.4 Shop Drawings, Product Data, Samples, and similar submittals are not Contract Documents. Their purpose is to demonstrate how the Contractor proposes to conform to the information given and the design concept expressed in the Contract Documents for those portions of the Work for which the Contract Documents require submittal. Review by the Architect is subject to the limitations of Section 4.2.7. Informational submittals upon which the Architect is not expected to take responsive action may be so identified in the Contract Documents. Submittals that are not required by the Contract Documents may be returned by the Architect without action.

§ 3.12.5 The Contractor shall review for compliance with the Contract Documents, approve, and submit to the Architect, Shop Drawings, Product Data, Samples, and similar submittals required by the Contract Documents, in accordance with the submittal schedule approved by the Architect or, in the absence of an approved submittal schedule, with reasonable promptness and in such sequence as to cause no delay in the Work or in the activities of the Owner or of Separate Contractors.

§ 3.12.6 By submitting Shop Drawings, Product Data, Samples, and similar submittals, the Contractor represents to the Owner and Architect that the Contractor has (1) reviewed and approved them, (2) determined and verified materials, field measurements and field construction criteria related thereto or will do so, and (3) checked and coordinated the information contained within such submittals with the requirements of the Work and of the Contract Documents.

§ 3.12.7 The Contractor shall perform no portion of the Work for which the Contract Documents require submittal and review of Shop Drawings, Product Data, Samples, or similar submittals, until the respective submittal has been approved by the Architect.

§ 3.12.8 The Work shall be in accordance with approved submittals except that the Contractor shall not be relieved of responsibility for deviations from the requirements of the Contract Documents by the Architect's approval of Shop Drawings, Product Data, Samples, or similar submittals, unless the Contractor has specifically notified the Architect of such deviation at the time of submittal and (1) the Architect has given written approval to the specific deviation as a minor change in the Work, or (2) a Change Order or Construction Change Directive has been issued authorizing the deviation. The Contractor shall not be relieved of responsibility for errors or omissions in Shop Drawings, Product Data, Samples, or similar submittals, by the Architect's approval thereof.

§ 3.12.9 The Contractor shall direct specific attention, in writing or on resubmitted Shop Drawings, Product Data, Samples, or similar submittals, to revisions other than those requested by the Architect on previous submittals. In the absence of such notice, the Architect's approval of a resubmission shall not apply to such revisions.

§ 3.12.10 The Contractor shall not be required to provide professional services that constitute the practice of architecture or engineering unless such services are specifically required by the Contract Documents for a portion of the Work or unless the Contractor needs to provide such services in order to carry out the Contractor's responsibilities for construction means, methods, techniques, sequences, and procedures. The Contractor shall not be required to provide professional services in violation of applicable law.

§ 3.12.10.1 If professional design services or certifications by a design professional related to systems, materials, or equipment are specifically required of the Contractor by the Contract Documents, the Owner and the Architect will specify all performance and design criteria that such services must satisfy. The Contractor shall be entitled to rely upon the adequacy and accuracy of the performance and design criteria provided in the Contract Documents. The Contractor shall cause such services or certifications to be provided by an appropriately licensed design professional, whose signature and seal shall appear on all drawings, calculations, specifications, certifications, Shop Drawings, and other submittals prepared by such professional. Shop Drawings, and other submittals related to the Work, designed or

certified by such professional, if prepared by others, shall bear such professional's written approval when submitted to the Architect. The Owner and the Architect shall be entitled to rely upon the adequacy and accuracy of the services, certifications, and approvals performed or provided by such design professionals, provided the Owner and Architect have specified to the Contractor the performance and design criteria that such services must satisfy. Pursuant to this Section 3.12.10, the Architect will review and approve or take other appropriate action on submittals only for the limited purpose of checking for conformance with information given and the design concept expressed in the Contract Documents.

**§ 3.12.10.2** If the Contract Documents require the Contractor's design professional to certify that the Work has been performed in accordance with the design criteria, the Contractor shall furnish such certifications to the Architect at the time and in the form specified by the Architect.

### **§ 3.13 Use of Site**

The Contractor shall confine operations at the site to areas permitted by applicable laws, statutes, ordinances, codes, rules and regulations, lawful orders of public authorities, and the Contract Documents and shall not unreasonably encumber the site with materials or equipment.

### **§ 3.14 Cutting and Patching**

**§ 3.14.1** The Contractor shall be responsible for cutting, fitting, or patching required to complete the Work or to make its parts fit together properly. All areas requiring cutting, fitting, or patching shall be restored to the condition existing prior to the cutting, fitting, or patching, unless otherwise required by the Contract Documents.

**§ 3.14.2** The Contractor shall not damage or endanger a portion of the Work or fully or partially completed construction of the Owner or Separate Contractors by cutting, patching, or otherwise altering such construction, or by excavation. The Contractor shall not cut or otherwise alter construction by the Owner or a Separate Contractor except with written consent of the Owner and of the Separate Contractor. Consent shall not be unreasonably withheld. The Contractor shall not unreasonably withhold, from the Owner or a Separate Contractor, its consent to cutting or otherwise altering the Work.

### **§ 3.15 Cleaning Up**

**§ 3.15.1** The Contractor shall keep the premises and surrounding area free from accumulation of waste materials and rubbish caused by operations under the Contract. At completion of the Work, the Contractor shall remove waste materials, rubbish, the Contractor's tools, construction equipment, machinery, and surplus materials from and about the Project.

**§ 3.15.2** If the Contractor fails to clean up as provided in the Contract Documents, the Owner may do so and the Owner shall be entitled to reimbursement from the Contractor.

### **§ 3.16 Access to Work**

The Contractor shall provide the Owner and Architect with access to the Work in preparation and progress wherever located.

### **§ 3.17 Royalties, Patents and Copyrights**

The Contractor shall pay all royalties and license fees. The Contractor shall defend suits or claims for infringement of copyrights and patent rights and shall hold the Owner and Architect harmless from loss on account thereof, but shall not be responsible for defense or loss when a particular design, process, or product of a particular manufacturer or manufacturers is required by the Contract Documents, or where the copyright violations are contained in Drawings, Specifications, or other documents prepared by the Owner or Architect. However, if an infringement of a copyright or patent is discovered by, or made known to, the Contractor, the Contractor shall be responsible for the loss unless the information is promptly furnished to the Architect.

### **§ 3.18 Indemnification**

**§ 3.18.1** To the fullest extent permitted by law, the Contractor shall indemnify and hold harmless the Owner, Architect, Architect's consultants, and agents and employees of any of them from and against claims, damages, losses, and expenses, including but not limited to attorneys' fees, arising out of or resulting from performance of the Work, provided that such claim, damage, loss, or expense is attributable to bodily injury, sickness, disease or death, or to injury to or destruction of tangible property (other than the Work itself), but only to the extent caused by the negligent acts or omissions of the Contractor, a Subcontractor, anyone directly or indirectly employed by them, or anyone for

whose acts they may be liable, regardless of whether or not such claim, damage, loss, or expense is caused in part by a party indemnified hereunder. Such obligation shall not be construed to negate, abridge, or reduce other rights or obligations of indemnity that would otherwise exist as to a party or person described in this Section 3.18.

**§ 3.18.2** In claims against any person or entity indemnified under this Section 3.18 by an employee of the Contractor, a Subcontractor, anyone directly or indirectly employed by them, or anyone for whose acts they may be liable, the indemnification obligation under Section 3.18.1 shall not be limited by a limitation on amount or type of damages, compensation, or benefits payable by or for the Contractor or a Subcontractor under workers' compensation acts, disability benefit acts, or other employee benefit acts.

## **ARTICLE 4 ARCHITECT**

### **§ 4.1 General**

**§ 4.1.1** The Architect is the person or entity retained by the Owner pursuant to Section 2.3.2 and identified as such in the Agreement.

**§ 4.1.2** Duties, responsibilities, and limitations of authority of the Architect as set forth in the Contract Documents shall not be restricted, modified, or extended without written consent of the Owner, Contractor, and Architect. Consent shall not be unreasonably withheld.

### **§ 4.2 Administration of the Contract**

**§ 4.2.1** The Architect will provide administration of the Contract as described in the Contract Documents and will be an Owner's representative during construction until the date the Architect issues the final Certificate for Payment. The Architect will have authority to act on behalf of the Owner only to the extent provided in the Contract Documents.

**§ 4.2.2** The Architect will visit the site at intervals appropriate to the stage of construction, or as otherwise agreed with the Owner, to become generally familiar with the progress and quality of the portion of the Work completed, and to determine in general if the Work observed is being performed in a manner indicating that the Work, when fully completed, will be in accordance with the Contract Documents. However, the Architect will not be required to make exhaustive or continuous on-site inspections to check the quality or quantity of the Work. The Architect will not have control over, charge of, or responsibility for the construction means, methods, techniques, sequences or procedures, or for the safety precautions and programs in connection with the Work, since these are solely the Contractor's rights and responsibilities under the Contract Documents.

**§ 4.2.3** On the basis of the site visits, the Architect will keep the Owner reasonably informed about the progress and quality of the portion of the Work completed, and promptly report to the Owner (1) known deviations from the Contract Documents, (2) known deviations from the most recent construction schedule submitted by the Contractor, and (3) defects and deficiencies observed in the Work. The Architect will not be responsible for the Contractor's failure to perform the Work in accordance with the requirements of the Contract Documents. The Architect will not have control over or charge of, and will not be responsible for acts or omissions of, the Contractor, Subcontractors, or their agents or employees, or any other persons or entities performing portions of the Work.

### **§ 4.2.4 Communications**

The Owner and Contractor shall include the Architect in all communications that relate to or affect the Architect's services or professional responsibilities. The Owner shall promptly notify the Architect of the substance of any direct communications between the Owner and the Contractor otherwise relating to the Project. Communications by and with the Architect's consultants shall be through the Architect. Communications by and with Subcontractors and suppliers shall be through the Contractor. Communications by and with Separate Contractors shall be through the Owner. The Contract Documents may specify other communication protocols.

**§ 4.2.5** Based on the Architect's evaluations of the Contractor's Applications for Payment, the Architect will review and certify the amounts due the Contractor and will issue Certificates for Payment in such amounts.

**§ 4.2.6** The Architect has authority to reject Work that does not conform to the Contract Documents. Whenever the Architect considers it necessary or advisable, the Architect will have authority to require inspection or testing of the Work in accordance with Sections 13.4.2 and 13.4.3, whether or not the Work is fabricated, installed or completed. However, neither this authority of the Architect nor a decision made in good faith either to exercise or not to exercise such authority shall give rise to a duty or responsibility of the Architect to the Contractor, Subcontractors, suppliers, their agents or employees, or other persons or entities performing portions of the Work.

§ 4.2.7 The Architect will review and approve, or take other appropriate action upon, the Contractor's submittals such as Shop Drawings, Product Data, and Samples, but only for the limited purpose of checking for conformance with information given and the design concept expressed in the Contract Documents. The Architect's action will be taken in accordance with the submittal schedule approved by the Architect or, in the absence of an approved submittal schedule, with reasonable promptness while allowing sufficient time in the Architect's professional judgment to permit adequate review. Review of such submittals is not conducted for the purpose of determining the accuracy and completeness of other details such as dimensions and quantities, or for substantiating instructions for installation or performance of equipment or systems, all of which remain the responsibility of the Contractor as required by the Contract Documents. The Architect's review of the Contractor's submittals shall not relieve the Contractor of the obligations under Sections 3.3, 3.5, and 3.12. The Architect's review shall not constitute approval of safety precautions or of any construction means, methods, techniques, sequences, or procedures. The Architect's approval of a specific item shall not indicate approval of an assembly of which the item is a component.

§ 4.2.8 The Architect will prepare Change Orders and Construction Change Directives, and may order minor changes in the Work as provided in Section 7.4. The Architect will investigate and make determinations and recommendations regarding concealed and unknown conditions as provided in Section 3.7.4.

§ 4.2.9 The Architect will conduct inspections to determine the date or dates of Substantial Completion and the date of final completion; issue Certificates of Substantial Completion pursuant to Section 9.8; receive and forward to the Owner, for the Owner's review and records, written warranties and related documents required by the Contract and assembled by the Contractor pursuant to Section 9.10; and issue a final Certificate for Payment pursuant to Section 9.10.

§ 4.2.10 If the Owner and Architect agree, the Architect will provide one or more Project representatives to assist in carrying out the Architect's responsibilities at the site. The Owner shall notify the Contractor of any change in the duties, responsibilities and limitations of authority of the Project representatives.

§ 4.2.11 The Architect will interpret and decide matters concerning performance under, and requirements of, the Contract Documents on written request of either the Owner or Contractor. The Architect's response to such requests will be made in writing within any time limits agreed upon or otherwise with reasonable promptness.

§ 4.2.12 Interpretations and decisions of the Architect will be consistent with the intent of, and reasonably inferable from, the Contract Documents and will be in writing or in the form of drawings. When making such interpretations and decisions, the Architect will endeavor to secure faithful performance by both Owner and Contractor, will not show partiality to either, and will not be liable for results of interpretations or decisions rendered in good faith.

§ 4.2.13 The Architect's decisions on matters relating to aesthetic effect will be final if consistent with the intent expressed in the Contract Documents.

§ 4.2.14 The Architect will review and respond to requests for information about the Contract Documents. The Architect's response to such requests will be made in writing within any time limits agreed upon or otherwise with reasonable promptness. If appropriate, the Architect will prepare and issue supplemental Drawings and Specifications in response to the requests for information.

## ARTICLE 5 SUBCONTRACTORS

### § 5.1 Definitions

§ 5.1.1 A Subcontractor is a person or entity who has a direct contract with the Contractor to perform a portion of the Work at the site. The term "Subcontractor" is referred to throughout the Contract Documents as if singular in number and means a Subcontractor or an authorized representative of the Subcontractor. The term "Subcontractor" does not include a Separate Contractor or the subcontractors of a Separate Contractor.

§ 5.1.2 A Sub-subcontractor is a person or entity who has a direct or indirect contract with a Subcontractor to perform a portion of the Work at the site. The term "Sub-subcontractor" is referred to throughout the Contract Documents as if singular in number and means a Sub-subcontractor or an authorized representative of the Sub-subcontractor.



## **§ 5.2 Award of Subcontracts and Other Contracts for Portions of the Work**

**§ 5.2.1** Unless otherwise stated in the Contract Documents, the Contractor, as soon as practicable after award of the Contract, shall notify the Owner and Architect of the persons or entities proposed for each principal portion of the Work, including those who are to furnish materials or equipment fabricated to a special design. Within 14 days of receipt of the information, the Architect may notify the Contractor whether the Owner or the Architect (1) has reasonable objection to any such proposed person or entity or (2) requires additional time for review. Failure of the Architect to provide notice within the 14-day period shall constitute notice of no reasonable objection.

**§ 5.2.2** The Contractor shall not contract with a proposed person or entity to whom the Owner or Architect has made reasonable and timely objection. The Contractor shall not be required to contract with anyone to whom the Contractor has made reasonable objection.

**§ 5.2.3** If the Owner or Architect has reasonable objection to a person or entity proposed by the Contractor, the Contractor shall propose another to whom the Owner or Architect has no reasonable objection. If the proposed but rejected Subcontractor was reasonably capable of performing the Work, the Contract Sum and Contract Time shall be increased or decreased by the difference, if any, occasioned by such change, and an appropriate Change Order shall be issued before commencement of the substitute Subcontractor's Work. However, no increase in the Contract Sum or Contract Time shall be allowed for such change unless the Contractor has acted promptly and responsively in submitting names as required.

**§ 5.2.4** The Contractor shall not substitute a Subcontractor, person, or entity for one previously selected if the Owner or Architect makes reasonable objection to such substitution.

## **§ 5.3 Subcontractual Relations**

By appropriate written agreement, the Contractor shall require each Subcontractor, to the extent of the Work to be performed by the Subcontractor, to be bound to the Contractor by terms of the Contract Documents, and to assume toward the Contractor all the obligations and responsibilities, including the responsibility for safety of the Subcontractor's Work that the Contractor, by these Contract Documents, assumes toward the Owner and Architect. Each subcontract agreement shall preserve and protect the rights of the Owner and Architect under the Contract Documents with respect to the Work to be performed by the Subcontractor so that subcontracting thereof will not prejudice such rights, and shall allow to the Subcontractor unless specifically provided otherwise in the subcontract agreement, the benefit of all rights, remedies, and redress against the Contractor that the Contractor, by the Contract Documents, has against the Owner. Where appropriate, the Contractor shall require each Subcontractor to enter into similar agreements with Sub-subcontractors. The Contractor shall make available to each proposed Subcontractor, prior to the execution of the subcontract agreement, copies of the Contract Documents to which the Subcontractor will be bound, and, upon written request of the Subcontractor, identify to the Subcontractor terms and conditions of the proposed subcontract agreement that may be at variance with the Contract Documents. Subcontractors will similarly make copies of applicable portions of such documents available to their respective proposed Sub-subcontractors.

## **§ 5.4 Contingent Assignment of Subcontracts**

**§ 5.4.1** Each subcontract agreement for a portion of the Work is assigned by the Contractor to the Owner, provided that

- .1 assignment is effective only after termination of the Contract by the Owner for cause pursuant to Section 14.2 and only for those subcontract agreements that the Owner accepts by notifying the Subcontractor and Contractor; and
- .2 assignment is subject to the prior rights of the surety, if any, obligated under bond relating to the Contract.

When the Owner accepts the assignment of a subcontract agreement, the Owner assumes the Contractor's rights and obligations under the subcontract.

**§ 5.4.2** Upon such assignment, if the Work has been suspended for more than 30 days, the Subcontractor's compensation shall be equitably adjusted for increases in cost resulting from the suspension.

**§ 5.4.3** Upon assignment to the Owner under this Section 5.4, the Owner may further assign the subcontract to a successor contractor or other entity. If the Owner assigns the subcontract to a successor contractor or other entity, the Owner shall nevertheless remain legally responsible for all of the successor contractor's obligations under the subcontract.

## ARTICLE 6 CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS

### § 6.1 Owner's Right to Perform Construction and to Award Separate Contracts

§ 6.1.1 The term "Separate Contractor(s)" shall mean other contractors retained by the Owner under separate agreements. The Owner reserves the right to perform construction or operations related to the Project with the Owner's own forces, and with Separate Contractors retained under Conditions of the Contract substantially similar to those of this Contract, including those provisions of the Conditions of the Contract related to insurance and waiver of subrogation.

§ 6.1.2 When separate contracts are awarded for different portions of the Project or other construction or operations on the site, the term "Contractor" in the Contract Documents in each case shall mean the Contractor who executes each separate Owner-Contractor Agreement.

§ 6.1.3 The Owner shall provide for coordination of the activities of the Owner's own forces and of each Separate Contractor with the Work of the Contractor, who shall cooperate with them. The Contractor shall participate with any Separate Contractors and the Owner in reviewing their construction schedules. The Contractor shall make any revisions to its construction schedule deemed necessary after a joint review and mutual agreement. The construction schedules shall then constitute the schedules to be used by the Contractor, Separate Contractors, and the Owner until subsequently revised.

§ 6.1.4 Unless otherwise provided in the Contract Documents, when the Owner performs construction or operations related to the Project with the Owner's own forces or with Separate Contractors, the Owner or its Separate Contractors shall have the same obligations and rights that the Contractor has under the Conditions of the Contract, including, without excluding others, those stated in Article 3, this Article 6, and Articles 10, 11, and 12.

### § 6.2 Mutual Responsibility

§ 6.2.1 The Contractor shall afford the Owner and Separate Contractors reasonable opportunity for introduction and storage of their materials and equipment and performance of their activities, and shall connect and coordinate the Contractor's construction and operations with theirs as required by the Contract Documents.

§ 6.2.2 If part of the Contractor's Work depends for proper execution or results upon construction or operations by the Owner or a Separate Contractor, the Contractor shall, prior to proceeding with that portion of the Work, promptly notify the Architect of apparent discrepancies or defects in the construction or operations by the Owner or Separate Contractor that would render it unsuitable for proper execution and results of the Contractor's Work. Failure of the Contractor to notify the Architect of apparent discrepancies or defects prior to proceeding with the Work shall constitute an acknowledgment that the Owner's or Separate Contractor's completed or partially completed construction is fit and proper to receive the Contractor's Work. The Contractor shall not be responsible for discrepancies or defects in the construction or operations by the Owner or Separate Contractor that are not apparent.

§ 6.2.3 The Contractor shall reimburse the Owner for costs the Owner incurs that are payable to a Separate Contractor because of the Contractor's delays, improperly timed activities or defective construction. The Owner shall be responsible to the Contractor for costs the Contractor incurs because of a Separate Contractor's delays, improperly timed activities, damage to the Work or defective construction.

§ 6.2.4 The Contractor shall promptly remedy damage that the Contractor wrongfully causes to completed or partially completed construction or to property of the Owner or Separate Contractor as provided in Section 10.2.5.

§ 6.2.5 The Owner and each Separate Contractor shall have the same responsibilities for cutting and patching as are described for the Contractor in Section 3.14.

### § 6.3 Owner's Right to Clean Up

If a dispute arises among the Contractor, Separate Contractors, and the Owner as to the responsibility under their respective contracts for maintaining the premises and surrounding area free from waste materials and rubbish, the Owner may clean up and the Architect will allocate the cost among those responsible.

## ARTICLE 7 CHANGES IN THE WORK

### § 7.1 General

§ 7.1.1 Changes in the Work may be accomplished after execution of the Contract, and without invalidating the Contract, by Change Order, Construction Change Directive or order for a minor change in the Work, subject to the limitations stated in this Article 7 and elsewhere in the Contract Documents.

§ 7.1.2 A Change Order shall be based upon agreement among the Owner, Contractor, and Architect. A Construction Change Directive requires agreement by the Owner and Architect and may or may not be agreed to by the Contractor. An order for a minor change in the Work may be issued by the Architect alone.

§ 7.1.3 Changes in the Work shall be performed under applicable provisions of the Contract Documents. The Contractor shall proceed promptly with changes in the Work, unless otherwise provided in the Change Order, Construction Change Directive, or order for a minor change in the Work.

### § 7.2 Change Orders

§ 7.2.1 A Change Order is a written instrument prepared by the Architect and signed by the Owner, Contractor, and Architect stating their agreement upon all of the following:

- .1 The change in the Work;
- .2 The amount of the adjustment, if any, in the Contract Sum; and
- .3 The extent of the adjustment, if any, in the Contract Time.

### § 7.3 Construction Change Directives

§ 7.3.1 A Construction Change Directive is a written order prepared by the Architect and signed by the Owner and Architect, directing a change in the Work prior to agreement on adjustment, if any, in the Contract Sum or Contract Time, or both. The Owner may by Construction Change Directive, without invalidating the Contract, order changes in the Work within the general scope of the Contract consisting of additions, deletions, or other revisions, the Contract Sum and Contract Time being adjusted accordingly.

§ 7.3.2 A Construction Change Directive shall be used in the absence of total agreement on the terms of a Change Order.

§ 7.3.3 If the Construction Change Directive provides for an adjustment to the Contract Sum, the adjustment shall be based on one of the following methods:

- .1 Mutual acceptance of a lump sum properly itemized and supported by sufficient substantiating data to permit evaluation;
- .2 Unit prices stated in the Contract Documents or subsequently agreed upon;
- .3 Cost to be determined in a manner agreed upon by the parties and a mutually acceptable fixed or percentage fee; or
- .4 As provided in Section 7.3.4.

§ 7.3.4 If the Contractor does not respond promptly or disagrees with the method for adjustment in the Contract Sum, the Architect shall determine the adjustment on the basis of reasonable expenditures and savings of those performing the Work attributable to the change, including, in case of an increase in the Contract Sum, an amount for overhead and profit as set forth in the Agreement, or if no such amount is set forth in the Agreement, a reasonable amount. In such case, and also under Section 7.3.3.3, the Contractor shall keep and present, in such form as the Architect may prescribe, an itemized accounting together with appropriate supporting data. Unless otherwise provided in the Contract Documents, costs for the purposes of this Section 7.3.4 shall be limited to the following:

- .1 Costs of labor, including applicable payroll taxes, fringe benefits required by agreement or custom, workers' compensation insurance, and other employee costs approved by the Architect;
- .2 Costs of materials, supplies, and equipment, including cost of transportation, whether incorporated or consumed;
- .3 Rental costs of machinery and equipment, exclusive of hand tools, whether rented from the Contractor or others;
- .4 Costs of premiums for all bonds and insurance, permit fees, and sales, use, or similar taxes, directly related to the change; and
- .5 Costs of supervision and field office personnel directly attributable to the change.



§ 7.3.5 If the Contractor disagrees with the adjustment in the Contract Time, the Contractor may make a Claim in accordance with applicable provisions of Article 15.

§ 7.3.6 Upon receipt of a Construction Change Directive, the Contractor shall promptly proceed with the change in the Work involved and advise the Architect of the Contractor's agreement or disagreement with the method, if any, provided in the Construction Change Directive for determining the proposed adjustment in the Contract Sum or Contract Time.

§ 7.3.7 A Construction Change Directive signed by the Contractor indicates the Contractor's agreement therewith, including adjustment in Contract Sum and Contract Time or the method for determining them. Such agreement shall be effective immediately and shall be recorded as a Change Order.

§ 7.3.8 The amount of credit to be allowed by the Contractor to the Owner for a deletion or change that results in a net decrease in the Contract Sum shall be actual net cost as confirmed by the Architect. When both additions and credits covering related Work or substitutions are involved in a change, the allowance for overhead and profit shall be figured on the basis of net increase, if any, with respect to that change.

§ 7.3.9 Pending final determination of the total cost of a Construction Change Directive to the Owner, the Contractor may request payment for Work completed under the Construction Change Directive in Applications for Payment. The Architect will make an interim determination for purposes of monthly certification for payment for those costs and certify for payment the amount that the Architect determines, in the Architect's professional judgment, to be reasonably justified. The Architect's interim determination of cost shall adjust the Contract Sum on the same basis as a Change Order, subject to the right of either party to disagree and assert a Claim, in accordance with Article 15.

§ 7.3.10 When the Owner and Contractor agree with a determination made by the Architect concerning the adjustments in the Contract Sum and Contract Time, or otherwise reach agreement upon the adjustments, such agreement shall be effective immediately and the Architect will prepare a Change Order. Change Orders may be issued for all or any part of a Construction Change Directive.

#### § 7.4 Minor Changes in the Work

The Architect may order minor changes in the Work that are consistent with the intent of the Contract Documents and do not involve an adjustment in the Contract Sum or an extension of the Contract Time. The Architect's order for minor changes shall be in writing. If the Contractor believes that the proposed minor change in the Work will affect the Contract Sum or Contract Time, the Contractor shall notify the Architect and shall not proceed to implement the change in the Work. If the Contractor performs the Work set forth in the Architect's order for a minor change without prior notice to the Architect that such change will affect the Contract Sum or Contract Time, the Contractor waives any adjustment to the Contract Sum or extension of the Contract Time.

### ARTICLE 8 TIME

#### § 8.1 Definitions

§ 8.1.1 Unless otherwise provided, Contract Time is the period of time, including authorized adjustments, allotted in the Contract Documents for Substantial Completion of the Work.

§ 8.1.2 The date of commencement of the Work is the date established in the Agreement.

§ 8.1.3 The date of Substantial Completion is the date certified by the Architect in accordance with Section 9.8.

§ 8.1.4 The term "day" as used in the Contract Documents shall mean calendar day unless otherwise specifically defined.

#### § 8.2 Progress and Completion

§ 8.2.1 Time limits stated in the Contract Documents are of the essence of the Contract. By executing the Agreement, the Contractor confirms that the Contract Time is a reasonable period for performing the Work.

§ 8.2.2 The Contractor shall not knowingly, except by agreement or instruction of the Owner in writing, commence the Work prior to the effective date of insurance required to be furnished by the Contractor and Owner.

**§ 8.2.3** The Contractor shall proceed expeditiously with adequate forces and shall achieve Substantial Completion within the Contract Time.

### **§ 8.3 Delays and Extensions of Time**

**§ 8.3.1** If the Contractor is delayed at any time in the commencement or progress of the Work by (1) an act or neglect of the Owner or Architect, of an employee of either, or of a Separate Contractor; (2) by changes ordered in the Work; (3) by labor disputes, fire, unusual delay in deliveries, unavoidable casualties, adverse weather conditions documented in accordance with Section 15.1.6.2, or other causes beyond the Contractor's control; (4) by delay authorized by the Owner pending mediation and binding dispute resolution; or (5) by other causes that the Contractor asserts, and the Architect determines, justify delay, then the Contract Time shall be extended for such reasonable time as the Architect may determine.

**§ 8.3.2** Claims relating to time shall be made in accordance with applicable provisions of Article 15.

**§ 8.3.3** This Section 8.3 does not preclude recovery of damages for delay by either party under other provisions of the Contract Documents.

## **ARTICLE 9 PAYMENTS AND COMPLETION**

### **§ 9.1 Contract Sum**

**§ 9.1.1** The Contract Sum is stated in the Agreement and, including authorized adjustments, is the total amount payable by the Owner to the Contractor for performance of the Work under the Contract Documents.

**§ 9.1.2** If unit prices are stated in the Contract Documents or subsequently agreed upon, and if quantities originally contemplated are materially changed so that application of such unit prices to the actual quantities causes substantial inequity to the Owner or Contractor, the applicable unit prices shall be equitably adjusted.

### **§ 9.2 Schedule of Values**

Where the Contract is based on a stipulated sum or Guaranteed Maximum Price, the Contractor shall submit a schedule of values to the Architect before the first Application for Payment, allocating the entire Contract Sum to the various portions of the Work. The schedule of values shall be prepared in the form, and supported by the data to substantiate its accuracy, required by the Architect. This schedule, unless objected to by the Architect, shall be used as a basis for reviewing the Contractor's Applications for Payment. Any changes to the schedule of values shall be submitted to the Architect and supported by such data to substantiate its accuracy as the Architect may require, and unless objected to by the Architect, shall be used as a basis for reviewing the Contractor's subsequent Applications for Payment.

### **§ 9.3 Applications for Payment**

**§ 9.3.1** At least ten days before the date established for each progress payment, the Contractor shall submit to the Architect an itemized Application for Payment prepared in accordance with the schedule of values, if required under Section 9.2, for completed portions of the Work. The application shall be notarized, if required, and supported by all data substantiating the Contractor's right to payment that the Owner or Architect require, such as copies of requisitions, and releases and waivers of liens from Subcontractors and suppliers, and shall reflect retainage if provided for in the Contract Documents.

**§ 9.3.1.1** As provided in Section 7.3.9, such applications may include requests for payment on account of changes in the Work that have been properly authorized by Construction Change Directives, or by interim determinations of the Architect, but not yet included in Change Orders.

**§ 9.3.1.2** Applications for Payment shall not include requests for payment for portions of the Work for which the Contractor does not intend to pay a Subcontractor or supplier, unless such Work has been performed by others whom the Contractor intends to pay.

**§ 9.3.2** Unless otherwise provided in the Contract Documents, payments shall be made on account of materials and equipment delivered and suitably stored at the site for subsequent incorporation in the Work. If approved in advance by the Owner, payment may similarly be made for materials and equipment suitably stored off the site at a location agreed upon in writing. Payment for materials and equipment stored on or off the site shall be conditioned upon compliance by the Contractor with procedures satisfactory to the Owner to establish the Owner's title to such materials

and equipment or otherwise protect the Owner's interest, and shall include the costs of applicable insurance, storage, and transportation to the site, for such materials and equipment stored off the site.

**§ 9.3.3** The Contractor warrants that title to all Work covered by an Application for Payment will pass to the Owner no later than the time of payment. The Contractor further warrants that upon submittal of an Application for Payment all Work for which Certificates for Payment have been previously issued and payments received from the Owner shall, to the best of the Contractor's knowledge, information, and belief, be free and clear of liens, claims, security interests, or encumbrances, in favor of the Contractor, Subcontractors, suppliers, or other persons or entities that provided labor, materials, and equipment relating to the Work.

#### **§ 9.4 Certificates for Payment**

**§ 9.4.1** The Architect will, within seven days after receipt of the Contractor's Application for Payment, either (1) issue to the Owner a Certificate for Payment in the full amount of the Application for Payment, with a copy to the Contractor; or (2) issue to the Owner a Certificate for Payment for such amount as the Architect determines is properly due, and notify the Contractor and Owner of the Architect's reasons for withholding certification in part as provided in Section 9.5.1; or (3) withhold certification of the entire Application for Payment, and notify the Contractor and Owner of the Architect's reason for withholding certification in whole as provided in Section 9.5.1.

**§ 9.4.2** The issuance of a Certificate for Payment will constitute a representation by the Architect to the Owner, based on the Architect's evaluation of the Work and the data in the Application for Payment, that, to the best of the Architect's knowledge, information, and belief, the Work has progressed to the point indicated, the quality of the Work is in accordance with the Contract Documents, and that the Contractor is entitled to payment in the amount certified. The foregoing representations are subject to an evaluation of the Work for conformance with the Contract Documents upon Substantial Completion, to results of subsequent tests and inspections, to correction of minor deviations from the Contract Documents prior to completion, and to specific qualifications expressed by the Architect. However, the issuance of a Certificate for Payment will not be a representation that the Architect has (1) made exhaustive or continuous on-site inspections to check the quality or quantity of the Work; (2) reviewed construction means, methods, techniques, sequences, or procedures; (3) reviewed copies of requisitions received from Subcontractors and suppliers and other data requested by the Owner to substantiate the Contractor's right to payment; or (4) made examination to ascertain how or for what purpose the Contractor has used money previously paid on account of the Contract Sum.

#### **§ 9.5 Decisions to Withhold Certification**

**§ 9.5.1** The Architect may withhold a Certificate for Payment in whole or in part, to the extent reasonably necessary to protect the Owner, if in the Architect's opinion the representations to the Owner required by Section 9.4.2 cannot be made. If the Architect is unable to certify payment in the amount of the Application, the Architect will notify the Contractor and Owner as provided in Section 9.4.1. If the Contractor and Architect cannot agree on a revised amount, the Architect will promptly issue a Certificate for Payment for the amount for which the Architect is able to make such representations to the Owner. The Architect may also withhold a Certificate for Payment or, because of subsequently discovered evidence, may modify the whole or a part of a Certificate for Payment previously issued, to such extent as may be necessary in the Architect's opinion to protect the Owner from loss for which the Contractor is responsible, including loss resulting from acts and omissions described in Section 3.3.2, because of

- .1 defective Work not remedied;
- .2 third party claims filed or reasonable evidence indicating probable filing of such claims, unless security acceptable to the Owner is provided by the Contractor;
- .3 failure of the Contractor to make payments properly to Subcontractors or suppliers for labor, materials or equipment;
- .4 reasonable evidence that the Work cannot be completed for the unpaid balance of the Contract Sum;
- .5 damage to the Owner or a Separate Contractor;
- .6 reasonable evidence that the Work will not be completed within the Contract Time, and that the unpaid balance would not be adequate to cover actual or liquidated damages for the anticipated delay; or
- .7 repeated failure to carry out the Work in accordance with the Contract Documents.

**§ 9.5.2** When either party disputes the Architect's decision regarding a Certificate for Payment under Section 9.5.1, in whole or in part, that party may submit a Claim in accordance with Article 15.

**§ 9.5.3** When the reasons for withholding certification are removed, certification will be made for amounts previously withheld.

**§ 9.5.4** If the Architect withholds certification for payment under Section 9.5.1.3, the Owner may, at its sole option, issue joint checks to the Contractor and to any Subcontractor or supplier to whom the Contractor failed to make payment for Work properly performed or material or equipment suitably delivered. If the Owner makes payments by joint check, the Owner shall notify the Architect and the Contractor shall reflect such payment on its next Application for Payment.

## **§ 9.6 Progress Payments**

**§ 9.6.1** After the Architect has issued a Certificate for Payment, the Owner shall make payment in the manner and within the time provided in the Contract Documents, and shall so notify the Architect.

**§ 9.6.2** The Contractor shall pay each Subcontractor, no later than seven days after receipt of payment from the Owner, the amount to which the Subcontractor is entitled, reflecting percentages actually retained from payments to the Contractor on account of the Subcontractor's portion of the Work. The Contractor shall, by appropriate agreement with each Subcontractor, require each Subcontractor to make payments to Sub-subcontractors in a similar manner.

**§ 9.6.3** The Architect will, on request, furnish to a Subcontractor, if practicable, information regarding percentages of completion or amounts applied for by the Contractor and action taken thereon by the Architect and Owner on account of portions of the Work done by such Subcontractor.

**§ 9.6.4** The Owner has the right to request written evidence from the Contractor that the Contractor has properly paid Subcontractors and suppliers amounts paid by the Owner to the Contractor for subcontracted Work. If the Contractor fails to furnish such evidence within seven days, the Owner shall have the right to contact Subcontractors and suppliers to ascertain whether they have been properly paid. Neither the Owner nor Architect shall have an obligation to pay, or to see to the payment of money to, a Subcontractor or supplier, except as may otherwise be required by law.

**§ 9.6.5** The Contractor's payments to suppliers shall be treated in a manner similar to that provided in Sections 9.6.2, 9.6.3 and 9.6.4.

**§ 9.6.6** A Certificate for Payment, a progress payment, or partial or entire use or occupancy of the Project by the Owner shall not constitute acceptance of Work not in accordance with the Contract Documents.

**§ 9.6.7** Unless the Contractor provides the Owner with a payment bond in the full penal sum of the Contract Sum, payments received by the Contractor for Work properly performed by Subcontractors or provided by suppliers shall be held by the Contractor for those Subcontractors or suppliers who performed Work or furnished materials, or both, under contract with the Contractor for which payment was made by the Owner. Nothing contained herein shall require money to be placed in a separate account and not commingled with money of the Contractor, create any fiduciary liability or tort liability on the part of the Contractor for breach of trust, or entitle any person or entity to an award of punitive damages against the Contractor for breach of the requirements of this provision.

**§ 9.6.8** Provided the Owner has fulfilled its payment obligations under the Contract Documents, the Contractor shall defend and indemnify the Owner from all loss, liability, damage or expense, including reasonable attorney's fees and litigation expenses, arising out of any lien claim or other claim for payment by any Subcontractor or supplier of any tier. Upon receipt of notice of a lien claim or other claim for payment, the Owner shall notify the Contractor. If approved by the applicable court, when required, the Contractor may substitute a surety bond for the property against which the lien or other claim for payment has been asserted.

## **§ 9.7 Failure of Payment**

If the Architect does not issue a Certificate for Payment, through no fault of the Contractor, within seven days after receipt of the Contractor's Application for Payment, or if the Owner does not pay the Contractor within seven days after the date established in the Contract Documents, the amount certified by the Architect or awarded by binding dispute resolution, then the Contractor may, upon seven additional days' notice to the Owner and Architect, stop the Work until payment of the amount owing has been received. The Contract Time shall be extended appropriately and the Contract Sum shall be increased by the amount of the Contractor's reasonable costs of shutdown, delay and start-up, plus interest as provided for in the Contract Documents.

## **§ 9.8 Substantial Completion**

**§ 9.8.1** Substantial Completion is the stage in the progress of the Work when the Work or designated portion thereof is sufficiently complete in accordance with the Contract Documents so that the Owner can occupy or utilize the Work for its intended use.

**§ 9.8.2** When the Contractor considers that the Work, or a portion thereof which the Owner agrees to accept separately, is substantially complete, the Contractor shall prepare and submit to the Architect a comprehensive list of items to be completed or corrected prior to final payment. Failure to include an item on such list does not alter the responsibility of the Contractor to complete all Work in accordance with the Contract Documents.

**§ 9.8.3** Upon receipt of the Contractor's list, the Architect will make an inspection to determine whether the Work or designated portion thereof is substantially complete. If the Architect's inspection discloses any item, whether or not included on the Contractor's list, which is not sufficiently complete in accordance with the Contract Documents so that the Owner can occupy or utilize the Work or designated portion thereof for its intended use, the Contractor shall, before issuance of the Certificate of Substantial Completion, complete or correct such item upon notification by the Architect. In such case, the Contractor shall then submit a request for another inspection by the Architect to determine Substantial Completion.

**§ 9.8.4** When the Work or designated portion thereof is substantially complete, the Architect will prepare a Certificate of Substantial Completion that shall establish the date of Substantial Completion; establish responsibilities of the Owner and Contractor for security, maintenance, heat, utilities, damage to the Work and insurance; and fix the time within which the Contractor shall finish all items on the list accompanying the Certificate. Warranties required by the Contract Documents shall commence on the date of Substantial Completion of the Work or designated portion thereof unless otherwise provided in the Certificate of Substantial Completion.

**§ 9.8.5** The Certificate of Substantial Completion shall be submitted to the Owner and Contractor for their written acceptance of responsibilities assigned to them in the Certificate. Upon such acceptance, and consent of surety if any, the Owner shall make payment of retainage applying to the Work or designated portion thereof. Such payment shall be adjusted for Work that is incomplete or not in accordance with the requirements of the Contract Documents.

## **§ 9.9 Partial Occupancy or Use**

**§ 9.9.1** The Owner may occupy or use any completed or partially completed portion of the Work at any stage when such portion is designated by separate agreement with the Contractor, provided such occupancy or use is consented to by the insurer and authorized by public authorities having jurisdiction over the Project. Such partial occupancy or use may commence whether or not the portion is substantially complete, provided the Owner and Contractor have accepted in writing the responsibilities assigned to each of them for payments, retainage, if any, security, maintenance, heat, utilities, damage to the Work and insurance, and have agreed in writing concerning the period for correction of the Work and commencement of warranties required by the Contract Documents. When the Contractor considers a portion substantially complete, the Contractor shall prepare and submit a list to the Architect as provided under Section 9.8.2. Consent of the Contractor to partial occupancy or use shall not be unreasonably withheld. The stage of the progress of the Work shall be determined by written agreement between the Owner and Contractor or, if no agreement is reached, by decision of the Architect.

**§ 9.9.2** Immediately prior to such partial occupancy or use, the Owner, Contractor, and Architect shall jointly inspect the area to be occupied or portion of the Work to be used in order to determine and record the condition of the Work.

**§ 9.9.3** Unless otherwise agreed upon, partial occupancy or use of a portion or portions of the Work shall not constitute acceptance of Work not complying with the requirements of the Contract Documents.

## **§ 9.10 Final Completion and Final Payment**

**§ 9.10.1** Upon receipt of the Contractor's notice that the Work is ready for final inspection and acceptance and upon receipt of a final Application for Payment, the Architect will promptly make such inspection. When the Architect finds the Work acceptable under the Contract Documents and the Contract fully performed, the Architect will promptly issue a final Certificate for Payment stating that to the best of the Architect's knowledge, information and belief, and on the basis of the Architect's on-site visits and inspections, the Work has been completed in accordance with the Contract Documents and that the entire balance found to be due the Contractor and noted in the final Certificate is due and payable. The Architect's final Certificate for Payment will constitute a further representation that conditions listed in Section 9.10.2 as precedent to the Contractor's being entitled to final payment have been fulfilled.



**§ 9.10.2** Neither final payment nor any remaining retained percentage shall become due until the Contractor submits to the Architect (1) an affidavit that payrolls, bills for materials and equipment, and other indebtedness connected with the Work for which the Owner or the Owner's property might be responsible or encumbered (less amounts withheld by Owner) have been paid or otherwise satisfied, (2) a certificate evidencing that insurance required by the Contract Documents to remain in force after final payment is currently in effect, (3) a written statement that the Contractor knows of no reason that the insurance will not be renewable to cover the period required by the Contract Documents, (4) consent of surety, if any, to final payment, (5) documentation of any special warranties, such as manufacturers' warranties or specific Subcontractor warranties, and (6) if required by the Owner, other data establishing payment or satisfaction of obligations, such as receipts and releases and waivers of liens, claims, security interests, or encumbrances arising out of the Contract, to the extent and in such form as may be designated by the Owner. If a Subcontractor refuses to furnish a release or waiver required by the Owner, the Contractor may furnish a bond satisfactory to the Owner to indemnify the Owner against such lien, claim, security interest, or encumbrance. If a lien, claim, security interest, or encumbrance remains unsatisfied after payments are made, the Contractor shall refund to the Owner all money that the Owner may be compelled to pay in discharging the lien, claim, security interest, or encumbrance, including all costs and reasonable attorneys' fees.

**§ 9.10.3** If, after Substantial Completion of the Work, final completion thereof is materially delayed through no fault of the Contractor or by issuance of Change Orders affecting final completion, and the Architect so confirms, the Owner shall, upon application by the Contractor and certification by the Architect, and without terminating the Contract, make payment of the balance due for that portion of the Work fully completed, corrected, and accepted. If the remaining balance for Work not fully completed or corrected is less than retainage stipulated in the Contract Documents, and if bonds have been furnished, the written consent of the surety to payment of the balance due for that portion of the Work fully completed and accepted shall be submitted by the Contractor to the Architect prior to certification of such payment. Such payment shall be made under terms and conditions governing final payment, except that it shall not constitute a waiver of Claims.

**§ 9.10.4** The making of final payment shall constitute a waiver of Claims by the Owner except those arising from

- .1 liens, Claims, security interests, or encumbrances arising out of the Contract and unsettled;
- .2 failure of the Work to comply with the requirements of the Contract Documents;
- .3 terms of special warranties required by the Contract Documents; or
- .4 audits performed by the Owner, if permitted by the Contract Documents, after final payment.

**§ 9.10.5** Acceptance of final payment by the Contractor, a Subcontractor, or a supplier, shall constitute a waiver of claims by that payee except those previously made in writing and identified by that payee as unsettled at the time of final Application for Payment.

## **ARTICLE 10 PROTECTION OF PERSONS AND PROPERTY**

### **§ 10.1 Safety Precautions and Programs**

The Contractor shall be responsible for initiating, maintaining, and supervising all safety precautions and programs in connection with the performance of the Contract.

### **§ 10.2 Safety of Persons and Property**

**§ 10.2.1** The Contractor shall take reasonable precautions for safety of, and shall provide reasonable protection to prevent damage, injury, or loss to

- .1 employees on the Work and other persons who may be affected thereby;
- .2 the Work and materials and equipment to be incorporated therein, whether in storage on or off the site, under care, custody, or control of the Contractor, a Subcontractor, or a Sub-subcontractor; and
- .3 other property at the site or adjacent thereto, such as trees, shrubs, lawns, walks, pavements, roadways, structures, and utilities not designated for removal, relocation, or replacement in the course of construction.

**§ 10.2.2** The Contractor shall comply with, and give notices required by applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities, bearing on safety of persons or property or their protection from damage, injury, or loss.

**§ 10.2.3** The Contractor shall implement, erect, and maintain, as required by existing conditions and performance of the Contract, reasonable safeguards for safety and protection, including posting danger signs and other warnings

against hazards; promulgating safety regulations; and notifying the owners and users of adjacent sites and utilities of the safeguards.

**§ 10.2.4** When use or storage of explosives or other hazardous materials or equipment, or unusual methods are necessary for execution of the Work, the Contractor shall exercise utmost care and carry on such activities under supervision of properly qualified personnel.

**§ 10.2.5** The Contractor shall promptly remedy damage and loss (other than damage or loss insured under property insurance required by the Contract Documents) to property referred to in Sections 10.2.1.2 and 10.2.1.3 caused in whole or in part by the Contractor, a Subcontractor, a Sub-subcontractor, or anyone directly or indirectly employed by any of them, or by anyone for whose acts they may be liable and for which the Contractor is responsible under Sections 10.2.1.2 and 10.2.1.3. The Contractor may make a Claim for the cost to remedy the damage or loss to the extent such damage or loss is attributable to acts or omissions of the Owner or Architect or anyone directly or indirectly employed by either of them, or by anyone for whose acts either of them may be liable, and not attributable to the fault or negligence of the Contractor. The foregoing obligations of the Contractor are in addition to the Contractor's obligations under Section 3.18.

**§ 10.2.6** The Contractor shall designate a responsible member of the Contractor's organization at the site whose duty shall be the prevention of accidents. This person shall be the Contractor's superintendent unless otherwise designated by the Contractor in writing to the Owner and Architect.

**§ 10.2.7** The Contractor shall not permit any part of the construction or site to be loaded so as to cause damage or create an unsafe condition.

**§ 10.2.8 Injury or Damage to Person or Property**

If either party suffers injury or damage to person or property because of an act or omission of the other party, or of others for whose acts such party is legally responsible, notice of the injury or damage, whether or not insured, shall be given to the other party within a reasonable time not exceeding 21 days after discovery. The notice shall provide sufficient detail to enable the other party to investigate the matter.

**§ 10.3 Hazardous Materials and Substances**

**§ 10.3.1** The Contractor is responsible for compliance with any requirements included in the Contract Documents regarding hazardous materials or substances. If the Contractor encounters a hazardous material or substance not addressed in the Contract Documents and if reasonable precautions will be inadequate to prevent foreseeable bodily injury or death to persons resulting from a material or substance, including but not limited to asbestos or polychlorinated biphenyl (PCB), encountered on the site by the Contractor, the Contractor shall, upon recognizing the condition, immediately stop Work in the affected area and notify the Owner and Architect of the condition.

**§ 10.3.2** Upon receipt of the Contractor's notice, the Owner shall obtain the services of a licensed laboratory to verify the presence or absence of the material or substance reported by the Contractor and, in the event such material or substance is found to be present, to cause it to be rendered harmless. Unless otherwise required by the Contract Documents, the Owner shall furnish in writing to the Contractor and Architect the names and qualifications of persons or entities who are to perform tests verifying the presence or absence of the material or substance or who are to perform the task of removal or safe containment of the material or substance. The Contractor and the Architect will promptly reply to the Owner in writing stating whether or not either has reasonable objection to the persons or entities proposed by the Owner. If either the Contractor or Architect has an objection to a person or entity proposed by the Owner, the Owner shall propose another to whom the Contractor and the Architect have no reasonable objection. When the material or substance has been rendered harmless, Work in the affected area shall resume upon written agreement of the Owner and Contractor. By Change Order, the Contract Time shall be extended appropriately and the Contract Sum shall be increased by the amount of the Contractor's reasonable additional costs of shutdown, delay, and start-up.

**§ 10.3.3** To the fullest extent permitted by law, the Owner shall indemnify and hold harmless the Contractor, Subcontractors, Architect, Architect's consultants, and agents and employees of any of them from and against claims, damages, losses, and expenses, including but not limited to attorneys' fees, arising out of or resulting from performance of the Work in the affected area if in fact the material or substance presents the risk of bodily injury or death as described in Section 10.3.1 and has not been rendered harmless, provided that such claim, damage, loss, or expense is attributable to bodily injury, sickness, disease or death, or to injury to or destruction of tangible property

(other than the Work itself), except to the extent that such damage, loss, or expense is due to the fault or negligence of the party seeking indemnity.

**§ 10.3.4** The Owner shall not be responsible under this Section 10.3 for hazardous materials or substances the Contractor brings to the site unless such materials or substances are required by the Contract Documents. The Owner shall be responsible for hazardous materials or substances required by the Contract Documents, except to the extent of the Contractor's fault or negligence in the use and handling of such materials or substances.

**§ 10.3.5** The Contractor shall reimburse the Owner for the cost and expense the Owner incurs (1) for remediation of hazardous materials or substances the Contractor brings to the site and negligently handles, or (2) where the Contractor fails to perform its obligations under Section 10.3.1, except to the extent that the cost and expense are due to the Owner's fault or negligence.

**§ 10.3.6** If, without negligence on the part of the Contractor, the Contractor is held liable by a government agency for the cost of remediation of a hazardous material or substance solely by reason of performing Work as required by the Contract Documents, the Owner shall reimburse the Contractor for all cost and expense thereby incurred.

#### **§ 10.4 Emergencies**

In an emergency affecting safety of persons or property, the Contractor shall act, at the Contractor's discretion, to prevent threatened damage, injury, or loss. Additional compensation or extension of time claimed by the Contractor on account of an emergency shall be determined as provided in Article 15 and Article 17.

### **ARTICLE 11 INSURANCE AND BONDS**

#### **§ 11.1 Contractor's Insurance and Bonds**

**§ 11.1.1** The Contractor shall purchase and maintain insurance of the types and limits of liability, containing the endorsements, and subject to the terms and conditions, as described in the Agreement or elsewhere in the Contract Documents. The Contractor shall purchase and maintain the required insurance from an insurance company or insurance companies lawfully authorized to issue insurance in the jurisdiction where the Project is located. The Owner, Architect, and Architect's consultants shall be named as additional insureds under the Contractor's commercial general liability policy or as otherwise described in the Contract Documents.

**§ 11.1.2** The Contractor shall provide surety bonds of the types, for such penal sums, and subject to such terms and conditions as required by the Contract Documents. The Contractor shall purchase and maintain the required bonds from a company or companies lawfully authorized to issue surety bonds in the jurisdiction where the Project is located.

**§ 11.1.3** Upon the request of any person or entity appearing to be a potential beneficiary of bonds covering payment of obligations arising under the Contract, the Contractor shall promptly furnish a copy of the bonds or shall authorize a copy to be furnished.

**§ 11.1.4 Notice of Cancellation or Expiration of Contractor's Required Insurance.** Within three (3) business days of the date the Contractor becomes aware of an impending or actual cancellation or expiration of any insurance required by the Contract Documents, the Contractor shall provide notice to the Owner of such impending or actual cancellation or expiration. Upon receipt of notice from the Contractor, the Owner shall, unless the lapse in coverage arises from an act or omission of the Owner, have the right to stop the Work until the lapse in coverage has been cured by the procurement of replacement coverage by the Contractor. The furnishing of notice by the Contractor shall not relieve the Contractor of any contractual obligation to provide any required coverage.

#### **§ 11.2 Owner's Insurance**

**§ 11.2.1** The Owner shall purchase and maintain insurance of the types and limits of liability, containing the endorsements, and subject to the terms and conditions, as described in the Agreement or elsewhere in the Contract Documents. The Owner shall purchase and maintain the required insurance from an insurance company or insurance companies lawfully authorized to issue insurance in the jurisdiction where the Project is located.

**§ 11.2.2 Failure to Purchase Required Property Insurance.** If the Owner fails to purchase and maintain the required property insurance, with all of the coverages and in the amounts described in the Agreement or elsewhere in the Contract Documents, the Owner shall inform the Contractor in writing prior to commencement of the Work. Upon receipt of notice from the Owner, the Contractor may delay commencement of the Work and may obtain insurance that will protect the interests of the Contractor, Subcontractors, and Sub-Subcontractors in the Work. When the failure to



provide coverage has been cured or resolved, the Contract Sum and Contract Time shall be equitably adjusted. In the event the Owner fails to procure coverage, the Owner waives all rights against the Contractor, Subcontractors, and Sub-subcontractors to the extent the loss to the Owner would have been covered by the insurance to have been procured by the Owner. The cost of the insurance shall be charged to the Owner by a Change Order. If the Owner does not provide written notice, and the Contractor is damaged by the failure or neglect of the Owner to purchase or maintain the required insurance, the Owner shall reimburse the Contractor for all reasonable costs and damages attributable thereto.

**§ 11.2.3 Notice of Cancellation or Expiration of Owner's Required Property Insurance.** Within three (3) business days of the date the Owner becomes aware of an impending or actual cancellation or expiration of any property insurance required by the Contract Documents, the Owner shall provide notice to the Contractor of such impending or actual cancellation or expiration. Unless the lapse in coverage arises from an act or omission of the Contractor: (1) the Contractor, upon receipt of notice from the Owner, shall have the right to stop the Work until the lapse in coverage has been cured by the procurement of replacement coverage by either the Owner or the Contractor; (2) the Contract Time and Contract Sum shall be equitably adjusted; and (3) the Owner waives all rights against the Contractor, Subcontractors, and Sub-subcontractors to the extent any loss to the Owner would have been covered by the insurance had it not expired or been cancelled. If the Contractor purchases replacement coverage, the cost of the insurance shall be charged to the Owner by an appropriate Change Order. The furnishing of notice by the Owner shall not relieve the Owner of any contractual obligation to provide required insurance.

### **§ 11.3 Waivers of Subrogation**

**§ 11.3.1** The Owner and Contractor waive all rights against (1) each other and any of their subcontractors, sub-subcontractors, agents, and employees, each of the other; (2) the Architect and Architect's consultants; and (3) Separate Contractors, if any, and any of their subcontractors, sub-subcontractors, agents, and employees, for damages caused by fire, or other causes of loss, to the extent those losses are covered by property insurance required by the Agreement or other property insurance applicable to the Project, except such rights as they have to proceeds of such insurance. The Owner or Contractor, as appropriate, shall require similar written waivers in favor of the individuals and entities identified above from the Architect, Architect's consultants, Separate Contractors, subcontractors, and sub-subcontractors. The policies of insurance purchased and maintained by each person or entity agreeing to waive claims pursuant to this section 11.3.1 shall not prohibit this waiver of subrogation. This waiver of subrogation shall be effective as to a person or entity (1) even though that person or entity would otherwise have a duty of indemnification, contractual or otherwise, (2) even though that person or entity did not pay the insurance premium directly or indirectly, or (3) whether or not the person or entity had an insurable interest in the damaged property.

**§ 11.3.2** If during the Project construction period the Owner insures properties, real or personal or both, at or adjacent to the site by property insurance under policies separate from those insuring the Project, or if after final payment property insurance is to be provided on the completed Project through a policy or policies other than those insuring the Project during the construction period, to the extent permissible by such policies, the Owner waives all rights in accordance with the terms of Section 11.3.1 for damages caused by fire or other causes of loss covered by this separate property insurance.

### **§ 11.4 Loss of Use, Business Interruption, and Delay in Completion Insurance**

The Owner, at the Owner's option, may purchase and maintain insurance that will protect the Owner against loss of use of the Owner's property, or the inability to conduct normal operations, due to fire or other causes of loss. The Owner waives all rights of action against the Contractor and Architect for loss of use of the Owner's property, due to fire or other hazards however caused.

### **§ 11.5 Adjustment and Settlement of Insured Loss**

**§ 11.5.1** A loss insured under the property insurance required by the Agreement shall be adjusted by the Owner as fiduciary and made payable to the Owner as fiduciary for the insureds, as their interests may appear, subject to requirements of any applicable mortgagee clause and of Section 11.5.2. The Owner shall pay the Architect and Contractor their just shares of insurance proceeds received by the Owner, and by appropriate agreements the Architect and Contractor shall make payments to their consultants and Subcontractors in similar manner.

**§ 11.5.2** Prior to settlement of an insured loss, the Owner shall notify the Contractor of the terms of the proposed settlement as well as the proposed allocation of the insurance proceeds. The Contractor shall have 14 days from receipt of notice to object to the proposed settlement or allocation of the proceeds. If the Contractor does not object, the Owner shall settle the loss and the Contractor shall be bound by the settlement and allocation. Upon receipt, the Owner

shall deposit the insurance proceeds in a separate account and make the appropriate distributions. Thereafter, if no other agreement is made or the Owner does not terminate the Contract for convenience, the Owner and Contractor shall execute a Change Order for reconstruction of the damaged or destroyed Work in the amount allocated for that purpose. If the Contractor timely objects to either the terms of the proposed settlement or the allocation of the proceeds, the Owner may proceed to settle the insured loss, and any dispute between the Owner and Contractor arising out of the settlement or allocation of the proceeds shall be resolved pursuant to Article 15. Pending resolution of any dispute, the Owner may issue a Construction Change Directive for the reconstruction of the damaged or destroyed Work.

## **ARTICLE 12 UNCOVERING AND CORRECTION OF WORK**

### **§ 12.1 Uncovering of Work**

**§ 12.1.1** If a portion of the Work is covered contrary to the Architect's request or to requirements specifically expressed in the Contract Documents, it must, if requested in writing by the Architect, be uncovered for the Architect's examination and be replaced at the Contractor's expense without change in the Contract Time.

**§ 12.1.2** If a portion of the Work has been covered that the Architect has not specifically requested to examine prior to its being covered, the Architect may request to see such Work and it shall be uncovered by the Contractor. If such Work is in accordance with the Contract Documents, the Contractor shall be entitled to an equitable adjustment to the Contract Sum and Contract Time as may be appropriate. If such Work is not in accordance with the Contract Documents, the costs of uncovering the Work, and the cost of correction, shall be at the Contractor's expense.

### **§ 12.2 Correction of Work**

#### **§ 12.2.1 Before Substantial Completion**

The Contractor shall promptly correct Work rejected by the Architect or failing to conform to the requirements of the Contract Documents, discovered before Substantial Completion and whether or not fabricated, installed or completed. Costs of correcting such rejected Work, including additional testing and inspections, the cost of uncovering and replacement, and compensation for the Architect's services and expenses made necessary thereby, shall be at the Contractor's expense.

#### **§ 12.2.2 After Substantial Completion**

**§ 12.2.2.1** In addition to the Contractor's obligations under Section 3.5, if, within one year after the date of Substantial Completion of the Work or designated portion thereof or after the date for commencement of warranties established under Section 9.9.1, or by terms of any applicable special warranty required by the Contract Documents, any of the Work is found to be not in accordance with the requirements of the Contract Documents, the Contractor shall correct it promptly after receipt of notice from the Owner to do so, unless the Owner has previously given the Contractor a written acceptance of such condition. The Owner shall give such notice promptly after discovery of the condition. During the one-year period for correction of Work, if the Owner fails to notify the Contractor and give the Contractor an opportunity to make the correction, the Owner waives the rights to require correction by the Contractor and to make a claim for breach of warranty. If the Contractor fails to correct nonconforming Work within a reasonable time during that period after receipt of notice from the Owner or Architect, the Owner may correct it in accordance with Section 2.5.

**§ 12.2.2.2** The one-year period for correction of Work shall be extended with respect to portions of Work first performed after Substantial Completion by the period of time between Substantial Completion and the actual completion of that portion of the Work.

**§ 12.2.2.3** The one-year period for correction of Work shall not be extended by corrective Work performed by the Contractor pursuant to this Section 12.2.

**§ 12.2.3** The Contractor shall remove from the site portions of the Work that are not in accordance with the requirements of the Contract Documents and are neither corrected by the Contractor nor accepted by the Owner.

**§ 12.2.4** The Contractor shall bear the cost of correcting destroyed or damaged construction of the Owner or Separate Contractors, whether completed or partially completed, caused by the Contractor's correction or removal of Work that is not in accordance with the requirements of the Contract Documents.

**§ 12.2.5** Nothing contained in this Section 12.2 shall be construed to establish a period of limitation with respect to other obligations the Contractor has under the Contract Documents. Establishment of the one-year period for

correction of Work as described in Section 12.2.2 relates only to the specific obligation of the Contractor to correct the Work, and has no relationship to the time within which the obligation to comply with the Contract Documents may be sought to be enforced, nor to the time within which proceedings may be commenced to establish the Contractor's liability with respect to the Contractor's obligations other than specifically to correct the Work.

### **§ 12.3 Acceptance of Nonconforming Work**

If the Owner prefers to accept Work that is not in accordance with the requirements of the Contract Documents, the Owner may do so instead of requiring its removal and correction, in which case the Contract Sum will be reduced as appropriate and equitable. Such adjustment shall be effected whether or not final payment has been made.

## **ARTICLE 13 MISCELLANEOUS PROVISIONS**

### **§ 13.1 Governing Law**

The Contract shall be governed by the law of the place where the Project is located, excluding that jurisdiction's choice of law rules. If the parties have selected arbitration as the method of binding dispute resolution, the Federal Arbitration Act shall govern Section 15.4.

### **§ 13.2 Successors and Assigns**

**§ 13.2.1** The Owner and Contractor respectively bind themselves, their partners, successors, assigns, and legal representatives to covenants, agreements, and obligations contained in the Contract Documents. Except as provided in Section 13.2.2, neither party to the Contract shall assign the Contract as a whole without written consent of the other. If either party attempts to make an assignment without such consent, that party shall nevertheless remain legally responsible for all obligations under the Contract.

**§ 13.2.2** The Owner may, without consent of the Contractor, assign the Contract to a lender providing construction financing for the Project, if the lender assumes the Owner's rights and obligations under the Contract Documents. The Contractor shall execute all consents reasonably required to facilitate the assignment.

### **§ 13.3 Rights and Remedies**

**§ 13.3.1** Duties and obligations imposed by the Contract Documents and rights and remedies available thereunder shall be in addition to and not a limitation of duties, obligations, rights, and remedies otherwise imposed or available by law.

**§ 13.3.2** No action or failure to act by the Owner, Architect, or Contractor shall constitute a waiver of a right or duty afforded them under the Contract, nor shall such action or failure to act constitute approval of or acquiescence in a breach thereunder, except as may be specifically agreed upon in writing.

### **§ 13.4 Tests and Inspections**

**§ 13.4.1** Tests, inspections, and approvals of portions of the Work shall be made as required by the Contract Documents and by applicable laws, statutes, ordinances, codes, rules, and regulations or lawful orders of public authorities. Unless otherwise provided, the Contractor shall make arrangements for such tests, inspections, and approvals with an independent testing laboratory or entity acceptable to the Owner, or with the appropriate public authority, and shall bear all related costs of tests, inspections, and approvals. The Contractor shall give the Architect timely notice of when and where tests and inspections are to be made so that the Architect may be present for such procedures. The Owner shall bear costs of tests, inspections, or approvals that do not become requirements until after bids are received or negotiations concluded. The Owner shall directly arrange and pay for tests, inspections, or approvals where building codes or applicable laws or regulations so require.

**§ 13.4.2** If the Architect, Owner, or public authorities having jurisdiction determine that portions of the Work require additional testing, inspection, or approval not included under Section 13.4.1, the Architect will, upon written authorization from the Owner, instruct the Contractor to make arrangements for such additional testing, inspection, or approval, by an entity acceptable to the Owner, and the Contractor shall give timely notice to the Architect of when and where tests and inspections are to be made so that the Architect may be present for such procedures. Such costs, except as provided in Section 13.4.3, shall be at the Owner's expense.

**§ 13.4.3** If procedures for testing, inspection, or approval under Sections 13.4.1 and 13.4.2 reveal failure of the portions of the Work to comply with requirements established by the Contract Documents, all costs made necessary by such failure, including those of repeated procedures and compensation for the Architect's services and expenses, shall be at the Contractor's expense.

§ 13.4.4 Required certificates of testing, inspection, or approval shall, unless otherwise required by the Contract Documents, be secured by the Contractor and promptly delivered to the Architect.

§ 13.4.5 If the Architect is to observe tests, inspections, or approvals required by the Contract Documents, the Architect will do so promptly and, where practicable, at the normal place of testing.

§ 13.4.6 Tests or inspections conducted pursuant to the Contract Documents shall be made promptly to avoid unreasonable delay in the Work.

### § 13.5 Interest

Payments due and unpaid under the Contract Documents shall bear interest from the date payment is due at the rate the parties agree upon in writing or, in the absence thereof, at the legal rate prevailing from time to time at the place where the Project is located.

## ARTICLE 14 TERMINATION OR SUSPENSION OF THE CONTRACT

### § 14.1 Termination by the Contractor

§ 14.1.1 The Contractor may terminate the Contract if the Work is stopped for a period of 30 consecutive days through no act or fault of the Contractor, a Subcontractor, a Sub-subcontractor, their agents or employees, or any other persons or entities performing portions of the Work, for any of the following reasons:

- .1 Issuance of an order of a court or other public authority having jurisdiction that requires all Work to be stopped;
- .2 An act of government, such as a declaration of national emergency, that requires all Work to be stopped;
- .3 Because the Architect has not issued a Certificate for Payment and has not notified the Contractor of the reason for withholding certification as provided in Section 9.4.1, or because the Owner has not made payment on a Certificate for Payment within the time stated in the Contract Documents; or
- .4 The Owner has failed to furnish to the Contractor reasonable evidence as required by Section 2.2.

§ 14.1.2 The Contractor may terminate the Contract if, through no act or fault of the Contractor, a Subcontractor, a Sub-subcontractor, their agents or employees, or any other persons or entities performing portions of the Work, repeated suspensions, delays, or interruptions of the entire Work by the Owner as described in Section 14.3, constitute in the aggregate more than 100 percent of the total number of days scheduled for completion, or 120 days in any 365-day period, whichever is less.

§ 14.1.3 If one of the reasons described in Section 14.1.1 or 14.1.2 exists, the Contractor may, upon seven days' notice to the Owner and Architect, terminate the Contract and recover from the Owner payment for Work executed, as well as reasonable overhead and profit on Work not executed, and costs incurred by reason of such termination.

§ 14.1.4 If the Work is stopped for a period of 60 consecutive days through no act or fault of the Contractor, a Subcontractor, a Sub-subcontractor, or their agents or employees or any other persons or entities performing portions of the Work because the Owner has repeatedly failed to fulfill the Owner's obligations under the Contract Documents with respect to matters important to the progress of the Work, the Contractor may, upon seven additional days' notice to the Owner and the Architect, terminate the Contract and recover from the Owner as provided in Section 14.1.3.

### § 14.2 Termination by the Owner for Cause

§ 14.2.1 The Owner may terminate the Contract if the Contractor

- .1 repeatedly refuses or fails to supply enough properly skilled workers or proper materials;
- .2 fails to make payment to Subcontractors or suppliers in accordance with the respective agreements between the Contractor and the Subcontractors or suppliers;
- .3 repeatedly disregards applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of a public authority; or
- .4 otherwise is guilty of substantial breach of a provision of the Contract Documents.

§ 14.2.2 When any of the reasons described in Section 14.2.1 exist, and upon certification by the Architect that sufficient cause exists to justify such action, the Owner may, without prejudice to any other rights or remedies of the Owner and after giving the Contractor and the Contractor's surety, if any, seven days' notice, terminate employment of the Contractor and may, subject to any prior rights of the surety:

- .1 Exclude the Contractor from the site and take possession of all materials, equipment, tools, and construction equipment and machinery thereon owned by the Contractor;
- .2 Accept assignment of subcontracts pursuant to Section 5.4; and
- .3 Finish the Work by whatever reasonable method the Owner may deem expedient. Upon written request of the Contractor, the Owner shall furnish to the Contractor a detailed accounting of the costs incurred by the Owner in finishing the Work.

**§ 14.2.3** When the Owner terminates the Contract for one of the reasons stated in Section 14.2.1, the Contractor shall not be entitled to receive further payment until the Work is finished.

**§ 14.2.4** If the unpaid balance of the Contract Sum exceeds costs of finishing the Work, including compensation for the Architect's services and expenses made necessary thereby, and other damages incurred by the Owner and not expressly waived, such excess shall be paid to the Contractor. If such costs and damages exceed the unpaid balance, the Contractor shall pay the difference to the Owner. The amount to be paid to the Contractor or Owner, as the case may be, shall be certified by the Initial Decision Maker, upon application, and this obligation for payment shall survive termination of the Contract.

### **§ 14.3 Suspension by the Owner for Convenience**

**§ 14.3.1** The Owner may, without cause, order the Contractor in writing to suspend, delay or interrupt the Work, in whole or in part for such period of time as the Owner may determine.

**§ 14.3.2** The Contract Sum and Contract Time shall be adjusted for increases in the cost and time caused by suspension, delay, or interruption under Section 14.3.1. Adjustment of the Contract Sum shall include profit. No adjustment shall be made to the extent

- .1 that performance is, was, or would have been, so suspended, delayed, or interrupted, by another cause for which the Contractor is responsible; or
- .2 that an equitable adjustment is made or denied under another provision of the Contract.

### **§ 14.4 Termination by the Owner for Convenience**

**§ 14.4.1** The Owner may, at any time, terminate the Contract for the Owner's convenience and without cause.

**§ 14.4.2** Upon receipt of notice from the Owner of such termination for the Owner's convenience, the Contractor shall

- .1 cease operations as directed by the Owner in the notice;
- .2 take actions necessary, or that the Owner may direct, for the protection and preservation of the Work; and
- .3 except for Work directed to be performed prior to the effective date of termination stated in the notice, terminate all existing subcontracts and purchase orders and enter into no further subcontracts and purchase orders.

**§ 14.4.3** In case of such termination for the Owner's convenience, the Owner shall pay the Contractor for Work properly executed; costs incurred by reason of the termination, including costs attributable to termination of Subcontracts; and the termination fee, if any, set forth in the Agreement.

## **ARTICLE 15 CLAIMS AND DISPUTES**

### **§ 15.1 Claims**

#### **§ 15.1.1 Definition**

A Claim is a demand or assertion by one of the parties seeking, as a matter of right, payment of money, a change in the Contract Time, or other relief with respect to the terms of the Contract. The term "Claim" also includes other disputes and matters in question between the Owner and Contractor arising out of or relating to the Contract. The responsibility to substantiate Claims shall rest with the party making the Claim. This Section 15.1.1 does not require the Owner to file a Claim in order to impose liquidated damages in accordance with the Contract Documents.

#### **§ 15.1.2 Time Limits on Claims**

The Owner and Contractor shall commence all Claims and causes of action against the other and arising out of or related to the Contract, whether in contract, tort, breach of warranty or otherwise, in accordance with the requirements of the binding dispute resolution method selected in the Agreement and within the period specified by applicable law, but in any case not more than 10 years after the date of Substantial Completion of the Work. The Owner and Contractor waive all Claims and causes of action not commenced in accordance with this Section 15.1.2.



### **§ 15.1.3 Notice of Claims**

**§ 15.1.3.1** Claims by either the Owner or Contractor, where the condition giving rise to the Claim is first discovered prior to expiration of the period for correction of the Work set forth in Section 12.2.2, shall be initiated by notice to the other party and to the Initial Decision Maker with a copy sent to the Architect, if the Architect is not serving as the Initial Decision Maker. Claims by either party under this Section 15.1.3.1 shall be initiated within 21 days after occurrence of the event giving rise to such Claim or within 21 days after the claimant first recognizes the condition giving rise to the Claim, whichever is later.

**§ 15.1.3.2** Claims by either the Owner or Contractor, where the condition giving rise to the Claim is first discovered after expiration of the period for correction of the Work set forth in Section 12.2.2, shall be initiated by notice to the other party. In such event, no decision by the Initial Decision Maker is required.

### **§ 15.1.4 Continuing Contract Performance**

**§ 15.1.4.1** Pending final resolution of a Claim, except as otherwise agreed in writing or as provided in Section 9.7 and Article 14, the Contractor shall proceed diligently with performance of the Contract and the Owner shall continue to make payments in accordance with the Contract Documents.

**§ 15.1.4.2** The Contract Sum and Contract Time shall be adjusted in accordance with the Initial Decision Maker's decision, subject to the right of either party to proceed in accordance with this Article 15. The Architect will issue Certificates for Payment in accordance with the decision of the Initial Decision Maker.

### **§ 15.1.5 Claims for Additional Cost**

If the Contractor wishes to make a Claim for an increase in the Contract Sum, notice as provided in Section 15.1.3 shall be given before proceeding to execute the portion of the Work that is the subject of the Claim. Prior notice is not required for Claims relating to an emergency endangering life or property arising under Section 10.4.

### **§ 15.1.6 Claims for Additional Time**

**§ 15.1.6.1** If the Contractor wishes to make a Claim for an increase in the Contract Time, notice as provided in Section 15.1.3 shall be given. The Contractor's Claim shall include an estimate of cost and of probable effect of delay on progress of the Work. In the case of a continuing delay, only one Claim is necessary.

**§ 15.1.6.2** If adverse weather conditions are the basis for a Claim for additional time, such Claim shall be documented by data substantiating that weather conditions were abnormal for the period of time, could not have been reasonably anticipated, and had an adverse effect on the scheduled construction.

### **§ 15.1.7 Waiver of Claims for Consequential Damages**

The Contractor and Owner waive Claims against each other for consequential damages arising out of or relating to this Contract. This mutual waiver includes

- .1 damages incurred by the Owner for rental expenses, for losses of use, income, profit, financing, business and reputation, and for loss of management or employee productivity or of the services of such persons; and
- .2 damages incurred by the Contractor for principal office expenses including the compensation of personnel stationed there, for losses of financing, business and reputation, and for loss of profit, except anticipated profit arising directly from the Work.

This mutual waiver is applicable, without limitation, to all consequential damages due to either party's termination in accordance with Article 14. Nothing contained in this Section 15.1.7 shall be deemed to preclude assessment of liquidated damages, when applicable, in accordance with the requirements of the Contract Documents.

### **§ 15.2 Initial Decision**

**§ 15.2.1** Claims, excluding those where the condition giving rise to the Claim is first discovered after expiration of the period for correction of the Work set forth in Section 12.2.2 or arising under Sections 10.3, 10.4, and 11.5, shall be referred to the Initial Decision Maker for initial decision. The Architect will serve as the Initial Decision Maker, unless otherwise indicated in the Agreement. Except for those Claims excluded by this Section 15.2.1, an initial decision shall be required as a condition precedent to mediation of any Claim. If an initial decision has not been rendered within 30 days after the Claim has been referred to the Initial Decision Maker, the party asserting the Claim may demand mediation and binding dispute resolution without a decision having been rendered. Unless the Initial Decision Maker

and all affected parties agree, the Initial Decision Maker will not decide disputes between the Contractor and persons or entities other than the Owner.

**§ 15.2.2** The Initial Decision Maker will review Claims and within ten days of the receipt of a Claim take one or more of the following actions: (1) request additional supporting data from the claimant or a response with supporting data from the other party, (2) reject the Claim in whole or in part, (3) approve the Claim, (4) suggest a compromise, or (5) advise the parties that the Initial Decision Maker is unable to resolve the Claim if the Initial Decision Maker lacks sufficient information to evaluate the merits of the Claim or if the Initial Decision Maker concludes that, in the Initial Decision Maker's sole discretion, it would be inappropriate for the Initial Decision Maker to resolve the Claim.

**§ 15.2.3** In evaluating Claims, the Initial Decision Maker may, but shall not be obligated to, consult with or seek information from either party or from persons with special knowledge or expertise who may assist the Initial Decision Maker in rendering a decision. The Initial Decision Maker may request the Owner to authorize retention of such persons at the Owner's expense.

**§ 15.2.4** If the Initial Decision Maker requests a party to provide a response to a Claim or to furnish additional supporting data, such party shall respond, within ten days after receipt of the request, and shall either (1) provide a response on the requested supporting data, (2) advise the Initial Decision Maker when the response or supporting data will be furnished, or (3) advise the Initial Decision Maker that no supporting data will be furnished. Upon receipt of the response or supporting data, if any, the Initial Decision Maker will either reject or approve the Claim in whole or in part.

**§ 15.2.5** The Initial Decision Maker will render an initial decision approving or rejecting the Claim, or indicating that the Initial Decision Maker is unable to resolve the Claim. This initial decision shall (1) be in writing; (2) state the reasons therefor; and (3) notify the parties and the Architect, if the Architect is not serving as the Initial Decision Maker, of any change in the Contract Sum or Contract Time or both. The initial decision shall be final and binding on the parties but subject to mediation and, if the parties fail to resolve their dispute through mediation, to binding dispute resolution.

**§ 15.2.6** Either party may file for mediation of an initial decision at any time, subject to the terms of Section 15.2.6.1.

**§ 15.2.6.1** Either party may, within 30 days from the date of receipt of an initial decision, demand in writing that the other party file for mediation. If such a demand is made and the party receiving the demand fails to file for mediation within 30 days after receipt thereof, then both parties waive their rights to mediate or pursue binding dispute resolution proceedings with respect to the initial decision.

**§ 15.2.7** In the event of a Claim against the Contractor, the Owner may, but is not obligated to, notify the surety, if any, of the nature and amount of the Claim. If the Claim relates to a possibility of a Contractor's default, the Owner may, but is not obligated to, notify the surety and request the surety's assistance in resolving the controversy.

**§ 15.2.8** If a Claim relates to or is the subject of a mechanic's lien, the party asserting such Claim may proceed in accordance with applicable law to comply with the lien notice or filing deadlines.

### **§ 15.3 Mediation**

**§ 15.3.1** Claims, disputes, or other matters in controversy arising out of or related to the Contract, except those waived as provided for in Sections 9.10.4, 9.10.5, and 15.1.7, shall be subject to mediation as a condition precedent to binding dispute resolution.

**§ 15.3.2** The parties shall endeavor to resolve their Claims by mediation which, unless the parties mutually agree otherwise, shall be administered by the American Arbitration Association in accordance with its Construction Industry Mediation Procedures in effect on the date of the Agreement. A request for mediation shall be made in writing, delivered to the other party to the Contract, and filed with the person or entity administering the mediation. The request may be made concurrently with the filing of binding dispute resolution proceedings but, in such event, mediation shall proceed in advance of binding dispute resolution proceedings, which shall be stayed pending mediation for a period of 60 days from the date of filing, unless stayed for a longer period by agreement of the parties or court order. If an arbitration is stayed pursuant to this Section 15.3.2, the parties may nonetheless proceed to the selection of the arbitrator(s) and agree upon a schedule for later proceedings.

**§ 15.3.3** Either party may, within 30 days from the date that mediation has been concluded without resolution of the dispute or 60 days after mediation has been demanded without resolution of the dispute, demand in writing that the other party file for binding dispute resolution. If such a demand is made and the party receiving the demand fails to file for binding dispute resolution within 60 days after receipt thereof, then both parties waive their rights to binding dispute resolution proceedings with respect to the initial decision.

**§ 15.3.4** The parties shall share the mediator's fee and any filing fees equally. The mediation shall be held in the place where the Project is located, unless another location is mutually agreed upon. Agreements reached in mediation shall be enforceable as settlement agreements in any court having jurisdiction thereof.

## **§ 15.4 Arbitration**

**§ 15.4.1** If the parties have selected arbitration as the method for binding dispute resolution in the Agreement, any Claim subject to, but not resolved by, mediation shall be subject to arbitration which, unless the parties mutually agree otherwise, shall be administered by the American Arbitration Association in accordance with its Construction Industry Arbitration Rules in effect on the date of the Agreement. The Arbitration shall be conducted in the place where the Project is located, unless another location is mutually agreed upon. A demand for arbitration shall be made in writing, delivered to the other party to the Contract, and filed with the person or entity administering the arbitration. The party filing a notice of demand for arbitration must assert in the demand all Claims then known to that party on which arbitration is permitted to be demanded.

**§ 15.4.1.1** A demand for arbitration shall be made no earlier than concurrently with the filing of a request for mediation, but in no event shall it be made after the date when the institution of legal or equitable proceedings based on the Claim would be barred by the applicable statute of limitations. For statute of limitations purposes, receipt of a written demand for arbitration by the person or entity administering the arbitration shall constitute the institution of legal or equitable proceedings based on the Claim.

**§ 15.4.2** The award rendered by the arbitrator or arbitrators shall be final, and judgment may be entered upon it in accordance with applicable law in any court having jurisdiction thereof.

**§ 15.4.3** The foregoing agreement to arbitrate and other agreements to arbitrate with an additional person or entity duly consented to by parties to the Agreement, shall be specifically enforceable under applicable law in any court having jurisdiction thereof.

## **§ 15.4.4 Consolidation or Joinder**

**§ 15.4.4.1** Subject to the rules of the American Arbitration Association or other applicable arbitration rules, either party may consolidate an arbitration conducted under this Agreement with any other arbitration to which it is a party provided that (1) the arbitration agreement governing the other arbitration permits consolidation, (2) the arbitrations to be consolidated substantially involve common questions of law or fact, and (3) the arbitrations employ materially similar procedural rules and methods for selecting arbitrator(s).

**§ 15.4.4.2** Subject to the rules of the American Arbitration Association or other applicable arbitration rules, either party may include by joinder persons or entities substantially involved in a common question of law or fact whose presence is required if complete relief is to be accorded in arbitration, provided that the party sought to be joined consents in writing to such joinder. Consent to arbitration involving an additional person or entity shall not constitute consent to arbitration of any claim, dispute or other matter in question not described in the written consent.

**§ 15.4.4.3** The Owner and Contractor grant to any person or entity made a party to an arbitration conducted under this Section 15.4, whether by joinder or consolidation, the same rights of joinder and consolidation as those of the Owner and Contractor under this Agreement.



**SECTION 00 73 13**  
**SUPPLEMENTARY GENERAL CONDITIONS A201-2017**

The following supplements modify the "General Conditions of the Contract for Construction," AIA Document A201-2017. Where a portion of the General Conditions is modified or deleted by the Supplementary Conditions, the unaltered portions of the General Conditions shall remain in effect.

TABLE OF ARTICLES

1. GENERAL PROVISIONS
2. OWNER
3. CONTRACTOR
4. ADMINISTRATION OF THE CONTRACT
5. SUBCONTRACTORS
6. CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS
7. CHANGES IN THE WORK
8. TIME
9. PAYMENTS AND COMPLETION
10. PROTECTION OF PERSONS AND PROPERTY
11. INSURANCE AND BONDS
12. UNCOVERING AND CORRECTION OF WORK
13. MISCELLANEOUS PROVISIONS
14. TERMINATION OR SUSPENSION OF THE CONTRACT
15. CLAIMS AND DISPUTES

## ARTICLE 1: GENERAL PROVISIONS

### 1.1 BASIC DEFINITIONS

#### 1.1.1 THE CONTRACT DOCUMENTS

Strike the last sentence of Section 1.1.1 in its entirety and replace with the following:

"The Contract Documents also include Advertisement for Bid, Instructions to Bidder, sample forms, the Bid Form, the Contractor's completed Bid and the Award Letter."

Add the following Section:

"1.1.1.1 In the event of conflict or discrepancies among the Contract Documents, the Documents prepared by the State of Delaware, Division of Facilities Management shall take precedence over all other documents."

#### 1.1.8 INITIAL DECISION MAKER

Strike the last sentence of Section 1.1.8 in its entirety and add the following to the end of the remaining sentence:

"and certify termination of the Agreement under Section 14.2.2."

### 1.2 CORRELATION AND INTENT OF THE CONTRACT DOCUMENTS

#### 1.2.1.1 Insert "if possible" at the end of the second sentence.

Add the following Sections:

"1.2.4 In the case of an inconsistency between the Drawings and the Specifications, or within either document not clarified by addendum, the better quality or greater quantity of work shall be provided in accordance with the Architect's interpretation."

"1.2.5 The word "PROVIDE" as used in the Contract Documents shall mean "FURNISH AND INSTALL" and shall include, without limitation, all labor, materials, equipment, transportation, services and other items required to complete the Work."

"1.2.6 The word "PRODUCT" as used in the Contract Documents means all materials, systems and equipment."

### 1.5 OWNERSHIP AND USE OF DRAWINGS, SPECIFICATIONS AND OTHER INSTRUMENTS OF SERVICE

Strike Section 1.5.1 in its entirety and replace with the following:

"All pre-design studies, drawings, specifications and other documents, including those in electronic form, prepared by the Architect under this Agreement are, and shall remain, the property of the Owner whether the Project for which they are made is executed or not. Such documents may be used by the Owner to construct one or more like Projects without the approval of, or additional compensation to, the Architect. The Contractor, Subcontractors, Sub-subcontractors, and Material or Equipment Suppliers are authorized to use and reproduce applicable portions of the Drawings, Specifications and other

documents prepared by the Architect and the Architect's consultants appropriate to and for use in the execution of their Work under the Contract Documents. They are not to be used by the Contractor or any Subcontractor, Sub-subcontractor or Material and Equipment Supplier on other Projects or for additions to this Project outside the scope of the Work without the specific written consent of the Owner, Architect and Architect's consultants.

The Architect shall not be liable for injury or damage resulting from the re-use of drawings and specifications if the Architect is not involved in the re-use Project. Prior to re-use of construction documents for a Project in which the Architect is not also involved, the Owner will remove from such documents all identification of the original Architect, including name, address and professional seal or stamp."

Strike Section 1.5.2 in its entirety.

1.7 DIGITAL DATA USE AND TRANSMISSION

Strike Section 1.7 in its entirety and replace with the following:

"The parties shall agree upon protocols governing transmission and use of Instruments of Service or any other information or documentation in digital form."

1.8 BUILDING INFORMATION MODELS USE AND RELIANCE

Strike Section 1.8 in its entirety.

**ARTICLE 2: OWNER**

2.2 EVIDENCE OF THE OWNER'S FINANCIAL ARRANGEMENTS

Strike Section 2.2 in its entirety.

2.3 INFORMATION AND SERVICES REQUIRED OF THE OWNER

2.3.3 Strike 2.3.3 in its entirety.

2.3.4 Add the following sentence at the end of the paragraph:

The Contractor, at their expense shall bear the costs to accurately identify the location of all underground utilities in the area of their excavation and shall bear all cost for any repairs required, out of failure to accurately identify said utilities."

Strike Section 2.3.6 in its entirety and replace with the following:

"2.3.6 The Contractor shall be furnished free of charge (1) electronic set of the Drawings and Project Manuals. Additional sets will be furnished at the cost of reproduction, postage and handling."

2.5 OWNER'S RIGHT TO CARRY OUT THE WORK

Add ", except as outlined in Section 3.15" after the reference to "Article 15" at the end of the last sentence of the Section.

### ARTICLE 3: CONTRACTOR

#### 3.2 REVIEW OF CONTRACT DOCUMENTS AND FIELD CONDITIONS BY CONTRACTOR

3.2.2 Add "and Owner" after "report to the Architect" in the second sentence.

3.2.4 Strike "subject to Section 15.1.7" in the second sentence.

3.2.4 Strike the third sentence.

#### 3.3 SUPERVISION AND CONSTRUCTION PROCEDURES

Add the following Sections:

"3.3.2.1 The Contractor shall immediately remove from the Work, whenever requested to do so by the Owner, any person who is considered by the Owner or Architect to be incompetent or disposed to be so disorderly, or who for any reason is not satisfactory to the Owner, and that person shall not again be employed on the Work without the consent of the Owner or the Architect."

"3.3.4 The Contractor must provide suitable storage facilities at the Site for the proper protection and safe storage of their materials, or as otherwise identified by the specifications. Consult the Owner and the Architect before storing any materials."

"3.3.5 When any room is used as a shop, storeroom, office, etc., by the Contractor or Subcontractor(s) during the construction of the Work, the Contractor making use of these areas will be held responsible for any repairs, patching or cleaning arising from such use."

#### 3.4 LABOR AND MATERIALS

Add the Following Sections:

"3.4.4 Before starting the Work, each Contractor shall carefully examine all preparatory Work that has been executed to receive their Work. Check carefully, by whatever means are required, to insure that its Work and adjacent, related Work, will finish to proper contours, planes and levels. Promptly notify the Architect & Owner of any defects or imperfections in preparatory Work which will in any way affect satisfactory completion of its Work. Absence of such notification will be construed as an acceptance of preparatory Work and later claims of defects will not be recognized."

"3.4.5 Under no circumstances shall the Contractor's Work proceed prior to preparatory Work having been completely cured, dried and/or otherwise made satisfactory to receive this Work. Responsibility for timely installation of all materials rests solely with the Contractor responsible for that Work, who shall maintain coordination at all times."

#### 3.5 WARRANTY

Add the following Sections:

"3.5.3 The Contractor will guarantee all materials and workmanship against original defects, except injury from proper and usual wear when used for the purpose intended,

for two years after Acceptance by the Owner, and will maintain all items in perfect condition during the period of warranty.”

“3.5.4 Defects appearing during the period of warranty will be made good by the Contractor at his expense upon demand of the Owner, it being required that all work will be in perfect condition when the period of warranty will have elapsed.”

“3.5.5 Upon notification by the Owner of a defect covered by the Contractor’s warranty, the Contractor shall respond within 4 hours of the notification.”

“3.5.6 In addition to the General Warranty there are other warranties required for certain items for different periods of time than the two years as above, and are particularly so stated in that part of the specifications referring to same. The said warranties will commence at the same time as the General Warranty.”

“3.5.7 If the Contractor fails to remedy any failure, defect or damage within a reasonable time after receipt of notice, the Owner will have the right to replace, repair, or otherwise remedy the failure, defect or damage at the Contractor’s expense.”

### 3.8 ALLOWANCES

Add the following Section:

“3.8.1.1 For costs to be covered under a project allowance, (included in the schedule of values) the Contractor shall submit a summary of those costs anticipated and an Allowance Access Authorization Form to the Architect and Owner, reflecting the projected costs. The Allowance Access Authorization Form must be signed by the Owner prior to initiating any work associated with the allowance.”

### 3.10 CONTRACTOR’S CONSTRUCTION AND SUBMITTAL SCHEDULES

3.10.1 Add “estimated” after “and the” and before “date of” in the second sentence.

3.10.2 Strike “and thereafter as necessary to maintain a current submittal schedule” in the first sentence.

### 3.11 DOCUMENTS AND SAMPLES AT THE SITE

Add the following Sections:

“3.11.1 During the course of the Work, the Contractor shall maintain a record set of drawings on which the Contractor shall mark the actual physical location of all piping, valves, equipment, conduit, outlets, access panels, controls, actuators, including all appurtenances that will be concealed once construction is complete, etc., including all invert elevations.”

“3.11.2 At the completion of the project, the Contractor shall obtain a set of the conformed contract drawings from the Architect, and neatly transfer all information outlined in 3.11.1 to provide a complete record of the as-built conditions.”

“3.11.3 Upon completion of the work noted in 3.11.2 the contractor shall schedule a meeting with the Architect/Engineer and Owner to review the final record drawings and closeout documents prior to submission. After this meeting the Contractor shall make adjustments per the review, and submit one (1) original markup and (2) copies of the red line drawings (as-built conditions, to the Owner and one (1) print to the Architect. In addition, attach one complete set of the as-built documents to each of the Operating and Maintenance Instructions/Manuals. The Contractor will include (2) USB drives, each

containing all “red line drawings (as-built) and Closeout Documents properly tabbed in accordance with closeout requirements as defined elsewhere in the contract documents.”

3.12 SHOP DRAWINGS, PRODUCT DATA AND SAMPLES

3.12.10.2 Strike “If the Contract Documents require” from the beginning of the sentence.

3.12.10.2 Strike “to” between “professional” and certify” and replace with “shall”.

3.17 Insert “indemnify and” between “shall” and “hold” in the second sentence.

**ARTICLE 4: ADMINISTRATION OF THE CONTRACT**

4.2 ADMINISTRATION OF THE CONTRACT

4.2.7 Strike the first sentence and replace with the following:

“The Architect will review and approve or take other appropriate action upon the Contractor’s submittals such as Shop Drawings, Product Data and Samples for the purpose of checking for conformance with the Contract Documents.”

4.2.7 Strike the second sentence and replace with the following:

“The Architect’s action will be taken with such reasonable promptness as to cause no delay in the Work in the activities of the Owner, Contractor or separate Contractors, while allowing sufficient time in the Owner’s professional judgment to permit adequate review.”

Add the following Section:

“4.2.10.1 There will be no full-time Project Representative provided by the Owner or Architect on this project.”

“4.2.13 Add “and in compliance with all local requirements.” to the end of the sentence.”

**ARTICLE 5: SUBCONTRACTORS**

5.2 AWARD OF SUBCONTRACTS AND OTHER CONTRACTS FOR PORTIONS OF THE WORK

5.2.3 Strike Section 5.2.3 in its entirety and replace with the following:

“If the Owner or Architect has reasonable objection to a person or entity proposed by the Contractor, the Contractor shall propose another to whom the Owner or Architect has no reasonable objection, subject to the statutory requirements of 29 Delaware Code § 6962(d)(10)b.3 and 4.”

5.2.4 Strike Section 5.2.4 in its entirety and replace with the following:

“The Contractor may not substitute any Subcontractor listed in its Bid unless the Contractor complies with the requirements of 29 Delaware Code § 6962(d)(10)b.3 and 4. Failure to comply with this requirement shall subject the Contractor to a penalty as outlined in Section 5.2 of the Owner’s General Requirements.”

Add the following Section:

"5.2.5 The Contractor shall comply and shall ensure all Subcontractors comply with all requirements for drug testing as set forth in TITLE 19 LABOR DELAWARE ADMINISTRATIVE CODE 4000 Office of Management and Budget 4100 Division of Facilities Management **4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects.**"

#### **ARTICLE 6: CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS**

- 6.1 OWNER'S RIGHT TO PERFORM CONSTRUCTION AND TO AWARD SEPARATE CONTRACTS
  - 6.1.1 Strike "and waiver of subrogation" from the end of the second sentence.
  - 6.1.4 Strike Section 6.1.4 in its entirety.
- 6.2 MUTUAL RESPONSIBILITY
  - 6.2.3 Strike "shall" and replace with "may" in the second sentence.

#### **ARTICLE 7: CHANGES IN THE WORK**

(SEE ARTICLE 7: CHANGES IN WORK IN THE STATE OF DELAWARE DIVISION OF FACILITIES MANAGEMENT GENERAL REQUIREMENTS)

- 7.2 CHANGE ORDERS
  - 7.2.2 In addition to the above:
    - 7.2.2.1 The General Contractor is allowed a fifteen percent (15%) markup for overhead and profit for additional work performed by the General Contractor's own forces.
    - 7.2.2.2 For additional subcontractor work, the Subcontractor is allowed a fifteen (15) percent overhead and profit on change order work above and beyond the direct costs stated previously. To this amount, the General Contractor will be allowed a mark-up not exceeding seven- and one-half percent (7.5%) on the subcontractor's work.
    - 7.2.2.3 Where the Third Tier Contractor is going to be completing the additional work, the Third-Tier contractor will be allowed a markup of fifteen percent (15%) overhead and profit on changes order work above and beyond the direct costs stated previously. To this amount, the Subcontractor will be allowed a markup not to exceed seven and one-half percent (7.5%) on the Third-Tier Contractor's work and the General Contractor will be allowed a markup not to exceed seven and one-half percent (7.5%) of the amount of the Subcontractor's markup.
    - 7.2.2.4 No additional costs shall be allowed for changes related to the Contractor's onsite superintendent/staff, or project manager, unless a change in the work changes the project duration and is identified by the CPM schedule. There will be no other costs associated with the change order.
    - 7.2.2.5 These markups shall include all costs including, but not limited to: overhead, profit, bonds, insurance, supervision, etc."

- 7.3.4.1 Strike “and other employee costs approved by the Architect” after “worker’s compensation insurance,”
- 7.3.4.4 Add “work attributable to the” before “change” at the end of the sentence.
- 7.4 MINOR CHANGES IN WORK  
Add “unless such changes are approved” at the end of the third sentence.

## ARTICLE 8: TIME

### 8.2 PROGRESS AND COMPLETION

#### 8.2.1 Add the following Section:

“8.2.1.1 Refer to Project Specifications Section SUMMARY OF WORK for Contract time requirements.”

#### 8.2.2 After “by the Contractor” strike “and” and insert “to”

#### 8.2.4 Add the following Section:

“8.2.4 If the Work falls behind the Progress Schedule as submitted by the Contractor, the Contractor shall employ additional labor and/or equipment necessary to bring the Work into compliance with the Progress Schedule at no additional cost to the Owner.”

### 8.3 DELAYS AND EXTENSION OF TIME

#### 8.3.1 Strike “binding dispute resolution” and insert “any and all remedies at law or in equity”.

Add the following Section:

“8.3.2.1 The Contractor shall update the status of the suspension, delay, or interruption of the Work with each Application for Payment. (The Contractor shall report the termination of such cause immediately upon the termination thereof.) Failure to comply with this procedure shall constitute a waiver for any claim for adjustment of time or price based upon said cause.”

Strike Section 8.3.3 in its entirety and replace with the following:

#### 8.3.3 “Except in the case of a suspension of the Work directed by the Owner, an extension of time under the provisions of Section 8.3.1 shall be the Contractor’s sole remedy in the progress of the Work and there shall be no payment or compensation to the Contractor for any expense or damage resulting from the delay.”

Add the following Section:

“8.3.4 By permitting the Contractor to work after the expired time for completion of the project, the Owner does not waive their rights under the Contract.”



## **ARTICLE 9: PAYMENTS AND COMPLETION**

### **9.2 SCHEDULE OF VALUES**

Add the following Sections:

"9.2.1 The Schedule of Values shall be submitted using AIA Document G703, Continuation Sheet to G702."

"9.2.2 The Schedule of Values is to include a line item for Project Closeout Document Submittal. The value of this item is to be no less than 1.5% of the initial contract amount."

### **9.3 APPLICATIONS FOR PAYMENT**

#### **9.3.1 Strike Section 9.3.1 in its entirety and replace with the following:**

"At least ten days before the date established for each progress payment, the Contractor shall submit to the Architect an itemized Application for Payment prepared in accordance with the schedule of values for completed portions of the Work. The application shall be notarized, and supported by all data substantiating the Contractor's right to payment that the Owner or Architect require, such as copies of requisitions, and releases and waivers of liens from Subcontractors and suppliers, and shall reflect retainage."

Add the following Sections:

"9.3.1.3 Application for Payment shall be submitted on AIA Document G702 "Application and Certificate for Payment", supported by AIA Document G703 "Continuation Sheet". Said Applications shall be fully executed and notarized."

"9.3.4 Until Closeout Documents have been received and outstanding items completed the Owner will pay 95% (ninety-five percent) of the amount due the Contractor on account of progress payments."

"9.3.5 The Contractor shall provide a current and updated Progress Schedule to the Architect with each Application for Payment. Failure to provide Schedule will be just cause for rejection of Application for Payment."

### **9.5 DECISIONS TO WITHHOLD CERTIFICATION**

Add the following Subsections to 9.5.1:

- .8 failure to provide a current Progress Schedule;
- .9 a lien or attachment is filed;
- .10 failure to comply with mandatory requirements for maintaining Record Documents.

### **9.6 PROGRESS PAYMENTS**

#### **9.6.1 Strike Section 9.6.1 in its entirety and replace with the following:**

"9.6.1 After the Architect has approved and issued a Certificate for Payment, payment shall be made by the Owner within 30 days after Owner's receipt of the Certificate for Payment."

9.6.8 Strike "Provided the Owner has fulfilled its payment obligations under the Contract Documents," in the first sentence.

9.7 FAILURE OF PAYMENT

Strike Section 9.7 in its entirety and replace with the following:

"If the Architect does not issue a Certificate for Payment, through no fault of the Contractor, within fourteen days after receipt of the Contractor's Application for Payment, or if the Owner does not pay the Contractor within thirty days after the date established in the Contract Documents, the amount certified by the Architect, then the Contractor may, upon thirty additional days' notice to the Owner and Architect, stop the Work until payment of the amount owing has been received. The Contract Time shall be extended appropriately and the Contract Sum shall be increased by the amount of the Contractor's reasonable costs of shutdown, delay and start-up, plus interest as provided for in the Contract Documents."

9.8 SUBSTANTIAL COMPLETION

9.8.3 At the end of Section 9.8.3, add the following sentence.

"If the Architect is required to make more than 2 inspections of the same portion of work, the Contractor shall be responsible for all costs associated with subsequent inspections including but not limited to any Architect's fees."

9.8.5 Strike "shall" and insert "may" in the second sentence.

9.8.5 Insert "1/2 of the" after "make payment of" in the second sentence.

9.9 PARTIAL OCCUPANCY OR USE

9.9.1 Strike the the first sentence and replace with the following (the remainder of the Section remains as written).

"The Owner may occupy or use any completed or partially completed portion of the Work at any stage when such portion is designated by separate agreement with the Contractor, provided such occupancy or use authorized by public authorities having jurisdiction over the Project."

9.10.2 Strike "to remain in force after final payment is currently in effect" after "required by the Contract Documents" and replace with "shall remain in force until final payment is completed" in the first sentence.

9.10.4.4 Strike "if permitted by the Contract Documents,"

**ARTICLE 10: PROTECTION OF PERSONS AND PROPERTY**

10.1 SAFETY PRECAUTIONS AND PROGRAMS

Add the following Sections:

10.1.1 Each Contractor shall develop a safety program in accordance with the Occupational Safety and Health Act of 1970. A copy of said plan shall be furnished to the Owner and Architect prior to the commencement of that Contractor's Work.

- 10.1.2 Each Contractor shall appoint a Safety Representative. Safety Representatives shall be someone who is on site on a full time basis. If deemed necessary by the Owner or Architect, Contractor Safety meetings will be scheduled. The attendance of all Safety Representatives will be required. Minutes will be recorded of said meetings by the Contractor and will be distributed to all parties as well as posted in all job offices/trailers etc.

10.2 SAFETY OF PERSONS AND PROPERTY

Add the following Section:

- 10.2.4.1 As required in the Hazardous Chemical Act of June 1984, all vendors supplying any material that may be defined as hazardous must provide Material Safety Data Sheets for those products. Any chemical product should be considered hazardous if it has a caution warning on the label relating to a potential physical or health hazard, if it is known to be present in the work place, and if employees may be exposed under normal conditions or in foreseeable emergency situations. Material Safety Data Sheets shall be provided directly to the Owner, along with the shipping slips that include those products.

- 10.2.5 Strike the second sentence in its entirety.

10.3 HAZARDOUS MATERIALS AND SUBSTANCES

- 10.3.3 Strike Section 10.3.3 in its entirety.

- 10.3.4 Insert "hazardous" in the last sentence after "handling of such" .

- 10.3.6 Strike Section 10.3.6 in its entirety.

**ARTICLE 11: INSURANCE AND BONDS**

11.1 CONTRACTOR'S INSURANCE AND BONDS

- 11.1.1 Strike "Owner" from the third sentence.

11.2 OWNER'S LIABILITY INSURANCE

Strike 11.2 in its entirety, except that in the case of school projects in which case Section 11.2 shall remain.

11.3 WAIVERS OF SUBROGATION

Delete Section 11.3 in its entirety

11.4 LOSS OF USE, BUSINESS INTERRUPTION, AND DELAY IN COMPLETION  
INSURANCE

Delete Section 11.4 in its entirety

**ARTICLE 12: UNCOVERING AND CORRECTION OF WORK**

12.2.2 AFTER SUBSTANTIAL COMPLETION

Add the following Section:

“12.2.2.1.1 At any time during the progress of the Work, or in any case where the nature of the defects will be such that it is not expedient to have corrected, the Owner, at its option, will have the right to deduct such sum, or sums, of money from the amount of the Contract as it considers justified to adjust the difference in value between the non-conforming work and that required under contract including any damage to the structure.”

12.2.2.1 Strike all references to “one year” or “one-year” and replace with “two years”.

12.2.2.2 Strike “one-year” and replace with “two years”.

12.2.2.3 Strike “one-year” and replace with “two years”.

12.2.5 Strike “one-year” and replaced with “two years”.

#### **ARTICLE 13: MISCELLANEOUS PROVISIONS**

13.1 GOVERNING LAW

Strike the last sentence.

13.4 TESTS AND INSPECTIONS

13.4.1 Strike the last sentence and replace with the following:

“The Owner shall pay for tests, inspections, or approvals where building codes or applicable laws or regulations prohibit the Owner from delegating their cost to the Contractor.”

13.5 INTEREST

Strike “the date payment is due at such rate as the parties may agree upon in writing or, in the absence thereof, at the legal rate prevailing from time to time at the place where the Project is located” and replace with “30 days of presentment of the authorized Certificate of Payment at the annual rate of 12% or 1% per month.”

Insert the following Section:

“13.6 CONFLICTS WITH FEDERAL STATUTES OR REGULATIONS

13.6.1 If any provision, specifications or requirement of the Contract Documents conflict or is inconsistent with any statute, law or regulation of the government of the United State of America, the Contractor shall notify the Architect and Owner immediately upon discovery.”

#### **ARTICLE 14: TERMINATION OR SUSPENSION OF THE CONTRACT**

14.1 TERMINATION BY THE CONTRACTOR

14.1.1.4 Insert “, upon the Contractors’ request,” after “furnish to the Contractor”.

14.1.3 Strike “and profit on Work not executed, and” after “as well as reasonable overhead” and replace with “, profit, and reasonable”

14.3 SUSPENSION BY OWNER FOR CONVENIENCE

14.3.2 Strike "Adjustment of the Contract Sum shall include profit".

14.4 TERMINATION BY THE OWNER FOR CONVENIENCE

14.4.3 Strike Section 14.4.3 in its entirety and replace with the following:

"In case of such termination for the Owner's convenience, the Contractor shall be entitled to receive payment for Work executed, and reasonable costs incurred by reason of such termination along with reasonable overhead."

## ARTICLE 15: CLAIMS AND DISPUTES

15.1 CLAIMS

15.1.2 TIME LIMITS ON CLAIMS

Strike the last sentence.

15.1.3 NOTICE OF CLAIM

Strike all references to "21" and replace with "45".

15.1.5 CLAIMS FOR ADDITIONAL COSTS

Strike the first sentence and replace with the following:

"Contractor shall not proceed to execute any portion of the Work that is subject to the Claim without prior approval of the costs or method of payment for the costs associated with the Claim as determined by the Architect and approved by the Owner."

15.1.7 WAIVER OF CLAIMS FOR CONSEQUENTIAL DAMAGES

Strike Section 15.1.7 in its entirety.

15.2 INITIAL DECISION

15.2.1 Strike "and binding dispute resolution" in the fourth sentence and replace with "or any and all remedies at law or in equity".

15.2.5 Strike Section 15.2.5 in its entirety and replace with the following:

"The Architect will approve or reject Claims by written decision, which shall state the reasons therefore and shall notify the parties of any change in the Contract Sum or Contract Time or both. The approval or rejection of a Claim by the Architect shall be subject to mediation and any or all remedies at law or in equity."

15.2.6 Strike Section 15.2.6 and its sub-Sections in their entirety.

15.3 MEDIATION

15.3.1 Strike "binding dispute resolution" and replace with "any or all remedies at law or in equity".

- 15.3.2 Strike “, shall be administered by the American Arbitration Association in accordance with its Construction Industry Mediation Procedure in effect on the date of the Agreement,” in the first sentence.
- 15.3.2 Strike all references to “binding dispute resolution” and replace with “any or all remedies at law and in equity”.
- 15.3.3 Strike Section 15.3.3 in its entirety.
- 15.4 ARBITRATION
- Strike Section 15.4 and its Subsections in their entirety.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

**SECTION 00 73 46**  
**WAGE DETERMINATION SCHEDULE**

The Delaware Department of Labor Division of Industrial Affairs has established the category and associated prevailing wage rate for this project. The project approved prevailing wage rate determination schedule follows:

NOT FOR BIDDING PURPOSES

STATE OF DELAWARE  
DEPARTMENT OF LABOR  
DIVISION OF INDUSTRIAL AFFAIRS  
OFFICE OF LABOR LAW ENFORCEMENT  
PHONE: (302) 318-2769

Mailing Address:  
252 Chapman Road  
Suite 210  
Newark, DE 19702

Located at:  
252 Chapman Road  
Suite 210  
Newark, DE 19702

PREVAILING WAGES FOR BUILDING CONSTRUCTION EFFECTIVE MARCH 13, 2026

| CLASSIFICATION                    | NEW CASTLE | KENT  | SUSSEX |
|-----------------------------------|------------|-------|--------|
| ASBESTOS WORKERS                  | 30.70      | 37.78 | 52.01  |
| BOILERMAKERS                      | 91.87      | 46.61 | 68.52  |
| BRICKLAYERS                       | 68.29      | 68.29 | 68.29  |
| CARPENTERS                        | 64.06      | 64.06 | 52.30  |
| CEMENT FINISHERS                  | 96.91      | 68.29 | 53.44  |
| ELECTRICAL LINE WORKERS           | 61.02      | 52.30 | 39.90  |
| ELECTRICIANS                      | 86.87      | 86.87 | 86.87  |
| ELEVATOR CONSTRUCTORS             | 121.73     | 86.57 | 109.37 |
| GLAZIERS                          | 88.42      | 88.42 | 76.04  |
| INSULATORS                        | 71.54      | 71.54 | 71.54  |
| IRON WORKERS                      | 79.33      | 79.33 | 79.33  |
| LABORERS                          | 59.65      | 59.65 | 59.65  |
| MILLWRIGHTS                       | 91.00      | 91.00 | 73.10  |
| PAINTERS                          | 61.53      | 61.53 | 61.53  |
| PILEDRIVERS                       | 52.83      | 52.83 | 42.72  |
| PLASTERERS                        | 40.06      | 40.06 | 29.69  |
| PLUMBERS/PIPEFITTERS/STEAMFITTERS | 82.05      | 85.29 | 78.26  |
| POWER EQUIPMENT OPERATORS         | 85.29      | 85.29 | 85.29  |
| ROOFERS-COMPOSITION               | 36.41      | 31.28 | 33.64  |
| ROOFERS-SHINGLE/SLATE/TILE        | 24.68      | 29.36 | 23.08  |
| SHEET METAL WORKERS               | 87.84      | 87.84 | 87.84  |
| SOFT FLOOR LAYERS                 | 63.69      | 63.69 | 50.43  |
| SPRINKLER FITTERS                 | 77.63      | 77.63 | 77.63  |
| TERRAZZO/MARBLE/TILE FNR          | 73.75      | 73.75 | 84.10  |
| TERRAZZO/MARBLE/TILE STR          | 81.93      | 81.93 | 93.27  |
| TRUCK DRIVERS                     | 58.41      | 36.83 | 28.66  |

CERTIFIED: 6/4/26

BY: IDzuonkoko /for Francis Chudzik  
ADMINISTRATOR, OFFICE OF LABOR LAW ENFORCEMENT

NOTE: THESE RATES ARE PROMULGATED AND ENFORCED PURSUANT TO THE PREVAILING WAGE REGULATIONS ADOPTED BY THE DEPARTMENT OF LABOR ON APRIL 3, 1992.

CLASSIFICATIONS OF WORKERS ARE DETERMINED BY THE DEPARTMENT OF LABOR. FOR ASSISTANCE IN CLASSIFYING WORKERS, OR FOR A COPY OF THE REGULATIONS OR CLASSIFICATIONS, PHONE (302) 318-2769.

NON-REGISTERED APPRENTICES MUST BE PAID THE MECHANIC'S RATE.

PROJECT: LEONARD L WILLIAMS JUSTICE CENTER ESCALATOR REPLACEMENT, New Castle

MJ1002000087A





**SECTION 00 81 13  
GENERAL REQUIREMENTS**

**TABLE OF ARTICLES**

1. GENERAL
2. OWNER
3. CONTRACTOR
4. ADMINISTRATION OF THE CONTRACT
5. SUBCONTRACTORS
6. CONSTRUCTION BY OWNER OR SEPARATE CONTRACTORS
7. CHANGES IN THE WORK
8. TIME
9. PAYMENTS AND COMPLETION
10. PROTECTION OF PERSONS AND PROPERTY
11. INSURANCE AND BONDS
12. UNCOVERING AND CORRECTION OF WORK
13. MISCELLANEOUS PROVISIONS
14. TERMINATION OR SUSPENSION OF THE CONTRACT

**ARTICLE 1: GENERAL**

**1.1 CONTRACT DOCUMENTS**

- 1.1.1 The intent of the Contract Documents is to include all items necessary for the proper execution and completion of the Work by the Contractor. The Contract Documents are complementary and what is required by one shall be as binding as if required by all. Performance by the Contractor shall be required to an extent consistent with the Contract Documents and reasonably inferable from them as being necessary to produce the intended results.

- 1.1.2 Work including material purchases shall not begin until the Contractor is in receipt of a bonafide State of Delaware Purchase Order. Any work performed or material purchases prior to the issuance of the Purchase Order is done at the Contractor's own risk and cost.

**1.2 EQUALITY OF EMPLOYMENT OPPORTUNITY ON PUBLIC WORKS**

1.2.1 For Public Works Projects financed in whole or in part by state appropriation the Contractor agrees that during the performance of this contract:

1. The Contractor will not discriminate against any employee or applicant for employment because of race, creed, sex, color, sexual orientation, gender identity or national origin. The Contractor will take positive steps to ensure that applicants are employed and that employees are treated during employment without regard to their race, creed, sex, color, sexual orientation, gender identity or national origin. Such action shall include, but not be limited to, the following: employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship. The Contractor agrees to post in conspicuous places available to employees and applicants for employment notices to be provided by the contracting agency setting forth this nondiscrimination clause.
2. The Contractor will, in all solicitations or advertisements for employees placed by or on behalf of the Contractor, state that all qualified applicants will receive consideration for employment without regard to race, creed, sex, color, sexual orientation, gender identity or national origin."

**ARTICLE 2: OWNER**

(NO ADDITIONAL GENERAL REQUIREMENTS - SEE SUPPLEMENTARY GENERAL CONDITIONS)

**ARTICLE 3: CONTRACTOR**

- 3.1 Schedule of Values: The successful Bidder shall within twenty (20) days after receiving notice to proceed with the work, furnish to the Owner a complete schedule of values on the various items comprising the work.
- 3.2 Subcontracts: Upon approval of Subcontractors, the Contractor shall award their Subcontracts as soon as possible after the signing of their own contract and see that all material, their own and those of their Subcontractors, are promptly ordered so that the work will not be delayed by failure of materials to arrive on time.
- 3.3 Before commencing any work or construction, the General Contractor is to consult with the Owner as to matters in connection with access to the site and the allocation of Ground Areas for the various features of hauling, storage, etc.
- 3.4 The Contractor shall supervise and direct the Work, using the Contractor's best skill and attention. The Contractor shall be solely responsible for and have control over construction means, methods, techniques, sequences and procedures and for coordinating all portions of the Work under the Contract, unless the Contract Documents give other specific instructions.
- 3.5 The Contractor shall enforce strict discipline and good order among the Contractor's employees and other persons carrying out the Contract. The Contractor shall not permit employment of unfit persons or persons not skilled in tasks assigned to them.
- 3.6 The Contractor warrants to the Owner that materials and equipment furnished will be new and of good quality, unless otherwise permitted, and that the work will be free from defects and in conformance with the Contract Documents. Work not conforming to these requirements, including substitutions not properly approved, may be considered defective. If

required by the Owner, the Contractor shall furnish evidence as to the kind and quality of materials and equipment provided.

- 3.7 Unless otherwise provided, the Contractor shall pay all sales, consumer, use and other similar taxes, and shall secure and pay for required permits, fees, licenses, and inspections necessary for proper execution of the Work.
- 3.8 The Contractor shall comply with and give notices required by laws, ordinances, rules, regulations, and lawful orders of public authorities bearing on performance of the Work. The Contractor shall promptly notify the Owner if the Drawings and Specifications are observed to be at variance therewith.
- 3.9 The Contractor shall be responsible to the Owner for the acts and omissions of the Contractor's employees, Subcontractors and their agents and employees, and other persons performing portions of the Work under contract with the Contractor.
- 3.10 The Contractor shall keep the premises and surrounding area free from accumulation of waste materials or rubbish caused by operations under the Contract. At completion of the Work the Contractor shall remove from and about the Project all waste materials, rubbish, the Contractor's tools, construction equipment, machinery and surplus materials. The Contractor shall be responsible for returning all damaged areas to their original conditions.
- 3.11 STATE LICENSE AND TAX REQUIREMENTS
- 3.11.1 Each Contractor and Subcontractor shall be licensed to do business in the State of Delaware and shall pay all fees and taxes due under State laws. In conformance with Section 2503, Chapter 25, Title 30, Delaware Code, "the Contractor shall furnish the Delaware Department of Finance with in ten (10) days after entering into any contract with a contractor or subcontractor not a resident of this State, a statement of total value of such contract or contracts together with the names and addresses of the contracting parties."
- 3.12 The Contractor shall comply with all requirements set forth in Section 6962, Chapter 69, Title 29 of the Delaware Code.
- 3.13 During the contract Work, the Contractor and each Subcontractor, shall implement an Employee Drug Testing Program in accordance with OMB Regulation 4104 - "Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on "Large Public Works Projects". "Large Public Works" is based upon the current threshold required for bidding Public Works as set by the Purchasing and Contracting Advisory Council.

#### **ARTICLE 4: ADMINISTRATION OF THE CONTRACT**

- 4.1 CONTRACT SURETY
- 4.1.1 PERFORMANCE BOND AND LABOR AND MATERIAL PAYMENT BOND
- 4.1.2 All bonds will be required as follows unless specifically waived elsewhere in the Bidding Documents.
- 4.1.3 Contents of Performance Bonds – The bond shall be in the form approved by the Office of Management and Budget. The bond shall be conditioned upon the faithful compliance and performance by the successful bidder of each and every term and condition of the contract and the proposal, plans, specifications, and bid documents thereof. Each term and condition shall be met at the time and in the manner prescribed by the Contract, Bid

documents and the specifications, including the payment in full to every person furnishing material or performing labor in the performance of the Contract, of all sums of money due the person for such labor and material. (The bond shall also contain the successful bidder's guarantee to indemnify and save harmless the State and the agency from all costs, damages and expenses growing out of or by reason of the Contract in accordance with the Contract.)

4.1.4 Invoking a Performance Bond – The agency may, when it considers that the interest of the State so requires, cause judgement to be confessed upon the bond.

4.1.5 Within twenty (20) days after the date of notice of award of contract, the Bidder to whom the award is made shall furnish a Performance Bond and Labor and Material Payment Bond, each equal to the full amount of the Contract price to guarantee the faithful performance of all terms, covenants and conditions of the same. The bonds are to be issued by an acceptable Bonding Company licensed to do business in the State of Delaware and shall be issued in duplicate.

4.1.6 Performance and Payment Bonds shall be maintained in full force (warranty bond) for a period of two (2) years after the date of the Certificate for Final Payment. The Performance Bond shall guarantee the satisfactory completion of the Project and that the Contractor will make good any faults or defects in his work which may develop during the period of said guarantees as a result of improper or defective workmanship, material or apparatus, whether furnished by themselves or their Sub-Contractors. The Payment Bond shall guarantee that the Contractor shall pay in full all persons, firms or corporations who furnish labor or material or both labor and material for, or on account of, the work included herein. The bonds shall be paid for by this Contractor. The Owner shall have the right to demand that the proof parties signing the bonds are fully authorized to do so.

#### 4.2 FAILURE TO COMPLY WITH CONTRACT

4.2.1 If any firm entering into a contract with the State, or Agency that neglects or refuses to perform or fails to comply with the terms thereof, the Agency which signed the Contract may terminate the Contract and proceed to award a new contract in accordance with this Chapter 69, Title 29 of the Delaware Code or may require the Surety on the Performance Bond to complete the Contract in accordance with the terms of the Performance Bond. Nothing herein shall preclude the Agency from pursuing additional remedies as otherwise provided by law.

#### 4.3 CONTRACT INSURANCE AND CONTRACT LIABILITY

4.3.1 In addition to the bond requirements stated in the Bid Documents, each successful Bidder shall purchase adequate insurance for the performance of the Contract and, by submission of a Bid, agrees to indemnify and save harmless and to defend all legal or equitable actions brought against the State, any Agency, officer and/or employee of the State, for and from all claims of liability which is or may be the result of the successful Bidder's actions during the performance of the Contract.

4.3.2 The purchase or nonpurchase of such insurance or the involvement of the successful Bidder in any legal or equitable defense of any action brought against the successful Bidder based upon work performed pursuant to the Contract will not waive any defense which the State, its agencies and their respective officers, employees and agents might otherwise have against such claims, specifically including the defense of sovereign immunity, where applicable, and by the terms of this section, the State and all agencies, officers and employees thereof shall not be financially responsible for the consequences of work performed, pursuant to said contract.

4.4 RIGHT TO AUDIT RECORDS

4.4.1 The Owner shall have the right to audit the books and records of a Contractor or any Subcontractor under any Contract or Subcontract to the extent that the books and records relate to the performance of the Contract or Subcontract.

4.4.2 Said books and records shall be maintained by the Contractor for a period of seven (7) years from the date of final payment under the Prime Contract and by the Subcontractor for a period of seven (7) years from the date of final payment under the Subcontract.

**ARTICLE 5: SUBCONTRACTORS**

5.1 SUBCONTRACTING REQUIREMENTS

5.1.1 All contracts for the construction, reconstruction, alteration or repair of any public building (not a road, street or highway) shall be subject to the following provisions:

1. A contract shall be awarded only to a Bidder whose Bid is accompanied by a statement containing, for each Subcontractor category, the name and address (city or town and State only – street number and P.O. Box addresses not required) of the subcontractor whose services the Bidder intends to use in performing the Work and providing the material for such Subcontractor category.
2. A Bid will not be accepted nor will an award of any Contract be made to any Bidder which, as the Prime Contractor, has listed itself as the Subcontractor for any Subcontractor unless:
  - A. It has been established to the satisfaction of the awarding Agency that the Bidder has customarily performed the specialty work of such Subcontractor category by artisans regularly employed by the Bidder's firm;
  - B. That the Bidder is duly licensed by the State to engage in such specialty work, if the State requires licenses; and
  - C. That the Bidder is recognized in the industry as a bona fide Subcontractor or Contractor in such specialty work and Subcontractor category.

5.1.2 The decision of the awarding Agency as to whether a Bidder who list itself as the Subcontractor for a Subcontractor category shall be final and binding upon all Bidders, and no action of any nature shall lie against any awarding agency or its employees or officers because of its decision in this regard.

5.1.3 After such a Contract has been awarded, the successful Bidder shall not substitute another Subcontractor for any Subcontractor whose name was set forth in the statement which accompanied the Bid without the written consent of the awarding Agency.

5.1.4 No Agency shall consent to any substitution of Subcontractors unless the Agency is satisfied that the Subcontractor whose name is on the Bidders accompanying statement:

- A. Is unqualified to perform the work required;
- B. Has failed to execute a timely reasonable Subcontract;

- C. Has defaulted in the performance on the portion of the work covered by the Subcontract; or
- D. Is no longer engaged in such business.

5.1.5 Should a Bidder be awarded a contract, such successful Bidder shall provide to the agency the taxpayer identification license numbers of such subcontractors. Such numbers shall be provided on the later of the date on which such subcontractor is required to be identified or the time the contract is executed. The successful Bidder shall provide to the agency to which it is contracting, within 30 days of entering into such public works contract, copies of all Delaware Business licenses of subcontractors and/or independent contractors that will perform work for such public works contract. However, if a subcontractor or independent contractor is hired or contracted more than 20 days after the Bidder entered the public works contract the Delaware Business license of such subcontractor or independent contractor shall be provided to the agency within 10 days of being contracted or hired.

5.1.6 The Contractor may employ additional Subcontractors on the jobsite only after submitting a copy of the Subcontractor's Employee Drug Testing Program to the Owner for approval. A Contractor or Subcontractor shall not commence work until the Owner has concluded its review and determined that the submitted Employee Drug Testing Program complies with OMB Regulation 4104.

## 5.2 PENALTY FOR SUBSTITUTION OF SUBCONTRACTORS

5.2.1 Should the Contractor fail to utilize any or all of the Subcontractors in the Contractor's Bid statement in the performance of the Work on the public bidding, the Contractor shall be penalized in the amount of (project specific amount\*). The Agency may determine to deduct payments of the penalty from the Contractor or have the amount paid directly to the Agency. Any penalty amount assessed against the Contractor may be remitted or refunded, in whole or in part, by the Agency awarding the Contract, only if it is established to the satisfaction of the Agency that the Subcontractor in question has defaulted or is no longer engaged in such business. No claim for the remission or refund of any penalty shall be granted unless an application is filed within one year after the liability of the successful Bidder accrues. All penalty amounts assessed and not refunded or remitted to the contractor shall be reverted to the State.

\*one (1) percent of contract amount not to exceed \$10,000

## 5.3 ASBESTOS ABATEMENT

5.3.1 The selection of any Contractor to perform asbestos abatement for State-funded projects shall be approved by the Office of Management and Budget, Division of Facilities Management pursuant to Chapter 78 of Title 16.

## 5.4 STANDARDS OF CONSTRUCTION FOR THE PROTECTION OF THE PHYSICALLY HANDICAPPED

5.4.1 All Contracts shall conform with the standard established by the Delaware Architectural Accessibility Board unless otherwise exempted by the Board.

## 5.5 CONTRACT PERFORMANCE

5.5.1 Any firm entering into a Public Works Contract that neglects or refuses to perform or fails to comply with its terms, the Agency may terminate the Contract and proceed to award a

new Contract or may require the Surety on the Performance Bond to complete the Contract in accordance with the terms of the Performance Bond.

#### **ARTICLE 6: CONSTRUCTION BY OWNER OR SEPARATE CONTRACTORS**

- 6.1 The Owner reserves the right to simultaneously perform other construction or operations related to the Project with the Owner's own forces, and to award separate contracts in connection with other portions of the Project or other Projects at the same site.
- 6.2 The Contractor shall afford the Owner and other Contractors reasonable opportunity for access and storage of materials and equipment, and for the performance of their activities, and shall connect and coordinate their activities with other forces as required by the Contract Documents.

#### **ARTICLE 7: CHANGES IN THE WORK**

- 7.1 The Owner, without invalidating the Contract, may order changes in the Work consisting of Additions, Deletions, Modifications or Substitutions, with the Contract Sum and Contract completion date being adjusted accordingly. Such changes in the Work shall be authorized by written Change Order signed by the Professional as the duly authorized agent, the Contractor and the Owner.
- 7.2 The Contract Sum and Contract Completion Date shall be adjusted only by a fully executed Change Order.
- 7.3 The additional cost, or credit to the Owner resulting from a change in the Work shall be by mutual agreement of the Owner, Contractor and the Architect. In all cases, this cost or credit shall be based on the "DPE" wages required and the "invoice price" of the materials/equipment needed.
- 7.3.1 "DPE" shall be defined to mean "direct personnel expense". Direct payroll expense includes prevailing wage rates plus a maximum multiplier of 1.35 times DPE. For example, if the prevailing wage rate is \$50/hour, the DPE would be \$67.50/hour (50 x 1.35).
- 7.3.2 "Invoice price" of materials/equipment shall be defined to mean the actual cost of materials and/or equipment that is paid by the Contractor, (or subcontractor), to a material distributor, direct factory vendor, store, material provider, or equipment leasing entity. Rates for equipment that is leased and/or owned by the Contractor or subcontractor(s) shall not exceed those listed in the latest version of the "Means Building Construction Cost Data" publication.
- 7.3.3 In addition to the above:
- 7.3.3.1 The General Contractor is allowed a fifteen percent (15%) markup for overhead and profit for additional work performed by the General Contractor's own forces.
- 7.3.3.2 For additional subcontractor work, the Subcontractor is allowed a fifteen (15) percent overhead and profit on change order work above and beyond the direct costs stated previously. To this amount, the General Contractor will be allowed a mark-up not exceeding seven- and one-half percent (7.5%) on the subcontractor's work.
- 7.3.3.3 Where the Third Tier Contractor is going to be completing the additional work, the Third-Tier contractor will be allowed a markup of fifteen percent (15%) overhead and profit on changes order work above and beyond the direct costs stated previously. To this amount, the Subcontractor will be allowed a markup not to exceed seven and one-half percent (7.5%) on the Third-Tier Contractor's work and the General Contractor will be

allowed a markup not to exceed seven and one-half percent (7.5%) of the amount of the Subcontractor's markup.

- 7.3.3.4 No additional costs shall be allowed for changes related to the Contractor's onsite superintendent/staff, or project manager, unless a change in the work changes the project duration and is identified by the CPM schedule. There will be no other costs associated with the change order.
- 7.3.3.5 These markups shall include all costs including, but not limited to: overhead, profit, bonds, insurance, supervision, etc.

## **ARTICLE 8: TIME**

- 8.1 Time limits, if any, are as stated in the Project Manual. By executing the Agreement, the Contractor confirms that the stipulated limits are reasonable, and that the Work will be completed within the anticipated time frame.
- 8.2 If progress of the Work is delayed at any time by changes ordered by the Owner, by labor disputes, fire, unusual delay in deliveries, abnormal adverse weather conditions, unavoidable casualties or other causes beyond the Contractor's control, the Contract Time shall be extended for such reasonable time as the Owner may determine.
- 8.3 Any extension of time beyond the date fixed for completion of the construction and acceptance of any part of the Work called for by the Contract, or the occupancy of the building by the Owner, in whole or in part, previous to the completion shall not be deemed a waiver by the Owner of his right to annul or terminate the Contract for abandonment or delay in the matter provided for, nor relieve the Contractor of full responsibility
- 8.4 **SUSPENSION AND DEBARMENT**
- 8.4.1 Per Section 6962(d)(14), Title 29, Delaware Code, "Any Contractor who fails to perform a public works contract or complete a public works project within the time schedule established by the Agency in the Invitation To Bid, may be subject to Suspension or Debarment for one or more of the following reasons: a) failure to supply the adequate labor supply ratio for the project; b) inadequate financial resources; or, c) poor performance on the Project."
- 8.4.2 "Upon such failure for any of the above stated reasons, the Agency that contracted for the public works project may petition the Director of the Office of Management and Budget for Suspension or Debarment of the Contractor. The Agency shall send a copy of the petition to the Contractor within three (3) working days of filing with the Director. If the Director concludes that the petition has merit, the Director shall schedule and hold a hearing to determine whether to suspend the Contractor, debar the Contractor or deny the petition. The Agency shall have the burden of proving, by a preponderance of the evidence, that the Contractor failed to perform or complete the public works project within the time schedule established by the Agency and failed to do so for one or more of the following reasons: a) failure to supply the adequate labor supply ratio for the project; b) inadequate financial resources; or, c) poor performance on the project. Upon a finding in favor of the Agency, the Director may suspend a Contractor from Bidding on any project funded, in whole or in part, with public funds for up to 1 year for a first offense, up to 3 years for a second offense and permanently debar the Contractor for a third offense. The Director shall issue a written decision and shall send a copy to the Contractor and the



Agency. Such decision may be appealed to the Superior Court within thirty (30) days for a review on the record.”

8.5 RETAINAGE

8.5.1 Per Section 6962(d)(5) a.3, Title 29, Delaware Code: The Agency may at the beginning of each public works project establish a time schedule for the completion of the project. If the project is delayed beyond the completion date due to the Contractor's failure to meet their responsibilities, the Agency may forfeit, at its discretion, all or part of the Contractor's retainage.

8.5.2 This forfeiture of retainage also applies to the timely completion of the punchlist. A punchlist will only be prepared upon the mutual agreement of the Owner, Architect and Contractor. Once the punchlist is prepared, all three parties will by mutual agreement, establish a schedule for its completion. Should completion of the punchlist be delayed beyond the established date due to the Contractor's failure to meet their responsibilities, the Agency may hold permanently, at its discretion, all or part of the Contractor's retainage.

**ARTICLE 9: PAYMENTS AND COMPLETION**

9.1 APPLICATION FOR PAYMENT

9.1.1 Applications for payment shall be made upon AIA Document G702. There will be a five percent (5%) retainage on all Contractor's monthly invoices until completion of the project. This retainage may become payable upon receipt of all required closeout documentation, provided all other requirements of the Contract Documents have been met.

9.1.2 A date will be fixed for the taking on the monthly account of work done. Upon receipt of Contractor's itemized application for payment, such application will be audited, modified, if found necessary, and approved for the amount. Statement shall be submitted to the Owner.

9.1.3 Section 6516, Title 29 of the Delaware Code annualized interest is not to exceed 12% per annum beginning thirty (30) days after the “presentment” (as opposed to the date) of the invoice.

9.2 PARTIAL PAYMENTS

9.2.1 Any public works Contract executed by any Agency may provide for partial payments at the option of the Owner with respect to materials placed along or upon the sites or stored at secured locations, which are suitable for use in the performance of the contract.

9.2.2 When approved by the agency, partial payment may include the values of tested and acceptable materials of a nonperishable or noncontaminative nature which have been produced or furnished for incorporation as a permanent part of the work yet to be completed, provided acceptable provisions have been made for storage.

9.2.2.1 Any allowance made for materials on hand will not exceed the delivered cost of the materials as verified by invoices furnished by the Contractor, nor will it exceed the contract bid price for the material complete in place.

9.2.3 If requested by the Agency, receipted bills from all Contractors, Subcontractors, and material, men, etc., for the previous payment must accompany each application for payment. Following such a request, no payment will be made until these receipted bills have been received by the Owner.

9.3 SUBSTANTIAL COMPLETION

9.3.1 When the building has been made suitable for occupancy, but still requires small items of miscellaneous work, the Owner will determine the date when the project has been substantially completed.

9.3.2 If, after the Work has been substantially completed, full completion thereof is materially delayed through no fault of the Contractor, and without terminating the Contract, the Owner may make payment of the balance due for the portion of the Work fully completed and accepted. Such payment shall be made under the terms and conditions governing final payment that it shall not constitute a waiver of claims.

9.3.3 On projects where commissioning is included, the commissioning work as defined in the specifications must be complete prior to the issuance of substantial completion.

9.4 FINAL PAYMENT

9.4.1 Final payment, including the five percent (5%) retainage if determined appropriate, shall be made within thirty (30) days after the Work is fully completed and the Contract fully performed and provided that the Contractor has submitted the following closeout documentation (in addition to any other documentation required elsewhere in the Contract Documents):

9.4.1.1 Evidence satisfactory to the Owner that all payrolls, material bills, and other indebtedness connected with the work have been paid,

9.4.1.2 An acceptable RELEASE OF LIENS,

9.4.1.3 Copies of all applicable warranties,

9.4.1.4 As-built drawings,

9.4.1.5 Operations and Maintenance Manuals,

9.4.1.6 Instruction Manuals,

9.4.1.7 Consent of Surety to final payment.

9.4.1.8 The Owner reserves the right to retain payments, or parts thereof, for its protection until the foregoing conditions have been complied with, defective work corrected and all unsatisfactory conditions remedied.

**ARTICLE 10: PROTECTION OF PERSONS AND PROPERTY**

10.1 The Contractor shall be responsible for initiating, maintaining, and supervising all safety precautions and programs in connection with the performance of the Contract. The Contractor shall take all reasonable precautions to prevent damage, injury or loss to: workers, persons nearby who may be affected, the Work, materials and equipment to be incorporated, and existing property at the site or adjacent thereto. The Contractor shall give notices and comply with applicable laws ordinances, rules regulations, and lawful orders of public authorities bearing on the safety of persons and property and their protection from injury, damage, or loss. The Contractor shall promptly remedy damage and loss to property at the site caused in whole or in part by the Contractor, a Subcontractor, or anyone directly or indirectly employed by any of them, or by anyone for whose acts they may be liable.

- 10.2 The Contractor shall notify the Owner in the event any existing hazardous material such as lead, PCBs, asbestos, etc. is encountered on the project. The Owner will arrange with a qualified specialist for the identification, testing, removal, handling and protection against exposure or environmental pollution, to comply with applicable regulation laws and ordinances. The Contractor and Architect will not be required to participate in or to perform this operation. Upon completion of this work, the Owner will notify the Contractor and Architect in writing the area has been cleared and approved by the authorities in order for the work to proceed. The Contractor shall attach documentation from the authorities of said approval.
- 10.3 As required in the Hazardous Chemical Information Act of June 1984, all vendors supplying any materials that may be defined as hazardous, must provide Material Safety Data Sheets for those products. Any chemical product should be considered hazardous if it has a warning caution on the label relating to a potential physical or health hazard if it is known to be present in the work place, and if employees may be exposed under normal conditions or in any foreseeable emergency situation. Material Safety Data Sheets must be provided directly to the Owner along with the shipping slips that include those products.
- 10.4 The Contractor shall certify to the Owner that materials incorporated into the Work are free of all asbestos. This certification may be in the form of Material Safety Data Sheet (MSDS) provided by the product manufacturer for the materials used in construction, as specified or as provided by the Contractor.

#### **ARTICLE 11: INSURANCE AND BONDS**

- 11.1 The Contractor shall carry all insurance required by law, such as Unemployment Insurance, etc. The Contractor shall carry such insurance coverage as they desire on their own property such as a field office, storage sheds or other structures erected upon the project site that belong to them and for their own use. The Subcontractors involved with this project shall carry whatever insurance protection they consider necessary to cover the loss of any of their personal property, etc.
- 11.2 Upon being awarded the Contract, the Contractor shall obtain a minimum of two (2) copies of all required insurance certificates called for herein, and submit one (1) copy of each certificate, to the Owner, within 20 days of contract award.
- 11.3 Bodily Injury Liability and Property Damage Liability Insurance shall, in addition to the coverage included herein, include coverage for injury to or destruction of any property arising out of the collapse of or structural injury to any building or structure due to demolition work and evidence of these coverages shall be filed with and approved by the Owner.
- 11.4 The Contractor's Property Damage Liability Insurance shall, in addition to the coverage noted herein, include coverage on all real and personal property in their care, custody and control damaged in any way by the Contractor or their Subcontractors during the entire construction period on this project.
- 11.5 Builders Risk (including Standard Extended Coverage Insurance) on the existing building during the entire construction period, may be provided by the Contractor under this contract. The Owner shall insure the existing building and all of its contents and all this new alteration work under this contract during entire construction period for the full insurable value of the entire work at the site. Note, however, that the Contractor and their Subcontractors shall be responsible for insuring building materials (installed and stored) and their tools and equipment whenever in use on the project, against fire damage, theft, vandalism, etc.

11.6 Certificates of the insurance company or companies stating the amount and type of coverage, terms of policies, etc., shall be furnished to the Owner, within 20 days of contract award.

11.7 The Contractor shall, at their own expense, (in addition to the above) carry the following forms of insurance:

11.7.1 Contractor's Contractual Liability Insurance

Minimum coverage to be:

|                 |                            |                                  |
|-----------------|----------------------------|----------------------------------|
| Bodily Injury   | \$1,000,000<br>\$3,000,000 | for each occurrence<br>aggregate |
| Property Damage | \$1,000,000<br>\$3,000,000 | for each occurrence<br>aggregate |

11.7.2 Contractor's Protective Liability Insurance

Minimum coverage to be:

|                 |                            |                                  |
|-----------------|----------------------------|----------------------------------|
| Bodily Injury   | \$1,000,000<br>\$3,000,000 | for each occurrence<br>aggregate |
| Property Damage | \$1,000,000<br>\$3,000,000 | for each occurrence<br>aggregate |

11.7.3 Automobile Liability Insurance

Minimum coverage to be:

|                 |                            |                                        |
|-----------------|----------------------------|----------------------------------------|
| Bodily Injury   | \$1,000,000<br>\$1,000,000 | for each person<br>for each occurrence |
| Property Damage | \$500,000                  | per accident                           |

11.7.4 Prime Contractor's and Subcontractors' policies shall include contingent and contractual liability coverage in the same minimum amounts as 11.7.1 above.

11.7.5 Workmen's Compensation (including Employer's Liability):

11.7.5.1 Minimum Limit on employer's liability to be as required by law.

11.7.5.2 Minimum Limit for all employees working at one site.

11.7.6 Certificates of Insurance must be filed with the Owner guaranteeing fifteen (15) days prior notice of cancellation, non-renewal, or any change in coverages and limits of liability shown as included on certificates.

11.7.7 Social Security Liability

11.7.7.1 With respect to all persons at any time employed by or on the payroll of the Contractor or performing any work for or on their behalf, or in connection with or arising out of the Contractor's business, the Contractor shall accept full and exclusive liability for the payment

of any and all contributions or taxes or unemployment insurance, or old age retirement benefits, pensions or annuities now or hereafter imposed by the Government of the United States and the State or political subdivision thereof, whether the same be measured by wages, salaries or other remuneration paid to such persons or otherwise.

- 11.7.7.2 Upon request, the Contractor shall furnish Owner such information on payrolls or employment records as may be necessary to enable it to fully comply with the law imposing the aforesaid contributions or taxes.
- 11.7.7.3 If the Owner is required by law to and does pay any and/or all of the aforesaid contributions or taxes, the Contractor shall forthwith reimburse the Owner for the entire amount so paid by the Owner.

## **ARTICLE 12: UNCOVERING AND CORRECTION OF WORK**

- 12.1 The Contractor shall promptly correct Work rejected by the Owner or failing to conform to the requirements of the Contract Documents, whether observed before or after Substantial Completion and whether or not fabricated, installed or completed, and shall correct any Work found to be not in accordance with the requirements of the Contract Documents within a period of two years from the date of Substantial Completion, or by terms of an applicable special warranty required by the Contract Documents. The provisions of this Article apply to work done by Subcontractors as well as to Work done by direct employees of the Contractor.
- 12.2 At any time during the progress of the work, or in any case where the nature of the defects shall be such that it is not expedient to have them corrected, the Owner, at their option, shall have the right to deduct such sum, or sums, of money from the amount of the contract as they consider justified to adjust the difference in value between the defective work and that required under contract including any damage to the structure.

## **ARTICLE 13: MISCELLANEOUS PROVISIONS**

### **13.1 CUTTING AND PATCHING**

- 13.1.1 The Contractor shall be responsible for all cutting and patching. The Contractor shall coordinate the work of the various trades involved.

### **13.2 DIMENSIONS**

- 13.2.1 All dimensions shown shall be verified by the Contractor by actual measurements at the project site. Any discrepancies between the drawings and specifications and the existing conditions shall be referred to the Owner for adjustment before any work affected thereby has been performed.

### **13.3 LABORATORY TESTS**

- 13.3.1 Any specified laboratory tests of material and finished articles to be incorporated in the work shall be made by bureaus, laboratories or agencies approved by the Owner and reports of such tests shall be submitted to the Owner. The cost of the testing shall be paid for by the Contractor.
- 13.3.2 The Contractor shall furnish all sample materials required for these tests and shall deliver same without charge to the testing laboratory or other designated agency when and where directed by the Owner.

13.4 ARCHAEOLOGICAL EVIDENCE

- 13.4.1 Whenever, in the course of construction, any archaeological evidence is encountered on the surface or below the surface of the ground, the Contractor shall notify the authorities of the State Historic Preservation Office and suspend work in the immediate area for a reasonable time to permit those authorities, or persons designated by them, to examine the area and ensure the proper removal of the archaeological evidence for suitable preservation by the Division of Historical and Cultural Affairs.

13.5 GLASS REPLACEMENT AND CLEANING

- 13.5.1 The General Contractor shall replace without expense to the Owner all glass broken during the construction of the project. If job conditions warrant, at completion of the job the General Contractor shall have all glass cleaned and polished.

13.6 WARRANTY

- 13.6.1 For a period of two (2) years from the date of substantial completion, as evidenced by the date of final acceptance of the work, the contractor warrants that work performed under this contract conforms to the contract requirements and is free of any defect of equipment, material or workmanship performed by the contractor or any of his subcontractors or suppliers. However, manufacturer's warranties and guarantees, if for a period longer than two (2) years, shall take precedence over the above warranties. The contractor shall remedy, at his own expense, any such failure to conform or any such defect. The protection of this warranty shall be included in the Contractor's Performance Bond.

**ARTICLE 14: TERMINATION OR SUSPENSION OF THE CONTRACT**

- 14.1 If the Contractor defaults or persistently fails or neglects to carry out the Work in accordance with the Contract Documents or fails to perform a provision of the Contract, the Owner, after seven days written notice to the Contractor, may make good such deficiencies and may deduct the cost thereof from the payment then or thereafter due the Contractor. Alternatively, at the Owner's option, and the Owner may terminate the Contract and take possession of the Site and of all materials, equipment, tools, and machinery thereon owned by the Contractor and may finish the Work by whatever method the Owner may deem expedient. If the costs of finishing the Work exceed any unpaid compensation due the Contractor, the Contractor shall pay the difference to the Owner.
- 14.2 "If the continuation of this Agreement is contingent upon the appropriation of adequate state, or federal funds, this Agreement may be terminated on the date beginning on the first fiscal year for which funds are not appropriated or at the exhaustion of the appropriation. The Owner may terminate this Agreement by providing written notice to the parties of such non-appropriation. All payment obligations of the Owner will cease upon the date of termination. Notwithstanding the foregoing, the Owner agrees that it will use its best efforts to obtain approval of necessary funds to continue the Agreement by taking appropriate action to request adequate funds to continue the Agreement."

**END OF SECTION**

**SECTION 00 81 14  
DRUG TESTING FORMS**

The Office of Management and Budget (OMB) has developed the 4014 regulations as part of the Delaware Code that requires Contractors and Subcontractors to implement a program of mandatory drug testing for Employees who work on Large Public Works Contracts funded all or in part with public funds pursuant to 29 **Del.C.** 6908(a)(6). The regulations establish the mechanism, standards and requirements of a Mandatory Drug Testing Program that will be incorporated by reference into this Contract awarded pursuant to 29 **Del.C.** 6962. Sample copies of Testing report Forms maintained and/or submitted pursuant to the requirements of 4104 regulations for this Project are included herewith.

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING PURPOSES



**EMPLOYEE DRUG TESTING REPORT FORM**

**Period Ending:** \_\_\_\_\_

4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects requires that Contractors and Subcontractors who work on Large Public Works Contracts funded all or in part with public funds maintain testing data that includes but is not limited to the data elements below.

Project Number: \_\_\_\_\_

Project Name: \_\_\_\_\_

Contractor/Subcontractor Name: \_\_\_\_\_

Contractor/Subcontractor Address: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Number of employees who worked on the jobsite during the report period: \_\_\_\_\_

Number of employees subject to random testing during the report period: \_\_\_\_\_

Number of Negative Results \_\_\_\_\_ Number of Positive Results \_\_\_\_\_

Action taken on employee(s) in response to a failed or positive random test:

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Date: \_\_\_\_\_

This form is not required to be submitted to the Owner. Included as a reference to show information required to be maintained by the Contractor. The Owner shall have the right to periodically audit all Contractor and Subcontractor test results at the Contractor's or Subcontractor's offices (or by other means to make the data available for inspection by the Owner).

**THIS PAGE INTENTIONALLY LEFT BLANK**

NOT FOR BIDDING PURPOSES

**EMPLOYEE DRUG TESTING  
REPORT OF POSITIVE RESULTS**

4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects requires that Contractors and Subcontractors who work on Large Public Works Contracts funded all or in part with public funds to notify the Owner in writing of a positive random drug test.

Project Number: \_\_\_\_\_

Project Name: \_\_\_\_\_

Contractor/Subcontractor Name: \_\_\_\_\_

Contractor/Subcontractor Address: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Name of employee with positive test result: \_\_\_\_\_

Last 4 digits of employee SSN: \_\_\_\_\_

Date test results received: \_\_\_\_\_

Action taken on employee in response to a positive test result:  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Authorized Representative of Contractor/Subcontractor: \_\_\_\_\_  
(typed or printed)

Authorized Representative of Contractor/Subcontractor: \_\_\_\_\_  
(signature)

Date: \_\_\_\_\_

**This form shall be sent by mail to the Owner within 24 hours of receipt of test results.**

**Enclose this test results form in a sealed envelope with the notation "Drug Testing Form – DO NOT OPEN" on the face thereof and place in a separate mailing envelope.**

**END OF SECTION**

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING PURPOSES

**AFFIDAVIT OF  
CRAFT TRAINING COMPLIANCE**

We, the contractor, hereby certify that we and all applicable subcontractors will abide by the contractor and subcontractor craft training requirements outlined below for the duration of the contract. Craft training must be provided by a contractor and/or subcontractor for each craft on a project for which there are Delaware Department of Labor approved and registered training programs or, if the contractor and/or subcontractor meets the requirements under Title 29, Chapter 69, Section 6960A.(b)(1)c.1.-3., payment may be made in accordance with Title 29, Chapter 69, Section 6960A.(b)(1)d. A list of crafts for which there are approved and registered training programs is maintained by the Delaware Department of Labor and can be found at:

<https://laborfiles.delaware.gov/main/det/apprenticeship/DE%20Craft%20Training%20Occupation%20List%20Effective%20March%201%202022.pdf>. If you have questions regarding craft training programs, please submit all questions in writing to the Delaware Department of Labor at: [apprenticeship@delaware.gov](mailto:apprenticeship@delaware.gov). ***This Affidavit of Craft Training Compliance must be submitted prior to contract execution.***

In accordance with Title 29, Chapter 69, Section 6960A.(a)(1), a contract relating to a public works project under § 6962 of Title 29 must include a craft training program for each craft in the project if at the time the contractor executes a public works contract, all of the following apply:

- a. A project meets the prevailing wage requirement under Section 6960 of Title 29.
- b. The contractor employs 10 or more total employees.
- c. The project is not a federal highway project except for the project under Section 6962(c)(11) of Title 29.
- d. There is an apprenticeship program for a craft in the project on the list of crafts under Section 204(b)(2) of Title 19.

Pursuant to Title 29, Chapter 69, Section 6960A.(a)(2), ***a contractor must commit that all subcontractors provide craft training*** if paragraph (a)(1) of this section applies to the subcontractor. Failure to provide required craft training or payment on the project may subject the successful contractor and/or subcontractor(s) to penalties as outlined in Title 29, Chapter 69, Section 6960A.(d)(1)-(3).

**Craft(s):**

---

**Contractor Name:**

---

**Contractor Address:**

---

---

---

**Contractor Program  
Registration Number(s)**

---

On this line also indicate whether DE, Other State (identify) or US Registration Number

**Or**

☐ A payment has been made in the amount established under Section 204(b)(2)b.2. of Title 19, for the craft into the Delaware Department of Labor's Apprenticeship and Training Fund.

Or

☐ Craft Training requirements are not applicable because:

\_\_\_\_\_  
Authorized Representative (typed or printed):

\_\_\_\_\_  
Authorized Representative (signature):

\_\_\_\_\_  
Title:

State of Delaware )

County of \_\_\_\_\_ )

ss:

Before me, a notary public, in and for said county and state, personally appeared, \_\_\_\_\_, who acknowledged to me that she/he did execute the foregoing instrument on behalf of \_\_\_\_\_.

IN TESTIMONY WHEREOF, I have subscribed my name and affixed my official seal this \_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_.

\_\_\_\_\_  
Notary Public

Commission Expires \_\_\_\_\_

**THIS PAGE MUST BE SIGNED AND NOTARIZED TO BE CONSIDERED.**

**SECTION 01 10 00  
SUMMARY**

**PART 1 GENERAL**

**1.01 PROJECT**

- A. Project Name: 25P132 - LLWJC Escalator Replacement
- B. Owner's Name: State of Delaware OMB - Division of Facilities Management - Leonard L. Williams Justice Center
- C. The Project consists of the replacement of six existing escalators in their entirety. All escalators are to be replaced at once and a temporary partition will be built around the construction area to mitigate dust and noise.

**1.02 CONTRACT DESCRIPTION**

- A. Contract Type: A single prime contract based on a Stipulated Price as described in Document 00 52 00 - Agreement Form.

**1.03 DESCRIPTION OF WORK**

- A. Architectural: Escalator demolition and installation. Replacement of finishes removed for escalator installation.
- B. Electrical Power and Lighting: Power new escalators and associated lighting.
- C. Structural: As required to support new escalators

**1.04 OWNER OCCUPANCY**

- A. State of Delaware OMB - Division of Facilities Management intends to continue to occupy adjacent portions of the existing building during the entire construction period.
- B. State of Delaware OMB - Division of Facilities Management intends to occupy the Project upon Substantial Completion.
- C. Cooperate with State of Delaware OMB - Division of Facilities Management to minimize conflict and to facilitate continuation of normal State of Delaware OMB - Division of Facilities Management's operations.
- D. Schedule the Work to accommodate State of Delaware OMB - Division of Facilities Management occupancy.

**1.05 CONTRACTOR USE OF SITE AND PREMISES**

- A. Provide access to and from site as required by law and by State of Delaware OMB - Division of Facilities Management:
  - 1. Emergency Building Exits During Construction: Keep all exits required by code clear and open during construction period; provide temporary exit signs if exit routes are temporarily altered.
  - 2. Do not obstruct roadways, sidewalks, or other public ways without permit.
- B. Utility Outages and Shutdown:
  - 1. Limit disruption of utility services to hours the building is unoccupied.
  - 2. Do not disrupt or shut down life safety systems, including but not limited to fire sprinklers and fire alarm system, without 14 notice to State of Delaware OMB - Division of Facilities Management and authorities having jurisdiction.
  - 3. Prevent accidental disruption of utility services to other facilities.

**1.06 PROJECT WORK HOURS**

- A. Contractor work hours on this project shall be from 8:00 a.m. to 4:30 p.m. Monday through Friday unless otherwise noted. Contractors to coordinate work schedule with State Holidays. Contractor shall not work on site during State holidays unless otherwise noted by the Owner.

**1.07 WORK SEQUENCE**

- A. Construct Work in phases during the construction period. The phases are indicated in the construction drawings.
- B. Coordinate construction schedule and operations with State of Delaware OMB - Division of Facilities Management.

**PART 2 PRODUCTS - NOT USED**

**PART 3 EXECUTION - NOT USED**

**END OF SECTION**

NOT FOR BIDDING PURPOSES



**SECTION 01 20 00  
PRICE AND PAYMENT PROCEDURES**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Procedures for preparation and submittal of applications for progress payments.
- B. Change procedures.

**1.02 SCHEDULE OF VALUES**

- A. Forms to be used: AIA G703.
- B. Electronic media printout including equivalent information will be considered in lieu of standard form specified; submit draft to DEDC, LLC for approval.
- C. Forms shall be typed. Forms filled out by hand will not be accepted.
- D. Submit Schedule of Values in duplicate within 5 days after date of Pre-Construction Meeting.

**1.03 APPLICATIONS FOR PROGRESS PAYMENTS**

- A. Payment Period: Submit at intervals stipulated in the Agreement.
- B. Electronic media printout including equivalent information will be considered in lieu of standard form specified; submit sample to DEDC, LLC for approval.
- C. Forms shall be typed. Forms filled out by hand will not be accepted.
- D. Execute certification by signature of authorized officer.
- E. Submit one electronic and three hard-copies of each Application for Payment.
- F. Include the following with the application:
  - 1. OMB/DFM Project Number.
  - 2. Contractors Purchase Order Number from the State.
  - 3. Transmittal letter as specified for submittals in Section 01 30 00.

**1.04 MODIFICATION PROCEDURES**

- A. For minor changes not involving an adjustment to the Contract Sum or Contract Time, DEDC, LLC will issue instructions directly to Contractor.
- B. For other required changes, DEDC, LLC will issue a document signed by State of Delaware OMB - Division of Facilities Management instructing Contractor to proceed with the change, for subsequent inclusion in a Change Order.
  - 1. The document will describe the required changes and will designate method of determining any change in Contract Sum or Contract Time.
  - 2. Promptly execute the change.
- C. For changes for which advance pricing is desired, DEDC, LLC will issue a document that includes a detailed description of a proposed change with supplementary or revised drawings and specifications, a change in Contract Time for executing the change with a stipulation of any overtime work required and the period of time during which the requested price will be considered valid. Contractor shall prepare and submit a fixed price quotation within 5 days.
- D. Computation of Change in Contract Amount: As specified in the Agreement and Conditions of the Contract.
- E. Execution of Change Orders: DEDC, LLC will issue Change Orders for signatures of parties as provided in the Conditions of the Contract.
- F. After execution of Change Order, promptly revise Schedule of Values and Application for Payment forms to record each authorized Change Order as a separate line item and adjust the Contract Sum.
- G. Promptly revise progress schedules to reflect any change in Contract Time, and revise sub-schedules to adjust times for other items of work affected by the change.

H. Promptly enter changes in Project Record Documents.

**1.05 APPLICATION FOR FINAL PAYMENT**

- A. Prepare Application for Final Payment as specified for progress payments, identifying total adjusted Contract Sum, previous payments, and sum remaining due.
- B. Application for Final Payment will not be considered until the following have been accomplished:
  - 1. All closeout procedures specified in Section 01 70 00.

**PART 2 PRODUCTS - NOT USED**

**PART 3 EXECUTION - NOT USED**

**END OF SECTION**

NOT FOR BIDDING PURPOSES

**SECTION 01 21 00  
ALLOWANCES**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Contingency allowance.

**1.02 RELATED REQUIREMENTS**

- A. State of Delaware Front End Documents Division 0
- B. Section 01 20 00 - Price and Payment Procedures: Additional payment and modification procedures.

**1.03 CONTINGENCY ALLOWANCE**

- A. Contractor's costs for products, delivery, installation, labor, insurance, payroll, taxes, bonding, equipment rental, overhead and profit will be included in Change Orders authorizing expenditure of funds from this Contingency Allowance.
- B. Funds will be drawn from the Contingency Allowance only by Approved Allowance Authorization Form or Change Order.
- C. At closeout of Contract, funds remaining in Contingency Allowance will be credited to Owner by Change Order.

**1.04 ALLOWANCES SCHEDULE**

- A. Contingency Allowance: Include the stipulated sum/price of \$50,000 for use upon Owner's instructions for miscellaneous items found during construction.

**PART 2 PRODUCTS - NOT USED**

**PART 3 EXECUTION - NOT USED**

**END OF SECTION**

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 01 26 00**  
**CONTRACT MODIFICATION PROCEDURES**

**PART 1 GENERAL**

**1.01 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

**1.02 SUMMARY**

- A. This Section specifies administrative and procedural requirements for handling and processing Contract modifications.
- B. Related Sections include the following:
  - 1. Division 01 Section 01 60 00 "Product Requirements" for administrative procedures for handling requests for substitutions made after Contract award.

**1.03 MINOR CHANGES IN THE WORK**

- A. Architect will issue supplemental instructions authorizing Minor Changes in the Work, not involving adjustment to the Contract Sum or the Contract Time, on AIA Document G710, "Architect's Supplemental Instructions."

**1.04 PROPOSAL REQUESTS**

- A. Owner-Initiated Proposal Requests: Architect will issue a detailed description of proposed changes in the Work that may require adjustment to the Contract Sum or the Contract Time. If necessary, the description will include supplemental or revised Drawings and Specifications.
  - 1. Proposal Requests issued by Architect are for information only. Do not consider them instructions either to stop work in progress or to execute the proposed change.
  - 2. Within time specified in Proposal Request, but no more than 20 days after receipt of Proposal Request, submit a quotation estimating cost adjustments to the Contract Sum and the Contract Time necessary to execute the change.
    - a. Include a list of quantities of products required or eliminated and unit costs, with total amount of purchases and credits to be made. If requested, furnish survey data to substantiate quantities.
    - b. Indicate applicable taxes, delivery charges, equipment rental, and amounts of trade discounts.
    - c. Include costs of labor and supervision directly attributable to the change.
    - d. Include an updated Contractor's Construction Schedule that indicates the effect of the change, including, but not limited to, changes in activity duration, start and finish times, and activity relationship. Use available total float before requesting an extension of the Contract Time.
- B. Contractor-Initiated Proposals: If latent or unforeseen conditions require modifications to the Contract, Contractor may propose changes by submitting a request for a change to Architect.
  - 1. Include a statement outlining reasons for the change and the effect of the change on the Work. Provide a complete description of the proposed change. Indicate the effect of the proposed change on the Contract Sum and the Contract Time.
  - 2. Include a list of quantities of products required or eliminated and unit costs, with total amount of purchases and credits to be made. If requested, furnish survey data to substantiate quantities.
  - 3. Indicate applicable taxes, delivery charges, equipment rental, and amounts of trade discounts.
  - 4. Include costs of labor and supervision directly attributable to the change.
  - 5. Include an updated Contractor's Construction Schedule that indicates the effect of the change, including, but not limited to, changes in activity duration, start and finish times, and activity relationship. Use available total float before requesting an extension of the Contract Time.

6. Comply with requirements in Division 01 Section "Product Requirements" if the proposed change requires substitution of one product or system for product or system specified.

C. Proposal Request Form: Use AIA Document G709 for Proposal Requests.

#### **1.05 CHANGE ORDER PROCEDURES**

- A. On Owner's approval of a Proposal Request, Architect will issue a Change Order for signatures of Owner and Contractor on AIA Document G701.

#### **1.06 CONSTRUCTION CHANGE DIRECTIVE**

- A. Construction Change Directive: Architect may issue a Construction Change Directive on AIA Document G714. Construction Change Directive instructs Contractor to proceed with a change in the Work, for subsequent inclusion in a Change Order.
  1. Construction Change Directive contains a complete description of change in the Work. It also designates method to be followed to determine change in the Contract Sum or the Contract Time.
- B. Documentation: Maintain detailed records on a time and material basis of work required by the Construction Change Directive.
  1. After completion of change, submit an itemized account and supporting data necessary to substantiate cost and time adjustments to the Contract.

#### **1.07 P2 PRODUCTS (NOT USED)**

#### **1.08 P3 EXECUTION (NOT USED)**

**END OF SECTION**

**SECTION 01 30 00  
ADMINISTRATIVE REQUIREMENTS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. General administrative requirements.
- B. Preconstruction meeting.
- C. Progress meetings.
- D. Construction progress schedule.
- E. Progress photographs.
- F. Coordination drawings.
- G. Submittals for review, information, and project closeout.
- H. Number of copies of submittals.
- I. Requests for Interpretation (RFI) procedures.
- J. Submittal procedures.

**1.02 RELATED REQUIREMENTS**

- A. Section 01 60 00 - Product Requirements: General product requirements.
- B. Section 01 70 00 - Execution and Closeout Requirements: Additional coordination requirements.
- C. Section 01 78 00 - Closeout Submittals: Project record documents; operation and maintenance data; warranties and bonds.
- D. Section 01 91 13 - General Commissioning Requirements: Additional procedures for submittals relating to commissioning.
  - 1. Where submittals are indicated for review by both DEDC, LLC and the Commissioning Authority, submit one extra and route to DEDC, LLC first, for forwarding to the Commissioning Authority.
  - 2. Where submittals are not indicated to be reviewed by DEDC, LLC, submit directly to the Commissioning Authority; otherwise, the procedures specified in this section apply to commissioning submittals.

**1.03 GENERAL ADMINISTRATIVE REQUIREMENTS**

- A. Comply with requirements of Section 01 70 00 - Execution and Closeout Requirements for coordination of execution of administrative tasks with timing of construction activities.

**1.04 PROJECT COORDINATOR**

- A. Project Coordinator: State of Delaware's Project Manager and DEDC.
- B. Cooperate with the Project Coordinator in allocation of mobilization areas of site; for field offices and sheds, for access, traffic, and parking facilities.
- C. During construction, coordinate use of site and facilities through the Project Coordinator.
- D. Comply with Project Coordinator's procedures for intra-project communications; submittals, reports and records, schedules, coordination drawings, and recommendations; and resolution of ambiguities and conflicts.
- E. Comply with instructions of the Project Coordinator for use of temporary utilities and construction facilities. Responsibility for providing temporary utilities and construction facilities is identified in Section 01 10 00 - Summary.
- F. Coordinate field engineering and layout work under instructions of the Project Coordinator.
- G. Make the following types of submittals to DEDC, LLC through the Project Coordinator:
  - 1. Requests for Interpretation.

2. Requests for substitution.
3. Shop drawings, product data, and samples.
4. Test and inspection reports.
5. Manufacturer's instructions and field reports.
6. Applications for payment and change order requests.
7. Progress schedules.
8. Coordination drawings.
9. Closeout submittals.

## **PART 2 PRODUCTS - NOT USED**

## **PART 3 EXECUTION**

### **3.01 PRECONSTRUCTION MEETING**

- A. State of Delaware OMB - Division of Facilities Management will schedule a meeting after Notice of Award.
- B. Attendance Required:
  1. State of Delaware OMB - Division of Facilities Management.
  2. DEDC, LLC.
  3. Contractor.
  4. Major subcontractors.
- C. Agenda:
  1. Execution of State of Delaware OMB - Division of Facilities Management-Contractor Agreement.
  2. Designation of personnel representing the parties to Contract and DEDC, LLC.
  3. Designation of personnel representing the parties to Contract, owner, and DEDC, LLC.
  4. Procedures and processing of field decisions, submittals, substitutions, applications for payments, proposal request, Change Orders, and Contract closeout procedures.
  5. Scheduling.

### **3.02 PROGRESS MEETINGS**

- A. Schedule and administer meetings throughout progress of the work at maximum bi-weekly intervals.
- B. DEDC, LLC will make arrangements for meetings, prepare agenda with copies for participants, preside at meetings
- C. Attendance Required:
  1. Contractor.
  2. State of Delaware OMB - Division of Facilities Management.
  3. DEDC, LLC.
  4. Contractor's superintendent.
  5. Major subcontractors.
- D. Contractor shall provide a 3-week look ahead schedule in writing at each meeting and be prepared to review with attendees.
- E. Agenda:
  1. Review minutes of previous meetings.
  2. Review of work progress.
  3. Field observations, problems, and decisions.
  4. Identification of problems that impede, or will impede, planned progress.
  5. Review of submittals schedule and status of submittals.
  6. Maintenance of progress schedule.
  7. Review contractor's 3 week look ahead schedule.
  8. Corrective measures to regain projected schedules.
  9. Planned progress during succeeding work period.



10. Maintenance of quality and work standards.
11. Effect of proposed changes on progress schedule and coordination.
12. Other business relating to work.

### **3.03 CONSTRUCTION PROGRESS SCHEDULE**

- A. If preliminary construction progress schedule requires revision after review, submit revised schedule within 10 days.
- B. Within 20 days after review of preliminary construction progress schedule, submit draft of proposed final schedule for review.
  1. Include written certification that major Subcontractors have reviewed and accepted proposed schedule.
- C. Within 10 days after joint review, submit final schedule.
- D. Submit updated schedule with each Application for Payment.

### **3.04 PROGRESS PHOTOGRAPHS**

- A. Submit photographs with each application for payment, taken not more than 3 days prior to submission of application for payment.
- B. Photography Type: Digital; electronic files.
- C. Provide photographs of site and construction throughout progress of work produced by an experienced photographer, acceptable to DEDC, LLC.
- D. In addition to periodic, recurring views, take photographs of each of the following events:
- E. Views:
  1. Provide non-aerial photographs from four cardinal views at each specified time, until date of Substantial Completion.
  2. Consult with DEDC, LLC for instructions on views required.
  3. Provide factual presentation.
  4. Provide correct exposure and focus, high resolution and sharpness, maximum depth of field, and minimum distortion.
- F. Digital Photographs: 24 bit color, minimum resolution of 1024 by 768, in JPG format; provide files unaltered by photo editing software.
  1. Delivery Medium: On photo CD.
  2. File Naming: Include project identification, date and time of view, and view identification.
  3. Point of View Sketch: Include digital copy of point of view sketch with each electronic submittal; include point of view identification in each photo file name.

### **3.05 COORDINATION DRAWINGS**

- A. System coordination drawings are required as noted in the specifications. Each contractor shall review the existing conditions and other contractors shop drawings prior to submitting coordinated shop drawings. Any interferences that the contractor is unable to overcome shall be noted on the drawings.
- B. Plans are generally diagrammatic, and each contractor shall coordinate their work with the work of others, so that interference in the work do not occur. This includes interference with new work and existing conditions. Each contractor shall furnish and install offsets, bends, turns and the like in connection with their work to avoid interference with work of other contractors on this project and the exsisting conditions. In case of inteference or lack of clearnace and access, the prime contractor shall notify the project Architect immediatly through the RFI process.
- C. Conflicts that result after the coordiantion drawings are approved by the Architect will be the responsibility of the contractor. All costs incurred or adjustments to the work made that are necessary to accomadate installations are the responsibility of the contractor

### **3.06 REQUESTS FOR INFORMATION (RFI)**

- A. Definition: A request seeking one of the following:

1. An interpretation, amplification, or clarification of some requirement of Contract Documents arising from inability to determine from them the exact material, process, or system to be installed; or when the elements of construction are required to occupy the same space (interference); or when an item of work is described differently at more than one place in Contract Documents.
  2. A resolution to an issue which has arisen due to field conditions and affects design intent.
- B. Preparation: Prepare an RFI immediately upon discovery of a need for interpretation of Contract Documents. Failure to submit a RFI in a timely manner is not a legitimate cause for claiming additional costs or delays in execution of the work.
1. Prepare a separate RFI for each specific item.
    - a. Review, coordinate, and comment on requests originating with subcontractors and/or materials suppliers.
    - b. Do not forward requests which solely require internal coordination between subcontractors.
  2. Prepare in a format and with content acceptable to State of Delaware OMB - Division of Facilities Management.
- C. Reason for the RFI: Prior to initiation of an RFI, carefully study all Contract Documents to confirm that information sufficient for their interpretation is definitely not included.
1. Include in each request Contractor's signature attesting to good faith effort to determine from Contract Documents information requiring interpretation.
  2. Unacceptable Uses for RFIs: Do not use RFIs to request the following::
    - a. Approval of submittals (use procedures specified elsewhere in this section).
    - b. Approval of substitutions (see Section 01 60 00 - Product Requirements)
    - c. Changes that entail change in Contract Time and Contract Sum (comply with provisions of the Conditions of the Contract).
    - d. Different methods of performing work than those indicated in the Contract Drawings and Specifications (comply with provisions of the Conditions of the Contract).

### 3.07 SUBMITTAL SCHEDULE

- A. Submit to DEDC, LLC for review a schedule for submittals in tabular format.
1. Submit at the same time as the preliminary schedule.
  2. Format schedule to allow tracking of status of submittals throughout duration of construction.
  3. Account for time required for preparation, review, manufacturing, fabrication and delivery when establishing submittal delivery and review deadline dates.
    - a. For assemblies, equipment, systems comprised of multiple components and/or requiring detailed coordination with other work, allow for additional time to make corrections or revisions to initial submittals, and time for their review.

### 3.08 SUBMITTALS FOR REVIEW

- A. When the following are specified in individual sections, submit them for review:
1. Product data.
  2. Shop drawings.
  3. Samples for selection.
  4. Samples for verification.
- B. Submit to DEDC, LLC for review for the limited purpose of checking for compliance with information given and the design concept expressed in Contract Documents.
- C. Samples will be reviewed for aesthetic, color, or finish selection.
- D. After review, provide copies and distribute in accordance with SUBMITTAL PROCEDURES article below and for record documents purposes described in Section 01 78 00 - Closeout Submittals.

### **3.09 SUBMITTALS FOR INFORMATION**

- A. When the following are specified in individual sections, submit them for information:
  - 1. Design data.
  - 2. Certificates.
  - 3. Test reports.
  - 4. Inspection reports.
  - 5. Manufacturer's instructions.
  - 6. Manufacturer's field reports.
  - 7. Other types indicated.
- B. Submit for DEDC, LLC's knowledge as contract administrator or for State of Delaware OMB - Division of Facilities Management.

### **3.10 SUBMITTALS FOR PROJECT CLOSEOUT**

- A. Submit Correction Punch List for Substantial Completion.
- B. Submit Final Correction Punch List for Substantial Completion.
- C. When the following are specified in individual sections, submit them at project closeout in compliance with requirements of Section 01 78 00 - Closeout Submittals:
  - 1. Project record documents.
  - 2. Operation and maintenance data.
  - 3. Warranties.
  - 4. Bonds.
  - 5. Other types as indicated.
- D. Submit for State of Delaware OMB - Division of Facilities Management's benefit during and after project completion.

### **3.11 NUMBER OF COPIES OF SUBMITTALS**

- A. Documents for Review:
  - 1. Small Size Sheets, Not Larger Than 8-1/2 by 11 inches: Submit the number of copies that Contractor requires, plus two copies that will be retained by DEDC, LLC.
- B. Documents for Information: Submit one copy.
- C. Documents for Project Closeout: Make one reproduction of submittal originally reviewed. Submit one extra of submittals for information.
- D. Samples: Submit the number specified in individual specification sections; one of which will be retained by DEDC, LLC.
  - 1. After review, produce duplicates.
  - 2. Retained samples will not be returned to Contractor unless specifically so stated.

### **3.12 SUBMITTAL PROCEDURES**

- A. General Requirements:
- B. Transmit each submittal with approved form.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 01 40 00  
QUALITY REQUIREMENTS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Submittals.
- B. Testing and inspection agencies and services.
- C. Control of installation.
- D. Manufacturers' field services.
- E. Defect Assessment.
- F. Warranty

**1.02 RELATED REQUIREMENTS**

- A. Section 01 30 00 - Administrative Requirements: Submittal procedures.
- B. Section 01 60 00 - Product Requirements: Requirements for material and product quality.

**1.03 REFERENCE STANDARDS**

- A. ASTM C1077 - Standard Practice for Laboratories Testing Concrete and Concrete Aggregates for Use in Construction and Criteria for Laboratory Evaluation; 2014.

**1.04 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Design Data: Submit for DEDC, LLC's knowledge as contract administrator for the limited purpose of assessing compliance with information given and the design concept expressed in the Contract Documents, or for State of Delaware OMB - Division of Facilities Management's information.
- C. Test Reports: After each test/inspection, promptly submit two copies of report to DEDC, LLC and to Contractor.
  - 1. Include:
    - a. Date issued.
    - b. Project title and number.
    - c. Name of inspector.
    - d. Date and time of sampling or inspection.
    - e. Identification of product and specifications section.
    - f. Location in the Project.
    - g. Type of test/inspection.
    - h. Date of test/inspection.
    - i. Results of test/inspection.
    - j. Compliance with Contract Documents.
    - k. When requested by DEDC, LLC, provide interpretation of results.

**1.05 TESTING AND INSPECTION AGENCIES AND SERVICES**

- A. State of Delaware OMB - Division of Facilities Management will employ and pay for services of an independent testing agency to perform other specified testing.
- B. Employment of agency in no way relieves Contractor of obligation to perform Work in accordance with requirements of Contract Documents.

**PART 2 PRODUCTS - NOT USED**

**PART 3 EXECUTION**

**3.01 CONTROL OF INSTALLATION**

- A. Monitor quality control over suppliers, manufacturers, products, services, site conditions, and workmanship, to produce work of specified quality.
- B. Comply with manufacturers' instructions, including each step in sequence.
- C. Should manufacturers' instructions conflict with Contract Documents, request clarification from DEDC, LLC before proceeding.
- D. Comply with specified standards as minimum quality for the work except where more stringent tolerances, codes, or specified requirements indicate higher standards or more precise workmanship.
- E. Have work performed by persons qualified to produce required and specified quality.
- F. Verify that field measurements are as indicated on shop drawings or as instructed by the manufacturer.
- G. Secure products in place with positive anchorage devices designed and sized to withstand stresses, vibration, physical distortion, and disfigurement.

**3.02 TESTING AND INSPECTION**

- A. Testing Agency Duties:
  - 1. Provide qualified personnel at site. Cooperate with DEDC, LLC and Contractor in performance of services.
  - 2. Perform specified sampling and testing of products in accordance with specified standards.
  - 3. Ascertain compliance of materials and mixes with requirements of Contract Documents.
  - 4. Promptly notify DEDC, LLC and Contractor of observed irregularities or non-compliance of Work or products.
  - 5. Perform additional tests and inspections required by DEDC, LLC.
  - 6. Submit reports of all tests/inspections specified.
- B. Limits on Testing/Inspection Agency Authority:
  - 1. Agency may not release, revoke, alter, or enlarge on requirements of Contract Documents.
  - 2. Agency may not approve or accept any portion of the Work.
  - 3. Agency may not assume any duties of Contractor.
  - 4. Agency has no authority to stop the Work.
- C. Contractor Responsibilities:
  - 1. Deliver to agency at designated location, adequate samples of materials proposed to be used that require testing, along with proposed mix designs.
  - 2. Cooperate with laboratory personnel, and provide access to the Work and to manufacturers' facilities.
  - 3. Provide incidental labor and facilities:
    - a. To provide access to Work to be tested/inspected.
    - b. To obtain and handle samples at the site or at source of Products to be tested/inspected.
    - c. To facilitate tests/inspections.
    - d. To provide storage and curing of test samples.
  - 4. Notify DEDC, LLC and laboratory 24 hours prior to expected time for operations requiring testing/inspection services.
  - 5. Employ services of an independent qualified testing laboratory and pay for additional samples, tests, and inspections required by Contractor beyond specified requirements.

6. Arrange with State of Delaware OMB - Division of Facilities Management's agency and pay for additional samples, tests, and inspections required by Contractor beyond specified requirements.
- D. Re-testing required because of non-compliance with specified requirements shall be performed by the same agency on instructions by DEDC, LLC.
- E. Re-testing required because of non-compliance with specified requirements shall be paid for by Contractor.

### **3.03 MANUFACTURERS' FIELD SERVICES**

- A. When specified in individual specification sections, require material or product suppliers or manufacturers to provide qualified staff personnel to observe site conditions, conditions of surfaces and installation, quality of workmanship, start-up of equipment, test, adjust and balance of equipment as applicable, and to initiate instructions when necessary.
- B. Report observations and site decisions or instructions given to applicators or installers that are supplemental or contrary to manufacturers' written instructions.

### **3.04 DEFECT ASSESSMENT**

- A. Replace Work or portions of the Work not complying with specified requirements.
- B. If, in the opinion of DEDC, LLC, it is not practical to remove and replace the work, DEDC, LLC will direct an appropriate remedy or adjust payment.

### **3.05 WARRANTY**

- A. The Contractor will guarantee all materials and workmanship against original defects, except injury from proper and usual wear when used for the purpose intended, for two years after Acceptance by the Owner, and will maintain all items in perfect condition during the period of guarantee.
- B. Defects appearing during the period of guarantee will be made good by the Contractor at his expense upon demand of the Owner, it being required that all work will be in perfect condition when the period of guarantee will have elapsed.
- C. In addition to the General Guarantee there are other guarantees required for certain items for different periods of time than the two years as above, and are particularly so stated in that part of the specifications referring to same. The said guarantees will commence at the same time as the General Guarantee.
- D. If the Contractor fails to remedy any failure, defect or damage within a reasonable time after receipt of notice, the Owner will have the right to replace, repair, or otherwise remedy the failure, defect or damage at the Contractor's expense.
- E. For a period of two (2) years from the date of substantial completion, as evidenced by the date of final acceptance of the work, the contractor warrants that work performed under this contract conforms to the contract requirements and is free of any defect of equipment, material or workmanship performed by the contractor or any of his subcontractors or suppliers. However, manufacturer's warranties and guarantees, if for a period longer than two (2) years, shall take precedence over the above warranties. The contractor shall remedy, at his own expense, any such failure to conform or any such defect. The protection of this warranty shall be included in the Contractor's Performance Bond.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK



**SECTION 01 60 00  
PRODUCT REQUIREMENTS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. General product requirements.
- B. Re-use of existing products.
- C. Transportation, handling, storage and protection.
- D. Product option requirements.
- E. Substitution "or Equal" limitations and procedures.
- F. Procedures for State of Delaware OMB - Division of Facilities Management-supplied products.
- G. Maintenance materials, including extra materials, spare parts, tools, and software.

**1.02 RELATED REQUIREMENTS**

- A. Document Instructions to Bidders: Product options and substitution procedures prior to bid date.
- B. Section 01 10 00 - Summary:
- C. Section 01 40 00 - Quality Requirements: Product quality monitoring.
- D. Section 01 74 19 - Construction Waste Management and Disposal: Waste disposal requirements potentially affecting product selection, packaging and substitutions.

**1.03 REFERENCE STANDARDS**

- A. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.

**1.04 SUBMITTALS**

- A. Product Data Submittals: Submit manufacturer's standard published data. Mark each copy to identify applicable products, models, options, and other data. Supplement manufacturers' standard data to provide information specific to this Project.
- B. Shop Drawing Submittals: Prepared specifically for this Project; indicate utility and electrical characteristics, utility connection requirements, and location of utility outlets for service for functional equipment and appliances.
- C. Sample Submittals: Illustrate functional and aesthetic characteristics of the product, with integral parts and attachment devices. Coordinate sample submittals for interfacing work.
  - 1. For selection from standard finishes, submit samples of the full range of the manufacturer's standard colors, textures, and patterns.

**PART 2 PRODUCTS**

**2.01 EXISTING PRODUCTS**

- A. Do not use materials and equipment removed from existing premises unless specifically required or permitted by Contract Documents.
- B. Unforeseen historic items encountered remain the property of the State of Delaware OMB - Division of Facilities Management; notify State of Delaware OMB - Division of Facilities Management promptly upon discovery; protect, remove, handle, and store as directed by State of Delaware OMB - Division of Facilities Management.
- C. Existing materials and equipment indicated to be removed, but not to be re-used, relocated, reinstalled, delivered to the State of Delaware OMB - Division of Facilities Management, or otherwise indicated as to remain the property of the State of Delaware OMB - Division of Facilities Management, become the property of the Contractor; remove from site.

- D. Reused Products: Reused products include materials and equipment previously used in this or other construction, salvaged and refurbished as specified.
- E. Specific Products to be Reused: The reuse of certain materials and equipment already existing on the project site is not prohibited.
  - 1. See Section 01 10 00 for list of items required to be salvaged for reuse and relocation.

## 2.02 NEW PRODUCTS

- A. Provide new products unless specifically required or permitted by Contract Documents.
- B. Use of products having any of the following characteristics is not permitted:
  - 1. Made using or containing CFC's or HCFC's.
- C. Where other criteria are met, Contractor shall give preference to products that:
  - 1. If used on interior, have lower emissions, as defined in Section 01 61 16.
  - 2. If wet-applied, have lower VOC content, as defined in Section 01 61 16.
  - 3. Are extracted, harvested, and/or manufactured closer to the location of the project.
  - 4. Have longer documented life span under normal use.
  - 5. Result in less construction waste. See Section 01 74 19
  - 6. Are made of vegetable materials that are rapidly renewable.
- D. Provide interchangeable components by the same manufacture for components being replaced.
- E. Wiring Terminations: Provide terminal lugs to match branch circuit conductor quantities, sizes, and materials indicated. Size terminal lugs to NFPA 70. Include lugs for terminal box.

## 2.03 PRODUCT OPTIONS

- A. Products Specified by Reference Standards or by Description Only: Use any product meeting those standards or description.
- B. Products Specified by Naming One or More Manufacturers with a Provision for Substitutions: Submit a request for substitution for any manufacturer not named in accordance with this specification.

## 2.04 MAINTENANCE MATERIALS

- A. Furnish extra materials, spare parts, tools, and software of types and in quantities specified in individual specification sections.
- B. Deliver to Project site: Obtain receipt prior to final payment.

## PART 3 EXECUTION

### 3.01 SUBSTITUTION LIMITATIONS

- A. See Section 01 25 00 - Substitution Procedures.
- B. The intent of this process is to allow for manufacturers not listed to provide an "Equal" product to DEDC, LLC for review and approval. This process must take place prior to award of bid.
- C. A request for substitution constitutes a representation that the submitter:
  - 1. Has investigated proper clearances and working spaces for substituted equipment and waives claims for additional costs or time extension that may subsequently become apparent. These physical differences must be pointed out at the time of the submittal.

### 3.02 OWNER-SUPPLIED PRODUCTS

- A. State of Delaware OMB - Division of Facilities Management's Responsibilities:
  - 1. Arrange for and deliver State of Delaware OMB - Division of Facilities Management reviewed shop drawings, product data, and samples, to Contractor.
  - 2. Arrange and pay for product delivery to site.
  - 3. On delivery, inspect products jointly with Contractor.
  - 4. Submit claims for transportation damage and replace damaged, defective, or deficient items.

5. Arrange for manufacturers' warranties, inspections, and service.
- B. Contractor's Responsibilities:
  1. Review State of Delaware OMB - Division of Facilities Management reviewed shop drawings, product data, and samples.
  2. Receive and unload products at site; inspect for completeness or damage jointly with State of Delaware OMB - Division of Facilities Management.
  3. Handle, store, install and finish products.
  4. Repair or replace items damaged after receipt.

### **3.03 TRANSPORTATION AND HANDLING**

- A. Package products for shipment in manner to prevent damage; for equipment, package to avoid loss of factory calibration.
- B. If special precautions are required, attach instructions prominently and legibly on outside of packaging.
- C. Coordinate schedule of product delivery to designated prepared areas in order to minimize site storage time and potential damage to stored materials.
- D. Transport and handle products in accordance with manufacturer's instructions.
- E. Transport materials in covered trucks to prevent contamination of product and littering of surrounding areas.
- F. Promptly inspect shipments to ensure that products comply with requirements, quantities are correct, and products are undamaged.
- G. Provide equipment and personnel to handle products by methods to prevent soiling, disfigurement, or damage, and to minimize handling.
- H. Arrange for the return of packing materials, such as wood pallets, where economically feasible.

### **3.04 STORAGE AND PROTECTION**

- A. Designate receiving/storage areas for incoming products so that they are delivered according to installation schedule and placed convenient to work area in order to minimize waste due to excessive materials handling and misapplication. See Section 01 74 19.
- B. Store and protect products in accordance with manufacturers' instructions.
- C. Store with seals and labels intact and legible.
- D. Store sensitive products in weathertight, climate-controlled enclosures in an environment favorable to product.
- E. For exterior storage of fabricated products, place on sloped supports above ground.
- F. Protect products from damage or deterioration due to construction operations, weather, precipitation, humidity, temperature, sunlight and ultraviolet light, dirt, dust, and other contaminants.
- G. Comply with manufacturer's warranty conditions, if any.
- H. Cover products subject to deterioration with impervious sheet covering. Provide ventilation to prevent condensation and degradation of products.
- I. Prevent contact with material that may cause corrosion, discoloration, or staining.
- J. Provide equipment and personnel to store products by methods to prevent soiling, disfigurement, or damage.
- K. Arrange storage of products to permit access for inspection. Periodically inspect to verify products are undamaged and are maintained in acceptable condition.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 01 70 00**  
**EXECUTION AND CLOSEOUT REQUIREMENTS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Examination, preparation, and general installation procedures.
- B. Requirements for alterations work, including selective demolition.
- C. Pre-installation meetings.
- D. Cutting and patching.
- E. Cleaning and protection.
- F. Starting of systems and equipment.
- G. Demonstration and instruction of State of Delaware OMB - Division of Facilities Management personnel.
- H. Closeout procedures, including Contractor's Correction Punch List, except payment procedures.
- I. General requirements for maintenance service.

**1.02 RELATED REQUIREMENTS**

- A. Section 01 10 00 - Summary: Limitations on working in existing building; continued occupancy; work sequence; identification of salvaged and relocated materials.
- B. Section 01 30 00 - Administrative Requirements: Submittals procedures, Electronic document submittal service.
- C. Section 01 74 19 - Construction Waste Management and Disposal: Additional procedures for trash/waste removal, recycling, salvage, and reuse.
- D. Section 01 78 00 - Closeout Submittals: Project record documents, operation and maintenance data, warranties, and bonds.
- E. Section 01 79 00 - Demonstration and Training: Demonstration of products and systems to be commissioned and where indicated in specific specification sections
- F. Section 01 91 13 - General Commissioning Requirements: Contractor's responsibilities in regard to commissioning
- G. Section 07 84 00 - Firestopping.

**1.03 REFERENCE STANDARDS**

- A. NFPA 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations; 2013.

**1.04 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Cutting and Patching: Submit written request in advance of cutting or alteration that affects:
  - 1. Structural integrity of any element of Project.
  - 2. Integrity of weather exposed or moisture resistant element.
  - 3. Efficiency, maintenance, or safety of any operational element.
  - 4. Visual qualities of sight exposed elements.
  - 5. Work of State of Delaware OMB - Division of Facilities Management or separate Contractor.
  - 6. Include in request:
    - a. Identification of Project.
    - b. Location and description of affected work.
    - c. Necessity for cutting or alteration.

- d. Description of proposed work and products to be used.
- e. Effect on work of State of Delaware OMB - Division of Facilities Management or separate Contractor.
- f. Written permission of affected separate Contractor.
- g. Date and time work will be executed.

C. Project Record Documents: Accurately record actual locations of capped and active utilities.

#### **1.05 PROJECT CONDITIONS**

- A. Use of explosives is not permitted.
- B. Ventilate enclosed areas to assist cure of materials, to dissipate humidity, and to prevent accumulation of dust, fumes, vapors, or gases.
- C. Dust Control: Execute work by methods to minimize raising dust from construction operations. Provide positive means to prevent air-borne dust from dispersing into atmosphere and over adjacent property.
  - 1. Provide dust-proof barriers between construction areas and areas continuing to be occupied.
- D. Noise Control: Provide methods, means, and facilities to minimize noise produced by construction operations.
  - 1. Outdoors: Limit conduct of especially noisy exterior work to the hours of 8 am to 5 pm.
  - 2. Indoors: Limit conduct of especially noisy interior work to the hours of 6 pm to 7 am.
- E. Pest and Rodent Control: Provide methods, means, and facilities to prevent pests and insects from damaging the work.

#### **1.06 COORDINATION**

- A. See Section 01 10 00 for occupancy-related requirements.
- B. Coordinate scheduling, submittals, and work of the various sections of the Project Manual to ensure efficient and orderly sequence of installation of interdependent construction elements, with provisions for accommodating items installed later.
- C. Notify affected utility companies and comply with their requirements.
- D. Verify that utility requirements and characteristics of new operating equipment are compatible with building utilities. Coordinate work of various sections having interdependent responsibilities for installing, connecting to, and placing in service, such equipment.
- E. Coordinate space requirements, supports, and installation of mechanical and electrical work that are indicated diagrammatically on drawings. Follow routing indicated for pipes, ducts, and conduit, as closely as practicable; place runs parallel with lines of building. Utilize spaces efficiently to maximize accessibility for other installations, for maintenance, and for repairs.
- F. In finished areas except as otherwise indicated, conceal pipes, ducts, and wiring within the construction. Coordinate locations of fixtures and outlets with finish elements.
- G. Coordinate completion and clean-up of work of separate sections.
- H. After State of Delaware OMB - Division of Facilities Management occupancy of premises, coordinate access to site for correction of defective work and work not in accordance with Contract Documents, to minimize disruption of State of Delaware OMB - Division of Facilities Management's activities.

### **PART 2 PRODUCTS**

#### **2.01 PATCHING MATERIALS**

- A. New Materials: As specified in product sections; match existing products and work for patching and extending work.
- B. Type and Quality of Existing Products: Determine by inspecting and testing products where necessary, referring to existing work as a standard.

- C. Product Substitution: For any proposed change in materials, submit request for substitution described in Section 01 60 00 - Product Requirements.

### **PART 3 EXECUTION**

#### **3.01 EXAMINATION**

- A. Verify that existing site conditions and substrate surfaces are acceptable for subsequent work. Start of work means acceptance of existing conditions.
- B. Verify that existing substrate is capable of structural support or attachment of new work being applied or attached.
- C. Examine and verify specific conditions described in individual specification sections.
- D. Take field measurements before confirming product orders or beginning fabrication, to minimize waste due to over-ordering or misfabrication.
- E. Verify that utility services are available, of the correct characteristics, and in the correct locations.
- F. Prior to Cutting: Examine existing conditions prior to commencing work, including elements subject to damage or movement during cutting and patching. After uncovering existing work, assess conditions affecting performance of work. Beginning of cutting or patching means acceptance of existing conditions.

#### **3.02 PREPARATION**

- A. Clean substrate surfaces prior to applying next material or substance.
- B. Seal cracks or openings of substrate prior to applying next material or substance.
- C. Apply manufacturer required or recommended substrate primer, sealer, or conditioner prior to applying any new material or substance in contact or bond.

#### **3.03 PREINSTALLATION MEETINGS**

- A. When required in individual specification sections, convene a preinstallation meeting at the site prior to commencing work of the section.
- B. Require attendance of parties directly affecting, or affected by, work of the specific section.
- C. Notify DEDC, LLC four days in advance of meeting date.
- D. Prepare agenda and preside at meeting:
  - 1. Review conditions of examination, preparation and installation procedures.
  - 2. Review coordination with related work.
- E. Record minutes and distribute copies within two days after meeting to participants, with two copies to DEDC, LLC, State of Delaware OMB - Division of Facilities Management, participants, and those affected by decisions made.

#### **3.04 GENERAL INSTALLATION REQUIREMENTS**

- A. Install products as specified in individual sections, in accordance with manufacturer's instructions and recommendations, and so as to avoid waste due to necessity for replacement.
- B. Make vertical elements plumb and horizontal elements level, unless otherwise indicated.
- C. Install equipment and fittings plumb and level, neatly aligned with adjacent vertical and horizontal lines, unless otherwise indicated.
- D. Make consistent texture on surfaces, with seamless transitions, unless otherwise indicated.
- E. Make neat transitions between different surfaces, maintaining texture and appearance.

#### **3.05 ALTERATIONS**

- A. Drawings showing existing construction and utilities are based on casual field observation and existing record documents only.
  - 1. Verify that construction and utility arrangements are as indicated.

2. Report discrepancies to DEDC, LLC before disturbing existing installation.
3. Beginning of alterations work constitutes acceptance of existing conditions.
- B. Maintain weatherproof exterior building enclosure except for interruptions required for replacement or modifications; take care to prevent water and humidity damage.
  1. Where openings in exterior enclosure exist, provide construction to make exterior enclosure weatherproof.
  2. Insulate existing ducts or pipes that are exposed to outdoor ambient temperatures by alterations work.
- C. Remove existing work as indicated and as required to accomplish new work.
  1. Remove items indicated on drawings.
  2. Relocate items indicated on drawings.
  3. Where new surface finishes are to be applied to existing work, perform removals, patch, and prepare existing surfaces as required to receive new finish; remove existing finish if necessary for successful application of new finish.
  4. Where new surface finishes are not specified or indicated, patch holes and damaged surfaces to match adjacent finished surfaces as closely as possible.
- D. Services (Including but not limited to HVAC, Plumbing, Fire Protection, Electrical, and Telecommunications): Remove, relocate, and extend existing systems to accommodate new construction.
  1. Maintain existing active systems that are to remain in operation; maintain access to equipment and operational components; if necessary, modify installation to allow access or provide access panel.
  2. Where existing systems or equipment are not active and Contract Documents require reactivation, put back into operational condition; repair supply, distribution, and equipment as required.
  3. Where existing active systems serve occupied facilities but are to be replaced with new services, maintain existing systems in service until new systems are complete and ready for service.
    - a. Disable existing systems only to make switchovers and connections; minimize duration of outages.
    - b. See Section 01 10 00 for other limitations on outages and required notifications.
    - c. Provide temporary connections as required to maintain existing systems in service.
  4. Verify that abandoned services serve only abandoned facilities.
  5. Remove abandoned pipe, ducts, conduits, and equipment, including those above accessible ceilings; remove back to source of supply where possible, otherwise cap stub and tag with identification; patch holes left by removal using materials specified for new construction.
- E. Protect existing work to remain.
  1. Prevent movement of structure; provide shoring and bracing if necessary.
  2. Perform cutting to accomplish removals neatly and as specified for cutting new work.
  3. Repair adjacent construction and finishes damaged during removal work.
- F. Adapt existing work to fit new work: Make as neat and smooth transition as possible.
- G. Patching: Where the existing surface is not indicated to be refinished, patch to match the surface finish that existed prior to cutting. Where the surface is indicated to be refinished, patch so that the substrate is ready for the new finish.
- H. Refinish existing surfaces as indicated:
  1. Where rooms or spaces are indicated to be refinished, refinish all visible existing surfaces to remain to the specified condition for each material, with a neat transition to adjacent finishes.
  2. If mechanical or electrical work is exposed accidentally during the work, re-cover and refinish to match.



- I. Clean existing systems and equipment.
- J. Remove demolition debris and abandoned items from alterations areas and dispose of off-site; do not burn or bury.
- K. Do not begin new construction in alterations areas before demolition is complete.
- L. Comply with all other applicable requirements of this section.

### 3.06 CUTTING AND PATCHING

- A. Whenever possible, execute the work by methods that avoid cutting or patching.
- B. See Alterations article above for additional requirements.
- C. Perform whatever cutting and patching is necessary to:
  - 1. Complete the work.
  - 2. Fit products together to integrate with other work.
  - 3. Provide openings for penetration of mechanical, electrical, and other services.
  - 4. Match work that has been cut to adjacent work.
  - 5. Repair areas adjacent to cuts to required condition.
  - 6. Repair new work damaged by subsequent work.
  - 7. Remove samples of installed work for testing when requested.
  - 8. Remove and replace defective and non-complying work.
- D. Execute work by methods that avoid damage to other work and that will provide appropriate surfaces to receive patching and finishing. In existing work, minimize damage and restore to original condition.
- E. Employ original installer to perform cutting for weather exposed and moisture resistant elements, and sight exposed surfaces.
- F. Cut rigid materials using masonry saw or core drill. Pneumatic tools not allowed without prior approval.
- G. Restore work with new products in accordance with requirements of Contract Documents.
- H. Fit work air tight to pipes, sleeves, ducts, conduit, and other penetrations through surfaces.
- I. At penetrations of fire rated walls, partitions, ceiling, or floor construction, completely seal voids with fire rated material in accordance with Section 07 84 00, to full thickness of the penetrated element.
- J. Patching:
  - 1. Finish patched surfaces to match finish that existed prior to patching. On continuous surfaces, finish to nearest intersection or natural break. For an assembly, refinish entire unit.
  - 2. Match color, texture, and appearance.
  - 3. Repair patched surfaces that are damaged, lifted, discolored, or showing other imperfections due to patching work. If defects are due to condition of substrate, repair substrate prior to repairing finish.

### 3.07 PROGRESS CLEANING

- A. Maintain areas free of waste materials, debris, and rubbish. Maintain site in a clean and orderly condition.
- B. Remove debris and rubbish from pipe chases, plenums, attics, crawl spaces, and other closed or remote spaces, prior to enclosing the space.
- C. Broom and vacuum clean interior areas prior to start of surface finishing, and continue cleaning to eliminate dust.
- D. Collect and remove waste materials, debris, and trash/rubbish from site periodically and dispose off-site; do not burn or bury.

### **3.08 PROTECTION OF INSTALLED WORK**

- A. Protect installed work from damage by construction operations.
- B. Provide special protection where specified in individual specification sections.
- C. Provide temporary and removable protection for installed products. Control activity in immediate work area to prevent damage.
- D. Provide protective coverings at walls, projections, jambs, sills, and soffits of openings.
- E. Protect finished floors, stairs, and other surfaces from traffic, dirt, wear, damage, or movement of heavy objects, by protecting with durable sheet materials.
- F. Prohibit traffic or storage upon waterproofed or roofed surfaces. If traffic or activity is necessary, obtain recommendations for protection from waterproofing or roofing material manufacturer.
- G. Remove protective coverings when no longer needed; reuse or recycle coverings if possible.

### **3.09 SYSTEM STARTUP**

- A. Coordinate schedule for start-up of various equipment and systems.
- B. Verify that each piece of equipment or system has been checked for proper lubrication, drive rotation, belt tension, control sequence, and for conditions that may cause damage.
- C. Verify tests, meter readings, and specified electrical characteristics agree with those required by the equipment or system manufacturer.
- D. Verify that wiring and support components for equipment are complete and tested.
- E. Execute start-up under supervision of applicable Contractor personnel and manufacturer's representative in accordance with manufacturers' instructions.
- F. Submit a written report that equipment or system has been properly installed and is functioning correctly.

### **3.10 DEMONSTRATION AND INSTRUCTION**

- A. See Section 01 79 00 - Demonstration and Training.

### **3.11 ADJUSTING**

- A. Adjust operating products and equipment to ensure smooth and unhindered operation.

### **3.12 FINAL CLEANING**

- A. Use cleaning materials that are nonhazardous.
- B. Clean interior and exterior glass, surfaces exposed to view; remove temporary labels, stains and foreign substances, polish transparent and glossy surfaces, vacuum carpeted and soft surfaces.
- C. Remove all labels that are not permanent. Do not paint or otherwise cover fire test labels or nameplates on mechanical and electrical equipment.
- D. Clean equipment and fixtures to a sanitary condition with cleaning materials appropriate to the surface and material being cleaned.
- E. Clean filters of operating equipment.
- F. Clean debris from roofs, gutters, downspouts, scuppers, overflow drains, area drains, and drainage systems.
- G. Clean site; sweep paved areas, rake clean landscaped surfaces.
- H. Remove waste, surplus materials, trash/rubbish, and construction facilities from the site; dispose of in legal manner; do not burn or bury.

### **3.13 CLOSEOUT PROCEDURES**

- A. Make submittals that are required by governing or other authorities.
  - 1. Provide copies to DEDC, LLC.

- B. Accompany Project Coordinator on preliminary inspection to determine items to be listed for completion or correction in the Contractor's Correction Punch List for Contractor's Notice of Substantial Completion.
- C. Notify DEDC, LLC when work is considered ready for DEDC, LLC's Substantial Completion inspection.
- D. Submit written certification containing Contractor's Correction Punch List, that Contract Documents have been reviewed, work has been inspected, and that work is complete in accordance with Contract Documents and ready for DEDC, LLC's Substantial Completion inspection.
- E. Conduct Substantial Completion inspection and create Final Correction Punch List containing DEDC, LLC's and Contractor's comprehensive list of items identified to be completed or corrected and submit to DEDC, LLC.
- F. Correct items of work listed in Final Correction Punch List and comply with requirements for access to State of Delaware OMB - Division of Facilities Management-occupied areas.
- G. Notify DEDC, LLC when work is considered finally complete and ready for DEDC, LLC's Substantial Completion final inspection.
- H. Complete items of work determined by DEDC, LLC listed in executed Certificate of Substantial Completion.

### **3.14 MAINTENANCE**

- A. Provide service and maintenance of components indicated in specification sections.
- B. Maintenance Period: As indicated in specification sections or, if not indicated, not less than one year from the Date of Substantial Completion or the length of the specified warranty, whichever is longer.
- C. Examine system components at a frequency consistent with reliable operation. Clean, adjust, and lubricate as required.
- D. Include systematic examination, adjustment, and lubrication of components. Repair or replace parts whenever required. Use parts produced by the manufacturer of the original component.
- E. Maintenance service shall not be assigned or transferred to any agent or subcontractor without prior written consent of the State of Delaware OMB - Division of Facilities Management.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 01 74 19**  
**CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL**

**PART 1 – GENERAL**

**1.01 SUMMARY**

- A. Section includes: Administrative and procedural requirements for construction waste management activities.

**1.02 DEFINITIONS**

- A. Construction, Demolition, and Land clearing (CDL) Waste: Includes all non-hazardous solid wastes resulting from construction, remodeling, alterations, repair, demolition and land clearing. Includes material that is recycled, reused, salvaged or disposed as garbage.
- B. Salvage: Recovery of materials for on-site reuse, sale or donation to a third party.
- C. Reuse: Making use of a material without altering its form. Materials can be reused on-site or reused on other projects off-site. Examples include, but are not limited to the following: Crushing or grinding of concrete for use as sub-base material. Chipping of land clearing debris for use as mulch.
- D. Recycling: The process of sorting, cleaning, treating, and reconstituting materials for the purpose of using the material in the manufacture of a new product.
- E. Source-Separated CDL Recycling: The process of separating recyclable materials in separate containers as they are generated on the job-site. The separated materials are hauled directly to a recycling facility or transfer station.
- F. Co-mingled CDL Recycling: The process of collecting mixed recyclable materials in one container on-site. The container is taken to a material recovery facility where materials are separated for recycling.
- G. Approved Recycling Facility: Any of the following:
  - 1. A facility that can legally accept CDL waste materials for the purpose of processing the
    - a. materials into an altered form for the manufacture of a new product.
  - 2. Material Recovery Facility: A general term used to describe a waste-sorting facility.
    - a. Mechanical, hand-separation, or a combination of both procedures, are used to recover
    - b. recyclable materials.
- H. Universal waste components (UWC) are as follows: electric motors, PCB ballasts, non PCB ballasts, capacitors, contactors, circuit breakers, elemental and liquid mercury containing articles, transformers, lead acid batteries, fluorescent light bulbs, and all HID light bulbs.

**1.03 SUBMITTALS**

- A. Contractor shall develop a Waste Management Plan: Submit 3 copies of plan within 14 days of date established for the Notice to Proceed.
- B. Contractor shall provide Waste Management Report: Concurrent with each Application for Payment, submit 3 copies of report.

**1.04 PERFORMANCE REQUIREMENTS**

- A. General: Divert a minimum of 75% CDL waste, by weight, from the landfill by one, or a combination of the following activities:
  - 1. Salvage
  - 2. Reuse
  - 3. Source-Separated CDL Recycling
  - 4. Co-mingled CDL Recycling
- B. CDL waste materials that can be salvaged, reused or recycled include, but are not limited to, the following:

1. Acoustical ceiling tiles
2. Asphalt
3. Asphalt shingles
4. Cardboard packaging
5. Carpet and carpet pad
6. Concrete
7. Drywall
8. Fluorescent lights and ballasts
9. Land clearing debris (vegetation, stumpage, dirt)
10. Metals
11. Paint (through hazardous waste outlets)
12. Wood
13. Plastic film (sheeting, shrink wrap, packaging)
14. Window glass
15. Wood
16. Field office waste, including office paper, aluminum cans, glass, plastic, and office cardboard.

#### 1.05 QUALITY ASSURANCE

- A. Waste Management Coordinator Qualifications: Experienced firm, with a record of successful waste management coordination of projects with similar requirements, that employs a LEED Accredited Professional, certified by the USGBC as waste management coordinator.
- B. Refrigerant Recovery Technician Qualifications: Certified by EPA-approved certification program.
- C. Regulatory Requirements: Conduct construction waste management activities in accordance with hauling and disposal regulations of all authorities having jurisdiction and all other applicable laws and ordinances.
- D. Preconstruction Conference: Schedule and conduct meeting at Project site prior to construction activities.
  1. Attendees: Inform the following individuals, whose presence is required, of date and time of meeting.
    - a. Owner
    - b. Architect
    - c. Contractor's superintendent
    - d. Major subcontractors
    - e. Waste Management Coordinator
    - f. Other concerned parties.
  2. Agenda Items: Review methods and procedures related to waste management including, but not limited to, the following:
    - a. Review and discuss waste management plan including responsibilities of Waste Management Coordinator.
    - b. Review requirements for documenting quantities of each type of waste and its disposition.
    - c. Review and finalize procedures for materials separation and verify availability of containers and bins needed to avoid delays.
    - d. Review procedures for periodic waste collection and transportation to recycling and disposal facilities.
    - e. Review waste management requirements for each trade.
  3. Minutes: Record discussion. Distribute meeting minutes to all participants.
    - a. Note: If there is a Project Architect, they will perform this role.

**1.06 WASTE MANAGEMENT PLAN – CONTACTOR SHALL DEVELOP AND DOCUMENT THE FOLLOWING:**

- A. Develop a plan to meet the requirements listed in this section at a minimum. Plan shall consist of waste identification, waste reduction plan and cost/revenue analysis. Distinguish between demolition and construction waste. Indicate quantities by weight throughout the plan.
- B. Indicate anticipated types and quantities of demolition, site-cleaning and construction waste generated by the project. List all assumptions made for the quantities estimates.
- C. List each type of waste and whether it will be salvaged, recycled, or disposed of in an landfill. The plan should included the following information:
  1. Types and estimated quantities, by weight, of CDL waste expected to be generated during demolition and construction.
  2. Proposed methods for CDL waste salvage, reuse, recycling and disposal during demolition including, but not limited to, one or more of the following:
    - a. Contracting with a deconstruction specialist to salvage materials generated,
    - b. Selective salvage as part of demolition contractor's work,
    - c. Reuse of materials on-site or sale or donation to a third party.
  3. Proposed methods for salvage, reuse, recycling and disposal during construction including, but not limited to, one or more of the following:
    - a. Requiring subcontractors to take their CDL waste to a recycling facility;
    - b. Contracting with a recycling hauler to haul recyclable CDL waste to an approved recycling or material recovery facility;
    - c. Processing and reusing materials on-site;
    - d. Self-hauling to a recycling or material recovery facility.
  4. Name of recycling or material recovery facility receiving the CDL wastes.
  5. Handling and Transportation Procedures: include method that will be used for separating recyclable waste including sizes of containers, container labeling, and designated location on project site where materials separation will be located.
- D. Cost/Revenue Analysis: Indicate total cost of waste disposal as if there was no waste management plan and net additional cost or net savings resulting from implementing waste management plan. Include the following:
  1. Total quantity of waste.
  2. Estimated cost of disposal (cost per unit). Include hauling and tipping fees and cost of collection containers for each type of waste.
  3. Total cost of disposal (with no waste management).
  4. Revenue from salvaged materials.
  5. Revenue from recycled materials.
  6. Savings in hauling and tipping fees by donating materials.
  7. Savings in hauling and tipping fees that are avoided.
  8. Handling and transportation costs. Including cost of collection containers for each type of waste.
  9. Net additional cost or net savings from waste management plan.

**PART 2 - PRODUCTS (NOT USED)**

**PART 3 – EXECUTION**

**3.01 CONSTRUCTION WASTE MANAGEMENT, GENERAL**

- A. Provide containers for CDL waste that is to be recycled clearly labeled as such with a list of acceptable and unacceptable materials. The list of acceptable materials must be the same as the materials recycled at the receiving material recovery facility or recycling processor.
- B. The collection containers for recyclable CDL waste must contain no more than 10% non-recyclable material, by volume.
- C. Provide containers for CDL waste that is disposed in a landfill clearly labeled as such.

- D. Use detailed material estimates to reduce risk of unplanned and potentially wasteful cuts.
- E. To the greatest extent possible, include in material purchasing agreements a waste reduction provision requesting that materials and equipment be delivered in packaging made of recyclable material, that they reduce the amount of packaging, that packaging be taken back for reuse or recycling, and to take back all unused product. Insure that subcontractors require the same provisions in their purchase agreements.
- F. Conduct regular visual inspections of dumpsters and recycling bins to remove contaminants.

### 3.02 SOURCE SEPARATION

- A. General: Contractor shall separate recyclable materials from CDL waste to the maximum extent possible.
- B. Separate recyclable materials by type.
  - 1. Provide containers, clearly labeled, by type of separated materials or provide other storage method for managing recyclable materials until they are removed from Project site.
  - 2. Stockpile processed materials on-site without intermixing with other materials. Place, grade, and shape stockpiles to drain surface water and to minimize pest attraction. Cover to prevent windblown dust.
  - 3. Stockpile materials away from demolition area. Do not store within drip line of remaining trees.
  - 4. Store components off the ground and protect from weather.

### 3.03 CO-MINGLED RECYCLING

- A. General: Do not put CDL waste that will be disposed in a landfill into a co-mingled CDL waste recycling container.

### 3.04 REMOVAL OF CONSTRUCTION WASTE MATERIALS

- A. Remove CDL waste materials from project site on a regular basis. Do not allow CDL waste to accumulate on-site.
- B. Transport CDL waste materials off Owner's property and legally dispose of them.
- C. Burning of CDL waste is not permitted.

### 3.05 UNIVERSAL WASTE DIVERSION

- A. Remove all universal waste from fixtures, panels, and related devices for proper diversion and reclamation.
- B. Store all universal waste in containers provided by contact person within facilities operations.
- C. Store all universal waste in a secured location and request periodic removal from assigned contact person.
- D. Exemption: electric motors, circuit breakers, transformers and lighting contactors are exempt from this provision provided the contractor chooses to salvage or reuse the components.
- E. No identified universal waste will be discarded into the waste stream.

|                                         |                                                    |
|-----------------------------------------|----------------------------------------------------|
| <b>PERCENTAGE OF<br/>WASTE DIVERTED</b> | <b>(TOTAL WASTE DIVIDED BY TOTAL<br/>DIVERTED)</b> |
|-----------------------------------------|----------------------------------------------------|

END OF SECTION



**SECTION 01 78 00  
CLOSEOUT SUBMITTALS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Project record documents.
- B. Operation and maintenance data.
- C. Closeout Document Checklist
- D. Warranties and bonds.

**1.02 RELATED REQUIREMENTS**

- A. Division 00 Documents
- B. Section 01 30 00 - Administrative Requirements: Submittals procedures, shop drawings, product data, and samples.
- C. Section 01 70 00 - Execution and Closeout Requirements: Contract closeout procedures.
- D. Individual Product Sections: Specific requirements for operation and maintenance data.
- E. Individual Product Sections: Warranties required for specific products or Work.

**1.03 SUBMITTALS**

- A. Project Record Documents: Submit documents to DEDC, LLC prior to final payment application. The following documents must be submitted:
  - 1. Red line drawings (As-Built)
    - a. One original paper copy
    - b. Two copies of the original.
- B. Electronic Documentation: Submit the electronic documentation on two long duration archival cd storage devices with gold lacquer finish. The following electronic data shall be included on each CD:
  - 1. Scanned copy of the As-Built in PDF format.
  - 2. Revised AutoCAD (release 2007 or later) drawing. Original copy of the AutoCAD file will be provided upon request.
  - 3. Approved project submittals (PDF Format).
  - 4. Operation and Maintenance Data (PDF Format)
- C. Operation and Maintenance Data:
  - 1. Submit two copies of preliminary draft or proposed formats and outlines of contents before start of Work. DEDC, LLC will review draft and return one copy with comments.
  - 2. For equipment, or component parts of equipment put into service during construction and operated by State of Delaware OMB - Division of Facilities Management, submit completed documents within ten days after acceptance.
  - 3. Submit one copy of completed documents 15 days prior to final inspection. This copy will be reviewed and returned after final inspection, with DEDC, LLC comments. Revise content of all document sets as required prior to final submission.
  - 4. Submit two sets of revised final documents in a 3-ring binder in final form within 10 days after final inspection.
- D. Warranties and Bonds:
  - 1. For equipment or component parts of equipment put into service during construction with State of Delaware OMB - Division of Facilities Management's permission, submit documents within 10 days after acceptance.
  - 2. Make other submittals within 10 days after Date of Substantial Completion, prior to final Application for Payment.

3. For items of Work for which acceptance is delayed beyond Date of Substantial Completion, submit within 10 days after acceptance, listing the date of acceptance as the beginning of the warranty period.

## **PART 2 PRODUCTS - NOT USED**

## **PART 3 EXECUTION**

### **3.01 PROJECT RECORD DOCUMENTS**

- A. Maintain on site one set of the following record documents; record actual revisions to the Work:
  1. Drawings.
  2. Addenda.
  3. Change Orders and other modifications to the Contract.
  4. Manufacturer's instruction for assembly, installation, and adjusting.
- B. Ensure entries are complete and accurate, enabling future reference by State of Delaware OMB - Division of Facilities Management.
- C. Store record documents separate from documents used for construction.
- D. Record information concurrent with construction progress.
- E. Record Drawings: Legibly mark each item to record actual construction including:
  1. Field changes of dimension and detail.
  2. Details not on original Contract drawings.

### **3.02 OPERATION AND MAINTENANCE DATA**

- A. Source Data: For each product or system, list names, addresses and telephone numbers of Subcontractors and suppliers, including local source of supplies and replacement parts.
- B. Product Data: Mark each sheet to clearly identify specific products and component parts, and data applicable to installation. Delete inapplicable information.
- C. Drawings: Supplement product data to illustrate relations of component parts of equipment and systems, to show control and flow diagrams. Do not use Project Record Documents as maintenance drawings.
- D. Typed Text: As required to supplement product data. Provide logical sequence of instructions for each procedure, incorporating manufacturer's instructions.

### **3.03 OPERATION AND MAINTENANCE DATA FOR EQUIPMENT AND SYSTEMS**

- A. For Each Item of Equipment and Each System:
  1. Description of unit or system, and component parts.
  2. Identify function, normal operating characteristics, and limiting conditions.
  3. Include performance curves, with engineering data and tests.
  4. Complete nomenclature and model number of replaceable parts.
- B. Where additional instructions are required, beyond the manufacturer's standard printed instructions, have instructions prepared by personnel experienced in the operation and maintenance of the specific products.
- C. Panelboard Circuit Directories: Provide electrical service characteristics, controls, and communications; typed.
- D. Operating Procedures: Include start-up, break-in, and routine normal operating instructions and sequences. Include regulation, control, stopping, shut-down, and emergency instructions. Include summer, winter, and any special operating instructions.
- E. Maintenance Requirements: Include routine procedures and guide for preventative maintenance and trouble shooting; disassembly, repair, and reassembly instructions; and alignment, adjusting, balancing, and checking instructions.
- F. Provide servicing and lubrication schedule, and list of lubricants required.
- G. Include manufacturer's printed operation and maintenance instructions.

- H. Include sequence of operation by controls manufacturer.
- I. Provide original manufacturer's parts list, illustrations, assembly drawings, and diagrams required for maintenance.
- J. Provide control diagrams by controls manufacturer as installed.
- K. Include test and balancing reports.
- L. Additional Requirements: As specified in individual product specification sections.

### **3.04 ASSEMBLY OF OPERATION AND MAINTENANCE MANUALS**

- A. Assemble operation and maintenance data into durable manuals for State of Delaware OMB - Division of Facilities Management's personnel use, with data arranged in the same sequence as, and identified by, the specification sections.
- B. Where systems involve more than one specification section, provide separate tabbed divider for each system.
- C. Binders: Commercial quality, 8-1/2 by 11 inch three D side ring binders with durable plastic covers; 2 inch maximum ring size. When multiple binders are used, correlate data into related consistent groupings.
- D. Cover: Identify each binder with typed or printed title OPERATION AND MAINTENANCE INSTRUCTIONS; identify title of Project; identify subject matter of contents.
- E. Project Directory: Title and address of Project; names, addresses, and telephone numbers of DEDC, LLC, Consultants, Contractor and subcontractors, with names of responsible parties.
- F. Tables of Contents: List every item separated by a divider, using the same identification as on the divider tab; where multiple volumes are required, include all volumes Tables of Contents in each volume, with the current volume clearly identified.
- G. Dividers: Provide tabbed dividers for each separate product and system; identify the contents on the divider tab; immediately following the divider tab include a description of product and major component parts of equipment.
- H. Text: Manufacturer's printed data, or typewritten data on 24 pound paper.
- I. Drawings: Provide with reinforced punched binder tab. Bind in with text; fold larger drawings to size of text pages.

### **3.05 CLOSEOUT DOCUMENT CHECKLIST**

- A. Form G704 Substantial Completion
- B. Form G706 Affidavit of Payment of Debts and Claims
- C. Form 706A Release of Liens Contractor / Subcontractor
- D. Form 707 Consent of Surety Company
- E. Final Payment App
- F. Meeting Minutes
- G. General Correspondence
- H. Certificate of Occupancy
- I. Environmental Certificates
- J. Warranties (Letter of Guarantee and Warranty Info)
- K. O&M Manuals
- L. Hard Copies of As-Built Drawings
- M. 2 sets of drawing discs with updated CAD files. Gold foil, archival grade disks
- N. Test & Balancing Reports
- O. Field Reports/Inspection Reports

- P. Pest Control Final Inspection Report & Warranty (Slabs over 400SF)
- Q. Affidavit of Discharge of State Tax Liability
- R. Copy of completed final punch list signed off on by Owner's Representative
- S. Punch list Closeout Letter.

**3.06 WARRANTIES AND BONDS**

- A. Obtain warranties and bonds, executed in duplicate by responsible Subcontractors, suppliers, and manufacturers, within 10 days after completion of the applicable item of work. Except for items put into use with State of Delaware OMB - Division of Facilities Management's permission, leave date of beginning of time of warranty until Date of Substantial completion is determined.
- B. Verify that documents are in proper form, contain full information, and are notarized.
- C. Co-execute submittals when required.
- D. Retain warranties and bonds until time specified for submittal.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

**SECTION 01 79 00  
DEMONSTRATION AND TRAINING**

**PART 1 GENERAL**

**1.01 SUMMARY**

- A. Demonstration of products and systems to be commissioned and where indicated in specific specification sections.
- B. Training of State of Delaware OMB - Division of Facilities Management personnel in operation and maintenance is required for:
  - 1. All software-operated systems.
  - 2. HVAC systems and equipment.
  - 3. Plumbing equipment.
  - 4. Electrical systems and equipment.
  - 5. Items specified in individual product Sections.
- C. Training of State of Delaware OMB - Division of Facilities Management personnel in care, cleaning, maintenance, and repair is required for:
  - 1. Items specified in individual product Sections.

**1.02 RELATED REQUIREMENTS**

- A. Section 01 78 00 - Closeout Submittals: Operation and maintenance manuals.
- B. Section 01 91 13 - General Commissioning Requirements: Additional requirements applicable to demonstration and training.

**1.03 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures; except:
  - 1. Make all submittals specified in this section, and elsewhere where indicated for commissioning purposes, directly to the Commissioning Authority.
  - 2. Submit one copy to the Commissioning Authority, not to be returned.
  - 3. Make commissioning submittals on time schedule specified by Commissioning Authority.
  - 4. Submittals indicated as "Draft" are intended for the use of the Commissioning Authority in preparation of overall Training Plan; submit in editable electronic format, Microsoft Word 2003 preferred.
- B. Draft Training Plans: State of Delaware OMB - Division of Facilities Management will designate personnel to be trained; tailor training to needs and skill-level of attendees.
  - 1. Submit to DEDC, LLC for transmittal to State of Delaware OMB - Division of Facilities Management.
  - 2. Submit to Commissioning Authority for review and inclusion in overall training plan.
  - 3. Submit not less than four weeks prior to start of training.
  - 4. Revise and resubmit until acceptable.
  - 5. Provide an overall schedule showing all training sessions.
  - 6. Include at least the following for each training session:
    - a. Identification, date, time, and duration.
    - b. Description of products and/or systems to be covered.
    - c. Name of firm and person conducting training; include qualifications.
    - d. Intended audience, such as job description.
    - e. Objectives of training and suggested methods of ensuring adequate training.
    - f. Methods to be used, such as classroom lecture, live demonstrations, hands-on, etc.
    - g. Media to be used, such as slides, hand-outs, etc.
    - h. Training equipment required, such as projector, projection screen, etc., to be provided by Contractor.
- C. Training Manuals: Provide training manual for each attendee; allow for minimum of two attendees per training session.

1. Include applicable portion of O&M manuals.
  2. Include copies of all hand-outs, slides, overheads, video presentations, etc., that are not included in O&M manuals.
  3. Provide one extra copy of each training manual to be included with operation and maintenance data.
- D. Training Reports:
1. Identification of each training session, date, time, and duration.
  2. Sign-in sheet showing names and job titles of attendees.
  3. List of attendee questions and written answers given, including copies of and references to supporting documentation required for clarification; include answers to questions that could not be answered in original training session.
  4. Include Commissioning Authority's formal acceptance of training session.
- E. Video Recordings: Submit digital video recording of each demonstration and training session for State of Delaware OMB - Division of Facilities Management's subsequent use.
1. Format: DVD Disc.
  2. Label each disc and container with session identification and date.

#### **1.04 QUALITY ASSURANCE**

- A. Instructor Qualifications: Familiar with design, operation, maintenance and troubleshooting of the relevant products and systems.
1. Provide as instructors the most qualified trainer of those contractors and/or installers who actually supplied and installed the systems and equipment.
  2. Where a single person is not familiar with all aspects, provide specialists with necessary qualifications.

### **PART 2 PRODUCTS - NOT USED**

### **PART 3 EXECUTION**

#### **3.01 DEMONSTRATION - GENERAL**

- A. Demonstrations conducted during system start-up do not qualify as demonstrations for the purposes of this section, unless approved in advance by State of Delaware OMB - Division of Facilities Management.
- B. Demonstrations conducted during Functional Testing need not be repeated unless State of Delaware OMB - Division of Facilities Management personnel training is specified.
- C. Demonstration may be combined with State of Delaware OMB - Division of Facilities Management personnel training if applicable.
- D. Operating Equipment and Systems: Demonstrate operation in all modes, including start-up, shut-down, seasonal changeover, emergency conditions, and troubleshooting, and maintenance procedures, including scheduled and preventive maintenance.
1. Perform demonstrations not less than two weeks prior to Substantial Completion.
  2. For equipment or systems requiring seasonal operation, perform demonstration for other season within six months.
- E. Non-Operating Products: Demonstrate cleaning, scheduled and preventive maintenance, and repair procedures.
1. Perform demonstrations not less than two weeks prior to Substantial Completion.

#### **3.02 TRAINING - GENERAL**

- A. Commissioning Authority will prepare the Training Plan based on draft plans submitted.
- B. Conduct training on-site unless otherwise indicated.
- C. State of Delaware OMB - Division of Facilities Management will provide classroom and seating at no cost to Contractor.

- D. Do not start training until Functional Testing is complete, unless otherwise specified or approved by the Commissioning Authority.
- E. Provide training in minimum two hour segments.
- F. The Commissioning Authority is responsible for determining that the training was satisfactorily completed and will provide approval forms.
- G. Training schedule will be subject to availability of State of Delaware OMB - Division of Facilities Management's personnel to be trained; re-schedule training sessions as required by State of Delaware OMB - Division of Facilities Management; once schedule has been approved by State of Delaware OMB - Division of Facilities Management failure to conduct sessions according to schedule will be cause for State of Delaware OMB - Division of Facilities Management to charge Contractor for personnel "show-up" time.
- H. Review of Facility Policy on Operation and Maintenance Data: During training discuss:
  - 1. The location of the O&M manuals and procedures for use and preservation; backup copies.
  - 2. Typical contents and organization of all manuals, including explanatory information, system narratives, and product specific information.
  - 3. Typical uses of the O&M manuals.
- I. Product- and System-Specific Training:
  - 1. Review the applicable O&M manuals.
  - 2. For systems, provide an overview of system operation, design parameters and constraints, and operational strategies.
  - 3. Review instructions for proper operation in all modes, including start-up, shut-down, seasonal changeover and emergency procedures, and for maintenance, including preventative maintenance.
  - 4. Provide hands-on training on all operational modes possible and preventive maintenance.
  - 5. Emphasize safe and proper operating requirements; discuss relevant health and safety issues and emergency procedures.
  - 6. Discuss common troubleshooting problems and solutions.
  - 7. Discuss any peculiarities of equipment installation or operation.
  - 8. Discuss warranties and guarantees, including procedures necessary to avoid voiding coverage.
  - 9. Review recommended tools and spare parts inventory suggestions of manufacturers.
  - 10. Review spare parts and tools required to be furnished by Contractor.
  - 11. Review spare parts suppliers and sources and procurement procedures.
- J. Be prepared to answer questions raised by training attendees; if unable to answer during training session, provide written response within three days.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK



**SECTION 01 91 13**  
**GENERAL COMMISSIONING REQUIREMENTS**

**PART 1 GENERAL**

**1.01 SUMMARY**

- A. Commissioning is intended to achieve the following specific objectives; this section specifies the Contractor's responsibilities for commissioning:
  - 1. Verify that the work is installed in accordance with the Contract Documents, the manufacturer's recommendations and instructions, and that it receives adequate operational checkout prior to startup: Startup reports are utilized to achieve this.
  - 2. Verify and document that functional performance is in accordance with the Contract Documents: Functional Tests such as manufacturers startup reports, balancing, and site demonstrations executed by the contractor and witnessed by the Commissioning Authority are utilized to achieve this.
  - 3. Verify that operation and maintenance manuals submitted to State of Delaware OMB - Division of Facilities Management are complete: Detailed operation and maintenance (O&M) data submittals by Contractor are utilized to achieve this.
  - 4. Verify that the State of Delaware OMB - Division of Facilities Management's operating personnel are adequately trained: Formal training conducted by Contractor is utilized to achieve this.
- B. The Commissioning Authority is the State of Delaware OMB - Division of Facilities Management

**1.02 SCOPE OF COMMISSIONING**

- A. The following are to be commissioned:
- B. Elevating and conveying systems.
- C. Other equipment and systems explicitly identified elsewhere in Contract Documents as requiring commissioning.

**1.03 RELATED REQUIREMENTS**

- A. Section 01 70 00 - Execution and Closeout Requirements: General startup requirements.
- B. Section 01 78 00 - Closeout Submittals: Scope and procedures for operation and maintenance manuals and project record documents.
- C. Section 01 79 00 - Demonstration and Training: Scope and procedures for State of Delaware OMB - Division of Facilities Management personnel training.

**PART 2 PRODUCTS**

**2.01 TEST EQUIPMENT**

- A. Provide all standard testing equipment required to perform startup and initial checkout and required Functional Testing; unless otherwise noted such testing equipment will NOT become the property of State of Delaware OMB - Division of Facilities Management.
- B. Calibration Tolerances: Provide testing equipment of sufficient quality and accuracy to test and/or measure system performance with the tolerances specified. If not otherwise noted, the following minimum requirements apply:
  - 1. Temperature Sensors and Digital Thermometers: Certified calibration within past year to accuracy of 0.5 degree F and resolution of plus/minus 0.1 degree F.
  - 2. Pressure Sensors: Accuracy of plus/minus 2.0 percent of the value range being measured (not full range of meter), calibrated within the last year.
  - 3. Calibration: According to the manufacturer's recommended intervals and when dropped or damaged; affix calibration tags or keep certificates readily available for inspection.
- C. Equipment-Specific Tools: Where special testing equipment, tools and instruments are specific to a piece of equipment, are only available from the vendor, and are required in order to accomplish startup or Functional Testing, provide such equipment, tools, and instruments as

part of the work at no extra cost to State of Delaware OMB - Division of Facilities Management; such equipment, tools, and instruments are to become the property of State of Delaware OMB - Division of Facilities Management.

### **PART 3 EXECUTION**

#### **3.01 STARTUP PLANS AND REPORTS**

- A. Startup Plans: For each item of equipment and system for which the manufacturer provides a startup plan, submit the plan not less than 2 weeks prior to startup.
- B. Startup Reports: For each item of equipment and system for which the manufacturer provides a startup checklist (or startup plan or field checkout sheet), document compliance by submitting the completed startup checklist prior to startup, signed and dated by responsible entity.
- C. Submit directly to the Commissioning Authority and DEDC, LLC.

#### **3.02 FUNCTIONAL TESTS**

- A. A Functional Test is required for each item of equipment, system, or other assembly specified to be commissioned, unless sampling of multiple identical or near-identical units is allowed by the final test procedures.
- B. Commissioning Authority is responsible for witnessing results of Functional Tests.
- C. Contractor is responsible for correction of deficiencies and re-testing at no extra cost to State of Delaware OMB - Division of Facilities Management; if a deficiency is not corrected and re-tested immediately, the Commissioning Authority will document the deficiency and the Contractor's stated intentions regarding correction.
  - 1. Deficiencies are any condition in the installation or function of a component, piece of equipment or system that is not in compliance with Contract Documents or does not perform properly.
  - 2. When the deficiency has been corrected, the Contractor completes the form certifying that the item is ready to be re-tested and returns the form to the Commissioning Authority; the Commissioning Authority will reschedule the test and the Contractor shall re-test.
  - 3. Identical or Near-Identical Items: If 10 percent, or three, whichever is greater, of identical or near-identical items fail to perform due to material or manufacturing defect, all items will be considered defective; provide a proposal for correction within 2 weeks after notification of defect, including provision for testing sample installations prior to replacement of all items.
  - 4. Contractor shall bear the cost of State of Delaware OMB - Division of Facilities Management and Commissioning Authority personnel time witnessing re-testing.
- D. Functional Test Procedures:
  - 1. Some test procedures are included in Contract Documents; where Functional Test procedures are not included in Contract Documents, test procedures will be determined by the Commissioning Authority with input by and coordination with Contractor.
  - 2. Examples of Functional Testing:
    - a. Test the dynamic function and operation of equipment and systems (rather than just components) using manual (direct observation) or monitoring methods under full operation (e.g., the chiller pump is tested interactively with the chiller functions to see if the pump ramps up and down to maintain the differential pressure setpoint).
    - b. Systems are tested under various modes, such as during low cooling or heating loads, high loads, component failures, unoccupied, varying outside air temperatures, fire alarm, power failure, etc.
    - c. Systems are run through all the HVAC control system's sequences of operation and components are verified to be responding as the sequence's state.
    - d. Traditional air or water test and balancing (TAB) is not Functional Testing; spot checking of TAB by demonstration to the Commissioning Authority is Functional Testing.

- E. Deferred Functional Tests: Some tests may need to be performed later, after substantial completion, due to partial occupancy, equipment, seasonal requirements, design or other site conditions; performance of these tests remains the Contractor's responsibility regardless of timing.

### **3.03 TEST PROCEDURES - GENERAL**

- A. Provide skilled technicians to execute starting of equipment and to execute the Functional Tests. Ensure that they are available and present during the agreed upon schedules and for sufficient duration to complete the necessary tests, adjustments and problem-solving.
- B. Provide all necessary materials and system modifications required to produce the flows, pressures, temperatures, and conditions necessary to execute the test according to the specified conditions. At completion of the test, return all affected equipment and systems to their pre-test condition.
- C. Simulating Signals: Disconnect the sensor and use a signal generator to send an amperage, resistance or pressure to the transducer and control system to simulate the sensor value.

### **3.04 OPERATION AND MAINTENANCE MANUALS**

- A. See Section 01 78 00 - Closeout Submittals for additional requirements.
- B. Add design intent documentation furnished by DEDC, LLC to manuals prior to submission to State of Delaware OMB - Division of Facilities Management.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 061000  
ROUGH CARPENTRY**

**PART 1 GENERAL**

**1.01 REFERENCE STANDARDS**

- A. AWC (WFCM) - Wood Frame Construction Manual for One- and Two-Family Dwellings; 2024, with Errata.
- B. PS 20 - American Softwood Lumber Standard; 2025.

**PART 2 PRODUCTS**

**2.01 GENERAL REQUIREMENTS**

- A. Dimension Lumber: Comply with PS 20 and requirements of specified grading agencies.
  - 1. If no species is specified, provide species graded by the agency specified; if no grading agency is specified, provide lumber graded by grading agency meeting the specified requirements.
  - 2. Grading Agency: Grading agency whose rules are approved by the Board of Review, American Lumber Standard Committee at [www.alsc.org](http://www.alsc.org), and who provides grading service for the species and grade specified; provide lumber stamped with grade mark unless otherwise indicated.

**PART 3 EXECUTION**

**3.01 INSTALLATION - GENERAL**

- A. Select material sizes to minimize waste.
- B. Reuse scrap to the greatest extent possible; clearly separate scrap for use on site as accessory components, including: shims, bracing, and blocking.

**3.02 FRAMING INSTALLATION**

- A. Set structural members level, plumb, and true to line. Discard pieces with defects that would lower required strength or result in unacceptable appearance of exposed members.
- B. Make provisions for temporary construction loads, and provide temporary bracing sufficient to maintain structure in true alignment and safe condition until completion of erection and installation of permanent bracing.
- C. Install structural members full length without splices unless otherwise specifically detailed.
- D. Comply with member sizes, spacing, and configurations indicated, and fastener size and spacing indicated, but not less than required by applicable codes and AWC (WFCM) Wood Frame Construction Manual.
- E. Construct double joist headers at floor and ceiling openings and under wall stud partitions that are parallel to floor joists; use metal joist hangers unless otherwise detailed.
- F. Frame wall openings with two or more studs at each jamb; support headers on cripple studs.

**3.03 BLOCKING, NAILERS, AND SUPPORTS**

- A. Provide framing and blocking members as indicated or as required to support finishes, fixtures, specialty items, and trim.
- B. In metal stud walls, provide continuous blocking around door and window openings for anchorage of frames, securely attached to stud framing.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

This page intentionally left blank

**SECTION 07 84 00  
FIRESTOPPING**

**PART 1 GENERAL**

**1.01 RELATED REQUIREMENTS**

- A. Section 01 70 00 - Execution and Closeout Requirements: Cutting and patching.

**1.02 REFERENCE STANDARDS**

- A. ASTM E119 - Standard Test Methods for Fire Tests of Building Construction and Materials; 2024.
- B. ASTM E814 - Standard Test Method for Fire Tests of Penetration Firestop Systems; 2024.
- C. FM (AG) - FM Approval Guide; Current Edition.
- D. FM 4991 - Approval Standard of Firestop Contractors; 2013.
- E. ITS (DIR) - Directory of Listed Products; Current Edition.
- F. SCAQMD 1168 - Adhesive and Sealant Applications; 1989, with Amendment (2022).
- G. UL (FRD) - Fire Resistance Directory; Current Edition.
- H. UL 1479 - Standard for Fire Tests of Penetration Firestops; Current Edition, Including All Revisions.

**1.03 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements for submittal procedures.
- B. Schedule of Firestopping: List each type of penetration, fire rating of the penetrated assembly, and firestopping test or design number.
- C. Product Data: Provide data on product characteristics, performance ratings, and limitations.
- D. Manufacturer's qualification statement.
- E. Installer's qualification statement.

**1.04 QUALITY ASSURANCE**

- A. Fire Testing: Provide firestopping assemblies of designs that provide the scheduled fire ratings when tested in accordance with methods indicated.
  - 1. Listing in UL (FRL), FM (AG), or ITS (DIR) will be considered as constituting an acceptable test report.
  - 2. Valid evaluation report published by ICC Evaluation Service, Inc. (ICC-ES) at [www.icc-es.org](http://www.icc-es.org) will be considered as constituting an acceptable test report.
- B. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
- C. Installer Qualifications: Company specializing in performing the work of this section and:
  - 1. Approved by Factory Mutual Research Corporation under FM 4991, or meeting any two of the following requirements:
  - 2. Verification of minimum three years documented experience installing work of this type.
  - 3. Verification of at least five satisfactorily completed projects of comparable size and type.
  - 4. Licensed by local authorities having jurisdiction (AHJ).

**PART 2 PRODUCTS**

**2.01 MATERIALS**

- A. Primers, Sleeves, Forms, Insulation, Packing, Stuffing, and Accessories: Provide type of materials as required for tested firestopping assembly.

**2.02 FIRESTOPPING SYSTEMS**

- A. Firestopping: Any material meeting requirements.

1. Fire Ratings: Use system that is listed by FM (AG), ITS (DIR), or UL (FRD) and tested in accordance with ASTM E814, ASTM E119, or UL 1479 with F Rating equal to fire rating of penetrated assembly and minimum T Rating Equal to F Rating and in compliance with other specified requirements.

## 2.03 MATERIALS

- A. Firestopping Sealants: Provide only products having lower volatile organic compound (VOC) content than required by South Coast Air Quality Management District Rule No.1168.
- B. Elastomeric Silicone Firestopping: Single component silicone elastomeric compound and compatible silicone sealant; conforming to the following:
  1. Color: Black, dark gray, or red.
  2. Manufacturers:
    - a. A/D Fire Protection Systems Inc: [www.adfire.com](http://www.adfire.com).
    - b. 3M Fire Protection Products: [www.3m.com/firestop](http://www.3m.com/firestop).
    - c. Hilti, Inc: [www.us.hilti.com](http://www.us.hilti.com).
    - d. Specified Technologies, Inc: [www.stifirestop.com](http://www.stifirestop.com).
    - e. Substitutions: See Section 01 60 00 - Product Requirements.
- C. Foam Firestopping: Single component silicone foam compound; conforming to the following:
  1. Durability and Longevity: Permanent.
  2. Color: Dark grey.
  3. Manufacturers:
    - a. 3M Fire Protection Products: [www.3m.com/firestop](http://www.3m.com/firestop).
    - b. Hilti, Inc: [www.us.hilti.com](http://www.us.hilti.com).
    - c. Specified Technologies, Inc: [www.stifirestop.com](http://www.stifirestop.com).
    - d. Substitutions: See Section 01 60 00 - Product Requirements.
- D. Fibered Compound Firestopping: Formulated compound mixed with incombustible non-asbestos fibers; conforming to the following:
  1. Durability and Longevity: Permanent.
  2. Color: Dark grey.
  3. Manufacturers:
    - a. A/D Fire Protection Systems Inc: [www.adfire.com](http://www.adfire.com).
    - b. USG: [www.usg.com](http://www.usg.com).
    - c. Substitutions: See Section 01 60 00 - Product Requirements.
- E. Fiber Firestopping: Mineral fiber insulation used in conjunction with elastomeric surface sealer forming airtight bond to opening; conforming to the following:
  1. Durability and Longevity: Permanent.
  2. Manufacturers:
    - a. A/D Fire Protection Systems Inc: [www.adfire.com](http://www.adfire.com).
    - b. Pecora Corporation: [www.pecora.com](http://www.pecora.com).
    - c. Thermafiber, Inc: [www.thermafiber.com](http://www.thermafiber.com).
    - d. Substitutions: See Section 01 60 00 - Product Requirements.
- F. Firestop Devices - Wrap Type: Mechanical device with incombustible filler and sheet stainless steel jacket, intended to be installed after penetrating item has been installed; conforming to the following:
  1. Manufacturers:
    - a. Grace Construction Products: [www.na.graceconstruction.com](http://www.na.graceconstruction.com).
    - b. 3M Fire Protection Products: [www.3m.com/firestop](http://www.3m.com/firestop).
    - c. Hilti, Inc: [www.us.hilti.com](http://www.us.hilti.com).
    - d. Specified Technologies, Inc: [www.stifirestop.com](http://www.stifirestop.com).
    - e. Substitutions: See Section 01 60 00 - Product Requirements.
- G. Intumescent Putty: Compound that expands on exposure to surface heat gain; conforming to the following:



1. Potential Expansion: Minimum 1000 percent.
2. Durability and Longevity: Permanent.
3. Color: Black, dark gray, or red.
4. Manufacturers:
  - a. Grace Construction Products: [www.na.graceconstruction.com](http://www.na.graceconstruction.com).
  - b. 3M Fire Protection Products: [www.3m.com/firestop](http://www.3m.com/firestop).
  - c. Hilti, Inc: [www.us.hilti.com](http://www.us.hilti.com).
  - d. Specified Technologies, Inc: [www.stifirestop.com](http://www.stifirestop.com).
  - e. Substitutions: See Section 01 60 00 - Product Requirements.
- H. Primers, Sleeves, Forms, Insulation, Packing, Stuffing, and Accessories: Type required for tested assembly design.

### **PART 3 EXECUTION**

#### **3.01 PREPARATION**

- A. Clean substrate surfaces of dirt, dust, grease, oil, loose material, or other materials that could adversely affect bond of firestopping material.
- B. Remove incompatible materials that could adversely affect bond.
- C. Install backing materials to prevent liquid material from leakage.

#### **3.02 INSTALLATION**

- A. Install materials in manner described in fire test report and in accordance with manufacturer's instructions, completely closing openings.
- B. Do not cover installed firestopping until inspected by authorities having jurisdiction.

#### **3.03 CLEANING**

- A. Clean adjacent surfaces of firestopping materials.

#### **3.04 PROTECTION**

- A. Protect adjacent surfaces from damage by material installation.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 092116  
GYPSUM BOARD ASSEMBLIES**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Metal stud wall framing.
- B. Acoustic insulation.
- C. Gypsum wallboard.
- D. Joint treatment and accessories.

**1.02 RELATED REQUIREMENTS**

- A. Section 061000 - Rough Carpentry: Wood blocking product and execution requirements.

**1.03 REFERENCE STANDARDS**

- A. AISI S220 - North American Standard for Cold-Formed Steel Nonstructural Framing; 2020.
- B. AISI S240 - North American Standard for Cold-Formed Steel Structural Framing; 2015, with Errata (2020).
- C. ASTM A1003/A1003M - Standard Specification for Steel Sheet, Carbon, Metallic- and Nonmetallic-Coated for Cold-Formed Framing Members; 2015.
- D. ASTM C475/C475M - Standard Specification for Joint Compound and Joint Tape for Finishing Gypsum Board; 2017 (Reapproved 2022).
- E. ASTM C665 - Standard Specification for Mineral-Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing; 2024.
- F. ASTM C754 - Standard Specification for Installation of Steel Framing Members to Receive Screw-Attached Gypsum Panel Products; 2020.
- G. ASTM C840 - Standard Specification for Application and Finishing of Gypsum Board; 2024.
- H. ASTM C954 - Standard Specification for Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Steel Studs from 0.033 in. (0.84 mm) to 0.112 in. (2.84 mm) in Thickness; 2022.
- I. ASTM C1002 - Standard Specification for Steel Self-Piercing Tapping Screws for Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs; 2022.
- J. ASTM C1007 - Standard Specification for Installation of Load Bearing (Transverse and Axial) Steel Studs and Related Accessories; 2020 (Reapproved 2024).
- K. ASTM C1047 - Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base; 2019.
- L. ASTM C1396/C1396M - Standard Specification for Gypsum Board; 2024.
- M. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials; 2024.
- N. ASTM E90 - Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements; 2023.
- O. ASTM E413 - Classification for Rating Sound Insulation; 2022.
- P. GA-216 - Application and Finishing of Gypsum Panel Products; 2024.
- Q. GA-600 - Fire Resistance and Sound Control Design Manual; 2024.
- R. UL (FRD) - Fire Resistance Directory; Current Edition.

#### 1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordination: Coordinate the installation of gypsum board assemblies with size, location, and installation of service utilities.
- B. Sequencing: Install service utilities in an orderly and expeditious manner.

#### 1.05 SUBMITTALS

- A. See Section 013000 - Administrative Requirements for submittal procedures.
- B. Product Data:
  - 1. Provide data on metal framing, gypsum board, accessories, and joint finishing system.
  - 2. Provide manufacturer's data on partition head to structure connectors, showing compliance with requirements.

#### 1.06 DELIVERY, STORAGE, AND HANDLING

- A. Store gypsum products and accessories indoors and keep above freezing. Elevate boards above floor, on nonwicking supports, in accordance with manufacturer's recommendations.
- B. Store metal products to prevent corrosion.

### PART 2 PRODUCTS

#### 2.01 GYPSUM BOARD ASSEMBLIES

- A. Provide completed assemblies complying with ASTM C840 and GA-216.

#### 2.02 METAL FRAMING MATERIALS

- A. Steel Sheet: ASTM A1003/A1003M, subject to the ductility limitations indicated in AISI S220 or equivalent.
  - 1. Corrosion Protection Coating Designation: G40, or equivalent in accordance with AISI S220.
- B. Manufacturers - Metal Framing, Connectors, and Accessories:
  - 1. ClarkDietrich: [www.clarkdietrich.com/#sle](http://www.clarkdietrich.com/#sle).
  - 2. MarinoWARE: [www.marinoware.com/#sle](http://www.marinoware.com/#sle).
  - 3. SCAFCO Corporation: [www.scafco.com/#sle](http://www.scafco.com/#sle).
  - 4. Substitutions: See Section 016000 - Product Requirements.
- C. Nonstructural Framing System Components: AISI S220; galvanized sheet steel, of size and properties necessary to comply with ASTM C754 for the spacing indicated, with maximum deflection of wall framing of L/120 at 5 psf (L/120 at 240 Pa).
  - 1. Studs: C-shaped with knurled or embossed faces.
  - 2. Runners: U-shaped, sized to match studs.
- D. Partition Head To Structure Connections: Provide track fastened to structure with legs of sufficient length to accommodate deflection, for friction fit of studs cut short and fastened as indicated on drawings.
- E. Non-structural Framing Accessories:
  - 1. Partial Height Wall Framing Support: Provides stud reinforcement and anchored connection to floor.

#### 2.03 BOARD MATERIALS

- A. Manufacturers - Gypsum-Based Board:
  - 1. CertainTeed Corporation: [www.certainteed.com/#sle](http://www.certainteed.com/#sle).
  - 2. Georgia-Pacific Gypsum: [www.gpgypsum.com/#sle](http://www.gpgypsum.com/#sle).
  - 3. USG Corporation: [www.usg.com/#sle](http://www.usg.com/#sle).
- B. Gypsum Wallboard: Paper-faced gypsum panels as defined in ASTM C1396/C1396M; sizes to minimize joints in place; ends square cut.
  - 1. Application: Use for vertical surfaces and ceilings, unless otherwise indicated.

2. Thickness:
  - a. Vertical Surfaces: 5/8 inch (16 mm).

## **2.04 GYPSUM BOARD ACCESSORIES**

- A. Acoustic Insulation: ASTM C665; preformed mineral-fiber, friction fit type, unfaced; thickness to match stud thickness.
- B. Fire and Sound Attenuating Insulation: Sprayed cellulose fire-rated material for cavities in wall assemblies.
  1. Surface Burning Characteristics: Provide assemblies with Class I rating, when tested in accordance with ASTM E84.
  2. Sound Transmission Class (STC): 56, calculated in accordance with ASTM E413, based on tests conducted in accordance with ASTM E90.
- C. Acoustic Sealant: Acrylic emulsion latex or water-based elastomeric sealant; do not use solvent-based non-curing butyl sealant.
- D. Beads, Joint Accessories, and Other Trim: ASTM C1047, rigid plastic, galvanized steel, or rolled zinc, unless noted otherwise.
  1. Corner Beads: Low profile, for 90 degree outside corners.
  2. L-Trim with Tear-Away Strip: Sized to fit 1/2-inch (13 mm) thick gypsum wallboard.
- E. Joint Materials: ASTM C475/C475M and as recommended by gypsum board manufacturer for project conditions.
  1. Paper Tape: 2 inch (50 mm) wide, creased paper tape for joints and corners, except as otherwise indicated.
  2. Joint Compound: Drying type, vinyl-based, ready-mixed.
- F. Screws for Fastening of Gypsum Panel Products to Cold-Formed Steel Studs Less than 0.033 inches (0.84 mm) in Thickness and Wood Members: ASTM C1002; self-piercing tapping screws, corrosion-resistant.
- G. Screws for Fastening of Gypsum Panel Products to Steel Members from 0.033 to 0.112 inch (0.84 to 2.84 mm) in Thickness: ASTM C954; steel drill screws, corrosion-resistant.

## **PART 3 EXECUTION**

### **3.01 EXAMINATION**

- A. Verify that project conditions are appropriate for work of this section to commence.

### **3.02 SHAFT WALL INSTALLATION**

- A. Shaft Wall Framing: Install in accordance with manufacturer's installation instructions.
- B. Shaft Wall Liner: Cut panels to accurate dimensions and install sequentially between special friction studs.

### **3.03 FRAMING INSTALLATION**

- A. Metal Framing: Install in accordance with ASTM C1007/AISI S220 and manufacturer's instructions.
- B. Studs: Space studs at 16 inches on center (at 406 mm on center).
  1. Extend partition framing to structure where indicated and to ceiling in other locations.
  2. Partitions Terminating at Ceiling: Attach ceiling runner securely to ceiling track in accordance with manufacturer's instructions.
  3. Partitions Terminating at Structure: Attach top runner to structure, maintain clearance between top of studs and structure, and connect studs to track using specified mechanical devices in accordance with manufacturer's instructions; verify free movement of top of stud connections; do not leave studs unattached to track.

### **3.04 ACOUSTIC ACCESSORIES INSTALLATION**

- A. Acoustic Insulation: Place tightly within spaces, around cut openings, behind and around electrical and mechanical items within partitions, and tight to items passing through partitions.
- B. Acoustic Sealant: Install in accordance with manufacturer's instructions.

### **3.05 BOARD INSTALLATION**

- A. Comply with ASTM C840, GA-216, and manufacturer's instructions. Install to minimize butt end joints, especially in highly visible locations.
- B. Single-Layer Nonrated: Install gypsum board in most economical direction, with ends and edges occurring over firm bearing.
- C. Installation on Metal Framing: Use screws for attachment of gypsum board except face layer of nonrated double-layer assemblies, which may be installed by means of adhesive lamination.

### **3.06 INSTALLATION OF TRIM AND ACCESSORIES**

- A. Control Joints: Place control joints consistent with lines of building spaces and as indicated.
- B. Corner Beads: Install at external corners, using longest practical lengths.

### **3.07 JOINT TREATMENT**

- A. Finish gypsum board in accordance with levels defined in ASTM C840, as follows:
  - 1. Level 4: Walls and ceilings to receive paint finish or wall coverings, unless otherwise indicated.
  - 2. Level 1: Fire-resistance-rated wall areas above finished ceilings, whether or not accessible in the completed construction.
- B. Tape, fill, and sand exposed joints, edges, and corners to produce smooth surface ready to receive finishes.
  - 1. Feather coats of joint compound so that camber is maximum 1/32 inch (0.8 mm).

### **3.08 TOLERANCES**

- A. Maximum Variation of Finished Gypsum Board Surface from True Flatness: 1/8 inch in 10 feet (3 mm in 3 m) in any direction.

### **3.09 PROTECTION**

- A. Protect installed gypsum board assemblies from subsequent construction operations.

**END OF SECTION**

**SECTION 099123  
INTERIOR PAINTING**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Surface preparation.
- B. Field application of paints.
- C. Scope: Finish interior surfaces exposed to view, unless fully factory-finished and unless otherwise indicated.
- D. Do Not Paint or Finish the Following Items:
  - 1. Items factory-finished unless otherwise indicated; materials and products having factory-applied primers are not considered factory finished.
  - 2. Items indicated to receive other finishes.
  - 3. Items indicated to remain unfinished.
  - 4. Fire rating labels, equipment serial number and capacity labels, bar code labels, and operating parts of equipment.
  - 5. Floors, unless specifically indicated.
  - 6. Glass.
  - 7. Concealed pipes, ducts, and conduits.

**1.02 DEFINITIONS**

- A. Comply with ASTM D16 for interpretation of terms used in this section.

**1.03 REFERENCE STANDARDS**

- A. ASTM D16 - Standard Terminology for Paints, Related Coatings, Materials, and Applications; 2024.
- B. MPI (APSM) - Master Painters Institute Architectural Painting Specification Manual; Current Edition.
- C. SSPC-SP 1 - Solvent Cleaning; 2015, with Editorial Revision (2016).
- D. SSPC-SP 6/NACE No.3 - Commercial Blast Cleaning; 2006.

**1.04 SUBMITTALS**

- A. See Section 013000 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide complete list of products to be used, with the following information for each:
  - 1. Manufacturer's name, product name and/or catalog number, and general product category (e.g., "alkyd enamel").
  - 2. MPI product number (e.g., MPI #47).
  - 3. Cross-reference to specified paint system products to be used in project; include description of each system.

**1.05 QUALITY ASSURANCE**

**1.06 DELIVERY, STORAGE, AND HANDLING**

- A. Deliver products to site in sealed and labeled containers; inspect to verify acceptability.
- B. Container Label: Include manufacturer's name, type of paint, brand name, lot number, brand code, coverage, surface preparation, drying time, cleanup requirements, color designation, and instructions for mixing and reducing.
- C. Paint Materials: Store at minimum ambient temperature of 45 degrees F (7 degrees C) and a maximum of 90 degrees F (32 degrees C), in ventilated area, and as required by manufacturer's instructions.

## **1.07 FIELD CONDITIONS**

- A. Do not apply materials when surface and ambient temperatures are outside the temperature ranges required by the paint product manufacturer.
- B. Follow manufacturer's recommended procedures for producing best results, including testing of substrates, moisture in substrates, and humidity and temperature limitations.
- C. Provide lighting level of 80 fc (860 lux) measured mid-height at substrate surface.

## **PART 2 PRODUCTS**

### **2.01 MANUFACTURERS**

- A. Paints:

### **2.02 PAINTS AND FINISHES - GENERAL**

- A. Paints and Finishes: Ready-mixed, unless intended to be a field-catalyzed paint.
  - 1. Provide paints and finishes of a soft paste consistency, capable of being readily and uniformly dispersed to a homogeneous coating, with good flow and brushing properties, and capable of drying or curing free of streaks or sags.
  - 2. Provide materials that are compatible with one another and the substrates indicated under conditions of service and application, as demonstrated by manufacturer based on testing and field experience.
  - 3. For opaque finishes, tint each coat including primer coat and intermediate coats, one-half shade lighter than succeeding coat, with final finish coat as base color.
  - 4. Supply each paint material in quantity required to complete entire project's work from a single production run.
  - 5. Do not reduce, thin, or dilute paint or finishes or add materials unless such procedure is specifically described in manufacturer's product instructions.

### **2.03 PAINT SYSTEMS - INTERIOR**

- A. Paint I-OP - Interior Surfaces to be Painted, Unless Otherwise Indicated: Including gypsum board, concrete, concrete masonry units, brick, wood, plaster, uncoated steel, shop primed steel, galvanized steel, aluminum, and acoustical ceilings.
  - 1. Two top coats and one coat primer.

### **2.04 PRIMERS**

- A. Primers: Provide the following unless other primer is required or recommended by manufacturer of top coats.

## **PART 3 EXECUTION**

### **3.01 PREPARATION**

- A. Clean surfaces thoroughly and correct defects prior to application.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.
- C. Remove or mask surface appurtenances, including electrical plates, hardware, light fixture trim, escutcheons, and fittings, prior to preparing surfaces or finishing.
- D. Seal surfaces that might cause bleed through or staining of topcoat.
- E. Concrete:
- F. Masonry:
- G. Gypsum Board: Fill minor defects with filler compound. Spot prime defects after repair.
- H. Plaster: Fill hairline cracks, small holes, and imperfections with latex patching plaster. Make smooth and flush with adjacent surfaces. Wash and neutralize high-alkali surfaces.



- I. Aluminum: Remove surface contamination and oils and wash with solvent according to SSPC-SP 1.
- J. Galvanized Surfaces:
- K. Ferrous Metal:
  - 1. Solvent clean according to SSPC-SP 1.
  - 2. Shop-Primed Surfaces: Sand and scrape to remove loose primer and rust. Feather edges to make touch-up patches inconspicuous. Clean surfaces with solvent. Prime bare steel surfaces. Re-prime entire shop-primed item.
  - 3. Remove rust, loose mill scale, and other foreign substances using methods recommended in writing by paint manufacturer and blast cleaning in accordance with SSPC-SP 6/NACE No.3. Protect from corrosion until coated.
- L. Wood Surfaces to Receive Opaque Finish: Wipe off dust and grit prior to priming. Seal knots, pitch streaks, and sappy sections with sealer. Fill nail holes and cracks after primer has dried; sand between coats. Back prime concealed surfaces before installation.

### **3.02 APPLICATION**

- A. Apply products in accordance with manufacturer's written instructions and recommendations in "MPI Architectural Painting Specification Manual".
- B. Do not apply finishes to surfaces that are not dry. Allow applied coats to dry before next coat is applied.
- C. Apply each coat to uniform appearance in thicknesses specified by manufacturer.
- D. Sand wood and metal surfaces lightly between coats to achieve required finish.
- E. Vacuum clean surfaces of loose particles. Use tack cloth to remove dust and particles just prior to applying next coat.
- F. Reinstall electrical cover plates, hardware, light fixture trim, escutcheons, and fittings removed prior to finishing.

### **3.03 FIELD QUALITY CONTROL**

- A. See Section 014000 - Quality Requirements, for general requirements for field inspection.

### **3.04 CLEANING**

- A. Collect waste material that could constitute a fire hazard, place in closed metal containers, and remove daily from site.

### **3.05 PROTECTION**

- A. Protect finishes until completion of project.
- B. Touch up damaged finishes after Substantial Completion.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

This page intentionally left blank

SECTION 14 70 01

ESCALATORS

DIVISION 14 – CONVEYING EQUIPMENT

14 00 00 Conveying Equipment

14 31 00 – Escalators

PART 1 - GENERAL

1.1 SUMMARY AND DEFINITIONS

A. Related Documents

1. Supplemental Conditions – Owner / Management Company Terms and Conditions, and Table of Contents.
2. Project Drawings – Escalator Layout, Preliminary Barricade Plans and Site Plans.
3. Work shall be coordinated with the General Contractor documents of which this specification is a part.

B. Intent

1. This section includes the complete removal of the existing escalators and replacement with new escalators located at the Leonard L. Williams Justice Center, Wilmington, DE
  - a. Six (6) existing KONE interior escalators - #1 - #6.
2. The scope of work covered in this Section includes all labor, surveying, permitting, cranes, rigging, materials, equipment and services necessary to complete the escalator work as shown on the drawings and specified herein for the complete removal and disposal of six (6) existing 40" step-width KONE escalators and installation of six (6) new escalators in the same locations. Work includes, but is not necessarily limited to, the following:
  - a. All existing escalators to be replaced consecutively in multiple phases of work.
  - b. Coordination is required with all associated trades for work as delineated in the project documentation and all applicable code requirements.
  - c. All material shall be removed from the premises and properly disposed of elsewhere.
  - d. All work shall be performed during the hours and in accordance with the schedule as approved by the owner or owner's designees.

- e. Methods and rigging plans will be submitted and approved by owner or owner's designees prior to implementation.
  - f. In order to minimize the site modifications required to accommodate the new escalators, every effort to modify the new escalator dimensioning is required to fit existing conditions and still meet all specified requirements.
- 3. Related equipment shall be designed, constructed, installed and adjusted to produce the highest results with respect to smooth, quiet, convenient and efficient operation, durability, economy of maintenance, and the highest standard of safety.
  - 4. It is not the intent of these specifications to detail the construction and design of all parts of the equipment, but it is expected that the type, materials, design, quality of work and construction of each part shall be adequate for the service required, durable, properly coordinated with all other parts, and in accordance with the best commercial standards applicable and of the highest commercial efficiency possible.
  - 5. Electric and magnetic circuits and related parts shall be of proper size, design and material to avoid heating and arcing, and all other objectionable effects which may reduce the efficiency of operation, economy of maintenance and/or net-useful life of the apparatus.
  - 6. Minimum requirements for design, materials, etc., are for certain parts of the equipment. Equivalent requirements approved by the Architect shall apply to such parts as are of special design, construction or material and to which the specified requirements are not directly applicable. These minimum requirements as a whole shall be considered as establishing proportionate general minimum standards for all parts of the equipment.
  - 7. The Architect may permit variations from the requirement of these specifications to permit use of the Contractor's standard equipment, provided such standard equipment is in every way adequate for the intended use and meets the full intent of these specifications. All such variations proposed by the manufacturer shall be called to the attention of the Architect and shall only be made if approved in writing prior to the award of the contract.
  - 8. General requirements for design, materials and construction are intended primarily to apply to the heavy-duty and important parts of the equipment specifically mentioned and to other parts of similar duty and importance. Less important and light-duty parts may be of the standard design, materials and construction provided that, in the opinion of the Architect, such standards are in accordance with the best commercial practice and are fully adequate for the purpose of use. All such variations shall be made only on the Architect's written approval.
  - 9. All equipment and component parts installed, supplied or provided under this contract shall be manufactured and distributed by an original equipment manufacturer as outlined in Section 2.2 of this specification.
    - a. Apparatus shall conform to the design and construction standards referenced herein, and shall be rated the best commercial grade suitable for this application.
    - b. Equipment and component systems shall not employ any experimental devices or proprietary designs that could hamper and/or otherwise prohibit subsequent maintenance repairs or adjustments by all qualified contractors.
    - c. Manufacturers of the apparatus shall provide technical support and parts replacements for their equipment and component systems for a minimum of twenty (20) years and issue such guarantee of support to the purchaser with written certification naming the final

Owner of their product(s) to ensure the apparatus or systems remain maintainable regardless of who may be selected for future service.

10. All equipment provided shall be factory and field tested with a history of design reliability and net-useful life established.
  - a. Contractor must be able to demonstrate the apparatus to be installed has been used successfully in a substantially similar manner under comparable conditions.
  - b. If the apparatus proposed differs substantially in construction, material composition, design, size, capacity, duty or other such rating from the equipment previously used for the same purpose by the manufacturer, the Architect may reject the apparatus or require the vendor test and demonstrate the adequacy and suitability for this particular situation. Any necessary tests shall be performed at the sole expense of the Contractor with no prior guarantee of acceptance after the testing procedure.
11. The Contractor shall not use as part of the permanent equipment any experimental devices, proprietary design, components, construction of materials which have not been fully tried out in at least substantially similar or under comparable service, except as may be especially approved by the Architect. If any important equipment or devices to be used on this installation differ substantially in construction, materials, design, size, capacity or duty from corresponding items previously used for the same purpose by the manufacturer, they shall pass such tests as the Architect may require to fully show their adequacy and suitability. These tests shall be in addition to tests herein specified and shall be made at the expense of the Contractor.
12. Certain design limitations, tests, etc., are herein specified as a partial check of the adequacy of design, construction and materials used. These requirements do not cover all features necessary to ensure satisfactory and approved operation, etc., of the equipment.
13. It is understood; the entire system shall be designed, fabricated, modified and/or upgraded in full compliance with applicable local laws and code standards. The absence of a particular item or requirement shall not relieve the Contractor of full and sole responsibility for such equipment, features and/or procedures.
14. With the exception of only those items specifically identified as being performed by others, the Specifications are intended to include all engineering, material, labor, testing, and inspections needed to achieve work specified by the Contract Documents. Inasmuch as it is understood that any incidental work necessary to complete the project is also covered by the Specifications, bidders are cautioned to familiarize themselves with the existing job site conditions. Additional charges for material or labor shall not be permitted subsequent to execution of the Contract.
15. Bidders must report discrepancies or ambiguities occurring in the Specifications to the Architect for resolution prior to the bidding deadline, otherwise the Specifications shall be deemed acceptable in their existing form.

C. Related Work by Other Trades in this Project

1. The following related work items shall be performed by the General Contractor under this contract. The Escalator Contractor shall be responsible for coordinating the related work with all of the work performed under this contract. The Escalator Contractor shall be familiar with the

related work and shall be responsible for integrating, scheduling and sequencing this work for the overall project. In addition, the Escalator Contractor shall allow access to the work areas as required to minimize the overall construction schedule.

2. Prior to escalator removal:

- a. Protecting all work areas, laydown areas, and transport paths, including flooring, walls, site fixtures and finishes, during all phases of mobilization, preparation, demo, transport, and installation of the equipment.
- b. Installation and removal of temporary barricade walls isolating construction and laydown areas at both levels for the work. Design, dimensions, configuration and functionality of barricades and transport protection plans to meet preliminary criteria established in the General Conditions as subject to mutual approval of designated escalator installer.
- c. Complete demolition and/or removal of all drywall cladding, framing, soffit materials, rough and finished flooring, grout and filler, trim work, safety railing and associated supporting materials, enclosures, fixtures, displays, lighting, sprinklers, electrical wiring, conduit, plumbing, HVAC, and/or any other material connected to or located directly beneath or adjacent to the existing escalators, as required to accommodate the removal and installation of the escalators. Saw cutting or chopping of concrete or grouted areas surrounding the escalators at the floor levels should be sufficient to free the equipment bindings as directed by the escalator installer, but minimize excessive damage requiring restoration. Typically a border of 6" to 12" is acceptable.
- d. Temporary removal and reinstallation of any obstructions, doors, railings, security devices, fixtures, furniture, counters, displays, etc. to provide a clear path for removal and installation of existing and new escalators.
- e. At a time determined by escalator contractor, disconnect all escalator power supplies.

3. After existing escalator removal and before new escalator installation:

- a. Necessary building structural modifications and well-way preparation needed for the new escalators.

1. If required at all, modifications to the existing lower concrete pits to accommodate dimensions of the new escalators will be limited to:

- a) Removal of the existing steel end-support beam located in the pit, and/or...
- b) Cutting back filler floor slab to existing front pit wall location and exposing or forming new escalator support pocket atop front pit wall sufficient to accommodate required escalator lower end support dimensions and reactions.
- c) No modifications will be factored for making the existing pits any deeper, wider, or longer than they currently are.
- d) If required by code, provide proper sump cover over existing sump holes located in existing pits.

- 2) Upper well-way and end support will require the following:
  - a) Inspect and verify existing steel support beam and pocket will accommodate new upper end escalator load reactions and dimensions.
  - b) Make any modifications required to provide adequate clearance and support for escalator.
4. After new escalator trusses are set in pockets and before final inspection and operation:
  - a. Since the escalator is edge-mounted on the beam at the upper landing, additional safety railing (similar to existing) and support for same will be required to close the openings between the new escalator balustrades and the adjacent balcony safety railing.
  - b. Repair of walls, floor or other building surfaces disturbed, modified or changed due to the preparation by others for escalator work specified herein.
  - c. Installation of new AC fused disconnect switches for the new escalator systems and lighting as required.
  - d. Provision of all associated code requirements such as adequate overhead lighting and/or lights and GFCI receptacles within the wellways at both ends of the escalator or other appurtenances.
  - e. Signal wiring from fire alarm system to a junction box in each escalator machine space if required by code.
  - f. Cladding for the exterior of the escalator truss sides and soffit areas to be provided and installed from the edge of the outer decking, including all covering material and its support framing. Materials shall be fire resistant and shall not weigh more than eight (8) pounds per square foot (unless further specified). Design and configuration of the framing materials must conform to the truss mounting guidelines provided by the escalator manufacturer.
  - g. Patching of wellway openings, surroundings, installation of new lighting, sprinklers or other attachments to the escalator cladding or adjacent structures.
  - h. Suitable floor grouting and patching of flooring including permanent floor covering adjacent to the landing plates at both ends of each escalator. All floor finishing shall be completed after installation of the landing plates.
  - i. Removal of all barricades and work area protection.
- D. Description of work to be completed by escalator installer:
  1. Work of this Section includes labor, materials, tools, rigging, equipment, appliances, protection and related services required to remove two existing escalators from the premises, manufacture, deliver and install the replacement escalators complete, as shown on the drawings, as specified herein, and/or as required by job conditions in accordance with all applicable code requirements.
  2. The work and /or requirements specified in all sections is described in singular with the understanding that identical work shall be performed on all units or associated systems unless otherwise specified herein.
  3. The work shall include, but is not limited to the following:
    - a. Remove six (6) indoor KONE commercial escalators with 40" wide steps – ESC #1 - #6.

- b. Manufacture and install six (6) new indoor commercial escalators with 40" wide steps – ESC #1 - #6 as specified herein.

E. General

1. Escalators shall be the cleat step reversible type, self-contained units, capable of operating under full load conditions, in either direction for passenger service, at a specified incline from the horizontal and be complete with driving machine, safety devices, balustrading, etc., as herein specified. Design the unit for quiet and smooth operation at the specified speed.
2. Site verify vertical rise and all other relevant site dimensions and factors for each unit prior to fabrication.
3. Coordinate the delivery, storage and installation requirements of the escalators with the General Contractor.
4. Sectionalize the units as required and stage their installation so that the surrounding structure, floor and wall construction are protected and impacted to the minimal extent in accordance with the related site plans enclosed with these documents.
5. Design the escalators for commercial service, 18-hour a day operation at a speed within 5% of rated speed under any loading conditions, without over stressing components and deteriorating performance.

- F. Certify that the step/skirt clearance and skirt sliding coefficient of friction shall comply with the escalator step/skirt performance index as prescribed in the Code.

G. Abbreviations and Symbols

1. The following abbreviations, Associations, Institutions, and Societies may appear in the Project Manual or Contract Documents:

|      |                                                                                               |
|------|-----------------------------------------------------------------------------------------------|
| AHJ  | Authority Having Jurisdiction                                                                 |
| AIA  | American Institute of Architects                                                              |
| ANSI | American National Standards Institute                                                         |
| ASME | American Society of Mechanical Engineers                                                      |
| ASTM | American Society for Testing and Materials                                                    |
| AWS  | American Welding Society                                                                      |
| BOCA | Building Officials and Code Administrators International, Inc. - Basic National Building Code |
| IEEE | Institute of Electrical and Electronics Engineers                                             |
| NEC  | National Electrical Code                                                                      |
| NEMA | National Electrical Manufacturers Association                                                 |
| NFPA | National Fire Protection Agency                                                               |
| OSHA | Occupational Safety and Health Act                                                            |



H. Codes and Ordinances / Regulatory Agencies

1. Work specified by the Contract Documents shall be performed in compliance with applicable Federal, State, and municipal codes and ordinances in effect at the time of Contract execution. Regulations of the Authority Having Jurisdiction shall be fulfilled by the Contractor and Subcontractors. The entire installation, when completed, shall conform with all applicable regulations set forth in the latest editions of:
  - a. Local and/or State laws applicable for logistical area of project work.
  - b. Building Code applicable to the AHJ.
  - c. Elevator Code applicable to the AHJ.
  - d. Safety Code for Elevators and Escalators, ASME A17.1 and all supplements as modified and adopted by the AHJ.
  - e. Guide for Inspection of Elevators, Escalators, and Moving Walks, ASME A17.2.
  - f. National Electrical Code (ANSI/NFPA 70).
  - g. ASME A17.5/CSA-B44.1 - Elevator and escalator electrical equipment.
2. The Contractor shall advise the Owner's Representative of pending code changes that could be applicable to this project and provide quotations for compliance with related costs.

I. Reference Standards

1. AISC - Specification for the Design, Fabrication and Erection of Structural Steel for Buildings.
2. ICC/ANSI A117.1 - Buildings and Facilities - Providing Accessibility and Usability for Physically Handicapped People.
3. ANSI/AWS D1.1 - Structural Welding Code, Steel.
4. ANSI/NFPA 80 - Fire Doors and Windows.
5. ANSI/UL 10B - Fire Tests of Door Assemblies.
6. APA - American Plywood Association.
7. ASTM A36 - Steel Supports and Reinforcement.
8. ASTM A139 - Electric-Fusion (ARC) Welded Steel Pipe (NPS 4 Inch and Over).
9. ASTM A276 - Stainless Steel Bars and Shapes.
10. ASTM A446 - Steel Sheet, Zinc Coated (Galvanized) by the Hot-Dip Process, Structural (Physical) Quality.
11. ASTM A786 - Rolled Steel Floor Plate.
12. ASTM B36 (36M) - Bronze Sheet (alloy) UNS No.C2800 (Muntz metal).
13. ASTM B151 - Nickel Silver Extrusions.
14. ASTM B221 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes and Tubes.
15. ASTM B455 - Bronze Extrusions.
16. ASTM B632 - Aluminum-alloy Rolled Tread Plate.
17. NEMA LD3 - High Pressure Decorative Laminates
18. ANSI/IEEE - 519-1992
19. ANSI/IEEE - Guide for Surge Withstand Capability (SWC) Tests
20. ANSI Z97.1 - Laminated/Safety Tempered Glass
21. ANSI B29.1 - Chain Drives.

J. Definitions

1. Defective Work: Operation or control system failure, including excessive malfunctions; performances below specified ratings; excessive wear; unusual deterioration or aging of materials or finishes; unsafe conditions; need for excessive maintenance; abnormal noise or vibration; and similar unusual, unexpected, and unsatisfactory conditions.
2. Provide: Where used in this document, provide shall mean to install new device, apparatus, system, equipment or feature as specified in this document.
3. Definitions in ASME A17.1 as amended or modified by the AHJ apply to work of this Section.

1.2 PERMITS AND SUBMITTALS

A. Permits

1. Prior to commencing work specified by the Contract Documents, the Contractor shall, at its own expense, obtain all permits as may be required by the AHJ and provide satisfactory evidence of having obtained said permits and variances to both the Owner's Representative and Architect. Include any related demolition work in the permit process as required.

B. Submittals

1. Submit the following
  - a. Rigging and site-safety plan for escalator removal and installation to include (but not limited to) the following
    - 1) Site-specific hoisting methodology to be utilized for removing the existing escalator truss assemblies from the support locations and lifting new escalator truss assemblies into support locations.
    - 2) Site-specific laydown, dismantling, and transport plan for removal of existing escalator assemblies from premises and loading at street location.
    - 3) Site-specific laydown, assembly, and transport plan for delivering new escalator assemblies into premises including off-loading at street location.
    - 4) Verify hoisting equipment locations, transport paths, work spaces, and methodologies meet or exceed all work load and demand requirements.
    - 5) Include specific additional provisions and/or site modifications as needed to accommodate the work involved.
  - b. Samples

| Item No. | Quantity | Size    | Description                                    |
|----------|----------|---------|------------------------------------------------|
| S1       | 3        | 4" x 6" | Exposed finishes as requested by the Architect |

|    |   |        |                                            |
|----|---|--------|--------------------------------------------|
| S2 | 1 | Actual | Each fixture as requested by the Architect |
|----|---|--------|--------------------------------------------|

c. Shop Drawings

1) Fully dimensioned escalator plan and sections including:

- a) Support location, loads and seismic attachment details
- b) Balustrade details
- c) Floor plate details
- d) Control/safety details
- e) Service connections
- f) Location and details of fixtures and signs
- g) Wiring diagrams
- h) Truss cladding attachment details.
- i) Interface details and dimensions for coordination with construction contractor of any safety railing required at the landings.

d. Calculations (to be stamped approved by certified structural engineer)

- 1) Support normal and seismic loads/reactions (including truss cladding)
- 2) Electrical loads including starting and running currents
- 3) Auxiliary loads

C. Measurements and Drawings

1. Drawings or measurements included with the bidding material shall be for the convenience of the bidders only and full responsibility for detailed dimensions lies with the Contractor.
2. In the execution of the work on the job, the Contractor shall verify all dimensions with the actual conditions.
3. Where the work of the Elevator Contractor is to join other trades, the shop drawings shall show the actual dimensions and the method of joining the work of the various trades.

D. Keys

1. Upon the initial acceptance of work specified by the Contract Documents on each unit, the Contractor shall deliver to the Owner, six (6) keys for each general key-operated device that is provided under these specifications in accordance with ASME A17.1, Part 8 standards as may be adopted and modified by the AHJ.
2. All other keying of access or operation of equipment shall be provided in accordance with ASME A17.1 Part 8 as may be adopted and modified by the AHJ.

E. Diagnostic Tools

1. Prior to seeking final acceptance of the project, the Contractor shall deliver to the Owner any specialized tools required to perform diagnostic evaluations, adjustments, and/or programming changes on any microprocessor-based control equipment installed by the Contractor. All such tools shall become the property of the Owner.
  - a. Owner's diagnostic tools shall be configured to perform all levels of diagnostics, systems adjustment and software program changes which are available to the Contractor.
  - b. Owner's diagnostic tools that require periodic re-calibration and/or re-initiation shall be performed by the Contractor at no additional cost to the Owner for a period equal to the term of the warranty agreement from the date of final acceptance of the project.
  - c. The Contractor shall provide a temporary replacement, at no additional cost to the Owner, during those intervals in which the Owner might find it necessary to surrender a diagnostic tool for re-calibration, re-initiation or repair.
2. Contractor shall deliver to the Owner, printed instructions, access codes, fault codes, passwords or other proprietary information necessary to interface with the microprocessor-control equipment.

F. Wiring Diagrams, Operating Manuals and Maintenance Data

1. Comply with the requirements of Division 01.
2. Contractor shall deliver to the Owner, four (4) identical volumes of printed information organized into neatly bound manuals prior to seeking final acceptance of the project.
3. The manuals shall also be submitted in electronic format on non-volatile media, incorporating raw 'CAD' and/or Acrobat 'PDF' file formats.
4. Manuals, as well as electronic copies, shall contain the following:
  - a. Step-by-step adjusting, programming and troubleshooting procedures that pertain to the solid-state microprocessor-control and motor drive equipment.
  - b. Passwords or identification codes required to gain access to each software program in order to perform diagnostics or program changes.
  - c. A composite listing of the individual settings chosen for variable software parameters stored in the software programs of both the motion and dispatch controllers.
  - d. Method of control and operation.
5. Contractor shall provide four (4) sets of "AS INSTALLED" straight-line wiring diagrams in both hard and electronic format in accordance with the following requirements:
  - a. Displaying name and symbol of each relay, switch or other electrical component utilized including identification of each wiring terminal.
  - b. Electrical circuits depicted shall include all those which are hard-wired in both the machine room and hoistway.

- c. Supplemental wiring changes performed in the field shall be incorporated into the diagrams in order to accurately replicate the completed installation.

- 6. Furnish four (4) bound instructions and recommendations for maintenance, with special reference to lubrication and lubricants.
- 7. Manuals or photographs showing controller repair parts with part numbers listed.

G. Patents

- 1. Patent licenses which may be required to perform work specified by the Contract Documents shall be obtained by the Contractor at its own expense.
- 2. The Contractor agrees to defend and save harmless the Owner, Architect and agents, servants, and employees thereof from any liability resulting from the manufacture or use of any patented invention, process or article of appliance in performing work specified in the Contract Documents.

H. Advertising

- 1. Advertising privileges shall be retained by the Owner.
- 2. It shall be the duty of the Contractor to keep the job site free of posters, signs, and/or decorations.
- 3. Contractor's logo shall not appear on faceplates or floor plates.

1.3 QUALITY ASSURANCE

A. Structural, Mechanical and Electrical Design Parameters

- 1. The mechanical and electrical systems and the building structure have been designed for the following design loads:
  - a. Structural Loads: The top and bottom support loads exist based on originally installed escalators.
  - b. New escalators must be manufactured to fit within the site dimensions and comply with site load capabilities to the extent stated in these documents and/or clarified in your proposal.
- 2. Power supply: 460V-3PH-60HZ
- 3. Electrical Loads: To be provided by manufacturer:

Escalators #1 - #6      \_\_\_\_\_ HP  
                                          \_\_\_/\_\_\_A. FLR (Full Load Running)  
                                          \_\_\_/\_\_\_A. FLA (Full Load Acceleration)

- 4. Heat release data - to be provided by manufacturer:

Escalators #1 - #6 , \_\_\_\_\_ BTU/HR/UNIT

5. Submit a written statement with the submittal that the above design loads and the clearance requirements shown on the Architectural drawings are acceptable for the proposed equipment. If not, specifically state the design variances for approval by the Owner's representative.
6. After the award, if the type of equipment provided requires structure, mechanical and electrical system changes and/or revisions, the Elevator Contractor shall be responsible for all additional design and construction costs.
7. Electrical equipment, motors, controllers, etc., installed under this contract shall have necessary CSA/US or UL listing. Equipment shall be labeled or tagged accordingly.

B. Materials, Painting and Finishes:

1. Two (2) coats of rust inhibiting machinery enamel shall be applied to exposed ferrous metal surfaces in the pit that do not have a galvanized, anodized, baked enamel, or special architectural finishes.
2. Two (2) coats of rust inhibiting enamel paint to the machinery located within the machine room and truss section.

C. General

1. Cold-rolled Sheet Steel Sections: ASTM A 1008, commercial steel, Type "B".
  - a. Shop Prime: Factory-applied baked on coat of mineral filler and primer.
  - b. Finish Paint: Two coats of low sheen baked enamel, color as selected by the Architect.
  - c. Steel Equipment: Two coats of manufacturer's standard rust-inhibiting paint.
2. Rolled Steel Floor Plate: ASTM A786
3. Steel Supports and Reinforcement: ASTM A36
4. Aluminum-alloy Rolled Tread Plate: ASTM B632
5. Stainless Steel: ASTM A240 Type 304
  - a. Satin Finish: No. 4 satin, long grain.
6. Stainless Steel Bars and Shapes: ASTM A276
7. Stainless Steel Tubes: ASTM A269
8. Aluminum Extrusions: ASTM B221
9. Structural Tubing: ASTM A500
10. Bolts, Nuts and Washers: ASTM A325 and A490.
11. Clear Tempered Glass: ASTM C1048

D. Qualifications

1. The work shall be performed by a company specialized in the business of manufacturing, installing and servicing conveying systems of the type and character required by these specifications with a minimum of ten (10) years of experience.
2. Prior written acceptance is required for manufacturers other than those listed, before quoting this project. Requests for acceptance will not be considered unless they are submitted before substitution date and are accompanied by the following information:
  - a. List of five (5) similar installations having exact equipment being proposed for this project arranged to show name of project, system description and date of completed installation.
  - b. Complete literature, performance and technical data describing the proposed equipment.
  - c. List of ten (10) service accounts by building name, building manager or owner, including phone numbers.
  - d. Location of closest service office from which conveying system will be maintained.
  - e. Location of closest parts inventory for this installation.

#### 1.4 REMOVAL / DELIVERY / STORAGE / HANDLING / COORDINATION

##### A. Removal of Existing Escalators

1. This section includes Demolition / Removal of Six (6) existing KONE escalators at the Leonard L. Williams Justice Center. Work will occur on all escalators simultaneously unless otherwise directed and agreed in writing. All work and schedules will be coordinated to create minimal impact to store operations. All hoisting, rigging, transporting, and street closure work will be performed overnight during store closing hours as mutually agreed by all parties.
2. Prior to commencing work specified by the Contract Documents, the Contractor shall, at its own expense, obtain all permits as may be required by the AHJ and provide satisfactory evidence of having obtained said permits and variances to both the Owner's Representative and Architect.
3. Escalator Contractor's scope of work for the Demolition / Removal shall include:
  - a. After preliminary barricade construction, demo of surrounding finishes, and power disconnections as described in these documents, the following will be performed.
  - b. Removal of any escalator finishes or components required for truss-lightening or lowering from support locations such as decking, balustrades, handrails, escalator step assemblies, etc.
  - c. Separation of escalator truss sections, balustrades, decking, drive machine, controllers, or other escalator components from the building structure.
  - d. Contractor shall be responsible to provide their own rigging / hoisting equipment or hire rigging sub-contractor equipment services as necessary for assistance in removal of the existing escalators.
  - e. Escalator truss assemblies will be lowered to grade level within the designated barricaded work and laydown areas.
  - f. Contractor shall be responsible for any necessary separation of existing escalator truss sections or other escalator components to accommodate transport and removal from the

building structure. If torch cutting or burning is required, proper approval by owner and general contractor as well as necessary permits will be obtained in advance.

- g. Escalator components and truss sections will be safely and properly transported by escalator contractor via pre-approved and protected site pathways through the premises for off-site loading and disposal in accordance with mutually agreed site and rigging plans.
  - h. The Contractor is responsible to coordinate all barricades and protection where necessary for all areas in which work specified by the Contract Documents is being performed, including open escalator pits and well-ways, and pathways. Fabrication and erection of all barricades shall be in compliance with applicable OSHA regulations.
4. Once escalator equipment has been removed from premises, escalator contractor will coordinate and verify with architect and general contractor all final pit and site modifications required to accommodate the new escalator truss dimensions and requirements. The cost of these modifications will be owned by the contractor.
  5. Delivery of the new escalators will be coordinated accordingly to allow sufficient preliminary site preparations to occur without interference.

B. Delivery and Storage of Material and Tools

1. Delivery, Storage and Handling:

- a. Deliver materials to the site ready for use in the accepted manufacturer's original and unopened containers and packaging, bearing labels as to type of material, brand name and manufacturer's name. Delivered materials shall be identical to accepted samples.
  - b. Store all materials and equipment in pre-determined designated storage and work areas depicted and agreed in the project plans unless otherwise agreed by all parties in writing.
  - c. Remove delivered materials which are damaged or otherwise not suitable for installation from the job site and replace with acceptable materials.
2. The Owner shall bear no responsibility for the materials, equipment or tools of the Contractor and shall not be liable for any loss thereof or damage thereto.
  3. The Contractor shall confine storage of materials on the job site to the limits and locations designated by the Owner and shall not unnecessarily encumber the premises or overload any portion with materials to a greater extent than the structural design load of the Facility.

1.5 WARRANTY / MAINTENANCE SERVICES

A. Contract Close-Out, Guarantee and Warranties

1. Comply with the requirements of Division 01.
2. Guarantee and Warranties:
  - a. Warrant the equipment installed under these specifications against defects in material and quality of installation and correct any defects not due to ordinary wear and tear or



improper use of escalator which may develop within two (2) years from the date each escalator is completed and placed in permanent operation and accepted by the Owner.

- b. This warrantee shall be written and issued at the completion of each unit prior to final payment.

B. Maintenance

1. Provide full protective maintenance on the specified equipment for a period of twelve (12) months from the date of final acceptance of the entire installation.
2. Include 24-hour emergency callback service between regular examinations at no extra cost to the Owner. The response time shall not exceed one (1) hour.
3. Maintenance work shall be performed by personnel under supervision and in direct employ of manufacturer and installer.
4. Provide interim maintenance on the units that are completed and put in service prior to the overall project completion.
5. Perform maintenance work during the regular working hours of regular working days of the trade.
6. Maintenance shall include systematic examination, adjustment and lubrication of all escalator equipment and apparatus, including repair or replacement of electrical and mechanical parts of the equipment and apparatus. Repair equipment whenever required and use only genuine standard parts produced and manufactured for equipment concerned.
7. Supply all necessary lubricants, cleaning materials and repair parts required to keep installations in good working order during maintenance periods.
8. Adequate stock of spare parts for maintenance or repair work and minor callback service repairs shall be stocked within the confines of the building in areas designated and assigned by the Owner.
9. Additional parts of other equipment required for maintenance and repair of the systems may be stored at the Contractor's facilities with the understanding delivery of same for emergency procedures must be made to the job site within four (4) hours.
10. Other materials and equipment normally not stocked by the Contractor locally must be available within twenty-four (24) hours for delivery to the job site from remote facilities and/or Supplier Contractors responsible to the Contractor for stocking the materials or equipment.
11. If the requirements for stockade of parts as defined herein are not met on any item, the Contractor shall immediately notify the Owner in writing as to the circumstances and provide a confirmed delivery date for the required materials and equipment.
12. Spare parts and materials for preventive maintenance on site shall be cataloged and inventoried.

PART 2 - PRODUCTS

2.1 GENERAL DESCRIPTION

A. Escalator Nos. #1 - #6

- |    |      |                           |
|----|------|---------------------------|
| 1. | Type | Interior Commercial units |
|----|------|---------------------------|

- |     |                                         |                                                                         |
|-----|-----------------------------------------|-------------------------------------------------------------------------|
| 2.  | Quantity                                | Six (6)                                                                 |
| 3.  | Incline                                 | 30 degrees                                                              |
| 4.  | Step width                              | 40"                                                                     |
| 5.  | Vertical Rise                           | 14'0" ESC 1-4, 16'0" ESC 5-6                                            |
| 6.  | Floors Served                           | L2-L1, L1-1, 1-2                                                        |
| 7.  | Number of Intermediate Supports         | 1 (Field Verify)                                                        |
| 8.  | Speed                                   | 100 fpm (nominal)                                                       |
| 9.  | Flat steps                              | Two (2)                                                                 |
| 10. | Inside balustrade material              | Clear tempered safety glass                                             |
| 11. | Balustrade joints                       | Vertical                                                                |
| 12. | Deckboard and skirt                     | Stainless steel No. 4 finish                                            |
| 13. | Handrail color                          | Black                                                                   |
| 14. | Handrail lighting                       | Optional LED                                                            |
| 15. | Combplate Color                         | Natural aluminum                                                        |
| 16. | Step Color                              | Black/natural aluminum                                                  |
| 17. | Operating Requirements                  | 5 days a week, 12 hours per day of which 8 hours are with heavy traffic |
| 18. | Remote Monitoring and Management System | Required                                                                |
| 19. | Power Supply                            | 480 V, 3PH, 60Hz, 40A MOCP Max                                          |
| 20. | Seismic Design                          | Not required                                                            |

B. Pre-Approved Equipment Manufacturers

1. The following original equipment manufacturer's equipment and materials have been pre-approved for use on this project.
2. Other equipment not specifically mentioned shall be considered for approval on an individual basis.
  - a. Escalator – Otis 508 NCE, Schindler 9300AE-10, ThyssenKrupp Velino, Kone Travel Master 110 ( Note, if Contractor has an updated model, it must be approved prior to bid,)

2.2 SYSTEMS AND COMPONENTS

A. Controllers

1. The controller shall be of the microprocessor type, designed to connect the drive motor to the electric service, protect the motor against overload, and provide proper control of the escalator. Should any safety device operate, the controller shall automatically cut off power to the motor and apply the service brake to bring the unit to a quick, smooth, safe stop within the code prescribed distance.
  - a. Provide a pendant style hand station to operate the unit during maintenance.

- 1) Connection points for the pendant station shall be provided at both ends of the unit within a truss enclosure beneath the landing plates.
  - 2) The pendants shall include maintained pressure push buttons to operate the escalator in either direction, and a maintenance stop button.
2. Mount all electrical equipment on insulated panels with adequate spacing and protect them to prevent personnel from contacting equipment during normal operation.
3. All panel wiring shall be neatly formed and tied.
  - a. The terminals are to have indelible means of identification to facilitate testing and repair.
  - b. The identification markings shall be coordinated with identical markings used on the wiring diagrams.
4. Locate the controller in the machine space.
  - a. The controller shall be removable with flexible connecting cables and a device to stand controller firmly upright when removed from machine space.
5. Provide fault finder panel for each unit.
  - a. The panel shall indicate which safety device has caused the unit to stop.
  - b. The panel shall have a capacity of retaining the last 16 faults and permit testing of all of the safety devices.
  - c. The panel shall be desk mounted not requiring access to the controller or machinery space.
- B. Driving Machine and Motor
  1. The driving machine shall be of the worm, planetary or helical gear type, especially designed for escalator service and provided with accurately machined gears driven by a moderate speed A.C. motor. The driving machine shall be of sufficient size and capacity to operate without exceeding horsepower of the driving motor.
  2. The motor rating shall be based on a temperature rise not exceeding 50 degrees C after a continuous run of one hour at room temperature. The motor speed shall not exceed 1200 rpm and shall conform to the standards of the IEEE 519.
- C. Service Brake
  1. Mount an electrically released and spring applied service brake of sufficient capacity to stop and hold a fully loaded escalator on the main drive shaft or on the moving walk machine.
  2. This brake shall apply every time the power is removed from the motor by operation of any of the safety devices.
- D. Truss

1. The truss shall be designed and constructed of structural steel shapes to safely carry the entire load of the escalators including all parts, together with the full capacity load, including the weight of the exterior balustrading and truss covering as specified and shown on the drawings.
  - a. Design truss for a deflection of  $1/750$  of support-to-support distance.
2. Design the top of the truss to carry the drive machine and controller. The entire truss shall have a factor of safety in accordance with the requirements of the code.
3. Design and reinforce the truss for the specified rise and site dimensions without intermediate support.
4. Provide oil-tight steel drip pan to the underside of the truss, and along the entire length and width of the truss. Design drip pan with sufficient rigidity to support a worker.
5. Apply not less than two (2) coats of rust inhibiting paint or equivalent material protection.
6. Design and construct the truss to permit cladding of sides of the truss and the soffit that shall weigh not more than 8.0 pounds per square foot.

E. Tracks

1. The tracks upon which the step rollers travel shall be constructed of drawn steel and shall be installed and supported to insure correct alignment and smooth operation of the running gear under all conditions in both directions of travel. All tracks shall have a smooth finish surface and shall have means provided to positively insure the forming of the step before the 30-degree run and flattening of the step to the comb plates.
2. The tracks shall be set up to provide for the following flat steps at the bottom and top prior to the 30-degree transition:
  - a. Escalator Nos. #1 - #6 Two (2) steps

F. Step Chains

1. One step chain shall be located on either side of the steps and shall be of the endless rollertype.
2. The chain shall be made of high grade steel links with hardened pins and rollers designed to accurately and quietly engage the drive sprockets to ensure a smooth, quiet operation.
3. Provision shall be made to prevent sagging or buckling of the chains, to prevent the steps from coming in contact with each other, and to maintain substantially constant distances between axles of all exposed steps. Provide a tensioning device to maintain the proper tension on the chains.
4. These chains shall have a factor of safety of at least 5.

G. Steps

1. The color of the steps will be aluminum finish or black factory-applied powder coating as selected by Owner. The top edge of the tread surface will be factory-ground slightly to remain unpainted, reducing paint deterioration from passenger traffic.

2. The step frame shall be integral with the treads and shall be made of aluminum suitably reinforced and braced to carry a maximum load per step under eccentric loading condition without distortion.
3. The width, depth and clearance of the steps shall be as outlined in the Code.
4. Provide ball or roller type rollers with a minimum diameter of 3 inches and a minimum width of 1 inch.
  - a. The rollers shall be the dust-proof, self-aligning and self-lubricating type. Mount rollers for smooth, quiet operation and for easy removal.
  - b. The design of the steps and their attachments shall permit the steps to be removed without disturbing the balustrades or dismantling any part of the chains.

H. Step Treads

1. The step treads and step frame shall be integral and shall be of die cast aluminum, cleat type, of a design to afford the best possible foothold.
2. The tread surface of the step shall be slotted in the direction parallel to the travel of the steps.
3. Each slot shall be not more than 1/4" wide and not less than 3/8" deep.
  - a. The distance from the center line to center line of adjacent slots shall be not less than 3/8".
  - b. The maximum clearance between step treads on the horizontal run shall be 1/8".
4. The clearance on either side of the steps between the steps and adjacent skirt panel shall be not more than 1/8" and the sum of the clearances on both sides shall be not more than 5/16". This requirement applies even with top and bottom skirt safety switches and skirt deflection devices.
5. The step tread sides and rear shall have manufacturer's standard yellow plastic demarcation inserts.
6. The vertical curved step riser on each step shall be of die cast aluminum, with the face having grooves that mesh with the treads of the adjacent step during step formation to prevent objects from becoming engaged between the riser and step in the transition of a fully formed step to the flattened surface entering the combplate at the top or bottom of the escalator.

I. Combplates

1. The combplates shall have a skid-reducing surface except for the comb areas.
2. The comb shall have closely spaced teeth arranged so that the steps shall pass between them with minimum clearance.
3. The comb teeth shall be made in sections so that any damaged or worn sections can be readily replaced without disturbing the main combplate.
4. The comb teeth shall be formed to correspond to the form of treads to obtain uniform side clearances.
5. The combplates shall be adjustable both horizontally and vertically.

J. Handrail Guides and Handrails

1. The handrail guides shall be of steel or other alloy of proper rigidity and shall be shaped to allow easy movement of the handrail. Shape guides to prevent the handrail from being easily thrown off.
2. The handrail color shall be black, or color selected by owner and shall be constructed of neoprene with dacron lining.
3. Each handrail will be factory-measured and pre-formed in a continuous loop of the required length prior to delivery to the jobsite.
4. The handrail shall be properly shaped to fit the guide track of the handrail guide.
5. The handrails shall be synchronized to move in the same direction and at the same speed on the steps.
6. The handrails shall extend at least 12 inches beyond the combplate teeth at the same height before starting its turn.
7. Hand or finger guards shall be provided at the point where the handrail enters the balustrades.

K. Floor Plates

1. Provide full width landing and floor plates to cover the entire area of the landings within the outline of the truss and shall be supported by the truss.
2. Furnish access in the form of removable covers at the upper and lower ends over the machinery spaces in accordance with code requirements.
  - a. Upper and lower landing floor plates shall be extruded aluminum and reinforced not to deflect more than 1/8" when a weight of 350 lb. is applied to any area 8 in. X 12 in. centered on the plates with the 12-in. dimension parallel to the direction of travel.
  - b. The floor plates shall be removable lightweight plates of rigid construction and shall have a ribbed aluminum surface designed to match the comb plate design.

L. Balustrading

1. Provide the skin panels, inside and outside deck boards and moldings, to match the finishes as hereinafter specified.
2. The balustrading shall be of the slimline type, with extended newels at upper and lower landings.
3. The skin panels shall be stainless steel with a 1/16" thick polytetrafluoroethylene coating and rigidly reinforced and arranged for positive and permanent adjustment.
4. The inner and outer deck boards shall be flat, stainless steel with a No. 4 finish.
5. The balustrade panels shall be fully tempered clear glass, manufacturer's recommended thickness with vertical butt joints without separating mullions.

M. Deck Barrier Guards

1. Provide solid protective guards at code designated locations at the upper and lower end of each outer deck.
2. Guards shall be constructed of clear lexan and securely mounted to the decking.

N. Caution Signs

1. Post caution signs near the entrances of the units.
2. The signs shall be a durable material, in the form of pictographs and shall be 4" wide by 7 3/4" high.
3. Provide all signage in code mandated colors.

O. Provisions for Equipment Lubrication

1. Provide each moving part of the escalator installation with a self-oiling bearing with provisions for greasing or with grease-gun connections suited to a pressure gun for distributing heavy oil or light grease.
2. All grease gun connections shall be of the same type to fit the gun.
3. All points of lubrication shall be readily accessible

P. Broken Drive and Drive Chain Emergency Brake

1. If a machine to step drive chain sprocket is used, a mechanically applied emergency brake shall be provided on the top sprocket shaft that shall automatically engage and safely stop a loaded escalator if the drive chain breaks.
2. If the drive chain breaks, a mechanically applied emergency brake shall be automatically engaged to bring the unit to a smooth and safe stop.

2.3 WIRING AND ELECTRICAL SAFETY DEVICES

A. Wiring and Disconnect

1. Provide all necessary wiring for the proper operation of the equipment, beginning at the power outlets. All wiring shall be SO type hard service cord wiring and shall meet the requirements of the Electrical Code.
2. Run all conductors in steel conduit or electrical metallic tubing within the truss.
3. Adequately support and fasten conduit, flexible metal conduit and wiring so that they do not come in contact with the components in motion.
4. Provide a fused disconnect or circuit breaker switch of the proper amperage next to the controller. The disconnecting means shall be lockable in the "open" position.
5. All wiring must test free from short circuit or grounds and the insulation resistance between conductors, and conductors and ground shall be at least one megohm.
6. Mark all connections and wires by numbered adhesive waterproof labels.

B. Emergency Stop Station

1. Provide a red stop button at the top and bottom landing where directed by Code.
  - a. Enclose the button with a lift-up 1/4" thick plastic cover.
  - b. When the cover is lifted an audible alarm shall sound with an intensity of 80 dBA minimum at the button location.

- c. Cover markings shall conform to the requirements of the Code.
  - 2. Locate the emergency stop button in the newel and provide clearly and permanently identified switch positions.
  - 3. The operation of any stop switch shall cause the disconnection of the power supply from the driving machine.
  - 4. Arrange the controls to automatically shut down the escalator upon receiving alarm signal from smoke detectors, water flow switches and other safety devices as described by Code.
- C. Provide machine space stop switches as required by code.
- D. Broken Chain Safety Devices
- 1. Provide broken chain safety device with electric contacts which shall open and cause the service brake to be applied.
  - 2. The device shall operate when:
    - a. One or both chains break.
    - b. The tension on the chains drop below or exceed a predetermined value.
  - 3. Opening of these contacts shall remove power from the driving machine and set the brake bringing the escalator to a smooth and safe stop within one (1) tread length.
- E. Starting Stations
- 1. Provide a start switch mounted fixture located at the upper and lower landings as directed by Code.
    - a. The switch shall be of the spring return key type, and monetary movement in either direction shall determine the direction of travel.
    - b. Locate the switch to provide view of the escalator steps when operating the switch.
  - 2. The start switch shall be interconnected through the controller so that the escalator is brought to a complete stop before direction of travel can be changed.
- F. Non-Reversing Device
- 1. Should the unit attempt to reverse while operating in either direction, the non-reversing device shall remove power from the driving machine and apply the service brake to bring the escalator to a smooth and safe stop within one (1) tread length.
- G. Skirt Obstruction Devices
- 1. Provide safety switches on each side of the unit, top and bottom.



2. If an obstruction occurs, between the edge of the steps and the skirt panel, actuation of any one of the switches shall remove the power from the driving machine and apply the service brake.
3. The switches shall be effective for either direction of travel and shall not have their efficiency impaired by dirt or dust.
4. Actuation of the switch closest to the combplate shall cause the unit to stop before the obstruction reaches the combplate.

H. Slack Handrail Device

1. Provide a safety device with an electrical switch to cut off the power to the driving machine and bring the unit to a smooth and safe stop should either handrail break or should the tension change from a predetermined value.
2. Operation of this device shall sound an audible alarm without any delay.

I. Handrail Speed Monitoring Device

1. Provide a safety device with an electrical switch to cut off the power to the driving machine and bring the unit to a smooth and safe stop should the handrail speed vary from the step speed by 15% or more.
2. Operation of this device shall sound an audible alarm without any delay.

J. Handrail Entry Device

1. A handrail entry device shall be provided at each newel.
2. It shall be operative in the newels in which the handrail enters the balustrade.
3. It shall be of the manually reset type and shall cause the unit to stop by removing power from the driving machine motor and applying the brake.
4. It shall operate in either of two ways:
  - a. If an object becomes caught between the handrail and the handrail guard.
  - b. If an object approaches the area between the handrail and the handrail guard.
5. For those units that rely on an opening of the balustrade to prevent entrapment, all handrail entry devices shall be operative whenever the handrails are operating.

K. Combplate Impact Device

1. Provide a dual acting combplate safety switch on both ends of the unit.
2. The switch shall actuate and stop the unit if the combplate is subject to a horizontal or a vertical force as prescribed by the Code.

L. Missing Step Device

1. Provide a device to detect a missing step.

2. When operated, the device shall bring the unit to a stop before the missing section becomes exposed.
3. Step level devices shall be located at the top and bottom of the escalator.
4. These devices shall detect downward displacement of 3 mm (0.125 in.) or greater at the riser end at either side of the step.
5. When activated, the device shall cause the escalator to stop before the step enters the combplate.
6. The device shall cause power to be removed from the driving-machine motor and brake.
7. Devices shall be of the manual-reset type.

M. Step Up-thrust Device

1. Means shall be provided to cause the electric power to be removed from the driving-machine motor and brake should a step be displaced against the upthrust track at the lower curve in the passenger-carrying line of the track system.

N. Demarcation Lights

1. Locate a demarcation light below the steps at the entrance and exit of the unit so that the break in the steps is clearly visible as they start to form.
2. The demarcation lights shall consist of two (2) LED fixtures and shall be mounted perpendicular to moving walk travel.

O. Combplate Lights

1. Provide manufacturer's standard white LED lighting located in the skirt panels on both sides of the upper and lower escalator combplates.

P. Under Handrail balustrade lighting

1. Provide manufacturer's standard linear white LED lighting located directly below the escalator handrails on both sides of the escalator. The lighting will extend from the newel ends continuously through the incline section encased in a weathertight, lensed enclosure designed to direct the lighting downward towards the glass balustrade panels, decking and steps

PART 3 - EXECUTION

3.1 EXAMINATION

A. Inspection

1. Study the Contract Documents with regard to the work as specified and required so as to ensure its completeness.
2. Examine surface and conditions to which this work is to be attached or applied and notify the Owner in writing if conditions or surfaces are detrimental to the proper and expeditious

installation of the work. Starting the work shall imply acceptance of the surfaces and conditions to perform the work as specified.

3. Verify, by measurements at the job site, dimensions affecting the work. Bring field dimensions which are at variance with those on the accepted shop drawings to the attention of the Owner. Obtain the decision regarding corrective measures before the start of fabrication of items affected.
4. Cooperate in the coordination and scheduling of the work of this section with the work of other sections so as not to delay job progress.

### 3.2 FIELD QUALITY CONTROL

#### A. Inspection and Testing

1. Upon completion of each work phase or individual unit specified herein, the Contractor shall, at its own expense, arrange and assist with inspection and testing as may be required by the State and municipal governing authorities in order to secure a Certificate of Operation.

#### B. Substantial Completion

1. The work shall be deemed "Substantially Complete" for the group of units when, in the opinion of the Architect, the unit is complete, such that there are no material and substantial variations from the Contract Documents, and the unit is fit for its intended purpose.
2. Governing authority testing shall be completed and approved in conjunction with inspection for operation of the unit; a certificate of operation or other required documentation issued; and remaining items mandated for final acceptance completion are limited to minor punch list work not incorporating any life safety deficiencies.
3. The issuance of a substantial completion notification shall not relieve the Contractor from its obligations hereunder to complete the work.
4. Final completion cannot be achieved until all deliverables, including but not limited to training, spare parts, manuals, and other documentation requirements, have been completed.

#### C. Contractor's Superintendent

1. The Contractor shall assign a competent project superintendent during the work progress and any necessary assistant, all satisfactory to the Owner. The superintendent shall represent the Contractor and all instructions given to him shall be as binding as if given to the Contractor.

### 3.3 PROTECTION / CLEANING

#### A. Protection and Cleaning

1. Adequately protect surfaces against accumulation of paint, mortar, mastic and disfiguration or discoloration and damage during shipment and installation.

2. Upon completion, remove protection from finished surfaces and thoroughly clean and polish surfaces with due regard to the type of material. Work shall be free from discoloration, scratches, dents and other surface defects.
3. The finished installation shall be free of defects.
4. Before final completion and acceptance, repair and/or replace defective work, to the satisfaction of the Owner, at no additional cost.
5. Remove tools, equipment and surplus materials from the site.

### 3.4 DEMONSTRATION

#### A. Adjustment / Balance

1. Make necessary adjustment of equipment to insure escalators operate smoothly and quietly.

#### B. Escalator Performance Requirements

1. The escalators shall meet the following performance requirements:
  - a. Speed: Within 95% to 105% of rated speed under any loading condition in both directions of travel.
  - b. Step/Skirt Performance Index: Within the limits outlined in the applicable Code.
  - c. Handrail Tracking: Equal to step movement throughout the length of the escalator.
2. Provide necessary sound isolation so that the noise level does not exceed 55 dBa measured three (3) feet above the combplate.
3. When stopping, deceleration with brake shall not exceed 3.0 ft/sec<sup>2</sup>.

#### C. Acceptance Testing

1. Comply with the requirements of Division 01.
2. The Contractor shall provide at least five (5) days prior written notice to the Owner and Architect regarding the exact date on which work specified in the Contract Documents will reach completion on any single unit of vertical transportation equipment.
3. In addition to conducting whatever testing procedures may be required by local inspecting authorities in order to gain approval of the completed work, and before seeking approval of said work by the Owner, the Contractor shall perform certain other tests in the presence of the Architect.
4. The Contractor shall provide test instruments, test weights, and qualified field labor as required to safely operate the escalator under load conditions that vary from empty to full rated load and, in so doing, to successfully demonstrate compliance with applicable performance standards set forth in the project specifications with regard to:
  - a. Bi-directional travel speeds.
  - b. Ride quality and noise levels.

- c. Handrail tracking.
- d. Brake stopping rate.
- e. Operation of fault finder and/or remote monitoring.

END OF SECTION

NOT FOR BIDDING PURPOSES

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 21 05 00**  
**COMMON WORK RESULTS FOR FIRE SUPPRESSION**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. General Requirements
- B. Above ground piping.
- C. Pipe hangers and supports.
- D. Pipe sleeves.

**1.02 RELATED REQUIREMENTS**

- A. Section 07 84 00 - Firestopping.
- B. Section 21 05 53 - Identification for Fire Suppression Piping and Equipment: Piping identification.
- C. Section 21 13 00 - Fire-Suppression Sprinkler Systems: Sprinkler systems design.

**1.03 REFERENCE STANDARDS**

- A. ASME B16.1 - Gray Iron Pipe Flanges and Flanged Fittings: Classes 25, 125, and 250; 2026.
- B. ASME B16.4 - Gray Iron Threaded Fittings: Classes 125 and 250; 2021.
- C. FM (AG) - FM Approval Guide; Current Edition.
- D. ITS (DIR) - Directory of Listed Products; Current Edition.
- E. NFPA 13 - Standard for the Installation of Sprinkler Systems; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- F. NFPA 14 - Standard for the Installation of Standpipe and Hose Systems; 2024.
- G. UL (DIR) - Online Certifications Directory; Current Edition.

**1.04 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements for submittal procedures.
- B. Product Data: Provide manufacturer's catalog information. Indicate valve data and ratings.
- C. Shop Drawings: Indicate pipe materials used, jointing methods, supports, and floor and wall penetration seals. Indicate installation, layout, weights, mounting and support details, and piping connections.
- D. Project Record Documents: Record actual locations of components and tag numbering.
- E. Operation and Maintenance Data: Include installation instructions and spare parts lists.

**1.05 QUALITY ASSURANCE**

- A. Manufacturer Qualifications: Company specializing in manufacturing the Products specified in this section with minimum three years documented experience.
- B. Conform to FM (AG), UL (DIR), and ITS (DIR) or Warnock Hersey requirements.
- C. Valves: Bear FM (AG), UL (DIR), and ITS (DIR) or Warnock Hersey product listing label or marking. Provide manufacturer's name and pressure rating marked on valve body.

**1.06 DELIVERY, STORAGE, AND HANDLING**

- A. Deliver and store valves in shipping containers, with labeling in place.
- B. Provide temporary protective coating on cast iron and steel valves.
- C. Provide temporary end caps and closures on piping and fittings. Maintain in place until installation.

## **PART 2 PRODUCTS**

### **2.01 GENERAL REQUIREMENTS**

- A. Welding Materials and Procedures: Comply with ASME BPVC-IX.
- B. Provide system pipes, fittings, sleeves, escutcheons, seals, and other related accessories.

### **2.02 ABOVE GROUND PIPING**

- A. Steel Pipe: ASTM A53 Schedule 40 or ASTM A795 Schedule 40, black.
  - 1. Cast Iron Fittings: ASME B16.1, flanges and flanged fittings and ASME B16.4, threaded fittings.
  - 2. Mechanical Grooved Couplings: Malleable iron housing clamps to engage and lock, "C" shaped elastomeric sealing gasket, steel bolts, nuts, and washers; galvanized for galvanized pipe.

### **2.03 PIPE SLEEVES**

- A. Vertical Piping:
  - 1. Sleeve Length: 1 inch above finished floor.
  - 2. Provide sealant for watertight joint.
- B. Pipe Passing Through Quarry Tile, Terrazzo, or Ceramic Tile Floors:
  - 1. Brass pipe.
  - 2. Connect sleeve with floor plate.

### **2.04 PIPE HANGERS AND SUPPORTS**

- A. Hangers for Pipe Sizes 1/2 to 1-1/2 inch: Malleable iron, adjustable swivel, split ring.
- B. Hangers for Pipe Sizes 2 inches and Over: Carbon steel, adjustable, clevis.
- C. Multiple or Trapeze Hangers: Steel channels with welded spacers and hanger rods.
- D. Wall Support for Pipe Sizes to 3 inches: Cast iron hook.
- E. Vertical Support: Steel riser clamp.

## **PART 3 EXECUTION**

### **3.01 PREPARATION**

- A. Ream pipe and tube ends. Remove burrs. Bevel plain end ferrous pipe.
- B. Remove scale and foreign material, from inside and outside, before assembly.
- C. Prepare piping connections to equipment with flanges or unions.

### **3.02 INSTALLATION**

- A. Route piping in orderly manner, plumb and parallel to building structure. Maintain gradient.
- B. Install piping to conserve building space, to not interfere with use of space and other work.
- C. Group piping whenever practical at common elevations.
- D. Install piping to allow for expansion and contraction without stressing pipe, joints, or connected equipment.
- E. Pipe Hangers and Supports:
  - 1. Install hangers to provide minimum 1/2 inch space between finished covering and adjacent work.
  - 2. Place hangers within 12 inches of each horizontal elbow.
  - 3. Use hangers with 1-1/2 inch minimum vertical adjustment. Design hangers for pipe movement without disengagement of supported pipe.
  - 4. Support vertical piping at every other floor. Support riser piping independently of connected horizontal piping.
  - 5. Where several pipes can be installed in parallel and at same elevation, provide multiple or trapeze hangers.



- F. Slope piping and arrange systems to drain at low points. Use eccentric reducers to maintain top of pipe level.
- G. Prepare pipe, fittings, supports, and accessories for finish painting. Where pipe support members are welded to structural building framing, scrape, brush clean, and apply one coat of zinc-rich primer to welding.
- H. Do not penetrate building structural members unless indicated.
- I. Provide sleeves when penetrating footings, floors, walls, and partitions. Seal pipe including sleeve penetrations to achieve fire resistance equivalent to fire separation required.
- J. Escutcheons:
  - 1. Install and firmly attach escutcheons at piping penetrations into finished spaces.
  - 2. Provide escutcheons on both sides of partitions separating finished areas through which piping passes.
  - 3. Use chrome plated escutcheons in occupied spaces and to conceal openings in construction.
- K. When installing more than one piping system material, ensure system components are compatible and joined to ensure the integrity of the system. Provide necessary joining fittings. Ensure flanges, unions, and couplings for servicing are consistently provided.

### **3.03 CLEANING**

- A. Upon completion of work, clean all parts of the installation.
- B. Clean equipment, pipes, valves, and fittings of grease, metal cuttings, and sludge that may have accumulated from the installation and testing of the system.
- C. See Section 01 74 19 - Construction Waste Management and Disposal for additional requirements.

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 21 05 53**  
**IDENTIFICATION FOR FIRE SUPPRESSION PIPING AND EQUIPMENT**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Nameplates.
- B. Tags.
- C. Pipe markers.
- D. Ceiling tacks.

**1.02 REFERENCE STANDARDS**

- A. ASME A13.1 - Scheme for the Identification of Piping Systems; 2007.

**1.03 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Manufacturer's Installation Instructions: Indicate special procedures, and installation instructions.
- C. Project Record Documents: Record actual locations of tagged valves.

**PART 2 PRODUCTS**

**2.01 IDENTIFICATION APPLICATIONS**

- A. Piping: Pipe markers.
- B. Valves: Nameplates and ceiling tacks where above lay-in ceilings.

**2.02 NAMEPLATES**

- A. Description: Laminated three-layer plastic with engraved letters.

**2.03 TAGS**

- A. Plastic Tags: Laminated three-layer plastic with engraved black letters on light contrasting background color. Tag size minimum 1-1/2 inch diameter.

**2.04 PIPE MARKERS**

- A. Color: Comply with ASME A13.1.
- B. Plastic Pipe Markers: Factory fabricated, flexible, semi-rigid plastic, preformed to fit around pipe or pipe covering; minimum information indicating flow direction arrow and identification of fluid being conveyed.

**2.05 CEILING TACKS**

- A. Description: Steel with 3/4 inch diameter color coded head.

**PART 3 EXECUTION**

**3.01 INSTALLATION**

- A. Install tags with corrosion resistant chain.
- B. Install plastic pipe markers in accordance with manufacturer's instructions.
- C. Install plastic tape pipe markers complete around pipe in accordance with manufacturer's instructions.
- D. Use tags on piping 3/4 inch diameter and smaller.
  - 1. Install in clear view and align with axis of piping.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 21 13 00**  
**FIRE-SUPPRESSION SPRINKLER SYSTEMS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Wet-pipe sprinkler system.
- B. System design, installation, and certification.

**1.02 RELATED REQUIREMENTS**

- A. Section 07 84 00 - Firestopping.
- B. Section 21 05 00 - Common Work Results for Fire Suppression: Pipe and fittings.

**1.03 REFERENCE STANDARDS**

- A. FM (AG) - FM Approval Guide; Current Edition.
- B. ICC-ES AC01 - Acceptance Criteria for Expansion Anchors in Masonry Elements; 2018, with Editorial Revision (2020).
- C. ICC-ES AC106 - Acceptance Criteria for Predrilled Fasteners (Screw Anchors) in Masonry; 2018, with Editorial Revision (2020).
- D. ICC-ES AC193 - Acceptance Criteria for Mechanical Anchors in Concrete Elements; 2017, with Editorial Revision (2020).
- E. ICC-ES AC308 - Acceptance Criteria for Post-Installed Adhesive Anchors in Concrete Elements; 2023.
- F. NFPA 13 - Standard for the Installation of Sprinkler Systems; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- G. UL (DIR) - Online Certifications Directory; Current Edition.

**1.04 ADMINISTRATIVE REQUIREMENTS**

- A. Preinstallation Meeting: Convene three weeks before starting work of this section.

**1.05 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements for submittal procedures.
- B. Product Data: Provide data on sprinklers, valves, and specialties, including manufacturers catalog information. Submit performance ratings, rough-in details, weights, support requirements, and piping connections.
- C. Shop Drawings:
  - 1. Indicate hydraulic calculations, detailed pipe layout, hangers and supports, sprinklers, components, and accessories. Indicate system controls.
  - 2. Submit shop drawings to Authorities Having Jurisdiction for approval. Submit proof of approval to DEDC, LLC.
- D. Project Record Documents: Record actual locations of sprinklers and deviations of piping from drawings. Indicate drain and test locations.

**1.06 QUALITY ASSURANCE**

- A. Comply with FM (AG) requirements.
- B. Designer Qualifications: Design system under direct supervision of a Professional Engineer experienced in design of this type of work and licensed in Delaware.
- C. Installer Qualifications: Company specializing in performing the work of this section and approved by manufacturer.
- D. Equipment and Components: Provide products that bear FM (AG) label or marking.

- E. Products Requiring Electrical Connection: Listed and classified by UL (DIR) as suitable for the purpose specified and indicated.

### **1.07 DELIVERY, STORAGE, AND HANDLING**

- A. Store products in shipping containers and maintain in place until installation. Provide temporary inlet and outlet caps. Maintain caps in place until installation.

## **PART 2 PRODUCTS**

### **2.01 MANUFACTURERS**

- A. Sprinklers, Valves, and Equipment:
  - 1. Anvil International: [www.anvilintl.com/#sle](http://www.anvilintl.com/#sle).
  - 2. Tyco Fire Protection Products: [www.tyco-fire.com/#sle](http://www.tyco-fire.com/#sle).
  - 3. Viking Corporation: [www.vikinggroupinc.com/#sle](http://www.vikinggroupinc.com/#sle).
  - 4. Substitutions: See Section 01 60 00 - Product Requirements.

### **2.02 SPRINKLER SYSTEM**

- A. Sprinkler System: Provide coverage for building areas noted.
- B. Occupancy: Light hazard; comply with NFPA 13.
- C. Water Supply: Determine volume and pressure from water flow test data.
- D. Interface system with building fire and smoke alarm system.
- E. Pipe Hanger Fasteners: Attach hangers to structure using appropriate fasteners, as follows:
  - 1. Concrete Wedge Expansion Anchors: Complying with ICC-ES AC193.
  - 2. Masonry Wedge Expansion Anchors: Complying with ICC-ES AC01.
  - 3. Concrete Screw Type Anchors: Complying with ICC-ES AC193.
  - 4. Masonry Screw Type Anchors: Complying with ICC-ES AC106.
  - 5. Concrete Adhesive Type Anchors: Complying with ICC-ES AC308.

### **2.03 SPRINKLERS**

- A. Suspended Ceiling Type: Concealed pendant type with matching push on escutcheon plate.
  - 1. Response Type: Quick.
  - 2. Coverage Type: Standard.
  - 3. Finish: Brass.
  - 4. Escutcheon Plate Finish: Enamel, color to match ceiling.
  - 5. Fusible Link: Fusible solder link type temperature rated for specific area hazard.
- B. Exposed Area Type: Pendant upright type with guard.
  - 1. Response Type: Quick.
  - 2. Coverage Type: Standard.
  - 3. Finish: Brass.
  - 4. Fusible Link: Fusible solder link type temperature rated for specific area hazard.
- C. Sidewall Type: Semi-recessed horizontal sidewall type with matching push on escutcheon plate.
  - 1. Response Type: Quick.
  - 2. Coverage Type: Standard.
  - 3. Finish: Brass.
  - 4. Fusible Link: Fusible solder link type temperature rated for specific area hazard.
- D. Guards: Finish to match sprinkler finish.
- E. Flexible Drop System: Stainless steel, multiple use, open gate type.
  - 1. Application: Use to properly locate sprinkler heads.
  - 2. Include all supports and bracing.
  - 3. Provide braided type tube as required for the application.
  - 4. Manufacturers:

- a. FlexHead Industries, a brand of Anvil International: [www.anvilintl.com/#sle](http://www.anvilintl.com/#sle).
- b. Victaulic Company; Vic-Flex: [www.victaulic.com/#sle](http://www.victaulic.com/#sle).
- c. Substitutions: See Section 01 60 00 - Product Requirements.

### **PART 3 EXECUTION**

#### **3.01 INSTALLATION**

- A. Install in accordance with referenced NFPA design and installation standard.
- B. Install equipment in accordance with manufacturer's instructions.
- C. Place pipe runs to minimize obstruction to other work.
- D. Place piping in concealed spaces above finished ceilings.
- E. Center sprinklers in two directions in ceiling tile and provide piping offsets as required.
- F. Apply masking tape or paper cover to ensure concealed sprinklers, cover plates, and sprinkler escutcheons do not receive field paint finish. Remove after painting. Replace painted sprinklers.
- G. Flush entire piping system of foreign matter.
- H. Install guards on sprinklers where indicated.
- I. Hydrostatically test entire system.
- J. Require test be witnessed by Fire Marshal.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK



**SECTION 26 05 05**  
**SELECTIVE DEMOLITION FOR ELECTRICAL**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Electrical demolition.

**1.02 RELATED REQUIREMENTS**

- A. Section 01 70 00 - Execution and Closeout Requirements: Additional requirements for alterations work.
- B. Section 02 84 00 - Polychlorinate Biphenyl (PCB) Remediation: Removal of equipment and materials containing substances regulated under the Federal Toxic Substances Control Act (TSCA), including but not limited to those containing PCBs and mercury.
- C. Section 07 84 00 - Firestopping.
- D. Section 26 05 53 - Identification for Electrical Systems.

**PART 2 PRODUCTS**

**2.01 MATERIALS AND EQUIPMENT**

- A. Materials and equipment for patching and extending work: As specified in individual sections.

**PART 3 EXECUTION**

**3.01 EXAMINATION**

- A. Verify field measurements and circuiting arrangements are as indicated.
- B. Verify that abandoned wiring and equipment serve only abandoned facilities.
- C. Demolition drawings are based on casual field observation and existing record documents. Contractor shall be responsible for field-verification of existing conditions prior to beginning work.
- D. Report discrepancies to State of Delaware OMB - Division of Facilities Management before disturbing existing installation.
- E. Beginning of demolition means installer accepts existing conditions.

**3.02 PREPARATION**

- A. Prior to performing work on electrical circuits, Contractor shall positively identify power sources, turn circuit breakers or switches to "off" and lock out and/or tag out circuits as required.
- B. Contractor shall coordinate all electrical demolition work with State of Delaware OMB - Division of Facilities Management as well as all other trades involved in Project.
- C. Contractor shall keep work area clean and orderly.
- D. All electrical demolition work shall be performed in a safe and orderly manner and in accordance with all State of Delaware OMB - Division of Facilities Management regulations, local codes, OSHA, International Building Code and National Electrical Code; all being most recent editions adopted by Authoriti(es) Having Jurisdiction, including all applicable amendments and supplements.
- E. All electrical demolition work shall be scheduled and coordinated with State of Delaware OMB - Division of Facilities Management such that disruption of areas involved is kept to minimum.
- F. All power shutdowns affecting areas not within scope of Project shall be coordinated with State of Delaware OMB - Division of Facilities Management. Accidental interruptions to services shall be repaired immediately by Contractor at no additional cost to State of Delaware OMB - Division of Facilities Management.
- G. Disconnect electrical systems in walls, floors, and ceilings to be removed.
- H. Coordinate utility service outages with utility company.

- I. Provide temporary wiring and connections to maintain existing systems in service during construction. When work must be performed on energized equipment or circuits, use personnel experienced in such operations.

### 3.03 DEMOLITION AND EXTENSION OF EXISTING ELECTRICAL WORK

- A. Perform work for removal and disposal of equipment and materials containing toxic substances regulated under the Federal Toxic Substances Control Act (TSCA) in accordance with applicable federal, state, and local regulations. Applicable equipment and materials include, but are not limited to:
  1. PCB-containing electrical equipment, including transformers, capacitors, and switches.
  2. PCB- and DEHP-containing lighting ballasts.
  3. Mercury-containing lamps and tubes, including fluorescent lamps, high intensity discharge (HID), arc lamps, ultra-violet, high pressure sodium, mercury vapor, ignitron tubes, neon, and incandescent.
- B. Unless otherwise noted, all electrical items indicated for demolition shall be removed including all associated wiring, controls and accessible conduit and boxes traced back to source. Where removal causes power interruption of electrical items to remain, rewire existing circuits as required to maintain continuity.
- C. Conduit and boxes becoming inactive that are inaccessible shall be abandoned in place with open ends filled with firestopping expandable foam.
- D. Openings in conduit and boxes remaining active shall be capped with appropriate fittings.
- E. Unless otherwise noted, circuit breakers becoming inactive shall have operating mechanisms placed in "off" (de-energized) position and be labeled as "SPARE" in accordance with Section 26 05 53.
- F. Contractor shall update panel schedules for all panelboards affected by Project in accordance with Section 26 05 53.
- G. Remove, relocate, and extend existing installations to accommodate new construction.
- H. All circuits abandoned or not used shall be located, identified, disconnected and removed back to source.
- I. Remove abandoned wiring to source of supply.
- J. Remove exposed abandoned conduit, including abandoned conduit above accessible ceiling finishes. Cut conduit flush with walls and floors, fill open ends with firestopping expandable foam and patch surfaces.
- K. Remove existing abandoned wiring and conduit designated as obsolete by State of Delaware OMB - Division of Facilities Management authorities.
- L. Disconnect abandoned outlets and remove devices. Remove abandoned outlets if conduit servicing them is abandoned and removed. Provide blank cover for abandoned outlets that are not removed.
- M. Disconnect and remove abandoned panelboards and distribution equipment.
- N. Disconnect and remove electrical devices and equipment serving utilization equipment that has been removed.
- O. Disconnect and remove abandoned luminaires. Remove brackets, stems, hangers, and other accessories.
- P. Remove abandoned support channel associated with demolished electrical equipment.
- Q. Existing branch circuits or circuits of other systems passing through Project area that interferes with new construction shall be relocated as required. All relocation of existing circuits shall be coordinated with State of Delaware OMB - Division of Facilities Management and with all other affected trades before proceeding with new construction.

- R. Contractor shall be responsible for temporary removal and re-installation of existing ceiling tiles as required to accommodate electrical demolition and/or extension work. Contractor shall be responsible for repair and/or replacement of all ceiling tiles damaged as result of work.  
Contractor shall inspect existing conditions prior to commencement of work and provide written report of existing damage to State of Delaware OMB - Division of Facilities Management.
- S. Contractor shall be responsible for patching and painting of all holes, dents, cracks, penetrations, etc. left in surfaces and/or structures after electrical demolition and/or extension work. Surfaces and/or structures to be restored shall include ceilings, walls, floors, columns, roofs, etc. Patching and painting shall restore surfaces and/or structures to original designs and/or finishes, including all fire-resistant and watertight ratings. All openings to building exteriors and through roofs shall be sealed watertight.
- T. Repair adjacent construction and finishes damaged during demolition and extension work.
- U. Damage caused by Contractor to areas outside area of demolition shall be repaired to original condition by Contractor at no additional cost to State of Delaware OMB - Division of Facilities Management.
- V. Maintain access to existing electrical installations that remain active. Modify installation or provide access panel as appropriate.
- W. Extend existing installations using materials and methods compatible with existing electrical installations, or as specified.
- X. All demolished materials not to be turned over to State of Delaware OMB - Division of Facilities Management shall be removed from site daily. Salvaged materials shall be stored for re-use.

#### **3.04 CLEANING AND REPAIR**

- A. See Section 01 74 19 - Construction Waste Management and Disposal for additional requirements.
- B. Clean and repair existing materials and equipment that remain or that are to be reused.
- C. Panelboards: Clean exposed surfaces and check tightness of electrical connections. Replace damaged circuit breakers and provide closure plates for vacant positions. Provide typed circuit directory showing revised circuiting arrangement.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 26 05 19**  
**LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Single conductor building wire.
- B. Metal-clad cable.
- C. Wire and cable for 600 volts and less.
- D. Wiring connectors.
- E. Electrical tape.
- F. Heat shrink tubing.
- G. Oxide inhibiting compound.
- H. Wire pulling lubricant.
- I. Cable ties.
- J. Firestop sleeves.

**1.02 RELATED REQUIREMENTS**

- A. Section 07 84 00 - Firestopping.
- B. Section 26 05 05 - Selective Demolition for Electrical: Disconnection, removal, and/or extension of existing electrical conductors and cables.
- C. Section 26 05 26 - Grounding and Bonding for Electrical Systems: Additional requirements for grounding conductors and grounding connectors.
- D. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.
- E. Section 28 46 00 - Fire Detection and Alarm: Fire alarm system conductors and cables.

**1.03 REFERENCE STANDARDS**

- A. ASTM B3 - Standard Specification for Soft or Annealed Copper Wire; 2013.
- B. ASTM B8 - Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft; 2011.
- C. ASTM B33 - Standard Specification for Tin-Coated Soft or Annealed Copper Wire for Electrical Purposes; 2010 (Reapproved 2014).
- D. ASTM B787/B787M - Standard Specification for 19 Wire Combination Unilay-Stranded Copper Conductors for Subsequent Insulation; 2004 (Reapproved 2014).
- E. ASTM D3005 - Standard Specification for Low-Temperature Resistant Vinyl Chloride Plastic Pressure-Sensitive Electrical Insulating Tape; 2010.
- F. ASTM D4388 - Standard Specification for Nonmetallic Semi-Conducting and Electrically Insulating Rubber Tapes; 2013.
- G. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials; 2026a.
- H. FM 3971 - Fire Protective Coatings and Wraps for Grouped Cables; 2019.
- I. IEEE 383 - IEEE Standard for Qualifying Electric Cables and Splices for Nuclear Facilities; 2015.
- J. NECA 1 - Standard for Good Workmanship in Electrical Construction; 2010.
- K. NECA 120 - Standard for Installing Armored Cable (AC) and Metal-Clad Cable (MC); 2012.

- L. NEMA WC 70 - Nonshielded Power Cable 2000 V or Less for the Distribution of Electrical Energy; 2009.
- M. NETA ATS - Acceptance Testing Specifications for Electrical Power Equipment and Systems; 2013.
- N. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- O. UL 44 - Thermoset-Insulated Wires and Cables; Current Edition, Including All Revisions.
- P. UL 83 - Thermoplastic-Insulated Wires and Cables; Current Edition, Including All Revisions.
- Q. UL 267 - Outline of Investigation for Wire-Pulling Compounds; Most Recent Edition, Including All Revisions.
- R. UL 486A-486B - Wire Connectors; Current Edition, Including All Revisions.
- S. UL 486C - Splicing Wire Connectors; Current Edition, Including All Revisions.
- T. UL 486D - Sealed Wire Connector Systems; Current Edition, Including All Revisions.
- U. UL 510 - Polyvinyl Chloride, Polyethylene, and Rubber Insulating Tape; Current Edition, Including All Revisions.
- V. UL 1569 - Metal-Clad Cables; Current Edition, Including All Revisions.

#### **1.04 ADMINISTRATIVE REQUIREMENTS**

- A. Coordination:
  - 1. Coordinate sizes of raceways, boxes, and equipment enclosures installed under other sections with the actual conductors to be installed, including adjustments for conductor sizes increased for voltage drop.
  - 2. Coordinate with electrical equipment installed under other sections to provide terminations suitable for use with the conductors to be installed.
  - 3. Notify DEDC, LLC of any conflicts with or deviations from Contract Documents. Obtain direction before proceeding with work.

#### **1.05 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for conductors and cables, including detailed information on materials, construction, ratings, listings, and available sizes, configurations, and stranding.
- C. Project Record Documents: Record actual installed circuiting arrangements. Record actual routing.
- D. Maintenance Materials: Furnish the following for State of Delaware OMB - Division of Facilities Management's use in maintenance of project.
  - 1. See Section 01 60 00 - Product Requirements, for additional provisions.

#### **1.06 QUALITY ASSURANCE**

- A. Comply with requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
- D. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

### **1.07 DELIVERY, STORAGE, AND HANDLING**

- A. Receive, inspect, handle, and store conductors and cables in accordance with manufacturer's instructions.

### **1.08 FIELD CONDITIONS**

- A. Do not install or otherwise handle thermoplastic-insulated conductors at temperatures lower than 14 degrees F, unless otherwise permitted by manufacturer's instructions. When installation below this temperature is unavoidable, notify DEDC, LLC and obtain direction before proceeding with work.

## **PART 2 PRODUCTS**

### **2.01 CONDUCTOR AND CABLE APPLICATIONS**

- A. Do not use conductors and cables for applications other than as permitted by NFPA 70 and product listing.
- B. Provide single conductor building wire installed in suitable raceway unless otherwise indicated, permitted, or required.
- C. Nonmetallic-sheathed cable is not permitted.
- D. Underground feeder and branch-circuit cable is not permitted.
- E. Service entrance cable is not permitted.
- F. Armored cable is not permitted.
- G. Metal-clad cable is permitted only as follows:
  - 1. Where not otherwise restricted, may be used:
    - a. Where concealed above accessible ceilings for final connections from junction boxes to luminaires.
      - 1) Maximum Length: 6 feet.
    - b. Where concealed in hollow stud walls, above accessible ceilings, and under raised floors for branch circuits up to 20 A.
  - 2. In addition to other applicable restrictions, may not be used:
    - a. Unless approved by State of Delaware OMB - Division of Facilities Management.
    - b. Where not approved for use by the authority having jurisdiction.
    - c. Where exposed to view.
    - d. Where exposed to damage.
    - e. For damp, wet, or corrosive locations.
- H. Concealed Dry Interior Locations: Use only building wire in raceway or metal clad cable.
- I. Exposed Dry Interior Locations: Use only building wire in raceway.
- J. Above Accessible Ceilings: Use only building wire in raceway or metal clad cable.
- K. Wet or Damp Interior Locations: Use only building wire in raceway.

### **2.02 CONDUCTOR AND CABLE GENERAL REQUIREMENTS**

- A. Provide products that comply with requirements of NFPA 70.
- B. Provide products listed, classified, and labeled as suitable for the purpose intended.
- C. Provide products with insulation and temperature ratings as required per equipment installation instructions where such ratings differ from those indicated herein.
- D. Unless specifically indicated to be excluded, provide all required conduit, boxes, wiring, connectors, etc. as required for a complete operating system.
- E. Comply with NEMA WC 70.
- F. Thermoplastic-Insulated Conductors and Cables: Listed and labeled as complying with UL 83.

- G. Thermoset-Insulated Conductors and Cables: Listed and labeled as complying with UL 44.
- H. Conductors for Grounding and Bonding: Also comply with Section 26 05 26.
- I. Conductors and Cables Installed Exposed in Spaces Used for Environmental Air (only where specifically permitted): Plenum rated, listed and labeled as suitable for use in return air plenums.
- J. Conductor Material:
  - 1. Provide copper conductors only. Aluminum conductors are not acceptable for this project. Conductor sizes indicated are based on copper.
  - 2. Copper Conductors: Soft drawn annealed, 98 percent conductivity, uncoated copper conductors complying with ASTM B3, ASTM B8, or ASTM B787/B787M unless otherwise indicated.
  - 3. Tinned Copper Conductors: Comply with ASTM B33.
- K. Minimum Conductor Size:
  - 1. Branch Circuits: 12 AWG.
    - a. Exceptions: Size homerun branch circuit conductors from power source to first outlet in accordance with the following maximum circuit limits, using center of load served as basis for computing circuit lengths:
      - 1) 20 A, 120 V circuits longer than 75 feet: 10 AWG, for voltage drop.
      - 2) 20 A, 120 V circuits longer than 150 feet: 8 AWG, for voltage drop.
      - 3) 20 A, 277 V circuits longer than 150 feet: 10 AWG, for voltage drop.
  - 2. Control Circuits: 14 AWG.
- L. Where conductor size is not indicated, size to comply with NFPA 70 but not less than applicable minimum size requirements specified.
- M. Conductor Color Coding:
  - 1. Color code conductors as indicated unless otherwise required by the authority having jurisdiction. Maintain consistent color coding throughout project.
  - 2. Color Coding Method: Integrally colored insulation.
    - a. Conductors size 4 AWG and larger may have black insulation color coded using vinyl color coding electrical tape.
  - 3. Color Code:
    - a. 480Y/277 V, 3 Phase, 4 Wire System:
      - 1) Phase A: Brown.
      - 2) Phase B: Orange.
      - 3) Phase C: Yellow.
      - 4) Neutral/Grounded: Gray.
    - b. 208Y/120 V, 3 Phase, 4 Wire System:
      - 1) Phase A: Black.
      - 2) Phase B: Red.
      - 3) Phase C: Blue.
      - 4) Neutral/Grounded: White.
    - c. Equipment Ground, All Systems: Green.
    - d. Travelers for 3-Way and 4-Way Switching: Pink.
    - e. For modifications or additions to existing wiring systems, comply with existing color code when existing code complies with NFPA 70 and is approved by the authority having jurisdiction.
    - f. For control circuits, comply with manufacturer's recommended color code.

## 2.03 SINGLE CONDUCTOR BUILDING WIRE

- A. Manufacturers:
  - 1. Copper Building Wire:
    - a. Cerro Wire LLC: [www.cerrowire.com/#sle](http://www.cerrowire.com/#sle).
    - b. Encore Wire Corporation: [www.encorewire.com/#sle](http://www.encorewire.com/#sle).



- c. General Cable Technologies Corporation: [www.generalcable.com/#sle](http://www.generalcable.com/#sle).
  - d. Service Wire Co: [www.servicewire.com/#sle](http://www.servicewire.com/#sle).
  - e. Southwire Company: [www.southwire.com/#sle](http://www.southwire.com/#sle).
  - f. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: Single conductor insulated wire.
- C. Conductor Stranding:
- 1. Feeders and Branch Circuits:
    - a. Size 10 AWG and Smaller: Solid.
    - b. Size 8 AWG and Larger: Stranded.
  - 2. Control Circuits: Stranded.
- D. Conductor: Copper.
- E. Insulation Voltage Rating: 600 volts.
- F. Insulation: NFPA 70, Type THHN/THWN unless otherwise indicated on plans.

#### 2.04 METAL-CLAD CABLE

- A. Manufacturers:
- 1. AFC Cable Systems Inc: [www.afcweb.com/#sle](http://www.afcweb.com/#sle).
  - 2. Encore Wire Corporation: [www.encorewire.com/#sle](http://www.encorewire.com/#sle).
  - 3. Service Wire Co: [www.servicewire.com/#sle](http://www.servicewire.com/#sle).
  - 4. Southwire Company: [www.southwire.com/#sle](http://www.southwire.com/#sle).
  - 5. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: NFPA 70, Type MC cable listed and labeled as complying with UL 1569, and listed for use in classified firestop systems to be used.
- C. Conductor Stranding:
- 1. Size 10 AWG and Smaller: Solid.
  - 2. Size 8 AWG and Larger: Stranded.
- D. Insulation: Type THHN/THWN.
- E. Provide dedicated neutral conductor for each phase conductor where indicated or required.
- F. Grounding: Full-size integral green insulated copper equipment grounding conductor.
- G. Armor: Aluminum or steel interlocked tape.
- H. Description: NFPA 70, Type MC.
- I. Conductor: Copper.
- J. Insulation Voltage Rating: 600 volts.

#### 2.05 WIRING CONNECTORS

- A. Description: Wiring connectors appropriate for the application, suitable for use with the conductors to be connected, and listed as complying with UL 486A-486B or UL 486C as applicable.
- B. Connectors for Grounding and Bonding: Comply with Section 26 05 26.
- C. Wiring Connectors for Splices and Taps:
- 1. Copper Conductors Size 8 AWG and Smaller: Use twist-on insulated spring connectors.
  - 2. Copper Conductors Size 6 AWG and Larger: Use mechanical connectors or compression connectors. Tape uninsulated conductors and connector with electrical tape or insulate with heat shrink tubing to 150 percent of insulation rating of conductor.
- D. Wiring Connectors for Non-Motor Terminations:
- 1. Provide terminal lugs for connecting conductors to equipment furnished with terminations designed for terminal lugs.

2. Provide compression adapters for connecting conductors to equipment furnished with mechanical lugs when only compression connectors are specified.
3. Where over-sized conductors are larger than the equipment terminations can accommodate, provide connectors suitable for reducing to appropriate size, but not less than required for the rating of the overcurrent protective device.
4. Copper Conductors Size 8 AWG and Larger: Use mechanical connectors or compression connectors where connectors are required.
5. Stranded Conductors Size 10 AWG and Smaller: Use crimped terminals for connections to terminal screws.
6. Conductors for Control Circuits: Use crimped terminals for all connections.
- E. Wiring Connectors for Motor Terminations: Use motor lead disconnects with slip-on insulating boot, pin and silicone gel. Boot sealant shall be used with all insulating boots.
- F. Do not use insulation-piercing or insulation-displacement connectors designed for use with conductors without stripping insulation.
- G. Do not use push-in wire connectors as a substitute for twist-on insulated spring connectors.
- H. Twist-on Insulated Spring Connectors: Rated 600 V, 221 degrees F for standard applications and 302 degrees F for high temperature applications; pre-filled with sealant and listed as complying with UL 486D for damp and wet locations.
  1. Manufacturers:
    - a. 3M: [www.3m.com/#sle](http://www.3m.com/#sle).
    - b. Ideal Industries, Inc: [www.idealindustries.com/#sle](http://www.idealindustries.com/#sle).
    - c. NSI Industries LLC: [www.nsiindustries.com/#sle](http://www.nsiindustries.com/#sle).
    - d. Substitutions: See Section 01 60 00 - Product Requirements.
- I. Mechanical Connectors: Provide bolted type or set-screw type.
  1. Manufacturers:
    - a. Burndy LLC: [www.burndy.com](http://www.burndy.com).
    - b. IlSCO: [www.ilSCO.com/#sle](http://www.ilSCO.com/#sle).
    - c. Thomas & Betts Corporation; Blackburn Products: [www.tnb.com/#sle](http://www.tnb.com/#sle).
    - d. Polaris: [www.polarisconnectors.com](http://www.polarisconnectors.com).
    - e. Substitutions: See Section 01 60 00 - Product Requirements.
- J. Compression Connectors: Provide circumferential type or hex type crimp configuration.
  1. Manufacturers:
    - a. Burndy LLC: [www.burndy.com](http://www.burndy.com).
    - b. IlSCO: [www.ilSCO.com/#sle](http://www.ilSCO.com/#sle).
    - c. Thomas & Betts Corporation; Blackburn Products: [www.tnb.com/#sle](http://www.tnb.com/#sle).
    - d. Substitutions: See Section 01 60 00 - Product Requirements.
- K. Crimped Terminals: Nylon-insulated, with insulation grip and terminal configuration suitable for connection to be made.
  1. Manufacturers:
    - a. Burndy LLC: [www.burndy.com](http://www.burndy.com).
    - b. IlSCO: [www.ilSCO.com/#sle](http://www.ilSCO.com/#sle).
    - c. Thomas & Betts Corporation; Sta-Kon Products: [www.tnb.com/#sle](http://www.tnb.com/#sle).
    - d. Substitutions: See Section 01 60 00 - Product Requirements.
- L. Motor Lead Disconnects: Color-keyed compression-type with slip-on insulating boot, pin, silicone gel and boot sealant.
  1. Manufacturers:
    - a. Thomas & Betts Corporation: [www.tnb.com](http://www.tnb.com).
      - 1) Motor Lead Disconnects: M2D Series.
      - 2) Boot Sealant: MDBOOT-SEAL.
    - b. Substitutions: See Section 01 60 00 - Product Requirements.

## 2.06 ACCESSORIES

- A. Electrical Tape:
1. Manufacturers:
    - a. 3M: [www.3m.com/#sle](http://www.3m.com/#sle).
    - b. Plymouth Rubber Europa: [www.plymouthrubber.com/#sle](http://www.plymouthrubber.com/#sle).
    - c. Substitutions: See Section 01 60 00 - Product Requirements.
  2. Vinyl Color Coding Electrical Tape: Integrally colored to match color code indicated; listed as complying with UL 510; minimum thickness of 7 mil; resistant to abrasion, corrosion, and sunlight; suitable for continuous temperature environment up to 221 degrees F.
  3. Vinyl Insulating Electrical Tape: Complying with ASTM D3005 and listed as complying with UL 510; minimum thickness of 7 mil; resistant to abrasion, corrosion, and sunlight; conformable for application down to 0 degrees F and suitable for continuous temperature environment up to 221 degrees F.
  4. Rubber Splicing Electrical Tape: Ethylene Propylene Rubber (EPR) tape, complying with ASTM D4388; minimum thickness of 30 mil; suitable for continuous temperature environment up to 194 degrees F and short-term 266 degrees F overload service.
  5. Electrical Filler Tape: Rubber-based insulating moldable putty; minimum thickness of 125 mil; suitable for continuous temperature environment up to 176 degrees F.
  6. Varnished Cambric Electrical Tape: Cotton cambric fabric tape, with or without adhesive, oil-primed and coated with high-grade insulating varnish; minimum thickness of 7 mil; suitable for continuous temperature environment up to 221 degrees F.
  7. Moisture Sealing Electrical Tape: Insulating master compound laminated to flexible, all-weather vinyl backing; minimum thickness of 90 mil.
- B. Heat Shrink Tubing: Heavy-wall, split-resistant, with factory-applied adhesive; rated 600 V; suitable for direct burial applications; listed as complying with UL 486D.
1. Manufacturers:
    - a. 3M: [www.3m.com/#sle](http://www.3m.com/#sle).
    - b. Burndy LLC: [www.burndy.com](http://www.burndy.com).
    - c. Thomas & Betts Corporation: [www.tnb.com/#sle](http://www.tnb.com/#sle).
    - d. Substitutions: See Section 01 60 00 - Product Requirements.
- C. Oxide Inhibiting Compound: Listed; suitable for use with the conductors or cables to be installed.
1. Manufacturers:
    - a. Burndy LLC: [www.burndy.com](http://www.burndy.com).
    - b. Ideal Industries, Inc: [www.idealindustries.com/#sle](http://www.idealindustries.com/#sle).
    - c. IlSCO: [www.ilsco.com/#sle](http://www.ilsco.com/#sle).
    - d. Substitutions: See Section 01 60 00 - Product Requirements.
- D. Wire Pulling Lubricant:
1. Manufacturers:
    - a. 3M: [www.3m.com/#sle](http://www.3m.com/#sle).
    - b. American Polywater Corporation: [www.polywater.com/#sle](http://www.polywater.com/#sle).
    - c. Ideal Industries, Inc: [www.idealindustries.com/#sle](http://www.idealindustries.com/#sle).
    - d. Substitutions: See Section 01 60 00 - Product Requirements.
  2. Listed and labeled as complying with UL 267.
  3. Suitable for use with conductors/cables and associated insulation/jackets to be installed.
  4. Suitable for use at installation temperature.
- E. Cable Ties: Material and tensile strength rating suitable for application.
1. Manufacturers:
    - a. Burndy LLC: [www.burndy.com](http://www.burndy.com).
    - b. Substitutions: See Section 01 60 00 - Product Requirements.

- F. Firestop Sleeves: Listed; provide as required to preserve fire resistance rating of building elements.
  - 1. Products:
    - a. HoldRite, a brand of Reliance Worldwide Corporation; HydroFlame Pro Series/HydroFlame Custom Built: [www.holdrite.com/#sle](http://www.holdrite.com/#sle).
    - b. Substitutions: See Section 01 60 00 - Product Requirements.
- G. Fire-Protective Coating for Electrical Conductors and Cables: Field-applied, intumescent or ablative coating designed to prevent ignition and propagation of fire along thermoplastic-insulated conductors and cables.
  - 1. Pass flammability tests of one of the following:
    - a. ASTM E84, Class A; maximum flame spread index of 25.
    - b. FM 3971.
    - c. IEEE 383.
  - 2. Products:
    - a. Vimasco Corporation; CharCoat CC Cable Coating: [www.charcoat.com/#sle](http://www.charcoat.com/#sle).
    - b. Substitutions: See Section 01 60 00 - Product Requirements.

### **PART 3 EXECUTION**

#### **3.01 EXAMINATION**

- A. Verify that interior of building has been protected from weather.
- B. Verify that work likely to damage wire and cable has been completed.
- C. Verify that raceways, boxes, and equipment enclosures are installed and are properly sized to accommodate conductors and cables in accordance with NFPA 70.
- D. Verify that raceway installation is complete and supported.
- E. Verify that field measurements are as indicated.
- F. Verify that conditions are satisfactory for installation prior to starting work.

#### **3.02 PREPARATION**

- A. Clean raceways thoroughly to remove foreign materials before installing conductors and cables.

#### **3.03 INSTALLATION**

- A. Circuiting Requirements
  - 1. All exposed raceway shall be run in a neat organized fashion and shall be parallel with other building systems.
  - 2. Unless dimensioned, circuit routing indicated is diagrammatic.
  - 3. When circuit destination is indicated without specific routing, determine exact routing required.
  - 4. Arrange circuiting to minimize splices.
  - 5. Include circuit lengths required to install connected devices within 10 ft of location indicated.
  - 6. Maintain separation of Class 1, Class 2, and Class 3 remote-control, signaling, and power-limited circuits in accordance with NFPA 70.
  - 7. Maintain separation of wiring for emergency systems in accordance with NFPA 70.
  - 8. Circuiting Adjustments: Unless otherwise indicated, when branch circuits are indicated as separate, combining them together in a single raceway is permitted, under the following conditions:
    - a. Provide no more than six current-carrying conductors in a single raceway. Dedicated neutral conductors are considered current-carrying conductors.
    - b. Increase size of conductors as required to account for ampacity derating.
    - c. Size raceways, boxes, etc. to accommodate conductors.

9. Common Neutrals: Unless otherwise indicated, sharing of neutral/grounded conductors among single phase branch circuits is not permitted. Provide dedicated neutral/grounded conductor for each individual branch circuit.
- B. Install products in accordance with manufacturer's instructions.
- C. Perform work in accordance with NECA 1 (general workmanship).
- D. Install metal-clad cable (Type MC) in accordance with NECA 120.
- E. Installation in Raceway:
  1. Remove existing conductors and cables from raceway before pulling in new (where applicable).
  2. Tape ends of conductors and cables to prevent infiltration of moisture and other contaminants.
  3. Pull all conductors and cables together into raceway at same time.
  4. Do not damage conductors and cables or exceed manufacturer's recommended maximum pulling tension and sidewall pressure.
  5. Use suitable wire pulling lubricant where necessary, except when lubricant is not recommended by the manufacturer.
- F. Paralleled Conductors: Install conductors of the same length and terminate in the same manner.
- G. Secure and support conductors and cables in accordance with NFPA 70 using suitable supports and methods approved by the authority having jurisdiction. Provide independent support from building structure. Do not provide support from raceways, piping, ductwork, or other systems.
  1. Installation Above Suspended Ceilings: Do not provide support from ceiling support system. Do not provide support from ceiling grid or allow conductors and cables to lay on ceiling tiles. Support at 6 foot maximum intervals using type MC cable supports designed and listed for the purpose.
  2. Installation in Vertical Raceways: Provide supports where vertical rise exceeds permissible limits.
- H. Terminate cables using suitable fittings.
  1. Metal-Clad Cable (Type MC):
    - a. Fittings used for connecting type MC cable to boxes, cabinets or other equipment shall be listed and identified for such use. Snap-in connectors or internal box clamps shall not be permitted. All connectors shall be locknut type, designed to secure type MC cable to boxes or enclosures.
    - b. Cut cable armor only using specialized tools to prevent damaging conductors or insulation. Do not use hacksaw or wire cutters to cut armor.
    - c. Do not use direct-bearing set-screw type fittings for cables with aluminum armor.
    - d. Provide plastic anti-short bushings on ends of all type MC cable.
- I. Install conductors with a minimum of 12 inches of slack at each outlet.
- J. Where conductors are installed in enclosures for future termination by others, provide a minimum of 5 feet of slack.
- K. Neatly train and bundle conductors inside boxes, wireways, panelboards and other equipment enclosures.
- L. Group or otherwise identify neutral/grounded conductors with associated ungrounded conductors inside enclosures in accordance with NFPA 70.
- M. Make wiring connections using specified wiring connectors.
  1. Make splices and taps only in accessible boxes. Do not pull splices into raceways or make splices in conduit bodies or wiring gutters.

2. Remove appropriate amount of conductor insulation for making connections without cutting, nicking or damaging conductors.
  3. Do not remove conductor strands to facilitate insertion into connector.
  4. Clean contact surfaces on conductors and connectors to suitable remove corrosion, oxides, and other contaminates. Do not use wire brush on plated connector surfaces.
  5. Mechanical Connectors: Secure connections according to manufacturer's recommended torque settings.
  6. Compression Connectors: Secure connections using manufacturer's recommended tools and dies.
- N. Insulate splices and taps that are made with uninsulated connectors using methods suitable for the application, with insulation and mechanical strength at least equivalent to unspliced conductors.
1. Dry Locations: Use insulating covers specifically designed for the connectors, electrical tape, or heat shrink tubing.
    - a. For taped connections, first apply adequate amount of rubber splicing electrical tape or electrical filler tape, followed by outer covering of vinyl insulating electrical tape.
    - b. For taped connections likely to require re-entering first apply varnished cambric electrical tape, followed by adequate amount of rubber splicing electrical tape, followed by outer covering of vinyl insulating electrical tape.
  2. Damp Locations: Use insulating covers specifically designed for the connectors, electrical tape, or heat shrink tubing.
    - a. For connections with insulating covers, apply outer covering of moisture sealing electrical tape.
    - b. For taped connections, follow same procedure as for dry locations but apply outer covering of moisture sealing electrical tape.
  3. Wet Locations: Use heat shrink tubing.
- O. Insulate ends of spare conductors using vinyl insulating electrical tape.
- P. Field-Applied Color Coding: Where vinyl color coding electrical tape is used in lieu of integrally colored insulation as permitted in Part 2 under "Color Coding", apply half overlapping turns of tape at each termination and at each location conductors are accessible.
- Q. Identify conductors and cables in accordance with Section 26 05 53.
- R. Color Code Legend: Provide identification label identifying color code for ungrounded conductors at each piece of feeder or branch-circuit distribution equipment when premises has feeders or branch circuits served by more than one nominal voltage system.
- S. Install firestopping to preserve fire resistance rating of partitions and other elements, using materials and methods specified in Section 07 84 00.
- T. Unless specifically indicated to be excluded, provide final connections to all equipment and devices, including those furnished by others, as required for a complete operating system.
- U. Install wire and cable securely, in a neat and workmanlike manner, as specified in NECA 1.
- V. Protect exposed cable from damage.
- W. Clean conductor surfaces before installing lugs and connectors.
- X. Make splices, taps, and terminations to carry full ampacity of conductors with no perceptible temperature rise.

### 3.04 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Perform field inspection and testing in accordance with Section 01 40 00.
- C. Inspect and test in accordance with NETA ATS, except Section 4.

- D. Perform inspections and tests listed in NETA ATS, Section 7.3.2. The insulation resistance test is required for all conductors. The resistance test for parallel conductors listed as optional is not required.
  - 1. Disconnect surge protective devices (SPDs) prior to performing any high potential testing. Replace SPDs damaged by performing high potential testing with SPDs connected.
- E. Correct deficiencies and replace damaged or defective conductors and cables.
- F. Perform inspections and tests listed in NETA STD ATS, Section 7.3.2.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK



**SECTION 26 05 26**  
**GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Grounding and bonding requirements.
- B. Conductors for grounding and bonding.
- C. Connectors for grounding and bonding.
- D. Grounding and bonding components.

**1.02 RELATED REQUIREMENTS**

- A. Section 26 05 19 - Low-Voltage Electrical Power Conductors and Cables: Additional requirements for conductors for grounding and bonding, including conductor color coding.
  - 1. Includes oxide inhibiting compound.
- B. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.

**1.03 REFERENCE STANDARDS**

- A. IEEE 81 - IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Grounding System; 2012.
- B. NECA 1 - Standard for Good Workmanship in Electrical Construction; 2010.
- C. NETA ATS - Acceptance Testing Specifications for Electrical Power Equipment and Systems; 2013.
- D. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- E. UL 467 - Grounding and Bonding Equipment; Current Edition, Including All Revisions.

**1.04 ADMINISTRATIVE REQUIREMENTS**

- A. Coordination:
  - 1. Notify DEDC, LLC of any conflicts with or deviations from Contract Documents. Obtain direction before proceeding with work.

**1.05 PERFORMANCE REQUIREMENTS**

- A. Grounding System Resistance: 5 ohms.

**1.06 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements for submittals procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for grounding and bonding system components.

**1.07 QUALITY ASSURANCE**

- A. Comply with requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
- D. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

**1.08 DELIVERY, STORAGE, AND HANDLING**

- A. Receive, inspect, handle, and store products in accordance with manufacturer's instructions.

## PART 2 PRODUCTS

### 2.01 GROUNDING AND BONDING REQUIREMENTS

- A. Do not use products for applications other than as permitted by NFPA 70 and product listing.
- B. Unless specifically indicated to be excluded, provide all required components, conductors, connectors, conduit, boxes, fittings, supports, accessories, etc. as necessary for a complete grounding and bonding system.
- C. Where conductor size is not indicated, size to comply with NFPA 70 but not less than applicable minimum size requirements specified.
- D. Grounding System Resistance:
  - 1. Achieve specified grounding system resistance under normally dry conditions unless otherwise approved by DEDC, LLC. Precipitation within the previous 48 hours does not constitute normally dry conditions.
  - 2. Grounding Electrode System: Not greater than 5 ohms to ground, when tested according to IEEE 81 using "fall-of-potential" method.
  - 3. Between Grounding Electrode System and Major Electrical Equipment Frames, System Neutral, and Derived Neutral Points: Not greater than 0.5 ohms, when tested using "point-to-point" methods.
- E. Separately Derived System Grounding:
  - 1. Separately derived systems include, but are not limited to
    - a. Transformers (except autotransformers such as buck-boost transformers).
  - 2. Provide grounding electrode conductor to connect derived system grounded conductor to nearest effectively grounded metal building frame. Unless otherwise indicated, make connection at neutral (grounded) bus in source enclosure.
  - 3. Provide bonding jumper to connect derived system grounded conductor to nearest metal building frame and nearest metal water piping in the area served by the derived system, where not already used as a grounding electrode for the derived system. Make connection at same location as grounding electrode conductor connection.
  - 4. Where common grounding electrode conductor ground riser is used for tap connections to multiple separately derived systems, provide bonding jumper to connect the metal building frame and metal water piping in the area served by the derived system to the common grounding electrode conductor.
  - 5. Provide system bonding jumper to connect system grounded conductor to equipment ground bus. Make connection at same location as grounding electrode conductor connection. Do not make any other connections between neutral (grounded) conductors and ground on load side of separately derived system disconnect.
  - 6. Where the source and first disconnecting means are in separate enclosures, provide supply-side bonding jumper between source and first disconnecting means.
- F. Bonding and Equipment Grounding:
  - 1. Provide bonding for equipment grounding conductors, equipment ground busses, metallic equipment enclosures, metallic raceways and boxes, device grounding terminals, and other normally non-current-carrying conductive materials enclosing electrical conductors/equipment or likely to become energized as indicated and in accordance with NFPA 70.
  - 2. Provide green insulated copper equipment grounding conductor in each feeder and branch circuit raceway. Do not use raceways as sole equipment grounding conductor.
  - 3. Where circuit conductor sizes are increased for voltage drop, increase size of equipment grounding conductor proportionally in accordance with NFPA 70.
  - 4. Unless otherwise indicated, connect wiring device grounding terminal to branch circuit equipment grounding conductor and to outlet box with bonding jumper.
  - 5. All electrical equipment, devices and raceways shall form continuously grounded systems. Neutral and equipment grounding conductors shall be bonded together only at service entrances or at secondary sides of separately derived systems.

6. Terminate branch circuit equipment grounding conductors on solidly bonded equipment ground bus only. Do not terminate on neutral (grounded) or isolated/insulated ground bus.
7. Provide bonding jumper across expansion or expansion/deflection fittings provided to accommodate conduit movement.
8. Provide bonding for interior metal piping systems in accordance with NFPA 70. This includes, but is not limited to:
  - a. Metal water piping where not already effectively bonded to metal underground water pipe used as grounding electrode.
  - b. Metal gas piping. **NOTE:** Contractor shall ensure that interior metal gas piping is electrically isolated from underground metal gas piping in order to prevent underground gas piping from inadvertently becoming a grounding electrode as is prohibited by NFPA 70.
  - c. Metal process piping.
9. Provide bonding for interior metal air ducts.

## 2.02 GROUNDING AND BONDING COMPONENTS

- A. General Requirements:
  1. Provide products listed, classified, and labeled as suitable for the purpose intended.
  2. Provide products listed and labeled as complying with UL 467 where applicable.
- B. Conductors for Grounding and Bonding, in Addition to Requirements of Section 26 05 26:
  1. Use insulated copper conductors unless otherwise indicated.
    - a. Exceptions:
      - 1) Use bare copper conductors where installed underground in direct contact with earth.
      - 2) Use bare copper conductors where directly encased in concrete (not in raceway).
  2. Factory Pre-fabricated Bonding Jumpers: Furnished with factory-installed ferrules; size braided cables to provide equivalent gauge of specified conductors.
- C. Connectors for Grounding and Bonding:
  1. Description: Connectors appropriate for the application and suitable for the conductors and items to be connected, listed and labeled as complying with UL 467.
  2. Unless otherwise indicated, use exothermic welded connections or compression connectors for underground, concealed and other inaccessible connections.
  3. Unless otherwise indicated, use mechanical connectors or compression connectors for accessible connections.
  4. Manufacturers - Mechanical and Compression Connectors:
    - a. allG Fabrication: [www.allgfab.com/#sle](http://www.allgfab.com/#sle).
    - b. Burndy LLC: [www.burndy.com](http://www.burndy.com).
    - c. Harger Lightning & Grounding: [www.harger.com/#sle](http://www.harger.com/#sle).
    - d. nVent ERICO: [www.nvent.com/#sle](http://www.nvent.com/#sle).
    - e. Thomas & Betts Corporation: [www.tnb.com/#sle](http://www.tnb.com/#sle).
    - f. Substitutions: See Section 01 60 00 - Product Requirements.
  5. Manufacturers - Exothermic Welded Connections:
    - a. Burndy LLC: [www.burndy.com](http://www.burndy.com).
    - b. nVent ERICO; Cadweld: [www.nvent.com/#sle](http://www.nvent.com/#sle).
    - c. thermOweld, subsidiary of Continental Industries; division of Burndy LLC: [www.thermoweld.com/#sle](http://www.thermoweld.com/#sle).
    - d. Substitutions: See Section 01 60 00 - Product Requirements.

## PART 3 EXECUTION

### 3.01 EXAMINATION

- A. Verify that work likely to damage grounding and bonding system components has been completed.

- B. Verify that field measurements are as indicated.
- C. Verify that conditions are satisfactory for installation prior to starting work.
- D. Verify existing conditions prior to beginning work.

### **3.02 INSTALLATION**

- A. Install products in accordance with manufacturer's instructions.
- B. Perform work in accordance with NECA 1 (general workmanship).
- C. Make grounding and bonding connections using specified connectors.
  - 1. Remove appropriate amount of conductor insulation for making connections without cutting, nicking or damaging conductors. Do not remove conductor strands to facilitate insertion into connector.
  - 2. Remove nonconductive paint, enamel, or similar coating at threads, contact points, and contact surfaces.
  - 3. Exothermic Welds: Make connections using molds and weld material suitable for the items to be connected in accordance with manufacturer's recommendations.
  - 4. Mechanical Connectors: Secure connections according to manufacturer's recommended torque settings.
  - 5. Compression Connectors: Secure connections using manufacturer's recommended tools and dies.
- D. Identify grounding and bonding system components in accordance with Section 26 05 53.
- E. Provide bonding to meet requirements described in Quality Assurance.
- F. Equipment Grounding Conductor: Provide separate green insulated copper equipment grounding conductor within each feeder and branch circuit raceway. Terminate each end on suitable lug, bus, or bushing.

### **3.03 FIELD QUALITY CONTROL**

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Inspect and test in accordance with NETA ATS except Section 4.
- C. Perform inspections and tests listed in NETA ATS, Section 7.13.
- D. Perform ground electrode resistance tests under normally dry conditions. Precipitation within the previous 48 hours does not constitute normally dry conditions.
- E. Investigate and correct deficiencies where measured ground resistances do not comply with specified requirements.

**END OF SECTION**

**SECTION 26 05 29  
HANGERS AND SUPPORTS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Support and attachment requirements and components for equipment, conduit, cable, boxes, and other electrical work.

**1.02 RELATED REQUIREMENTS**

- A. Section 03 30 00 - Cast-in-Place Concrete: Concrete equipment pads.
- B. Section 26 05 33.13 - Conduit for Electrical Systems: Additional support and attachment requirements for conduits.
- C. Section 26 05 33.16 - Boxes for Electrical Systems: Additional support and attachment requirements for boxes.
- D. Section 26 51 00 - Interior Lighting: Additional support and attachment requirements for interior luminaires.
- E. Conduit and equipment supports.
- F. Anchors and fasteners.

**1.03 REFERENCE STANDARDS**

- A. ASTM A123/A123M - Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products; 2015.
- B. ASTM A153/A153M - Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware; 2009.
- C. ASTM B633 - Standard Specification for Electrodeposited Coatings of Zinc on Iron and Steel; 2013.
- D. MFMA-4 - Metal Framing Standards Publication; 2004.
- E. NECA 1 - Standard for Good Workmanship in Electrical Construction; 2010.
- F. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- G. UL 5B - Strut-Type Channel Raceways and Fittings; Current Edition, Including All Revisions.

**1.04 ADMINISTRATIVE REQUIREMENTS**

- A. Coordination:
  - 1. Coordinate sizes and arrangement of supports and bases with actual equipment and components to be installed.
  - 2. Coordinate work to provide additional framing and materials required for installation.
  - 3. Coordinate compatibility of support and attachment components with mounting surfaces at installed locations.
  - 4. Coordinate arrangement of supports with ductwork, piping, equipment and other potential conflicts.
  - 5. Notify DEDC, LLC of conflicts with or deviations from Contract Documents. Obtain direction before proceeding with work.
- B. Sequencing:
  - 1. Do not install products on or provide attachment to concrete surfaces until concrete has cured; see Section 03 30 00.

**1.05 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements for submittal procedures.

- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for channel/strut framing systems, nonpenetrating rooftop supports, and post-installed concrete/masonry anchors.
- C. Shop Drawings: Include details for fabricated hangers and supports where materials or methods other than those indicated are proposed for substitution.

#### **1.06 QUALITY ASSURANCE**

- A. Maintain at project site one copy of each referenced document that prescribes execution requirements.
- B. Product Listing Organization Qualifications: Organization recognized by OSHA as Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

#### **1.07 DELIVERY, STORAGE, AND HANDLING**

- A. Receive, inspect, handle, and store products in accordance with manufacturer's instructions.

### **PART 2 PRODUCTS**

#### **2.01 SUPPORT AND ATTACHMENT COMPONENTS**

- A. General Requirements:
  - 1. Comply with the following. Where requirements differ, comply with most stringent.
    - a. NFPA 70.
    - b. Applicable building code.
    - c. Requirements of authorities having jurisdiction.
  - 2. Provide required hangers, supports, anchors, fasteners, fittings, accessories, and hardware as necessary for complete installation of electrical work.
  - 3. Provide products listed, classified, and labeled as suitable for purpose intended, where applicable.
  - 4. Where support and attachment component types and sizes are not indicated, select in accordance with manufacturer's application criteria as required for the load to be supported with a minimum safety factor of five times the applied force. Include consideration for vibration, equipment operation, and shock loads where applicable.
  - 5. Do not use products for applications other than as permitted by NFPA 70 and product listing.
  - 6. Do not use wire, chain, perforated pipe strap, or wood for permanent supports unless specifically indicated or permitted.
  - 7. Steel Components: Use corrosion-resistant materials suitable for environment where installed.
    - a. Indoor Dry Locations: Use zinc-plated steel or approved equivalent unless otherwise indicated.
    - b. Outdoor and Damp or Wet Indoor Locations: Use galvanized steel, stainless steel, or approved equivalent unless otherwise indicated.
    - c. Zinc-Plated Steel: Electroplated in accordance with ASTM B633.
    - d. Galvanized Steel: Hot-dip galvanized after fabrication in accordance with ASTM A123/A123M or ASTM A153/A153M.
- B. Conduit and Cable Supports: Straps and clamps suitable for conduit or cable to be supported.
  - 1. Manufacturers:
    - a. ABB: [www.electrification.us.abb.com/#sle](http://www.electrification.us.abb.com/#sle).
    - b. Eaton Corporation: [www.eaton.com/#sle](http://www.eaton.com/#sle).
    - c. Emerson Electric Co; O-Z/Gedney: [www.emerson.com/#sle](http://www.emerson.com/#sle).
    - d. HoldRite, a brand of Reliance Worldwide Corporation: [www.holdrite.com/#sle](http://www.holdrite.com/#sle).
    - e. nVent; Caddy: [www.nvent.com/#sle](http://www.nvent.com/#sle).
    - f. Substitutions: See Section 01 60 00 - Product Requirements.
  - 2. Conduit Straps: One-hole or two-hole type; steel or malleable iron.
  - 3. Conduit Clamps: Bolted type unless otherwise indicated.

4. Products:
- Gripple, Inc; Universal Bracket: [www.gripple.com/#sle](http://www.gripple.com/#sle).
  - Gripple, Inc; Fast Trak: [www.gripple.com/#sle](http://www.gripple.com/#sle).
  - Gripple, Inc; Universal Clamp (Threaded): [www.gripple.com/#sle](http://www.gripple.com/#sle).
  - Gripple, Inc; Low Profile Bracket Kits: [www.gripple.com/#sle](http://www.gripple.com/#sle).
  - Substitutions: See Section 01 60 00 - Product Requirements.
- C. Outlet Box Supports: Hangers and brackets suitable for boxes to be supported.
1. Manufacturers:
- ABB: [www.electrification.us.abb.com/#sle](http://www.electrification.us.abb.com/#sle).
  - Eaton Corporation: [www.eaton.com/#sle](http://www.eaton.com/#sle).
  - Emerson Electric Co; O-Z/Gedney: [www.emerson.com/#sle](http://www.emerson.com/#sle).
  - HoldRite, a brand of Reliance Worldwide Corporation: [www.holdrite.com/#sle](http://www.holdrite.com/#sle).
  - nVent; Caddy: [www.nvent.com/#sle](http://www.nvent.com/#sle).
  - Substitutions: See Section 01 60 00 - Product Requirements.
- D. Metal Channel/Strut Framing Systems:
1. Manufacturers:
- ABB: [www.electrification.us.abb.com/#sle](http://www.electrification.us.abb.com/#sle).
  - Atkore International Inc; Unistrut: [www.unistrut.us/#sle](http://www.unistrut.us/#sle).
  - Custom Strut and Roll Forming, LLC: [www.customstrut.com/#sle](http://www.customstrut.com/#sle).
  - Eaton Corporation: [www.eaton.com/#sle](http://www.eaton.com/#sle).
  - Elgen Manufacturing Company, Inc: [www.elgenmfg.com/#sle](http://www.elgenmfg.com/#sle).
  - Substitutions: See Section 01 60 00 - Product Requirements.
  - Source Limitations: Furnish channel/strut and associated fittings, accessories, and hardware produced by single manufacturer.
2. Description: Factory-fabricated, continuous-slot, metal channel/strut and associated fittings, accessories, and hardware required for field assembly of supports.
3. Comply with MFMA-4.
4. Channel Material:
- Indoor Dry Locations: Use painted steel, zinc-plated steel, or galvanized steel.
5. Minimum Channel Thickness: Steel sheet, 12 gauge, 0.1046 inch.
6. Minimum Channel Dimensions: 1-5/8 inch wide by 13/16 inch high.
- E. Hanger Rods: Threaded, zinc-plated steel unless otherwise indicated.
1. Minimum Size, Unless Otherwise Indicated or Required:
- Equipment Supports: 1/2-inch diameter.
  - Single Conduit up to 1-inch (27 mm) Trade Size: 1/4-inch diameter.
  - Single Conduit Larger than 1-inch (27 mm) Trade Size: 3/8-inch diameter.
  - Trapeze Support for Multiple Conduits: 3/8-inch diameter.
  - Outlet Boxes: 1/4-inch diameter.
  - Luminaires: 1/4-inch diameter.
- F. Anchors and Fasteners:
1. Manufacturers - Mechanical Anchors:
- Dewalt: [anchors.dewalt.com/#sle](http://anchors.dewalt.com/#sle).
  - Hilti, Inc: [www.hilti.com/#sle](http://www.hilti.com/#sle).
  - ITW Red Head, a division of Illinois Tool Works, Inc: [www.itwredhead.com/#sle](http://www.itwredhead.com/#sle).
  - Simpson Strong-Tie Company Inc: [www.strongtie.com/#sle](http://www.strongtie.com/#sle).
  - Substitutions: See Section 01 60 00 - Product Requirements.
2. Unless otherwise indicated and where not otherwise restricted, use anchor and fastener types indicated for specified applications.
3. Concrete: Use preset concrete inserts, expansion anchors, or screw anchors.
4. Solid or Grout-Filled Masonry: Use expansion anchors or screw anchors.
5. Hollow Masonry: Use toggle bolts.

6. Hollow Stud Walls: Use toggle bolts.
7. Steel: Use beam clamps, machine bolts, or welded threaded studs.
8. Sheet Metal: Use sheet metal screws.
9. Wood: Use wood screws.
10. Plastic and lead anchors are not permitted.
11. Preset Concrete Inserts: Continuous metal channel/strut and spot inserts specifically designed to be cast in concrete ceilings, walls, and floors.
  - a. Manufacturer: Same as manufacturer of metal channel/strut framing system.
  - b. Comply with MFMA-4.
  - c. Channel Material: Use galvanized steel.
  - d. Minimum Channel Thickness: Steel sheet, 12 gauge, 0.1046 inch minimum base metal thickness.
12. Post-Installed Concrete and Masonry Anchors: Evaluated and recognized by ICC Evaluation Service, LLC (ICC-ES) for compliance with applicable building code.

## 2.02 MATERIALS

- A. Hangers, Supports, Anchors, and Fasteners - General: Corrosion-resistant materials of size and type adequate to carry the loads of equipment and conduit, including weight of wire in conduit.
- B. Supports: Fabricated of structural steel or formed steel members; galvanized.
- C. Anchors and Fasteners:

### ANCHOR HARDWARE TABLE

## PART 3 EXECUTION

### 3.01 EXAMINATION

- A. Verify that field measurements are as indicated.
- B. Verify that mounting surfaces are ready to receive support and attachment components.
- C. Verify that conditions are satisfactory for installation prior to starting work.

### 3.02 INSTALLATION

- A. Install products in accordance with manufacturer's instructions.
- B. Install hangers and supports in accordance with NECA 1.
- C. Install anchors and fasteners in accordance with ICC Evaluation Services, LLC (ICC-ES) evaluation report conditions of use where applicable.
- D. Provide independent support from building structure. Do not provide support from piping, ductwork, or other systems.
- E. Unless specifically indicated or approved by DEDC, LLC, do not provide support from suspended ceiling support system or ceiling grid.
- F. Unless specifically indicated or approved by DEDC, LLC, do not provide support from roof deck.
- G. Do not penetrate or otherwise notch or cut structural members without approval of Structural Engineer.
- H. Equipment Support and Attachment:
  1. Use metal, fabricated supports or supports assembled from metal channel/strut to support equipment as required.
  2. Use metal channel/strut secured to studs to support equipment surface mounted on hollow stud walls when wall strength is not sufficient to resist pull-out.
  3. Use metal channel/strut to support surface-mounted equipment in wet or damp locations to provide space between equipment and mounting surface.



4. Unless otherwise indicated, mount floor-mounted equipment on properly sized concrete pad 3 inches in height; see Section 03 30 00.
5. Securely fasten floor-mounted equipment. Do not install equipment such that it relies on its own weight for support.
- I. Conduit Support and Attachment: See Section 26 05 33.13 for additional requirements.
- J. Box Support and Attachment: See Section 26 05 33.16 for additional requirements.
- K. Interior Luminaire Support and Attachment: See Section 26 51 00 for additional requirements.
- L. Preset Concrete Inserts: Use manufacturer provided closure strips to inhibit concrete seepage during concrete pour.
- M. Secure fasteners in accordance with manufacturer's recommended torque settings.
- N. Remove temporary supports.
- O. Identify independent electrical component support wires above accessible ceilings with color distinguishable from ceiling support wires in accordance with NFPA 70.

### 3.03 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements for additional requirements.
- B. Inspect support and attachment components for damage and defects.
- C. Repair cuts and abrasions in galvanized finishes using zinc-rich paint recommended by manufacturer. Replace components that exhibit signs of corrosion.
- D. Correct deficiencies and replace damaged or defective support and attachment components.
- E. Install hangers and supports as required to adequately and securely support electrical system components, in a neat and workmanlike manner as specified in NECA 1.
  1. Do not fasten supports to pipes, ducts, mechanical equipment, or conduit.
  2. Do not drill or cut structural members.
- F. Rigidly weld support members or use hexagon-head bolts to present neat appearance with adequate strength and rigidity. Use spring lock washers under all nuts.
- G. Install surface-mounted cabinets and panelboards with minimum of four anchors.
- H. In wet and damp locations use steel channel supports to stand cabinets and panelboards 1-5/8" off wall.
- I. Use sheet metal channel to bridge studs above and below cabinets and panelboards recessed in hollow partitions.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 26 05 33.13**  
**CONDUIT FOR ELECTRICAL SYSTEMS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Galvanized steel rigid metal conduit (RMC).
- B. Flexible metal conduit (FMC).
- C. Liquidtight flexible metal conduit (LFMC).
- D. Galvanized steel electrical metallic tubing (EMT).
- E. Conduit, fittings and conduit bodies.

**1.02 RELATED REQUIREMENTS**

- A. Section 07 84 00 - Firestopping.
- B. Section 26 05 19 - Low-Voltage Electrical Power Conductors and Cables: Metal clad cable (Type MC), including uses permitted..
- C. Section 26 05 26 - Grounding and Bonding for Electrical Systems
  - 1. Includes additional requirements for fittings for grounding and bonding.
- D. Section 26 05 29 - Hangers and Supports.
- E. Section 26 05 33.16 - Boxes for Electrical Systems.
- F. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.

**1.03 REFERENCE STANDARDS**

- A. ANSI C80.1 - American National Standard for Electrical Rigid Steel Conduit (ERSC); 2005.
- B. ANSI C80.3 - American National Standard for Steel Electrical Metallic Tubing (EMT); 2005.
- C. NECA 1 - Standard for Good Workmanship in Electrical Construction; 2010.
- D. NECA 101 - Standard for Installing Steel Conduits (Rigid, IMC, EMT); 2013.
- E. NEMA FB 1 - Fittings, Cast Metal Boxes, and Conduit Bodies for Conduit, Electrical Metallic Tubing, and Cable; 2012.
- F. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- G. UL 1 - Flexible Metal Conduit; Current Edition, Including All Revisions.
- H. UL 6 - Electrical Rigid Metal Conduit-Steel; Current Edition, Including All Revisions.
- I. UL 360 - Liquid-Tight Flexible Steel Conduit; Current Edition, Including All Revisions.
- J. UL 514B - Conduit, Tubing, and Cable Fittings; Current Edition, Including All Revisions.
- K. UL 757 - Electrical Metallic Tubing-Steel; Current Edition, Including All Revisions.
- L. UL 2419 - Outline of Investigation for Electrically Conductive Corrosion Resistant Compounds; Current Edition, Including All Revisions.

**1.04 ADMINISTRATIVE REQUIREMENTS**

- A. Coordination:
  - 1. Coordinate minimum sizes of conduits with actual type and quantity of conductors to be installed, including adjustments for conductor sizes increased for voltage drop.
  - 2. Coordinate arrangement of conduits with structural members, ductwork, piping, equipment, and other potential conflicts.
  - 3. Verify exact conduit termination locations required for boxes, enclosures, and equipment.
  - 4. Coordinate work to provide roof penetrations that preserve integrity of roofing system and do not void roof warranty.

5. Notify DEDC, LLC of conflicts with or deviations from Contract Documents. Obtain direction before proceeding with work.
- B. Sequencing:
  1. Do not begin installation of conductors and cables until installation of conduit between termination points is complete.

#### **1.05 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements for submittals procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for conduits and fittings.
- C. Shop Drawings:
- D. Project Record Documents: Record actual routing for conduits 2 inch (53 mm) trade size and larger.

#### **1.06 QUALITY ASSURANCE**

- A. Documents at Project Site: Maintain at project site one copy of manufacturer's instructions and shop drawings.
- B. Product Listing Organization Qualifications: Organization recognized by OSHA as Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

#### **1.07 DELIVERY, STORAGE, AND HANDLING**

- A. See Section 01 74 19 - Construction Waste Management and Disposal for packaging waste requirements.
- B. Receive, inspect, handle, and store conduit and fittings in accordance with manufacturer's instructions.
- C. Accept conduit on site. Inspect for damage.
- D. Protect conduit from corrosion and entrance of debris by storing above grade. Provide appropriate covering.

### **PART 2 PRODUCTS**

#### **2.01 CONDUIT APPLICATIONS**

- A. Do not use conduit and associated fittings for applications other than as permitted by NFPA 70, manufacturer's instructions, and product listing.
- B. Unless otherwise indicated and where not otherwise restricted, use conduit types indicated for specified applications. Where more than one listed application applies, comply with most restrictive requirements. Where conduit type for particular application is not specified, use galvanized steel rigid metal conduit.
- C. Concealed Within Masonry Walls: Use galvanized steel rigid metal conduit or electrical metallic tubing (EMT).
- D. Concealed Within Hollow Stud Walls: Use galvanized steel rigid metal conduit or electrical metallic tubing (EMT).
- E. Concealed Above Accessible Ceilings: Use galvanized steel rigid metal conduit or electrical metallic tubing (EMT).
- F. Interior, Damp or Wet Locations: Use galvanized steel rigid metal conduit.
- G. Exposed, Interior (including unfinished spaces), Not Subject to Physical Damage: Use electrical metallic tubing (EMT).
- H. Exposed, Interior (including unfinished spaces), Subject to Physical Damage: Use galvanized steel rigid metal conduit.
  1. Locations subject to physical damage include, but are not limited to:

- a. Where exposed below 8 feet, except within electrical and communication rooms or closets.
  - b. Where exposed below 20 feet in warehouse areas.
- I. Flexible Connections to Luminaires Above Accessible Ceilings: Use flexible metal conduit (FMC).
  - 1. Maximum Length: 6 feet.
- J. Flexible Connections to Vibrating Equipment:
  - 1. Dry Locations: Use flexible metal conduit (FMC).
  - 2. Damp, Wet, or Corrosive Locations: Use liquidtight flexible metal conduit (LFMC).
  - 3. Maximum Length: 18 inches unless otherwise indicated.
  - 4. Vibrating equipment includes, but is not limited to:
    - a. Transformers.
    - b. Motors.
- K. Fished in Existing Walls, Where Necessary: Use flexible metal conduit.

## **2.02 CONDUIT - GENERAL REQUIREMENTS**

- A. Comply with NFPA 70.
- B. Existing Work: Where existing conduits are indicated to be reused, they may be reused only where they comply with specified requirements, are free from corrosion, and integrity is verified by pulling mandrel through them.
- C. Fittings for Grounding and Bonding: See Section 26 05 26 for additional requirements.
- D. Provide conduit, fittings, supports, and accessories required for complete raceway system.
- E. Provide products listed, classified, and labeled as suitable for purpose intended.
- F. Minimum Conduit Size, Unless Otherwise Indicated:
  - 1. Branch Circuits: 3/4-inch trade size.
  - 2. Branch Circuit Homeruns: 3/4-inch trade size.
  - 3. Control Circuits: 1/2-inch trade size.
  - 4. Flexible Connections to Luminaires: 3/8-inch trade size.
- G. Where conduit size is not indicated, size to comply with NFPA 70 but not less than applicable minimum size requirements specified.

## **2.03 GALVANIZED STEEL RIGID METAL CONDUIT (RMC)**

- A. Manufacturers:
  - 1. Allied Tube & Conduit, a division of Atkore International: [www.alliedeg.com/#sle](http://www.alliedeg.com/#sle).
  - 2. Nucor Tubular Products: [www.nucortubular.com/#sle](http://www.nucortubular.com/#sle).
  - 3. Western Tube, a division of Zekelman Industries: [www.westerntube.com/#sle](http://www.westerntube.com/#sle).
  - 4. Wheatland Tube, a division of Zekelman Industries: [www.wheatland.com/#sle](http://www.wheatland.com/#sle).
  - 5. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: NFPA 70, Type RMC galvanized steel rigid metal conduit complying with ANSI C80.1 and listed and labeled as complying with UL 6.
- C. Fittings:
  - 1. Manufacturers:
    - a. ABB; T&B: [www.electrification.us.abb.com/#sle](http://www.electrification.us.abb.com/#sle).
    - b. Allied Tube & Conduit, a division of Atkore International: [www.alliedeg.us/#sle](http://www.alliedeg.us/#sle).
    - c. Bridgeport Fittings Inc: [www.bptfittings.com/#sle](http://www.bptfittings.com/#sle).
    - d. Emerson Electric Co; O-Z/Gedney: [www.emerson.com/#sle](http://www.emerson.com/#sle).
    - e. Substitutions: See Section 01 60 00 - Product Requirements.
  - 2. Nonhazardous Locations: Use fittings complying with NEMA FB 1 and listed and labeled as complying with UL 514B or UL 6.
  - 3. Material: Use steel or malleable iron.

- a. Do not use die cast zinc fittings.
- 4. Connectors and Couplings: Use threaded type fittings only. Threadless fittings, including set screw and compression/gland types, are not permitted.

#### **2.04 FLEXIBLE METAL CONDUIT (FMC)**

- A. Manufacturers:
  - 1. AFC Cable Systems, Inc: [www.afcweb.com](http://www.afcweb.com).
  - 2. Electri-Flex Company: [www.electriflex.com](http://www.electriflex.com).
  - 3. International Metal Hose: [www.metalhose.com](http://www.metalhose.com).
  - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: NFPA 70, Type FMC standard-wall steel flexible metal conduit listed and labeled as complying with UL 1, and listed for use in classified firestop systems.
- C. Fittings:
  - 1. Manufacturers:
    - a. ABB; T&B: [www.electrification.us.abb.com/#sle](http://www.electrification.us.abb.com/#sle).
    - b. Bridgeport Fittings, LLC: [www.bptfittings.com/#sle](http://www.bptfittings.com/#sle).
    - c. Emerson Electric Co; O-Z/Gedney: [www.emerson.com/#sle](http://www.emerson.com/#sle).
    - d. Substitutions: See Section 01 60 00 - Product Requirements.
  - 2. Description: Fittings complying with NEMA FB 1 and listed and labeled as complying with UL 514B.
  - 3. Material: Use steel or malleable iron.
    - a. Do not use die cast zinc fittings.
- D. Description: Interlocked steel construction.
- E. Fittings: NEMA FB 1.

#### **2.05 LIQUIDTIGHT FLEXIBLE METAL CONDUIT (LFMC)**

- A. Manufacturers:
  - 1. AFC Cable Systems, Inc: [www.afcweb.com](http://www.afcweb.com).
  - 2. Electri-Flex Company: [www.electriflex.com](http://www.electriflex.com).
  - 3. International Metal Hose: [www.metalhose.com](http://www.metalhose.com).
  - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: NFPA 70, Type LFMC polyvinyl chloride (PVC) jacketed steel flexible metal conduit listed and labeled as complying with UL 360.
- C. Fittings:
  - 1. Manufacturers:
    - a. ABB; T&B: [www.electrification.us.abb.com/#sle](http://www.electrification.us.abb.com/#sle).
    - b. Bridgeport Fittings, LLC: [www.bptfittings.com/#sle](http://www.bptfittings.com/#sle).
    - c. Emerson Electric Co; O-Z/Gedney: [www.emerson.com/#sle](http://www.emerson.com/#sle).
    - d. Substitutions: See Section 01 60 00 - Product Requirements.
  - 2. Description: Fittings complying with NEMA FB 1 and listed and labeled as complying with UL 514B.
  - 3. Material: Use steel or malleable iron.
    - a. Do not use die cast zinc fittings.
- D. Description: Interlocked steel construction with PVC jacket.
- E. Fittings: NEMA FB 1.

#### **2.06 GALVANIZED STEEL ELECTRICAL METALLIC TUBING (EMT)**

- A. Manufacturers:
  - 1. Allied Tube & Conduit: [www.alliedeg.com](http://www.alliedeg.com).
  - 2. Nucor Tubular Products: [www.nucortubular/#sle](http://www.nucortubular/#sle).
  - 3. Western Tube, a division of Zekelman Industries: [www.westerntube.com/#sle](http://www.westerntube.com/#sle).

4. Wheatland Tube Company: [www.wheatland.com](http://www.wheatland.com).
  5. Triangle
  6. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: NFPA 70, Type EMT galvanized steel electrical metallic tubing complying with ANSI C80.3 and listed and labeled as complying with UL 797.
- C. Fittings:
1. Manufacturers:
    - a. ABB; T&B: [www.electrification.us.abb.com/#sle](http://www.electrification.us.abb.com/#sle).
    - b. Allied Tube & Conduit, a division of Atkore International: [www.alliedeg.us/#sle](http://www.alliedeg.us/#sle).
    - c. Bridgeport Fittings, LLC: [www.bptfittings.com/#sle](http://www.bptfittings.com/#sle).
    - d. Emerson Electric Co; O-Z/Gedney: [www.emerson.com/#sle](http://www.emerson.com/#sle).
    - e. Substitutions: See Section 01 60 00 - Product Requirements.
  2. Description: Fittings complying with NEMA FB 1 and listed and labeled as complying with UL 514B.
  3. Material: Use steel or malleable iron.
    - a. Do not use die cast zinc fittings.
  4. Connectors and Couplings: Use compression/gland or set screw type.
    - a. Do not use indenter type connectors and couplings.
    - b. Do not use set-screw type connectors and couplings.
- D. Description: ANSI C80.3; galvanized tubing.
- E. Fittings and Conduit Bodies: NEMA FB 1; steel or malleable iron compression type.

## 2.07 ACCESSORIES

- A. Conduit Joint Compound: Corrosion-resistant, electrically conductive compound listed as complying with UL 2419; suitable for use with conduit to be installed.
- B. Pull Strings: Use nylon or polyester tape with average breaking strength of not less than 1,250 lbf.
- C. Foam Conduit Sealant:
1. Removable, two-part, closed-cell foam, specifically designed for sealing conduit openings against water, moisture, gases, and dust.
  2. Suitable for use with conductors/cables and associated insulation/jackets to be installed.
  3. Rated to hold minimum of 10 ft water head pressure.
  4. Products:
    - a. American Polywater Corporation; Polywater AFT Foam Duct Sealant: [www.polywater.com/#sle](http://www.polywater.com/#sle).
    - b. American Polywater Corporation; Polywater FST Foam Duct Sealant: [www.polywater.com/#sle](http://www.polywater.com/#sle).
    - c. Substitutions: See Section 01 60 00 - Product Requirements.
- D. Conduit Mechanical Seals:
1. Listed as complying with UL 514B.
  2. Specifically designed for sealing conduit openings against water, moisture, gases, and dust.
  3. Suitable for sealing around conductors/cables to be installed.
  4. Products:
    - a. American Polywater Corporation; PHRD SG Mechanical Seals: [www.polywater-haufftechnik.com/#sle](http://www.polywater-haufftechnik.com/#sle).
    - b. Substitutions: See Section 01 60 00 - Product Requirements.
- E. Sealing Systems for Concrete Penetrations:
1. Sleeves: Provide water stop ring or cement coating that bonds to concrete to prevent water infiltration.
  2. Rate for minimum of 40 psig; suitable for sealing around conduits to be installed.

3. Products:
  - a. American Polywater Corporation; PZVR Cement-Coated Concrete Wall Sleeves: [www.polywater-haufftechnik.com/#sle](http://www.polywater-haufftechnik.com/#sle).
  - b. American Polywater Corporation; PHSD Mechanical Seals: [www.polywater-haufftechnik.com/#sle](http://www.polywater-haufftechnik.com/#sle).
  - c. American Polywater Corporation; PHSI 150 Varia Double Wall Inserts: [www.polywater-haufftechnik.com/#sle](http://www.polywater-haufftechnik.com/#sle).
  - d. American Polywater Corporation; PGKD Modular Seals: [www.polywater-haufftechnik.com/#sle](http://www.polywater-haufftechnik.com/#sle).
  - e. Substitutions: See Section 01 60 00 - Product Requirements.
- F. Firestop Sleeves: Listed; provide as required to preserve fire resistance rating of building elements.
  1. Products:
    - a. HoldRite, a brand of Reliance Worldwide Corporation; HydroFlame Pro Series/HydroFlame Custom Built: [www.holdrite.com/#sle](http://www.holdrite.com/#sle).
    - b. Substitutions: See Section 01 60 00 - Product Requirements.

### PART 3 EXECUTION

#### 3.01 EXAMINATION

- A. Verify that field measurements are as indicated.
- B. Verify that mounting surfaces are ready to receive conduits.
- C. Verify that conditions are satisfactory for installation prior to starting work.
- D. Conduit routing is shown on drawings in approximate locations unless dimensioned. Route as required to complete wiring system.

#### 3.02 INSTALLATION

- A. Install products in accordance with manufacturer's instructions.
- B. All conduit penetrations into equipment enclosures shall be made by the Electrical Contractor.
- C. Install conduit securely in a neat and workmanlike manner in accordance with NECA 1.
- D. Install galvanized steel rigid metal conduit (RMC) in accordance with NECA 101.
- E. Conduit Routing:
  1. Unless dimensioned, conduit routing indicated is diagrammatic.
  2. When conduit designation is indicated without specific routing, determine exact routing required.
  3. Conceal all conduits within finished walls, ceilings and floors unless specifically indicated to be exposed.
  4. Conduits in the following areas may be exposed, unless otherwise indicated:
    - a. Electrical rooms.
    - b. Mechanical equipment rooms.
    - c. Within joists in areas with no ceiling.
  5. Unless otherwise approved, do not route exposed conduits:
    - a. Across floors.
    - b. Across roofs.
    - c. Across top of parapet walls.
    - d. Across building exterior surfaces.
  6. Conduits installed underground or embedded in concrete may be routed in shortest possible manner unless otherwise indicated. Route other conduits parallel or perpendicular to building structure and surfaces, following surface contours where practical.
  7. Arrange conduit to maintain adequate headroom, clearances, and access.



8. Arrange conduit to provide no more than the equivalent of four 90 degree bends between pull points. Use conduit bodies to make sharp changes in direction, as around beams. Use hydraulic one-shot bender to fabricate bends in metal conduit larger than 2 inch size.
  9. Arrange conduit to provide no more than 150 feet between pull points.
  10. Route conduits above water and drain piping where possible.
  11. Arrange conduit to prevent moisture traps. Provide drain fittings at low points and at sealing fittings where moisture may collect.
  12. Maintain minimum clearance of 6 inches between conduits and piping for other systems.
  13. Maintain minimum clearance of 12 inches between conduits and hot surfaces. This includes, but is not limited to:
    - a. Heaters.
    - b. Hot water piping.
    - c. Flues.
  14. Group parallel conduits in same area on common rack.
- F. Conduit Support:
1. Secure and support conduits in accordance with NFPA 70 using suitable supports and methods approved by authorities having jurisdiction; see Section 26 05 29.
  2. Provide independent support from building structure. Do not provide support from piping, ductwork, or other systems.
  3. Installation Above Suspended Ceilings: Do not provide support from ceiling support system. Do not provide support from ceiling grid or allow conduits to lay on ceiling tiles.
  4. Use conduit strap to support single surface-mounted conduit.
    - a. Use clamp back spacer with conduit strap for damp and wet locations to provide space between conduit and mounting surface.
  5. Use metal channel/strut with accessory conduit clamps to support multiple parallel surface-mounted conduits.
  6. Use conduit clamp to support single conduit from beam clamp or threaded rod.
  7. Use trapeze hangers assembled from threaded rods and metal channel/strut with accessory conduit clamps to support multiple parallel suspended conduits.
  8. Use of spring steel conduit clips for support of conduits is not permitted.
  9. Use of wire for support of conduits is not permitted. Remove all wire used for temporary supports.
  10. Use of perforated pipe straps for support of conduits is not permitted.
  11. Where conduit support intervals specified in NFPA 70 and NECA standards differ, comply with most stringent requirements.
- G. Connections and Terminations:
1. Use fittings compatible with conduit used and suitable for location.
  2. Use approved zinc-rich paint or conduit joint compound on field-cut threads of galvanized steel conduits prior to making connections.
  3. Where two threaded conduits must be joined and neither can be rotated, use three-piece couplings or split couplings. Do not use running threads.
  4. Use suitable adapters where required to transition from one type of conduit to another.
  5. Provide drip loops for liquidtight flexible conduit connections to prevent drainage of liquid into connectors.
  6. Terminate threaded conduits in boxes and enclosures using threaded hubs or double lock nuts for dry locations and raintight hubs for wet locations.
  7. Provide insulating bushings, insulated throats, or listed metal fittings with smooth, rounded edges at conduit terminations to protect conductors.
  8. Bring conduit to shoulders of fittings. Secure joints and connections tightly to provide maximum mechanical strength and electrical continuity. Use bonding bushings or wedges at connections subject to vibration.
- H. Penetrations:

1. Do not penetrate or otherwise notch or cut structural members, including footings and grade beams, without approval of Structural Engineer.
2. All penetrations through floors or walls shall be core-drilled. Use of jack hammers shall not be permitted. Maximum hole diameters shall not exceed 6 inches. All holes shall be spaced at least 18 inches apart in all directions. Re-use of existing penetrations shall be permitted.
3. Prior to any core drilling through floors or walls, the Electrical Contractor shall visually survey both sides to determine if any pipes, ducts or electrical utilities exist that may present obstacles. The Electrical Contractor shall also identify locations of existing concrete slab reinforcement or in-slab utilities using a pachometer, x-ray or similar device. All core-drilled penetrations shall be a minimum of 3 inches away from existing concrete slab reinforcement or in-slab utilities.
4. Make penetrations perpendicular to surfaces unless otherwise indicated.
5. Provide steel sleeves for penetrations as indicated or as required to facilitate installation. Set sleeves flush with exposed surfaces unless otherwise indicated or required.
6. Conceal bends for conduit risers emerging above ground.
7. Where conduits penetrate waterproof membrane, seal as required to maintain integrity of membrane.
8. Provide metal escutcheon plates for conduit penetrations exposed to public view.
9. Install firestopping to preserve fire resistance rating of partitions and other elements, using materials and methods specified in Section 07 84 00.
- I. Stub-Up Connections for Equipment: Extend conductors to equipment with rigid metal conduit (RMC). Flexible metal conduit (FMC) or liquidtight flexible metal conduit (LFMC) may be used 6 inches above the floor.
- J. Conduit Movement Provisions: Where conduits are subject to movement, provide expansion and expansion/deflection fittings or approved flexible connections to prevent damage to enclosed conductors or connected equipment. This includes, but is not limited to:
  1. Where conduits cross structural joints intended for expansion, contraction, or deflection.
- K. Conduit Sealing:
  1. Use foam conduit sealant to prevent entry of moisture and gases. This includes, but is not limited to:
    - a. Where conduits enter building from outside.
    - b. Where service conduits enter building from underground distribution system.
    - c. Where conduits enter building from underground.
    - d. Where conduits may transport moisture to contact live parts.
  2. Where conduits cross barriers between areas of potential substantial temperature differential, use foam conduit sealant at accessible point near penetration to prevent condensation. This includes, but is not limited to:
    - a. Where conduits pass from outdoors into conditioned interior spaces.
    - b. Where conduits pass from unconditioned interior spaces into conditioned interior spaces.
    - c. Where conduits penetrate coolers or freezers.
- L. Provide pull string in each empty conduit and in conduits where conductors and cables are to be installed by others. Leave minimum slack of 12 inches at each end.
- M. Provide grounding and bonding of conduit in accordance with Section 26 05 26.
- N. Identify conduits; see Section 26 05 53.

### 3.03 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements for additional requirements.
- B. Repair cuts and abrasions in galvanized finishes using zinc-rich paint recommended by manufacturer. Replace components that exhibit signs of corrosion.
- C. Correct deficiencies and replace damaged or defective conduits.

**3.04 CLEANING**

- A. Clean interior of conduits to remove moisture and foreign matter.

**3.05 PROTECTION**

- A. Immediately after installation of conduit, use suitable manufactured plugs to provide protection from entry of moisture and foreign material and do not remove until ready for installation of conductors.
- B. Arrange supports to prevent misalignment during wiring installation.
- C. Cut conduit square using saw or pipecutter; de-burr cut ends.
- D. Use suitable caps to protect installed conduit against entrance of dirt and moisture.

**3.06 INTERFACE WITH OTHER PRODUCTS**

- A. Install conduit to preserve fire resistance rating of partitions and other elements, using materials and methods specified in Section 07 84 00.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 26 05 33.16**  
**BOXES FOR ELECTRICAL SYSTEMS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Outlet and device boxes up to 100 cubic inches, including those used as junction and pull boxes.
- B. Cabinets and enclosures, including junction and pull boxes larger than 100 cubic inches.
- C. Wall and ceiling outlet boxes.
- D. Pull and junction boxes.

**1.02 RELATED REQUIREMENTS**

- A. Section 07 84 00 - Firestopping.
- B. Section 26 05 26 - Grounding and Bonding for Electrical Systems.
- C. Section 26 05 29 - Hangers and Supports.
- D. Section 26 05 33.13 - Conduit for Electrical Systems:
  - 1. Conduit bodies and other fittings.
  - 2. Additional requirements for locating boxes to limit conduit length and/or number of bends between pulling points.
- E. Section 26 05 53 - Identification for Electrical Systems: identification products and requirements.
- F. Section 26 27 26 - Wiring Devices:
  - 1. Wall plates.
  - 2. Additional requirements for locating boxes for wiring devices.

**1.03 REFERENCE STANDARDS**

- A. NECA 1 - Standard for Good Workmanship in Electrical Construction; 2010.
- B. NECA 130 - Standard for Installing and Maintaining Wiring Devices; 2010.
- C. NEMA EN 10250 - Enclosures for Electrical Equipment (1000 Volts Maximum); 2024.
- D. NEMA FB 1 - Fittings, Cast Metal Boxes, and Conduit Bodies for Conduit, Electrical Metallic Tubing, and Cable; 2012.
- E. NEMA OS 1 - Sheet-Steel Outlet Boxes, Device Boxes, Covers, and Box Supports; 2013.
- F. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- G. UL 50 - Enclosures for Electrical Equipment, Non-Environmental Considerations; Current Edition, Including All Revisions.
- H. UL 50E - Enclosures for Electrical Equipment, Environmental Considerations; Current Edition, Including All Revisions.
- I. UL 508A - Industrial Control Panels; Current Edition, Including All Revisions.
- J. UL 514A - Metallic Outlet Boxes; Current Edition, Including All Revisions.

**1.04 ADMINISTRATIVE REQUIREMENTS**

- A. Coordination:
  - 1. Coordinate the work with other trades to avoid placement of ductwork, piping, equipment, or other potential obstructions within the dedicated equipment spaces and working clearances for electrical equipment required by NFPA 70.
  - 2. Coordinate arrangement of electrical equipment with the dimensions and clearance requirements of the actual equipment to be installed.

3. Coordinate minimum sizes of boxes with the actual installed arrangement of conductors, clamps, support fittings, and devices, calculated according to NFPA 70.
4. Coordinate minimum sizes of pull boxes with the actual installed arrangement of connected conduits, calculated according to NFPA 70.
5. Coordinate the placement of boxes with millwork, furniture, devices, equipment, etc. installed under other sections or by others.
6. Coordinate the work with other trades to preserve insulation integrity.
7. Coordinate the work with other trades to provide walls suitable for installation of flush-mounted boxes where indicated.
8. Notify DEDC, LLC of any conflicts with or deviations from Contract Documents. Obtain direction before proceeding with work.

#### **1.05 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for outlet and device boxes and junction and pull boxes.
- C. Project Record Documents: Record actual locations for pull boxes.
- D. Maintenance Materials: Furnish the following for State of Delaware OMB - Division of Facilities Management's use in maintenance of project.
  1. See Section 01 60 00 - Product Requirements, for additional provisions.

#### **1.06 QUALITY ASSURANCE**

- A. Comply with requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

#### **1.07 DELIVERY, STORAGE, AND HANDLING**

- A. Receive, inspect, handle, and store products in accordance with manufacturer's instructions.

### **PART 2 PRODUCTS**

#### **2.01 BOXES**

- A. General Requirements:
  1. Do not use boxes and associated accessories for applications other than as permitted by NFPA 70 and product listing.
  2. Provide all boxes, fittings, supports, and accessories required for a complete raceway system and to accommodate devices and equipment to be installed.
  3. Provide products listed, classified, and labeled as suitable for the purpose intended.
  4. Where box size is not indicated, size to comply with NFPA 70 but not less than applicable minimum size requirements specified.
  5. Provide grounding terminals within boxes where equipment grounding conductors terminate.
- B. Outlet and Device Boxes Up to 100 cubic inches, Including Those Used as Junction and Pull Boxes:
  1. Use sheet-steel boxes for concealed interior dry locations unless otherwise indicated or required.
  2. Use cast iron boxes or cast aluminum boxes for exposed interior dry locations, and for interior and exterior damp or wet locations unless otherwise indicated or required; furnish with compatible weatherproof gasketed covers.
  3. Use cast iron boxes or cast aluminum boxes where exposed galvanized steel rigid metal conduit is used.

4. Use suitable concrete type boxes where flush-mounted in concrete.
  5. Use suitable masonry type boxes where flush-mounted in masonry walls.
  6. Use raised covers suitable for the type of wall construction and device configuration where required.
  7. Use shallow boxes where required by the type of wall construction.
  8. Do not use "through-wall" boxes designed for access from both sides of wall.
  9. Sheet-Steel Boxes: Comply with NEMA OS 1, and list and label as complying with UL 514A.
  10. Cast Metal Boxes: Comply with NEMA FB 1, and list and label as complying with UL 514A; furnish with threaded hubs.
  11. Boxes for Supporting Luminaires and Ceiling Fans: Listed as suitable for the type and weight of load to be supported; furnished with fixture stud to accommodate mounting of luminaire where required.
  12. Boxes for Ganged Devices: Use multigang boxes of single-piece construction. Do not use field-connected gangable boxes unless specifically indicated or permitted.
  13. Minimum Box Size, Unless Otherwise Indicated:
    - a. Wiring Devices: 4 inch square by 2-1/8 inch deep (100 by 54 mm) trade size.
    - b. Communications Systems Outlets: 4 inch square by 2-1/8 inch (100 by 54 mm) trade size.
    - c. Ceiling Outlets: 4 inch octagonal or square by 2-1/8 inch deep (100 by 54 mm) trade size.
  14. Wall Plates: Comply with Section 26 27 26.
  15. Manufacturers:
    - a. Cooper Crouse-Hinds, a division of Eaton Corporation: [www.cooperindustries.com/#sle](http://www.cooperindustries.com/#sle).
    - b. Hubbell Incorporated; Bell Products: [www.hubbell-rtb.com](http://www.hubbell-rtb.com).
    - c. Hubbell Incorporated; RACO Products: [www.hubbell-rtb.com](http://www.hubbell-rtb.com).
    - d. O-Z/Gedney, a brand of Emerson Electric Co: [www.emerson.com/#sle](http://www.emerson.com/#sle).
    - e. Thomas & Betts Corporation; Steel City Products: [www.tnb.com/#sle](http://www.tnb.com/#sle).
    - f. Substitutions: See Section 01 60 00 - Product Requirements.
- C. Cabinets and Enclosures, Including Junction and Pull Boxes Larger Than 100 cubic inches:
1. Comply with NEMA EN 10250, and list and label as complying with UL 50 and UL 50E, or UL 508A.
  2. NEMA EN 10250 Environment Type, Unless Otherwise Indicated:
    - a. Indoor Clean, Dry Locations: Type 1, painted steel.
    - b. Outdoor Locations: Type 3R, painted steel.
  3. Junction and Pull Boxes Larger Than 100 cubic inches:
    - a. Provide screw-cover or hinged-cover enclosures unless otherwise indicated.
  4. Finish for Painted Steel Enclosures: Manufacturer's standard grey unless otherwise indicated.
  5. Manufacturers:
    - a. Cooper B-Line, a division of Eaton Corporation: [www.cooperindustries.com/#sle](http://www.cooperindustries.com/#sle).
    - b. Hoffman, a brand of Pentair Technical Products: [www.hoffmanonline.com/#sle](http://www.hoffmanonline.com/#sle).
    - c. Hubbell Incorporated; Wiegmann Products: [www.hubbell-wiegmann.com/#sle](http://www.hubbell-wiegmann.com/#sle).
    - d. Substitutions: See Section 01 60 00 - Product Requirements.

## **PART 3 EXECUTION**

### **3.01 EXAMINATION**

- A. Verify that field measurements are as indicated.
- B. Verify that mounting surfaces are ready to receive boxes.
- C. Verify that conditions are satisfactory for installation prior to starting work.
- D. Verify locations of floor boxes and outlets in offices and work areas prior to rough-in.

### 3.02 INSTALLATION

- A. Install products in accordance with manufacturer's instructions.
- B. Install boxes in accordance with NECA 1 (general workmanship) and, where applicable, NECA 130, including mounting heights specified in those standards where mounting heights are not indicated.
- C. Arrange equipment to provide minimum clearances in accordance with manufacturer's instructions and NFPA 70.
- D. Unless otherwise indicated, provide separate boxes for line voltage and low voltage systems.
- E. Flush-mount boxes in finished areas unless specifically indicated to be surface-mounted.
- F. Unless otherwise indicated, boxes may be surface-mounted where exposed conduits are indicated or permitted.
- G. Box Locations:
  - 1. Locate boxes to be accessible. Provide access panels in accordance with Section 08 31 00 as required where approved by the Architect.
  - 2. Unless dimensioned, box locations indicated are approximate.
  - 3. Locate and orient boxes as required for devices installed under other sections or by others.
    - a. Switches, Receptacles, and Other Wiring Devices: Comply with Section 26 27 26.
  - 4. Locate boxes so that wall plates do not span different building finishes.
  - 5. Locate boxes so that wall plates do not cross masonry joints.
  - 6. Unless otherwise indicated, where multiple outlet boxes are installed at the same location at different mounting heights, install along a common vertical center line.
  - 7. Do not install flush-mounted boxes on opposite sides of walls back-to-back. Provide minimum 6 inches horizontal separation unless otherwise indicated:
    - a. Acoustic-Rated Walls: Do not install flush-mounted boxes on opposite sides of walls back-to-back; provide minimum 24 inches horizontal separation.
    - b. Fire Resistance Rated Walls: Install flush-mounted boxes such that the required fire resistance will not be reduced.
      - 1) Do not install flush-mounted boxes on opposite sides of walls back-to-back; provide minimum 24 inches separation where wall is constructed with individual noncommunicating stud cavities or protect both boxes with listed putty pads.
      - 2) Do not install flush-mounted boxes with area larger than 16 square inches or such that the total aggregate area of openings exceeds 100 square inches for any 100 square feet of wall area.
  - 8. Locate junction and pull boxes as indicated, as required to facilitate installation of conductors, and to limit conduit length and/or number of bends between pulling points in accordance with Section 26 05 33.13.
  - 9. Locate junction and pull boxes in the following areas, unless otherwise indicated or approved by the Architect:
    - a. Concealed above accessible suspended ceilings.
    - b. Within joists in areas with no ceiling.
    - c. Electrical rooms.
    - d. Mechanical equipment rooms.
- H. Box Supports:
  - 1. Secure and support boxes in accordance with NFPA 70 and Section 26 05 29 using suitable supports and methods approved by the authority having jurisdiction.
  - 2. Provide independent support from building structure except for cast metal boxes (other than boxes used for fixture support) supported by threaded conduit connections in accordance with NFPA 70. Do not provide support from piping, ductwork, or other systems.



3. Installation Above Suspended Ceilings: Do not provide support from ceiling grid or ceiling support system.
  4. Use far-side support to secure flush-mounted boxes supported from single stud in hollow stud walls. Repair or replace supports for boxes that permit excessive movement.
- I. Install boxes plumb and level.
- J. Flush-Mounted Boxes:
1. Install boxes in noncombustible materials such as concrete, tile, gypsum, plaster, etc. so that front edge of box or associated raised cover is not set back from finished surface more than 1/4 inch or does not project beyond finished surface.
  2. Install boxes in combustible materials such as wood so that front edge of box or associated raised cover is flush with finished surface.
  3. Repair rough openings around boxes in noncombustible materials such as concrete, tile, gypsum, plaster, etc. so that there are no gaps or open spaces greater than 1/8 inch at the edge of the box.
- K. Install boxes as required to preserve insulation integrity.
- L. Install permanent barrier between ganged wiring devices when voltage between adjacent devices exceeds 300 V.
- M. Install firestopping to preserve fire resistance rating of partitions and other elements, using materials and methods specified in Section 07 84 00.
- N. Close unused box openings.
- O. Install blank wall plates on junction boxes and on outlet boxes with no devices or equipment installed or designated for future use.
- P. Provide grounding and bonding of boxes, enclosures and cabinets in accordance with Section 26 05 26.
- Q. Identify boxes in accordance with Section 26 05 53.
- R. Install boxes securely, in a neat and workmanlike manner, as specified in NECA 1.
- S. Install in locations as shown on Drawings, and as required for splices, taps, wire pulling, equipment connections, and as required by NFPA 70.
- T. Coordinate installation of outlet boxes for equipment connected under Section 26 27 17.
- U. Set wall mounted boxes at elevations to accommodate mounting heights indicated.
- V. Electrical boxes are shown on Drawings in approximate locations unless dimensioned.
1. Adjust box locations up to 10 feet if required to accommodate intended purpose.
- W. Maintain headroom and present neat mechanical appearance.
- X. Inaccessible Ceiling Areas: Install outlet and junction boxes no more than 6 inches from ceiling access panel or from removable recessed luminaire.
- Y. Coordinate mounting heights and locations of outlets mounted above counters, benches, and backsplashes.
- Z. Locate outlet boxes to allow luminaires to be positioned as shown on reflected ceiling plan.
- AA. Align adjacent wall mounted outlet boxes for switches, thermostats, and similar devices.
- BB. Locate flush mounting boxes in masonry walls to require cutting of masonry unit corner only. Coordinate masonry cutting to achieve neat opening.
- CC. Secure flush mounting box to interior wall and partition studs. Accurately position to allow for surface finish thickness.
- DD. Support boxes independently of conduit, except cast box that is connected to two rigid metal conduits both supported within 12 inches of box.
- EE. Use gang box with plaster ring for single device outlets.

**3.03 ADJUSTING**

- A. Adjust flush-mounting outlets to make front flush with finished wall material.
- B. Install knockout closures in unused box openings.

**3.04 CLEANING**

- A. Clean interior of boxes to remove dirt, debris, plaster and other foreign material.

**3.05 PROTECTION**

- A. Immediately after installation, protect boxes from entry of moisture and foreign material until ready for installation of conductors.
- B. Clean exposed surfaces and restore finish.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

**SECTION 26 05 53**  
**IDENTIFICATION FOR ELECTRICAL SYSTEMS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Electrical identification requirements.
- B. Large Device Identification.
- C. Nameplates and Labels.
- D. Wire and cable markers.
- E. Voltage markers.
- F. Warning signs and labels.

**1.02 RELATED REQUIREMENTS**

- A. Section 26 05 19 - Low-Voltage Electrical Power Conductors and Cables: Color coding for power conductors and cables 600 V and less; vinyl color coding electrical tape.

**1.03 REFERENCE STANDARDS**

- A. ANSI Z535.2 - American National Standard for Environmental and Facility Safety Signs; 2011.
- B. ANSI Z535.4 - American National Standard for Product Safety Signs and Labels; 2011.
- C. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- D. NFPA 70E - Standard for Electrical Safety in the Workplace; 2015.
- E. UL 969 - Marking and Labeling Systems; Current Edition, Including All Revisions.

**1.04 ADMINISTRATIVE REQUIREMENTS**

- A. Coordination:
  - 1. Verify final designations for equipment, systems, and components to be identified prior to fabrication of identification products.
- B. Sequencing:
  - 1. Do not conceal items to be identified, in locations such as above suspended ceilings, until identification products have been installed.
  - 2. Do not install identification products until final surface finishes and painting are complete.

**1.05 SUBMITTALS**

- A. See Section 01 50 00 - Administrative Requirements for submittals procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for each product.
- C. Shop Drawings: Provide schedule of items to be identified indicating proposed designations, materials, legends, and formats.

**1.06 QUALITY ASSURANCE**

- A. Comply with requirements of NFPA 70.

**1.07 FIELD CONDITIONS**

- A. Do not install adhesive products when ambient temperature is lower than recommended by manufacturer.

**PART 2 PRODUCTS**

**2.01 IDENTIFICATION REQUIREMENTS**

- A. Identification for Equipment:

1. Use identification nameplate to identify each piece of electrical distribution and control equipment and associated sections, compartments, and components.
    - a. Panelboards:
      - 1) Use typewritten circuit directory to identify load(s) served for panelboards with a door.
    - b. Enclosed switches and circuit breakers:
      - 1) Identify voltage and phase.
      - 2) Identify power source and circuit number. Include location when not within sight of equipment.
      - 3) Identify load(s) served. Include location when not within sight of equipment.
  2. Emergency System Equipment:
    - a. Use identification label to identify emergency system equipment in accordance with NFPA 70.
  3. Use voltage marker to identify highest voltage present for each piece of electrical equipment with nominal voltage equal to or greater than 480 V phase-to-phase and 277 V phase-to-ground.
  4. Use identification nameplate to identify disconnect location for equipment with remote disconnecting means.
  5. Use identification label to identify overcurrent protective devices for branch circuits serving fire alarm circuits. Identify with text "FIRE ALARM CIRCUIT".
  6. Arc Flash Hazard Warning Labels: Use warning labels to identify arc flash hazards for electrical equipment, such as switchboards, panelboards, industrial control panels, meter socket enclosures, and motor control centers that are likely to require examination, adjustment, servicing, or maintenance while energized.
    - a. Minimum Size: 3.5 by 5 inches.
    - b. Legend: Include orange header that reads "WARNING", followed by the word message "Arc Flash and Shock Hazard; Appropriate PPE Required; Do not operate controls or open covers without appropriate personal protection equipment; Failure to comply may result in injury or death; Refer to NFPA 70E for minimum PPE requirements" or approved equivalent.
  7. Use warning labels, identification nameplates, or identification labels to identify electrical hazards for equipment where multiple power sources are present with the word message "DANGER; Hazardous voltage; Multiple power sources may be present; Disconnect all electric power including remote disconnects before servicing" or approved equivalent.
- B. Identification for Conductors and Cables:
1. Color Coding for Power Conductors 600 V and Less: Comply with Section 26 05 19.
  2. Use wire and cable markers to identify circuit number or other designation indicated for power, control, and instrumentation conductors and cables at the following locations:
    - a. At each source and load connection.
    - b. Within boxes when more than one circuit is present.
    - c. Within equipment enclosures when conductors and cables enter or leave the enclosure.
- C. Identification for Raceways:
1. Use voltage markers to identify highest voltage present for accessible conduits containing conductors with nominal voltage equal to or greater than 480 V phase-to-phase and 277 V phase-to-ground at maximum intervals of 20 feet.
  2. Use voltage markers, color-coded bands, or factory-painted conduits to identify systems other than normal power system for accessible conduits.
    - a. Maximum Intervals: 20 feet.
    - b. Color-Coded Bands: Use vinyl color coding electrical tape to mark bands 3 inches wide.
      - 1) Vinyl Color Coding Electrical Tape: Comply with Section 26 05 19.
    - c. Color Code:

- 1) Emergency Power System: Red.
- 2) Fire Alarm System: Red.
3. Use identification labels or plastic marker tags to identify circuits enclosed for accessible conduits at wall penetrations, at floor penetrations, at roof penetrations, and at equipment terminations when source is not within sight.
4. Use identification labels or plastic marker tags to identify spare conduits at each end. Identify purpose and termination location.
- D. Identification for Boxes:
  1. Use voltage markers or identification labels to identify highest voltage present.
  2. Use voltage markers or color coded boxes to identify systems other than normal power system.
    - a. Color-Coded Boxes: Field-painted with the same color code used for raceways.
      - 1) Emergency Power System: Red.
      - 2) Fire Alarm System: Red.
  3. Use identification labels to identify circuits enclosed.
    - a. Identify circuits via power source and circuit numbers.
      - 1) Include voltage and phase for other than 120 V, single phase circuits.
    - b. For exposed boxes in public areas, provide identification on inside face of cover.
- E. Identification for Devices:
  1. Use identification label to identify fire alarm system devices.
  2. Use identification label to identify serving branch circuit for all receptacles.
  3. Use identification label or engraved wallplate to identify load controlled for wall-mounted control devices controlling loads that are not visible from the control location and for multiple wall-mounted control devices installed at one location.
- F. Identification for Luminaires:
  1. Use permanent red dot on luminaire frame to identify luminaires connected to emergency power system or with integral emergency battery units.

## 2.02 IDENTIFICATION NAMEPLATES AND LABELS

- A. Identification Nameplates:
  1. Manufacturers:
    - a. Brimar Industries, Inc: [www.brimar.com/#sle](http://www.brimar.com/#sle).
    - b. Kolbi Pipe Marker Co: [www.kolbipipemarkers.com](http://www.kolbipipemarkers.com).
    - c. Seton Identification Products: [www.seton.com](http://www.seton.com).
    - d. Substitutions: See Section 01 60 00 - Product Requirements.
  2. Materials:
    - a. Indoor Clean, Dry Locations: Use plastic nameplates.
    - b. Outdoor Locations: Use plastic nameplates suitable for exterior use.
  3. Plastic Nameplates: Two-layer or three-layer laminated acrylic or electrically non-conductive phenolic with beveled edges; minimum thickness of 1/16 inch; engraved text.
    - a. Exception: Provide minimum thickness of 1/8 inch when any dimension is greater than 4 inches.
  4. Mounting Holes for Mechanical Fasteners: Two, centered on sides for sizes up to 1 inch high; Four, located at corners for larger sizes.
- B. Identification Labels:
  1. Manufacturers:
    - a. Brady Corporation: [www.bradyid.com](http://www.bradyid.com).
    - b. Brother International Corporation: [www.brother-usa.com/#sle](http://www.brother-usa.com/#sle).
    - c. Panduit Corp: [www.panduit.com/#sle](http://www.panduit.com/#sle).
    - d. Substitutions: See Section 01 60 00 - Product Requirements.
  2. Materials: Use self-adhesive laminated plastic labels; UV, chemical, water, heat, and abrasion resistant.

- a. Use only for indoor locations.
3. Text: Use factory pre-printed or machine-printed text. Do not use handwritten text unless otherwise indicated.
- C. Format for Equipment Identification:
  1. Minimum Size: 1.5 inches by 4 inches.
  2. Legend:
    - a. System designation where applicable:
      - 1) Emergency Power System: Identify with text "EMERGENCY".
      - 2) Fire Alarm System: Identify with text "FIRE ALARM".
    - b. Equipment designation or other approved description.
    - c. Voltage and phase (single-phase or 3-phase).
    - d. Power source and circuit number.
    - e. Other information as indicated.
  3. Text: All capitalized unless otherwise indicated.
  4. Minimum Text Height:
    - a. System Designation: 1 inch.
    - b. Equipment Designation: 1/4 inch.
    - c. Other Information: 1/4 inch.
    - d. Exception: Provide minimum text height of 1 inch for equipment located more than 10 feet above floor or working platform.
  5. Color:
    - a. Normal Power System: White text on black background.
    - b. Emergency Power System:
      - 1) Life Safety Branch: White text on red background.
    - c. Fire Alarm System: White text on red background.
- D. Format for General Information and Operating Instructions:
  1. Minimum Size: 2 inches by 4 inches.
  2. Legend: Include information or instructions indicated or as required for proper and safe operation and maintenance.
  3. Text: All capitalized unless otherwise indicated.
  4. Minimum Text Height: 1/4 inch.
  5. Color: White text on blue background unless otherwise indicated.
    - a. Exceptions:
      - 1) Provide white text on red background for general information or operational instructions for emergency systems.
      - 2) Provide white text on red background for general information or operational instructions for fire alarm systems.
- E. Format for Caution and Warning Messages:
  1. Minimum Size: 2 inches by 4 inches.
  2. Legend: Include information or instructions indicated or as required for proper and safe operation and maintenance.
  3. Text: All capitalized unless otherwise indicated.
  4. Minimum Text Height: 1/2 inch.
  5. Color: Black text on yellow background unless otherwise indicated.
- F. Format for Receptacle Identification:
  1. Minimum Size: 3/8 inch by 1.5 inches.
  2. Legend: Power source and circuit number or other designation indicated.
    - a. Include voltage and phase for other than 120 V, single phase circuits.
  3. Text: All capitalized unless otherwise indicated.
  4. Minimum Text Height: 3/16 inch.
  5. Color: Black text on white background.

- G. Format for Control Device Identification (toggle switches, motor starters, etc.):
  - 1. Minimum Size: 3/8 inch by 1.5 inches.
  - 2. Legend: Load controlled, power source and circuit number or other designation indicated.
  - 3. Text: All capitalized unless otherwise indicated.
  - 4. Minimum Text Height: 3/16 inch.
  - 5. Color: Black text on white background.
- H. Format for Fire Alarm Device Identification:
  - 1. Minimum Size: 3/8 inch by 1.5 inches.
  - 2. Legend: Designation indicated and device zone or address.
  - 3. Text: All capitalized unless otherwise indicated.
  - 4. Minimum Text Height: 3/16 inch.
  - 5. Color: Black text on white background.

## 2.03 WIRE AND CABLE MARKERS

- A. Manufacturers:
  - 1. Brady Corporation: [www.bradyid.com](http://www.bradyid.com).
  - 2. HellermannTyton: [www.hellermannityton.com](http://www.hellermannityton.com).
  - 3. Panduit Corp: [www.panduit.com/#sle](http://www.panduit.com/#sle).
  - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Markers for Conductors and Cables: Use heat-shrink sleeve type markers suitable for the conductor or cable to be identified.
  - 1. Do not use self-adhesive type markers.
- C. Markers for Conductor and Cable Bundles: Use plastic marker tags secured by nylon cable ties.
- D. Legend: Power source and circuit number or other designation indicated.
- E. Text: Use factory pre-printed or machine-printed text, all capitalized unless otherwise indicated.
  - 1. Do not use handwritten text.
- F. Minimum Text Height: 1/8 inch.
- G. Color: Black text on white background unless otherwise indicated.
- H. Locations: Each conductor at pull boxes, junction boxes, and termination or connection points including each load connection.
- I. Legend:
  - 1. Power and Lighting Circuits: Power source and branch circuit or feeder number indicated on drawings.

## 2.04 VOLTAGE MARKERS

- A. Manufacturers:
  - 1. Brady Corporation: [www.bradyid.com](http://www.bradyid.com).
  - 2. Brimar Industries, Inc: [www.brimar.com/#sle](http://www.brimar.com/#sle).
  - 3. Seton Identification Products: [www.seton.com](http://www.seton.com).
  - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Markers for Conduits: Use factory pre-printed self-adhesive vinyl, self-adhesive vinyl cloth, or vinyl snap-around type markers.
- C. Markers for Boxes and Equipment Enclosures: Use factory pre-printed self-adhesive vinyl or self-adhesive vinyl cloth type markers.
- D. Minimum Size:
  - 1. Markers for Equipment: 1 1/8 by 4 1/2 inches.
  - 2. Markers for Conduits: As recommended by manufacturer for conduit size to be identified.
  - 3. Markers for Pull Boxes: 1 1/8 by 4 1/2 inches.
  - 4. Markers for Junction Boxes: 1/2 by 2 1/4 inches.

- E. Legend:
  - 1. Markers for Voltage Identification: Highest voltage present.
  - 2. Markers for System Identification:
    - a. Emergency Power System: Text "EMERGENCY".
    - b. Other Systems: Type of service.
- F. Color: Black text on orange background unless otherwise indicated.
- G. Location: Furnish markers for each conduit longer than 6 feet.
- H. Spacing: 20 feet on center.

## **2.05 WARNING SIGNS AND LABELS**

- A. Manufacturers:
  - 1. Brimar Industries, Inc: [www.brimar.com/#sle](http://www.brimar.com/#sle).
  - 2. Clarion Safety Systems, LLC: [www.clarionsafety.com](http://www.clarionsafety.com).
  - 3. Insite Solutions, LLC: [www.stop-painting.com/#sle](http://www.stop-painting.com/#sle).
  - 4. Seton Identification Products: [www.seton.com](http://www.seton.com).
  - 5. Substitutions: See Section 01 60 00 - Product Requirements
- B. Comply with ANSI Z535.2 or ANSI Z535.4 as applicable.
- C. Warning Labels:
  - 1. Materials: Use factory pre-printed or machine-printed self-adhesive polyester or self-adhesive vinyl labels; UV, chemical, water, heat, and abrasion resistant; produced using materials recognized to UL 969.
    - a. Do not use labels designed to be completed using handwritten text.
  - 2. Machine-Printed Labels: Use thermal transfer process printing machines and accessories recommended by label manufacturer.
  - 3. Minimum Size: 2 by 4 inches unless otherwise indicated.

## **PART 3 EXECUTION**

### **3.01 PREPARATION**

- A. Clean surfaces to receive adhesive products according to manufacturer's instructions.
- B. Degrease and clean surfaces to receive nameplates and labels.

### **3.02 INSTALLATION**

- A. Install products in accordance with manufacturer's instructions.
- B. Install identification products to be plainly visible for examination, adjustment, servicing, and maintenance. Unless otherwise indicated, locate products as follows:
  - 1. Surface-Mounted Equipment: Enclosure front.
  - 2. Flush-Mounted Equipment: Enclosure front.
  - 3. Free Standing Equipment: Enclosure front; also enclosure rear for equipment with rear access.
  - 4. Elevated Equipment: Legible from the floor or working platform.
  - 5. Interior Components: Legible from the point of access.
  - 6. Conduits: Legible from the floor.
  - 7. Boxes: Outside face of cover.
  - 8. Conductors and Cables: Legible from the point of access.
  - 9. Devices: Outside face of cover.
- C. Install identification products centered, level, and parallel with lines of item being identified.
- D. Secure nameplates to exterior surfaces of enclosures using stainless steel screws or epoxy cement and to interior surfaces using self-adhesive backing or epoxy cement.
- E. Install self-adhesive labels and markers to achieve maximum adhesion, with no bubbles or wrinkles and edges properly sealed.



**3.03 FIELD QUALITY CONTROL**

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Replace self-adhesive labels and markers that exhibit bubbles, wrinkles, curling or other signs of improper adhesion.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 26 05 83  
WIRING CONNECTIONS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Electrical connections to equipment.

**1.02 RELATED REQUIREMENTS**

- A. Section 26 05 19 - Low-Voltage Electrical Power Conductors and Cables.
- B. Section 26 05 33.13 - Conduit for Electrical Systems.
- C. Section 26 05 33.16 - Boxes for Electrical Systems.

**1.03 REFERENCE STANDARDS**

- A. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.

**1.04 ADMINISTRATIVE REQUIREMENTS**

- A. Coordination:
  - 1. Obtain and review shop drawings, product data, manufacturer's wiring diagrams, and manufacturer's instructions for equipment furnished under other sections.
  - 2. Determine connection locations and requirements.
- B. Sequencing:
  - 1. Install rough-in of electrical connections before installation of equipment is required.
  - 2. Make electrical connections before required start-up of equipment.

**1.05 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

**1.06 QUALITY ASSURANCE**

- A. Comply with requirements of NFPA 70.
- B. Products: Listed, classified, and labeled as suitable for the purpose intended.
- C. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

**PART 2 PRODUCTS**

**2.01 MATERIALS**

- A. Flexible Conduit: As specified in Section 26 05 33.13.
- B. Wire and Cable: As specified in Section 26 05 19.
- C. Boxes: As specified in Section 26 05 33.16.

**PART 3 EXECUTION**

**3.01 EXAMINATION**

- A. Verify that equipment is ready for electrical connection, wiring, and energization.

**3.02 ELECTRICAL CONNECTIONS**

- A. Make electrical connections in accordance with equipment manufacturer's instructions.
- B. Make conduit connections to equipment using flexible conduit. Use liquidtight flexible conduit with watertight connectors in damp or wet locations.
- C. Connect heat producing equipment using wire and cable with insulation suitable for temperatures encountered.

- D. Install suitable strain-relief clamps and fittings for cord connections at outlet boxes and equipment connection boxes.
- E. Install disconnect switches, controllers, control stations, and control devices to complete equipment wiring requirements.
- F. Install terminal block jumpers to complete equipment wiring requirements.
- G. Install interconnecting conduit and wiring between devices and equipment to complete equipment wiring requirements.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

**SECTION 26 09 23  
LIGHTING CONTROL DEVICES**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Occupancy sensors.
- B. Daylighting controls.

**1.02 RELATED REQUIREMENTS**

- A. Section 26 05 26 - Grounding and Bonding for Electrical Systems.
- B. Section 26 05 29 - Hangers and Supports
- C. Section 26 05 33.16 - Boxes for Electrical Systems.
- D. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.
- E. Section 26 51 00 - Interior Lighting.

**1.03 REFERENCE STANDARDS**

- A. NECA 1 - Standard for Good Workmanship in Electrical Construction; 2010.
- B. NECA 130 - Standard for Installing and Maintaining Wiring Devices; 2010.
- C. NEMA 410 - Performance Testing for Lighting Controls and Switching Devices with Electronic Drivers and Discharge Ballasts; 2011.
- D. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- E. UL 916 - Energy Management Equipment; Current Edition, Including All Revisions.
- F. UL 1472 - Solid-State Dimming Controls; Current Edition, Including All Revisions.

**1.04 ADMINISTRATIVE REQUIREMENTS**

- A. Coordination:
  - 1. Coordinate the placement of lighting control devices with millwork, furniture, equipment, etc. installed under other sections or by others.
  - 2. Coordinate the placement of wall switch occupancy sensors with actual installed door swings.
  - 3. Coordinate the placement of occupancy sensors with millwork, furniture, equipment or other potential obstructions to motion detection coverage installed under other sections or by others.
  - 4. Coordinate the placement of photo sensors for daylighting controls with windows, skylights, and luminaires to achieve optimum operation. Coordinate placement with ductwork, piping, equipment, or other potential obstructions to light level measurement installed under other sections or by others.
  - 5. Notify DEDC, LLC of any conflicts or deviations from Contract Documents to obtain direction prior to proceeding with work.
- B. Sequencing:
  - 1. Do not install lighting control devices until final surface finishes and painting are complete.

**1.05 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Include ratings, configurations, standard wiring diagrams, dimensions, colors, service condition requirements, and installed features.
  - 1. Occupancy Sensors: Include detailed motion detection coverage range diagrams.
- C. Field Quality Control Reports.

- D. Operation and Maintenance Data: Include detailed information on device programming and setup.
- E. Maintenance Materials: Furnish the following for State of Delaware OMB - Division of Facilities Management's use in maintenance of project.
  - 1. See Section 01 60 00 - Product Requirements, for additional provisions.
- F. Project Record Documents: Record actual installed locations and settings for lighting control devices.

#### **1.06 QUALITY ASSURANCE**

- A. Comply with requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
- D. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

#### **1.07 DELIVERY, STORAGE, AND PROTECTION**

- A. Store products in a clean, dry space in original manufacturer's packaging in accordance with manufacturer's written instructions until ready for installation.

#### **1.08 FIELD CONDITIONS**

- A. Maintain field conditions within manufacturer's required service conditions during and after installation.

#### **1.09 WARRANTY**

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.
- B. Provide five year manufacturer warranty for all occupancy sensors.
- C. Provide two year manufacturer warranty for all daylighting controls.

### **PART 2 PRODUCTS**

#### **2.01 LIGHTING CONTROL DEVICES - GENERAL REQUIREMENTS**

- A. Provide products listed, classified, and labeled as suitable for the purpose intended.
- B. Unless specifically indicated to be excluded, provide all required conduit, wiring, connectors, hardware, components, accessories, etc. as required for a complete operating system.
- C. Products for Switching of Electronic Ballasts/Drivers: Tested and rated to be suitable for peak inrush currents specified in NEMA 410.

#### **2.02 OCCUPANCY SENSORS**

- A. Manufacturers:
  - 1. Hubbell Incorporated: [www.hubbell.com/#sle](http://www.hubbell.com/#sle).
  - 2. Lutron Electronics Company, Inc: [www.lutron.com/sle](http://www.lutron.com/sle).
  - 3. RAB Lighting, Inc: [www.rablighting.com/#sle](http://www.rablighting.com/#sle).
  - 4. Sensor Switch Inc: [www.sensorswitch.com/#sle](http://www.sensorswitch.com/#sle).
  - 5. WattStopper: [www.wattstopper.com/#sle](http://www.wattstopper.com/#sle).
  - 6. Leviton: [www.leviton.com](http://www.leviton.com).
  - 7. Substitutions: See Section 01 60 00 - Product Requirements.
  - 8. Source Limitations: Furnish products produced by a single manufacturer and obtained from a single supplier.
- B. All Occupancy Sensors:

1. Description: Factory-assembled commercial specification grade devices for indoor use capable of sensing both major motion, such as walking, and minor motion, such as small desktop level movements, according to published coverage areas, for automatic control of load indicated.
  2. Sensor Technology:
    - a. Passive Infrared/Ultrasonic Dual Technology Occupancy Sensors: Designed to detect occupancy using a combination of both passive infrared and ultrasonic technologies.
    - b. Passive Infrared/Acoustic Dual Technology Occupancy Sensors: Designed to detect occupancy using a combination of both passive infrared and audible sound sensing technologies.
  3. Provide LED to visually indicate motion detection with separate color LEDs for each sensor type in dual technology units.
  4. Operation: Unless otherwise indicated, occupancy sensor to turn load on when occupant presence is detected and to turn load off when no occupant presence is detected during an adjustable turn-off delay time interval.
  5. Dual Technology Occupancy Sensors: Field configurable turn-on and hold-on activation with settings for activation by either or both sensing technologies.
  6. Passive Infrared Lens Field of View: Field customizable by addition of factory masking material, adjustment of integral blinders, or similar means to block motion detection in selected areas.
  7. Turn-Off Delay: Field adjustable, with time delay settings up to 30 minutes.
  8. Sensitivity: Field adjustable.
  9. Adaptive Technology: Field selectable; capable of self-adjusting sensitivity and time delay according to conditions.
  10. Integral Photocell: For field selectable and adjustable inhibition of automatic turn-on of load when ambient lighting is above the selected level.
  11. Compatibility (Non-Dimming Sensors): Suitable for controlling incandescent lighting, low-voltage lighting with electronic and magnetic transformers, fluorescent lighting with electronic and magnetic ballasts, and fractional motor loads, with no minimum load requirements.
  12. Load Rating for Line Voltage Occupancy Sensors: As required to control the load indicated on drawings.
- C. Wall Switch Occupancy Sensors:
1. All Wall Switch Occupancy Sensors:
    - a. Description: Occupancy sensors designed for installation in standard wall box at standard wall switch mounting height with a field of view of 180 degrees, integrated manual control capability, and no leakage current to load in off mode.
    - b. Unless otherwise indicated or required to control the load indicated on drawings, provide line voltage units with self-contained relay.
    - c. Operation: As indicated on drawings.
    - d. Manual-Off Override Control: When used to turn off load while in automatic-on mode, unit to revert back to automatic mode after no occupant presence is detected during the delayed-off time interval.
    - e. Provide selectable audible alert to notify occupant of impending load turn-off.
    - f. Finish: As indicated on drawings.
    - g. Provide vandal resistant lenses for passive infrared (PIR) and dual technology wall switch occupancy sensors.
  2. Passive Infrared/Ultrasonic Dual Technology Wall Switch Occupancy Sensors: Capable of detecting motion within an area of 900 square feet.
- D. Wall Dimmer Occupancy Sensors:
1. General Requirements:

- a. Description: Occupancy sensors designed for installation in standard wall box at standard wall switch mounting height with a field of view of 180 degrees, integrated dimming control capability , and no leakage current to load in off mode.
  - b. Operation: as indicated on drawings.
  - c. Manual-Off Override Control Capability: When used to turn off load while in automatic-on mode, unit to revert back to automatic mode after no occupant presence is detected during the delayed-off time interval.
  - d. Dimmer: Solid-state with continuous full-range even control following square law dimming curve, integral radio frequency interference filtering, power failure preset memory, air gap switch accessible without removing wall plate, and listed as complying with UL 1472; type and rating suitable for load controlled.
  - e. Provide field adjustable dimming preset for occupied state.
  - f. Provide fade-to-off operation to notify occupant of impending load turn-off.
  - g. Finish: As indicated on drawings<>.
2. Passive Infrared (PIR) Wall Dimmer Occupancy Sensors: Capable of detecting motion within an area of 900 square feet.
- E. Ceiling Mounted Occupancy Sensors:
1. All Ceiling Mounted Occupancy Sensors:
    - a. Description: Low profile occupancy sensors designed for ceiling installation.
    - b. Unless otherwise indicated or required to control the load indicated on the drawings, provide low voltage units, for use with separate compatible accessory power packs.
    - c. Provide field selectable setting for disabling LED motion detector visual indicator.
    - d. Occupancy sensor to be field selectable as either manual-on/automatic-off or automatic on/off.
    - e. Finish: White unless otherwise indicated.
  2. Passive Infrared/Ultrasonic Dual Technology Ceiling Mounted Occupancy Sensors:
    - a. Extended Range Sensors: Capable of detecting motion within an area of 1,200 square feet at a mounting height of 9 feet, with a field of view of 360 degrees.
  3. Passive Infrared/Acoustic Dual Technology Ceiling Mounted Occupancy Sensors:
    - a. Extended Range Sensors: Capable of detecting motion within an area of 1,200 square feet at a mounting height of 9 feet.
- F. Power Packs for Low Voltage Occupancy Sensors:
1. Description: Plenum rated, self-contained low voltage class 2 transformer and relay compatible with specified low voltage occupancy sensors for switching of line voltage loads.
  2. Provide quantity and configuration of power and slave packs with all associated wiring and accessories as required to control the load indicated on drawings.
  3. Input Supply Voltage: Dual rated for 120/277 V ac.
  4. Load Rating:
    - a. As indicated on drawings.

## 2.03 DAYLIGHTING CONTROLS

- A. Manufacturers:
1. Hubbell Control Solutions: [www.hubbell.com/hubbellcontrolsolutions/en/#sle](http://www.hubbell.com/hubbellcontrolsolutions/en/#sle).
  2. Lutron Electronics Company, Inc: [www.lutron.com/#sle](http://www.lutron.com/#sle).
  3. Sensor Switch Inc: [www.sensorswitch.com/#sle](http://www.sensorswitch.com/#sle).
  4. WattStopper: [www.wattstopper.com/#sle](http://www.wattstopper.com/#sle).
  5. Leviton: [www.leviton.com](http://www.leviton.com).
  6. Substitutions: See Section 01 60 00 - Product Requirements.
  7. Source Limitations: Furnish products produced by a single manufacturer and obtained from a single supplier.
- B. System Description: Control system consisting of photo sensors and compatible control modules and power packs, contactors, or relays as required for automatic control of load



indicated according to available natural light; capable of integrating with occupancy sensors and manual override controls.

- C. Daylighting Control Photo Sensors: Low voltage class 2 photo sensor units with output signal proportional to the measured light level and provision for zero or offset based signal.
  - 1. Sensor Type: Filtered silicon photo diode.
  - 2. Sensor Range:
    - a. Open Loop Photo Sensors: 3 to 6,000 footcandles.
  - 3. Finish: White unless otherwise indicated.
- D. Dimming Photo Sensors: Photo sensor units with integral controller compatible with specified dimming ballasts, for direct continuous dimming of up to 50 ballasts.
- E. Daylighting Control Switching Modules for Low Voltage Sensors: Low voltage class 2 control unit compatible with specified photo sensors, for switching of compatible power packs, contactors, or relays in response to changes in measured light levels according to selected settings.
  - 1. Operation: Unless otherwise indicated, load to be turned on when light level is below selected low set point and load to be turned off when light level is above selected high set point, with a no switching dead band between set points to prevent unwanted cycling.
  - 2. Input Delay: To prevent unwanted cycling due to intermittent light level fluctuations.
  - 3. Control Capability:
    - a. Single Zone Switching Modules: Capable of controlling one programmable channel.
    - b. Multi-Zone Switching Modules: Capable of controlling up to two separately programmable channels.
- F. Daylighting Control Dimming Modules for Low Voltage Sensors: Low voltage class 2 control unit compatible with specified photo sensors and with specified dimming ballasts, for both continuous dimming of compatible dimming ballasts and switching of compatible power packs, contactors, or relays in response to changes in measured light levels according to selected settings.
  - 1. Operation: Unless otherwise indicated, specified load to be continuously brightened as not enough daylight becomes available and continuously dimmed as enough daylight becomes available.
  - 2. Load to be turned off when available daylight is sufficient to fully dim the load, after the selected time delay.
  - 3. Control Capability: Capable of controlling up to three separately programmable channels, with up to 50 ballasts per channel.
  - 4. Dimming and Fade Rates: Adjustable from 5 to 60 seconds.
  - 5. Cut-Off Delay: Selectable and adjustable from 0 to 20 minutes.
  - 6. Output Voltage: Compatible with specified dimming ballasts.
- G. Power Packs for Low Voltage Daylighting Control Modules:
  - 1. Description: Plenum rated, self-contained low voltage class 2 transformer and relay compatible with specified low voltage daylighting control modules for switching of line voltage loads. Provide quantity and configuration of power and slave packs with all associated wiring and accessories as required to control the load indicated on drawings.
  - 2. Input Supply Voltage: Dual rated for 120/277 V ac.
  - 3. Load Ratings: As required to control the load indicated on drawings.

## **PART 3 EXECUTION**

### **3.01 EXAMINATION**

- A. Verify that field measurements are as indicated.
- B. Verify that outlet boxes are installed in proper locations and at proper mounting heights and are properly sized to accommodate devices and conductors in accordance with NFPA 70.

- C. Verify that openings for outlet boxes are neatly cut and will be completely covered by devices or wall plates.
- D. Verify that final surface finishes are complete, including painting.
- E. Verify that branch circuit wiring installation is completed, tested, and ready for connection to lighting control devices.
- F. Verify that the service voltage and ratings of lighting control devices are appropriate for the service voltage and load requirements at the location to be installed.
- G. Verify that conditions are satisfactory for installation prior to starting work.

### 3.02 PREPARATION

- A. Provide extension rings to bring outlet boxes flush with finished surface.
- B. Clean dirt, debris, plaster, and other foreign materials from outlet boxes.

### 3.03 INSTALLATION

- A. Install lighting control devices in accordance with NECA 1 (general workmanship) and, where applicable, NECA 130, including mounting heights specified in those standards unless otherwise indicated.
- B. Coordinate locations of outlet boxes provided under Section 26 05 33.16 as required for installation of lighting control devices provided under this section.
  - 1. Mounting Heights: Unless otherwise indicated, as follows:
    - a. Wall Switch Occupancy Sensors: 48 inches above finished floor.
  - 2. Orient outlet boxes for vertical installation of lighting control devices unless otherwise indicated.
  - 3. Locate wall switch occupancy sensors on strike side of door with edge of wall plate 3 inches from edge of door frame. Where locations are indicated otherwise, notify DEDC, LLC to obtain direction prior to proceeding with work.
- C. Install lighting control devices in accordance with manufacturer's instructions.
- D. Unless otherwise indicated, connect lighting control device grounding terminal or conductor to branch circuit equipment grounding conductor and to outlet box with bonding jumper.
- E. Install lighting control devices plumb and level, and held securely in place.
- F. Where required and not furnished with lighting control device, provide wall plate in accordance with Section 26 27 26.
- G. Provide required supports in accordance with Section 26 05 29.
- H. Where applicable, install lighting control devices and associated wall plates to fit completely flush to mounting surface with no gaps and rough opening completely covered without strain on wall plate. Repair or reinstall improperly installed outlet boxes or improperly sized rough openings. Do not use oversized wall plates in lieu of meeting this requirement.
- I. Identify lighting control devices in accordance with Section 26 05 53.
- J. Occupancy Sensor Locations:
  - 1. Location Adjustments: Locations indicated are diagrammatic and only intended to indicate which rooms or areas require devices. Provide quantity and locations as required for complete coverage of respective room or area based on manufacturer's recommendations for installed devices.
  - 2. Locate dual technology passive infrared/ultrasonic occupancy sensors a minimum of 4 feet from air supply ducts or other sources of heavy air flow and as per manufacturer's recommendations, in order to minimize false triggers.
- K. Daylighting Control Photo Sensor Locations:
  - 1. Location Adjustments: Locations indicated are diagrammatic and only intended to indicate which rooms or areas require devices. Provide quantity and locations as required for

- proper control of respective room or area based on manufacturer's recommendations for installed devices.
2. Unless otherwise indicated, locate photo sensors for open loop systems to accurately measure the level of daylight coming into the space, while minimizing the measured amount of lighting from artificial sources.
  - L. Lamp Burn-In: Operate lamps at full output for minimum of 100 hours or prescribed period per manufacturer's recommendations prior to use with any dimming controls. Replace lamps that fail prematurely due to improper lamp burn-in.
  - M. Unless otherwise indicated, install power packs for lighting control devices above accessible ceiling or above access panel in inaccessible ceiling near the sensor location.
  - N. Where indicated, install separate compatible wall switches for manual control interface with lighting control devices or associated power packs.
  - O. Unless otherwise indicated, install switches on load side of power packs so that switch does not turn off power pack.

### **3.04 FIELD QUALITY CONTROL**

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Inspect each lighting control device for damage and defects.
- C. Test occupancy sensors to verify proper operation, including time delays and ambient light thresholds where applicable. Verify optimal coverage for entire room or area.
- D. Test daylighting controls to verify proper operation, including light level measurements and time delays where applicable. Record test results in written report to be included with submittals.
- E. Correct wiring deficiencies and replace damaged or defective lighting control devices.

### **3.05 ADJUSTING**

- A. Adjust devices and wall plates to be flush and level.
- B. Adjust occupancy sensor settings to minimize undesired activations while optimizing energy savings, and to achieve desired function as indicated or as directed by DEDC, LLC.
- C. Where indicated or as directed by Architect, install factory masking material or adjust integral blinders on dual technology occupancy sensor lenses to block undesired motion detection.
- D. Adjust daylighting controls under optimum lighting conditions after all room finishes, furniture, and window treatments have been installed to achieve desired operation as indicated or as directed by Architect. Record settings in written report to be included with submittals. Readjust controls calibrated prior to installation of final room finishes, furniture, and window treatments that do not function properly as determined by DEDC, LLC.

### **3.06 CLEANING**

- A. Clean exposed surfaces to remove dirt, paint, or other foreign material and restore to match original factory finish.

### **3.07 COMMISSIONING**

- A. See Section 01 91 13 - General Commissioning Requirements for commissioning requirements.

### **3.08 CLOSEOUT ACTIVITIES**

- A. See Section 01 78 00 - Closeout Submittals, for closeout submittals.
- B. See Section 01 79 00 - Demonstration and Training, for additional requirements.
- C. Demonstration: Demonstrate proper operation of lighting control devices to DEDC, LLC, and correct deficiencies or make adjustments as directed.
- D. Training: Train State of Delaware OMB - Division of Facilities Management's personnel on operation, adjustment, programming, and maintenance of lighting control devices.

1. Use operation and maintenance manual as training reference, supplemented with additional training materials as required.
2. Provide minimum of two hours of training.
3. Instructor: Qualified contractor familiar with the project and with sufficient knowledge of the installed lighting control devices.
4. Location: At project site.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

**SECTION 26 28 16.13  
ENCLOSED CIRCUIT BREAKERS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Molded case circuit breakers.

**1.02 RELATED REQUIREMENTS**

- A. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.

**1.03 REFERENCE STANDARDS**

- A. NECA 1 - Standard for Good Workmanship in Electrical Construction; 2010.
- B. NETA ATS - Acceptance Testing Specifications for Electrical Power Equipment and Systems; 2013.
- C. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- D. UL 50 - Enclosures for Electrical Equipment, Non-Environmental Considerations; Current Edition, Including All Revisions.
- E. UL 50E - Enclosures for Electrical Equipment, Environmental Considerations; Current Edition, Including All Revisions.
- F. UL 489 - Molded-Case Circuit Breakers, Molded-Case Switches and Circuit Breaker Enclosures; Current Edition, Including All Revisions.

**1.04 ADMINISTRATIVE REQUIREMENTS**

- A. Coordination:
  - 1. Coordinate work with other trades. Avoid placement of ductwork, piping, equipment, or other potential obstructions within dedicated equipment spaces and within working clearances for electrical equipment required by NFPA 70.
  - 2. Coordinate arrangement of electrical equipment with the dimensions and clearance requirements of the actual equipment to be installed.
  - 3. Verify with manufacturer that conductor terminations are suitable for use with the conductors to be installed.
  - 4. Notify DEDC, LLC of any conflicts with or deviations from Contract Documents. Obtain direction before proceeding with work.

**1.05 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for circuit breakers, enclosures, and other installed components and accessories.
  - 1. Include characteristic trip curves for each type and rating of circuit breaker upon request.
- C. Shop Drawings: Indicate outline and support point dimensions, voltage and current ratings, short circuit current ratings, conduit entry locations, conductor terminal information, and installed features and accessories.

**1.06 QUALITY ASSURANCE**

- A. Comply with requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.

- D. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

### **1.07 DELIVERY, STORAGE, AND HANDLING**

- A. Store in a clean, dry space. Maintain factory wrapping or provide an additional heavy canvas or heavy plastic cover to protect units from dirt, water, construction debris, and traffic.
- B. Handle carefully in accordance with manufacturer's written instructions to avoid damage to enclosed circuit breaker internal components, enclosure, and finish.

### **1.08 FIELD CONDITIONS**

- A. Maintain ambient temperature between 23 degrees F and 104 degrees F during and after installation of enclosed circuit breakers.

## **PART 2 PRODUCTS**

### **2.01 MANUFACTURERS**

- A. Schneider Electric; Square D Products: [www.schneider-electric.us](http://www.schneider-electric.us).
- B. Substitutions: See Section 01 60 00 - Product Requirements.

### **2.02 MOLDED CASE CIRCUIT BREAKERS**

- A. Description: Quick-make, quick-break, over center toggle, trip-free, trip-indicating circuit breakers listed and labeled as complying with UL 489; ratings, configurations, and features as indicated on the drawings.
- B. Provide products listed and labeled by Underwriters Laboratories Inc. or testing firm acceptable to the authority having jurisdiction as suitable for the purpose indicated.
- C. Interrupting Capacity:
  - 1. Provide circuit breaker(s) with interrupting capacity as required to provide the short circuit current rating(s) indicated.
- D. Conductor Terminations:
  - 1. Provide mechanical lugs unless otherwise indicated.
  - 2. Lug Material: Aluminum, suitable for terminating aluminum or copper conductors.
- E. Thermal Magnetic Circuit Breakers: For each pole, furnish thermal inverse time tripping element for overload protection and magnetic instantaneous tripping element for short circuit protection.
- F. Multi-Pole Circuit Breakers: Furnish with common trip for all poles.

## **PART 3 EXECUTION**

### **3.01 EXAMINATION**

- A. Verify that field measurements are as indicated.
- B. Verify that the ratings of the enclosed circuit breakers are consistent with the indicated requirements.
- C. Verify that mounting surfaces are ready to receive enclosed circuit breakers.
- D. Verify that conditions are satisfactory for installation prior to starting work.

### **3.02 INSTALLATION**

- A. Install products in accordance with manufacturer's instructions.
- B. Perform work in accordance with NECA 1 (general workmanship).
- C. Arrange equipment to provide minimum clearances in accordance with manufacturer's instructions and NFPA 70.
- D. Provide required support and attachment in accordance with Section 26 05 29.
- E. Provide grounding and bonding in accordance with Section 26 05 26.

- F. Identify enclosed circuit breakers in accordance with Section 26 05 53.
- G. Provide arc flash warning labels in accordance with NFPA 70.

**3.03 FIELD QUALITY CONTROL**

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Inspect and test in accordance with manufacturer's instructions and NETA ATS, except Section 4.
- C. Perform inspections and tests listed in NETA ATS, Section 7.6.1.1. Tests listed as optional are not required.
- D. Correct deficiencies and replace damaged or defective enclosed circuit breakers.
- E. Perform several mechanical ON-OFF operations on each circuit breaker.
- F. Verify circuit continuity on each pole in closed position.
- G. Determine that circuit breaker will trip on overcurrent condition, with tripping time to NEMA AB 1 requirements.

**3.04 ADJUSTING**

- A. Adjust tightness of mechanical and electrical connections to manufacturer's recommended torque settings.

**3.05 CLEANING**

- A. Clean dirt and debris from circuit breaker enclosures and components according to manufacturer's instructions.
- B. Repair scratched or marred exterior surfaces to match original factory finish.

**END OF SECTION**

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK



**SECTION 26 51 00  
INTERIOR LIGHTING**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Interior luminaires.
- B. Exit signs.
- C. Ballasts and drivers.
- D. Lamps.

**1.02 RELATED REQUIREMENTS**

- A. Section 26 05 29 - Hangers and Supports.
- B. Section 26 05 33.16 - Boxes for Electrical Systems.
- C. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.

**1.03 REFERENCE STANDARDS**

- A. IEEE C62.41.2 - IEEE Recommended Practice on Characterization of Surges in Low-Voltage (1000 V and less) AC Power Circuits; 2002 (Corrigendum 2012).
- B. IES LM-63 - IESNA Standard File Format for Electronic Transfer of Photometric Data and Related Information; 2002 (Reaffirmed 2008).
- C. IES LM-79 - Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products; 2008.
- D. IES LM-80 - Approved Method: Measuring Luminous Flux and Color Maintenance of LED Packages, Arrays, and Modules; Illuminating Engineering Society; 2015.
- E. NECA 1 - Standard for Good Workmanship in Electrical Construction; 2010.
- F. NECA/IESNA 500 - Standard for Installing Indoor Commercial Lighting Systems; 2006.
- G. NECA/IESNA 502 - Standard for Installing Industrial Lighting Systems; 2006.
- H. NEMA 410 - Performance Testing for Lighting Controls and Switching Devices with Electronic Drivers and Discharge Ballasts; 2011.
- I. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- J. NFPA 101 - Life Safety Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- K. UL 924 - Emergency Lighting and Power Equipment; Current Edition, Including All Revisions.
- L. UL 1598 - Luminaires; Current Edition, Including All Revisions.
- M. UL 8750 - Light Emitting Diode (LED) Equipment for Use in Lighting Products; Current Edition, Including All Revisions.

**1.04 ADMINISTRATIVE REQUIREMENTS**

- A. Coordination:
  - 1. Coordinate the installation of luminaires with mounting surfaces installed under other sections or by others. Coordinate the work with placement of supports, anchors, etc. required for mounting. Coordinate compatibility of luminaires and associated trims with mounting surfaces at installed locations.
  - 2. Coordinate the placement of luminaires with structural members, ductwork, piping, equipment, diffusers, fire suppression system components, and other potential conflicts installed under other sections or by others.

3. Coordinate the placement of exit signs with furniture, equipment, signage or other potential obstructions to visibility installed under other sections or by others.
4. Notify DEDC, LLC of any conflicts or deviations from Contract Documents to obtain direction prior to proceeding with work.

#### 1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Shop Drawings:
  1. Indicate dimensions and components for each luminaire that is not a standard product of the manufacturer.
  2. Provide photometric calculations where luminaires are proposed for substitution.
- C. Shop Drawings: Indicate dimensions and components for each fixture that is not a standard product of the manufacturer.
- D. Product Data: Provide manufacturer's standard catalog pages and data sheets including detailed information on luminaire construction, dimensions, ratings, finishes, mounting requirements, listings, service conditions, photometric performance, installed accessories, and ceiling compatibility; include model number nomenclature clearly marked with all proposed features.
  1. LED Luminaires:
    - a. Include estimated useful life, calculated based on IES LM-80 test data.
    - b. Include IES LM-79 test report for proposed substitutions.
  2. Provide electronic files of photometric data certified by a National Voluntary Laboratory Accreditation Program (NVLAP) lab or independent testing agency in IES LM-63 standard format upon request.
  3. Lamps: Include rated life, color temperature, color rendering index (CRI), and initial and mean lumen output.
- E. Certificates for Dimming Ballasts: Manufacturer's documentation of compatibility with dimming controls to be installed.
- F. Maintenance Materials: Furnish the following for State of Delaware OMB - Division of Facilities Management's use in maintenance of project.
  1. See Section 01 60 00 - Product Requirements, for additional provisions.
  2. Extra Lenses and Louvers: Two percent of total quantity installed for each type, but not less than one of each type.
- G. Project Record Documents: Record actual connections and locations of luminaires and any associated remote components.

#### 1.06 QUALITY ASSURANCE

- A. Comply with requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Conform to requirements of NFPA 70 and NFPA 101.
- D. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
- E. Products: Listed and classified by Underwriters Laboratories Inc. or testing firm acceptable to the authority having jurisdiction as suitable for the purpose specified and indicated.
- F. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

#### 1.07 DELIVERY, STORAGE, AND PROTECTION

- A. Receive, handle, and store products according to NECA/IESNA 500 (commercial lighting), NECA/IESNA 502 (industrial lighting), and manufacturer's written instructions.

- B. Keep products in original manufacturer's packaging and protect from damage until ready for installation.

#### **1.08 FIELD CONDITIONS**

- A. Maintain field conditions within manufacturer's required service conditions during and after installation.

#### **1.09 WARRANTY**

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.
- B. Provide 3-year manufacturer warranty for LED luminaires, including drivers.
- C. Provide 10-year pro-rata warranty for batteries for self-powered exit signs.
- D. Products: Listed and classified by Underwriters Laboratories Inc. or testing firm acceptable to the authority having jurisdiction as suitable for the purpose specified and indicated.

### **PART 2 PRODUCTS**

#### **2.01 LUMINAIRE TYPES**

- A. Provide products as indicated in the Luminaire Schedule included on the drawings.
- B. Substitutions: See Section 01 60 00 - Product Requirements.

#### **2.02 LUMINAIRES**

- A. Provide products that are listed and labeled as complying with UL 1598, where applicable.
- B. Provide products that comply with requirements of NFPA 70 and NFPA 101.
- C. Provide products listed, classified, and labeled as suitable for the purpose intended.
- D. Unless otherwise indicated, provide complete luminaires including lamp(s) and all sockets, ballasts, reflectors, lenses, housings and other components required to position, energize and protect the lamp and distribute the light.
- E. Unless specifically indicated to be excluded, provide all required conduit, boxes, wiring, connectors, hardware, supports, trims, accessories, etc. as necessary for a complete operating system.
- F. Provide products suitable to withstand normal handling, installation, and service without any damage, distortion, corrosion, fading, discoloring, etc.
- G. Recessed Luminaires:
  - 1. Ceiling Compatibility: Comply with NEMA LE 4.
  - 2. Luminaires Recessed in Insulated Ceilings: Listed and labeled as IC-rated, suitable for direct contact with insulation and combustible materials.
- H. LED Luminaires:
  - 1. Components: UL 8750 recognized or listed as applicable.
  - 2. Tested in accordance with IES LM-79 and IES LM-80.
  - 3. LED Estimated Useful Life: Minimum of 50,000 hours at 70 percent lumen maintenance, calculated based on IES LM-80 test data.

#### **2.03 EXIT SIGNS**

- A. Provide products as indicated in the Luminaire Schedule included on the drawings.
- B. Substitutions: See Section 01 6000 - Product Requirements.
- C. Description: Exit signs complying with NFPA 101 and applicable state and local codes, and listed and labeled as complying with UL 924.
  - 1. Number of Faces: Single- or double-face as indicated or as required for installed location.
  - 2. Directional Arrows: As indicated or as required for installed location.
- D. Powered Exit Signs: Internally illuminated with LEDs unless otherwise indicated.
  - 1. Self-Powered Exit Signs:

- a. Operation: Upon interruption of normal power source or brownout condition exceeding 20 percent voltage drop from nominal, solid-state control automatically switches connected lamps to integral battery power for minimum of 90 minutes of rated emergency illumination, and automatically recharges battery upon restoration of normal power source.
- b. Battery: Sealed, maintenance-free, nickel cadmium unless otherwise indicated.
- c. Diagnostics: Provide power status indicator light and accessible integral test switch to manually activate emergency operation.
- d. Provide low-voltage disconnect to prevent battery damage from deep discharge.
- e. Self-Diagnostics: Provide units that self-monitor functionality and automatically perform testing required by NFPA 101; provide indicator light(s) to report test and diagnostic status.

## **2.04 BALLASTS AND DRIVERS**

- A. Ballasts/Drivers - General Requirements:
  1. Provide ballasts with characteristics as indicated in the Luminaire Schedule included on the Drawings.
  2. Provide ballasts containing no polychlorinated biphenyls (PCBs).
  3. Minimum Efficiency/Efficacy: Provide ballasts complying with all current applicable federal and state ballast efficiency/efficacy standards.
  4. Electronic Ballasts/Drivers: Inrush currents not exceeding peak currents specified in NEMA 410.
- B. Dimmable LED Drivers:
  1. Dimming Range: Continuous dimming from 100 percent to ten percent relative light output unless dimming capability to lower level is indicated, without flicker.
  2. Control Compatibility: Fully compatible with the dimming controls to be installed.
    - a. Low-Voltage Dimming Controls
    - b. Daylighting Controls: See Section 26 09 23.

## **2.05 LAMPS**

- A. Lamps - General Requirements:
  1. Provide lamps with characteristics as indicated on Lighting Fixture Schedule included on the Drawings.
  2. Unless explicitly excluded, provide new, compatible, operable lamps in each luminaire.
  3. Verify compatibility of specified lamps with luminaires to be installed. Where lamps are not specified, provide lamps per luminaire manufacturer's recommendations.
  4. Minimum Efficiency: Provide lamps complying with all current applicable federal and state lamp efficiency standards.
  5. Color Temperature Consistency: Unless otherwise indicated, for each type of lamp furnish products which are consistent in perceived color temperature. Replace lamps that are determined by the DEDC, LLC to be inconsistent in perceived color temperature.
- B. Lamp Types: As specified for each fixture.

## **PART 3 EXECUTION**

### **3.01 EXAMINATION**

- A. Verify that field measurements are as indicated.
- B. Verify that outlet boxes are installed in proper locations and at proper mounting heights and are properly sized to accommodate conductors in accordance with NFPA 70.
- C. Verify that suitable support frames are installed where required.
- D. Verify that branch circuit wiring installation is completed, tested, and ready for connection to luminaires.
- E. Verify that conditions are satisfactory for installation prior to starting work.

### 3.02 PREPARATION

- A. Provide extension rings to bring outlet boxes flush with finished surface.
- B. Clean dirt, debris, plaster, and other foreign materials from outlet boxes.

### 3.03 INSTALLATION

- A. Coordinate locations of outlet boxes provided under Section 26 05 33.16 as required for installation of luminaires provided under this section.
- B. Perform work in accordance with NECA 1 (general workmanship).
- C. Install products in accordance with manufacturer's instructions.
- D. Install luminaires securely, in a neat and workmanlike manner, as specified in NECA 500 (commercial lighting) and NECA 502 (industrial lighting).
- E. Provide required support and attachment in accordance with Section 26 05 29.
- F. Install luminaires plumb and square and aligned with building lines and with adjacent luminaires.
- G. Suspended Ceiling Mounted Luminaires:
  - 1. Do not use ceiling tiles to bear weight of luminaires.
  - 2. Do not use ceiling support system to bear weight of luminaires unless ceiling support system is certified as suitable to do so.
  - 3. Secure surface-mounted luminaires to ceiling support channels or framing members or to building structure.
  - 4. Secure pendant-mounted luminaires to building structure.
  - 5. Secure lay-in luminaires to ceiling support channels using listed safety clips at four corners.
  - 6. In addition to ceiling support wires, provide two galvanized steel safety wire(s), minimum 12 gauge, connected from opposing corners of each recessed luminaire to building structure.
  - 7. See appropriate Division 9 section where suspended grid ceiling is specified for additional requirements.
- H. Install accessories furnished with each luminaire.
- I. Connect luminaires to branch circuit outlets provided under Section 26 05 37 using flexible conduit.
- J. Make wiring connections to branch circuit using building wire with insulation suitable for temperature conditions within luminaire.
- K. Bond products and metal accessories to branch circuit equipment grounding conductor.
- L. Install specified lamps in each luminaire.
- M. Exit Signs
  - 1. Unless otherwise indicated, connect unit to unswitched power from same circuit feeding normal lighting in same room or area. Bypass local switches, contactors, or other lighting controls.
  - 2. Install lock-on device on branch circuit breaker serving units.
- N. Identify luminaires connected to emergency power system or with integral emergency battery units in accordance with Section 26 05 53.
- O. Lamp Burn-In: Operate lamps at full output for prescribed period per manufacturer's recommendations prior to use with any dimming controls. Replace lamps that fail prematurely due to improper lamp burn-in.

### 3.04 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Inspect each product for damage and defects.

- C. Perform field inspection in accordance with Section 01 40 00.
- D. Operate each luminaire after installation and connection to verify proper operation.
- E. Test emergency lights and self-powered exit signs to verify proper operation upon loss of normal power supply.
- F. Correct wiring deficiencies and repair or replace damaged or defective products. Repair or replace excessively noisy ballasts as determined by DEDC, LLC.

**3.05 ADJUSTING**

- A. Exit Signs with Field-Selectable Directional Arrows: Set as indicated or as required to properly designate egress path as directed by DEDC, LLC or authority having jurisdiction.
- B. Aim and adjust fixtures as directed.

**3.06 CLEANING**

- A. Clean surfaces according to NECA 500 (commercial lighting), NECA 502 (industrial lighting), and manufacturer's instructions to remove dirt, fingerprints, paint, or other foreign material and restore finishes to match original factory finish.
- B. Clean electrical parts to remove conductive and deleterious materials.
- C. Remove dirt and debris from enclosures.
- D. Clean finishes and touch up damage.

**3.07 CLOSEOUT ACTIVITIES**

- A. See Section 01 78 00 - Closeout Submittals, for closeout submittals.
- B. See Section 01 79 00 - Demonstration and Training, for additional requirements.
- C. Demonstration: Demonstrate proper operation of luminaires to DEDC, LLC, and correct deficiencies or make adjustments as directed.
- D. Just prior to Substantial Completion, replace all lamps that have failed.

**3.08 PROTECTION**

- A. Protect installed luminaires from subsequent construction operations.

**3.09 SCHEDULE - SEE DRAWINGS**

**END OF SECTION**