

*Gerald G. Friedel, P.E.
Michael R. Wigley, AIA, LEED AP
Randy B. Duplechain, P.E.
Charles R. Woodward, Jr., LS
W. Zachary Crouch, P.E.
Michael E. Wheedleton, AIA
Jason P. Loar, P.E.*

**WILLIAMS STATE SERVICE CENTER
INTERIOR RENOVATIONS
DOVER, DELAWARE
DBF #586B031.S01 ❖ OMB/DFM# MC3512000003
JANUARY 4, 2013**


ADDENDUM NO. 2

The following items shall become a part of the contract documents. Contractor must acknowledge receipt of this addendum on the Bid Form. Failure to do so may subject the Bidder to disqualification.


- Item No. 1: Clarification: Background checks will be paid for by the contractor and will be administered by the Delaware State Police. At pre-construction, the owner will deliver the appropriate forms to the general contractor.
- Item No. 2: Clarification: Specifications Section GR - GENERAL REQUIREMENTS, paragraph 13.3.1, and Section 03 30 00 - CAST-IN-PLACE CONCRETE, paragraph 3.9: there are no tests required to be performed by the general contractor on this project. Paragraph 3.9 in Section 03 30 00 may be deleted.
- Item No. 3: Alternate No. 2 is only for Door 100-1.
- Item No. 4: Clarification, Sheet D1.1: The dashed line between columns 3 and 4 in the Records Office and Dental Reception are filing cabinets. The State will remove these and reinstall them.
- Item No. 5: The general contractor shall utilize the Room Finish Schedule on A5.1 as a signage schedule.
- Item No. 6: The location of the toilet accessories are listed in the specifications Section 10 28 00 - TOILET AND BATH ACCESSORIES, paragraph 2.3.
- Item No. 7: All solid surface tops shall have integral backsplashes per the details on Sheet A4.1.
- Item No. 8: Refer to Detail K7 on Sheet A2.1 and Detail C16 on Sheet A3.1: Only the wall cabinets on both sides are 18" deep, the base cabinets are 24" deep.

- Item No. 9: Refer to attached sketch SK-3 for elevations for cabinets in Teaching Prep 306 and BF Room 304.
- Item No. 10: Clarification F15/A2.1: The 30" tall cabinets noted are above the work counter, the bottom of the cabinets shall be 54" AFF.
- Item No. 11: Refer to specifications Section 23 09 00 - AUTOMATIC TEMPERATURE CONTROL. Delete section in its entirety.
- Item No. 12: Refer to Drawing E3 – ELECTRICAL SCHEDULES AND DETAILS, LPC Panel Schedule. Change mounting of panel from "Flush" to "Surface".
- Item No. 13: Refer to specifications Section 10 56 13 - METAL STORAGE SHELVING. Wire type, four post metal storage shelving shall be the type used at all locations on the plan for metal shelving. Basis of design is Lyon Workspace Products, Chrome Plated Wire Shelving.
- Item No. 14: Refer to attached sketch SK-4 for location of the work area that will remain occupied during construction.

END OF ADDENUM

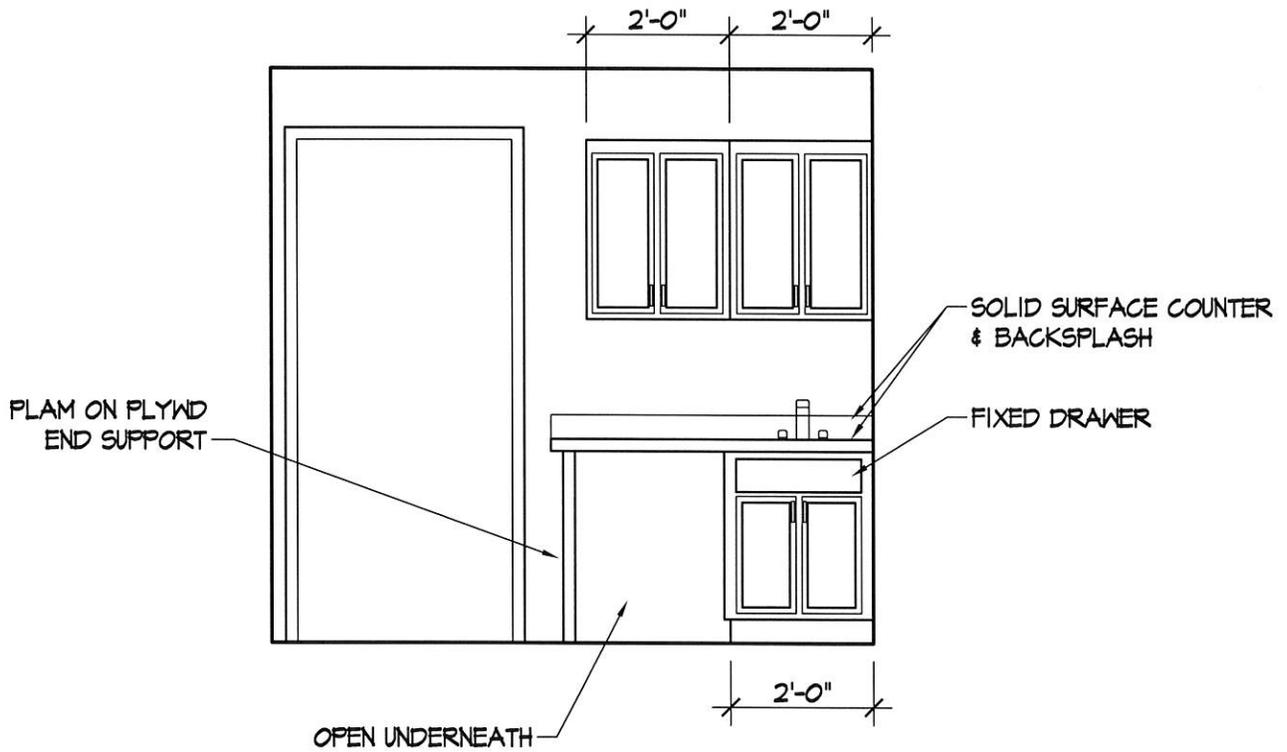

BF ROOM 304 CABINET ELEVATION

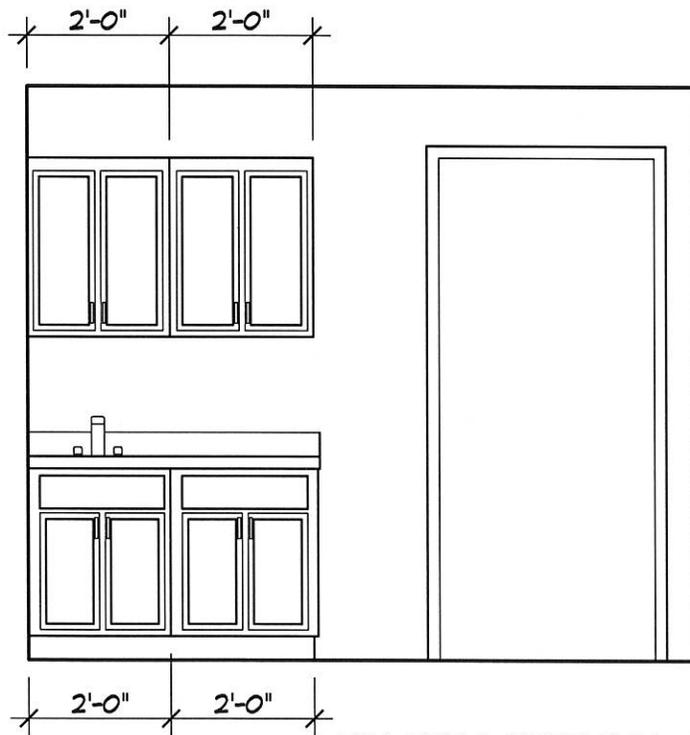

TEACHING PREP 306 CABINET ELEVATION



DAVIS, BOWEN & FRIEDEL, INC.
ARCHITECTS, ENGINEERS & SURVEYORS

SALISBURY, MARYLAND 410-543-9091
MILFORD, DELAWARE 302-424-1441

WILLIAMS STATE SERVICE CENTER
INTERIOR RENOVATIONS

DOVER, DELAWARE

COPYRIGHT © 2009

SK-3

Date: 01/04/13

Scale: NTS

Proj.No.: 586B031.501

