Baltz Elementary School
Capital Improvements

Red Clay Consolidated School District

EDiS Company, Inc.

NOT FOR BIDDING

Bid Package "A"
Volume I
January 11, 2016

NOT FOR BIDDING

SECTION 00 01 10
TABLE OF CONTENTS

DIVISION 0 – PROCUREMENT AND CONTRACT REQUIREMENTS

A. 000110 Table of Contents
B. 000115 List of Drawings
C. 001113 Advertisement for Bid
D. 002113 Instructions to Bidders
E. 004100 Bid Form and Attachments
F. 005200 Agreement with Sample
G. 006113 Performance and Payment Bond
H. 006216 Certificate of Insurance With Sample
I. 007200 General Conditions
J. 007300 Supplementary General Conditions
K. 007343 Wage Rate Requirements with Wages
L. 008114 Drug Testing Forms

DIVISION 01 – GENERAL REQUIREMENTS

A. 011100 Summary of Work
B. 012100 Allowances
C. 012200 Unit Prices
D. 012300 Alternates
E. 012600 Change Order Procedures
F. 012613 Contractor Compensation
G. 012900 Payment Procedures
H. 13000 Administrative Requirements
I. 013113 Project Coordination Meetings
J. 013119 Preinstallation Meetings
K. 013125 Web-Based Project Management System
L. 013216 Construction Schedule
M. 013226 Contractor Daily Reports
N. 013300 Submittal Procedures
O. 013500 Contractor Employee Background Check
P. 013523 Safety Program
Q. 014500 Quality Control
R. 015113 Temporary Electricity
S. 015123 Temporary Heating, Cooling, And Ventilating
T. 015200 Construction Facilities & Temporary Controls
U. 16000 Product Requirements
V. 17000 Execution and Closeout Requirements
W. 017123 Field Engineering
X. 017700 Contract Closeout

NOT FOR BIDDING

1.01 DIVISION 00 -- PROCUREMENT AND CONTRACTING REQUIREMENTS

A. 00 01 10 - Table of Contents

SPECIFICATIONS

2.01 DIVISION 02 -- EXISTING CONDITIONS

A. 02 41 00 - Demolition

2.02 DIVISION 03 -- CONCRETE

A. 03 30 00 - Cast-in-Place Concrete

2.03 DIVISION 04 -- MASONRY

A. 04 05 11 - Masonry Mortaring and Grouting
B. 04 20 00 - Unit Masonry
C. 04 72 00 - Cast Stone Masonry

2.04 DIVISION 06 -- WOOD, PLASTICS, AND COMPOSITES

A. 06 10 00 - Rough Carpentry
B. 06 20 00 - Finish Carpentry

2.05 DIVISION 07 -- THERMAL AND MOISTURE PROTECTION

A. 07 01 50 - Preparation for Re-Roofing
B. 07 21 00 - Thermal Insulation
C. 07 42 13 - Metal Wall Panels
D. 07 53 00 - Elastomeric Membrane Roofing
E. 07 62 00 - Sheet Metal Flashing and Trim
F. 07 72 00 - Roof Accessories
G. 07 72 01 - Roof Hatch Rail
H. 07 90 05 - Joint Sealers

2.06 DIVISION 08 -- OPENINGS

A. 08 11 13 - Hollow Metal Doors and Frames
B. 08 14 16 - Flush Wood Doors
C. 08 31 00 - Access Doors and Panels
D. 08 41 00 - Aluminum Framed Entrance and Doors
E. 08 41 13 - Aluminum Framed Storefront
F. 08 41 13.10 - Aluminum Framed Storefronts - Interior
G. 08 44 13 - Glazed Aluminum Curtain Walls
H. 08 71 00 - Door Hardware
I. 08 80 00 - Glazing

2.07 DIVISION 09 -- FINISHES

A. 09 21 16 - Gypsum Board Assemblies
B. 09 30 00 - Tiling
C. 09 51 00 - Acoustical Ceilings
D. 09 65 00 - Resilient Flooring
E. 09 68 00 - Carpeting

NOT FOR BIDDING

F. 09 90 00 - Painting and Coating

2.08 DIVISION 12 -- FURNISHINGS

A. 12 24 13 - Roller Window Shades

2.09 DIVISION 22 -- PLUMBING

A. 22 05 53 - Identification for Plumbing Piping and Equipment
B. 22 07 19 - Plumbing Piping Insulation
C. 22 10 05 - Plumbing Piping

2.10 DIVISION 23 -- HEATING, VENTILATING, AND AIR-CONDITIONING (HVAC)

A. 23 31 00 - HVAC Ducts and Casings
B. 23 33 00 - Air Duct Accessories
C. 23 37 00 - Air Outlets and Inlets
D. 23 81 01 - Terminal Heat Transfer Units
E. 23 81 27 - Small Split-System Heating and Cooling
F. 23 81 29 - Variable Refrigerant Volume (VRV) HVAC System

2.11 DIVISION 26 -- ELECTRICAL

A. 26 05 01 - Minor Electrical Demolition
B. 26 05 19 - Low-Voltage Electrical Power Conductors and Cables
C. 26 05 26 - Grounding and Bonding for Electrical Systems
D. 26 05 29 - Hangers and Supports for Electrical Systems
E. 26 05 34 - Conduit
F. 26 05 37 - Boxes
G. 26 05 53 - Identification for Electrical Systems
H. 26 24 16 - Panelboards
I. 26 27 17 - Equipment Wiring
J. 26 27 26 - Wiring Devices
K. 26 28 13 – Fuses
M. 26 32 13 - Engine Generators
N. 26 36 00 - Transfer Switches
O. 26 51 00 - Interior Lighting

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

DRAWING LIST

GENERAL		
G1.0	COVER SHEET	3/4/2016
ARCHITECTURAL		
A3.1	LOWER LEVEL FLOOR PLAN	3/4/2016
A3.2	PARTIAL FIRST FLOOR PLAN	3/4/2016
A3.3	PARTIAL FIRST FLOOR PLAN	3/4/2016
A3.4	PARTIAL SECOND FLOOR PLAN	3/4/2016
A3.5	PARTIAL SECOND FLOOR PLAN	3/4/2016
A3.6	ROOF PLAN	3/4/2016
A3.7	BASEMENT REFLECTED CEILING PLAN	3/4/2016
A4.1	BUILDING ELEVATIONS	3/4/2016
A6.1	STOREFRONT ELEVATIONS	3/4/2016
A6.2	STOREFRONT DETAILS	3/4/2016
A6.3	CURTAINWALL DETAILS	3/4/2016
A6.4	ROOF DETAILS	3/4/2016
A6.5	ROOF DETAILS	3/4/2016
A6.6	ROOF DETAILS	3/4/2016
A6.7	DOOR SCHEDULE	3/4/2016
A6.8	ACM ABATEMENT REFERENCE PLAN	3/4/2016
MECHANICAL		
M8.0	MECHANICAL COVER SHEET	3/4/2016
M8.1	PARTIAL FIRST FLOOR MECHANICAL PLAN	3/4/2016
ELECTRICAL		
E9.0	ELECTRICAL COVER SHEET	3/4/2016
E9.1	BASEMENT ELECTRICAL DEMOLITION PLAN	3/4/2016
E9.2	PARTIAL FIRST FLOOR ELECTRICAL DEMOLITION PLAN	3/4/2016
E9.3	PARTIAL FIRST FLOOR ELECTRICAL DEMOLITION PLAN	3/4/2016
E9.4	PARTIAL SECOND FLOOR ELECTRICAL DEMOLITION PLAN	3/4/2016
E9.5	BASEMENT ELECTRICAL PLAN	3/4/2016
E9.6	PARTIAL FIRST FLOOR ELECTRICAL PLAN	3/4/2016
E9.7	PARTIAL FIRST FLOOR ELECTRICAL PLAN	3/4/2016
E9.8	PARTIAL SECOND FLOOR ELECTRICAL PLAN	3/4/2016
E9.9	PANEL SCHEDULE AND SINGLE LINE DIAGRAM	3/4/2016
PLUMBING		
P10.0	PLUMBING COVER SHEET	3/4/2016
P10.1	BASEMENT PLUMBING DEMOLITION PLAN	3/4/2016
P10.2	PARTIAL FIRST FLOOR PLUMBING DEMOLITION PLAN	3/4/2016
P10.3	PARTIAL FIRST FLOOR PLUMBING DEMOLITION PLAN	3/4/2016
P10.4	BASEMENT PLUMBING PLAN	3/4/2016
P10.5	PARTIAL FIRST FLOOR PLUMBING PLAN	3/4/2016
P10.6	PARTIAL FIRST FLOOR PLUMBING PLAN	3/4/2016
FIRE PROTECTION		
FP11.0	LOWER LEVEL SPRINKLER PLAN	3/4/2016

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 001113 ADVERTISEMENT FOR BID

Receipt of Bids

Public notice is hereby given that sealed bids for the following prime contracts will be received for the construction of Baltz Elementary School Capital Improvements located at 1500 Spruce Ave., Wilmington, Delaware 19805. Bids will be received at the Red Clay Consolidated School District, **1798 Limestone Road, Wilmington, DE until 3:00 PM** local time on May 27, 2016, at which time they will be publicly opened and read aloud. ***Bidder bears the risk of late delivery. Any bids received after the stated time will be returned unopened.*** The time and location of the bid opening may be extended with a minimum of 2 calendar days notice to the Bidders.

Contract A-01	Carpentry & General Work
Contract A-02	Roofing
Contract A-03	Glass & Glazing
Contract A-04	Mechanical & Plumbing
Contract A-05	Electrical

NOT FOR BIDDING

Bidding Document

Documents may be viewed and downloaded at EDiS' FTP site. Bidders requesting the log on information may obtain user name and password permission by contacting Cyndi Slothour with EDiS Company at cslothour@ediscompany.com or 302-421-2882. Each contractor will be required to provide the following information prior to receiving the log on information: company name, contact name, email address, phone number, fax number and postal mailing address.

It is the responsibility of each bidder to review and coordinate all Project Documents. This includes plans, specifications and addendums. Documents may be examined on the State of Delaware Online Bid Solicitation Directory, bids.delaware.gov, or at the office of the Construction Manager, EDIS Company, 110 S. Poplar Street, Suite 400, Wilmington, Delaware 19801

Bid Security

A bid security in the amount of 10% of the bid including all alternates, plus a consent of surety must accompany each bid. Bid Security shall specify the Owner as the obligee. Owner: Red Clay Consolidated School District, 1502 Spruce Avenue, Wilmington, Delaware 19805.

Pre-Bid Meeting

A pre-bid meeting will be held at the Baltz Elementary School, 1500 Spruce Ave, Wilmington, DE 19805, on Friday, May 13, 2016 at 10:00 a.m. local time. A site visit will be conducted immediately following the pre-bid meeting. Attendance is highly suggested but not mandatory.

Questions

Please contact EDiS Company, Jeffrey Isbert at jisbert@ediscompany.com or 302-421-2944 with questions.

Conformance to the Delaware Architectural Accessibility Act and the standards of the Architectural Accessibility Board is required on the Project.

Prevailing Wage Rates, as described by Delaware Law, must be adhered to where applicable.

The Red Clay Consolidated School District reserves the right to waive irregularities and to reject any and all bids.

Pursuant to the Office of Management and Budget (OMB) "4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects" requires that Contractors and Subcontractors who work on Large Public Works Contracts funded all or in part with public funds implement a Mandatory Drug Testing Program. The regulation can be downloaded from the following website:
http://regulations.delaware.gov/AdminCode/title19/4000/4100/index.shtml#TopOfPage

END OF SECTION

NOT FOR BIDDING

SECTION 002113 - INSTRUCTIONS TO BIDDERS

1. DEFINITIONS

1.1 Bidding Documents include the Contract Documents, Invitation to Bid, Instructions to Bidders, the Proposal Forms, Contract, General Conditions of the Contract, Supplementary Conditions, Specifications, Plans, and any Addenda issued prior to receipt of bids.

1.2 All definitions set forth in the General Conditions and the other Contract Documents are applicable to the Bidding Documents.

1.3 "Addenda" are written or graphic instruments issued by the Architect/Engineer prior to the receipt of bids which modify or interpret the Bidding Documents, by additions, deletions, clarifications or corrections. Addenda become part of the contract documents upon execution of the agreement.

1.4 The term Work is defined in 1.1.3 of the General Conditions.

1.5 A "Unit of Work" includes all Work covered by the one or more Sections of the specifications listed under that particular Unit of Work in Section 011100 - SUMMARY OF WORK. A Unit of Work is the smallest portion of the Project for which a separate Bid will be accepted by the Construction Manager. The word "Unit" means "Unit of Work" whenever the context clearly implies "Unit of Work".

1.6 A "Bid" is a complete and properly signed proposal to do one or more Units of Work for the sum stipulated therein.

1.7 A "Bidder" is one who submits a Bid to the Bidding Agency for the Unit or Units of Work indicated therein.

1.8 A substantial amount of specification language constitutes definitions for terms found in other Contract Documents, including drawings, which must be recognized as diagrammatic in nature and not completely descriptive of requirements indicated thereon. Certain terms used in Contract Documents are defined generally in this article. Definitions and explanations to this section are not necessarily either complete or exclusive, but are general for the work to the extent not stated more explicitly in another provision of Contract Documents.

1.9 General Requirements (or Conditions) apply to entire work of Contract and, where so indicated, to other elements which are included in the project.

1.10 The term "indicated" is a cross reference to details, notes or schedules on the

NOT FOR BIDDING

Drawings, to other similar means of recording requirements in the Contract Documents. Where terms such as "shown", "noted", "schedule" and "specified" are used in lieu of "indicate," it is for purpose of helping to locate cross reference and no limitation of location is intended, except as specifically noted.

1.11 Where not otherwise explained, terms such as "directed", "requested", "authorized", "selected", "approved", "required", "accepted" and "permitted" mean "directed by Construction Manager or Architect", "requested by Construction Manager or Architect", etc.

1.12 Where used in conjunction with Construction Manager's or Architect's response to submittals, requests, applications, inquiries, reports and claims by Contractor, the meaning of the term "approved" will be held to limitations of Construction Manager's and Architect's responsibilities and duties as specified in General and Supplementary Conditions. In no case will "approval" by Construction Manager or Architect be interpreted as a release of Contractor from responsibilities to fulfill requirements of the Contract Documents.

1.13 The "Project Site" is the space available to Contractor for performance of the Work, either exclusively or in conjunction with others performing other work as part of the Project. The extent of project site is shown on the Drawings and may or may not be identical with description of the land upon which project is to be built. The Contractor shall visit the site to verify contract or construction limits.

1.14 Except as otherwise defined in greater detail, term "furnish" is used to mean supply and deliver to project site, ready for unloading, unpacking, assembly, installation, etc., as applicable in each instance.

1.15 Except as otherwise defined in greater detail, term "install" is used to describe operations at project site including unloading, unpacking, assembly, erection, placing, anchoring, applying, working to dimension, finishing, curing, protecting, cleaning and similar operations as applicable in each instance.

1.16 Except as otherwise defined in greater detail, term "provide" means furnish and install, complete and ready for intended use, as applicable in each instance.

1.17 An "Installer" is the entity, person or firm, engaged by the Contractor or his subcontractor or sub-subcontractor for the performance of a particular unit of work at the project site, including installation, erection, application and similar required operation. It is a general requirement that such installers be expert in operations they are engaged to perform.

1.18 The duties and obligations of the Contract apply to this Contractor (as defined

NOT FOR BIDDING

herein) regardless of similar or identical duties or obligations of other Prime Contractors related to the Project. Therefore, even though other Prime Contractors may have similar, identical or overlapping duties and obligations, each and every duty and obligation set forth in this Contract is enforceable against this Contractor.

2. BIDDER'S REPRESENTATION

2.1 Each Bidder in submitting its bid represents that:

1. It has read and understands the Bidding Documents and its Bid is made in accordance therewith.

2. Contractor has visited the site; familiarized himself with the local conditions under which the work is to be performed; compared the site with drawings and specifications; satisfied himself of the conditions of delivery, handling and storage of materials and all other matters that may be incidental to the Work before submitting his Bid.

3. Its Bid is based upon the materials and equipment described within the Bidding Documents without exceptions.

2.2 EVIDENCE OF REPRESENTATION

1. Submission of a Bid will be considered as evidence of the bidder's representation. No allowance will subsequently be made to the successful contractor by reason of any error omission on his part, due to his neglect in complying with the requirements of this article.

NOT FOR BIDDING

3. BIDDING DOCUMENTS

3.1 ISSUANCE

1. The drawings and specifications of preceding bid packages may not be issued with the drawings and specifications of this bid package but are included by reference in the Table of Contents. Contractors bidding on work in this bid package are responsible for knowing what work has preceded this bid package and how it affects its work. In order to assist contractors in this effort, the contract documents from preceding or simultaneous bid packages will be available for review at the Construction Manager's FTP site; bids.ediscompany.com. Bidders requesting the log on information may obtain user name and password permission by contacting Cyndi Slothour with EDiS Company at **cslothour@ediscompany.com**. Bidding documents will be made available to qualified bidders only. Contractors are advised that no change

orders will be allowed that are based on ignorance of work assigned in preceding or simultaneous bid packages.

2. Bidding Documents will not be issued to subcontractors or other individuals or organizations who will not be contracting directly with the Owner.

3. The complete set of Bidding Documents shall be used in preparing bids; neither the Owner, the Architect nor the Construction Manager assume any responsibility for errors or misinterpretations resulting from the use of incomplete sets of Bidding Documents.

4. The Owner, Architect, and the Construction Manager, in making copies of Bidding Documents available on the above terms, do so only for the purpose of obtaining bids on the Work and do not confer a license or grant for any other use.

3.2 INTERPRETATION OR CORRECTION OF BIDDING DOCUMENTS

1. Bidders shall examine the Bidding Documents carefully and shall promptly notify the Construction Manager of any ambiguity, inconsistency or error which they may discover. No request for adjustment of Contract Time or Sum shall be permitted with regard to any purported ambiguity, inconsistency or error not promptly noticed to the Construction Manager.

2. Bidders requiring clarification or interpretation of the Bidding Documents shall make a written request to the Construction Manager to reach him at least seven days prior to the date of receipt of bids.

3. Any interpretation, correction or change of the Bidding Documents will be made by Addendum. Interpretations, corrections, or changes of the Bidding Documents made in any other manner will not be binding, and Bidders shall not rely upon such interpretations, corrections, and changes.

3.3 SUBSTITUTIONS

1. Refer to Specification Section 016200 - MATERIAL AND EQUIPMENT.

2. Substitution requests must be made at least seven (7) days prior to the receipt of bids.

3.4 ADDENDA

NOT FOR BIDDING

1. Addenda will be emailed to each person or firm recorded by the Construction Manager as having received a complete set of the Bidding Documents, and will be available for inspection on the EDiS FTP site and wherever the Bidding Documents are kept available for that purpose.

2. Addenda issued during the time of bidding shall be listed on Bid form in the space provided. Failure of a Bidder to receive any Addendum shall not release the Bidder from any obligations under his Bid, provided said addendum was sent by e-mail to the address furnished by the bidder for transmittal of mail.

3. No Addenda will be issued later than three (3) days prior to the date for receipt of Bids, except an Addendum withdrawing the request for Bids or one which extends the time or changes the location for the opening of Bids.

4. BIDDING PROCEDURE

4.1 FORM AND STYLE OF BIDS

1. Bids shall be submitted in triplicate upon the proposal form included in these specifications, or upon an exact copy of it.

2. The Bidder shall complete all blank spaces on the Bid form.

3. Where indicated on the Bid form, sums shall be expressed in both words and figures. In case of discrepancy between the two, the written amount shall govern.

4. Any interlineation, alteration or erasure of an entry made in a blank space of the form must be initialed by the signer of the Bid. However, no interlineation, alteration or erasure shall be made in the wording printed on the bid form unless the Bidder is instructed by the Bidding Documents to do so. The Bidders shall add no stipulations or qualifications on the Bid form or accompanying the bid form unless permitted by or instructed by the Bidding Documents to do so.

5. All requested quantities, unit prices and alternates shall be included as part of the bid.

6. All signatures shall be in long hand.

7. The Bidder shall include on the Bid Form, within the Base Bid total costs associated with providing both the Labor and Material Payment and Performance Bonds.

NOT FOR BIDDING

8. The Bidder shall affix his seal to the bid form, if organized as a corporation.

4.2 SUBMISSION OF BIDS

1. Bids shall be deposited at the designated location prior to the time and date for receipt of Bids indicated in the Invitation to Bid, or any extension thereof made by Addendum. The time and location of the bid opening may be extended with a minimum of two (2) calendar days notice to the Bidders. Bids received after the time and date for receipt of Bids will be marked "LATE BID" and returned.

2. The Bid Proposal (3 copies) shall be enclosed in a sealed envelope. The envelope shall be addressed to the Owner, and shall be identified with the Project name, the Bidder's name and address and the Unit of Work included in the Bid.

3. If the Bidder submits his Bid by mail, he shall enclose the above described sealed envelope in a separate mailing envelope with the notation "BID ENCLOSED' on the face thereof.

4. Bids shall include a fully executed Bid Bond, Power of Attorney, Non-collusion Statement, Consent of Surety and Subcontractor listing.

5. The Bidder shall include signed Affidavit(s) for the Bidder and each listed Subcontractor certifying compliance with OMB Regulation 4104- "Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on "Large Public Works Projects."

4.3 MODIFICATION OR WITHDRAWAL OF BID

1. A Bidder may modify his Bid in writing at any time prior to the time scheduled for receiving Bids, provided such written modification is received by the Construction Manager prior to said time.

2. Unless specifically authorized, faxed bids will not be considered.

3. No Bidder shall modify, withdraw or cancel his Bid or any part thereof for SIXTY (60) days after the time designed for the receipt of Bids, in the Invitation to Bid. Any further extension of the time will be by mutual consent of the Owner and the Contractor.

4. A Bid may be withdrawn up until the time scheduled for receiving the Bids. Such withdrawal shall be in writing.

NOT FOR BIDDING

5. CONSIDERATIONS OF BIDS

5.1 OPENING OF BIDS

1. Bid shall be publicly opened and read aloud.

5.2 REJECTION OF BIDS

1. The Owner, in its sole discretion, shall have the right to reject any or all bids for any reason or for no reason whatsoever.

5.3 ACCEPTANCE OF BIDS

1. The Owner, in its sole discretion, shall have the right to waive any informality or irregularity in any Bid received.

2. The Owner shall have the right to accept Alternates in any order or combination.

6. SUBCONTRACT INFORMATION

6.1 SUBMISSION OF SUBCONTRACTOR LIST

1. Should the Contractor fail to utilize any or all of the Subcontractors in the Contractor's Bid statement in the performance of the Work on the public bidding, the Contractor shall be penalized in the amount of (project specific amount *). The Agency may determine to deduct payment of the penalty from the Contractor or have the amount paid directly to the Agency. Any penalty amount assessed against the Contractor may be remitted or refunded, in whole or in part, by the Agency awarding the Contract, only if it is established to the satisfaction of the Agency that the Subcontractor in question has defaulted or is no longer engaged in such business. No claim for the remission or refund of any penalty shall be granted unless an application is filed within one year after the liability of the successful Bidder accrues. All penalty amounts assessed and not refunded or remitted to the Contractor shall be reverted to the State.

   * one (1) percent of the contract amount not to exceed $10,000.

2. Upon request of the Construction Manager, the Bidder shall within seven (7) days of the request submit a list of the other subcontractors or other persons or organizations (including those who are to furnish materials or equipment fabricated to a special design) if any, proposed for the various portions of the

NOT FOR BIDDING

Work not included in the subcontractors list submitted with the bid.

3. The Bidder will be required to establish to the satisfaction of the Construction Manager the capability and experience of all proposed subcontractors to furnish and perform the work described in the sections of the specifications pertaining to such proposed subcontractor's respective trades.

4. Subcontractors and other persons and organizations proposed by the Bidder and accepted by the Owner must be used on the work for which they were proposed and accepted, and shall not be changed except with the written approval of the Construction Manager.

7. EQUALITY OF EMPLOYMENT OPPORTUNITY ON PUBLIC WORKS

During the performance of this Contract, the Contractor agrees as follows:

7.1 The Contractor will not discriminate against any employee or applicant for employment because of race, creed, color, sex or national origin. The Contractor will take affirmative action to ensure the applicants are employed, and that employees are treated during employment, without regard to their race, creed, color, sex or national origin. Such action shall include, but not be limited to, the following: Employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training including apprenticeship. The Contractor agrees to post in conspicuous places available to employees and applicants for employment notices to be provided by the contracting agency setting forth this nondiscrimination clause.

7.2 The Contractor will, in all solicitants or advertisements for employees placed by or on behalf of the Contractor, state that all qualified applicants will receive consideration for employment without regard to race, creed, color sex, or national origin.

7.3 The term "Contract for public works" means construction, reconstruction, demolition, alteration and repair work and maintenance work paid for, in whole or in part, with public funds.

7.4 The Secretary of the Department of Labor shall be responsible for the administration of this section and shall adopt such rules and regulations and issue such orders as he deems necessary to achieve the purpose thereof, provided that no requirement established herby shall be in conflict with subchapter 6904 of this title.

NOT FOR BIDDING

8. PREVAILING WAGE REQUIREMENT

8.1 Wage Provisions: In accordance with Delaware Code, Title 29, Section 6960, renovation projects whose total cost shall exceed $15,000 and $100,000 for new construction, the minimum wage rates for various classes of laborers and mechanics shall be as determined by the Department of Labor, Division of Industrial Affairs of the State of Delaware.

8.2 The prevailing wage shall be the wage paid to a majority of employees performing similar work as reported in the Department's annual prevailing wage survey or in the absence of a majority, the average paid to all employees reported.

8.3 The Contractor shall pay all mechanics and labors employed directly upon the site of work, unconditionally and not less often than once a week and without subsequent deduction or rebate on any account the full amounts accrued at time of payment, computed at wage rates not less than those stated in the specifications, regardless of any contractual relationship which may be alleged to exist between the employer and such laborers and mechanics.

8.4 The scale of the wages to be paid shall be posted by the employer in a prominent and easily accessible place at the site of the work.

8.5 Every contract based upon these specifications shall contain a stipulation that certified sworn payroll reports be maintained by every Contractor and Subcontractor performing work upon the site of construction. The Contractor and Subcontractor shall keep and maintain the sworn payroll information for a period of 2 years from the last day of the work week covered by the payroll. A certified copy of these payroll reports shall be made available: 1) Effective June 30, 2007, all Contractors performing work on public work projects are required to furnish sworn payroll records on a weekly basis to the Department of Labor. Specifically, 29 Del. C. § 6960(c) states that "(e)very contract… shall contain a stipulation that sworn payroll information, as required by the Department of Labor, be furnished weekly." Further, that "(t)he Department of Labor shall keep and maintain the sworn payroll information for a period of 6 months from the last day of the work week covered by the payroll." Lastly, the failure to submit payroll reports shall be subject to a civil penalty of not less than $1,000 nor more than $5,000 for each violation. 29 Del. C. § 6960(e). Sworn payroll information shall consist of a fully completed and notarized report on a form provided upon request by the Department of Labor. *See* Delaware Prevailing Wage Regulations VII A.2(c)"; 2) upon request by the public or for copies thereof. However, a request by the public must be made through the Department of Labor. The requesting party shall, prior to being provided the records, reimburse the costs of preparation by the

NOT FOR BIDDING

Department of Labor in accordance with the Department's copying fee policy. The public shall not be given access to the records at the principal office of the Contractor or Subcontractor; and 3) the certified payroll records shall be on a form provided by the Department of Labor or shall contain the same information as the form provided by the Department and shall be provided within 10 days from receipt of notice requesting the records from the Department of Labor.

9. PERFORMANCE AND PAYMENT BONDS

9.1 The Contractor shall be required to furnish bonds covering the faithful performance of the contract and the payment of all obligations arising thereunder with such sureties secured through the Bidder's usual sources as may be agreeable to the parties. The Owner shall be noted as the obligee. The Owner is the Red Clay Consolidated School District.

9.2 The performance and payment bonds shall each be in an amount equal to 100% of the Contract Sum as adjusted from time to time. The Owner shall be noted as the obligee. The Owner is the Red Clay Consolidated School District.

9.3 TIME OF DELIVERY AND FORM OF BONDS

1. The Bidder shall deliver the required bonds within seven (7) days from receipt of request from the Construction Manager.

2. The performance and payment bonds shall be written in the form found in Section 00600 Bonds.

3. The required bonds shall be by an authorized agent of the bonding company and shall be accompanied by a certified and current copy of the bonding agent's Power of Attorney, indicating the monetary limit of such power. The bonding company shall be licensed to operate in the state which the work is to be performed.

10. EXECUTION OF AGREEMENT

10.1 The Agreement will be written on a contract form, stipulated by the Owner, a copy of which is included in the Specifications.

10.2 The Bidder shall, within seven (7) days following its presentation, execute the Agreement and return it to the Construction Manager.

10.3 The Bidder agrees to commence work within seven (7) days of 1) execution of the Agreement, or 2) receipt of a Letter of Intent to execute the Agreement, or other

NOT FOR BIDDING

authorization to proceed, if furnished at an earlier date.

10.4 The Bidder shall provide two (2) business days prior to contract execution, copies of the Employee Drug Testing Program for the Bidder and all listed Subcontractors.

10.5 If the successful Bidder fails to execute the required Contract and Bond, as aforesaid, within twenty (20) days after the date of official Notice of the Award of the Contract, their Bid guaranty shall immediately be taken and become the property of the State for the benefit of the Agency as liquidated damages, and not as a forfeiture or as a penalty. Award will then be made to the next lowest qualified Bidder of the Work or readvertised, as the Agency may decide.

11. GENERAL COMMENTS

11.1 JOINT VENTURE AGREEMENTS

In the event of a mandatory pre-bid meeting, representatives of both Joint Ventures must attend the pre-bid meeting and must be an officer and co-joint venture of the corporations involved.

Each Joint Venture shall be qualified and capable to complete the project with their own forces.

Included with the bid submission, and as a requirement to bid, a copy of the executed Joint Venture Agreement shall be submitted and signed by all Joint Ventures involved.

All required bid bonds, performance bonds, material and labor payment bonds must be executed by both Joint Ventures and be placed in both of their names.

All required insurance certificates shall name both Joint Ventures.

Both Joint Ventures shall sign the bid form and shall submit a valid Delaware Business License Number with their bid or shall state that the process of application for a Delaware Business License has been initiated.

Both Joint Ventures shall include their Federal E. I. Number with the bid.

Due to exceptional circumstances and for good cause shown, one or more of these provisions may be waived at the discretion of the Owner.

11.2 LICENSE APPLICATION REQUIRED TO BID

NOT FOR BIDDING

A business license application must be initiated prior to or in conjunction with the submission of a bid on competitively bid contracts exceeding $50,000; or in the case of a subcontractor, prior to the submission of a bid by the general contractor. The license application procedure may be initiated by visiting or calling the Division of Revenue.

11.3 BONDING REQUIREMENTS FOR NON-RESIDENT CONTRACTORS

All non-resident contractors are reminded that they must supply a surety or cash bond to the Division of Revenue equal to six percent (6%) of the total of all contracts exceeding $20,000 for construction within this state. For Division of Revenue purposes, cash bonds and bank letters of credit issued by financial institutions will be accepted on all contracts.

11.4 CONTRACT AWARD TO NON-RESIDENT CONTRACTORS

Every architect, or professional engineer or contractor or construction manager engaging in the practice of such profession shall furnish the Department of Finance within 10 days after entering into any contract with a contractor or subcontractor not a resident of this State, a statement of the total value of such contract or contracts together with the names and addresses of the contracting parties.

11.5 STATE LICENSE AND TAX REQUIREMENTS

The Contractor and Subcontractor shall be licensed to do business in the State of Delaware and shall pay al fees and taxes due under State laws. In conformance with Section 2503, Chapter 25, Title 30, Delaware Code, "the Contractor shall furnish the State Tax Department within ten (10) days after award of the Contract, a statement of the total values of each contract and subcontract, together with the names and addresses of the contracting parties. All Contractors are required to submit a copy of their City of Wilmington and New Castle County business license to the Construction Manager.

11.6 RIGHT TO AUDIT RECORDS

The Owner (contracting agency) shall have the right to audit the books and records of a Contractor or any Subcontractor under any Contract or Subcontract to the extent that the books and records relate to the performance of the Contract or Subcontract.

Said books and records shall be maintained by the Contractor for a period of three (3) years from the date of final payment under the Prime Contract and by the

NOT FOR BIDDING

Subcontractor for a period of three (3) years from the date of final payment under the Subcontract.

11.7 LIQUIDATED DAMAGES

Not applicable.

11.8 PREQUALIFICATION

Not applicable

11.9 PREFERENCE FOR DELAWARE LABOR

In the construction of all public works for the State or any political subdivision thereof or by firms contracting with the State or any political subdivision thereof, preference in employment of laborers, workers or mechanics shall be given to bona fide legal citizens of the State who have established citizenship by residence of at least 90 days in the State. Each public works contract for the construction of public works for the State or any political subdivision thereof shall contain a stipulation that any persons, company or corporation who violates this section shall pay a penalty to the Secretary of Finance equal to the amount of compensation paid to any person in violation of this section.

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

CONTRACT A-01 CARPENTRY AND GENERAL WORK

BID FORM

For Bids Due: _____ To: Red Clay Consolidated School District
1502 Spruce Avenue
Wilmington, Delaware 19805

Name of Bidder: _____

Bidder Address: _____

_____

Contact Name: _____ E-Mail Address: _____

Delaware Business License No.: _____ Taxpayer ID No.: _____

(Other License Nos.): _____

Phone No.: ( ) _____ - _____ Fax No.: ( ) _____ - _____

The undersigned, representing that he has read and understands the Bidding Documents and that this bid is made in accordance therewith, that he has visited the site and has familiarized himself with the local conditions under which the Work is to be performed, and that his bid is based upon the materials, systems and equipment described in the Bidding Documents without exception, hereby proposes and agrees to provide all labor, materials, plant, equipment, supplies, transport and other facilities required to execute the work described by the aforesaid documents for the lump sum itemized below:

$_____ ($_____)

ALTERNATES (Bidders must review Section 012300 Alternates for a complete description of alternates)

Alternate No. 1: Scope of work to include elevations 4 and 5 on sheet 4.1, Completed by August 16, 1016

Add/~~Deduct~~ _____($_____)

Alternate No. 1B: Scope of work to include elevations 4 and 5 on sheet 4.1, Completed between June 13, 2017 and August 16, 2017

Add/Deduct _____($_____)

NOT FOR BIDDING

ALTERNATES (Cont.)

Alternate No. 2: Scope of work to include elevations 6, 7, and 8 on sheet 4.1, Completed by August 16, 1016

Add/Deduct-_____($_____)

Alternate No. 2B: Scope of work to include elevations 6, 7, and 8 on sheet 4.1, Completed between June 13, 2017 and August 16, 2017

Add/Deduct-_____($_____)

Alternate No. 3: Scope of work to include elevation 1 on sheet 4.1. , Completed by August 16, 1016

Add/~~Deduct~~ _____($_____)

Alternate No. 3B: Scope of work to include elevation 1 on sheet 4.1., Completed between June 13, 2017 and August 16, 2017

Add/~~Deduct~~ _____($_____)

Alternate No. 4: Provide and remove temporary protection…..

Add/~~Deduct~~ _____($_____)

Alternate No. 5 Provide second shift to expedite completion

Add/~~Deduct~~ _____($_____)

NOT FOR BIDDING

UNIT PRICES

Unit prices conform to applicable project specification section. Refer to the specifications for a complete description of the following Unit Prices:

	ADD
1. Install and removal of temporary sheeting to secure an opening created by removal of 225 SF of windows.	_____
2. Provide one complete unit, per scope of work, plans and specs for window types W1 and W1A.	_____
3. Provide one complete unit, per scope of work, plans and specs for window types W2 and W2A.	_____

NOTE: The difference in price between Add and Deduct in the above Unit Prices should not exceed ten percent (10%).

I/We acknowledge Addendums numbered _____ and the price(s) submitted include any cost/schedule impact they may have.

This bid shall remain valid and cannot be withdrawn for sixty (60) days from the date of opening of bids, and the undersigned shall abide by the Bid Security forfeiture provisions. Bid Security is attached to this Bid (if required).

The Owner shall have the right to reject any or all bids, and to waive any informality or irregularity in any bid received.

This bid is based upon work being accomplished by the Sub-Contractors named on the list attached to this bid.

The undersigned represents and warrants that he has complied and shall comply with all requirements of local, state, and national laws; that no legal requirement has been or shall be violated in making or accepting this bid, in awarding the contract to him or in the prosecution of the work required; that the bid is legal and firm; that he has not, directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken action in restraint of free competitive bidding.

Upon receipt of written notice of the acceptance of this Bid, the Bidder shall, within twenty (20) calendar days, execute the agreement in the required form and deliver the Contract Bonds, and Insurance Certificates, required by the Contract Documents.

I am / We are an Individual / a Partnership / a Corporation

By _____ Trading as _____
(Individual's / General Partner's / Corporate Name)

NOT FOR BIDDING

_____
(State of Corporation)

Business Address:_____
_____
_____
_____

Witness: _____ By: _____
(Authorized Signature)

(SEAL) _____
(Title)

Date: _____

ATTACHMENTS

Sub-Contractor List
Non-Collusion Statement
Bid Bond
Consent of Surety
Delaware Business License
Affidavit of Employee Drug Testing Program
(Others as Required by Project Manuals)

NOT FOR BIDDING

SUBCONTRACTOR LIST

In accordance with Title 29, Chapter 6962 (d)(10)b Delaware Code, the following sub-contractor listing must accompany the bid submittal. The name and address of the sub-contractor must be listed for each category where the bidder intends to use a sub-contractor to perform that category of work. In order to provide full disclosure and acceptance of the bid by the Owner, it is required that bidders list themselves as being the sub-contractor for all categories where he/she is qualified and intends to perform such work.

Subcontractor Category	Subcontractor	Address (City & State)	Subcontractor's Tax Payer ID # or DE Business License #
1. Carpentry	_____	_____	_____
2. Door and Hardware (Supply)	_____	_____	_____

NOT FOR BIDDING

NON-COLLUSION STATEMENT

This is to certify that the undersigned bidder has neither directly nor indirectly, entered into any agreement, participated in any collusion or otherwise taken any action in restraint of free competitive bidding in connection with this proposal submitted this date

All the terms and conditions of _____ have been thoroughly examined and are understood.

NAME OF BIDDER: _____

AUTHORIZED REPRESENTATIVE (TYPED): _____

AUTHORIZED REPRESENTATIVE (SIGNATURE): _____

TITLE: _____

ADDRESS OF BIDDER: _____

_____

_____

PHONE NUMBER: _____

NOT FOR BIDDING

Sworn to and Subscribed before me this _____ day of _____ 20____.

My Commission expires _____. NOTARY PUBLIC _____.

THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.

BID BOND

TO ACCOMPANY PROPOSAL
(Not necessary if security is used)

KNOW ALL MEN BY THESE PRESENTS That: _____of _____in the County of _____ and State of _____ as Principal, and _____of _____in the County of _____ _____ and State of _____ as Surety, legally authorized to do business in the State of Delaware ('State"), are held and firmly unto the Red Clay Consolidated School District in the sum of _____ _____ Dollars (S_____), or percent not to exceed _____ _____ Dollars (S_____) of amount of bid on Contract No. A-01 Carpentry & General Work to be paid to the Red Clay Consolidated School District for the use and benefit of the Red Clay Consolidated School District for which payment well and truly to be made, we do bind ourselves, our and each of our heirs, executors, administrators. and successors, jointly and severally for and in the whole firmly by these presents.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH That if the above bounden Principal who has submitted to the Red Clay Consolidated School District a certain proposal to enter into this contract for the furnishing of certain material and/or services within the State, shall be awarded this Contract, and if said Principal shall well and truly enter into and execute this Contract as may be required by the terms of this Contract and approved by the Red Clay Consolidated School District this Contract to be entered into within twenty days after the date of official notice of the award thereof in accordance with the terms of said proposal, then this obligation shall be void or else to be and remain in full force and virtue.

Sealed with _____seal and dated this____day of _____in the year of our Lord two thousand and _____(20__).

SEALED, AND DELIVERED IN THE PRESENCE OF

_____
Name of Bidder (Organization)

Corporate Seal

By:_____
Authorized Signature

Attest _____

_____
Title

_____
Name of Surety

Witness_____

_____

_____
Title

NOT FOR BIDDING

CONSENT OF SURETY

DATE_____

To:

Gentlemen:

We, the _____

_____
(Surety Company's Address)

_____

a Surety Company authorized to do business in the State of Delaware hereby agrees that if

_____
(Contractor)

_____
(Address)

_____

is awarded the Contract No. _____

We will write the required Performance and/or Labor and Material Bond required by Paragraph 9 of the Instructions to Bidders.

_____
(Surety Company)

By _____
(Attorney-in-Fact)

NOT FOR BIDDING

AFFIDAVIT
OF
EMPLOYEE DRUG TESTING PROGRAM

4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects requires that Contractors and Subcontractors implement a program of mandatory drug testing for Employees who work on Large Public Works Contracts funded all or in part with public funds.

We hereby certify that we have in place or will implement during the entire term of the contract a Mandatory Drug Testing Program for our employees on the jobsite that complies with this regulation:

Contractor/Subcontractor Name: _____

Contractor/Subcontractor Address: _____

_____

_____

Authorized Representative (typed or printed): _____

Authorized Representative (signature): _____

Title: _____

Sworn to and Subscribed before me this _____day of _____ 20_____.

My Commission expires _____. NOTARY PUBLIC _____.

NOT FOR BIDDING

<u>THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.</u>

END OF SECTION

NOT FOR BIDDING

CONTRACT A-02 ROOFING

BID FORM

For Bids Due: _____ To: Red Clay Consolidated School District
1502 Spruce Avenue
Wilmington, Delaware 19805

Name of Bidder: _____

Bidder Address: _____

_____

Contact Name: _____ E-Mail Address: _____

Delaware Business License No.: _____ Taxpayer ID No.: _____

(Other License Nos.): _____

Phone No.: ( ) _____ - _____ Fax No.: ( ) _____ - _____

The undersigned, representing that he has read and understands the Bidding Documents and that this bid is made in accordance therewith, that he has visited the site and has familiarized himself with the local conditions under which the Work is to be performed, and that his bid is based upon the materials, systems and equipment described in the Bidding Documents without exception, hereby proposes and agrees to provide all labor, materials, plant, equipment, supplies, transport and other facilities required to execute the work described by the aforesaid documents for the lump sum itemized below:

$_____ ($_____)

ALTERNATES (Bidders must review Section 012300 Alternates for a complete description of alternates)

Alternate No. 1: Scope of work to include elevations 4 and 5 on sheet 4.1, Completed by August 16, 1016

Add/~~Deduct~~ _____($_____)

Alternate No. 1B: Scope of work to include elevations 4 and 5 on sheet 4.1, Completed between June 13, 2017 and August 16, 2017

Add/Deduct _____($_____)

NOT FOR BIDDING

ALTERNATES (Cont.)

Alternate No. 2: Scope of work to include elevations 6, 7, and 8 on sheet 4.1, Completed by August 16, 1016

Add/Deduct-_____($_____)

Alternate No. 2B: Scope of work to include elevations 6, 7, and 8 on sheet 4.1, Completed between June 13, 2017 and August 16, 2017

Add/Deduct-_____($_____)

Alternate No. 3: Scope of work to include elevation 1 on sheet 4.1. , Completed by August 16, 1016

Add/~~Deduct~~ _____($_____)

Alternate No. 3B: Scope of work to include elevation 1 on sheet 4.1., Completed between June 13, 2017 and August 16, 2017

Add/~~Deduct~~ _____($_____)

Alternate No. 4: Provide and remove temporary protection…..

Add/~~Deduct~~ _____($_____)

Alternate No. 5 Provide second shift to expedite completion

Add/~~Deduct~~ _____($_____)

UNIT PRICES

Unit prices conform to applicable project specification section. Refer to the specifications for a complete description of the following Unit Prices:

	ADD
1. Install and removal of temporary sheeting to secure an opening created by removal of 225 SF of windows.	_____

NOT FOR BIDDING

2. Provide one complete unit, per scope of work, plans and specs for window types W1 and W1A. _____

3. Provide one complete unit, per scope of work, plans and specs for window types W2 and W2A. _____

NOTE: The difference in price between Add and Deduct in the above Unit Prices should not exceed ten percent (10%).

I/We acknowledge Addendums numbered _____ and the price(s) submitted include any cost/schedule impact they may have.

This bid shall remain valid and cannot be withdrawn for sixty (60) days from the date of opening of bids, and the undersigned shall abide by the Bid Security forfeiture provisions. Bid Security is attached to this Bid (if required).

The Owner shall have the right to reject any or all bids, and to waive any informality or irregularity in any bid received.

This bid is based upon work being accomplished by the Sub-Contractors named on the list attached to this bid.

The undersigned represents and warrants that he has complied and shall comply with all requirements of local, state, and national laws; that no legal requirement has been or shall be violated in making or accepting this bid, in awarding the contract to him or in the prosecution of the work required; that the bid is legal and firm; that he has not, directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken action in restraint of free competitive bidding.

Upon receipt of written notice of the acceptance of this Bid, the Bidder shall, within twenty (20) calendar days, execute the agreement in the required form and deliver the Contract Bonds, and Insurance Certificates, required by the Contract Documents.

I am / We are an Individual / a Partnership / a Corporation

By _____ Trading as _____
(Individual's / General Partner's / Corporate Name)

_____
(State of Corporation)

Business Address:_____
_____
_____

NOT FOR BIDDING

_____

Witness: _____ By: _____
(Authorized Signature)

(SEAL) _____
(Title)

Date: _____

ATTACHMENTS

Sub-Contractor List
Non-Collusion Statement
Bid Bond
Consent of Surety
Delaware Business License
Affidavit of Employee Drug Testing Program
(Others as Required by Project Manuals)

NOT FOR BIDDING

SUBCONTRACTOR LIST

In accordance with Title 29, Chapter 6962 (d)(10)b Delaware Code, the following sub-contractor listing must accompany the bid submittal. The name and address of the sub-contractor must be listed for each category where the bidder intends to use a sub-contractor to perform that category of work. In order to provide full disclosure and acceptance of the bid by the Owner, it is required that bidders list themselves as being the sub-contractor for all categories where he/she is qualified and intends to perform such work.

Subcontractor Category	Subcontractor	Address (City & State)	Subcontractor's Tax Payer ID # or DE Business License #
1. Roofing	_____	_____	_____

NOT FOR BIDDING

NON-COLLUSION STATEMENT

This is to certify that the undersigned bidder has neither directly nor indirectly, entered into any agreement, participated in any collusion or otherwise taken any action in restraint of free competitive bidding in connection with this proposal submitted this date

All the terms and conditions of _____ have been thoroughly examined and are understood.

NAME OF BIDDER: _____

AUTHORIZED REPRESENTATIVE (TYPED): _____

AUTHORIZED REPRESENTATIVE (SIGNATURE): _____

TITLE: _____

ADDRESS OF BIDDER: _____

_____

_____

PHONE NUMBER: _____

NOT FOR BIDDING

Sworn to and Subscribed before me this _____ day of _____ 20____.

My Commission expires _____. NOTARY PUBLIC _____.

THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.

BID BOND

TO ACCOMPANY PROPOSAL
(Not necessary if security is used)

KNOW ALL MEN BY THESE PRESENTS That: _____of _____in the County of _____ and State of _____ as Principal, and _____of _____in the County of _____ _____ and State of _____ as Surety, legally authorized to do business in the State of Delaware ('State"), are held and firmly unto the Red Clay Consolidated School District in the sum of _____ _____ Dollars (S_____), or percent not to exceed _____ _____ Dollars (S_____) of amount of bid on Contract No. A-01 Carpentry & General Work to be paid to the Red Clay Consolidated School District for the use and benefit of the Red Clay Consolidated School District for which payment well and truly to be made, we do bind ourselves, our and each of our heirs, executors, administrators. and successors, jointly and severally for and in the whole firmly by these presents.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH That if the above bounden Principal who has submitted to the Red Clay Consolidated School District a certain proposal to enter into this contract for the furnishing of certain material and/or services within the State, shall be awarded this Contract, and if said Principal shall well and truly enter into and execute this Contract as may be required by the terms of this Contract and approved by the Red Clay Consolidated School District this Contract to be entered into within twenty days after the date of official notice of the award thereof in accordance with the terms of said proposal, then this obligation shall be void or else to be and remain in full force and virtue.

Sealed with _____seal and dated this____day of _____in the year of our Lord two thousand and _____(20__).

SEALED, AND DELIVERED IN THE PRESENCE OF

_____
Name of Bidder (Organization)

Corporate Seal

By:_____
Authorized Signature

Attest _____

_____
Title

_____
Name of Surety

Witness_____

_____

_____
Title

NOT FOR BIDDING

CONSENT OF SURETY

DATE_____

To:

Gentlemen:

We, the _____

_____
(Surety Company's Address)

_____

a Surety Company authorized to do business in the State of Delaware hereby agrees that if

_____
(Contractor)

_____
(Address)

_____

is awarded the Contract No. _____

We will write the required Performance and/or Labor and Material Bond required by Paragraph 9 of the Instructions to Bidders.

_____
(Surety Company)

By _____
(Attorney-in-Fact)

NOT FOR BIDDING

AFFIDAVIT
OF
EMPLOYEE DRUG TESTING PROGRAM

4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects requires that Contractors and Subcontractors implement a program of mandatory drug testing for Employees who work on Large Public Works Contracts funded all or in part with public funds.

We hereby certify that we have in place or will implement during the entire term of the contract a Mandatory Drug Testing Program for our employees on the jobsite that complies with this regulation:

Contractor/Subcontractor Name: _____

Contractor/Subcontractor Address: _____

_____

_____

Authorized Representative (typed or printed): _____

Authorized Representative (signature): _____

Title: _____

Sworn to and Subscribed before me this _____day of _____ 20_____.

My Commission expires _____. NOTARY PUBLIC _____.

NOT FOR BIDDING

<u>THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.</u>

END OF SECTION

NOT FOR BIDDING

CONTRACT A-03 GLASS AND GLAZING

BID FORM

For Bids Due: _____ To: Red Clay Consolidated School District
1502 Spruce Avenue
Wilmington, Delaware 19805

Name of Bidder: _____

Bidder Address: _____

_____

Contact Name: _____ E-Mail Address: _____

Delaware Business License No.: _____ Taxpayer ID No.: _____

(Other License Nos.): _____

Phone No.: ( ) _____ - _____ Fax No.: ( ) _____ - _____

The undersigned, representing that he has read and understands the Bidding Documents and that this bid is made in accordance therewith, that he has visited the site and has familiarized himself with the local conditions under which the Work is to be performed, and that his bid is based upon the materials, systems and equipment described in the Bidding Documents without exception, hereby proposes and agrees to provide all labor, materials, plant, equipment, supplies, transport and other facilities required to execute the work described by the aforesaid documents for the lump sum itemized below:

$_____ ($_____)

ALTERNATES (Bidders must review Section 012300 Alternates for a complete description of alternates)

Alternate No. 1: Scope of work to include elevations 4 and 5 on sheet 4.1, Completed by August 16, 1016

Add/~~Deduct~~ _____($_____)

Alternate No. 1B: Scope of work to include elevations 4 and 5 on sheet 4.1, Completed between June 13, 2017 and August 16, 2017

NOT FOR BIDDING

Add/Deduct _____($_____)

ALTERNATES (Cont.)

Alternate No. 2: Scope of work to include elevations 6, 7, and 8 on sheet 4.1, Completed by August 16, 1016

Add/Deduct-_____($_____)

Alternate No. 2B: Scope of work to include elevations 6, 7, and 8 on sheet 4.1, Completed between June 13, 2017 and August 16, 2017

Add/Deduct-_____($_____)

Alternate No. 3: Scope of work to include elevation 1 on sheet 4.1. , Completed by August 16, 1016

Add/~~Deduct~~ _____($_____)

Alternate No. 3B: Scope of work to include elevation 1 on sheet 4.1., Completed between June 13, 2017 and August 16, 2017

Add/~~Deduct~~ _____($_____)

Alternate No. 4: Provide and remove temporary protection…..

Add/~~Deduct~~ _____($_____)

Alternate No. 5 Provide second shift to expedite completion

Add/~~Deduct~~ _____($_____)

NOT FOR BIDDING

UNIT PRICES

Unit prices conform to applicable project specification section. Refer to the specifications for a complete description of the following Unit Prices:

	ADD
1. Install and removal of temporary sheeting to secure an opening created by removal of 225 SF of windows.	_____
2. Provide one complete unit, per scope of work, plans and specs for window types W1 and W1A.	_____
3. Provide one complete unit, per scope of work, plans and specs for window types W2 and W2A.	_____

NOT FOR BIDDING

I/We acknowledge Addendums numbered _____ and the price(s) submitted include any cost/schedule impact they may have.

This bid shall remain valid and cannot be withdrawn for sixty (60) days from the date of opening of bids, and the undersigned shall abide by the Bid Security forfeiture provisions. Bid Security is attached to this Bid (if required).

The Owner shall have the right to reject any or all bids, and to waive any informality or irregularity in any bid received. This bid is based upon work being accomplished by the Sub-Contractors named on the list attached to this bid.

The undersigned represents and warrants that he has complied and shall comply with all requirements of local, state, and national laws; that no legal requirement has been or shall be violated in making or accepting this bid, in awarding the contract to him or in the prosecution of the work required; that the bid is legal and firm; that he has not, directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken action in restraint of free competitive bidding.

Upon receipt of written notice of the acceptance of this Bid, the Bidder shall, within twenty (20) calendar days, execute the agreement in the required form and deliver the Contract Bonds, and Insurance Certificates, required by the Contract Documents.

I am / We are an Individual / a Partnership / a Corporation

By _____ Trading as _____
(Individual's / General Partner's / Corporate Name)

_____
(State of Corporation)

Business Address:_____
_____
_____
_____

Witness: _____ By: _____
(Authorized Signature)

(SEAL) _____
(Title)

Date: _____

ATTACHMENTS

Sub-Contractor List
Non-Collusion Statement
Bid Bond
Consent of Surety
Delaware Business License
Affidavit of Employee Drug Testing Program
(Others as Required by Project Manuals)

NOT FOR BIDDING

SUBCONTRACTOR LIST

In accordance with Title 29, Chapter 6962 (d)(10)b Delaware Code, the following sub-contractor listing must accompany the bid submittal. The name and address of the sub-contractor must be listed for each category where the bidder intends to use a sub-contractor to perform that category of work. In order to provide full disclosure and acceptance of the bid by the Owner, it is required that bidders list themselves as being the sub-contractor for all categories where he/she is qualified and intends to perform such work.

Subcontractor Category	Subcontractor	Address (City & State)	Subcontractor's Tax Payer ID # or DE Business License #
1. Glass and Glazing			

NOT FOR BIDDING

NON-COLLUSION STATEMENT

This is to certify that the undersigned bidder has neither directly nor indirectly, entered into any agreement, participated in any collusion or otherwise taken any action in restraint of free competitive bidding in connection with this proposal submitted this date

All the terms and conditions of _____ have been thoroughly examined and are understood.

NAME OF BIDDER: _____

AUTHORIZED REPRESENTATIVE (TYPED): _____

AUTHORIZED REPRESENTATIVE (SIGNATURE): _____

TITLE: _____

ADDRESS OF BIDDER: _____

_____

_____

PHONE NUMBER: _____

NOT FOR BIDDING

Sworn to and Subscribed before me this _____ day of _____ 20____.

My Commission expires _____. NOTARY PUBLIC _____.

THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.

BID BOND

TO ACCOMPANY PROPOSAL
(Not necessary if security is used)

KNOW ALL MEN BY THESE PRESENTS That: _____of _____in the County of _____ and State of _____ as Principal, and _____of _____in the County of _____ _____ and State of _____ as Surety, legally authorized to do business in the State of Delaware ('State"), are held and firmly unto the Red Clay Consolidated School District in the sum of _____ _____ Dollars (S_____), or percent not to exceed _____ _____ Dollars (S_____) of amount of bid on Contract No. A-01 Carpentry & General Work to be paid to the Red Clay Consolidated School District for the use and benefit of the Red Clay Consolidated School District for which payment well and truly to be made, we do bind ourselves, our and each of our heirs, executors, administrators. and successors, jointly and severally for and in the whole firmly by these presents.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH That if the above bounden Principal who has submitted to the Red Clay Consolidated School District a certain proposal to enter into this contract for the furnishing of certain material and/or services within the State, shall be awarded this Contract, and if said Principal shall well and truly enter into and execute this Contract as may be required by the terms of this Contract and approved by the Red Clay Consolidated School District this Contract to be entered into within twenty days after the date of official notice of the award thereof in accordance with the terms of said proposal, then this obligation shall be void or else to be and remain in full force and virtue.

Sealed with _____seal and dated this____day of _____in the year of our Lord two thousand and _____(20__).

SEALED, AND DELIVERED IN THE PRESENCE OF

_____
Name of Bidder (Organization)

Corporate Seal

By:_____
Authorized Signature

Attest _____

_____
Title

_____
Name of Surety

Witness_____

_____

_____
Title

NOT FOR BIDDING

CONSENT OF SURETY

DATE_____

To:

Gentlemen:

We, the _____

_____
(Surety Company's Address)

_____

a Surety Company authorized to do business in the State of Delaware hereby agrees that if

_____
(Contractor)

_____
(Address)

_____

is awarded the Contract No. _____

We will write the required Performance and/or Labor and Material Bond required by Paragraph 9 of the Instructions to Bidders.

_____
(Surety Company)

By _____
(Attorney-in-Fact)

NOT FOR BIDDING

AFFIDAVIT
OF
EMPLOYEE DRUG TESTING PROGRAM

4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects requires that Contractors and Subcontractors implement a program of mandatory drug testing for Employees who work on Large Public Works Contracts funded all or in part with public funds.

We hereby certify that we have in place or will implement during the entire term of the contract a Mandatory Drug Testing Program for our employees on the jobsite that complies with this regulation:

Contractor/Subcontractor Name: _____

Contractor/Subcontractor Address: _____

_____

_____

Authorized Representative (typed or printed): _____

Authorized Representative (signature): _____

Title: _____

Sworn to and Subscribed before me this _____day of _____ 20_____.

My Commission expires _____. NOTARY PUBLIC _____.

NOT FOR BIDDING

<u>THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.</u>

END OF SECTION

NOT FOR BIDDING

CONTRACT A-05 MECHANICAL AND PLUMBING

BID FORM

For Bids Due: _____ To: Red Clay Consolidated School District
1502 Spruce Avenue
Wilmington, Delaware 19805

Name of Bidder: _____

Bidder Address: _____

_____

Contact Name: _____ E-Mail Address: _____

Delaware Business License No.: _____ Taxpayer ID No.: _____

(Other License Nos.): _____

Phone No.: ( ) _____ - _____ Fax No.: ( ) _____ - _____

The undersigned, representing that he has read and understands the Bidding Documents and that this bid is made in accordance therewith, that he has visited the site and has familiarized himself with the local conditions under which the Work is to be performed, and that his bid is based upon the materials, systems and equipment described in the Bidding Documents without exception, hereby proposes and agrees to provide all labor, materials, plant, equipment, supplies, transport and other facilities required to execute the work described by the aforesaid documents for the lump sum itemized below:

$_____ ($_____)

ALTERNATES (Bidders must review Section 012300 Alternates for a complete description of alternates)

Alternate No. 1: Scope of work to include elevations 4 and 5 on sheet 4.1, Completed by August 16, 1016

Add/~~Deduct~~ _____($_____)

Alternate No. 1B: Scope of work to include elevations 4 and 5 on sheet 4.1, Completed between June 13, 2017 and August 16, 2017

Add/Deduct _____($_____)

NOT FOR BIDDING

ALTERNATES (Cont.)

Alternate No. 2: Scope of work to include elevations 6, 7, and 8 on sheet 4.1, Completed by August 16, 1016

Add/Deduct-_____($_____)

Alternate No. 2B: Scope of work to include elevations 6, 7, and 8 on sheet 4.1, Completed between June 13, 2017 and August 16, 2017

Add/Deduct-_____($_____)

Alternate No. 3: Scope of work to include elevation 1 on sheet 4.1. , Completed by August 16, 1016

Add/~~Deduct~~ _____($_____)

Alternate No. 3B: Scope of work to include elevation 1 on sheet 4.1., Completed between June 13, 2017 and August 16, 2017

Add/~~Deduct~~ _____($_____)

Alternate No. 4: Provide and remove temporary protection…..

Add/~~Deduct~~ _____($_____)

Alternate No. 5 Provide second shift to expedite completion

Add/~~Deduct~~ _____($_____)

NOT FOR BIDDING

UNIT PRICES

Unit prices conform to applicable project specification section. Refer to the specifications for a complete description of the following Unit Prices:

NA

NOTE: The difference in price between Add and Deduct in the above Unit Prices should not exceed ten percent (10%).

I/We acknowledge Addendums numbered _____ and the price(s) submitted include any cost/schedule impact they may have.

This bid shall remain valid and cannot be withdrawn for sixty (60) days from the date of opening of bids, and the undersigned shall abide by the Bid Security forfeiture provisions. Bid Security is attached to this Bid (if required).

The Owner shall have the right to reject any or all bids, and to waive any informality or irregularity in any bid received.

This bid is based upon work being accomplished by the Sub-Contractors named on the list attached to this bid.

The undersigned represents and warrants that he has complied and shall comply with all requirements of local, state, and national laws; that no legal requirement has been or shall be violated in making or accepting this bid, in awarding the contract to him or in the prosecution of the work required; that the bid is legal and firm; that he has not, directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken action in restraint of free competitive bidding.

Upon receipt of written notice of the acceptance of this Bid, the Bidder shall, within twenty (20) calendar days, execute the agreement in the required form and deliver the Contract Bonds, and Insurance Certificates, required by the Contract Documents.

I am / We are an Individual / a Partnership / a Corporation

By _____ Trading as _____
(Individual's / General Partner's / Corporate Name)

_____
(State of Corporation)

Business Address:_____
_____

NOT FOR BIDDING

_____

_____

Witness: _____ By: _____

(Authorized Signature)

(SEAL) _____

(Title)

Date: _____

ATTACHMENTS

Sub-Contractor List
Non-Collusion Statement
Bid Bond
Consent of Surety
Delaware Business License
Affidavit of Employee Drug Testing Program
(Others as Required by Project Manuals)

NOT FOR BIDDING

SUBCONTRACTOR LIST

In accordance with Title 29, Chapter 6962 (d)(10)b Delaware Code, the following sub-contractor listing must accompany the bid submittal. The name and address of the sub-contractor must be listed for each category where the bidder intends to use a sub-contractor to perform that category of work. In order to provide full disclosure and acceptance of the bid by the Owner, it is required that bidders list themselves as being the sub-contractor for all categories where he/she is qualified and intends to perform such work.

Subcontractor Category	Subcontractor	Address (City & State)	Subcontractor's Tax Payer ID # or DE Business License #
1. Mechanical			
2. Plumbing			

NOT FOR BIDDING

NON-COLLUSION STATEMENT

This is to certify that the undersigned bidder has neither directly nor indirectly, entered into any agreement, participated in any collusion or otherwise taken any action in restraint of free competitive bidding in connection with this proposal submitted this date

All the terms and conditions of _____ have been thoroughly examined and are understood.

NAME OF BIDDER: _____

AUTHORIZED REPRESENTATIVE (TYPED): _____

AUTHORIZED REPRESENTATIVE (SIGNATURE): _____

TITLE: _____

ADDRESS OF BIDDER: _____

_____

_____

PHONE NUMBER: _____

NOT FOR BIDDING

Sworn to and Subscribed before me this _____ day of _____ 20____.

My Commission expires _____. NOTARY PUBLIC _____.

THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.

BID BOND

TO ACCOMPANY PROPOSAL
(Not necessary if security is used)

KNOW ALL MEN BY THESE PRESENTS That: _____of _____in the County of _____ and State of _____ as Principal, and _____of _____in the County of _____ _____ and State of _____ as Surety, legally authorized to do business in the State of Delaware ('State"), are held and firmly unto the Red Clay Consolidated School District in the sum of _____ _____ Dollars (S_____), or percent not to exceed _____ _____ Dollars (S_____) of amount of bid on Contract No. A-01 Carpentry & General Work to be paid to the Red Clay Consolidated School District for the use and benefit of the Red Clay Consolidated School District for which payment well and truly to be made, we do bind ourselves, our and each of our heirs, executors, administrators. and successors, jointly and severally for and in the whole firmly by these presents.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH That if the above bounden Principal who has submitted to the Red Clay Consolidated School District a certain proposal to enter into this contract for the furnishing of certain material and/or services within the State, shall be awarded this Contract, and if said Principal shall well and truly enter into and execute this Contract as may be required by the terms of this Contract and approved by the Red Clay Consolidated School District this Contract to be entered into within twenty days after the date of official notice of the award thereof in accordance with the terms of said proposal, then this obligation shall be void or else to be and remain in full force and virtue.

Sealed with _____seal and dated this____day of _____in the year of our Lord two thousand and _____(20__).

SEALED, AND DELIVERED IN THE PRESENCE OF

_____
Name of Bidder (Organization)

Corporate Seal

By:_____
Authorized Signature

Attest _____

_____
Title

_____
Name of Surety

Witness_____

_____

_____
Title

NOT FOR BIDDING

CONSENT OF SURETY

DATE_____

To:

Gentlemen:

We, the _____

_____
(Surety Company's Address)

_____

a Surety Company authorized to do business in the State of Delaware hereby agrees that if

_____
(Contractor)

_____
(Address)

_____

is awarded the Contract No. _____

We will write the required Performance and/or Labor and Material Bond required by Paragraph 9 of the Instructions to Bidders.

_____
(Surety Company)

By _____
(Attorney-in-Fact)

NOT FOR BIDDING

AFFIDAVIT
OF
EMPLOYEE DRUG TESTING PROGRAM

4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects requires that Contractors and Subcontractors implement a program of mandatory drug testing for Employees who work on Large Public Works Contracts funded all or in part with public funds.

We hereby certify that we have in place or will implement during the entire term of the contract a Mandatory Drug Testing Program for our employees on the jobsite that complies with this regulation:

Contractor/Subcontractor Name: _____

Contractor/Subcontractor Address: _____

_____

_____

Authorized Representative (typed or printed): _____

Authorized Representative (signature): _____

Title: _____

Sworn to and Subscribed before me this _____day of _____ 20_____.

My Commission expires _____. NOTARY PUBLIC _____.

NOT FOR BIDDING

<u>THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.</u>

END OF SECTION

NOT FOR BIDDING

CONTRACT A-04 ELECTRICAL

BID FORM

For Bids Due: _____ To: Red Clay Consolidated School District
1502 Spruce Avenue
Wilmington, Delaware 19805

Name of Bidder: _____

Bidder Address: _____

_____

Contact Name: _____ E-Mail Address: _____

Delaware Business License No.: _____ Taxpayer ID No.: _____

(Other License Nos.): _____

Phone No.: ( ) _____ - _____ Fax No.: ( ) _____ - _____

The undersigned, representing that he has read and understands the Bidding Documents and that this bid is made in accordance therewith, that he has visited the site and has familiarized himself with the local conditions under which the Work is to be performed, and that his bid is based upon the materials, systems and equipment described in the Bidding Documents without exception, hereby proposes and agrees to provide all labor, materials, plant, equipment, supplies, transport and other facilities required to execute the work described by the aforesaid documents for the lump sum itemized below:

$_____ ($_____)

ALTERNATES (Bidders must review Section 012300 Alternates for a complete description of alternates)

Alternate No. 1: Scope of work to include elevations 4 and 5 on sheet 4.1, Completed by August 16, 1016

Add/~~Deduct~~ _____($_____)

Alternate No. 1B: Scope of work to include elevations 4 and 5 on sheet 4.1, Completed between June 13, 2017 and August 16, 2017

Add/Deduct _____($_____)

NOT FOR BIDDING

ALTERNATES (Cont.)

Alternate No. 2: Scope of work to include elevations 6, 7, and 8 on sheet 4.1, Completed by August 16, 1016

Add/Deduct-_____($_____)

Alternate No. 2B: Scope of work to include elevations 6, 7, and 8 on sheet 4.1, Completed between June 13, 2017 and August 16, 2017

Add/Deduct-_____($_____)

Alternate No. 3: Scope of work to include elevation 1 on sheet 4.1. , Completed by August 16, 1016

Add/~~Deduct~~ _____($_____)

Alternate No. 3B: Scope of work to include elevation 1 on sheet 4.1., Completed between June 13, 2017 and August 16, 2017

Add/~~Deduct~~ _____($_____)

Alternate No. 4: Provide and remove temporary protection…..

Add/~~Deduct~~ _____($_____)

Alternate No. 5 Provide second shift to expedite completion

Add/~~Deduct~~ _____($_____)

NOT FOR BIDDING

UNIT PRICES

Unit prices conform to applicable project specification section. Refer to the specifications for a complete description of the following Unit Prices:

	Add	Deduct
NA		

NOTE: The difference in price between Add and Deduct in the above Unit Prices should not exceed ten percent (10%).

I/We acknowledge Addendums numbered _____ and the price(s) submitted include any cost/schedule impact they may have.

This bid shall remain valid and cannot be withdrawn for sixty (60) days from the date of opening of bids, and the undersigned shall abide by the Bid Security forfeiture provisions. Bid Security is attached to this Bid (if required).

The Owner shall have the right to reject any or all bids, and to waive any informality or irregularity in any bid received.

This bid is based upon work being accomplished by the Sub-Contractors named on the list attached to this bid.

The undersigned represents and warrants that he has complied and shall comply with all requirements of local, state, and national laws; that no legal requirement has been or shall be violated in making or accepting this bid, in awarding the contract to him or in the prosecution of the work required; that the bid is legal and firm; that he has not, directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken action in restraint of free competitive bidding.

Upon receipt of written notice of the acceptance of this Bid, the Bidder shall, within twenty (20) calendar days, execute the agreement in the required form and deliver the Contract Bonds, and Insurance Certificates, required by the Contract Documents.

I am / We are an Individual / a Partnership / a Corporation

By _____ Trading as _____
(Individual's / General Partner's / Corporate Name)

_____
(State of Corporation)

Business Address:_____
_____
_____

NOT FOR BIDDING

_____

Witness: _____ By: _____
(Authorized Signature)

(SEAL) _____
(Title)

Date: _____

ATTACHMENTS

Sub-Contractor List
Non-Collusion Statement
Bid Bond
Consent of Surety
Delaware Business License
Affidavit of Employee Drug Testing Program
(Others as Required by Project Manuals)

NOT FOR BIDDING

SUBCONTRACTOR LIST

In accordance with Title 29, Chapter 6962 (d)(10)b Delaware Code, the following sub-contractor listing must accompany the bid submittal. The name and address of the sub-contractor must be listed for each category where the bidder intends to use a sub-contractor to perform that category of work. In order to provide full disclosure and acceptance of the bid by the Owner, it is required that bidders list themselves as being the sub-contractor for all categories where he/she is qualified and intends to perform such work.

Subcontractor Category	Subcontractor	Address (City & State)	Subcontractor's Tax Payer ID # or DE Business License #
1. Electrical			

NOT FOR BIDDING

NON-COLLUSION STATEMENT

This is to certify that the undersigned bidder has neither directly nor indirectly, entered into any agreement, participated in any collusion or otherwise taken any action in restraint of free competitive bidding in connection with this proposal submitted this date

All the terms and conditions of _____ have been thoroughly examined and are understood.

NAME OF BIDDER: _____

AUTHORIZED REPRESENTATIVE (TYPED): _____

AUTHORIZED REPRESENTATIVE (SIGNATURE): _____

TITLE: _____

ADDRESS OF BIDDER: _____

_____

_____

PHONE NUMBER: _____

NOT FOR BIDDING

Sworn to and Subscribed before me this _____ day of _____ 20____.

My Commission expires _____. NOTARY PUBLIC _____.

THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.

BID BOND

TO ACCOMPANY PROPOSAL
(Not necessary if security is used)

KNOW ALL MEN BY THESE PRESENTS That: _____of _____in the County of _____ and State of _____ as Principal, and _____of _____in the County of _____ _____ and State of _____ as Surety, legally authorized to do business in the State of Delaware ('State"), are held and firmly unto the Red Clay Consolidated School District in the sum of _____ _____ Dollars (S_____), or percent not to exceed _____ _____ Dollars (S_____) of amount of bid on Contract No. A-01 Carpentry & General Work to be paid to the Red Clay Consolidated School District for the use and benefit of the Red Clay Consolidated School District for which payment well and truly to be made, we do bind ourselves, our and each of our heirs, executors, administrators. and successors, jointly and severally for and in the whole firmly by these presents.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH That if the above bounden Principal who has submitted to the Red Clay Consolidated School District a certain proposal to enter into this contract for the furnishing of certain material and/or services within the State, shall be awarded this Contract, and if said Principal shall well and truly enter into and execute this Contract as may be required by the terms of this Contract and approved by the Red Clay Consolidated School District this Contract to be entered into within twenty days after the date of official notice of the award thereof in accordance with the terms of said proposal, then this obligation shall be void or else to be and remain in full force and virtue.

Sealed with _____seal and dated this____day of _____in the year of our Lord two thousand and _____(20__).

SEALED, AND DELIVERED IN THE PRESENCE OF

_____
Name of Bidder (Organization)

Corporate Seal

By:_____
Authorized Signature

Attest _____

_____
Title

_____
Name of Surety

Witness_____

_____

_____
Title

NOT FOR BIDDING

CONSENT OF SURETY

DATE_____

To:

Gentlemen:

We, the _____

_____
(Surety Company's Address)

_____

a Surety Company authorized to do business in the State of Delaware hereby agrees that if

_____
(Contractor)

_____
(Address)

_____

is awarded the Contract No. _____

We will write the required Performance and/or Labor and Material Bond required by Paragraph 9 of the Instructions to Bidders.

_____
(Surety Company)

By _____
(Attorney-in-Fact)

NOT FOR BIDDING

AFFIDAVIT
OF
EMPLOYEE DRUG TESTING PROGRAM

4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects requires that Contractors and Subcontractors implement a program of mandatory drug testing for Employees who work on Large Public Works Contracts funded all or in part with public funds.

We hereby certify that we have in place or will implement during the entire term of the contract a Mandatory Drug Testing Program for our employees on the jobsite that complies with this regulation:

Contractor/Subcontractor Name: _____

Contractor/Subcontractor Address: _____

_____

_____

Authorized Representative (typed or printed): _____

Authorized Representative (signature): _____

Title: _____

Sworn to and Subscribed before me this _____day of _____ 20_____.

My Commission expires _____. NOTARY PUBLIC _____.

NOT FOR BIDDING

<u>THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.</u>

END OF SECTION

NOT FOR BIDDING

SECTION 005200 - AGREEMENT

1. SUMMARY

1.1. The Agreement Form for this Project is either the American Institute of Architects Standard Form of Agreement between Owner and Contractor, Construction Manager as Advisor, AIA Document A132 - 2009 Edition

1.2 A copy of AIA Document A132 – 2009 Edition is bound into this Project Manual following this page.

1.2.1 Under Article 5.1.4.5 add the following:

"Upon completion of the work under the Contract, the Owner may release 60% of the amount then retained. The balance of the amount retained will be held until:

A. All reports required of the Contract are received;
B. All Subcontractors in trades listed on the Bid Form are paid by the Contractor, unless the amount owed to the Subcontractor is disputed, in which case the Owner may withhold 150% of the amount withheld by the Contractor in its dispute with the Subcontractor; and
C. Final payment is authorized by the Owner."

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

AIA® Document A132™ – 2009

Standard Form of Agreement Between Owner and Contractor, *Construction Manager as Adviser Edition*

AGREEMENT made as of the day of in the year .
(In words, indicate day, month and year.)

BETWEEN the Owner:
(Name, legal status, address and other information)

Red Clay Consolidated School District
1502 Spruce Avenue
Wilmington, DE 19805

and the Contractor:
(Name, legal status, address and other information)

for the following Project:
(Name, location and detailed description)

Warner Elementary School

The Construction Manager:
(Name, legal status, address and other information)

EDiS Company
110 South Poplar Street, Suite 400
Wilmington, DE 19801

The Architect:
(Name, legal status, address and other information)

ABHA Architects
1621 N. Lincoln Street
Wilmington, DE 19806

The Owner and Contractor agree as follows.

ADDITIONS AND DELETIONS: The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added necessary information and where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

This document is intended to be used in conjunction with AIA Documents A232™–2009, General Conditions of the Contract for Construction, Construction Manager as Adviser Edition; B132™–2009, Standard Form of Agreement Between Owner and Architect, Construction Manager as Adviser Edition; and C132™–2009, Standard Form of Agreement Between Owner and Construction Manager as Adviser.

AIA Document A232™–2009 is adopted in this document by reference. Do not use with other general conditions unless this document is modified.

NOT FOR BIDDING

AIA Document A132™ – 2009 (formerly A101™CMa – 1992). Copyright © 1975, 1980, 1992 and 2009 by The American Institute of Architects. **All rights reserved. WARNING: This AIA® Document is protected by U.S. Copyright Law and International Treaties. Unauthorized reproduction or distribution of this AIA® Document, or any portion of it, may result in severe civil and criminal penalties, and will be prosecuted to the maximum extent possible under the law.** This document was produced by AIA software at 08:29:39 on 03/02/2015 under Order No.1697299329_1 which expires on 01/26/2016, and is not for resale.
User Notes: (1517183831)

TABLE OF ARTICLES

1 THE CONTRACT DOCUMENTS

2 THE WORK OF THIS CONTRACT

3 DATE OF COMMENCEMENT AND SUBSTANTIAL COMPLETION

4 CONTRACT SUM

5 PAYMENTS

6 DISPUTE RESOLUTION

7 TERMINATION OR SUSPENSION

8 MISCELLANEOUS PROVISIONS

9 ENUMERATION OF CONTRACT DOCUMENTS

10 INSURANCE AND BONDS

NOT FOR BIDDING

ARTICLE 1 THE CONTRACT DOCUMENTS

The Contract Documents consist of this Agreement, Conditions of the Contract (General, Supplementary and other Conditions), Drawings, Specifications, Addenda issued prior to execution of this Agreement, other documents listed in this Agreement and Modifications issued after execution of this Agreement, all of which form the Contract, and are as fully a part of the Contract as if attached to this Agreement or repeated herein. The Contract represents the entire and integrated agreement between the parties hereto and supersedes prior negotiations, representations or agreements, either written or oral. An enumeration of the Contract Documents, other than Modifications, appears in Article 9.

ARTICLE 2 THE WORK OF THIS CONTRACT

The Contractor shall fully execute the Work described in the Contract Documents, except as specifically indicated in the Contract Documents to be the responsibility of others.

ARTICLE 3 DATE OF COMMENCEMENT AND SUBSTANTIAL COMPLETION

§ 3.1 The date of commencement of the Work shall be the date of this Agreement unless a different date is stated below or provision is made for the date to be fixed in a notice to proceed issued by the Owner.
(Insert the date of commencement, if it differs from the date of this Agreement or, if applicable, state that the date will be fixed in a notice to proceed.)

If, prior to the commencement of the Work, the Owner requires time to file mortgages, mechanics' liens and other security interests, the Owner's time requirement shall be as follows:

§ 3.2 The Contract Time shall be measured from the date of commencement.

§ 3.3 The Contractor shall achieve Substantial Completion of the entire Work not later than ( ) days from the date of commencement, or as follows:
(Insert number of calendar days. Alternatively, a calendar date may be used when coordinated with the date of commencement. If appropriate, insert requirements for earlier Substantial Completion of certain portions of the Work.)

Per the construction schedule in Section 013216 Construction Schedule in the Project Manual.

AIA Document A132™ – 2009 (formerly A101™CMa – 1992). Copyright © 1975, 1980, 1992 and 2009 by The American Institute of Architects. **All rights reserved. WARNING: This AIA® Document is protected by U.S. Copyright Law and International Treaties. Unauthorized reproduction or distribution of this AIA® Document, or any portion of it, may result in severe civil and criminal penalties, and will be prosecuted to the maximum extent possible under the law.** This document was produced by AIA software at 08:29:39 on 03/02/2015 under Order No.1697299329_1 which expires on 01/26/2016, and is not for resale.
User Notes:

Portion of the Work	Substantial Completion Date

, subject to adjustments of this Contract Time as provided in the Contract Documents.
(Insert provisions, if any, for liquidated damages relating to failure to achieve Substantial Completion on time or for bonus payments for early completion of the Work.)

$1,000 per day.

ARTICLE 4 CONTRACT SUM

§ 4.1 The Owner shall pay the Contractor the Contract Sum in current funds for the Contractor's performance of the Contract. The Contract Sum shall be one of the following:
(Check the appropriate box.)

[X] Stipulated Sum, in accordance with Section 4.2 below

[ ] Cost of the Work plus the Contractor's Fee without a Guaranteed Maximum Price, in accordance with Section 4.3 below

[ ] Cost of the Work plus the Contractor's Fee with a Guaranteed Maximum Price, in accordance with Section 4.4 below

(Based on the selection above, complete Section 4.2, 4.3 or 4.4 below. Based on the selection above, also complete either Section 5.1.4, 5.1.5 or 5.1.6 below.)

§ 4.2 Stipulated Sum

§ 4.2.1 The Stipulated Sum shall be ($.), subject to additions and deletions as provided in the Contract Documents.

§ 4.2.2 The Stipulated Sum is based on the following alternates, if any, which are described in the Contract Documents and are hereby accepted by the Owner:
(State the numbers or other identification of accepted alternates. If the bidding or proposal documents permit the Owner to accept other alternates subsequent to the execution of this Agreement, attach a schedule of such other alternates showing the amount for each and the date when that amount expires.)

N/A

§ 4.2.3 Unit prices, if any:
(Identify and state the unit price, and state the quantity limitations, if any, to which the unit price will be applicable.)

Item	Units and Limitations	Price per Unit ($0.00)

§ 4.2.4 Allowances included in the Stipulated Sum, if any:
(Identify allowance and state exclusions, if any, from the allowance price.)

Item	Allowance
Per Contract Documents.	

(Paragraphs deleted)
(Table deleted)
(Paragraphs deleted)
(Table deleted)

NOT FOR BIDDING

AIA Document A132™ – 2009 (formerly A101™CMa – 1992). Copyright © 1975, 1980, 1992 and 2009 by The American Institute of Architects. All rights reserved. WARNING: This AIA® Document is protected by U.S. Copyright Law and International Treaties. Unauthorized reproduction or distribution of this AIA® Document, or any portion of it, may result in severe civil and criminal penalties, and will be prosecuted to the maximum extent possible under the law. This document was produced by AIA software at 08:29:39 on 03/02/2015 under Order No.1697299329_1 which expires on 01/26/2016, and is not for resale.
User Notes: (1517183831)

(Paragraphs deleted)
(Table deleted)
(Paragraphs deleted)

ARTICLE 5 PAYMENTS

§ 5.1 Progress Payments

§ 5.1.1 Based upon Applications for Payment submitted to the Construction Manager by the Contractor, and upon certification of the Project Application and Project Certificate for Payment or Application for Payment and Certificate for Payment by the Construction Manager and Architect and issuance by the Architect, the Owner shall make progress payments on account of the Contract Sum to the Contractor as provided below and elsewhere in the Contract Documents.

§ 5.1.2 The period covered by each Application for Payment shall be one calendar month ending on the last day of the month, or as follows:

§ 5.1.3 Provided that an Application for Payment is received by the Construction Manager not later than the 25th day of a month, the Owner shall make payment of the certified amount in the Application for Payment to the Contractor not later than the 15th day of the second being billed (e.g. payment submitted 25 May 2013 will be paid by 15 July 2013.). If an Application for Payment is received by the Construction Manager after the application date fixed above, payment shall be made by the Owner not later than forty five (45) days after the Construction Manager receives the Application for Payment.
(Federal, state or local laws may require payment within a certain period of time.)

§ 5.1.4 Progress Payments Where the Contract Sum is Based on a Stipulated Sum

§ 5.1.4.1 Each Application for Payment shall be based on the most recent schedule of values submitted by the Contractor in accordance with the Contract Documents. The schedule of values shall allocate the entire Contract Sum among the various portions of the Work and be prepared in such form and supported by such data to substantiate its accuracy as the Construction Manager and Architect may require. This schedule, unless objected to by the Construction Manager or Architect, shall be used as a basis for reviewing the Contractor's Applications for Payment.

§ 5.1.4.2 Applications for Payment shall show the percentage of completion of each portion of the Work as of the end of the period covered by the Application for Payment.

§ 5.1.4.3 Subject to the provisions of the Contract Documents, the amount of each progress payment shall be computed as follows:

.1 Take that portion of the Contract Sum properly allocable to completed Work as determined by multiplying the percentage completion of each portion of the Work by the share of the total Contract Sum allocated to that portion of the Work in the schedule of values, less retainage of five percent (5%). Pending final determination of cost to the Owner of changes in the Work, amounts not in dispute may be included as provided in Section 7.3.9 of the General Conditions;

.2 Add that portion of the Contract Sum properly allocable to materials and equipment delivered and suitably stored at the site for subsequent incorporation in the completed construction (or, if approved in advance by the Owner, suitably stored off the site at a location agreed upon in writing), less retainage of five percent (5 %);

.3 Subtract the aggregate of previous payments made by the Owner; and

.4 Subtract amounts, if any, for which the Construction Manager or Architect has withheld or nullified a Certificate for Payment as provided in Section 9.5 of the General Conditions.

§ 5.1.4.4 The progress payment amount determined in accordance with Section 5.1.4.3 shall be further modified under the following circumstances:

.1 Add, upon Substantial Completion of the Work, a sum sufficient to increase the total payments to One Hundred percent (100 %) of the Contract Sum, less such amounts as the Construction Manager recommends and the Architect determines for incomplete Work and unsettled claims; and

NOT FOR BIDDING

AIA Document A132™ – 2009 (formerly A101™CMa – 1992). Copyright © 1975, 1980, 1992 and 2009 by The American Institute of Architects. All rights reserved. WARNING: This AIA® Document is protected by U.S. Copyright Law and International Treaties. Unauthorized reproduction or distribution of this AIA® Document, or any portion of it, may result in severe civil and criminal penalties, and will be prosecuted to the maximum extent possible under the law. This document was produced by AIA software at 08:29:39 on 03/02/2015 under Order No.1697299329_1 which expires on 01/26/2016, and is not for resale.
User Notes:

.2 Add, if final completion of the Work is thereafter materially delayed through no fault of the Contractor, any additional amounts payable in accordance with Section 9.10.3 of the General Conditions.

§ 5.1.4.5 Reduction or limitation of retainage, if any, shall be as follows:
(If it is intended, prior to Substantial Completion of the entire Work, to reduce or limit the retainage resulting from the percentages inserted in Sections 5.1.4.3.1 and 5.1.4.3.2 above, and this is not explained elsewhere in the Contract Documents, insert here provisions for such reduction or limitation.)

(Paragraphs deleted)

§ 5.2 Final Payment

§ 5.2.1 Final payment, constituting the entire unpaid balance of the Contract Sum, shall be made by the Owner to the Contractor when

.1 the Contractor has fully performed the Contract except for the Contractor's responsibility to correct Work as provided in Section 12.2 of AIA Document A232–2009, and to satisfy other requirements, if any, which extend beyond final payment;

.2 the Contractor has submitted a final accounting for the Cost of the Work, pursuant to Exhibit A, Determination of the Cost of the Work when payment is on the basis of the Cost of the Work, with or without a Guaranteed Maximum payment; and

.3 a final Certificate for Payment or Project Certificate for Payment has been issued by the Architect; such final payment shall be made by the Owner not more than 45 days after the issuance of the final Certificate for Payment or Project Certificate for Payment, or as follows:

.4 As described in the Contract Documents.

ARTICLE 6 DISPUTE RESOLUTION

§ 6.1 Initial Decision Maker

The Architect will serve as Initial Decision Maker pursuant to Section 15.2 of AIA Document A232–2009, unless the parties appoint below another individual, not a party to this Agreement, to serve as Initial Decision Maker.
(If the parties mutually agree, insert the name, address and other contact information of the Initial Decision Maker, if other than the Architect.)

§ 6.2 Binding Dispute Resolution

For any Claim subject to, but not resolved by, mediation pursuant to Section 15.3 of AIA Document A232–2009, the method of binding dispute resolution shall be as follows:
(Check the appropriate box. If the Owner and Contractor do not select a method of binding dispute resolution below, or do not subsequently agree in writing to a binding dispute resolution method other than litigation, Claims will be resolved by litigation in a court of competent jurisdiction.)

[X] Arbitration pursuant to Section 15.4 of AIA Document A232–2009.

[ ] Litigation in a court of competent jurisdiction.

[ ] Other: *(Specify)*

NOT FOR BIDDING

ARTICLE 7 TERMINATION OR SUSPENSION

§ 7.1 Where the Contract Sum is a Stipulated Sum

§ 7.1.1 The Contract may be terminated by the Owner or the Contractor as provided in Article 14 of AIA Document A232–2009.

§ 7.1.2 The Work may be suspended by the Owner as provided in Article 14 of AIA Document A232–2009.

(Paragraphs deleted)

ARTICLE 8 MISCELLANEOUS PROVISIONS

§ 8.1 Where reference is made in this Agreement to a provision of AIA Document A232–2009 or another Contract Document, the reference refers to that provision as amended or supplemented by other provisions of the Contract Documents.

§ 8.2 Payments due and unpaid under the Contract shall bear interest from the date payment is due at the rate stated below, or in the absence thereof, at the legal rate prevailing from time to time at the place where the Project is located.
(Insert rate of interest agreed upon, if any.)

§ 8.3 The Owner's representative:
(Name, address and other information)

Marcin Michalski
Red Clay Consolidated School District
1502 Spruce Avenue
Wilmington, DE 19805

§ 8.4 The Contractor's representative:
(Name, address and other information)

§ 8.5 Neither the Owner's nor the Contractor's representative shall be changed without ten days written notice to the other party.

§ 8.6 Other provisions:

NOT FOR BIDDING

ARTICLE 9 ENUMERATION OF CONTRACT DOCUMENTS

§ 9.1 The Contract Documents, except for Modifications issued after execution of this Agreement, are enumerated in the sections below.

§ 9.1.1 The Agreement is this executed AIA Document A132–2009, Standard Form of Agreement Between Owner and Contractor, Construction Manager as Adviser Edition.

§ 9.1.2 The General Conditions are, AIA Document A232–2009, General Conditions of the Contract for Construction, Construction Manager as Adviser Edition.

§ 9.1.3 The Supplementary and other Conditions of the Contract:

Document	Title	Date	Pages
A232-2009	Supplementary General Conditions		16

§ 9.1.4 The Specifications:

AIA Document A132™ – 2009 (formerly A101™CMa – 1992). Copyright © 1975, 1980, 1992 and 2009 by The American Institute of Architects. **All rights reserved. WARNING: This AIA® Document is protected by U.S. Copyright Law and International Treaties. Unauthorized reproduction or distribution of this AIA® Document, or any portion of it, may result in severe civil and criminal penalties, and will be prosecuted to the maximum extent possible under the law.** This document was produced by AIA software at 08:29:39 on 03/02/2015 under Order No.1697299329_1 which expires on 01/26/2016, and is not for resale.
User Notes:

(Either list the Specifications here or refer to an exhibit attached to this Agreement.)

Section	Title	Date	Pages
Bid Package A	Project Manual		

§ **9.1.5** The Drawings:
(Either list the Drawings here or refer to an exhibit attached to this Agreement.)

Number	Title	Date
See Section 000115 of the Project Manual		

§ **9.1.6** The Addenda, if any:

Number	Date	Pages

Portions of Addenda relating to bidding requirements are not part of the Contract Documents unless the bidding requirements are also enumerated in this Article 9.

§ **9.1.7** Additional documents, if any, forming part of the Contract Documents are:

.1 AIA Document A132™–2009, Exhibit A, Determination of the Cost of the Work, if applicable.

.2 AIA Document E201™–2007, Digital Data Protocol Exhibit, if completed, or the following:

.3 AIA Document E202™–2008, Building Information Modeling Protocol Exhibit, if completed, or the following:

.4 Other documents, if any, listed below:
(List here any additional documents which are intended to form part of the Contract Documents. AIA Document A232–2009 provides that bidding requirements such as advertisement or invitation to bid, Instructions to Bidders, sample forms and the Contractor's bid are not part of the Contract Documents unless enumerated in this Agreement. They should be listed here only if intended to be part of the Contract Documents.)

.5 Para. 9.1.7.1, 9.1.7.2, 9.1.7.2 and 9.1.7.4 are not used in this contract.

.6 Bid Form dated
Letter of Intent dated
State Purchase Order.

ARTICLE 10 INSURANCE AND BONDS

The Contractor shall purchase and maintain insurance and provide bonds as set forth in Article 11 of AIA Document A232–2009.
(State bonding requirements, if any, and limits of liability for insurance required in Article 11 of AIA Document A232–2009.)

Type of Insurance or Bond	Limit of Liability or Bond Amount ($0.00)
Certificate of Insuance	
Performance and Payment Bonds	

NOT FOR BIDDING

AIA Document A132™ – 2009 (formerly A101™CMa – 1992). Copyright © 1975, 1980, 1992 and 2009 by The American Institute of Architects. **All rights reserved. WARNING: This AIA® Document is protected by U.S. Copyright Law and International Treaties. Unauthorized reproduction or distribution of this AIA® Document, or any portion of it, may result in severe civil and criminal penalties, and will be prosecuted to the maximum extent possible under the law.** This document was produced by AIA software at 08:29:39 on 03/02/2015 under Order No.1697299329_1 which expires on 01/26/2016, and is not for resale.
User Notes: (1517183831)

This Agreement is entered into as of the day and year first written above.

Red Clay Consolidated School District	**Contractor**
OWNER *(Signature)*	**CONTRACTOR** *(Signature)*
(Printed name and title)	*(Printed name and title)*

NOT FOR BIDDING

AIA Document A132™ – 2009 (formerly A101™CMa – 1992). Copyright © 1975, 1980, 1992 and 2009 by The American Institute of Architects. **All rights reserved. WARNING: This AIA® Document is protected by U.S. Copyright Law and International Treaties. Unauthorized reproduction or distribution of this AIA® Document, or any portion of it, may result in severe civil and criminal penalties, and will be prosecuted to the maximum extent possible under the law.** This document was produced by AIA software at 08:29:39 on 03/02/2015 under Order No.1697299329_1 which expires on 01/26/2016, and is not for resale.
User Notes:

(1517183831)

SECTION 006113 – PERFORMANCE AND PAYMENT BONDS

1. PERFORMANCE AND PAYMENT BONDS

1.1 Bonds must be in the following form:

1. Form of Performance Bond (attached).
2. Form of Payment Bond (attached).

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 00 61 13 - FORM OF PAYMENT BOND

Bond Number:

KNOW ALL PERSONS BY THESE PRESENTS, that we, _____, as principal ("Principal"), and _____, a _____ corporation, legally authorized to do business in the State of Delaware, as surety ("Surety"), are held and firmly bound unto the State of Delaware, Red Clay Consolidated School District ("Owner"), in the amount of _____ ($_____), to be paid to Owner, for which payment well and truly to be made, we do bind ourselves, our and each and every of our heirs, executors, administrations, successors and assigns, jointly and severally, for and in the whole firmly by these presents.

Sealed with our seals and dated this _____ day of_____, 20_____.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH, that if Principal, who has been awarded by Owner that certain contract known as Contract No. _____dated the _____ day of _____, 20__ (the "Contract"), which Contract is incorporated herein by reference, shall well and truly pay all and every person furnishing materials or performing labor or service in and about the performance of the work under the Contract, all and every sums of money due him, her, them or any of them, for all such materials, labor and service for which Principal is liable, shall make good and reimburse Owner sufficient funds to pay such costs in the completion of the Contract as Owner may sustain by reason of any failure or default on the part of Principal, and shall also indemnity and save harmless Owner from all costs, damages and expenses arising out of or by reason of the performance of the Contract and for as long as provided by the Contract; then this obligation shall be void, otherwise to be and remain in full force and effect.

Surety, for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of Surety and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition or change in or to the Contract or the work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any work to be performed or any monies due or to become due thereunder; and Surety hereby waives notice of any and all such extensions, modifications, omissions, additions, changes, payments, waivers, things done and omitted to be done by and in relation to assignees, subcontractors, and other transferees shall have the same effect as to Surety as though done or omitted to be done by or in relation to Principal.

Surety hereby stipulates and agrees that no modifications, omission or additions in or to the terms of the Contract shall in any way whatsoever affect the obligation of Surety and its bond. Any proceeding, legal or equitable, under this Bond may be brought in any court of competent

NOT FOR BIDDING

jurisdiction in the State of Delaware. Notices to Surety or Contractor may be mailed or delivered to them at their respective addresses shown below.

IN WITNESS WHEREOF, Principal and Surety have hereunto set their hand and seals, and such of them as are corporations have caused their corporate seal to be hereto affixed and these presents to be signed by their duly authorized officers, the day and year first above written.

PRINCIPAL

Name: _____

Witness or Attest: Address: _____

By:_____(SEAL)
Name:
Name:
Title:

(Corporate Seal)

SURETY

Name: _____

Witness or Attest: Address: _____

By:_____(SEAL)
Name:
Name:
Title:

(Corporate Seal)

NOT FOR BIDDING

SECTION 00 61 13 - FORM OF PERFORMANCE BOND

Bond Number: _____

KNOW ALL PERSONS BY THESE PRESENTS, that we, _____, as principal ("Principal"), and _____, a _____ corporation, legally authorized to do business in the State of Delaware, as surety ("Surety"), are held and firmly bound unto the State of Delaware, Red Clay Consolidated School District ("Owner"), in the amount of_____ ($_____) to be paid to Owner, for which payment well and truly to be made, we do bind ourselves, our and each and every of our heirs, executors, administrations, successors and assigns. jointly and severally, for and in the whole, firmly by these presents.

Sealed with our seals and dated this _____ day of _____, 20_____.

NOW THE CONDITION OF THIS OBLICATION IS SUCH, that if Principal, who has been awarded by Owner that certain contract known as Contract No. _____ dated the _____ day of _____, 20 (the "Contract"), which Contract is incorporated herein by reference, shall well and truly provide and furnish all materials, appliances and tools and perform all the work required under and pursuant to the terms and conditions of the Contract and the Contract Documents (as defined in the Contract) or any changes or modifications thereto made as therein provided, shall make good and reimburse Owner sufficient funds to pay the costs of completing the Contract that Owner may sustain by reason of any failure or default on the part of Principal, and shall also indemnify and save harmless Owner from all costs, damages and expenses arising out of or by reason of the performance of the Contract and for as long as provided by the Contract; then this obligation shall be void, otherwise to be and remain in full force and effect.

Surety, for value received, hereby stipulates and agrees, if requested to do so by Owner, to fully perform and complete the work to be performed under the Contract pursuant to the terms, conditions and covenants thereof, if for any cause Principal fails or neglects to so fully perform and complete such work

Surety, for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of Surety and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition or change in or to the Contract or the work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any work to be performed or any monies due or to become due thereunder; and Surety hereby waives notice of any and all such extensions, modifications, omissions, additions, changes, payments, waivers, assignments, subcontracts and transfers and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to

NOT FOR BIDDING

assignees, subcontractors, and other transferees shall have the same effect as to Surety as though done or omitted to be done by or in relation to Principal.
Surety hereby stipulates and agrees that no modifications, omissions or additions in or to the terms of the Contract shall in any way whatsoever affect the obligation of Surety and its bond.

Any proceeding, legal or equitable, under this Bond may be brought in any court of competent jurisdiction in the State of Delaware. Notices to Surety or Contractor may be mailed or delivered to them at their respective addresses shown below.

IN WITNESS WHEREOF, Principal and Surety have hereunto set their hand and seals, and such of them as are corporations have caused their corporate seal to be hereto affixed and these presents to be signed by their duly authorized officers, the day and year first above written.

PRINCIPAL

Name: _____

Witness or Attest: Address: _____

By:_____(SEAL)
Name: Name:
Title:

(Corporate Seal)

SURETY

Name: _____

Witness or Attest: Address: _____

By: _____(SEAL)
Name: Name:
Title:

(Corporate Seal)

NOT FOR BIDDING

SECTION 006216 – CERTIFICATE OF INSURANCE

In conjunction with Insurance Requirements AIA General Conditions, Article 11, the Contractor shall be bound by the following limits of liability insurance (for Contracts under this Bid Pac). The Contractor shall use the standard "ACCORD" for titled "Certificate of Insurance" in submitting his liability insurance limits. The required limits to be inserted in accordance with the sample "ACCORD" form in this section:

GENERAL NOTES

1. Other Insurance

   1.1 Contractor shall carry any necessary insurance required to cover Owned and Rental equipment that may be necessary for them to use in the performance of the Work.

2. Contractor shall have the following additional items added to his required "ACCORD" form Certificate of Insurance:

   1. Name and Address of Insured (Contractor).
   2. Description of Operations/Locations -

3. Added Insured – Red Clay Consolidated School District and EDiS Company

4. Certificate Holder – Red Clay Consolidated School District
   1502 Spruce Avenue
   Wilmington, Delaware 19805

Contractors shall note that although not a part of AIA Document A232 - 2009 Edition, these additional articles apply as noted to this Project.

A sample certificate is bound into the Project Manual immediately following this Document.

END OF SECTION

NOT FOR BIDDING

ACORD™ CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YY) XX/XX/XX

PRODUCER

PRODUCER INSURANCE AGENCY
PO BOX
PRODUCER STREET ADDRESS
PRODUCER CITY, ST PROD ZIP

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW.

INSURERS AFFORDING COVERAGE

INSURED

SAMPLE SUBCONTRACTOR CERTIFICATE
(REQUIRED MINIMUM INSURANCE)

INSURER A: XXXXXX
INSURED B XXXXXX
INSURER C: XXXXXX
INSURER D:
INSURER E:

COVERAGES

THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. AGGREGATE LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	POLICY NUMBER	POLICY EFFECTIVE DATE (MM/DD/YY)	DATE (MM/YY)	LIMITS	
	GENERAL LIABILITY X COMMERCIAL GENERAL LIABILITY CLAIMS MADE X OCCUR GENL AGGREGATE LIMIT APPLIES PER: POLICY X PRO-JECT LOC	XXXXXXXXXXXXXXX	XXXXXXXX	XXXXXXXXXX	EACH OCCURRENCE	$ 1,000,000
					FIRE DAMAGE (Any one fire)	$ 300,000
					MED EXP (Any one person)	$ 10,000
					PERSONAL & ADV INJURY	$ 1,000,000
					GENERAL AGGREGATE	$ 2,000,000
					PRODUCTS - COMP/OP AGG	$ 2,000,000
	AUTOMOBILE LIABILITY X ANY AUTO ALL OWNED AUTOS SCHEDULED AUTOS X HIREDAUTOS X NON-OWNED AUTOS	XXXXXXXXXXXXXXXX	XXXXXXXXXXX	XXXXXXXXXX	COMBINED SINGLE LIMIT (Ea accident)	$ 1,000,000
					BODILY INJURY (Per person)	$
					BODILY INJURY (Per accident)	$
					PROPERTY DAMAGE (Per accident)	$
	GARAGE LIABILITY ANY AUTO				AUTO ONLY - EA ACCIDENT	$
					OTHER THAN: AUTO ONLY: EA ACC	$
					AGG	$
	EXCESS LIABILITY X OCCUR CLAIMS MADE DEDUCTIBLE RETENTION $	XXXXXXXXXXXXXXX	XXXXXXXXXXX	XXXXXXX	EACH OCCURRENCE	$ 5,000,000
					AGGREGATE	$ 5,000,000
						$
						$
						$
	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY	XXXXXXXXXXXXXXX	XXXXXXXXXXX	XXXXXXXXXX	X WC STATU-TORY LIMITS / OTH-ER	$
					E.L. EACH ACCIDENT	$ 1,000,000
					E.L. DISEASE - EA EMPLOYEE	$ 1,000,000
					E.L. DISEASE - POLICY LIMIT	$ 1,000,000
	OTHER					

DESCRIPTION OF OPERATIONS/LOCATIONS/VEHICLES/EXCLUSIONS ADDED BY ENDORSEMENT/SPECIAL PROVISIONS

Project: Warner Elementary School – Red Clay Consolidated School District and EDiS Company shall be named as Additional Insureds under Commercial General Liability, Automobile Liability and Umbrella Liability for both ongoing and completed operations. The endorsements providing the Additional Insured status for ongoing and completed operations must be attached to the Certificate of Insurance.

CERTIFICATE HOLDER X ADDITIONAL INSURED; INSURER LETTER: ——— CANCELLATION

Red Clay Consolidated School District
1502 Spruce Avenue
Wilmington, DE 19805

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, THE ISSUING INSURER WILL ENDEAVOR TO MAIL 30 DAYS WRITTEN NOTICE TO THE CERTIFICATE HOLDER NAMED TO THE LEFT, BUT FAILURE TO DO SO SHALL IMPOSE NO OBLIGATION OR LIABILITY OF ANY KIND UPON THE INSURER, ITS AGENTS OR REPRESENTATIVES.

AUTHORIZED REPRESENTATIVE

NOT FOR BIDDING

© ACORD CORPORATION 1988

SECTION 007200 – GENERAL CONDITIONS

1. SUMMARY

1.1. The General Conditions for this Project are the American Institute of Architects General Conditions of the Contract for Construction, Construction Manager as Advisor Edition, AIA Document A232 - 2009 Edition.

1.2 A copy of AIA Document A232 - 2009 Edition is bound into this Project Manual following this page.

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

STATE OF DELAWARE DIVISION OF FACILITIES MANAGEMENT

SUPPLEMENTARY GENERAL CONDITIONS A232-2009

The following supplements modify the "General Conditions of the Contract for Construction," AIA Document A232-2009. Where a portion of the General Conditions is modified or deleted by the Supplementary Conditions, the unaltered portions of the General Conditions shall remain in effect.

NOT FOR BIDDING

TABLE OF ARTICLES

1. GENERAL PROVISIONS
2. OWNER
3. CONTRACTOR
4. ADMINISTRATION OF THE CONTRACT
5. SUBCONTRACTORS
6. CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS
7. CHANGES IN THE WORK
8. TIME
9. PAYMENTS AND COMPLETION
10. PROTECTION OF PERSONS AND PROPERTY
11. INSURANCE AND BONDS
12. UNCOVERING AND CORRECTION OF WORK
13. MISCELLANEOUS PROVISIONS
14. TERMINATION OR SUSPENSION OF THE CONTRACT

ARTICLE 1: GENERAL PROVISIONS

1.1 BASIC DEFINITIONS

1.1.1 THE CONTRACT DOCUMENTS

Delete the last sentence in its entirety and replace with the following:

"The Contract Documents also include Advertisement for Bid, Instructions to Bidder, all documents which are part of the Bid package, including but not limited to sample forms, the Bid Form, the Contractor's completed Bid and the Award Letter."

1.1.2 THE CONTRACT

Add the following text at the end of subparagraph (5):

"except as set forth in § 3.7.3, §5.3 and § 5.4."

Add the following new Section: 1.10 Terms Used

"The terms "knowledge", "recognize", and "discover", their respective derivatives and similar terms in the Contract Documents, as used in reference to the Contractor, shall be interpreted to mean that which the Contractor knows, recognizes and discovers in exercising the care, skill and diligence required by the Contract Documents. The term "reasonably inferable" and similar terms in the Contract Documents shall be interpreted to mean reasonably inferable by a contractor familiar with the Project and exercising the care, skill, and diligence required of the Contractor by the Contract Documents."

1.2 CORRELATION AND INTENT OF THE CONTRACT DOCUMENTS

Add the following Paragraphs:

1.2.4 In the case of an inconsistency, missing or conflicting information between the Drawings and the Specifications, Contract Documents or between the Contract Documents and applicable standards, codes and ordinances, or within any Contract Document not clarified by addendum, the Contractor shall (i) provide the better quality or greater quantity of Work, or (ii) comply with the more stringent requirements. The Contractor shall submit its proposed work to Architect for review and the work shall be provided in accordance with the Architect's interpretation. The terms and conditions of this Section 1.2.4, however, shall not relieve the Contractor of any of the obligations set forth in the Contract Documents, including Sections 3.2 and 3.7.

1.2.5 The word "PROVIDE" as used in the Contract Documents shall mean "FURNISH AND INSTALL" and shall include, without limitation, all labor, materials, equipment, transportation, services and other items required to complete the Work.

1.2.6 The word "PRODUCT" as used in the Contract Documents means all materials, systems and equipment.

1.5 OWNERSHIP AND USE OF DRAWINGS, SPECIFICATIONS AND OTHER INSTRUMENTS OF SERVICE

NOT FOR BIDDING

Delete Paragraph 1.5.1 in its entirety and replace with the following:

"All pre-design studies, drawings, specifications and other documents, including those in electronic form, prepared by the Architect under this Agreement are, and shall remain, the property of the Owner whether the Project for which they are made is executed or not. Such documents may be used by the Owner to construct one or more like Projects without the approval of, or additional compensation to, the Architect. The Contractor, Subcontractors, Sub-subcontractors and Material or Equipment Suppliers are authorized to use and reproduce applicable portions of the Drawings, Specifications and other documents prepared by the Architect and the Architect's consultants appropriate to and for use in the execution of their Work under the Contract Documents. They are not to be used by the Contractor or any Subcontractor, Sub-subcontractor or Material and Equipment Supplier on other Projects or for additions to this Project outside the scope of the Work without the specific written consent of the Owner, Architect and Architect's consultants.

The Architect shall not be liable for injury or damage resulting from the re-use of drawings and specifications if the Architect is not involved in the re-use Project. "

Delete Paragraph 1.5.2 in its entirety.

ARTICLE 2: OWNER

2.1 General

2.1.2 Delete Paragraph 2.1.2 in its entirety.

2.2 INFORMATION AND SERVICES REQUIRED OF THE OWNER

2.2.1 Delete the last sentence in this paragraph.

2.2.3 Add the following sentence:

"The Contractor shall at their expense contact all appropriate agencies or utilities to determine the location of all Utilities and, at their expense, shall bear the costs to accurately identify the location of all underground utilities in the area of their excavation and shall bear all cost for any repairs required, together with being solely responsible for any and all other claims, charges, damages, expenses, fees or liabilities arising out of any acts or omissions in failing to accurately identify said utilities."

2.2.5 Delete Subparagraph 2.2.5 in its entirety and substitute the following:

2.2.5 The Contractor shall be furnished free of charge up to five (5) sets of the Drawings and Project Manuals. Additional sets will be furnished at the cost of reproduction, postage and handling.

2.3 Insert the following words after "repeatedly" in the second line: "or materially".

2.4 Delete the last sentence and substitute the following new sentence:

"If the payments then or thereafter due to the Contractor are not sufficient to cover such amount, at the Owner's option, the excess shall be deducted from any payment thereafter due to the Contractor or shall be paid by the Contractor immediately upon demand of the Owner."

NOT FOR BIDDING

ARTICLE 3: CONTRACTOR

3.1.4 Insert the word "observations" after the word "test" in the last line of the sentence.

3.2 REVIEW OF CONTRACT DOCUMENTS AND FIELD CONDITIONS BY CONTRACTOR

Delete the third sentence in Paragraph 3.2.4.

3.2.1 Add the following text at the end of the existing subparagraph:

"Prior to execution of the Agreement, the Contractor and each Subcontractor has evaluated and satisfied themselves as to the conditions and limitations under which the Work is to be performed, including, without limitation: (i) the location, condition, layout and nature of the Project site and surrounding areas, (ii) generally prevailing climatic conditions, (iii) anticipated labor supply and costs, (iv) availability and cost of materials, tools and equipment, and (v) other similar issues. The Owner assumes no responsibility or liability for the physical condition or safety of the Project site or any improvements located on the Project site as it relates to the Work. Except as set forth in Section 10.3, the Contractor shall be solely responsible for providing a safe place for the performance of the Work. The Owner shall not be required to make any adjustment in either the Contract Sum or the Contract Time in connection with any failure by the Contractor or any Subcontractor to have complied with the requirements of this Section 3.2.1."

3.3 SUPERVISION AND CONSTRUCTION PROCEDURES

3.3.2 Add the following text at the end of the existing sentence: "and for any damages, losses, costs, and expenses resulting from such acts or omissions."

Add the following Paragraphs:

3.3.2.1 The Contractor shall immediately remove from the Work, whenever requested to do so by the Owner, any person who is considered by the Owner or Architect to be incompetent or disposed to be disorderly, or who for any reason is not satisfactory to the Owner, and that person shall not again be employed on the Work without the consent of the Owner or the Architect.

3.3.4 The Contractor must provide suitable storage facilities at the Site for the proper protection and safe storage of their materials. Consult the Owner and the Architect before storing any materials.

3.3.5 When any room is used as a shop, storeroom, office, etc., by the Contractor or Subcontractor(s) during the construction of the Work, the Contractor making use of these areas will be held responsible for any repairs, patching or cleaning arising from any acts or omissions with such use.

3.4 LABOR AND MATERIALS

Add the Following Paragraphs:

3.4.4 Before starting the Work, each Contractor shall carefully examine all preparatory Work that has been executed to receive their Work. Check carefully, by whatever means are required, to insure that its Work and adjacent, related Work, will finish to proper contours, planes and levels. Promptly notify the General Contractor/Construction Manager of any defects or imperfections in

NOT FOR BIDDING

preparatory Work which will in any way affect satisfactory completion of its Work. Absence of such notification will be construed as an acceptance of preparatory Work and later claims of defects will not be recognized and are expressly waived.

3.4.5 Under no circumstances shall the Contractor's Work proceed prior to preparatory Work proceed prior to preparatory Work having been completely cured, dried and/or otherwise made satisfactory to receive this Work. Responsibility for timely installation of all materials rests solely with the Contractor responsible for that Work, who shall maintain coordination at all times.

3.4.6 The Contractor shall make reasonable efforts to only employ or use labor in connection with the Work capable of working harmoniously with all trades, crafts, and any other individuals associated with the Project. The Contractor shall also use reasonable efforts to minimize the likelihood of any strike, work stoppage, or other labor disturbance.

3.4.7 In case the progress of the Work is affected by any undue delay in furnishing or installing any items, materials or equipment required under the Contract Documents because of such conflict involving any such labor agreement or regulation, the Owner may require that other items, materials or equipment of equal kind and quality be provided pursuant to a Change Order or Construction Change Directive.

3.5 WARRANTY

Add the following Paragraphs:

3.5.1 The Contractor will warrant all materials and workmanship against original defects, except injury from proper and usual wear when used for the purpose intended, for one year after Acceptance by the Owner, and will maintain all items in condition that conforms with the Contract Documents during the period of warranty.

3.5.2 Non-conforming work during the period of warranty will be corrected by the Contractor at its expense upon demand of the Owner, it being required that the Work conforms to the Contract Documents at the expiration of the warranty period.

3.5.3 In addition to the General Warranty there are other warranties required for certain items for different periods of time than the one year as above, and are particularly so stated in that part of the specifications referring to same. The said warranties will commence at the same time as the General Warranty.

3.5.4 If the Contractor fails to remedy any failure, defect or damage within a reasonable time after receipt of notice, the Owner will have the right to replace, repair, or otherwise remedy the failure, defect or damage at the Contractor's expense.

3.5.5 The Contractor agrees to assign to the Owner at the time of final completion of the Work any and all manufacturers' warranties relating to materials and labor used in the Work and further agrees to perform the Work in such manner so as to preserve any and all such manufacturers' warranties.

NOT FOR BIDDING

3.7 PERMITS, FEES, NOTICES AND COMPLIANCE WITH LAWS

3.7.1 Delete the second sentence and substitute the following new sentence:

"The Contractor shall secure, pay for, and, as soon as practicable, furnish the Owner, Construction Manager and Architect with copies and/or certificates of all other permits, fees, licenses and inspections by government agencies necessary for proper execution and completion of the Work that are customarily secured after execution of the Contract and legally required at the time bids are received or negotiations concluded.

3.7.3 Deleted in its entirety and replace with the following: "If the Contractor, any of its Subcontractors or any Sub-subcontractor performs Work knowing it to be contrary to applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of public authorities, the Contractor, any of its Subcontractors or any Sub-subcontractor shall assume appropriate responsibility for such Work and shall bear the costs, damages, losses, expenses of every kind, including reasonable attorneys' fees, attributable to correction."

Add the following Paragraph:

3.7.6 No separate inspection performed or failed to be performed by the Owner, Construction Manager or Architect hereunder shall be a waiver of any of the Contractor's obligations hereunder or be construed as an approval or acceptance of the Work or any part thereof.

3.10 CONTRACTOR'S CONSTRUCTION SCHEDULE

Add the following Paragraphs:

3.10.5 The schedule shall indicate the proposed starting and completion dates for the various subdivisions of the Work as well as the totality of the Work. The schedule shall be updated every thirty (30) days and submitted to Architect with Contractor's Applications for Payment. Each schedule shall contain a comparison of actual progress with the estimated progress for such point in time stated in the original schedule. If any schedule submitted sets forth a date for Substantial Completion for the Work or any phase of the Work beyond the Date(s) of Substantial Completion established in the Contract (as the same may be extended as provided in the Contract Document(s), the Contractor shall submit to Owner and Architect for their information and to the Construction Manager for its review and approval, a narrative description of the means and methods which Contractor intends to employ to expedite the progress of the Work to ensure timely completion of the various phases of the Work as well as the totality of the Work. To ensure such timely completion, Contractor shall take all necessary action including, without limitation, (i) working additional shifts or overtime, (ii) supplying additional manpower, equipment and facilities, and (iii) other similar measures (hereinafter referred to collectively as "Corrective Measures"). In that event, Contractor is required to implement Corrective Measures, then Contractor shall not be entitled to an adjustment in the Contract Sum, the Schedule or the Contract Time. The date of final completion shall not be changed without the written consent of the Owner.

3.10.6 The construction schedule shall be in a detailed precedence-style critical path management ("CPM") or primavera-type format satisfactory to the Construction Manager and Architect that shall also (i) provide a graphic representation of all

NOT FOR BIDDING

activities and events that will occur during performance of the Work; (ii) identify each phase of construction and occupancy; and (iii) set forth dates that are critical in ensuring the timely and orderly completion of the Work in accordance with the requirements of the Contract Documents (hereinafter referred to as "Milestone Dates").

3.10.7 In the event the Construction Manager and/or Architect determine that the performance of the Work, as of a Milestone Date, has not progressed or reached the level of completion required by the Contract Documents, the Construction Manager shall have the right to order the Contractor to take corrective measures necessary to expedite the progress of construction, including, without limitation, implementing Corrective Measures. Such Corrective Measures shall continue until the progress of the Work complies with the stage of completion required by the Contract Documents. The Construction Manager's right to require Corrective Measures is solely for the purpose of ensuring the Contractor's compliance with the construction schedule.

3.10.8 The Contractor shall not be entitled to an adjustment in the Contract Sum or Contract Time in connection with Extraordinary Measures required by the Construction Manager under or pursuant to this Section 3.10.

3.10.9 The Construction Manager may exercise the rights furnished the Construction Manager under or pursuant to this Section 3.10 as frequently as the Construction Manager deems necessary to ensure that the Contractor's performance of the Work will comply with any Milestone Date or completion date(s) set forth in the Contract Documents.

3.11 DOCUMENTS AND SAMPLES AT THE SITE

Add the following Paragraphs:

3.11.1 During the course of the Work, the Contractor shall maintain a record set of drawings on which the Contractor shall mark the actual physical location of all piping, valves, equipment, conduit, outlets, access panels, controls, actuators, including all appurtenances that will be concealed once construction is complete, etc., including all invert elevations.

3.11.2 At the completion of the Project, the Contractor shall obtain a set of reproducible drawings from the Architect, and neatly transfer all information outlined in 3.11.1 to provide a complete record of the as-built conditions.

3.11.3 The Contractor shall provide two (2) prints of the as-built conditions, along with the reproducible drawings themselves, to the Owner and one (1) set to the Architect. In addition, attach one complete set to each of the Operating and Maintenance Instructions/Manuals.

3.17 In the second sentence of the paragraph, insert "indemnify and" between "shall" and "hold".

ARTICLE 4: ARCHITECT AND CONSTRUCTION MANAGER

4.1 General
4.1.2 Insert "As required by law," at the beginning of the first sentence.

4.2 Administration of the Contract

NOT FOR BIDDING

Delete the first sentence of Paragraph 4.2.10 and replace with the following:

The Architect will review and approve or take other appropriate action upon the Contractor's submittals such as Shop Drawings, Product Data and Samples for the purpose of checking for conformance with the Contract Documents.

Delete the second sentence of Paragraph 4.2.10 and replace with the following:

The Architect's action will be taken with such reasonable promptness as to cause no delay in the Work in the activities of the Owner, Contractor or separate Contractors, while allowing sufficient time in the Owner's professional judgment to permit adequate review.

Add the following to Paragraph 4.2.16:

There will be no full-time project representative provided by the Owner or Architect on this project.

Add to Paragraph 4.2.19 "and in compliance with all applicable codes, regulations and ordinances." to the end of the sentence.

NOT FOR BIDDING

ARTICLE 5: SUBCONTRACTORS

5.2 AWARD OF SUBCONTRACTS AND OTHER CONTRACTS FOR PORTIONS OF THE WORK

Delete Paragraph 5.2.3 in its entirety and replace with the following:

5.2.3 If the Owner, Architect or Construction Manager has reasonable objection to a person or entity proposed by the Contractor, the Contractor shall propose another to whom the Owner, Architect or Construction Manager has no reasonable objection, subject to the statutory requirements of 29 Delaware Code § 6962(d)(10)b.3 and 4.

Add the following new Paragraph:

5.2.5 Upon written request, the Contractor shall provide to the Owner and Construction Manager an executed copy of all subcontracts, purchase orders and other agreements relating to the Work.

5.3 SUBCONTRACTOR RELATIONS

Add the following new Paragraphs:

5.3.1 All subcontracts shall be in writing and shall specifically provide that the Owner is an intended third-party beneficiary of such subcontract. Each subcontract shall contain a contingent assignment of the subcontract to the Owner consistent with Section 5.4

5.3.2 The Contractor shall be responsible for any and all Subcontractors working under it and shall carry insurance for all Subcontractors or ensure that they are carrying it themselves so as to relieve the Owner of any and all liability to be covered by insurance.

ARTICLE 6: CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS

6.1 OWNER'S RIGHT TO PERFORM CONSTRUCTION AND TO AWARD SEPARATE CONTRACTS

Delete Paragraph 6.1.3 in its entirety and replace with the following:

"When separate contracts are awarded for different portions of the Project or other construction or operations on the site, the term "Contractor" in the Contract Documents in each case shall mean the Constructor who executes each separate Owner-Contractor Agreement."

6.2 MUTUAL RESPONSIBILITY

6.2.3 In the second sentence, strike the word "shall" and insert the word "may".

ARTICLE 7: CHANGES IN THE WORK

(SEE ARTICLE 7: CHANGES IN WORK IN THE GENERAL REQUIREMENTS)

7.1.3 Insert the following sentence at the end of the existing sentence: "Except as permitted in Section 7.3, a change in the Contract Sum or the Contract Time shall be accomplished only by Change Order."

Add the following new Paragraphs:

7.1.4 A field directive or field order shall not be recognized as having any impact upon the Contract Sum or the Contract Time and the Contractor shall have no claim therefor unless it shall, prior to complying with same and in no event later than ten (10) working days from the date such direction or order was given, submit to the Owner, Construction Manager and Architect for the Architect's and Construction Manager's evaluation and Owner's approval of its change proposal.

7.1.5 When submitting any proposal for Changes in the Work, the Contractor shall include and set forth in clear and precise detail breakdowns of labor and materials for all trades involved for the estimated impact on the construction schedule. If request, the Contractor shall furnish spreadsheets of any Subcontractors.

7.2 CHANGE ORDERS

Add the following new Paragraph 7.2.1 – Agreement on any Change Order shall constitute a final settlement of all matters relating to the change in the Work that is the subject of the Change Order, including, but not limited to, all direct and indirect costs associated with such change and any and all adjustments to the Contract Sum and the construction schedule, including the Contract Time.

ARTICLE 8: TIME

8.2 PROGRESS AND COMPLETION

Add the following Paragraphs:

NOT FOR BIDDING

8.2.1.1 Refer to Specification Section SUMMARY OF WORK for Contract time requirements.

8.2.4 If the Work falls behind the Progress Schedule as submitted by the Contractor, the Contractor shall employ additional labor and/or equipment necessary to bring the Work into compliance with the Progress Schedule at no additional cost to the Owner.

8.3 DELAYS AND EXTENSION OF TIME

8.3.1 Strike "arbitration" and insert "remedies at law or in equity".

Add the following Paragraph:

8.3.2.1 The Contractor shall update the status of the suspension, delay, or interruption of the Work with each Application for Payment. (The Contractor shall report the termination of such cause immediately upon the termination thereof.) Failure to comply with this procedure shall constitute a waiver for any claim for adjustment of time or price based upon said cause.

Delete Paragraph 8.3.3 in its entirety and replace with the following:

8.3.3 Except in the case of a suspension of the Work directed by the Owner, an extension of time under the provisions of Paragraph 8.3.1 shall be the Contractor's sole remedy in the progress of the Work and there shall be no payment or compensation to the Contractor for any expense or damage resulting from the delay.

Add the following Paragraph:

8.3.4 By permitting the Contractor to work after the expired time for completion of the project, the Owner does not waive its rights under the Contract.

8.3.5 The parties agree that Paragraph 8.3.3 of the Supplementary General Conditions does not apply to the Construction Manager in the event of a delay caused by a party other than the Construction Manager.

NOT FOR BIDDING

ARTICLE 9: PAYMENTS AND COMPLETION

9.2 SCHEDULE OF VALUES

Add the following Paragraphs:

9.2.1 The Schedule of Values shall be submitted using AIA Document G702, Continuation Sheet to G703.

9.3 APPLICATIONS FOR PAYMENT

Add the following Paragraph:

9.3.1.3 Application for Payment shall be submitted on AIA Document G702 "Application and Certificate for Payment", supported by AIA Document G703 "Continuation Sheet". Said Applications shall be fully executed and notarized.

Add the following Paragraphs:

9.3.4 Until Closeout Documents have been received and outstanding items completed the Owner will pay 95% (ninety-five percent) of the amount due the Contractor on account of progress payments.

9.3.5 The Contractor shall provide a current and updated Progress Schedule to the Architect with each Application for Payment. Failure to provide Schedule will be just cause for rejection of Application for Payment.

9.5 DECISIONS TO WITHHOLD CERTIFICATION

Add the following to 9.5.1:

.8 failure to provide a current Progress Schedule;
.9 a lien or attachment is filed;
.10 failure to comply with mandatory requirements for maintaining Record Documents.
.11 reasonable evidence that the Work has not progressed as indicated on the Application for Payment; or
.12 otherwise is responsible for a substantial and material breach of a provision of the Contract Documents.

Add the following Paragraph:

9.5.4 If the Contractor disputes any determination by the Construction Manager or the Architect made in accordance with the foregoing with regard to any Certificate of Payment, the Contractor nevertheless shall expeditiously continue to prosecute the Work.

9.6 PROGRESS PAYMENTS

Delete Paragraph 9.6.1 in its entirety and replace with the following:

9.6.1 After the Architect and the Construction Manager have approved and issued a Certificate for Payment, payment shall be made by the Owner within 30 days after Owner's receipt of the Certificate for Payment.

Add the following Paragraph:

9.6.2.1 Notwithstanding anything in Section 9.6.2 to the contrary, in the event the Construction Manager has reasonable cause to believe a Subcontractor is not being paid by the Contractor, the Construction Manager may elect to make any payment requested by the Contractor on behalf of a Subcontractor of any tier jointly payable to the Contractor and such Subcontractor, provided that in the event the Contractor disputes the sum due to the Subcontractor, Construction Manager shall only pay the sum not disputed by the Contractor, provided that the Contractor provides satisfactory assurance such as a bond to Owner with respect to payment of the disputed sum. The Contractor and such Subcontractor shall be responsible for the allocation and disbursement of funds included as part of any such joint payment. In no event shall any joint payment be construed to create any (i) contract between the Owner and a Subcontractor of any tier, (ii) obligations from the Owner to such Subcontractor, or (iii) rights in such Subcontractor against the Owner.

9.7 FAILURE OF PAYMENT

NOT FOR BIDDING

In first sentence, strike the first reference to "seven" and insert "thirty (30)". Also strike "binding dispute resolution" and insert "remedies at law or in equity" and add the following at the end of the Paragraph: "Notwithstanding the preceding sentence, the Contractor shall not stop the Work during the pendency of a bona fide dispute between the Owner and the Contractor, provided any sums in dispute claimed by the Contractor are placed in escrow and Owner agrees to pay said disputed sum in accordance with the resolution of the dispute.

Add the following Paragraph:

9.7.1 If the Owner is entitled to reimbursement or payment from the Contractor under or pursuant to the Contract Documents, such payment shall be made promptly upon demand by the Owner. Notwithstanding anything contained in the Contract Documents to the contrary, if the Contractor fails to promptly make any payment due the Owner, or if the Owner incurs any costs and expenses to cure any default of the Contractor or to correct defective Work, the Owner shall have an absolute right to offset such amount against the Contract Sum and may, in the Owner's sole discretion, elect either to (i) deduct an amount equal to that which the Owner is entitled from any payment then or thereafter due the Contractor from the Owner, or (ii) issue a written notice to the Contractor reducing the Contract Sum by an amount equal to that which the Owner is entitled.

9.8 SUBSTANTIAL COMPLETION

9.8.5 In the second sentence, strike "shall" and insert "may".

ARTICLE 10: PROTECTION OF PERSONS AND PROPERTY

10.1 SAFETY PRECAUTIONS AND PROGRAMS

Add the following Paragraphs:

10.1.1 Each Contractor shall develop a safety program in accordance with the Occupational Safety and Health Act of 1970. A copy of said plan shall be furnished to the Owner, Construction Manager and Architect prior to the commencement of that Contractor's Work.

10.1.2 Each Contractor shall appoint a Safety Representative. Safety Representatives shall be someone who is on site on a full time basis. If deemed necessary by the Owner, Construction Manager or Architect, Contractor Safety meetings will be scheduled. The attendance of all Safety Representatives will be required. Minutes will be recorded of said meetings by the Contractor and will be distributed to all parties as well as posted in all job offices/trailers etc.

10.2 SAFETY OF PERSONS AND PROPERTY

Add the following Paragraph:

10.2.4.1 As required in the Hazardous Chemical Act of June 1984, all vendors supplying any material that may be defined as hazardous must provide Material Safety Data Sheets for those products. Any chemical product should be considered hazardous if it has a caution warning on the label relating to a potential physical or health hazard, if it is known to be present in the work place, and if employees may be exposed under normal conditions or in foreseeable emergency situations. Material Safety Data Sheets shall be provided directly to the Owner, along with the shipping slips that include those products.

NOT FOR BIDDING

10.3 HAZARDOUS MATERIALS

Delete Paragraph 10.3.3 in its entirety.

Delete Paragraphs 10.3.6 in its entirety.

ARTICLE 11: INSURANCE AND BONDS

11.1 CONTRACTOR'S LIABILITY INSURANCE

11.1.4 Strike "the Owner" immediately following "(1)" and strike "and (2) the Owner as an additional insured for claims caused in whole or in part by the Contractor's negligent acts or omissions during the Contractor's completed operations."

Add the following Paragraph:

11.1.5 If the Contractor fails to purchase or maintain or require to be purchased or maintained the liability insurance specified in the Contract Documents, the Owner may (but shall not be obligated to) purchase such insurance on the Contractor's behalf and shall be entitled to be repaid for any premiums paid therefor by Contractor in the manner set forth in Section 2.4 and/or as provided in Section 9.7.2, at Owner's election.

11.2 OWNER'S LIABILITY INSURANCE

Delete Paragraph 11.2 in its entirety.

11.3 PROPERTY INSURANCE

Delete Paragraph 11.3 and its subparagraphs in their entirety and replace with the following:

11.3 The Owner will not provide Builder's All Risk Insurance for the Project. The Contractor and all Subcontractors shall provide property coverage for their tools and equipment, as necessary. Any mandatory deductible required by the Contractor's Insurance shall be the responsibility of the Contractor.

11.4 PERFORMANCE BOND AND PAYMENT BOND

11.4.1 Add the following sentence: "The bonds will conform to those forms approved by the Office of Management and Budget."

Add the following new Paragraph:

11.4.3 If any Surety hereunder makes any assignment for the benefit of creditors, or commits any act of bankruptcy, or is declared bankrupt, or files a voluntary petition in bankruptcy, or in the reasonable opinion of the Owner is insolvent, the Contractor shall immediately furnish and maintain another Surety in accordance with the provisions of this Section 11.4 satisfactory to the Owner.

ARTICLE 12: UNCOVERING AND CORRECTION OF WORK

12.2.2 AFTER SUBSTANTIAL COMPLETION

12.2.2 Add the following sentence at the end of the existing paragraph:

NOT FOR BIDDING

If prior to the date of Substantial Completion, the Contractor, a subcontractor or anyone for whom either is responsible uses or damages any portion of the Work, including, without limitation, mechanical, electrical, plumbing and other building systems, machinery, equipment or other mechanical device, the Contractor shall cause such item to be restored to "like new" condition at no expense to the Owner.

Add the following Paragraph:

12.2.2.1.1 At any time during the progress of the Work, or in any case where the nature of the defects will be such that it is not expedient to have corrected, the Owner, at its option, will have the right to deduct such sum, or sums, of money from the amount of the Contract as determined by the Architect in consultation with the Construction Manager and adjust the difference in value between the defective work and that required under Contract including any damage to the structure.

12.2.2.2 Strike "one" and insert "two".

12.2.2.3 Strike "one" and insert "two".

12.2.5 In second sentence, strike "one" and insert "two".

ARTICLE 13: MISCELLANEOUS PROVISIONS

13.1 GOVERNING LAW

Strike "except that, if the parties have selected arbitration as the method of binding dispute resolution, the Federal Arbitration Act shall govern Section 15.4."

Insert "except that, if the parties have selected arbitration as the method of dispute resolution, the Delaware Arbitration Act, 10 Del. C. §5701, shall govern Section 15.4."

13.6 INTEREST

Strike "the date payment is due at such rate as the parties may agree upon in writing or, in the absence thereof, at the legal rate prevailing from time to time at the place where the Project is located." Insert "30 days of presentment of the authorized Certificate of Payment at the annual rate of 12% or 1% per month.

13.7 TIME LIMITS ON CLAIMS

Strike the last sentence.

Add the following Paragraph:

13.8 CONFLICTS WITH FEDERAL STATUTES OR REGULATIONS

13.8.1 If any provision, specifications or requirement of the Contract Documents conflict or is inconsistent with any statute, law or regulation of the government of the United State of America, the Contractor shall notify the Architect, Construction Manager and Owner immediately upon discovery.

Add the following Paragraph:

NOT FOR BIDDING

13.9 "GENERAL PROVISIONS – All personal pronouns used in this Contract, whether used in the masculine, feminine, or neuter gender, shall include all other genders; and the singular shall include the plural and vice versa. Titles of articles, Sections and Sections are for convenience only and neither limit nor amplify the provisions of this Contract in itself. The use herein of the word "including", when following any general statement, term, or matter, shall not be construed to limit such statement, term, or matter to the specific items or matters set forth immediately following such word or to similar items or matters, whether or not non-limiting language (such words as "without limitation", or "but not limited to", or words of similar import) is used with reference thereto, but rather shall be deemed to refer to all other items or matters that could reasonably fall within the broadest possible scope of such general statement, term or matter.

Wherever possible, each provision of this Agreement shall be interpreted in a manner as to be effective and valid under applicable law. If, however, any provision of this Agreement, or portion thereof, is prohibited by law or found invalid under any law, only such provision or portion thereof shall be ineffective, without in any manner invalidating or affecting the remaining provisions of this Agreement or valid portions of such provision, which are hereby deemed severable.

Each party hereto agrees to do all acts and things and to make, execute and deliver such written instruments, as shall from time to time be reasonably required to carry out the terms and provisions of the Contract Documents.

Any specific requirement in this Contract that the responsibilities or obligations of the Contractor also apply to a Subcontractor is added for emphasis and is also hereby deemed to include a Subcontractor of any tier. The omission of a reference to a Subcontractor in connection with any of the Contractor's responsibilities or obligations shall not be construed to diminish, abrogate, or limit any responsibilities or obligations of a subcontractor of any tier under the Contract Documents or the applicable subcontract.

Contractor makes the following representations:

1. Contractor has familiarized itself with the nature and extent of the Contract Documents, Work, locality, local conditions, and with Federal, State and Local Laws, ordinances, rules and regulations that may in any manner effect costs, progress or performance of the Work.

2. Contractor has made examinations, investigations, tests and studies at the project site, as he deems necessary for the performance of the Work at the Contract Price and within the Contract Time. Contractor has correlated the results of all such observations, examinations, tests, reports and data with the terms and conditions of the other Contract Documents.

3. Contractor has given the Architect written notice of all conflicts, errors or discrepancies that he has discovered in the Contract Documents and the written resolution thereof by the Architect is acceptable to the Contractor."

ARTICLE 14: TERMINATION OR SUSPENSION OF THE CONTRACT

Add the following additional Paragraphs to 14.1.1:

.5 disregards the instruction of the Construction Manager or Architect when such instructions are based on the requirements of the Contract Documents.

NOT FOR BIDDING

.6 fails to furnish the Owner and Construction Manager with assurances satisfactory to the Owner and Construction Manager evidencing the Contractor's ability to complete the Work in compliance with the requirements of the Contract Documents.

.7 fails or neglects to progress work in such a manner to reasonably assure completion of the Work within the Contract Time or in accordance with the Construction Schedule.

.8 purposefully engages in a strike or work stoppage, or is in any way responsible for hindering or delaying the work of other trades, or ceases to work due to picketing or labor disputes of any kind.

14.4 TERMINATION BY THE OWNER FOR CONVENIENCE

Delete Paragraph 14.4.3 in its entirety and replace with the following:

14.4.3 In case of such termination for the Owner's convenience, the Contractor shall be entitled to receive payment for Work executed, and cost incurred by reason of such termination along with reasonable overhead.

ARTICLE 15: CLAIMS AND DISPUTES

15.1.6 CLAIMS FOR CONSEQUENTIAL DAMAGES

Delete Paragraph 15.1.6 and its subparagraphs in their entirety.

15.2 INITIAL DECISION

Delete Paragraph 15.2.5 in its entirety and replace with the following:

15.2.5 The Architect will approve or reject Claims by written decision, which shall state the reasons therefore and shall notify the parties of any change in the Contract Sum or Contract Time or both. The approval or rejection of a Claim by the Architect shall be subject to mediation and other remedies at law or in equity.

Delete Paragraph 15.2.6 and its subparagraphs in their entirety.

15.3 MEDIATION

15.3.1 Strike "binding dispute resolution" and insert "any or all remedies at law or in equity".

15.3.2 In the first sentence, delete "administered by the American Arbitration Association in accordance with its Construction Industry Mediation Procedure in effect on the date of the Agreement,". Also strike "binding dispute resolution" and insert "remedies at law and in equity".

15.4 ARBITRATION

Delete Paragraph 15.4 and its subparagraphs in their entirety.

END OF SUPPLEMENTARY GENERAL CONDITIONS

NOT FOR BIDDING

SECTION 007343 – WAGE RATE REQUIREMENTS

1. SUMMARY

1.1. In accordance with Delaware Code, Title 29, Chapter 69, Section 6912, all laborers and mechanics of the Contractor and all subcontractors employed to perform work directly upon the site of the work shall be paid unconditionally and not less often than once a week and without subsequent deduction or rebate on any account the full amounts accrued at the time of payment computed at wage rates not less than those determined by the Division of Industrial Affairs, Department of Labor, State of Delaware, as the prevailing rates in this area.

1.2 This approved scale of wages must be posted by the Contractor in a prominent and easily accessible place at the site of the work.

1.3 It is further stipulated that there may be withheld from the Contractor such accrued payment as may be considered necessary by the contracting officer to pay laborers and mechanics employed by the Contractor or any subcontractors on the work the difference between the rates of wages required and the rate of wages received by such laborers and mechanics and not refunded to the Contractor, subcontractor or their agents.

1.4 Where wage rates are published in this Manual they are issued by the State Department of Labor on the date indicated and are included for the convenience of Bidders. The Owner, the Architect, and the Construction Manager, accept no responsibility for the accuracy or applicability of any rates included herein. The actual wage rate determinations which will apply to the work will be those in effect on the first day of public advertisement for bids as determined by the State Department of Labor. It will be the responsibility of each bidder to contact the State Department of Labor and to incorporate these rates in his bid.

1.5 "In accordance with Delaware Code, Title 29, Section 6912, as amended July 5, 1994, contractors shall furnish sworn payroll information to the Department of Labor on a weekly basis for each contract which exceeds $15,000 for renovation work and $100,000 for new construction. The construction contract amount is based on a cumulative total of all contracts bid for a specific project. Payroll forms for submission may be obtained from the Department of Labor."

1.5.1 A Payroll Report, available from the Department of Labor is to be used to provide this information.

1.6 A copy of the Prevailing Wages for the project is attached hereto.

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

STATE OF DELAWARE
DEPARTMENT OF LABOR
DIVISION OF INDUSTRIAL AFFAIRS
OFFICE OF LABOR LAW ENFORCEMENT
PHONE: (302) 451-3423

Mailing Address:
225 CORPORATE BOULEVARD
SUITE 104
NEWARK, DE 19702

Located at:
225 CORPORATE BOULEVARD
SUITE 104
NEWARK, DE 19702

PREVAILING WAGES FOR **BUILDING CONSTRUCTION**
EFFECTIVE MARCH 13, 2015 - AMENDED JULY 15, 2015

CLASSIFICATION	NEW CASTLE	KENT	SUSSEX
ASBESTOS WORKERS	21.87	26.94	39.20
BOILERMAKERS	39.67	33.22	48.83
BRICKLAYERS	49.39	49.39	49.39
CARPENTERS	51.86	51.86	41.22
CEMENT FINISHERS	69.27	29.11	21.20
ELECTRICAL LINE WORKERS	43.49	37.29	28.44
ELECTRICIANS	63.60	63.60	63.60
ELEVATOR CONSTRUCTORS	80.31	40.93	30.55
GLAZIERS	67.35	67.35	20.15
INSULATORS	53.38	53.38	53.38
IRON WORKERS	60.12	60.12	60.12
LABORERS	40.95	40.95	40.95
MILLWRIGHTS	65.23	65.23	51.80
PAINTERS	44.97	44.97	44.97
PILEDRIVERS	71.17	37.64	30.45
PLASTERERS	21.60	28.55	17.50
PLUMBERS/PIPEFITTERS/STEAMFITTERS	62.20	36.66	54.49
POWER EQUIPMENT OPERATORS	59.81	59.81	24.13
ROOFERS – COMPOSITION	21.82	20.45	17.63
ROOFERS – SHINGLE/SLATE/TILE	17.59	13.72	14.10
SHEET METAL WORKERS	64.16	64.16	64.16
SOFT FLOOR LAYERS	48.57	48.57	48.57
SPRINKLER FITTERS	53.52	53.52	53.52
TERRAZZO/MARBLE/TILE FINISHERS	54.11	54.11	45.45
TERRAZZO /MARBLE/TILE SETTERS	62.13	62.13	52.63
TRUCK DRIVERS	24.43	26.64	20.03

NOT FOR BIDDING

CERTIFIED: 1/20/16 BY: _____
ADMINISTRATOR, OFFICE OF LABOR LAW ENFORCEMENT

NOTE: THESE RATES ARE PROMULGATED AND ENFORCED PURSUANT TO THE PREVAILING WAGE REGULATIONS ADOPTED BY THE DEPARTMENT OF LABOR ON APRIL 3, 1992.

CLASSIFICATIONS OF WORKERS ARE DETERMINED BY THE DEPARTMENT OF LABOR. FOR ASSISTANCE IN CLASSIFYING WORKERS, OR FOR A COPY OF THE REGULATIONS OR CLASSIFICATIONS, PHONE (302) 451-3423.

NON- REGISTERED APPRENTICES MUST BE PAID THE MECHANICS RATE.

PROJECT: A-01 Baltz Elementary Building Renovation Window Pac, New Castle County, DE

NOT FOR BIDDING

SECTION 008114 – DRUG TESTING FORMS

1. SUMMARY

   A. Pursuant to 4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects requires that Contractors and Subcontractors who work on Large Public Works Contracts funded all or in part with public funds submit Testing Report Forms to the Owner no less than quarterly. See the form attached hereto.

   B. The Contractor will notify the Owner in writing of any positive results of random drug testing. See the form attached hereto. The results must be reported to the Owner within 24 hours of receipt of the test results.

NOT FOR BIDDING

EMPLOYEE DRUG TESTING REPORT FORM
Period Ending:_____

4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects requires that Contractors and Subcontractors who work on Large Public Works Contracts funded all or in part with public funds submit Testing Report Forms to the Owner no less than quarterly.

Project Number: _____

Project Name: _____

Contractor/Subcontractor Name: _____

Contractor/Subcontractor Address: _____

_____

_____

Number of employees who worked on the jobsite during the report period:_____

Number of employees subject to random testing during the report period:_____

Number of Negative Results_____Number of Positive Results _____

Action taken on employee(s) in response to a failed or positive random test:

_____

_____

_____

Authorized Representative of Contractor/Subcontractor: _____
(typed or printed)

Authorized Representative of Contractor/Subcontractor: _____
(signature)

Date: _____

NOT FOR BIDDING

EMPLOYEE DRUG TESTING
REPORT OF POSITIVE RESULTS

4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects requires that Contractors and Subcontractors who work on Large Public Works Contracts funded all or in part with public funds to notify the Owner in writing of a positive random drug test.

Project Number: _____

Project Name: _____

Contractor/Subcontractor Name: _____

Contractor/Subcontractor Address: _____

_____

_____

Name of employee with positive test result: _____

Last 4 digits of employee SSN: _____

Date test results received: _____

Action taken on employee in response to a positive test result:

_____

_____

_____

Authorized Representative of Contractor/Subcontractor: _____
(typed or printed)

Authorized Representative of Contractor/Subcontractor: _____
(signature)

Date: _____

This form shall be sent by mail to the Owner within 24 hours of receipt of test results.

Enclose this test results form in a sealed envelope with the notation "Drug Testing Form – DO NOT OPEN" on the face thereof and place in a separate mailing envelope.

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 011100 - SUMMARY OF WORK

1. RELATED DOCUMENTS

1.1 Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Sections, apply to work of this Section.

2. CONTRACTS

2.1 The work will be performed under separate prime contracts managed by the Construction Manager.

3. ALTERATIONS & COORDINATION

3.1 Contractor shall be responsible to coordinate their work with the work of others, including, but not limited to, the preparation of general coordination drawings, diagrams and schedules, and control of site utilization, from the beginning of activity, through project close-out and warranty periods.

4. KNOWLEDGE OF CONTRACT REQUIREMENTS

4.1 The Contractor and his Subcontractors, Sub-subcontractors and material men shall consult in detail the Contract Documents for instructions and requirements pertaining to the Work, and at his and their cost, shall provide all labor, materials, equipment and services necessary to furnish, install and complete the work in strict conformance with all provisions thereof.

4.2 The Contractor will be held to have examined the site of the Work prior to submitting his proposal and informed himself, his Subcontractors, Sub-subcontractors and material men of all existing conditions affecting the execution of the Work.

4.3 The Contractor will be held to have examined the Contract Documents and modifications thereto, as they may affect subdivisions of the Work and informed himself, his Subcontractors, Sub-subcontractors and material men of all conditions thereof affecting the execution of the Work.

4.4 The Scope of Work for the Contract is not necessarily limited to the description of each section of the Specifications and the illustrations shown on the Drawings. Include all minor items not expressly indicated in the Contract Documents, or as might be found necessary as a result of field conditions, in order to complete the Work as it is intended, without any gaps between the various subdivisions of work.

4.5 The Contractor will be held to be thoroughly familiar with all conditions affecting labor in the area of the Project including, but not limited to, Unions, incentive pay, procurements, living,

NOT FOR BIDDING

parking and commuting conditions and to have informed his Subcontractors and Sub-subcontractors thereof.

5. CONTRACT DOCUMENTS INFORMATION

5.1 The Contract Documents are prepared in accordance with available information as to existing conditions and locations. If, during construction, conditions are revealed at variance with the Contract Documents, notify the Construction Manager immediately, but no more than three (3) days from the day the variance is first known. Failure to give timely notice shall operate to waive any claim Contractor might otherwise have for an adjustment to Contract Time or Sum as a consequence of such variance.

5.2 The Specifications determine the kinds and methods of installation of the various materials, the Drawings establish the quantities, dimensions and details of materials, the schedules on the Drawings give the location, type and extent of the materials.

5.3 Dimensions given on the Drawings govern scale measurements and large scale drawings govern small scale drawings, except as to anything omitted unless such omission is expressly noted on the large scale drawings.

5.4 The techniques or methods of specifying to record requirements varies throughout text, and may include "prescriptive", "open generic/descriptive", "compliance with standards", "performance", "proprietary", or a combination of these. The methods used for specifying one unit of work has no bearing on requirements for another unit of work.

5.5 Whenever a material, article or piece of equipment is referred to in the singular number in the Contract Documents, it shall be the same as referring to it in the plural. As many such materials, articles or pieces of equipment shall be provided as are required to complete the Work.

5.6 Whenever a material, article or piece of equipment is specified by reference to a governmental, trade association of similar standard, it shall comply with the requirements of the latest publication thereof and amendments thereto in effect on the bid date.

5.7 In addition to the requirements of the Contract Documents, Contractor's work shall also comply with applicable standards of the construction industry and those industry standards are made a part of Contract Documents by reference, as if copied directly into Contract Documents, or as if published copies were bound herein.

5.8 Where compliance with two (2) or more industry standards, contract requirements, or sets of requirements is specified, and overlapping of those different standards or requirements establishes different or conflicting minimums or levels of quality, then the most stringent requirements, which are generally recognized to be also the most costly, is intended and will

NOT FOR BIDDING

be enforced, unless specifically detailed language written into the Contract Documents clearly indicates that a less stringent requirement is to be fulfilled. Refer apparently equal but different requirements, and uncertainties as to which level of quality is more stringent, to Architect for decision before proceeding.

5.9 Reference standards referenced directly in Contract Documents or by governing regulations have precedence over non-reference standards which are recognized in industry for applicability of work.

5.10 Contractor's bid is based on the complete set of Contract Documents including documents not specifically issued as part of the bid pack but referenced in same.

6. SCOPE OF WORK/GENERAL INFORMATION

6.1 A Scope of Work for each contract to be awarded on the project follows in this section. When a Contract has been awarded to a Contractor, the successful Contractor will be listed after the title of the Contract. When no Contract has yet been awarded, no Contractor's name will be listed. Previous Scopes of Work include addendum changes.

6.2 Contractor is responsible for performing the work listed in the Summary of Work for his contract. Contractor is also responsible for knowing the work that has been assigned to preceding contracts. No additional compensation or extension of time will be allowed a Contractor due to his ignorance of the work assigned to his Contract or to other contracts which may affect his work. The Contractor is responsible, however, for all items which are covered in the Specifications and Drawings relating to their Contract if not specifically mentioned in the Summary of Work.

6.3 The Construction Manager will provide on site a source for temporary electric, temporary water and portable sanitation facilities only. It is each Contractor's responsibility to make the necessary connections, including all material for temporary electric and water. Please note that utility charges for office trailers will be the responsibility of the individual Contractors.

6.4 A dumpster will be provided on site for free use by Contractors to dispose of non-hazardous, common, work-related refuse. Clean-up is the responsibility of each Contractor. Clean up shall be performed on a daily basis. Contractors not complying will be advised in writing and back charged for all costs associated with the clean up of their work.

6.5 Contractors are reminded that there are limited storage areas available on site. Off site storage will be the responsibility of each individual Contractor.

6.6 Office trailer permits off site will be the responsibility of each individual Contractor. On site Contractor's field offices, one (1) per Contractor, if required, will be located as directed by the Construction Manager.

NOT FOR BIDDING

6.7 Contractor will be prepared to discuss and submit a detailed project schedule seven (7) days after receipt of Notice to Proceed and to begin its submittal process. The Project Schedule is an integral part of this contract. Certain construction sequences and priorities must take place in order to meet the target dates. Concentrated work periods will occur and each Contractor is responsible to staff the project as required by the current Construction Schedule or as directed by the Construction Manager. Contractor will cooperate with the Construction Manager in planning and meeting the required sequences of work and Project Schedule as periodically updated by the Construction Manager.

6.8 All bids must include insurance limits in accordance with Article 11 of the Section 007300 SUPPLEMENTARY CONDITIONS.

6.9 Hoisting, scaffolding and material handling is the responsibility of each Contractor, unless otherwise noted.

6.10 Contractor will be responsible for layout of its own work. The Construction Manager will provide benchmark and layout of the building line.

6.11 Contractor will be responsible to keep clean public roadways soiled by construction traffic on a daily basis. If cleaning is not done, the Construction Manager may perform the cleaning on an overtime basis and backcharge the Contractor responsible.

6.12 Contractor Scopes of Work and Schedule are interrelated. Familiarity with each is required.

6.13 The Construction Manager will provide testing services for soil, concrete and steel. Other testing as required by the Contract Documents will be in accordance with the technical specifications and/or the individual scope of work. Refer to Specification Section 004500 - QUALITY CONTROL.

6.14 Safety is the responsibility of each individual Contractor. The project will be governed under the guidelines of OSHA.

6.15 Inter-Contractor shop drawing distribution will be performed by the Construction Manager. Contractor is individually responsible for either coordinating his work with these distributed drawings or notifying the Construction Manager, in writing, of any discrepancies.

6.16 Coordination with other trades will be required. The Contractor will be required to attend periodic coordination meetings with other trades where requirements, conflicts and coordination issues will be discussed and resolved. Attendance when requested will be mandatory. If inter-Contractor coordination is not satisfactorily performed, the conflicting Contractors shall mutually share the cost to relocate and/or reinstall their work.

NOT FOR BIDDING

6.17 Contractor shall submit a schedule of values to the Construction Manager prior to the submission of their first invoice for approval on AIA G702/CMa, Application for Payment and G703, Continuation Sheet.

6.18 Contractor is expected to review and coordinate its Work with the complete set of Contract Documents, including all items noted as by his trade whether or not shown on that particular set of drawings. Documents are available at the site for review.

6.19 Contractor is responsible for obtaining all necessary permits required for his work, including street permits. Unless otherwise noted, building permit shall be secured by the Construction Manager. Any subcontractor who will be restricting access to street, right of way or adjacent property must notify the Construction Manager 48 hours in advance.

6.20 Contractor's License: Submit a copy of all business licenses required by local and state agencies.

6.21 Contractor shall absorb, without additional compensation, any and all costs of working beyond normal hours to maintain job progress in accordance with the current construction schedule.

6.22 No asbestos or PCB's in or on any material or equipment will be accepted or allowed on this project. All hazardous materials will be treated in accordance with all State and Federal regulations.

6.23 Daily clean up of the work is the responsibility of each individual Contractor which includes broom cleaning of their debris as required. Contractor will be individually back charged by the Construction Manager for clean up not satisfactorily performed by the Contractor.

6.24 In the event asbestos is uncovered, the Contractor shall notify the Construction Manager of the areas requiring removal of asbestos. The Construction Manager shall then coordinate the removal with the Owner.

6.25 This project is to be constructed adjacent to and in existing buildings. Contractor shall exercise all due precautions to minimize noise, air pollution and any other construction hazards which in any way would cause discomfort or danger to the occupants of the existing building in the area.

6.26 Existing mechanical, electrical, plumbing, sprinkler, medical gas, fire alarm, etc. systems will be shut off and locked out by the Owner as required by the Work. Tie-in's and modifications to those systems will be performed by the specific Contractor associated with the work as indicated in the Contract Documents. Re-energizing and re-start up of all systems should be performed by the Owner.

NOT FOR BIDDING

6.27 The Safety Cable System shall not be altered or removed without a written request submitted to the Project Manager with a copy to the Field Manager. It shall be the responsibility of each and every Contractor that is removing or altering the Safety Cable System to maintain the fall protection safety provided by the safety cable and not leave the area unprotected. Each and every Contractor shall be responsible to re-install the Safety Cable System immediately after work is completed. Each and every Contractor shall be responsible to re-install the Safety Cable System in accordance to OSHA standards.

6.28 Normal work hours for this project are from 7:00 a.m. to 3:30 p.m. Any work to be performed outside of these hours must receive prior approval from the Construction Manager. Requests to work beyond normal work hours shall be submitted at least 48 hours prior.

6.29 Contractor is responsible for having a competent project superintendent/foreman on-site during all work performed under its contract.

6.30 In the event the Contractor has non-English speaking employees or subcontractors on the project, they shall have a superintendent or foreman on site, at all times, who speaks English and can communicate with Contractor's employees. Should the Contractor fail to meet this requirement, at any time, Construction Manager may direct all Work to stop until the proper supervision is on site. The Contractor will be responsible for maintaining the project work schedule and make up at its own expense, any delay to the Schedule resulting from the work stoppage.

6.31 Punch List Procedures: Contractor shall be given a copy of the punch list with his appropriate work identified. Contractor shall have nine (9) calendar work days to complete its punch list work. On the 10th day or as determined by the Construction Manager, the Construction Manager shall employ other contractors, as required, to complete any incomplete punch list work and retain from the appropriate Contractors retainage all costs incurred.

6.32 Contractor shall provide the necessary safety barricades and railings required to complete their work and comply with all OSHA, local code and contract specifications.

6.33 **Temporary Protection**: Provide temporary protection to ensure that no damages occur to existing or new finishes, building components, materials, equipment, etc. In addition, provide all approved signage and safety devices applicable to the referenced temporary protection. An approved temporary protection plan will be required before the initial start of the work.

6.34 Provide fine clean up on a daily basis. Fine cleaning will be defined as those means/methods utilized to ensure that all odors, dust, and debris will be non-existent within the project area at the end of each workday. In addition, means and methods shall be utilized that prevent the migration of odors, dust, debris, and excessive noise from migrating into non-working areas. An approved cleanup plan will be required before the initial start of the work.

NOT FOR BIDDING

CONTRACT NO. A-01 - CARPENTRY AND GENERAL WORK

A. Work included in this contract consists of, but is not necessarily limited to, all labor, materials and equipment for:

- Technical Specification Sections:

Division 0	Bidding and Contract Requirements
Division 1	General Requirements
Division 2	Existing Conditions
Division 3	Concrete
Division 6	Wood Plastics and composites
Division 7	Thermal and Moisture Protection
Section 081113	Hollow Metal Doors and Frames
Section 081416	Flush Wood Doors
Section 083100	Access Doors and Panels
Division 9	Finishes
Division 12	Furnishings

This contract also includes, but is not necessarily limited to, all labor, materials and equipment for the following:

1. Provide labor and materials to perform the work related to all carpentry and general work as described within the scope of this Contract.

2. Provide selective demolition and repair. Remove exterior and interior building items as shown on or required by the Contract Documents. Remove other items indicated for salvage, relocation and recycling. Store materials for reuse in a safe protected method. Remove, store and reinstall ceiling, walls, flooring, etc. as required for this scope and scope by others within contracts; A-02, A-03, A-04, A-05, etc. Comply with all applicable code requirements and obtain required permits. Provide safety requirements associated with performing this work. Provide temporary barriers needed to facilitate this work.

3. Coordinate mechanical, plumbing and electrical demolition with the Mechanical and Electrical Contractors. Those Contractors will safe off items requiring removal or relocation. The Carpentry and General Work Contractor will remove the item (i.e. lights, fixtures, diffusers, ductwork) and dispose of in a proper receptacle. Removal of mechanical and electrical equipment (unit ventilators, air handlers, etc.) shall be provided by the Mechanical Contractor. This includes hoisting, rigging and required equipment to safely remove the equipment requiring demolition from its current location and dispose of same off site.

4. Provide exterior and interior demolition and repair of building components as detailed on or required by the Contract Documents. Coordinate schedule for removal of exterior building

NOT FOR BIDDING

items with delivery of replacement items and provide temporary opening protection as required.

5. Provide like new repair of adjacent areas impacted by demolition under this contract.

6. Provide temporary protection as required for this contract including but not limited close-in of any exterior openings created from demolition.

7. This Contractor is responsible for all dumpsters, disposal fees and labor required to dispose of demolition debris, junk and trash from the site.

8. This Contractor will be responsible for laying out all concrete work as shown on the structural and architectural drawings.

9. Include all weather, frost protection, and water pumping as required. This Contractor is also responsible for the premiums required for hot water, heated aggregate and admixtures for cold weather concrete.

10. This Contractor will be responsible for laying out all concrete work as shown on the structural and architectural drawings.

11. Provide masonry units, reinforcing, accessories and related work.

12. Cast stone/limestone work.

13. Temporary protection for final wash down/cleaning of masonry.

14. Provide stairs, loose lintels, handrails, railings, steel ladders and accessories

15. Provide Toilet, sink, partition, etc. supports

16. Provide all rough carpentry related to the exterior skin of the building including wood nailers, blocking and supports.

17. All rough carpentry related to the interior of the building including blocking, wood nailers, etc. for the installation of fire extinguishers, doors, windows, toilet accessories, cabinets, toilet partitions, casework, millwork, etc. including fire treating, as required.

18. Provide new hollow metal and wood doors and frames, fire rated and non-fire-rated, all accessory materials including glazing, stops, astragals, silencers, door sweeps, thresholds, weather stripping, frame spreaders, primer and bituminous coating, sound ratings and other requirements as required.

NOT FOR BIDDING

19. Provide finish hardware related to all doors (hollow metal, wood and aluminum). Include preparation taking caution to coordinate combined requirements for each type specified. Coordinate cylinder cores with Owner. Provide cylinders and keying, gasketing and weather stripping, thresholds, silencers and other accessories. Coordinate electrical/special system requirements with the Electrical Contractor.

20. Provide all joint sealers including exterior sealants, interior sealants, fire resistant foam sealants and bathtub/tile sealants. Include prepare and accessories for proper application.

21. Provide gypsum board assemblies and gypsum plastering at new and modified construction. Provide demolition scar patches, opening infills, and other cutting and patching associated with the scope of this Contract.

22. Provide wall and floor tile, accessories and trim, thresholds, setting beds, grouting and protection, cleaning and grout sealing associated with Alternate No. 1.

23. Provide acoustical ceilings at new and modified construction. Provide infill, replacements and reworking of ceilings around renovated areas. Include tile units, suspension systems and all accessories as specified.

24. Provide fall protection for roofing scope

25. Provide resilient flooring, base and accessories at new and modified construction. Provide subfloor filler, primers and subfloor surfaces, infill, replacements and flooring materials required for cutting and patching at new and renovated construction. This Contractor shall provide the VCT flooring in the elevator.

26. Provide interior and exterior painting and coatings including surface preparation, primers and field application of paints. Provide a mock up for quality control verification. Verify surfaces to be finished noted in Technical Section 099001, field conditions and the items listed in this Scope of Work.

27. Mirrors.

28. Provide anchoring devices, fasteners, inserts, metal supports and other related items associated with the installation of the above items with-in this contract.

29. This Contractor shall at a minimum provide and maintain for the length of the project, one temporary fire extinguisher for each 3,000 sq. ft of the protected building area. Fire extinguishers shall be 10lb, Multi-Purpose (ABC) dry chemical, UL labeled, with a rating of 3a:40bc.

30. This Contractor shall include the following allowances in the Base Bid. Allowances to be

NOT FOR BIDDING

used at the discretion of the Construction Manager. Unused portions of the allowance shall be returned to the Owner via change order.

a. $10,000 for miscellaneous demolition work.
b. 80 hours Carpenter's time.
c. 80 hours Laborer's time.
d. $5,000 miscellaneous carpentry work.
e. $10,000 for miscellaneous roofing patching.
f. 40 hours of Painter's time with associated paint materials.
g. $5,000 for miscellaneous acoustical ceiling work.
h. $5,000 for miscellaneous flooring work.
i. $10,000 Temporary Protection (Including Fall Protection).

31. Provide operation and maintenance manuals, attic stock, maintenance tools, demonstration and training.

32. All warranties begin at overall project substantial completion. This project requires a two-year general warranty, in addition to the specific warranties required by the Contract Documents.

33. Provide Alternates as indicated in section 012300.

NOT FOR BIDDING

CONTRACT NO. A-02 - ROOFING

Work included in this contract consists of, but is not necessarily limited to, all labor, materials and equipment for:

- Technical Specification Sections:

Division 0	Bidding and Contract Requirements
Division 1	General Requirements
Section 070150	Preparation for Re-Roofing
Section 072100	Thermal Insulation
Section 074213	Metal Wall Panels
Section 075300	Elastomeric Membrane Roofing
Section 076200	Sheet Metal Flashing and Trim
Section 077200	Roof Accessories
Section 079005	Joint Sealers

This contract also includes, but is not necessarily limited to, all labor, materials and equipment for the following:

1. Provide single ply flexible roofing system, including rigid and tapered insulation and all related accessories.

2. Caulking related to roofing, flashing and roof accessories.

3. Roof drains and associated plumbing shall be provided by the Mechanical Contractor. Flashing of the roof drains shall be by the Roofing Contractor. Openings for the roof drains in the roofing materials shall be cut by the Roofing Contractor. Openings in the metal deck shall be cut by others.

4. Metal parapet coping.

5. Roof hatches.

6. Walk pads.

7. Perform cutting, patching and maintenance of temporary patch for work performed by others on existing roofs intended to be re-roofed as part of this work.

8. Metal drip edges.

9. Gravel stops.

NOT FOR BIDDING

10. Roof curbs.

11. Smoke vents.

12. Provide expansion joints that are integral to the roof.

13. Provide permanent patching of existing roofing systems at areas of demolition. Demolition of roof drains, mechanical and electrical equipment shall be performed by others. All patching shall conform to original warranty requirements and documents.

14. Gutters, downspouts and splash pans.

15. Metal scuppers and related work.

16. Wood blocking shall be provided by others.

17. Flashing and sheet metal.

18. Provide Alternates as indicated in section 012300.

NOT FOR BIDDING

CONTRACT NO. A-03 – GLASS AND GLAZING

A. Work included in this contract consists of, but is not necessarily limited to, all labor, materials and equipment for:

- Technical Specification Sections:

Division 0	Bidding and Contract Requirements
Division 1	General Requirements
Section 024100	Demolition
Division 04	Masonry
Division 06	Wood, Plastic, and Composites
Section 072100	Thermal Insulation
Section 076200	Sheet Metal and Flashing
Section 079005	Joint Sealers
Section 084100	Aluminum Framed Entrance and Doors
Section 084313	Aluminum Framed Storefronts
Section 084113.10	Aluminum Framed Storefronts - Interior
Section 084413	Glazed Aluminum Curtain Walls
Section 088000	Glazing
Division 09	Finishes
Division 12	Furnishings

D

This contract also includes, but is not necessarily limited to, all labor, materials and equipment for the following:

1. Provide all labor, material, trucking, equipment, hoisting, scaffolding, power, temporary facilities, permit fees, supervision, layout, clean up, haul off, dumpsters, etc. for the complete performance of all demolition work to remove windows as stated on the drawings and necessary to prepare opening for new windows.

2. Provide all labor, material, trucking, equipment, hoisting, scaffolding, power, temporary facilities, permit fees, supervision, layout, clean up, haul off, dumpsters, etc. for the complete performance of all windows, aluminum entrance doors, storefronts, curtain walls, glazing.

3. Base bid scope of work is for front of building scope of work. Front of building is indicated as elevation details 2 and 3 on sheet 4.1

NOT FOR BIDDING

4. Remove existing counter balance relief air louver and damper.

5. Remove wire mesh panels.

6. Coordination of this scope of work with abatement contractor. Abatement contractor to remove asbestos materials. All other demo for window scope of work by this contractor.

7. Coordination with steel lintel cleaning and painting scope of work done by others.

8. Coordination with blocking scope of work done by others.

9. Coordination with new black honed slate sill by others.

10. Coordination with work removal of suspended ceiling tile by others.

11. Coordination with CFMF by others.

12. Coordination with power washing by others.

13. Coordination with window treatment removal and install by others

14. Coordination with Masonry scope by others.

15. Provide Thermal Insulation.

16. Provide complete curtain wall, storefront, glass and glazing.

17. Interior door, partition, vision panel and window glass

18. Provide aluminum door systems and handling

19. Finish hardware for aluminum doors only

20. Caulking related to storefront doors and curtain wall systems.

21. Provide breakmetal.

22. Provide flashings and aluminum drip edge.

23. Provide extruded aluminum tube guardrail.

24. Hoisting/scaffolding related to the work of this Contract

NOT FOR BIDDING

25. Caulk between the materials supplied under this section and the adjacent surfaces

26. Provide Steel Woven Wire Mesh Window Guard

27. Provide new counter balance relief air louver and damper.

28. Project start is estimated to be 6/10/16 and completion 8/15/16, any expediting of design, shop drawings, manufacturing, shipping, etc. Should be part of base bid.

29. Provide shop and touch up for all components.

30. Provide daily cleaning of this scope of work.

31. Provide cleaning of windows at end of installation.

32. Provide a $10,000 allowance to be used at the discretion of the Construction Manager.

33. Provide Alternates as indicated in section 012300.

NOT FOR BIDDING

NOT FOR BIDDING

CONTRACT NO. A-04 - MECHANICAL AND PLUMBING

A. Work included in this contract consists of, but is not necessarily limited to, all labor, materials and equipment for:

- Technical Specification Sections:

Division 0	Bidding and Contract Requirements
Division 1	General Requirements
Division 22	Plumbing
Division 23	HVAC
Division 26	Electrical (for reference and coordination)

This contract also includes, but is not necessarily limited to, all labor, materials and equipment for the following:

1. Provide a complete mechanical, plumbing and piping system as indicated in the Contract Documents.

2. This Contractor shall be responsible to designate an individual within his organization, intimately familiar with this project and assigned on site, to act as the System Start-up Coordinator. This individual must be pre-approved by the Construction Manager. This individual's responsibilities shall include, but not be limited to, coordinating the start-up of all mechanical equipment, including the coordination between the Electrical Contractor, the Controls Contractor, and all testing, adjusting and balancing work. This individual shall report on a weekly basis, in written form, to the Construction Manager. These reports shall include a summary of current conditions including manufacturers' start-ups, systems' deficiencies noted to date and the remediation of same, coordination issues between trades, system interfacing and forecasting, as necessary to project the completion of each individual system within the building.

3. Provide safing off of items requiring selective demolition. Coordinate this work with the Carpentry and General Work Contractor and the Electrical Contractor who will be providing the electrical/special system safing off and the removal of items as outlined. Mechanical equipment such as unit ventilators and air handlers will be demolition, removed and disposed of off site by the Mechanical Contractor. Extent of removal of ceilings, walls and other existing construction shall be closely coordinated by this Contractor with the Carpentry and General Work Contractor.

4. Provide plumbing insulation and covering.

5. Provide domestic cold water, hot water and recirculating water piping. Complete flow balancing of entire domestic water, water return system.

NOT FOR BIDDING

6. Provide plumbing system testing (domestic cold, hot and hot water return, gas piping and sanitary and condensate waste drainage piping) as indicated in the Contract Documents.

7. Provide domestic hot water and hot water return system balancing as indicated in the Contract Documents.

8. Provide pipe and equipment labeling and identification.

9. Provide permits, testing and inspections.

10. Provide testing and balancing of system.

11. Provide sleeves for penetrations through wall, floors, roofs etc. including cutting, patching and fire safing.

12. Provide hoisting, rigging and scaffolding required to perform the scope of this Contract.

13. Provide gas piping and accessories .

14. This Contractor shall include the following allowances in the Base Bid. Allowances to be used at the discretion of the Construction Manager. Unused portions of the allowance shall be returned to the Owner via change order.
    1. $5,000 for miscellaneous mechanical or plumbing work.
    2. $5,000 for plumbing or duct insulation.
    3. $5,000 for equipment pads.
    4. $5,000 for tie-in locations.
    5. $5,000 for ductwork support.
    6. $10,000 for roof support rails and acoustic system.

22. Provide operation and maintenance manuals, attic stock, maintenance tools, demonstration and training.

23. All warranties begin at overall project substantial completion. This project requires a two-year general warranty, in addition to the specific warranties required by the Contract Documents.

NOT FOR BIDDING

CONTRACT NO. A-05 - ELECTRICAL

A. Work included in this contract consists of, but is not necessarily limited to, all labor, materials and equipment for:

- Technical Specification Sections:

Division 0	Bidding and Contract Requirements
Division 1	General Requirements
Division 22	Plumbing (for reference and coordination)
Division 23	HVAC (for reference and coordination)
Division 26	Electrical

This contract also includes, but is not necessarily limited to, all labor, materials and equipment for the following:

1. Provide a complete electrical system as indicated on the Contract Documents.

2. Provide safing off of items requiring selective demolition. Coordinate this work with the Carpentry and General Work Contractor and the Mechanical Contractor who will be providing the plumbing and HVAC system safing off and the removal of items as outlined. Extent of removal of ceilings, walls and other existing construction shall be closely coordinated by this Contractor with the Carpentry and General Work Contractor.

3. Provide electrical identification and labeling.

4. Provide raceways, wires and cables, electrical boxes and fittings and wiring devices required for the scope of this Contract.

5. Provide motor starters. Coordinate the design equipment characteristics with the Mechanical Contractors.

6. Provide motor and circuit disconnects. Coordinate access, clearances and maintenance prior to installation to avoid conflicts.

7. Provide overcurrent protective devices.

8. Provide supporting devices.

9. Provide feeder circuits and branch circuits.

10. Provide temporary electric installation, maintenance and removal. Refer to Division 1,

NOT FOR BIDDING

Specification Section 015113 - TEMPORARY ELECTRIC, for specific scope.

11. Rough in and final connection and related work for equipment provided under other contracts (i.e. kitchen, elevators, HVAC, sprinkler, motorized doors, etc.)

12. Furnish duct smoke detectors. Verify and coordinate work with the Mechanical Contractor (and Fire Alarm vendor) for the locations and mounting of all duct smoke detectors – shown on the mechanical drawings for reference. Final locations determined on approved FA drawings. Mounting shall comply with NFPA.

13. Provide sleeves for penetrations through wall, floors, roofs etc. including cutting, patching and fire safing.

14. Provide hoisting, rigging and scaffolding required to perform the scope of this Contract.

15. Provide rough-in and final connection and related work for equipment provided under other contracts (i.e. elevators, HVAC, sprinkler, motorized doors, etc.).

16. Provide pricing for Alternate No. 1 Restroom Finish Upgrade.

a. This Contractor shall include the following allowances in the Base Bid. Allowances to be used at the discretion of the Construction Manager. Unused portions of the allowance shall be returned to the Owner via change order.
   a. $5,000 for miscellaneous electrical work.

17. Provide permits, testing and inspections.

18. Provide operation and maintenance manuals, attic stock, maintenance tools, demonstration and training.

19. All warranties begin at overall project substantial completion. This project requires a two-year general warranty, in addition to the specific warranties required by the Contract Documents.

END OF SECTION

NOT FOR BIDDING

SECTION 012100 - ALLOWANCES

1. RELATED DOCUMENTS

1.1 The general provisions of the Contract, including the Conditions of the Contract (General, Supplementary and other Conditions, if any) and Division 1 as appropriate, apply to the Work specified in this Section.

1.2 Refer to provisions in AIA Document A232 – 2009 EDITION, GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION, CONSTRUCTION MANAGER AS ADVISOR EDITION, for requirements in addition to those specified in Division 1.

1.3 Refer to Scope Information Sheets for all contracts bound in the Project Manual under Section 011100 - SUMMARY OF WORK. The Scope Information Sheets describe generally the work included in each contract, but the work is not necessarily limited to that described.

1.4 For work being constructed under separate prime contracts, provisions of this Section apply to each contract being bid.

1.5 Include in the Contract Sum all lump sum and unit cost allowances stated in the Contract Documents.

1.6 Designate in the construction progress schedule the delivery dates for products specified under each allowance.

1.7 Designate in the Schedule of Values the quantities of materials required under each unit cost allowance.

2. ALLOWANCES FOR PRODUCTS

2.1 The amount of each allowance includes:

A. The cost of the product or labor to the Contractor or Subcontractor, less any applicable trade discounts.

B. Delivery to the site.

C. Labor required under the allowance, only when labor in specified to be included in the allowance. If labor is not specified to be included in the allowance, it shall be included in the Contractor's bid and in the resulting Contract Sum.

NOT FOR BIDDING

D. Applicable taxes.

E. Profit and overhead.

2.2 In addition to the amount of each allowance, include in the Contract Sum the Contractor's costs for:

A. Handling at the site; including unloading, uncrating and storage.

B. Protection from the elements and from damage.

C. Labor for installation and finishing, except where labor is specified to be a part of the allowance.

D. Other expenses required to complete the installation.

E. Contractor's and Subcontractor's overhead and profit.

2.3 Refer to Scope Information Sheets under Section 011100 - SUMMARY OF WORK for the amount of each lump sum allowance and for work specified in the specification sections listed below.

A. A-01 Glass and Glazing
1. $10,000 for miscellaneous and unforeseen conditions.

3. ADJUSTMENT OF COSTS

3.1 Should the net cost be more or less than the specified amount of the allowance, the Contract Sum will be adjusted accordingly by Change Order.

A. For products and labor specified under a unit cost allowance, the unit cost shall apply to the quantities actually used with a nominal allowance for waste, as determined by receipted invoices, or by field measurement.

3.2 At Contract closeout, reflect all approved changes in Contract amounts in the final statement of accounting.

END OF SECTION

NOT FOR BIDDING

SECTION 012200 - UNIT PRICES

1. GENERAL PROVISIONS

1.1 The general provision of the Contract, including the Conditions of the Contract (General, Supplementary and other conditions, if any) and Division 1 as appropriate, apply to the Work specified in this Section.

1.2 Refer to provisions in AIA Document A232 – 2009 EDITION, GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION, CONSTRUCTION MANAGER AS ADVISOR EDITION, for requirements in addition to those specified in Division 1.

1.3 For work being constructed under separate prime contract, provisions of this Section apply to each contract being bid.

2. BASE BID

2.1 The Base Bid shall consist of all work shown or specified in the Contract Documents, exclusive of any Additive Unit Prices specified herein.

.2.2 The Base Bid shall include all work in any Subtractive Unit Prices specified herein.

3. UNIT PRICES

3.1 State in the Bid Form the amount to be added to (or subtracted from) the Base Bid per unit of measurement for each Unit Price specified. State this amount to include all overhead and profit. No surcharge in addition to the Unit Price listed will be permitted.

3.2 See Section 002113, INSTRUCTIONS TO BIDDERS for related information.

3.3 For description of Unit Prices requested, refer to the specification. The method of stating the Unit Prices is described in the Bid Form.

3.4 Where both add and deduct unit prices are requested, there shall not be more that a 10% variation between the two.

4. APPLICATION OF UNIT PRICES

4.1 Unit prices stated in the Bid Form will apply from the time the Bid is submitted until Contract completion.

NOT FOR BIDDING

5. MEASUREMENT OF QUANTITIES

5.1 Quantities shall be determined by field measurement by contractor personnel and as verified by the Construction Manager.

5.2 At the Contractor's option, and at his expense, measurement may be made by a registered surveyor.

6. LIST AND DESCRIPTION OF UNIT PRICES

6.1. Install and removal of temporary sheeting to secure an opening created by removal of 225 SF of windows.

6.2. Provide one complete unit, per scope of work, plans and specs for window types W1 and W1A.

6.3. Provide one complete unit, per scope of work, plans and specs for window types W2 and W2A.

END OF SECTION

NOT FOR BIDDING

SECTION 012300 - ALTERNATES

1. GENERAL PROVISIONS

1.1 The general provisions of the Contract, including the Conditions of the Contract (General, Supplementary and other conditions, if any) and Division 1 as appropriate, apply to the Work specified in this Section.

1.2 Refer to provisions in AIA Document A232 – 2009 Edition, GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION, CONSTRUCTION MANAGER AS ADVISOR EDITION, for requirements in addition to those specified in Division 1.

1.3 For work being constructed under separate prime contracts, provisions of this Section apply to each contract being bid.

2. BASE BID

2.1 The Base Bid shall consist of all work shown or specified in the Contract Documents, exclusive of any Additive Alternates specified herein.

2.2 The Base Bid shall include all work in any Subtractive Alternates specified herein.

3. ALTERNATES

3.1 State in the Bid Form the amount to be added to the Base Bid for each Alternate specified.

3.2 See Section 002113 - INSTRUCTIONS TO BIDDERS for related information.

3.3 The description of Alternates contained herein is in summary form. Detailed requirements for materials and execution shall be as specified in other sections and as shown on drawings.

Alternate No. 1: Scope of work to include elevations 4 and 5 on sheet 4.1, Completed by August 16, 1016

Alternate No. 1B: Scope of work to include elevations 4 and 5 on sheet 4.1, Completed between June 13, 2017 and August 16, 2017

Alternate No. 2: Scope of work to include elevations 6, 7, and 8 on sheet 4.1, Completed by August 16, 1016

Alternate No. 2B: Scope of work to include elevations 6, 7, and 8 on sheet 4.1, Completed between June 13, 2017 and August 16, 2017

NOT FOR BIDDING

ALTERNATES (Cont.)

Alternate No. 3: Scope of work to include elevation 1 on sheet 4.1. , Completed by August 16, 1016

Alternate No. 3B: Scope of work to include elevation 1 on sheet 4.1., Completed between June 13, 2017 and August 16, 2017

Alternate No. 4: Provide and remove temporary protection (sheathing) for any window openings that will not be secure by end of workday.

Alternate No. 5: Provide second shift to expedite completion

END OF SECTION

NOT FOR BIDDING

SECTION 012600 - CHANGE ORDER PROCEDURES

1. GENERAL:

1.1 The general provisions of the Contract, including the Conditions of the Contract (General, Supplementary and other Conditions, if any) and Division 1 as appropriate, apply to the Work specified in this Section.

1.2 Refer to provisions in AIA Document A232 – 2009 EDITION, GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION, CONSTRUCTION MANAGER AS ADVISOR EDITION, for requirements in addition to those specified in Division 1.

1.3 The Construction Manager is responsible for processing all change orders. Each request will be assigned a change order request (COR) number. The Change Order Request & Execution Form will be initiated via the web-based project management system (Building Blok) used by the CM.

1.4 It is to be clearly understood that no extra work shall commence without an approved written and executed change order from the Owner.

2. INITIATING A CHANGE ORDER:

2.1 Specific changes initiated by the Owner, Architect, Construction Manager (CM) or Contractor will be processed as follows:

A. The Owner will authorize the Architect to prepare sufficient documents to establish an accurate price. These documents to be forwarded to the Construction Manager and Owner "for pricing only, not authorized for construction." The Construction Manager will develop the estimate (within 2 weeks) showing a breakdown by trades with all trade contractor quotes. The Owner will approve or reject the change request within two (2) weeks. If the Owner elects to proceed with the change, the Construction Manager will prepare formal change orders to the various trade contractors involved in the change and reference in all formal change orders the original change order request number.

B. Field Change: Contractor shall immediately notify the Construction Manager of a change due to field conditions or site conditions. If documents cannot be prepared for pricing due to schedule constraints, the Construction Manager will make every effort in estimating the field change. If the Owner and Construction Manager agree that certain field changes should be handled on a time and material basis, the Construction Manager will closely monitor the Contractor's labor and material affecting this change. At the completion of the work a formal change order will be issued.

C. Contractor Change: If a Contractor initiates a change order for work not included in

NOT FOR BIDDING

the Contract, the Construction Manager and Architect will research the validity of the request, verify quantities and pricing and submit to the Owner for approval on a change order request.

2.2 The additional cost, or credit to the Owner resulting from a change in the Work shall be by mutual agreement of the Owner, Contractor, Construction Manager and the Architect.

3. PROCESSING A CHANGE ORDER:

3.1 The Contractor will fill in the Change Order Request & Execution Form (COREF) with a brief description of the change, any time extension, and cost changes.

3.2 The Contractor will attach to the COREF copies of the written quotations from the trade contractors, Contractors, and suppliers. The Labor Detail Sheet and the Change Order Detail forms must be added as an attachment to the COREF. The Contractor and each sub-tier contractor (as applicable) must fill out the Labor Detail Sheet and Change Order Detail Sheet. Samples of these forms are attached.

3.3 In all cases, this cost or credit shall be based on the "DPE" wages required and the "invoice price" of the materials/equipment needed.

3.4 "DPE" shall be defined to mean "direct personnel expense". Direct payroll expense includes direct salary plus customary fringe benefits (prevailing wage rates) and documented statutory costs such as workman's compensation insurance, FICA, and unemployment insurance.

A. "Fringe Benefit" is any medical, life or disability insurance, paid time off, etc.

B. "Worker's Compensation" is the insurance required for injuries including medical leave, etc.

C. "FICA" is the costs association with Social Security and Medicare insurance.

D. "Unemployment insurance" is the cost associated with the governmental assessment for employee's unemployment benefits.

3.5 "Invoice price" of materials/equipment shall be defined to mean the actual cost of materials and/or equipment that is paid by the Contractor (or Subcontractor) to a material distributor, direct factory vendor, store, material provider, or equipment leasing entity.

3.6 In addition to the above, the Contractor is allowed markup for overhead and profit on additional work performed as outlined in Specification Section 012613, Contractor Compensation.

3.7 Building Blok Procedures: The Contractor will submit all change order requests and

NOT FOR BIDDING

supporting documentation via the Building Blok web-based project management system. Each Contractor will be issued a unique login and password. Each contractor must submit the information as follows:

A. Create a new change order, from your "To-Do List" by clicking on the "Create Issue" tab in the upper right corner and select "Change Order Request".
B. The Contractor will enter a brief description of the change in the "Summary" block. A detailed description of the change will be entered in the "Description of Change" block, to include any changes to documents or time extension. The cost of the change will be entered in the "Total Cost Change" block.

C. The Labor Detail Sheet and the Change Order Detail forms must be added as an attachment to the request. The Contractor and each sub-tier contractor (as applicable) must fill out the Labor Detail Sheet and Change Order Detail Sheet. Samples of these forms are included behind this section. In addition to these forms, the Contractor also must attach any material and equipment rental quotations. All of these documents should be scanned and saved as a PDF file. Click on the "Browse" box to upload the file. Be sure to wait until Building Blok tells you the file was "Uploaded Successfully".

D. Once the information is entered on the form and the proper attachments are uploaded, the contractor will click "Save". The Contractor will be prompted to enter their password to approve an electronic signature. Once you save the request you will have an opportunity to check it before submitting it to the CM. After you verify the COREF is correct click "Recommend Approval" to submit the change request to the CM. The Contractor will then be prompted to re-enter the password to approve an electronic signature and complete the submission request. Click on "Home" in the upper left corner to make sure the change order does not appear on your To-Do List.

E. The Change Order Request will then be reviewed by the CM Project Manager and Recommended for Approval, Rejected, or returned to the Contractor for additional information. Once the Construction Manager, Owner, and Architect have approved the request all parties will receive an email from Building Blok notifying them that a fully executed Change Order and Contract Recalculation Form can be downloaded from Building Blok. Hard copies of the executed change order and recalculation form will not be provided by the CM.

It is to be clearly stated that no extra work shall commence without an approval from the Owner or Construction Manager or Owner's representative.

END OF SECTION

NOT FOR BIDDING

CHANGE ORDER REQUEST & EXECUTION FORM

110 South Poplar Street
Suite 400
Wilmington, DE 19801

Tel. 302-421-5700
Fax 302-421-5715

DATE:
CONTRACT:
CONTRACTOR:

PROJECT NAME:
REQUEST NUMBER:
CHANGE ORDER NUMBER:
STATE PO NUMBER:

The following is a summary of the request submitted by the contractor as described above. All supporting documents have been attached and described herewith. This summary shall contain a total amount of compensation requested by the contractor as well as any request for an extension in contract time. It shall be understood that the amounts described below shall remain valid for a period of sixty days from the date described above unless otherwise stated.

A detailed breakdown of Labor, material, equipment, and subcontract costs must be attached to be considered for review.

1. Summary Description(s):
2. Changes to the Contract Drawings:
3. Changes to the Project Manual:
4. Total Cost Change:
5. Total Time Change:

REVIEWED

This request has been reviewed and____approval_____disapproval is recommended by:

Name Title Date

APPROVED

This change order request is not approved until executed by all parties bound by a contractual relationship. Upon execution it shall represent a modification to the agreement and is subject to all terms and conditions of the contract documents.

Contractor:
Signed By:
Title:
Date:

Architect:
Signed By:
Title:
Date:

EDiS Company
Signed By:
Title:

Owner:
Signed By:
Title:

NOT FOR BIDDING

Date:	Date:

NOT FOR BIDDING

CHANGE ORDER DETAIL FORM

(Provided by contractor, subcontractor or sub tier contractor)

DATE SUBMITTED:

CONTRACT:

CONTRACTOR:

PROJECT NAME: BALTZ RENOVATIONS

CHANGE ORDER REQUEST #:

LABOR SECTION

TRADESMAN(s):	LABOR HOURS	RATE (per schedule)	SUBTOTAL
Subtotal			

MATERIAL SECTION

MATERIAL:	QUANTITY	UNIT COST	SUBTOTAL
Subtotal			

EQUIPMENT SECTION

EQUIPMENT:	QUANTITY	UNIT COST	SUBTOTAL
Subtotal			

SUBTOTAL	
SUBCONTRACTOR/ SUB TIER*	
OH & PROFIT (10% on sub/sub tier only))	
BOND COST	
OH & PROFIT (15% on own work)	
GRAND TOTAL	

3/2012

NOT FOR BIDDING

Red Clay Consolidated School District
Capital Improvements
Baltz Elementary School
Bid Pack A
January 11, 2016

LABOR DETAIL FORM

(Provided by contractor, subcontractor, or sub-tier contractor)

DATE:

CONTRACT:

CONTRACTOR:

PROJECT NAME: BALTZ RENOVATIONS

CHANGE ORDER REQUEST #:

NOT FOR BIDDING

CLASSIFICATION:			
Base Wage Rate:			
Health Insurance			
Holidays			
Sick Days			
Life Insurance			
Disability Insurance			
Dental Insurance			
Company Vehicle			
401K			
Education			
Other (*specify below*)			
Subtotal			
Posted Prevailing Rate			
FICA (Social Security & Medicare)			
SUTA (State Unemployment)			
FUTA (Federal Unemployment)			
General Liability Insurance			
Worker's Compensation			
Total Wage Rate			

3/2012

NOT FOR BIDDING

SECTION 012613 - CONTRACTOR COMPENSATION

1. GENERAL

1.1 The Contractor agrees to perform any additional Work, for the net cost of materials and labor (including wages paid, payroll taxes, and all insurance) plus the following percentage for all of his overhead and profit, which includes Field Supervision:

The percentages to be added or allowed for any Work change involving both added Work and omitted Work shall be applied only to the net difference in cost.

(a) 15% mark-up (10% overhead and 5% profit) by the Contractor on Work performed by his own forces.

(b) For work done by a Subcontractor, 10% for subcontractor overhead and 5% for subcontractor profit to which the Contractor may add 7.5% for his overhead and profit combined.

(c) Contractor mark-up shall include supervision, home and field overhead, all self-owned small tools and equipment.

1.2 When the Contractor is directed to perform overtime work at the CM (Owner) expense to accelerate contractual work, the cost for same shall only be the actual premium costs incurred by the Contractor.

NOT FOR BIDDING

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 012900 - PAYMENT PROCEDURES

1. GENERAL PROVISIONS

1.1 The general provisions of the Contract, including the Conditions of the Contract (General, Supplementary and other conditions, if any) and Division 1 as appropriate, apply to the Work specified in this Section.

1.2 Refer to provisions in AIA Document A232 - 2009 Edition, GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION, CONSTRUCTION MANAGER AS ADVISOR EDITION, for requirements in addition to those specified in Division 1.

1.3 For work being constructed under separate prime contracts, provisions of this Section apply to each contract being bid.

2. REQUIREMENTS INCLUDED

2.1 Submit Applications for Payment to Construction Manager in accordance with the schedule and procedures established in the Contract Documents.

3. RELATED REQUIREMENTS

3.1 Owner-Contractor Agreement.

3.2 Conditions of the Contract: Article 9 PAYMENTS AND COMPLETION.

3.3 Section 01 31 13: Project Coordination Meetings

3.4 Section 01 33 00: Submittal Procedures

3.5 Section 01 77 00: Closeout Procedures

4. FORMAT AND DATA REQUIRED

4.1 Submit itemized applications typed on AIA Document G702/CMa, Application and Certificate for Payment, and Continuation Sheet G703, examples of which will be furnished to the Contractor at the Pre-Construction meeting.

4.2 Provide itemized data on Continuation Sheet:

1. Format, schedules, line items and values: Duplicates of those of the schedule of values previously accepted by the Construction Manager.

5. PREPARATION OF APPLICATIONS FOR PROGRESS PAYMENTS

5.1 Form: AIA Document G702/CMa

1. Fill in required information, including that for Change Orders executed prior to date of submittal of application.

2. Fill in summary of dollar values to agree with respective totals indicated on Continuation Sheets.

5.2 Continuation Sheets:

1. Line items of components of Work will be subject to Owner's review and approval under the Provisions of Section 013300 - SUBMITTALS, and the General Conditions. Continuation Sheets shall follow Schedule of Values submitted at the start of the job.

2. Fill in total list of all scheduled components of Work, with item number and scheduled dollar value for each item. Fill in values of work completed in the period.

3. Fill in dollar value in each column for each scheduled line item when work has been performed or products stored; round off values to nearest dollar.

4. List each Change Order executed prior to date of submission, at the end of the Continuation Sheets; list by Change Order Number, and description, as for an original component item of work.

6. PREPARATION OF APPLICATION FOR FINAL PAYMENT

6.1 Fill in Application form as specified in progress payments.

7. SUBMITTAL PROCEDURES

7.1 Complete Invoice:

1. Submit completed Application to the Construction Manager by the date stipulated in the Project Manual.

7.2 Number: Submit 3 copies of each invoice.

NOT FOR BIDDING

SECTION 013000 – ADMINISTRATIVE REQUIREMENTS

1. SUBMITTALS/SUBMITTAL REGISTER

1.1 The Contractor shall submit all items listed or specified within the sections of the Specifications included in its Work. Submittals shall include such items as: contractor's, manufacturer's or fabricator's drawings; descriptive literature including, but not limited to, catalog cuts, diagrams, operation charts or curves; test reports; samples, operations and maintenance manuals, including parts lists; certifications; warranties and other required submittals. Submittals pertinent to materials and equipment which are subject to advance approval shall be scheduled and made prior to the acquisition or the delivery thereof.

1.2 The Contractor shall carefully control procurement operations to assure that each individual submittal is made on or before the dates required for timely performance of its Work.

1.3 Within seven (7) days after award of Contract or issuance of Notice to Proceed, the Contractor shall execute and submit to the Construction Manager, seven (7) copies of the Submittal Register, on a form to be provided by the Construction Manager, on which shall be listed each item of equipment and material of each type for which fabricator's drawings and/or related descriptive data, test reports, samples, spare parts, operation and maintenance manuals, or other types of submittals required by the Specifications. The Submittal Register form shall be reproduced by the Contractor. The order of listing of items on the Register shall conform to the sequence of the items as they occur within the divisions. Drawings of component items forming a system or that are interrelated shall be scheduled to be correlated and submitted concurrently. Certifications to be submitted with the pertinent drawings shall be so scheduled. Adequate time shall be allowed for review and approval and possible resubmittal of any item subject to approval, because no delay damages or time extensions will be allowed for time lost in late submittals or resubmittals. The Construction Manager and Architect/Engineer will review the Submittal Register for approval action. The approved Register will become a part of the Contract and Contractor will be subject to requirements thereof. The Contractor shall revise and/or update the Register monthly to take into account all changes in the Contract. Each such revised edition and/or revision to the Register shall be resubmitted to the Construction Manager. This Register shall be coordinated with related submittals of other Contractors.

2. SAMPLES

2.1 Submit tagged or labeled samples in triplicate, unless another quantity is otherwise specified by the Construction Manager.

2.2 Tags or labels shall be securely affixed and contain as a minimum the following information: Project Name, Contractor's Name, Contract Title and Number, Date, Transmittal Number, Product Manufacturer's or Fabricator's Name and Product Identifier.

NOT FOR BIDDING

END OF SECTION

NOT FOR BIDDING

SECTION 013113 - PROJECT COORDINATION MEETING

1. PROJECT COORDINATION MEETING

1.1 An on-site project coordination meeting will be held on a biweekly basis throughout the project construction period.

2. ATTENDANCE

2.1 Attendance at the project coordination meeting is mandatory of each Contractor or major supplier on the project.

2.2 The representative of the Contractor shall be the Project Manager and field superintendent, unless a substitute representative has been approved by the Construction Manager.

2.3 Contractor will begin attending the Project Coordination Meetings at least 4 weeks prior to mobilization on site, and will continue until the Contractor has fulfilled the obligations of his Contract.

2.4 EDiS will prepare meeting minutes and distribute them to all of the contractors. Each contractor is required to review the meeting minutes and follow-up on items assigned. Each contractor will be responsible for disseminating information discussed during these meetings to their field personnel, subcontractors, and suppliers.

3. AGENDA

3.1 The Construction Manager will set the agenda for the biweekly Project Coordination Meeting.

3.2 At a minimum, the Contractor shall be prepared to discuss the following:

1. Actual vs. as planned progress for the prior two week period.

2. Planned construction activities for the next four weeks.

3. Contract document clarifications.

4. Coordination items with other contractors.

5. Quality Control.

NOT FOR BIDDING

6. Recently issued change orders.

7. Potential change orders.

8. Submittals and shop drawings.

9. Requests for Information (RFI's).

10. Other items requiring Construction Manager's attention.

END OF SECTION

NOT FOR BIDDING

SECTION 013119 – PRE-INSTALLATION MEETINGS

1. PRE-INSTALLATION MEETINGS

1.1 An on-site pre-installation meeting will be held at least two weeks prior to commencement of installation of work.

2. ATTENDANCE

2.1 Attendance at the pre-installation meeting is mandatory of each Contractor and/or major supplier as required for each specific meeting listed below.

2.2 The following individuals shall attend these meetings:
- Contractors' Project Manager
- Contractors' Field Superintendent
- Contractors' Safety Representative (as needed)
- Key Subcontractors, Suppliers, and Vendors
- EDiS Project Manager
- EDiS Field Manager
- EDiS Safety Director (as needed)
- EDiS MEP Specialist (as needed)
- Owner's Representative (as needed)
- Architect/Engineer (as needed)
- Governmental Agency Representatives (as needed)
- Testing/Inspection Agency Representatives (as needed)
- Utility Company Representatives (as needed)

3. SUBMITTALS

3.1 Each contractor is responsible to have all submittals and mock-ups, as related to the pre-installation meeting scope of work, submitted and approved prior to commencement of the pre-installation meeting.

4. LIST OF REQUIRED MEETINGS

- Demolition Sequence and Schedule
- Building Envelope
  - Curtain Wall/Glazing/Storefronts
- Doors/Frames/Hardware
- Interior Glass and Glazing
- Carpentry & General Work
- MEP Coordination
  - Mechanical Piping Roughin
  - Plumbing Roughin

NOT FOR BIDDING

- Insulation
- Electrical Roughin
- Automatic Temperature Controls

- Security System
- Final Cleaning

5. AGENDA

5.1 At a minimum, the Contractor shall be prepared to discuss the items as listed on the agenda template shown on the following page:

NOT FOR BIDDING

PROJECT: WARNER ELEMENTARY SCHOOL CAPITAL IMPROVEMENTS

PRE-INSTALLATION MEETING: (Insert Phase of Work)

A. INTRODUCTIONS

B. REVIEW SCOPES OF WORK

C. REVIEW CONTRACT DRAWINGS AND SPECIFICATIONS

D. REVIEW SUBMITTALS

E. TESTING & INSPECTION REQUIREMENTS

F. REVIEW RELEVANT RFI'S OR DESIGN BULLETINS

G. REVIEW MATERIALS AND DELIVERIES

H. REVIEW SCHEDULE AND SEQUENCE OF WORK

I. JOB SITE SAFETY

J. COORDINATION WITH OTHER TRADES

K. CLOSEOUT

L. ACTION ITEMS AND RESPONSIBILITY

NOT FOR BIDDING

END OF SECTION

NOT FOR BIDDING

SECTION 013125– WEB-BASED PROJECT MANAGEMENT SYSTEM

1. GENERAL PROVISIONS

1.1 The general provisions of the Contract, including the Conditions of the Contract (General, Supplementary and other Conditions, if any) and Division 1 as appropriate, apply to the Work specified in this Section.

1.2 Refer to provisions in AIA Document A201 – 2007 EDITION, GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION, for requirements in addition to those specified in Division 1.

1.3 Refer to Scope Information Sheets for all contracts bound in the Project Manual under Section 011100 - SUMMARY OF WORK. The Scope Information Sheets describe generally the work included in each contract, but the work is not necessarily limited to that described.

1.4 All Contractors shall use Internet/Web-based project management software to transmit documents, track, and otherwise manage this project.

1.5 Use of this project management software will not change any contractual responsibilities of the construction team members.

2. DEFINITIONS

2.1 System: A real time web-based software that shares data, translates data, organizes data, facilitates communication, archives actions, and offers scheduling prompts to identified Users.

2.2 Users: Authorized participants of this project furnished with a unique password and authorized to access the system to view/input/export data. Owner, Construction Manager, Architect, and the Contractors are all Users. Other Users may be added as necessary.

2.3 Contacts: Entities identified to automatically receive specific transmissions or entities selected to receive specific information sent by the system through to an e-mail address.

2.4 Signees: Those individuals identified, by the Contractors, authorized to sign change orders and payment applications via electronic signature. This electronic signature is as contractually binding as an original signature on paper.

3. USE OF SYSTEM

3.1 The use of the system is mandatory for the documentation of the transmittal of all non-oral information, even if the actual transmission of the information is by another means.

NOT FOR BIDDING

3.2 The use of the system will be mandatory by the Contractors to send, retrieve, and respond to data.

3.3 In addition to this web-based project management system, the Contractors will be required to use electronic mail (email) for day-to-day communication and correspondence. Email will be the primary means of transmitting written communication (i.e. meeting minutes, draft pay applications, etc.).

4. QUALITY ASSURANCE

4.1 A three hour training session in the use of the software for this project will be offered by the Construction Manager at a location convenient to the project site. Attendance by one member of each Contractor's organization is mandatory. Additional attendees may enroll based on availability of training space. All attendees must have a working knowledge of computers. Training can not begin until three working days after the receipt of the submittals indicated below.

4.2 Technical assistance will be provided by on-line help, email, or telephone for all Users throughout the life of the project.

5. SUBMITTALS

5.1 Submit to the Construction Manager, within 5 days following the receipt of the letter of intent to award, in an electronic template, the following:

a. Electronic logo of organization (as needed)
b. Names, mailing address and electronic address of its Users and Contacts.
c. Designation the role/responsibility for each User

6. SOFTWARE AND HARDWARE REQUIREMENTS

6.1 Each User shall provide and maintain a computer with high speed internet access and an email address. The computer shall have a high speed internet browser (Internet Explorer 8.0 or higher, Firefox version 3.6.12 or higher, Google Chrome or Safari version 5.0 or higher) and a high speed cable Internet access, high speed DSL or T1 line.

6.2 License(s) to Use System - Each Contractor will be provided unlimited licenses to use the system for this project. Each license will allow secure unlimited usage from the notice to proceed until the original contract completion date.

7. SYSTEM DESCRIPTION

7.1 The web based project management system is a "secure, real-time, interactive, centralized

NOT FOR BIDDING

database" specifically established and maintained for the management of this construction project. The product is designed to facilitate communication and improve the time management of its users by facilitating the sharing of information. Information will be available 24/7, from any computer meeting the specifications listed above. The information is fully protected. The electronic platform allows information to be transmitted across the internet reducing printing and postage costs and the time associated with such activities.

7.2 The system contains a directory of the project participants.

7.3 The system includes templates, with the CM's letterhead, for each document created inside the system. The template allows the use of "pull down" menus to complete significant portions of each document.

7.4 The system allows the templates (and attached documents created outside the system) to be distributed to Users and Contacts.

7.5 The System contains "translation software" to permit the viewing (and marking) of documents created outside the system. The system can view documents created by different software programs and can deliver images of its translation to any computer meeting the criteria listed above.

7.6 The system can be personalized by the Construction Manager to automatically send e-mail notices upon issuance of certain documents if such a practice facilitates the User's business needs.

7.7 The system is the product of ***Building Blok LLC*** (www.buildingblok.com) and will be continuously updated.

7.8 The Construction Manager will administer the Building Blok User accounts for this project.

8. DOCUMENTS CREATED INSIDE THE SYSTEM

8.1 The following documents shall be created on templates inside the system.
   a. Transmittals for submittals processed in the system. The transmittals are automatically created by the system when the submittal is uploaded.
   b. Submittal Register showing all of the submittals required of the contract, assigned to each Contractor.
   c. Submittal Log: The CM will maintain submittal log after it is initialized.
   d. RFI (Requests for Information)
   e. Change Orders
   f. RFP (Requests for Proposal)
   g. ASI (Architect's Supplemental Instructions)
   h. Tasks & Memos as determined by the CM
   i. Payment Applications

NOT FOR BIDDING

j. Closeout Tracking Log

8.2 The following documents may, at each Users option, be created on the system.

a. Morning & Afternoon Activity Reports generated by the system
b. E-mails: Contacts that do not have access to the system may be sent information from the system, by the system.
c. Reports of information on the system
d. Project Notices: "Broadcast" messages can be sent to other Users system entry screen.

9. DOCUMENTS CREATED OUTSIDE THE SYSTEM AND DISTRIBUTED BY THE SYSTEM

9.1 The following documents are expected to be created outside the system and distributed through the system. The actual documents may be scanned or electronically attached to the transmittal.

a. Technical Submittals: Shop drawings, product data, testing reports, certifications, installation instructions, operation & maintenance manuals, will be submitted and distributed through the system. The Architect will return all submissions through the system electronically. The Construction Manager will distribute submittals (after Architect's action) electronically. Contractors may download and distribute submittals to their subcontractors and suppliers or elect to print paper copies for distribution, or both.
b. Photographs: Digital photographs and scanned images can be loaded onto the system and shared.
d. Schedule of Values/ Payment Applications: (The "pencil" review of these documents can occur inside the system).
e. Change Orders: (The "pencil" review of these documents can occur inside the system.)
g. Schedules: The schedule document(s) will be available for review on the system.
h. Data created in other software may be uploaded to the system electronically.

10. DOCUMENTS CREATED OUTSIDE THE SYSTEM AND DISTRIBUTED OUTSIDE THE SYSTEM

10.1 The following documents are expected to be created outside the system and distributed outside the system. The actual documents may be scanned or electronically attached to the transmittal.

a. Schedules: The Construction Manager will develop the Master Schedule through Microsoft Project 2003. The schedule will be distributed either through hard copies at meetings or through email.
b. Product samples, color samples, physical samples are still required to be provided per the technical specifications, however, the transmittal documenting the distribution shall be done inside the system and submitted electronically and printed to accompany the actual submission.
c. Meeting minutes will be created using Microsoft Word 2003 and distributed through hard copies at meetings or through email.

NOT FOR BIDDING

d. AIA closeout documents, which require an "original" signature, will be created and distributed outside the system.

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

RED CLAY CONSOLIDATED SCHOOL DISTRICT BALTZ RENOVATIONS
PROJECT BID SCHEDULE

ID	Task Name	Duration	Start	Finish
1	**BALTZ ELEMENTARY SCHOOL**	**213 days**	**Mon 8/24/15**	**Wed 6/15/16**
2	**PRECONSTRUCTION & DESIGN ACTIVITIES**	**174 days**	**Mon 8/24/15**	**Thu 4/21/16**
49	**BIDDING & AWARD ACTIVITIES**	**39 days**	**Fri 4/22/16**	**Wed 6/15/16**
50	**BID PAC A & B - PHASE I BUILDING RENOVATION & BUILDING ENVELOPE**	**39 days**	**Fri 4/22/16**	**Wed 6/15/16**
51	AE revises Bid Pac A CD's from PlanCheck & OMB Review	1 day	Fri 4/22/16	Fri 4/22/16
52	EDiS Rec/Prepares Bid Pac A Documents for Bidding - Window	1 day	Mon 4/25/16	Mon 4/25/16
53	**Bidding Period Bid Pac A**	**25 days**	**Tue 4/26/16**	**Mon 5/30/16**
54	GSS Submittal - Bid Pac A	1 day	Tue 4/26/16	Tue 4/26/16
55	GSS Review - Bid Pac A	10 days	Tue 4/26/16	Thu 5/5/16
56	GSS Posting to MYMARKETPLACE.COM - Bid Pac A	1 day	Fri 5/6/16	Fri 5/6/16
57	Pre Bid Meeting Bid Pac A	1 day	Fri 5/13/16	Fri 5/13/16
58	Bid Pac A Min. Duration After Pre Bid Meeting	15 days	Sat 5/14/16	Sat 5/28/16
59	Bid Date Bid Pac A	1 day	Fri 5/27/16	Sat 5/28/16
60	Bid Review & Recommendation Bid Pac A	1 day	Mon 5/30/16	Mon 5/30/16
61	Bid Pac A Contracts Presented to Board for Approval	1 day	Wed 6/15/16	Wed 6/15/16
62	**CONSTRUCTION**	**89 days**	**Wed 4/27/16**	**Mon 8/29/16**

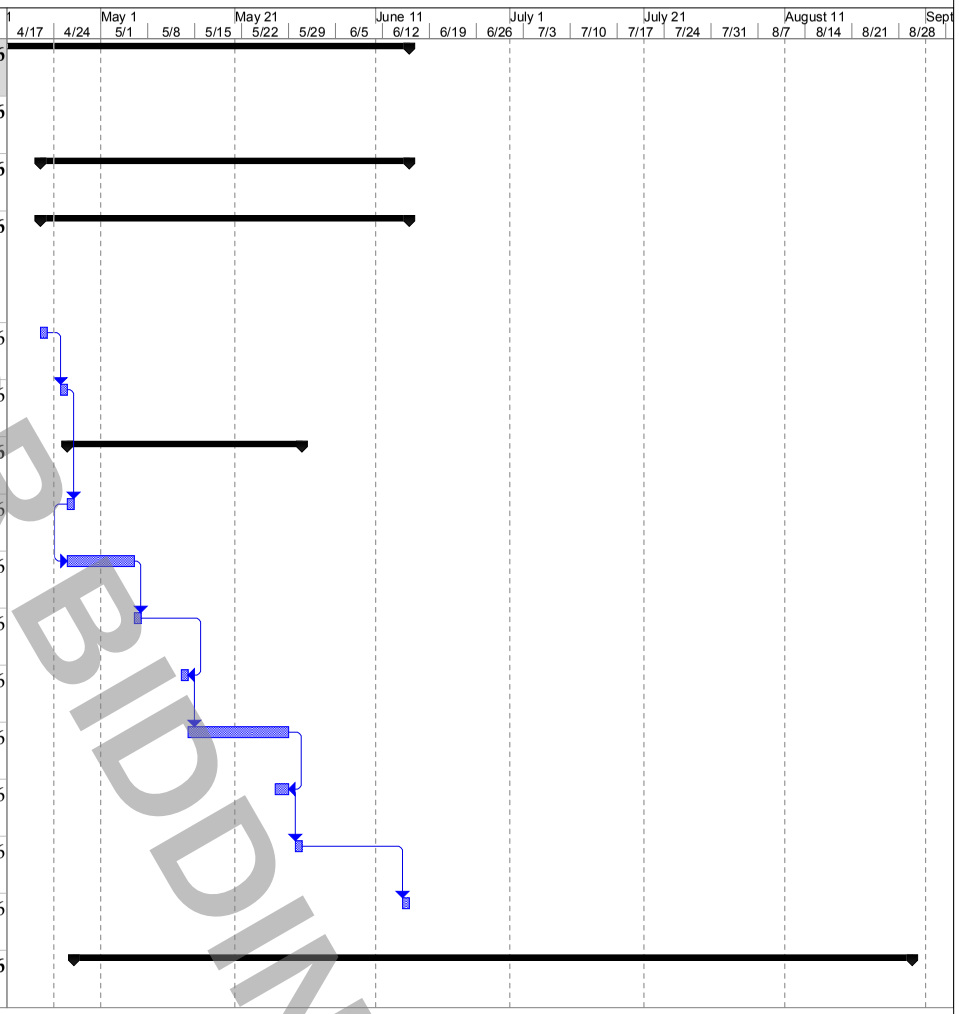

RCCSD Baltz Elementary
Project Bid Schedule
Date: 26 April 2016

Task | Split | Milestone | Summary | Project Summary | External Tasks | External Milestone | Inactive Task | Inactive Task | Inactive Milestone | Inactive Summary | Manual Task | Duration-only | Manual Summary Rollup | Manual Summary | Start-only | Finish-only | Progress | Deadline

NOT FOR BIDDING

RED CLAY CONSOLIDATED SCHOOL DISTRICT BALTZ RENOVATIONS
PROJECT BID SCHEDULE

ID	Task Name	Duration	Start	Finish
1	**BALTZ ELEMENTARY SCHOOL**	**213 days**	**Mon 8/24/15**	**Wed 6/15/16**
2	**PRECONSTRUCTION & DESIGN ACTIVITIES**	**174 days**	**Mon 8/24/15**	**Thu 4/21/16**
49	**BIDDING & AWARD ACTIVITIES**	**39 days**	**Fri 4/22/16**	**Wed 6/15/16**
50	**BID PAC A & B - PHASE I BUILDING RENOVATION & BUILDING ENVELOPE**	**39 days**	**Fri 4/22/16**	**Wed 6/15/16**
51	AE revises Bid Pac A CD's from PlanCheck & OMB Review	1 day	Fri 4/22/16	Fri 4/22/16
52	EDiS Rec/Prepares Bid Pac A Documents for Bidding - Window	1 day	Mon 4/25/16	Mon 4/25/16
53	**Bidding Period Bid Pac A**	**25 days**	**Tue 4/26/16**	**Mon 5/30/16**
54	GSS Submittal - Bid Pac A	1 day	Tue 4/26/16	Tue 4/26/16
55	GSS Review - Bid Pac A	10 days	Tue 4/26/16	Thu 5/5/16
56	GSS Posting to MYMARKETPLACE.COM - Bid Pac A	1 day	Fri 5/6/16	Fri 5/6/16
57	Pre Bid Meeting Bid Pac A	1 day	Fri 5/13/16	Fri 5/13/16
58	Bid Pac A Min. Duration After Pre Bid Meeting	15 days	Sat 5/14/16	Sat 5/28/16
59	Bid Date Bid Pac A	1 day	Fri 5/27/16	Sat 5/28/16
60	Bid Review & Recommendation Bid Pac A	1 day	Mon 5/30/16	Mon 5/30/16
61	Bid Pac A Contracts Presented to Board for Approval	1 day	Wed 6/15/16	Wed 6/15/16
62	**CONSTRUCTION**	**89 days**	**Wed 4/27/16**	**Mon 8/29/16**
63	Last Day For Teachers (June 14)	1 day	Tue 6/14/16	Tue 6/14/16
64	Teacher Back in School (Aug 22)	1 day	Mon 8/22/16	Mon 8/22/16
65	First Day of School (Aug 29)	1 day	Mon 8/29/16	Mon 8/29/16
66	**Baltz Elementary School**	**85 days**	**Wed 4/27/16**	**Tue 8/23/16**
67	**Baltz Pre-Construction**	**65 days**	**Wed 4/27/16**	**Tue 7/26/16**
68	Baltz Window Bid Pac A Contracts Awarded	1 day	Tue 5/31/16	Tue 5/31/16
69	Window Shop Drawings	5 days	Wed 6/1/16	Tue 6/7/16
70	Permit Review / Issued	30 days	Wed 4/27/16	Thu 5/26/16

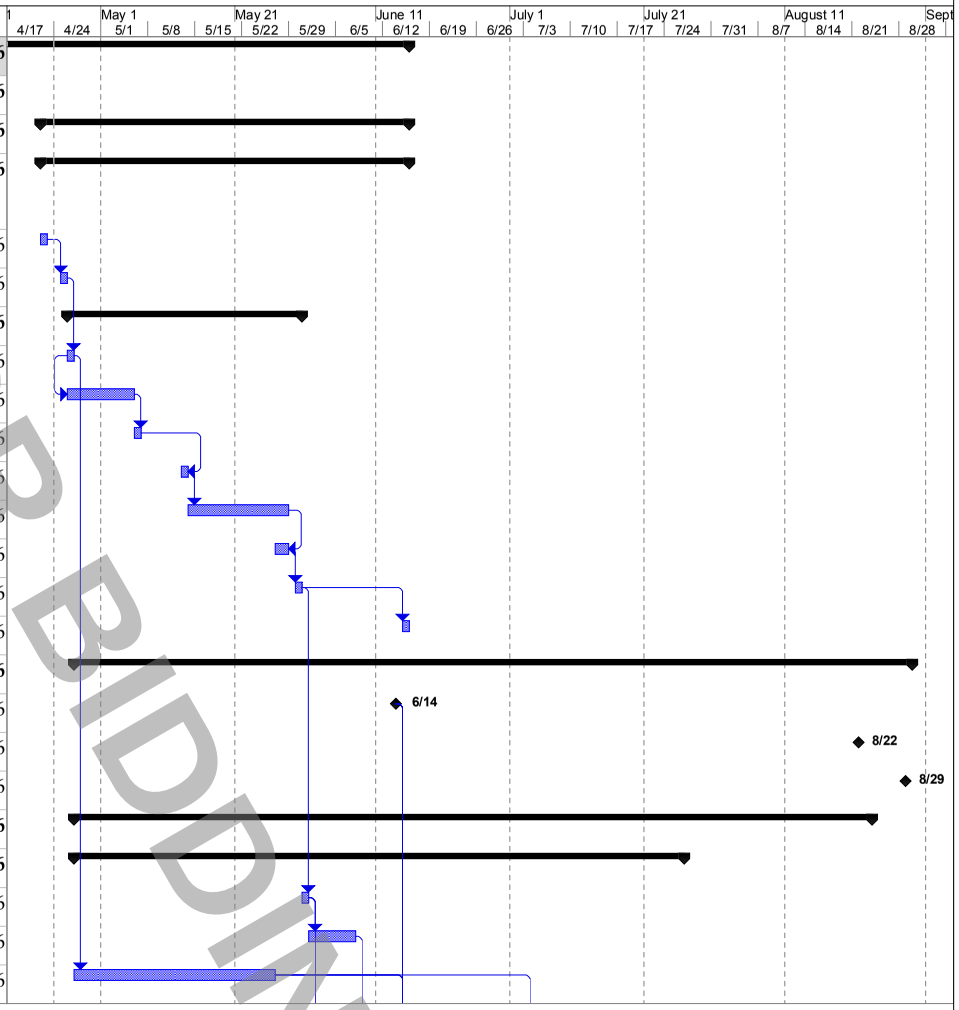

RCCSD Baltz Elementary
Project Bid Schedule
Date: 26 April 2016

Task		Project Summary		Inactive Task		Duration-only		Finish-only	
Split		External Tasks		Inactive Milestone		Manual Summary Rollup		Progress	
Milestone		External Milestone		Inactive Summary		Manual Summary		Deadline	
Summary		Inactive Task		Manual Task		Start-only			

NOT FOR BIDDING

RED CLAY CONSOLIDATED SCHOOL DISTRICT BALTZ RENOVATIONS
PROJECT BID SCHEDULE

ID	Task Name	Duration	Start	Finish
71	MEP Shop Drawings	5 days	Wed 6/1/16	Tue 6/7/16
72	Roof Shop Drawings	5 days	Wed 6/1/16	Tue 6/7/16
73	Window Shop Drawing Review	5 days	Wed 6/8/16	Tue 6/14/16
74	MEP Shop Drawing Review	5 days	Wed 6/8/16	Tue 6/14/16
75	Roof Shop Drawing Review	5 days	Wed 6/8/16	Tue 6/14/16
76	Order and Receive Windows	30 days	Wed 6/15/16	Tue 7/26/16
77	Order and Receive Generator	25 days	Wed 6/15/16	Tue 7/19/16
78	Order and Receive Roofing Materials	15 days	Wed 6/15/16	Tue 7/5/16
79	**Baltz Site Work**	**50 days**	**Wed 6/15/16**	**Tue 8/23/16**
80	Start of Demo (All Scopes)	15 days	Wed 6/15/16	Tue 7/5/16
81	Abatement at Windows	50 days	Wed 6/15/16	Tue 8/23/16
82	Abatement at Roof	13 days	Wed 6/15/16	Fri 7/1/16
83	Electrical Install	25 days	Wed 6/15/16	Tue 7/19/16
84	Plumbing First Floor	15 days	Wed 6/15/16	Tue 7/5/16
85	Roofing Demo and Install	30 days	Mon 7/4/16	Fri 8/12/16
86	Ceiling in Basement	20 days	Wed 7/6/16	Tue 8/2/16
87	Plumbing Basement (Crawl Space)	15 days	Wed 7/6/16	Tue 7/26/16
88	Generator	15 days	Wed 7/20/16	Tue 8/9/16
89	LED Lighting	10 days	Wed 7/20/16	Tue 8/2/16
90	Window Scope Base Scope	15 days	Wed 7/27/16	Tue 8/16/16
91	Install Roller shades Base Scope	10 days	Wed 8/3/16	Tue 8/16/16
92	Window Scope Alt #1 Scope	15 days	Wed 7/27/16	Tue 8/16/16
93	Window Scope Alt #2 Scope	3 days	Fri 8/12/16	Tue 8/16/16
94	Window Scope Alt #3 Scope	2 days	Mon 8/15/16	Tue 8/16/16

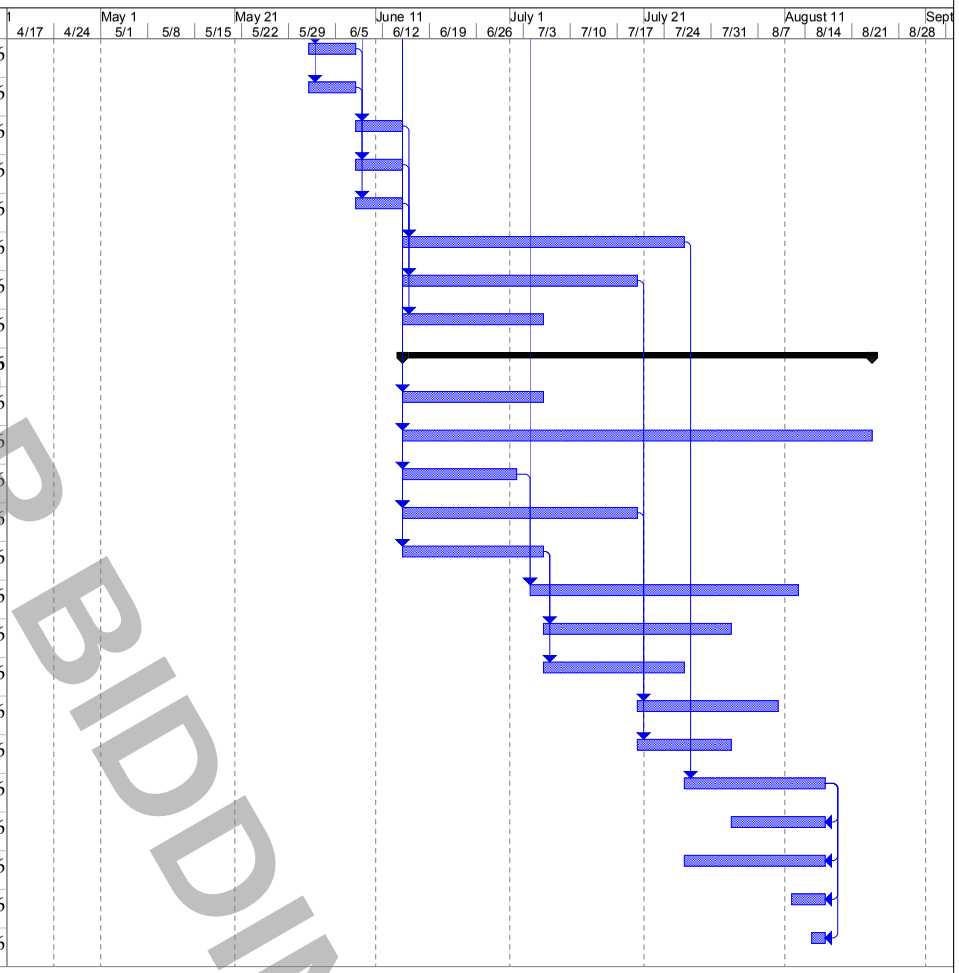

RCCSD Baltz Elementary
Project Bid Schedule
Date: 26 April 2016

Task		Project Summary		Inactive Task		Duration-only		Finish-only	
Split		External Tasks		Inactive Milestone		Manual Summary Rollup		Progress	
Milestone		External Milestone		Inactive Summary		Manual Summary		Deadline	
Summary		Inactive Task		Manual Task		Start-only			

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 013226 - SUBCONTRACTOR DAILY REPORTS

1. SUBCONTRACTOR DAILY REPORTS

1.1 The Subcontractor shall submit a Daily Report to the Construction Manager on the forms provided covering the following subjects:

1. Work in Progress, including areas where work is being performed, nature of the operations in progress, and the manpower assigned.

2. Extra Work (Time and Material) in progress.

3. Materials Received.

4. Trade labor breakdown including identification of all workers on site and the number of hours (or portions thereof) worked by each.

5. Inspection Checklist (performed daily).

1.2 The Subcontractor shall submit the Daily Report to the Construction Manager by 9:00 AM on the next workday following the workday covered in the Daily Report.

2. DAILY EXTRA WORK REPORT

2.1 The Subcontractor shall submit on the form provided a Daily Extra Work Report on each day he performs authorized Extra Work on a time and material basis.

2.2 A separate Daily Extra Work Report shall be submitted for each separate authorized Extra Work item done on a time and material basis.

2.3 The Subcontractor shall submit his Daily Extra Work Report as an attachment to his Daily Report by 9:00 AM on the next workday following the workday covered in the Daily Extra Work Report.

3. Sample Daily Report

3.1 A sample daily report follows this section for your reference.

END OF SECTION

NOT FOR BIDDING

EDiS COMPANY

CONTRACTOR'S DAILY REPORT

Project Name: _____

Date: _____

Contractor: _____

Contract No. & Description: _____

Weather: _____

Foreman's Name (Print) _____

TRADE	*CLASS	MANPOWER COUNT	TOTAL MAN HOURS	TODAY'S DESCRIPTION / LOCATION OF WORK
	TOTAL			

** INDICATE: F = FOREMAN; J = JOURNEYMAN; A = APPRENTICE*

Work Status/Work Planned:

Construction Equipment:

Qualified Operator(s)

Deliveries or Materials:

Machinery, tools, material, and equipment to be used:

Inspection of work area, machinery, tools, material, or equipment

The use of any machinery, tool, material, or equipment which is not in compliance with any applicable requirement Is prohibited. Such machine, tool, material or equipment shall either be identified as unsafe by tagging or locking The controls to render them inoperable or shall be physically removed from its place of operation.

Please See Other Side

NOT FOR BIDDING

Below is a general checklist of requirements on this project. Contractors will check off items that pertain to their contract and project tasks. Notify EDiS Field Manager of any issues. This checklist is not meant to be all inclusive. Please refer to additional OSHA regulations for compliance.

House Keeping

- ☐ Material Storage Area's Orderly
- ☐ Trash Containers Available and Emptied daily
- ☐ Fire Hazards
- ☐ Lighting and ventilation
- ☐ Exits and Stair clear passage
- ☐ Walkways, corridors clear passage
- ☐ Daily debris /trash removal
- ☐ _____

Personal Protective Equipment

- ☐ Hard Hats being worn
- ☐ Safety Glasses with side shields being worn
- ☐ Secondary Eye/Face protection
- ☐ Respirators as required
- ☐ Hand protection when needed
- ☐ Ear protection when needed
- ☐ Inspected & Maintained
- ☐ _____

Fire Prevention

- ☐ Fire extinguishers inspected
- ☐ Flammable / Combustibles properly store
- ☐ Approved Fuel cans used and labeled
- ☐ Oxygen / Acetylenes stored properly
- ☐ _____

Electrical

- ☐ GFI in use
- ☐ Three prong insulated extension cords used
- ☐ Extension cords in good condition
- ☐ Lockout / Tag-out program in use
- ☐ _____

Excavations

- ☐ Miss Utility been contacted
- ☐ Properly Barricaded
- ☐ Ladders in use at depths over 4'-0"
- ☐ Ladders every 25'-0" distance
- ☐ Shored, sloped, benched as required
- ☐ Dewatering as needed
- ☐ _____

Ladders

- ☐ Good condition
- ☐ Correct pitch
- ☐ Extends 3'-0" above landing
- ☐ Open and secured / tied off
- ☐ _____

Scaffolds

- ☐ Certified Scaffold Installer
- ☐ Guardrails, toe boards, and planking secured
- ☐ Appropriate signage
- ☐ Adequate cross bracing
- ☐ Secured to building over 25'-0" in height
- ☐ _____

Cranes

- ☐ Rated Load Capacity available in cab
- ☐ Swing Radius barricaded
- ☐ Appropriate certificates / decals / hand signals
- ☐ Daily safety inspection log completed
- ☐ _____

Fall Protection

- ☐ Fall protection plan on file
- ☐ Full harness / shock absorbing lanyard used
- ☐ Anchoring points secured
- ☐ Perimeter barricades
- ☐ Open sided floor protection
- ☐ 6'-0" Tie-off utilized
- ☐ _____

Paperwork

- ☐ MSDS Information
- ☐ Contractors Safety Program
- ☐ Hazardous Communications Training
- ☐ Hazardous Communications Program
- ☐ Contractor Qualified Representation
- ☐ _____

Other

- ☐ _____
- ☐ _____

Foreman / Competent Person:

Print Name_____

NOT FOR BIDDING

EDiS COMPANY

CONTRACTOR'S DAILY REPORT

Project Name: _____

Date: _____

Contractor: _____

Contract No. & Description: _____

Weather: _____

Foreman's Name (Print) _____

TRADE	*CLASS	MANPOWER COUNT	TOTAL MAN HOURS	TODAY'S DESCRIPTION / LOCATION OF WORK
	TOTAL			

** INDICATE: F = FOREMAN; J = JOURNEYMAN; A = APPRENTICE*

Work Status/Work Planned:

Construction Equipment:

Qualified Operator(s)

Deliveries or Materials:

Machinery, tools, material, and equipment to be used:

Inspection of work area, machinery, tools, material, or equipment

The use of any machinery, tool, material, or equipment which is not in compliance with any applicable requirement Is prohibited. Such machine, tool, material or equipment shall either be identified as unsafe by tagging or locking The controls to render them inoperable or shall be physically removed from its place of operation.

Please See Other Side

NOT FOR BIDDING

Below is a general checklist of requirements on this project. Contractors will check off items that pertain to their contract and project tasks. Notify EDiS Field Manager of any issues. This checklist is not meant to be all inclusive. Please refer to additional OSHA regulations for compliance.

House Keeping

- ☐ Material Storage Area's Orderly
- ☐ Trash Containers Available and Emptied daily
- ☐ Fire Hazards
- ☐ Lighting and ventilation
- ☐ Exits and Stair clear passage
- ☐ Walkways, corridors clear passage
- ☐ Daily debris /trash removal
- ☐ _____

Personal Protective Equipment

- ☐ Hard Hats being worn
- ☐ Safety Glasses with side shields being worn
- ☐ Secondary Eye/Face protection
- ☐ Respirators as required
- ☐ Hand protection when needed
- ☐ Ear protection when needed
- ☐ Inspected & Maintained
- ☐ _____

Fire Prevention

- ☐ Fire extinguishers inspected
- ☐ Flammable / Combustibles properly store
- ☐ Approved Fuel cans used and labeled
- ☐ Oxygen / Acetylenes stored properly
- ☐ _____

Electrical

- ☐ GFI in use
- ☐ Three prong insulated extension cords used
- ☐ Extension cords in good condition
- ☐ Lockout / Tag-out program in use
- ☐ _____

Excavations

- ☐ Miss Utility been contacted
- ☐ Properly Barricaded
- ☐ Ladders in use at depths over 4'-0"
- ☐ Ladders every 25'-0" distance
- ☐ Shored, sloped, benched as required
- ☐ Dewatering as needed
- ☐ _____

Ladders

- ☐ Good condition
- ☐ Correct pitch
- ☐ Extends 3'-0" above landing
- ☐ Open and secured / tied off
- ☐ _____

Scaffolds

- ☐ Certified Scaffold Installer
- ☐ Guardrails, toe boards, and planking secured
- ☐ Appropriate signage
- ☐ Adequate cross bracing
- ☐ Secured to building over 25'-0" in height
- ☐ _____

Cranes

- ☐ Rated Load Capacity available in cab
- ☐ Swing Radius barricaded
- ☐ Appropriate certificates / decals / hand signals
- ☐ Daily safety inspection log completed
- ☐ _____

Fall Protection

- ☐ Fall protection plan on file
- ☐ Full harness / shock absorbing lanyard used
- ☐ Anchoring points secured
- ☐ Perimeter barricades
- ☐ Open sided floor protection
- ☐ 6'-0" Tie-off utilized
- ☐ _____

Paperwork

- ☐ MSDS Information
- ☐ Contractors Safety Program
- ☐ Hazardous Communications Training
- ☐ Hazardous Communications Program
- ☐ Contractor Qualified Representation
- ☐ _____

Other

- ☐ _____
- ☐ _____

Foreman / Competent Person:

Print Name_____

NOT FOR BIDDING

EDiS COMPANY **CONTRACTOR SUBMITTAL FORM**

Contractor: **Contract #:**_____

Project Name: Baltz Elementary School Capital Improvements

To:

The following submittal (s) for the Architect's Review and Approval:

[ ] Shop Drawings [ ] Product Data [ ] Samples [ ] Samples [ ] Other (Identify)_____

[ ] Design Data [ ] Calculations [ ] Certificates [ ] Coordination Drawings [ ] Reports

[ ] Qualification Statements [ ] Other (Identify)_____

No. of Copies	Date	Submittal Number	Spec. Section #	Description of Submittal Items	Requested Return Date	EDIS Submittal Number (by EDIS)

Deviations from Contract Documents requirements are identified as follows:_____
_____

Remarks:_____

We hereby certify that _____(Contractor)_____has reviewed and approved submittals transmitted herewith for compliance and conformance with requirements of the Contract Documents.

Signed:_____ **Date:**_____

PU09, Revised 5/11

NOT FOR BIDDING

SECTION 013300 – SUBMITTAL PROCEDURES

1. GENERAL PROVISIONS

1.1 The general provisions of the Contract, including the Conditions of the Contract (General, Supplementary and other Conditions, if any) and Division 1 as appropriate, apply to the Work specified in this Section.

2. ITEMS TO BE SUBMITTED AT START OF WORK

2.1 Performance/Labor and Material Payment Bond(s): One (1) copy of each bond simultaneously with the signed Agreement. See General Conditions Article 11.4 and Supplementary Conditions.

2.2 Policies or Certificates of Insurance: Two (2) copies simultaneously with the signed Agreement. See General Conditions Article 11 and Supplementary Conditions.

2.3 Contractor's License: Submit a copy of all business licenses required by local and state agencies.

2.4 Contractor's Schedule of Values: Two (2) copies for approval within 21 days after the Agreement is signed. See General Conditions Article 9.2 and provisions in this Section.

2.5 Contractor's Progress Schedule: Two (2) copies for review and reference within 21 days after the Agreement is signed. See General Conditions Article 3.10 and provisions in this Section.

2.6 Submittal Schedule: Two (2) copies for review and reference within 21 days after the Agreement is signed. See provisions in this Section.

2.7 Products List: Two (2) copies for approval within 30 days after the Agreement is signed. See provisions in Section 016200 - MATERIAL AND EQUIPMENT.

3. NON-RESIDENT CONTRACTOR & SUBCONTRACTORS BONDS

3.1 Refer to requirements in Section 011100 - INSTRUCTIONS TO BIDDERS for filing of Surety Bonds with the Division of Revenue.

3.2 If such bonds are required on this project, it will be the responsibility of the Contractor to produce evidence to the Construction Manager that they have been filed, or if not required, to supply a notarized statement that they are not required. This must be done within seven (7) days after award of Contract and in any event

NOT FOR BIDDING

before construction starts.

4. RELATED REQUIREMENTS

4.1 See Section 017700 - CONTRACT CLOSE OUT: for submittal requirements for Contract Close out.

5. SUBMITTALS

5.1 All submittals shall be directed to the Construction Manager in the manner directed by the Construction Manager, and paragraph 9 of this section. Contractor shall use the Contractor Submittal Form appended to this section.

5.2 Prepare a Submittal's Schedule for Shop Drawings, Product Data and Samples. Show:

1. The dates for Contractor's submittals.

2. The dates submittals will be required for Owner-furnished products.

3. The date approved submittals will be required from the Architect.

5.3 Should the Architect or Construction Manager elect to omit any items from the list of items to be reviewed, it shall not relieve the Contractor from compliance with the Contract Documents with regard to that item. In such instance, the Contractor may still elect to have submittals prepared for his own use without review by the Architect or Construction Manager.

6. SHOP DRAWINGS

6.1 Conform to provisions in General Conditions applying to Shop Drawings.

6.2 Present in a clear and thorough manner.

1. Identify details by reference to sheet and details, schedule or room numbers shown on Contract Drawings.

2. Maximum sheet size: 30" x 42".

7. PRODUCT DATA

7.1 Conform to provisions in General Conditions applying to Product Data.

7.2 Preparation:

NOT FOR BIDDING

1. Clearly mark each copy to specifically identify products or models pertinent to project.

2. Show performance characteristics and capacities.

3. Show dimensions and clearances required.

4. Show wiring or piping diagrams and controls.

7.3 Manufacturer's standard schematic drawings and diagrams:

1. Modify drawings and diagrams to delete information which is not applicable to the Work.

2. Supplement standard information to provide information specifically applicable to the Work.

8. SAMPLES

8.1 Conform to provisions in General Conditions applying to Samples.

8.2 Provide samples of sufficient size and quantity to clearly illustrate:

1. Functional characteristics of the project, with integrally related parts and attachment devices.

2. Full range of color, texture and pattern.

8.3 Field samples and mock-ups; See requirements, if any, in other specification Sections.

9. SUBMITTAL REQUIREMENTS

9.1 Make submittals promptly through the Construction Manager in accordance with published schedule, and in such sequence as to cause no delay in the Work or in the Work of any other contractor.

9.2 Number of submittals required.

1. Shop drawings: Submit eight (8) copies for each submittal. Copies will be marked up with corrections and comments, stamped and returned. Any additional copies required by the Contractor shall be made by him.

NOT FOR BIDDING

2. Product Data: Submit eight (8) copies. Four (4) will be retained by the Architect, the Construction Manager and the Consultants. Four (4) will be reviewed, marked and stamped by the Architect and returned to the Contractor by the Construction Manager. Any additional copies required by the Contractor shall be made by him from the stamped copy.

3. Samples: Submit four (4) each. Submit all transmittal data and pictures of samples through the Building Blok Management System for tracking purposes. When approved the samples will be returned to the Construction Manager to be retained at the site for reference use.

9.3 Submittals shall contain:

1. The date of submission and the dates of any previous submissions.

2. The Project title and number.

3. Contract identification.

4. The names of the Contractor, Supplier and Manufacturer.

5. Identification of the product, with the specification section number.

6. Field dimensions, clearly identified as such.

7. Relation to adjacent or critical features of the Work or materials.

8. Applicable standards, such as ASTM or Federal Specification numbers.

9. Identification of deviations from Contract Documents.

10. Identification of revisions on resubmittals.

11. An 8 inch x 3 inch blank space for Contractor and Architect's stamps.

12. Contractor's stamp, initialed or signed, certifying review of submittal, verification of products, field measurements and field construction criteria, and coordination of the information within the submittal with requirements of the Work and of Contract Documents. Submittals which have not been stamped with this stamp or its approved equivalent will be returned without being reviewed.

9.4 Shop Drawing coordination and interface with work of other Contracts and adjacent

NOT FOR BIDDING

work is the responsibility of each individual Contractor.

10. RESUBMISSION REQUIREMENTS

10.1 Make any corrections or changes in the submittals required by the Architect and resubmit until approved.

10.2 Shop drawings and Product Data:

1. Revise initial drawings or data, and resubmit as specified for the initial submittal.

2. Indicate any changes which have been made other than those requested by the Architect.

10.3 Samples: Submit new samples as required for initial submittal.

11. FINAL DISTRIBUTION OF APPROVED SUBMITTALS

11.1 The Construction Manager will receive and log submittals and forward to Architect after processing.

11.2 The Construction Manager will distribute copies of Shop Drawings and Product Data which carry the Architect's stamp to:

1. Contractor that made submittal.

2. Jobsite File.

3. Record Document File.

4. Other Contractors, as required for coordination.

11.3 The Construction Manager will distribute samples as required.

11.4 The Contractor will distribute copies of Shop Drawings and Product Data which carry the Architect's stamp to:

1. Subcontractors.

2. Suppliers.

NOT FOR BIDDING

3. Fabricators.

12. SCHEDULE OF VALUES

12.1 Use AIA Document G703, Continuation Sheet to G702.

13. PROGRESS SCHEDULE

13.1 Prepare schedules in the form of a horizontal bar chart.

1. Provide separate horizontal bar chart for each trade or operation.

2. Horizontal time scale: Identify the first work day of each week.

3. Scale and spacing: To allow space for notations and future revisions.

4. Minimum sheet size 11 inches by 17 inches.

13.2 Format of listings: The chronological order of the start of each item of work.

13.3 Show the complete sequence of construction by activity.

13.4 Show the dates for the beginning, and completion of, each major element of construction such as:

1. Site clearing.

2. Site utilities.

3. Foundation work.

4. Structural framing.

5. Subcontractor work.

6. Equipment installation.

13.5 Show projected percentage of completion for each item as of the first day of each month.

13.6 Update Progress Schedule monthly and submit with Application for Payment and Schedule of values.

NOT FOR BIDDING

13.7 Indicate progress of each activity to date of submission.

13.8 Show changes occurring since previous submission of schedule:

1. Major changes in scope.
2. Activities modified since previous submission.
3. Revised projections of progress and completion.
4. Other identifiable changes.

13.9 Provide a narrative report as needed to define:

1. Problem areas, anticipated delays and the impact of the schedule.
2. Corrective action recommended, and its effect.
3. The effect of changes on schedules of other prime contractors.

13.10 Submit one reproducible transparency.

13.11 After review, distribute copies of the schedule to:

1. Jobsite File.
2. Subcontractors.
3. Architect.
4. Owner.

13.12 Instruct recipients to report promptly to the Contractor, in writing, any problems anticipated by the projections shown in the schedules.

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 013500 – CONTRACTOR EMPLOYEE BACKGROUND CHECK

1. It is the contractor's responsibility to perform background checks and screen all employees working onsite. The background check must include checking for a previous history of Child Abuse Convictions, Child Molestation Convictions, Felony Convictions, and Drug Convictions within the last 5 years. Any employee with any of these convictions may not enter the job site or school campus. This background check must be completed and screened by the contractor prior to an employee entering the job site. The Construction Manager, The Owner's representative and the Owner have the right to request that the screening data be submitted on a case by case basis.

2. The contractor is required to provide the Construction Manager written notice verifying background checks were completed and screened by the contractor prior to an employee entering the job site. This notice will contain the individual's name and the last four digits of their social security numbers. Notices must be received no later than two (2) working days before access is required. Notices will be forwarded electronically to the Construction Manager. A sample notice follows this section for your reference.

NOT FOR BIDDING

END OF SECTION

Red Clay Consolidated School District
Capital Improvments
Baltz Elementary School
Bid Pack A
January 11, 2016

CONTRACTOR

COMPETENT / QUALIFIED PERSON DESIGNATION LOG

Project: Baltz Renovations **Field Manager:**

Contract: Contrctor:	Applicable to Subcontractor (yes / no)		Foreman	Competent Person (if not foreman)
Subpart C-General Provisions				
1926-20 General Safety				
Subpart D - Health and Environmental Controls				
1926-53 Ionizing Radiation				
1926-55 Gases, Vapors, Fumes, Dusts, Mists				
1926-57 Ventilation				
1926.59 Hazard Communication				
1926.62 Lead				
Subpart E - Personal Protective Equipment				
1926.101 Hearing				
1926.103 Respirator Protection				
Subpart H - Materials Handling, Storage				
1926.251 Rigging Equipment for Material Handling				
Subpart J - Welding and Cutting				
1926.354 Welding, Cutting and Heating				
Subpart K - Electrical				
1926.404 Wiring Design and Protection				
Subpart L - Scaffolding				
1926.451 Scaffolding				
Subpart M - Fall Protection				
1926.502 Fall Protection Criteria and Practices				
1926.503 Training				
Subpart N - Cranes, Derrick -Redesignated 1926.1501				
Subpart O - Motor Vehicles and Equipment				
1926.601 Motor Vehicles				
Subpart P - Excavations				
1926.651 Specific Excavation Requirements				
1926.652 Requirements to Protective Systems				
Subpart S - Tunnels, Shafts, Caissons				
1926.800 Tunnels, Shafts, Caissons				
1926.803 Compressed Air				
Subpart T - Demolition				
1926.850 Preparatory Operations				

NOT FOR BIDDING

Contract: Contrctor:	Applicable to Subcontractor (yes / no)		Foreman	Competent Person (if not foreman)
1926.852 Chutes				
1926.859 Mechanical Demolition				
Subpart V - Power Transmission and Distribution				
1926.955 Overhead Lines				
Subpart X - Stairways and Ladders				
1926.1053 Ladders				
1926.1060 Training Requirements				
Subpart Z - Toxic and Hazardous Substances				
1926.1101 Asbestos				
1926.1101 thru 1926.1148 Toxic and Hazardous Substances				

I certify that the listed employees are competent persons, as defined and required by specific OSHA standards. They are capable of identifying existing and predictable hazards in the surroundings or working conditions which are unsanitary, hazardous or dangerous to employees, and who has authorization to take prompt corrective measures to eliminate them.

Name (print)

Contractor Signature

Date

PU09, Revised 3/2012

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 013523 - SAFETY PROGRAM

1. GENERAL

1.1 The Contractor shall be responsible for initiating, maintaining and supervising all safety activities and programs in connection with the Work.

1.2 Contractor shall be responsible for the safety of its personnel.

1.3 Hard hats and safety glasses must be worn by all personnel on the jobsite, except in contractor's administrative office/trailer. All equipment must comply with OSHA standards. All job site personnel shall wear long pants, shirts (no tank tops), high visibility garments, and work boots.

2. SAFETY PROGRAM

2.1 Prior to commencing the Work, the Contractor shall submit to the Construction Manager (1) electronic copy and (1) bound copy of its safety program and one (1) copy of MSDS information in a 2" ringed notebook. One paper copy of the safety program and MSDS will be retained by the Construction Manager in the field office.

2.2 The safety program shall outline those hazards peculiar to the Contractor's Work, and the steps to be taken to eliminate or reduce the risk of injury or loss due to those hazards**. The program shall be site specific.** Contractor shall implement and enforce its safety program, which is in accordance with all OSHA, Federal, State and local laws.

2.3 Contractor shall designate a qualified Safety Supervisor to implement their safety program. Unless otherwise approved by the Construction Manager, the Safety Supervisor shall be the Contractor's Field Superintendent/Foremen.

2.4 Contractor shall furnish the names and qualifications of the competent persons and qualified persons who may be required for their scope of work by the Contractor's safety procedures, and by federal, state and/or local regulations. Examples include competent persons and/or qualified persons for steel erection, excavation, scaffold erection, confined space entry, crane and rigging operations, annual crane inspections, fall protection including horizontal lifeline systems, etc. See the attached Competent/Qualified Person Designation Log.

2.5 Contractor shall provide written certification showing that all employees have been trained on the Contractor's Safety Program. The written certification record shall contain the name or other identity of the employee trained, the date(s) of the training and the signature of the person who conducted the training or the signature of the

NOT FOR BIDDING

employer. If the employer relies on training conducted by another employer or completed prior to the effective date of this section, the certification record shall include the date the employer determined the prior training was adequate rather than the date of actual training. The employer shall instruct each employee in the recognition and avoidance of unsafe conditions and the regulations applicable to his work environment to control or eliminate any hazards or other exposure to illness or injury. Please forward certification (document) of training for each employee on an EDiS project. The latest training certificate shall be maintained.

2.6 Contractor shall provide certification of training on the following programs, as they pertain to your contract and project tasks: Scaffold, Fall Protection, Crane Operator, Signal Person, Crane Maintenance, Steel Erection Fall Protection, Respiratory Protection, Powder-Actuated Tools, and Motor Vehicles. Certification of training must include: Employee's name, date of training, person conducting the training, topics covered, and a statement that the student has successfully completed the course. This list is not meant to be all inclusive; please refer to OSHA regulations for applicable safety requirements.

2.7 Contractor Daily Reports with Safety Inspection Checklist will be submitted daily to Field Manager, verifying inspection of work area, machinery, equipment and tools.

2.8 Prior to starting work on-site, the Contractor shall arrange with the on-site Field Manager to have their employees complete the EDiS Company Zero Accidents Safety Orientation program.

2.9 Contractor shall hold weekly safety toolbox talks with all of its employees every Monday at 12:30 PM. The Contractor shall designate a responsible, capable person to conduct these meetings. Contractor's safety supervisor or superintendent must submit to the Construction Manager weekly toolbox talks attendance sheets and the topics discussed.

3. SUBSTANCE ABUSE POLICY STATEMENT

The Construction Manager is committed to providing a safe work site environment for its employees and Contractors' employees. The Construction Manager does not condone or permit employees and Contractors' employees to use or be under the influence of drugs or alcohol while they are on any of the Construction Manager's work sites. The Policy is as follows:

3.1 It is a violation of the Construction Manager's policy for employees and Contractors' employees to use, possess, sell, trade, or otherwise engage in the use of illegal drugs and alcohol.

NOT FOR BIDDING

3.2 It is a violation for employees and Contractors' employees to report to work while influenced by illegal drugs or alcohol.

3.3. It is a violation for employees and Contractors' employees to use prescription drugs illegally (i.e. to use prescription drugs that have not been legally obtained) and to use prescription drugs in a manner other than the prescribed intentions.

3.4 Employees and Contractors' employees who are taking medication, which is prescribed by their physician, are expected to discuss potential side effects with their prescribing physician, as it relates to the work requirements.

Violations of this policy will require disciplinary action. If any employees or Contractors' employees are observed or suspected of being influenced by drugs or alcohol, they will be instructed to stop work and may be required to leave the work site.

4. EXECUTION

4.1 Contractor shall comply with all applicable federal, state and local laws, regulations and orders relating to occupational safety and health, and related procedures, and shall, to the extent permitted by law, indemnify and hold Construction Manager, Owner and Architect, and their respective directors, officers, or agents and employees, harmless from any and all liability, public or private, penalties, contractual or otherwise, losses, damages, costs, attorney's fees, expenses, causes of action, claims or judgments resulting from a claim filed by anyone in connection with the aforementioned acts, or any rule, regulation or order promulgated thereunder, arising out of the Contractor's Work, this Agreement or any subcontract executed in prosecution of the Work. Contractor further agrees in the event of a claim of violation of any such laws, regulations, orders or procedures arising out of or in any way connected with the performance of this agreement, Construction Manager may immediately take whatever action is deemed necessary by Owner and/or Construction Manager to remedy the claim or violation. Any and all costs or expenses paid or incurred by Owner and/or Construction Manager in taking such action shall be borne by Contractor, and may be deducted from any payments due Contractor.

4.2 The Contractor agrees to (1) take all necessary steps to promote safety and health on the job site; (2) cooperate with Owner and/or Construction Manager and other Contractors in preventing and eliminating safety and health hazards: (3) train, instruct and provide adequate supervision to ensure that its employees are aware of, and comply with, applicable Federal and State safety and health laws, standards, regulations and rules, safe healthful work practices and all applicable safety rules, regulations and work practices and procedures (4) not create any hazards or expose any of its employees, employees of the Owner and/or Construction Manager or employees of Contractors to any hazards; and (5) where the Contractor is aware of

NOT FOR BIDDING

the existence of a hazard not within its control, notify the Construction Manager of the hazard as well as warn exposed persons to avoid the hazard.

4.3 The Contractor's Superintendent or Safety Supervisor shall immediately, verbally report, and promptly thereafter confirm in writing to the Construction Manager any unsafe conditions or practices that are observed, or violations of job safety which are not within the Contractor's control.

4.4 Contractors shall immediately, verbally report, and promptly thereafter confirm in writing, to the Construction Manager any unsafe practices or conditions that are observed which are not under the Contractor's control.

4.5 The Contractor's Superintendent or Safety Supervisor shall insure that adequate first aid supplies are available, and that personnel are qualified to administer first aid/CPR, as required by State and/or Federal regulations.

4.6 Contractor shall promptly notify Construction Manager of any personal injury requiring medical treatment of any of the Contractor's employees at the Project site; or of significant damage to property arising in connection with Contractor's performance, as promptly as possible after the occurrence of such injury or damage. Within twenty-four hours of such occurrence, Contractor shall furnish to Construction Manager a complete written report of such injury or damage.

4.7 Contractor certifies that the forgoing terms shall be made applicable to all Contractors' suppliers, materialmen or anyone furnishing labor and/or materials to the site.

4.8 The Contractor shall continue to educate his job Safety Supervisor or Superintendent of their responsibilities, which shall include:

1. Instructing workers and subcontractors under its supervision in safe work practices and work methods at the time they are given work assignments.

2. Ensuring that its workers and subcontractors have and use the proper protective equipment and suitable tools for the job.

3. Continuously checking to see that no unsafe practices or conditions are allowed to exist on any part of his job.

4. Acquainting its workers and subcontractors with all applicable safety requirements and seeing that they are enforced.

5. Setting a good example for his workers.

NOT FOR BIDDING

6. Making a complete investigation of accidents to determine facts necessary to take corrective action.

7. Promptly completing a "Supervisor's Investigation Form" with his Supervisor's assistance and distributing as required. This form will be provided by the Construction Manager.

8. Holding weekly "tool box" safety meetings with his men to:
   a. Discuss observed unsafe work practices or conditions including a review of current Construction Manager safety report.

   b. Review the accident experience of his crew and discuss correction of accident causes.

   c. Encourage safety suggestions from his men.

9. Seeing that prompt medical treatment is administered to an injured employee.

10. Correcting or reporting immediately to job superintendent any observed unsafe conditions, practices or violations of job security.

11. Making all reports required by these Contract Documents to the Construction Manager in a full and timely fashion.

NOT FOR BIDDING

5. SAFETY MEETINGS

5.1 The Contractor's Project Manager or Superintendent shall attend weekly or biweekly supervisory job meetings. The first topic of these meetings will be job site safety. The weekly safety reports will be reviewed and violations must be corrected immediately. Contractors will be encouraged to participate in the on-going jobsite safety.

6. TOOL BOX SAFETY MEETINGS

6.1 The Contractor shall schedule weekly "tool box" safety sessions to be held by his job safety supervisor or superintendent for all of his employees.

6.2 A member of the Contractor's management staff shall periodically attend "tool box" safety sessions to evaluate their effectiveness and offer any appropriate suggestions for improvement.

7. REPORTS

7.1 Contractors shall report all accidents or injuries on a timely basis in accordance with all applicable regulations.

7.2 Contractors shall promptly complete an accident investigation report of all accidents.

7.3 A record of all "tool box" safety sessions shall be made and submitted to the Construction Manager on forms to be provided.

8. SAFETY REPRESENTATIVE

8.1 The Construction Manager may employ the services of a Safety Representativ*e* on the project.

8.2 The Safety Representative *will* visit the job site on a weekly basis to determine if the work is being performed in a safe manner and in accordance with OSHA, State and Local safety regulations. Safety representative is not responsible for observing and documenting all possible safety violations. The Contractor's Safety Representative or Superintendent shall attend job site safety inspections with the Safety Representative on a weekly basis.

8.3 The Safety Representative will file a written report with the Construction Manager at the end of each inspection listing the safety violations observed during the inspection.

8.4 The Construction Manager will distribute the Safety Representative's report to all Contractors. All safety violations must be corrected immediately.

9. RIGHT TO STOP THE WORK DUE TO SAFETY VIOLATIONS

9.1 The Construction Manager, in its sole discretion, may order the Contractor to stop the work due to safety violations under the following circumstances:

1. If the Construction Manager observes the Contractor is violating safety regulations and the Contractor takes no immediate action to correct the violation.

2. If the Contractor has been notified by the Construction Manager in writing that he is in violation of safety regulations and fails to take action to correct the violation within 24 hours of the notice.

9.2 If the Construction Manager directs the Contractor to stop the work due to safety violation, it will be done in accordance with the General Conditions of the Contract. Contractor shall not be permitted an adjustment of the Contract Time or Sum for the days lost to any suspension of work.

NOT FOR BIDDING

9.3 If the Construction Manager or Safety Representative observes Contractor's employee violating this safety program or OSHA Standards in an habitual manner, or creating a serious life safety violation, the Construction Manager or Safety Representative may instruct the Contractor's superintendent or foreman to remove the violator from the work site for failure to comply with the safety program and the contract.

10. EMERGENCY PROCEDURES

10.1 The Construction Manager shall establish a central meeting location for the assembly of all Contractors' employees in the event of a major job site emergency.

10.2 Contractor shall assemble all of their personnel and account for all employees. Contractor must immediately report to the Project Superintendent with the status of their employees.

11. FALL PROTECTION PROCEDURES

11.1 Contractor is responsible, in accordance with federal, state, local laws and regulations including OSHA, to provide and enforce their own site specific fall protection program and equipment. The following fall protection procedures shall be enforced by all Contractors as a minimum standard.

All workers on walking/working surfaces with unprotected sides or edges six feet (6') or higher above the next lower level must be protected from falls by the use of guardrail systems, net systems, fall arrest systems or control access zone programs. It is intended that when fall protection is required, it is required 100% of the time. All contractors are reminded that relevant industry regulations require that contractors comply with the following standards.

1. Workers constructing or working near leading edges must be protected.

2. Workers on the face of formwork or reinforcing steel must be protected at a height of 6 feet (6') or greater.

3. Scaffolds shall be guarded at 6 feet (6') above next lower level.

4. Brick layers performing overhand bricklaying and related work six feet (6') or higher above lower levels must be protected from falls.

5. Roofers must comply with OSHA standards for roof work.

6. The Contractor's controlled access zone plan shall be included in their site-

NOT FOR BIDDING

specific safety program and shall be submitted prior to the start of work. Contractors are responsible for assuring programs are OSHA compliant.

7. Guidelines for Residential Construction or any interpretations will not be accepted in lieu of 1926 Standards.

8. Contractors must provide certification per OSHA CFR29 § 1926.503(b) of employee training and retraining on fall protection upon request.

11.2 Contractor shall provide its own fall protection. Fall protection may be provided by guardrail systems, net systems, or personal fall arrest systems. All fall protection systems must comply with OSHA standards.

11.3 Stepladders, exposed to shafts or edges of the building, greater than six feet (6') above the next lower level, must be tied off or otherwise secured. Employee must wear fall protection, i.e. harness/lanyard.

11.4 The Safety Cable System shall not be altered or removed without a written request submitted to the Project Manager with a copy to the Field Manager. It shall be the responsibility of each and every Contractor that is removing or altering the Safety Cable System to maintain the fall protection safety provided by the safety cable and not leave the area unprotected. Each and every Contractor shall be responsible to re-install the Safety Cable System immediately after work is completed. Each and every Contractor shall be responsible to re-install the Safety Cable System in accordance to OSHA standards.

11.5 Fall protection will be enforced for Structural Steel Erectors.

1. As for a Contractor engaged in structural steel erection, the Contractor is specifically advised that structural steel erectors shall comply with all protection requirements for all work at a height of six feet (6') or greater above the next lower level, 100 percent of the time, by any of the following means.

   a. Standard guardrail system.

   b. Personal Fall Arrest System (PFAS) – full body harness with shock absorbing lanyard. Maximum free fall distance permitted, with lanyard and lanyard attachment shall not exceed six feet (6'). Anchor point must be capable of supporting five thousand pounds. Perimeter guard cables or alignment cables may not be used for anchor points.

   c. Access to work area shall be provided by ladders. There shall be sufficient number of ladders available to reduce the amount of "beam walking." When

NOT FOR BIDDING

it is absolutely necessary to traverse a beam, 100% fall protection must be utilized.

d. Steel erection Contractors must, at all times, be able to certify in writing that each of his employees has been properly trained in both OSHA fall protection standards and the Contractor's site specific project fall protection procedures.

e. Prior to the erection of the steel, the Contractor shall meet with the Project Manager and Safety Representatives to review and document site specific procedures.

12. AIRBORNE CONTAMINENTS PROCEDURES

A. Contractor must provide and use equipment furnished with Exhaust Purifiers / Scrubbers when any equipment produces airborne containments and will be used in an enclosed building.

B. The Contractor shall verify air quality by the use of air monitoring equipment and document such verified air quality on the daily report. The monitoring equipment shall, at a minimum, be designed with an auditory alarm and shall provide continuous monitoring of these four gases: Oxygen, Hydrogen Sulfide, Carbon Monoxide and Combustible gases.

C. The Contractor must provide administrative or engineering controls to protect its workers from exposure to occupational health , environmental or other hazards to be implemented whenever feasible. When such controls are not feasible to achieve full compliance, protective equipment or other protective measures shall be used to keep the exposure of employees to air contaminants within the limits prescribed by local, state, and federal regulations. Any equipment and technical measures used for this purpose must first be approved for each particular use by a competent industrial hygienist or other technically qualified person. Whenever respirators are used, their use shall comply with 1926.103.

END OF SECTION

NOT FOR BIDDING

Certification of Training Documents to be Submitted with Safety Policy/Program

Provide a certification of training for employees on your safety program.

In addition, Contractor shall provide certification of training on the following programs, as they pertain to your contract and project tasks. Certification of training must include: Employee's name, date of training, person conducting the training, topics covered, and a statement that the student has successfully completed the course. This list is not meant to be all inclusive: please refer to OSHA regulations for applicable safety requirements.

a. ☐ Scaffold: 1926.454

b. ☐ Fall Protection 1926.503

c. ☐ Crane Operator: 1926.1427

d. ☐ Signal person (this is for any persons connecting material or equipment for lifting): 1926.1428

e. ☐ Crane maintenance: 1926.1429

f. ☐ Steel erection fall protection: 1926.761

g. ☐ Respiratory protection (medical clearance and training records complying with 1910.134

h. ☐ Powder-actuated tools: 1926.302

i. ☐ Motor Vehicles (are those vehicles that operate within an off-highway jobsite, not open to public traffic): 1926.21

NOT FOR BIDDING

SECTION 014500 - QUALITY CONTROL

1. DESCRIPTION

1.1 Quality control services include inspections and tests performed by independent agencies and governing authorities, as well as by the Contractor. Inspection and testing services are intended to determine compliance of the work with requirements specified. Specific quality control requirements are specified in individual specification sections.

2. RESPONSIBILITIES

2.1 Contractor Responsibilities: Except where indicated as being the Owner's responsibility, quality control services are the Contractor's responsibility, including those specified to be performed by an independent agency and not by the Contractor. The Contractor shall employ and pay an independent agency, testing laboratory or other qualified firm to perform quality control services specified.

1. The Owner will engage and pay for services of an independent agency to perform the inspections and tests that are specified as Owner's responsibilities.

2.2 Retest Responsibility: Where results of inspections or test do not indicate compliance with Contract Documents, retests are the Contractor's responsibility.

2.3 Responsibility for Associated Services: The Contractor shall cooperate with independent agencies performing inspections or test. Provide auxiliary services as are reasonable. Auxiliary services include:

1. Provide access to the Work.

2. Assist taking samples.

3. Deliver samples to test laboratory.

2.4 Coordination: The Contractor and independent test agency shall coordinate the sequence of their activities and shall avoid removing and replacing work to accommodate inspections and test. The Contractor is responsible for scheduling time for inspections and tests.

2.5 Qualifications for Service Agencies: Contractor shall engage only inspection and test service agencies which are pre-qualified as complying with "Recommended Requirements for Independent Laboratory Qualification" by the American Council of

NOT FOR BIDDING

Independent Laboratories.

2.6 Submittals: Contractor shall submit a certified written report of each test, Inspection or similar service, in duplicate to the Construction Manager. Contractor shall submit additional copies of each report to any governing authority, when the authority so directs.

2.7 Report Data: Written inspection or test reports shall include:

1. Name of testing agency or test laboratory.
2. Dates and locations of samples, tests or inspections.
3. Names of individual present.
4. Complete inspection of test data.
5. Test results.
6. Interpretations.
7. Recommendations.

2.8 Repair and Protection: Upon completion of inspection or testing, Contractor shall repair damaged work and restore substrates and finishes. Contractor shall comply with requirements for "Cutting and Patching."

NOT FOR BIDDING

END OF SECTION

SECTION 015113 - TEMPORARY ELECTRICITY

1. GENERAL

1.1 RELATED WORK SPECIFIED ELSEWHERE

1. Electrical Basic Materials and Methods, Division 16 or 26.

1.2 DESCRIPTION OF SYSTEM

1. Power Source

1. Suppliers: Delmarva Power

2. The Construction Manager shall provide 277/480 volt, three phase, 60 cycle power service to the site from the existing service.

3. The Construction Manager will make all arrangements for bringing the power supply to the site and for installation of appropriate temporary transformers to provide for the power supply in 1.2.1.2, above.

4. The source will be adequate to service temporary electrical needs of the proposed construction.

2. Electrical Service

1. Contractor will be responsible to pay for all costs associated with providing electrical service from the power source to their respective site office, temporary storage facilities or temporary construction buildings as appropriate.

2. Prior to issuance of the Notice to Proceed for the electrical contract, the Construction Manager will be responsible for providing temporary electrical service as provided in 1.2.2.3, below. After issuance of the Notice to Proceed for the electrical contract, the Electrical Contractor shall become responsible for maintaining all electrical power supply and service facilities installed by the Construction Manager. The Electrical Contractor shall also, from that date forward, be responsible for providing and maintaining temporary electrical service to the site as provided in 1.2.2.3, below.

3. The Construction Manager or Electrical Contractor, as provided in 1.2.2.2 above, shall install temporary electric service for items below, throughout the construction period, such that power can be secured at any desired point with

NOT FOR BIDDING

no more than a 60 foot extension:

1. Power Centers for miscellaneous tools and equipment used in the construction work shall be provided with a minimum of four 20-amp, 120 volt grounding type outlets. Each outlet shall be provided with ground fault detecting circuit breaker protection.

2. Adequate lighting for safe working conditions shall be provided and maintained on a 24 hour per day basis throughout the building, tunnels, and stairways per OSHA requirements. Each lamp must be rated at least 100 watts. Voltage of each socket must be at least 110 volts.

3. Power for testing and checking equipment must be supplied.

3. Capacity

1. All electrical power supply and service lines installed shall be of adequate capacity for construction use by all trades during the construction period at the locations necessary.

2. The Electrical Contractor shall notify the Power Company if unusually heavy loads, such as welding units, are anticipated.

4. Power Costs

1. The Construction Manager will pay all costs of temporary electrical power used during construction.

2. The Owner will pay all costs of power used in the permanent wiring.

1.3 REQUIREMENTS AND REGULATORY AGENCIES

1. The Electrical Contractor will obtain permits as required by local governmental authorities.

2. The temporary electrical service shall comply with National Electrical Code, 1990 Edition and applicable local codes and utility regulations.

1.4 USE OF PERMANENT SYSTEM

1. The Electrical Contractor shall regulate any part of the permanent electrical system which is used for construction purposes to prevent interference with safety and orderly progress of the Work.

NOT FOR BIDDING

2. Contractors shall leave permanent electrical services in a condition as good as new and clean.

2. PRODUCTS

2.1 MATERIALS

1. General

   1. The materials may be new or used, but must be adequate in capacity for the purposes intended and must not create unsafe conditions or violate the requirements of applicable codes.

2. Conductors

   1. Use wire, cable, or busses of appropriate type, sized in accordance with the National Electrical Code for the applied loads.

   2. Use only UL labeled wire and devices.

2.2 EQUIPMENT

1. Provide appropriate enclosure for the environment in which used in compliance with NEMA standards.

NOT FOR BIDDING

3. EXECUTION

3.1 GENERAL

1. Install all work with a neat and orderly appearance.

2. Make structurally sound throughout.

3. Maintain to give continuous service and to provide safe working conditions.

4. Modify temporary power and light installation as job progress requires.

3.2 INSTALLATION

1. Locate so that interference with storage areas, traffic areas and work under other Contracts is avoided.

3.3 REMOVAL

1. Remove all temporary equipment and materials completely upon completion of construction.

2. Repair all damage caused by the installation and restore to satisfactory condition.

END OF SECTION

NOT FOR BIDDING

SECTION 015123 - TEMPORARY HEATING, COOLING AND VENTILATING

1. GENERAL

1.1 RELATED REQUIREMENTS SPECIFIED ELSEWHERE

1. Temporary Electric: Section 015113

2. Temporary Facilities: Section 015200

3. Heating Requirements for Cold Weather Installation and Protection of Materials: Respective specification section for each item of work.

1.2 DEFINITIONS

1. Temporary Enclosures: Sufficient preliminary enclosures of an area of structure, or of an entire building, to prevent entrance or infiltration of rain water, wind or other elements and which will prevent undue heat loss from within enclosed area.

2. Permanent Enclosure: Stage of construction at which all moisture and weather protection elements of construction have been installed in accordance with Contract Documents, either for a portion of structure, or for an entire building.

1.3 DESCRIPTION OF SYSTEM

1. Prior to the building or portion of building being permanently enclosed, the contractor shall provide temporary heat and ventilation and weather protection necessary for its work, as described below. After permanent enclosure, the Construction Manager will arrange for and coordinate temporary heat and ventilation in enclosed areas, required to:

1. Facilitate progress of Work.

2. Protect Work and products against dampness and cold.

3. Prevent moisture condensation on surfaces.

4. Provide suitable ambient temperatures and humidity levels for installation and curing of materials.

5. Provide adequate ventilation to meet health regulations for safe working

NOT FOR BIDDING

environment.

2. Temperatures Required

    1. Generally, 24 hours a day: Minimum of 40 degrees F.

    2. 24 hours a day during placing, setting and curing of cementitious materials: As required by specification section for each product.

    3. 24 hours a day, seven days prior to, and during, placing of interior finishes: woodwork, resilient floors, painting and finishing: As required by specification section for each product.

    4. 24 hours a day after application of finishes, and until Substantial Completion: Minimum of 50 degrees F.

3. Ventilation Required:

    1. Contractors shall prevent hazardous accumulations of dusts, fumes, mists, vapors or gases in areas occupied during construction.

        1. Provide local exhaust ventilation to prevent harmful dispersal of hazardous substances into atmosphere of occupied areas.

        2. Dispose of exhaust materials in manner that will not result in harmful dispersal of hazardous substances into atmosphere of occupied areas.

        3. Continuously ventilate storage spaces containing hazardous or volatile materials.

        4. Contractor / subcontractor must provide and use equipment which is furnished with Exhaust Purifiers / Scrubbers or is electrically power-driven when any such equipment produces airborne containments and will be used in an enclosed building.

        5. The contractor / subcontractor shall verify air quality by the use of air monitoring equipment and document the verified air quality on the daily report. The monitoring equipment shall, at a minimum, be designed with an auditory alarm and shall provide continuous monitoring of these four gases: Oxygen, Hydrogen Sulfide, Carbon Monoxide and Combustible gases.

    2. Contractors shall provide adequate ventilation for:

NOT FOR BIDDING

1. Curing installed materials.

2. Dispersal of humidity.

3. Temporary sanitary facilities.

3. Duration of Operations:

1. For Personnel:

1. At all times personnel occupy an area subject to hazardous accumulations of harmful elements.

2. Continue operation of ventilation and exhaust system for time after cessation of work process to assure removal of harmful elements.

2. For curing installed materials: As required by specification section for respective materials.

3. For humidity dispersal: Continuously ventilate to provide suitable ambient conditions for work.

4. The Contractor shall maintain supervision and operation of temporary heating and ventilating equipment in order to:

1. Enforce conformance with applicable codes and standards.

2. Enforce safe practices.

3. Prevent abuse of services.

1.4 COSTS OF INSTALLATION AND OPERATION

1. The Contractor shall be responsible for all installation and operating costs for any heat and ventilation as required in this section until the permanent HVAC system is in operation.

2. After the permanent HVAC system is operational, the Owner will pay the costs of fuel for temporary heat and ventilation. The Contractor will pay the costs for maintaining the system until final acceptance by the Owner.

3. The Contractor shall be responsible for all installation and operating costs for any heat required to supplement that which is to be supplied by the Construction

NOT FOR BIDDING

Manager in 1.3, above.

1.5 REQUIREMENTS OF REGULATORY AGENCIES

1. The Construction Manager will obtain and pay for permits as required by governing authorities for those activities required by this Section.

2. Contractor shall comply with Federal, State and local codes, and utility company regulations.

2. PRODUCTS

2.1 MATERIALS

1. General

1. Materials may be new or used, but must be adequate for purposes intended and must not create unsafe conditions nor violate requirements of applicable codes.

2.2 EQUIPMENT

1. Standard products, meeting code requirements.

2. Provide required facilities, including piping, wiring and controls.

3. Portable Heater: Standard Units, meeting code requirements.

1. Safety Controls against explosion, overheating, and carbon monoxide build up.

2. Vent direct-fired units to outside.

3. Provide adequate combustion air.

4. Oil-Fired heaters will not be allowed.

3. EXECUTION

3.1 GENERAL

1. Comply with applicable sections of Division 15 - Mechanical.

NOT FOR BIDDING

2. Install work in neat and orderly manner.

3. Make structurally, mechanically and electrically sound throughout.

4. Maintain to give safe, continuous service at required times and to provide safe working conditions.

5. Modify and extend system as work progress requires.

3.2 INSTALLATION

1. Locate units to provide equitable distribution of heat and air movements.

2. Locate to avoid interference with, or hazards to:

    1. Work or movement of personnel.

    2. Traffic areas.

    3. Materials handling.

    4. Storage areas.

    5. Work of other Contractors.

    6. Finishes.

3.3 OPERATION OF PERMANENT EQUIPMENT

1. The Construction Manager will coordinate with Contractor.

2. The Contractor will place permanent HVAC system in operation only upon written authorization by the Construction Manager.

3. Before operating the permanent HVAC equipment, the Contractor shall confirm to the Construction Manager that:

    1. Inspection has been made by proper authorities.

    2. Systems, equipment piping, strainers, filters and associated operating items are sufficiently complete, cleaned, and ready for operation.

    3. Controls and safety devices are complete and tested, or adequate temporary

NOT FOR BIDDING

controls are provided.

4. Before operating the permanent HVAC equipment, the Contractor shall install temporary filters:

    1. For air handling units.

    2. For permanent ducts.

3.4 REMOVAL

1. The Contractor shall completely remove temporary materials and equipment when no longer required, or on completion of construction.

2. The Contractor shall clean and repair damage caused by temporary installation, and restore equipment to specified or original condition.

3. The Contractor shall remove temporary filters and install new filters, or clean permanent filters, in the permanent HVAC system prior to final acceptance by the Owner.

END OF SECTION

NOT FOR BIDDING

SECTION 015200 - CONSTRUCTION FACILITIES & TEMPORARY CONTROLS

1. GENERAL

1.1 DESCRIPTION

1. Construction Manager and Contractors shall provide all temporary facilities throughout the construction period unless otherwise indicated in the Contract Documents.

2. Construction Manager and Contractors shall pay all costs for providing, maintaining and removing of all temporary facilities unless otherwise indicated in the Contract Documents.

1.2 RELATED WORK SPECIFIED ELSEWHERE

1. Temporary Electric: Section 015113.

2. FACILITIES

2.1 TEMPORARY SANITATION FACILITIES

1. Construction Manager will provide and maintain sanitary facilities for all personnel on the project.

2. The number of sanitary facilities required shall be based on the total number or workers employed on the site and shall be in accordance with the provisions of the applicable code.

3. Construction Manager will maintain sanitary facilities in a sanitary and clean condition at all times.

2.2 TEMPORARY WATER

1. Drinking Water: Contractor shall provide potable water for drinking purposes for all his personnel on the site. He shall furnish disposable drinking cups at water stations. Each water station shall be equipped with a suitable trash container for disposal of the drinking cups.

2. Construction Water: Construction Manager will provide and maintain tap locations for construction water of sufficiently pure and potable quality to avoid deleterious effect on any materials used. Location of construction water tap locations will be determined by the Construction Manager depending on the

NOT FOR BIDDING

stage of construction of the incoming water service. Contractor shall provide and maintain all hoses, piping and valves as required for obtaining construction water from taps provided by the Construction Manager.

2.3 TEMPORARY TELEPHONES

1. Construction Manager will not provide any telephones or fax machines for Contractor's personnel. Each Contractor is responsible for its own phones and fax machines.

2.4 FIELD OFFICE

1. During the period of the Work and until final acceptance of the project, the Construction Manager will provide a weatherproof building for the Construction Manager's Field Project Manager(s) and Superintendent(s). Contractor shall make provisions for its own field office, subject to approval by the Construction Manager.

2.5 FIRE PROTECTION

1. The Carpentry & General Work Contractor will provide and maintain temporary portable fire extinguishers on each floor level and building area. Number to conform to applicable codes.

2. Contractor shall provide additional fire extinguishers as required by OSHA regulations for its work.

3. Fire extinguishers shall be 10lb, Multi-Purpose (ABC) dry chemical, UL labeled, with a rating of 3a:40bc.

2.6 ACCESS ROADS AND PARKING AREAS

1. Neither the Construction Manager nor the Owner will provide parking for Contractor's personnel on or about the project site. All parking provisions required for Contractors will be solely the responsibility of the Contractors or their personnel.

2.7 STORAGE AREAS

1. The Construction Manager will assign storage areas on the site. Storage areas are extremely limited and will be assigned in a manner which will best facilitate the work.

NOT FOR BIDDING

2. Contractor shall provide all other storage space required for its work at off-site locations.

3. All combustible or flammable materials must be safely stored in a secured area in strict accordance with regulations, codes and laws enforced by local, State or Federal agencies, whichsoever is the most stringent.

2.8 FIRST AID STATION

1. The Contractor's Superintendent or Safety Supervisor shall insure that adequate first aid supplies are available, and that personnel are qualified to administer first aid/CPR, as required by State and/or Federal regulations.

2.9 SECURITY

1. The Construction Manager will provide the following security measures at the site: security lighting will be provided.

2. All other safety and security measures shall be the responsibility of each Contractor. These measures shall include but are not limited to the provision of secured storage for tools, construction equipment, and materials and equipment scheduled for installation in the building.

2.10 BENCH MARKS AND BASELINE

1. The Construction Manager will lay out and establish and maintain bench marks and baselines.

2. The Contractor shall lay out his own work and shall be responsible for the accuracy of same.

3. Each Contractor shall check grades, lines, levels and dimensions as shown on the drawings and shall promptly report errors or inconsistencies in same to the Construction Manager before Work proceeds.

4. The Contractor is responsible for damaging or altering the bench marks and baselines established by the Construction Manager and shall bear the costs of replacing same.

2.11 FIELD OFFICE AND STORAGE TRAILERS

1. Each Contractor shall provide and maintain its own field office and storage trailers as required.

NOT FOR BIDDING

2. Each Contractor shall provide temporary heat and power for its field office and storage trailer.

3. Each Contractor's field offices and storage trailers shall be located as directed by the Construction Manager.

2.12 PROJECT SIGN

1. The Construction Manager will provide a Project Sign naming the major participants, as determined by the Owner.

2.13 TRASH DISPOSAL

1. Each Contractor shall be responsible for daily clean up and depositing its common trash in the dumpsters provided by the Construction Manager.

2. The Construction Manager will not provide a trash chute.

3. The Construction Manager will provide dumpsters, and will arrange for disposal of common, non-hazardous, work-related trash deposited in these dumpsters.

2.14 HOISTING

1. Contractor shall provide its own materials hoists and cranes. No personnel hoist will be provided.

2.15 SCAFFOLDING AND WORKING PLATFORMS

1. No scaffolding shall be provided by the Construction Manager. Each Contractor shall provide all scaffolding required to perform its Work.

2.16 SAFETY BARRICADES AND RAILINGS

1. The Structural Contractor shall provide barricades and protective barriers around elevator, stair, shaft and cut openings in floors and roofs, and edges of floors and roofs. The methods and materials used in barricading shall be in accordance with OSHA and local code regulations. Barricades and protective barriers will be installed immediately after the installation of the floor slab on any level or part of a level on the Building. Until a level has been fully barricaded, the Structural Contractor will be responsible for maintenance of the barricades. When a warning barricade is used to prohibit employees from

NOT FOR BIDDING

entering a restricted work area. The "warning barricade" shall meet the requirements of CFR 1926.502 (f)(2). The supported rope, wire, or chain shall be flagged at not more than 6-foot (1.8 m) intervals with high-visibility material and maintain between 34 and 39 inches above the walking/working surface; Warning signs and tags shall be used in accordance with Subpart G of CFR OSHA Construction Industry Regulations.

2. After the barricades and protective barriers are no longer needed, the Structural Contractor will remove the barricades from the site. The Construction Manager will determine the location and scheduling of barriers to be removed.

3. Each Contractor shall provide for its own barricades at all other trenches, excavations, and locations not specifically identified in Paragraph 1 above.

4. Contractors who remove barricades shall be responsible for replacing them. If, after proper notification, in writing, from the Construction Manager the responsible Contractor does not correct his deficiencies in safety barricade placement, the Construction Manager reserves the right to undertake this work and backcharge the responsible Contractor(s).

5. During the execution of his work, Contractor will provide daily maintenance of, and upon completion of same, restore all barricades in a manner acceptable to prevailing safety standards enforced by local, State or Federal ordinance, whichsoever is most stringent. The intent is to leave no floor penetration or perimeter opening in an unsafe condition.

6. The Construction Manager shall arrange for temporary ladders required for access to each of the floor levels after the completion of floor slab work, and until the final stairs are ready for use.

2.17 PUMPING AND DRAINAGE

1. Each Contractor shall provide its own pumping and drainage.

2. When an area is released by one Contractor to another, the Contractor releasing an area shall be responsible for leaving it in a drained condition. The incoming Contractor shall assume responsibility for drainage on the day that he is scheduled to start work in the area. If the incoming Contractor is late in starting work, he shall assume responsibility for pumping and drainage arising as a result.

2.18 TEMPORARY BUILDING ENCLOSURES

NOT FOR BIDDING

1. The Construction Manager will equip all temporary exterior doors of the building with self-closing hardware and padlocks.

2. All other temporary enclosures and protection shall be provided by the Contractor requiring the protection.

3. Temporary enclosures required due to late delivery of materials or untimely installation of work shall be the responsibility of the Contractor responsible for the delay.

2.19 TEMPORARY POWER AND LIGHTING

1. EachContractor shall provide all extension cords and outlets as required for obtaining electric power from power centers provided by the Electrical Contractor. Refer to Section 015113 - TEMPORARY ELECTRIC.

2. Each Contractor shall provide its own additional temporary lighting of sufficient lighting levels to properly install his work.

2.20 TEMPORARY HEAT

1. Each Contractor shall provide temporary heat as required for its operations. Once a building has reached the "Permanent Enclosure" stage, temporary heat will be provided as specified in Section 015123 - TEMPORARY HEAT AND VENTILATION.

2. Equipment and methods of temporary heating shall be satisfactory to the Construction Manager.

2.21 PROTECTION OF ADJACENT MATERIALS

1. Contractor shall protect adjacent materials and finishes from damage as a result of its work.

2.22 CLEAN UP

1. Contractor shall arrange for clean up and removal of debris resulting from its operations, and shall dispose of debris in accordance with the provisions of Paragraph 2.13 above. Clean up shall be on a continual basis to ensure that building, grounds and public properties are maintained free from accumulations of waste materials and trash.

NOT FOR BIDDING

2. The Contractor will limit use of and ensure that all materials, including waste, that are combustible or flammable will be removed from the building continually, as work progresses, and at a minimum at the end of each work day. All trash which is potentially edible or may attract rodents or insects will be disposed of in metal containers and removed by the end of the work day.

3. At completion of its Work, each Contractor shall remove waste materials, rubbish, tools, equipment, and clean up all exposed surfaces in preparation for final cleaning.

4. If, after notification in writing from the Construction Manager, the Contractor does not correct its deficiencies in housekeeping within twenty four (24) hours, the Construction Manager reserves the right to undertake the Work and to backcharge the Contractor.

5. Final clean up prior to Owner occupancy shall be arranged for by the Construction Manager.

2.23 DUST PROTECTION

1. Each Contractor shall erect and maintain dust proof protection whenever its operations will produce dust and dirt that might filter through the building into occupied or finished areas. Contractor shall be responsible for all cleaning required due to its failure to provide adequate dust protection.

2.24 PROTECTION OF EXISTING CONSTRUCTION

1. Each Contractor shall be responsible for all damage that it may cause to materials and equipment stored or installed by other Contractors.

2.25 OTHER

1. Each Contractor shall provide any other Temporary Facilities and services that it requires and which are not specifically identified above.

3. PERMITS

3.1 The Construction Manager will obtain the Building Permit. All other permits are to be obtained and paid for by the Contractor requiring them.

4. EXECUTION

NOT FOR BIDDING

4.1 GENERAL

1. Each Contractor shall install all temporary facilities in accordance with applicable codes.

2. Each Contractor shall maintain temporary facilities for which it is responsible throughout the construction period.

3. Each Contractor shall remove all temporary facilities for which it is responsible when they are no longer required or when the Construction Manager directs the removal of same.

4. Each Contractor shall repair all damage to the Project Site caused by the installation of its temporary facilities.

END OF SECTION

NOT FOR BIDDING

SECTION 016000 – PRODUCT REQUIREMENTS

1. GENERAL CONDITIONS

1.1 The general provisions of the Contract, including the Conditions of the Contract (General, Supplementary and other Conditions, if any) and Division 1 as appropriate apply to the Work specified in this Section.

1.2 Where work is to be executed under Separate Prime Contracts, the provisions of this Section apply to each Contract.

2. REQUIREMENTS INCLUDED

2.1 All materials and equipment incorporated into the Work shall:

1. be new;

2. conform to applicable specifications and standards; and

3. comply with size, make, type and quality specified, or as specifically approved in writing by the Architect.

2.2 Manufactured and Fabricated Products shall conform to the following requirements:

1. Designed, fabricated and assembled in accord with the best engineering and shop practices.

2. Manufactured like parts of duplicate units to standard sizes and gauges, to be interchangeable.

3. Two or more items of the same kind shall be identical, by the same manufacturer.

4. Products shall be suitable for service conditions.

5. Equipment capacities, sizes and dimensions shown or specified shall be adhered to unless variations are specifically approved in writing.

2.3 Contractor shall not use materials or equipment for any purpose other than that for which it is designated or is specified.

2.4 Materials removed form existing structures shall not be reused in the completed work unless specifically indicated or specified.

NOT FOR BIDDING

2.5 For materials and equipment specifically indicated or specified to be reused in the Work:

1. Contractor shall use special care on removal, handling storage and reinstallation, to assure proper function in the completed Work.

2. Arrange for transportation, storage and handling of products which require off-site storage, restoration or renovation. Pay all costs for such work.

3. MANUFACTURER'S INSTRUCTIONS

3.1 When Contract Documents require that installation of work shall comply with manufacturer's printed instructions, Contractor shall obtain and distribute copies of such instructions to parties involved in the installation, including two copies to Construction Manager.

1. Maintain one set of complete instructions at the job site during installation and until completion.

3.2 Contractor shall handle, install, connect, clean, condition and adjust products in strict accord with such instructions and in conformity with specified requirements.

1. Should job conditions or specified requirements conflict with manufacturer's instructions, Contractor shall consult with Construction Manager for further instructions.

2. Contractor shall perform work in accord with manufacturer's instructions. Contractor shall not omit any preparatory step or installation procedure unless specifically modified or exempted by Contract Documents.

4. TRANSPORTATION AND HANDLING

4.1 Contractor shall arrange deliveries of Products in accord with construction schedules, coordinate to avoid conflict with work and conditions at the site.

1. Deliver Products in undamaged condition, in manufacturer's original containers or packaging, with identifying labels intact and legible.

2. Contractor shall immediately on delivery, inspect shipments to assure compliance with requirements of Contract Documents and approved submittals, and that Products are properly protected and undamaged.

4.2 Contractor shall provide equipment and personnel to handle Products by methods to

NOT FOR BIDDING

prevent soiling or damage to Products or packaging.

5. STORAGE AND PROTECTION

5.1 Contractor shall store Products in accord with manufacturer's instructions, with seals and labels intact and legible.

1. Contractor shall store Products subject to damage by the elements in weathertight enclosures.

2. Contractor shall maintain temperature and humidity within the ranges required by manufacture's instructions.

5.2 Exterior Storage

1. Contractor shall store fabricated Products above the ground, on blocking or skids, to prevent soiling or staining. Cover Products which are subject to deterioration with impervious sheet coverings; provide adequate ventilation to avoid condensation.

2. Contractor shall store loose granular materials in a well-drained area on soiled surfaces to prevent mixing with foreign matter.

5.3 Contractor shall arrange storage in a manner to provide easy access for inspection. Contractor shall make periodic inspections of stored Products to assure that Products are maintained under specified conditions, and free from damage or deterioration.

5.4 Contractor shall store flammable materials so as to prevent contact with flames and fire. Conform with manufacturer's recommendations and local laws. Pay particular attention to storage of:

1. Roof insulation.

2. Roofing materials, including solvents.

3. Paint materials.

4. Cleaning and other solvents.

5. Fuels.

5.5 Protection after Installation:

NOT FOR BIDDING

1. Contractor shall provide substantial coverings as necessary to protect installed Products from damage from traffic and subsequent construction operations. Remove when no longer needed.

6. SUBSTITUTIONS AND PRODUCT OPTIONS

6.1 Product List.

1. Within 30 days after Contract Date, Contractor shall submit to Construction Manager a complete list of major products proposed to be used, with the name of the manufacturer and the installing Contractor.

6.2 Contractor's Options.

1. For Products specified only by reference standard, Contractor shall select any Product meeting that standard.

2. For Products specified by naming several Products or manufacturers, Contractor shall select any one of the Products or manufacturers named which complies with the specifications.

3. For Products specified by naming one or more Products or manufacturers and "or equal", Bidders must, during the bidding period, submit a request for substitutions for any Product or manufacturer not specifically named. See provisions in Paragraph 1.6.3.

4. For Products specified by naming only one Product and manufacturer, there is no option; and Contractor shall provide the precise Product specified.

6.3 Substitutions.

1. Until a date no later than seven (7) days before the date Bids are due, Architect will consider written requests from bidders for substitution of Products. **The contractor will submit any substitution requests to the Construction Manager for transmittal to the Architect. The** architect will review requests and will notify Bidders in an Addendum if the requested substitution is acceptable.

2. Should the Bidder desire a substitution, it shall submit a separate request for each Product, supported with complete data, with drawings and samples as appropriate, including:

1. Comparison of the qualities of the proposed substitution with that specified.

NOT FOR BIDDING

2. Changes required in other elements of the Work because of the substitution.

3. Effect on the construction schedule.

4. Cost data comparing the proposed substitution with the Product specified.

5. Any required license fees or royalties.

6. Availability of maintenance service, and source of replacement materials.

3. Architect, in its sole discretion, shall be the judge of the acceptability of the proposed substitution.

4. A request for a substitution constitutes a representation that Bidder:

1. has investigated the proposed Product and determined that it is equal to or superior in all respects to that specified;

2. will provide the same warranties or bonds for the substitution as for the Product specified;

3. will coordinate the installation of an accepted substitution into the Work, and make such other changes as may be required to make the Work complete in all respects; and

4. waives all claims for additional costs, under his responsibility, which may subsequently become apparent.

6.4 Architect will review requests for substitutions with reasonable promptness, and notify Bidders, in writing, through the Construction Manager, of the decision to accept or reject the requested substitution. Any decision to accept a substitution must be confirmed in an Addendum issued during the bidding period in order to be valid. Oral approvals will not be binding.

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 017000 – EXECUTION & CLOSEOUT REQUIREMENTS

1. GENERAL

1.1 Definition: "Cutting and Patching" includes cutting into existing construction to provide for the installation or performance of other work and subsequent fitting and patching required to restore surfaces to their original condition.

1.2 Refer to Other Sections of these specifications for specific cutting and patching requirements and limitations applicable to individual units of work.

1.3 Structural Work: Do not cut and patch structural work in a manner resulting in a reduction of load carrying capacity or load deflection ratio. Submit proposal and request and obtain Architect's/Engineer's approval before proceeding with cut and patch of structural work.

1.4 Operational/Safety Limitations: Do not cut and patch operational elements and safety components in a manner resulting in decreased performance, shortened useful life, or increased maintenance. Submit proposals and requests and obtain Architect's/Engineer's approval before proceeding with cut and patches of structural work.

1.5 Visual/Quality Limitations: Do not cut and patch work exposed to view (exterior and interior) in manner resulting in noticeable reduction of aesthetic qualities and similar qualities, as judged by Architect/Engineer.

1. Engage the original Installer/Fabricator, or (if not available) an acceptable equivalent entity, to cut and patch the following categories of exposed work but not limited to
2. Exterior wall materials, ie., curtain wall
3. Finish floor materials, ie., substrate, carpet, ceramic tile
4. Walls
5. Ceilings

1.6 Limitation on Approvals: Architect's/Engineer's approval to proceed with cutting and patching does not waive right to later acquire removal/replacement of work found to be cut and patched in an unsatisfactory manner, as judged by Architect/Engineer.

2. MATERIALS

2.1 General: Use materials for cutting and patching that are identical to existing materials. If identical materials are not available, or cannot be used, use materials that

NOT FOR BIDDING

match existing adjacent surfaces to the fullest extent possible with regard to visual effect. Use materials for cutting and patching that will result in equal or better performance characteristics.

3. EXECUTION

3.1 Inspection: Before cutting, examine surfaces to be cut and patched and conditions under which the work is to be performed. If unsafe or otherwise unsatisfactory conditions are encountered, take corrective action before proceeding with the work.

3.2 Temporary Support: To prevent failure provide temporary support of work to be cut.

3.3 Protection: Protect other work during cutting and patching to prevent damage. Provide protection from adverse weather conditions for that part of the project that may be exposed during cutting and patching operations.

1. Avoid interference with use of adjoining areas or interruption of free passage to adjoining areas.

2. Take precautions not to cut existing pipe, conduit or duct serving the building but scheduled to be relocated until provisions have been made to bypass them.

3.4 Cutting: Cut the work using methods that are least likely to damage work to be retained or adjoining work. Where possible review proposed procedures with the original installer; comply with original installer's recommendations.

1. Where cutting is required use hand or small power tools designed for sawing or grinding, not hammering and chopping. Cut through concrete and masonry using a cutting machine such as a carborundum saw or core drill. Cut holes and slots neatly to size required with minimum disturbance of adjacent work. To avoid marring existing finished surfaces, cut and drill from the exposed or finished side into concealed surfaces. Temporarily cover openings when not in use.

3.5 Patching: Patch with seams which are durable and as invisible as possible. Comply with specified tolerances for the work.

1. Restore exposed finishes of patched areas and where necessary extend finish restoration into retained adjoining work in a manner which will eliminate evidence of patching and finishing.

END OF SECTION

NOT FOR BIDDING

SECTION 017700 – CONTRACT CLOSEOUT

1. DESCRIPTION OF REQUIREMENTS

1.1 Provisions of this section apply to the procedural requirements for the actual close out of the Work, not to the administrative matters such as final payment or the change over of insurance. Close out requirements relate to both substantial and final completion of the Work; they also apply to individual portions of completed work as well as the Total work. Specific requirements contained in other sections have precedence over the general requirements contained in this section.

2. PROCEDURES AT SUBSTANTIAL COMPLETION

2.1 Prerequisites: Contractor shall comply with the General Conditions and complete the following before requesting inspection of the Work, or a designated portion of the Work, for certification of substantial completion:

1. submit executed warranties, workmanship bonds, maintenance agreements, inspection certificates, releases of liens, tax certification and similar required documentation for specific units of work, and documents needed to enable Owner's unrestricted occupancy and use;

2. submit record documentation, maintenance manuals, tools, spare parts, keys and similar operational items;

3. complete instructions of Owner's operating personnel, and start up of systems; and

4. complete final cleaning and remove temporary facilities and tools.

2.2 Inspection Procedures: Upon receipt of Contractor's request, Architect/Engineer will either proceed with inspection or advise Construction Manger of prerequisites not fulfilled. Following initial inspection, Architect/Engineer will either prepare certificate of substantial completion, or advise Construction Manager of work which must be performed prior to issuance of certificate. The Architect/Engineer will repeat the inspection when requested and assure that the work has been substantially completed. Results of the completed inspection will form the initial "punch list" for final acceptance.

2.3 Punch List Procedures: Each Contractor shall be given a copy of the punch list with its appropriate work identified. Each Contractor shall be given 9 (nine) calendar work days to complete their punch list work. On the 10th day or as determined by the Construction Manager the Construction Manager shall employ other Contractors, as

NOT FOR BIDDING

required, to complete any incomplete punch list work and retain from the appropriate Contractors retainage all costs incurred.

3. PROCEDURES AT FINAL ACCEPTANCE

3.1 Reinspection Procedure: The Architect/Engineer will reinspect the Work upon receipt of the Contractor's notice that, except for those items whose completion has been delayed due to circumstances that are acceptable to the Architect/Engineer, the Work has been completed, including punch list items from earlier inspections. Upon completion of reinspection, the Architect/Engineer will either recommend final acceptance and final payment, or will advise the Contractor of work not completed or obligations not fulfilled as required for final acceptance. If necessary, this procedure will be repeated.

4. CLOSEOUT DOCUMENTATION

4.1 Record Drawings: Contractor shall maintain a complete set of either blue or black line prints of the contract documents and shop drawings for record mark up purposes throughout the Contract Time. Contractor shall mark up these drawings during the course of the Work to show both changes and the actual installation, in sufficient detail to form a complete record for Owner's purposes giving particular attention to work that will be concealed and difficult to measure and record at a later date, and Work which may require servicing or replacement during the life of the project. Require the entities marking prints to sign and date each mark up. Bind prints into manageable sets, with durable paper cover, appropriately labeled.

4.2 Installation, Operation and Maintenance Manual: Contractor shall provide 3-ring vinyl covered binders containing required maintenance manuals, properly identified and indexed and including operating and maintenance instructions extended to cover emergencies, spare parts, warranties, inspection procedures, diagrams, safety, security, and similar appropriate data for each system of equipment item.

4.3 State Tax Certification: Contractor shall provide recent Delaware State Tax Certification form as issued by State of Delaware, Department of Finance, Division of Revenue, Carvel State Office Building, 820 N. French Street, Wilmington, Delaware 19801.

4.4 AIA Documents: Contractors shall provide the following AIA documents with their final payment application submission:

- AIA G732, Application for Payment for 100% Complete
- AIA G732, Final Application for Payment for Retainage
- AIA G704-CMA, Certificate of Substantial Completion – 4 originals

NOT FOR BIDDING

- AIA G706, Affidavit of Payment of Debts & Claims
- AIA G706A, Affidavit of Release of Liens
- AIA G707, Consent of Surety

4.5 Release of Liens: Contractors shall provide the following release of liens with their final payment application submission:

- Prime Contractor's Release of Liens
- Subcontractors' & Suppliers' Release of Liens (major subs and suppliers)

5. GENERAL CLOSE OUT REQUIREMENTS

5.1 Operator Instruction: Contractor shall require each Installer of systems requiring continued operation and maintenance by Owner's operating personnel, to provide on location instruction to Owner's personnel, sufficient to ensure safe, secure, efficient, non-failing utilization and operation of systems. Contractor shall provide instructions for the following categories of work:

1. Mechanical/electrical/electronic systems (not limited to work of Division 15 and 16).
2. Roofing, flashing, joint sealers.
3. Floor Finishes
4. Door Hardware

6. FINAL CLEANING

6.1 At the time of project close out Contractor shall clean or reclean the Work to the condition expected from a normal, commercial building cleaning and maintenance program. Complete the following cleaning operations before requesting the Architect/Engineer's inspection for certification of substantial completion:

1. Remove non-permanent protections and labels.
2. Polish glass.
3. Clean exposed finishes.
4. Touch up minor finish damage.
5. Clean or replace mechanical systems filters.
6. Remove debris.
7. Broom clean unoccupied spaces.
8. Sanitize plumbing and food service facilities.
9. Clean light fixtures and replace burned out lamps.
10. Sweep and wash paved areas.
11. Police yards and grounds.

NOT FOR BIDDING

END OF SECTION

NOT FOR BIDDING

SECTION 02 41 00
DEMOLITION

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Selective demolition of building elements.

B. Selective demolition of building elements for alteration purposes.

PART 2 PRODUCTS -- NOT USED

PART 3 EXECUTION

3.01 SCOPE

A. Remove and dispose of building elements identifed on the drawings and/or those required to facilitate new work.

3.02 GENERAL PROCEDURES AND PROJECT CONDITIONS

A. Comply with applicable codes and regulations for demolition operations and safety of adjacent structures and the public.
   1. Provide, erect, and maintain temporary barriers and security devices.
   2. Conduct operations to minimize effects on and interference with adjacent structures and occupants.
   3. Do not close or obstruct roadways or sidewalks without permit.
   4. Conduct operations to minimize obstruction of public and private entrances and exits; do not obstruct required exits at any time; protect persons using entrances and exits from removal operations.
   5. Obtain written permission from owners of adjacent properties when demolition equipment will traverse, infringe upon or limit access to their property.

B. Do not begin removal until receipt of notification to proceed from Owner.

C. Protect existing structures and other elements that are not to be removed.
   1. Provide bracing and shoring.

D. Minimize production of dust due to demolition operations; do not use water if that will result in ice, flooding, sedimentation of public waterways or storm sewers, or other pollution.

E. If hazardous materials are discovered during removal operations, stop work and notify Architect and Owner; hazardous materials include regulated asbestos containing materials, lead, PCB's, and mercury.

3.03 SELECTIVE DEMOLITION FOR ALTERATIONS

A. Drawings showing existing construction are based on casual field observation and existing record documents only.
   1. Verify that construction arrangements are as shown.
   2. Report discrepancies to Architect before disturbing existing installation.
   3. Beginning of demolition work constitutes acceptance of existing conditions that would be apparent upon examination prior to starting demolition.

B. Maintain weatherproof exterior building enclosure; take care to prevent water and humidity damage.

C. Remove existing work as indicated and as required to accomplish new work.
   1. Remove items indicated on drawings.

D. Services (Including, but not limited to, HVAC, Plumbing, Fire Protection, Electrical, and Telecommunications): Remove existing systems and equipment as required to facilitate new work.

NOT FOR BIDDING

1. Maintain existing active systems that are to remain in operation; maintain access to equipment and operational components.
2. Where existing active systems serve occupied facilities but are to be replaced with new services, maintain existing systems in service until new systems are complete and ready for service.

E. Protect existing work to remain.
1. Prevent movement of structure; provide shoring and bracing if necessary.
2. Perform cutting to accomplish removals neatly and as specified for cutting new work.
3. Repair adjacent construction and finishes damaged during removal work.
4. Patch as specified for patching new work.

3.04 DEBRIS AND WASTE REMOVAL

A. Remove debris, junk, and trash from site.

B. Leave site in clean condition, ready for subsequent work.

C. Clean up spillage and wind-blown debris from public and private lands.

END OF SECTION

NOT FOR BIDDING

SECTION 03 30 00
CAST-IN-PLACE CONCRETE

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Floors and slabs on grade.

B. Concrete foundation walls and footings.

C. Joint devices associated with concrete work.

D. Concrete curing.

1.02 RELATED REQUIREMENTS

A. Section 03 10 00 - Concrete Forming and Accessories: Forms and accessories for formwork.

B. Section 03 20 00 - Concrete Reinforcing.

C. See Structural Drawings for additional Project Specifications. If Conflicting Project Specifications arise, the Project Specifications on the Structural Drawings govern.

1.03 REFERENCE STANDARDS

A. ACI 117 - Standard Specifications for Tolerances for Concrete Construction and Materials; American Concrete Institute International.

B. ACI 211.1 - Standard Practice for Selecting Proportions for Normal, Heavyweight, and Mass Concrete; American Concrete Institute International.

C. ACI 211.2 - Standard Practice for Selecting Proportions for Structural Lightweight Concrete; American Concrete Institute International.

D. ACI 301 - Specifications for Structural Concrete; American Concrete Institute International.

E. ACI 302.1R - Guide for Concrete Floor and Slab Construction; American Concrete Institute International.

F. ACI 304R - Guide for Measuring, Mixing, Transporting, and Placing Concrete; American Concrete Institute International.

G. ACI 305R - Hot Weather Concreting; American Concrete Institute International.

H. ACI 308R - Guide to Curing Concrete; American Concrete Institute International.

I. ACI 318 - Building Code Requirements for Structural Concrete and Commentary; American Concrete Institute International.

J. ACI 347 - Guide to Formwork for Concrete; American Concrete Institute International.

K. ASTM C33/C33M - Standard Specification for Concrete Aggregates.

L. ASTM C39/C39M - Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens.

M. ASTM C94/C94M - Standard Specification for Ready-Mixed Concrete.

N. ASTM C143/C143M - Standard Test Method for Slump of Hydraulic-Cement Concrete.

O. ASTM C150/C150M - Standard Specification for Portland Cement.

P. ASTM C173/C173M - Standard Test Method for Air Content of Freshly Mixed Concrete by the Volumetric Method.

Q. ASTM C260/C260M - Standard Specification for Air-Entraining Admixtures for Concrete.

R. ASTM C309 - Standard Specification for Liquid Membrane-Forming Compounds for Curing Concrete.

NOT FOR BIDDING

S. ASTM C330/C330M - Standard Specification for Lightweight Aggregates for Structural Concrete.

T. ASTM C494/C494M - Standard Specification for Chemical Admixtures for Concrete.

U. ASTM C881/C881M - Standard Specification for Epoxy-Resin-Base Bonding Systems for Concrete.

V. ASTM C1059/C1059M - Standard Specification for Latex Agents for Bonding Fresh to Hardened Concrete.

W. ASTM C1116/C1116M - Standard Specification for Fiber-Reinforced Concrete.

X. ASTM C1315 - Standard Specification for Liquid Membrane-Forming Compounds Having Special Properties for Curing and Sealing Concrete.

Y. ASTM D994/D994M - Standard Specification for Preformed Expansion Joint Filler for Concrete (Bituminous Type).

Z. ASTM D1751 - Standard Specification for Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Nonextruding and Resilient Bituminous Types).

AA. ASTM E1155 - Standard Test Method for Determining F(F) Floor Flatness and F(L) Floor Levelness Numbers.

AB. ASTM E1745 - Standard Specification for Plastic Water Vapor Retarders Used in Contact with Soil or Granular Fill under Concrete Slabs.

AC. COE CRD-C 513 - COE Specifications for Rubber Waterstops; Corps of Engineers.

1.04 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

B. Product Data: Submit manufacturers' data on manufactured products showing compliance with specified requirements and installation instructions.

C. Mix Design: Submit proposed concrete mix design.

D. Samples: Submit samples of underslab vapor retarder to be used.

E. Manufacturer's Installation Instructions: For concrete accessories, indicate installation procedures and interface required with adjacent construction.

F. Project Record Documents: Accurately record actual locations of embedded utilities and components that will be concealed from view upon completion of concrete work.

G. Warranty: Submit manufacturer warranty and ensure forms have been completed in Owner's name and registered with manufacturer.

1.05 QUALITY ASSURANCE

A. Perform work of this section in accordance with ACI 301 and ACI 318.

B. Follow recommendations of ACI 305R when concreting during hot weather.

C. For slabs required to include moisture vapor reduction admixture (MVRA), do not proceed with placement unless manufacturer's representative is present for every day of placement.

1.06 WARRANTY

A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.

B. Slabs with Moisture Vapor Reducing Admixture (MVRA): Provide warranty to cover the cost of flooring failures due to moisture migration from slabs for ten years.
   1. Include cost of repair or removal of failed flooring, placement of topical moisture remediation system, and replacement of flooring with comparable flooring system.

C. Moisture Emission Reducing Curing and Sealing Compound: Provide warranty to cost of flooring delamination failures for 10 years.

NOT FOR BIDDING

1. Include cost of repair or removal of failed flooring, remediation with a moisture vapor impermeable surface coating, and replacement of flooring with comparable flooring system.

PART 2 PRODUCTS

2.01 FORMWORK

A. Comply with requirements of Section 03 10 00.

2.02 REINFORCEMENT

A. Comply with requirements of Section 03 20 00.

2.03 CONCRETE MATERIALS

A. Cement: ASTM C150, Type I - Normal Portland type.
   1. Acquire all cement for entire project from same source.

B. Fine and Coarse Aggregates: ASTM C 33.
   1. Acquire all aggregates for entire project from same source.

C. Lightweight Aggregate: ASTM C330/C330M.

D. Water: Clean and not detrimental to concrete.

E. Fiber Reinforcement: Alkali-resistant polypropylene complying with ASTM C1116/C1116M.
   1. Fiber Length: 0.25 inch, nominal.

2.04 ADMIXTURES

A. Do not use chemicals that will result in soluble chloride ions in excess of 0.1 percent by weight of cement.

B. Air Entrainment Admixture: ASTM C260/C260M.

C. High Range Water Reducing and Retarding Admixture: ASTM C494/C494M Type G.

D. Fiber Reinforcing Admixture:

E. Moisture Vapor Reduction Admixture (MVRA): Liquid, inorganic admixture free of volatile organic compounds (VOCs) and formulated to close capillary systems formed during curing to reduce moisture vapor emission and transmission, with no adverse effect on concrete properties.
   1. Provide admixture in all slabs to receive adhesively applied flooring .

2.05 ACCESSORY MATERIALS

A. Underslab Vapor Retarder: Multi-layer, fabric-, cord-, grid-, or aluminum-reinforced polyethylene or equivalent, complying with ASTM E1745, Class A; stated by manufacturer as suitable for installation in contact with soil or granular fill under concrete slabs. The use of single ply polyethylene is prohibited.
   1. Accessory Products: Vapor retarder manufacturer's recommended tape, adhesive, mastic, prefabricated boots, etc., for sealing seams and penetrations in vapor retarder.
   2. Products:
      a. Stego Industries, LLC; Stego Wrap Vapor Barrier 15-mil (Class A): www.stegoindustries.com.

2.06 BONDING AND JOINTING PRODUCTS

A. Latex Bonding Agent: Non-redispersable acrylic latex, complying with ASTM C1059/C1059M, Type II.

B. Epoxy Bonding System:

C. Waterstops: Rubber, complying with COE CRD-C 513.

NOT FOR BIDDING

D. Reglets: Formed steel sheet, galvanized, with temporary filler to prevent concrete intrusion during placement.

E. Slab Isolation Joint Filler: 1/2 inch thick, height equal to slab thickness, with removable top section that will form 1/2 inch deep sealant pocket after removal.
   1. Material: ASTM D1751, cellulose fiber.

F. Slab Contraction Joint Device: Preformed linear strip intended for pressing into wet concrete to provide straight route for shrinkage cracking.

G. Slab Construction Joint Devices: Combination keyed joint form and screed, galvanized steel, with minimum 1 inch diameter holes for conduit or rebars to pass through at 6 inches on center; ribbed steel stakes for setting.

2.07 CURING MATERIALS

A. Evaporation Reducer: Liquid thin-film-forming compound that reduces rapid moisture loss caused by high temperature, low humidity, and high winds; intended for application immediately after concrete placement.

B. Curing Compound, Naturally Dissipating: Clear, water-based, liquid membrane-forming compound; complying with ASTM C309.

C. Curing and Anti-Spalling Compound: Boiled linseed oil compound.

D. Resin Curing Compound: Solvent-based liquid, white pigmented, membrane-forming.
   1. For use on exterior slabs. When slab will be painted, sealed, topped, or receive other applied finish, completely remove curing compound after curing is complete and before finish coatings are applied.

E. Curing and Sealing Compound, Moisture Emission Reducing: Liquid, membrane-forming, clear sealer, for application to newly placed concrete; capable of providing adequate bond for flooring adhesives, initially and over the long term; with sufficient moisture vapor impermeability to prevent deterioration of flooring adhesives due to moisture emission.
   1. Use this product to cure and seal all slabs to receive adhesively applied flooring or roofing.
   2. Comply with ASTM C309 and ASTM C1315 Type I Class A.
   3. VOC Content: Less than 100 g/L.
   4. Solids Content: 25 percent, minimum.

F. Curing and Sealing Compound: Liquid, membrane-forming, clear, non-yellowing acrylic; complying with ASTM C309.

2.08 CONCRETE MIX DESIGN

A. Proportioning Structural Lightweight Concrete: Comply with ACI 211.2 recommendations.

B. Concrete Strength: Establish required average strength for each type of concrete on the basis of field experience or trial mixtures, as specified in ACI 301.
   1. For trial mixtures method, employ independent testing agency acceptable to Architect for preparing and reporting proposed mix designs.

C. Admixtures: Add acceptable admixtures as recommended in ACI 211.1 and at rates recommended or required by manufacturer.

D. Fiber Reinforcement: Add to mix at rate of 1.5 pounds per cubic yard, or as recommended by manufacturer for specific project conditions.

E. Structural Lightweight Concrete:
   1. Compressive Strength, when tested in accordance with ASTM C39/C39M at 28 days: 3,000 pounds per square inch.
   2. Water-Cement Ratio: Maximum 40 percent by weight.
   3. Total Air Content: 3 percent, determined in accordance with ASTM C173/C173M.
   4. Maximum Slump: 3 inches.

NOT FOR BIDDING

5. Maximum Aggregate Size: 5/8 inch.
6. Maximum dry unit weight: 115 lb per cubic foot.

2.09 MIXING

A. Transit Mixers: Comply with ASTM C94/C94M.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify lines, levels, and dimensions before proceeding with work of this section.

3.02 PREPARATION

A. Where new concrete is to be bonded to previously placed concrete, prepare existing surface by cleaning with steel brush and applying bonding agent in accordance with manufacturer's instructions.
   1. Use epoxy bonding system for bonding to damp surfaces, for structural load-bearing applications, and where curing under humid conditions is required.
   2. Use latex bonding agent only for non-load-bearing applications.

B. Where new concrete with integral waterproofing is to be bonded to previously placed concrete, prepare surfaces to be treated in accordance with waterproofing manufacturer's instructions. Saturate cold joint surface with clean water, and remove excess water before application of coat of waterproofing admixture slurry. Apply slurry coat uniformly with semi-stiff bristle brush at rate recommended by waterproofing manufacturer.

C. In locations where new concrete is doweled to existing work, drill holes in existing concrete, insert steel dowels and pack solid with non-shrink grout.

D. Interior Slabs on Grade: Install vapor retarder under interior slabs on grade. Lap joints minimum 6 inches. Seal joints, seams and penetrations watertight with manufacturer's recommended products and follow manufacturer's written instructions. Repair damaged vapor retarder before covering.
   1. Vapor Retarder Over Granular Fill: Install compactible granular fill before placing vapor retarder as shown on the drawings. Do not use sand.

3.03 PLACING CONCRETE

A. Place concrete in accordance with ACI 304R.

B. Place concrete for floor slabs in accordance with ACI 302.1R.

C. Ensure reinforcement, inserts, waterstops, embedded parts, and formed construction joint devices will not be disturbed during concrete placement.

D. Place concrete continuously without construction (cold) joints wherever possible; where construction joints are necessary, before next placement prepare joint surface by removing laitance and exposing the sand and sound surface mortar, by sandblasting or high-pressure water jetting.

E. Finish floors level and flat, unless otherwise indicated, within the tolerances specified below.

3.04 SLAB JOINTING

A. Locate joints as indicated on the drawings.

B. Anchor joint fillers and devices to prevent movement during concrete placement.

C. Isolation Joints: Use preformed joint filler with removable top section for joint sealant, total height equal to thickness of slab, set flush with top of slab.
   1. Install wherever necessary to separate slab from other building members, including columns, walls, equipment foundations, footings, stairs, manholes, sumps, and drains.

NOT FOR BIDDING

D. Load Transfer Construction and Contraction Joints: Install load transfer devices as indicated; saw cut joint at surface as indicated for contraction joints.

E. Saw Cut Contraction Joints: Saw cut joints before concrete begins to cool, within 4 to 12 hours after placing; use 3/16 inch thick blade and cut at least 1 inch deep but not less than one quarter (1/4) the depth of the slab.

F. Contraction Joint Devices: Use preformed joint device, with top set flush with top of slab.

G. Construction Joints: Where not otherwise indicated, use metal combination screed and key form, with removable top section for joint sealant.

3.05 FLOOR FLATNESS AND LEVELNESS TOLERANCES

A. Maximum Variation of Surface Flatness:
   1. Exposed Concrete Floors: 1/4 inch in 10 ft.
   2. Under Seamless Resilient Flooring: 1/4 inch in 10 ft.
   3. Under Carpeting: 1/4 inch in 10 ft.

B. Correct the slab surface if tolerances are less than specified.

C. Correct defects by grinding or by removal and replacement of the defective work. Areas requiring corrective work will be identified. Re-measure corrected areas by the same process.

3.06 CONCRETE FINISHING

A. Concrete Slabs: Finish to requirements of ACI 302.1R, and as follows:
   1. Other Surfaces to Be Left Exposed: "Steel trowel" as described in ACI 302.1R, minimizing burnish marks and other appearance defects.

3.07 CURING AND PROTECTION

A. Comply with requirements of ACI 308R. Immediately after placement, protect concrete from premature drying, excessively hot or cold temperatures, and mechanical injury.

B. Maintain concrete with minimal moisture loss at relatively constant temperature for period necessary for hydration of cement and hardening of concrete.

C. Surfaces Not in Contact with Forms:
   1. Initial Curing: Start as soon as free water has disappeared and before surface is dry. Keep continuously moist for not less than three days by water ponding, water-saturated sand, water-fog spray, or saturated burlap.
   2. Final Curing: Begin after initial curing but before surface is dry.

3.08 FIELD QUALITY CONTROL

A. Provide free access to concrete operations at project site and cooperate with appointed firm.

B. Submit proposed mix design of each class of concrete to inspection and testing firm for review prior to commencement of concrete operations.

C. Tests of concrete and concrete materials may be performed at any time to ensure conformance with specified requirements.

D. Compressive Strength Tests: ASTM C39/C39M. For each test, mold and cure three concrete test cylinders. Obtain test samples for every 100 cu yd or less of each class of concrete placed.

E. Perform one slump test for each set of test cylinders taken, following procedures of ASTM C143/C143M.

F. Slab Testing: Cooperate with manufacturer of specified moisture vapor reduction admixture (MVRA) to allow access for sampling and testing concrete for compliance with warranty requirements.

NOT FOR BIDDING

3.09 DEFECTIVE CONCRETE

A. Test Results: The testing agency shall report test results in writing to Architect and Contractor within 24 hours of test.

B. Defective Concrete: Concrete not conforming to required lines, details, dimensions, tolerances or specified requirements.

C. Repair or replacement of defective concrete will be determined by the Architect. The cost of additional testing shall be borne by Contractor when defective concrete is identified.

D. Do not patch, fill, touch-up, repair, or replace exposed concrete except upon express direction of Architect for each individual area.

3.10 PROTECTION

A. Do not permit traffic over unprotected concrete floor surface until fully cured.

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 04 05 11
MASONRY MORTARING AND GROUTING

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Mortar for unit masonry.

B. Grout for masonry.

C. Mortar for cast stone masonry.

1.02 RELATED REQUIREMENTS

A. Section 04 20 00 - Unit Masonry: Installation of mortar and grout.

B. Section 04 72 00 - Cast Stone Masonry

C. See Structural Drawings for additional Project Specifications. If Conflicting Project Specifications arise, the Project Specifications on the Structural Drawings govern.

1.03 REFERENCE STANDARDS

A. ACI 530/530.1/ERTA - Building Code Requirements and Specification for Masonry Structures and Related Commentaries; American Concrete Institute International.

B. ACI 530.1/ASCE 6/TMS 602 - Specification for Masonry Structures; American Concrete Institute International.

C. ASTM C5 - Standard Specification for Quicklime for Structural Purposes.

D. ASTM C94/C94M - Standard Specification for Ready-Mixed Concrete.

E. ASTM C144 - Standard Specification for Aggregate for Masonry Mortar.

F. ASTM C150/C150M - Standard Specification for Portland Cement.

G. ASTM C207 - Standard Specification for Hydrated Lime for Masonry Purposes.

H. ASTM C270 - Standard Specification for Mortar for Unit Masonry.

I. ASTM C404 - Standard Specification for Aggregates for Masonry Grout.

J. ASTM C476 - Standard Specification for Grout for Masonry.

K. ASTM C780 - Standard Test Method for Preconstruction and Construction Evaluation of Mortars for Plain and Reinforced Unit Masonry.

L. ASTM C1019 - Standard Test Method for Sampling and Testing Grout.

M. ASTM C1072 - Standard Test Method for Measurement of Masonry Flexural Bond Strength.

N. ASTM C1314 - Standard Test Method for Compressive Strength of Masonry Prisms.

O. ASTM E518 - Standard Test Methods for Flexural Bond Strength of Masonry.

P. IMIAWC (CW) - Recommended Practices & Guide Specifications for Cold Weather Masonry Construction; International Masonry Industry All-Weather Council; 1993.

Q. IMIAWC (HW) - Recommended Practices & Guide Specifications for Hot Weather Masonry Construction; International Masonry Industry All-Weather Council; current edition.

1.04 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

B. Product Data: Include design mix based on the Proportion specification of ASTM C 270 is to be used.

C. Manufacturer's Certificate: Certify that products meet or exceed specified requirements.

NOT FOR BIDDING

1.05 QUALITY ASSURANCE

A. Comply with provisions of ACI 530/530.1/ERTA, except where exceeded by requirements of the contract documents.

1.06 DELIVERY, STORAGE, AND HANDLING

A. Maintain packaged materials clean, dry, and protected against dampness, freezing, and foreign matter.

1.07 FIELD CONDITIONS

A. Maintain materials and surrounding air temperature to minimum 40 degrees F prior to, during, and 48 hours after completion of masonry work.

B. Maintain materials and surrounding air temperature to maximum 90 degrees F prior to, during, and 48 hours after completion of masonry work.

PART 2 PRODUCTS

2.01 MORTAR AND GROUT APPLICATIONS

A. At Contractor's option, mortar and grout may be field-mixed from packaged dry materials, made from factory premixed dry materials with addition of water only, or ready-mixed.

B. Mortar Mix Designs: ASTM C270, Property Specification.

2.02 MATERIALS

A. Packaged Dry Material for Mortar for Unit Masonry: Premixed Portland cement, hydrated lime, and sand; complying with ASTM C387/C387M and capable of producing mortar of the specified strength in accordance with ASTM C270 with the addition of water only.
   1. Color: Mineral pigments added as required to produce approved color sample.
   2. Products:
      a. Amerimix, an Oldcastle brand; AMX 400: www.amerimix.com.
      b. Substitutions: See Section 01 60 00 - Product Requirements.

B. Masonry Cement: ASTM C91.
   1. Type: Type N.
   2. Colored Mortar: Premixed cement as required to match Architect's color sample.
   3. Manufacturers:
      a. Solomon Colors; Solomon Colors Concentrated A, H, and X Series: www.solomoncolors.com.
      b. Substitutions: See Section 01 60 00 - Product Requirements.

C. Portland Cement: ASTM C 150, Type I - Normal; color as required to produce approved color sample. Color must match existing building mortar color.

D. Hydrated Lime: ASTM C207, Type S.

E. Quicklime: ASTM C5, non-hydraulic type.

F. Mortar Aggregate: ASTM C144.

G. Grout Aggregate: ASTM C404.

H. Pigments for Colored Mortar: Pure, concentrated mineral pigments specifically intended for mixing into mortar and complying with ASTM C979/C979M.
   1. Color(s): As selected by Architect from manufacturer's full range, to match existing mortar.
   2. Manufacturers:
      a. Davis Colors
      b. Lambert Corporation
      c. Solomon Colors

NOT FOR BIDDING

d. Substitutions: See Section 01 60 00 - Product Requirements.

I. Water: Clean and potable.

2.03 MORTAR MIXES

A. Mortar for Unit Masonry: ASTM C270, Property Specification.
   1. Exterior, non-loadbearing masonry: Type N.
   2. Interior, non-loadbearing masonry: Type N.

2.04 MORTAR MIXING

A. Thoroughly mix mortar ingredients using mechanical batch mixer, in accordance with ASTM C270 and in quantities needed for immediate use.

B. Maintain sand uniformly damp immediately before the mixing process.

C. Colored Mortar: Proportion selected pigments and other ingredients to match Architect's sample, without exceeding manufacturer's recommended pigment-to-cement ratio; mix in accordance with manufacturer's instructions, uniform in coloration.

D. Do not use anti-freeze compounds to lower the freezing point of mortar.

E. If water is lost by evaporation, re-temper only within two hours of mixing.

F. Use mortar within two hours after mixing at temperatures of 90 degrees F, or two-and-one-half hours at temperatures under 40 degrees F.

PART 3 EXECUTION

3.01 PREPARATION

A. Apply bonding agent to existing Masonry surfaces.

B. Plug clean-out holes for grouted masonry with Brick or block masonry units. Brace masonry to resist wet grout pressure.

3.02 INSTALLATION

A. Install mortar and grout to requirements of section(s) in which masonry is specified.

B. Work grout into masonry cores and cavities to eliminate voids.

C. Do not install grout in lifts greater than 16 inches without consolidating grout by rodding.

D. Do not displace reinforcement while placing grout.

E. Remove excess mortar from grout spaces.

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 04 20 00
UNIT MASONRY

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Concrete Block.

B. Clay Facing Brick.

C. Accessories.

1.02 RELATED REQUIREMENTS

A. Section 04 05 11 - Masonry Mortaring and Grouting.

B. Section 07 90 05 - Joint Sealers: Backing rod and sealant at control and expansion joints.

1.03 REFERENCE STANDARDS

A. ACI 530/530.1/ERTA - Building Code Requirements and Specification for Masonry Structures and Related Commentaries; American Concrete Institute International.

B. ACI 530.1/ASCE 6/TMS 602 - Specification For Masonry Structures; American Concrete Institute International.

C. ASTM A82/A82M - Standard Specification for Steel Wire, Plain, for Concrete Reinforcement.

D. ASTM A153/A153M - Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware.

E. ASTM A580/A580M - Standard Specification for Stainless Steel Wire.

F. ASTM A615/A615M - Standard Specification for Deformed and Plain Billet-Steel Bars for Concrete Reinforcement.

G. ASTM A641/A641M - Standard Specification for Zinc-Coated (Galvanized) Carbon Steel Wire.

H. ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.

I. ASTM A666 - Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar.

J. ASTM B370 - Standard Specification for Copper Sheet and Strip for Building Construction.

K. ASTM C62 - Standard Specification for Building Brick (Solid Masonry Units Made From Clay or Shale).

L. ASTM C67 - Standard Test Methods for Sampling and Testing Brick and Structural Clay Tile.

M. ASTM C90 - Standard Specification for Loadbearing Concrete Masonry Units.

N. ASTM C129 - Standard Specification for Nonloadbearing Concrete Masonry Units.

O. ASTM C140 - Standard Test Methods of Sampling and Testing Concrete Masonry Units and Related Units.

P. ASTM C144 - Standard Specification for Aggregate for Masonry Mortar.

Q. ASTM C150/C150M - Standard Specification for Portland Cement.

R. ASTM C207 - Standard Specification for Hydrated Lime for Masonry Purposes.

S. ASTM C216 - Standard Specification for Facing Brick (Solid Masonry Units Made From Clay or Shale).

T. ASTM C270 - Standard Specification for Mortar for Unit Masonry.

U. ASTM C404 - Standard Specification for Aggregates for Masonry Grout.

V. ASTM C476 - Standard Specification for Grout for Masonry.

NOT FOR BIDDING

W. ASTM C652 - Standard Specification for Hollow Brick (Hollow Masonry Units Made From Clay or Shale).

X. ASTM C744 - Standard Specification for Prefaced Concrete and Calcium Silicate Masonry Units.

Y. ASTM C780 - Standard Test Method for Preconstruction and Construction Evaluation of Mortars for Plain and Reinforced Unit Masonry.

Z. IMIAWC (CW) - Recommended Practices & Guide Specifications for Cold Weather Masonry Construction; International Masonry Industry All-Weather Council; 1993.

AA. IMIAWC (HW) - Recommended Practices & Guide Specifications for Hot Weather Masonry Construction; International Masonry Industry All-Weather Council; current edition.

AB. UL (FRD) - Fire Resistance Directory; Underwriters Laboratories Inc..

1.04 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

B. Product Data: Provide data for masonry units, mortar, and masonry accessories.

C. Samples: Submit four samples of concrete block units to illustrate color, texture, and extremes of color range.

D. Manufacturer's Certificate: Certify that masonry units meet or exceed specified requirements.

1.05 QUALITY ASSURANCE

A. Comply with provisions of ACI 530/530.1/ERTA, except where exceeded by requirements of the contract documents.
   1. Maintain one copy of each document on project site.

1.06 DELIVERY, STORAGE, AND HANDLING

A. Deliver, handle, and store masonry units by means that will prevent mechanical damage and contamination by other materials.

1.07 ENVIRONMENTAL REQUIREMENTS

A. Maintain materials and surrounding air temperature to minimum 40 degrees F prior to, during, and 48 hours after completion of masonry work.

B. Maintain materials and surrounding air temperature to maximum 90 degrees F prior to, during, and 48 hours after completion of masonry work.

1.08 EXTRA MATERIALS

A. See Section 01 60 00 - Product Requirements, for additional provisions.

B. Provide 50 of each size, color, and type of brick units for Owner use in maintenance of project.

PART 2 PRODUCTS

2.01 CONCRETE MASONRY UNITS

A. Concrete Block: Comply with referenced standards and as follows:
   1. Size: Standard units with nominal face dimensions of 16 x 8 inches and nominal depths as indicated on the drawings for specific locations.
   2. Non-Loadbearing Units: ASTM C129.
      a. Both hollow and solid block, as indicated.
      b. Normal weight.
      c. Exposed corners to be bull nose. Note wall type where first course is square to accommodate cove base.

NOT FOR BIDDING

2.02 BRICK UNITS

A. Manufacturers:
   1. Belden Brick Company: www.boralbricks.com.
   2. Endicott Clay Products Co: www.endicott.com.
   3. General Shale Brick: www.generalshale.com.
   4. Glen Gery Brick . www.glengerybrick.com
   5. Substitutions: See section 01 60 00 - Product Requirements.

B. Facing Brick: ASTM C216, Type FBX, Grade SW.
   1. Type, color and texture: to match exisitng brick.
   2. Actual size: to match existing brick.
   3. Compressive strength: Min. 2,500 p.si.; 5 brick average = 3,000 p.s.i, measured in accordance with ASTM C 67.

2.03 MORTAR AND GROUT MATERIALS

A. Mortar and grout: As specified in Section 04 05 11.

2.04 REINFORCEMENT AND ANCHORAGE

A. Manufacturers of Joint Reinforcement and Anchors:
   1. Dur-O-Wal: www.dur-o-wal.com.
   2. Hohmann & Barnard, Inc: www.h-b.com.
   3. WIRE-BOND: www.wirebond.com.
   4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Single Wythe Joint Reinforcement: Truss or Ladder type; ASTM A 82/A 82M steel wire, hot dip galvanized after fabrication to ASTM A 153/A 153M, Class B-2; 0.1483 inch side rods with 0.1483 inch cross rods; width as required to provide not more than 1 inch and not less than 1/2 inch of mortar coverage on each exposure.

C. Strap Anchors: Bent steel shapes configured as required for specific situations, 2 in width, 0.1875 in thick, lengths as required to provide not more than 1 inch and not less than 1/2 inch of mortar coverage from masonry face, corrugated for embedment in masonry joint, hot dip galvanized to ASTM A 153/A 153M, Class B-2 or stainless steel.

D. Flexible Anchors: 2-piece anchors that permit differential movement between masonry and building frame, sized to provide not more than 1 inch and not less than 1/2 inch of mortar coverage from masonry face.
   1. Steel frame: Crimped wire anchors for welding to frame, 0.25 inch thick, with trapezoidal wire ties 0.1875 inch thick, hot dip galvanized to ASTM A 153/A 153M, Class B-2.

E. Two-Piece Wall Ties: Formed steel wire, 0.1875 inch thick, adjustable, eye and pintle type, hot dip galvanized to ASTM A 153/A 153M, Class B-2, sized to provide not more than 1 inch and not less than 1/2 inch of mortar coverage from masonry face and to allow vertical adjustment of up to 1-1/4 in.

2.05 ACCESSORIES

A. Preformed Control Joints: Rubber or neoprene material.
   1. Manufacturers:
      a. Dur-O-Wal: www.dur-o-wal.com.
      b. Hohmann & Barnard, Inc (including Dur-O-Wal brand); Product RS or VS: www.h-b.com.
      c. WIRE-BOND: www.wirebond.com.
      d. Substitutions: See Section 01 60 00 - Product Requirements.

B. Joint Filler: Closed cell polyethylene; polyurethane or rubber oversized 50 percent to joint width; self expanding; 1 inch wide design width x by maximum lengths available.

NOT FOR BIDDING

1. Manufacturers:
   a. Dur-O-Wal; Product Mortar Net: www.dur-o-wal.com.
   b. Hohmann & Barnard, Inc (including Dur -O-Wal brand); Product P.E. Foam Expansion unit fuller: www.h-b.com.
   c. Substitutions: See Section 01 60 00 - Product Requirements.

C. Cleaning Solution: Non-acidic, not harmful to masonry work or adjacent materials.

2.06 MORTAR AND GROUT MIXES

A. Mortar and Grout mixes as specified in Section 04 05 11.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that field conditions are acceptable and are ready to receive masonry.

B. Verify that related items provided under other sections are properly sized and located.

C. Verify that built-in items are in proper location, and ready for roughing into masonry work.

3.02 PREPARATION

A. Direct and coordinate placement of items supplied for installation under other sections.

B. Provide temporary bracing during installation of masonry work. Maintain in place until building structure provides permanent bracing.

3.03 PLACING AND BONDING

A. Lay solid masonry units in full bed of mortar, with full head joints, uniformly jointed with other work.

B. Lay hollow masonry units with face shell bedding on head and bed joints.

C. Buttering corners of joints or excessive furrowing of mortar joints is not permitted.

D. Remove excess mortar and mortar smears as work progresses.

E. Interlock intersections and external corners.

F. Do not shift or tap masonry units after mortar has achieved initial set. Where adjustment must be made, remove mortar and replace.

G. Set reglets as shown on plans.

H. Perform job site cutting of masonry units with proper tools to provide straight, clean, unchipped edges. Prevent broken masonry unit corners or edges.

I. Cut mortar joints flush where wall tile is scheduled, cement parging is required, or resilient base is scheduled. Block exposed cavity space with raiseable steel guard of correct width.

J. Isolate masonry partitions from vertical structural framing members with a control joint as indicated.

K. Isolate top joint of masonry partitions from horizontal structural framing members and slabs or decks with compressible joint filler.

3.04 REINFORCEMENT AND ANCHORAGE - GENERAL

A. Fasten anchors to structural framing and embed in masonry joints as masonry is laid. Unless otherwise indicated on drawings or closer spacing is indicated under specific wall type, space anchors at maximum of 16 inches horizontally and 16 inches vertically.

3.05 CONTROL AND EXPANSION JOINTS

A. Do not continue horizontal joint reinforcement through control and expansion joints.

NOT FOR BIDDING

B. Form control joint with a sheet building paper bond breaker fitted to one side of the hollow contour end of the block unit. Fill the resultant core with grout fill. Rake joint at exposed unit faces for placement of backer rod and sealant.

C. Install preformed control joint device in continuous lengths. Seal butt and corner joints in accordance with manufacturer's instructions.

D. Size control joint in accordance with Section 07 90 05 for sealant performance.

E. Form expansion joint as detailed.

F. Locate per drawings.

3.06 BUILT-IN WORK

A. As work progresses, install built-in metal door frames, glazed frames, fabricated metal frames, window frames, anchor bolts, plates, and boxes and other items to be built into the work and furnished under other sections.

B. Install built-in items plumb, level, and true to line.

C. Bed anchors of metal door and glazed frames in adjacent mortar joints. Fill frame voids solid with grout.

1. Fill adjacent masonry cores with grout minimum 12 inches from framed openings.

D. Do not build into masonry construction organic materials that are subject to deterioration.

3.07 TOLERANCES

A. Maximum Variation From Unit to Adjacent Unit: 1/16 inch.

B. Maximum Variation from Plane of Wall: 1/4 inch in 10 ft.

C. Maximum Variation from Plumb: 1/4 inch per story non-cumulative; 1/2 inch in two stories or more.

D. Maximum Variation from Level Coursing: 1/8 inch in 3 ft and 1/4 inch in 20ft.

E. Maximum Variation of Joint Thickness: 1/8 inch in 3 ft.

F. Maximum Variation from Cross Sectional Thickness of Walls: 1/4 inch.

3.08 CUTTING AND FITTING

A. Cut and fit for chases, pipes, conduit, sleeves, and grounds. Coordinate with other sections of work to provide correct size, shape, and location.

B. Obtain approval prior to cutting or fitting masonry work not indicated or where appearance or strength of masonry work may be impaired.

3.09 FIELD QUALITY CONTROL

A. Concrete Masonry Unit Tests: Test each variety of concrete unit masonry in accordance with ASTM C140 for conformance to requirements of this specification.

B. Mortar Tests: Test each type of mortar in accordance with ASTM C780, testing with same frequency as masonry samples.

3.10 CLEANING

A. Remove excess mortar and mortar droppings.

B. Replace defective mortar. Match adjacent work.

C. Clean soiled surfaces with cleaning solution.

D. Use non-metallic tools in cleaning operations.

NOT FOR BIDDING

3.11 PROTECTION

A. Without damaging completed work, provide protective boards at exposed external corners that are subject to damage by construction activities.

END OF SECTION

NOT FOR BIDDING

SECTION 04 72 00
CAST STONE MASONRY

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Architectural cast stone.

B. Units required are indicated on the drawings as "Cast Stone Sill".

C. Units required are:
   1. Exterior window and wall sill.

1.02 RELATED REQUIREMENTS

A. Section 04 05 11 - Masonry Mortaring and Grouting: Mortar for setting cast stone.

B. Section 04 20 00 - Unit Masonry: Installation of cast stone in conjunction with masonry.

C. Section 07 90 05 - Joint Sealers: Materials and execution methods for sealing soft joints in cast stone work.

1.03 REFERENCE STANDARDS

A. ACI 318 - Building Code Requirements for Structural Concrete and Commentary; American Concrete Institute International.

B. ASTM A123/A123M - Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.

C. ASTM A185/A185M - Standard Specification for Steel Welded Wire Reinforcement, Plain, for Concrete.

D. ASTM A615/A615M - Standard Specification for Deformed and Plain Billet-Steel Bars for Concrete Reinforcement.

E. ASTM C33/C33M - Standard Specification for Concrete Aggregates.

F. ASTM C150/C150M - Standard Specification for Portland Cement.

G. ASTM C270 - Standard Specification for Mortar for Unit Masonry.

H. ASTM C494/C494M - Standard Specification for Chemical Admixtures for Concrete.

I. ASTM C642 - Standard Test Method for Density, Absorption, and Voids in Hardened Concrete.

J. ASTM C979/C979M - Standard Specification for Pigments for Integrally Colored Concrete.

K. ASTM C1364 - Standard Specification for Architectural Cast Stone.

1.04 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

B. Manufacturer's Qualification Data: Documentation showing compliance with specified requirements.

C. Product Data: Test results of cast stone components made previously by the manufacturer.
   1. Include one copy of ASTM C1364 for Architect's use.

D. Shop Drawings: Include elevations, dimensions, layouts, profiles, cross sections, reinforcement, exposed faces, arrangement of joints, anchoring methods, anchors, and piece numbers.

E. Mortar Color Selection Samples.

F. Verification Samples: Pieces of actual cast stone components not less than 12 inches square, illustrating range of color and texture to be anticipated in components furnished for the project.

G. Full-Size Samples: One unit of each shape, for review.

NOT FOR BIDDING

H. Source Quality Control Test Reports.

1.05 QUALITY ASSURANCE

A. Manufacturer Qualifications: A current producer member of the Cast Stone Institute with a minimum of 10 years of experience in producing cast stone of the types required for project.
   1. Adequate plant capacity to furnish quality, sizes, and quantity of cast stone required without delaying progress of the work.
   2. Products previously produced by plant and exposed to weather that exhibit satisfactory appearance.

B. Mock-Up: Provide full size cast stone components for installation in mock-up of exterior wall.
   1. Approved mock-up will become standard for appearance and workmanship.
   2. Mock-up may remain as part of the completed work.
   3. Remove mock-up not incorporated into the work and dispose of debris.

C. Source Quality Control: Test compressive strength and absorption of specimens selected at random from plant production.
   1. Test in accordance with ASTM C642.
   2. Select specimens at rate of 3 per 500 cubic feet, with a minimum of 3 per production week.
   3. Submit reports of tests by independent testing agency, showing compliance with requirements.

1.06 DELIVERY, STORAGE, AND HANDLING

A. Deliver cast stone components secured to shipping pallets and protected from damage and discoloration. Protect corners from damage.

B. Number each piece individually to match shop drawings and schedule.

C. Store cast stone components and installation materials in accordance with manufacturer's instructions.

D. Store cast stone components on pallets with nonstaining, waterproof covers. Ventilate under covers to prevent condensation. Prevent contact with dirt.

E. Protect cast stone components during handling and installation to prevent chipping, cracking, or other damage.

F. Store mortar materials where contamination can be avoided.

G. Schedule and coordinate production and delivery of cast stone components with unit masonry work to optimize on-site inventory and to avoid delaying the work.

PART 2 PRODUCTS

2.01 MANUFACTURERS

A. Architectural Cast Stone:
   1. Any current producer member of the Cast Stone Institute
   2. Continental Cast Stone Manufacturing Company
   3. D. C. Kerckoff Company
   4. Pineapple Grove Designs

2.02 ARCHITECTURAL CAST STONE

A. Cast Stone: Architectural concrete product manufactured to simulate appearance of natural limestone, complying with ASTM C1364.
   1. Compressive Strength: As specified in ASTM C1364; calculate strength of pieces to be field cut at 80 percent of uncut piece.
   2. Freeze-Thaw Resistance: Demonstrated by laboratory testing in accordance with ASTM C 1364.

NOT FOR BIDDING

3. Surface Texture: Fine grained texture, with no bugholes, air voids, or other surface blemishes visible from distance of 10 feet.
4. Color: Selected by Architect from manufacturer's full range.
5. Remove cement film from exposed surfaces before packaging for shipment.

B. Shapes: Provide shapes indicated on drawings.
1. Variation from Any Dimension, Including Bow, Camber, and Twist: Maximum of plus/minus 1/8 inch or length divided by 360, whichever is greater, but not more than 1/4 inch.
2. Unless otherwise indicated on drawings, provide:
a. Wash or slope of 1:12 on exterior horizontal surfaces.
b. Drips on projecting components, wherever possible.
c. Raised fillets at back of sills and at ends to be built in.

C. Reinforcement: Provide reinforcement as required to withstand handling and structural stresses; comply with ACI 318.
1. Pieces More than 12 inches Wide: Provide full length two-way reinforcement of cross-sectional area not less than 0.25 percent of unit cross-sectional area. Use epoxy coated reinforcement.

2.03 MATERIALS

A. Portland Cement: ASTM C150.
1. For Units: Type I, white or gray as required to match Architect 's selection.
2. For Mortar: Type I or II, except Type III may be used in cold weather to match mortar on existing building.

B. Coarse Aggregate: ASTM C33, except for gradation; granite, quartz, or limestone.

C. Fine Aggregate: ASTM C33, except for gradation; natural or manufactured sands.

D. Pigments: ASTM C979, inorganic iron oxides; do not use carbon black.

E. Admixtures: ASTM C494/C494M.

F. Water: Potable.

G. Reinforcing Bars: ASTM A615/A615M deformed bars, galvanized or epoxy coated.

H. Steel Welded Wire Reinforcement: ASTM A185/A185M, galvanized or epoxy coated.

I. Embedded Anchors, Dowels, and Inserts: Type 304 stainless steel, of type and size as required for conditions.

J. Mortar: Portland cement-lime, ASTM C270, Type N; as specified in Section 04 0511.

K. Sealant: As specified in Section 07 90 05.

L. Cleaner: General-purpose cleaner designed for removing mortar and grout stains, efflorescence, and other construction stains from new masonry surfaces without discoloring or damaging masonry surfaces; approved for intended use by cast stone manufacturer and by cleaner manufacturer for use on cast stone and adjacent masonry materials.

PART 3 EXECUTION

3.01 EXAMINATION

A. Examine construction to receive cast stone components. Notify Architect if construction is not acceptable.

B. Do not begin installation until unacceptable conditions have been corrected.

3.02 INSTALLATION

A. Install cast stone components in conjunction with masonry, complying with requirements of Section 04 20 00.

NOT FOR BIDDING

B. Mechanically anchor cast stone units indicated; set remainder in mortar.

C. Setting:
   1. Drench cast stone components with clear, running water immediately before installation.
   2. Set units in a full bed of mortar unless otherwise indicated.
   3. Fill vertical joints with mortar.
   4. Fill dowel holes and anchor slots completely with mortar or non-shrink grout.

D. Joints: Make all joints 3/8 inch, except as otherwise detailed.
   1. Rake mortar joints 3/4 inch for pointing.
   2. Remove excess mortar from face of stone before pointing joints.
   3. Point joints with mortar in layers 3/8 inch thick and tool to a slight concave profile.
   4. Leave the following joints open for sealant:
      a. Head joints in sills.
      b. Joints labeled "expansion joint".

E. Sealant Joints: Install sealants as specified in Section 07 90 05.

F. Installation Tolerances:
   1. Variation from Plumb: Not more than 1/8 inch in 10 feet or 1/4 inch in 20 feet or more.
   2. Variation from Level: Not more than 1/8 inch in 10 feet or 1/4 inch in 20 feet, or 3/8 inch maximum.
   3. Variation in Joint Width: Not more than 1/8 inch in 36 inches or 1/4 of nominal joint width, whichever is less.
   4. Variation in Plane Between Adjacent Surfaces (Lipping): Not more than 1/16 inch difference between planes of adjacent units or adjacent surfaces indicated to be flush with units.

G. Repairs: Repair chips and other surface damage noticeable when viewed in direct daylight at 20 feet.
   1. Repair with matching touchup material provided by the manufacturer and in accordance with manufacturer's instructions.
   2. Repair methods and results subject to Architect 's approval.

3.03 CLEANING

A. Repair chips and other surface damage noticeable when viewed in direct daylight at 10 feet.
   1. Repair with matching touchup material provided by the manufacturer and in accordance with manufacturer's instructions.
   2. Repair methods and results subject to Architect 's approval.

B. Keep cast stone components clean as work progresses.

C. Clean completed exposed cast stone after mortar is thoroughly set and cured.
   1. Wet surfaces with water before applying cleaner.
   2. Apply cleaner to cast stone in accordance with manufacturer's instructions.
   3. Remove cleaner promptly by rinsing thoroughly with clear water.
   4. Do not use acidic cleaners.

3.04 PROTECTION

A. Protect completed work from damage.

B. Clean, repair, or restore damaged or mortar-splashed work to condition of new work.

END OF SECTION

NOT FOR BIDDING

SECTION 06 10 00
ROUGH CARPENTRY

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Rough opening framing for windows.

B. Preservative treated wood materials.

C. Concealed wood blocking, nailers, and supports.

1.02 RELATED REQUIREMENTS

A. Section 07 62 00 - Sheet Metal Flashing and Trim: Drip flashings.

B. Section 09 21 16 - Gypsum Board Assemblies: Gypsum-based sheathing.

C. Section 08 41 13.10 and 08 44 13: Window openings to receive wood blocking.

1.03 REFERENCE STANDARDS

A. AFPA (WFCM) - Wood Frame Construction Manual for One- and Two-Family Dwellings; American Forest and Paper Association.

B. ASTM A153/A153M - Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware.

C. ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

D. ASTM C208 - Standard Specification for Cellulosic Fiber Insulating Board.

E. ASTM C578 - Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation.

F. ASTM C1396/C1396M - Standard Specification for Gypsum Board.

G. ASTM D2898 - Standard Test Methods for Accelerated Weathering of Fire-Retardant-Treated Wood for Fire Testing.

H. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials.

I. AWPA C9 - Plywood -- Preservative Treatment by Pressure Processes; American Wood Protection Association.

J. AWPA U1 - Use Category System: User Specification for Treated Wood; American Wood Protection Association.

K. ICC-ES AC38 - Acceptance Criteria for Water-Resistive Barriers; ICC Evaluation Service, Inc.

L. PS 20 - American Softwood Lumber Standard; National Institute of Standards and Technology (Department of Commerce).

M. SPIB (GR) - Grading Rules; Southern Pine Inspection Bureau, Inc..

N. WCLIB (GR) - Standard Grading Rules for West Coast Lumber No. 17; West Coast Lumber Inspection Bureau.

O. WWPA G-5 - Western Lumber Grading Rules; Western Wood Products Association.

1.04 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

B. Product Data: Provide technical data on insulated sheathing, wood preservative materials, and application instructions.

C. Manufacturer's Certificate: Certify that wood products supplied for rough carpentry meet or exceed specified requirements.

NOT FOR BIDDING

1.05 QUALITY ASSURANCE

A. Lumber: Comply with PS 20 and approved grading rules and inspection agencies.
   1. Lumber of other species or grades, or graded by other agencies, is acceptable provided structural and appearance characteristics are equivalent to or better than products specified.

B. Preservative-Treated Wood: Provide lumber and plywood marked or stamped by an ALSC-accredited testing agency, certifying level and type of treatment in accordance with AWPA standards.

1.06 DELIVERY, STORAGE, AND HANDLING

A. General: Cover wood products to protect against moisture. Support stacked products to prevent deformation and to allow air circulation.

B. Fire Retardant Treated Wood: Prevent exposure to precipitation during shipping, storage, or installation.

PART 2 PRODUCTS

2.01 GENERAL REQUIREMENTS

A. Dimension Lumber: Comply with PS 20 and requirements of specified grading agencies.
   1. Species: Douglas Fir-Larch, unless otherwise indicated.
   2. If no species is specified, provide any species graded by the agency specified; if no grading agency is specified, provide lumber graded by any grading agency meeting the specified requirements.
   3. Grading Agency: Any grading agency whose rules are approved by the Board of Review, American Lumber Standard Committee (www.alsc.org) and who provides grading service for the species and grade specified; provide lumber stamped with grade mark unless otherwise indicated.

B. Lumber fabricated from old growth timber is not permitted.

2.02 DIMENSION LUMBER FOR CONCEALED APPLICATIONS

A. Grading Agency: Southern Pine Inspection Bureau, Inc. (SPIB).

B. Sizes: Nominal sizes as indicated on drawings, S4S.

C. Moisture Content: S-dry or MC19.

D. Miscellaneous Framing, Blocking, Nailers, Grounds, and Furring:
   1. Lumber: S4S No. 2 or Standard Grade.
   2. Boards: Standard or No. 3.

E. Miscellaneous Blocking, Furring, Nailers, and Curbs:
   1. Lumber: S4S, No. 1 or Construction Grade.
   2. Boards: Standard.

2.03 ACCESSORIES

A. Fasteners and Anchors:
   1. Metal and Finish: Hot-dipped galvanized steel per ASTM A 153/A 153M; or Stainless Steel for high humidity and preservative-treated wood locations, unfinished steel elsewhere.
   2. Drywall Screws: Bugle head, hardened steel, power driven type, length three times thickness of sheathing.
   3. Anchors: Toggle bolt type for anchorage to hollow masonry.

NOT FOR BIDDING

2.04 FACTORY WOOD TREATMENT

A. Treated Lumber and Plywood: Comply with requirements of AWPA U1 - Use Category System for wood treatments determined by use categories, expected service conditions, and specific applications.
   1. Preservative-Treated Wood: Provide lumber and plywood marked or stamped by an ALSC-accredited testing agency, certifying level and type of treatment in accordance with AWPA standards.

B. Preservative Treatment:
   1. Manufacturers:
      a. Arch Wood Protection, Inc.: www.wolmanizedwood.com.
      b. Viance, LLC: www.treatedwood.com.
      c. Osmose, Inc: www.osmose.com.
      d. Substitutions: Not permitted.

C. Preservative Pressure Treatment of Lumber Above Grade: AWPA U1, Use Category UC3B, Commodity Specification A using waterborne preservative to 0.25 lb/cu ft retention.
   1. Kiln dry lumber after treatment to maximum moisture content of 19 percent.
   2. Treat lumber in contact with roofing, flashing, or waterproofing.
   3. Treat lumber in contact with masonry or concrete.
   4. Treat lumber less than 18 inches above grade.
      a. Treat lumber in other locations as indicated.
   5. Preservative Pressure Treatment of Plywood Above Grade: AWPA U1, Use Category UC2 and UC3B, Commodity Specification F using waterborne preservative to 0.25 lb/cu ft retention.
      a. Kiln dry plywood after treatment to maximum moisture content of 15 percent.
      b. Treat plywood in contact with masonry or concrete.
      c. Treat plywood in other locations as indicated.

PART 3 EXECUTION

3.01 INSTALLATION - GENERAL

A. Select material sizes to minimize waste.

B. Reuse scrap to the greatest extent possible; clearly separate scrap for use on site as accessory components, including: shims, bracing, and blocking.

C. Where treated wood is used on interior, provide temporary ventilation during and immediately after installation sufficient to remove indoor air contaminants.

3.02 BLOCKING, NAILERS, AND SUPPORTS

A. Provide framing and blocking members as indicated or as required to support windows, ceilings and trim.

B. In metal stud walls, provide continuous blocking around door and window openings for anchorage of frames, securely attached to stud framing.

C. In walls, provide blocking attached to studs as backing and support for wall-mounted items, unless item can be securely fastened to two or more studs or other method of support is explicitly indicated.

3.03 TOLERANCES

A. Framing Members: 1/4 inch from true position, maximum.

B. Surface Flatness of Floor: 1/8 inch in 10 feet maximum, and 1/4 inch in 30 feet maximum.

C. Variation from Plane (Other than Floors): 1/4 inch in 10 feet maximum, and 1/4 inch in 30 feet maximum.

NOT FOR BIDDING

3.04 CLEANING

A. Waste Disposal:
   1. Comply with applicable regulations.
   2. Do not burn scrap on project site.
   3. Do not burn scraps that have been pressure treated.
   4. Do not send materials treated with pentachlorophenol, CCA, or ACA to co-generation facilities or “waste-to-energy” facilities.

B. Do not leave any wood, shavings, sawdust, etc. on the ground or buried in fill.

C. Prevent sawdust and wood shavings from entering the storm drainage system.

END OF SECTION

NOT FOR BIDDING

SECTION 06 20 00
FINISH CARPENTRY

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Finish carpentry items.

B. Door Hardware attachment.

1.02 RELATED REQUIREMENTS

A. Section 08 71 00 -Door Hardware:

1.03 REFERENCE STANDARDS

A. ANSI A208.1 - American National Standard for Particleboard.

B. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials.

C. AWI/AWMAC/WI (AWS) - Architectural Woodwork Standards.

D. BHMA A156.9 - American National Standard for Cabinet Hardware; Builders Hardware Manufacturers Association (ANSI/BHMA A156.9).

E. NEMA LD 3 - High-Pressure Decorative Laminates; National Electrical Manufacturers Association.

1.04 ADMINISTRATIVE REQUIREMENTS

A. Coordinate the work with plumbing rough-in, electrical rough-in, and installation of associated and adjacent components.

B. Sequence installation to ensure utility connections are achieved in an orderly and expeditious manner.

1.05 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements for submittal procedures.

1.06 QUALITY ASSURANCE

A. Fabricator Qualifications: Company specializing in fabricating the products specified in this section with minimum five years of documented experience.

1.07 DELIVERY, STORAGE, AND HANDLING

A. Protect work from moisture damage.

PART 2 PRODUCTS

2.01 FINISH CARPENTRY ITEMS

A. Quality Grade: Unless otherwise indicated provide products of quality specified by AWI/AWMAC/WI Architectural Woodwork Standards for Premium Grade.

B. Interior Woodwork Items:
   1. Custom Casework.

2.02 SHEET MATERIALS

A. Particleboard: ANSI A208.1; composed of wood chips, sawdust, or flakes of medium density, made with waterproof resin binders; of grade to suit application; sanded faces.

2.03 HARDWARE

A. Hardware: Comply with BHMA A156.9. See Hardware Schedule in Section 08 71 00.

2.04 FABRICATION

A. Shop assemble work for delivery to site, permitting passage through building openings.

NOT FOR BIDDING

B. When necessary to cut and fit on site, provide materials with ample allowance for cutting. Provide trim for scribing and site cutting.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify adequacy of backing and support framing.

3.02 INSTALLATION

A. Install work in accordance with AWI/AWMAC/WI Architectural Woodwork Standards requirements for grade indicated.

B. Set and secure materials and components in place, plumb and level.

C. Carefully scribe work abutting other components, with maximum gaps of 1/32 inch. Do not use additional overlay trim to conceal larger gaps.

3.03 TOLERANCES

A. Maximum Variation from True Position: 1/16 inch.

B. Maximum Offset from True Alignment with Abutting Materials: 1/32 inch.

END OF SECTION

NOT FOR BIDDING

SECTION 07 01 50
PREPARATION FOR RE-ROOFING

PART 1 - GENERAL

1.01 SCOPE OF WORK

A. Remove the existing roofing layers, insulation, recovery board, base flashings, sheet metal, vent stack flashings, and metal wall panels completely to the existing structural deck. Sweep and clean all debris off of the deck and adjacent areas.

B. Remove all marked obsolete equipment and install new decking as required.

C. All roof work shall be conducted within the contract time limits but in no case while students or teachers are in the building.

D. Remove and reinstall ALL rooftop equipment as necessary to extend the existing curb flashings to a minimum of 8 inches above the finished roof surface and 12 inches above the finished roof surface for all vents. This shall include removal and re-installation of the existing exhaust fans, ventilators and all other equipment on areas to be re-roofed. Disconnect electric surface and controls and extend wiring / controls as necessary to achieve the required minimum heights.

1.02 PRE-INSTALLATION CONFERENCE

A. Review installation procedures and coordination required with related work.

1.03 ENVIRONMENTAL REQUIREMENTS

A. Do not remove existing roofing system or damaged decking when weather conditions threaten the integrity of the building contents or intended continued occupancy. Maintain continued temporary protection prior to installation of the new roofing system. Provide temporary weather protection to insure that the building is weather tight and that no damage occurs to the building, interior contents, furnishings, equipment and finished during re-roofing operations.

1.04 PROTECTION

A. It shall be the Contractor's responsibility to respond immediately to correction of roof leakage during construction. A four (4) hour time limit shall be given from the time of notification of emergency conditions. In the event of water penetration during rain or a storm, the Contractor shall provide for repair of the building contents and interior including, but not limited to, all interior contents, furnishings, equipment, building systems and finishes. If the Contractor does not respond or cannot be contacted, the Owner will affect repairs or emergency action and the Contractor shall be back charged for all expenses and damages, if any.

1.05 SCHEDULING

A. Schedule work to coincide with commencement of installation of new roofing system.

PART 2 - PRODUCTS

2.01 MATERIALS

A. Temporary protection; Sheet Polyethylene. Provide weights or fasteners to retain sheeting in position.

B. Base Sheet: ASTM D-4601 Type II. Provide weights, adhesives or fasteners to retain sheeting in position.

C. Quick-setting cement for deck repair

PART 3 - EXECUTION

3.01 EXAMINATION

A. Roofing Contractor to verify existing site conditions, including roof dimensions. The Owner and Architect assume no responsibility for the existing actual conditions that the Contractor may encounter during the course of work that can be reasonably foreseen during the Pre-Bid

NOT FOR BIDDING

inspection. The building layout was taken from existing drawings. The Contractor shall verify all dimensions and conditions in the field prior to demolition and notify the Architect should any conditions encountered vary from the Contract Documents.

B. Verify that existing roof surface is clear and ready for work.

3.02 MATERIALS REMOVAL

A. Remove all membrane, cant strips, insulation, expansion joints, base flashings, and any other items required for installation of the new roof. In addition, completely remove all nails and other debris to leave a smooth, even surface for re-roofing.

B. Under certain conditions, it will be necessary and desirable to incorporate one or more of the following methods for removal of dirt, silt, gravel, debris, roof membrane, and insulation from the roof surface in order to preserve the ecology, eliminate unsightly conditions, and protect the building surfaces:

C. Enclosed chutes with protective shrouds on the building and ground surfaces.

D. All debris dumped from the roof shall be transported from the roof via chutes into dumpsters or trucks, and this debris shall be removed from the premises when vehicles are full at the Contractors cost. No debris shall be transported from the area being worked on over a previously finished roof without an underlayment of 3/4" plywood.

E. Perform all demolition and re-roofing work in such a manner as to not damage or affect the load carrying capacity of the existing structural system.

F. Contractor shall provide cut off (night tie in) at the end of each day's work.

G. All curbs are to be raised to a minimum height of 8” above the finished roof surface. Be sure to calculate tapered insulation + recovery board + new roof system when calculating blocking heights

H. All soil stacks must be raised a minimum of 8” above the finished roof surface. No soil stack may be sleeved with the joint facing to weather.

I. All abandoned drain lines must be capped with a threaded cap.

J. All abandoned curbs must be removed and the deck replaced with like kind materials and color.

K. All heat pumps are to be disconnected by a licensed mechanical contractor and set aside until the roof is replaced. The units are to be reinstalled after work is complete and fed through a goose neck penetration. The roofing contract must hire a certified mechanical contractor for all mechanical reclamation work and disconnect

L. Areas of deteriorated deck are to be filled by mixing fast setting cement mix with water per manufacturer’s instructions to fill damaged areas and level uneven areas of deck.

END OF SECTION

NOT FOR BIDDING

SECTION 07 21 00
THERMAL INSULATION

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Board insulation at cavity wall construction and as indicated on drawings at window locations.

B. Batt and spray foam insulation for filling perimeter window and door shim spaces and crevices in exterior wall and roof.

C. Acoustic Batt insulation. See Section 09 21 16 Gypsum Board Assemblies.

1.02 RELATED REQUIREMENTS

A. Section 06 10 00 - Rough Carpentry: Supporting construction for batt insulation.

1.03 REFERENCE STANDARDS

A. ASTM C240 - Standard Test Methods of Testing Cellular Glass Insulation Block.

B. ASTM C552 - Standard Specification for Cellular Glass Thermal Insulation.

C. ASTM C578 - Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation.

D. ASTM C612 - Standard Specification for Mineral Fiber Block and Board Thermal Insulation.

E. ASTM C665 - Standard Specification for Mineral-Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing.

F. ASTM C1289 - Standard Specification for Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board.

G. ASTM D2842 - Standard Test Method for Water Absorption of Rigid Cellular Plastics.

H. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials.

I. ASTM E96/E96M - Standard Test Methods for Water Vapor Transmission of Materials.

J. ASTM E136 - Standard Test Method for Behavior of Materials in a Vertical Tube Furnace At 750 Degrees C.

K. NFPA 255 - Standard Method of Test of Surface Burning Characteristics of Building Materials; National Fire Protection Association.

L. UL 723 - Standard for Test for Surface Burning Characteristics of Building Materials; Underwriters Laboratories Inc..

1.04 SUBMITTALS

A. See Section 01 33 00 - Administrative Requirements, for submittal procedures.

B. Product Data: Provide data on product characteristics, performance criteria, and product limitations.

C. Manufacturer's Installation Instructions: Include information on special environmental conditions required for installation and installation techniques.

D. Manufacturer's Certificate: Certify that products meet or exceed specified requirements.

1.05 FIELD CONDITIONS

A. Do not install insulation adhesives when temperature or weather conditions are detrimental to successful installation.

1.06 SEQUENCING

A. Sequence work to ensure fireproofing and firestop materials are in place before beginning work of this section.

NOT FOR BIDDING

PART 2 PRODUCTS

2.01 MANUFACTURERS

A. Insulation:
   1. Dow
   2. Owens Corning
   3. Demilec USA (Spray Foam Insulation)
   4. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 APPLICATIONS

A. Insulation above Windows: Extruded polystyrene board.

B. Insulation in Metal Framed Walls: Batt insulation with no vapor retarder.

C. Insulation at window head: Spray foam.

2.03 FOAM BOARD INSULATION MATERIALS

A. Extruded Polystyrene Board Insulation: ASTM C 578, Type IV; Extruded polystyrene board with natural skin surfaces; with the following characteristics:
   1. Flame Spread Index: 25 or less, when tested in accordance with ASTM E84.
   2. Flame Spread Index: 75 or less, when tested in accordance with ASTM E84.
   3. Smoke Developed Index: 450 or less, when tested in accordance with ASTM E84.
   4. Board Size: 48 x 96 inch or 24 X 96 inch.
   5. Board Thickness: 2 inches,
   6. Board Edges: Square, Shiplap or Tongue and groove.
   7. Thermal Conductivity (k factor) at 75 degrees: or 20.
   8. Compressive Resistance: 25 psi and 40 psi.
   9. Board Density: 1.8 lb/cu ft.
   10. Water Absorption, maximum: 0.1 percent, volume.

B. Manufacturers:
   1. Dow Chemical Co(Design Basis):
      a. Cavity Wall - "Cavity Mate Plus", type IV
      b. Foundation and slabs - "Styrofoam Highload 40" type VI.
   2. Owens Corning Corp.
      a. Cavity Wall -= "Foamular 250", type IV
      b. Foundation and Slabs - "Foamular 400 SE", type VI.
   3. Pactiv Building Products
      a. Cavity Wall - "Green Board Score Board", type IV
      b. Foundation and Slabs - Type VI.

C. Substitutions: See Section 01 60 00 - Product Requirements.

2.04 BATT INSULATION MATERIALS

A. Batt Insulation: ASTM C 665; preformed batt; friction fit, conforming to the following:
   1. Material: Rock or slag fiber, or glass fiber.
   2. Flame Spread Index: 25 or less, when tested in accordance with ASTM E84.
   3. Smoke Developed Index: 50 or less, when tested in accordance with ASTM E84.
   4. Combustibility: Non-combustible, when tested in accordance with ASTM E136.
   5. Formaldehyde Content: Zero.
   6. Thermal Resistance: in accordance with plans.
   7. Thickness: Varies.
   8. Manufacturers:
      a. CertainTeed Corporation: www.certainteed.com.
      b. Johns Manville Corporation: www.jm.com.

NOT FOR BIDDING

c. Owens Corning Corp: www.owenscorning.com.

9. Substitutions: See Section 01 60 00 - Product Requirements.

2.05 SPRAY FOAM INSULATION MATERIALS

A. Spray Foam Insulation: two component, open cell, spray applied, semi rigid polyurethane foam system; conforming to the following:
   1. Density: .45 - .5 lbs/cubic ft.
   2. R-Value @ 1 inch: 3.81
   3. Air leakage: (air impermeable 2012 IBC requirements)
   4. Air permeance @ 50 Pa @ 3.5": .001 L/sm2
   5. Water vapor permeance @ 3.5": 6.33 perms
   6. Surface burning characteristics: Class I
   7. Flame spread index: 21
   8. Smoke developed: 216
   9. Manufacturers:
      a. Sealection 500 by Demilec USA

2.06 ACCESSORIES

A. Tape: Bright aluminum; Polythylene or Polyester self-adhering type, mesh reinforced, 2 inch wide.

B. Insulation Fasteners: Impaling clip of galvanized steel with washer retainer and clips, to be adhered to surface to receive insulation, length to suit insulation thickness and substrate, capable of securely and rigidly fastening insulation in place.

C. Wire Mesh: Galvanized steel, hexagonal wire mesh.

D. Adhesive: Type recommended by insulation manufacturer for application.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that substrate, adjacent materials, and insulation materials are dry and that substrates are ready to receive insulation and adhesive.

B. Verify substrate surfaces are flat, free of irregularities or materials or substances that may impede adhesive bond.

3.02 BOARD INSTALLATION ABOVE WINDOWS

A. Adhere a 6 inch wide strip of polyethylene sheet over expansion joints with double beads of adhesive each side of joint.
   1. Tape seal joints between sheets.
   2. Extend sheet full height of joint.

B. Apply adhesive to back of boards:
   1. Three continuous beads per board length.
   2. Full bed 1/8 inch thick.

C. Install boards to fit snugly between top of widow and roof deck.

D. Make insulation continuous, fill all voids with insulation.
   1. Place membrane surface against adhesive.
   2. Place membrane surface facing out, and tape seal board joints.

E. Install boards horizontally on walls.
   1. Place boards to maximize adhesive contact.
   2. Install in running bond pattern.
   3. Butt edges and ends tightly to adjacent boards and to protrusions.

F. Cut and fit insulation tightly to protrusions or interruptions to the insulation plane.

NOT FOR BIDDING

G. Place 6 inch wide polyethylene sheet at perimeter of wall openings, from adhesive vapor retarder bed to window, door, and storefront frames. Tape seal in place to ensure continuity of vapor retarder and air seal.

3.03 BATT INSTALLATION

A. Install insulation and vapor retarder in accordance with manufacturer's instructions.

B. Install in exterior cavities at window, door, wall and roof spaces without gaps or voids. Do not compress insulation.

C. Trim insulation neatly to fit spaces. Insulate miscellaneous gaps and voids.

D. Fit insulation tightly in cavities and tightly to exterior side of mechanical and electrical services within the plane of the insulation.

E. Install with factory applied vapor retarder membrane facing warm side of building spaces. Lap ends and side flanges of membrane over framing members.

F. Tape seal butt ends, lapped flanges, and tears or cuts in membrane.

G. At metal framing, place vapor retarder on warm side of insulation; lap and seal sheet retarder joints over member face.

H. Tape seal tears or cuts in vapor retarder.

I. Extend vapor retarder tightly to full perimeter of adjacent window and door frames and other items interrupting the plane of the membrane. Tape seal in place.

3.04 PROTECTION

A. Do not permit installed insulation to be damaged prior to its concealment.

END OF SECTION

NOT FOR BIDDING

METAL WALL PANEL

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

A. This Section includes

1. Factory-formed: concealed-fastener, metal wall panels.

2. Finish must conform to the "Metal Construction Association Certified Premium Painted™" designation

1.3 RELATED SECTIONS

A. Division 6 Section 06 10 00 “Rough Carpentry”

B. Division 7 Section 07 62 00 “Sheet Metal Flashing and Trim”

1.4 PERFORMANCE REQUIREMENTS

A. General: Provide metal wall panel assemblies that comply with performance requirements specified as determined by testing manufacturers' standard assemblies similar to those indicated for this Project, by a qualified testing and inspecting agency.

B. System shall meet performance criteria as installed. Either test data or signed and sealed engineering calculations shall document the performance of the panel system to meet design loads required.

C. Wind Loading: Design and size components to withstand dead and live loads caused by wind pressures as follows:

1. Positive pressure: 39.7 psf normal to panel.

2. Negative pressure: 43.1 PSF (field), 53.2 PSF (corner)

NOT FOR BIDDING

D. Maximum Deflection under Design Loads:

1. 1/180 of span

Air Infiltration: Air leakage through assembly of not more than 0.06 cfm/sq. ft. of wall area when tested according to ASTM E 283 at a static-air-pressure difference of 6.24lbf/sq. ft.

E. Water Penetration: No water penetration when tested according to ASTM E 331 at a minimum differential pressure of 20 percent of inward-acting, wind-load design pressure of not less than 6.24 lbf/sq. ft. and not more than 12 lbf/sq. ft.

1.5 SUBMITTALS

A. Product Data: Manufacturer's current product specifications and installation instructions.

B. Shop Drawings: Include small-scale elevations, as required. Show details of trim and flashing conditions, fastening and anchorage methods, weatherproofing techniques, terminations, and penetrations.

C. Samples:

1. Selection Samples: Submit actual metal chips with full range of colors available for Architect's selection.

2. Verification Samples: Submit two samples of each type of metal panel required, not less than 12 inches (305mm), and illustrating finished panel profile.

D. Product Test Reports: Submit copies of test reports or load tables verifying performance capability of panel system:

1. Metal Wall Panels: Include reports for UL 790/ASTM E 108, ASTM E 283, ASTM E 331, Field Tested, ASTM E 84 Flame Spread Rating, Paint Performance Tests.

2. Fastener test and pull-out calculations

3. Load tables

4. Maintenance Data

1.6 QUALITY ASSURANCE

A. Installer: Company specializing in the type of work required for this project, with not less than 2 years of documented experience.

B. Pre-Installation meeting: Convene meeting not less than one week prior to beginning installation between general contractor, installing contractor, owner's representative and

NOT FOR BIDDING

manufacturer.

1.7 DELIVERY, STORAGE & HANDLING

A. Do not deliver materials of this section to project site until suitable facilities for storage and protection are available.

B. Protect materials from damage during transit and at project site. Store under cover, but sloped to provide positive drainage. Do not expose materials with strippable protective film to direct sunlight or extreme heat.

C. Do not allow storage of other materials or allow staging of other work on installed metal panel system.

D. Upon receipt of delivery of metal panel system, and prior to signing the delivery ticket, the installer is to examine each shipment for damage and for completion of the consignment.

1.8 WARRANTY

A. Special Warranty on Finishes: Manufacturer's standard form in which manufacturer agrees to repair finish or replace sheet metal roofing that shows evidence of deterioration of factory-applied finishes within specified warranty period.

1. Fluoropolymer Finish Warranty Period: 30 years from date of Substantial Completion.

B. Special Installer's Warranty: Specified form in which Wall Installer agrees to repair or replace components of custom-fabricated sheet metal wall that fail in materials or workmanship within 5 years from date of Substantial Completion.

NOT FOR BIDDING

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Manufacturer's Qualifications: All panels are to be factory formed and packaged per job requirements.

1. Manufacturer shall have a minimum of ten (10) years experience in the factory fabrication of metal wall panels.

2. Manufacturer must be certified to ISO 9001:2008 with design.

B. Specification is based upon the products of ATAS International, Inc. No other manufacturer of metal wall systems shall be accepted as an alternate product without prior written approval. These substitution requests must meet specifications and must be submitted a minimum of ten (10) days prior to date of bid.

C. Coordinate with insulation requirements as noted by Architect.

D. Secondary framing members as required for load criteria and wind requirements.

2.2 CONCEALED-FASTENER, LAP-SEAM METAL WALL PANELS

A. Concealed-fastener, Lap seam Metal Wall Panels: Provide factory-formed metal wall panels designed to be field assembled by lapping and interconnecting side edges of adjacent panels and mechanically attaching through panel to supports using concealed fasteners in side laps. Include accessories required for weathertight installation

B. Flush-Profile, Concealed-Fastener Metal Wall Panels: Formed with vertical panel edges and between panel edges; with flush joint between panels.

1. Basis-of Design Product: ATAS International, Inc.; Design Wall™ - DSF

2. Available Manufacturers:
   a. ATAS International, Inc.

3. Material: Metallic coated steel sheet - 24 gauge thick
   a. Texture: Smooth
   b. Finish: KYNAR 5000® PDVF or HYLAR 5000® Finish
   c. Color: Standard color to be chosen later

4. Panel Coverage: 12"

5. Panel Height: 1-3/4"

6. Panel Application Orientation: Vertical.

NOT FOR BIDDING

2.3 FABRICATION

A. Panels:

1. Panels to be Factory fabricated in a controlled environment.

2. Panels to be tension leveled during roll forming process.

3. Panels to be produced in longest lengths possible, except when modular units are utilized.

B. Form all components true to shape, accurate in size, square and free from distortion or defects. Cut panels to precise lengths indicated on approved shop drawings or as required by field conditions.

C. Accessories: Factory fabricates trim and flashing components in standard 12-foot lengths.

1. Form panel lines, breaks, and angles to be sharp and true, with surfaces free from warp and buckle.

2. Fabricate wall panels as required to maintain fabrication tolerances and to withstand design loads.

D. Fabricate metal wall panels in a manner that eliminates condensation on interior side of panel and with joints between panels designed to form weathertight seals.

E. Protect mechanical and painted finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

F. Panels, fabrication and installation shall meet the requirements of the Metal Construction Association Preformed Metal Wall Guidelines

PART 3 - EXECUTION

3.1 PREPARATION

A. Field Measurements

1. Field measurements should be taken by the installer for verification of dimensional correctness in relationship to original plans, prior to providing manufacturer with a bill of material.

B. Delivery, Storage and Handling

1. Do not deliver materials of this section to project site until suitable facilities for storage and protection are available.

2. Protect materials from damage during transit and at project site. Store under cover, but sloped to provide positive drainage. Do not expose materials with strippable protective film to direct sunlight or extreme heat.

3. Do not allow storage of other materials or allow staging of other work on installed metal panel system.

4. Upon receipt of delivery of metal panel system, and prior to signing the delivery ticket, the installer is to examine each shipment or damage and for completion of the consignment.

C. Sequencing and Scheduling

1. Installer shall coordinate with general contractor as to scheduled delivery time after receipt of field verified bill of material by manufacturer as it relates to actual project scheduling.

NOT FOR BIDDING

3.2 METAL WALL PANEL INSTALLATION, GENERAL

A. General: Install metal wall panels in orientation, sizes, and locations indicated on Drawings. Install panels perpendicular to girts and subgirts, unless otherwise indicated. Anchor metal wall panels and other components of the Work securely in place, with provisions for thermal and structural movement.

1. Field cutting of metal wall panels by torch is not permitted.

2. Rigidly fasten metal wall panels and allow for thermal expansion and contraction as required by the panel manufacturer. Pre-drill panels as required.

3. Install screw fasteners.

4. Locate panel splices over, but not attached to, structural supports. Stagger panel splices and end laps to avoid a four-panel lap splice condition.

5. Apply elastomeric sealant continuously between metal base channel (sill angle) and concrete, and elsewhere as indicated or, if not indicated, as necessary for waterproofing and material compatibility.

6. Provide weatherproof seals for pipe and conduit penetrating exterior walls.

B. Fasteners: Use fasteners of size and length as required for compatibility with substrate.

1. Steel Wall Panels: Use stainless-steel fasteners or metallic coated fasteners for surfaces exposed to the exterior and galvanized steel fasteners for surfaces exposed to the interior.

2. Concealed fasteners shall have a high performance coating

3. Metal Protection: Where dissimilar metals will contact each other or corrosive substrates, protect against galvanic action by painting contact surfaces with bituminous coating, by applying rubberized-asphalt underlayment to each contact surface, or by other permanent separation as recommended by metal wall panel manufacturer.

C. Joint Sealers: Install gaskets, joint fillers, and sealants where indicated and where required for weatherproof performance of metal wall panel assemblies.

D. Provide water and air infiltration retarder / barriers: W.R. Grace Ultra

3.3 ACCESSORY INSTALLATION

A. General: Install accessories with positive anchorage to building and weathertight mounting and provide for thermal expansion. Coordinate installation with flashings and other components.

NOT FOR BIDDING

1. Install components required for a complete sheet metal roofing assembly including trim, copings, ridge closures, seam covers, flashings, sealants, gaskets, fillers, closure strips, and similar items.

2. Comply with performance requirements, manufacturer's written installation instructions, and SMACNA's "Architectural Sheet Metal Manual" and NRCA Waterproofing Manual. Provide concealed fasteners where possible, and set units true to line and level as indicated. Install work with laps, joints, and seams that will be permanently watertight and weather resistant.

3. Panels, fabrication and installation shall meet the requirements of the Metal Construction Association Preformed Metal Wall Guidelines.

B. Coordinate with installation of:

1. Rough Carpentry, as noted in Section 6

2. Sheet Metal Flashing and Trim, as noted in Section 7

3.4 CLEANING AND PROTECTION

A. Remove temporary protective coverings and strippable films, if any, as metal wall panels are installed. Maintain in a clean condition during construction.

B. Protection:

1. Provide as required completed work of this section will be without damager or deterioration at date of substantial completion.

C. Touch up minor abrasions with matching paint provided by panel manufacturer. Remove and replace panels that cannot be satisfactorily touched up. See Metal Construction Association Technical Bulletin #95-1051.

D. Sweep and remove chips, shavings and dust from roof on a daily basis during installation period. Leave installed work clean, free from grease, finger marks and stains. Remove all protective masking from material immediately after installation of product.

E. Upon completion of installation, remove scraps and debris from project site.

F. After metal wall panel installation, clear weep holes and drainage channels of obstructions, dirt and sealant.

END OF SECTION 07 42 13

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 07 53 00
ELASTOMERIC MEMBRANE ROOFING

PART 1 - GENERAL

1.01 WORK INCLUDED

A. Work under this section covers the installation of a new Fully Adhered white EPDM roofing system. Contractor shall include all related items of work as noted herein or indicated on the drawings or otherwise required to complete the specified elements of work and provide the necessary 20 year Warranty for this project. Contractor to follow all details and assembly requirements as outlined by the manufacturer for the 20 year warranty.

B. Contractor shall remove all flashings, counterflashings, and existing roof system down as noted on the drawings. Contractor will dispose of all materials as described in the scope of work section. Any material removal shall comply with state and local codes and requirements and shall be disposed of in a legal manner.

C. Contractor shall include in bid price all the required wood blocking on the roof and at roof perimeter and penetrations. Any wood blocking required to accommodate new insulation heights or to be removed shall be included in base bid price.

D. All curbs less than 8” in flashing height shall be raised by adding wood blocking. All blocking and costs associated with raising mechanical equipment are the responsibility of the roofing contractor and should be included in bid price. Walkway pads shall be installed at access area and around main units per drawings.

E. Contractor shall provide owner all MSDS sheets prior to start of roofing work.

F. Smoking will not be permitted on this re-roofing project. Fines will be applied to all offenders.

G. Roofing contractor shall adequately staff roofing project once project has begun. Owner fully expects re-roofing to commence every day weather permits.

1.02 THIS SECTION INCLUDES THE FOLLOWING:

A. Adhered membrane roofing system.

B. Roof insulation.

C. Edge Metal

1.03 DEFINITIONS

A. Roofing Terminology: Refer to ASTM D 1079 and glossary of NRCA's "The NRCA Roofing and Waterproofing Manual" for definition of terms related to roofing work in this Section.

1.04 PERFORMANCE REQUIREMENTS

A. General: Provide installed roofing membrane and base flashings that remain watertight; do not permit the passage of water; and resist specified uplift pressures, thermally induced movement, and exposure to weather without failure.

B. Material Compatibility: Provide roofing materials that are compatible with one another under conditions of service and application required, as demonstrated by roofing membrane manufacturer based on testing and field experience.

C. FMG Listing: Provide roofing membrane, base flashings, and component materials that comply with requirements in FMG 4450 and FMG 4470 as part of a membrane roofing system and that are listed in FMG's "Approval Guide" for Class 1 or noncombustible construction, as applicable. Identify materials with FMG markings.

D. Fire/Windstorm Classification: Class 1A-90.

E. Hail Resistance: SH.

NOT FOR BIDDING

1.05 SUBMITTALS

A. Product Data: For each type of product indicated.

B. Base flashings and membrane terminations.

C. Insulation fastening patterns.

D. Installer Certificates: Signed by roofing system manufacturer certifying that Installer is authorized, or licensed by the manufacturer to install their roofing systems, and be eligible to receive the manufacturer's warranty.

E. Manufacturer Certificates: Signed by the manufacturer certifying that roofing system complies with requirements specified in "Performance Requirements" Article.

F. Submit evidence of meeting performance requirements, ie. Assembly Letter.

1.06 PREINSTALLATION CONFERENCE

A. Preinstallation Conference: Conduct conference at Project site. Review methods and procedures related to roofing system including, but not limited to, the following:
   1. Meet with Owner; roofing Installer; roofing system manufacturer's representative; and installers whose work interfaces with or affects roofing, including installers of roof accessories.
   2. Review methods and procedures related to roofing installation, including manufacturer's written instructions.
   3. Review and finalize construction schedule and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.
   4. Examine deck substrate conditions and finishes for compliance with requirements, including flatness and fastening.
   5. Review structural loading limitations of roof deck during and after roofing.
   6. Review base flashings, special roofing details, roof drainage, roof penetrations, equipment curbs, and condition of other construction that will affect roofing system.
   7. Review governing regulations and requirements for insurance and certificates if applicable.
   8. Review temporary protection requirements for roofing system during and after installation.
   9. Review roof observation and repair procedures after roofing installation.

1.07 DELIVERY, STORAGE, AND HANDLING

A. Deliver roofing materials to Project site in original containers with seals unbroken and labeled with manufacturer's name, product brand name and type, date of manufacture, and directions for storing and mixing with other components.

B. Store liquid materials in their original undamaged containers in a clean, dry, protected location and within the temperature range required by roofing system manufacturer. Protect stored liquid material from direct sunlight.

C. Discard and legally dispose of liquid material that cannot be applied within its stated shelf life.

D. Protect roof insulation materials from physical damage and from deterioration by sunlight, moisture, soiling, and other sources. Store in a dry location. Comply with insulation manufacturer's written instructions for handling, storing, and protecting during installation.

E. Handle and store roofing materials and place equipment in a manner to avoid permanent deflection of deck.

1.08 PROJECT CONDITIONS

A. Weather Limitations: Proceed with installation only when existing and forecasted weather conditions permit roofing system to be installed according to manufacturer's written instructions and warranty requirements.

NOT FOR BIDDING

1.09 WARRANTY

A. Special Warranty: Manufacturer's Warranty standard form, without monetary limitation, in which manufacturer agrees to repair or replace components of membrane roofing system that fail in materials or workmanship within specified warranty period. Failure includes roof leaks.

B. Warranty includes roofing membrane, base flashings, roofing accessories, roof insulation, fasteners, walkway products and other components of membrane roofing system.

C. Warranty Period: 20 years coverage from date of Substantial Completion.

D. Special Project Warranty: Submit roofing Installer's warranty, on warranty form at end of this Section, signed by Installer, covering Work of this Section, including all components of membrane roofing system such as roofing membrane, base flashing, roof insulation, fasteners, cover boards, and walkway products, for the following warranty period:

E. Warranty Period: Two years from date of Substantial Completion.

PART 2 PRODUCTS

2.01 EPDM ROOFING MEMBRANE

A. EPDM Roofing Membrane: ASTM D 4637, Type I, 60 mil, white, nonreinforced uniform, flexible sheet made from EPDM.

2.02 MANUFACTURERS

A. Manufacturer from only the following:
   1. Firestone
   2. Carlisle
   3. John Mansville

2.03 AUXILIARY MATERIALS

A. General: Auxiliary materials recommended by roofing system manufacturer for intended use and compatible with membrane roofing.

B. Liquid-type auxiliary materials shall meet VOC limits of authorities having jurisdiction.

C. Sheet Flashing: 60-mil- (1.5-mm-) thick EPDM, partially cured or cured, according to application.

D. Bonding Adhesive: Manufacturer's standard bonding adhesive or VOC Compliant if applicable.

E. Seaming Material: Manufacturer's standard synthetic-rubber polymer primer and 3-inch- (75-mm-) wide minimum, butyl splice tape with release film with a stripping ply application of 6” Flashing centered over the lap splice.

F. Lap Sealant: Manufacturer's standard single-component sealant, color to match roofing membrane.

G. Water Cutoff Mastic: Manufacturer's standard butyl mastic sealant.

H. Metal Termination Bars: Manufacturer's standard predrilled stainless-steel or aluminum bars, approximately 1 by 1/8 inch thick; with anchors.

I. Fasteners: Heavy Duty heat treated steel fasteners and metal plates meeting corrosion-resistance provisions in FMG 4470, designed for fastening membrane to substrate and insulation materials and acceptable to membrane roofing system manufacturer.

J. Miscellaneous Accessories: Provide pourable sealers, preformed cone and vent sheet flashings, preformed inside and outside corner sheet flashings, T-joint covers, in-seam sealants, termination reglets, cover strips, and other accessories, color to match roofing membrane.

2.04 EDGE METAL

A. Fabricated edge metal system: .050 gauge standard Kynar finish.

NOT FOR BIDDING

B. Edge System: Metal edge system, specified by the roofing manufacturer as an integral part of the roofing system warranty.

C. Aluminum: .050 gauge

D. Paint type: Standard Kynar 500 Finish

E. Paint warranty: 20 year paint finish warranty
   1. Manufacturer:
      a. AnchorGard Platinum by Firestone Metal Products
      b. Secure Edge by Carlisle SynTec

2.05 ROOF INSULATION

A. General: Provide preformed roof insulation boards that comply with requirements and referenced standards, selected from manufacturer's standard sizes and of thicknesses indicated.

B. Polyisocyanurate Board Insulation: ASTM C 1289, Type II, felt or glass-fiber mat facer on both major surfaces.

C. Board Thickness: Tapered and Uniform

D. Board Size: 48 x 96 inch

E. Compressive strength 20 psi

2.06 MANUFACTURER

A. Firestone (ISO 95+), Carlisle (HP-H)

B. Provide preformed crickets as noted on the roof drawings. Fabricated by manufacturer to slopes indicated.

2.07 INSULATION ACCESSORIES

A. Fasteners: Factory-coated Heavy Duty fasteners and metal plates meeting corrosion-resistance provisions in FMG 4470, designed for fastening roof insulation to substrate, and acceptable to roofing system manufacturer.

B. Insulation Adhesive: A two-component low-rise polyurethane adhesive designed for anchoring acceptable roof insulation to specific substrates.

C. Cover Board
   1. Cover Board: Tested to ASTM C 1289, Type II, felt or glass-fiber mat facer on both major surfaces.
   2. Thickness .5” (R Value 2.5)
   3. Board Size: 4’x4’
      a. Products:
         1) Firestone Iso Gard HD
         2) Carlisle Secure Shield HD

2.08 WALKWAYS

A. Flexible Walkways: Factory-formed, nonporous, heavy-duty, solid-rubber, slip-resisting, surface-textured walkway pads, approximately 3/16 inch (5 mm) thick, and acceptable to membrane roofing system manufacturer.

2.09 HVAC ROOF SUPPORTS

A. Furnish and install condensing unit support frame as manufactured by MIRO Industries Inc. www.miroind.com
   1. Mechanical Unit Support: HD-Mechanical Supports SKU:c802a174a9fe

NOT FOR BIDDING

PART 3 EXECUTION

3.01 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with the following requirements and other conditions affecting performance of roofing system:

B. Verify that roof openings and penetrations are in place and set and braced and that roof drains are securely clamped in place.

C. Verify that wood blocking, curbs, and nailers are securely anchored to roof deck at penetrations and terminations and that nailers match thicknesses of insulation.

D. Verify that minimum concrete drying period recommended by roofing system manufacturer has passed.

E. Verify that concrete substrate is visibly dry and free of moisture. Test for capillary moisture by plastic sheet method according to ASTM D 4263.

F. Verify that concrete curing compounds that will impair adhesion of roofing components to roof deck have been removed.

G. Proceed with installation only after unsatisfactory conditions have been corrected.

3.02 PREPARATION

A. Clean substrate of dust, debris, moisture, and other substances detrimental to roofing installation according to roofing system manufacturer's written instructions. Remove sharp projections.

B. Prevent materials from entering and clogging roof drains and conductors and from spilling or migrating onto surfaces of other construction. Remove roof-drain plugs when no work is taking place or when rain is forecast.

C. Complete terminations and base flashings and provide temporary seals to prevent water from entering completed sections of roofing system at the end of the workday or when rain is forecast. Remove and discard temporary seals before beginning work on adjoining roofing.

3.03 INSULATION INSTALLATION

A. Mechanically Fastened Insulation for Steel Deck: Install each layer of insulation and secure to deck using mechanical fasteners specifically designed and sized for fastening specified board-type roof insulation to deck type.

B. Fasten insulation with Heavy Duty Fasteners at a rate of 8 fasteners and plates per 4’x8’ board in the field; 16 fasteners and plates per 4’x8’ board in the perimeter and 32 fasteners and plates per 4’x8’ board in the corners of the roof system.

C. Adhesive Attach Cover Board to Insulation: Prior to commencing production, a test insulation board must be installed to verify ambient conditions, adhesive application rate, and rise are sufficient to achieve good adhesion over entire insulation board. An authorized supplier shall be used to perform the required testing. Consult Manufacturer’s Technical Information Sheets (TIS) or Technical Manual for additional application, storage, and handling information.

D. Apply ½” wide beads to deck or substrate spaced as outlined above. Allow adhesive to rise to ¾“–1”. Rise time will be a few minutes depending upon ambient temperature.

E. Set the insulation boards immediately after foam rises but prior to adhesive skinning over.

F. Immediately after positioning the insulation, weight each board using full pails of bonding adhesive or other available weight. Position pails so they are centered over the corners of the insulation boards. Weight shall be left in place for about 5-15 minutes. Adhesive cures quicker at warmer temperatures than colder temperature. Boards must have weight placed immediately after they are set in place. Consult TIS for set-up time information.

G. Insulation may be walked on and roofed over after weight is removed.

NOT FOR BIDDING

H. Application rate of adhesive is 12” o.c bead spacing. in the field of the roof with bead spacing of 6” o.c. in the perimeter and 4” o.c. in the corners of the building.

I. Comply with Manufacturer’s written instructions for installing roof insulation. Coordinate installing membrane roofing system components so insulation is not exposed to precipitation or left exposed at the end of the workday.

J. Comply with membrane roofing system Manufacturer’s written instructions for installing roof insulation.

K. Install tapered insulation under area of roofing to conform to slopes indicated.

L. Trim surface of insulation where necessary at roof drains so completed surface is flush and does not restrict flow of water.

M. Install insulation with long joints of insulation in a continuous straight line with end joints staggered between rows, abutting edges and ends between boards. Fill gaps exceeding 1/4 inch (6 mm) with insulation.

N. Cut and fit insulation within 1/4 inch (6 mm) of nailers, projections, and penetrations.

3.04 ADHERED ROOFING MEMBRANE INSTALLATION

A. Install roofing membrane over area to receive roofing according to membrane roofing system manufacturer's written instructions. Unroll roofing membrane and allow to relax before installing.

B. Accurately align roofing membrane and maintain uniform side and end laps of minimum dimensions required by manufacturer.

C. Bonding Adhesive: Apply bonding adhesive to substrate and underside of roofing membrane at rate required by manufacturer and allow to partially dry before installing roofing membrane. Do not apply bonding adhesive to splice area of roofing membrane.

D. Tape Seam Installation: Clean and prime both faces of splice areas, apply splice tape, and firmly roll side and end laps of overlapping roofing membranes according to manufacturer's written instructions to ensure a watertight seam installation. Apply stripping ply application of 6” Flashing centered over the lap splice.

E. Apply lap sealant and seal exposed edges of roofing membrane terminations.

F. Repair tears, voids, and lapped seams in roofing that does not meet requirements.

G. Spread sealant or mastic bed over deck drain flange at deck drains and securely seal roofing membrane in place with clamping ring.

3.05 BASE FLASHING INSTALLATION

A. Install sheet flashings and preformed flashing accessories and adhere to substrates according to membrane roofing system manufacturer's written instructions.

B. Apply bonding adhesive to substrate and underside of sheet flashing at required rate and allow to partially dry. Do not apply bonding adhesive to seam area of flashing.

C. Flash penetrations and field-formed inside and outside corners with cured or uncured sheet flashing.

D. Clean splice areas, apply splicing cement, and firmly roll side and end laps of overlapping sheets to ensure a watertight seam installation. Apply lap sealant and seal exposed edges of sheet flashing terminations.

E. Terminate and seal top of sheet flashings and mechanically anchor to substrate through termination bars.

NOT FOR BIDDING

3.06 WALKWAY INSTALLATION

A. Flexible Walkways: Install walkway products in locations indicated. Adhere walkway products to substrate with compatible adhesive according to roofing system manufacturer's written instructions.

3.07 FIELD QUALITY CONTROL

A. Final Roof Inspection: Arrange for roofing system manufacturer's technical personnel to inspect roofing installation on completion.

B. Notify Architect or Owner 48 hours in advance of date and time of inspection.

C. Repair or remove and replace components of membrane roofing system where test results or inspections indicate that they do not comply with specified requirements.

D. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements. Contractors will be required to have manufacturer’s representative perform inspections no less than 3 times a week during roof application. Cost of inspections will be included in base bid price.

3.08 PROTECTING AND CLEANING

A. Protect membrane roofing system from damage and wear during remainder of construction period. When remaining construction will not affect or endanger roofing, inspect roofing for deterioration and damage, describing its nature and extent in a written report, with copies to Architect and Owner.

B. Correct deficiencies in or remove membrane roofing system that does not comply with requirements, repair substrates and repair or reinstall membrane roofing system to a condition free of damage and deterioration at time of Substantial Completion and according to warranty requirements.

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 07 62 00
SHEET METAL FLASHING AND TRIM

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Brake metal trim at storefronts, curtainwalls and column enclosures.
2. Manufactured through-wall flashing with interlocking counterflashing.
3. Manufactured reglets with counterflashing.
4. Manufactured roof edging & fascia system.
5. Formed roof-drainage sheet metal fabrications.
6. Formed low-slope roof sheet metal fabrications.
7. Formed equipment support flashing.

B. Related Requirements:

1. Section 06 10 00 Rough Carpentry
2. Section 07 53 00 Elastomeric Membrane Roofing for installation of sheet metal flashing and trim integral with roofing.
3. Section 07 90 05 Joint Sealers

NOT FOR BIDDING

1.3 COORDINATION

A. Coordinate sheet metal flashing and trim layout and seams with sizes and locations of penetrations to be flashed, and joints and seams in adjacent materials.

B. Coordinate sheet metal flashing and trim installation with adjoining roofing and wall materials, joints, and seams to provide leakproof, secure, and noncorrosive installation.

1.4 PREINSTALLATION MEETINGS

A. Pre-installation Conference: Conduct conference at Project site.

1. Review construction schedule. Verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.
2. Review special roof details, roof drainage, roof-penetration flashing, equipment curbs, and condition of other construction that affect sheet metal flashing and trim.
3. Review requirements for insurance and certificates if applicable.
4. Review sheet metal flashing observation and repair procedures after flashing installation.

1.5 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for each manufactured product and accessory.

B. Shop Drawings: For sheet metal flashing and trim.

1. Include plans, elevations, sections, and attachment details.
2. Detail fabrication and installation layouts, expansion-joint locations, and keyed details. Distinguish between shop- and field-assembled work.
3. Include identification of material, thickness, weight, and finish for each item and location in Project.
4. Include details for forming, including profiles, shapes, seams, and dimensions.
5. Include details for joining, supporting, and securing, including layout and spacing of fasteners, cleats, clips, and other attachments. Include pattern of seams.
6. Include details of termination points and assemblies.
7. Include details of expansion joints and expansion-joint covers, including showing direction of expansion and contraction from fixed points.
8. Include details of roof-penetration flashing.
9. Include details of edge conditions, including eaves, ridges, valleys, rakes, crickets, and counterflashings as applicable.
10. Include details of special conditions.
11. Include details of connections to adjoining work.
12. Detail formed flashing and trim at scale of not less than 3 inches per 12 inches (1:5).

C. Samples for Initial Selection: For each type of sheet metal and accessory indicated with factory-applied finishes.

D. Samples for Verification: For each type of exposed finish.

1. Sheet Metal Flashing: 12 inches long by actual width of unit, including finished seam and in required profile. Include fasteners, cleats, clips, closures, and other attachments.
2. Trim, Metal Closures, Expansion Joints, Joint Intersections, and Miscellaneous Fabrications: 12 inches long and in required profile. Include fasteners and other exposed accessories.
3. Unit-Type Accessories and Miscellaneous Materials: Full-size Sample.
4. Anodized Aluminum Samples: Samples to show full range to be expected for each color required.

1.6 INFORMATIONAL SUBMITTALS

A. Qualification Data: For fabricator.

B. Product Certificates: For each type of coping and roof edge flashing that is FM Approvals approved.

C. Product Test Reports: For each product, for tests performed by a qualified testing agency.

D. Sample Warranty: For special warranty.

NOT FOR BIDDING

1.7 CLOSEOUT SUBMITTALS

A. Maintenance Data: For sheet metal flashing and trim, and its accessories, to include in maintenance manuals.

1.8 QUALITY ASSURANCE

A. Fabricator Qualifications: Employs skilled workers who custom fabricate sheet metal flashing and trim similar to that required for this Project and whose products have a record of successful in-service performance.

1. For copings and roof edge flashings that are FM Approvals approved, shop shall be listed as able to fabricate required details as tested and approved.

B. Mockups: Build mockups to verify selections made under Sample submittals, to demonstrate aesthetic effects, and to set quality standards for fabrication and installation.

1. Build mockup of typical roof eave, including fascia trim, approximately 10 feet long, including supporting construction cleats, seams, attachments, underlayment, and accessories.
2. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
3. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.9 DELIVERY, STORAGE, AND HANDLING

A. Do not store sheet metal flashing and trim materials in contact with other materials that might cause staining, denting, or other surface damage. Store sheet metal flashing and trim materials away from uncured concrete and masonry.

B. Protect strippable protective covering on sheet metal flashing and trim from exposure to sunlight and high humidity, except to extent necessary for period of sheet metal flashing and trim installation.

1.10 WARRANTY

A. Special Warranty on Finishes: Manufacturer agrees to repair finish or replace sheet metal flashing and trim that shows evidence of deterioration of factory-applied finishes within specified warranty period.

1. Exposed Panel Finish: Deterioration includes, but is not limited to, the following:

a. Color fading more than 5 Hunter units when tested according to ASTM D 2244.
b. Chalking in excess of a No. 8 rating when tested according to ASTM D 4214.
c. Cracking, checking, peeling, or failure of paint to adhere to bare metal.

2. Finish Warranty Period: 20 years from date of Substantial Completion.

NOT FOR BIDDING

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. General: Sheet metal flashing and trim assemblies shall withstand wind loads, structural movement, thermally induced movement, and exposure to weather without failure due to defective manufacture, fabrication, installation, or other defects in construction. Completed sheet metal flashing and trim shall not rattle, leak, or loosen, and shall remain watertight.

B. Sheet Metal Standard for Flashing and Trim: Comply with NRCA's "The NRCA Roofing Manual" and SMACNA's "Architectural Sheet Metal Manual" requirements for dimensions and profiles shown unless more stringent requirements are indicated.

C. Sheet Metal Standard for Copper: Comply with CDA's "Copper in Architecture Handbook." Conform to dimensions and profiles shown unless more stringent requirements are indicated.

D. FM Approvals Listing: Manufacture and install copings, roof edge flashings that are listed in FM Approvals' "RoofNav" and approved for windstorm classification, Class 1-90. Identify materials with name of fabricator and design approved by FM Approvals.

E. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes to prevent buckling, opening of joints, overstressing of components, failure of joint sealants, failure of connections, and other detrimental effects. Base calculations on surface temperatures of materials due to both solar heat gain and nighttime-sky heat loss.

1. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.

2.2 SHEET METALS

A. General: Protect mechanical and other finishes on exposed surfaces from damage by applying strippable, temporary protective film before shipping.

B. Copper Sheet: ASTM B 370, cold-rolled copper sheet, H00 or H01 temper.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Hussey Copper Ltd.
b. Revere Copper Products, Inc.

2. Nonpatinated Exposed Finish: Mill.

C. Aluminum Sheet: ASTM B 209, alloy as standard with manufacturer for finish required, with temper as required to suit forming operations and performance required; with smooth, flat surface.

1. As-Milled Finish: Mil.
2. Exposed Coil-Coated Finish:
   a. Two-Coat Fluoropolymer: AAMA 620. Fluoropolymer finish containing not less than 70 percent PVDF resin by weight in color coat. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.
3. Color: As selected by Architect from manufacturer's full range.

NOT FOR BIDDING

4. Concealed Finish: Pretreat with manufacturer's standard white or light-colored acrylic or polyester backer finish, consisting of prime coat and wash coat with minimum total dry film thickness of 0.5 mil.

D. Stainless-Steel Sheet: ASTM A 240/A 240M or ASTM A 666, Type 304, dead soft, fully annealed; with smooth, flat surface.

1. Finish: 2D (dull, cold rolled).

E. Copper-Clad Stainless-Steel Sheet: ASTM B 506, annealed Temper O61.

1. Products: Subject to compliance with requirements, provide one of the following:

a. Engineering Materials Solutions, a member of the Wickeder Group; CopperPlus.
b. SEMCO Southeastern Metals, a Gibraltar Industries company; CopperXT.

2. Nonpatinated Exposed Finish: Mill.

F. Aluminum Brake Metal

1. Basic Use: Brake metal trim, interior and exterior at aluminum storefronts and curtainwalls, at jambs, heads, sills and column enclosures. Material: Aluminum. Gauge: .050”. Texture – Smooth. Color: Color anodized using standard color chart.

2. Limitations: Fabrication and installation of materials should conform to standards established by the Architectural Sheet Metal Community. During the fabrication and/or forming of the materials, proper bend radii must be used. Minor scratches should be touched-up immediately, utilizing an air dry. For damage other than minor scratches, such as dents, deep abrasions, or scratches which have damaged base materials, the actual unit should be replaced. All metal shavings, chips, and dust must be removed from material immediately.

3. Technical Data - Applicable Standards:

Aluminum materials conform to ASTM B 209, alloy 3003 H14 or 3105 H14. Painted aluminum conforms to performance requirements of AAMA 2605. Anodic finishes to meet the requirements of the Aluminum Association DAF-45 and AAMA 611 for anodized architectural aluminum.

4. Installation

Installation shall be in accordance with standards established by the Architectural Sheet Metal Community. Installer to comply with all manufacturer's installation instructions as per project requirements. Care should be taken during handling and fabrication of materials to prevent bending, twisting, abrasion, scratching, denting, etc. All cutting tools should be kept sharp, properly dressed and aligned. If protective masking is utilized, it must be removed immediately after installation.

5. Warranty

Warrant for film integrity (color-fade-chalk) and rupture, cracking or perforating for a thirty-year period from time of shipment, as per standard terms and conditions noted in materials and finish warranty. Provide an actual copy of the warranty will be sent upon request. The product is to be used as it is intended.

NOT FOR BIDDING

6. Maintenance

Materials to be non-staining and maintenance free. Any surface residue is easily removed with conventional cleaning solvents or detergents. Minor scratches may be touched up with an air dry touch-up coating of the same color. Conventional caulking compounds and sealants compatible with the ATAS finish are acceptable for use in conjunction with the ATAS coated materials.

2.3 UNDERLAYMENT MATERIALS

A. Synthetic Underlayment: Laminated or reinforced, woven polyethylene or polypropylene, synthetic roofing underlayment; bitumen free; slip resistant; suitable for high temperatures over 220 deg F; and complying with physical requirements of ASTM D 226/D 226M for Type I and Type II felts.

1. Products: Subject to compliance with requirements, provide one of the following:

a. Atlas Roofing Corporation; Summit.
b. Engineered Coated Products; Nova-Seal II.
c. Kirsch Building Products, LLC; Sharkskin Ultra.
d. SDP Advanced Polymer Products Inc; Palisade.

B. Self-Adhering, High-Temperature Sheet: Minimum 30 mils thick, consisting of a slip-resistant polyethylene- or polypropylene-film top surface laminated to a layer of butyl- or SBS-modified asphalt adhesive, with release-paper backing; specifically designed to withstand high metal temperatures beneath metal roofing. Provide primer according to written recommendations of underlayment manufacturer.

1. Products: Subject to compliance with requirements, provide one of the following:

a. Carlisle Residential, a division of Carlisle Construction Materials; WIP 300HT.
b. Grace Construction Products, a unit of W. R. Grace & Co.-Conn.; Grace Ice and Water Shield HT.
c. Henry Company; Blueskin PE200 HT.
d. Kirsch Building Products, LLC; Sharkskin Ultra SA.
e. Metal-Fab Manufacturing, LLC; MetShield.
f. Owens Corning; WeatherLock Specialty Tile & Metal Underlayment.
g. Polyguard Products, Inc.; Deck Guard HT.

2. Thermal Stability: ASTM D 1970; stable after testing at 240 deg F or higher.
3. Low-Temperature Flexibility: ASTM D 1970; passes after testing at minus 20 deg F or lower.

C. Slip Sheet: Rosin-sized building paper, 3 lb/100 sq. ft. minimum.

2.4 MISCELLANEOUS MATERIALS

A. General: Provide materials and types of fasteners, solder, protective coatings, sealants, and other miscellaneous items as required for complete sheet metal flashing and trim installation and as recommended by manufacturer of primary sheet metal or manufactured item unless otherwise indicated.

B. Fasteners: Wood screws, annular threaded nails, self-tapping screws, self-locking rivets and bolts, and other suitable fasteners designed to withstand design loads and recommended by manufacturer of primary sheet metal or manufactured item.

NOT FOR BIDDING

1. General: Blind fasteners or self-drilling screws, gasketed, with hex-washer head.

   a. Exposed Fasteners: Heads matching color of sheet metal using plastic caps or factory-applied coating. Provide metal-backed EPDM or PVC sealing washers under heads of exposed fasteners bearing on weather side of metal.
   b. Blind Fasteners: High-strength aluminum or stainless-steel rivets suitable for metal being fastened.
   c. Spikes and Ferrules: Same material as gutter; with spike with ferrule matching internal gutter width.

2. Fasteners for Copper and Copper-Clad Stainless-Steel Sheet: Copper, hardware bronze or passivated Series 300 stainless steel.
3. Fasteners for Aluminum Sheet: Aluminum or Series 300 stainless steel.
4. Fasteners for Stainless-Steel Sheet: Series 300 stainless steel.

C. Solder:

1. For Copper and Copper-Clad Stainless Steel: ASTM B 32, Grade Sn50, 50 percent tin and 50 percent lead with maximum lead content of 0.2 percent.
2. For Stainless Steel: ASTM B 32, Grade Sn60Sn96, with acid flux of type recommended by stainless-steel sheet manufacturer.

D. Sealant Tape: Pressure-sensitive, 100 percent solids, polyisobutylene compound sealant tape with release-paper backing. Provide permanently elastic, nonsag, nontoxic, nonstaining tape 1/2 inch wide and 1/8 inch thick.

E. Elastomeric Sealant: ASTM C 920, elastomeric polyurethane polymer sealant; of type, grade, class, and use classifications required to seal joints in sheet metal flashing and trim and remain watertight.

F. Butyl Sealant: ASTM C 1311, single-component, solvent-release butyl rubber sealant; polyisobutylene plasticized; heavy bodied for hooked-type expansion joints with limited movement.

G. Epoxy Seam Sealer: Two-part, noncorrosive, aluminum seam-cementing compound, recommended by aluminum manufacturer for exterior nonmoving joints, including riveted joints.

H. Bituminous Coating: Cold-applied asphalt emulsion according to ASTM D 1187.

I. Asphalt Roofing Cement: ASTM D 4586, asbestos free, of consistency required for application.

2.5 MANUFACTURED SHEET METAL FLASHING AND TRIM

A. Through-Wall, Ribbed, Sheet Metal Flashing: Manufacture through-wall sheet metal flashing for embedment in masonry, with ribs at 3-inch intervals along length of flashing to provide integral mortar bond. Manufacture through-wall flashing with interlocking counterflashing on exterior face, of same metal as flashing.

1. Copper: 16 oz. / sq. ft.

   a. Products: Subject to compliance with requirements, provide one of the following:

      1) Cheney Flashing Company; Cheney Flashing Dovetail.
      2) Hohmann & Barnard, Inc.; STF Sawtooth Flashing.

NOT FOR BIDDING

3) Keystone Flashing Company, Inc.; Keystone Three-Way Interlocking Thruwall Flashing.
Sandell Manufacturing; Pre-Formed Metal Flashing.

2. Stainless Steel: 0.016 inch thick.

a. Products: Subject to compliance with requirements, provide one of the following:

1) Cheney Flashing Company; Cheney Flashing Dovetal.
2) Hohmann & Barnard, Inc.; STF Sawtooth Flashing.
3) Keystone Flashing Company, Inc.; Keystone Three-Way Interlocking Thruwall Flashing.
4) Sandell Manufacturing; Pre-Formed Metal Flashing.

B. Reglets: Units of type, material, and profile required, formed to provide secure interlocking of separate reglet and counterflashing pieces, and compatible with flashing indicated with factory-mitered and welded corners and junctions and with interlocking counterflashing on exterior face, of same metal as reglet.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
2. Basis-of-Design Product: Subject to compliance with requirements, provide product indicated on Drawings or comparable product by one of the following:

a. Cheney Flashing Company.
b. Fry Reglet Corporation.
c. Heckmann Building Products, Inc.
d. Hickman, W. P. Company.
e. Hohmann & Barnard, Inc.
f. Keystone Flashing Company, Inc.

3. Material: Stainless steel, 0.019 inch thick, Copper, 16 oz. / sq. ft.
4. Surface-Mounted Type: Provide with slotted holes for fastening to substrate, with neoprene or other suitable weatherproofing washers, and with channel for sealant at top edge.
5. Stucco Type: Provide with upturned fastening flange and extension leg of length to match thickness of applied finish materials.
6. Concrete Type: Provide temporary closure tape to keep reglet free of concrete materials, special fasteners for attaching reglet to concrete forms, and guides to ensure alignment of reglet section ends.
7. Masonry Type: Provide with offset top flange for embedment in masonry mortar joint.
8. Accessories:

a. Flexible-Flashing Retainer: Provide resilient plastic or rubber accessory to secure flexible flashing in reglet where clearance does not permit use of standard metal counterflashing or where Drawings show reglet without metal counterflashing.
b. Counterflashing Wind-Restraint Clips: Provide clips to be installed before counterflashing to prevent wind uplift of counterflashing's lower edge.

9. Finish: Mill.

C. Roof Edge Flashing (Gravel Stop) and Fascia Cap: Units of type, material, and profile required, formed to provide secure interlocking of separate roof edge and fascia cap pieces, and compatible with base flashing indicated with factory-mitered and welded corners and junctions and with interlocking cap on exterior face, of same metal as roof edge flashing & fascia cap.

NOT FOR BIDDING

1. Basis-of-Design Product: Subject to compliance with requirements, provide product indicated on Drawings
2. Material: .050” aluminum.
3. Deck Bracket Units: Provide with deck bracket units for fastening to substrate.
4. Finish: Standard color range.

2.6 FABRICATION, GENERAL

A. General: Custom fabricate sheet metal flashing and trim to comply with details shown and recommendations in cited sheet metal standard that apply to design, dimensions, geometry, metal thickness, and other characteristics of item required. Fabricate sheet metal flashing and trim in shop to greatest extent possible.

1. Fabricate sheet metal flashing and trim in thickness or weight needed to comply with performance requirements, but not less than that specified for each application and metal.
2. Obtain field measurements for accurate fit before shop fabrication.
3. Form sheet metal flashing and trim to fit substrates without excessive oil canning, buckling, and tool marks; true to line, levels, and slopes; and with exposed edges folded back to form hems.
4. Conceal fasteners and expansion provisions where possible. Do not use exposed fasteners on faces exposed to view.

B. Fabrication Tolerances: Fabricate sheet metal flashing and trim that is capable of installation to a tolerance of 1/4 inch in 20 feet on slope and location lines indicated on Drawings and within 1/8-inch offset of adjoining faces and of alignment of matching profiles.

C. Fabrication Tolerances: Fabricate sheet metal flashing and trim that is capable of installation to tolerances specified in MCA's "Guide Specification for Residential Metal Roofing."

D. Expansion Provisions: Form metal for thermal expansion of exposed flashing and trim.

1. Form expansion joints of intermeshing hooked flanges, not less than 1 inch deep, filled with butyl sealant concealed within joints.
2. Use lapped expansion joints only where indicated on Drawings.

E. Sealant Joints: Where movable, nonexpansion-type joints are required, form metal to provide for proper installation of elastomeric sealant according to cited sheet metal standard.

F. Fabricate cleats and attachment devices from same material as accessory being anchored or from compatible, noncorrosive metal.

G. Fabricate cleats and attachment devices of sizes as recommended by cited sheet metal standard and by FM Global Property Loss Prevention Data Sheet 1-49 for application, but not less than thickness of metal being secured.

H. Seams: Fabricate nonmoving seams with flat-lock seams. Tin edges to be seamed, form seams, and solder.

I. Seams: Fabricate nonmoving seams with flat-lock seams. Form seams and seal with elastomeric sealant unless otherwise recommended by sealant manufacturer for intended use. Rivet joints where necessary for strength.

NOT FOR BIDDING

J. Seams for Aluminum: Fabricate nonmoving seams with flat-lock seams. Form seams and seal with epoxy seam sealer. Rivet joints where necessary for strength.

K. Do not use graphite pencils to mark metal surfaces.

2.7 ROOF-DRAINAGE SHEET METAL FABRICATIONS

A. Hanging Gutters: Fabricate to cross section required, complete with end pieces, outlet tubes, and other accessories as required. Fabricate in minimum 96-inch- long sections. Furnish flat-stock gutter brackets and flat-stock gutter spacers and straps fabricated from same metal as gutters, of size recommended by cited sheet metal standard but with thickness not less than 1/8 inch. Fabricate expansion joints, expansion-joint covers, gutter bead reinforcing bars, and gutter accessories from same metal as gutters. Shop fabricate interior and exterior corners.

1. Gutter Profile: Style indicated on drawings according to cited sheet metal standard.
2. Expansion Joints: Butt type with cover plate.
3. Accessories: Wire-ball downspout strainer.
4. Gutters with Girth up to 15 Inches: Fabricate from the following materials:

   a. Aluminum: 0.040 inch thick.

B. Downspouts: Fabricate downspouts to dimensions indicated on drawings, complete with mitered elbows. Furnish with metal hangers from same material as downspouts and anchors. Shop fabricate elbows.

1. Fabricated Hanger Style: Provide hangers per drawing details and according to SMACNA's "Architectural Sheet Metal Manual."

C. Parapet Scuppers: Fabricate scuppers to dimensions required, with closure flange trim to exterior, 4-inch wide wall flanges to interior, and base extending 4 inches beyond cant or tapered strip into field of roof. Fabricate from the following materials:

1. Aluminum: 0.040 inch thick.

D. Conductor Heads: Fabricate conductor heads with flanged back and stiffened top edge and of dimensions and shape required, complete with outlet tubes, exterior flange trim and built-in overflows. Fabricate from the following materials:

1. Aluminum: 0. 080 inch thick pre-fabricated and 0.050” thick shop fabricated.
2. Splash Pans: Fabricate to dimensions and shape required and from the following materials:
   a. Stainless Steel: 0.019 inch thick.

2.8 LOW-SLOPE ROOF SHEET METAL FABRICATIONS

A. Roof Edge Flashing (Gravel Stop) and Fascia Cap: Fabricate in minimum 96-inch long, but not exceeding 12-foot long sections. Furnish with 6-inch wide, joint cover plates. Shop fabricate interior and exterior corners.

1. Joint Style: Butted with expansion space and 6-inch wide, concealed backup plate.
2. Fabricate with scuppers spaced 10 feet apart, to dimensions required with 4-inch wide flanges and base extending 4 inches beyond cant or tapered strip into field of roof. Fasten gravel guard angles to base of scupper.

NOT FOR BIDDING

3. Fabricate from the Following Materials:
   a. Aluminum: 0.050" thick shop fabricated.

B. Copings: Fabricate in minimum 96-inch long, but not exceeding 12-foot long, sections. Fabricate joint plates of same thickness as copings. Furnish with continuous cleats to support edge of external leg and drill elongated holes for fasteners on interior leg. Miter corners weld watertight. Shop fabricate interior and exterior corners.

1. Coping Profile: As indicated on Drawings.
2. Joint Style: Butted with expansion space and 6-inch wide, concealed backup plate.
3. Fabricate from the Following Materials:
   a. Aluminum: 0.050 inch thick.

C. Counterflashing: Shop fabricate interior and exterior corners. Fabricate from the following materials:

1. Stainless Steel: 0.019 inch thick.

D. Flashing Receivers: Fabricate from the following materials:

1. Stainless Steel: 0.019 inch thick.

E. Roof-Penetration Flashing: Fabricate from the following materials:

1. Stainless Steel: 0.019 inch thick.

F. Roof-Drain Flashing: Fabricate from the following materials:

1. Copper: 12 oz. / sq. ft.

2.9 STEEP-SLOPE ROOF SHEET METAL FABRICATIONS

A. Apron, Step, Cricket, and Backer Flashing: Fabricate from the following materials:

1. Stainless Steel: 0.019 inch thick.

B. Drip Edges: Fabricate from the following materials:

1. Aluminum: 0.040 inch thick.

C. Eave, Rake, Ridge, and Hip Flashing: Fabricate from the following materials:

1. Aluminum: 0.40 inch thick.

D. Counterflashing: Shop fabricate interior and exterior corners. Fabricate from the following materials:

1. Copper: 16 oz. / sq. ft. thick.
2. Stainless Steel: 0.019 inch thick.

E. Flashing Receivers: Fabricate from the following materials:

1. Copper: 16 oz. / sq. ft.

NOT FOR BIDDING

2. Stainless Steel: 0.019 inch thick.
3.

F. Roof-Penetration Flashing: Fabricate from the following materials:

1. Copper: 16 oz./sq. ft.
2. Stainless Steel: 0.019 inch thick.

2.10 WALL SHEET METAL FABRICATIONS

A. Through-Wall Flashing: Fabricate continuous flashings in minimum 96-inch long, but not exceeding 12-foot long, sections, under copings, and at shelf angles. Fabricate discontinuous lintel, sill, and similar flashings to extend 6 inches beyond each side of wall openings; and form with 2-inch high, end dams. Fabricate from the following materials:

1. Copper: 16 oz. / sq. ft.
2. Stainless Steel: 0.019 inch thick.
3. Copper-Clad Stainless Steel: 0.018 inch thick.

2.11 MISCELLANEOUS SHEET METAL FABRICATIONS

A. Equipment Support Flashing: Fabricate from the following materials:

1. Copper: 16 oz. / sq. ft.
2. Copper-Clad Stainless Steel: 0.018 inch thick.
3. Stainless Steel: 0.019 inch thick.

NOT FOR BIDDING

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances, substrate, and other conditions affecting performance of the Work.

1. Verify compliance with requirements for installation tolerances of substrates.
2. Verify that substrate is sound, dry, smooth, clean, sloped for drainage, and securely anchored.
3. Verify that air- or water-resistant barriers have been installed over sheathing or backing substrate to prevent air infiltration or water penetration.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 UNDERLAYMENT INSTALLATION

A. Felt Underlayment: Install felt underlayment, wrinkle free, using adhesive to minimize use of mechanical fasteners under sheet metal flashing and trim. Apply in shingle fashion to shed water, with lapped joints of not less than 2 inches.

B. Synthetic Underlayment: Install synthetic underlayment, wrinkle free, according to manufacturers' written instructions, and using adhesive where possible to minimize use of mechanical fasteners under sheet metal.

C. Self-Adhering Sheet Underlayment: Install self-adhering sheet underlayment, wrinkle free. Prime substrate if recommended by underlayment manufacturer. Comply with temperature restrictions of underlayment manufacturer for installation; use primer for installing underlayment at low temperatures. Apply in shingle fashion to shed water, with end laps of not less than 6 inches staggered 24 inches between courses. Overlap side edges not less than 3-1/2 inches. Roll laps and edges with roller. Cover underlayment within 14 days.

D. Apply slip sheet, wrinkle free, over underlayment before installing sheet metal flashing and trim.

3.3 INSTALLATION, GENERAL

A. General: Anchor sheet metal flashing and trim and other components of the Work securely in place, with provisions for thermal and structural movement. Use fasteners, solder, protective coatings, separators, sealants, and other miscellaneous items as required to complete sheet metal flashing and trim system.

1. Install sheet metal flashing and trim true to line, levels, and slopes. Provide uniform, neat seams with minimum exposure of solder, welds, and sealant.
2. Install sheet metal flashing and trim to fit substrates and to result in watertight performance. Verify shapes and dimensions of surfaces to be covered before fabricating sheet metal.
3. Space cleats not more than 12 inches apart. Attach each cleat with at least two fasteners. Bend tabs over fasteners.
4. Install exposed sheet metal flashing and trim with limited oil canning, and free of buckling and tool marks.
5. Torch cutting of sheet metal flashing and trim is not permitted.
6. Do not use graphite pencils to mark metal surfaces.

B. Metal Protection: Where dissimilar metals contact each other, or where metal contacts pressure-treated wood or other corrosive substrates, protect against galvanic action or corrosion by painting contact surfaces with bituminous coating or by other permanent separation as recommended by sheet metal manufacturer or cited sheet metal standard.

1. Coat concealed side of uncoated-aluminum and stainless-steel sheet metal flashing and trim with bituminous coating where flashing and trim contact wood, ferrous metal, or cementitious construction.
2. Underlayment: Where installing sheet metal flashing and trim directly on cementitious or wood substrates, install underlayment and cover with slip sheet.

C. Expansion Provisions: Provide for thermal expansion of exposed flashing and trim. Space movement joints at maximum of 10 feet with no joints within 24 inches of corner or intersection.

1. Form expansion joints of intermeshing hooked flanges, not less than 1 inch deep, filled with sealant concealed within joints.
2. Use lapped expansion joints only where indicated on Drawings.

D. Fasteners: Use fastener sizes that penetrate wood blocking or sheathing not less than 1-1/4 inches for nails and not less than 3/4 inch for wood.

NOT FOR BIDDING

E. Conceal fasteners and expansion provisions where possible in exposed work and locate to minimize possibility of leakage. Cover and seal fasteners and anchors as required for a tight installation.

F. Seal joints as required for watertight construction.

1. Use sealant-filled joints unless otherwise indicated. Embed hooked flanges of joint members not less than 1 inch into sealant. Form joints to completely conceal sealant. When ambient temperature at time of installation is between 40 and 70 deg F, set joint members for 50 percent movement each way. Adjust setting proportionately for installation at higher ambient temperatures. Do not install sealant-type joints at temperatures below 40 deg F.
2. Prepare joints and apply sealants to comply with requirements in Section 079200 "Joint Sealants."

G. Soldered Joints: Clean surfaces to be soldered, removing oils and foreign matter. Pre-tin edges of sheets with solder to width of 1-1/2 inches; however, reduce pre-tinning where pre-tinned surface would show in completed Work.

1. Do not solder aluminum sheet.
2. Do not use torches for soldering.
3. Heat surfaces to receive solder, and flow solder into joint. Fill joint completely. Completely remove flux and spatter from exposed surfaces.
4. Stainless-Steel Soldering: Tin edges of uncoated sheets, using solder for stainless steel and acid flux. Promptly remove acid flux residue from metal after tinning and soldering. Comply with solder manufacturer's recommended methods for cleaning and neutralization.
5. Copper Soldering: Tin edges of uncoated sheets, using solder for copper.
6. Copper-Clad Stainless-Steel Soldering: Tin edges of uncoated sheets, using solder for copper-clad stainless steel.

H. Rivets: Rivet joints in uncoated aluminum where necessary for strength.

NOT FOR BIDDING

3.4 ROOF-DRAINAGE SYSTEM INSTALLATION

A. General: Install sheet metal roof-drainage items to produce complete roof-drainage system according to cited sheet metal standard unless otherwise indicated. Coordinate installation of roof perimeter flashing with installation of roof-drainage system.

B. Hanging Gutters: Join sections with joints sealed with sealant. Provide for thermal expansion. Attach gutters at eave or fascia to firmly anchor them in position. Provide end closures and seal watertight with sealant. Slope to downspouts.

1. Fasten gutter spacers to front and back of gutter.
2. Anchor and loosely lock back edge of gutter to continuous cleat.
3. Anchor gutter with straps spaced not more than 24 inches apart to roof deck, unless otherwise indicated, and loosely lock to front gutter bead.
4. Install gutter with expansion joints at locations indicated, but not exceeding, 40 feet apart. Install expansion-joint caps.

C. Downspouts: Join sections with 1-1/2-inch telescoping joints.

1. Provide hangers with fasteners designed to hold downspouts securely to walls. Locate hangers at top and bottom and at approximately 60 inches o.c.

2. Provide elbows at base of downspout to direct water away from building.
3. Connect downspouts to underground drainage system.

D. Splash Pans: Install where downspouts discharge on low-slope roofs. Set in elastomeric sealant compatible with the substrate.

E. Parapet Scuppers: Continuously support scupper, set to correct elevation, and seal flanges to interior wall face, over cants or tapered edge strips, and under roofing membrane.

1. Anchor scupper closure trim flange to exterior wall and solder to scupper.
2. Loosely lock front edge of scupper with conductor head.
3. Seal with elastomeric sealant exterior wall scupper flanges into back of conductor head.

F. Conductor Heads: Anchor securely to wall, with elevation of conductor head rim at minimum of 1 inch below scupper or gutter discharge.

G. Expansion-Joint Covers: Install expansion-joint covers at locations and of configuration indicated. Lap joints minimum of 4 inches in direction of water flow.

3.5 ROOF FLASHING INSTALLATION

A. General: Install sheet metal flashing and trim to comply with performance requirements, sheet metal manufacturer's written installation instructions, and cited sheet metal standard. Provide concealed fasteners where possible, and set units true to line, levels, and slopes. Install work with laps, joints, and seams that are permanently watertight and weather resistant.

B. Roof Edge & Fascia Cap Flashing: Anchor to resist uplift and outward forces according to recommendations in FM Global Property Loss Prevention Data Sheet 1-49 for FM Approvals' listing for required windstorm classification. Interlock bottom edge of roof edge flashing with cleat anchored to substrates.

C. Copings: Anchor to resist uplift and outward forces according to recommendations in FM Global Property Loss Prevention Data Sheet 1-49for specified FM Approvals' listing for required windstorm classification, unless otherwise indicated.

1. Interlock exterior bottom edge of coping with continuous cleat anchored to substrate at 16-inch centers.
2. Anchor interior leg of coping with washers and screw fasteners through slotted holes at 18-inch centers.

D. Pipe or Post Counterflashing: Install counterflashing umbrella with close-fitting collar with top edge flared for elastomeric sealant, extending minimum of 4 inches over base flashing. Install stainless-steel draw band and tighten.

E. Counterflashing: Coordinate installation of counterflashing with installation of base flashing. Insert counterflashing in reglets or receivers and fit tightly to base flashing. Extend counterflashing 4 inches over base flashing. Lap counterflashing joints minimum of 4 inches. Secure in waterproof manner by means of nap-in installation and sealant or lead wedges, unless otherwise indicated.

F. Roof-Penetration Flashing: Coordinate installation of roof-penetration flashing with installation of roofing and other items penetrating roof. Seal with elastomeric sealant and clamp flashing to pipes that penetrate roof.

NOT FOR BIDDING

3.6 WALL FLASHING INSTALLATION

A. General: Install sheet metal wall flashing to intercept and exclude penetrating moisture according to cited sheet metal standard unless otherwise indicated. Coordinate installation of wall flashing with installation of wall-opening components such as windows, doors, and louvers.

B. Through-Wall Flashing: Installation of through-wall flashing is specified in Section 042000 "Unit Masonry."

C. Reglets: Installation of reglets is specified in Section 033000 "Cast-in-Place Concrete.", Section 042000 "Unit Masonry."

D. Opening Flashings in Frame Construction: Install continuous head, sill, jamb, and similar flashings to extend 4 inches beyond wall openings.

3.7 MISCELLANEOUS FLASHING INSTALLATION

A. Equipment Support Flashing: Coordinate installation of equipment support flashing with installation of roofing and equipment. Weld or seal flashing with elastomeric sealant to equipment support member.

3.8 ERECTION TOLERANCES

A. Installation Tolerances: Shim and align sheet metal flashing and trim within installed tolerance of 1/4 inch in 20 feet on slope and location lines indicated on Drawings and within 1/8-inch offset of adjoining faces and of alignment of matching profiles.

B. Installation Tolerances: Shim and align sheet metal flashing and trim within installed tolerances specified in MCA's "Guide Specification for Residential Metal Roofing."

3.9 CLEANING AND PROTECTION

A. Clean exposed metal surfaces of substances that interfere with uniform oxidation and weathering.

B. Clean and neutralize flux materials. Clean off excess solder.

C. Clean off excess sealants.

D. Remove temporary protective coverings and strippable films as sheet metal flashing and trim are installed unless otherwise indicated in manufacturer's written installation instructions. On completion of sheet metal flashing and trim installation, remove unused materials and clean finished surfaces as recommended by sheet metal flashing and trim manufacturer. Maintain sheet metal flashing and trim in clean condition during construction.

E. Replace sheet metal flashing and trim that have been damaged or that have deteriorated beyond successful repair by finish touchup or similar minor repair procedures.

END OF SECTION

NOT FOR BIDDING

SECTION 07 72 00
ROOF ACCESSORIES

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Manufactured equipment rails, and pedestals.

1.02 SUBMITTALS

A. See Section 01 33 00 - Administrative Requirements, for submittal procedures.

B. Product Data: Manufacturer's data sheets on each product to be used.
   1. Preparation instructions and recommendations.
   2. Storage and handling requirements and recommendations.
   3. Installation methods.
   4. Maintenance requirements.

1.03 DELIVERY, STORAGE, AND HANDLING

A. Store products in manufacturer's unopened packaging until ready for installation.

B. Store products under cover and elevated above grade.

PART 2 PRODUCTS

2.01 MANUFACTURED CURBS

A. Pipe, Duct, and Conduit Mounting Pedestals: Vertical posts, minimum 8 inches square unless otherwise indicated.
   1. Height Above Finished Roof Surface: 8 inches, minimum.

2.02 NON-PENETRATING ROOFTOP ASSEMBLIES

A. Non-Penetrating Rooftop Assemblies: Manufacturer-engineered and factory-fabricated, with pedestal bases that rest on top of roofing membrane, not requiring any attachment to the roof structure and not penetrating the roofing assembly.
   1. Design Loadings and Configurations: As required by applicable codes.
   2. Height: Provide minimum clearance of 8 inches under supported items to top of roofing.
   3. Support Spacing and Base Sizes: As required to distribute load sufficiently to prevent indentation of roofing assembly.
   4. Steel Components: Stainless steel, or carbon steel hot-dip galvanized after fabrication in accordance with ASTM A123/A123M.
   5. Hardware, Bolts, Nuts, and Washers: Stainless steel, or carbon steel hot-dip galvanized after fabrication in accordance with ASTM A153/A153M.

B. Non-Penetrating Pedestals: Steel pedestals with square, round, or rectangular bases.
   1. Bases: High density polypropylene.
   2. Base Sizes: As required to distribute load sufficiently to prevent indentation of roofing assembly.
   3. Steel Components: Stainless steel, or carbon steel hot-dip galvanized after fabrication in accordance with ASTM A123/A123M.

PART 3 EXECUTION

3.01 EXAMINATION

A. Do not begin installation until substrates have been properly prepared.

B. If substrate preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.

NOT FOR BIDDING

3.02 PREPARATION

A. Clean surfaces thoroughly prior to installation.

B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.

3.03 INSTALLATION

A. Install in accordance with manufacturer's instructions, in manner that maintains roofing weather integrity.

3.04 CLEANING

A. Clean installed work to like-new condition.

3.05 PROTECTION

A. Protect installed products until completion of project.

B. Touch-up, repair or replace damaged products before Substantial Completion.

END OF SECTION

NOT FOR BIDDING

SECTION 07 72 01
ROOF HATCH RAIL SYSTEM

PART ONE - GENERAL

1.01 SUMMARY

A. Work included: Furnishing and installing factory fabricated roof hatch rail system.

B. Related Work: Section 07 72 00 – Enhanced Performance Roof Hatch.

1.02 REFERENCES

A. American Society for Testing and Materials (ASTM), 100 Bar Harbor Drive, West Conshocken, PA

B. 19428-2959; (610) 832-9585, fax (610) 832-9555
   1. ASTM A123

C. Occupational Safety & Health Administration (OSHA), 200 Constitution Avenue NW,
   1. Washington, DC 20210
   2. 29 CFR 1910.23 Fall Protection in General Industry

1.03 SUBMITTALS

A. Product Data: Provide manufacturer's product data for all materials in this specification.

B. Shop Drawings: Show profiles, accessories, location, and dimensions.

C. Samples: Manufacturer to provide upon request; sized to represent material adequately.

D. Contract Closeout: Roof hatch rail system manufacturer shall provide the manufacturer's Warranty prior to the contract closeout [if applicable].

1.04 PRODUCT HANDLING

A. All materials shall be delivered in manufacturer's original packaging.

B. Store materials in a dry, protected, well-vented area. The contractor shall thoroughly inspect product upon receipt and report damaged material immediately to delivering carrier and note such damage on the carrier's freight bill of lading.

C. Remove protective wrapping immediately after installation [if applicable].

1.05 SUBSTITUTIONS

A. Proposals for substitution products shall be accepted only from bidding contractors and not less than (10) working days before bid due date. Contractor guarantees that proposed substitution shall meet the performance and quality standards of this specification.

1.06 JOB CONDITIONS

A. Verify that other trades with related work are complete before installing roof hatch rail system(s).

B. Mounting surfaces shall be straight and secure; substrates shall be of proper width.

C. Refer to the construction documents, shop drawings, and manufacturer's installation instructions.

D. Observe all appropriate OSHA safety guidelines for this work.

1.07 WARRANTY/GUARANTEE

A. Manufacturer's standard warranty: Materials shall be free of defects in material and workmanship for a period of twenty-five years from the date of purchase. Should a part fail to function in normal use within this period, manufacturer shall furnish a new part at no charge. Electrical motors, special finishes, and other special equipment (if applicable) shall be warranted separately by the manufacturers of those products.

NOT FOR BIDDING

PART TWO - PRODUCTS

2.01 MANUFACTURER

A. The BILCO Company, P.O. Box 1203, New Haven, CT 06505
   1. 1-203-934-6363, Fax: 1-203-933-8478
   2. Internet address: http://www.bilco.com

2.02 HATCH RAIL SYSTEM

A. Furnish and install where indicated on plans hatch rail system Model RL-NB. The hatch rail system shall be field assembled and installed (by others) per the manufacturer's instructions.

B. Performance characteristics:
   1. High visibility safety yellow color shall be molded in.
   2. Hatch rail system shall attach to the capflashing of the roof hatch and shall not penetrate any roofing material.
   3. Hatch rail system shall satisfy the requirements of OSHA 29 CFR 1910.23 and shall meet OSHA strength requirements with a factor of safety of two.
   4. UV and corrosion resistant construction with a twenty-five year warranty.
   5. Self-closing gate shall be provided with hatch rail system.

C. Posts and Rails: Shall be round pultruded reinforced fire retardant yellow fiberglass treated with a UV inhibitor.

D. Hardware: Mounting brackets shall be ¼" thick hot dip galvanized steel. Hinges and post guides shall be 6063T5 aluminum. Fasteners shall be Type 316 stainless steel.

PART THREE - EXECUTION

3.01 INSPECTION

A. Verify that hatch rail system installation will not disrupt other trades. Report and correct defects prior to any installation.

3.02 INSTALLATION

A. Submit product design drawings for review and approval to the architect or specifier before fabrication.

B. The installer shall check as-built conditions and verify the manufacturer's hatch rail system details for accuracy to fit the application prior to fabrication. The installer shall comply with the ladder safety post manufacturer's installation instructions.

C. The manufacturer shall furnish fasteners necessary for installing hatch rail system on hatch.

END OF SECTION

NOT FOR BIDDING

SECTION 07 90 05
JOINT SEALERS

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Sealants and joint backer rods.

B. Precompressed foam sealers.

1.02 RELATED REQUIREMENTS

A. Section 07 62 00: Sealants required in conjunction with flashing.

B. Section 08 80 00 - Glazing: Glazing sealants and accessories.

1.03 REFERENCE STANDARDS

A. ASTM C834 - Standard Specification for Latex Sealants.

B. ASTM C920 - Standard Specification for Elastomeric Joint Sealants.

C. ASTM C1193 - Standard Guide for Use of Joint Sealants.

D. ASTM D1056 - Standard Specification for Flexible Cellular Materials--Sponge or Expanded Rubber.

E. ASTM D1667 - Standard Specification for Flexible Cellular Materials--Poly(Vinyl Chloride) Foam (Closed-Cell).

1.04 ADMINISTRATIVE REQUIREMENTS

A. Coordinate the work with other sections referencing this section.

1.05 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

B. Product Data: Provide data indicating sealant chemical characteristics, performance criteria, substrate preparation, limitations, and color availability.

C. Samples: Submit two samples, 2 x 1/2 in size illustrating sealant colors for selection.

D. Manufacturer's Installation Instructions: Indicate special procedures, surface preparation, and perimeter conditions requiring special attention.

1.06 QUALITY ASSURANCE

A. Manufacturer Qualifications: Company specializing in manufacturing the Products specified in this section with minimum 5 years documented experience.

B. Applicator Qualifications: Company specializing in performing the work of this section with minimum 5 years experience.

1.07 FIELD CONDITIONS

A. Maintain temperature and humidity recommended by the sealant manufacturer during and after installation.

1.08 COORDINATION

A. Coordinate the work with all sections referencing this section.

1.09 WARRANTY

A. Correct defective work within a five year period after Date of Substantial Completion.

B. Warranty: Include coverage for installed sealants and accessories which fail to achieve airtight seal, exhibit loss of adhesion or cohesion, or do not cure.

NOT FOR BIDDING

PART 2 PRODUCTS

2.01 MANUFACTURERS

A. Polyurethane Sealants:
   1. Pecora Corporation: www.pecora.com.
   2. Bostik, Inc www.bostik-us.com
   3. BASF Construction Chemicals-Building Systems: www.buildingsystems.basf.com.
   4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Acrylic Sealants (ASTM C920):
   1. Pecora Corporation; www.pecora.com.
   2. Tremco, Inc www.tremcosealants.com.
   3. Bostik, Inc. www.bostik-us.com.
   4. Substitutions: See Section 01 60 00 - Product Requirements.

C. Preformed Compressible Foam Sealers and backer rods:
   1. Sandell Manufacturing Company, Inc: www.sandellmfg.com.
   2. Emseal Joint Systems, Ltd.
   3. Dayton Superior Corporation: www.daytonsuperior.com.
   4. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 SEALANTS

A. Sealants and Primers - General: Provide only products having lower volatile organic compound (VOC) content than required by South Coast Air Quality Management District Rule No.1168.

B. Type 1 - General Purpose Exterior Sealant: Polyurethane; ASTM C920, Grade NS, Class 25, Uses M, G, and A; single component.
   1. Color: Standard colors matching finished surfaces.
   2. Product: Dynatrol II manufactured by Pecora.
   3. Applications: Use for:
      a. Control, expansion, and soft joints in masonry.
      b. Joints between concrete and other materials.
      c. Joints between metal frames and other materials.
      d. Other exterior joints for which no other sealant is indicated.

C. Type 2 - General Purpose Interior Sealant: Acrylic emulsion latex; ASTM C 834, Type OP, Grade NF single component, paintable.
   1. Color: Standard colors matching finished surfaces.
   2. Product: AC-20 + Silicone manufactured by Pecora.
   3. Applications: Use for:
      a. Interior wall and ceiling control joints.
      b. Joints between door and window frames and wall surfaces.
      c. Other interior joints for which no other type of sealant is indicated.

D. Type 3 - Exterior Expansion Joint Sealer: ASTM D 2628, hollow neoprene (polychloroprene) compression gasket.
   1. Black color.
   2. Size and Shape: . As indicated by drawings.
   3. Product: Poly seal manufactured by Sandell mfg.
   4. Applications: Use for:
      a. Exterior wall expansion joints.

2.03 ACCESSORIES

A. Primer: Non-staining type, recommended by sealant manufacturer to suit application.

NOT FOR BIDDING

B. Joint Cleaner: Non-corrosive and non-staining type, recommended by sealant manufacturer; compatible with joint forming materials.

C. Joint Backing: Round foam rod compatible with sealant; ASTM D 1667, closed cell PVC; oversized 30 to 50 percent larger than joint width.

D. Bond Breaker: Pressure sensitive tape recommended by sealant manufacturer to suit application.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that substrate surfaces and joint openings are ready to receive work.

B. Verify that joint backing and release tapes are compatible with sealant.

3.02 PREPARATION

A. Remove loose materials and foreign matter that could impair adhesion of sealant.

B. Clean and prime joints in accordance with manufacturer's instructions.

C. Perform preparation in accordance with manufacturer's instructions and ASTM C1193.

D. Protect elements surrounding the work of this section from damage or disfigurement.

3.03 INSTALLATION

A. Perform work in accordance with sealant manufacturer's requirements for preparation of surfaces and material installation instructions.

B. Perform installation in accordance with ASTM C1193.

C. Perform acoustical sealant application work in accordance with ASTM C919.

D. Measure joint dimensions and size joint backers to achieve width-to-depth ratio, neck dimension, and surface bond area as recommended by manufacturer, except where specific dimensions are indicated.

E. Measure joint dimensions and size joint backers to achieve the following, unless otherwise indicated:
   1. Width/depth ratio of 2:1.
   2. Neck dimension no greater than 1/3 of the joint width.
   3. Surface bond area on each side not less than 75 percent of joint width.

F. Install bond breaker where joint backing is not used.

G. Install sealant free of air pockets, foreign embedded matter, ridges, and sags.

H. Apply sealant within recommended application temperature ranges. Consult manufacturer when sealant cannot be applied within these temperature ranges.

I. Tool joints concave.

J. Precompressed Foam Sealant: Do not stretch; avoid joints except at corners, ends, and intersections; install with face 1/8 to 1/4 inch below adjoining surface.

3.04 CLEANING

A. Clean adjacent soiled surfaces.

3.05 PROTECTION

A. Protect sealants until cured.

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 08 11 13
HOLLOW METAL DOORS AND FRAMES

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Non-fire-rated steel door frames.

1.02 RELATED REQUIREMENTS

A. Section 08 71 00 - Door Hardware.

B. Section 08 80 00 - Glazing: Glass for doors and borrowed lites.

C. Section 09 90 00 - Painting and Coating: Field painting.

1.03 REFERENCE STANDARDS

A. ANSI/ICC A117.1 - American National Standard for Accessible and Usable Buildings and Facilities; International Code Council.

B. ANSI A250.8 - SDI-100 Recommended Specifications for Standard Steel Doors and Frames.

C. ANSI A250.10 - Test Procedure and Acceptance Criteria for Prime Painted Steel Surfaces for Steel Doors and Frames.

D. ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.

E. BHMA A156.115 - Hardware Preparation in Steel Doors and Steel Frames.

F. DHI A115 Series - Specifications for Steel Doors and Frame Preparation for Hardware; Door and Hardware Institute (ANSI/DHI A115 Series).

G. NAAMM HMMA 840 - Guide Specifications for Installation and Storage of Hollow Metal Doors and Frames; The National Association of Architectural Metal Manufacturers.

H. NAAMM HMMA 861 - Guide Specifications for Commercial Hollow Metal Doors and Frames; The National Association of Architectural Metal Manufacturers.

1.04 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements for submittal procedures.

B. Product Data: Materials and details of design and construction, hardware locations, reinforcement type and locations, anchorage and fastening methods, and finishes; and one copy of referenced grade standard.

C. Shop Drawings: Details of each opening, showing elevations, glazing, frame profiles, and identifying location of different finishes, if any.

D. Samples: Submit two samples of metal, 2 x 2 inches in size showing factory finishes, colors, and surface texture.

E. Installation Instructions: Manufacturer's published instructions, including any special installation instructions relating to this project.

F. Manufacturer's Certificate: Certification that products meet or exceed specified requirements.

1.05 QUALITY ASSURANCE

A. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum five years documented experience.

B. Maintain at the project site a copy of all reference standards dealing with installation.

1.06 DELIVERY, STORAGE, AND HANDLING

A. Store in accordance with NAAMM HMMA 840.

NOT FOR BIDDING

B. Protect with resilient packaging; avoid humidity build-up under coverings; prevent corrosion.

PART 2 PRODUCTS

2.01 MANUFACTURERS

A. Steel Door Frames:
1. Assa Abloy Ceco, Curries, or Fleming: www.assaabloydss.com.
2. Ceco Door Products: www.cecodoor.com.
3. Steelcraft: www.steelcraft.com.
4. Phillip Manufacturing Company
5. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 DOORS AND FRAMES

A. Requirements for All Door Frames:
1. Accessibility: Comply with ANSI/ICC A117.1.
2. Finish: Factory primed, for field finishing.

2.03 STEEL FRAMES

A. General:
1. Grade:
   a. ANSI A250.8 Level 3 Doors: 14 gage frames.
2. Finish: Factory primed, for field finishing.
3. Frames Wider than 48 Inches: Reinforce with steel channel fitted tightly into frame head, flush with top.

B. Exterior Door Frames: Fully welded.
1. Galvanizing: All components hot-dipped zinc-iron alloy-coated (galvannealed) in accordance with ASTM A653/A653M, with A60/ZF180 coating.
2. Finish: Factory primed, for field finishing.
3. Weatherstripping: Integral, recessed into door edge or frame.

2.04 ACCESSORY MATERIALS

A. Silencers: Resilient rubber or vinyl, fitted into drilled hole; 3 on strike side of single door, 3 on center mullion of pairs, and 2 on head of pairs without center mullions.

B. Temporary Frame Spreaders: Provide for all factory- or shop-assembled frames.

2.05 FINISH MATERIALS

A. Primer: Rust-inhibiting, complying with ANSI A250.10, door manufacturer's standard, baked on.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify existing conditions before starting work.

B. Verify that opening sizes and tolerances are acceptable.

C. Verify that finished walls are in plane to ensure proper door alignment.

3.02 INSTALLATION

A. Coordinate frame anchor placement with wall construction.

B. Coordinate installation of hardware.

C. Touch up damaged factory finishes.

3.03 TOLERANCES

A. Maximum Diagonal Distortion: 1/16 in measured with straight edge, corner to corner.

NOT FOR BIDDING

3.04 ADJUSTING

A. Adjust for smooth and balanced door movement.

3.05 SCHEDULE - SEE DRAWINGS

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 08 14 16
FLUSH WOOD DOORS

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Flush wood doors; flush and flush glazed configuration; fire rated and smoke rated.

1.02 RELATED REQUIREMENTS

A. Section 08 11 13 - Hollow Metal Doors and Frames.

B. Section 08 71 00 - Door Hardware.

C. Section 08 80 00 - Glazing.

1.03 REFERENCE STANDARDS

A. ANSI A135.4 - American National Standard for Basic Hardboard.

B. ICC (IBC) - International Building Code; 2003.

C. UBC Std 7-2, Part II - Test Standard for Smoke- and Draft-control Assemblies; International Conference of Building Officials; 1997.

D. UL 1784 - Standard for Air Leakage Tests of Door Assemblies.

E. WDMA I.S.1-A - Architectural Wood Flush Doors; Window and Door Manufacturers Association.

1.04 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements for submittal procedures.

B. Product Data: Indicate door core materials and construction; veneer species, type and characteristics.

C. Shop Drawings: Illustrate door opening criteria, elevations, sizes, types, swings, undercuts required, special beveling, special blocking for hardware, factory machining criteria, factory finishing criteria, identify cutouts for glazing.

D. Samples: Submit two samples of door construction, 8 x 12 inch in size cut from top; or bottom corner of door.

E. Samples: Submit two samples of door veneer, 6 x 6 inch in size illustrating wood grain, stain color, and sheen.

F. Manufacturer's Installation Instructions: Indicate special installation instructions.

G. Warranty, executed in Owner's name.

1.05 QUALITY ASSURANCE

A. Maintain one copy of the specified door quality standard on site for review during installation and finishing.

B. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum five years of documented experience.

1.06 DELIVERY, STORAGE, AND HANDLING

A. Package, deliver and store doors in accordance with specified quality standard.

B. Accept doors on site in manufacturer's packaging. Inspect for damage.

C. Protect doors with resilient packaging sealed with heat shrunk plastic. Do not store in damp or wet areas; or in areas where sunlight might bleach veneer. Seal top and bottom edges with tinted sealer if stored more than one week. Break seal on site to permit ventilation.

NOT FOR BIDDING

1.07 PROJECT CONDITIONS

A. Coordinate the work with door opening construction, door frame and door hardware installation.

1.08 WARRANTY

A. Interior Doors: Provide manufacturer's warranty for the life of the installation.

B. Provide warranty for the following term:
   1. Interior Doors: Warranty - Provide for replacing, including cost of rehanging and refinishing, at no cost to Owner, wood doors exhibiting defects in materials or workmanship including warp and delaminating for the life of installation.

C. Include coverage for delamination of veneer, warping beyond specified installation tolerances, defective materials, and telegraphing core construction.

PART 2 PRODUCTS

2.01 MANUFACTURERS

A. Wood Veneer Faced Doors:
   1. Graham Wood Doors: www.grahamdoors.com.
   2. Eggers Industries: www.eggersindustries.com.
   3. VT Industries www.VTindustries.com
   4. Marshfield DoorSystems, Inc: www.marshfielddoors.com.
   5. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 DOORS

A. All Doors: See drawings for locations and additional requirements.
   1. Quality Level: Custom Grade, Extra Heavy Duty performance, in accordance with WDMA I.S.1-A.
   2. Wood Veneer Faced Doors: 5-ply unless otherwise indicated.

B. Interior Doors: 1-3/4 inches; thick unless otherwise indicated; flush construction.
   1. Fire Rated Doors: Tested to ratings indicated on drawings in accordance with International Building Code ("positive pressure"); UL or WH (ITS) labeled without any visible seals when door is open.
   2. Smoke and Draft Control Doors : In addition to required fire rating, provide door assemblies tested in accordance with UBC Standard 7-2, Part II; with "S" label; if necessary, provide additional gasketing or edge sealing.
   3. Wood veneer facing with factory transparent finish .

2.03 DOOR AND PANEL CORES

A. Non-Rated Solid Core and 20 Minute Rated Doors: Type structural composite lumber core (SCLC), plies and faces as indicated above.

B. Fire Rated Doors: Mineral core, Type FD, plies and faces as indicated above; with core blocking as required to provide adequate anchorage of hardware without through-bolting.

2.04 DOOR FACINGS

A. Wood Veneer Facing for Transparent Finish: Red oak "A", veneer grade as specified by quality standard.
   1. Cut: Plain Sliced.
   2. Veneer match: Book match and balanced.
   3. Vertical Edges: Same species as face veneer.

B. Facing Adhesive: Type II - water resistant.

NOT FOR BIDDING

2.05 ACCESSORIES

A. Glazing Stops: Wood, of same species as door facing, butted; or mitered corners; prepared for countersink style tamper proof screws.

2.06 DOOR CONSTRUCTION

A. Fabricate doors in accordance with door quality standard specified.

B. Cores Constructed with stiles and rails:
   1. Provide solid blocks at lock edge for hardware reinforcement.
   2. Provide solid blocking for other through bolted hardware.

C. Fit door edge trim to edge of stiles after applying veneer facing.

D. Factory machine doors for hardware other than surface-mounted hardware, in accordance with hardware requirements and dimensions.

E. Factory fit doors for frame opening dimensions identified on shop drawings, with edge clearances in accordance with specified quality standard.

F. Provide edge clearances in accordance with the quality standard specified.

2.07 FACTORY FINISHING - WOOD VENEER DOORS

A. Factory finish doors in accordance with specified quality standard:
   1. Transparent Finish: Transparent catalyzed polyurethane, Custom quality, semi-gloss sheen.

B. Factory finish doors in accordance with approved sample.

C. Seal door top edge with color sealer to match door facing.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify existing conditions before starting work.

B. Verify that opening sizes and tolerances are acceptable.

C. Do not install doors in frame openings that are not plumb or are out-of-tolerance for size or alignment.

3.02 INSTALLATION

A. Install doors in accordance with manufacturer's instructions and specified quality standard.

B. Factory-Finished Doors: Do not field cut or trim; if fit or clearance is not correct, replace door.

C. Use machine tools to cut or drill for hardware.

D. Coordinate installation of doors with installation of frames and hardware.

E. Coordinate installation of glazing.

3.03 TOLERANCES

A. Conform to specified quality standard for fit and clearance tolerances.

B. Conform to specified quality standard for telegraphing, warp, and squareness.

C. Maximum Diagonal Distortion (Warp): 1/8 inch measured with straight edge or taut string, corner to corner, over an imaginary 36 by 84 inches surface area.

D. Maximum Vertical Distortion (Bow): 1/8 inch measured with straight edge or taut string, top to bottom, over an imaginary 36 by 84 inches surface area.

E. Maximum Width Distortion (Cup): 1/8 inch measured with straight edge or taut string, edge to edge, over an imaginary 36 by 84 inches surface area.

NOT FOR BIDDING

3.04 ADJUSTING

A. Adjust doors for smooth and balanced door movement.

B. Adjust closers for full closure.

3.05 SCHEDULE - SEE DRAWINGS

END OF SECTION

NOT FOR BIDDING

SECTION 08 31 00
ACCESS DOORS AND PANELS

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Wall access door and frame units.

B. Ceiling access door and frame units.

1.02 REFERENCE STANDARDS

A. ITS (DIR) - Directory of Listed Products; Intertek Testing Services NA, Inc..

B. UL (FRD) - Fire Resistance Directory; Underwriters Laboratories Inc..

1.03 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

PART 2 PRODUCTS

2.01 ACCESS DOOR AND PANEL APPLICATIONS

A. Walls, Unless Otherwise Indicated:
   1. Material: Steel.
   2. Size: 12 x 12 inches, unless otherwise indicated.
   3. Standard duty, hinged door.
   4. Tool-operated spring or cam lock; no handle.
   5. In All Wall Types: Surface mounted face frame and door surface flush with frame surface.

B. Walls in Wet Areas:
   1. Material: Steel, hot-dipped galvanized.
   2. Size: 12 x 12 inches, unless otherwise indicated.
   3. Standard duty, hinged door.
   4. Tool-operated spring or cam lock; no handle.
   5. In All Wall Types: Surface mounted face frame and door surface flush with frame surface.

C. Fire Rated Walls: See drawings for wall fire ratings.
   1. Material: Steel.
   2. Size: 12 x 12 inches, unless otherwise indicated.
   3. Insulated, double skin door panel.
   4. Tool-operated spring or cam lock; no handle.

D. Ceilings, Unless Otherwise Indicated: Same type as for walls.
   1. Material: Steel.
   2. Size in Lay-in Grid Ceilings: To match grid module.
   3. Size in Other Ceilings: 12 x 12 inches, unless otherwise indicated.
   4. Standard duty, hinged door.
   5. Tool-operated spring or cam lock; no handle.

E. Fire Rated Ceilings: See drawings for ceiling fire ratings.
   1. Material: Steel.
   2. Size: 12 x 12 inches, unless otherwise indicated.
   3. Standard duty, hinged door.
   4. Tool-operated spring or cam lock; no handle.

2.02 WALL AND CEILING UNITS

A. Manufacturers:
   1. Acudor Products Inc: www.acudor.com.
   2. Cendrex, Inc: www.cendrex.com.

NOT FOR BIDDING

3. Karp Associates, Inc: www.karpinc.com.
4. Milcor by Commercial Products Group of Hart & Cooley, Inc: www.milcorinc.com.

B. Access Doors: Factory fabricated door and frame units, fully assembled units with corner joints welded, filled, and ground flush; square and without rack or warp; coordinate requirements with assemblies units are to be installed in.
1. Material: Steel.
2. Door Style: Single thickness with rolled or turned in edges.
3. Double-Skinned Hollow Steel Door Panels: 16 gage, 0.059 inch, minimum, on both sides and all edges.
4. Units in Fire Rated Assemblies: Fire rating as required by applicable code for the fire rated assembly in which they are to be installed.
5. Steel Finish: Primed.
6. Primed Finish: Polyester powder coat; manufacturer's standard color.
7. Hardware:
a. Hardware for Fire Rated Units: As required for listing.
b. Hinges for Non-Fire-Rated Units: Concealed, constant force closure spring type.
c. Handle: Fixed.
d. Latch/Lock: Tamperproof tool-operated cam latch.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that rough openings are correctly sized and located.

3.02 INSTALLATION

A. Install units in accordance with manufacturer's instructions.

B. Install frames plumb and level in openings. Secure rigidly in place.

C. Position units to provide convenient access to the concealed work requiring access.

END OF SECTION

NOT FOR BIDDING

SECTION 08 41 00
ALUMINUM – FRAMED ENTRANCES & DOORS

Series D518 DuraStile™ Wide Stile Entrance Door and Frame

PART 1 GENERAL

1.01 Work Included

A. Furnish and install aluminum entrance, entrance door frames complete with hardware, and related components as shown on the drawings and specified in this section.

B. All doors shall be EFCO® Series D518 DuraStile Wide Stile Entrance Door and Frame. Other manufacturers requesting approval to bid their product as an equal must submit the following information fifteen days prior to close of bidding.
   1. A sample door (size and configuration) as per requirements of architect.
   2. Test reports documenting compliance with requirements of Section 1.05.

C. Glass and Glazing

   1. Reference Section 08 80 00 for Glazing.

D. Single Source Requirement
   1. All products listed in Section 1.02 shall be by the same manufacturer.

1.02 Related Work

A. Section 08 44 13 – Glazed Aluminum Curtain Walls

1.03 Items Furnished but Not Installed

1.04 Items Installed but Not Furnished

A. Structural support of the framing, wood framing, structural steel, and final cleaning.

1.05 Laboratory Testing and Performance Requirements

A. Test Units
   1. Air test unit shall be minimum size of 36" (914 mm) x 84" (2134 mm).

B. Test Procedures and Performances
   1. Entrance doors shall conform to all requirements for the door type referenced in 1.01.B. In addition, the following specific performance requirements shall be met.
   2. Air Infiltration Test
      a. With door sash closed and locked, test unit in accordance with ASTM E 283 at a static air pressure difference of 1.57 psf (75 Pa).
      b. Air infiltration shall not exceed .50 cfm/SF (2.54 l/s•m²) of unit, for single doors.
      c. Air infiltration shall not exceed .10 cfm/SF (.50 l/s•m²) of unit, for a pair of doors.

C. Project Wind Loads

   1. The system shall be designed to withstand the following loads normal to the plane of the wall:
      a. Positive pressure of 30 psf
      b. Negative pressure of 40 psf

1.06 Quality Assurance

NOT FOR BIDDING

A. Provide test reports from AAMA accredited laboratories certifying the performance as specified in 1.05.

B. Test reports shall be accompanied by the entrance door manufacturer's letter of certification stating that the tested door meets or exceeds the referenced performance standard for the appropriate door type.

1.07 References

1.08 Submittals

A. Contractor shall submit shop drawings, finish samples, test reports, and warranties.
   1. Samples of materials as may be requested without cost to owner, i.e., metal, glass, fasteners, anchors, frame sections, corner section, etc.

1.09 Warranties

A. Total Entrance Door / Storefront Installation
   1. The responsible contractor shall assume full responsibility and warrant for one year the satisfactory performance of the total entrance door installation which includes that of the doors, hardware, glass (including insulated units), glazing, anchorage and setting system, sealing, flashing, etc., as it relates to air and structural adequacy as called for in the specifications and approved shop drawings.
   2. Any deficiencies due to such elements not meeting the specifications shall be corrected by the responsible contractor at his expense during the warranty period.

B. Window Material and Workmanship
   1. Provide written guarantee against defects in material and workmanship for 2 years from the date of final shipment.

C. Glass
   1. Provide written warranty for insulated glass units, that they will be free from obstruction of vision as a result of dust or film formation on the internal glass surfaces caused by failure of the hermetic seal due to defects in material and workmanship.
   2. Warranty period shall be for 10 (ten) years.

D. Finish
   1. Warranty period shall be for 3 years from the date of final shipment.

NOT FOR BIDDING

PART 2 PRODUCTS

2.01 Material

A. Aluminum
   1. Extruded aluminum shall be 6063-T6 alloy and temper.

B. Hardware
   1. Hardware for entrance doors (check with entrance door manufacturer for compatibility with door) is specified under “Hardware Section” of the specifications and shall be sent to the door manufacturer for application. The finish hardware supplier shall be responsible for furnishing physical hardware and templates of all hardware to the entrance door manufacturer prior to fabrication, and for coordinating hardware delivery requirements with the hardware

manufacturer, the general contractor and the entrance door manufacturer to ensure the building project is not delayed.

C. Glass
   1. Insulated glass shall be 1” thick
      a. Exterior lite – 1/4” thick, tempered glass, with a surface coating of low E on the number 2
      b. Air space of 1/2” inch (or argon filled).
      c. Interior lite – 1/4” thick, tempered glass,

2.02 Fabrication

A. General
   1. Major portions of the door sections shall have .188" (5 mm) wall thickness. Glazing stop sections shall have .050" (1.2 mm) wall thickness.

B. Entrance Doors
   1. Door stiles shall be no less than 5" (127 mm) wide (not including glass stops).
   2. Door stiles and rails shall have hairline joints at corners. Heavy concealed reinforcement brackets shall be secured with screws and shall be of deep penetration and fillet welded.
   3. Weather stripping shall be wool pile and shall be installed in one stile of door pairs and in jamb stiles of center pivoted doors.

C. Door Frame
   1. Depth of frame shall not be less than 4 1/2" (114 mm).
   2. Face dimension shall not be less than 2" (50 mm).
   3. Shear block construction shall be utilized throughout.
   4. System design shall be such that raw edges will not be visible at joints.

D. Glazing
   1. All units shall be dry glazed with extruded pressure fitting aluminum glazing stops, and EPDM gaskets.

F. Finish
   1. Anodic
      a. Finish all exposed areas of aluminum windows and components with electrolytically deposited color in accordance with Aluminum Association Designation AA-M10-C22-Color shall be dark bronze.

PART 3 EXECUTION

3.01 Inspection

A. Job Conditions
   1. All openings shall be prepared by others to the proper size and shall be plumb, level, and in the proper location and alignment as shown on the architect's drawings.

3.02 Installation

A. Use only skilled tradesmen with work done in accordance with approved shop drawings and specifications.

NOT FOR BIDDING

B. Plumb and align entrance door faces in a single plane for each wall plane and erect doors and materials square and true. Adequately anchor to maintain positions permanently when subjected to normal thermal movement, specified building movement, and specified wind loads.

C. Adjust doors for proper operation after installation.

D. Furnish and apply sealants to provide a weather tight installation at all joints and intersections and at opening perimeters. Wipe off excess material and leave all exposed surfaces and joints clean and smooth.

3.03 Anchorage

A. Adequately anchor to maintain positions permanently when subjected to normal thermal movement, specified building movement, and specified wind loads.

3.04 Protection and Cleaning

A. After completion of entrance installation, entrance doors shall be inspected, adjusted, put into working order and left clean, free of labels, dirt, etc. Protection from this point shall be the responsibility of the general contractor.

END OF SECTION

NOT FOR BIDDING

SECTION 08 41 13
ALUMINUM – FRAMED STOREFRONT

System 403I Thermal Flush-Glazed Screw Spline Storefront

PART 1 GENERAL

1.01 Work Included

A. Furnish and install aluminum architectural storefront system complete with hardware and related components as shown on drawings and specified in this section.

B. All storefront systems shall be EFCO® System 403I Thermal Flush-Glazed Screw Spline Storefront. Other manufacturers requesting approval to bid their product as an equal must submit the following information fifteen days prior to close of bidding.
   1. A sample storefront system (size and configuration) as per requirements of architect.
   2. Test reports documenting compliance with requirements of Section 1.05.

C. Glass
   1. Reference Section 08 80 00 for Glazing.

D. Single Source Requirement
   1. All products listed in Section 1.02 shall be by the same manufacturer.

1.02 Related Work

A. Section 08 44 13 – Glazed Aluminum Curtain Walls

1.03 Items Furnished but Not Installed

1.04 Items Installed but Not Furnished

1.05 Laboratory Testing and Performance Requirements

A. Test Units
   1. Air, water, and structural test unit size shall be a minimum of two lites high and three lites wide.
   2. Thermal test unit sizes shall be 80" (2032 mm) wide x 80" (2032 mm) high with one intermediate vertical mullion and two lites of glass.

B. Test Procedures and Performance
   1. Air Infiltration Test
      a. Test unit in accordance with ASTM E 283 at a static air pressure difference of 6.24 psf (299 Pa).
      b. Air infiltration shall not exceed .06 cfm/SF (.30 l/s•m²) of unit.
   2. Water Resistance Test
      a. Test unit in accordance with ASTM E 331.
      b. There shall be no uncontrolled water leakage at a static test pressure of 12.0 psf (575 Pa).
   3. Uniform Load Deflection Test
      a. Test in accordance with ASTM E 330.
      b. Deflection under design load shall not exceed L/175 of the clear span.
   4. Uniform Load Structural Test
      a. Test in accordance with ASTM E 330 at a pressure 1.5 times the design wind pressure in 1.05.B.3.b.

NOT FOR BIDDING

b. At conclusion of the test, there shall be no glass breakage, permanent damage to fasteners, storefront parts, or any other damage that would cause the storefront to be defective.

5. Condensation Resistance Test (CRF)
   a. Test unit in accordance with AAMA 1503.1.
6. Condensation Resistance (CR)
   a. With ventilators closed and locked, test unit in accordance with NFRC 500-2010.
7. Thermal Transmittance Test (Conductive U-Factor)
   a. With ventilators closed and locked, test unit in accordance with NFRC 100-2010.

Glass Comparison Chart				
Glass	**C.O.G.[2] U-Factor**	**U-Factor[1]**	**Frame CRF[3]**	**CR[1]**
1" IG	0.47	0.58 BTU/hr•ft²•ºF (3.29 W/m²•K)	59	*
1" IG	0.29	0.44 BTU/hr•ft²•ºF (2.50 W/m²•K)	59	*
1" IG	0.24	0.40 BTU/hr•ft²•ºF (2.27 W/m²•K)	59	*

C. Project Wind Loads

1. The system shall be designed to withstand the following loads normal to the plane of the wall:
   a. Positive pressure of 30 psf at non-corner zones.
   b. Negative pressure of 40 psf at non-corner zones.
   c. Negative pressure of 40 psf at corner zones.

1.06 Field Testing and Performance Requirements

A. Test in accordance with AAMA 501.2 for spray test only or AAMA 503.92 for pressurized test.

1.07 Quality Assurance

A. Provide test reports from AAMA accredited laboratories certifying the performance as specified in 1.05.

B. Test reports shall be accompanied by the storefront manufacturer's letter of certification stating that the tested storefront meets or exceeds the referenced criteria for the appropriate storefront type.

1.08 References

1.09 Submittals

A. Contractor shall submit shop drawings; finish samples, test reports, and warranties.
   1. Samples of materials as may be requested without cost to owner, i.e., metal, glass, fasteners, anchors, frame sections, mullion section, corner section, etc.

B. An NFRC Component Modeling Approach (CMA) generated label certificate shall be provided by the manufacturer. The label certificate shall be project specific and will contain the thermal performance ratings of the manufacturer's framing combined with the specified glass, and the glass spacer used in the fabrication of the glass, at NFRC standard test size as defined in table 4-3 in NFRC 100-2010.

NOT FOR BIDDING

1.10 Warranties

A. Total Storefront Installation
   1. The responsible contractor shall assume full responsibility and warrant for one year the satisfactory performance of the total storefront installation. This includes the glass (including insulated units), glazing, anchorage and setting system, sealing, flashing, etc., as it relates to air, water, and structural adequacy as called for in the specifications and approved shop drawings.
   2. Any deficiencies due to such elements not meeting the specifications shall be corrected by the responsible contractor at their expense during the warranty period.
   3. It is the responsibility of the installer to be sure the thermal strut at the subsill is cap sealed at all horizontal members that would be exposed to water infiltration.

B. Window Material and Workmanship
   1. Provide written guarantee against defects in material and workmanship for 3 years from the date of final shipment.

C. Glass
   1. Provide written warranty for insulated glass units that they will be free from obstruction of vision as a result of dust or film formation on the internal glass surfaces caused by failure of the hermetic seal due to defects in material and workmanship.
   2. Warranty period shall be for 10 (ten) years.

D. Finish
   1. Warranty period shall be for 3years from the date of final shipment.

NOT FOR BIDDING

PART 2 PRODUCTS

2.01 Materials

A. Aluminum
   1. Extruded aluminum shall be 6063-T6 alloy and temper.

B. Include the EFCO WV 410 hopper style vents where shown on drawings.

C Glass
   See Glazing Section

D. Thermal Barrier
   1. All exterior aluminum shall be separated from interior aluminum by a rigid, structural thermal barrier. For purposes of this specification, a structural thermal barrier is defined as a system that shall transfer shear during bending and, therefore, promote composite action between the exterior and interior extrusions.
   2. The thermal barrier shall be thermal struts, consisting of glass reinforced polyamide nylon, mechanically crimped in raceways extruded in the exterior and interior extrusions.
   3. Poured and debridged urethane thermal barriers shall not be permitted.

2.02 Fabrication

A. General
   1. All aluminum frame extrusions shall have a minimum wall thickness of .125" (3 mm).
   2. All exposed work shall be carefully matched to produce continuity of line and design with all joints. System design shall be such that raw edges will not be visible at joints.

B. Frame
   1. Depth of frame shall not be less than 4 1/2" (114 mm).
   2. Face dimension shall not be less than 2 1/4" (57 mm).
   3. Frame components shall be screw spline construction.

C. Glazing
   1. All units shall be “dry glazed" with gaskets on both exterior and interior of the glass.

D. Finish
   1. Anodic
      a. Finish all exposed areas of aluminum windows and components with electrolytically deposited color in accordance with Aluminum Association Designation
         Color shall be dark bronze

PART 3 EXECUTION

3.01 Inspection

A. Job Conditions
   1. All openings shall be prepared by others to the proper size and shall be plumb, level and in the proper location and alignment as shown on the architect's drawings.

3.02 Installation

A. Use only skilled tradesmen with work done in accordance with approved shop drawings and specifications.

B. Storefront system shall be erected plumb and true, in proper alignment and relation to established lines and grades.

C. Entrance doors shall be securely anchored in place to a straight, plumb and level condition, without distortion. Weather stripping contact and hardware movement shall be checked and final adjustments made for proper operation and performance of units.

D. Furnish and apply sealing materials to provide a weather tight installation at all joints and intersections and at opening perimeters.

E. Sealing materials specified shall be used in strict accordance with the manufacturer‘s printed instructions, and shall be applied only by mechanics specially trained or experienced in their use. All surfaces must be clean and free of foreign matter before applying sealing materials. Sealing compounds shall be tooled to fill the joint and provide a smooth finished surface.

3.03 Anchorage

A. Adequately anchor to maintain positions permanently when subjected to normal thermal movement, specified building movement, and specified wind loads.

3.04 Protection and Cleaning

A. The general contractor shall protect the aluminum materials and finish against damage from construction activities and harmful substances. The general contractor shall remove any protective coatings as directed by the architect, and shall clean the aluminum surfaces as recommended for the type of finish applied.

END OF SECTION

NOT FOR BIDDING

SECTION 08 41 13 10
ALUMINUM – FRAMED STOREFRONTS INTERIOR

System 402 Flush-Glazed Screw Spline Storefront

PART 1 GENERAL

1.01 Work Included

A. Furnish and install aluminum architectural storefront system complete with hardware and related components as shown on drawings and specified in this section.

B. All storefront systems shall be EFCO® System 402 Flush-Glazed Screw Spline Storefront. Other manufacturers requesting approval to bid their product as an equal must submit the following information fifteen days prior to close of bidding.
   1. A sample storefront system (size and configuration) as per requirements of architect.
   2. Test reports documenting compliance with requirements of Section 1.05.

C. Glass
   1. Reference Section 08 80 00 for Glazing.

D. Single Source Requirement
   1. All products listed in Section 1.02 shall be by the same manufacturer.

1.02 Related Work

A. Section 08 44 13 – Glazed Aluminum Curtain Walls

1.05 Laboratory Testing and Performance Requirements

A. Test Units
   1. Air, water, and structural test unit size shall be a minimum of two lites high and three lites wide.

B. Test Procedures and Performance
   1. Air Infiltration Test
      a. Test unit in accordance with ASTM E 283 at a static air pressure difference of 6.24 psf (299 Pa).
      b. Air infiltration shall not exceed .06 cfm/SF (.30 l/s•m²) of unit.
   2. Water Resistance Test
      a. Test unit in accordance with ASTM E 331.
      b. There shall be no uncontrolled water leakage at a static test pressure of 12.0 psf (575 Pa).
   3. Uniform Load Deflection Test
      a. Test in accordance with ASTM E 330.
      b. Deflection under design load shall not exceed L/175 of the clear span.
   4. Uniform Load Structural Test
      a. Test in accordance with ASTM E 330 at a pressure 1.5 times the design wind pressure in 1.05.B.3.b.
      b. At conclusion of the test, there shall be no glass breakage, permanent damage to fasteners, storefront parts, or any other damage that would cause the storefront to be defective.

C. Project Wind Loads

   1. The system shall be designed to withstand the following loads normal to the plane of the wall:

NOT FOR BIDDING

a. Positive pressure of 30 psf at non-corner zones.
b. Negative pressure of 40 psf at non-corner zones.
c. Negative pressure of 40 psf at corner zones.

1.06 Field Testing and Performance Requirements

A. Test in accordance with AAMA 501.2 for spray test only or AAMA 503.92 for pressurized test.

1.07 Quality Assurance

A. Provide test reports from AAMA accredited laboratories certifying the performance as specified in 1.05.

B. Test reports shall be accompanied by the storefront manufacturer's letter of certification stating that the tested storefront meets or exceeds the referenced criteria for the appropriate storefront type.

1.08 References

1.09 Submittals

A. Contractor shall submit shop drawings; finish samples, test reports, and warranties.
1. Samples of materials as may be requested without cost to owner, i.e., metal, glass, fasteners, anchors, frame sections, mullion section, corner section, etc.

B. An NFRC Component Modeling Approach (CMA) generated label certificate shall be provided by the manufacturer. The label certificate shall be project specific and will contain the thermal performance ratings of the manufacturer's framing combined with the specified glass, and the glass spacer used in the fabrication of the glass, at NFRC standard test size as defined in table 4-3 in NFRC 100-2010.

1.10 Warranties

A. Total Storefront Installation
1. The responsible contractor shall assume full responsibility and warrant for one year the satisfactory performance of the total storefront installation. This includes the glass (including insulated units), glazing, anchorage and setting system, sealing, flashing, etc., as it relates to air, water, and structural adequacy as called for in the specifications and approved shop drawings.
2. Any deficiencies due to such elements not meeting the specifications shall be corrected by the responsible contractor at their expense during the warranty period.

B. Window Material and Workmanship
1. Provide written guarantee against defects in material and workmanship for 10 years from the date of final shipment.

C. Glass
1. Provide written warranty for insulated glass units that they will be free from obstruction of vision as a result of dust or film formation on the internal glass surfaces caused by failure of the hermetic seal due to defects in material and workmanship.
2. Warranty period shall be for 10 (ten) years.

D. Finish
1. Warranty period shall be for 5 years from the date of final shipment.

NOT FOR BIDDING

PART 2 PRODUCTS

2.01 Materials

A. Aluminum
   1. Extruded aluminum shall be 6063-T6 alloy and temper.

2.02 Fabrication

A. General
   1. All aluminum frame extrusions shall have a minimum wall thickness of .080" (2 mm).
   2. All exposed work shall be carefully matched to produce continuity of line and design with all joints. System design shall be such that raw edges will not be visible at joints.

B. Frame
   1. Depth of frame shall not be less than 4 1/2" (114 mm).
   2. Face dimension shall not be less than 2" (50 mm).
   3. Frame components shall be screw spline construction.

C. Glazing
   1. All units shall be “dry glazed" with gaskets on both exterior and interior of the glass.

D. Finish
   1. Anodic
      a. Finish all exposed areas of aluminum windows and components with electrolytically deposited color in accordance with Aluminum Association Designation
      Color shall be Dark Bronze.

PART 3 EXECUTION

3.01 Inspection

A. Job Conditions
   1. Verify that openings are dimensionally within allowable tolerances, plumb, level, clean, provide a solid anchoring surface, and are in accordance with approved shop drawings.
   2. Provide for manufacturer representation to conduct pre-installation site meeting.

3.02 Installation

A. Use only skilled tradesmen with work done in accordance with approved shop drawings and specifications.

B. Storefront system shall be erected plumb and true, in proper alignment and relation to established lines and grades.

C. Entrance doors shall be securely anchored in place to a straight, plumb, and level condition, without distortion. Weather stripping contact and hardware movement shall be checked and final adjustments made for proper operation and performance of units.

D. Furnish and apply sealing materials to provide a weather tight installation at all joints and intersections and at opening perimeters.

E. Sealing materials specified shall be used in strict accordance with the manufacturer‘s printed instructions, and shall be applied only by mechanics specially trained or experienced in their use.

NOT FOR BIDDING

All surfaces must be clean and free of foreign matter before applying sealing materials. Sealing compounds shall be tooled to fill the joint and provide a smooth finished surface.

3.03 Anchorage

A. Adequately anchor to maintain positions permanently when subjected to normal thermal movement, specified building movement, and specified wind loads.

3.04 Protection and Cleaning

A. The general contractor shall protect the aluminum materials and finish against damage from construction activities and harmful substances. The general contractor shall remove any protective coatings as directed by the architect, and shall clean the aluminum surfaces as recommended for the type of finish applied.

END OF SECTION

NOT FOR BIDDING

SECTION 08 44 13
GLAZED ALUMINUM CURTAIN WALL

Series 5600 Outside Glazed Aluminum Curtain Wall System

PART 1 GENERAL

1.01 Work Included

A. Furnish and install architectural aluminum curtain wall complete with related components as shown on drawings and specified in this section.

B. Curtain Wall System shall be EFCO® Series 5600 Outside Glazed. Other manufacturers requesting approval to bid their product as an equal must submit the following information fifteen days prior to close of bidding.
   1. A proposal drawing showing full size details of all curtain wall components including all anchors and building attachments.
   2. Test reports documenting compliance with requirements of Section 1.05.

C. Glass
   1. Reference Section 08 80 00 for Glazing.

D. Single Source Requirement
   1. All products listed in Section 1.02 shall be by the same manufacturer.

1.02 Related Work

A. Section 08 41 13 – Aluminum – Framed Entrances and Storefronts

1.03 Items Furnished but Not Installed

1.04 Items Installed but Not Furnished

1.05 Laboratory Testing and Performance Requirements

A. Test Units
   1. Air, water, and structural test unit size shall be a minimum of two stories high and three lites wide.
   2. Thermal test unit sizes shall be 80" (2032 mm) wide x 80" (2032 mm) high with one intermediate vertical mullion and two lites of glass.

B. Test Procedures and Performance
   1. Air Infiltration Test
      a. Test unit in accordance with ASTM E 283 at a static air pressure difference of 6.24 psf (300 Pa).
      b. Air infiltration shall not exceed .06 cfm/SF (.31 l/s•m²) of unit.
   2. Water Resistance Test
      a. Test unit in accordance with ASTM E 331.
      b. The test for static water penetration (ASTM E 331) shall be conducted at an air pressure difference of 15.0 psf (720 Pa). There shall be no water leakage as defined by AAMA 501.1, paragraph 5.5.
   3. Uniform Load Deflection Test
      a. Test in accordance with ASTM E 330.
      b. Deflection under design load shall not exceed L/175 for spans less than 162" (4114 mm).
      c. Deflection under design load shall not exceed L/240 +1/4" (6 mm) for spans greater than 162" (4114 mm).

NOT FOR BIDDING

4. Uniform Load Structural Test
   a. Test in accordance with ASTM E 330 at a pressure 1.5 times the design wind pressure in 1.05.B.3.b.
   b. At conclusion of the test there shall be no glass breakage, permanent damage to fasteners, curtain wall parts, or any other damage that would cause the curtain wall to be defective.
5. Condensation Resistance Test (CRF)
   a. Test unit in accordance with AAMA 1503.1.
6. Condensation Resistance (CR)
   a. With ventilators closed and locked, test unit in accordance with NFRC 500-2010.
7. Thermal Transmittance Test (Conductive U-Factor)
   a. With ventilators closed and locked, test unit in accordance with NFRC 100-2010.

Glass Comparison Chart				
Glass	**C.O.G.[2] U-Factor**	**U-Factor[1]**	**Frame CRF[3]**	**CR[1]**
1" IG	0.47	0.58 BTU/hr•ft²•ºF (3.29 W/m²•K)	68	*
1" IG	0.29	0.42 BTU/hr•ft²•ºF (2.38 W/m²•K)	68	*
1" IG	0.24	0.38 BTU/hr•ft²•ºF (2.16 W/m²•K)	68	*

8. Seismic Performance
   a. Test unit in accordance to AAMA 501.4 system to meet design displacement of 0.010 x the greater adjacent story height and ultimate displacement of 1.5 x the design displacement.
9. Sound Transmission Loss
   a. Test unit in accordance with ASTM E 90-02.
   b. Sound Transmission Class (STC) shall not be less than 29.

C. Project Wind Loads
1. The system shall be designed to withstand the following loads normal to the plane of the wall:
   a. Positive pressure of 30 psf at non-corner zones.
   b. Negative pressure of 40 psf at non-corner zones.
   c. Negative pressure of 40 psf at corner zones.

1.06 Field Testing and Performance Requirements

A. Test Units
1. Air, water, and structural test unit size shall be a representative sample of typical construction and shall have no outstanding punch list or other visible defects. If no test area and/or location have been identified, the persons doing the test shall select an area. This area shall be selected to provide representative performance data, usually a minimum of 100 ft². The area to be tested shall include perimeter caulking, typical splices, frame intersections, and, if applicable, at least 2 entire vision lites and 2 entire spandrel lites containing an intermediate horizontal member. All operable components within the test area shall be isolated and exempt from the test procedure.

B. Test Procedures and Performance
1. Air Infiltration Test

NOT FOR BIDDING

a. Test unit in accordance with AAMA 503-03 for field testing. The unit test shall be conducted at a minimum uniform static test pressure differential of at least 1.57 psf (75 Pa), but at a pressure differential not to exceed 6.24 psf (300 Pa).
b. The maximum allowable rates of air leakage for field testing shall not exceed 1.5 times the project specification rate or .09 cfmSF (.45 l/s•m²), whichever is greater.

2. Water Resistance Test
   a. Test unit in accordance with AAMA 503-03.
   b. The field water penetration resistance tests shall be conducted at a static test pressure of two-thirds of the specified project water penetration test pressure, but not less than 6.24 psf (300 Pa).

1.07 Quality Assurance

A. Provide test reports from AAMA accredited laboratories certifying the performance as specified in 1.05.

B. Test reports shall be accompanied by the curtain wall manufacturer's letter of certification stating that the tested curtain wall meets or exceeds the referenced criteria for the appropriate curtain wall type.

1.08 References

1.09 Submittals

A. Contractor shall submit shop drawings; finish samples, test reports, and warranties.
   1. Samples of materials as may be requested without cost to owner, i.e., metal, glass, fasteners, anchors, frame sections, mullion section, corner section, etc.

1.10 Warranties

A. Total Curtain Wall Installation
   1. The responsible contractor shall assume full responsibility and warrant for one year the satisfactory performance of the total curtain wall installation. This includes the glass (including insulated units), glazing, anchorage and setting system, sealing, flashing, etc. as it relates to air, water, and structural adequacy and the specifications and approved shop drawings.
   2. Any deficiencies due to such elements not meeting the specifications shall be corrected by the responsible contractor at their expense during the warranty period.

B. Window Material and Workmanship
   1. Provide written guarantee against defects in material and workmanship for 3 years from the date of final shipment.

C. Glass
   1. Provide written warranty for insulated glass units, that they will be free from obstruction of vision as a result of dust or film formation on the internal glass surfaces caused by failure of the hermetic seal due to defects in material and workmanship.
   2. Warranty period shall be for 10 (ten) years.

D. Finish
   1. Warranty period shall be for 3 years from the date of final shipment.

NOT FOR BIDDING

PART 2 PRODUCTS

2.01 Materials

A. Aluminum
   1. Extruded aluminum shall be 6063-T6 alloy and temper.

B. Include the EFCO WV 410 hopper style and casement style vents.

C. Glass
   See glazing section

D. Anchors
   1. Perimeter and floor line anchors shall be aluminum or steel. All steel anchors shall be properly insulated from the aluminum.

E. Thermal Barrier
   1. The thermal barrier shall be extruded PVC used as an applied thermal isolator.

2.02 Fabrication

A. General
   1. All aluminum vertical and horizontal extrusions shall have a minimum wall thickness of .093" (2.3 mm) to .125" (3 mm).

B. Frame
   1. Frame components shall be mechanically fastened by means of extruded aluminum shear blocks attached to vertical mullions.
   2. Curtain wall system is able to accommodate separate interior and exterior finishes and colors.

C. Glazing
   1. Outside glazed curtain wall system shall be dry glazed with an exterior aluminum pressure plate and snap cover with interior and exterior dense EPDM preset gaskets.

D. Finish
   1. Anodic
      a. Finish all exposed areas of aluminum windows and components with electrolytically deposited color in accordance with Aluminum Association Designation
         Color shall be dark bronze.

PART 3 EXECUTION

3.01 Inspection

A. Job Conditions
   1. All openings shall be prepared by others to the proper size and shall be plumb, level, and in the proper location and alignment as shown on the architect's drawings.

3.02 Installation

A. Use only skilled tradesmen with work done in accordance with approved shop drawings and established specifications, and erect all curtain wall components to all building bench marks and column center lines.

NOT FOR BIDDING

B. Plumb and align curtain wall faces in a single plane for each wall plane, and erect curtain wall materials square and true. Adequately anchor to maintain positions permanently when subjected to normal thermal movement, building movement, and specified wind loads.

C. Adjust windows in curtain wall for proper operation after installation.

D. Furnish and apply sealants to provide a weather tight installation at all joints and intersections and at opening perimeters. Wipe off excess material, leave all exposed surfaces and joints clean and smooth.

3.03 Anchorage

A. Adequately anchor to maintain positions permanently when subjected to normal thermal movement, specified building movement, and specified wind loads.

3.04 Protection and Cleaning

A. The general contractor shall protect the aluminum materials and finish against damage from construction activities and harmful substances. The general contractor shall remove any protective coatings as directed by the architect, and shall clean the aluminum surfaces as recommended for the type of finish applied.

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 08 71 00

DOOR HARDWARE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

A. This Section includes the following:

1. Commercial door hardware

B. Related Sections include the following:

1. Division 8 Section 08 11 13 "Hollow Metal Doors and Frames"
2. Division 8 Section 08 14 16 "Flush Wood Doors"
3. Division 8 Section 08 41 00 "Aluminum Framed Entrance and Doors"

1.3 SUBMITTALS

A. Product Data: Include installation details, material descriptions, dimensions of individual components and profiles, and finishes.

B. Shop Drawings: Details of electrified door hardware, indicating the following:

1. Wiring Diagrams: Detail wiring for power, signal, and control systems and differentiate between manufacturer-installed and field-installed wiring. Include the following:

   a. System schematic.
   b. Point-to-point wiring diagram.
   c. Riser diagram.
   d. Elevation of each door.

2. Detail interface between electrified door hardware and access fire alarm, control, and security building control system.

C. Samples for Initial Selection: Manufacturer's color charts consisting of units or sections of units showing the full range of colors, textures, and patterns available for each type of door hardware indicated.

1. Samples will be returned to Contractor. Units that are acceptable and remain undamaged through submittal, review, and field comparison process may, after final check of operation, be incorporated into the Work, within limitations of keying requirements.

D. Door Hardware Schedule: Prepared by or under the supervision of supplier, detailing fabrication and assembly of door hardware, as well as procedures and diagrams. Coordinate the final Door Hardware

NOT FOR BIDDING

Schedule with doors, frames, and related work to ensure proper size, thickness, hand, function, and finish of door hardware.

1. Format: Comply with scheduling sequence and vertical format in DHI's "Sequence and Format for the Hardware Schedule."
2. Organization: Organize the Door Hardware Schedule into door hardware sets indicating complete designations of every item required for each door or opening.

    a. Organize door hardware sets in same order as in the Door Hardware Schedule at the end of Part 3.

3. Content: Include the following information:

    a. Type, style, function, size, label, hand, and finish of each door hardware item.
    b. Manufacturer of each item.
    c. Fastenings and other pertinent information.
    d. Location of each door hardware set, cross-referenced to Drawings, both on floor plans and in door and frame schedule.
    e. Explanation of abbreviations, symbols, and codes contained in schedule.
    f. Mounting locations for door hardware.
    g. Door and frame sizes and materials.
    h. Description of each electrified door hardware function, including location, sequence of operation, and interface with other building control systems.

        1) Sequence of Operation: Include description of component functions that occur in the following situations: authorized person wants to enter; authorized person wants to exit; unauthorized person wants to enter; unauthorized person wants to exit.

4. Submittal Sequence: Submit the final Door Hardware Schedule at earliest possible date, particularly where approval of the Door Hardware Schedule must precede fabrication of other work that is critical in the Project construction schedule. Include Product Data, Samples, Shop Drawings of other work affected by door hardware, and other information essential to the coordinated review of the Door Hardware Schedule.
5. Submittal Sequence: Submit initial draft of final schedule along with essential Product Data to facilitate the fabrication of other work that is critical in the Project construction schedule. Submit the final Door Hardware Schedule after Samples, Product Data, coordination with Shop Drawings of other work, delivery schedules, and similar information has been completed and accepted.

E. Keying Schedule: Prepared by or under the supervision of supplier, detailing Owner's final keying instructions for locks. Include schematic keying diagram and index each key set to unique door designations.

F. Product Certificates: Signed by manufacturers of electrified door hardware certifying that products furnished comply with requirements.

1. Certify that door hardware approved for use on types and sizes of labeled fire doors complies with listed fire door assemblies.

G. Qualification Data: For firms and persons specified in "Quality Assurance" Article.

1. Include lists of completed projects with project names and addresses of architects and owners, and other information specified.

NOT FOR BIDDING

H. Product Test Reports: Based on evaluation of comprehensive tests performed by manufacturer and witnessed by a qualified testing agency, indicating current products comply with requirements.

I. Maintenance Data: For each type of door hardware to include in maintenance manuals specified in Division 1.

J. Warranties: Special warranties specified in this Section.

1.4 QUALITY ASSURANCE

A. Installer Qualifications: An experienced installer who has completed door hardware similar in material, design, and extent to that indicated for this Project and whose work has resulted in construction with a record of successful in-service performance.

B. Supplier Qualifications: Door hardware supplier with warehousing facilities in Project's vicinity and who is or employs a qualified Architectural Hardware Consultant, available during the course of the Work to consult with Contractor, Architect, and Owner about door hardware and keying.

1. Electrified Door Hardware Supplier Qualifications: An experienced door hardware supplier who has completed projects with electrified door hardware similar in material, design, and extent to that indicated for this Project, whose work has resulted in construction with a record of successful in-service performance, and who is acceptable to manufacturer of primary materials.

a. Engineering Responsibility: Prepare data for electrified door hardware, including Shop Drawings, based on testing and engineering analysis of manufacturer's standard units in assemblies similar to those indicated for this Project.

2. Scheduling Responsibility: Preparation of door hardware and keying schedules.

C. Architectural Hardware Consultant Qualifications: A person who is currently certified by the Door and Hardware Institute as an Architectural Hardware Consultant and who is experienced in providing consulting services for door hardware installations that are comparable in material, design, and extent to that indicated for this Project.

1. Electrified Door Hardware Qualifications: Experienced in providing consulting services for electrified door hardware installations.

D. Source Limitations: Obtain each type and variety of door hardware from a single manufacturer, unless otherwise indicated.

1. Provide electrified door hardware from same manufacturer as mechanical door hardware, unless otherwise indicated. Manufacturers that are listed to perform electrical modifications, by a testing and inspecting agency acceptable to authorities having jurisdiction, are acceptable.

E. Regulatory Requirements: Comply with provisions of the following:

1. Where indicated to comply with accessibility requirements, comply with Americans with Disabilities Act (ADA), "Accessibility Guidelines for Buildings and Facilities (ADAAG)," ANSI A117.1, FED-STD-795, "Uniform Federal Accessibility Standards**,"** as follows:

a. Handles, Pulls, Latches, Locks, and other Operating Devices: Shape that is easy to grasp with one hand and does not require tight grasping, tight pinching, or twisting of the wrist.

NOT FOR BIDDING

b. Door Closers: Comply with the following maximum opening-force requirements indicated:

1) Interior Hinged Doors: 5 lbf (22.2 N) applied perpendicular to door.
2) Sliding or Folding Doors: 5 lbf (22.2 N) applied parallel to door at latch.
3) Fire Doors: Minimum opening force allowable by authorities having jurisdiction.

c. Thresholds: Not more than 1/2 inch (13 mm) high, Not more than 3/4 inch (19 mm) high for exterior sliding doors. Bevel raised thresholds with a slope of not more than 1:2.

2. NFPA 101: Comply with the following for means of egress doors:

a. Latches, Locks, and Exit Devices: Not more than 15 lbf (67 N) to release the latch. Locks shall not require the use of a key, tool, or special knowledge for operation.
b. Delayed-Egress Locks: Lock releases within 15 seconds after applying a force not more than 15 lbf (67 N) for not more than 3 seconds.
c. Door Closers: Not more than 30 lbf (133 N) to set door in motion and not more than 15 lbf (67 N) to open door to minimum required width.
d. Thresholds: Not more than 1/2 inch (13 mm) high.

3. Electrified Door Hardware: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction.

F. Fire-Rated Door Assemblies: Provide door hardware for assemblies complying with NFPA 80 that are listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for fire ratings indicated, based on testing according to NFPA 252.

1. Test Pressure: Test at atmospheric pressure.

G. Keying Conference: Conduct conference at Project site to comply with requirements in Division 1 Section "Project Meetings." Incorporate keying conference decisions into final keying schedule after reviewing door hardware keying system including, but not limited to, the following:

1. Function of building, flow of traffic, purpose of each area, degree of security required, and plans for future expansion.
2. Preliminary key system schematic diagram.
3. Requirements for key control system.
4. Address for delivery of keys.

H. Preinstallation Conference: Conduct conference at Project site to comply with requirements in Division 1 Section "Project Meetings."

I. All Electric Door Hardware shall be furnished and installed by the General Contractor. All Electric Door Hardware shall be wired by the Electrical Contractor. Both the Electrical & General Contractor shall meet and coordinate all work before proceeding.

J. Preinstallation Conference: Conduct conference at Project site to comply with requirements in Division 1 Section "Project Meetings." Review methods and procedures related to electrified door hardware including, but not limited to, the following:

1. Inspect and discuss electrical roughing-in and other preparatory work performed by other trades.
2. Review sequence of operation for each type of electrified door hardware.
3. Review and finalize construction schedule and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.

NOT FOR BIDDING

4. Review required testing, inspecting, and certifying procedures.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Inventory door hardware on receipt and provide secure lock-up for door hardware delivered to Project site.

B. Tag each item with Door Number related to the final Approved Door Hardware Schedule, and include basic installation instructions with each item or package.

C. Deliver keys to manufacturer of key control system, or Owner as Directed.

D. Deliver keys to Owner by registered mail or overnight package service.

1.6 COORDINATION

A. Coordinate layout and installation of recessed pivots and closers with floor construction. Cast anchoring inserts into concrete. Concrete, reinforcement, and formwork requirements are specified in Division 3 Section "Cast-in-Place Concrete."

B. Templates: Obtain and distribute to the parties involved templates for doors, frames, and other work specified to be factory prepared for installing door hardware. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing door hardware to comply with indicated requirements.

C. Electrical System Roughing-in: Coordinate layout and installation of electrified door hardware with connections to power supplies, fire alarm system and detection devices, access control system, security system, and building control system.

1.7 WARRANTY

A. General Warranty: Special warranties specified in this Article shall not deprive Owner of other rights Owner may have under other provisions of the Contract Documents and shall be in addition to, and run concurrent with, other warranties made by Contractor under requirements of the Contract Documents.

B. Special Warranty: Written warranty, executed by manufacturer agreeing to repair or replace components of door hardware that fail in materials or workmanship within specified warranty period. Failures include, but are not limited to, the following:

1. Structural failures including excessive deflection, cracking, or breakage.
2. Faulty operation of operators and door hardware.
3. Deterioration of metals, metal finishes, and other materials beyond normal weathering.

C. Warranty Period for Locksets: Three, (3) years from date of Substantial Completion, unless otherwise indicated.

D. Warranty Period for Manual Closers: Ten, (10) years from date of Substantial Completion, unless otherwise indicated.

E. Warranty Period for Exit Devices: Three, (3) years from date of Substantial Completion, unless otherwise indicated.

NOT FOR BIDDING

1.8 MAINTENANCE SERVICE

A. Maintenance Tools and Instructions: Furnish a complete set of specialized tools and maintenance instructions as needed for Owner's continued adjustment, maintenance, and removal and replacement of door hardware.

B. Maintenance Service: Beginning at Substantial Completion, provide six months' full maintenance by skilled employees of door hardware Installer. Include quarterly preventive maintenance, repair or replacement of worn or defective components, lubrication, cleaning, and adjusting as required for proper door hardware operation. Provide parts and supplies as used in the manufacture and installation of original products.

C. Engage a factory authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain door hardware and door hardware finishes.

PART 2 - PRODUCTS

2.1 SCHEDULED DOOR HARDWARE

A. General: Provide door hardware for each door to comply with requirements in this Section**,** door hardware sets indicated in door and frame schedule, and the Door Hardware Schedule at the end of Part 3.

1. Door Hardware Sets: Provide quantity, item, size, finish or color indicated, and named manufacturer's products**.** Retain subparagraph below for electrified door hardware.
2. Sequence of Operation: Provide electrified door hardware function, sequence of operation, and interface with other building control systems indicated.

B. Designations: Requirements for design, grade, function, finish, size, and other distinctive qualities of each type of door hardware are indicated in the Door Hardware Schedule at the end of Part 3. Products are identified by using door hardware designations, as follows:

1. Named Manufacturer's Products: Product designation and manufacturer are listed for each door hardware type required for the purpose of establishing minimum requirements. Manufacturers' names are abbreviated in the Door Hardware Schedule.
2. References to BHMA Standards: Provide products complying with these standards and requirements for description, quality, and function.

2.2 HINGES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Butt Hinges:
   a. Stanley Commercial Hardware

2. Continuous Hinges:

   a. Architectural Builders Hardware Mfg., Inc.
   b. Stanley Commercial Hardware

B. Standards: Comply with the following:
1. Hinges ANSI/BHMA Standard A156.1 Grade 1

NOT FOR BIDDING

2. Continuous Hinges ANSI/BHMA Standard A156.26 Grade 1

C. Template Requirements: Except for hinges and pivots to be installed entirely (both leaves) into wood doors and frames, provide only template-produced units.

D. Concealed bearings are made from engineered polymer material with PTFE and Aramid fiber; bearing is maintenance free, no oil, no grease.

E. Butt hinges equipped with easily seated, non-rising pin. Hole in bottom of pin enables quick pin removal for ease of installation.

F. Continuous hinge material to be 14 gauge, 304 stainless steel

G. Continuous hinge steel pin to be .25 diameter, 304 stainless steel

H. Continuous hinge exterior barrel diameter .438 (7/16)

I. Continuous hinge knuckle to be 2", including split nylon bearing at each separation for a quiet, smooth, self-lubricating operation

J. All hinges to carry Warnock Hersey Int. or UL for fire rated doors and frames up to 3 hours

K. Continuous hinges to have Symmetrically templated hole pattern

L. Continuous hinge to have a 10 year Warranty

M. Hinge Weight: Unless otherwise indicated, provide the following:
1. Supports weights up to 600lbs.

N. Hinge Base Metal: Unless otherwise indicated, provide the following:

1. Exterior Continuous Hinges: Stainless steel, with stainless-steel pin,
2. Interior Continuous Hinges: Stainless steel, with stainless-steel pin.
3. Continuous Hinges for Fire-Rated Assemblies: Stainless steel, with stainless-steel pin.
4. Exterior Butt Hinges: Stainless Steel or Brass or Bronze
5. Interior Butt Hinges: Steel or Brass or Bronze

O. Hinge Options: Comply with the following where indicated in the Door Hardware Schedule or on Drawings:

1. Hospital Tips: Slope ends of hinge barrel.
2. Maximum Security Pin: Fix pin in hinge barrel after it is inserted.
3. Nonremovable Pins: Provide set screw in hinge barrel that, when tightened into a groove in hinge pin, prevents removal of pin while door is closed; for the following applications:

   a. Outswinging exterior doors.
   b. Outswinging corridor doors with locks.

P. Fasteners: Comply with the following:

1. Machine Screws: For metal doors and frames. Install into drilled and tapped holes.
2. Wood Screws: For wood doors and frames.
3. Threaded-to-the-Head Wood Screws: For fire-rated wood doors.
4. Screws: Phillips flat-head screws; machine screws drilled and tapped holes for metal doors, wood screws for wood doors and frames. Finish screw heads to match surface of hinges.

NOT FOR BIDDING

2.3 LOCKS AND LATCHES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Mechanical Locks and Latches:
   a. Schlage Lock Corporation, Red Clay School District Standard

B. Standards: Comply with the following:

1. Bored Locks and Latches: BHMA A156.2.

C. Bored Locks: ANSI A156.2, BHMA Series 4000, Grade 1, and is UL Listed.

D. Certified Products: Provide door hardware listed in the following BHMA directories:

1. Mechanical Locks and Latches: BHMA's "Directory of Certified Locks & Latches."

E. Lock Trim: Comply with the following:

1. Lever: Cylindrical Locks & Latches, Zinc material with a minimum wall thickness of .060
2. Dummy Trim: Match lever lock trim and escutcheons.

F. Lock Functions: Function numbers and descriptions indicated in the Door Hardware Schedule comply with the following:

1. Bored Locks: BHMA A156.2.

G. Lock Throw: Comply with testing requirements for length of bolts to comply with labeled fire door requirements, and as follows:

1. Bored Locks: Minimum 9/16-inch latch bolt throw.
2. Deadbolts: Minimum 1-inch bolt throw.

H. Backset: 2-3/4 inches (70 mm), unless otherwise indicated.

I. Cylindrical Locks & Latches to have solid shank with no opening for access to keyed lever keeper.

2.4 DOOR BOLTS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Flush Bolts:
   a. Burns Manufacturing Company, Inc.
   b. Triangle Brass Manufacturing Company, Inc.

B. Standards: Comply with the following:

1. Automatic and Self-Latching Flush Bolts: BHMA A156.3.
2. Manual Flush Bolts: BHMA A156.16.

C. Flush Bolts: BHMA Grade 1, designed for mortising into door edge.

NOT FOR BIDDING

D. Bolt Throw: Comply with testing requirements for length of bolts to comply with labeled fire door requirements, and as follows:

1. Mortise Flush Bolts: Minimum 3/4-inch (19-mm) throw.

2.5 EXIT DEVICES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. Von Duprin, Inc., Red Clay School District Standard

B. Standard: BHMA A156.3.

1. BHMA Grade: Grade 1

C. Certified Products: Provide exit devices listed in BHMA's "Directory of Certified Exit Devices."

D. Panic Exit Devices: Listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for panic protection, based on testing according to UL 305.

E. Fire Exit Devices: Complying with NFPA 80 that are listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for fire and panic protection, based on testing according to UL 305 and NFPA 252.

F. Warranty: Exit device to have published Five (5) Year Warranty.

G. Exit device shall be “touch pad” type with a touch pad that shall extend a minimum of one half (1/2) of the door width.

H. Exit device shall have a one-quarter (1/4) gap between the face of the door and the touch bar channel eliminating the need for shims or cutting away the glass molding.

I. Exit device lock stile chassis shall be investment cast steel. Stamped steel units will not be accepted. All device latch bolts shall be stainless steel and shall be deadlocking type.

J. Exit device strikes shall be adjustable type investment cast stainless steel.

K. Exit device shall include sound reduction dampening for both depression and extension of the touch pad.

L. Exit device end cap shall be all metal and secured with a bracket that interlocks both at the touch bar channel base and hinge side filler to prevent end cap “peel-back”.

M. All exposed surfaces of the exit device housing shall be no less than 14 gauge brass or bronze; or no less than 16 gauge stainless steel. Aluminum housing type exit devices are not acceptable.

N. Dummy Push Bar: Nonfunctioning push bar matching functional push bar.

1. Operation: Rigid

O. Outside Trim: Lever, Lever with cylinder, Pull, Pull with cylinder, material and finish to match locksets, unless otherwise indicated.

1. Match design for locksets and latchsets, unless otherwise indicated.

NOT FOR BIDDING

2.6 CYLINDERS AND KEYING

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
   1. Cylinders:
      a. Schlage Lock Corporation, Red Clay School District Standard

B. Standards: Comply with the following:

   1. Cylinders: BHMA A156.5.

C. Cylinder Grade: BHMA Grade 1**,** Cylinders: Manufacturer's standard tumbler type, constructed from brass or bronze, stainless steel, or nickel silver, and complying with the following:

   1. Number of Pins: Seven.
   2. Mortise Type: Threaded cylinders with rings and straight- or clover-type cam.
   3. Rim Type: Cylinders with back plate, flat-type vertical or horizontal tailpiece, and raised trim ring.
   4. Bored-Lock Type: Cylinders with tailpieces to suit locks.

D. Keying System: Unless otherwise indicated, provide a factory-registered keying system complying with the following requirements:
   1. Existing System: Master key or grand master key locks to Owner's existing system.

E. Keys: Provide nickel-silver keys complying with the following:

   1. Stamping: Permanently inscribe each key with a visual key control number and include the following notation:

      a. Notation: **"DO NOT DUPLICATE."**

   2. Quantity: In addition to one extra blank key for each lock, provide the following:

      a. Cylinder Change Keys: Three.
      b. Master Keys: Five.
      c. Grand Master Keys: Five.
      d. Great-Grand Master Keys: Five.
      e. Construction Master Keys: Ten
      f. Construction Core Control Keys: Five

2.7 STRIKES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   1. Electric Strikes:

      a. Security Door Controls Inc.
      b. Folger Adam Security Inc.

B. Standards: Comply with the following:

   1. Strikes for Bored Locks and Latches: BHMA A156.2.
   2. Strikes for Auxiliary Deadlocks: BHMA A156.5.

NOT FOR BIDDING

C. Strikes: Provide manufacturer's standard strike with strike box for each latch or lock bolt, with curved lip extended to protect frame, finished to match door hardware set, unless otherwise indicated, and as follows:

1. Flat-Lip Strikes: For locks with three-piece antifriction latch bolts, as recommended by manufacturer.
2. Extra-Long-Lip Strikes: For locks used on frames with applied wood casing trim.
3. Aluminum-Frame Strike Box: Provide manufacturer's special strike box fabricated for aluminum framing.

2.8 OPERATING TRIM

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Burns Manufacturing Company, Inc.
2. Stanley Commercial Hardware

B. Standard: Comply with BHMA A156.6.

C. Materials: Fabricate from aluminum, brass, bronze, stainless steel, unless otherwise indicated.

2.9 ACCESSORIES FOR PAIRS OF DOORS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Coordinators:
   a. Burns Manufacturing Company, Inc.
   b. Triangle Brass Manufacturing Company, Inc.

2. Removable Mullions:
   a. Von Duprin, Inc., Red Clay School District Standard

3. Astragals:
   a. Stanley Commercial Hardware
   b. Architectural Builders Hardware, Inc.

B. Standards: Comply with the following:

1. Coordinators: BHMA A156.3.
2. Removable Mullions: BHMA A156.3.

C. Fire-Exit Removable Mullions: Provide removable mullions for use with fire exit devices complying with NFPA 80 that are listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for fire and panic protection, based on testing according to UL 305 and NFPA 252. Mullions shall be used only with exit devices for which they have been tested.

2.10 CLOSERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Surface-Mounted Closers:

NOT FOR BIDDING

a. LCN Door Closers, Red Clay School District Standard

B. Standards: Comply with the following:

1. Closers: BHMA A156.4.

C. Surface Closers: BHMA Grade 1

D. Certified Products: Provide door closers listed in BHMA's "Directory of Certified Door Closers."

E. Size of Units: Unless otherwise indicated, comply with manufacturer's written recommendations for size of door closers depending on size of door, exposure to weather, and anticipated frequency of use. Provide factory-sized closers, adjustable to meet field conditions and requirements for opening force.

2.11 PROTECTIVE TRIM UNITS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Metal Protective Trim Units:
   a. Burns Manufacturing Company, Inc.
   b. Triangle Brass Manufacturing Company, Inc.

B. Standard: Comply with BHMA A156.6.

C. Materials: Fabricate protection plates from the following:
1. Stainless Steel: 0.050 inch (1.3 mm) thick; beveled 4 sides.

D. Fasteners: Provide manufacturer's standard exposed fasteners for door trim units consisting of either machine or self-tapping screws.

E. Furnish protection plates sized 2” less than door width on push side and 1” less than door width on pull side, by height specified in Door Hardware Schedule.

2.12 STOPS AND HOLDERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Architectural Builders Hardware Mfg., Inc.
2. Triangle Brass Manufacturing Company, Inc.

B. Standards: Comply with the following:

1. Stops and Bumpers: BHMA A156.16.
2. Mechanical Door Holders: BHMA A156.16.
3. Electromagnetic Door Holders: BHMA A156.15.
4. Combination Overhead Holders and Stops: BHMA A156.8.
5. Door Silencers: BHMA A156.16.

C. Stops and Bumpers: BHMA Grade 1

D. Mechanical Door Holders: BHMA Grade 1

E. Combination Overhead Stops and Holders: BHMA Grade 1

NOT FOR BIDDING

F. Electromagnetic Door Holders for Labeled Fire Door Assemblies: Coordinate with fire detectors and interface with fire alarm system.

G. Silencers for Metal Door Frames: BHMA Grade 1; neoprene or rubber, minimum diameter 1/2 inch (13 mm); fabricated for drilled-in application to frame.

2.13 DOOR GASKETING

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Door Gasketing:
   a. Reese Manufacturing Co., Inc.
   b. National Guard Products, Inc.

2. Door Bottoms:
   a. Reese Manufacturing Co., Inc.
   b. National Guard Products

B. Standard: Comply with BHMA A156.22.

C. General: Provide continuous weather-strip gasketing on exterior doors and provide smoke, light, or sound gasketing on interior doors where indicated or scheduled. Provide noncorrosive fasteners for exterior applications and elsewhere as indicated.

1. Perimeter Gasketing: Apply to head and jamb, forming seal between door and frame.
2. Meeting Stile Gasketing: Fasten to meeting stiles, forming seal when doors are closed.
3. Door Bottoms: Apply to bottom of door, forming seal with threshold when door is closed.

D. Air Leakage: Not to exceed 0.50 cfm per foot (0.000774 cu. m/s per m) of crack length for gasketing other than for smoke control, as tested according to ASTM E 283.

E. Smoke-Labeled Gasketing: Assemblies complying with NFPA 105 that are listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for smoke-control ratings indicated, based on testing according to UL 1784.

1. Provide smoke-labeled gasketing on 20-minute-rated doors and on smoke-labeled doors.

F. Fire-Labeled Gasketing: Assemblies complying with NFPA 80 that are listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for fire ratings indicated, based on testing according to UL 10B or NFPA 252.

G. Sound-Rated Gasketing: Assemblies that are listed and labeled by a testing and inspecting agency, for sound ratings indicated, based on testing according to ASTM E 1408.

H. Replaceable Seal Strips: Provide only those units where resilient or flexible seal strips are easily replaceable and readily available from stocks maintained by manufacturer.

I. Gasketing Materials: Comply with ASTM D 2000 and AAMA 701/702.

2.14 THRESHOLDS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. Reese Manufacturing Co., Inc.

NOT FOR BIDDING

2. National Guard Products, Inc.

B. Standard: Comply with BHMA A156.21.

2.15 FABRICATION

A. Manufacturer's Nameplate: Do not provide manufacturers' products that have manufacturer's name or trade name displayed in a visible location (omit removable nameplates) except in conjunction with required fire-rated labels and as otherwise approved by Architect.

1. Manufacturer's identification will be permitted on rim of lock cylinders only.

B. Base Metals: Produce door hardware units of base metal, fabricated by forming method indicated, using manufacturer's standard metal alloy, composition, temper, and hardness. Furnish metals of a quality equal to or greater than that of specified door hardware units and BHMA A156.18 for finishes. Do not furnish manufacturer's standard materials or forming methods if different from specified standard.

C. Fasteners: Provide door hardware manufactured to comply with published templates generally prepared for machine, wood, and sheet metal screws. Provide screws according to commercially recognized industry standards for application intended. Provide Phillips flat-head screws with finished heads to match surface of door hardware, unless otherwise indicated.

1. Concealed Fasteners: For door hardware units that are exposed when door is closed, except for units already specified with concealed fasteners. Do not use through bolts for installation where bolt head or nut on opposite face is exposed unless it is the only means of securely attaching the door hardware. Where through bolts are used on hollow door and frame construction, provide sleeves for each through bolt.
2. Steel Machine or Wood Screws: For the following fire-rated applications:

   a. Mortise hinges to doors.
   b. Strike plates to frames.
   c. Closers to doors and frames.

3. Steel Through Bolts: For the following fire-rated applications, unless door blocking is provided:

   a. Surface hinges to doors.
   b. Closers to doors and frames.
   c. Surface-mounted exit devices.

4. Spacers or Sex Bolts: For through bolting of hollow metal doors.
5. Fasteners for Wood Doors: Comply with requirements of DHI WDHS.2, "Recommended Fasteners for Wood Doors."

2.16 FINISHES

A. Standard: Comply with BHMA A156.18.

B. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

C. Appearance of Finished Work: Variations in appearance of abutting or adjacent pieces are acceptable if they are within one-half of the range of approved Samples. Noticeable variations in the same piece

NOT FOR BIDDING

are not acceptable. Variations in appearance of other components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

D. BHMA Designations: Comply with base material and finish requirements indicated by the following:

1. BHMA 600: Primed for painting, over steel base metal.
2. BHMA 626: Satin chromium plated over nickel, over brass or bronze base metal.
3. BHMA 628: Satin aluminum, clear anodized, over aluminum base metal.
4. BHMA 630: Satin stainless steel, over stainless steel base metal.
5. BHMA 652: Satin chromium plated over nickel, over steel base metal.
6. BHMA 689: Aluminum painted, over any base metal.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine doors and frames, with Installer present, for compliance with requirements for installation tolerances, labeled fire door assembly construction, wall and floor construction, and other conditions affecting performance.

B. Examine roughing-in for electrical power systems to verify actual locations of wiring connections before electrified door hardware installation.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Steel Doors and Frames: Comply with DHI A115 series.

1. Surface-Applied Door Hardware: Drill and tap doors and frames according to SDI 107.

B. Wood Doors: Comply with DHI A115-W series.

3.3 INSTALLATION

A. Mounting Heights: Mount door hardware units at heights indicated in following applicable publications, unless specifically indicated or required to comply with governing regulations:

1. Standard Steel Doors and Frames: DHI's "Recommended Locations for Architectural Hardware for Standard Steel Doors and Frames."
2. Custom Steel Doors and Frames: DHI's "Recommended Locations for Builders' Hardware for Custom Steel Doors and Frames."
3. Wood Doors: DHI WDHS.3, "Recommended Locations for Architectural Hardware for Wood Flush Doors."

B. Install each door hardware item to comply with manufacturer's written instructions. Where cutting and fitting are required to install door hardware onto or into surfaces that are later to be painted or finished in another way, coordinate removal, storage, and reinstallation of surface protective trim units with finishing work specified in Division 9 Sections. Do not install surface-mounted items until finishes have been completed on substrates involved.

NOT FOR BIDDING

1. Set units level, plumb, and true to line and location. Adjust and reinforce attachment substrates as necessary for proper installation and operation.
2. Drill and countersink units that are not factory prepared for anchorage fasteners. Space fasteners and anchors according to industry standards.

C. Key Control System: Place keys on markers and hooks in key control system cabinet, as determined by final keying schedule. Supply key cabinet with 25% expansion. Factory install keys in cabinet or in field with owner's representative. Key cabinet to be supplied with a "Complete System" equal to the Telkee System.

D. Boxed Power Supplies: Locate power supplies as indicated or, if not indicated, above accessible ceilings, in equipment room. Verify location with Architect.

1. Configuration: Provide one power supply for each door opening.
2. Configuration: Provide the least number of power supplies required to adequately serve doors with electrified door hardware.

E. Thresholds: Set thresholds for exterior and acoustical doors in full bed of sealant complying with requirements specified in Division 7 Section "Joint Sealants."

3.4 FIELD QUALITY CONTROL

A. Independent Architectural Hardware Consultant: Owner or Architect will engage a qualified independent Architectural Hardware Consultant to perform inspections and to prepare inspection reports.

1. Independent Architectural Hardware Consultant will inspect door hardware and state in each report whether installed work complies with or deviates from requirements, including whether door hardware is properly installed and adjusted.

3.5 ADJUSTING

A. Initial Adjustment: Adjust and check each operating item of door hardware and each door to ensure proper operation or function of every unit. Replace units that cannot be adjusted to operate as intended. Adjust door control devices to compensate for final operation of heating and ventilating equipment and to comply with referenced accessibility requirements.

1. Spring Hinges: Adjust to achieve positive latching when door is allowed to close freely from an open position of 30 degrees.
2. Electric Strikes: Adjust horizontal and vertical alignment of keeper to properly engage lock bolt.
3. Door Closers: Adjust sweep period so that, from an open position of 70 degrees, the door will take at least 3 seconds to move to a point 3 inches (75 mm) from the latch, measured to the leading edge of the door.

B. Six-Month Adjustment: Approximately six months after date of Substantial Completion, Installer shall perform the following:

1. Examine and readjust each item of door hardware as necessary to ensure function of doors, door hardware, and electrified door hardware.
2. Consult with and instruct Owner's personnel on recommended maintenance procedures.
3. Replace door hardware items that have deteriorated or failed due to faulty design, materials, or installation of door hardware units.

NOT FOR BIDDING

3.6 CLEANING AND PROTECTION

A. Clean adjacent surfaces soiled by door hardware installation.

B. Clean operating items as necessary to restore proper function and finish.

C. Provide final protection and maintain conditions that ensure door hardware is without damage or deterioration at time of Substantial Completion.

3.7 DEMONSTRATION

A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain door hardware and door hardware finishes.

NOT FOR BIDDING

Door Schedule
AUSTIN D. BALTZ ELEMENTARY SCHOOL

Door	Set	Lock Type	Title
D013C	0001	STORE RM LOCKSET	PRS DRS HMD & HMF EXTERIOR
D014C	0001	STORE RM LOCKSET	PRS DRS HMD & HMF EXTERIOR
D02	0004	EXIT DEVICE	PRS DRS ALUM DRS & ALUM FR
D02V	0003	EXIT DEVICE	PRS DRS ALUM DRS & ALUM FR EXTERIOR
D09	0002	EXIT DEVICE	SGL DRS HMD & HMF EXTERIOR
D09.1	0002	EXIT DEVICE	SGL DRS HMD & HMF EXTERIOR
D118	0002	EXIT DEVICE	SGL DRS HMD & HMF EXTERIOR
D151	0005	STORE RM LOCKSET	SGL DRS WD & HMF
D241	0002	EXIT DEVICE	SGL DRS HMD & HMF EXTERIOR

9 Total Doors Printed

Hardware Schedule
AUSTIN D. BALTZ ELEMENTARY SCHOOL

Hardware Set #: 0001 - PRS DRS HMD & HMF EXTERIOR
D013C D014C

Opening to Have:

Qty	Description	Finish	Mfg
2	CONTINUOUS HINGE A500 x FULL HEIGHT	630	ABH
2	FLUSH BOLT 3917 1" x 6-3/4" x 12"	626	TRIMCO
1	PRIMUS CYLINDER 20-765 (ND-LINE)	626	SCHLAGE
1	STOREROOM LOCKSET ND96LD x SPA x 10-025	626	SCHLAGE
1	ASTRAGAL A548S x SQUARE EDGE x FULL HEIGHT	630	ABH
2	DOOR CLOSER 4111 x SHCUSH x SRI	689	LCN
2	KICK PLATE 16" x 1" LDW .050 x B4E x CTSK	630	TRIMCO
2	DOOR CONTACT MC-7 x SPDT x 1" DIA		SDC
1	TEAR DROP SEAL 797B x HEAD & JAMBS	BLK	REESE
1	TEAR DROP SEAL 797B x ASTRAGAL x FULL HEIGHT	BLK	REESE
1	RAIN DRIP R201A x FULL WIDTH + 4"	628	REESE
1	THRESHOLD S483APR x SRS x FHSL x FULL WIDTH	628	REESE
2	DOOR SWEEP 772A x FULL WIDTH	628	REESE

Hardware Set #: 0002 - SGL DRS HMD & HMF EXTERIOR
D09 D09.1 D118 D241

Opening to Have:

Qty	Description	Finish	Mfg
1	CONTINUOUS HINGE A500 x FULL HEIGHT	630	ABH
1	RIM CYLINDER (PRIMUS) 20-709	626	SCHLAGE
1	MORTISE CYLINDER (IC) 20-700 x XQ11-949	626	SCHLAGE
1	RIM EXIT DEVICE CD99NL-OP	626	VON DUPRIN
1	VANDAL RESISTANT TRIM VR910-NL	630	VON DUPRIN
1	DOOR CLOSER 4111 x SHCUSH x SRI	689	LCN
1	FLOOR STOP 1209	626	TRIMCO
1	DOOR CONTACT MC-7 x SPDT x 1" DIA		SDC
1	TEAR DROP SEAL 797B x HEAD & JAMBS	BLK	REESE
1	RAIN DRIP R201A x FULL WIDTH + 4"	628	REESE
1	THRESHOLD S483APR x SRS x FHSL x FULL WIDTH	628	REESE
1	DOOR SWEEP 772A x FULL WIDTH	628	REESE

NOT FOR BIDDING

Hardware Set #: 0003 - PRS DRS ALUM DRS & ALUM FR EXTERIOR D02V

Opening to Have:

Qty	Description	Finish	Mfg
2	CONTINUOUS HINGE A500 x FULL HEIGHT	630	ABH
1	RIM CYLINDER (PRIMUS) 20-709	626	SCHLAGE
2	MORTISE CYLINDER (IC) 20-700 x XQ11-949	626	SCHLAGE
1	MORTISE CYLINDER (IC) 20-700	626	SCHLAGE
1	POWER TRANSFER PT1000	628	ABH
1	RIM EXIT DEVICE CD99EO	626	VON DUPRIN
1	RIM EXIT DEVICE SD-EL99NL-OP	626	VON DUPRIN
1	REMOVABLE MULLION KR4954 x (2) 154 x SIZE AS REQ	628	VON DUPRIN
1	MULLION WALL MOUNT KIT MT54	628	VON DUPRIN
1	VANDAL RESISTANT TRIM VR910-NL	630	VON DUPRIN
1	VANDAL RESISTANT TRIM VR910-DT	630	VON DUPRIN
1	POWER SUPPLY PS902 x 900-2RS-FA	600	VON DUPRIN
1	DOOR CLOSER 4111 x SHCUSH x SRI	689	LCN
2	DOOR CONTACT MC-7 x SPDT x 1" DIA		SDC
1	TEAR DROP SEAL 797B x HEAD & JAMBS	BLK	REESE
2	TEAR DROP SEAL 797B x MULLION x FULL HEIGHT	BLK	REESE
1	RAIN DRIP R201A x FULL WIDTH + 4"	628	REESE
1	THRESHOLD S483APR x SRS x FHSL x FULL WIDTH	628	REESE
2	DOOR BOTTOM SWEEP (CONCEALED) BY ALUMINUM DOOR SUPPLER		
1	REUSE EXISTING CARD READER		

Hardware Set #: 0004 - PRS DRS ALUM DRS & ALUM FR D02

Opening to Have:

Qty	Description	Finish	Mfg
2	CONTINUOUS HINGE A500 x FULL HEIGHT	630	ABH
1	RIM CYLINDER (PRIMUS) 20-709	626	SCHLAGE
2	MORTISE CYLINDER (IC) 20-700 x XQ11-949	626	SCHLAGE
1	MORTISE CYLINDER (IC) 20-700	626	SCHLAGE
1	RIM EXIT DEVICE CD99EO	626	VON DUPRIN
1	RIM EXIT DEVICE CD99NL-OP	626	VON DUPRIN
1	REMOVABLE MULLION KR4954 x (2) 154 x SIZE AS REQ	628	VON DUPRIN
1	MULLION WALL MOUNT KIT MT54	628	VON DUPRIN
1	VANDAL RESISTANT TRIM VR910-NL	630	VON DUPRIN
1	VANDAL RESISTANT TRIM VR910-DT	630	VON DUPRIN
1	DOOR CLOSER 4111 x SHCUSH	689	LCN

Hardware Set #: 0005 - SGL DRS WD & HMF D151

Opening to Have:

Qty	Description	Finish	Mfg
3	HINGE CB168 4.5 x 4.5 x NRP	652	STANLEY
1	PRIMUS CYLINDER 20-765 (ND-LINE)	626	SCHLAGE
1	STOREROOM LOCKSET ND96LD x SPA x 10-025	626	SCHLAGE
1	ELECTRIC STRIKE ES5-A x 24VDC	630	BEST
1	DOOR CLOSER 4111 x SCUSH	689	LCN
1	KICK PLATE 10" x 2" LDW .050 x B4E x CTSK	630	TRIMCO
1	MOP PLATE 6" x 1" LDW .050 x B4E x CTSK	630	TRIMCO
3	SILENCERS 1229A	GRAY	TRIMCO
1	POWER SUPPLY 10-1-FPD x 1.5A	600	RCI
1	ROCKER SWITCH 909S-MO		RCI
1	CARD READER BY SECURITY CONTRACTOR		

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 08 80 00
GLAZING

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Glass.

B. Glazing compounds and accessories.

1.02 RELATED REQUIREMENTS

A. Section 07 90 05 - Joint Sealers: Sealant and back-up material.

B. Section 08 44 13 - Glazed Aluminum Curtain Wall

1.03 REFERENCE STANDARDS

A. 16 CFR 1201 - Safety Standard for Architectural Glazing Materials.

B. ANSI Z97.1 - American National Standard for Safety Glazing Materials Used in Buildings, Safety Performance Specifications and Methods of Test.

C. ASTM C864 - Standard Specification for Dense Elastomeric Compression Seal Gaskets, Setting Blocks, and Spacers.

D. ASTM C920 - Standard Specification for Elastomeric Joint Sealants.

E. ASTM C1036 - Standard Specification for Flat Glass.

F. ASTM C1048 - Standard Specification for Heat-Treated Flat Glass--Kind HS, Kind FT Coated and Uncoated Glass.

G. ASTM C1193 - Standard Guide for Use of Joint Sealants.

H. ASTM E 773 - Standard Test Method for Accelerated Weathering of Sealed Insulating Glass Units.

I. ASTM E 774 - Standard Specification for the Classification of the Durability of Sealed Insulating Glass Units; 1997.

J. ASTM E1300 - Standard Practice for Determining Load Resistance of Glass in Buildings.

K. ASTM E2190 - Standard Specification for Insulating Glass Unit Performance and Evaluation.

L. GANA (GM) - GANA Glazing Manual; Glass Association of North America.

M. GANA (SM) - GANA Sealant Manual; Glass Association of North America.

N. GANA (LGDG) - Laminated Glazing Reference Manual; Glass Association of North America.

O. SIGMA TM-3000 - Glazing Guidelines for Sealed Insulating Glass Units; Sealed Insulating Glass Manufacturers Association.

1.04 ADMINISTRATIVE REQUIREMENTS

A. Preinstallation Meeting: Convene a preinstallation meeting one week before starting work of this section; require attendance by all affected installers.

1.05 SUBMITTALS

A. See Section 01 33 00 - Administrative Requirements, for submittal procedures.

B. Product Data on Glass Types: Provide structural, physical and environmental characteristics, size limitations, special handling or installation requirements.

C. Product Data on Glazing Compounds: Provide chemical, functional, and environmental characteristics, limitations, special application requirements. Identify available colors.

D. Samples: Submit two samples 12 x12 inch in size of glass and plastic units, showing coloration and design.

NOT FOR BIDDING

E. Certificates: Certify that products meet or exceed specified requirements.

F. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
   1. See Section 01 60 00 - Product Requirements, for additional provisions.
   2. Extra Insulating Glass Units: One of each glass size and each glass type.

1.06 QUALITY ASSURANCE

A. Perform Work in accordance with GANA Glazing Manual and FGMA Sealant Manual for glazing installation methods.

B. Installer Qualifications: Company specializing in performing the work of this section with minimum 10 years documented experience.

1.07 FIELD CONDITIONS

A. Do not install glazing when ambient temperature is less than 50 degrees F.

B. Maintain minimum ambient temperature before, during and 24 hours after installation of glazing compounds.

1.08 WARRANTY

A. Sealed Insulating Glass Units: Provide a five (5) year warranty to include coverage for seal failure, interpane dusting or misting, including replacement of failed units.

1.09 PERFORMANCE REQUIREMENTS

A. General: Provide glass capable of withstanding thermal movement and wind and impact loads (where applicable) as specified in paragraph B following.

B. Glass Design: Glass thickness designations indicated are minimums and are for detailing only. Confirm glass thicknesses by analyzing Project loads and in-service conditions. Provide glass lites in the thickness designations indicated for various size openings, but not less than thicknesses and in strengths (annealed or heat treated) required to meet or exceed the following criteria:
   1. Glass Thicknesses: Select minimum glass thicknesses to comply with ASTM E 1300, according to the following requirements:
      a. Basic Wind Speed: 120 mph.

C. Thermal Movements: Provide glazing that allows for thermal movements resulting from ambient and surface temperatures changes acting on glass framing members and glazing components.

D. Thermal and Optical Performance Properties: Provide glass with performance properties specified based on manufacturer's published test data, as determined according to procedures indicated below:
   1. For monolithic-glass lites, properties are based on units with lites 1/4 inch (6.0 mm) thick.
   2. For insulating-glass units, properties are based on units of thickness indicated for overall unit and for each lite.
   3. Center-of-Glass Values: Based on using LBL-44789 WINDOW 5.0 computer program for the following methodologies:
      a. U-Factors: NFRC 100 expressed as Btu/ sq. ft. per h per degree F.
      b. Solar Heat Gain Coefficient: NFRC 200.
      c. Solar Optical Properties: NFRC 300.

PART 2 PRODUCTS

2.01 GLAZING TYPES

2.02 BASIS OF DESIGN - INSULATING GLASS UNITS

A. Type G-1 - Sealed Insulating Glass Units: Vision glazing, low-E.
   1. Application(s): All exterior glazing unless otherwise indicated.

NOT FOR BIDDING

2. Substitutions: Refer to Section 01 60 00 - Product Requirements.
3. Between-lite space filled with air.
4. Tint: None.
5. Basis of Design: Guardian Industries Corp: www.sunguardglass.com.
6. Outboard Lite: Fully tempered float glass, 1/4 inch thick, minimum.
   a. Coating: SunGuard SNX 62/27 on #2 surface.
   b. Tint: None (clear).
7. Inboard Lite: Fully tempered float glass, 1/4 inch thick.
   a. Tint: None (clear).
8. Total Thickness: 1 inch.

2.03 GLAZING UNITS

A. Type G-2 - Insulated Metal Panel: Spandrel panel.
   1. Application: Exterior glazing where indicated.
   2. Veneer Metal Glazing Panels
      a. Panels are to be 1" nominal thickness.
      b. Face: .062 aluminum (smooth).
      c. Finish: as selected from manufacturer's standard colors.
      d. Substrate: 1/8" hardboard.
      e. Core: expanded polystyrene (EPS) foam board.
      f. Back: .062 aluminum (smooth).
   3. Fabrication
      a. Panels are to be produced in a controlled environment using state of the art automated laminating equipment. Heated adhesive applied to each surface by an automated reciprocal spray system assuring an even coverage to the exact thickness required for proper adhesion of all parts. Minimum 100 lb. pressure evenly applied with an automated rotary pinch roller to assure a high strenth bond.
   4. Accessories
      a. Moldings, angles or stops as required, providing a whether tight installation.
      b. Sealants as recommended for use as an infill panel component.
   5. Finishes
      a. Exposed aluminum surfaces: All exposed surfaces of insulated metal glazing panels shall be finished with Polyvinyl-flouride system meeting "Kynar 500". Duranar Fluoropolymer or equal manufacturer's standard 2-coat thermo-cured system composed of specially formulated inhibitive primer, fluorocarbon color coat with a dry film thickness not less than 1.5 mils, and conforming to AAMA 605.2. Exposed surfaces shall be clean of oils, dirt and free of blemishes. Color shall be selected by Owner from manufacturer's standard colors. Unless otherwise noted, the back face shall have either mill finish or random finish material.
   6. Total Thickness: 1 inch.

2.04 GLASS MATERIALS

A. Float Glass Manufacturers:
   1. AGC Glass Company North America, Inc: www.us.agc.com.

B. Float Glass: All glazing is to be float glass unless otherwise indicated.
   1. Heat-Strengthened and Fully Tempered Types: ASTM C1048.
   2. Thicknesses: As indicated; for exterior glazing comply with specified requirements for wind load design regardless of specified thickness.

2.05 SEALED INSULATING GLASS UNITS

A. Manufacturers:
   1. Any of the manufacturers specified for float glass.

NOT FOR BIDDING

2. Substitutions: Refer to Section 01 60 00 - Product Requirements.

B. Sealed Insulating Glass Units: Types as indicated.
1. Durability: Certified by an independent testing agency to comply with ASTM E2190.
2. Edge Spacers: Aluminum, bent and soldered corners.
3. Edge Seal: Glass to elastomer with supplementary silicone sealant.
4. Purge interpane space with dry hermetic air.

2.06 GLAZING COMPOUNDS

A. Manufacturers:
1. Pecora Corporation: www.pecora.com.
2. Substitutions: Refer to Section 01 60 00 - Product Requirements.

B. Glazing Putty : Polymer modified latex recommended by manufacturer for outdoor use, knife grade consistency; grey color.

C. Butyl Sealant : Single component; ASTM C 920, Grade NS, Class 12-1/2, Uses M and A; Shore A hardness of 10 to 20; black color; non-skinning.

D. Acrylic Sealant : Single component, solvent curing, non-bleeding; ASTM C 920, Type S, Grade NS, Class 12-1/2, Uses M and A; cured Shore A hardness of 15 to 25; color as selected.

E. Polysulfide Sealant : Two component; chemical curing, non-sagging type; ASTM C 920, Type M, Grade NS, Class 25, Uses M, A, and G; cured Shore A hardness of 15 to 25; color as selected.

F. Polyurethane Sealant : Single component, chemical curing, non-staining, non-bleeding; Shore A Hardness Range 20 to 35; color as selected.

G. Silicone Sealant : Single component; neutral curing; capable of water immersion without loss of properties; non-bleeding, non-staining; ASTM C 920, Type S, Grade NS, Class 25, Uses M, A, and G; cured Shore A hardness of 15 to 25; color as selected.

2.07 GLAZING ACCESSORIES

A. Setting Blocks: Neoprene, 80 to 90 Shore A durometer hardness, ASTM C864 Option I. Length of 0.1 inch for each square foot of glazing or minimum 4 inch x width of glazing rabbet space minus 1/16 inch x height to suit glazing method and pane weight and area.

B. Spacer Shims: Neoprene, 50 to 60 Shore A durometer hardness, ASTM C 864 Option I. Minimum 3 inch long x one half the height of the glazing stop x thickness to suit application, self adhesive on one face.

C. Glazing Tape: Preformed butyl compound with integral resilient tube spacing device; 10 to 15 Shore A durometer hardness; coiled on release paper; black color.
1. Manufacturers:
a. Pecora Corporation: www.pecora.com.
b. Substitutions: Refer to Section 01 60 00 - Product Requirements.

D. Glazing Gaskets: Resilient silicone extruded shape to suit glazing channel retaining slot; ASTM C864 Option I; black color.

E. Glazing Clips: Manufacturer's standard type.

2.08 SOURCE QUALITY CONTROL AND TESTS

A. Provide shop inspection and testing for all glass.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that openings for glazing are correctly sized and within tolerance.

NOT FOR BIDDING

B. Verify that surfaces of glazing channels or recesses are clean, free of obstructions that may impede moisture movement, weeps are clear, and ready to receive glazing.

3.02 PREPARATION

A. Clean contact surfaces with solvent and wipe dry.

B. Seal porous glazing channels or recesses with substrate compatible primer or sealer.

C. Prime surfaces scheduled to receive sealant.

D. Install sealants in accordance with ASTM C1193 and GANA Sealant Manual.

E. Install sealant in accordance with manufacturer's instructions.

3.03 GLAZING METHODS

3.04 INSTALLATION - EXTERIOR DRY METHOD (TAPE AND GASKET SPLINE GLAZING)

A. Cut glazing tape to length; install on glazing pane. Seal corners by butting tape and sealing junctions with butyl sealant.

B. Place setting blocks at 1/4 points with edge block no more than 6 inches from corners.

C. Rest glazing on setting blocks and push against fixed stop with sufficient pressure to attain full contact.

D. Install removable stops without displacing glazing spline. Exert pressure for full continuous contact.

E. Trim protruding tape edge.

3.05 INSTALLATION - INTERIOR DRY METHOD (TAPE AND TAPE)

A. Cut glazing tape to length and set against permanent stops, projecting 1/16 inch (1.6 mm) above sight line.

B. Place setting blocks at 1/4 points with edge block no more than 6 inches from corners.

C. Rest glazing on setting blocks and push against tape for full contact at perimeter of pane or unit.

D. Place glazing tape on free perimeter of glazing in same manner described above.

E. Install removable stop without displacement of tape. Exert pressure on tape for full continuous contact.

F. Knife trim protruding tape.

3.06 MANUFACTURER'S FIELD SERVICES

A. Glass and Glazing product manufacturers to provide field surveillance of the installation of their products.

B. Monitor and report installation procedures and unacceptable conditions.

3.07 CLEANING

A. Remove glazing materials from finish surfaces.

B. Remove labels after Work is complete.

C. Clean glass and adjacent surfaces.

3.08 PROTECTION

A. After installation, mark pane with an 'X' by using removable plastic tape or paste; do not mark heat absorbing or reflective glass units.

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 09 21 16
GYPSUM BOARD ASSEMBLIES

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Metal stud wall, ceiling and soffit framing.

B. Gypsum wallboard.

C. Joint treatment and accessories.

1.02 RELATED REQUIREMENTS

A. Section 06 10 00 - Rough Carpentry: Building Framing and Wood blocking .

B. Section 06 10 00 - Rough Carpentry: Wood blocking product and execution requirements.

1.03 REFERENCE STANDARDS

A. AISI SG02-1 - North American Specification for the Design of Cold-Formed Steel Structural Members; American Iron and Steel Institute. (replaced SG-971)

B. ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.

C. ASTM C475/C475M - Standard Specification for Joint Compound and Joint Tape for Finishing Gypsum Board.

D. ASTM C514 - Standard Specification for Nails for the Application of Gypsum Board.

E. ASTM C645 - Standard Specification for Nonstructural Steel Framing Members.

F. ASTM C665 - Standard Specification for Mineral-Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing.

G. ASTM C754 - Standard Specification for Installation of Steel Framing Members to Receive Screw-Attached Gypsum Panel Products.

H. ASTM C840 - Standard Specification for Application and Finishing of Gypsum Board.

I. ASTM C954 - Standard Specification for Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Steel Studs From 0.033 in. (0.84 mm) to 0.112 in. (2.84 mm) in Thickness.

J. ASTM C1002 - Standard Specification for Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs.

K. ASTM C1047 - Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base.

L. ASTM C1396/C1396M - Standard Specification for Gypsum Board.

M. ASTM C1629/C1629 - Standard Classification for Abuse-Resistant Nondecorated Interior Gypsum Panel Products and Fiber-Reinforced Cement Panels.

N. ASTM D3273 - Standard Test Method for Resistance to Growth of Mold on the Surface of Interior Coatings in an Environmental Chamber.

O. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials.

P. ASTM E90 - Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements.

Q. ASTM E413 - Classification for Rating Sound Insulation.

R. GA-214 - Recommended Levels of Gypsum Board Finish; Gypsum Association.

S. GA-216 - Application and Finishing of Gypsum Board; Gypsum Association.

NOT FOR BIDDING

1.04 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

B. Shop Drawings: Indicate special details associated with vertical deflection joints and acoustic seals. Provide special details for suspended ceilings. Indicate layout, anchorage to structure, type and location of fasteners, framed openings, accessories, and items of related work.

C. Product Data: Provide data on metal framing, gypsum board, accessories, and joint finishing system.

D. Product Data: Provide manufacturer's data on partition head to structure connectors, showing compliance with requirements.

1.05 QUALITY ASSURANCE

A. Perform in accordance with ASTM C 840. Comply with requirements of GA-600 for fire-rated assemblies.

B. Installer Qualifications: Company specializing in performing gypsum board application and finishing, with minimum 5 years of documented experience.

PART 2 PRODUCTS

2.01 GYPSUM BOARD ASSEMBLIES

A. Provide completed assemblies per drawings.

2.02 METAL FRAMING MATERIALS

A. Manufacturers - Metal Framing, Connectors, and Accessories:
   1. Clarkwestern Dietrich Building Systems LLC: www.clarkdietrich.com.
   2. Dietrich Metal Framing: www.dietrichindustries.com.
   3. Marino: www.marinoware.com.
   4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Non-Loadbearing Framing System Components: ASTM C645; galvanized sheet steel, of size and properties necessary to comply with ASTM C754 for the spacing indicated, with maximum deflection of wall framing of L/360 at 5 psf.
   1. Exception: The minimum metal thickness and section properties requirements of ASTM C 645 are waived provided steel of 40 ksi minimum yield strength is used, the metal is continuously dimpled, the effective thickness is at least twice the base metal thickness, and maximum stud heights are determined by testing in accordance with ASTM E 72 using assemblies specified by ASTM C 754.
      a. Acceptable Products:
         1) Dietrich Metal Framing; UltraSteel (tm): www.dietrichindustries.com.
         2) Clark Western Building Systems; UltraSteel (tm): www.clarkwestern.com.
   2. Studs: "C" shaped with flat or formed webs with knurled faces. Minimum gauge = 20.
   3. Runners: U shaped, sized to match studs. Minimum gauge = 16.
   4. Ceiling Channels: C shaped. Minimum gauge = 16.
   5. Furring: Hat-shaped sections, minimum depth of 7/8 inch. Minimum gauge = 18.

C. Ceiling Hangers: Type and size as specified in ASTM C754 for spacing required.

D. Partition Head to Structure Connections: Provide mechanical anchorage devices that accommodate deflection using slotted holes, screws and anti-friction bushings, preventing rotation of studs while maintaining structural performance of partition.
   1. Structural Performance: Maintain lateral load resistance and vertical movement capacity required by applicable code, when evaluated in accordance with AISI North American Specification for the Design of Cold-Formed Steel Structural Members.
   2. Material: ASTM A653/A653M steel sheet, SS Grade 50/340, with G60/Z180 hot dipped galvanized coating.

NOT FOR BIDDING

3. Provide kickers / framing for top of wall and soffits as necessary.

2.03 BOARD MATERIALS

A. Manufacturers - Gypsum-Based Board:
   1. CertainTeed Corporation: www.certainteed.com.
   2. Georgia-Pacific Gypsum: www.gpgypsum.com.
   3. National Gypsum Company: www.nationalgypsum.com.
   4. USG Corporation: www.usg.com.
   5. Substitutions: See Section 01 60 00 - Product Requirements.

B. Impact-Rated Wallboard: Tested to Level 3 soft-body and hard-body impact in accordance with ASTM C1629.
   1. Application: Walls.
   2. Paper-Faced Type: Gypsum wallboard as defined in ASTM C1396/C1396M.
   3. Thickness: 5/8 inch.
   4. Edges: Tapered.
   5. Products:
      a. National Gypsum Company; Gold Bond Hi-Impact Brand XP Wallboard.
      b. USG Corporation; Fiberock Brand Panels--VHI Abuse-Resistant.

C. Gypsum Wallboard: ASTM C 1396/C 1396M. Sizes to minimize joints in place; ends square cut.
   1. Abuse-Resistant Type: Gypsum wallboard especially formulated for increased impact resistance, with enhanced gypsum core and heavy duty face and back paper.
      a. Application: Walls.
      b. Core Type: Regular, as indicated.
      c. Thickness: 5/8 inch.
      d. Edges: Tapered.

2.04 ACCESSORIES

A. Acoustic Insulation: ASTM C 665; preformed glass fiber, friction fit type, unfaced. Thickness to fit cavity. As specified in Section 07 21 00.

B. Finishing Accessories: ASTM C1047, rigid plastic, unless otherwise indicated.
   1. Types: As detailed or required for finished appearance.
   2. Special Shapes: In addition to conventional cornerbead and control joints, provide U-bead at exposed panel edges.

C. Joint Materials: ASTM C475 and as recommended by gypsum board manufacturer for project conditions.
   1. Tape: 2 inch wide, coated glass fiber tape for joints and corners, except as otherwise indicated.
   2. Tape: 2 inch wide, creased paper tape for joints and corners, except as otherwise indicated.
   3. Ready-mixed vinyl-based joint compound.
   4. Powder-type vinyl-based joint compound.
   5. Chemical hardening type compound.

D. Screws for Attachment to Steel Members Less Than 0.03 inch In Thickness, to Wood Members, and to Gypsum Board: ASTM C1002; self-piercing tapping type; cadmium-plated for exterior locations.

E. Screws for Attachment to Steel Members From 0.033 to 0.112 Inch in Thickness: ASTM C954; steel drill screws for application of gypsum board to loadbearing steel studs.

F. Screws: ASTM C 1002; self-piercing tapping type; cadmium-plated for exterior locations.

G. Staples: ASTM C 840.

NOT FOR BIDDING

H. Anchorage to Substrate: Tie wire, screws, and other metal supports, of type and size to suit application; to rigidly secure materials in place.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that project conditions are appropriate for work of this section to commence.

3.02 FRAMING INSTALLATION

A. Metal Framing: Install in accordance with ASTM C754 and manufacturer's instructions.

B. Studs: Space studs as indicated.
   1. Extend partition framing to structure where indicated and to ceiling in other locations.
   2. Partitions Terminating at Ceiling: Attach ceiling runner securely to ceiling framing in accordance with details.
   3. Partitions Terminating at Structure: Attach extended leg top runner to structure, maintain clearance between top of studs and structure, and brace both flanges of studs with continuous bridging.
   4. Partitions Terminating at Structure: Attach top runner to structure, maintain clearance between top of studs and structure, and connect studs to track using specified mechanical devices in accordance with manufacturer's instructions; verify free movement of top of stud connections; do not leave studs unattached to track.

C. Openings: Reinforce openings as required for weight of doors or operable panels, using not less than double studs at jambs.

D. Connections: Minimum (4) #12 screws per connection of cold formed metal framing members.

E. Blocking: Install blocking for support of plumbing fixtures, toilet partitions, wall cabinets, wood frame openings, toilet accessories, and hardware. Comply with Section 06 10 00 for wood blocking.

3.03 ACOUSTIC ACCESSORIES INSTALLATION

A. Acoustic Insulation: Place tightly within spaces, around cut openings, behind and around electrical and mechanical items within partitions, and tight to items passing through partitions.

3.04 BOARD INSTALLATION

A. Comply with ASTM C 840 and manufacturer's instructions. Install to minimize butt end joints, especially in highly visible locations.

B. Single-Layer Non-Rated: Install gypsum board in most economical direction, with ends and edges occurring over firm bearing.
   1. Exception: Tapered edges to receive joint treatment at right angles to framing.

C. Installation on Metal Framing: Use screws for attachment of all gypsum board except face layer of non-rated double-layer assemblies, which may be installed by means of adhesive lamination.

3.05 INSTALLATION OF TRIM AND ACCESSORIES

A. Control Joints: Place control joints consistent with lines of building spaces and as directed.
   1. Not more than 30 feet apart on walls and ceilings over 50 feet long.

B. Corner Beads: Install at external corners, using longest practical lengths.

C. Edge Trim: Install at locations where gypsum board abuts dissimilar materials and as indicated.

3.06 JOINT TREATMENT

A. Paper Faced Gypsum Board: Use fiberglass joint tape, bedded with ready-mixed vinyl-based; or powder-type vinyl-based; or chemical hardening type joint compound and finished with ready-mixed vinyl-based; or powder-type vinyl-based; or chemical hardening type joint compound.

NOT FOR BIDDING

B. Finish gypsum board in accordance with levels defined in ASTM C840, as follows:
   1. Level 4: Walls and ceilings to receive paint finish or wall coverings, unless otherwise indicated.
   2. Level 2: In utility areas, behind cabinetry, and on backing board to receive tile finish or where FRP panel to be installed.
   3. Level 1: Fire rated wall areas above finished ceilings, whether or not accessible in the completed construction.

C. Finish gypsum board in scheduled areas in accordance with levels defined in GA-214; or ASTM C 840 and as scheduled below.
   1. Above Finished Ceilings Concealed From View: Level 1.
   2. Walls and Ceilings to Receive Flat Paint Finish: Level 4.

D. Tape, fill, and sand exposed joints, edges, and corners to produce smooth surface ready to receive finishes.
   1. Feather coats of joint compound so that camber is maximum 1/32 inch.
   2. Taping, filling, and sanding is not required at surfaces behind adhesive applied ceramic tile and fixed cabinetry.
   3. Taping, filling and sanding is not required at base layer of double layer applications.

3.07 TOLERANCES

A. Maximum Variation of Finished Gypsum Board Surface from True Flatness: 1/8 inch in 10 feet in any direction.

3.08 FINISH LEVEL SCHEDULE (SEE 1.03 REFERENCES FOR DEFINITION)

A. Level 1: Above finished ceilings concealed from view.

B. Level 4: Walls and ceilings scheduled to receive flat paint finish.

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 09 30 00
TILING

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Tile for floor applications.

B. Tile for wall applications.

C. Cementitious backer board as tile substrate.

D. Ceramic trim.

1.02 RELATED REQUIREMENTS

A. Section 07 90 05 - Joint Sealers.

1.03 REFERENCE STANDARDS

A. ANSI A108 Series/A118 Series/A136.1 - American National Standard Specifications for the Installation of Ceramic Tile (Compendium).

1. ANSI A108.1a - American National Standard Specifications for Installation of Ceramic Tile in the Wet-Set Method, with Portland Cement Mortar.
2. ANSI A108.1b - American National Standard Specifications for Installation of Ceramic Tile on a Cured Portland Cement Mortar Setting Bed with Dry-Set or Latex Portland Cement Mortar.
3. ANSI A108.1c - Specifications for Contractors Option: Installation of Ceramic Tile in the Wet-Set Method with Portland Cement Mortar or Installation of Ceramic Tile on a Cured Portland Cement Mortar Bed with Dry-Set or Latex Portland Cement
4. ANSI A108.4 - American National Standard Specifications for Installation of Ceramic Tile with Organic Adhesives or Water Cleanable Tile-Setting Epoxy Adhesive.
5. ANSI A108.5 - American National Standard Specifications for Installation of Ceramic Tile with Dry-Set Portland Cement Mortar or Latex-Portland Cement Mortar.
6. ANSI A108.6 - American National Standard Specifications for Installation of Ceramic Tile with Chemical Resistant, Water Cleanable Tile-Setting and -Grouting Epoxy.
7. ANSI A108.8 - American National Standard Specifications for Installation of Ceramic Tile with Chemical Resistant Furan Resin Mortar and Grout.
8. ANSI A108.9 - American National Standard Specifications for Installation of Ceramic Tile with Modified Epoxy Emulsion Mortar/Grout.
9. ANSI A108.10 - American National Standard Specifications for Installation of Grout in Tilework.
10. ANSI A108.11 - American National Standard for Interior Installation of Cementitious Backer Units.
11. ANSI A108.12 - American National Standard for Installation of Ceramic Tile with EGP (Exterior glue plywood) Latex-Portland Cement Mortar.
12. ANSI A108.13 - American National Standard for Installation of Load Bearing, Bonded, Waterproof Membranes for Thin-Set Ceramic Tile and Dimension Stone.
13. ANSI A118.1 - American National Standard Specifications for Dry-Set Portland Cement Mortar.
14. ANSI A118.4 - American National Standard Specifications for Latex-Portland Cement Mortar.
15. ANSI A118.5 - American National Standard Specifications for Chemical Resistant Furan Mortars and Grouts for Tile Installation.
16. ANSI A118.6 - American National Standard Specifications for Standard Cement Grouts for Tile Installation.

NOT FOR BIDDING

17. ANSI A118.7 - American National Standard Specifications for Polymer Modified Cement Grouts for Tile Installation.
18. ANSI A118.9 - American National Standard Specifications for Test Methods and Specifications for Cementitious Backer Units.
19. ANSI A118.10 - American National Standard Specifications for Load Bearing, Bonded, Waterproof Membranes for Thin-Set Ceramic Tile and Dimension Stone Installation.

B. TCNA (HB) - Handbook for Ceramic, Glass, and Stone Tile Installation.

1.04 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

B. Product Data: Provide manufacturers' data sheets on tile, mortar, grout, and accessories. Include instructions for using grouts and adhesives.

C. Shop Drawings: Indicate tile layout, patterns, color arrangement, perimeter conditions, junctions with dissimilar materials, control and expansion joints, thresholds, ceramic accessories, and setting details.

D. Samples: Mount tile and apply grout on two plywood panels, minimum 18 x 18 inches in size illustrating pattern, color variations, and grout joint size variations.

E. Manufacturer's Certificate: Certify that products meet or exceed specified requirements.

F. Maintenance Data: Include recommended cleaning methods, cleaning materials, stain removal methods, and polishes and waxes.

1.05 QUALITY ASSURANCE

A. Maintain one copy of The Tile Council of North America Handbook and ANSI A108 Series/A118 Series on site.

B. Manufacturer Qualifications: Company specializing in manufacturing the types of products specified in this section, with minimum 10 years of documented experience.

C. Installer Qualifications: Company specializing in performing tile installation, with minimum of 5 years of documented experience.

1.06 MOCK-UP

A. Construct tile mock-up where indicated on the drawings, incorporating all components specified for the location.
1. Minimum size of mock-up is indicated on the drawings.
2. Approved mock-up may remain as part of the Work.
3. Demolish mock-up when directed by Architect, and remove debris from the site.

1.07 PRE-INSTALLATION MEETING

A. Convene one week before starting work of this section.

1.08 DELIVERY, STORAGE, AND HANDLING

A. Protect materials from freezing or overheating in accordance with manufacturer's instructions.

1.09 FIELD CONDITIONS

A. Do not install solvent-based products in an unventilated environment.

B. Maintain ambient and substrate temperature of 50 degrees F during installation of mortar materials.

1.10 EXTRA MATERIALS

A. Provide 2 percent of each size, color, and surface finish of tile specified.

NOT FOR BIDDING

PART 2 PRODUCTS

2.01 TILE

A. Manufacturers: All products by the same manufacturer.
   1. Dal-Tile Corporation: www.daltile.com.
   2. Substitutions: See Section 01 60 00 - Product Requirements.

B. Ceramic Mosaic Floor Tile : ANSI A137.1
   1. Keystones Manufactured by Daltile .
   2. Moisture Absorption: 0 to 0.5 percent.
   3. Size and Shape: 2" x 2".
   4. Surface Finish: Unglazed.

C. Glazed Wall Tile : ANSI A137.1, and as follows:
   1. Festiva manufactured by Daltile or approved equivalent product.
   2. Moisture Absorption: 3.0 to 7.0 percent.
   3. Size and Shape: 4-1/4 inch square.
   4. Edges: Cushioned.
   5. Surface Finish: High gloss.
   6. Pattern: (2) color random pattern.
   7. Trim Units: Matching bullnose, cove, and base shapes in sizes coordinated with field tile.

2.02 TRIM AND ACCESSORIES

A. Non-Ceramic Trim: Brushed stainless steel, style and dimensions to suit application, as indicated on drawings for setting using tile mortar or adhesive.
   1. Applications: Use in the following locations:
      a. Open edges of floor tile.
      b. Transition between floor finishes of different heights.
      c. Expansion and control joints, floor and wall.
      d. Floor to wall joints.
   2. Manufacturer:
      a. Schluter-Systems: www.schluter.com.
      b. Substitutions: See Section 01 60 00 - Product Requirements.

B. Thresholds: Marble, white, honed finish; 4 inches wide by full width of wall or frame opening; 1/2 inch thick thickness to fit application; beveled one long edge with radiused corners on top side; without holes, cracks, or open seams.
   1. Applications: Provide at the following locations:
      a. At doorways where tile terminates.
      b. At open edges of floor tile where adjacent finish is a different height.

2.03 SETTING MATERIALS

2.04 ADHESIVE MATERIALS

A. Manufacturers:
   1. LATICRETE International, Inc; LATICRETE 254 Platinum: www.laticrete.com.
   2. Substitutions: See Section 01 60 00 - Product Requirements.

2.05 GROUTS

A. Manufacturers:
   1. Substitutions: See Section 01 60 00 - Product Requirements.

B. Standard Grout: Polymer modified cement grout, sanded, as specified in ANSI A118.7.

2.06 THIN-SET ACCESSORY MATERIALS

A. Floor Patch/Leveler

NOT FOR BIDDING

1. Acceptable Product: Bostik, Floor Patch 101.

B. Cementitious Backer Board: ANSI A118.9; High density, cementitious, glass fiber reinforced, 1/2 inch thick; 2 inch wide coated glass fiber tape for joints and corners.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that sub-floor surfaces are smooth and flat within the tolerances specified for that type of work and are ready to receive tile.

B. Verify that wall surfaces are smooth and flat within the tolerances specified for that type of work, are dust-free, and are ready to receive tile.

C. Verify that sub-floor surfaces are dust-free and free of substances that could impair bonding of setting materials to sub-floor surfaces.

D. Verify that concrete sub-floor surfaces are ready for tile installation by testing for moisture emission rate and alkalinity; obtain instructions if test results are not within limits recommended by tile manufacturer and setting materials manufacturer.

E. Verify that required floor-mounted utilities are in correct location.

3.02 PREPARATION

A. Protect surrounding work from damage.

B. Vacuum clean surfaces and damp clean.

C. Seal substrate surface cracks with filler. Level existing substrate surfaces to acceptable flatness tolerances. With floor patch leveler.

D. Install backer board in accordance with ANSI A108.11 and board manufacturer's instructions. Tape joints and corners, cover with skim coat of setting material to a feather edge.

E. Install cementitious backer board in accordance with ANSI A108.11 and board manufacturer's instructions. Tape joints and corners, cover with skim coat of dry-set mortar to a feather edge.

3.03 INSTALLATION - GENERAL

A. Install tile, thresholds, and stair treads and grout in accordance with applicable requirements of ANSI A108.1 through A108.13, manufacturer's instructions, and The Tile Council of North America Handbook recommendations.

B. Lay tile to pattern indicated. Do not interrupt tile pattern through openings.

C. Cut and fit tile to penetrations through tile, leaving sealant joint space. Form corners and bases neatly. Align floor joints.

D. Place tile joints uniform in width, subject to variance in tolerance allowed in tile size. Make grout joints without voids, cracks, excess mortar or excess grout, or too little grout.

E. Form internal angles square and external angles bullnosed.

F. Sound tile after setting. Replace hollow sounding units.

G. Keep expansion joints free of adhesive or grout. Apply sealant to joints.

H. Prior to grouting, allow installation to completely cure; minimum of 48 hours.

I. Grout tile joints. Use standard grout unless otherwise indicated.

J. Apply sealant to junction of tile and dissimilar materials and junction of dissimilar planes.

3.04 INSTALLATION - FLOORS - THIN-SET METHODS

A. Over concrete substrates, install in accordance with TCA Handbook Method F122, dry-set or latex-portland cement bond coat, over crack - isolation membrane with standard grout, unless otherwise indicated.

NOT FOR BIDDING

3.05 INSTALLATION - WALL TILE

A. Over cementitious backer units on studs, install in accordance with The Tile Council of North America Handbook Method W244, using membrane at toilet rooms.

B. Over gypsum wallboard on wood or metal studs install in accordance with The Tile Council of North America Handbook Method W243, thin-set with dry-set or latex-Portland cement bond coat, unless otherwise indicated.

C. Over interior concrete and masonry install in accordance with The Tile Council of North America Handbook Method W202, thin-set with dry-set or latex-Portland cement bond coat.

3.06 CLEANING

A. Clean tile and grout surfaces.

3.07 PROTECTION

A. Do not permit traffic over finished floor surface for 4 days or manufacturer's recommended curing time after installation.

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 09 51 00
ACOUSTICAL CEILINGS

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Suspended metal grid ceiling system to facilitate new window installation.

B. Support hangers, channels, and wires.

1.02 RELATED REQUIREMENTS

A. Section 07 21 00 - Thermal Insulation: Acoustical insulation.

1.03 REFERENCE STANDARDS

A. ASTM C635 - Standard Specification for the Manufacture, Performance, and Testing of Metal Suspension Systems for Acoustical Tile and Lay-in Panel Ceilings.

B. ASTM C636/C636M - Standard Practice for Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels.

C. ASTM E1264 - Standard Classification for Acoustical Ceiling Products.

D. GEI (SCH) - GREENGUARD "Children and Schools" Certified Products; GREENGUARD Environmental Institute.

1.04 SUBMITTALS

A. See Section 01 30 00 - General Conditions, for submittal procedures.

B. Product Data: Provide data on suspension system components.

C. Samples: Submit two samples 4x4 inch in size illustrating material and finish of acoustical units.

D. Samples: Submit two samples each, 6 inches long, of suspension system main runner, cross runner, and perimeter molding.

E. Manufacturer's Installation Instructions: Indicate special procedures and perimeter conditions requiring special attention.

1.05 QUALITY ASSURANCE

A. Suspension System Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum ten years documented experience.

B. Acoustical Unit Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum ten years documented experience.

1.06 FIELD CONDITIONS

A. Maintain uniform temperature of minimum 60 degrees F, and maximum humidity of 40 percent prior to, during, and after acoustical unit installation.

1.07 PROJECT CONDITIONS

A. Sequence work to ensure acoustical ceilings are not installed until building is enclosed, sufficient heat is provided, dust generating activities have terminated, and overhead work is completed, tested, and approved.

B. Install acoustical units after interior wet work is dry.

1.08 EXTRA MATERIALS

A. See Section 01 60 00 - Product Requirements, for additional provisions.

B. Provide 800 SF of Type A acoustical unit, 160 SF of Type B acoustical unit, 48 SF of Type C, and 48 SF of Type D for Owner's use in maintenance of project.

NOT FOR BIDDING

PART 2 PRODUCTS

2.01 ACOUSTICAL UNITS

A. Manufacturers:
   1. Armstrong World Industries, Inc: www.armstrong.com.
   2. Substitutions: See Section 01 60 00 - Product Requirements.

B. Acoustical Units - General: ASTM E1264, Class A.

C. Acoustical Tile Type A: Painted mineral fiber, ASTM E 1264 Type III, with to the following characteristics:
   1. Size: 24 x 48 inches.
   2. Edge: Square.
   3. Surface Color: White.
   4. Surface Pattern: Fine Fissured, match existing..
   5. Product: Armstrong

2.02 SUSPENSION SYSTEM(S) UNLESS NOTED OTHERWISE ABOVE.

A. Manufacturers:
   1. Same as for acoustical units.
   2. Armstrong World Industries, Inc:www.armstrong.com.
   3. Substitutions: See Section 01 60 00 - Product Requirements.

B. Suspension Systems - General: ASTM C 635; die cut and interlocking components, with stabilizer bars, clips, splices, perimeter moldings, and hold down clips as required.

C. Exposed Tee Steel Suspension System: Formed galvanized steel, commercial quality cold rolled; heavy-duty.
   1. Profile: Tee; for square edge panels 15/16 inch wide face.
   2. Construction: Double web.
   3. Finish: White painted.
   4. Product: Match existing by Armstrong.

2.03 ACCESSORIES

A. Support Channels and Hangers: Galvanized steel; size and type to suit application and ceiling system flatness requirement specified.

B. Perimeter Moldings: Same material and finish as grid.

C. Acoustical Sealant For Perimeter Moldings: Specified in Section 07 90 05.

D. Gasket For Perimeter Moldings: Closed cell rubber sponge tape.

E. Touch-up Paint: Type and color to match acoustical and grid units.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify existing conditions before starting work.

B. Verify that layout of hangers will not interfere with other work.

3.02 INSTALLATION - SUSPENSION SYSTEM

A. Install suspension system in accordance with ASTM C 636, ASTM E 580, and manufacturer's instructions and as supplemented in this section.

B. Rigidly secure system, including integral mechanical and electrical components, for maximum deflection of 1:240.

C. Lay out system to a balanced grid design with edge units no less than 50 percent of acoustical unit size.

NOT FOR BIDDING

D. Locate system on room axis according to reflected plan.

E. Install after major above-ceiling work is complete. Coordinate the location of hangers with other work.

F. Hang suspension system independent of walls, columns, ducts, pipes and conduit. Where carrying members are spliced, avoid visible displacement of face plane of adjacent members.

G. Where ducts or other equipment prevent the regular spacing of hangers, reinforce the nearest affected hangers and related carrying channels to span the extra distance.

H. Do not support components on main runners or cross runners if weight causes total dead load to exceed deflection capability.

I. Support fixture loads using supplementary hangers located within 6 inches of each corner, or support components independently.

J. Do not eccentrically load system or induce rotation of runners.

K. Perimeter Molding: Install at intersection of ceiling and vertical surfaces and at junctions with other interruptions.
   1. Install in bed of acoustical sealant or in bed of acoustical sealant.
   2. Use longest practical lengths.
   3. Miter or Overlap and rivet corners.

L. Form expansion joints as detailed. Form to accommodate plus or minus 1 inch movement. Maintain visual closure.

3.03 TOLERANCES

A. Maximum Variation from Flat and Level Surface: 1/8 inch in 10 feet.

B. Maximum Variation from Plumb of Grid Members Caused by Eccentric Loads: 2 degrees.

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 09 65 00
RESILIENT FLOORING

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Resilient tile flooring with field and accent colors. 2 color pattern.

B. Resilient base and pre-molded internal / external corners.

C. Installation accessories.

1.02 RELATED REQUIREMENTS

1.03 REFERENCE STANDARDS

A. ASTM E648 - Standard Test Method for Critical Radiant Flux of Floor-Covering Systems Using a Radiant Heat Energy Source.

B. ASTM F710 - Standard Practice for Preparing Concrete Floors to Receive Resilient Flooring.

C. ASTM F1066 - Standard Specification for Vinyl Composition Floor Tile.

D. ASTM F1303 - Standard Specification for Sheet Vinyl Floor Covering with Backing.

E. ASTM F1344 - Standard Specification for Rubber Floor Tile.

F. ASTM F1861 - Standard Specification for Resilient Wall Base.

G. BAAQMD 8-51 - Bay Area Air Quality Management District Regulation 8, Rule 51, Adhesive and Sealant Products; www.baaqmd.gov.

H. NFPA 253 - Standard Method of Test for Critical Radiant Flux of Floor Covering Systems Using a Radiant Heat Energy Source; National Fire Protection Association.

I. RFCI (RWP) - Recommended Work Practices for Removal of Resilient Floor Coverings; Resilient Floor Covering Institute.

J. SCAQMD 1168 - South Coast Air Quality Management District Rule No.1168; www.aqmd.gov.

1.04 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

B. Product Data: Provide data on specified products, describing physical and performance characteristics; including sizes, patterns and colors available; and installation instructions.

C. Shop Drawings: Indicate seaming plan.

D. Selection Samples: Submit manufacturer's complete set of color samples for Architect's initial selection.

E. Verification Samples: Submit two samples, 12x12 inch in size illustrating color and pattern for each resilient flooring product specified.

1.05 DELIVERY, STORAGE, AND HANDLING

A. Protect roll materials from damage by storing on end.

1.06 FIELD CONDITIONS

A. Maintain temperature in storage area between 55 degrees F and 90 degrees F.

B. Store materials for not less than 48 hours prior to installation in area of installation at a temperature of 70 degrees F to achieve temperature stability. Thereafter, maintain conditions above 55 degrees F.

1.07 EXTRA MATERIALS

A. See Section 01 60 00 - Product Requirements, for additional provisions.

B. Provide 50 sq ft of flooring, 20 lineal feet of base, of each type and color specified.

NOT FOR BIDDING

PART 2 PRODUCTS

2.01 TILE FLOORING

A. Vinyl Composition Tile: Homogeneous, with uniform color extending throughout thickness, and:
   1. Minimum Requirements: Comply with ASTM F 1066, of Class corresponding to type specified. Composition 1, class 2.
   2. Critical Radiant Flux (CRF): Minimum 0.45 watt per square centimeter, when tested in accordance with ASTM E 648.
   3. Size: 12 x 12 inch.
   4. Thickness: 0.125 inch.
   5. Pattern: Marbleized.
   6. Manufacturers:
      a. Armstrong World Industries, Inc; Product Designer Essentials: www.armstrong.com.
      b. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 RESILIENT BASE

A. Resilient Base: ASTM F 1861, Type TP, rubber, thermoplastic; Style A, Straight; and Style B, Cove, and as follows:
   1. Critical Radiant Flux (CRF): Minimum 0.45 watt per square centimeter, when tested in accordance with ASTM E 648 or NFPA 253.
   2. Height: 2-1/2 inch, 4".
   3. Thickness: 0.125 inch thick.
   4. Finish: Satin.
   5. Length: Roll.
   6. Color: Color as selected from manufacturer's standards.
   7. Accessories: Premolded external corners and end stops.
   8. Manufacturers:
      a. Burke Mercer; Product Rubber Myte: www.burkeflooring.com.
      b. Substitutions: See Section 01 60 00 - Product Requirements.

2.03 ACCESSORIES

A. Subfloor Filler: White premix latex; type recommended by adhesive material manufacturer.

B. Primers, Adhesives, and Seaming Materials: Waterproof; types recommended by flooring manufacturer.
   1. Provide only products having lower volatile organic compound (VOC) content than required by the more stringent of the South Coast Air Quality Management District Rule No.1168 and the Bay Area Air Quality Management District Regulation 8, Rule 51.

C. Moldings and Edge Strips: Metal or metal.
   1. Products: manufactured by Burke Mercer = Design Basis.

D. Filler for Coved Base: Plastic or as recommended by manufacturer.

E. Sealer and Wax: Types recommended by flooring manufacturer.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that sub-floor surfaces are smooth and flat within the tolerances specified for that type of work and are ready to receive resilient flooring.

B. Verify that wall surfaces are smooth and flat within the tolerances specified for that type of work, are dust-free, and are ready to receive resilient base.

C. Verify that sub-floor surfaces are dust-free and free of substances that could impair bonding of adhesive materials to sub-floor surfaces.

NOT FOR BIDDING

D. Verify that concrete sub-floor surfaces are ready for resilient flooring installation by testing for moisture emission rate and alkalinity; obtain instructions if test results are not within the following limits:
   1. Moisture emission rate: Not greater than 3 lb per 1000 sq ft per 24 hours when tested using calcium chloride moisture test kit for 72 hours.
   2. Alkalinity: pH range of 5-9.

3.02 PREPARATION

A. Remove existing resilient flooring and flooring adhesives; follow the recommendations of RFCI Recommended Work Practices for Removal of Resilient Floor Coverings.

B. Remove sub-floor ridges and bumps. Fill minor low spots, cracks, joints, holes, and other defects with sub-floor filler to achieve smooth, flat, hard surface.

C. Prohibit traffic until filler is cured.

D. Clean substrate.

E. Apply primer as required to prevent "bleed-through" or interference with adhesion by substances that cannot be removed.

3.03 INSTALLATION

A. Starting installation constitutes acceptance of sub-floor conditions.

B. Install in accordance with manufacturer's instructions.

C. Spread only enough adhesive to permit installation of materials before initial set.

D. Fit joints tightly.

E. Set flooring in place, press with heavy roller to attain full adhesion.

F. Where type of floor finish, pattern, or color are different on opposite sides of door, terminate flooring under centerline of door.

G. Install edge strips at unprotected or exposed edges, where flooring terminates, and where indicated.

H. Scribe flooring to walls, columns, cabinets, floor outlets, and other appurtenances to produce tight joints.

3.04 TILE FLOORING

A. Install in accordance with manufacturer's instructions.

B. Mix tile from container to ensure shade variations are consistent when tile is placed, unless manufacturer's instructions say otherwise.

C. Spread only enough adhesive to permit installation of materials before initial set.

D. Set flooring in place, press with heavy roller to attain full adhesion.

E. Lay flooring with joints and seams parallel or as shown on plans to building lines to produce symmetrical tile pattern.

F. Install tile to basket weave pattern. Allow minimum 1/2 full size tile width at room or area perimeter.

G. Where floor finishes are different on opposite sides of door, terminate flooring under centerline of door.

H. Install edge and termination strips at unprotected or exposed edges, where flooring terminates, and where indicated. Before installation of flooring, secure metal strips with stainless steel screws.

I. Scribe flooring to walls, columns, cabinets, and other appurtenances to produce tight joints.

J. Install feature strips and floor markings where indicated. Fit joints tightly.

NOT FOR BIDDING

3.05 RESILIENT BASE

A. Fit joints tightly and make vertical. Maintain minimum dimension of 48 inches between joints.

B. At external and internal corners, use premolded units. At exposed ends, use premolded units.

C. Install base on solid backing. Bond tightly to wall and floor surfaces.

D. Scribe and fit to door frames and other interruptions.

3.06 CLEANING

A. Remove excess adhesive from floor, base, and wall surfaces without damage.

B. Clean, seal, and wax resilient flooring products in accordance with manufacturer's instructions.

3.07 PROTECTION

A. Prohibit traffic on resilient flooring for 48 hours after installation.

END OF SECTION

NOT FOR BIDDING

SECTION 09 68 00
CARPETING

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Modular Carpet

1.02 RELATED REQUIREMENTS

1.03 REFERENCE STANDARDS

A. ASTM D2859 - Standard Test Method for Ignition Characteristics of Finished Textile Floor Covering Materials.

B. ASTM E648 - Standard Test Method for Critical Radiant Flux of Floor Covering Systems Using a Radiant Heat Energy Source.

C. ASTM F710 - Standard Practice for Preparing Concrete Floors to Receive Resilient Flooring.

D. CRI (CIS) - Carpet Installation Standard; Carpet and Rug Institute.

E. CRI (GLA) - Green Label Testing Program - Approved Adhesive Products; Carpet and Rug Institute.

F. CRI (GLC) - Green Label Testing Program - Approved Product Categories for Carpet; Carpet and Rug Institute.

G. CRI (GLCC) - Green Label Testing Program - Approved Product Categories for Carpet Cushion; Carpet and Rug Institute.

H. CRI (GLP) - Green Label Plus Carpet Testing Program - Approved Products; Carpet and Rug Institute.

I. NFPA 253 - Standard Method of Test for Critical Radiant Flux of Floor Covering Systems Using a Radiant Heat Energy Source; National Fire Protection Association.

1.04 SUBMITTALS

A. See Section 01 33 00 - Administrative Requirements, for submittal procedures.

B. Product Data: Provide data on specified products, describing physical and performance characteristics; sizes, patterns, colors available, and method of installation.

C. Samples: Submit two samples 24x24 inch in size illustrating color and pattern for each carpet and cushion material specified.

D. LEED Report: Submit data documenting VOC content of carpet, cushion, and adhesives; copy of current CRI Approved Products Listing is acceptable.

1.05 QUALITY ASSURANCE

A. Manufacturer Qualifications: Company specializing in manufacturing specified carpet with minimum five years documented experience.

B. Installer Qualifications: Company specializing in installing carpet with minimum three years experience.

1.06 FIELD CONDITIONS

A. Store materials in area of installation for minimum period of 24 hours prior to installation.

B. Maintain minimum 70 degrees F ambient temperature 24 hours prior to, during and 24 hours after installation.

C. Ventilate installation area during installation and for 72 hours after installation.

NOT FOR BIDDING

PART 2 PRODUCTS

2.01 MANUFACTURERS

A. Carpet:
   1. Tandus; Product Aftermath II over Flex-Aire Cushion Modular and Powerbond.
   2. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 CARPET

A. Carpet : Auditorium
   1. Product: Aftermath II over Flex-Aire Modular (2 colors) as manufactured by Tandus
   2. Adhesive System: Non-wet peel & stick adhesive applied during manufacturing.

2.03 ACCESSORIES

A. Sub-Floor Filler: Type recommended by carpet manufacturer.

B. Moldings and Edge Strips: Rubber, color as selected.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that sub-floor surfaces are smooth and flat within the tolerances specified for that type of work and are ready to receive carpet.

B. Verify that sub-floor surfaces are dust-free and free of substances that could impair bonding of adhesives to sub floor surfaces.

3.02 PREPARATION

A. Remove sub-floor ridges and bumps. Fill minor or local low spots, cracks, joints, holes, and other defects with sub-floor filler.

B. Apply, trowel, and float filler to achieve smooth, flat, hard surface. Prohibit traffic until filler is cured.

C. Clean substrate.

3.03 INSTALLATION - GENERAL

A. Starting installation constitutes acceptance of sub-floor conditions.

B. Lay out carpet tiles:
   1. See drawings for pattern. if no pattern indicated consult Architect for pattern and orientatioj of tiles.

C. Install carpet tight and flat on subfloor, well fastened at edges, with a uniform appearance.

3.04 CLEANING

A. Remove excess adhesive from floor and wall surfaces without damage.

B. Clean and vacuum carpet surfaces.

END OF SECTION

NOT FOR BIDDING

SECTION 09 90 00
PAINTING AND COATING

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Surface preparation.

B. Field application of paints and other coatings.

C. Scope: Prepare and paint all interior new work and patching and all exterior lintels.

1.02 REFERENCE STANDARDS

A. 40 CFR 59, Subpart D - National Volatile Organic Compound Emission Standards for Architectural Coatings; U.S. Environmental Protection Agency.

B. ASTM D16 - Standard Terminology for Paint, Related Coatings, Materials, and Applications.

C. NACE (IMP) - Industrial Maintenance Painting; NACE International; Edition date unknown.

D. SSPC (PM1) - Good Painting Practice: SSPC Painting Manual, Vol. 1; Society for Protective Coatings.

1.03 DEFINITIONS

A. Conform to ASTM D 16 for interpretation of terms used in this section.

1.04 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

B. Product Data: Provide data on all finishing products and special coatings, including VOC content.

C. Samples: Submit two paper chip samples, 1 X 1 inch in size illustrating range of colors and textures available for each surface finishing product scheduled.

D. Samples: Submit two painted samples, illustrating selected colors and textures for each color and system selected with specified coats cascaded. Submit on aluminum sheet, 6 x 6 inch in size.

E. Certification: By manufacturer that all paints and coatings comply with VOC limits specified.

F. Certification: By manufacturer that all paints and coatings do not contain any of the prohibited chemicals specified; GreenSeal GS-11 certification is not required but if provided shall constitute acceptable certification.

G. Manufacturer's Instructions: Indicate special surface preparation procedures and substrate conditions requiring special attention.

H. Maintenance Data: Submit data on cleaning, touch-up, and repair of painted and coated surfaces.

1.05 QUALITY ASSURANCE

A. Manufacturer Qualifications: Company specializing in manufacturing the products specified, with minimum 5 years documented experience.

B. Applicator Qualifications: Company specializing in performing the type of work specified with minimum 5 years experience.

1.06 REGULATORY REQUIREMENTS

A. Conform to applicable code for flame and smoke rating requirements for products and finishes.

1.07 DELIVERY, STORAGE, AND HANDLING

A. Deliver products to site in sealed and labeled containers; inspect to verify acceptability.

NOT FOR BIDDING

B. Container Label: Include manufacturer's name, type of paint, brand name, lot number, brand code, coverage, surface preparation, drying time, cleanup requirements, color designation, and instructions for mixing and reducing.

C. Paint Materials: Store at minimum ambient temperature of 45 degrees F and a maximum of 90 degrees F, in ventilated area, and as required by manufacturer's instructions.

1.08 FIELD CONDITIONS

A. Do not apply materials when surface and ambient temperatures are outside the temperature ranges required by the paint product manufacturer.

B. Follow manufacturer's recommended procedures for producing best results, including testing of substrates, moisture in substrates, and humidity and temperature limitations.

C. Minimum Application Temperatures for Latex Paints: 45 degrees F for interiors; 50 degrees F for exterior; unless required otherwise by manufacturer's instructions.

D. Minimum Application Temperature for Varnish Finishes: 65 degrees F for interior or exterior, unless required otherwise by manufacturer's instructions.

E. Provide lighting level of 80 ft candles measured mid-height at substrate surface.

1.09 EXTRA MATERIALS

A. See Section 01 60 00 - Product Requirements, for additional provisions.

B. Supply 1 gallon of each color; store where directed.

C. Label each container with color, type, texture, and room locations in addition to the manufacturer's label.

PART 2 PRODUCTS

2.01 MANUFACTURERS

A. Provide all paint and coating products used in any individual system from the same manufacturer; no exceptions.

B. Paints:
1. ICI Paints North America: www.icipaints.com
2. Duron, Inc: www.duron.com.
3. Sherwin Williams: www.sherwin-williams.com
4. Benjamin Moore & Co: www.benjaminmoore.com.
5. "Green Screen" paint:
   a. Filmtools House Brand Chroma Key Green paint (non-reflective matte finish).
   b. Rosco 5711 Chroma Key Green Video point.

C. Field-Catalyzed Coatings:

D. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 PAINTS AND COATINGS - GENERAL

A. Paints and Coatings: Ready mixed, unless intended to be a field-catalyzed coating.
1. Provide paints and coatings of a soft paste consistency, capable of being readily and uniformly dispersed to a homogeneous coating, with good flow and brushing properties, and capable of drying or curing free of streaks or sags.
2. For opaque finishes, tint each coat including primer coat and intermediate coats, one-half shade lighter than succeeding coat, with final finish coat as base color.
3. Supply each coating material in quantity required to complete entire project's work from a single production run.
4. Do not reduce, thin, or dilute coatings or add materials to coatings unless such procedure is specifically described in manufacturer's product instructions.

NOT FOR BIDDING

B. Primers: Where the manufacturer offers options on primers for a particular substrate, use primer categorized as "best" by the manufacturer.

C. Chemical Content: The following compounds are prohibited:
   1. Aromatic Compounds: In excess of 1.0 percent by weight of total aromatic compounds (hydrocarbon compounds containing one or more benzene rings).
   2. Acrolein, acrylonitrile, antimony, benzene, butyl benzyl phthalate, cadmium, di (2-ethylhexyl) phthalate, di-n-butyl phthalate, di-n-octyl phthalate, 1,2-dichlorobenzene, diethyl phthalate, dimethyl phthalate, ethylbenzene, formaldehyde, hexavalent chromium, isophorone, lead, mercury, methyl ethyl ketone, methyl isobutyl ketone, methylene chloride, naphthalene, toluene (methylbenzene), 1,1,1-trichloroethane, vinyl chloride.

2.03 PAINT SYSTEMS - EXTERIOR

A. Paint ME-OP-3A - Ferrous Metals, Unprimed, Alkyd, 3 Coat:
   1. One coat of alkyd primer.
   2. Semi-gloss: Two coats of alkyd enamel.

2.04 PAINT SYSTEMS - INTERIOR

A. Paint WI-OP-3L - Wood, Opaque, Latex, 3 Coat:
   1. One coat of latex primer sealer.

B. Paint CI-OP-3L - Concrete/Masonry, Opaque, Latex, 3 Coat:
   1. One coat of block filler.
   2. Egg Shell: Two coats of latex enamel.

C. Paint MI-OP-2L - Ferrous Metals, Primed, Latex, 2 Coat:
   1. Touch-up with latex primer or manufacturer recommended.
   2. Flat: Two coats of latex enamel.

D. Paint GI-OP-3L - Gypsum Board/Plaster, Latex, 3 Coat:
   1. One coat of alkyd or latex primer sealer.
   2. Eggshell: Two coats of latex enamel.

2.05 ACCESSORY MATERIALS

A. Accessory Materials: Provide all primers, sealers, cleaning agents, cleaning cloths, sanding materials, and clean-up materials required to achieve the finishes specified whether specifically indicated or not; commercial quality.

B. Patching Material: Latex filler.

C. Fastener Head Cover Material: Latex filler.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that surfaces are ready to receive work as instructed by the product manufacturer.

B. Examine surfaces scheduled to be finished prior to commencement of work. Report any condition that may potentially affect proper application.

C. Test shop-applied primer for compatibility with subsequent cover materials.

D. Measure moisture content of surfaces using an electronic moisture meter. Do not apply finishes unless moisture content of surfaces are below the following maximums:
   1. Gypsum Wallboard: 12 percent.
   2. Plaster and Stucco: 12 percent.
   3. Masonry, Concrete, and Concrete Unit Masonry: 12 percent.
   4. Interior Wood: 15 percent, measured in accordance with ASTM D4442.
   5. Exterior Wood: 15 percent, measured in accordance with ASTM D4442.
   6. Concrete Floors and Traffic Surfaces: 8 percent.

NOT FOR BIDDING

3.02 PREPARATION

A. Clean surfaces thoroughly and correct defects prior to coating application.

B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.

C. Remove or mask surface appurtenances, including electrical plates, hardware, light fixture trim, escutcheons, and fittings, prior to preparing surfaces or finishing.

D. Surfaces: Correct defects and clean surfaces which affect work of this section. Remove or repair existing coatings that exhibit surface defects.

E. Marks: Seal with shellac or stain blocker those which may bleed through surface finishes.

F. Remove mildew from impervious surfaces by scrubbing with solution of tetra-sodium phosphate and bleach. Rinse with clean water and allow surface to dry.

G. Concrete and Unit Masonry Surfaces to be Painted: Remove dirt, loose mortar, scale, salt or alkali powder, and other foreign matter. Remove oil and grease with a solution of tri-sodium phosphate; rinse well and allow to dry. Remove stains caused by weathering of corroding metals with a solution of sodium metasilicate after thoroughly wetting with water. Allow to dry.

H. Gypsum Board Surfaces to be Painted: Fill minor defects with filler compound. Spot prime defects after repair.

I. Galvanized Surfaces to be Painted: Remove surface contamination and oils and wash with solvent. Apply coat of etching primer.

J. Corroded Steel and Iron Surfaces to be Painted: Prepare using at least SSPC-PC 2 (hand tool cleaning) or SSPC-SP 3 (power tool cleaning) followed by SSPC-SP 1 (solvent cleaning).

K. Uncorroded Uncoated Steel and Iron Surfaces to be Painted: Remove grease, mill scale, weld splatter, dirt, and rust. Where heavy coatings of scale are evident, remove by power tool wire brushing or sandblasting; clean by washing with solvent. Apply a treatment of phosphoric acid solution, ensuring weld joints, bolts, and nuts are similarly cleaned. Prime paint entire surface; spot prime after repairs.

L. Interior Wood Surfaces to Receive Opaque Finish: Wipe off dust and grit prior to priming. Seal knots, pitch streaks, and sappy sections with sealer. Fill nail holes and cracks after primer has dried; sand between coats. Back prime concealed surfaces before installation.

3.03 APPLICATION

A. Exterior Wood to Receive Opaque Finish: If final painting must be delayed more than 2 weeks after installation of woodwork, apply primer within 2 weeks and final coating within 4 weeks.

B. Apply products in accordance with manufacturer's instructions.

C. Where adjacent sealant is to be painted, do not apply finish coats until sealant is applied.

D. Do not apply finishes to surfaces that are not dry. Allow applied coats to dry before next coat is applied.

E. Apply each coat to uniform appearance.

F. Dark Colors and Deep Clear Colors: Regardless of number of coats specified, apply as many coats as necessary for complete hide.

G. Sand wood and metal surfaces lightly between coats to achieve required finish.

H. Vacuum clean surfaces of loose particles. Use tack cloth to remove dust and particles just prior to applying next coat.

I. Reinstall electrical cover plates, hardware, light fixture trim, escutcheons, and fittings removed prior to finishing.

NOT FOR BIDDING

3.04 FIELD QUALITY CONTROL

A. See Section 01 40 00 - Quality Requirements, for general requirements for field inspection.

3.05 CLEANING

A. Collect waste material that could constitute a fire hazard, place in closed metal containers, and remove daily from site.

3.06 PROTECTION

A. Protect finished coatings until completion of project.

B. Touch-up damaged coatings after Substantial Completion.

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 12 24 13
ROLLER SHADES

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Sunscreen roller shades.

1.02 REFERENCE STANDARDS

A. ASTM G 21 - Standard Practice for Determining Resistance of Synthetic Polymeric Materials to Fungi.

B. NFPA 701 - Fire Tests for Flame-Resistant Textiles and Films.

1.03 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

B. Product Data: Provide Manufacturer's data sheets on each product to be used, including:
   1. Preparation instructions and recommendations.
   2. Styules, material descriptions, dimensions of individual components, profiles, features, finishes and operating instructions.
   3. Storage and handling requirements and recommendations.
   4. Mounting details and installation methods.

C. Shop Drawings: Indicate Plans, elevations, sections, product details, installation details, operational clearances, and relationship to adjacent work.

D. Selection Samples: For each finished product specified, one set of shade cloth options and aluminum finish color samples representing manufacturer's full range of available colors and patterns.

E. Maintenance Data: Methods for maintaining roller shades, precautions regarding cleaning materials and methods, and instructions for operating hardware.

1.04 QUALITY ASSURANCE

A. Manufacturer Qualifications: Company specializing in manufacturing products specified in this section, with not less than ten years of documented experience.

B. Installer Qualifications: Company specializing in performing the work of this section with minimum five years of experience.

C. Fire-Test-Response Characteristics: Passes NFPA 701 small and large-scale vertical burn. Materials tested shall be identical to products proposed for use.

D. Anti-Microbial Characteristics: 'No Growth' per ASTM G 21 reesults for fungi ATCC9642, ATCC 9644, ATCC 9645.

1.05 DELIVERY, STORAGE, AND HANDLING

A. Deliver shades to project site in factory-labeled packages, marked with manufacturer and product name, fire-test-response characteristics, and location of installation using same room designations as on Drawings.

1.06 FIELD CONDITIONS

A. Environmental Limitations: Install roller shades after finish work including painting is complete and ambient temperature and humidity conditions are maintained at the levels indicated for Project when occupied for its intended use.

1.07 WARRANTY

A. Roller Shade Hardware and Chain Warranty: Manufacturer's standard non-depreciating twenty-five year limited warranty.

NOT FOR BIDDING

B. Standard Shadecloth: Manufacturer's standard twenty-five year warranty.

C. Roller Shade Installation: One year from date of Substantial Completion.

PART 2 PRODUCTS

2.01 MANUFACTURERS

A. MechoShade Systems, Inc., 42-03 35th Street, Long Island, NY 11101; Tel: 718-729-2020; Email: angela.gratereaux@mechoshade.com; Web: www.mechoshade.com.

B. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 ROLLER SHADE TYPE

A. Manually Operated Shades:
   1. Mounting: Surface Mounted.
   2. Configuration: Single solar shadecloth.
   3. Solar Shadecloths:
      a. Fabric: MechoShade's ThermoVeil 2100, 10 percent open, 2 x 2 open basket-weave pattern (or equal)
      b. Color: Selected from manufacturer's standard colors.

2.03 SHADE CLOTH

A. Visually Transparent Shadecloth: Single thickness non-raveling 0.030-inch (0.762 mm) thick vinyl fabric, woven from 0.018-inch (457 mm) diameter extruded vinyl yarn comprising of 21 percent polyester and 79 percent reinforced vinyl.

2.04 SHADE BAND

A. Shade Bands: Construction of shade band includes the fabric, the hem weight, hem-pocket, shade roller tube, and the attachement of the shade band to the roller tube. Sewn hems and open hem pockets are not acceptable.
   1. Hem Pockets and Hem Weights: Fabric hem pocket with RF-welded seams (including welded ends) and concealed hem weights. Hem weights shall be of appropriate size and weight for shade band. Hem weight shall be continuous inside a sealed hem pocket. Hem pocket construction and hem weights shall be similar, for all shades within one room.
   2. Shade Band and Shade Roller Attachment:
      a. Use extruded aluminum shade roller tube of a diameter and wall thickness required to support shade fabric without excessive deflection. Roller tubes less than 1.55 inch (39.37 mm) in diameter for manual shades are not acceptable.
      b. Provide for positive mechanical engagement with drive/brake mechanism.
      c. Provide for positive mechanical attachment of shade band to roller tube; shade band shall be made removable/replaceable with a "snap-on" "snap-off" spline mounting, without having to remove shade roller from shade brackets.
      d. Mounting spline shall not require use of adhesives, adhesive tapes, staples, and/or rivets.

2.05 SHADE FABRICATION

A. Fabricate units to completely fill existing openings from head to sill and jamb to jamb, unless specifically indicated otherwise.

2.06 COMPONENTS

A. Access and Material Requirements:
   1. Provide shade hardware allowing for the removal of shade roller tube from brackets without removing hardware from opening and without requiring end or center supports to be removed.
   2. Provide shade hardware that allows for removal and re-mounting of the shade bands without having to remove the shade tube, drive or operating support brackets.

NOT FOR BIDDING

3. Use only Delrin engineered plastics by DuPont for all plastic components of shade hardware. Styrene based plastics, and /or polyester, or reinforced polyester will not be acceptable.

B. Manual Operated Chain Drive Hardware and Brackets:
1. Provide for universal, regular and offset drive capacity, allowing drive chain to fall at front, rear or non-offset for all shade drive and brackets. Universal offset shall be adjustable for future change.
2. Provide hardware capable for installation of a removable fascia, for both regular and/or reverse roll, which shall be installed without exposed fastening devices of any kind.
3. Provide positive mechanical engagement of drive mechansim to shade roller tube. Friction fit connectors for drive mechanism connection to shade roller tube are not acceptable.
4. Provide shade hardware constructed of minimum 1/8-inch (3.18 mm) thick plated steel or heavier as required to support 150 percent of the full weight of each shade.
5. Drive Bracket/Brake Assembly:
   a. Drive sprocket and brake assembly shall rotate and be supported on a welded 3/8 inch (9.525 mm) steel pin.
   b. The brake shall be an over-running clutch design which disengages to 90 percent during the raising and lowering of a shade. the brake shall withstand a pull force of 50 lbs. (22 kg) in the stopped position.
   c. The braking mechanism shall be applied to an oil-impregnated hub on to which the brake system is mounted. The oil impregnated hub design includes an articulated brake assembly. The assembly shall be permanently lubricated. Products that require externally applied lubrication and/or not permanently lubricated are not acceptable.
   d. The entire assembly shall be fully mounted on the steel support bracket, and fully independent of the shade tube assembly, which may be removed and reinstalled without effecting the roller shade limit adjustments.
   e. Drive Chain: #10 qualified stainless steel chain rated to 90 lbs. (41 kg) minimum breaking strength. Nickel plate chain shall not be acceptable.
6. Include Mecho / 5 Extended bracket with optional Mecho SnapLoc fascia per drawings (RS-1).
7. Include Mecho / 5 Slimline bracket with optional Mecho SnapLoc fascia per drawings (RS-2).

NOT FOR BIDDING

PART 3 EXECUTION

3.01 EXAMINATION

A. Do not begin installation until substrates have been properly prepared.

3.02 PREPARATION

A. Clean surfaces thoroughly prior to installation.

B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.

3.03 INSTALLATION

A. Install roller shades level, plumb, square, and true according to manufacturer's written instructions, and located so shade band is not closer than 2 inches (50 mm) to interior face of glass. Allow proper clearances for window operation hardware.

B. Adjust and balance roller shades to operate smoothly, easily, safely, and free from binding or malfunction throughout entire operational range.

C. Clean roller shade surfaces after installation, according to manufacturer's written instructions.

3.04 PROTECTION

A. Protect installed products until completion of project.

B. Touch-up, repair or replace demaged products before Substantial Completion.

END OF SECTION

NOT FOR BIDDING

SECTION 22 05 53
IDENTIFICATION FOR PLUMBING PIPING AND EQUIPMENT

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Nameplates.

B. Tags.

C. Stencils.

D. Pipe Markers.

1.02 RELATED REQUIREMENTS

A. Section 09 90 00 - Painting and Coating: Identification painting.

1.03 REFERENCE STANDARDS

A. ASME A13.1 - Scheme for the Identification of Piping Systems; The American Society of Mechanical Engineers.

1.04 SUBMITTALS

A. List: Submit list of wording, symbols, letter size, and color coding for mechanical identification.

B. Chart and Schedule: Submit valve chart and schedule, including valve tag number, location, function, and valve manufacturer's name and model number.

C. Product Data: Provide manufacturers catalog literature for each product required.

D. Samples: Submit two labels; tags in size.

E. Manufacturer's Installation Instructions: Indicate special procedures, and installation.

F. Project Record Documents: Record actual locations of tagged valves.

PART 2 PRODUCTS

2.01 MANUFACTURERS

A. Brady Corporation: www.bradycorp.com.

B. Champion America, Inc: www.Champion-America.com.

C. Seton Identification Products: www.seton.com/aec.

D. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 NAMEPLATES

A. Description: Laminated three-layer plastic with engraved letters.
   1. Letter Color: Black.
   2. Letter Height: 1/2 inch.
   3. Background Color: Yellow.

2.03 TAGS

A. Plastic Tags: Laminated three-layer plastic with engraved black letters on light contrasting background color. Tag size minimum 1-1/2 inch diameter or square.

B. Metal Tags: Brass, aluminum, or stainless steel with stamped letters; tag size minimum 1-1/2 inch diameter or square with smooth edges.

C. Chart: Typewritten letter size list in anodized aluminum frame.

2.04 STENCILS

A. Stencils: With clean cut symbols and letters of following size:

NOT FOR BIDDING

1. 3/4 to 1-1/4 inch Outside Diameter of Insulation or Pipe: 8 inch long color field, 1/2 inch high letters.
2. 1-1/2 to 2 inch Outside Diameter of Insulation or Pipe: 8 inch long color field, 3/4 inch high letters.
3. 2-1/2 to 6 inch Outside Diameter of Insulation or Pipe: 12 inch long color field, 1-1/4 inch high letters.
4. 8 to 10 inch Outside Diameter of Insulation or Pipe: 24 inch long color field, 2-1/2 inch high letters.
5. Over 10 inch Outside Diameter of Insulation or Pipe: 32 inch long color field, 3-1/2 inch high letters.
6. Ductwork and Equipment: 2-1/2 inch high letters.

B. Stencil Paint: As specified in Section 09 90 00, semi-gloss enamel, colors conforming to ASME A13.1.

2.05 PIPE MARKERS

A. Comply with ASME A13.1.

B. Plastic Pipe Markers: Factory fabricated, flexible, semi- rigid plastic, preformed to fit around pipe or pipe covering; minimum information indicating flow direction arrow and identification of fluid being conveyed.

C. Plastic Tape Pipe Markers: Flexible, vinyl film tape with pressure sensitive adhesive backing and printed markings.

D. Underground Plastic Pipe Markers: Bright colored continuously printed plastic ribbon tape, minimum 6 inches wide by 4 mil thick, manufactured for direct burial service.

2.06 CEILING TACKS

A. Description: Steel with 3/4 inch diameter color coded head.

B. Color code as follows:
1. HVAC Equipment: Yellow.
2. Fire Dampers and Smoke Dampers: Red.
3. Plumbing Valves: Green.
4. Heating/Cooling Valves: Blue.

PART 3 EXECUTION

3.01 PREPARATION

A. Degrease and clean surfaces to receive adhesive for identification materials.

B. Prepare surfaces in accordance with Section 09 90 00 for stencil painting.

3.02 INSTALLATION

A. Install plastic nameplates with corrosive-resistant mechanical fasteners, or adhesive. Apply with sufficient adhesive to ensure permanent adhesion and seal with clear lacquer.

B. Install tags with corrosion resistant chain.

C. Apply stencil painting in accordance with Section 09 90 00.

D. Install plastic pipe markers in accordance with manufacturer's instructions.

E. Install plastic tape pipe markers complete around pipe in accordance with manufacturer's instructions.

F. Install underground plastic pipe markers 6 to 8 inches below finished grade, directly above buried pipe.

NOT FOR BIDDING

G. Identify air handling units, pumps, heat transfer equipment, tanks, and water treatment devices with plastic nameplates or stencil painting. Small devices, such as in-line pumps, may be identified with tags.

H. Identify control panels and major control components outside panels with plastic nameplates.

I. Identify thermostats relating to terminal boxes or valves with nameplates.

J. Identify valves in main and branch piping with tags.

K. Identify air terminal units and radiator valves with numbered tags.

L. Tag automatic controls, instruments, and relays. Key to control schematic.

M. Identify piping, concealed or exposed, with plastic pipe markers or plastic tape pipe markers. Use tags on piping 3/4 inch diameter and smaller. Identify service, flow direction, and pressure. Install in clear view and align with axis of piping. Locate identification not to exceed 20 feet on straight runs including risers and drops, adjacent to each valve and Tee, at each side of penetration of structure or enclosure, and at each obstruction.

N. Identify ductwork with plastic nameplates or stenciled painting. Identify with air handling unit identification number and area served. Locate identification at air handling unit, at each side of penetration of structure or enclosure, and at each obstruction.

O. Locate ceiling tacks to locate valves or dampers above lay-in panel ceilings. Locate in corner of panel closest to equipment.

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 22 07 19
PLUMBING PIPING INSULATION

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Piping insulation.

B. Jackets and accessories.

1.02 RELATED REQUIREMENTS

A. Section 22 10 05 - Plumbing Piping: Placement of hangers and hanger inserts.

1.03 REFERENCE STANDARDS

A. ASTM A666 - Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar.

B. ASTM B209 - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate.

C. ASTM B209M - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate [Metric].

D. ASTM C177 - Standard Test Method for Steady-State Heat Flux Measurements and Thermal Transmission Properties by Means of the Guarded Hot Plate Apparatus.

E. ASTM C195 - Standard Specification for Mineral Fiber Thermal Insulating Cement.

F. ASTM C449 - Standard Specification for Mineral Fiber Hydraulic-Setting Thermal Insulating and Finishing Cement.

G. ASTM C518 - Standard Test Method for Steady-State Thermal Transmission Properties by Means of the Heat Flow Meter Apparatus.

H. ASTM C534/C534M - Standard Specification for Preformed Flexible Elastomeric Cellular Thermal Insulation in Sheet and Tubular Form.

I. ASTM C547 - Standard Specification for Mineral Fiber Pipe Insulation.

J. ASTM C552 - Standard Specification for Cellular Glass Thermal Insulation.

K. ASTM C578 - Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation.

L. ASTM C585 - Standard Practice for Inner and Outer Diameters of Rigid Thermal Insulation for Nominal Sizes of Pipe and Tubing (NPS System).

M. ASTM C591 - Standard Specification for Unfaced Preformed Rigid Cellular Polyisocyanurate Thermal Insulation.

N. ASTM C795 - Standard Specification for Thermal Insulation for Use in Contact with Austenitic Stainless Steel.

O. ASTM D1056 - Standard Specification for Flexible Cellular Materials--Sponge or Expanded Rubber.

P. ASTM D2842 - Standard Test Method for Water Absorption of Rigid Cellular Plastics.

Q. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials.

R. ASTM E96/E96M - Standard Test Methods for Water Vapor Transmission of Materials.

S. NFPA 255 - Standard Method of Test of Surface Burning Characteristics of Building Materials; National Fire Protection Association.

T. UL 723 - Standard for Test for Surface Burning Characteristics of Building Materials; Underwriters Laboratories Inc..

NOT FOR BIDDING

1.04 SUBMITTALS

A. Product Data: Provide product description, thermal characteristics, list of materials and thickness for each service, and locations.

B. Samples: Submit two samples of any representative size illustrating each insulation type.

C. Manufacturer's Instructions: Indicate installation procedures that ensure acceptable workmanship and installation standards will be achieved.

1.05 QUALITY ASSURANCE

A. Manufacturer Qualifications: Company specializing in manufacturing the Products specified in this section with not less than three years of experience.

B. Applicator Qualifications: Company specializing in performing the type of work specified in this section with minimum 3 years of experience, or and approved by manufacturer.

1.06 DELIVERY, STORAGE, AND HANDLING

A. Accept materials on site, labeled with manufacturer's identification, product density, and thickness.

1.07 FIELD CONDITIONS

A. Maintain ambient conditions required by manufacturers of each product.

B. Maintain temperature before, during, and after installation for minimum of 24 hours.

PART 2 PRODUCTS

2.01 REQUIREMENTS FOR ALL PRODUCTS OF THIS SECTION

A. Surface Burning Characteristics: Flame spread/Smoke developed index of 25/50, maximum, when tested in accordance with ASTM E84, NFPA 255, or UL 723.

2.02 GLASS FIBER

A. Manufacturers:
   1. Knauf Insulation: www.knaufusa.com.
   2. Johns Manville Corporation: www.jm.com.
   3. Owens Corning Corp: www.owenscorning.com.
   4. CertainTeed Corporation; : www.certainteed.com.
   5. Substitutions: See Gilbane Project Manual.

B. Insulation: ASTM C547 and ASTM C795; rigid molded, noncombustible.
   1. 'K' value: ASTM C177, 0.24 at 75 degrees F.
   2. Maximum service temperature: 850 degrees F; 1200 degrees F; 1600 degrees F.
   3. Maximum moisture absorption: 0.2 percent by volume.

C. Insulation: ASTM C547 ; semi-rigid, noncombustible, end grain adhered to jacket.
   1. 'K' value: ASTM C177, 0.24 at 75 degrees F.
   2. Maximum service temperature: 650 degrees F.
   3. Maximum moisture absorption: 0.2 percent by volume.

D. Vapor Barrier Jacket: White Kraft paper with glass fiber yarn, bonded to aluminized film; moisture vapor transmission when tested in accordance with ASTM E96/E96M of 0.02 perm-inches.

E. Tie Wire: 0.048 inch stainless steel with twisted ends on maximum 12 inch centers.

F. Vapor Barrier Lap Adhesive:
   1. Compatible with insulation. Low VOC compliant (LEED).

G. Insulating Cement/Mastic:
   1. ASTM C195; hydraulic setting on mineral wool.

NOT FOR BIDDING

H. Fibrous Glass Fabric:
   1. Cloth: Untreated; 9 oz/sq yd weight.
   2. Blanket: 1.0 lb/cu ft density.
   3. Weave: 5x5; 10x10; or 10x20.

I. Indoor Vapor Barrier Finish:
   1. Cloth: Untreated; 9 oz/sq yd weight.
   2. Vinyl emulsion type acrylic, compatible with insulation, black or white color. Low VOC compliant (LEED).

J. Outdoor Vapor Barrier Mastic:
   1. Vinyl emulsion type acrylic or mastic, compatible with insulation, black color. Low VOC compliant (LEED).

K. Outdoor Breather Mastic:
   1. Vinyl emulsion type acrylic or mastic, compatible with insulation, black color. Low VOC compliant (LEED).

L. Insulating Cement:
   1. ASTM C449/C449M. Low VOC compliant (LEED).

2.03 CELLULAR GLASS

A. Manufacturers:
   1. Pittsburgh Corning Corporation: www.foamglasinsulation.com.
   2. Substitutions: See Section 01 60 00 - Product Requirements.

B. Insulation: ASTM C552, Type 1.
   1. Apparent Thermal Conductivity; 'K' value: Grade 6, 0.33 at 100 degrees F.
   2. Service Temperature: Up to 800 degrees F.
   3. Water Vapor Permeability: 0.005 perm inch.
   4. Water Absorption: 0.5 percent by volume, maximum.

2.04 EXPANDED POLYSTYRENE

A. Manufacturers:

B. Insulation: ASTM C578; rigid closed cell.
   1. 'K' value: 0.23 at 75 degrees F.
   2. Maximum service temperature: 165 degrees F.
   3. Maximum water vapor permeance: 5.0 perms

2.05 EXPANDED PERLITE

A. Manufacturers:
   1. Schundler Company: www.schundler.com.

B. Insulation: ASTM C610, molded.
   1. Maximum service temperature: 1200 degrees F.
   2. Maximum water vapor transmission: 0.1 perm.

2.06 POLYISOCYANURATE CELLULAR PLASTIC

A. Insulation Material: ASTM C591, rigid molded modified polyisocyanurate cellular plastic.
   1. Dimension: Comply with requirements of ASTM C585.
   2. 'K' value: 0.18 at 75 degrees F, when tested in accordance with ASTM C518.
   3. Minimum Service Temperature: -70 degrees F.
   4. Maximum Service Temperature: 300 degrees F.
   5. Water Absorption: 0.5 percent by volume, maximum, when tested in accordance with ASTM D2842..
   6. Moisture Vapor Transmission: 4.0 perm in.

NOT FOR BIDDING

7. Connection: Waterproof vapor barrier adhesive. Low VOC compliant (LEED).

2.07 POLYETHYLENE

A. Manufacturers:
   1. Armacell LLC: www.armacell.us.

B. Insulation: Flexible closed-cell polyethylene tubing, slit lengthwise for installation, complying with applicable requirements of ASTM D1056.
   1. 'K' value: ASTM C177; 0.25 at 75 degrees F.
   2. Maximum Service Temperature: 200 degrees F.
   3. Density: 2 lb/cu ft.
   4. Maximum Moisture Absorption: 1.0 percent by volume.
   5. Moisture Vapor Permeability: 0.05 perm inch, when tested in accordance with ASTM E96/E96M.
   6. Connection: Contact adhesive. Low VOC compliant (LEED).

2.08 FLEXIBLE ELASTOMERIC CELLULAR INSULATION

A. Manufacturer:
   1. Armacell LLC: www.armacell.us.
   2. Substitutions: See Section 01 60 00 - Product Requirements.

B. Insulation: Preformed flexible elastomeric cellular rubber insulation complying with ASTM C 534 Grade 3;grade 2; grade 1 use molded tubular material wherever possible.
   1. Minimum Service Temperature: -40 degrees F.
   2. Maximum Service Temperature: 220 degrees F.
   3. Connection: Waterproof vapor barrier adhesive.

C. Elastomeric Foam Adhesive: Air dried, contact adhesive, compatible with insulation. Low VOC compliant (LEED).

2.09 JACKETS

A. PVC Plastic.
   1. Manufacturers:
      a. Johns Manville Corporation: www.jm.com.
      b. Substitutions: See Section 01 60 00 - Product Requirements.
   2. Jacket: One piece molded type fitting covers and sheet material, off-white color.
      a. Minimum Service Temperature: 0 degrees F.
      b. Maximum Service Temperature: 150 degrees F.
      c. Moisture Vapor Permeability: 0.002 perm inch, maximum, when tested in accordance with ASTM E96/E96M.
      d. Thickness: 20 mil; 30 mil.
      e. Connections: Brush on welding adhesive, tacks, pressure sensitive color matching vinyl tape.
   3. Covering Adhesive Mastic:
      a. Compatible with insulation. Low VOC compliant (LEED).

B. ABS Plastic:
   1. Jacket: One piece molded type fitting covers and sheet material, off-white color.
      a. Minimum Service Temperature: -40 degrees F.
      b. Maximum Service Temperature of 180 degrees F.
      c. Moisture Vapor Permeability: 0.012 perm inch, when tested in accordance with ASTM E96/E96M.
      d. Thickness: 30 mil.
      e. Connections: Brush on welding adhesive. Low VOC compliant (LEED).

NOT FOR BIDDING

C. Canvas Jacket: UL listed 6 oz/sq yd plain weave cotton fabric treated with dilute fire retardant lagging adhesive.
   1. Lagging Adhesive:
      a. Compatible with insulation. Low VOC compliant (LEED).

D. Aluminum Jacket: ASTM B209 (ASTM B209M) formed aluminum sheet.
   1. Thickness: 0.016 inch, 0.020 inch sheet.
   2. Finish: Smooth, embossed.
   3. Joining: Longitudinal slip joints and 2 inch laps.
   4. Fittings: 0.016 inch thick die shaped fitting covers with factory attached protective liner.
   5. Metal Jacket Bands: 3/8 inch wide; 0.015 inch thick aluminum.
   6. Metal Jacket Bands: 3/8 inch wide; 0.010 inch thick stainless steel.

E. Stainless Steel Jacket: ASTM A 666, Type 304 or 316 stainless steel.
   1. Thickness: 0.010 inch.
   2. Finish: Smooth.
   3. Metal Jacket Bands: 3/8 inch wide; 0.010 inch thick stainless steel.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that piping has been tested before applying insulation materials.

B. Verify that surfaces are clean and dry, with foreign material removed.

3.02 INSTALLATION

A. Install in accordance with manufacturer's instructions.

B. Install in accordance with NAIMA National Insulation Standards.

C. Exposed Piping: Locate insulation and cover seams in least visible locations.

D. Insulated pipes conveying fluids below ambient temperature: Insulate entire system including fittings, valves, unions, flanges, strainers, flexible connections, pump bodies, and expansion joints.

E. Glass fiber insulated pipes conveying fluids below ambient temperature:
   1. Provide vapor barrier jackets, factory-applied or field-applied. Secure with self-sealing longitudinal laps and butt strips with pressure sensitive adhesive. Secure with outward clinch expanding staples and vapor barrier mastic.
   2. Insulate fittings, joints, and valves with molded insulation of like material and thickness as adjacent pipe. Finish with glass cloth and vapor barrier adhesive or PVC fitting covers.

F. For hot piping conveying fluids 140 degrees F or less, do not insulate flanges and unions at equipment, but bevel and seal ends of insulation.

G. For hot piping conveying fluids over 140 degrees F, insulate flanges and unions at equipment.

H. Glass fiber insulated pipes conveying fluids above ambient temperature:
   1. Provide standard jackets, with or without vapor barrier, factory-applied or field-applied. Secure with self-sealing longitudinal laps and butt strips with pressure sensitive adhesive. Secure with outward clinch expanding staples.
   2. Insulate fittings, joints, and valves with insulation of like material and thickness as adjoining pipe. Finish with glass cloth and adhesive or PVC fitting covers.

I. Inserts and Shields:
   1. Application: Piping 1-1/2 inches diameter or larger.
   2. Shields: Galvanized steel between pipe hangers or pipe hanger rolls and inserts.
   3. Insert location: Between support shield and piping and under the finish jacket.

NOT FOR BIDDING

4. Insert configuration: Minimum 6 inches long, of same thickness and contour as adjoining insulation; may be factory fabricated.
5. Insert material: Hydrous calcium silicate insulation or other heavy density insulating material suitable for the planned temperature range.

J. Continue insulation through walls, sleeves, pipe hangers, and other pipe penetrations. Finish at supports, protrusions, and interruptions. At fire separations, refer to Section 07 84 00.

K. Pipe Exposed in Mechanical Equipment Rooms or Finished Spaces (less than 10 feet above finished floor): Finish with PVC jacket and fitting covers.

L. Exterior Applications: Provide vapor barrier jacket. Insulate fittings, joints, and valves with insulation of like material and thickness as adjoining pipe, and finish with glass mesh reinforced vapor barrier cement. Cover with aluminum jacket with seams located on bottom side of horizontal piping.

M. Buried Piping: Provide factory fabricated assembly with inner all-purpose service jacket with self-sealing lap, and asphalt impregnated open mesh glass fabric, with one mil thick aluminum foil sandwiched between three layers of bituminous compound; outer surface faced with a polyester film.

N. Heat Traced Piping: Insulate fittings, joints, and valves with insulation of like material, thickness, and finish as adjoining pipe. Size large enough to enclose pipe and heat tracer. Cover with aluminum jacket with seams located on bottom side of horizontal piping.

3.03 SCHEDULES

3.04 INTERIOR INSULATION APPLICATION SCHEDULE

A. Service: Domestic hot, recirculated hot water and solar piping.
1. Operating Temperature: 60 to 140 deg F.
2. Insulation Material: Flexible elastomeric or glass fiber.
3. Insulation Thickness: Apply the following insulation thicknesses:
   a. Pipe, All Sizes: 1.0 inch.
4. Jacket: None.
5. Vapor Retarder Required: No.
6. Finish: None.

B. Service: Domestic cold water.
1. Operating Temperature: 35 to 60 deg F.
2. Insulation Material: Flexible elastomeric or glass fiber.
3. Insulation Thickness: Apply the following insulation thicknesses:
   a. Pipe, 1” or less: 0.5 inch.
   b. Pipe, 1¼” to 2” : 0.5 inch.
   c. Pipe, 2-1/2” to 4”: 1.0 inch.
   d. Pipe, 5” and up : 1.0 inch.
4. Jacket: Foil and paper.
5. Vapor Retarder Required: Yes.
6. Finish: None.

C. Service: Rainwater conductors.
1. Operating Temperature: 32 to 100 deg F.
2. Insulation Material: Mineral fiber.
3. Insulation Thickness: Apply the following insulation thicknesses:
   a. Pipe, 3” and up: 1.0 inch.
4. Jacket:
   a. Concealed Piping - None
   b. Exposed Piping - PVC

NOT FOR BIDDING

5. Vapor Retarder Required: Yes.
6. Finish: None.

D. Service: Roof drain bodies.
1. Operating Temperature: 32 to 100 deg F.
2. Insulation Material: Mineral fiber.
3. Insulation Thickness: 1.0 inch.
4. Jacket:
a. Concealed - None
b. Exposed - PVC
5. Vapor Retarder Required: Yes.
6. Finish: None

E. Service: Sanitary waste piping where heat tracing is installed.
1. Operating Temperature: 35 to 100 deg F.
2. Insulation Material: Mineral fiber.
3. Insulation Thickness: Apply the following insulation thicknesses:
a. Pipe, 3” and up: 1.0 inch.
4. Jacket: Aluminum.
5. Vapor Retarder Required: Yes.
6. Finish: None.

F. Service: Condensate drain piping.
1. Operating Temperature: 35 to 75 deg F.
2. Insulation Material: Flexible elastomeric.
3. Insulation Thickness: 0.5 inch.
4. Jacket: None.
5. Vapor Retarder Required: Yes.
6. Finish: None.

G. Service: Exposed sanitary drains and domestic water supplies and stops for fixtures for the disabled.
1. Operating Temperature: 35 to 120 deg F.
2. Insulation Material: Molded closed cell vinyl.
3. Insulation Thickness: 3/16 inch.
4. Vapor Retarder Required: No.
5. Finish: None.

H. Service: Diesel-engine exhaust.
1. Operating Temperature: 850 deg F and lower.
2. Insulation Material: Calcium silicate.
3. Insulation Thickness: Apply the following insulation thicknesses:
a. Steel Pipe, All sizes: 3.0 inch.
4. Jacket: Aluminum
5. Vapor Retarder Required: No.
6. Finish: None.

3.05 EXTERIOR INSULATION APPLICATION SCHEDULE

A. This application schedule is for aboveground insulation outside the building. Loose-fill insulation, for belowground piping, is specified in Division 2 piping distribution Sections.

B. Service: Domestic water.
1. Operating Temperature: 60 to 180 deg F.
2. Insulation Material: Cellular glass, with jacket
3. Insulation Thickness: Apply the following insulation thicknesses:
a. Pipe, 1” or less: 2.0 inch.

NOT FOR BIDDING

b. Pipe, 1-1/4” and larger: 2.0 inch.
4. Jacket: Aluminum.
5. Vapor Retarder Required: No.
6. Finish: None.

C. Service: Storm water.
1. Operating Temperature: 32 to 100 deg F.
2. Insulation Material: Flexible elastomeric.
3. Insulation Thickness: Apply the following insulation thicknesses:
a. Pipe, 1-1/4” to 2”: 0.5 inch.
b. Pipe, 2-1/2” and up: 1.0 inch.
4. Field-Applied Jacket: Aluminum.
5. Vapor Retarder Required: Yes.
6. Finish: None.

END OF SECTION

NOT FOR BIDDING

SECTION 22 10 05
PLUMBING PIPING

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Pipe, pipe fittings, valves, and connections for piping systems.
   1. Gas.
   2. Flanges, unions, and couplings.
   3. Pipe hangers and supports.
   4. Valves.
   5. Flow controls.
   6. Check.
   7. Water pressure reducing valves.
   8. Relief valves.
   9. Strainers.

1.02 RELATED REQUIREMENTS

A. Section 08 31 00 - Access Doors and Panels.

B. Section 09 90 00 - Painting and Coating

C. Section 22 05 53 - Identification for Plumbing Piping and Equipment.

D. Section 22 07 19 - Plumbing Piping Insulation.

E. Section 26 27 17 - Equipment Wiring: Electrical characteristics and wiring connections.

1.03 REFERENCE STANDARDS

A. ANSI Z21.22 - American National Standard for Relief Valves and Automatic Gas Shutoff Devices for Hot Water Supply Systems.

B. ASME B16.1 - Gray Iron Pipe Flanges and Flanged Fittings: Classes 25, 125, and 250; The American Society of Mechanical Engineers.

C. ASME B16.3 - Malleable Iron Threaded Fittings: Classes 150 and 300; The American Society of Mechanical Engineers.

D. ASME B16.4 - Gray Iron Threaded Fittings; The American Society of Mechanical Engineers.

E. ASME B16.18 - Cast Copper Alloy Solder Joint Pressure Fittings; The American Society of Mechanical Engineers (ANSI B16.18).

F. ASME B16.22 - Wrought Copper and Copper Alloy Solder Joint Pressure Fittings; The American Society of Mechanical Engineers.

G. ASME B16.23 - Cast Copper Alloy Solder Joint Drainage Fittings - DWV; The American Society of Mechanical Engineers.

H. ASME B16.26 - Cast Copper Alloy Fittings for Flared Copper Tubes; The American Society of Mechanical Engineers.

I. ASME B16.29 - Wrought Copper and Wrought Copper Alloy Solder Joint Drainage Fittings - DWV; The American Society of Mechanical Engineers.

J. ASME B31.1 - Power Piping; The American Society of Mechanical Engineers (ANSI/ASME B31.1).

K. ASME B31.2 - Fuel Gas Piping; The American Society of Mechanical Engineers.

L. ASME B31.9 - Building Services Piping; The American Society of Mechanical Engineers (ANSI/ASME B31.9).

NOT FOR BIDDING

M. ASME BPVC-IV - Boiler and Pressure Vessel Code, Section IV - Rules for Construction of Heating Boilers; The American Society of Mechanical Engineers.

N. ASME BPVC-IX - Boiler and Pressure Vessel Code, Section IX - Welding, Brazing, and Fusing Qualifications; The American Society of Mechanical Engineers.

O. ASSE 1003 - Performance Requirements for Water Pressure Reducing Valves for Domestic Water Distribution Systems; The American Society of Sanitary Engineering.

P. ASTM A47/A47M - Standard Specification for Ferritic Malleable Iron Castings.

Q. ASTM A53/A53M - Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless.

R. ASTM A74 - Standard Specification for Cast Iron Soil Pipe and Fittings.

S. ASTM A234/A234M - Standard Specification for Piping Fittings of Wrought Carbon Steel and Alloy Steel for Moderate and High Temperature Service.

T. ASTM B32 - Standard Specification for Solder Metal.

U. ASTM B42 - Standard Specification for Seamless Copper Pipe, Standard Sizes.

V. ASTM B43 - Standard Specification for Seamless Red Brass Pipe, Standard Sizes.

W. ASTM B68/B68M - Standard Specification for Seamless Copper Tube, Bright Annealed.

X. ASTM B68M - Standard Specification for Seamless Copper Tube, Bright Annealed (Metric).

Y. ASTM B75/B75M - Standard Specification for Seamless Copper Tube.

Z. ASTM B75M - Standard Specification for Seamless Copper Tube (Metric).

AA. ASTM B88 - Standard Specification for Seamless Copper Water Tube.

AB. ASTM B88M - Standard Specification for Seamless Copper Water Tube (Metric).

AC. ASTM B280 - Standard Specification for Seamless Copper Tube for Air Conditioning and Refrigeration Field Service.

AD. ASTM B302 - Standard Specification for Threadless Copper Pipe, Standard Sizes.

AE. ASTM B306 - Standard Specification for Copper Drainage Tube (DWV).

AF. ASTM C4 - Standard Specification for Clay Drain Tile and Perforated Clay Drain Tile.

AG. ASTM C14 - Standard Specification for Nonreinforced Concrete Sewer, Storm Drain, and Culvert Pipe.

AH. ASTM C14M - Standard Specification for Nonreinforced Concrete Sewer, Storm Drain, and Culvert Pipe [Metric].

AI. ASTM C76 - Standard Specification for Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe.

AJ. ASTM C76M - Standard Specification for Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe (Metric).

AK. ASTM C425 - Standard Specification for Compression Joints for Vitrified Clay Pipe and Fittings.

AL. ASTM C443 - Standard Specification for Joints for Concrete Pipe and Manholes, Using Rubber Gaskets.

AM. ASTM C443M - Standard Specification for Joints for Concrete Pipe and Manholes, Using Rubber Gaskets (Metric).

AN. ASTM C564 - Standard Specification for Rubber Gaskets for Cast Iron Soil Pipe and Fittings.

AO. ASTM C700 - Standard Specification for Vitrified Clay Pipe, Extra Strength, Standard Strength, and Perforated.

NOT FOR BIDDING

AP. ASTM C1053 - Standard Specification for Borosilicate Glass Pipe and Fittings for Drain, Waste, and Vent (DWV) Applications.

AQ. ASTM D1785 - Standard Specification for Poly(Vinyl Chloride) (PVC) Plastic Pipe, Schedules 40, 80, and 120.

AR. ASTM D2235 - Standard Specification for Solvent Cement for Acrylonitrile-Butadiene-Styrene (ABS) Plastic Pipe and Fittings.

AS. ASTM D2239 - Standard Specification for Polyethylene (PE) Plastic Pipe (SIDR-PR) Based on Controlled Inside Diameter.

AT. ASTM D2241 - Standard Specification for Poly (Vinyl Chloride) (PVC) Pressure-Rated Pipe (SDR Series).

AU. ASTM D2447 - Standard Specification for Polyethylene (PE) Plastic Pipe, Schedules 40 and 80, Based on Outside Diameter; 2003.

AV. ASTM D2466 - Standard Specification for Poly(Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 40.

AW. ASTM D2513 - Standard Specification for Polyethylene (PE) Gas Pressure Pipe, Tubing, and Fittings.

AX. ASTM D2564 - Standard Specification for Solvent Cements for Poly(Vinyl Chloride) (PVC) Plastic Piping Systems.

AY. ASTM D2609 - Standard Specification for Plastic Insert Fittings for Polyethylene (PE) Plastic Pipe.

AZ. ASTM D2661 - Standard Specification for Acrylonitrile-Butadiene-Styrene (ABS) Schedule 40 Plastic Drain, Waste, and Vent Pipe and Fittings.

BA. ASTM D2665 - Standard Specification for Poly(Vinyl Chloride) (PVC) Plastic Drain, Waste, and Vent Pipe and Fittings.

BB. ASTM D2680 - Standard Specification for Acrylonitrile-Butadiene-Styrene (ABS) and Poly(Vinyl Chloride) (PVC) Composite Sewer Piping.

BC. ASTM D2683 - Standard Specification for Socket-Type Polyethylene Fittings for Outside Diameter-Controlled Polyethylene Pipe and Tubing.

BD. ASTM D2729 - Standard Specification for Poly(Vinyl Chloride) (PVC) Sewer Pipe and Fittings.

BE. ASTM D2751 - Standard Specification for Acrylonitrile-Butadiene-Styrene (ABS) Sewer Pipe and Fittings.

BF. ASTM D2846/D2846M - Standard Specification for Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Hot- and Cold-Water Distribution Systems.

BG. ASTM D2855 - Standard Practice for Making Solvent-Cemented Joints with Poly(Vinyl Chloride) (PVC) Pipe and Fittings.

BH. ASTM D2996 - Standard Specification for Filament-Wound "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Pipe.

BI. ASTM D2997 - Standard Specification for Centrifugally Cast "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Pipe.

BJ. ASTM D3034 - Standard Specification for Type PSM Poly(Vinyl Chloride) (PVC) Sewer Pipe and Fittings.

BK. ASTM D3262 - Standard Specification for "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Sewer Pipe.

BL. ASTM D3517 - Standard Specification for "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Pressure Pipe.

NOT FOR BIDDING

BM. ASTM D3754 - Standard Specification for "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Sewer and Industrial Pressure Pipe.

BN. ASTM D3840 - Standard Specification for "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Pipe Fittings for Nonpressure Applications.

BO. ASTM F437 - Standard Specification for Threaded Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 80.

BP. ASTM F438 - Standard Specification for Socket-Type Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 40.

BQ. ASTM F439 - Standard Specification for Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 80.

BR. ASTM F441/F441M - Standard Specification for Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe, Schedules 40 and 80.

BS. ASTM F442/F442M - Standard Specification for Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe (SDR-PR).

BT. ASTM F477 - Standard Specification for Elastomeric Seals (Gaskets) for Joining Plastic Pipe.

BU. ASTM F493 - Standard Specification for Solvent Cements for Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe and Fittings.

BV. ASTM F628 - Standard Specification for Acrylonitrile-Butadiene-Styrene (ABS) Schedule 40 Plastic Drain, Waste, and Vent Pipe with a Cellular Core.

BW. ASTM F679 - Standard Specification for Poly(Vinyl Chloride) (PVC) Large-Diameter Plastic Gravity Sewer Pipe and Fittings.

BX. ASTM F708 - Standard Practice for Design and Installation of Rigid Pipe Hangers.

BY. ASTM F1281 - Standard Specification for Crosslinked Polyethylene/Aluminum/Crosslinked Polyethylene (PEX-AL-PEX) Pressure Pipe.

BZ. ASTM F1282 - Standard Specification for Polyethylene/Aluminum/Polyethylene (PE-AL-PE) Composite Pressure Pipe.

CA. AWS A5.8/A5.8M - Specification for Filler Metals for Brazing and Braze Welding; American Welding Society.

CB. AWWA C105/A21.5 - Polyethylene Encasement for Ductile-Iron Pipe Systems; American Water Works Association (ANSI/AWWA C105/A21.5).

CC. AWWA C110/A21.10 - American National Standard for Ductile-Iron and Gray-Iron Fittings, 3 In. Through 48 In. (75 mm Through 1200 mm), for Water and Other Liquids; American Water Works Association.

CD. AWWA C111/A21.11 - Rubber-Gasket Joints for Ductile-Iron Pressure Pipe and Fittings; American Water Works Association (ANSI/AWWA C111/A21.11).

CE. AWWA C151/A21.51 - Ductile-Iron Pipe, Centrifugally Cast, for Water; American Water Works Association (ANSI/AWWA C151/A21.51).

CF. AWWA C651 - Disinfecting Water Mains; American Water Works Association (ANSI/AWWA C651).

CG. AWWA C900 - Polyvinyl Chloride (PVC) Pressure Pipe, 4 In. Through 12 In. (100 mm Through 300 mm), for Water Transmission and Distribution; American Water Works Association (ANSI/AWWA C900).

CH. AWWA C901 - Polyethylene (PE) Pressure Pipe and Tubing, 1/2 In. (13 mm) Through 3 In. (76 mm), for Water Service; American Water Works Association.

NOT FOR BIDDING

CI. AWWA C950 - Fiberglass Pressure Pipe; American Water Works Association (ANSI/AWWA C950).

CJ. CISPI 301 - Standard Specification for Hubless Cast Iron Soil Pipe and Fittings for Sanitary and Storm Drain, Waste and Vent Piping Applications; Cast Iron Soil Pipe Institute.

CK. CISPI 310 - Specification for Coupling for Use in Connection with Hubless Cast Iron Soil Pipe and Fittings for Sanitary and Storm Drain, Waste, and Vent Piping Applications; Cast Iron Soil Pipe Institute

CL. MSS SP-58 - Pipe Hangers and Supports - Materials, Design, Manufacture, Selection, Application, and Installation; Manufacturers Standardization Society of the Valve and Fittings Industry, Inc..

CM. MSS SP-67 - Butterfly Valves; Manufacturers Standardization Society of the Valve and Fittings Industry, Inc..

CN. MSS SP-69 - Pipe Hangers and Supports - Selection and Application; Manufacturers Standardization Society of the Valve and Fittings Industry, Inc..

CO. MSS SP-70 - Cast Iron Gate Valves, Flanged and Threaded Ends; Manufacturers Standardization Society of the Valve and Fittings Industry, Inc..

CP. MSS SP-71 - Cast Iron Swing Check Valves, Flanged and Threaded Ends; Manufacturers Standardization Society of the Valve and Fittings Industry, Inc..

CQ. MSS SP-78 - Cast Iron Plug Valves, Flanged and Threaded Ends; Manufacturers Standardization Society of the Valve and Fittings Industry, Inc..

CR. MSS SP-80 - Bronze Gate, Globe, Angle and Check Valves; Manufacturers Standardization Society of the Valve and Fittings Industry, Inc..

CS. MSS SP-85 - Cast Iron Globe & Angle Valves, Flanged and Threaded Ends; Manufacturers Standardization Society of the Valve and Fittings Industry, Inc..

CT. MSS SP-89 - Pipe Hangers and Supports - Fabrication and Installation Practices; Manufacturers Standardization Society of the Valve and Fittings Industry, Inc..

CU. MSS SP-110 - Ball Valves Threaded, Socket-Welding, Solder Joint, Grooved and Flared Ends; Manufacturers Standardization Society of the Valve and Fittings Industry, Inc..

CV. NFPA 54 - National Fuel Gas Code; National Fire Protection Association.

CW. NFPA 58 - Liquefied Petroleum Gas Code; National Fire Protection Association.

CX. NSF 61 - Drinking Water System Components - Health Effects.

CY. NSF 372 - Drinking Water System Components - Lead Content.

1.04 SUBMITTALS

A. Product Data: Provide data on pipe materials, pipe fittings, valves, and accessories. Provide manufacturers catalog information. Indicate valve data and ratings.

B. Project Record Documents: Record actual locations of valves.

1.05 QUALITY ASSURANCE

A. Perform Work in accordance with local standards.
   1. Maintain one copy on project site.

B. Valves: Manufacturer's name and pressure rating marked on valve body.

C. Welding Materials and Procedures: Conform to ASME BPVC-IX and applicable state labor regulations.

D. Welder Qualifications: Certified in accordance with ASME BPVC-IX.

NOT FOR BIDDING

E. Identify pipe with marking including size, ASTM material classification, ASTM specification, potable water certification, water pressure rating.

1.06 REGULATORY REQUIREMENTS

A. Perform Work in accordance with local plumbing code.

B. Conform to applicable code for installation of backflow prevention devices.

C. Provide certificate of compliance from authority having jurisdiction indicating approval of installation of backflow prevention devices.

1.07 DELIVERY, STORAGE, AND HANDLING

A. Accept valves on site in shipping containers with labeling in place. Inspect for damage.

B. Provide temporary protective coating on cast iron and steel valves.

C. Provide temporary end caps and closures on piping and fittings. Maintain in place until installation.

D. Protect piping systems from entry of foreign materials by temporary covers, completing sections of the work, and isolating parts of completed system.

1.08 FIELD CONDITIONS

A. Do not install underground piping when bedding is wet or frozen.

1.09 EXTRA MATERIALS

A. Provide two repacking kits for each size valve.

PART 2 PRODUCTS

2.01 GENERAL REQUIREMENTS

A. Potable Water Supply Systems: Provide piping, pipe fittings, and solder and flux (if used), that comply with NSF 61 and NSF 372 for maximum lead content; label pipe and fittings.

2.02 NATURAL GAS PIPING, ABOVE GRADE

A. Steel Pipe: ASTM A53/A53M Schedule 40 black.
   1. Fittings: ASME B16.3, malleable iron, or ASTM A234/A234M, wrought steel welding type.
   2. Joints: NFPA 54, threaded or welded to ASME B31.1 or ASME B31.9.

2.03 FLANGES, UNIONS, AND COUPLINGS

A. Unions for Pipe Sizes 3 Inches and Under:
   1. Ferrous pipe: Class 150 malleable iron threaded unions.
   2. Copper tube and pipe: Class 150 bronze unions with soldered joints.

B. Flanges for Pipe Size Over 1 Inch:
   1. Ferrous pipe: Class 150 malleable iron threaded or forged steel slip-on flanges; preformed neoprene gaskets.
   2. Copper tube and pipe: Class 150 slip-on bronze flanges; preformed neoprene gaskets.

C. Grooved and Shouldered Pipe End Couplings:
   1. Housing: Malleable iron clamps to engage and lock, designed to permit some angular deflection, contraction, and expansion; steel bolts, nuts, and washers; galvanized for galvanized pipe.
   2. Sealing gasket: "C" shape composition sealing gasket.

D. Dielectric Connections: Union with galvanized or plated steel threaded end, copper solder end, water impervious isolation barrier.

2.04 PIPE HANGERS AND SUPPORTS

A. Provide hangers and supports that comply with MSS SP-58.

NOT FOR BIDDING

1. If type of hanger or support for a particular situation is not indicated, select appropriate type using MSS SP-58 recommendations.
2. Overhead Supports: Individual steel rod hangers attached to structure or to trapeze hangers.
3. Trapeze Hangers: Welded steel channel frames attached to structure.
4. Vertical Pipe Support: Steel riser clamp.
5. Floor Supports: Concrete pier or steel pedestal with floor flange; fixture attachment.
6. Support Gas piping as required by the INTERNATIONAL FUEL GAS CODE, current edition.
   a. Minimum support standings:
      1) 1/2" = 6 foot maximum spacing.
      2) 3/4" - 1" = 8 foot maximum spacing.
      3) 1-1/4" and larger, horizontal installation = 10 foot maximum spacing.
      4) 1-1/4" and larger, vertical installation = Every floor level.

B. Plumbing Piping - Water:
1. Conform to ASME B31.9.
2. Hangers for Pipe Sizes 1/2 Inch to 1-1/2 Inches: Malleable iron, adjustable swivel, split ring.
3. Hangers for Cold Pipe Sizes 2 Inches and Over: Carbon steel, adjustable, clevis.
4. Hangers for Hot Pipe Sizes 2 Inches to 4 Inches: Carbon steel, adjustable, clevis.
5. Hangers for Hot Pipe Sizes 6 Inches and Over: Adjustable steel yoke, cast iron pipe roll, double hanger.
6. Multiple or Trapeze Hangers: Steel channels with welded supports or spacers and hanger rods.
7. Multiple or Trapeze Hangers for Hot Pipe Sizes 6 Inches and Over: Steel channels with welded supports or spacers and hanger rods, cast iron roll.
8. Wall Support for Pipe Sizes to 3 Inches: Cast iron hook.
9. Wall Support for Pipe Sizes 4 Inches and Over: Welded steel bracket and wrought steel clamp.
10. Wall Support for Hot Pipe Sizes 6 Inches and Over: Welded steel bracket and wrought steel clamp with adjustable steel yoke and cast iron pipe roll.
11. Vertical Support: Steel riser clamp.
12. Floor Support for Cold Pipe: Cast iron adjustable pipe saddle, lock nut, nipple, floor flange, and concrete pier or steel support.
13. Floor Support for Hot Pipe Sizes to 4 Inches: Cast iron adjustable pipe saddle, locknut, nipple, floor flange, and concrete pier or steel support.
14. Floor Support for Hot Pipe Sizes 6 Inches and Over: Adjustable cast iron pipe roll and stand, steel screws, and concrete pier or steel support.
15. Copper Pipe Support: Carbon steel ring, adjustable, copper plated.

2.05 GATE VALVES

A. Manufacturers:
1. Conbraco Industries: www.apollovalves.com.
2. Nibco, Inc: www.nibco.com.
3. Milwaukee Valve Company: www.milwaukeevalve.com.

B. Up To and Including 3 Inches:
1. MSS SP-80, Class 125, bronze body, bronze trim, rising stem, handwheel, inside screw, solid wedge disc, solder ends.

C. 2 Inches and Larger:

NOT FOR BIDDING

1. MSS SP-70, Class 125, iron body, bronze trim, outside screw and yoke, handwheel, solid wedge disc, flanged ends. Provide chain-wheel operators for valves 6 inches and larger mounted over 8 feet above floor.

2.06 GLOBE VALVES

A. Manufacturers:
   1. Conbraco Industries: www.apollovalves.com.
   2. Nibco, Inc: www.nibco.com.
   3. Milwaukee Valve Company: www.milwaukeevalve.com.

B. Up To and Including 3 Inches:
   1. MSS SP-80, Class 125, bronze body, bronze trim, handwheel, bronze disc, solder ends.

C. 2 Inches and Larger:
   1. MSS SP-85, Class 125, iron body, bronze trim, handwheel, outside screw and yoke, renewable bronze plug-type disc, renewable seat, flanged ends. Provide chain-wheel operators for valves 6 inches and larger mounted over 8 feet above floor.

2.07 BALL VALVES

A. Manufacturers:
   1. Conbraco Industries: www.apollovalves.com.
   2. Nibco, Inc: www.nibco.com.
   3. Milwaukee Valve Company: www.milwaukeevalve.com.

B. Construction, 4 Inches and Smaller: MSS SP-110, Class 150, 400 psi CWP, bronze, two piece body, chrome plated brass ball, regular port, teflon seats and stuffing box ring, blow-out proof stem, lever handle with balancing stops, solder ends with union.

2.08 PLUG VALVES

A. Manufacturers:
   1. Conbraco Industries: www.conbraco.com.
   2. Nibco, Inc: www.nibco.com.
   3. Milwaukee Valve Company: www.milwaukeevalve.com.

B. Construction 2-1/2 Inches and Larger: MSS SP-78, 175 psi CWP, cast iron body and plug, pressure lubricated, teflon or Buna N packing, flanged or grooved ends. Provide lever operator with set screw.

2.09 BUTTERFLY VALVES

A. Manufacturers:
   1. Hammond Valve: www.hammondvalve.com.
   2. Crane Co.: www.cranevalve.com.
   3. Milwaukee Valve Company: www.milwaukeevalve.com.

B. Construction 1-1/2 Inches and Larger: MSS SP-67, 200 psi CWP, cast or ductile iron body, nickel-plated ductile iron disc, resilient replaceable EPDM, Buna N, or EPT seat, wafer, lug, or grooved ends, extended neck, 10 position lever handle.

C. Provide gear operators for valves 8 inches and larger, and chain-wheel operators for valves mounted over 8 feet above floor.

2.10 FLOW CONTROLS

A. Manufacturers:
   1. ITT Bell & Gossett: www.bellgossett.com.
   2. Griswold Controls: www.griswoldcontrols.com.
   3. Taco, Inc: www.taco-hvac.com.

NOT FOR BIDDING

B. Construction: Class 125, Brass or bronze body with union on inlet and outlet, temperature and pressure test plug on inlet and outlet, blowdown/backflush drain.

C. Calibration: Control flow within 5 percent of selected rating, over operating pressure range of 10 times minimum pressure required for control, maximum minimum pressure 3.5 psi.

2.11 SWING CHECK VALVES

A. Manufacturers:
1. Hammond Valve: www.hammondvalve.com.
2. Nibco, Inc: www.nibco.com.
3. Milwaukee Valve Company: www.milwaukeevalve.com.

B. Up to 3 Inches:
1. MSS SP-80, Class 125, bronze body and cap, bronze swing disc with rubber seat, solder ends.

C. Over 3 Inches:
1. MSS SP-71, Class 125, iron body, bronze swing disc, renewable disc seal and seat, flanged or grooved ends.

2.12 SPRING LOADED CHECK VALVES

A. Manufacturers:
1. Hammond Valve: www.hammondvalve.com.
2. Crane Co.: www.cranevalve.com.
3. Milwaukee Valve Company: www.milwaukeevalve.com.

B. Class 125, iron body, bronze trim, stainless steel springs, bronze disc, Buna N seals, wafer style ends.

2.13 WATER PRESSURE REDUCING VALVES

A. Manufacturers:
1. Amtrol Inc: www.amtrol.com.
2. Cla-Val Co: www.cla-val.com.
3. Watts Regulator Company: www.wattsregulator.com.

B. Up to 2 Inches:
1. MSS SP-80, bronze body, stainless steel and thermoplastic internal parts, fabric reinforced diaphragm, strainer, threaded single or double union ends.

C. Over 2 Inches:
1. ASSE 1003, cast iron body, bronze fitted, elastomeric diaphragm and seat disc, flanged.

2.14 RELIEF VALVES

A. Pressure Relief:
1. Manufacturers:
a. Cla-Val Co: www.cla-val.com.
b. Henry Technologies: www.henrytech.com.
c. Watts Regulator Company: www.wattsregulator.com.
2. AGA Z21.22 certified, bronze body, teflon seat, steel stem and springs, automatic, direct pressure actuated.

B. Temperature and Pressure Relief:
1. Manufacturers:
a. Cla-Val Co: www.cla-val.com.
b. Henry Technologies: www.henrytech.com.
c. Watts Regulator Company: www.wattsregulator.com.

NOT FOR BIDDING

2. AGA Z21.22 certified, bronze body, teflon seat, stainless steel stem and springs, automatic, direct pressure actuated, temperature relief maximum 210 degrees F, capacity ASME BPVC-IV certified and labelled.

2.15 STRAINERS

A. Manufacturers:
   1. Armstrong International, Inc: www.armstronginternational.com.
   2. Green Country Filter Manufacturing: www.greencountryfilter.com.
   3. WEAMCO: www.weamco.com.

B. Size 2 inch and Under:
   1. Threaded brass body for 175 psi CWP, Y pattern with 1/32 inch stainless steel perforated screen.
   2. Class 150, threaded bronze body 300 psi CWP, Y pattern with 1/32 inch stainless steel perforated screen.

C. Size 1-1/2 inch to 4 inch:
   1. Class 125, flanged iron body, Y pattern with 1/16 inch stainless steel perforated screen.

D. Size 5 inch and Larger:
   1. Class 125, flanged iron body, basket pattern with 1/8 inch stainless steel perforated screen.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that excavations are to required grade, dry, and not over-excavated.

3.02 PREPARATION

A. Ream pipe and tube ends. Remove burrs. Bevel plain end ferrous pipe.

B. Remove scale and dirt, on inside and outside, before assembly.

C. Prepare piping connections to equipment with flanges or unions.

3.03 INSTALLATION

A. Install in accordance with manufacturer's instructions.

B. Provide non-conducting dielectric connections wherever jointing dissimilar metals.

C. Route piping in orderly manner and maintain gradient. Route parallel and perpendicular to walls.

D. Install piping to maintain headroom, conserve space, and not interfere with use of space.

E. Group piping whenever practical at common elevations.

F. Provide clearance in hangers and from structure and other equipment for installation of insulation and access to valves and fittings. Refer to Section 22 07 19.

G. Provide access where valves and fittings are not exposed. Coordinate size and location of access doors with Section 08 31 00.

H. Establish elevations of buried piping outside the building to ensure not less than 3 ft of cover.

I. Install vent piping penetrating roofed areas to maintain integrity of roof assembly .

J. Where pipe support members are welded to structural building framing, scrape, brush clean, and apply one coat of zinc rich primer to welding.

K. Provide support for utility meters in accordance with requirements of utility companies.

L. Prepare exposed, unfinished pipe, fittings, supports, and accessories ready for finish painting. Refer to Section 09 90 00.

M. Install bell and spigot pipe with bell end upstream.

NOT FOR BIDDING

N. Install valves with stems upright or horizontal, not inverted.

O. Pipe vents from gas pressure reducing valves to outdoors and terminate in weather proof hood.

P. Install water piping to ASME B31.9.

Q. Install fuel oil piping to ASME B31.9.

R. PVC Pipe: Make solvent-welded joints in accordance with ASTM D2855.

S. Sleeve pipes passing through partitions, walls and floors.

T. In all kitchen/cooking areas, any piping that is run exposed along walls shall maintain at least a 1" gap to the walls to allow for cleaning per codes.

U. Inserts:
   1. Provide inserts for placement in concrete formwork.
   2. Provide inserts for suspending hangers from reinforced concrete slabs and sides of reinforced concrete beams.
   3. Provide hooked rod to concrete reinforcement section for inserts carrying pipe over 4 inches.
   4. Where concrete slabs form finished ceiling, locate inserts flush with slab surface.
   5. Where inserts are omitted, drill through concrete slab from below and provide through-bolt with recessed square steel plate and nut flush with top of slab.

V. Pipe Hangers and Supports:
   1. Install in accordance with ASME B31.9.
   2. Support horizontal piping as scheduled.
   3. Install hangers to provide minimum 1/2 inch space between finished covering and adjacent work.
   4. Place hangers within 12 inches of each horizontal elbow.
   5. Use hangers with 1-1/2 inch minimum vertical adjustment. Design hangers for pipe movement without disengagement of supported pipe.
   6. Support vertical piping at every floor. Support riser piping independently of connected horizontal piping.
   7. Where several pipes can be installed in parallel and at same elevation, provide multiple or trapeze hangers.
   8. Provide copper plated hangers and supports for copper piping.
   9. Prime coat exposed steel hangers and supports. Refer to Section 09 90 00. Hangers and supports located in crawl spaces, pipe shafts, and suspended ceiling spaces are not considered exposed.
   10. Provide hangers adjacent to motor driven equipment with vibration isolation.
   11. Support cast iron drainage piping at every joint.

3.04 APPLICATION

A. Use grooved mechanical couplings and fasteners only in accessible locations.

B. Install unions downstream of valves and at equipment or apparatus connections.

C. Install brass male adapters each side of valves in copper piped system. Solder adapters to pipe.

D. Install gate or ball valves for shut-off and to isolate equipment, part of systems, or vertical risers.

E. Install globe valves for throttling, bypass, or manual flow control services.

F. Provide lug end butterfly valves adjacent to equipment when provided to isolate equipment.

G. Provide spring loaded check valves on discharge of water pumps.

H. Provide plug valves in natural gas systems for shut-off service.

I. Provide flow controls in water recirculating systems where indicated.

NOT FOR BIDDING

3.05 TOLERANCES

A. Drainage Piping: Establish invert elevations within 1/2 inch vertically of location indicated and slope to drain at minimum of 1/4 inch per foot slope.

B. Water Piping: Slope at minimum of 1/32 inch per foot and arrange to drain at low points.

3.06 DISINFECTION OF DOMESTIC WATER PIPING SYSTEM

A. Disinfect water distribution system.

B. Prior to starting work, verify system is complete, flushed and clean.

C. Ensure Ph of water to be treated is between 7.4 and 7.6 by adding alkali (caustic soda or soda ash) or acid (hydrochloric).

D. Inject disinfectant, free chlorine in liquid, powder, tablet or gas form, throughout system to obtain 50 to 80 mg/L residual.

E. Bleed water from outlets to ensure distribution and test for disinfectant residual at minimum 15 percent of outlets.

F. Maintain disinfectant in system for 24 hours.

G. If final disinfectant residual tests less than 25 mg/L, repeat treatment.

H. Flush disinfectant from system until residual equal to that of incoming water or 1.0 mg/L.

I. Take samples no sooner than 24 hours after flushing, from 10 percent of outlets and from water entry, and analyze in accordance with AWWA C651.

3.07 SERVICE CONNECTIONS

A. Provide new sanitary and storm sewer services. Before commencing work check invert elevations required for sewer connections, confirm inverts and ensure that these can be properly connected with slope for drainage and cover to avoid freezing.

B. Provide new water service complete with approved reduced pressure backflow preventer and water meter with by-pass valves, pressure reducing valve .
   1. Provide sleeve in wall for service main and support at wall with reinforced concrete bridge. Calk enlarged sleeve and make watertight with pliable material. Anchor service main inside to concrete wall.
   2. Provide 18 gage, 0.0478 inch galvanized sheet metal sleeve around service main to 6 inch above floor and 6 feet minimum below grade. Size for minimum of 2 inches of loose batt insulation stuffing.

C. Provide new gas service complete with gas meter and regulators. Gas service distribution piping to have initial minimum pressure of 7 inch wg. Provide regulators on each line serving gravity type appliances, sized in accordance with equipment.

3.08 SCHEDULES

A. Pipe Hanger Spacing:
   1. Metal Piping:
      a. Pipe size: 1/2 inches to 1-1/4 inches:
         1) Maximum hanger spacing: 6.5 ft.
         2) Hanger rod diameter: 3/8 inches.
      b. Pipe size: 1-1/2 inches to 2 inches:
         1) Maximum hanger spacing: 10 ft.
         2) Hanger rod diameter: 3/8 inch.
      c. Pipe size: 2-1/2 inches to 3 inches:
         1) Maximum hanger spacing: 10 ft.
         2) Hanger rod diameter: 1/2 inch.
      d. Pipe size: 4 inches to 6 inches:

NOT FOR BIDDING

1) Maximum hanger spacing: 10 ft.
2) Hanger rod diameter: 5/8 inch.

e. Pipe size: 8 inches to 12 inches:
1) Maximum hanger spacing: 14 ft.
2) Hanger rod diameter: 7/8 inch.

f. Pipe size: 14 inches and Over:
1) Maximum hanger spacing: 20 ft.
2) Hanger rod diameter: 1 inch.

2. Plastic Piping:
a. Pipe Size 1" to 6":
1) Maximum hanger spacing: 6 ft.
2) Hanger rod diameter: 3/8 inch.

b. Pipe Size 8" and Over:
1) Maximum hanger spacing: 6 ft.
2) Hanger rod diameter: 7/8 inch.

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 23 31 00
HVAC DUCTS AND CASINGS

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Metal ductwork.

B. Casing and plenums.

C. Kitchen hood ductwork.

1.02 RELATED REQUIREMENTS

A. Section 09 90 00 - Painting and Coating: Weld priming, weather resistant, paint or coating.

B. Section 23 33 00 - Air Duct Accessories.

C. Section 23 37 00 - Air Outlets and Inlets.

1.03 REFERENCE STANDARDS

A. ASTM A36/A36M - Standard Specification for Carbon Structural Steel.

B. ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.

C. ASTM A666 - Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar.

D. ASTM A1008/A1008M - Standard Specification for Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength, Low Alloy, and High-Strength Low-Alloy with Improved Formability, Solution Hardened, and Bake Hardenable

E. ASTM A1011/A1011M - Standard Specification for Steel, Sheet and Strip, Hot-Rolled, Carbon, Structural, High-Strength Low Alloy, High-Strength Low-Alloy With Improved Formability, and Ultra-High Strength

F. ASTM B209 - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate.

G. ASTM B209M - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate [Metric].

H. ASTM C14 - Standard Specification for Nonreinforced Concrete Sewer, Storm Drain, and Culvert Pipe.

I. ASTM C14M - Standard Specification for Nonreinforced Concrete Sewer, Storm Drain, and Culvert Pipe [Metric].

J. ASTM C443 - Standard Specification for Joints for Concrete Pipe and Manholes, Using Rubber Gaskets.

K. ASTM C443M - Standard Specification for Joints for Concrete Pipe and Manholes, Using Rubber Gaskets (Metric).

L. NFPA 90A - Standard for the Installation of Air-Conditioning and Ventilating Systems; National Fire Protection Association.

M. NFPA 90B - Standard for the Installation of Warm Air Heating and Air Conditioning Systems; National Fire Protection Association.

N. NFPA 96 - Standard for Ventilation Control and Fire Protection of Commercial Cooking Operations; National Fire Protection Association.

O. SMACNA (LEAK) - HVAC Air Duct Leakage Test Manual; Sheet Metal and Air Conditioning Contractors' National Association.

P. SMACNA (DCS) - HVAC Duct Construction Standards.

NOT FOR BIDDING

Q. SMACNA (FGD) - Fibrous Glass Duct Construction Standards; Sheet Metal and Air Conditioning Contractors' National Association.

R. SMACNA (KVS) - Kitchen Ventilation Systems and Food Service Equipment Fabrication & Installation Guidelines.

S. UL 181 - Standard for Factory-Made Air Ducts and Air Connectors; Underwriters Laboratories Inc..

T. IECC 2012 - International Energy Conservation Code - Duct construciton standards, leakage testing

1.04 PERFORMANCE REQUIREMENTS

A. No variation of duct configuration or sizes permitted except by written permission. Size round ducts installed in place of rectangular ducts in accordance with ASHRAE table of equivalent rectangular and round ducts.

1.05 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

B. Product Data: Provide data for duct materials and duct connections.

C. Shop Drawings: Indicate duct fittings, particulars such as gages, sizes, welds, and configuration prior to start of work for all systems.

D. MANDATORY Test Reports: Pressure test all ductwork. Indicate pressure tests performed. Include date, section tested, test pressure, and leakage rate, following SMACNA (LEAK) - HVAC Air Duct Leakage Test Manual.

1. Utilize standard equation CL=FP^0.65 where F= Measured leakage rate in CFM per 100 square feet of duct surface, and P = Static Pressure of the test.

E. Manufacturer's Certificate: Certify that installation of glass fiber ductwork meet or exceed recommended fabrication and installation requirements.

F. Project Record Documents: Record actual locations of ducts and duct fittings. Record changes in fitting location and type. Show additional fittings used.

1.06 QUALITY ASSURANCE

A. Manufacturer Qualifications: Company specializing in manufacturing the type of products specified in this section, with minimum three years of documented experience.

B. Installer Qualifications: Company specializing in performing the type of work specified in this section, with minimum five years of documented experience.

1.07 REGULATORY REQUIREMENTS

A. Construct ductwork to NFPA 90A, NFPA 90B, and NFPA 96 standards.

1.08 FIELD CONDITIONS

A. Do not install duct sealants when temperatures are less than those recommended by sealant manufacturers.

B. Maintain temperatures within acceptable range during and after installation of duct sealants.

PART 2 PRODUCTS

2.01 DUCT ASSEMBLIES

2.02 MATERIALS

A. Galvanized Steel for Ducts: Hot-dipped galvanized steel sheet, ASTM A653/A653M FS Type B, with G90/Z275 coating.

B. Aluminum for Ducts: ASTM B209 (ASTM B209M); aluminum sheet, alloy 3003-H14. Aluminum Connectors and Bar Stock: Alloy 6061-T651 or of equivalent strength.

NOT FOR BIDDING

C. Stainless Steel for Ducts: ASTM A 240/A 240M, Type 304.

D. Hanger Rod: ASTM A36/A36M; steel, galvanized; threaded both ends, threaded one end, or continuously threaded.

E. Flexible Ducts:
   1. Two ply vinyl film supported by helically wound spring steel wire.
      a. Pressure Rating: 10 inches WG positive and 1.0 inches WG negative.
      b. Maximum Velocity: 4000 fpm.
      c. Temperature Range: -10 degrees F to 160 degrees F.

F. Insulated Flexible Ducts:
   1. Two ply vinyl film supported by helically wound spring steel wire; fiberglass insulation; polyethylene vapor barrier film.
      a. Pressure Rating: 10 inches WG positive and 1.0 inches WG negative.
      b. Maximum Velocity: 4000 fpm.
      c. Temperature Range: -10 degrees F to 160 degrees F.

G. Stainless Steel Ducts: ASTM A 666, Type 304.

H. All Ducts: Galvanized steel, unless otherwise indicated.

I. Low Pressure Supply (Heating Systems): 1 inch w.g. pressure class, galvanized steel.

J. Low Pressure Supply (System with Cooling Coils): 1 inch w.g. pressure class, galvanized steel.

K. Medium and High Pressure Supply (All VAV Primary Supply Duct between AHU and VAV Terminal Unit): 2 inch w.g. pressure class, galvanized steel.

L. Return and Relief: 1 inch w.g. pressure class, galvanized steel.

M. General Exhaust: 1 inch w.g. pressure class, galvanized steel.

N. Kitchen Cooking Hood Exhaust: 1/2 inch w.g. pressure class, galvanized steel.
   1. Asphalt base.
   2. Construct of 18 gage stainless steel using continuous external welded joints in rectangular sections.

O. Joint Sealers and Sealants: Non-hardening, water resistant, mildew and mold resistant.
   1. Type: Heavy mastic or liquid used alone or with tape, suitable for joint configuration and compatible with substrates, and recommended by manufacturer for pressure class of ducts.
   2. VOC Content: Not more than 250 g/L, excluding water.

2.03 DUCTWORK FABRICATION

A. Fabricate and support in accordance with SMACNA HVAC Duct Construction Standards and as indicated.

B. Provide duct material, gages, reinforcing, and sealing for operating pressures indicated.

C. Construct T's, bends, and elbows with radius of not less than 1-1/2 times width of duct on centerline. Where not possible and where rectangular elbows must be used, provide turning vanes. .

D. Increase duct sizes gradually, not exceeding 15 degrees divergence wherever possible; maximum 30 degrees divergence upstream of equipment and 45 degrees convergence downstream.

E. Fabricate continuously welded round and oval duct fittings in accordance with SMACNA HVAC Duct Construction Standards.

F. Fabricate continuously welded round and oval duct fittings two gages heavier than duct gages indicated in SMACNA Standard. Joints shall be minimum 4 inch cemented slip joint, brazed or electric welded. Prime coat welded joints.

NOT FOR BIDDING

G. Provide standard 45 degree lateral wye takeoffs unless otherwise indicated where 90 degree conical tee connections may be used.

H. Where ducts are connected to exterior wall louvers and duct outlet is smaller than louver frame, provide blank-out panels sealing louver area around duct. Use same material as duct, painted black on exterior side; seal to louver frame and duct.

2.04 MANUFACTURED DUCTWORK AND FITTINGS

A. Manufacture in accordance with SMACNA HVAC Duct Construction Standards - Metal and Flexible, and as indicated. Provide duct material, gages,reinforcing, and sealing for operating pressures indicated.

B. Double Wall Insulated Round Ducts: Round spiral lockseam duct with paintable galvanized steel outer wall, perforated galvanized steel inner wall; fitting with solid inner wall. Provide paint in color selected by architect.
   1. Manufacture in accordance with SMACNA HVAC Duct Construction Standards.
   2. Insulation:
      a. Thickness: 1 inch.
      b. Material: Fiberglass, with mylar coating between insulation and perforated liner.

C. Transverse Duct Connection System: SMACNA "J" rated rigidly class connection, interlocking angle and duct edge connection system with sealant, gasket, cleats, and corner clips.
   1. Manufacturers:

2.05 CASINGS

A. Fabricate casings in accordance with SMACNA HVAC Duct Construction Standards and construct for operating pressures indicated.

B. Mount floor mounted casings on 4 inch high concrete curbs. At floor, rivet panels on 8 inch centers to angles. Where floors are acoustically insulated, provide liner of 18 gage galvanized expanded metal mesh supported at 12 inch centers, turned up 12 inches at sides with sheet metal shields.

C. Mount floor mounted casings on 4 inch high concrete curbs. At floor, rivet panels on 8 inch centers to angles. Where floors are acoustically insulated, provide liner of 18 gage galvanized expanded metal mesh supported at 12 inch centers, turned up 12 inches at sides with sheet metal shields.

D. Reinforce door frames with steel angles tied to horizontal and vertical plenum supporting angles. Install hinged access doors where indicated or required for access to equipment for cleaning and inspection.
   1. Provide clear wire glass observation ports, minimum 6 X 6 inch size.

2.06 KITCHEN HOOD EXHAUST DUCTWORK

A. Fabricate in accordance with SMACNA HVAC Duct Construction Standards, SMACNA Kitchen Ventilation Systems and Food Service Equipment Fabrication & Installation Guidelines and NFPA 96.

PART 3 EXECUTION

3.01 INSTALLATION

A. Install, support, and seal ducts in accordance with SMACNA HVAC Duct Construction Standards.

B. Install in accordance with manufacturer's instructions.

C. Duct sizes indicated are inside clear dimensions. For lined ducts, maintain sizes inside lining.

D. Install and seal metal and flexible ducts in accordance with SMACNA HVAC Duct Construction Standards - Metal and Flexible.

NOT FOR BIDDING

E. Provide openings in ductwork where required to accommodate thermometers and controllers. Provide pilot tube openings where required for testing of systems, complete with metal can with spring device or screw to ensure against air leakage. Where openings are provided in insulated ductwork, install insulation material inside a metal ring.

F. Locate ducts with sufficient space around equipment to allow normal operating and maintenance activities.

G. Use crimp joints with or without bead for joining round duct sizes 8 inch and smaller with crimp in direction of air flow.

H. Use double nuts and lock washers on threaded rod supports.

I. Tape joints of PVC coated metal ductwork with PVC tape.

J. Connect terminal units to supply ducts with one foot maximum length of flexible duct. Do not use flexible duct to change direction.

K. Connect diffusers or light troffer boots to low pressure ducts with 5 feet maximum length of flexible duct held in place with strap or clamp.

L. Connect flexible ducts to metal ducts with adhesive plus sheet metal screws.

M. Set plenum doors 6 to 12 inches above floor. Arrange door swings so that fan static pressure holds door in closed position.

N. Use stainless steel for ductwork exposed to view and stainless steel or carbon steel for ducts where concealed.

O. During construction provide temporary closures of metal or taped polyethylene on open ductwork to prevent construction dust from entering ductwork system.

P. At exterior wall louvers, seal duct to louver frame and install blank-out panels as required.

3.02 RANGE HOOD EXHAUST DUCT INSTALLATIONS

A. Install ducts to allow for thermal expasion of ductwork through 2000 deg F temperature range.

B. Provide residue traps in kitchen hood exhaust ducts at base of vertical risers with provisions for clean out.

C. Install ducts withouth dips or traps that may collect residues, unless traps have continuous or automatic residue removal.

D. Install access openings at each change in direction and at 50-foot intervals; locate on sides of duct a minimum of 1-1 1/2 inches from bottom; and fit with grease-tight covers of same material as duct.

E. Do not penetrate fire-rated assemblies.

3.03 CLEANING AND TESTING

A. Clean duct system and force air at high velocity through duct to remove accumulated dust. To obtain sufficient air, clean half the system at a time. Protect equipment that could be harmed by excessive dirt with temporary filters, or bypass during cleaning.

B. Conduct required duct-leakage testing as defined within this specification and otherwise noted in the contract documents.

3.04 SCHEDULES

A. Ductwork Material:
   1. Low Pressure Supply (Heating Systems): Steel, Aluminum.
   2. Low Pressure Supply (System with Cooling Coils): Steel, Aluminum.
   3. Medium and High Pressure Supply: Steel.
   4. Return and Relief: Steel, Aluminum.
   5. General Exhaust: Steel, Aluminum.

NOT FOR BIDDING

6. Kitchen Hood Exhaust: Carbon Steel, Stainless Steel.
7. Outside Air Intake: Steel.
8. Exposed round ductwork: Double-walled spiral.

B. Ductwork Pressure Class:
1. Supply (Heating Systems): 1 inch
2. Supply (System with Cooling Coils): 2 inch.
3. Return and Relief: 1 inch.
4. General Exhaust: 1 inch.
5. Outside Air Intake: 1 inch.

END OF SECTION

NOT FOR BIDDING

SECTION 23 33 00
AIR DUCT ACCESSORIES

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Air turning devices/extractors.
B. Backdraft dampers - metal.
C. Backdraft dampers.
D. Combination fire and smoke dampers.
E. Duct access doors.
F. Duct test holes.
G. Fire dampers.
H. Flexible duct connections.
I. Smoke dampers.
J. Volume control dampers.

1.02 RELATED REQUIREMENTS

A. Section 23 31 00 - HVAC Ducts and Casings.
B. Section 26 27 17 - Equipment Wiring: Electrical characteristics and wiring connections.

1.03 REFERENCE STANDARDS

A. NFPA 90A - Standard for the Installation of Air-Conditioning and Ventilating Systems; National Fire Protection Association.
B. NFPA 92 - Standard for Smoke-Control Systems.
C. NFPA 92A - Standard for Smoke-Control Systems Utilizing Barriers and Pressure Differences.
D. SMACNA (DCS) - HVAC Duct Construction Standards.
E. UL 33 - Heat Responsive Links for Fire-Protection Service; Underwriters Laboratories Inc..
F. UL 555 - Standard for Fire Dampers; Underwriters Laboratories Inc..
G. UL 555S - Standard for Leakage Rated Dampers for Use in Smoke Control Systems; Underwriters Laboratories Inc..

1.04 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
B. Product Data: Provide for shop fabricated assemblies including volume control dampers, duct access doors, duct test holes, and hardware used. Include electrical characteristics and connection requirements.
C. Shop Drawings: Indicate for shop fabricated assemblies including volume control dampers, duct access doors, and duct test holes.
D. Manufacturer's Installation Instructions: Provide instructions for fire dampers and combination fire and smoke dampers.

1.05 PROJECT RECORD DOCUMENTS

A. Record actual locations of access doors and test holes.

1.06 QUALITY ASSURANCE

A. Manufacturer Qualifications: Company specializing in manufacturing the type of products specified in this section, with minimum five years of documented experience.

NOT FOR BIDDING

B. Products Requiring Electrical Connection: Listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.

1.07 DELIVERY, STORAGE, AND HANDLING

A. Protect dampers from damage to operating linkages and blades.

1.08 EXTRA MATERIALS

A. See Section 01 60 00 - Product Requirements, for additional provisions.

B. Provide two of each size and type of fusible link.

PART 2 PRODUCTS

2.01 AIR TURNING DEVICES/EXTRACTORS

A. Manufacturers:
1. Krueger: www.krueger-hvac.com.
2. Ruskin Company: www.ruskin.com.
3. Titus: www.titus-hvac.com.
4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Multi-blade device with blades aligned in short dimension; steel construction; with individually adjustable blades, mounting straps.

2.02 BACKDRAFT DAMPERS - METAL

2.03 BACKDRAFT DAMPERS

A. Manufacturers:
1. Louvers & Dampers, Inc: www.louvers-dampers.com.
2. Nailor Industries Inc: www.nailor.com.
3. Ruskin Company: www.ruskin.com.
4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Gravity Backdraft Dampers, Size 18 x 18 inches or Smaller, Furnished with Air Moving Equipment: Air moving equipment manufacturer's standard construction.

2.04 BACKDRAFT DAMPERS - FABRIC

A. Fabric Backdraft Dampers: Factory-fabricated, 18 gage, galvanized steel frame.
1. Blades: Neoprene coated fabric material.
2. Birdscreen: 1/2 inch nominal mesh of galvanized steel or aluminum.
3. Maximum Velocity: 1000 fpm (5 m/sec) face velocity.

B. Multi-Blade, Parallel Action Gravity Balanced Backdraft Dampers: galvanized steel or extruded aluminum, with center pivoted blades of maximum 6 inch width, with felt or flexible vinyl sealed edges, linked together in rattle-free manner with 90 degree stop, steel ball bearings, and plated steel pivot pin; adjustment device to permit setting for varying differential static pressure.

2.05 COMBINATION FIRE AND SMOKE DAMPERS

A. Manufacturers:
1. Louvers & Dampers, Inc: www.louvers-dampers.com.
2. Nailor Industries Inc: www.nailor.com.
3. Ruskin Company: www.ruskin.com.
4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Fabricate in accordance with NFPA 90A, UL 555, UL 555S, and as indicated.

C. Provide factory sleeve and collar for each damper.

D. Multiple Blade Dampers: Fabricate with 16 gage galvanized steel frame and blades, oil-impregnated bronze or stainless steel sleeve bearings and plated steel axles, stainless steel

NOT FOR BIDDING

jamb seals, 1/8 x 1/2 inch plated steel concealed linkage, stainless steel closure spring, blade stops, and lock, and 1/2 inch actuator shaft.

E. Operators: UL listed and labelled spring return electric type suitable for 120 volts, single phase, 60 Hz. Provide end switches to indicate damper position. Locate damper operator on interior of duct and link to damper operating shaft.

F. Normally Closed Smoke Responsive Fire Dampers: Curtain type, opening by gravity upon actuation of electro thermal link, flexible stainless steel blade edge seals to provide constant sealing pressure.

G. Normally Open Smoke Responsive Fire Dampers: Curtain type, closing upon actuation of electro thermal link, flexible stainless steel blade edge seals to provide constant sealing pressure, stainless steel springs with locking devices to ensure positive closure for units mounted horizontally.

H. Electro Thermal Link: Fusible link melting at 165 degrees F; 120 volts, single phase, 60 Hz; UL listed and labeled.

2.06 DUCT ACCESS DOORS

A. Manufacturers:
   1. Nailor Industries Inc: www.nailor.com.
   2. Ruskin Company: www.ruskin.com.
   3. SEMCO Incorporated: www.semcoinc.com.
   4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Fabricate in accordance with SMACNA HVAC Duct Construction Standards and as indicated.

C. Fabrication: Rigid and close-fitting of galvanized steel with sealing gaskets and quick fastening locking devices. For insulated ducts, install minimum 1 inch thick insulation with sheet metal cover.
   1. Less Than 12 inches Square: Secure with sash locks.
   2. Up to 18 inches Square: Provide two hinges and two sash locks.
   3. Up to 24 x 48 inches: Three hinges and two compression latches with outside and inside handles.
   4. Larger Sizes: Provide an additional hinge.

D. Access doors with sheet metal screw fasteners are not acceptable.

2.07 DUCT TEST HOLES

A. Temporary Test Holes: Cut or drill in ducts as required. Cap with neat patches, neoprene plugs, threaded plugs, or threaded or twist-on metal caps.

B. Permanent Test Holes: Factory fabricated, air tight flanged fittings with screw cap. Provide extended neck fittings to clear insulation.

2.08 FIRE DAMPERS

A. Manufacturers:
   1. Louvers & Dampers, Inc: www.louvers-dampers.com.
   2. Nailor Industries Inc: www.nailor.com.
   3. Ruskin Company: www.ruskin.com.
   4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Fabricate in accordance with NFPA 90A and UL 555, and as indicated.

C. Ceiling Dampers: Galvanized steel, 22 gage frame and 16 gage flap, two layers 0.125 inch ceramic fiber on top side and one layer on bottom side for round flaps, with locking clip.

D. Horizontal Dampers: Galvanized steel, 22 gage frame, stainless steel closure spring, and lightweight, heat retardant non-asbestos fabric blanket.

NOT FOR BIDDING

E. Curtain Type Dampers: Galvanized steel with interlocking blades. Provide stainless steel closure springs and latches for horizontal installations or closure under air flow conditions. Configure with blades out of air stream except for 1.0 inch pressure class ducts up to 12 inches in height.

F. Multiple Blade Dampers: 16 gage galvanized steel frame and blades, oil-impregnated bronze or stainless steel sleeve bearings and plated steel axles, 1/8 x 1/2 inch plated steel concealed linkage, stainless steel closure spring, blade stops, and lock.

G. Fusible Links: UL 33, separate at 160 degrees F with adjustable link straps for combination fire/balancing dampers.

2.09 FLEXIBLE DUCT CONNECTIONS

A. Fabricate in accordance with SMACNA HVAC Duct Construction Standards and as indicated.

B. Flexible Duct Connections: Fabric crimped into metal edging strip.
   1. Fabric: UL listed fire-retardant neoprene coated woven glass fiber fabric to NFPA 90A, minimum density 30 oz per sq yd.
      a. Net Fabric Width: Approximately 6 inches wide.
   2. Metal: 3 inches wide, 24 gage thick galvanized steel.

C. Leaded Vinyl Sheet: Minimum 0.55 inch thick, 0.87 lbs per sq ft, 10 dB attenuation in 10 to 10,000 Hz range.

2.10 SMOKE DAMPERS

A. Manufacturers:
   1. Louvers & Dampers, Inc: www.louvers-dampers.com.
   2. Nailor Industries Inc: www.nailor.com.
   3. Ruskin Company: www.ruskin.com.
   4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Fabricate in accordance with NFPA 90A and UL 555S, and as indicated.

C. Dampers: UL Class 1 multiple blade type fire damper, normally closed automatically operated by electric actuator.

D. Electro Thermal Link: Fusible link melting at 165 degrees F; 120 volts, single phase, 60 Hz; UL listed and labeled.

2.11 VOLUME CONTROL DAMPERS

A. Manufacturers:
   1. Louvers & Dampers, Inc: www.louvers-dampers.com.
   2. Nailor Industries Inc: www.nailor.com.
   3. Ruskin Company: www.ruskin.com.
   4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Fabricate in accordance with SMACNA HVAC Duct Construction Standards and as indicated.

C. Splitter Dampers:
   1. Material: Same gage as duct to 24 inches size in either direction, and two gages heavier for sizes over 24 inches.
   2. Blade: Fabricate of double thickness sheet metal to streamline shape, secured with continuous hinge or rod.
   3. Operator: Minimum 1/4 inch diameter rod in self aligning, universal joint action, flanged bushing with set screw .

D. Single Blade Dampers: Fabricate for duct sizes up to 6 x 30 inch.

NOT FOR BIDDING

E. Multi-Blade Damper: Fabricate of opposed blade pattern with maximum blade sizes 8 x 72 inch. Assemble center and edge crimped blades in prime coated or galvanized channel frame with suitable hardware.

F. End Bearings: Except in round ducts 12 inches and smaller, provide end bearings. On multiple blade dampers, provide oil-impregnated nylon or sintered bronze bearings.

G. Quadrants:
   1. Provide locking, indicating quadrant regulators on single and multi-blade dampers.
   2. On insulated ducts mount quadrant regulators on stand-off mounting brackets, bases, or adapters.

PART 3 EXECUTION

3.01 PREPARATION

A. Verify that electric power is available and of the correct characteristics.

3.02 INSTALLATION

A. Install accessories in accordance with manufacturer's instructions, NFPA 90A, and follow SMACNA HVAC Duct Construction Standards. Refer to Section 23 31 00 for duct construction and pressure class.

B. Provide backdraft dampers on exhaust fans or exhaust ducts nearest to outside and where indicated.

C. Provide duct access doors for inspection and cleaning before and after filters, coils, fans, automatic dampers, at fire dampers, combination fire and smoke dampers, and elsewhere as indicated. Provide for cleaning kitchen exhaust ducts in accordance with NFPA 96. Provide minimum 8 x 8 inch size for hand access, 18 x 18 inch size for shoulder access, and as indicated. Provide 4 x 4 inch for balancing dampers only. Review locations prior to fabrication.

D. Provide duct test holes where indicated and required for testing and balancing purposes.

E. Provide fire dampers, combination fire and smoke dampers, and smoke dampers at locations indicated, where ducts and outlets pass through fire rated components, and where required by authorities having jurisdiction. Install with required perimeter mounting angles, sleeves, breakaway duct connections, corrosion resistant springs, bearings, bushings and hinges.

F. Install smoke dampers and combination smoke and fire dampers in accordance with NFPA 92.
   1. Smoke dampers shall be integrated into the "smoke purge control system". Dampers in the return ductwork shall be overridden to the open position when the smoke purge is activated.

G. Demonstrate re-setting of fire dampers to Owner's representative.

H. At fans and motorized equipment associated with ducts, provide flexible duct connections immediately adjacent to the equipment.

I. At equipment supported by vibration isolators, provide flexible duct connections immediately adjacent to the equipment.

J. For fans developing static pressures of 5.0 inches and over, cover flexible connections with leaded vinyl sheet, held in place with metal straps.

K. Provide balancing dampers at points on supply, return, and exhaust systems where branches are taken from larger ducts as required for air balancing. Install minimum 2 duct widths from duct take-off.

L. Use splitter dampers only where indicated.

M. Provide balancing dampers on high velocity systems where indicated.

NOT FOR BIDDING

N. Provide balancing dampers on duct take-off to diffusers, grilles, and registers, regardless of whether dampers are specified as part of the diffuser, grille, or register assembly.

END OF SECTION

NOT FOR BIDDING

SECTION 23 37 00
AIR OUTLETS AND INLETS

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Diffusers.

B. Registers/grilles.

C. Door grilles.

D. Louvers.

E. Goosenecks.

1.02 RELATED REQUIREMENTS

A. Section 09 90 00 - Painting and Coating: Painting of ducts visible behind outlets and inlets.

1.03 REFERENCE STANDARDS

A. AMCA 500-L - Laboratory Methods of Testing Louvers for Rating; Air Movement and Control Association International, Inc..

B. ARI 890 - Standard for Air Diffusers and Air Diffuser Assemblies; Air-Conditioning and Refrigeration Institute.

C. ASHRAE Std 70 - Method of Testing the Performance of Air Outlets and Inlets; American Society of Heating, Refrigerating and Air Conditioning Engineers, Inc..

D. SMACNA (DCS) - HVAC Duct Construction Standards.

1.04 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements for submittal procedures.

B. Product Data: Provide data for equipment required for this project. Review outlets and inlets as to size, finish, and type of mounting prior to submission. Submit schedule of outlets and inlets showing type, size, location, application, and noise level.

C. Samples: Submit one of each required air outlet and inlet type.

D. Project Record Documents: Record actual locations of air outlets and inlets.

1.05 QUALITY ASSURANCE

A. Test and rate air outlet and inlet performance in accordance with ASHRAE Std 70.

B. Test and rate louver performance in accordance with AMCA 500-L.

1.06 QUALITY ASSURANCE

A. Manufacturer Qualifications: Company specializing in manufacturing the type of products specified in this section, with minimum five years of documented experience.

1.07 MOCK-UP

A. Provide mock-up of typical exterior or exterior ceiling module with supply and return air outlets.

B. Locate where directed.

C. Mock-up may remain as part of the Work.

PART 2 PRODUCTS

2.01 MANUFACTURERS

A. Carnes Company HVAC: www.carnes.com.

B. Krueger: www.krueger-hvac.com.

C. Price Industries: www.price-hvac.com.

NOT FOR BIDDING

D. Titus: www.titus-hvac.com.

E. Tuttle and Bailey: www.tuttleandbailey.com.

F. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 RECTANGULAR CEILING DIFFUSERS

A. Type: Square, stamped, multi-core diffuser to discharge air in 360 degree, one way, two way, three way or four way pattern as shown on drawings and with sectorizing baffles where indicated.

B. Frame: Surface mount or inverted T-bar as indicated on drawings. In plaster ceilings, provide plaster frame and ceiling frame.

C. Fabrication: Aluminum with baked enamel off-white finish.

D. Accessories: Radial opposed blade damper and multi-louvered equalizing grid with damper adjustable from diffuser face.

2.03 PERFORATED FACE CEILING DIFFUSERS

A. Type: Perforated face with fully adjustable pattern and removable face.

B. Frame: Surface mount or Inverted T-bar as indicated on drawings. In plaster ceilings, provide plaster frame and ceiling frame.

C. Fabrication: Steel with steel or aluminum frame and baked enamel off-white finish.

D. Accessories: Radial opposed blade damper and multi-louvered equalizing grid with damper adjustable from diffuser face.

2.04 CEILING SUPPLY REGISTERS/GRILLES

A. Type: Streamlined and individually adjustable curved blades to discharge air along face of grille, two-way deflection.

B. Frame: 1 inch margin with countersunk screw mounting and gasket.

C. Fabrication: Aluminum extrusions with factory off-white enamel or prime coat finish as indicated on drawings or selected by architect.

D. Damper: Integral, gang-operated, opposed blade type with removable key operator, operable from face.

2.05 CEILING EXHAUST AND RETURN REGISTERS/GRILLES

A. Type: Streamlined blades, 3/4 inch minimum depth, 3/4 inch maximum spacing, with blades set at 45 degrees, horizontal face.

B. Frame: 1 inch margin with countersunk screw mounting.

C. Fabrication: Aluminum extrusions, with factory off-white enamel, baked enamel, or prime coated finish as indicated on drawings or selected by architect.

D. Damper: Integral, gang-operated, opposed blade type with removable key operator, operable from face where not individually connected to exhaust fans.

E. Gymnasiums: Provide front pivoted or welded in place blades, securely fastened to be immobile.

2.06 CEILING GRID CORE EXHAUST AND RETURN REGISTERS/GRILLES

A. Type: Fixed grilles of 1/2 x 1/2 x 1/2 inch louvers.

B. Fabrication: Acrylic plastic with off-white finish.

C. Frame: Channel lay-in frame for suspended grid ceilings.

D. Damper: Integral, gang-operated, opposed blade type with removable key operator, operable from face.

NOT FOR BIDDING

2.07 WALL SUPPLY REGISTERS/GRILLES

A. Type: Streamlined and individually adjustable blades, 3/4 inch minimum depth, 3/4 inch maximum spacing with spring or other device to set blades, horizontal face, double deflection.

B. Frame: 1 inch margin with countersunk screw mounting and gasket.

C. Fabrication: Aluminum extrusions, with factory off-white enamel, baked enamel, prime coat or clear lacquer finish as indicated on drawings or selected by architect.

D. Damper: Integral, gang-operated opposed blade type with removable key operator, operable from face.

E. Gymnasiums: Provide front pivoted or welded in place blades, securely fastened to be immobile.

2.08 WALL EXHAUST AND RETURN REGISTERS/GRILLES

A. Type: Streamlined blades, 3/4 inch minimum depth, 3/4 inch maximum spacing, with spring or other device to set blades, horizontal face.

B. Frame: 1 inch margin with countersunk screw mounting.

C. Fabrication: Aluminum extrusions, with factory off-white enamel, baked enamel, prime coated or clear lacquer finish as indicated on drawings or selected by architect.

D. Damper: Integral, gang-operated, opposed blade type with removable key operator, operable from face.

E. Gymnasiums: Provide front pivoted or welded in place blades, securely fastened to be immobile.

2.09 WALL GRID CORE EXHAUST AND RETURN REGISTERS/GRILLES

A. Type: Fixed grilles of 1/2 x 1/2 x 1/2 inch louvers.

B. Fabrication: Aluminum with factory clear lacquer, off-white enamel or baked enamel finish as indicated on drawings or selected by architect.

C. Frame: 1 inch margin with countersunk screw mounting.

D. Damper: Integral, gang-operated, opposed blade type with removable key operator, operable from face.

2.10 DOOR GRILLES

A. Type: V-shaped louvers of 20 gage thick steel, 1 inch deep on 1/2 inch centers.

B. Frame: 20 gage steel with auxiliary frame to give finished appearance on both sides of door, with factory prime coat finish.

2.11 LOUVERS

A. Type: 4 inch or 6 inch deep as indicated on drawings with blades on 45 degree slope , heavy channel frame, 1/2 inch square mesh screen over exhaust and 1/2 inch square mesh screen over intake.

B. Fabrication: 12 gage thick extruded aluminum, welded assembly, with factory prime coat, baked enamel, anodized or fluoropolymer spray finish as indicated on drawings or selected by architect.

C. Mounting: Furnish with exterior angle flange, screw holes in jambs or masonry strap anchors for installation.

2.12 GOOSENECKS

A. Fabricate in accordance with SMACNA HVAC Duct Construction Standards of minimum 18 gage galvanized steel.

NOT FOR BIDDING

B. Mount on minimum 12 inch high curb base where size exceeds 9 x 9 inch.

PART 3 EXECUTION

3.01 INSTALLATION

A. Install in accordance with manufacturer's instructions.

B. Check location of outlets and inlets and make necessary adjustments in position to conform with architectural features, symmetry, and lighting arrangement.

C. Install diffusers to ductwork with air tight connection.

D. Provide balancing dampers on duct take-off to diffusers, and grilles and registers, despite whether dampers are specified as part of the diffuser, or grille and register assembly.

E. Paint ductwork visible behind air outlets and inlets matte black. Refer to Section 09 90 00.

3.02 AIR OUTLET AND INLET SCHEDULE

A. See Drawings

END OF SECTION

NOT FOR BIDDING

SECTION 23 81 01
TERMINAL HEAT TRANSFER UNITS

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Finned tube radiation.

B. Unit heaters.

C. Fan-coil units.

D. Chilled Beams.

1.02 RELATED REQUIREMENTS

A. Section 26 27 17 - Equipment Wiring: Electrical characteristics and wiring connections. Installation of room thermostats. Electrical supply to units.

1.03 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

B. Product Data: Provide typical catalog of information including arrangements.

C. Shop Drawings:
   1. Indicate cross sections of cabinets, grilles, bracing and reinforcing, and typical elevations.
   2. Submit schedules of equipment and enclosures typically indicating length and number of pieces of element and enclosure, corner pieces, end caps, cap strips, access doors, pilaster covers, and comparison of specified heat required to actual heat output provided.
   3. Indicate mechanical and electrical service locations and requirements.,

D. Manufacturer's Instructions: Indicate installation instructions and recommendations.

E. Project Record Documents: Record actual locations of components and locations of access doors in radiation cabinets required for access or valving.

F. Operation and Maintenance Data: Include manufacturers descriptive literature, operating instructions, installation instructions, maintenance and repair data, and parts listings.

G. Warranty: Submit manufacturer's warranty and ensure forms have been completed in Owner's name and registered with manufacturer.

1.04 QUALITY ASSURANCE

A. Manufacturer Qualifications: Company specializing in manufacturing the Products specified in this section with minimum 5 years documented experience.

B. Products Requiring Electrical Connection: Listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.

1.05 WARRANTY

A. Provide five year manufacturers warranty for all motors.

B. Provide one year parts and labor warranty for enitre unit, from substitute and completion.

1.06 EXTRA MATERIALS

A. See Section 01 60 00 - Product Requirements, for additional provisions.

B. Provide three (3) sets of filters, with a final change immediately prior to occupancy.

PART 2 PRODUCTS

2.01 FINNED TUBE RADIATION

A. Manufacturers:
   1. Slant/Fin Corporation: www.slantfin.com.

NOT FOR BIDDING

2. Trane Inc: www.trane.com.
3. Rittling (Hydro Air, Inc.): www.rittling.com
4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Heating Elements: 1-1/4 inch as scheduled ID seamless copper tubing, mechanically expanded into evenly spaced aluminum fins sized 41/4 x 41/4 inch, suitable for soldered fittings.

C. Element Hangers: Quiet operating, ball bearing cradle type providing unrestricted longitudinal movement, on enclosure brackets.

D. Enclosures: Slope-topped perforated 14 gauge steel up to 18 inches in height, 12 gauge steel over 18 inches in height unless otherwise noted, with vandal-resistant components for wall to wall installation.
1. Support rigidly, on wall or floor mounted brackets at least 3 feet on center maximum.

E. Finish: Factory applied baked enamel of color as selected.

2.02 UNIT HEATERS

A. Manufacturers:
1. Slant/Fin Corporation: www.slantfin.com.
2. Sterling Hydronics/Mestek Technology, Inc: www.sterlingheat.com.
3. Trane Inc: www.trane.com.
4. Rittling www.rittling.com .
5. Substitutions: See Section 01 60 00 - Product Requirements.

B. Coils: Seamless copper tubing, silver brazed to steel headers, and with evenly spaced aluminum fins mechanically bonded to tubing.

C. Casing: 0.0478 inch steel with threaded pipe connections for hanger rods.

D. Finish: Factory applied baked enamel of color as selected.

E. Fan: Direct drive propeller type, statically and dynamically balanced, with fan guard; horizontal models with permanently lubricated sleeve bearings; vertical models with grease lubricated ball bearings.

F. Air Outlet: Adjustable pattern diffuser on projection models and two or four way louvers as scheduled on horizontal throw models.

G. Motor: ECM Motor.

H. Control: Local multi-speed orvia BAS, disconnect switch.

I. Capacity: As scheduled.

2.03 FAN-COIL UNITS

A. Manufacturers:
1. Trane Inc: www.trane.com.
2. Enviro-tec.
3. Rittling (Hydro Air, Inc.): www.rittling.com

B. Coils: Evenly spaced aluminum fins mechanically bonded to copper tubes, designed for 200 psi and 220 degrees F. Provide drain pan under cooling coil, easily removable for cleaning, with drain connection.

C. Cabinet: 0.0598 inch steel with exposed corners and edges rounded, easily removed panels, glass fiber insulation and integral air outlet as scheduled.

D. Finish: Factory apply baked for exposed units enamel of color as selected on visible surfaces of enclosure or cabinet.

E. Fans: Centrifugal forward-curved double-width wheels, statically and dynamically balanced, direct driven.

NOT FOR BIDDING

F. Motor: ECM Motor.

G. Control: Multiple speed switch, factory wired, located in cabinet, prepped for control by BAS.

H. Filter: Easily removed throw-away type with minimum efficiency reporting value (MERV) of at least 8.

I. Drain Pan: The drain pan shall be made of white plastic that is sloped in both directions and is fully drainable. The coil shall mount above the drain pan, not in the drain pan thus allowing the drain pan to be fully inspected and cleaned. The drain pan shall also be removable for cleaning. The drain pan connection shall be ¾" schedule 40 PVC for solvent bonding.

J. Mixing Dampers: Where indicated, mixing sections with dampers. Refer to Section 23 09 93 for operating sequence.

K. Capacity: As Scheduled.

2.04 CHILLED BEAMS

A. Manufacturers:
   1. Price
   2. Trox
   3. Dadanco
   4. Trane
   5. Substitutions: See Section 01 60 00 - Product Requirements.

B. Shop Drawings: Indicate rated capacities, furnished specialties, sound ratings, and accessories.

C. Coordination Drawings: Provide reflected ceiling plans, to scale, on which the following are shown:
   1. Ceiling suspension assembly members
   2. Method of attacheing hangers to building structure.
   3. Size and location of access modules for acoustical tile.
   4. Alls ceiling mounted items (light fixtures, speakers, diffusers, grills, chilled beams, sprinkler heads, etc.)

D. Operation:
   1. Active Chilled Beams shal consist of an air inlet, pressurization cavity, induction nozzles, eclosed single water coil, 2-pipe or 4-pipe water connections as indicated on the drawings, induction face grill or perforated panel, and shall have 1,2,3, or 4 sided discharge as indicated on the drawings.

E. Active Chilled Beam capacities shall be tested in accordance with EN Standard 15116 to meet the performance listed in the schedule.

F. Casing: Air plenum shall be constructed of 24 gauge galvaneal steel, consisting of at least one air inlet. The frame shall be constructed of 0.070" aluminum extrusion.

G. Water Coil: Coild shall consist of copper tubing mechanically expanded into aluminum fins Coils shall be leak tested by manufacturer to 450 PSI and have a working pressure of 250 PSI and shall be AHRI 410 Certified. Connections shall be on one end only, and shall be provided with threaded connections. Fin spacing shall be no greater than 10 fins per inch to prevent dust bridging. The coil shall be removable from the room side of the unit without requiring the removal of the casing from the ceiling. The coil shall include a vent and drain to facilitate maintenance of the unit.

H. Fastening: Adjustable mounting brackets shall be factory installed along the length of the air plenum on the unit. Each beam shall be individually supported to the buidling structureby a minimum of 4 individually ajustable fixing points, or as recommended by the manufacturer.

NOT FOR BIDDING

Installation hardware shall be in compliance will all applicable local codes and be in accordance with the manufacturer's instructions.

I. Nozzles: Nozzles shall be of fixed size, selected based on cooling and heating requirements. Only formed metal nozzles are acceptable.

J. Finish: Internal casing componend and exterior shall be painted black, face and frame elements shall be painted in color as selected by the architect. Provide up to TWO (2) separate colors for this project. Beams will be identified by the archtiect for selected color. The paint shall be powder coat polyester with 500 hour salt spray rating and periodic cross hatch and bend adhesion tests.

K. Balancing: Integrated pressure port shall be included with k-factor to read the plenum pressure and corresponding supply air volume.

L. Water and air connections shall be shipped sealed to limit the introduction of dust / dirt during shipping and construction.

M. Accessories:
   1. 18" stainless steel braided hose with isolation ball valves (1 set per chilled beam).
   2. Integral manual inlet balancing damper with locking handle (1 per chilled beam).
   3. Dew Point (Moisture) sensor, Honeywell HSS-DPS or equal (1 per chilled beam zone, mounted on chilled beam closest to water source) to prevent condensation from occurring.

PART 3 EXECUTION

3.01 INSTALLATION

A. Install in accordance with manufacturer's instructions.

B. Install equipment exposed to finished areas after walls and ceiling are finished and painted. Do not damage equipment or finishes.

C. Protection: Provide finished cabinet units with protective covers during balance of construction.

D. Finned Tube Radiation: Locate on outside walls and run cover wall-to-wall unless otherwise indicated. Center elements under windows. Install 6' AFF in group toilet rooms. Install wall angles where units butt against walls.

E. Fan-Coil Units and Blower Coil Units: Install as indicated. Coordinate to assure correct recess size for recessed units.

F. Hydronic Units: Provide with shut-off valve on supply and lockshield balancing valve on return piping. If not easily accessible, extend vent to exterior surface of cabinet for easy servicing. For cabinet unit heaters, fan coil units, and unit heaters, provide float operated automatic air vents with stop valve.

G. Units with Cooling Coils: Connect drain pan and auxilliary drain pan to condensate drain.

H. Chilled Beams: Install active or passive beam level and plumb. Maintain sufficient clearance for normal services, maintenance, or in accordance with construction drawings.
   1. Manufacturer’s Field Service: Engage a factory-authorized service representative to inspect, test, and adjust field- assembled components and equipment installation, including connections, and to assist in field testing. Report any findings in writing.
   2. Manufacturer or factory-authorized representative shall visit the site regularly during the installation process to ensure proper means and methods are being employed. Bid shall include the cost of a minimum of two (2) such visits.
   3. Manufacturer or factory-authorized representative shall provide start-up and training services to Owners staff to adjust, operate, and maintain active or passive beam. Refer to Division 01 Section “Demonstration and Training”. A minimum of eight (8) hours of such services shall be included in bid.

NOT FOR BIDDING

3.02 CLEANING

A. After construction is completed, including painting, clean exposed surfaces of units. Vacuum clean coils and inside of cabinets.

B. Touch-up marred or scratched surfaces of factory-finished cabinets, using finish materials furnished by manufacturer.

C. Install new filters.

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 23 81 27
SMALL SPLIT-SYSTEM HEATING AND COOLING

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Air cooled condensing units.

B. Indoor ductless fan & coil units.

C. Controls.

1.02 RELATED REQUIREMENTS

A. Section 26 27 17 - Equipment Wiring: Electrical characteristics and wiring connections and installation and wiring of thermostats and other controls components.

1.03 REFERENCE STANDARDS

A. AHRI 270 - Sound Rating of Outdoor Unitary Equipment; Air-Conditioning, Heating, and Refrigeration Institute.

B. AHRI 520 - Performance Rating of Positive Displacement Condensing Units; Air-Conditioning, Heating, and Refrigeration Institute.

C. AHRI 610 - Performance Rating of Central System Humidifiers for Residential Applications; Air Conditioning, Heating, and Refrigeration Institute.

D. ASHRAE Std 15 - Safety Standard for Refrigeration Systems; American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc. (ANSI/ASHRAE Std 15).

E. ASHRAE Std 23.1 - Methods of Testing for Rating Positive Displacement Refrigerant Compressors and Condensing Units that Operate at Subcritical Temperatures of the Refrigerant; American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc..

F. ASHRAE Std 52.1 - Gravimetric and Dust-Spot Procedures for Testing Air-Cleaning Devices Used in General Ventilation for Removing Particulate Matter; American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc.

G. ASHRAE Std 90.1 - Energy Standard for Buildings Except Low-Rise Residential Buildings; American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc. (ANSI/ASHRAE/IES Std 90.1).

H. ASHRAE Std 90.2 - Energy-Efficient Design of New Low-Rise Residential Buildings; American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc..

I. ASHRAE Std 103 - Methods of Testing for Annual Fuel Utilization Efficiency of Residential Central Furnaces and Boilers; American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc..

J. NEMA MG 1 - Motors and Generators; National Electrical Manufacturers Association.

K. NFPA 31 - Standard for the Installation of Oil Burning Equipment; National Fire Protection Association.

L. NFPA 90A - Standard for the Installation of Air-Conditioning and Ventilating Systems; National Fire Protection Association.

M. NFPA 90B - Standard for the Installation of Warm Air Heating and Air Conditioning Systems; National Fire Protection Association.

N. NFPA 211 - Standard for Chimneys, Fireplaces, Vents, and Solid Fuel-Burning Appliances; National Fire Protection Association.

O. UL 207 - Refrigerant-Containing Components and Accessories, Nonelectrical; Underwriters Laboratories Inc..

NOT FOR BIDDING

1.04 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

B. Product Data: Provide rated capacities, weights, accessories, electrical nameplate data, and wiring diagrams.

C. Shop Drawings: Indicate assembly, required clearances, and location and size of field connections.

D. Design Data: Indicate refrigerant pipe sizing.

E. Manufacturer's Instructions: Indicate rigging, assembly, and installation instructions.

F. Project Record Documents: Record actual locations of components and connections.

G. Operation and Maintenance Data: Include manufacturer's descriptive literature, operating instructions, installation instructions, maintenance and repair data, and parts listing.

H. Warranty: Submit manufacturers warranty and ensure forms have been filled out in Owner s name and registered with manufacturer.

1.05 QUALITY ASSURANCE

A. Manufacturer Qualifications: Company specializing in manufacturing the type of products specified in this section, with minimum 10 years of documented experience.

B. Installer Qualifications: Company specializing in performing the work of this section with minimum 5 years of documented experience and approved by manufacturer.

1.06 WARRANTY

A. Provide five year manufacturers warranty for heat exchangers, condensing units, and compressors.

B. Provide five year manufacturers warranty for electronic air cleaners.

1.07 EXTRA MATERIALS

A. See Section 01 60 00 - Project Requirements, for additional provisions.

B. Provide two filters for each indoor unit.

C. Provide two pilot thermocouples.

PART 2 PRODUCTS

2.01 MANUFACTURERS

A. Sanyo:

B. Mitsubishi:

C. LG:

D. Daikin.

E. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 SYSTEM DESIGN

A. Split-System Heating and Cooling Units: Self-contained, packaged, matched factory-engineered and assembled, pre-wired indoor and outdoor units; UL listed.

1. Heating and Cooling: Air-source electric heat pump located in outdoor unit with evaporator .
2. Heating: Natural gas fired; As scheduled.
3. Cooling: Outdoor electric condensing unit with evaporator coil in central ducted indoor unit or coils in multiple .
4. Provide refrigerant lines internal to units and between indoor and outdoor units, factory cleaned, dried, pressurized and sealed, with insulated suction line.

NOT FOR BIDDING

B. Performance Requirements: See Drawings for additional requirements.
   1. Efficiency: Energy Efficiency Rating (EER)/Coefficient of Performance (COP) not less than requirements of ASHRAE Std 90.1; seasonal efficiency to ASHRAE Std 103.

2.03 INDOOR UNITS FOR DUCTED SYSTEMS

A. Indoor Units: Self-contained, packaged, factory assembled, pre-wired unit consisting of cabinet, supply fan, heating and cooling element(s), controls, and accessories; wired for single power connection with control transformer.
   1. Air Flow Configuration: Counterflow, with additional steel base; counterflow or horizontal as scheduled.
   2. Cabinet: Steel with baked enamel finish, easily removed and secured access doors with safety interlock switches, glass fiber insulation with reflective liner.

B. Supply Fan: Centrifugal type rubber mounted with direct or belt drive with adjustable variable pitch motor pulley.
   1. Motor: NEMA MG 1; 1750 rpm single speed or multiple speed as scheduled permanently lubricated, hinge mounted.
   2. Motor Electrical Characteristics:

C. Air Filters: 1 inch thick glass fiber, disposable type arranged for easy replacement.

D. Evaporator Coils: Copper tube aluminum fin assembly, galvanized or polymer drain pan sloped in all directions to drain, drain connection, refrigerant piping connections, restricted distributor or thermostatic expansion valve.
   1. Construction and Ratings: In accordance with AHRI 210/240 and UL 207.
   2. Manufacturers: System manufacturer.

2.04 INDOOR UNITS FOR DUCTLESS SYSTEMS

A. Indoor Units: Self-contained, packaged, factory assembled, pre-wired unit consisting of cabinet, supply fan, evaporator coil, and controls; wired for single power connection with control transformer.

B. Evaporator Coils: Copper tube aluminum fin assembly, galvanized or polymer drain pan sloped in all directions to drain, drain connection, refrigerant piping connections, restricted distributor or thermostatic expansion valve.
   1. Construction and Ratings: In accordance with AHRI 210/240 and UL 207.
   2. Manufacturer: System manufacturer.

2.05 OUTDOOR UNITS

A. Outdoor Units: Self-contained, packaged, pre-wired unit consisting of cabinet, with compressor and condenser.
   1. Cabinet: Steel with baked enamel finish, easily removed and secured access doors with safety interlock switches, glass fiber insulation with reflective liner.
   2. Construction and Ratings: In accordance with AHRI 210/240 with testing in accordance with ASHRAE Std 23.1 and UL 207.

B. Compressor: As scheduled ARI 520; hermetic, single or two speed 1800 and 3600 rpm, resiliently mounted integral with condenser, with positive lubrication, crankcase heater, high pressure control, motor overload protection, service valves and drier. Provide time delay control to prevent short cycling and rapid speed changes.

C. Air Cooled Condenser: ARI 520; Aluminum fin and copper tube coil, with direct drive axial propeller fan resiliently mounted, galvanized fan guard.

D. Accessories: Filter drier, high pressure switch (manual reset), low pressure switch (automatic reset), service valves and gage ports, thermometer well (in liquid line).
   1. Provide thermostatic expansion valves.
   2. Provide heat pump reversing valves.

NOT FOR BIDDING

E. Operating Controls:
   1. Control by room thermostat to maintain room temperature setting.
   2. Low Ambient Kit: Provide refrigerant pressure switch to cycle condenser fan on when condenser refrigerant pressure is above 285 psig and off when pressure drops below 140 psig for operation to 0 degrees F.

F. Mounting Pad: Minimum square; minimum of two located under cabinet feet.

2.06 ACCESSORY EQUIPMENT

A. Room Humidistat: Electric, adjustable, to energize humidifier when fan operating, to maintain setting.

B. Room Thermostat: Wall-mounted, electric solid state microcomputer based room thermostat with remote sensor to maintain temperature setting; low-voltage; with following features:
   1. System selector switch (heat-off-cool) and fan control switch (auto-on).
   2. Automatic switching from heating to cooling.
   3. Preferential rate control to minimize overshoot and deviation from setpoint.
   4. Set-up for four separate temperatures per day.
   5. Instant override of setpoint for continuous or timed period from one hour to 31 days.
   6. Short cycle protection.
   7. Programming based on every day of the week.
   8. Selection features including degree F or degree C display, 12 or 24 hour clock, keyboard disable, remote sensor, fan on-auto.
   9. Battery replacement without program loss.
   10. Thermostat display:
      a. Time of day.
      b. Actual room temperature.
      c. Programmed temperature.
      d. Programmed time.
      e. Duration of timed override.
      f. Day of week.
      g. System mode indication: heating, cooling, fan auto, off, and on, auto or on, off.
   11. Manufacturers:
      a. Matching unit manufacturer or provided by Building Automation System vendor..

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that substrates are ready for installation of units and openings are as indicated on shop drawings.

B. Verify that proper power supply is available and in correct location.

C. Verify that proper fuel supply is available for connection.

D. Verify that water supply is available for humidifier.

3.02 INSTALLATION

A. Install in accordance with manufacturer's instructions and requirements of local authorities having jurisdiction.

B. Install in accordance with NFPA 90A and NFPA 90B.

C. Provide vent connections in accordance with NFPA 211.

D. Install refrigeration systems in accordance with ASHRAE Std 15.

E. Mount counterflow furnaces installed on combustible floors on additive base.

END OF SECTION

NOT FOR BIDDING

SECTION 23 81 29

VARIABLE REFRIGERANT VOLUME (VRV, VRF) HVAC SYSTEM

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Variable refrigerant volume HVAC system includes:
   1. Outdoor/Condensing unit(s).
   2. Indoor/Evaporator units.
   3. Branch selector units.
   4. Refrigerant piping.
   5. Control panels.
   6. Control wiring.

1.02 RELATED REQUIREMENTS

A. Section 01 23 00 - Alternates: List of alternates relevant to this section.

B. Section 26 27 17 - Equipment Wiring: Power connections to equipment.
   1. Provide separate power connections for each unit of equipment.

1.03 REFERENCE STANDARDS

A. AHRI 210/240 - Standard for Performance Rating of Unitary Air-Conditioning and Air-Source Heat Pump Equipment; Air-Conditioning, Heating, and Refrigeration Institute.

B. ASHRAE (FUND) - ASHRAE Handbook - Fundamentals.

C. ASHRAE Std 90.1 - Energy Standard for Buildings Except Low-Rise Residential Buildings; American Society of Heating, Refrigerating, and Air-Conditioning Engineers, Inc (ANSI/ASHRAE/IES Std 90.1).

D. NFPA 70 - National Electrical Code; National Fire Protection Association.

E. UL 1995 - Heating and Cooling Equipment.

1.04 ADMINISTRATIVE REQUIREMENTS

A. Preinstallation Meeting: Conduct a preinstallation meeting one week prior to the start of the work of this section; require attendance by all affected installers.

1.05 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

B. Pre-Bid Submittals: For proposed substitute systems/products, as defined in PART 2, and alternate systems/products, as defined above, proposer shall submit all data described in this article, under the terms given for substitutions stated in PART 2.

C. Design Data:
   1. Provide design calculations showing that system will achieve performance specified.
   2. Provide design data required by ASHRAE 90.1.

D. Product Data: Submit manufacturer's standard data sheets showing the following for each item of equipment, marked to correlate to equipment item markings shown in the contract documents:
   1. Control Panels: Complete description of options, control points, zones/groups.

E. Specimen Warranty: Copy of manufacturer's warranties.

F. Shop Drawings: Installation drawings custom-made for this project; include as-designed HVAC layouts, locations of equipment items, refrigerant piping sizes and locations, condensate piping sizes and locations, remote sensing devices, control components, electrical connections, control wiring connections. Include:
   1. Detailed piping diagrams, with branch balancing devices.

NOT FOR BIDDING

2. Condensate piping routing, size, and pump connections.
3. Detailed power wiring diagrams.
4. Detailed control wiring diagrams.
5. Locations of required access through fixed construction.
6. Drawings required by manufacturer.

G. Operating and Maintenance Data:
1. Manufacturer's complete standard instructions for each unit of equipment and control panel.
2. Custom-prepared system operation, troubleshooting, and maintenance instructions and recommendations.
3. Identification of replaceable parts and local source of supply.

H. Project Record Documents: Record the following:
1. As-installed routing of refrigerant piping and condensate piping.
2. Locations of access panels.
3. Locations of control panels.

I. Warranty: Executed warranty, made out in Owner's name.

1.06 QUALITY ASSURANCE

A. Manufacturer Qualifications:
1. Company that has been manufacturing variable refrigerant volume heat pump equipment for at least 5 years.
2. Company that provides system design software to installers.

B. Installer Qualifications: Trained and approved by manufacturer of equipment.

1.07 DELIVERY, STORAGE AND HANDLING

A. Deliver, store, and handle equipment and refrigerant piping according to manufacturer's recommendations.

1.08 WARRANTY

A. Compressors: Provide manufacturer's warranty for six (6) years from date of installation. During the stated period, should any part fail due to defects in material and workmanship, it shall be repaired or replaced by the manufacturer. All warranty service work shall be preformed by a factory trained service professional.

PART 2 PRODUCTS

2.01 MANUFACTURERS

A. Basis of Design: The system design shown in the contract documents is based on equipment and system designed by LG Industries.

B. Additional acceptable manufacturers:
1. Daikin AC: www.daikinac.com
2. Mitsubishi: www.mitsubishi.com
3. Samsung: www.www.samsungaccentre.com
4. Trane Corporation: www.trane.com

C. For systems proposed by other manufacturers other than the basis of design, LG, <u>all</u> required modifications to the design and installation shall be the responsibility of the contractor and supplier for both costs and coordination with all other contractors and designers. These changes include, but are not limited to:
1. Changes in refrigerant piping sizes, legnhts, and locations.
2. Changes in branch selector quantities, locations, and accessibility.
3. Changes in electrical requirements, including all power wiring, terminations, breakers, disconnects, and control wiring.

NOT FOR BIDDING

a. UNDER NO CIRCUMSTANCES MAY BLOWER COIL OR FAN COIL TERMINAL UNITS BE GROUPED TOGETHER ON THE SAME ELECTRICAL CIRCUIT. All units must maintain a dedicated circuit to each.

4. Changes in heat-pump unit locations and quantities.
5. Changes in structural supports, vibration isolation, and hangers.
6. Changes to the drawings to reflect the new system parameters.

2.02 HVAC SYSTEM DESIGN

A. System Operation: Heating and cooling, simultaneously.
   1. Zoning: Provide capability for temperature control for each individual indoor/evaporator unit independently of all other units.
   2. Zoning: Provide heating/cooling selection for each individual indoor/evaporator unit independently of all other units.
   3. Provide a complete functional system that achieves the specified performance based on the specified design conditions and that is designed and constructed according to the equipment manufacturer's requirements.
   4. Conditioned spaces are shown on the drawings.
   5. Branch selector unit locations are shown on the drawings for reference only. Final design locations shall be corrdinated in the field to ensure optimized line lengths and maintanence access.
   6. Required equipment unit capacities are shown on the drawings.
   7. Refrigerant piping sizes shown on the drawings are for general reference only. Final line sizing shall be the responsibility of the successful contractor and manufacturer.
   8. Connect equipment to condensate piping; condensate piping is shown on the drawings.

B. Cooling Mode Interior Design Performance:
   1. Daytime Setpoint: 74 degrees F, plus or minus 2 degrees F.
   2. Setpoint Range: 57 degrees F to 80 degrees F.
   3. Night Setback: 78 degrees F.
   4. Interior Relative Humidity: 50 percent, maximum.

C. Heating Mode Interior Design Performance:
   1. Daytime Setpoint: 70 degrees F, plus or minus 2 degrees F.
   2. Setpoint Range: 59 degrees F to 76 degrees F.
   3. Night Setback: 60 degrees F.
   4. Interior Relative Humidity: 20 percent, minimum.

D. Outside Air Design Conditions:
   1. Summer Outside Air Design Temperature: 0.4 percent cooling design condition listed in ASHRAE Fundamentals Handbook.

E. Operating Temperature Ranges:
   1. Simultaneous Heating and Cooling Operating Range: minus 4 degrees F to 60 degrees F dry bulb.
   2. Cooling Mode Operating Range: minus 4 degrees F to 110 degrees F dry bulb.
   3. Heating Mode Operating Range: 0 degrees F to 77 degrees F dry bulb; minus 4 degrees F to 60 degrees F wet bulb; without low ambient controls or auxiliary heat source.

F. Refrigerant Piping Lengths: Provide equipment capable of serving system with following piping lengths without any oil traps:
   1. Minimum Piping Length from Outdoor/Central Unit(s) to Furthest Terminal Unit: 540 feet, actual; 620 feet, equivalent.
   2. Total Combined Liquid Line Length: 3280 feet, minimum.
   3. Minimum Piping Length Between Indoor Units: 49 feet.

G. Controls: Provide the following control interfaces:

NOT FOR BIDDING

1. For Each Indoor/Evaporator Unit: One wall-mounted wired "local" controller, with temperature sensor; locate where directed, in each space.
   a. Where two or more units are used to condition the same space, provide a splitter or twinning kit to allow for multiple unit control from a single controller.
2. One central remote control panel for entire system; locate where indicated.
3. BACNet gateways sufficient to connect all units to building automation system by others; include wiring to gateways. Unit shall be BTL certified.
4. Building automation system by HVAC system manufacturer ; provide one user stations located where indicated.

H. Local Controllers: Mount units above ceiling for use with remote, flat-plate temerpature sensors. Units shall be wired, and provide local setpoint adjustment (with central control override, maximum temperature adjustment), and temperature display for trouble-shooting.

I. Remote Temperature Sensors: Provide wall-mounted, flush-mount flat-plate style RTD temperatuer sensors located in the same room for all units. For rooms with multiple units, provide twinning kits for simlutaneous control.

2.03 EQUIPMENT

A. All Units: Factory assembled, wired, and piped and factory tested for function and safety.
   1. Refrigerant: R-410A.
   2. Performance Certification: AHRI Certified; www.ahrinet.org.
   3. Safety Certification: Tested to UL 1995 by UL or Intertek-ETL and bearing the certification label.
   4. Provide outdoor/condensing units capable of serving indoor unit capacity up to 200 percent of the capacity of the outdoor/condensing unit.
   5. Provide units capable of serving the zones indicated.
   6. Thermal Performance: Provide heating and cooling capacity as indicated, based on the following nominal operating conditions:
   7. Energy Efficiency: Report EER and COP based on tests conducted at “full load” in accordance with AHRI 210/240 or alternate test method approved by U.S. Department of Energy.

B. Electrical Characteristics:
   1. See drawings.

C. System Controls:
   1. Include self diagnostic, auto-check functions to detect malfunctions and display the type and location.

D. Unit Controls: As required to perform input functions necessary to operate system; provided by manufacturer of units.
   1. Provide interfaces to remote control and building automation systems in BACNET native format.

E. Wiring:
   1. Control Wiring: 18 AWG, 2-conductor, non-shielded, non-polarized, stranded cable.
   2. Control Wiring Configuration: Daisy chain.
   3. All control wiring for the VRF system in it's entirety is the responsbility of the installing contractor, including, but not limited to: Wiring between the condensing unit(s) and system controller, wiring between the branch selector boxes and system controller, wiring from the terminal units to the system controllers, wiring from the thermostats to the terminal units. The BAS contractor shall only be required to provide communications wiring to the BACnet interface from the nearest BAS controller.

F. Refrigerant Piping:

NOT FOR BIDDING

1. Refrigerant Flow Balancing: Provide refrigerant piping joints and headers specifically designed to ensure proper refrigerant balance and flow for optimum system capacity and performance.
2. Insulate each refrigerant line individually between the condensing and indoor units.

2.04 OUTDOOR/CONDENSING UNITS

A. Outdoor/Condensing Units: Air-cooled DX refrigeration units, designed specifically for use with indoor/evaporator units; factory assembled and wired with all necessary electronic and refrigerant controls; modular design for ganging multiple units.
   1. Refrigeration Circuit: Scroll compressors, motors, fans, condenser coil, electronic expansion valves, solenoid valves, 4-way valve, distribution headers, capillaries, filters, shut off valves, oil separators, service ports and refrigerant regulator.
   2. Refrigerant: Factory charged.
   3. Variable Volume Control: Modulate compressor capacity automatically to maintain constant suction and condensing pressures while varying refrigerant volume to suit heating/cooling loads.
   4. Capable of being installed with wiring and piping to the left, right, rear or bottom.
   5. Capable of heating operation at low end of operating range as specified, without additional low ambient controls or auxiliary heat source; during heating operation, reverse cycle (cooling mode) oil return or defrost is not permitted, due to potential reduction in space temperature.
   6. Sound Pressure Level: As specified, measured at 3 feet from front of unit; provide night setback sound control as a standard feature; three selectable sound level steps of 55 dB, 50 dB, and 45 dB, maximum.
   7. Power Failure Mode: Automatically restart operation after power failure without loss of programmed settings.
   8. Safety Devices: High pressure sensor and switch, low pressure sensor/switch, control circuit fuses, crankcase heaters, fusible plug, overload relay, inverter overload protector, thermal protectors for compressor and fan motors, over current protection for the inverter and anti-recycling timers.
   9. Provide refrigerant sub-cooling to ensure the liquid refrigerant does not flash when supplying to us indoor units.
   10. Oil Recovery Cycle: Automatic, occurring 2 hours after start of operation and then every 8 hours of operation; maintain continuous heating during oil return operation.
   11. Controls: Provide contacts for electrical demand shedding.

B. Unit Cabinet: Weatherproof and corrosion resistant; rust-proofed mild steel panels coated with baked enamel finish.
   1. Designed to allow side-by-side installation with minimum spacing.

C. Fans: One or more direct-drive propeller type, vertical discharge, with multiple speed operation via DC (digitally commutating) inverter.
   1. Provide minimum of 2 fans for each condensing unit.
   2. External Static Pressure: Factory set at 0.12 in WG, minimum.
   3. Indoor Mounted Air-Cooled Units: External static pressure field set at 0.32 in WG, minimum; provide for mounting of field-installed ducts.
   4. Fan Airflow: As indicated for specific equipment.
   5. Fan Motors: Factory installed; permanently lubricated bearings; inherent protection; fan guard; output as indicated for specific equipment.

D. Condenser Coils: Copper tubes expanded into aluminum fins to form mechanical bond; waffle louver fin and rifled bore tube design to ensure high efficiency performance.

E. Compressors: Scroll type, hermetically sealed, variable speed inverter-driven and fixed speed in combination to suit total capacity; minimum of one variable speed, inverter driven compressor

NOT FOR BIDDING

per condenser unit; minimum of two compressors per condenser unit; capable of controlling capacity within range of 6 percent to 100 percent of total capacity.

1. Multiple Condenser Modules: Balance total operation hours of compressors by means of duty cycling function, providing for sequential starting of each module at each start/stop cycle, completion of oil return, and completion of defrost, or every 8 hours. Provide twinning kits where required.
2. Failure Mode: In the event of compressor failure, operate remaining compressor(s) at proportionally reduced capacity; provide microprocessor and associated controls specifically designed to address this condition.
3. Provide each compressor with crankcase heater, high pressure safety switch, and internal thermal overload protector.
4. Provide oil separators and intelligent oil management system.
5. Provide spring mounted vibration isolators.

2.05 BRANCH SELECTOR UNITS

A. Branch Selector Units: Concealed boxes designed specifically for this type of system to control heating/cooling mode selection of downstream units; consisting of electronic expansion valves, subcooling heat exchanger, refrigerant control piping and electronics to facilitate communications between unit and main processor and between branch unit and indoor/evaporator units.

1. Provide one electronic expansion valve for each downstream unit served, except multiple indoor/evaporator units may be connected, provided balancing joints are used in downstream piping and total capacity is within capacity range of the branch selector.
2. When branch unit is simultaneously heating and cooling, energize subcooling heat exchanger.
3. Casing: Galvanized steel sheet; with flame and heat resistant foamed polyethylene sound and thermal insulation.
4. Refrigerant Connections: Braze type.
5. Condensate Drainage: Provide condensate drain tap where required.

2.06 INDOOR/EVAPORATOR UNITS

A. All Indoor/Evaporator Units: Factory assembled and tested DX fan-coil units, with electronic proportional expansion valve, control circuit board, factory wiring and piping, self-diagnostics, auto-restart function, 3-minute fused time delay, and test run switch.

1. Refrigerant: Refrigerant circuits factory-charged with dehydrated air, for field charging.
2. Temperature Control Mechanism: Return air thermistor and computerized Proportional-Integral-Derivative (PID) control of superheat.
3. Dehumidification Function: On command.
4. Coils: Direct expansion type constructed from copper tubes expanded into aluminum fins to form a mechanical bond; waffle louver fin and high heat exchange, rifled bore tube design; factory tested.
   a. Provide thermistor on liquid and gas lines.
5. Fans: Direct-drive, with statically and dynamically balanced impellers; high and low speeds unless otherwise indicated; motor thermally protected.
6. Return Air Filter: High efficiency, MERV 13
7. Condensate Drainage: Built-in condensate drain pan with PVC drain connection.
8. Cabinet Insulation: Sound absorbing foamed polystyrene and polyethylene insulation.

B. Recessed Ceiling Units: Four-way airflow cassette with central return air grille, for installation in a fixed ceiling.

1. Cabinet Height: Maximum of 10 inches above face of ceiling.
2. Exposed Housing: White, impact resistant, with washable decoration panel.
3. Supply Airflow Adjustment:

NOT FOR BIDDING

a. Via motorized louvers which can be horizontally and vertically adjusted from 0 to 90 degrees.
b. Field-modifiable to 3-way and 2-way airflow.
c. Three auto-swing positions, including standard, draft prevention and ceiling stain prevention.

4. Return Air Filter: High efficiency,MERV 13.
5. Minimum Capacity: As indicated on the drawings.
6. Sound Pressure Range: Between 28 dB(A) to 33 dB(A) at low speed measured at 5 feet below the unit.
7. Fan: Direct-drive turbo type, with motor output range of 0.06 to 0.12 HP.
8. Condensate Pump: Built-in, with lift of 21 inches, minimum.
9. Provide side-mounted fresh air intake duct connection.

C. Concealed-In-Ceiling Units: Ducted horizontal discharge and return; galvanized steel cabinet.
1. Return Air Filter: MERV 13.
2. Sound Pressure: Measured at low speed at 5 feet below unit.
3. Provide external static pressure switch adjustable for high efficiency filter operation
4. Condensate Pump: Built-in, with lift of 9 inches, minimum.
5. Switch box accessible from side or bottom.

D. Wall Surface-Mounted Units: Finished white casing, with removable front grille; foamed polystyrene and polyethylene sound insulation; wall mounting plate; polystyrene condensate drain pan.
1. Airflow Control: Auto-swing louver that closes automatically when unit stops; five (5) steps of discharge angle, set using remote controller; upon restart, discharge angle defaulting to same angle as previous operation.
2. Sound Pressure Range: Measured at low speed at 3.3 feet below and away from unit.
3. Condensate Drain Connection: Side (end), not concealed in wall.
4. Fan: Direct-drive cross-flow type.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that required electrical services have been installed and are in the proper locations prior to starting installation.

B. Verify that condensate piping has been installed and is in the proper location prior to starting installation.

C. Notify Architect if conditions for installation are unsatisfactory.

3.02 INSTALLATION

A. Install in accordance with manufacturer's instructions.

B. Install refrigerant piping in accordance with equipment manufacturer's instructions.

C. Perform wiring in accordance with NFPA 70, National Electric Code (NEC).

D. Coordinate with installers of systems and equipment connecting to this system.

3.03 FIELD QUALITY CONTROL

A. Provide manufacturer's field representative to inspect installation prior to startup.

3.04 SYSTEM STARTUP

A. Provide manufacturer's field representative to perform system startup.

B. Prepare and start equipment and system in accordance with manufacturer's instructions and recommendations.

C. Adjust equipment for proper operation within manufacturer's published tolerances.

NOT FOR BIDDING

3.05 CLEANING

A. Clean exposed components of dirt, finger marks, and other disfigurements.

3.06 CLOSEOUT ACTIVITIES

A. Demonstrate proper operation of equipment to Owner's designated representative.

B. Demonstration: Demonstrate operation of system to Owner's personnel.
   1. Use operation and maintenance data as reference during demonstration.
   2. Briefly describe function, operation, and maintenance of each component.

C. Training: Train Owner's personnel on operation and maintenance of system.
   1. Use operation and maintenance manual as training reference, supplemented with additional training materials as required.
   2. Provide minimum of two hours of training.
   3. Instructor: Manufacturer's training personnel.
   4. Location: At project site.

3.07 PROTECTION

A. Protect installed components from subsequent construction operations.

B. Replace exposed components broken or otherwise damaged beyond repair.

END OF SECTION

NOT FOR BIDDING

SECTION 26 05 01
MINOR ELECTRICAL DEMOLITION

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Electrical demolition.

PART 2 PRODUCTS

2.01 MATERIALS AND EQUIPMENT

A. Materials and equipment for patching and extending work: As specified in individual sections.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that abandoned wiring and equipment serve only abandoned facilities.

B. Demolition drawings are based on casual field observation and existing record documents.

C. Report discrepancies to Owner before disturbing existing installation.

D. Beginning of demolition means installer accepts existing conditions.

3.02 PREPARATION

A. Disconnect electrical systems in walls, floors, and ceilings to be removed.

B. Coordinate utility service outages with utility company.

C. Provide temporary wiring and connections to maintain existing systems in service during construction. When work must be performed on energized equipment or circuits, use personnel experienced in such operations.

D. Existing Electrical Service: Maintain existing system in service until new system is complete and ready for service. Disable system only to make switchovers and connections. Minimize outage duration.
   1. Obtain permission from Owner at least 24 hours before partially or completely disabling system.
   2. Make temporary connections to maintain service in areas adjacent to work area.

E. Existing Fire Alarm System: Maintain existing system in service until new system is accepted. Disable system only to make switchovers and connections. Minimize outage duration.
   1. Notify Owner before partially or completely disabling system.
   2. Notify local fire service.
   3. Make notifications at least 24 hours in advance.
   4. Make temporary connections to maintain service in areas adjacent to work area.

F. Existing Telephone System: Maintain existing system in service until new system is complete and ready for service. Disable system only to make switchovers and connections. Minimize outage duration.
   1. Notify Owner at least 24 hours before partially or completely disabling system.
   2. Notify telephone utility company at least 24 hours before partially or completely disabling system.
   3. Make temporary connections to maintain service in areas adjacent to work area.

3.03 DEMOLITION AND EXTENSION OF EXISTING ELECTRICAL WORK

A. Remove, relocate, and extend existing installations to accommodate new construction.

B. Remove abandoned wiring to source of supply.

C. Remove exposed abandoned conduit, including abandoned conduit above accessible ceiling finishes. Cut conduit flush with walls and floors, and patch surfaces.

NOT FOR BIDDING

D. Disconnect abandoned outlets and remove devices. Remove abandoned outlets if conduit servicing them is abandoned and removed. Provide blank cover for abandoned outlets that are not removed.

E. Repair adjacent construction and finishes damaged during demolition and extension work.

F. Maintain access to existing electrical installations that remain active. Modify installation or provide access panel as appropriate.

3.04 CLEANING AND REPAIR

A. Clean and repair existing materials and equipment that remain or that are to be reused.

B. Panelboards: Clean exposed surfaces and check tightness of electrical connections. Replace damaged circuit breakers and provide closure plates for vacant positions. Provide typed circuit directory showing revised circuiting arrangement.

C. Luminaires: Remove existing luminaires for cleaning. Use mild detergent to clean all exterior and interior surfaces; rinse with clean water and wipe dry. Replace lamps, ballasts and broken electrical parts.

END OF SECTION

NOT FOR BIDDING

SECTION 26 05 19
LV ELEC. POWER CONDUCTORS AND CABLES (600V&LESS)

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Single conductor building wire.

B. Underground feeder and branch-circuit cable.

C. Service entrance cable.

D. Metal-clad cable.

E. Wire and cable for 600 volts and less.

F. Wiring connectors.

G. Electrical tape.

H. Heat shrink tubing.

I. Wire pulling lubricant.

1.02 RELATED REQUIREMENTS

A. Section 26 05 01 - Minor Electrical Demolition: Disconnection, removal, and/or extension of existing electrical conductors and cables.

B. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.

1.03 REFERENCE STANDARDS

A. ASTM B3 - Standard Specification for Soft or Annealed Copper Wire.

B. ASTM B33 - Standard Specification for Tin-Coated Soft or Annealed Copper Wire for Electrical Purposes.

C. ASTM B787/B787M - Standard Specification for 19 Wire Combination Unilay-Stranded Copper Conductors for Subsequent Insulation.

D. ASTM D3005 - Standard Specification for Low-Temperature Resistant Vinyl Chloride Plastic Pressure-Sensitive Electrical Insulating Tape.

E. ASTM D4388 - Standard Specification for Nonmetallic Semi-Conducting and Electrically Insulating Rubber Tapes.

F. NECA 1 - Standard for Good Workmanship in Electrical Construction; National Electrical Contractors Association.

G. NECA 120 - Standard for Installing Armored Cable (AC) and Metal-Clad Cable (MC); National Electrical Contractors Association (NECA/NACMA 102).

H. NECA 121 - Standard for Installing Nonmetallic-Sheathed Cable (Type NM-B) and Underground Feeder and Branch-Circuit Cable (Type UF); National Electrical Contractors Association.

I. NEMA WC 70 - Power Cables Rated 2000 Volts or Less for the Distribution of Electrical Energy; National Electrical Manufacturers Association (ANSI/NEMA WC 70/ICEA S-95-658).

J. NETA ATS - Acceptance Testing Specifications for Electrical Power Equipment and Systems; International Electrical Testing Association (ANSI/NETA ATS).

K. NFPA 70 - National Electrical Code; National Fire Protection Association.

L. UL 44 - Thermoset-Insulated Wires and Cables.

M. UL 83 - Thermoplastic-Insulated Wires and Cables.

N. UL 486A-486B - Wire Connectors.

NOT FOR BIDDING

O. UL 486C - Splicing Wire Connectors.

P. UL 486D - Sealed Wire Connector Systems.

Q. UL 493 - Thermoplastic-Insulated Underground Feeder and Branch-Circuit Cables.

R. UL 510 - Polyvinyl Chloride, Polyethylene, and Rubber Insulating Tape.

S. UL 1569 - Metal-Clad Cables.

1.04 ADMINISTRATIVE REQUIREMENTS

A. Coordination:
   1. Coordinate sizes of raceways, boxes, and equipment enclosures installed under other sections with the actual conductors to be installed, including adjustments for conductor sizes increased for voltage drop.
   2. Coordinate the installation of direct burial cable with other trades to avoid conflicts with piping or other potential conflicts.
   3. Coordinate with electrical equipment installed under other sections to provide terminations suitable for use with the conductors to be installed.
   4. Notify Architect and Engineer of any conflicts with or deviations from the contract documents. Obtain direction before proceeding with work.

1.05 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

B. Product Data: Provide manufacturer's standard catalog pages and data sheets for conductors and cables, including detailed information on materials, construction, ratings, listings, and available sizes, configurations, and stranding.

C. Product Data: Provide for each cable assembly type.

D. Samples of Actual Product Delivered: Submit one 18 inch length of cable assembly from each reel.
   1. Select each length to include complete set of manufacturer markings.
   2. Attach tag indicating cable size and application information.

E. Test Reports: Indicate procedures and values obtained.

F. Design Data: Indicate voltage drop and ampacity calculations for aluminum conductors substituted for copper conductors. Include proposed modifications to raceways, boxes, wiring gutters, enclosures, etc. to accommodate substituted conductors.

G. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.

H. Project Record Documents: Record actual installed circuiting arrangements. Record actual routing for underground circuits.

I. Project Record Documents: Record actual locations of components and circuits.

1.06 QUALITY ASSURANCE

A. Conform to requirements of NFPA 70.

B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.

C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.

D. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

NOT FOR BIDDING

1.07 DELIVERY, STORAGE, AND HANDLING

A. Receive, inspect, handle, and store conductors and cables in accordance with manufacturer's instructions.

1.08 FIELD CONDITIONS

A. Do not install or otherwise handle thermoplastic-insulated conductors at temperatures lower than 14 degrees F, unless otherwise permitted by manufacturer's instructions. When installation below this temperature is unavoidable, notify Architect and obtain direction before proceeding with work.

PART 2 PRODUCTS

2.01 CONDUCTOR AND CABLE APPLICATIONS

A. Do not use conductors and cables for applications other than as permitted by NFPA 70 and product listing.

B. Provide single conductor building wire installed in suitable raceway unless otherwise indicated, permitted, or required.

C. Metal-clad cable is permitted only as follows:
   1. Where not otherwise restricted, may be used:
      a. Where concealed above accessible ceilings for final connections from junction boxes to luminaires.
         1) Maximum Length: 6 feet.
      b. Where concealed in hollow stud walls, above accessible ceilings, and under raised floors for branch circuits up to 20 A.
   2. In addition to other applicable restrictions, may not be used:
      a. Unless approved by Owner.
      b. Where not approved for use by the authority having jurisdiction.
      c. Where exposed to view.
      d. Where exposed to damage.
      e. For damp, wet, or corrosive locations, .
      f. For isolated ground circuits, unless provided with an additional isolated/insulated grounding conductor.

D. Concealed Dry Interior Locations: Use only building wire in raceway or metal clad cable type THHN/THHW.

E. Exposed Dry Interior Locations: Use only building wire in raceway type THHN/THHW.

F. Above Accessible Ceilings: Use only building wire in raceway or metal clad cable type THHN.

G. Wet or Damp Interior Locations: Use only building wire in raceway type THW.

H. Exterior Locations: Use only building wire in raceway type THHW.

I. Use solid conductor for feeders and branch circuits 10 AWG and smaller.

J. Use solid conductors for control circuits.

K. Use conductor not smaller than 12 AWG for power and lighting circuits.

L. Use conductor not smaller than 16 AWG for control circuits.

M. Use 10 AWG conductors for 20 ampere, 120 volt branch circuits longer than 75 feet.

N. Use 10 AWG conductors for 20 ampere, 277 volt branch circuits longer than 200 feet.

2.02 CONDUCTOR AND CABLE MANUFACTURERS

A. Cerro Wire LLC: www.cerrowire.com.

B. Southwire Company: www.southwire.com.

NOT FOR BIDDING

C. Houston Wire and Cable co.

D. Substitutions: See Section 01 60 00 - Product Requirements.

2.03 CONDUCTOR AND CABLE GENERAL REQUIREMENTS

A. Provide products that comply with requirements of NFPA 70.

B. Provide products listed and classified by Underwriters Laboratories Inc. as suitable for the purpose indicated.

C. Provide new conductors and cables manufactured not more than one year prior to installation.

D. Unless specifically indicated to be excluded, provide all required conduit, boxes, wiring, connectors, etc. as required for a complete operating system.

E. Comply with NEMA WC 70.

F. Thermoplastic-Insulated Conductors and Cables: Listed and labeled as complying with UL 83.

G. Thermoset-Insulated Conductors and Cables: Listed and labeled as complying with UL 44.

H. Conductors for Grounding and Bonding: Also comply with Section 26 05 26.

I. Conductor Material:
   1. Provide copper conductors only. Aluminum conductors are not acceptable for this project. Conductor sizes indicated are based on copper.
   2. Copper Conductors: Soft drawn annealed, 98 percent conductivity, uncoated copper conductors complying with ASTM B3, ASTM B8, or ASTM B787/B 787M unless otherwise indicated.
   3. Tinned Copper Conductors: Comply with ASTM B33.

J. Minimum Conductor Size:
   1. Branch Circuits: 12 AWG.
      a. Exceptions:
         1) 20 A, 120 V circuits longer than 75 feet: 10 AWG, for voltage drop.
         2) 20 A, 120 V circuits longer than 150 feet: 8 AWG, for voltage drop.
         3) 20 A, 277 V circuits longer than 150 feet: 10 AWG, for voltage drop.
   2. Control Circuits: 14 AWG.

K. Where conductor size is not indicated, size to comply with NFPA 70 but not less than applicable minimum size requirements specified.

L. Conductor Color Coding:
   1. Color code conductors as indicated unless otherwise required by the authority having jurisdiction. Maintain consistent color coding throughout project.
   2. Color Coding Method: Integrally colored insulation.
   3. Color Code:
      a. 208Y/120 V, 3 Phase, 4 Wire System:
         1) Phase A: Black.
         2) Phase B: Red.
         3) Phase C: Blue.
         4) Neutral/Grounded: White.
      b. Equipment Ground, All Systems: Green.
      c. Isolated Ground, All Systems: Green with yellow stripe.
      d. For control circuits, comply with manufacturer's recommended color code.

2.04 SINGLE CONDUCTOR BUILDING WIRE

A. Manufacturers:
   1. Copper Building Wire:
      a. Cerro Wire LLC: www.cerrowire.com.

NOT FOR BIDDING

b. Encore Wire Corporation: www.encorewire.com.
c. Southwire Company: www.southwire.com.
d. Substitutions: See Section 01 60 00 - Product Requirements.

B. Description: Single conductor insulated wire.

C. Conductor Stranding:
1. Feeders and Branch Circuits:
a. Size 10 AWG and Smaller: Solid.
b. Size 8 AWG and Larger: Stranded.
2. Control Circuits: Stranded.

D. Insulation Voltage Rating: 600 V.

E. Insulation:
1. Copper Building Wire: Type THHN/THWN or THHN/THWN-2, except as indicated below.

F. Conductor: Copper.
1. For Sizes Smaller Than 4 AWG: Copper.
2. For Sizes 4 AWG and Larger: Copper.

G. Insulation Voltage Rating: 600 volts.

H. Insulation: NFPA 70, Type THHW/THWN/THHN/THW.

I. Insulation: Thermoplastic material rated 75/90 degrees C.

2.05 UNDERGROUND FEEDER AND BRANCH-CIRCUIT CABLE

A. Manufacturers:
1. Cerro Wire LLC: www.cerrowire.com.
2. Encore Wire Corporation: www.encorewire.com.
3. Southwire Company: www.southwire.com.
4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Description: NFPA 70, Type UF multiple-conductor cable listed and labeled as complying with UL 493, Type UF-B.

C. Provide equipment grounding conductor unless otherwise indicated.

D. Conductor Stranding:
1. Size 10 AWG and Smaller: Solid.
2. Size 8 AWG and Larger: Stranded.

E. Insulation Voltage Rating: 600 V.

F. Cable Jacket: Listed and labeled as sunlight resistant.

2.06 METAL-CLAD CABLE

A. Manufacturers:
1. AFC Cable Systems Inc: www.afcweb.com.
2. Encore Wire Corporation: www.encorewire.com.
3. Southwire Company: www.southwire.com.
4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Description: NFPA 70, Type MC cable listed and labeled as complying with UL 1569, and listed for use in classified firestop systems to be used.

C. Conductor Stranding:
1. Size 10 AWG and Smaller: Solid.
2. Size 8 AWG and Larger: Stranded.

D. Insulation Voltage Rating: 600 V.

E. Insulation: Type THHN, THHN/THWN, or THHN/THWN-2.

NOT FOR BIDDING

F. Provide dedicated neutral conductor for each phase conductor where indicated or required.

G. Grounding: Full-size integral equipment grounding conductor.
   1. Provide additional isolated/insulated grounding conductor where indicated or required.

H. Armor: Steel, interlocked tape.

I. Insulation Temperature Rating: 75/90 degrees C.

2.07 METAL CLAD CABLE

A. Description: NFPA 70, Type MC.

B. Conductor: Copper.
   1. For Sizes Smaller Than 4 AWG: Copper.
   2. For Sizes 4 AWG and Larger: Copper.

C. Insulation Voltage Rating: 600 volts.

D. Insulation Temperature Rating: 90 degrees C.

E. Insulation Material: Thermoplastic.

F. Armor Material: Steel.

G. Armor Design: Interlocked metal tape.

H. Jacket: PVC.

2.08 WIRING CONNECTORS

A. Description: Wiring connectors appropriate for the application, suitable for use with the conductors to be connected, and listed as complying with UL 486A-486B or UL 486C as applicable.

B. Wiring Connectors for Splices and Taps:
   1. Copper Conductors Size 8 AWG and Smaller: Use twist-on insulated spring connectors.
   2. Copper Conductors Size 6 AWG and Larger: Use mechanical connectors or compression connectors.

C. Wiring Connectors for Terminations:
   1. Provide terminal lugs for connecting conductors to equipment furnished with terminations designed for terminal lugs.
   2. Copper Conductors Size 8 AWG and Larger: Use mechanical connectors or compression connectors where connectors are required.
   3. Stranded Conductors Size 10 AWG and Smaller: Use crimped terminals for connections to terminal screws.
   4. Conductors for Control Circuits: Use crimped terminals for all connections.

D. Twist-on Insulated Spring Connectors: Rated 600 V, 221 degrees F for standard applications and 302 degrees F for high temperature applications; pre-filled with sealant and listed as complying with UL 486D for damp and wet locations.
   1. Manufacturers:
      a. 3M: www.3m.com.
      b. Ideal Industries, Inc: www.idealindustries.com.
      c. NSI Industries LLC: www.nsiindustries.com.
      d. Substitutions: See Section 01 60 00 - Product Requirements.

E. Mechanical Connectors: Provide bolted type or set-screw type.
   1. Manufacturers:
      a. Burndy: www.burndy.com.
      b. Ilsco: www.ilsco.com.
      c. Thomas & Betts Corporation: www.tnb.com.
      d. Substitutions: See Section 01 60 00 - Product Requirements.

NOT FOR BIDDING

F. Compression Connectors: Provide circumferential type or hex type crimp configuration.
   1. Manufacturers:
      a. Burndy: www.burndy.com.
      b. Ilsco: www.ilsco.com.
      c. Thomas & Betts Corporation: www.tnb.com.
      d. Substitutions: See Section 01 60 00 - Product Requirements.

G. Crimped Terminals: Nylon-insulated, with insulation grip and terminal configuration suitable for connection to be made.
   1. Manufacturers:
      a. Burndy: www.burndy.com.
      b. Ilsco: www.ilsco.com.
      c. Thomas & Betts Corporation: www.tnb.com.

2.09 WIRING ACCESSORIES

A. Electrical Tape:
   1. Manufacturers:
      a. 3M: www.3m.com.
      b. Plymouth Rubber Europa: www.plymouthrubber.com.
      c. Substitutions: See Section 01 60 00 - Product Requirements.
   2. Vinyl Color Coding Electrical Tape: Integrally colored to match color code indicated; listed as complying with UL 510; minimum thickness of 7 mil; resistant to abrasion, corrosion, and sunlight; suitable for continuous temperature environment up to 221 degrees F.
   3. Vinyl Insulating Electrical Tape: Complying with ASTM D3005 and listed as complying with UL 510; minimum thickness of 8.5 mil; resistant to abrasion, corrosion, and sunlight; conformable for application down to 0 degrees F and suitable for continuous temperature environment up to 221 degrees F.
      a. Product: 3M- Scoth Vinyl Electrcial Tape Super 88.
      b. Substitutions: See Section 01 60 00 - Product Requirements.
   4. Rubber Splicing Electrical Tape: Ethylene Propylene Rubber (EPR) tape, complying with ASTM D4388; minimum thickness of 30 mil; suitable for continuous temperature environment up to 194 degrees F and short-term 266 degrees F overload service.
   5. Electrical Filler Tape: Rubber-based insulating moldable putty, minimum thickness of 125 mil; suitable for continuous temperature environment up to 176 degrees F.
   6. Moisture Sealing Electrical Tape: Insulating mastic compound laminated to flexible, all-weather vinyl backing; minimum thickness of 90 mil.

B. Heat Shrink Tubing: Heavy-wall, split-resistant, with factory-applied adhesive; rated 600 V; suitable for direct burial applications; listed as complying with UL 486D.

C. Wire Pulling Lubricant: Listed; suitable for use with the conductors or cables to be installed and suitable for use at the installation temperature.
   1. Manufacturers:
      a. 3M: www.3m.com.
      b. American Polywater Corporation: www.polywater.com.
      c. Ideal Industries, Inc: www.idealindustries.com.
      d. Substitutions: See Section 01 60 00 - Product Requirements.

D. Split Bolt Connectors: Description: Connector suitable for copper to copper connection tested and listed to UL 486A requirements. Black burn type-H or equal.
   1. Product: Thomas R Betts or equal
   2. Substitutions: See Section 01 60 00 - Product Requirements.
   3. Product: Thomas R Betts or equal

NOT FOR BIDDING

E. Spring Wire Connectors: Description: Flame retardant thermoplastic shell with plated steel square wire spring gated for 105 degrees C, 600 volts, Thomas and Betts fixed spring wire connectors or equal.
   1. Product: Ideal or equal

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that interior of building has been protected from weather.

B. Verify that work likely to damage wire and cable has been completed.

C. Verify that raceways, boxes, and equipment enclosures are installed and are properly sized to accommodate conductors and cables in accordance with NFPA 70.

D. Verify that raceway installation is complete and supported.

E. Verify that field measurements are as shown on the drawings.

F. Verify that conditions are satisfactory for installation prior to starting work.

3.02 PREPARATION

A. Clean raceways thoroughly to remove foreign materials before installing conductors and cables.

3.03 INSTALLATION

A. Circuiting Requirements:
   1. Unless dimensioned, circuit routing indicated is diagrammatic.
   2. When circuit destination is indicated and routing is not shown, determine exact routing required.
   3. Arrange circuiting to minimize splices.

B. Install products in accordance with manufacturer's instructions.

C. Install conductors and cable in a neat and workmanlike manner in accordance with NECA 1.

D. Install underground feeder and branch-circuit cable (Type UF-B) in accordance with NECA 121.

E. Install metal-clad cable (Type MC) in accordance with NECA 120.

F. Installation in Raceway:
   1. Tape ends of conductors and cables to prevent infiltration of moisture and other contaminants.
   2. Pull all conductors and cables together into raceway at same time.
   3. Do not damage conductors and cables or exceed manufacturer's recommended maximum pulling tension and sidewall pressure.
   4. Use suitable wire pulling lubricant where necessary, except when lubricant is not recommended by the manufacturer.

G. Paralleled Conductors: Install conductors of the same length and terminate in the same manner.

H. Secure and support conductors and cables in accordance with NFPA 70 using suitable supports and methods approved by the authority having jurisdiction. Provide independent support from building structure. Do not provide support from raceways, piping, ductwork, or other systems.
   1. Installation Above Suspended Ceilings: Do not provide support from ceiling support system. Do not provide support from ceiling grid or allow conductors and cables to lay on ceiling tiles.

I. Terminate cables using suitable fittings.
   1. Metal-Clad Cable (Type MC):
      a. Use listed fittings.

NOT FOR BIDDING

b. Cut cable armor only using specialized tools to prevent damaging conductors or insulation. Do not use hacksaw or wire cutters to cut armor.

J. Install conductors with a minimum of 12 inches of slack at each outlet.

K. Neatly train and bundle conductors inside boxes, wireways, panelboards and other equipment enclosures.

L. Make wiring connections using specified wiring connectors.
1. Make splices and taps only in accessible boxes. Do not pull splices into raceways or make splices in conduit bodies or wiring gutters.
2. Remove appropriate amount of conductor insulation for making connections without cutting, nicking or damaging conductors.
3. Do not remove conductor strands to facilitate insertion into connector.
4. Clean contact surfaces on conductors and connectors to suitable remove corrosion, oxides, and other contaminates. Do not use wire brush on plated connector surfaces.
5. Mechanical Connectors: Secure connections according to manufacturer's recommended torque settings.
6. Compression Connectors: Secure connections using manufacturer's recommended tools and dies.

M. Insulate splices and taps that are made with uninsulated connectors using methods suitable for the application, with insulation and mechanical strength at least equivalent to unspliced conductors.
1. Dry Locations: Use insulating covers specifically designed for the connectors, electrical tape, or heat shrink tubing.
   a. For taped connections, first apply adequate amount of rubber splicing electrical tape or electrical filler tape, followed by outer covering of vinyl insulating electrical tape.
2. Damp Locations: Use insulating covers specifically designed for the connectors, electrical tape, or heat shrink tubing.
   a. For connections with insulating covers, apply outer covering of moisture sealing electrical tape.
   b. For taped connections, follow same procedure as for dry locations but apply outer covering of moisture sealing electrical tape.
3. Wet Locations: Use heat shrink tubing.

N. Insulate ends of spare conductors using vinyl insulating electrical tape.

O. Install firestopping to preserve fire resistance rating of partitions and other elements.

P. Unless specifically indicated to be excluded, provide final connections to all equipment and devices, including those furnished by others, as required for a complete operating system.

Q. Install wire and cable securely, in a neat and workmanlike manner, as specified in NECA 1.

R. Route wire and cable as required to meet project conditions.
1. Wire and cable routing indicated is approximate unless dimensioned.
2. Where wire and cable destination is indicated and routing is not shown, determine exact routing and lengths required.
3. Include wire and cable of lengths required to install connected devices within 10 ft of location shown.

S. Use wiring methods indicated.

T. Pull all conductors into raceway at same time.

U. Use suitable wire pulling lubricant for building wire 4 AWG and larger.

V. Protect exposed cable from damage.

W. Support cables above accessible ceiling, using spring metal clips or metal cable ties to support cables from structure or ceiling suspension system. Do not rest cable on ceiling panels.

NOT FOR BIDDING

X. Use suitable cable fittings and connectors.

Y. Neatly train and lace wiring inside boxes, equipment, and panelboards.

Z. Clean conductor surfaces before installing lugs and connectors.

AA. Make splices, taps, and terminations to carry full ampacity of conductors with no perceptible temperature rise.

AB. Use suitable reducing connectors or mechanical connector adaptors for connecting aluminum conductors to copper conductors.

AC. Use split bolt connectors for copper conductor splices and taps, 6 AWG and larger. Tape uninsulated conductors and connector with electrical tape to 150 percent of insulation rating of conductor.

AD. Use solderless pressure connectors with insulating covers for copper conductor splices and taps, 8 AWG and smaller.

AE. Use insulated spring wire connectors with plastic caps for copper conductor splices and taps, 10 AWG and smaller.

AF. Trench and backfill for direct burial cable installation as specified in Sections 31 23 16 and 31 23 23; Section 31 2316 13. Install warning tape along entire length of direct burial cable, within 3 inches of grade.

AG. Identify and color code wire and cable under provisions of Section 26 05 53. Identify each conductor with its circuit number or other designation indicated.

3.04 FIELD QUALITY CONTROL

A. Perform inspection, testing, and adjusting.

B. Perform field inpsecting and testing.

C. Inspect and test in accordance with NETA STD ATS, except Section 4.

D. Perform inspections and tests listed in NETA STD ATS, Section 7.3.2. The insulation resistance test is required for all conductors. The resistance test for parallel conductors listed as optional is not required.

1. Disconnect surge protective devices (SPDs) prior to performing any high potential testing. Replace SPDs damaged by performing high potential testing with SPDs connected.

E. Correct deficiencies and replace damaged or defective conductors and cables.

F. Perform inspections and tests listed in NETA STD ATS, Section 7.3.2.

END OF SECTION

NOT FOR BIDDING

SECTION 26 05 26
GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Grounding and bonding requirements.

B. Conductors for grounding and bonding.

C. Connectors for grounding and bonding.

D. Ground bars.

E. Ground rod electrodes.

1.02 RELATED REQUIREMENTS

A. Section 26 05 19 - LV Elec. Power Conductors and Cables (600V&Less): Additional requirements for conductors for grounding and bonding, including conductor color coding.

B. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.

1.03 REFERENCE STANDARDS

A. NECA 1 - Standard for Good Workmanship in Electrical Construction; National Electrical Contractors Association.

B. NEMA GR 1 - Grounding Rod Electrodes and Grounding Rod Electrode Couplings; National Electrical Manufacturers Association.

C. NETA ATS - Acceptance Testing Specifications for Electrical Power Equipment and Systems; International Electrical Testing Association (ANSI/NETA ATS).

D. NFPA 70 - National Electrical Code; National Fire Protection Association.

E. UL 467 - Grounding and Bonding Equipment.

1.04 ADMINISTRATIVE REQUIREMENTS

A. Coordination:
1. Verify exact locations of underground metal water service pipe entrances to building.
2. Coordinate the work with other trades to provide steel reinforcement complying with specified requirements for concrete-encased electrode.
3. Notify Architect of any conflicts with or deviations from the contract documents. Obtain direction before proceeding with work.

B. Sequencing:
1. Do not install ground rod electrodes until final backfill and compaction is complete.

1.05 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements for submittals procedures.

B. Product Data: Provide manufacturer's standard catalog pages and data sheets for grounding and bonding system components.

C. Shop Drawings:
1. Indicate proposed arrangement for signal reference grids. Include locations of items to be bonded and methods of connection.

D. Manufacturer's Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.

E. Field quality control test reports.

NOT FOR BIDDING

F. Project Record Documents: Record actual locations of grounding electrode system components and connections.

1.06 QUALITY ASSURANCE

A. Conform to requirements of NFPA 70.

B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.

C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.

D. Installer Qualifications for Signal Reference Grids: Company with minimum five years documented experience with high frequency grounding systems.

E. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

1.07 DELIVERY, STORAGE, AND HANDLING

A. Receive, inspect, handle, and store products in accordance with manufacturer's instructions.

PART 2 PRODUCTS

2.01 GROUNDING AND BONDING REQUIREMENTS

A. Existing Work: Where existing grounding and bonding system components are indicated to be reused, they may be reused only where they are free from corrosion, integrity and continuity are verified, and where acceptable to the authority having jurisdiction.

B. Do not use products for applications other than as permitted by NFPA 70 and product listing.

C. Unless specifically indicated to be excluded, provide all required components, conductors, connectors, conduit, boxes, fittings, supports, accessories, etc. as necessary for a complete grounding and bonding system.

D. Where conductor size is not indicated, size to comply with NFPA 70 but not less than applicable minimum size requirements specified.

E. Grounding System Resistance:
1. Achieve specified grounding system resistance under normally dry conditions unless otherwise approved by Architect. Precipitation within the previous 48 hours does not constitute normally dry conditions.

F. Grounding Electrode System:
1. Provide connection to required and supplemental grounding electrodes indicated to form grounding electrode system.
   a. Provide continuous grounding electrode conductors without splice or joint.
   b. Install grounding electrode conductors in raceway where exposed to physical damage. Bond grounding electrode conductor to metallic raceways at each end with bonding jumper.
2. Ground Ring:
   a. Provide a ground ring encircling the building or structure consisting of bare copper conductor not less than 2 AWG in direct contact with earth, installed at a depth of not less than 30 inches.
3. Provide additional ground electrode(s) as required to achieve specified grounding electrode system resistance.
4. Ground Bar: Provide ground bar, separate from service equipment enclosure, for common connection point of grounding electrode system bonding jumpers as permitted in NFPA 70. Connect grounding electrode conductor provided for service-supplied system grounding to this ground bar.

NOT FOR BIDDING

a. Ground Bar Size: 1/4 by 2 by 12 inches unless otherwise indicated or required.
b. Ground Bar Mounting Height: 18 inches above finished floor unless otherwise indicated.

G. Bonding and Equipment Grounding:
1. Provide bonding for equipment grounding conductors, equipment ground busses, metallic equipment enclosures, metallic raceways and boxes, device grounding terminals, and other normally non-current-carrying conductive materials enclosing electrical conductors/equipment or likely to become energized as indicated and in accordance with NFPA 70.
2. Where circuit conductor sizes are increased for voltage drop, increase size of equipment grounding conductor proportionally in accordance with NFPA 70.
3. Unless otherwise indicated, connect wiring device grounding terminal to branch circuit equipment grounding conductor and to outlet box with bonding jumper.
4. Terminate branch circuit equipment grounding conductors on solidly bonded equipment ground bus only. Do not terminate on neutral (grounded) or isolated/insulated ground bus.
5. Provide bonding jumper across expansion or expansion/deflection fittings provided to accommodate conduit movement.

2.02 GROUNDING AND BONDING COMPONENTS

A. General Requirements:
1. Provide products listed, classified, and labeled as suitable for the purpose intended.
2. Provide products listed and labeled as complying with UL 467 where applicable.

B. Conductors for Grounding and Bonding, in Addition to Requirements of Section 26 05 26:
1. Use insulated copper conductors unless otherwise indicated.
a. Exceptions:
1) Use bare copper conductors where installed underground in direct contact with earth.
2) Use bare copper conductors where directly encased in concrete (not in raceway).

C. Connectors for Grounding and Bonding:
1. Description: Connectors appropriate for the application and suitable for the conductors and items to be connected; listed and labeled as complying with UL 467.
2. Unless otherwise indicated, use exothermic welded connections for underground, concealed and other inaccessible connections.
3. Unless otherwise indicated, use mechanical connectors, compression connectors, or exothermic welded connections for accessible connections.

D. Ground Bars:
1. Description: Copper rectangular ground bars with mounting brackets and insulators.
2. Size: As indicated.
3. Holes for Connections: As indicated or as required for connections to be made.
4. Manufacturers:
a. Advanced Lightning Technology (ALT); _____: www.altfab.com.
b. Erico International Corporation; _____: www.erico.com.
c. Harger Lightning & Grounding; _____: www.harger.com.
d. Substitutions: See Section 01 60 00 - Product Requirements.

E. Ground Rod Electrodes:
1. Comply with NEMA GR 1.
2. Material: Copper-bonded (copper-clad) steel.
3. Size: 3/4 inch diameter by 10 feet length, unless otherwise indicated.
4. Manufacturers:

NOT FOR BIDDING

a. Advanced Lightning Technology (ALT); _____: www.altfab.com.
b. Erico International Corporation; _____: www.erico.com.
c. Galvan Industries, Inc; _____: www.galvanelectrical.com.
d. Harger Lightning & Grounding; _____: www.harger.com.
e. Substitutions: See Section 01 60 00 - Product Requirements.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that work likely to damage grounding and bonding system components has been completed.

B. Verify that field measurements are as shown on the drawings.

C. Verify that conditions are satisfactory for installation prior to starting work.

3.02 INSTALLATION

A. Install products in accordance with manufacturer's instructions.

B. Install grounding and bonding system components in a neat and workmanlike manner in accordance with NECA 1.

C. Ground Rod Electrodes: Unless otherwise indicated, install ground rod electrodes vertically. Where encountered rock prohibits vertical installation, install at 45 degree angle or bury horizontally in trench at least 30 inches (750 mm) deep in accordance with NFPA 70 or provide ground plates.

D. Make grounding and bonding connections using specified connectors.
1. Remove appropriate amount of conductor insulation for making connections without cutting, nicking or damaging conductors. Do not remove conductor strands to facilitate insertion into connector.
2. Remove nonconductive paint, enamel, or similar coating at threads, contact points, and contact surfaces.
3. Exothermic Welds: Make connections using molds and weld material suitable for the items to be connected in accordance with manufacturer's recommendations.
4. Mechanical Connectors: Secure connections according to manufacturer's recommended torque settings.
5. Compression Connectors: Secure connections using manufacturer's recommended tools and dies.

E. Identify grounding and bonding system components in accordance with Section 26 05 53.

3.03 FIELD QUALITY CONTROL

A. Inspect and test in accordance with NETA ATS except Section 4.

B. Perform inspections and tests listed in NETA ATS, Section 7.13.

C. Perform ground electrode resistance tests under normally dry conditions. Precipitation within the previous 48 hours does not constitute normally dry conditions.

D. Investigate and correct deficiencies where measured ground resistances do not comply with specified requirements.

E. Submit detailed reports indicating inspection and testing results and corrective actions taken.

END OF SECTION

NOT FOR BIDDING

SECTION 26 05 29

HANGERS AND SUPPORTS FOR ELECTRICAL SYSTEMS

PART 2 PRODUCTS

1.01 SUPPORT AND ATTACHMENT COMPONENTS

A. General Requirements:
   1. Provide all required hangers, supports, anchors, fasteners, fittings, accessories, and hardware as necessary for the complete installation of electrical work.
   2. Provide products listed, classified, and labeled as suitable for the purpose intended, where applicable.
   3. Where support and attachment component types and sizes are not indicated, select in accordance with manufacturer's application criteria as required for the load to be supported. Include consideration for vibration, equipment operation, and shock loads where applicable.
   4. Do not use products for applications other than as permitted by NFPA 70 and product listing.
   5. Steel Components: Use corrosion resistant materials suitable for the environment where installed.
      a. Zinc-Plated Steel: Electroplated in accordance with ASTM B633.
      b. Galvanized Steel: Hot-dip galvanized after fabrication in accordance with ASTM A123/A123M or ASTM A153/A153M.

B. Conduit and Cable Supports: Straps, clamps, etc. suitable for the conduit or cable to be supported.
   1. Conduit Straps: One-hole or two-hole type; steel or malleable iron.
   2. Conduit Clamps: Bolted type unless otherwise indicated.

C. Outlet Box Supports: Hangers, brackets, etc. suitable for the boxes to be supported.

D. Metal Channel (Strut) Framing Systems: Factory-fabricated continuous-slot metal channel (strut) and associated fittings, accessories, and hardware required for field-assembly of supports.
   1. Comply with MFMA-4.

E. Hanger Rods: Threaded zinc-plated steel unless otherwise indicated.

F. Anchors and Fasteners:
   1. Unless otherwise indicated and where not otherwise restricted, use the anchor and fastener types indicated for the specified applications.

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 26 05 34
CONDUIT

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Galvanized steel rigid metal conduit (RMC).
B. Flexible metal conduit (FMC).
C. Liquidtight flexible metal conduit (LFMC).
D. Electrical metallic tubing (EMT).
E. Rigid polyvinyl chloride (PVC) conduit.
F. Conduit fittings.
G. Accessories.
H. Conduit, fittings and conduit bodies.

1.02 RELATED REQUIREMENTS

A. Section 26 05 26 - Grounding and Bonding for Electrical Systems.
B. Section 26 05 29 - Hangers and Supports for Electrical Systems.
C. Section 26 05 53 - Identification for Electrical Systems.
D. Section 26 05 37 - Boxes.
E. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.

1.03 REFERENCE STANDARDS

A. ANSI C80.1 - American National Standard for Electrical Rigid Steel Conduit (ERSC).
B. ANSI C80.3 - American National Standard for Steel Electrical Metallic Tubing (EMT).
C. ANSI C80.5 - American National Standard for Electrical Rigid Aluminum Conduit (ERAC).
D. NECA 1 - Standard for Good Workmanship in Electrical Construction; National Electrical Contractors Association.
E. NECA 101 - Standard for Installing Steel Conduits (Rigid, IMC, EMT); National Electrical Contractors Association.
F. NECA 111 - Standard for Installing Nonmetallic Raceways (RNC, ENT, LFNC); National Electrical Contractors Association.
G. NEMA FB 1 - Fittings, Cast Metal Boxes, and Conduit Bodies for Conduit, Electrical Metallic Tubing, and Cable; National Electrical Manufacturers Association (ANSI/NEMA FB 1).
H. UL 1 - Flexible Metal Conduit.
I. UL 6 - Electrical Rigid Metal Conduit-Steel.
J. UL 360 - Liquid-Tight Flexible Steel Conduit.
K. UL 514B - Conduit, Tubing, and Cable Fittings.
L. UL 651 - Schedule 40, 80, Type EB and A Rigid PVC Conduit and Fittings.
M. UL 797 - Electrical Metallic Tubing-Steel.

1.04 ADMINISTRATIVE REQUIREMENTS

A. Coordination:
   1. Coordinate minimum sizes of conduits with the actual conductors to be installed, including adjustments for conductor sizes increased for voltage drop.

NOT FOR BIDDING

2. Coordinate the arrangement of conduits with structural members, ductwork, piping, equipment and other potential conflicts installed under other sections or by others.
3. Verify exact conduit termination locations required for boxes, enclosures, and equipment installed under other sections or by others.
4. Coordinate the work with other trades to provide roof penetrations that preserve the integrity of the roofing system and do not void the roof warranty.
5. Notify Architect of any conflicts with or deviations from the contract documents. Obtain direction before proceeding with work.

B. Sequencing:
1. Do not begin installation of conductors and cables until installation of conduit is complete between outlet, junction and splicing points.

1.05 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements for submittals procedures.

B. Product Data: Provide manufacturer's standard catalog pages and data sheets for conduits and fittings.

C. Shop Drawings:
1. Indicate proposed arrangement for conduits to be installed within structural concrete slabs, where permitted.
2. Include proposed locations of roof penetrations and proposed methods for sealing.

D. Project Record Documents: Record actual routing for conduits installed underground, conduits embedded within concrete slabs, and conduits 2 inch (53 mm) trade size and larger.

E. Product Data: Provide for metallic conduit and flexible metal conduit.

F. Samples of Materials Actually Delivered to Site:
1. Two pieces each of conduit, 2 feet long.

G. Project Record Documents: Accurately record actual routing of conduits larger than 2 inches.

1.06 QUALITY ASSURANCE

A. Conform to requirements of NFPA 70.

B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.

C. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

D. Products: Listed and classified by Underwriters Laboratories Inc. as suitable for purpose specified and shown.

1.07 DELIVERY, STORAGE, AND HANDLING

A. Receive, inspect, handle, and store conduit and fittings in accordance with manufacturer's instructions.

B. Accept conduit on site. Inspect for damage.

C. Protect conduit from corrosion and entrance of debris by storing above grade. Provide appropriate covering.

D. Protect PVC conduit from sunlight.

PART 2 PRODUCTS

2.01 CONDUIT APPLICATIONS

A. Do not use conduit and associated fittings for applications other than as permitted by NFPA 70 and product listing.

NOT FOR BIDDING

B. Unless otherwise indicated and where not otherwise restricted, use the conduit types indicated for the specified applications. Where more than one listed application applies, comply with the most restrictive requirements. Where conduit type for a particular application is not specified, use galvanized steel rigid metal conduit.

C. Underground:
   1. Exterior, Direct-Buried: Use rigid PVC conduit.
   2. Exterior, Embedded Within Concrete: Use rigid PVC conduit.
   3. Where rigid polyvinyl (PVC) conduit is provided, transition to galvanized steel rigid metal conduit where emerging from underground.
   4. Where rigid polyvinyl (PVC) conduit larger than 2 inch (53 mm) trade size is provided, use galvanized steel rigid metal conduit elbows for bends.

D. Concealed Within Masonry Walls: Use galvanized steel rigid metal conduit or electrical metallic tubing (EMT).

E. Concealed Within Hollow Stud Walls: Use galvanized steel rigid metal conduit or electrical metallic tubing (EMT).

F. Concealed Above Accessible Ceilings: Use galvanized steel rigid metal conduit or electrical metallic tubing (EMT).

G. Interior, Damp or Wet Locations: Use electrical metallic tubing (EMT).

H. Exposed, Exterior: Use galvanized steel rigid metal conduit or PVC-coated galvanized steel rigid metal conduit.

I. Connections to Luminaires Above Accessible Ceilings: Use flexible metal conduit.
   1. Maximum Length: 6 feet.

J. Connections to Vibrating Equipment:
   1. Dry Locations: Use flexible metal conduit.
   2. Damp, Wet, or Corrosive Locations: Use liquidtight flexible metal conduit.
   3. Maximum Length: 6 feet unless otherwise indicated.
   4. Vibrating equipment includes, but is not limited to:
      a. Transformers.
      b. Motors.
      c. HVAC equipment.

NOT FOR BIDDING

2.02 CONDUIT REQUIREMENTS

A. Provide all conduit, fittings, supports, and accessories required for a complete raceway system.

B. Provide products listed, classified, and labeled as suitable for the purpose intended.

C. Minimum Conduit Size, Unless Otherwise Indicated:
   1. Branch Circuits: 3/4 inch (21 mm) trade size.
   2. Branch Circuit Homeruns: 3/4 inch (21 mm) trade size.
   3. Control Circuits: 1/2 inch (16 mm) trade size.
   4. Flexible Connections to Luminaires: 1/2 inch (16 mm) trade size.
   5. Underground, Interior: 3/4 inch (21 mm) trade size.
   6. Underground, Exterior: 1 inch (27 mm) trade size.

D. Where conduit size is not indicated, size to comply with NFPA 70 but not less than applicable minimum size requirements specified.

2.03 GALVANIZED STEEL RIGID METAL CONDUIT (RMC)

A. Manufacturers:
   1. Allied Tube & Conduit: www.alliedeg.com.
   2. Republic Conduit: www.republic-conduit.com.
   3. Wheatland Tube Company: www.wheatland.com.

4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Description: NFPA 70, Type RMC galvanized steel rigid metal conduit complying with ANSI C80.1 and listed and labeled as complying with UL 6.

C. Fittings:
1. Manufacturers:
a. Bridgeport Fittings Inc: www.bptfittings.com.
b. O-Z/Gedney, a brand of Emerson Industrial Automation: www.emersonindustrial.com.
c. Thomas & Betts Corporation: www.tnb.com.
d. Substitutions: See Section 01 60 00 - Product Requirements.
2. Non-Hazardous Locations: Use fittings complying with NEMA FB 1 and listed and labeled as complying with UL 514B.
3. Material: Use steel or malleable iron.
4. Connectors and Couplings: Use threaded type fittings only. Threadless set screw and compression (gland) type fittings are not permitted.

2.04 METAL CONDUIT

A. Manufacturers:
1. Allied Tube & Conduit: www.alliedtube.com.
2. Beck Manufacturing, Inc: www.beckmfg.com.
3. Wheatland Tube Company: www.wheatland.com.
4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Rigid Steel Conduit: ANSI C80.1.

C. Fittings and Conduit Bodies: NEMA FB 1; material to match conduit.

2.05 FLEXIBLE METAL CONDUIT (FMC)

A. Manufacturers:
1. AFC Cable Systems, Inc: www.afcweb.com.
2. Electri-Flex Company: www.electriflex.com.
3. International Metal Hose: www.metalhose.com.
4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Description: NFPA 70, Type FMC standard wall steel flexible metal conduit listed and labeled as complying with UL 1, and listed for use in classified firestop systems to be used.

C. Fittings:
1. Manufacturers:
a. Bridgeport Fittings Inc: www.bptfittings.com.
b. O-Z/Gedney, a brand of Emerson Industrial Automation: www.emersonindustrial.com.
c. Thomas & Betts Corporation: www.tnb.com.
d. Substitutions: See Section 01 60 00 - Product Requirements.
2. Description: Fittings complying with NEMA FB 1 and listed and labeled as complying with UL 514B.
3. Material: Use steel or malleable iron.

D. Description: Interlocked steel construction.

E. Fittings: NEMA FB 1.

2.06 LIQUIDTIGHT FLEXIBLE METAL CONDUIT (LFMC)

A. Manufacturers:
1. AFC Cable Systems, Inc; _____: www.afcweb.com.
2. Electri-Flex Company; _____: www.electriflex.com.

NOT FOR BIDDING

3. International Metal Hose; _____: www.metalhose.com.
4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Description: NFPA 70, Type LFMC polyvinyl chloride (PVC) jacketed steel flexible metal conduit listed and labeled as complying with UL 360.

C. Fittings:
1. Manufacturers:
a. Bridgeport Fittings Inc: www.bptfittings.com.
b. O-Z/Gedney, a brand of Emerson Industrial Automation: www.emersonindustrial.com.
c. Thomas & Betts Corporation: www.tnb.com.
d. Substitutions: See Section 01 60 00 - Product Requirements.
2. Description: Fittings complying with NEMA FB 1 and listed and labeled as complying with UL 514B.
3. Material: Use steel or malleable iron.

2.07 ELECTRICAL METALLIC TUBING (EMT)

A. Manufacturers:
1. Allied Tube & Conduit; _____: www.alliedeg.com.
2. Republic Conduit: www.republic-conduit.com.
3. Wheatland Tube Company; _____: www.wheatland.com.
4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Description: NFPA 70, Type EMT steel electrical metallic tubing complying with ANSI C80.3 and listed and labeled as complying with UL 797.

C. Fittings:
1. Manufacturers:
a. Bridgeport Fittings Inc: www.bptfittings.com.
b. O-Z/Gedney, a brand of Emerson Industrial Automation: www.emersonindustrial.com.
c. Thomas & Betts Corporation: www.tnb.com.
d. Substitutions: See Section 01 60 00 - Product Requirements.
2. Description: Fittings complying with NEMA FB 1 and listed and labeled as complying with UL 514B.
3. Material: Use steel or malleable iron.
4. Connectors and Couplings: Use compression (gland) or set-screw type.
a. Do not use indenter type connectors and couplings.

2.08 RIGID POLYVINYL CHLORIDE (PVC) CONDUIT

A. Manufacturers:
1. Cantex Inc: www.cantexinc.com.
2. Carlon, a brand of Thomas & Betts Corporation: www.carlon.com.
3. JM Eagle: www.jmeagle.com.
4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Description: NFPA 70, Type PVC rigid polyvinyl chloride conduit complying with NEMA TC 2 and listed and labeled as complying with UL 651; Schedule 40 unless otherwise indicated, Schedule 80 where subject to physical damage; rated for use with conductors rated 90 degrees C.

C. Fittings:
1. Manufacturer: Same as manufacturer of conduit to be connected.
2. Description: Fittings complying with NEMA TC 3 and listed and labeled as complying with UL 651; material to match conduit.

NOT FOR BIDDING

2.09 ACCESSORIES

A. Conduit Joint Compound: Corrosion-resistant, electrically conductive; suitable for use with the conduit to be installed.

B. Solvent Cement for PVC Conduit and Fittings: As recommended by manufacturer of conduit and fittings to be installed.

C. Pull Strings: Use nylon cord with average breaking strength of not less than 200 pound-force.

D. Sealing Compound for Sealing Fittings: Listed for use with the particular fittings to be installed.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that field measurements are as shown on drawings.

B. Verify that mounting surfaces are ready to receive conduits.

C. Verify that conditions are satisfactory for installation prior to starting work.

D. Verify routing and termination locations of conduit prior to rough-in.

E. Conduit routing is shown on drawings in approximate locations unless dimensioned. Route as required to complete wiring system.

3.02 INSTALLATION

A. Install products in accordance with manufacturer's instructions.

B. Install conduit in a neat and workmanlike manner in accordance with NECA 1.

C. Install galvanized steel rigid metal conduit (RMC) in accordance with NECA 101.

D. Install rigid polyvinyl chloride (PVC) conduit in accordance with NECA 111.

E. Conduit Routing:
   1. Unless dimensioned, conduit routing indicated is diagrammatic.
   2. When conduit destination is indicated and routing is not shown, determine exact routing required.
   3. Conceal all conduits unless specifically indicated to be exposed.
   4. Conduits in the following areas may be exposed, unless otherwise indicated:
      a. Electrical rooms.
      b. Mechanical equipment rooms.
      c. Within joists in areas with no ceiling.
   5. Arrange conduit to maintain adequate headroom, clearances, and access.
   6. Arrange conduit to provide no more than the equivalent of four 90 degree bends between pull points.
   7. Arrange conduit to provide no more than 150 feet between pull points.
   8. Route conduits above water and drain piping where possible.
   9. Arrange conduit to prevent moisture traps. Provide drain fittings at low points and at sealing fittings where moisture may collect.
   10. Maintain minimum clearance of 6 inches between conduits and piping for other systems.
   11. Maintain minimum clearance of 12 inches between conduits and hot surfaces. This includes, but is not limited to:
      a. Heaters.
      b. Hot water piping.
      c. Flues.
   12. Group parallel conduits in the same area together on a common rack.

F. Conduit Support:
   1. Secure and support conduits in accordance with NFPA 70 and Section 26 05 29 using suitable supports and methods approved by the authority having jurisdiction.

NOT FOR BIDDING

2. Provide independent support from building structure. Do not provide support from piping, ductwork, or other systems.
3. Use metal channel (strut) with accessory conduit clamps to support multiple parallel surface-mounted conduits.
4. Use conduit clamp to support single conduit from beam clamp or threaded rod.
5. Use of wire for support of conduits is not permitted.

G. Connections and Terminations:
1. Use approved zinc-rich paint or conduit joint compound on field-cut threads of galvanized steel conduits prior to making connections.
2. Where two threaded conduits must be joined and neither can be rotated, use three-piece couplings or split couplings. Do not use running threads.
3. Use suitable adapters where required to transition from one type of conduit to another.
4. Provide drip loops for liquidtight flexible conduit connections to prevent drainage of liquid into connectors.
5. Terminate threaded conduits in boxes and enclosures using threaded hubs or double lock nuts for dry locations and raintight hubs for wet locations.
6. Provide insulating bushings or insulated throats at all conduit terminations to protect conductors.
7. Secure joints and connections to provide maximum mechanical strength and electrical continuity.

H. Penetrations:
1. Do not penetrate or otherwise notch or cut structural members, including footings and grade beams, without approval of Structural Engineer.
2. Make penetrations perpendicular to surfaces unless otherwise indicated.
3. Provide sleeves for penetrations as indicated or as required to facilitate installation. Set sleeves flush with exposed surfaces unless otherwise indicated or required.
4. Conceal bends for conduit risers emerging above ground.
5. Seal interior of conduits entering the building from underground at first accessible point to prevent entry of moisture and gases.
6. Where conduits penetrate waterproof membrane, seal as required to maintain integrity of membrane.
7. Make penetrations for roof-mounted equipment within associated equipment openings and curbs where possible to minimize roofing system penetrations. Where penetrations are necessary, seal as indicated or as required to preserve integrity of roofing system and maintain roof warranty. Include proposed locations of penetrations and methods for sealing with submittals.
8. Install firestopping to preserve fire resistance rating of partitions and other elements, using materials and methods specified.

I. Underground Installation:
1. Minimum Cover, Unless Otherwise Indicated or Required:
   a. Underground, Exterior: 24 inches.
2. Provide underground warning tape in accordance with Section 26 05 53 along entire conduit length for service entrance where not concrete-encased.

J. Concrete Encasement: Where conduits not otherwise embedded within concrete are indicated to be concrete-encased, provide concrete with minimum concrete cover of 3 inches on all sides unless otherwise indicated.

K. Conduit Movement Provisions: Where conduits are subject to movement, provide expansion and expansion/deflection fittings to prevent damage to enclosed conductors or connected equipment. This includes, but is not limited to:
1. Where conduits cross structural joints intended for expansion, contraction, or deflection.

NOT FOR BIDDING

2. Where conduits are subject to earth movement by settlement or frost.

L. Condensation Prevention: Where conduits cross barriers between areas of potential substantial temperature differential, provide sealing fitting or approved sealing compound at an accessible point near the penetration to prevent condensation. This includes, but is not limited to:
   1. Where conduits pass from outdoors into conditioned interior spaces.
   2. Where conduits pass from unconditioned interior spaces into conditioned interior spaces.

M. Provide grounding and bonding in accordance with Section 26 05 26.

3.03 FIELD QUALITY CONTROL

A. Repair cuts and abrasions in galvanized finishes using zinc-rich paint recommended by manufacturer. Replace components that exhibit signs of corrosion.

B. Correct deficiencies and replace damaged or defective conduits.

3.04 CLEANING

A. Clean interior of conduits to remove moisture and foreign matter.

3.05 PROTECTION

A. Immediately after installation of conduit, use suitable manufactured plugs to provide protection from entry of moisture and foreign material and do not remove until ready for installation of conductors.

3.06 INTERFACE WITH OTHER PRODUCTS

A. Install conduit to preserve fire resistance rating of partitions and other elements.

B. Route conduit through roof openings for piping and ductwork wherever possible. Where separate roofing penetration is required, coordinate location and installation method with roofing installation specified.

END OF SECTION

NOT FOR BIDDING

SECTION 26 05 37
BOXES

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Outlet and device boxes up to 100 cubic inches, including those used as junction and pull boxes.

B. Cabinets and enclosures, including junction and pull boxes larger than 100 cubic inches.

C. Wall and ceiling outlet boxes.

D. Floor boxes.

E. Pull and junction boxes.

1.02 RELATED REQUIREMENTS

A. Section 26 05 26 - Grounding and Bonding for Electrical Systems.

B. Section 26 05 29 - Hangers and Supports for Electrical Systems.

C. Section 26 27 26 - Wiring Devices:
   1. Wall plates.

D. Section 26 27 26 - Wiring Devices: Wall plates in finished areas, floor box service fittings, fire-rated poke-through fittings, and access floor boxes.

1.03 REFERENCE STANDARDS

A. NECA 1 - Standard for Good Workmanship in Electrical Construction; National Electrical Contractors Association.

B. NECA 130 - Standard for Installing and Maintaining Wiring Devices; National Electrical Contractors Association.

C. NEMA FB 1 - Fittings, Cast Metal Boxes, and Conduit Bodies for Conduit, Electrical Metallic Tubing, and Cable; National Electrical Manufacturers Association (ANSI/NEMA FB 1).

D. NEMA OS 1 - Sheet-Steel Outlet Boxes, Device Boxes, Covers, and Box Supports; National Electrical Manufacturers Association (ANSI/NEMA OS 1).

E. NEMA OS 2 - Nonmetallic Outlet Boxes, Device Boxes, Covers and Box Supports; National Electrical Manufacturers Association (ANSI/NEMA OS 2).

F. NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum); National Electrical Manufacturers Association.

G. NFPA 70 - National Electrical Code; National Fire Protection Association.

H. UL 50 - Enclosures for Electrical Equipment, Non-Environmental Considerations.

I. UL 50E - Enclosures for Electrical Equipment, Environmental Considerations.

J. UL 508A - Industrial Control Panels.

K. UL 514A - Metallic Outlet Boxes.

1.04 ADMINISTRATIVE REQUIREMENTS

A. Coordination:
   1. Coordinate the work with other trades to avoid placement of ductwork, piping, equipment, or other potential obstructions within the dedicated equipment spaces and working clearances for electrical equipment required by NFPA 70.
   2. Coordinate arrangement of electrical equipment with the dimensions and clearance requirements of the actual equipment to be installed.

NOT FOR BIDDING

3. Coordinate minimum sizes of boxes with the actual installed arrangement of conductors, clamps, support fittings, and devices, calculated according to NFPA 70.
4. Coordinate minimum sizes of pull boxes with the actual installed arrangement of connected conduits, calculated according to NFPA 70.
5. Coordinate the placement of boxes with millwork, furniture, devices, equipment, etc. installed under other sections or by others.
6. Coordinate the work with other trades to preserve insulation integrity.
7. Coordinate the work with other trades to provide walls suitable for installation of flush-mounted boxes where indicated.
8. Notify Architect of any conflicts with or deviations from the contract documents. Obtain direction before proceeding with work.

1.05 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

B. Project Record Documents: Record actual locations and mounting heights of outlet, pull, and junction boxes on project record documents.

1.06 QUALITY ASSURANCE

A. Conform to requirements of NFPA 70.

PART 2 PRODUCTS

2.01 BOXES

A. General Requirements:
1. Do not use boxes and associated accessories for applications other than as permitted by NFPA 70 and product listing.
2. Provide all boxes, fittings, supports, and accessories required for a complete raceway system and to accommodate devices and equipment to be installed.
3. Provide products listed, classified, and labeled as suitable for the purpose intended.
4. Where box size is not indicated, size to comply with NFPA 70 but not less than applicable minimum size requirements specified.
5. Provide grounding terminals within boxes where equipment grounding conductors terminate.

B. Outlet and Device Boxes Up to 100 cubic inches, Including Those Used as Junction and Pull Boxes:
1. Use sheet-steel boxes for dry locations unless otherwise indicated or required.
2. Use cast iron boxes or cast aluminum boxes for damp or wet locations unless otherwise indicated or required; furnish with compatible weatherproof gasketed covers.
3. Use suitable concrete type boxes where flush-mounted in concrete.
4. Use suitable masonry type boxes where flush-mounted in masonry walls.
5. Use raised covers suitable for the type of wall construction and device configuration where required.
6. Use shallow boxes where required by the type of wall construction.
7. Do not use "through-wall" boxes designed for access from both sides of wall.
8. Sheet-Steel Boxes: Comply with NEMA OS 1, and list and label as complying with UL 514A.
9. Cast Metal Boxes: Comply with NEMA FB 1, and list and label as complying with UL 514A; furnish with threaded hubs.
10. Boxes for Supporting Luminaires and Ceiling Fans: Listed as suitable for the type and weight of load to be supported; furnished with fixture stud to accommodate mounting of luminaire where required.
11. Boxes for Ganged Devices: Use multigang boxes of single-piece construction. Do not use field-connected gangable boxes.

NOT FOR BIDDING

12. Wall Plates: Comply with Section 26 27 26.

C. Cabinets and Enclosures, Including Junction and Pull Boxes Larger Than 100 cubic inches:
1. Comply with NEMA 250, and list and label as complying with UL 50 and UL 50E, or UL 508A.
2. NEMA 250 Environment Type, Unless Otherwise Indicated:
3. Junction and Pull Boxes Larger Than 100 cubic inches:
a. Provide screw-cover or hinged-cover enclosures unless otherwise indicated.

2.02 MANUFACTURERS

A. Appleton Electric: www.appletonelec.com.

B. Steel City

C. Substitutions: Reco, Inc. See Section 01 60 00 - Product Requirements.

2.03 OUTLET BOXES

A. Sheet Metal Outlet Boxes: NEMA OS 1, galvanized steel.
1. Luminaire and Equipment Supporting Boxes: Rated for weight of equipment supported; include 1/2 inch male fixture studs where required.
2. Concrete Ceiling Boxes: Concrete type.

B. Nonmetallic Outlet Boxes: NEMA OS 2.

C. Cast Boxes: NEMA FB 1, Type FD, aluminum. Provide gasketed cover by box manufacturer. Provide threaded hubs.

D. Wall Plates for Finished Areas: As specified in Section 26 27 26.

2.04 FLOOR BOXES

A. Floor Boxes: NEMA OS 1, fully adjustable, _4 inches deep.

B. Material: Cast metal.

C. Shape: Rectangular.

D. Service Fittings: As specified in Section 26 27 26.

2.05 PULL AND JUNCTION BOXES

A. Sheet Metal Boxes: NEMA OS 1, galvanized steel.

B. Surface Mounted Cast Metal Box: NEMA 250, Type 4; flat-flanged, surface mounted junction box:
1. Material: Galvanized cast iron; Cast Aluminum.
2. Cover: Furnish with ground flange, neoprene gasket, and stainless steel cover screws.

C. In-Ground Cast Metal Box: NEMA 250, Type 6, outside flanged, recessed cover box for flush mounting:
1. Material: Galvanized cast iron; Cast Aluminum.
2. Cover: Nonskid cover with neoprene gasket and stainless steel cover screws.
3. Cover Legend: "ELECTRIC".

PART 3 EXECUTION

3.01 EXAMINATION

3.02

A. Verify that field measurements are as shown on drawings.

B. Verify that mounting surfaces are ready to receive boxes.

C. Verify that conditions are satisfactory for installation prior to starting work.

D. Verify locations of floor boxes and outlets in offices and work areas prior to rough-in.

NOT FOR BIDDING

3.03 INSTALLATION

A. Install products in accordance with manufacturer's instructions.

B. Perform work in a neat and workmanlike manner in accordance with NECA 1 and, where applicable, NECA 130, including mounting heights specified in those standards where mounting heights are not indicated.

C. Arrange equipment to provide minimum clearances in accordance with manufacturer's instructions and NFPA 70.

D. Box Supports:
   1. Secure and support boxes in accordance with NFPA 70 and Section 26 05 29 using suitable supports and methods approved by the authority having jurisdiction.
   2. Provide independent support from building structure except for cast metal boxes (other than boxes used for fixture support) supported by threaded conduit connections in accordance with NFPA 70. Do not provide support from piping, ductwork, or other systems.

E. Install boxes plumb and level.

F. Flush-Mounted Boxes:
   1. Install boxes in noncombustible materials such as concrete, tile, gypsum, plaster, etc. so that front edge of box or associated raised cover is not set back from finished surface more than 1/4 inch or does not project beyond finished surface.
   2. Install boxes in combustible materials such as wood so that front edge of box or associated raised cover is flush with finished surface.
   3. Repair rough openings around boxes in noncombustible materials such as concrete, tile, gypsum, plaster, etc. so that there are no gaps or open spaces greater than 1/8 inch at the edge of the box.

G. Install boxes as required to preserve insulation integrity.

H. Install permanent barrier between ganged wiring devices when voltage between adjacent devices exceeds 300 V.

I. Install firestopping to preserve fire resistance rating of partitions and other elements.

J. Close unused box openings.

K. Install blank wall plates on junction boxes and on outlet boxes with no devices or equipment installed or designated for future use.

L. Provide grounding and bonding in accordance with Section 26 05 26.

M. Install boxes securely, in a neat and workmanlike manner, as specified in NECA 1.

N. Install in locations as shown on Drawings, and as required for splices, taps, wire pulling, equipment connections, and as required by NFPA 70.

O. Coordinate installation of outlet boxes for equipment connected under Section 26 27 17.

P. Set wall mounted boxes at elevations to accommodate mounting heights indicated.

Q. Electrical boxes are shown on Drawings in approximate locations unless dimensioned.
   1. Adjust box locations up to 10 feet if required to accommodate intended purpose.

R. Orient boxes to accommodate wiring devices oriented as specified in Section 26 27 26.

S. Maintain headroom and present neat mechanical appearance.

T. Install pull boxes and junction boxes above accessible ceilings and in unfinished areas only.

U. Inaccessible Ceiling Areas: Install outlet and junction boxes no more than 6 inches from ceiling access panel or from removable recessed luminaire.

V. Install boxes to preserve fire resistance rating of partitions and other elements.

NOT FOR BIDDING

W. Coordinate mounting heights and locations of outlets mounted above counters, benches, and backsplashes.

X. Locate outlet boxes to allow luminaires positioned as shown on reflected ceiling plan.

Y. Align adjacent wall mounted outlet boxes for switches, thermostats, and similar devices.

Z. Use flush mounting outlet box in finished areas.

AA. Locate flush mounting box in masonry wall to require cutting of masonry unit corner only. Coordinate masonry cutting to achieve neat opening.

AB. Do not install flush mounting box back-to-back in walls; provide minimum 6 inches separation. Provide minimum 24 inches separation in acoustic rated walls.

AC. Secure flush mounting box to interior wall and partition studs. Accurately position to allow for surface finish thickness.

AD. Use stamped steel bridges to fasten flush mounting outlet box between studs.

AE. Install flush mounting box without damaging wall insulation or reducing its effectiveness.

AF. Use adjustable steel channel fasteners for hung ceiling outlet box.

AG. Do not fasten boxes to ceiling support wires.

AH. Support boxes independently of conduit, except cast box that is connected to two rigid metal conduits both supported within 12 inches of box.

AI. Use gang box where more than one device is mounted together. Do not use sectional box.

AJ. Use gang box with plaster ring for single device outlets.

AK. Use cast outlet box in exterior locations exposed to the weather and wet locations.

AL. Use cast floor boxes for installations in slab on grade; formed steel boxes are acceptable for other installations.

AM. Set floor boxes level.

AN. Large Pull Boxes: Use hinged enclosure in interior dry locations, surface-mounted cast metal box in other locations.

3.04 ADJUSTING

A. Adjust floor boxes flush with finish flooring material.

B. Adjust flush-mounting outlets to make front flush with finished wall material.

C. Install knockout closures in unused box openings.

3.05 CLEANING

A. Clean interior of boxes to remove dirt, debris, plaster and other foreign material.

3.06 PROTECTION

A. Immediately after installation, protect boxes from entry of moisture and foreign material until ready for installation of conductors.

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 26 05 53
IDENTIFICATION FOR ELECTRICAL SYSTEMS

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Electrical identification requirements.

B. Identification nameplates and labels.

C. Wire and cable markers.

D. Voltage markers.

E. Underground warning tape.

F. Warning signs and labels.

G. Field-painted identification of conduit.

1.02 RELATED REQUIREMENTS

A. Section 09 91 13 - Exterior Painting.

B. Section 09 90 00 - Painting and Coating.

C. Section 26 05 19 - LV Elec. Power Conductors and Cables (600V&Less): Color coding for power conductors and cables 600 V and less; vinyl color coding electrical tape.

D. Section 26 27 26 - Wiring Devices - Lutron: Device and wallplate finishes; factory pre-marked wallplates.

E. Section 27 10 05 - Structured Cabling for Voice and Data - Inside-Plant: Identification for communications cabling and devices.

1.03 REFERENCE STANDARDS

A. ANSI Z535.2 - American National Standard for Environmental and Facility Safety Signs.

B. ANSI Z535.4 - American National Standard for Product Safety Signs and Labels.

C. NFPA 70 - National Electrical Code; National Fire Protection Association.

D. UL 969 - Marking and Labeling Systems.

1.04 ADMINISTRATIVE REQUIREMENTS

A. Coordination:
   1. Verify final designations for equipment, systems, and components to be identified prior to fabrication of identification products.

B. Sequencing:
   1. Do not conceal items to be identified, in locations such as above suspended ceilings, until identification products have been installed.
   2. Do not install identification products until final surface finishes and painting are complete.

1.05 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements for submittals procedures.

B. Product Data: Provide manufacturer's standard catalog pages and data sheets for each product.

C. Shop Drawings: Provide schedule of items to be identified indicating proposed designations, materials, legends, and formats.

D. Product Data: Provide catalog data for nameplates, labels, and markers.

NOT FOR BIDDING

E. Manufacturer's Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation and installation of product.

1.06 QUALITY ASSURANCE

A. Conform to requirements of NFPA 70.

1.07 FIELD CONDITIONS

A. Do not install adhesive products when ambient temperature is lower than recommended by manufacturer.

1.08 EXTRA MATERIALS

A. See Section 01 60 00 - Product Requirements for additional requirements.

PART 2 PRODUCTS

2.01 IDENTIFICATION REQUIREMENTS

A. Existing Work: Unless specifically excluded, identify existing elements to remain that are not already identified in accordance with specified requirements.

B. Identification for Equipment:
   1. Use identification nameplate to identify each piece of electrical distribution and control equipment and associated sections, compartments, and components.
      a. Panelboards:
         1) Identify ampere rating.
         2) Identify voltage and phase.
         3) Identify power source and circuit number. Include location when not within sight of equipment.
         4) Identify main overcurrent protective device. Use identification label for panelboards with a door. For power distribution panelboards without a door, use identification nameplate.
         5) Use typewritten circuit directory to identify load(s) served for panelboards with a door. Identify spares and spaces using pencil.
         6) For power panelboards without a door, use identification nameplate to identify load(s) served for each branch device. Do not identify spares and spaces.
      b. Enclosed switches, circuit breakers, and motor controllers:
         1) Identify voltage and phase.
         2) Identify power source and circuit number. Include location when not within sight of equipment.
         3) Identify load(s) served. Include location when not within sight of equipment.
      c. Transfer Switches:
         1) Identify voltage and phase.
         2) Identify power source and circuit number for both normal power source and standby power source. Include location when not within sight of equipment.
   2. Emergency System Equipment:
      a. Use identification nameplate or voltage marker to identify emergency system equipment in accordance with NFPA 70.
      b. Use identification nameplate at each piece of service equipment to identify type and location of on-site emergency power sources.
   3. Use voltage marker to identify highest voltage present for each piece of electrical equipment.
   4. Use identification nameplate to identify equipment utilizing series ratings, where permitted, in accordance with NFPA 70.

NOT FOR BIDDING

5. Use identification label or handwritten text using indelible marker on inside of door at each fused switch to identify required NEMA fuse class and size.
6. Use warning signs to identify electrical hazards for entrances to all rooms and other guarded locations that contain exposed live parts operating at 600 V nominal or less with the word message "DANGER; Electrical hazard; Authorized personnel only" or approved equivalent.
7. Use warning signs to identify electrical hazards for entrances to all buildings, vaults, rooms, or enclosures containing exposed live parts or exposed conductors operating at over 600 V nominal with the word message "DANGER; HIGH VOLTAGE; KEEP OUT".

C. Identification for Conductors and Cables:
1. Color Coding for Power Conductors 600 V and Less: Comply with Section 26 05 19.
2. Use identification nameplate or identification label to identify color code for ungrounded and grounded power conductors inside door or enclosure at each piece of feeder or branch-circuit distribution equipment when premises has feeders or branch circuits served by more than one nominal voltage system.
3. Use wire and cable markers to identify circuit number or other designation indicated for power, control, and instrumentation conductors and cables at the following locations:
   a. At each source and load connection.
   b. Within boxes when more than one circuit is present.
   c. Within equipment enclosures when conductors and cables enter or leave the enclosure.
4. Use wire and cable markers to identify connected grounding electrode system components for grounding electrode conductors.
5. Use underground warning tape to identify direct buried cables.

D. Identification for Raceways:
1. Use voltage markers to identify highest voltage present for accessible conduits at maximum intervals of 20 feet.
2. Use voltage markers or color-coded bands to identify systems other than normal power system for accessible conduits at maximum intervals of 20 feet.
   a. Color-Coded Bands: Use field-painting or vinyl color coding electrical tape to mark bands 3 inches wide.
      1) Color Code:
         (a) Emergency Power System: Red.
      2) Field-Painting: Comply with Section 09 91 23 and 09 91 13.
      3) Vinyl Color Coding Electrical Tape: Comply with Section 26 05 19.
3. Use underground warning tape to identify underground raceways.
4. Use voltage markers to identify highest voltage present for wireways at maximum intervals of 20 feet.

E. Identification for Boxes:
1. Use voltage markers to identify highest voltage present.
2. Use voltage markers or color coded boxes to identify systems other than normal power system.
   a. Color-Coded Boxes: Field-painted in accordance with Section 09 91 23 and 09 91 13 per the same color code used for raceways.

F. Identification for Devices:
1. Identification for Communications Devices: Comply with Section 27 10 05.
2. Wiring Device and Wallplate Finishes: Comply with Section 26 27 26.
3. Use identification label to identify fire alarm system devices.
4. Use identification label to identify receptacles protected by upstream GFI protection, where permitted.

NOT FOR BIDDING

G. Identification for Luminaires:

2.02 MANUFACTURERS

A. Brady Corporation: www.bradycorp.com.

B. Seton Identification Products: www.seton.com/aec.

C. HellermannTyton: www.hellermanntyton.com.

D. Substitutions: See Section 01 60 00 - Product Requirements.

2.03 IDENTIFICATION NAMEPLATES AND LABELS

A. Identification Nameplates:
   1. Manufacturers:
      a. Brimar Industries, Inc: www.brimar.com.
      b. Kolbi Pipe Marker Co; _____: www.kolbipipemarkers.com.
      c. Seton Identification Products; _____: www.seton.com.
      d. Substitutions: See Section 01 60 00 - Product Requirements.
   2. Materials:
      a. Indoor Clean, Dry Locations: Use plastic nameplates.
      b. Outdoor Locations: Use plastic, stainless steel, or aluminum nameplates suitable for exterior use.
   3. Plastic Nameplates: Two-layer or three-layer laminated acrylic or electrically non-conductive phenolic with beveled edges; minimum thickness of 1/16 inch; engraved text.
   4. Stainless Steel Nameplates: Minimum thickness of 1/32 inch; engraved or laser-etched text.
   5. Aluminum Nameplates: Anodized; minimum thickness of 1/32 inch; engraved or laser-etched text.
   6. Mounting Holes for Mechanical Fasteners: Two, centered on sides for sizes up to 1 inch high; Four, located at corners for larger sizes.

B. Identification Labels:
   1. Manufacturers:
      a. Brady Corporation; _____: www.bradyid.com.
      b. Brother International Corporation: www.brother-usa.com.
      c. Panduit Corp: www.panduit.com.
      d. Substitutions: See Section 01 60 00 - Product Requirements.
   2. Materials: Use self-adhesive laminated plastic labels; UV, chemical, water, heat, and abrasion resistant.
   3. Text: Use factory pre-printed or machine-printed text. Do not use handwritten text unless otherwise indicated.

C. Format for Equipment Identification:
   1. Minimum Size: 1 inch by 2.5 inches.
   2. Legend:
      a. System designation where applicable:
         1) Emergency Power System: Identify with text "EMERGENCY".
         2) Fire Alarm System: Identify with text "FIRE ALARM".
      b. Equipment designation or other approved description.
   3. Text: All capitalized unless otherwise indicated.
   4. Minimum Text Height:
      a. System Designation: 1 inch.
      b. Equipment Designation: 1/2 inch.
   5. Color:

NOT FOR BIDDING

a. Normal Power System: White text on black background.

D. Format for General Information and Operating Instructions:
1. Minimum Size: 1 inch by 2.5 inches.
2. Legend: Include information or instructions indicated or as required for proper and safe operation and maintenance.
3. Text: All capitalized unless otherwise indicated.
4. Minimum Text Height: 1/4 inch.
5. Color: Black text on white background unless otherwise indicated.
a. Exceptions:

E. Format for Caution and Warning Messages:
1. Minimum Size: 2 inches by 4 inches.
2. Legend: Include information or instructions indicated or as required for proper and safe operation and maintenance.
3. Text: All capitalized unless otherwise indicated.
4. Minimum Text Height: 1/2 inch.
5. Color: Black text on yellow background unless otherwise indicated.

F. Format for Receptacle Identification:
1. Minimum Size: 3/8 inch by 1.5 inches.
2. Legend: Power source and circuit number or other designation indicated.
3. Text: All capitalized unless otherwise indicated.
4. Minimum Text Height: 3/16 inch.
5. Color: Black text on clear background.

G. Format for Control Device Identification:
1. Minimum Size: 3/8 inch by 1.5 inches.
2. Legend: Load controlled or other designation indicated.
3. Text: All capitalized unless otherwise indicated.
4. Minimum Text Height: 3/16 inch.
5. Color: Black text on clear background.

H. Format for Fire Alarm Device Identification:
1. Minimum Size: 3/8 inch by 1.5 inches.
2. Legend: Designation indicated and device zone or address.
3. Text: All capitalized unless otherwise indicated.
4. Minimum Text Height: 3/16 inch.
5. Color: Red text on white background.

I. Nameplates: Engraved three-layer laminated plastic, black letters on white background.

J. Locations:
1. Each electrical distribution and control equipment enclosure.
2. Communication cabinets.
3. Disconnect switches, and starters.

K. Letter Size:
1. Use 1/8 inch letters for identifying individual equipment and loads.
2. Use 1/4 inch letters for identifying grouped equipment and loads.

2.04 WIRE AND CABLE MARKERS

A. Manufacturers:
1. Brady Corporation; _____: www.bradyid.com.
2. HellermannTyton; _____: www.hellermanntyton.com.
3. Panduit Corp: www.panduit.com.
4. Panduit Corp.

NOT FOR BIDDING

5. Substitutions: See Section 01 60 00 - Product Requirements.

B. Markers for Conductors and Cables: Use wrap-around self-adhesive vinyl cloth, wrap-around self-adhesive vinyl self-laminating, heat-shrink sleeve, plastic sleeve, plastic clip-on, or vinyl split sleeve type markers suitable for the conductor or cable to be identified.

C. Markers for Conductor and Cable Bundles: Use plastic marker tags secured by nylon cable ties.

D. Legend: Power source and circuit number or other designation indicated.

E. Text: Use factory pre-printed or machine-printed text, all capitalized unless otherwise indicated.

F. Minimum Text Height: 1/8 inch.

G. Color: Black text on white background unless otherwise indicated.

H. Description: split sleeve type wire markers.

I. Locations: Each conductor at panelboard gutters, pull boxes, outlet boxes, and junction boxes each load connection.

J. Legend:
1. Power and Lighting Circuits: Branch circuit or feeder number indicated on drawings.
2. Control Circuits: Control wire number indicated on shop drawings.

2.05 VOLTAGE MARKERS

A. Manufacturers: Panduit Corp
1. Brady Corporation; _____: www.bradyid.com.
2. Brimar Industries, Inc: www.brimar.com.
3. Seton Identification Products; _____: www.seton.com.
4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Markers for Conduits: Use factory pre-printed self-adhesive vinyl, self-adhesive vinyl cloth, or vinyl snap-around type markers.

C. Markers for Boxes and Equipment Enclosures: Use factory pre-printed self-adhesive vinyl or self-adhesive vinyl cloth type markers.

D. Minimum Size:
1. Markers for Equipment: 1 1/8 by 4 1/2 inches.
2. Markers for Conduits: As recommended by manufacturer for conduit size to be identified.
3. Markers for Pull Boxes: 1 1/8 by 4 1/2 inches.
4. Markers for Junction Boxes: 1/2 by 2 1/4 inches.

E. Legend:
1. Markers for Voltage Identification: Highest voltage present.
2. Markers for System Identification:
a. Emergency Power System: Text "EMERGENCY".
b. Other Systems: Type of service.

F. Color: Black text on orange background unless otherwise indicated.

G. Location: Furnish markers for each conduit longer than 6 feet.

H. Spacing: 20 feet on center.

I. Color:
1. 480 Volt System: Brown.
2. 208 Volt System: Yellow.
3. Fire Alarm System: Red.

J. Legend:
1. 480 Volt System: brown.

NOT FOR BIDDING

2. 208 Volt System: yellow.
3. Fire Alarm System: red.

2.06 UNDERGROUND WARNING TAPE

A. Manufacturers:
1. Brady Corporation; _____: www.bradyid.com.
2. Brimar Industries, Inc: www.brimar.com.
3. Seton Identification Products; _____: www.seton.com.
4. Pomduit Corp or equal.
5. Substitutions: See Section 01 60 00 - Product Requirements.

B. Materials: Use non-detectable type polyethylene tape suitable for direct burial, unless otherwise indicated.

C. Non-detectable Type Tape: 6 inches wide, with minimum thickness of 4 mil.

D. Legend: Type of service, continuously repeated over full length of tape.

E. Color:

2.07 WARNING SIGNS AND LABELS

A. Manufacturers:
1. Brimar Industries, Inc: www.brimar.com.
2. Clarion Safety Systems, LLC; _____: www.clarionsafety.com.
3. Seton Identification Products; _____: www.seton.com.
4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Comply with ANSI Z535.2 or ANSI Z535.4 as applicable.

C. Warning Signs:
1. Materials:
2. Minimum Size: 7 by 10 inches unless otherwise indicated.

D. Warning Labels:
1. Materials: Use factory pre-printed or machine-printed self-adhesive polyester or self-adhesive vinyl labels; UV, chemical, water, heat, and abrasion resistant; produced using materials recognized to UL 969.
2. Machine-Printed Labels: Use thermal transfer process printing machines and accessories recommended by label manufacturer.
3. Minimum Size: 2 by 4 inches unless otherwise indicated.

PART 3 EXECUTION

3.01 PREPARATION

A. Clean surfaces to receive adhesive products according to manufacturer's instructions.

B. Degrease and clean surfaces to receive nameplates and labels.

3.02 INSTALLATION

A. Install products in accordance with manufacturer's instructions.

B. Install identification products to be plainly visible for examination, adjustment, servicing, and maintenance. Unless otherwise indicated, locate products as follows:
1. Surface-Mounted Equipment: Enclosure front.
2. Flush-Mounted Equipment: Inside of equipment door.
3. Free-Standing Equipment: Enclosure front; also enclosure rear for equipment with rear access.
4. Elevated Equipment: Legible from the floor or working platform.
5. Branch Devices: Adjacent to device.
6. Interior Components: Legible from the point of access.

NOT FOR BIDDING

7. Conduits: Legible from the floor.
8. Boxes: Outside face of cover.
9. Conductors and Cables: Legible from the point of access.
10. Devices: Outside face of cover.

C. Install identification products centered, level, and parallel with lines of item being identified.

D. Secure nameplates to exterior surfaces of enclosures using stainless steel screws and to interior surfaces using self-adhesive backing or epoxy cement.

E. Install self-adhesive labels and markers to achieve maximum adhesion, with no bubbles or wrinkles and edges properly sealed.

F. Install underground warning tape above buried lines with one tape per trench at 3 inches below finished grade.

G. Mark all handwritten text, where permitted, to be neat and legible.

3.03 FIELD QUALITY CONTROL

A. See Section 01 40 00 - Quality Requirements, for additional requirements.

B. Replace self-adhesive labels and markers that exhibit bubbles, wrinkles, curling or other signs of improper adhesion.

END OF SECTION

NOT FOR BIDDING

SECTION 26 24 16
PANELBOARDS

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Power distribution panelboards.

B. Lighting and appliance panelboards.

C. Overcurrent protective devices for panelboards.

1.02 RELATED REQUIREMENTS

A. Section 26 05 26 - Grounding and Bonding for Electrical Systems.

B. Section 26 05 29 - Hangers and Supports for Electrical Systems.

C. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.

D. Section 26 28 13 - Fuses: Fuses for fusible switches and spare fuse cabinets.

1.03 REFERENCE STANDARDS

A. NECA 1 - Standard for Good Workmanship in Electrical Construction; National Electrical Contractors Association.

B. NECA 407 - Standard for Installing and Maintaining Panelboards; National Electrical Contractors Association.

C. NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum).

D. NEMA PB 1 - Panelboards; National Electrical Manufacturers Association.

E. NEMA PB 1.1 - General Instructions for Proper Installation, Operation and Maintenance of Panelboards Rated 600 Volts or Less; National Electrical Manufacturers Association (ANSI/NEMA PB 1.1).

F. NETA ATS - Acceptance Testing Specifications for Electrical Power Equipment and Systems; International Electrical Testing Association (ANSI/NETA ATS).

G. NFPA 70 - National Electrical Code; National Fire Protection Association.

H. UL 50 - Enclosures for Electrical Equipment, Non-Environmental Considerations.

I. UL 50E - Enclosures for Electrical Equipment, Environmental Considerations.

J. UL 67 - Panelboards.

K. UL 489 - Molded-Case Circuit Breakers, Molded-Case Switches and Circuit Breaker Enclosures.

1.04 ADMINISTRATIVE REQUIREMENTS

A. Coordination:

1. Coordinate the work with other trades to avoid placement of ductwork, piping, equipment, or other potential obstructions within the dedicated equipment spaces and working clearances for electrical equipment required by NFPA 70.
2. Coordinate arrangement of electrical equipment with the dimensions and clearance requirements of the actual equipment to be installed.
3. Coordinate the work with other trades to provide walls suitable for installation of flush-mounted panelboards where indicated.
4. Verify with manufacturer that conductor terminations are suitable for use with the conductors to be installed.
5. Notify Architect of any conflicts with or deviations from the contract documents. Obtain direction before proceeding with work.

NOT FOR BIDDING

1.05 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

B. Product Data: Provide manufacturer's standard catalog pages and data sheets for panelboards, enclosures, overcurrent protective devices, and other installed components and accessories.
   1. Include characteristic trip curves for each type and rating of overcurrent protective device upon request.

C. Shop Drawings: Indicate outline and support point dimensions, voltage, main bus ampacity, overcurrent protective device arrangement and sizes, short circuit current ratings, conduit entry locations, conductor terminal information, and installed features and accessories.
   1. Include dimensioned plan and elevation views of panelboards and adjacent equipment with all required clearances indicated.
   2. Include wiring diagrams showing all factory and field connections.
   3. Clearly indicate whether proposed short circuit current ratings are fully rated or, where acceptable, series rated systems.

D. Source Quality Control Test Reports: Include reports for tests designated in NEMA PB 1 as routine tests.

E. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.

F. Project Record Documents: Record actual installed locations of panelboards and actual installed circuiting arrangements.

G. Maintenance Data: Include information on replacement parts and recommended maintenance procedures and intervals.

H. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
   1. See Section 01 60 00 - Product Requirements, for additional provisions.
   2. Panelboard Keys: Two of each different key.

1.06 QUALITY ASSURANCE

A. Conform to requirements of NFPA 70.

B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.

C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.

D. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

1.07 DELIVERY, STORAGE, AND HANDLING

A. Receive, inspect, handle, and store panelboards in accordance with manufacturer's instructions and NECA 407.

B. Store in a clean, dry space. Maintain factory wrapping or provide an additional heavy canvas or heavy plastic cover to protect units from dirt, water, construction debris, and traffic.

C. Handle carefully in accordance with manufacturer's written instructions to avoid damage to panelboard internal components, enclosure, and finish.

1.08 FIELD CONDITIONS

A. Maintain ambient temperature within the following limits during and after installation of panelboards:

NOT FOR BIDDING

1. Panelboards Containing Circuit Breakers: Between 23 degrees F and 104 degrees F.

PART 2 PRODUCTS

2.01 MANUFACTURERS

A. Eaton Corporation: www.eaton.com.

B. General Electric Company: www.geindustrial.com.

C. Schneider Electric; Square D Products: www.schneider-electric.us.

D. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 PANELBOARDS - GENERAL REQUIREMENTS

A. Provide products listed, classified, and labeled as suitable for the purpose intended.

B. Unless otherwise indicated, provide products suitable for continuous operation under the following service conditions:
   1. Altitude: Less than 6,600 feet.
   2. Ambient Temperature:
      a. Panelboards Containing Circuit Breakers: Between 23 degrees F and 104 degrees F.

C. Short Circuit Current Rating:
   1. Provide panelboards with listed short circuit current rating not less than the available fault current at the installed location as indicated on the drawings.

D. Mains: Configure for top or bottom incoming feed as indicated or as required for the installation.

E. Branch Overcurrent Protective Devices: Replaceable without disturbing adjacent devices.

F. Bussing: Sized in accordance with UL 67 temperature rise requirements.
   1. Provide fully rated neutral bus unless otherwise indicated, with a suitable lug for each feeder or branch circuit requiring a neutral connection.
   2. Provide solidly bonded equipment ground bus in each panelboard, with a suitable lug for each feeder and branch circuit equipment grounding conductor.

G. Conductor Terminations: Suitable for use with the conductors to be installed.

H. Enclosures: Comply with NEMA 250, and list and label as complying with UL 50 and UL 50E.
   1. Environment Type per NEMA 250: Unless otherwise indicated, as specified for the following installation locations:
      a. Indoor Clean, Dry Locations: Type 1.
   2. Boxes: Galvanized steel unless otherwise indicated.
      a. Provide wiring gutters sized to accommodate the conductors to be installed.
   3. Fronts:
      a. Fronts for Surface-Mounted Enclosures: Same dimensions as boxes.
      b. Fronts for Flush-Mounted Enclosures: Overlap boxes on all sides to conceal rough opening.
   4. Lockable Doors: All locks keyed alike unless otherwise indicated.

I. Future Provisions: Prepare all unused spaces for future installation of devices including bussing, connectors, mounting hardware and all other required provisions.

2.03 POWER DISTRIBUTION PANELBOARDS

A. Description: Panelboards complying with NEMA PB 1, power and feeder distribution type, circuit breaker type, and listed and labeled as complying with UL 67; ratings, configurations and features as indicated on the drawings.

B. Products:
   1. Schneider Electric USA.
   2. General Electric .
   3. Cutler Hammer- Eaton.

NOT FOR BIDDING

4. Substitutions: See Section 01 60 00 - Product Requirements.

C. Conductor Terminations:
1. Main and Neutral Lug Material: Copper, suitable for terminating copper conductors only.
2. Main and Neutral Lug Type: Mechanical.

D. Bussing:
1. Phase and Neutral Bus Material: Copper.
2. Ground Bus Material: Copper.

E. Circuit Breakers:
1. Provide bolt-on type or plug-in type secured with locking mechanical restraints.

F. Enclosures:
1. Provide surface-mounted enclosures unless otherwise indicated.
2. Fronts: Provide door-in-door trim with continuous hinged cover for access to load terminals and wiring gutters, and separate lockable hinged door with concealed hinges for access to overcurrent protective device handles without exposing live parts.
3. Provide metal circuit directory holder mounted on inside of door.

2.04 LIGHTING AND APPLIANCE PANELBOARDS

A. Description: Panelboards complying with NEMA PB 1, lighting and appliance branch circuit type, circuit breaker type, and listed and labeled as complying with UL 67; ratings, configurations and features as indicated on the drawings.

B. Products:
1. Schneider Electric USA.
2. General Electric.
3. Cutler Hammer- Eaton.
4. Substitutions: See Section 01 60 00 - Product Requirements.

C. Conductor Terminations:
1. Main and Neutral Lug Material: Copper, suitable for terminating copper conductors only.
2. Main and Neutral Lug Type: Mechanical.

D. Bussing:
1. Phase Bus Connections: Arranged for sequential phasing of overcurrent protective devices.
2. Phase and Neutral Bus Material: Copper.
3. Isolated Ground Bus bar: Insulated ,copper.
4. Ground Bus Material: Copper.

E. Circuit Breakers: Thermal magnetic bolt-on type unless otherwise indicated.

F. Enclosures:
1. Provide surface-mounted or flush-mounted enclosures as indicated.
2. Fronts: Provide door-in-door trim with hinged cover for access to load terminals and wiring gutters, and separate lockable hinged door with concealed hinges for access to overcurrent protective device handles without exposing live parts.
3. Provide clear plastic circuit directory holder mounted on inside of door.

2.05 OVERCURRENT PROTECTIVE DEVICES

A. Molded Case Circuit Breakers:
1. Description: Quick-make, quick-break, over center toggle, trip-free, trip-indicating circuit breakers listed and labeled as complying with UL 489, and complying with FS W-C-375 where applicable; ratings, configurations, and features as indicated on the drawings.
2. Interrupting Capacity:

NOT FOR BIDDING

a. Provide circuit breakers with interrupting capacity as required to provide the short circuit current rating indicated, but not less than:
   1) 14000 rms symmetrical amperes at 240 VAC or 208 VAC.
   2) 21000 rms symmetrical amperes at 480 VAC.
b. Fully Rated Systems: Provide circuit breakers with interrupting capacity not less than the short circuit current rating indicated.

3. Conductor Terminations:
   a. Provide mechanical lugs unless otherwise indicated.
   b. Lug Material: Copper, suitable for terminating copper conductors only.
4. Thermal Magnetic Circuit Breakers: For each pole, furnish thermal inverse time tripping element for overload protection and magnetic instantaneous tripping element for short circuit protection.
   a. Provide field-adjustable magnetic instantaneous trip setting for circuit breaker frame sizes 225 amperes and larger.
5. Electronic Trip Circuit Breakers: Furnish solid state, microprocessor-based, true rms sensing trip units.
   a. Provide the following field-adjustable trip response settings:
      1) Long time pickup, adjustable by replacing interchangeable trip unit or by setting dial.
      2) Long time delay.
      3) Short time pickup and delay.
      4) Instantaneous pickup.
      5) Ground fault pickup and delay where ground fault protection is indicated.
6. Multi-Pole Circuit Breakers: Furnish with common trip for all poles.
7. Provide listed switching duty rated circuit breakers with SWD marking for all branch circuits serving fluorescent lighting.
8. Do not use tandem circuit breakers.
9. Do not use handle ties in lieu of multi-pole circuit breakers.

2.06 SOURCE QUALITY CONTROL

A. Factory test panelboards according to NEMA PB 1.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that field measurements are as shown on the drawings.

B. Verify that the ratings and configurations of the panelboards and associated components are consistent with the indicated requirements.

C. Verify that mounting surfaces are ready to receive panelboards.

D. Verify that conditions are satisfactory for installation prior to starting work.

3.02 INSTALLATION

A. Install products in accordance with manufacturer's instructions.

B. Install panelboards securely, in a neat and workmanlike manner in accordance with NECA 1 (general workmanship), NECA 407 (panelboards), and NEMA PB 1.1.

C. Arrange equipment to provide minimum clearances in accordance with manufacturer's instructions and NFPA 70.

D. Provide required supports in accordance with Section 26 05 29.

E. Install panelboards plumb.

F. Install flush-mounted panelboards so that trims fit completely flush to wall with no gaps and rough opening completely covered.

NOT FOR BIDDING

G. Mount panelboards such that the highest position of any operating handle for circuit breakers or switches does not exceed 79 inches above the floor or working platform.

H. Provide minimum of six spare 1 inch trade size conduits out of each flush-mounted panelboard stubbed into accessible space above ceiling and below floor.

I. Provide grounding and bonding in accordance with Section 26 05 26.
   1. Terminate branch circuit equipment grounding conductors on solidly bonded equipment ground bus only. Do not terminate on isolated/insulated ground bus.

J. Install all field-installed branch devices, components, and accessories.

K. Multi-Wire Branch Circuits: Group grounded and ungrounded conductors together in the panelboard as required by NFPA 70.

L. Set field-adjustable circuit breaker tripping function settings as indicated.

M. Provide filler plates to cover unused spaces in panelboards.

N. Provide circuit breaker lock-on devices to prevent unauthorized personnel from de-energizing essential loads where indicated. Also provide for the following:
   1. Emergency and night lighting circuits.
   2. Fire detection and alarm circuits.
   3. Intrusion detection and access control system circuits.
   4. Video surveillance system circuits.

O. Identify panelboards in accordance with Section 26 05 53.

3.03 FIELD QUALITY CONTROL

A. See Section 01 40 00 - Quality Requirements, for additional requirements.

B. Inspect and test in accordance with NETA ATS, except Section 4.

C. Test GFCI circuit breakers to verify proper operation.

D. Correct deficiencies and replace damaged or defective panelboards or associated components.

3.04 ADJUSTING

A. Adjust tightness of mechanical and electrical connections to manufacturer's recommended torque settings.

B. Adjust alignment of panelboard fronts.

C. Load Balancing: For each panelboard, rearrange circuits such that the difference between each measured steady state phase load does not exceed 20 percent and adjust circuit directories accordingly. Maintain proper phasing for multi-wire branch circuits.

3.05 CLEANING

A. Clean dirt and debris from panelboard enclosures and components according to manufacturer's instructions.

B. Repair scratched or marred exterior surfaces to match original factory finish.

END OF SECTION

NOT FOR BIDDING

SECTION 26 27 17
EQUIPMENT WIRING

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Electrical connections to equipment.

1.02 RELATED REQUIREMENTS

A. Section 26 05 34 - Conduit.

B. Section 26 05 19 - LV Elec. Power Conductors and Cables (600V&Less) (600 V and Less).

C. Section 26 05 37 - Boxes.

D. Section 26 27 26 - Wiring Devices.

1.03 REFERENCE STANDARDS

A. NEMA WD 1 - General Color Requirements for Wiring Devices; National Electrical Manufacturers Association.

B. NEMA WD 6 - Wiring Devices - Dimensional Requirements; National Electrical Manufacturers Association.

C. NFPA 70 - National Electrical Code; National Fire Protection Association.

1.04 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

B. Product Data: Provide wiring device manufacturer’s catalog information showing dimensions, configurations, and construction.

C. Manufacturer's Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.

1.05 QUALITY ASSURANCE

A. Conform to requirements of NFPA 70.

B. Products: Listed, classified, and labeled as suitable for the purpose intended.

1.06 COORDINATION

A. Obtain and review shop drawings, product data, manufacturer's wiring diagrams, and manufacturer's instructions for equipment furnished under other sections.

B. Determine connection locations and requirements.

C. Sequence rough-in of electrical connections to coordinate with installation of equipment.

D. Sequence electrical connections to coordinate with start-up of equipment.

PART 2 PRODUCTS

2.01 MATERIALS

A. Cords and Caps: NEMA WD 6; match receptacle configuration at outlet provided for equipment.
   1. Colors: Conform to NEMA WD 1.
   2. Cord Construction: NFPA 70, Type SO, multiconductor flexible cord with identified equipment grounding conductor, suitable for use in damp locations.
   3. Size: Suitable for connected load of equipment, length of cord, and rating of branch circuit overcurrent protection.
   4. Product:
   5. Substitutions: See Section 01 60 00 - Product Requirements.

NOT FOR BIDDING

B. Disconnect Switches: As specified in Section and in individual equipment sections.

C. Wiring Devices: As specified in Section 26 27 26.

D. Flexible Conduit: As specified in Section 26 05 34.

E. Wire and Cable: As specified in Section 26 05 19.

F. Boxes: As specified in Section 26 05 37.

2.02 EQUIPMENT CONNECTIONS

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that equipment is ready for electrical connection, wiring, and energization.

3.02 ELECTRICAL CONNECTIONS

A. Make electrical connections in accordance with equipment manufacturer's instructions.

B. Make conduit connections to equipment using flexible conduit. Use liquidtight flexible conduit with watertight connectors in damp or wet locations.

C. Connect heat producing equipment using wire and cable with insulation suitable for temperatures encountered.

D. Provide receptacle outlet to accommodate connection with attachment plug.

E. Provide cord and cap where field-supplied attachment plug is required.

F. Install suitable strain-relief clamps and fittings for cord connections at outlet boxes and equipment connection boxes.

G. Install disconnect switches, controllers, control stations, and control devices to complete equipment wiring requirements.

H. Install terminal block jumpers to complete equipment wiring requirements.

I. Install interconnecting conduit and wiring between devices and equipment to complete equipment wiring requirements.

J. Coolers and Freezers: Cut and seal conduit openings in freezer and cooler walls, floor, and ceilings.

END OF SECTION

NOT FOR BIDDING

SECTION 26 27 26
WIRING DEVICES

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Wall switches.
B. Wall dimmers.
C. Receptacles.
D. Wall plates.
E. Floor box service fittings.

1.02 RELATED REQUIREMENTS

A. Section 26 05 26 - Grounding and Bonding for Electrical Systems.
B. Section 26 05 37 - Boxes.
C. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.
D. Section 26 27 17 - Equipment Wiring: Cords and plugs for equipment.

1.03 REFERENCE STANDARDS

A. FS W-C-596 - Connector, Electrical, Power, General Specification for; Federal Specification.
B. FS W-S-896 - Switches, Toggle (Toggle and Lock), Flush-mounted (General Specification); Federal Specification.
C. NECA 1 - Standard for Good Workmanship in Electrical Construction; National Electrical Contractors Association.
D. NEMA WD 1 - General Color Requirements for Wiring Devices; National Electrical Manufacturers Association.
E. NEMA WD 6 - Wiring Device -- Dimensional Specifications; National Electrical Manufacturers Association.
F. NFPA 70 - National Electrical Code; National Fire Protection Association.
G. UL 20 - General-Use Snap Switches.
H. UL 498 - Attachment Plugs and Receptacles.
I. UL 514D - Cover Plates for Flush-Mounted Wiring Devices.
J. UL 943 - Ground-Fault Circuit-Interrupters.

1.04 ADMINISTRATIVE REQUIREMENTS

A. Coordination:
   1. Coordinate the placement of outlet boxes with millwork, furniture, equipment, etc. installed under other sections or by others.
   2. Coordinate wiring device ratings and configurations with the electrical requirements of actual equipment to be installed.
   3. Coordinate the installation and preparation of uneven surfaces, such as split face block, to provide suitable surface for installation of wiring devices.
   4. Notify Architect of any conflicts or deviations from the contract documents to obtain direction prior to proceeding with work.

1.05 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

NOT FOR BIDDING

B. Product Data: Provide manufacturer's catalog information showing dimensions, colors, and configurations.

C. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.

1.06 QUALITY ASSURANCE

A. Conform to requirements of NFPA 70.

B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.

C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.

D. Products: Listed, classified, and labeled as suitable for the purpose intended.

1.07 DELIVERY, STORAGE, AND PROTECTION

A. Store in a clean, dry space in original manufacturer's packaging until ready for installation.

1.08 EXTRA MATERIALS

A. See Section 01 60 00 - Product Requirements, for additional provisions.

B. Furnish two of each style, size, and finish wall plate.

PART 2 PRODUCTS

2.01 MANUFACTURERS

A. Hubbell Incorporated; : www.hubbell-wiring.com.

B. Leviton Manufacturing Company, Inc; : www.leviton.com.

C. Lutron Electronics Company, Inc: www.lutron.com.

D. Pass & Seymour, a brand of Legrand North America, Inc; : www.legrand.us

E. Cooper Wiring Devices: www.cooperwiringdevices.com.

F. Leviton Manufacturing, Inc: www.leviton.com.

G. Substitutions: See Section 01 60 00 - Product Requirements.

H. Source Limitations: Where possible, for each type of wiring device furnish products produced by a single manufacturer and obtained from a single supplier.

2.02 WIRING DEVICE APPLICATIONS

A. Provide wiring devices suitable for intended use and with ratings adequate for load served.

B. For single receptacles installed on an individual branch circuit, provide receptacle with ampere rating not less than that of the branch circuit.

C. Provide weather resistant GFI receptacles with specified weatherproof covers for all receptacles installed outdoors or in damp or wet locations.

D. Provide GFI protection for all receptacles installed within 6 feet of sinks.

E. Unless noted otherwise, do not use combination switch/receptacle devices.

F. For flush floor service fittings, use carpet flanges for installations in carpeted floors.

2.03 WIRING DEVICE FINISHES

A. Provide wiring device finishes as described below unless otherwise indicated.

B. Wiring Devices, Unless Otherwise Indicated: Black with stainless steel nylon wall plate.

NOT FOR BIDDING

2.04 ALL WIRING DEVICES

A. Provide products listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.

2.05 WALL SWITCHES

A. Manufacturers:
   1. Hubbell Incorporated; : www.hubbell-wiring.com.
   2. Leviton Manufacturing Company, Inc; : www.leviton.com.
   3. Pass & Seymour, a brand of Legrand North America, Inc; : www.legrand.us
   4. Substitutions: See Section 01 60 00 - Product Requirements.

B. All Wall Switches: AC only, quiet operating, general-use snap switches with silver alloy contacts, complying with NEMA WD 1 and NEMA WD 6, and listed as complying with UL 20 and where applicable, FS W-S-896; types as indicated on the drawings.
   1. Wiring Provisions: Terminal screws for side wiring and screw actuated binding clamp for back wiring with separate ground terminal screw.

C. Standard Wall Switches: Commercial specification grade, 20 A, 120/277 V with standard toggle type switch actuator and maintained contacts; single pole single throw, double pole single throw, three way, or four way as indicated on the drawings.

D. Wall Switches: Heavy Duty, AC only general-use snap switch, complying with NEMA WD 6 and WD 1.
   1. Body and Handle: Black plastic with toggle handle.
   2. Ratings:
      a. Voltage: 120 - 277 volts, AC.
      b. Current: 20 amperes.
   3. Ratings: Match branch circuit and load characteristics.

E. Switch Types: Single pole, double pole, 3-way, and 4-way.

2.06 RECEPTACLES

A. Manufacturers:
   1. Hubbell Incorporated; : www.hubbell-wiring.com.
   2. Leviton Manufacturing Company, Inc; : www.leviton.com.
   3. Pass & Seymour, a brand of Legrand North America, Inc; : www.legrand.us
   4. Substitutions: See Section 01 60 00 - Product Requirements.

B. All Receptacles: Self-grounding, complying with NEMA WD 1 and NEMA WD 6, and listed as complying with UL 498, and where applicable, FS W-C-596; types as indicated on the drawings.
   1. Wiring Provisions: Terminal screws for side wiring or screw actuated binding clamp for back wiring with separate ground terminal screw.
   2. NEMA configurations specified are according to NEMA WD 6.

C. Convenience Receptacles:
   1. Standard Convenience Receptacles: Industrial specification grade, 20A, 125V, NEMA 5-20R; single or duplex as indicated on the drawings.
   2. Isolated Ground Convenience Receptacles: Industrial specification grade, 20A, 125V, NEMA 5-20R, with ground contacts isolated from mounting strap; isolated ground triangle mark on device face; single or duplex as indicated on the drawings.

D. GFI Receptacles:
   1. All GFI Receptacles: Provide with feed-through protection, light to indicate ground fault tripped condition and loss of protection, and list as complying with UL 943, class A.

E. Receptacles: Heavy duty, complying with NEMA WD 6 and WD 1.
   1. Device Body: Black plastic.

NOT FOR BIDDING

2. Configuration: NEMA WD 6, type as specified and indicated.

F. Convenience Receptacles: Type 5 - 20.

G. Single Convenience Receptacles.

H. Duplex Convenience Receptacles.

I. GFCI Receptacles: Convenience receptacle with integral ground fault circuit interrupter to meet regulatory requirements.

2.07 TELEPHONE JACKS

A. Product: AMP manufacturing

B. Substitutions: See Section 01 60 00 - Product Requirements.

2.08 WALL PLATES

A. Manufacturers:
1. Hubbell Incorporated; : www.hubbell-wiring.com.
2. Leviton Manufacturing Company, Inc; : www.leviton.com.
3. Pass & Seymour, a brand of Legrand North America, Inc; : www.legrand.us
4. Substitutions: See Section 01 60 00 - Product Requirements.

B. All Wall Plates: Comply with UL 514D.
1. Configuration: One piece cover as required for quantity and types of corresponding wiring devices.
2. Size: Standard; .
3. Screws: Metal with slotted heads finished to match wall plate finish.

C. Stainless Steel Wall Plates: Brushed satin finish, Type 302 stainless steel.

D. Decorative Cover Plates: stainless steel.

E. Jumbo Cover Plates: stainless steel.

F. Weatherproof Cover Plates: Gasketed cast metal with hinged cover.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that field measurements are as shown on the drawings.

B. Verify that outlet boxes are installed in proper locations and at proper mounting heights and are properly sized to accommodate devices and conductors in accordance with NFPA 70.

C. Verify that wall openings are neatly cut and will be completely covered by wall plates.

D. Verify that final surface finishes are complete, including painting.

E. Verify that floor boxes are adjusted properly.

F. Verify that branch circuit wiring installation is completed, tested, and ready for connection to wiring devices.

G. Verify that openings in access floor are in proper locations.

H. Verify that conditions are satisfactory for installation prior to starting work.

3.02 PREPARATION

A. Provide extension rings to bring outlet boxes flush with finished surface.

B. Clean dirt, debris, plaster, and other foreign materials from outlet boxes.

NOT FOR BIDDING

3.03 INSTALLATION

A. Perform work in a neat and workmanlike manner in accordance with NECA 1 and, where applicable, NECA 130, including mounting heights specified in those standards unless otherwise indicated.

B. Perform work in a neat and workmanlike manner in accordance with NECA 1, including mounting heights specified in that standard unless otherwise indicated.

C. Coordinate locations of outlet boxes provided under Section 26 05 37 as required for installation of wiring devices provided under this section.

D. Install wiring devices in accordance with manufacturer's instructions.

E. Install permanent barrier between ganged wiring devices when voltage between adjacent devices exceeds 300 V.

F. Where required, connect wiring devices using pigtails not less than 6 inches long. Do not connect more than one conductor to wiring device terminals.

G. Connect wiring devices by wrapping conductor clockwise 3/4 turn around screw terminal and tightening to proper torque specified by the manufacturer. Where present, do not use push-in pressure terminals that do not rely on screw-actuated binding.

H. Unless otherwise indicated, connect wiring device grounding terminal to branch circuit equipment grounding conductor and to outlet box with bonding jumper.

I. For isolated ground receptacles, connect wiring device grounding terminal only to identified branch circuit isolated equipment grounding conductor. Do not connect grounding terminal to outlet box or normal branch circuit equipment grounding conductor.

J. Install securely, in a neat and workmanlike manner, as specified in NECA 1.

K. Install wiring devices plumb and level with mounting yoke held rigidly in place.

L. Install wall switches with OFF position down.

M. Do not share neutral conductor on branch circuits utilizing wall dimmers.

N. Install vertically mounted receptacles with grounding pole on top and horizontally mounted receptacles with grounding pole on left.

O. Install wall plates to fit completely flush to wall with no gaps and rough opening completely covered without strain on wall plate. Repair or reinstall improperly installed outlet boxes or improperly sized rough openings. Do not use oversized wall plates in lieu of meeting this requirement.

P. Install blank wall plates on junction boxes and on outlet boxes with no wiring devices installed or designated for future use.

Q. Install receptacles with grounding pole on top.

R. Connect wiring device grounding terminal to outlet box with bonding jumper.

S. Install decorative plates on switch, receptacle, and blank outlets in finished areas.

T. Connect wiring devices by wrapping conductor around screw terminal.

U. Use jumbo size plates for outlets installed in masonry walls.

V. Install galvanized steel plates on outlet boxes and junction boxes in unfinished areas, above accessible ceilings, and on surface mounted outlets.

3.04 INTERFACE WITH OTHER PRODUCTS

A. Coordinate locations of outlet boxes provided under Section 26 05 37 to obtain mounting heights.

B. Install wall switch 48 inches above finished floor.

NOT FOR BIDDING

C. Install convenience receptacle 18 inches above finished floor.

D. Install convenience receptacle 6 inches above backsplash of counter.

E. Install telephone jack 18 inches above finished floor.

F. Install telephone jack for side-reach wall telephone to position top of telephone at 54 inches above finished floor.

G. Install telephone jack for forward-reach wall telephone to position top of telephone at 48 inches above finished floor.

H. Coordinate installation of access floor boxes with access floor system provided under Section 09 69 00.

I. Coordinate the installation of wiring devices with underfloor duct service fittings provided under Section 26 05 40.

3.05 FIELD QUALITY CONTROL

A. Perform field inspection, testing, adjusting, and balancing in accordance with Section 01 40 00.

B. Inspect each wiring device for damage and defects.

C. Operate each wall switch, wall dimmer, and fan speed controller with circuit energized to verify proper operation.

D. Operate each wall switch with circuit energized and verify proper operation.

E. Verify that each receptacle device is energized.

F. Test each receptacle to verify operation and proper polarity.

G. Test each GFCI receptacle for proper tripping operation according to manufacturer's instructions.

H. Correct wiring deficiencies and replace damaged or defective wiring devices.

I. Verify that each telephone jack is properly connected and circuit is operational.

3.06 ADJUSTING

A. Adjust devices and wall plates to be flush and level.

3.07 CLEANING

A. Clean exposed surfaces to remove dirt, paint, or other foreign material and restore to match original factory finish.

END OF SECTION

NOT FOR BIDDING

SECTION 26 28 13
FUSES

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Fuses.

1.02 REFERENCE STANDARDS

A. NEMA FU 1 - Low Voltage Cartridge Fuses; National Electrical Manufacturers Association.

B. NFPA 70 - National Electrical Code; National Fire Protection Association.

C. UL 248-1 - Low-Voltage Fuses - Part 1: General Requirements.

1.03 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

B. Product Data: Provide manufacturer's standard data sheets including voltage and current ratings, interrupting ratings, time-current curves, and current limitation curves.

1.04 QUALITY ASSURANCE

A. Conform to requirements of NFPA 70.

B. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience and with service facilities within 100 miles of Project.

C. Products: Listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.

1.05 MAINTENANCE MATERIALS

A. See Section 01 60 00 - Product Requirements, for additional provisions.

B. Furnish two fuse pullers.

C. Furnish three of each size and type fuse installed.

PART 2 PRODUCTS

2.01 MANUFACTURERS

A. Cooper Bussmann, a division of Cooper Industries: www.cooperindustries.com.

B. Mersen (formerly Ferraz Shawmut): ferrazshawmut.mersen.com.

C. Littelfuse, Inc: www.littelfuse.com.

D. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 FUSES

A. Provide products listed, classified, and labeled as suitable for the purpose intended.

B. Unless specifically indicated to be excluded, provide fuses for all fusible equipment as required for a complete operating system.

C. Provide fuses of the same type, rating, and manufacturer within the same switch.

D. Comply with UL 248-1.

E. Unless otherwise indicated, provide cartridge type fuses complying with NEMA FU 1, Class and ratings as indicated.

F. Voltage Rating: Suitable for circuit voltage.

G. Power Load Feeder Switches: Class RK1 (time delay).

H. Motor Load Feeder Switches: Class RK1 (time delay).

NOT FOR BIDDING

I. Other Feeder Switches: Class RK1 (time delay).

J. General Purpose Branch Circuits: Class RK1 (time delay).

K. Motor Branch Circuits: Class L time delay.

L. Lighting Branch Circuits: Class G.

2.03 CLASS RK1 (TIME DELAY) FUSES

A. Manufacturers:
   1. Bussman Corp.
   2. Substitutions: See Section 01 60 00 - Product Requirements.

B. Construction: Current limiting, dual-element fuse, 10 seconds minimum at 500% rated amps, with copper fuse element.

2.04 CLASS G FUSES

PART 3 EXECUTION

3.01 INSTALLATION

A. Do not install fuses until circuits are ready to be energized.

B. Install fuses with label oriented such that manufacturer, type, and size are easily read.

END OF SECTION

NOT FOR BIDDING

SECTION 26 32 13
ENGINE GENERATORS

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Packaged engine generator system and associated components and accessories:
   1. Engine and engine accessory equipment.
   2. Alternator (generator).
   3. Generator set control system.
   4. Generator set enclosure.

B. Packaged engine generator set.

C. Heat exchanger.

D. Exhaust silencer, emissions controls, and fittings.

E. Remote control panel.

F. Battery and charger.

G. Sound enclosure.

1.02 RELATED REQUIREMENTS

A. Section 26 05 26 - Grounding and Bonding for Electrical Systems.

B. Section 26 05 29 - Hangers and Supports for Electrical Systems.

C. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.

D. Section 26 36 00 - Transfer Switches.

1.03 REFERENCE STANDARDS

A. NECA 1 - Standard for Good Workmanship in Electrical Construction; National Electrical Contractors Association.

B. NECA/EGSA 404 - Standard for Installing Generator Sets; National Electrical Contractors Association.

C. NEMA MG 1 - Motors and Generators; National Electrical Manufacturers Association.

D. NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum); National Electrical Manufacturers Association.

E. NFPA 30 - Flammable and Combustible Liquids Code; National Fire Protection Association.

F. NFPA 37 - Standard for the Installation and Use of Stationary Combustion Engines and Gas Turbines; National Fire Protection Association.

G. NFPA 70 - National Electrical Code; National Fire Protection Association.

H. NFPA 99 - Health Care Facilities Code; National Fire Protection Association.

I. NFPA 110 - Standard for Emergency and Standby Power Systems; National Fire Protection Association.

J. UL 1236 - Battery Chargers for Charging Engine-Starter Batteries.

K. UL 2200 - Stationary Engine Generator Assemblies.

1.04 ADMINISTRATIVE REQUIREMENTS

A. Coordination:
   1. Coordinate compatibility of generator sets to be installed with work provided under other sections or by others.

NOT FOR BIDDING

a. Transfer Switches: See Section 26 36 00.

2. Coordinate the work with other trades to avoid placement of ductwork, piping, equipment or other potential obstructions within the spaces dedicated for engine generator system.
3. Coordinate arrangement of equipment with the dimensions and clearance requirements of the actual equipment to be installed.
4. Coordinate the work to provide electrical circuits suitable for the power requirements of the actual auxiliary equipment and accessories to be installed.
5. Notify Architect of any conflicts with or deviations from the contract documents. Obtain direction before proceeding with work.

B. Preinstallation Meeting: Convene one week before starting work of this section; require attendance of all affected installers.

1.05 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

B. Product Data: Provide manufacturer's standard catalog pages and data sheets for each product, including ratings, configurations, dimensions, finishes, weights, service condition requirements, and installed features. Include alternator starting capabilities, engine fuel consumption rates, and cooling, combustion air, and exhaust requirements.
1. Include generator set sound level test data.
2. Include characteristic trip curves for overcurrent protective devices upon request.
3. Include alternator thermal damage curve upon request.

C. Shop Drawings: Include dimensioned plan views and sections indicating locations of system components, required clearances, and field connection locations. Include system interconnection schematic diagrams showing all factory and field connections.

D. Specimen Warranty: Submit sample of manufacturer's warranty.

E. Evidence of qualifications for installer.

F. Evidence of qualifications for maintenance contractor (if different entity from installer).

G. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, installation, and operation of product.

H. Manufacturer's factory emissions certification.

I. Manufacturer's certification that products meet or exceed specified requirements.

J. Source quality control test reports.

K. Provide NFPA 110 required documentation from manufacturer where requested by authorities having jurisdiction, including but not limited to:
1. Certified prototype tests.
2. Torsional vibration compatibility certification.
3. NFPA 110 compliance certification.
4. Certified rated load test at rated power factor.

L. Manufacturer’s detailed field testing procedures.

M. Field quality control test reports.

N. Operation and Maintenance Data: Include detailed information on system operation, equipment programming and setup, replacement parts, and recommended maintenance procedures and intervals.
1. Include contact information for entity that will be providing contract maintenance and trouble call-back service.

O. Executed Warranty: Submit documentation of final executed warranty completed in Owner's name and registered with manufacturer.

NOT FOR BIDDING

P. Maintenance contracts.

Q. Project Record Documents: Record actual locations of system components, installed circuiting arrangements and routing, and final equipment settings.

R. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
   1. See Section 01 60 00 - Product Requirements, for additional provisions.
   2. Extra Fuses: One of each type and size.
   3. Extra Filter Elements: One of each type, including fuel, oil and air.

S. Shop Drawings: Indicate electrical characteristics and connection requirements. Show plan and elevation views with overall and interconnection point dimensions, fuel consumption rate curves at various loads, ventilation and combustion air requirements, electrical diagrams including schematic and interconnection diagrams.

T. Product Data: Provide data showing dimensions, weights, ratings, interconnection points, and internal wiring diagrams for engine, generator, control panel, battery, battery rack, battery charger, exhaust silencer, vibration isolators, day tank, and remote radiator.

U. Test Reports: Indicate results of performance testing.

V. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, installation, and starting of product.

W. Manufacturer's Certificate: Certify that products meet or exceed specified requirements.

X. Manufacturer's Field Reports: Indicate procedures and findings.

Y. Operation Data: Include instructions for normal operation.

Z. Maintenance Data: Include instructions for routine maintenance requirements, service manuals for engine and day tank, oil sampling and analysis for engine wear, and emergency maintenance procedures.

AA. Maintenance Materials and Tools: Furnish the following for Owner's use in maintenance of project.
   1. Extra Filter Elements: One of each type, including fuel, oil and air.
   2. Tools: One set of tools required for preventative maintenance of the engine generator system. Package tools in adequately sized metal tool box.

1.06 QUALITY ASSURANCE

A. Comply with the following:
   1. NFPA 70 (National Electrical Code).
   2. NFPA 110 (Standard for Emergency and Standby Power Systems); meet requirements for Level 1 system.
   3. NFPA 37 (Standard for the Installation and Use of Stationary Combustion Engines and Gas Turbines).

B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.

C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
   1. Authorized service facilities located within 200 miles of project site.

D. Installer Qualifications: Company specializing in performing the work of this section with minimum three years documented experience with engine generator systems of similar size, type, and complexity; manufacturer's authorized installer.

E. Maintenance Contractor Qualifications: Same entity as installer or different entity with specified qualifications.

NOT FOR BIDDING

1. Contract maintenance office located within 200 miles of project site.

F. Products: Listed, classified, and labeled by Underwriter's Laboratories Inc. (UL) or testing firm acceptable to authorities having jurisdiction as suitable for the purpose indicated.

G. Conform to requirements of NFPA 70.
   1. Maintain one copy of each document on site.

H. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience with service facilities within 100 miles of Project.

I. Supplier Qualifications: Authorized distributor of specified manufacturer with minimum three years documented experience.

J. Products: Furnish products listed and classified by Underwriters Laboratories as suitable for purpose specified and indicated.

1.07 DELIVERY, STORAGE, AND HANDLING

A. Receive, inspect, handle, and store generator sets in accordance with manufacturer's instructions and NECA/EGSA 404.

B. Store in a clean, dry space. Maintain factory wrapping or provide an additional heavy canvas or heavy plastic cover to protect units from dirt, water, construction debris, and traffic.

C. Handle carefully in accordance with manufacturer's instructions to avoid damage to generator set components, enclosure, and finish.

1.08 FIELD CONDITIONS

A. Maintain field conditions within manufacturer's required service conditions during and after installation.

1.09 WARRANTY

A. Provide minimum one year manufacturer warranty covering repair or replacement due to defective materials or workmanship.

B. Accept unit on site on skids. Inspect for damage.

C. Protect equipment from dirt and moisture by securely wrapping in heavy plastic.

PART 2 PRODUCTS

2.01 MANUFACTURERS

A. Packaged Engine Generator Set - Basis of Design: Kohler Power Systems; Model 25 REZG

B. Packaged Engine Generator Set - Other Acceptable Manufacturers:
   1. Caterpillar Inc: www.cat.com.
   2. Cummins Power Generation Inc: www.cumminspower.com.

C. Substitutions: See Section 01 60 00 - Product Requirements.

D. Products other than basis of design are subject to compliance with specified requirements and prior approval of Engineer. By using products other than basis of design, Contractor accepts responsibility for costs associated with any necessary modifications to related work, including any design fees.

E. Source Limitations: Furnish engine generator sets and associated components and accessories produced by a single manufacturer and obtained from a single supplier.

F. Caterpillar Inc: www.caterpillar.com.

G. Cummins Engine Company, I: www.cummins.com.

H. Kohler Power Systems: www.kohler.com.

I. Substitutions: See Section 01 60 00 - Product Requirements.

NOT FOR BIDDING

2.02 PACKAGED ENGINE GENERATOR SYSTEM

A. Provide new engine generator system consisting of all required equipment, sensors, conduit, boxes, wiring, piping, supports, accessories, system programming, etc. as necessary for a complete operating system that provides the functional intent indicated.

B. System Description:
   1. Application: _Stand by.
   2. Configuration: Single packaged engine generator set operated independently (not in parallel).

C. Packaged Engine Generator Set:
   1. Type: Gaseous (spark ignition).
   2. Power Rating: 25 kW, standby. PRIOR TO BID, THE CONTRACTOR TO VERIFY GENERATOR SIZING BASED ON LOADS IDENTIFIED IN THE EMERGENCY PANEL.
   3. Voltage: As indicated on drawings.
   4. Main Line Circuit Breaker:
      a. Type: Thermal magnetic.
      b. Trip Rating: Select according to generator set rating.

D. Generator Set General Requirements:
   1. Prototype tested in accordance with NFPA 110 for Level 1 systems.
   2. Factory-assembled, with components mounted on suitable base.
   3. List and label engine generator assembly as complying with UL 2200.
   4. Power Factor: Unless otherwise indicated, specified power ratings are at 0.8 power factor for three phase voltages and 1.0 power factor for single phase voltages.
   5. Provide suitable guards to protect personnel from accidental contact with rotating parts, hot piping, and other potential sources of injury.
   6. Main Line Circuit Breakers: Provide factory-installed line side connections with suitable lugs for load side connections.

E. Service Conditions: Provide engine generator system and associated components suitable for operation under the service conditions at the installed location.
   1. Altitude: 1000 feet.
   2. Ambient Temperature: Between 25 and 104 degrees F.

F. Starting and Load Acceptance Requirements:
   1. Cranking Method: Cycle cranking complying with NFPA 110 (15 second crank period, followed by 15 second rest period, with cranking limiter time-out after 3 cycles), unless otherwise required.
   2. Cranking Limiter Time-Out: If generator set fails to start after specified cranking period, indicate overcrank alarm condition and lock-out generator set from further cranking until manually reset.
   3. Start Time: Capable of starting and achieving conditions necessary for load acceptance within 10 seconds (NFPA 110, Type 10).
   4. Maximum Load Step: Supports 100 percent of rated load in one step.
      a. Maximum Voltage Deviation with Load Step: 30 percent.
      b. Maximum Frequency Deviation with Load Step: 10 percent.

G. Exhaust Emissions Requirements:
   1. Comply with federal (EPA), state, and local regulations applicable at the time of commissioning; include factory emissions certification with submittals.
   2. Do not make modifications affecting generator set factory emissions certification without approval of manufacturer and Engineer. Where such modifications are made, provide field emissions testing as necessary for certification.

H. Sound Level Requirements:

NOT FOR BIDDING

1. Do not exceed 70 dBA when measured at 23 feet from generator set in free field (no sound barriers) while operating at full load; include manufacturer's sound data with submittals.

I. Description: NFPA 110, engine generator system to provide source of power for Level 1 applications conforming to NFPA 99.

J. System Capacity: 25 kW, 31 kVA at elevation of 1000 feet above sea level, continuous rating using engine-mounted radiator.

2.03 ENGINE AND ENGINE ACCESSORY EQUIPMENT

A. Provide engine with adequate horsepower to achieve specified power output at rated speed, accounting for alternator efficiency and parasitic loads.

B. Engine Starting System:
1. System Type: Electric, with DC solenoid-activated starting motor(s).
2. Battery(s):
   a. Battery Type: Lead-acid.
   b. Battery Capacity: Size according to manufacturer's recommendations for achieving starting and load acceptance requirements under worst case ambient temperature; capable of providing cranking through two complete periods of cranking limiter time-outs without recharging.
   c. Provide battery rack, cables, and connectors suitable for the supplied battery(s); size battery cables according to manufacturer's recommendations for cable length to be installed.
3. Battery-Charging Alternator: Engine-driven, with integral solid-state voltage regulation.
4. Battery Charger:
   a. Provide dual rate battery charger with automatic float and equalize charging modes and minimum rating of 10 amps; suitable for maintaining the supplied battery(s) at full charge without manual intervention.
   b. Capable of returning supplied battery(s) from fully discharged to fully charged condition within 24 hours, as required by NFPA 110 for Level 1 applications while carrying normal loads.
   c. Recognized as complying with UL 1236.
   d. Furnished with integral overcurrent protection; current limited to protect charger during engine cranking; reverse polarity protection.
   e. Provide integral DC output ammeter and voltmeter with five percent accuracy.
   f. Provide alarm output contacts as necessary for alarm indications.
5. Battery Heater: Provide thermostatically controlled battery heater to improve starting under cold ambient conditions.

C. Engine Speed Control System (Governor):
1. Single Engine Generator Sets (Not Operated in Parallel): Provide electronic isochronous governor for controlling engine speed/alternator frequency.
2. Frequency Regulation, Electronic Isochronous Governors: No change in frequency from no load to full load; plus/minus 0.25 percent at steady state.

D. Engine Lubrication System:
1. System Type: Full pressure, with engine-driven, positive displacement lubrication oil pump, replaceable full-flow oil filter(s), and dip-stick for oil level indication. Provide oil cooler where recommended by manufacturer.
2. Oil Heater: Provide thermostatically controlled oil heater to improve starting under cold ambient conditions.

E. Engine Cooling System:

NOT FOR BIDDING

1. System Type: Closed-loop, liquid-cooled, with unit-mounted radiator/fan and engine-driven coolant pump; suitable for providing adequate cooling while operating at full load under worst case ambient temperature.
2. Fan Guard: Provide suitable guard to protect personnel from accidental contact with fan.

F. Engine Air Intake and Exhaust System:
1. Air Intake Filtration: Provide engine-mounted, replaceable, dry element filter.
2. Engine Exhaust Connection: Provide suitable, approved flexible connector for coupling engine to exhaust system.
3. Exhaust Silencer: Provide critical grade or better exhaust silencer with sound attenuation not less than basis of design; select according to manufacturer's recommendations to meet sound performance requirements, where specified.

G. Type: Water-cooled inline or V-type, four stroke cycle, electric ignition natural-gas internal combustion engine.

H. Rating: Sufficient to operate under 10 percent overload for one hour in an ambient of 90 degrees F at elevation of 1000 feet.

I. Engine speed: 1800 rpm.

J. Governor: Isochronous type to maintain engine speed within 0.5 percent, steady state, and 5 percent, no load to full load, with recovery to steady state within 2 seconds following sudden load changes. Equip governor with means for manual operation and adjustment.

K. Safety Devices: Engine shutdown on high water temperature, low oil pressure, overspeed, and engine overcrank. Limits as selected by manufacturer.

L. Engine Starting: DC starting system with positive engagement, number and voltage of starter motors in accordance with manufacturer's instructions. Include remote starting control circuit, with MANUAL-OFF-REMOTE selector switch on engine-generator control panel.

M. Engine Jacket Heater: Thermal circulation type water heater with integral thermostatic control, sized to maintain engine jacket water at 90 degrees F, and suitable for operation on 120 volts AC.

N. Radiator: Radiator using glycol coolant, with blower type fan, sized to maintain safe engine temperature in ambient temperature of 110 degrees F. Radiator air flow restriction 0.5 inches of water maximum.

O. Engine Accessories: Fuel filter, lube oil filter, intake air filter, lube oil cooler, fuel transfer pump, fuel priming pump, gear-driven water pump. Include fuel pressure gage, water temperature gage, and lube oil pressure gage on engine/generator control panel.

P. Mounting: Provide unit with suitable spring-type vibration isolators and mount on structural steel base.

2.04 ALTERNATOR (GENERATOR)

A. Alternator: 4-pole, 1800 rpm (60 Hz output) revolving field, synchronous generator complying with NEMA MG 1; connected to engine with flexible coupling; voltage output configuration as indicated, with reconnectable leads for 3 phase alternators.

B. Exciter:
1. Exciter Type: Brushless; provide permanent magnet generator (PMG) excitation system; self-excited (shunt) systems are not permitted.
2. PMG Excitation Short-Circuit Current Support: Capable of sustaining 300 percent of rated output current for 10 seconds.
3. Voltage Regulation (with PMG excitation): Plus/minus 0.5 percent for any constant load from no load to full load.

C. Temperature Rise: Comply with UL 2200.

NOT FOR BIDDING

D. Insulation System: NEMA MG 1, Class H; suitable for alternator temperature rise.

E. Enclosure: NEMA MG 1, drip-proof.

F. Total Harmonic Distortion: Not greater than five percent.

G. Alternator Heater: Provide strip heater to prevent moisture condensation on alternator windings.

2.05 GENERATOR SET CONTROL SYSTEM

A. Provide microprocessor-based control system for automatic control, monitoring, and protection of generator set. Include sensors, wiring, and connections necessary for functions/indications specified.

B. Control Panel:
   1. Control Panel Mounting: Unit-mounted unless otherwise indicated; vibration isolated.
   2. Generator Set Control Functions:
      a. Automatic Mode: Initiates generator set start/shutdown upon receiving corresponding signal from remote device (e.g. automatic transfer switch).
      b. Manual Mode: Initiates generator set start/shutdown upon direction from operator.
      c. Reset Mode: Clears all faults, allowing generator set restart after a shutdown.
      d. Emergency Stop: Immediately shuts down generator set (without time delay) and prevents automatic restarting until manually reset.
      e. Cycle Cranking: Programmable crank time, rest time, and number of cycles.
      f. Time Delay: Programmable for shutdown (engine cooldown) and start (engine warmup).
      g. Voltage Adjustment: Adjustable through range of plus/minus 5 percent.
   3. Generator Set Status Indications:
      a. Voltage (Volts AC): Line-to-line, line-to-neutral for each phase.
      b. Current (Amps): For each phase.
      c. Frequency (Hz).
      d. Real power (W/kW).
      e. Reactive power (VAR/kVAR).
      f. Apparent power (VA/kVA).
      g. Power factor.
      h. Duty Level: Actual load as percentage of rated power.
      i. Engine speed (RPM).
      j. Battery voltage (Volts DC).
      k. Engine oil pressure.
      l. Engine coolant temperature.
      m. Engine run time.
      n. Generator powering load (position signal from transfer switch).
   4. Generator Set Protection and Warning/Shutdown Indications:
      a. Comply with NFPA 110; configurable for NFPA 110 Level 1 or Level 2, or NFPA 99 systems including but not limited to the following protections/indications:
         1) Overcrank (shutdown).
         2) Low coolant temperature (warning).
         3) High coolant temperature (warning).
         4) High coolant temperature (shutdown).
         5) Low oil pressure (shutdown).
         6) Overspeed (shutdown).
         7) Low fuel level (warning).
         8) Low coolant level (warning/shutdown).
         9) Generator control not in automatic mode (warning).
         10) High battery voltage (warning).

NOT FOR BIDDING

11) Low cranking voltage (warning).
12) Low battery voltage (warning).
13) Battery charger failure (warning).

b. In addition to NFPA 110 requirements, provide the following protections/indications:
1) High AC voltage (shutdown).
2) Low AC voltage (shutdown).
3) High frequency (shutdown).
4) Low frequency (shutdown).
5) Overcurrent (shutdown).

c. Provide contacts for local and remote common alarm.
d. Provide lamp test function that illuminates all indicator lamps.

5. Other Control Panel Features:
a. Event log.

C. Remote Annunciator:
1. Remote Annunciator Mounting: Wall-mounted; Provide flush-mounted annunciator for finished areas and surface-mounted annunciator for non-finished areas unless otherwise indicated.
2. Generator Set Status Indications:
a. Generator powering load (via position signal from transfer switch).
b. Communication functional.
3. Generator Set Warning/Shutdown Indications:
a. Comply with NFPA 110 for Level 1 systems including but not limited to the following indications:
1) Overcrank (shutdown).
2) Low coolant temperature (warning).
3) High coolant temperature (warning).
4) High coolant temperature (shutdown).
5) Low oil pressure (shutdown).
6) Overspeed (shutdown).
7) Low fuel level (warning).
8) Low coolant level (warning/shutdown).
9) Generator control not in automatic mode (warning).
10) High battery voltage (warning).
11) Low cranking voltage (warning).
12) Low battery voltage (warning).
13) Battery charger failure (warning).
b. Provide audible alarm with silence function.
c. Provide lamp test function that illuminates all indicator lamps.

2.06 GENERATOR SET ENCLOSURE

A. Enclosure Type: Sound attenuating, weather protective.
B. Enclosure Material: Steel.
C. Hardware Material: Stainless steel.
D. Color: Manufacturer's standard.
E. Access Doors: Lockable, with all locks keyed alike.
F. Openings: Designed to prevent bird/rodent entry.
G. External Drains: Extend oil and coolant drain lines to exterior of enclosure for maintenance service.

NOT FOR BIDDING

H. Sound Attenuating Enclosures: Line enclosure with non-hydroscopic, self-extinguishing sound-attenuating material.

I. Exhaust Silencers: Where exhaust silencers are mounted within enclosure in main engine compartment, insulate silencer to minimize heat dissipation as necessary for operation at rated load under worst case ambient temperature.

J. Enclosure Space Heater: Provide thermostatically controlled enclosure space heater to prevent condensation and improve starting under cold ambient conditions; size according to manufacturer's recommendations for achieving starting and load acceptance requirements under worst case ambient temperature.

2.07 SOURCE QUALITY CONTROL

A. Perform production tests on generator sets at factory to verify operation and performance characteristics prior to shipment. Include certified test report with submittals.

B. Generator Set production testing to include, at a minimum:
   1. Operation at rated load and rated power factor.
   2. Single step load pick-up.
   3. Transient and steady state voltage and frequency performance.
   4. Operation of safety shutdowns.

C. Generator: NEMA MG 1, three phase, four pole, reconnectable brushless synchronous generator with brushless exciter.

D. Rating: 25 kW, 31 kVA, at 0.8 power factor, 208Y-120 volts, 60 Hz at 1800 rpm.

E. Insulation Class: F.

F. Temperature Rise: 130 degrees C Standby.

G. Enclosure: NEMA MG 1, open drip proof.

H. Voltage Regulation: Include generator-mounted volts per hertz exciter-regulator to match engine and generator characteristics, with voltage regulation plus or minus 1 percent from no load to full load. Include manual controls to adjust voltage droop, voltage level (plus or minus 5 percent) and voltage gain.

2.08 ACCESSORIES

A. Heat Exchanger: Engine or base-mounted heat exchanger and expansion tank of type and capacity recommended by engine manufacturer. Include solenoid shut-off valve for installation on the cooling water inlet, and connected to open when engine runs.

B. Exhaust Silencer: Residential type silencer, with muffler companion flanges and flexible stainless steel exhaust fitting, sized in accordance with engine manufacturer's instructions.

C. Batteries: Heavy duty, diesel starting type lead-acid storage batteries, 170 ampere-hours minimum capacity. Match battery voltage to starting system. Include necessary cables and clamps.

D. Battery Tray: Treated for electrolyte resistance, constructed to contain spillage.

E. Battery Charger: Current limiting type designed to float at 2.17 volts per cell and equalize at 2.33 volts per cell. Include overload protection, full wave rectifier, DC voltmeter and ammeter, and 120 volts AC fused input. Provide wall-mounted enclosure to meet NEMA 250, Type 1 requirements.

F. Line Circuit Breaker: Molded case circuit breaker on generator output with integral thermal and instantaneous magnetic trip in each pole, sized in accordance with NFPA 70; UL listed. Include battery-voltage operated shunt trip, connected to open circuit breaker on engine failure. Unit mount in enclosure to meet NEMA 250, Type 1 requirements.

NOT FOR BIDDING

G. Engine-Generator Control Panel: NEMA 250, Type 1 generator mounted control panel enclosure with engine and generator controls and indicators. Include provision for padlock and the following equipment and features:
   1. Frequency Meter: 45-65 Hz. range, 3.5 inch dial.
   2. AC Output Voltmeter: 3.5 inch dial, 2 percent accuracy, with phase selector switch.
   3. AC Output Ammeter: 3.5 inch dial, 2 percent accuracy, with phase selector switch.
   4. Output voltage adjustment.
   5. Push-to-test indicator lamps, one each for low oil pressure, high water temperature, overspeed, and overcrank.
   6. Engine start/stop selector switch.
   7. Engine running time meter.
   8. Oil pressure gage.
   9. Water temperature gage.
   10. Auxiliary Relay: 3PDT, operates when engine runs, with contact terminals prewired to terminal strip.
   11. Additional visual indicators and alarms as required by NFPA 110.
   12. Remote Alarm Contacts: Pre-wire SPDT contacts to terminal strip for remote alarm functions required by NFPA 110.

H. Remote Annunciator Panel: Surface mounted panel with brushed stainless steel. Provide audible and visible indicators and alarms required by NFPA 110.

I. Emissions controls: Catalyst based, meeting State of Delaware Department of Natural Resourcese and Environmental Controls standards for stand-by generators.

J. Sound Enclosure:Lift based steel construction with hinged doors,.Accoustic insulation meeting UL94HF1 flammibility classification and repels moisture absorbption. Maximium sound level shall be 69 dB at 23.1 ft.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that field measurements are as shown on the drawings.

B. Verify that the ratings and configurations of generator sets and auxiliary equipment are consistent with the indicated requirements.

C. Verify that rough-ins for field connections are in the proper locations.

D. Verify that mounting surfaces are ready to receive equipment.

E. Verify that conditions are satisfactory for installation prior to starting work.

3.02 INSTALLATION

A. Perform work in a neat and workmanlike manner in accordance with NECA 1.

B. Install products in accordance with manufacturer's instructions.

C. Install generator sets and associated accessories in accordance with NECA/EGSA 404.

D. Arrange equipment to provide minimum clearances and required maintenance access.

E. Unless otherwise indicated, mount generator set on properly sized 6 inch high concrete pad. Provide suitable vibration isolators where not factory installed.

F. Provide required support and attachment in accordance with Section 26 05 29.

G. Use manufacturer's recommended oil and coolant, suitable for the worst case ambient temperatures.

H. Provide gas piping in accordance with Section 22 10 05.

I. Provide engine exhaust piping in accordance with Section 23 51 00, where not factory installed.

NOT FOR BIDDING

1. Include piping expansion joints, piping insulation, thimble, condensation trap/drain, rain cap, hangers/supports, etc. as indicated or as required.
2. Do not exceed manufacturer's maximum back pressure requirements.

J. Install exhaust silencer where not factory installed.

K. Provide grounding and bonding in accordance with Section 26 05 26.

L. Identify system wiring and components in accordance with Section 26 05 53.

3.03 FIELD QUALITY CONTROL

A. Provide services of a manufacturer's authorized representative to prepare and start systems and perform inspection and testing. Include manufacturer's detailed testing procedures and field reports with submittals.

B. Notify Owner and Architect at least two weeks prior to scheduled inspections and tests.

C. Notify authorities having jurisdiction and comply with their requirements for scheduling inspections and tests and for observation by their personnel.

D. Provide all equipment, tools, and supplies required to accomplish inspection and testing, including load bank and fuel.

E. Preliminary inspection and testing to include, at a minimum:
1. Inspect each system component for damage and defects.
2. Verify tightness of mechanical and electrical connections are according to manufacturer's recommended torque settings.
3. Check for proper oil and coolant levels.

F. Prepare and start system in accordance with manufacturer's instructions.

G. Perform acceptance test in accordance with NFPA 110.

H. Inspection and testing to include, at a minimum:
1. Verify compliance with starting and load acceptance requirements.
2. Verify voltage and frequency; make required adjustments as necessary.
3. Verify phase sequence.
4. Verify control system operation, including safety shutdowns.
5. Verify operation of auxiliary equipment and accessories (e.g. battery charger, heaters, etc.).

I. Provide field emissions testing where necessary for certification.

J. Correct defective work, adjust for proper operation, and retest until entire system complies with contract documents.

K. Submit detailed reports indicating inspection and testing results and corrective actions taken.

L. Provide the services of manufacturer's representative to prepare and start system.

M. Perform field inspection and testing in accordance with Section 01 40 00.

N. Provide full load test utilizing portable test bank for four hours minimum. Simulate power failure including operation of transfer switch, automatic starting cycle, and automatic shutdown and return to normal.

O. Record in 15 minute intervals during four hour test:
1. Kilowatts.
2. Amperes.
3. Voltage.
4. Coolant temperature.
5. Room temperature.
6. Frequency.
7. Oil pressure.

NOT FOR BIDDING

P. Test alarm and shutdown circuits by simulating conditions.

Q. Field-verify emissions levels to meet manufacturer's documented criteria per submittals.

3.04 ADJUSTING

A. Adjust generator output voltage and engine speed.

3.05 CLEANING

A. Clean exposed surfaces to remove dirt, paint, or other foreign material and restore to match original factory finish.

3.06 CLOSEOUT ACTIVITIES

A. Demonstration: Demonstrate proper operation of system to Owner, and correct deficiencies or make adjustments as directed.

B. Training: Train Owner's personnel on operation, adjustment, and maintenance of system.
   1. Use operation and maintenance manual as training reference, supplemented with additional training materials as required.
   2. Provide minimum of four hours of training.
   3. Instructor: Manufacturer's authorized representative.
   4. Location: At project site.

3.07 PROTECTION

A. Protect installed engine generator system from subsequent construction operations.

B. Demonstrate operation to Owner's operating personnel:
   1. Describe loads connected to emergency system and restrictions for future load additions.
   2. Simulate power outage by interrupting normal source, and demonstrate that system operates to provide emergency power.

3.08 MAINTENANCE

A. See Section 01 70 00 - Execution and Closeout Requirements, for additional requirements relating to maintenance service.

B. Provide to Owner a proposal as an alternate to the base bid, a separate maintenance contract for the service and maintenance of engine generator system for two years from date of Substantial Completion; Include a complete description of preventive maintenance, systematic examination, adjustment, inspection, and testing, with a detailed schedule.

C. Provide trouble call-back service upon notification by Owner:
   1. Provide on-site response within 4 hours of notification.
   2. Include allowance for call-back service during normal working hours at no extra cost to Owner.
   3. Owner will pay for call-back service outside of normal working hours on an hourly basis, based on actual time spent at site and not including travel time; include hourly rate and definition of normal working hours in maintenance contract.

D. Maintain an on-site log listing the date and time of each inspection and call-back visit, the condition of the system, nature of the trouble, correction performed, and parts replaced.

E. Provide a separate maintenance contract for specified maintenance service.

F. Provide service and maintenance of engine generator for one year from Date of Substantial Completion.

END OF SECTION

NOT FOR BIDDING

NOT FOR BIDDING

SECTION 26 36 00
TRANSFER SWITCHES

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Transfer switches for low-voltage (600 V and less) applications and associated accessories:
   1. Automatic transfer switches.
   2. Remote annunciators.

1.02 RELATED REQUIREMENTS

A. Section 26 05 26 - Grounding and Bonding for Electrical Systems.

B. Section 26 05 29 - Hangers and Supports for Electrical Systems.

C. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.

D. Section 26 32 13 - Engine Generators: For interface with transfer switches.
   1. Includes code requirements applicable to work of this section.
   2. Includes additional testing requirements.

E. Section 26 32 13 - Engine Generators: Testing requirements.

1.03 REFERENCE STANDARDS

A. NECA 1 - Standard for Good Workmanship in Electrical Construction; National Electrical Contractors Association.

B. NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum); National Electrical Manufacturers Association.

C. NEMA ICS 10 Part 1 - Industrial Control and Systems Part 1: Electromechanical AC Transfer Switch Equipment; National Electrical Manufacturers Association.

D. NETA ATS - Acceptance Testing Specifications for Electrical Power Equipment and Systems; International Electrical Testing Association. (ANSI/NETA ATS)

E. NFPA 70 - National Electrical Code; National Fire Protection Association.

F. NFPA 110 - Standard for Emergency and Standby Power Systems; National Fire Protection Association.

G. UL 1008 - Transfer Switch Equipment.

1.04 ADMINISTRATIVE REQUIREMENTS

A. Coordination:
   1. Coordinate compatibility of transfer switches to be installed with work provided under other sections or by others.
      a. Engine Generators: See Section 26 32 13.
   2. Coordinate the work with other trades to avoid placement of ductwork, piping, equipment, or other potential obstructions within the dedicated equipment spaces and working clearances required by NFPA 70.
   3. Coordinate arrangement of equipment with the dimensions and clearance requirements of the actual equipment to be installed.
   4. Coordinate the work with placement of supports, anchors, etc. required for mounting.
   5. Notify Architect of any conflicts with or deviations from the contract documents. Obtain direction before proceeding with work.

1.05 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

NOT FOR BIDDING

B. Product Data: Provide manufacturer's standard catalog pages and data sheets for each product, including ratings, configurations, dimensions, finishes, weights, service condition requirements, and installed features.
   1. Where applicable, include characteristic trip curves for overcurrent protective devices upon request.

C. Shop Drawings: Include dimensioned plan views and sections indicating locations of system components, required clearances, and field connection locations. Include system interconnection schematic diagrams showing all factory and field connections.

D. Evidence of qualifications for installer.

E. Evidence of qualifications for maintenance contractor (if different entity from installer).

F. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, installation, and operation of product.

G. Manufacturer's certification that products meet or exceed specified requirements.

H. Source quality control test reports.

I. Manufacturer’s detailed field testing procedures.

J. Field quality control test reports.

K. Operation and Maintenance Data: Include detailed information on system operation, equipment programming and setup, replacement parts, and recommended maintenance procedures and intervals.
   1. Include contact information for entity that will be providing contract maintenance and trouble call-back service.

L. Executed Warranty: Submit documentation of final executed warranty completed in Owner's name and registered with manufacturer.

M. Maintenance contracts.

N. Project Record Documents: Record actual locations of system components, installed circuiting arrangements and routing, and final equipment settings.

O. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
   1. See Section 01 60 00 - Product Requirements, for additional provisions.

P. Product Data: Provide catalog sheets showing voltage, switch size, ratings and size of switching and overcurrent protective devices, operating logic, short circuit ratings, dimensions, and enclosure details.

Q. Manufacturer's Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.

R. Operation Data: Instructions for operating equipment under emergency conditions when engine generator is running.

S. Maintenance Data: Routine preventative maintenance and lubrication schedule. List special tools, maintenance materials, and replacement parts.

1.06 QUALITY ASSURANCE

A. Comply with the following:
   1. NFPA 70 (National Electrical Code).
   2. NFPA 110 (Standard for Emergency and Standby Power Systems); meet requirements for system Level specified in Section 26 32 13.

B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.

NOT FOR BIDDING

C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
   1. Authorized service facilities located within 200 miles of project site.

D. Installer Qualifications: Company specializing in performing the work of this section with minimum three years documented experience with power transfer systems of similar size, type, and complexity; manufacturer's authorized installer.

E. Maintenance Contractor Qualifications: Same entity as installer or different entity with specified qualifications.
   1. Contract maintenance office located within 200 miles of project site.

F. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

G. Conform to requirements of NFPA 70.

H. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience and with service facilities within 100 miles of Project.

I. Supplier Qualifications: Authorized distributor of specified manufacturer with minimum three years documented experience.

J. Products: Listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.

1.07 DELIVERY, STORAGE, AND HANDLING

A. Receive, inspect, handle, and store transfer switches in accordance with manufacturer's instructions.

B. Store in a clean, dry space. Maintain factory wrapping or provide an additional heavy canvas or heavy plastic cover to protect units from dirt, water, construction debris, and traffic.

C. Handle carefully in accordance with manufacturer's instructions to avoid damage to transfer switch components, enclosure, and finish.

1.08 FIELD CONDITIONS

A. Maintain field conditions within manufacturer's required service conditions during and after installation.

1.09 WARRANTY

A. Provide minimum one year manufacturer warranty covering repair or replacement due to defective materials or workmanship.

PART 2 PRODUCTS

2.01 MANUFACTURERS

A. Transfer Switches - Basis of Design: ASCO 300 series power technologies.

B. ASCO Power Technologies, LP: www.asco.com.

C. Eaton Corporation; Cutler-Hammer Products: www.eaton.com.

D. Substitutions: See Section 01 60 00 - Product Requirements.

E. Products other than basis of design are subject to compliance with specified requirements and prior approval of Engineer. By using products other than basis of design, Contractor accepts responsibility for costs associated with any necessary modifications to related work, including any design fees.

NOT FOR BIDDING

2.02 TRANSFER SWITCHES

A. Provide complete power transfer system consisting of all required equipment, conduit, boxes, wiring, supports, accessories, system programming, etc. as necessary for a complete operating system that provides the functional intent indicated.

B. Provide products listed, classified, and labeled as suitable for the purpose intended.

C. Applications:
   1. Utilize open transition transfer unless otherwise indicated or required.

D. Construction Type: Either "contactor type" (open contact) or "breaker type" (enclosed contact) transfer switches complying with specified requirements are acceptable.

E. Manual Transfer Switch:
   1. Basis of Design: ASCO 300 seriesPoewr technologies.
   2. Voltage: As indicated on the drawings.
   3. Ampere Rating: As indicated on the drawings.
   4. Neutral Configuration: Solid neutral (unswitched), except as indicated.
   5. Load Served: As indicated on the drawings.
   6. Primary Source: As indicated on the drawings.
   7. Alternate Source: As indicated on the drawings.

F. Comply with NEMA ICS 10 Part 1, and list and label as complying with UL 1008 for the classification of the intended application (e.g. emergency, optional standby).

G. Do not use double throw safety switches or other equipment not specifically designed for power transfer applications and listed as transfer switch equipment.

H. Load Classification: Classified for total system load (any combination of motor, electric discharge lamp, resistive, and tungsten lamp loads with tungsten lamp loads not exceeding 30 percent of the continuous current rating) unless otherwise indicated or required.

I. Switching Methods:
   1. Open Transition:
      a. Provide break-before-make transfer without a neutral position that is not connected to either source, and with interlocks to prevent simultaneous connection of the load to both sources.
   2. Obtain control power for transfer operation from line side of source to which the load is to be transferred.

J. Service Conditions: Provide transfer switches suitable for continuous operation at indicated ratings under the service conditions at the installed location.
   1. Altitude: 1000 feet.

K. Enclosures:
   1. Environment Type per NEMA 250: Unless otherwise indicated, as specified for the following installation locations:
      a. Indoor Clean, Dry Locations: Type 1 or Type 12.
   2. Finish: Manufacturer's standard unless otherwise indicated.

L. Short Circuit Current Rating:

M. Automatic Transfer Switches:
   1. Description: Transfer switches with automatically initiated transfer between sources; electrically operated and mechanically held.
   2. Control Functions:
      a. Automatic mode.
      b. Test Mode: Simulates failure of primary/normal source.
      c. Voltage and Frequency Sensing:

NOT FOR BIDDING

1) Undervoltage sensing for each phase of primary/normal source; adjustable dropout/pickup settings.
2) Undervoltage sensing for alternate/emergency source; adjustable dropout/pickup settings.
3) Underfrequency sensing for alternate/emergency source; adjustable dropout/pickup settings.

d. Outputs:
1) Contacts for engine start/shutdown (except where direct generator communication interface is provided).
2) Auxiliary contacts; one set(s) for each switch position.

e. Adjustable Time Delays:
1) Engine generator start time delay; delays engine start signal to override momentary primary/normal source failures.
2) Transfer to alternate/emergency source time delay.
3) Retransfer to primary/normal source time delay.
4) Engine generator cooldown time delay; delays engine shutdown following retransfer to primary/normal source to permit generator to run unloaded for cooldown period.

f. In-Phase Monitor (Open Transition Transfer Switches): Monitors phase angle difference between sources for initiating in-phase transfer.

g. Engine Exerciser: Provides programmable scheduled exercising of engine generator selectable with or without transfer to load; provides memory retention during power outage.

3. Status Indications:
a. Connected to alternate/emergency source.
b. Connected to primary/normal source.
c. Alternate/emergency source available.

4. Other Features:
a. Event log.
b. Communications Capability: Compatible with system indicated. Provide all accessories necessary for proper interface.
c. Remote monitoring capability via PC.

5. Automatic Sequence of Operations:
a. Upon failure of primary/normal source for a programmable time period (engine generator start time delay), initiate starting of engine generator where applicable.
b. When alternate/emergency source is available, transfer load to alternate/emergency source after programmable time delay.
c. When primary/normal source has been restored, retransfer to primary/normal source after a programmable time delay. Bypass time delay if alternate/emergency source fails and primary/normal source is available.
d. Where applicable, initiate shutdown of engine generator after programmable engine cooldown time delay.

N. Remote Annunciators:
1. Remote Annunciator Mounting: Wall-mounted; Provide flush-mounted annunciator for finished areas and surface-mounted annunciator for non-finished areas unless otherwise indicated.
2. Transfer Switch Status Indications:
a. Connected to alternate/emergency source.
b. Connected to primary/normal source.
c. Alternate/emergency source available.
d. Primary/normal source available.

NOT FOR BIDDING

O. Interface with Other Work:
   1. Interface with engine generators as specified in Section 26 32 13.
   2.
   3. Interface with building automation system_____.

2.03 SOURCE QUALITY CONTROL

A. See Section 01 40 00 - Quality Requirements, for additional requirements.

B. Perform production tests on transfer switches at factory to verify operation and performance characteristics prior to shipment. Include certified test report with submittals.

2.04 AUTOMATIC TRANSFER SWITCH

A. Description: NEMA ICS 10, automatic transfer switch 260amp,4 pole, in NEMA1 enclosure.

B. Configuration: Electrically operated, mechanically held transfer switch.

C. Interrupting Capacity: 42000 amp minimum ,rms .

2.05 SERVICE CONDITIONS

A. Service Conditions: NEMA ICS 10.

B. Temperature: 105 deg F.

C. Altitude: 3,300 feet.

2.06 COMPONENTS

A. Indicating Lights: Mount in cover of enclosure to indicate NORMAL SOURCE AVAILABLE.

B. Test Switch: Mount in cover of enclosure to simulate failure of normal source.

C. Return to Normal Switch: Mount in cover of enclosure to initiate manual transfer from alternate source to normal source.

D. Transfer Switch Auxiliary Contacts: 1 normally open; 1 normally closed.

E. Normal Source Monitor: Monitor each line of normal source voltage and frequency; initiate transfer when voltage drops below 85 percent or frequency varies more than 3 percent from rated nominal value.

F. Alternate Source Monitor: Monitor alternate source voltage and frequency; inhibit transfer when voltage is below 85 percent or frequency varies more than 3 percent from rated nominal value.

G. In-Phase Monitor: Inhibit transfer until source and load are within zero electrical degrees.

H. Switched Neutral: Overlapping contacts.

I. Enclosure: ICS 10, Type 1, finished with manufacturer's standard gray enamel.

2.07 AUTOMATIC SEQUENCE OF OPERATION

A. Initiate Time Delay to Start Alternate Source Engine Generator: Upon initiation by normal source monitor.

B. Time Delay To Start Alternate Source Engine Generator: 0 to 6 seconds, adjustable.

C. Initiate Transfer Load to Alternate Source: Upon initiation by normal source monitor and permission by alternate source monitor.

D. Time Delay Before Transfer to Alternate Power Source: 0 to 60 seconds, adjustable.

E. Initiate Retransfer Load to Normal Source: Upon permission by normal source monitor.

F. Time Delay Before Transfer to Normal Power: 0 to 60 seconds, adjustable; bypass time delay in event of alternate source failure.

G. Time Delay Before Engine Shut Down: 0 to 1 minutes, adjustable, of unloaded operation.

NOT FOR BIDDING

H. Engine Exerciser: Start engine every 15days run for 30 minutes before shutting down. Bypass exerciser control if normal source fails during exercising period.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that field measurements are as shown on the drawings.

B. Verify that the ratings and configurations of transfer switches are consistent with the indicated requirements.

C. Verify that rough-ins for field connections are in the proper locations.

D. Verify that surface is suitable for transfer switch installation.

E. Verify that conditions are satisfactory for installation prior to starting work.

3.02 PREPARATION

A. Provide floor mounted unistrut support to install Automatic Transfer Switch.

3.03 INSTALLATION

A. Perform work in a neat and workmanlike manner in accordance with NECA 1.

B. Install in accordance with manufacturer's instructions.

C. Arrange equipment to provide minimum clearances and required maintenance access.

D. Provide required support and attachment in accordance with Section 26 05 29.

E. Install transfer switches plumb and level.

F. Provide grounding and bonding in accordance with Section 26 05 26.

G. Identify transfer switches in accordance with Section 26 05 53.

H. Provide engraved plastic nameplates under the provisions of Section 26 05 53.

3.04 FIELD QUALITY CONTROL

A. See Section 01 40 00 - Quality Requirements, for additional requirements.

B. Provide services of a manufacturer's authorized representative to observe installation and assist in inspection and testing. Include manufacturer's detailed testing procedures and field reports with submittals.

C. Prepare and start system in accordance with manufacturer's instructions.

D. Automatic Transfer Switches:
   1. Inspect and test in accordance with NETA ATS, except Section 4.
   2. Perform inspections and tests listed in NETA ATS, Section 7.22.3. The control wiring insulation-resistance tests listed as optional are not required.
      a. Disconnect surge protective devices (SPDs) prior to performing any high potential testing. Replace SPDs damaged by performing high potential testing with SPDs connected.

E. Provide additional inspection and testing as required for completion of associated engine generator testing as specified in Section 26 32 13.

F. Correct defective work, adjust for proper operation, and retest until entire system complies with contract documents.

G. Submit detailed reports indicating inspection and testing results and corrective actions taken.

H. Provide the services of the manufacturer's technical representative to check out transfer switch connections and operation and place in service.

I. Perform field inspection and testing.

NOT FOR BIDDING

J. Inspect and test in accordance with NETA STD ATS, except Section 4.

K. Perform inspections and tests listed in NETA STD ATS, Section 7.22.3.

3.05 CLEANING

A. Clean exposed surfaces to remove dirt, paint, or other foreign material and restore to match original factory finish.

3.06 CLOSEOUT ACTIVITIES

A. Demonstration: Demonstrate proper operation of transfer switches to Owner, and correct deficiencies or make adjustments as directed.

B. Training: Train Owner's personnel on operation, adjustment, and maintenance of transfer switches.
   1. Use operation and maintenance manual as training reference, supplemented with additional training materials as required.

C. Demonstrate operation of transfer switch in bypass, normal, and emergency modes.

3.07 PROTECTION

A. Protect installed transfer switches from subsequent construction operations.

3.08 MAINTENANCE

A. Provide to Owner a proposal as an alternate to the base bid, a separate maintenance contract for the service and maintenance of transfer switches for two years from date of Substantial Completion; Include a complete description of preventive maintenance, systematic examination, adjustment, inspection, and testing, with a detailed schedule.

B. Conduct site visit at least once every three months to perform inspection, testing, and preventive maintenance. Submit report to Owner indicating maintenance performed along with evaluations and recommendations.

C. Provide trouble call-back service upon notification by Owner:
   1. Provide on-site response within 4 hours of notification.
   2. Include allowance for call-back service during normal working hours at no extra cost to Owner.
   3. Owner will pay for call-back service outside of normal working hours on an hourly basis, based on actual time spent at site and not including travel time; include hourly rate and definition of normal working hours in maintenance contract.

D. Maintain an on-site log listing the date and time of each inspection and call-back visit, the condition of the system, nature of the trouble, correction performed, and parts replaced.

E. Provide a separate maintenance contract for specified maintenance service.

F. Provide service and maintenance of transfer switches for one year from Date of Substantial Completion.

END OF SECTION

NOT FOR BIDDING

SECTION 26 51 00
INTERIOR LIGHTING

PART 1 GENERAL

1.01 SECTION INCLUDES

A. Interior luminaires.

B. Emergency lighting units.

C. Exit signs.

D. Ballasts and drivers.

E. Lamps.

F. Luminaire accessories.

1.02 RELATED REQUIREMENTS

A. Section 26 05 37 - Boxes.

B. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.

C. Section 26 27 26 - Wiring Devices: Manual wall switches and wall dimmers.

1.03 REFERENCE STANDARDS

A. ANSI C78.379 - American National Standard for Electric Lamps -- Reflector Lamps -- Classification of Beam Patterns.

B. ANSI C82.1 - American National Standard for Lamp Ballast - Line Frequency Fluorescent Lamp Ballast.

C. ANSI C82.4 - American National Standard for Ballasts for High-Intensity-Discharge and Low Pressure Sodium Lamps (Multiple-Supply Type).

D. IES LM-79 - Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products; Illuminating Engineering Society.

E. IES LM-80 - Approved Method: Measuring Luminous Flux and Color Maintenance of LED Packages, Arrays, and Modules; Illuminating Engineering Society.

F. NECA 1 - Standard for Good Workmanship in Electrical Construction; National Electrical Contractors Association.

G. NECA/IESNA 500 - Standard for Installing Indoor Commercial Lighting Systems; National Electrical Contractors Association.

H. NECA/IESNA 502 - Standard for Installing Industrial Lighting Systems; National Electrical Contractors Association.

I. NEMA LE 4 - Recessed Luminaires, Ceiling Compatibility; National Electrical Manufacturers Association.

J. NEMA WD 6 - Wiring Devices - Dimensional Requirements; National Electrical Manufacturers Association.

K. NFPA 70 - National Electrical Code; National Fire Protection Association.

L. NFPA 101 - Life Safety Code; National Fire Protection Association.

M. UL 924 - Emergency Lighting and Power Equipment.

N. UL 935 - Fluorescent-Lamp Ballasts.

O. UL 1598 - Luminaires.

P. UL 8750 - Light Emitting Diode (LED) Equipment for Use in Lighting Products.

NOT FOR BIDDING

1.04 ADMINISTRATIVE REQUIREMENTS

A. Coordination:
   1. Coordinate the installation of luminaires with mounting surfaces installed under other sections or by others. Coordinate the work with placement of supports, anchors, etc. required for mounting. Coordinate compatibility of luminaires and associated trims with mounting surfaces at installed locations.
   2. Coordinate the placement of luminaires with structural members, ductwork, piping, equipment, diffusers, fire suppression system components, and other potential conflicts installed under other sections or by others.
   3. Coordinate the placement of exit signs with furniture, equipment, signage or other potential obstructions to visibility installed under other sections or by others.
   4. Notify Architect of any conflicts or deviations from the contract documents to obtain direction prior to proceeding with work.

1.05 SUBMITTALS

A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

B. Shop Drawings:
   1. Indicate dimensions and components for each luminaire that is not a standard product of the manufacturer.
   2. Provide photometric calculations where luminaires are proposed for substitution upon request.

C. Shop Drawings: Indicate dimensions and components for each luminaire that is not a standard product of the manufacturer.

D. Product Data: Provide manufacturer's standard catalog pages and data sheets including detailed information on luminaire construction, dimensions, ratings, finishes, mounting requirements, listings, service conditions, photometric performance, installed accessories, and ceiling compatibility; include model number nomenclature clearly marked with all proposed features.
   1. LED Luminaires:
      a. Include estimated useful life, calculated based on IES LM-80 test data.
      b. Include IES LM-79 test report.

E. Field Quality Control Reports.

F. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.

G. Operation and Maintenance Data: Instructions for each product including information on replacement parts.

H. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
   1. See Section 01 60 00 - Product Requirements, for additional provisions.
   2. Extra Lenses and Louvers: Two percent of total quantity installed for each type, but not less than one of each type.
   3. Extra Lamps: Ten percent of total quantity installed for each type, but not less than two of each type.
   4. Extra Ballasts: Two percent of total quantity installed for each type, but not less than one of each type.

I. Project Record Documents: Record actual connections and locations of luminaires and any associated remote components.

1.06 QUALITY ASSURANCE

A. Conform to requirements of NFPA 70.

NOT FOR BIDDING

B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.

C. Conform to requirements of NFPA 70 and NFPA 101.

D. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.

1.07 DELIVERY, STORAGE, AND PROTECTION

A. Receive, handle, and store products according to NECA/IESNA 500 (commercial lighting), NECA/IESNA 502 (industrial lighting), and manufacturer's written instructions.

B. Keep products in original manufacturer's packaging and protect from damage until ready for installation.

1.08 FIELD CONDITIONS

A. Maintain field conditions within manufacturer's required service conditions during and after installation.

1.09 WARRANTY

A. Provide two year manufacturer warranty for all linear fluorescent ballasts.

1.10 EXTRA MATERIALS

A. See Section 01 60 00 - Product Requirements, for additional provisions.

B. Furnish two of each plastic lens type.

C. Furnish one replacement lamps for each lamp type.

D. Furnish two of each ballast type.

PART 2 PRODUCTS

2.01 MANUFACTURERS - LUMINAIRES

A. Acuity Brands, Inc; : www.acuitybrands.com.

B. Hubbell Lighting, Inc; : www.hubbelllighting.com.

C. Lightolier: www.lightolier.com.

D. Lithonia Lighting: www.lithonia.com.

E. Columbia Lighting.

F. Substitutions: See Section 01 60 00 - Product Requirements, except where individual luminaire types are designated with substitutions not permitted.

2.02 LUMINAIRE TYPES

A. Furnish products as indicated in luminaire schedule included on the drawings.

B. Substitutions: See Section 01 60 00 - Product Requirements, except where individual luminaire types are designated with substitutions not permitted.

2.03 LUMINAIRES

A. Manufacturers:
   1. Acuity Brands, Inc; : www.acuitybrands.com.
   2. Cooper Lighting, a division of Cooper Industries; : www.cooperindustries.com.
   3. Hubbell Lighting, Inc; : www.hubbelllighting.com.
   4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Provide products that comply with requirements of NFPA 70.

C. Provide products that are listed and labeled as complying with UL 1598, where applicable.

D. Provide products listed, classified, and labeled as suitable for the purpose intended.

NOT FOR BIDDING

E. Unless otherwise indicated, provide complete luminaires including lamp(s) and all sockets, ballasts, reflectors, lenses, housings and other components required to position, energize and protect the lamp and distribute the light.

F. Unless specifically indicated to be excluded, provide all required conduit, boxes, wiring, connectors, hardware, supports, trims, accessories, etc. as necessary for a complete operating system.

G. Provide products suitable to withstand normal handling, installation, and service without any damage, distortion, corrosion, fading, discoloring, etc.

H. Recessed Luminaires:
   1. Ceiling Compatibility: Comply with NEMA LE 4.
   2. Luminaires Recessed in Insulated Ceilings: Listed and labeled as IC-rated, suitable for direct contact with insulation and combustible materials.
   3. Luminaires Recessed in Sloped Ceilings: Provide suitable sloped ceiling adapters.

I. LED Luminaires:
   1. Components: UL 8750 recognized or listed as applicable.
   2. Tested in accordance with IES LM-79 and IES LM-80.
   3. LED Estimated Useful Life: Minimum of 50,000 hours at 70 percent lumen maintenance, calculated based on IES LM-80 test data.

J. LED Luminaires: Listed and labeled as complying with UL 8750.

K. Track Lighting Systems: Provide track compatible with specified track heads, with all connectors, power feed fittings, dead ends, hangers and canopies as necessary to complete installation.

L. Luminaires Mounted in Continuous Rows: Provide quantity of units required for length indicated, with all accessories required for joining and aligning.

2.04 EMERGENCY LIGHTING UNITS

A. Manufacturers:
   1. Acuity Brands, Inc; : www.acuitybrands.com.
   2. Cooper Lighting, a division of Cooper Industries; : www.cooperindustries.com.
   3. Hubbell Lighting, Inc; : www.hubbelllighting.com.
   4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Description: Emergency lighting units complying with NFPA 101 and all applicable state and local codes, and listed and labeled as complying with UL 924. Emergency and Exit light combination unit with (2) unit mounted lamps and LED exit light with battery backup. Thois cmobination unit shall have spare capacity to power remote emergency lamp heads.

C. Operation: Upon interruption of normal power source or brownout condition exceeding 20 percent voltage drop from nominal, solid-state control automatically switches connected lamps to integral battery power for minimum of 90 minutes of rated emergency illumination, and automatically recharges battery upon restoration of normal power source.

D. Battery:
   1. Sealed maintenance-free nickel cadmium unless otherwise indicated.
   2.
   3. Size battery to supply all connected lamps, including emergency remote heads where indicated.

E. Diagnostics: Provide power status indicator light and accessible integral test switch to manually activate emergency operation.

F. Provide low-voltage disconnect to prevent battery damage from deep discharge.

NOT FOR BIDDING

G. Self-Diagnostics: Provide units that self-monitor functionality and automatically perform testing required by NFPA 101 where indicated; provide indicator light(s) to report test and diagnostic status.

H. Accessories:
   1. Provide compatible accessory mounting brackets where indicated or required to complete installation.
   2. Provide compatible accessory high impact polycarbonate vandal shields where indicated.
   3. Provide compatible accessory wire guards where indicated.
   4. Where indicated, provide emergency remote heads that are compatible with the emergency lighting unit they are connected to and suitable for the installed location.

2.05 LUMINAIRES

A. Furnish products as indicated in Schedule attached to this section.

B. Substitutions: See Section 01 60 00 - Product Requirements.
   1. Input Voltage: 120 or 277 volts.

2.06 EXIT SIGNS

A. Manufacturers - Powered and Self-Luminous Signs:
   1. Acuity Brands, Inc; : www.acuitybrands.com.
   2. Cooper Lighting, a division of Cooper Industries; : www.cooperindustries.com.
   3. Hubbell Lighting, Inc; : www.hubbelllighting.com.
   4. Substitutions: See Section 01 60 00 - Product Requirements.

B. All Exit Signs: Internally illuminated with LEDs unless otherwise indicated; complying with NFPA 101 and all applicable state and local codes, and listed and labeled as complying with UL 924.
   1. Number of Faces: Single or double as indicated or as required for the installed location.
   2. Directional Arrows: As indicated or as required for the installed location.

C. Self-Powered Exit Signs:
   1. Operation: Upon interruption of normal power source or brownout condition exceeding 20 percent voltage drop from nominal, solid-state control automatically switches connected lamps to integral battery power for minimum of 90 minutes of rated emergency illumination, and automatically recharges battery upon restoration of normal power source.
   2. Battery: Sealed maintenance-free nickel cadmium unless otherwise indicated.
   3. Diagnostics: Provide power status indicator light and accessible integral test switch to manually activate emergency operation.
   4. Provide low-voltage disconnect to prevent battery damage from deep discharge.
   5. Self-Diagnostics: Provide units that self-monitor functionality and automatically perform testing required by NFPA 101 where indicated; provide indicator light(s) to report test and diagnostic status.

D. Accessories:
   1. Provide compatible accessory high impact polycarbonate vandal shields where indicated.
   2. Provide compatible accessory wire guards where indicated.

E. Manufacturers: As indicated on lighting fixture schedule.
   1. Substitutions: See Section 01 60 00 - Product Requirements.

F. Exit Signs: Exit sign fixture .
   1. Housing: Plastic.
   2. Face: Translucent glass face with red letters on white background.
   3. Face: Aluminum stencil face with red letters.
   4. Directional Arrows: Universal type for field adjustment.
   5. Mounting: Universal, for field selection.
   6. Battery: 12 volt, nickel-cadmium type, with 1.5 hour capacity.

NOT FOR BIDDING

7. Battery Charger: Dual-rate type, with sufficient capacity to recharge discharged battery to full charge within twelve hours.
8. Lamps: Manufacturer's standard.
9. Input Voltage: 120/277 volts.

2.07 BALLASTS AND DRIVERS

A. Manufacturers:
1. General Electric Company/GE Lighting; : www.gelighting.com.
2. Osram Sylvania; : www.sylvania.com.
3. Philips Lighting Electronics/Advance; : www.advance.philips.com.
4. Substitutions: See Section 01 60 00 - Product Requirements.
5. Manufacturer Limitations: Where possible, for each type of luminaire provide ballasts produced by a single manufacturer.

B. All Ballasts:
1. Provide ballasts containing no polychlorinated biphenyls (PCBs).
2. Minimum Efficiency/Efficacy: Provide ballasts complying with all current applicable federal and state ballast efficiency/efficacy standards.

2.08 LAMPS

A. Manufacturers:
1. General Electric Company/GE Lighting; : www.gelighting.com.
2. Osram Sylvania; : www.sylvania.com.
3. Philips Lighting Company; : www.lighting.philips.com.
4. Philips Lighting Co of NA: www.lighting.philips.com.
5. Substitutions: See Section 01 60 00 - Product Requirements.

B. Lamps - General Requirements:
1. Unless explicitly excluded, provide new, compatible, operable lamps in each luminaire.
2. Verify compatibility of specified lamps with luminaires to be installed. Where lamps are not specified, provide lamps per luminaire manufacturer's recommendations.
3. Minimum Efficiency: Provide lamps complying with all current applicable federal and state lamp efficiency standards.
4. Color Temperature Consistency: Unless otherwise indicated, for each type of lamp furnish products which are consistent in perceived color temperature. Replace lamps that are determined by the Architect to be inconsistent in perceived color temperature.

C. Compact Fluorescent Lamps: Wattage and bulb type as indicated, with base type as required for luminaire.
1. Low Mercury Content: Provide lamps that pass the EPA Toxicity Characteristic Leaching Procedure (TCLP) test for characteristic hazardous waste.
2. Correlated Color Temperature (CCT): 3,500 K unless otherwise indicated.
3. Color Rendering Index (CRI): Not less than 80.
4. Average Rated Life: Not less than 10,000 hours for an operating cycle of three hours per start.

D. Linear Fluorescent Lamps: Wattage and bulb type as indicated, with base type as required for luminaire.
1. Low Mercury Content: Provide lamps that pass the EPA Toxicity Characteristic Leaching Procedure (TCLP) test for characteristic hazardous waste.
2. T8 Linear Fluorescent Lamps:
   a. Correlated Color Temperature (CCT): 3,500 K unless otherwise indicated.
   b. Color Rendering Index (CRI): Not less than 80.
   c. Average Rated Life: Not less than 20,000 hours for an operating cycle of three hours per start.

NOT FOR BIDDING

3. T5 Linear Fluorescent Lamps:
   a. Correlated Color Temperature (CCT): 3,500 K unless otherwise indicated.
   b. Color Rendering Index (CRI): Not less than 80.
   c. Average Rated Life: Not less than 20,000 hours for an operating cycle of three hours per start.

E. Lamp Types: As specified for each luminaire.

F. Fluorescent Lamps:
   1. Product: Phillips Lighting - Type T5 or T8.
   2. Substitutions: See Section 01 60 00 - Product Requirements.

G. High Intensity Discharge (HID) Lamps:
   1. Product: Match Lighting Fixture Type
   2. Substitutions: See Section 01 60 00 - Product Requirements.

2.09 ACCESSORIES

A. Stems for Suspended Luminaires: Steel tubing, minimum 1/2" size, factory finished to match luminaire or field-painted as directed.

B. Threaded Rods for Suspended Luminaires: Zinc-plated steel, minimum 1/4" size, field-painted as directed.

C. Provide accessory plaster frames for luminaires recessed in plaster ceilings.

D. Tube Guards for Linear Fluorescent Lamps: Provide clear virgin polycarbonate sleeves with endcaps where indicated.

E. Product: As indicated in lighting fixture schedule.
   1. Substitutions: See Section 01 60 00 - Product Requirements.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verify that field measurements are as shown on the drawings.

B. Verify that outlet boxes are installed in proper locations and at proper mounting heights and are properly sized to accommodate conductors in accordance with NFPA 70.

C. Verify that suitable support frames are installed where required.

D. Verify that branch circuit wiring installation is completed, tested, and ready for connection to luminaires.

E. Verify that conditions are satisfactory for installation prior to starting work.

3.02 PREPARATION

A. Provide extension rings to bring outlet boxes flush with finished surface.

B. Clean dirt, debris, plaster, and other foreign materials from outlet boxes.

3.03 INSTALLATION

A. Coordinate locations of outlet boxes provided under Section 26 05 37 as required for installation of luminaires provided under this section.

B. Install products according to manufacturer's instructions.

C. Install luminaires securely, in a neat and workmanlike manner, as specified in NECA 1 (general workmanship), NECA 500 (commercial lighting), and NECA 502 (industrial lighting).

D. Install luminaires plumb and square and aligned with building lines and with adjacent luminaires.

E. Suspended Ceiling Mounted Luminaires:
   1. Do not use ceiling tiles to bear weight of luminaires.

NOT FOR BIDDING

2. Do not use ceiling support system to bear weight of luminaires unless ceiling support system is certified as suitable to do so.
3. Secure pendant-mounted luminaires to building structure.
4. Secure lay-in luminaires to ceiling support channels using listed safety clips at four corners.
5. In addition to ceiling support wires, provide two galvanized steel safety wire(s), minimum 12 gage, connected from opposing corners of each recessed luminaire to building structure.
6. See appropriate Division 9 section where suspended grid ceiling is specified for additional requirements.

F. Recessed Luminaires:
1. Install trims tight to mounting surface with no visible light leakage.
2. Non-IC Rated Luminaires: Maintain required separation from insulation and combustible materials according to listing.
3. Luminaires Recessed in Fire-Rated Ceilings: Install using accessories and firestopping materials to meet regulatory requirements for fire rating.

G. Suspended Luminaires:
1. Install using the suspension method indicated, with support lengths and accessories as required for specified mounting height.
2. Install canopies tight to mounting surface.

H. Wall-Mounted Luminaires: Unless otherwise indicated, specified mounting heights are to center of luminaire.

I. Install fixtures securely, in a neat and workmanlike manner, as specified in NECA 500 (commercial lighting).

J. Install suspended luminaires and exit signs using pendants supported from swivel hangers. Provide pendant length required to suspend luminaire at indicated height.

K. Support luminaires independent of ceiling framing.

L. Locate recessed ceiling luminaires as indicated on reflected ceiling plan.

M. Install surface mounted luminaires and exit signs plumb and adjust to align with building lines and with each other. Secure to prevent movement.

N. Exposed Grid Ceilings: Support surface mounted luminaires in grid ceiling directly from building structure.

O. Exposed Grid Ceilings: Provide auxiliary members spanning ceiling grid members to support surface mounted luminaires.

P. Exposed Grid Ceilings: Fasten surface mounted luminaires to ceiling grid members using bolts, screws, rivets, or suitable clips.

Q. Install recessed luminaires to permit removal from below.

R. Install recessed luminaires using accessories and firestopping materials to meet regulatory requirements for fire rating.

S. Install clips to secure recessed grid-supported luminaires in place.

T. Install wall mounted luminaires, emergency lighting units, and exit signs at height as scheduled.

U. Install accessories furnished with each luminaire.

V. Make wiring connections to branch circuit using building wire with insulation suitable for temperature conditions within luminaire.

W. Bond products and metal accessories to branch circuit equipment grounding conductor.

X. Install specified lamps in each emergency lighting unit, exit sign, and luminaire.

NOT FOR BIDDING

Y. Air Handling Luminaires: Interface with air handling accessories furnished and installed under Section 23 36 00.

Z. Emergency Lighting Units:
   1. Unless otherwise indicated, connect unit to unswitched power from same circuit feeding normal lighting in same room or area. Bypass local switches, contactors, or other lighting controls.

AA. Exit Signs:
   1. Unless otherwise indicated, connect unit to unswitched power from same circuit feeding normal lighting in same room or area. Bypass local switches, contactors, or other lighting controls.

AB. Install lamps in each luminaire.

AC. Lamp Burn-In: Operate lamps at full output for prescribed period per manufacturer's recommendations prior to use with any dimming controls. Replace lamps that fail prematurely due to improper lamp burn-in.

3.04 FIELD QUALITY CONTROL

A. Inspect each product for damage and defects.

B. Perform field inspection, testing, and adjusting.

C. Operate each luminaire after installation and connection to verify proper operation.

D. Test self-powered exit signs, emergency lighting units, and fluorescent emergency power supply units to verify proper operation upon loss of normal power supply.

E. Correct wiring deficiencies and repair or replace damaged or defective products. Repair or replace excessively noisy ballasts as determined by Architect.

3.05 ADJUSTING

A. Aim and position adjustable luminaires to achieve desired illumination as indicated or as directed by Architect. Secure locking fittings in place.

B. Aim and position adjustable emergency lighting unit lamps to achieve optimum illumination of egress path as required or as directed by Architect or authority having jurisdiction.

C. Exit Signs with Field-Selectable Directional Arrows: Set as indicated or as required to properly designate egress path as directed by Architect or authority having jurisdiction.

D. Aim and adjust luminaires as indicated.

E. Position exit sign directional arrows as indicated.

3.06 CLEANING

A. Clean surfaces according to NECA 500 (commercial lighting), NECA 502 (industrial lighting), and manufacturer's instructions to remove dirt, fingerprints, paint, or other foreign material and restore finishes to match original factory finish.

B. Clean electrical parts to remove conductive and deleterious materials.

C. Remove dirt and debris from enclosures.

D. Clean photometric control surfaces as recommended by manufacturer.

E. Clean finishes and touch up damage.

3.07 CLOSEOUT ACTIVITIES

A. Just prior to Substantial Completion, replace all lamps that have failed.

3.08 PROTECTION

A. Protect installed luminaires from subsequent construction operations.

NOT FOR BIDDING

3.09 PROTECTION

A. Relamp luminaires that have failed lamps at Substantial Completion.

3.10 SCHEDULE - ATTACHED

END OF SECTION

NOT FOR BIDDING