

SPECIFICATIONS
FOR
SEAFORD SCHOOL DISTRICT
CENTRAL ELEMENTARY SCHOOL KITCHEN RENOVATIONS – PHASE I
BID DOCUMENTS

Specifications prepared by: StudioJAED
Project Number: 12016
Project Manager: Brian M. Zigmond, P.E.
Date: May 14, 2012

SECTION 00 01 10

TABLE OF CONTENTS

PROCUREMENT AND CONTRACTING REQUIREMENTS

1.01 Division 00 -- Procurement and Contracting Requirements

- A. Table of Contents
- B. Location and Description of Work
- C. Invitation to Bid
- D. Instructions to Bidders
 - 1. Bid Bond
 - 2. Payment Bond
 - 3. Performance Bond
- E. General Requirements
- F. Proposal Form
 - 1. Non-Collusion Report
- G. General Conditions
 - 1. Supplementary General Conditions
 - 2. Contract for Construction
 - 3. State Wage Scale
- H. Drawings Applicable

SPECIFICATIONS

2.01 Division 01 -- General Requirements

- A. 01 10 00 - Summary
- B. 01 20 00 - Price and Payment Procedures
- C. 01 30 00 - Administrative Requirements
- D. 01 40 00 - Quality Requirements
- E. 01 50 00 - Temporary Facilities and Controls
- F. 01 51 00 - Temporary Utilities
- G. 01 52 13 - Field Offices and Sheds
- H. 01 55 00 - Vehicular Access and Parking
- I. 01 57 21 - Indoor Air Quality Controls
- J. 01 58 13 - Temporary Project Signage
- K. 01 60 00 - Product Requirements
- L. 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions
- M. 01 70 00 - Execution and Closeout Requirements
- N. 01 78 00 - Closeout Submittals

2.02 Division 02 -- Existing Conditions

- A. 02 41 00 - Demolition

2.03 Division 03 -- Concrete

- A. 03 10 00 - Concrete Forming and Accessories
- B. 03 20 00 - Concrete Reinforcing
- C. 03 30 00 - Cast-in-Place Concrete

2.04 Division 04 -- Masonry

- A. 04 05 11 - Masonry Mortaring and Grouting
- B. 04 20 00 - Unit Masonry

2.05 Division 06 -- Wood, Plastics, and Composites

- A. 06 10 00 - Rough Carpentry
- B. 06 20 00 - Finish Carpentry

2.06 Division 07 -- Thermal and Moisture Protection

- A. 07 21 00 - Thermal Insulation
- B. 07 62 00 - Sheet Metal Flashing and Trim
- C. 07 84 00 - Firestopping
- D. 07 90 05 - Joint Sealers

2.07 Division 08 -- Openings

- A. 08 11 13 - Hollow Metal Doors and Frames
- B. 08 14 16 - Flush Wood Doors
- C. 08 71 00 - Door Hardware

2.08 Division 09 -- Finishes

- A. 09 21 16 - Gypsum Board Assemblies
- B. 09 23 00 - Gypsum Plastering
- C. 09 65 00 - Resilient Flooring
- D. 09 90 00 - Painting and Coating

2.09 Division 11 -- Equipment

- A. 11 40 00 - Foodservice Equipment

2.10 Division 22 -- Plumbing

- A. 22 05 53 - Identification for Plumbing Piping and Equipment
- B. 22 07 19 - Plumbing Piping Insulation
- C. 22 10 05 - Plumbing Piping
- D. 22 30 00 - Plumbing Equipment

2.11 Division 26 -- Electrical

- A. 26 05 01 - Minor Electrical Demolition
- B. 26 05 19 - Low-Voltage Electrical Power Conductors and Cables (600 V and Less)
- C. 26 05 26 - Grounding and Bonding for Electrical Systems
- D. 26 05 29 - Hangers and Supports for Electrical Systems
- E. 26 05 34 - Conduit
- F. 26 05 37 - Boxes
- G. 26 05 53 - Identification for Electrical Systems
- H. 26 24 16 - Panelboards
- I. 26 27 17 - Equipment Wiring
- J. 26 27 26 - Wiring Devices
- K. 26 28 13 - Fuses
- L. 26 28 18 - Enclosed Switches

END OF TABLE OF CONTENTS

1 GENERAL

1.1 LOCATION OF WORK

- A. The work to be done under this Contract is located in the Seaford School District, at the Seaford Central Elementary School, 1 Delaware Place, Seaford DE 19973.

1.2 DESCRIPTION

- A. Without limiting the scope of work as shown on the drawings and as required by the specifications, the following specific mention of items of the included work is made:
- a. Modifications to the kitchen for installation of a new walk-in cooler and dry storage area.

END OF SECTION

INVITATION TO BID
SEAFORD SCHOOL DISTRICT
SEAFORD CENTRAL ELEMENTARY SCHOOL KITCHEN RENOVATIONS – PHASE I

Sealed bids for the Seaford Central Elementary School Kitchen Renovations – Phase I will be received by the Seaford School District until **10:00 AM**, local time, on **Thursday, June 14th, 2012** at the **Seaford School District Offices, 390 N. Market Street, Ext**, at which time they will be publicly opened and read aloud in the Conference Room. Bidder bears the risk of late delivery. Any bids received after the stated time will be returned unopened.

Project involves the following: Renovations of the facility for a new dry storage area and a new walk-in cooler.

Attention is called to construction schedule as detailed in the Bid Documents.

A mandatory pre-bid meeting will be held on **Wednesday, May 30th, 2012** at **10:00 AM**, local time at the **Seaford School District Offices, 390 N. Market Street, Ext, Seaford, DE 19973**, for the purpose of establishing the listing of subcontractors and to answer questions. Individuals may represent only one firm at this meeting. Representatives of each party to any Joint Venture must attend this meeting. **ATTENDANCE OF THIS MEETING IS A PREREQUISITE FOR BIDDING ON THIS CONTRACT.**

Sealed bids shall be addressed to the Seaford School District.

For further information please contact Brian M. Zigmond at StudioJAED, (302) 832-1652.

Prevailing Wage Rates, as described by Delaware Law, must be adhered to where applicable.

Contract documents can be obtained at **Reprographics Center, Inc., 298 Churchmans Road, New Castle, DE 19720, Phone: 302-328-5019, Fax: 302-328-5067, Email: rci1@rciplot.com** on or after **May 30th, 2012** for a cost of **\$50**. Checks should be made payable to StudioJAED. Prints requested by mail will have an additional shipping charge attached.

The proposals may not be withdrawn for a period of sixty (60) calendar days after the scheduled closing time for receipt of bids.

Minority Business Enterprises (MBE), Disadvantaged Business Enterprises (DBE) and Women-Owned Business Enterprises (WBE) will be afforded full opportunity to submit bids on this contract and will not be subject to discrimination on the basis of race, color, national origin or sex in consideration of this award. Each bid must be accompanied by a bid security equivalent to ten percent of the bid amount and all additive alternates. The successful bidder must post a performance bond and payment bond in a sum equal to 100 percent of the contract price upon execution of the contract. The Owner reserves the right to reject any or all bids and to waive any informalities therein. The Owner may extend the time and place for the opening of the bids from that described in the advertisement, with not less than two calendar days notice by certified delivery, facsimile machine or other electronic means to those bidders receiving plans.

Mr. Roy Whitaker
Seaford School District
390 N. Market Street, Ext.
Seaford, DE 19973

INSTRUCTIONS TO BIDDERS

TABLE OF ARTICLES

1. DEFINITIONS
2. BIDDER'S REPRESENTATION
3. BIDDING DOCUMENTS
4. BIDDING PROCEDURES
5. CONSIDERATION OF BIDS
6. POST-BID INFORMATION
7. PERFORMANCE BOND AND PAYMENT BOND
8. FORM OF AGREEMENT BETWEEN OWNER AND CONTRACTOR

ARTICLE 1: GENERAL

1.1 DEFINITIONS

1.1.1 Whenever the following terms are used, their intent and meaning shall be interpreted as follows:

1.2 STATE: The State of Delaware.

1.3 AGENCY: Contracting State Agency as noted on cover sheet.

1.4 DESIGNATED OFFICIAL: The agent authorized to act for the Agency.

1.5 BIDDING DOCUMENTS: Bidding Documents include the Bidding Requirements and the proposed Contract Documents. The Bidding Requirements consist of the Advertisement for Bid, Invitation to Bid, Instructions to Bidders, Supplementary Instructions to Bidders (if any), General Conditions, Supplementary General Conditions, General Requirements, Special Provisions (if any), the Bid Form (including the Non-collusion Statement), and other sample bidding and contract forms. The proposed Contract Documents consist of the form of Agreement between the Owner and Contractor, as well as the Drawings, Specifications (Project Manual) and all Addenda issued prior to execution of the Contract.

1.6 CONTRACT DOCUMENTS: The Contract Documents consist of the: Instructions to Bidders, Supplementary Instructions to Bidders (if any), General Conditions, Supplementary General Conditions, General Requirements, Special Provisions (if any), the form of agreement between the Owner and the Contractor, Drawings (if any), Specifications (Project Manual), and all addenda.

1.7 AGREEMENT: The form of the Agreement shall be AIA Document A101, Standard Form of Agreement between Owner and Contractor where the basis of payment is a STIPULATED SUM. In the case of conflict between the instructions contained therein and the General Requirements herein, these General Requirements shall prevail.

1.8 GENERAL REQUIREMENTS (or CONDITIONS): General Requirements (or conditions) are instructions pertaining to the Bidding Documents and to contracts in general. They contain, in summary, requirements of laws of the State; policies of the Agency and instructions to bidders.

1.9 SPECIAL PROVISIONS: Special Provisions are specific conditions or requirements peculiar to the bidding documents and to the contract under consideration and are supplemental to the General Requirements. Should the Special Provisions conflict with the General Requirements, the Special Provisions shall prevail.

1.10 ADDENDA: Written or graphic instruments issued by the Owner/Architect prior to the execution of the contract which modify or interpret the Bidding Documents by additions, deletions, clarifications or corrections.

1.11 BIDDER OR VENDOR: A person or entity who formally submits a Bid for the material or Work contemplated, acting directly or through a duly authorized representative who meets the requirements set forth in the Bidding Documents.

1.12 SUB-BIDDER: A person or entity who submits a Bid to a Bidder for materials or labor, or both for a portion of the Work.

1.13 BID: A complete and properly executed proposal to do the Work for the sums stipulated therein, submitted in accordance with the Bidding Documents.

- 1.14 BASE BID: The sum stated in the Bid for which the Bidder offers to perform the Work described in the Bidding Documents as the base, to which Work may be added or from which Work may be deleted for sums stated in Alternate Bids (if any are required to be stated in the bid).
- 1.15 ALTERNATE BID (or ALTERNATE): An amount stated in the Bid, where applicable, to be added to or deducted from the amount of the Base Bid if the corresponding change in the Work, as described in the Bidding Documents is accepted.
- 1.16 UNIT PRICE: An amount stated in the Bid, where applicable, as a price per unit of measurement for materials, equipment or services or a portion of the Work as described in the Bidding Documents.
- 1.17 SURETY: The corporate body which is bound with and for the Contract, or which is liable, and which engages to be responsible for the Contractor's payments of all debts pertaining to and for his acceptable performance of the Work for which he has contracted.
- 1.18 BIDDER'S DEPOSIT: The security designated in the Bid to be furnished by the Bidder as a guaranty of good faith to enter into a contract with the Agency if the Work to be performed or the material or equipment to be furnished is awarded to him.
- 1.19 CONTRACT: The written agreement covering the furnishing and delivery of material or work to be performed.
- 1.20 CONTRACTOR: Any individual, firm or corporation with whom a contract is made by the Agency.
- 1.21 SUBCONTRACTOR: An individual, partnership or corporation which has a direct contract with a contractor to furnish labor and materials at the job site, or to perform construction labor and furnish material in connection with such labor at the job site.
- 1.22 CONTRACT BOND: The approved form of security furnished by the contractor and his surety as a guaranty of good faith on the part of the contractor to execute the work in accordance with the terms of the contract.

ARTICLE 2: BIDDER'S REPRESENTATIONS

2.1 PRE-BID MEETING

2.1.1 A pre-bid meeting for this project will be held at the time and place designated. Attendance at this meeting is a pre-requisite for submitting a Bid, unless this requirement is specifically waived elsewhere in the Bid Documents.

2.2 By submitting a Bid, the Bidder represents that:

2.2.1 The Bidder has read and understands the Bidding Documents and that the Bid is made in accordance therewith.

2.2.2 The Bidder has visited the site, become familiar with existing conditions under which the Work is to be performed, and has correlated the Bidder's his personal observations with the requirements of the proposed Contract Documents.

2.2.3 The Bid is based upon the materials, equipment, and systems required by the Bidding Documents without exception.

2.3 JOINT VENTURE REQUIREMENTS

- 2.3.1 For Public Works Contracts, each Joint Venturer shall be qualified and capable to complete the Work with their own forces.
- 2.3.2 Included with the Bid submission, and as a requirement to bid, a copy of the executed Joint Venture Agreement shall be submitted and signed by all Joint Venturers involved.
- 2.3.3 All required Bid Bonds, Performance Bonds, Material and Labor Payment Bonds must be executed by both Joint Venturers and be placed in both of their names.
- 2.3.4 All required insurance certificates shall name both Joint Venturers.
- 2.3.5 Both Joint Venturers shall sign the Bid Form and shall submit a valid Delaware Business License Number with their Bid or shall state that the process of application for a Delaware Business License has been initiated.
- 2.3.6 Both Joint Venturers shall include their Federal E.I. Number with the Bid.
- 2.3.7 In the event of a mandatory Pre-bid Meeting, each Joint Venturer shall have a representative in attendance.
- 2.3.8 Due to exceptional circumstances and for good cause shown, one or more of these provisions may be waived at the discretion of the State.

2.4 ASSIGNMENT OF ANTITRUST CLAIMS

- 2.4.1 As consideration for the award and execution by the Owner of this contract, the Contractor hereby grants, conveys, sells, assigns and transfers to the State of Delaware all of its right, title and interests in and to all known or unknown causes of action it presently has or may now or hereafter acquire under the antitrust laws of the United States and the State of Delaware, relating to the particular goods or services purchased or acquired by the Owner pursuant to this contract.

ARTICLE 3: BIDDING DOCUMENTS

3.1 COPIES OF BID DOCUMENTS

- 3.1.1 Bidders may obtain complete sets of the Bidding Documents from the Architectural/Engineering firm designated in the Advertisement or Invitation to Bid in the number and for the deposit sum, if any, stated therein.
- 3.1.2 Bidders shall use complete sets of Bidding Documents for preparation of Bids. The issuing Agency nor the Architect assumes no responsibility for errors or misinterpretations resulting from the use of incomplete sets of Bidding Documents.
- 3.1.3 Any errors, inconsistencies or omissions discovered shall be reported to the Architect immediately.
- 3.1.4 The Agency and Architect may make copies of the Bidding Documents available on the above terms for the purpose of obtaining Bids on the Work. No license or grant of use is conferred by issuance of copies of the Bidding Documents.

3.2 INTERPRETATION OR CORRECTION OF BIDDING DOCUMENTS

- 3.2.1 The Bidder shall carefully study and compare the Bidding Documents with each other, and with other work being bid concurrently or presently under construction to the extent that it relates to the Work for which the Bid is submitted, shall examine the site and local conditions, and shall report any errors, inconsistencies, or ambiguities discovered to the Architect.
- 3.2.2 Bidders or Sub-bidders requiring clarification or interpretation of the Bidding Documents shall make a written request to the Architect at least four days prior to the date for receipt of Bids. Interpretations, corrections and changes to the Bidding Documents will be made by written Addendum. Interpretations, corrections, or changes to the Bidding Documents made in any other manner shall not be binding.
- 3.2.3 The apparent silence of the specifications as to any detail, or the apparent omission from it of detailed description concerning any point, shall be regarded as meaning that only the best commercial practice is to prevail and only material and workmanship of the first quality are to be used. Proof of specification compliance will be the responsibility of the Bidder. In the event of a conflict between or within the drawings and specifications, the more intensive, highest quality description shall be utilized for the project.
- 3.2.4 Unless otherwise provided in the Contract Documents, the Contractor shall provide and pay for all permits, labor, materials, equipment, tools, construction equipment and machinery, water, heat, utilities, transportation, and other facilities and services necessary for the proper execution and completion of the Work.
- 3.2.5 The Owner will bear the costs for all impact and user fees associated with the project.

3.3 SUBSTITUTIONS

- 3.3.1 The materials, products and equipment described in the Bidding Documents establish a standard of quality, required function, dimension, and appearance to be met by any proposed substitution. The specification of a particular manufacturer or model number is not intended to be proprietary in any way. Substitutions of products for those named will be considered, providing that the Vendor certifies that the function, quality, and performance characteristics of the material offered is equal or superior to that specified. It shall be the Bidder's responsibility to assure that the proposed substitution will not affect the intent of the design, and to make any installation modifications required to accommodate the substitution.
- 3.3.2 Requests for substitutions shall be made in writing to the Architect at least ten days prior to the date of the Bid Opening. Such requests shall include a complete description of the proposed substitution, drawings, performance and test data, explanation of required installation modifications due the substitution, and any other information necessary for an evaluation. The burden of proof of the merit of the proposed substitution is upon the proposer. The Architect's decision of approval or disapproval shall be final. The Architect is to notify Owner prior to any approvals.
- 3.3.3 If the Architect approves a substitution prior to the receipt of Bids, such approval shall be set forth in an Addendum. Approvals made in any other manner shall not be binding.
- 3.3.4 The Architect shall have no obligation to consider any substitutions after the Contract award.
- ### 3.4 ADDENDA
- 3.4.1 Addenda will be mailed or delivered to all who are known by the Architect to have received a complete set of the Bidding Documents.
- 3.4.2 Copies of Addenda will be made available for inspection wherever Bidding Documents are on file for that purpose.

- 3.4.3 No Addenda will be issued later than 2 days prior to the date for receipt of Bids except an Addendum withdrawing the request for Bids or one which extends the time or changes the location for the opening of bids.
- 3.4.4 Each bidder shall ascertain prior to submitting his Bid that they have received all Addenda issued, and shall acknowledge their receipt in their Bid in the appropriate space. Not acknowledging an issued Addenda could be grounds for determining a bid to be non-responsive.

ARTICLE 4: BIDDING PROCEDURES

4.1 PREPARATION OF BIDS

- 4.1.1 Submit the bids on the Bid Forms included with the Bidding Documents.
- 4.1.2 Submit the original Bid Form in duplicate for each bid. Bid Forms may be removed from the project manual for this purpose.
- 4.1.3 Execute all blanks on the Bid Form in a non-erasable medium (typewriter or manually in ink).
- 4.1.4 Where so indicated by the makeup on the Bid Form, express sums in both words and figures, in case of discrepancy between the two, the written word amount shall govern.
- 4.1.5 Interlineations, alterations or erasures must be initialed by the signer of the Bid.
- 4.1.6 BID ALL REQUESTED ALTERNATES AND UNIT PRICES, IF ANY. If there is no change in the Base Bid for an Alternate, enter "No Change". The Contractor is responsible for verifying that they have received all addenda issued during the bidding period. Work required by Addenda shall automatically become part of the Contract.
- 4.1.7 Make no additional stipulations on the Bid Form and do not qualify the Bid in any other manner.
- 4.1.8 Each copy of the Bid shall include the legal name of the Bidder and a statement whether the Bidder is a sole proprietor, a partnership, a corporation, or any legal entity, and each copy shall be signed by the person or persons legally authorized to bind the Bidder to a contract. A Bid by a corporation shall further give the state of incorporation and have the corporate seal affixed. A Bid submitted by an agent shall have a current Power of Attorney attached, certifying agent's authority to bind the Bidder.
- 4.1.9 Bidder shall complete the Non-Collusion Statement form included with the Bid Forms and include it with their Bid.
- 4.1.10 In the construction of all Public Works projects for the State of Delaware or any agency thereof, preference in employment of laborers, workers or mechanics shall be given to bona fide legal citizens of the State who have established citizenship by residence of at least 90 days in the State.

4.2 BID SECURITY

- 4.2.1 All bids shall be accompanied by a deposit of either a good and sufficient bond to the agency for the benefit of the agency, with corporate surety authorized to do business in this State, the form of the bond and the surety to be approved by the agency, or a security of the bidder assigned to the agency, for a sum equal to at least 10% of the bid plus all add alternates, or in lieu of the bid bond a security deposit in the form of a certified check, bank treasurer's

check, cashier's check, money order, or other prior approved secured deposit assigned to the State. The bid bond need not be for a specific sum, but may be stated to be for a sum equal to 10% of the bid plus all add alternates to which it relates and not to exceed a certain stated sum, if said sum is equal to at least 10% of the bid. The Bid Bond form used shall be the standard OMB form (attached).

4.2.2 The Agency has the right to retain the bid security of Bidders to whom an award is being considered until either a formal contract has been executed and bonds have been furnished or the specified time has elapsed so the Bids may be withdrawn or all Bids have been rejected.

4.2.3 In the event of any successful Bidder refusing or neglecting to execute a formal contract and bond within 20 calendar days of the awarding of the contract, the bid bond or security deposited by the successful bidder shall be forfeited.

4.3 SUBCONTRACTOR LIST

4.3.1 As required by Delaware Code, Title 29, section 6962(d)(10)b, each Bidder shall submit with their Bid a completed List of Sub-Contractors they intend to employ for this project. NAME ONLY ONE SUBCONTRACTOR FOR EACH TRADE. A Bid will be considered non-responsive unless the completed list is included. The format and categories for the list shall be provided and reviewed and confirmed at the pre-bid meeting.

4.3.2 Provide the Name and Address for each listed subcontractor. Addresses by City, Town or Locality, plus State, will be acceptable.

4.3.3 It is the responsibility of the Contractor to ensure that their Subcontractors are in compliance with the provisions of this law. Also, if a Contractor elects to list themselves as a Subcontractor for any category, they must specifically name themselves on the Bid Form and be able to document their capability to act as Subcontractor in that category in accordance with this law.

4.4 EQUALITY OF EMPLOYMENT OPPORTUNITY ON PUBLIC WORKS

4.4.1 During the performance of this contract, the contractor agrees as follows:

- A. The Contractor will not discriminate against any employee or applicant for employment because of race, creed, color, sex or national origin. The Contractor will take affirmative action to ensure the applicants are employed, and that employees are treated during employment, without regard to their race, creed, color, sex or national origin. Such action shall include, but not be limited to, the following: Employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship. The Contractor agrees to post in conspicuous places available to employees and applicants for employment notices to be provided by the contracting agency setting forth this nondiscrimination clause.
- B. The Contractor will, in all solicitations or advertisements for employees placed by or on behalf of the Contractor, state that all qualified applicants will receive consideration for employment without regard to race, creed, color, sex or national origin."

4.5 PREVAILING WAGE REQUIREMENT

4.5.1 Wage Provisions: In accordance with Delaware Code, Title 29, Section 6960, renovation projects whose total cost shall exceed \$15,000, and \$100,000 for new construction, the

minimum wage rates for various classes of laborers and mechanics shall be as determined by the Department of Labor, Division of Industrial Affairs of the State of Delaware.

- 4.5.2 The prevailing wage shall be the wage paid to a majority of employees performing similar work as reported in the Department's annual prevailing wage survey or in the absence of a majority, the average paid to all employees reported.
- 4.5.3 The employer shall pay all mechanics and labors employed directly upon the site of work, unconditionally and not less often than once a week and without subsequent deduction or rebate on any account, the full amounts accrued at time of payment, computed at wage rates not less than those stated in the specifications, regardless of any contractual relationship which may be alleged to exist between the employer and such laborers and mechanics.
- 4.5.4 The scale of the wages to be paid shall be posted by the employer in a prominent and easily accessible place at the site of the work.
- 4.5.5 Every contract based upon these specifications shall contain a stipulation that certified sworn payroll reports be maintained by every contractor and subcontractor performing work upon the site of construction. The contractor and subcontractor shall keep and maintain the sworn payroll information for a period of 2 years from the last day of the work week covered by the payroll. A certified copy of these payroll reports shall be made available: (1) For inspection or furnished upon request to a representative of the Department of Labor; (2) Upon request by the public or for copies thereof. However, a request by the public must be made through the Department of Labor. The requesting party shall, prior to being provided the records, reimburse the costs of preparation by the Department of Labor in accordance with the Department's copying fee policy. The public shall not be given access to the records at the principal office of the contractor or subcontractor; and (3) The certified payroll records shall be on a form provided by the Department of Labor or shall contain the same information as the form provided by the Department and shall be provided within 10 days from receipt of notice requesting the records from the Department of Labor.

4.6 SUBMISSION OF BIDS

- 4.6.1 Enclose the Bid, the Bid Security, and any other documents required to be submitted with the Bid in a sealed opaque envelope. Address the envelope to the party receiving the Bids. Identify with the project name, project number, and the Bidder's name and address. If the Bid is sent by mail, enclose the sealed envelope in a separate mailing envelope with the notation "BID ENCLOSED" on the face thereof. The State is not responsible for the opening of bids prior to bid opening date and time that are not properly marked.
- 4.6.2 Deposit Bids at the designated location prior to the time and date for receipt of bids indicated in the Advertisement for Bids. Bids received after the time and date for receipt of bids will be marked "LATE BID" and returned.
- 4.6.3 Bidder assumes full responsibility for timely delivery at location designated for receipt of bids.
- 4.6.4 Oral, telephonic or telegraphic bids are invalid and will not receive consideration.
- 4.6.5 Withdrawn Bids may be resubmitted up to the date and time designated for the receipt of Bids, provided that they are then fully in compliance with these Instructions to Bidders.

4.7 MODIFICATION OR WITHDRAW OF BIDS

- 4.7.1 Prior to the closing date for receipt of Bids, a Bidder may withdraw a Bid by personal request and by showing proper identification to the Architect. A request for withdraw by letter or fax, if the Architect is notified in writing prior to receipt of fax, is acceptable. A fax directing a

modification in the bid price will render the Bid informal, causing it to be ineligible for consideration of award. Telephone directives for modification of the bid price shall not be permitted and will have no bearing on the submitted proposal in any manner.

4.7.2 Bidders submitting Bids that are late shall be notified as soon as practicable and the bid shall be returned.

4.7.3 A Bid may not be modified, withdrawn or canceled by the Bidder during a thirty (30) day period following the time and date designated for the receipt and opening of Bids, and Bidder so agrees in submitting their Bid. Bids shall be binding for 30 days after the date of the Bid opening.

ARTICLE 5: CONSIDERATION OF BIDS

5.1 OPENING/REJECTION OF BIDS

5.1.1 Unless otherwise stated, Bids received on time will be publicly opened and will be read aloud. An abstract of the Bids will be made available to Bidders.

5.1.2 The Agency shall have the right to reject any and all Bids. A Bid not accompanied by a required Bid Security or by other data required by the Bidding Documents, or a Bid which is in any way incomplete or irregular is subject to rejection.

5.1.3 If the Bids are rejected, it will be done within sixty (60) calendar days of the Bid opening.

5.2 COMPARISON OF BIDS

5.2.1 After the Bids have been opened and read, the bid prices will be compared and the result of such comparisons will be made available to the public. Comparisons of the Bids may be based on the Base Bid plus desired Alternates. The Agency shall have the right to accept Alternates in any order or combination.

5.2.2 The Agency reserves the right to waive technicalities, to reject any or all Bids, or any portion thereof, to advertise for new Bids, to proceed to do the Work otherwise, or to abandon the Work, if in the judgment of the Agency or its agent(s), it is in the best interest of the State.

5.2.3 An increase or decrease in the quantity for any item is not sufficient grounds for an increase or decrease in the Unit Price.

5.2.4 The prices quoted are to be those for which the material will be furnished F.O.B. Job Site and include all charges that may be imposed during the period of the Contract.

5.2.5 No qualifying letter or statements in or attached to the Bid, or separate discounts will be considered in determining the low Bid except as may be otherwise herein noted. Cash or separate discounts should be computed and incorporated into Unit Bid Price(s).

5.3 DISQUALIFICATION OF BIDDERS

5.3.1 An agency shall determine that each Bidder on any Public Works Contract is responsible before awarding the Contract. Factors to be considered in determining the responsibility of a Bidder include:

- A. The Bidder's financial, physical, personnel or other resources including Subcontracts;

- B. The Bidder's record of performance on past public or private construction projects, including, but not limited to , defaults and/or final adjudication or admission of violations of the Prevailing Wage Laws in Delaware or any other state;
- C. The Bidder's written safety plan;
- D. Whether the Bidder is qualified legally to contract with the State;
- E. Whether the Bidder supplied all necessary information concerning its responsibility; and,
- F. Any other specific criteria for a particular procurement, which an agency may establish; provided however, that, the criteria be set forth in the Invitation to Bid and is otherwise in conformity with State and/or Federal law.

5.3.2 If an agency determines that a Bidder is nonresponsive and/or nonresponsible, the determination shall be in writing and set forth the basis for the determination. A copy of the determination shall be sent to the affected Bidder within five (5) working days of said determination.

5.3.3 In addition, any one or more of the following causes may be considered as sufficient for the disqualification of a Bidder and the rejection of their Bid or Bids.

5.3.3.1 More than one Bid for the same Contract from an individual, firm or corporation under the same or different names.

5.3.3.2 Evidence of collusion among Bidders.

5.3.3.3 Unsatisfactory performance record as evidenced by past experience.

5.3.3.4 If the Unit Prices are obviously unbalanced either in excess or below reasonable cost analysis values.

5.3.3.5 If there are any unauthorized additions, interlineation, conditional or alternate bids or irregularities of any kind which may tend to make the Bid incomplete, indefinite or ambiguous as to its meaning.

5.3.3.6 If the Bid is not accompanied by the required Bid Security and other data required by the Bidding Documents.

5.3.3.7 If any exceptions or qualifications of the Bid are noted on the Bid Form.

5.4 ACCEPTANCE OF BID AND AWARD OF CONTRACT

5.4.1 A formal Contract shall be executed with the successful Bidder within twenty (20) calendar days after the award of the Contract.

5.4.2 Per Section 6962(d)(13) a., Title 29, Delaware Code, "The contracting agency shall award any public works contract within thirty (30) days of the bid opening to the lowest responsive and responsible Bidder, unless the Agency elects to award on the basis of best value, in which case the election to award on the basis of best value shall be stated in the Invitation To Bid."

5.4.3 Each Bid on any Public Works Contract must be deemed responsive by the Agency to be considered for award. A responsive Bid shall conform in all material respects to the requirements and criteria set forth in the Contract Documents and specifications.

- 5.4.4 The Agency shall have the right to accept Alternates in any order or combination, and to determine the low Bidder on the basis of the sum of the Base Bid, plus accepted Alternates.
- 5.4.5 The successful Bidder shall execute a formal contract, submit the required Insurance Certificate, and furnish good and sufficient bonds, unless specifically waived in the General Requirements, in accordance with the General Requirement, within twenty (20) days of official notice of contract award. Bonds shall be for the benefit of the Agency with surety in the amount of 100% of the total contract award. Said Bonds shall be conditioned upon the faithful performance of the contract. Bonds shall remain in effect for period of one year after the date of substantial completion.
- 5.4.6 If the successful Bidder fails to execute the required Contract and Bond, as aforesaid, within twenty (20) calendar days after the date of official Notice of the Award of the Contract, their Bid guaranty shall immediately be taken and become the property of the State for the benefit of the Agency as liquidated damages, and not as a forfeiture or as a penalty. Award will then be made to the next lowest qualified Bidder of the Work or readvertised, as the Agency may decide.
- 5.4.7 Prior to receiving an award, the successful Bidder shall furnish to the Agency proof of State of Delaware Business Licensure. If the Bidder does not currently have a Business License, they may obtain an application by writing to: Division of Revenue, Carvel State Office Building, 820 French Street, Wilmington, DE 19899. A copy of the letter written to the Division of Revenue, sent with your Bid will be adequate proof for your firm to be considered for award until such time as you receive your license.
- 5.4.8 The Bid Security shall be returned to the successful Bidder upon the execution of the formal contract. The Bid Securities of unsuccessful bidders shall be returned within sixty (60) calendar days after the opening of the Bids.

ARTICLE 6: POST-BID INFORMATION

- 6.1 CONTRACTOR'S QUALIFICATION STATEMENT
- 6.1.1 Bidders to whom award of a Contract is under consideration shall, if requested by the Agency, submit a properly executed AIA Document A305, Contractor's Qualification Statement, unless such a statement has been previously required and submitted.
- 6.2 BUSINESS DESIGNATION FORM
- 6.2.1 Successful bidder shall be required to accurately complete an Office of Management and Budget Business Designation Form for Subcontractors.

ARTICLE 7: PERFORMANCE BOND AND PAYMENT BOND

- 7.1 BOND REQUIREMENTS
- 7.1.1 The cost of furnishing the required Bonds, that are stipulated in the Bidding Documents, shall be included in the Bid.
- 7.1.2 If the Bidder is required by the Agency to secure a bond from other than the Bidder's usual sources, changes in cost will be adjusted as provided in the Contract Documents.

7.1.3 The Performance and Payment Bond forms used shall be the standard OMB forms (attached).

7.2 TIME OF DELIVERY AND FORM OF BONDS

7.2.1 The bonds shall be dated on or after the date of the Contract.

7.2.2 The Bidder shall require the attorney-in- fact who executes the required bonds on behalf of the surety to affix a certified and current copy of the power of attorney.

ARTICLE 8: FORM OF AGREEMENT BETWEEN AGENCY AND CONTRACTOR

8.1 Unless otherwise required in the Bidding Documents, the Agreement for the Work will be written on AIA Document A101, Standard Form of Agreement Between Owner and Contractor Where the Basis of Payment is a Stipulated Sum.

END OF INSTRUCTIONS TO BIDDERS

STATE OF DELAWARE
OFFICE OF MANAGEMENT AND BUDGET

BID BOND

TO ACCOMPANY PROPOSAL

KNOW ALL MEN BY THESE PRESENTS That: _____
_____ of _____ in the County of _____
_____ and State of _____ as **Principal**, and _____
_____ of _____ in the County of _____
and State of _____ as **Surety**, legally authorized to do business in the State of Delaware
("State"), are held and firmly unto the **State** in the sum of _____
_____ Dollars (\$_____), or _____ percent not to exceed _____
_____ Dollars (\$_____)
of amount of bid on Contract No. _____, to be paid to the **State** for the use and
benefit of _____ (*insert State agency name*) for which payment
well and truly to be made, we do bind ourselves, our and each of our heirs, executors, administrators, and
successors, jointly and severally for and in the whole firmly by these presents.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH That if the above bonded **Principal**
who has submitted to the _____ (*insert State agency name*) a
certain proposal to enter into this contract for the furnishing of certain material and/or services within the
State, shall be awarded this Contract, and if said **Principal** shall well and truly enter into and execute this
Contract as may be required by the terms of this Contract and approved by the _____
_____ (*insert State agency name*) this Contract to be entered into within twenty days after
the date of official notice of the award thereof in accordance with the terms of said proposal, then this
obligation shall be void or else to be and remain in full force and virtue.

Sealed with _____ seal and dated this _____ day of _____ in the year of our Lord two
thousand and _____ (20____).

SEALED, AND DELIVERED IN THE
Presence of

Name of Bidder (Organization)

Corporate
Seal

By:

Authorized Signature

Attest _____

Title

Name of Surety

Witness: _____

By:

Title

STATE OF DELAWARE
OFFICE OF MANAGEMENT AND BUDGET

PAYMENT BOND

Bond Number: _____

KNOW ALL PERSONS BY THESE PRESENTS, that we, _____, as principal (“**Principal**”), and _____, a _____ corporation, legally authorized to do business in the State of Delaware, as surety (“**Surety**”), are held and firmly bound unto the _____ (“**Owner**”) (*insert State agency name*), in the amount of _____ (\$_____), to be paid to **Owner**, for which payment well and truly to be made, we do bind ourselves, our and each and every of our heirs, executors, administrations, successors and assigns, jointly and severally, for and in the whole firmly by these presents.

Sealed with our seals and dated this _____ day of _____, 20__.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH, that if **Principal**, who has been awarded by **Owner** that certain contract known as Contract No. _____ dated the _____ day of _____, 20__ (the “Contract”), which Contract is incorporated herein by reference, shall well and truly pay all and every person furnishing materials or performing labor or service in and about the performance of the work under the Contract, all and every sums of money due him, her, them or any of them, for all such materials, labor and service for which **Principal** is liable, shall make good and reimburse **Owner** sufficient funds to pay such costs in the completion of the Contract as **Owner** may sustain by reason of any failure or default on the part of **Principal**, and shall also indemnify and save harmless **Owner** from all costs, damages and expenses arising out of or by reason of the performance of the Contract and for as long as provided by the Contract; then this obligation shall be void, otherwise to be and remain in full force and effect.

Surety, for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of **Surety** and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition or change in or to the Contract or the work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any work to be performed or any monies due or to become due thereunder; and **Surety** hereby waives notice of any and all such extensions, modifications, omissions, additions, changes, payments, waivers, assignments, subcontracts and transfers and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to assignees, subcontractors, and other transferees shall have the same effect as to **Surety** as though done or omitted to be done by or in relation to **Principal**.

Surety hereby stipulates and agrees that no modifications, omission or additions in or to the terms of the Contract shall in any way whatsoever affect the obligation of **Surety** and its bond.

Any proceeding, legal or equitable, under this Bond may be brought in any court of competent jurisdiction in the State of Delaware. Notices to **Surety** or Contractor may be mailed or delivered to them at their respective addresses shown below.

IN WITNESS WHEREOF, **Principal** and **Surety** have hereunto set their hand and seals, and such of them as are corporations have caused their corporate seal to be hereto affixed and these presents to be signed by their duly authorized officers, the day and year first above written.

PRINCIPAL

Name: _____

Witness or Attest: Address: _____

Name:

(Corporate Seal)

By: _____(SEAL)
Name:
Title:

SURETY

Name: _____

Witness or Attest: Address: _____

Name:

(Corporate Seal)

By: _____(SEAL)
Name:
Title:

STATE OF DELAWARE
OFFICE OF MANAGEMENT AND BUDGET

PERFORMANCE BOND

Bond Number: _____

KNOW ALL PERSONS BY THESE PRESENTS, that we, _____, as principal (“**Principal**”), and _____, a _____ corporation, legally authorized to do business in the State of Delaware, as surety (“**Surety**”), are held and firmly bound unto the _____ (“**Owner**”) (*insert State agency name*), in the amount of _____ (\$_____), to be paid to **Owner**, for which payment well and truly to be made, we do bind ourselves, our and each and every of our heirs, executors, administrations, successors and assigns, jointly and severally, for and in the whole, firmly by these presents.

Sealed with our seals and dated this _____ day of _____, 20__.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH, that if **Principal**, who has been awarded by **Owner** that certain contract known as Contract No. _____ dated the _____ day of _____, 20__ (the “Contract”), which Contract is incorporated herein by reference, shall well and truly provide and furnish all materials, appliances and tools and perform all the work required under and pursuant to the terms and conditions of the Contract and the Contract Documents (as defined in the Contract) or any changes or modifications thereto made as therein provided, shall make good and reimburse **Owner** sufficient funds to pay the costs of completing the Contract that **Owner** may sustain by reason of any failure or default on the part of **Principal**, and shall also indemnify and save harmless **Owner** from all costs, damages and expenses arising out of or by reason of the performance of the Contract and for as long as provided by the Contract; then this obligation shall be void, otherwise to be and remain in full force and effect.

Surety, for value received, hereby stipulates and agrees, if requested to do so by **Owner**, to fully perform and complete the work to be performed under the Contract pursuant to the terms, conditions and covenants thereof, if for any cause **Principal** fails or neglects to so fully perform and complete such work.

Surety, for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of **Surety** and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition or change in or to the Contract or the work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any work to be performed or any monies due or to become due thereunder; and **Surety** hereby waives notice of any and all such extensions, modifications, omissions, additions, changes, payments, waivers, assignments, subcontracts and transfers and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to assignees, subcontractors, and other

transferees shall have the same effect as to **Surety** as though done or omitted to be done by or in relation to **Principal**.

Surety hereby stipulates and agrees that no modifications, omissions or additions in or to the terms of the Contract shall in any way whatsoever affect the obligation of **Surety** and its bond.

Any proceeding, legal or equitable, under this Bond may be brought in any court of competent jurisdiction in the State of Delaware. Notices to **Surety** or Contractor may be mailed or delivered to them at their respective addresses shown below.

IN WITNESS WHEREOF, **Principal** and **Surety** have hereunto set their hand and seals, and such of them as are corporations have caused their corporate seal to be hereto affixed and these presents to be signed by their duly authorized officers, the day and year first above written.

PRINCIPAL

Name: _____

Witness or Attest: Address: _____

Name:

(Corporate Seal)

By: _____ (SEAL)
Name:
Title:

SURETY

Name: _____

Witness or Attest: Address: _____

Name:

(Corporate Seal)

By: _____ (SEAL)
Name:
Title:

GENERAL REQUIREMENTS

TABLE OF ARTICLES

1. GENERAL PROVISIONS
2. OWNER
3. CONTRACTOR
4. ADMINISTRATION OF THE CONTRACT
5. SUBCONTRACTORS
6. CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS
7. CHANGES IN THE WORK
8. TIME
9. PAYMENTS AND COMPLETION
10. PROTECTION OF PERSONS AND PROPERTY
11. INSURANCE AND BONDS
12. UNCOVERING AND CORRECTION OF WORK
13. MISCELLANEOUS PROVISIONS
14. TERMINATION OR SUSPENSION OF THE CONTRACT

ARTICLE 1: GENERAL

1.1 CONTRACT DOCUMENTS

1.1.1 The intent of the Contract Documents is to include all items necessary for the proper execution and completion of the Work by the Contractor. The Contract Documents are complementary and what is required by one shall be as binding as if required by all. Performance by the Contractor shall be required to an extent consistent with the Contract Documents and reasonably inferable from them as being necessary to produce the intended results.

1.1.2 Work including material purchases shall not begin until the Contractor is in receipt of a bonafide State of Delaware Purchase Order. Any work performed or material purchases prior to the issuance of the Purchase Order is done at the Contractor's own risk and cost.

1.2 EQUALITY OF EMPLOYMENT OPPORTUNITY ON PUBLIC WORKS

1.2.1 For Public Works Projects financed in whole or in part by state appropriation the Contractor agrees that during the performance of this contract:

1. The Contractor will not discriminate against any employee or applicant for employment because of race, creed, color, sex or national origin. The Contractor will take positive steps to ensure that applicants are employed and that employees are treated during employment without regard to their race, creed, color, sex or national origin. Such action shall include, but not be limited to, the following: employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship. The Contractor agrees to post in conspicuous places available to employees and applicants for employment notices to be provided by the contracting agency setting forth this nondiscrimination clause.
2. The Contractor will, in all solicitations or advertisements for employees placed by or on behalf of the Contractor, state that all qualified applicants will receive consideration for employment without regard to race, creed, color, sex or national origin."

ARTICLE 2: OWNER

(NO ADDITIONAL GENERAL REQUIREMENTS – SEE SUPPLEMENTARY GENERAL CONDITIONS)

ARTICLE 3: CONTRACTOR

3.1 Schedule of Values: The successful Bidders shall within twenty (20) days after receiving notice to proceed with the work, furnish to the Owner a complete schedule of values on the various items comprising the work.

3.2 Subcontracts: Upon approval of Subcontractors, the Contractor shall award their Subcontracts as soon as possible after the signing of their own contract and see that all material, their own and those of their Subcontractors, are promptly ordered so that the work will not be delayed by failure of materials to arrive on time.

- 3.3 Before commencing any work or construction, the General Contractor is to consult with the Owner as to matters in connection with access to the site and the allocation of Ground Areas for the various features of hauling, storage, etc.
- 3.4 The Contractor shall supervise and direct the Work, using the Contractor's best skill and attention. The Contractor shall be solely responsible for and have control over construction means, methods, techniques, sequences and procedures and for coordinating all portions of the Work under the Contract, unless the Contract Documents give other specific instructions.
- 3.5 The Contractor shall enforce strict discipline and good order among the Contractor's employees and other persons carrying out the Contract. The Contractor shall not permit employment of unfit persons or persons not skilled in tasks assigned to them.
- 3.6 The Contractor warrants to the Owner that materials and equipment furnished will be new and of good quality, unless otherwise permitted, and that the work will be free from defects and in conformance with the Contract Documents. Work not conforming to these requirements, including substitutions not properly approved, may be considered defective. If required by the Owner, the Contractor shall furnish evidence as to the kind and quality of materials and equipment provided.
- 3.7 Unless otherwise provided, the Contractor shall pay all sales, consumer, use and other similar taxes, and shall secure and pay for required permits, fees, licenses, and inspections necessary for proper execution of the Work.
- 3.8 The Contractor shall comply with and give notices required by laws, ordinances, rules, regulations, and lawful orders of public authorities bearing on performance of the Work. The Contractor shall promptly notify the Owner if the Drawings and Specifications are observed to be at variance therewith.
- 3.9 The Contractor shall be responsible to the Owner for the acts and omissions of the Contractor's employees, Subcontractors and their agents and employees, and other persons performing portions of the Work under contract with the Contractor.
- 3.10 The Contractor shall keep the premises and surrounding area free from accumulation of waste materials or rubbish caused by operations under the Contract. At completion of the Work the Contractor shall remove from and about the Project all waste materials, rubbish, the Contractor's tools, construction equipment, machinery and surplus materials. The Contractor shall be responsible for returning all damaged areas to their original conditions.
- 3.11 STATE LICENSE AND TAX REQUIREMENTS
- 3.11.1 Each Contractor and Subcontractor shall be licensed to do business in the State of Delaware and shall pay all fees and taxes due under State laws. In conformance with Section 2503, Chapter 25, Title 30, Delaware Code, "the Contractor shall furnish the Delaware Department of Finance within ten (10) days after entering into any contract with a contractor or subcontractor not a resident of this State, a statement of total value of such contract or contracts together with the names and addresses of the contracting parties."
- 3.12. The Contractor shall comply with all requirements set forth in Section 6962, Chapter 69, Title 29 of the Delaware Code.

ARTICLE 4: ADMINISTRATION OF THE CONTRACT

4.1 CONTRACT SURETY

4.1.1 PERFORMANCE BOND AND LABOR AND MATERIAL PAYMENT BOND

4.1.2 All bonds will be required as follows unless specifically waived elsewhere in the Bidding Documents.

4.1.3 Contents of Performance Bonds – The bond shall be in the form approved by the Office of Management and Budget. The bond shall be conditioned upon the faithful compliance and performance by the successful bidder of each and every term and condition of the contract and the proposal, plans, specifications, and bid documents thereof. Each term and condition shall be met at the time and in the manner prescribed by the Contract, Bid documents and the specifications, including the payment in full to every person furnishing material or performing labor in the performance of the Contract, of all sums of money due the person for such labor and material. (The bond shall also contain the successful bidder's guarantee to indemnify and save harmless the State and the agency from all costs, damages and expenses growing out of or by reason of the Contract in accordance with the Contract.)

4.1.4 Invoking a Performance Bond – The agency may, when it considers that the interest of the State so require, cause judgement to be confessed upon the bond.

4.1.5 Within twenty (20) days after the date of notice of award of contract, the Bidder to whom the award is made shall furnish a Performance Bond and Labor and Material Payment Bond, each equal to the full amount of the Contract price to guarantee the faithful performance of all terms, covenants and conditions of the same. The bonds are to be issued by an acceptable Bonding Company licensed to do business in the State of Delaware and shall be issued in duplicate.

4.1.6 Performance and Payment Bonds shall be maintained in full force (warranty bond) for a period of two (2) years after the date of the Certificate for Final Payment. The Performance Bond shall guarantee the satisfactory completion of the Project and that the Contractor will make good any faults or defects in his work which may develop during the period of said guarantees as a result of improper or defective workmanship, material or apparatus, whether furnished by themselves or their Sub-Contractors. The Payment Bond shall guarantee that the Contractor shall pay in full all persons, firms or corporations who furnish labor or material or both labor and material for, or on account of, the work included herein. The bonds shall be paid for by this Contractor. The Owner shall have the right to demand that the proof parties signing the bonds are duly authorized to do so.

4.2 FAILURE TO COMPLY WITH CONTRACT

4.2.1 If any firm entering into a contract with the State, or Agency that neglects or refuses to perform or fails to comply with the terms thereof, the Agency which signed the Contract may terminate the Contract and proceed to award a new contract in accordance with this Chapter 69, Title 29 of the Delaware Code or may require the Surety on the Performance Bond to complete the Contract in accordance with the terms of the Performance Bond. Nothing herein shall preclude the Agency from pursuing additional remedies as otherwise provided by law.

4.3 CONTRACT INSURANCE AND CONTRACT LIABILITY

4.3.1 In addition to the bond requirements stated in the Bid Documents, each successful Bidder shall purchase adequate insurance for the performance of the Contract and, by submission of a Bid, agrees to indemnify and save harmless and to defend all legal or equitable actions brought against the State, any Agency, officer and/or employee of the State, for and from all claims of liability which is or may be the result of the successful Bidder's actions during the performance of the Contract.

4.3.2 The purchase or nonpurchase of such insurance or the involvement of the successful Bidder in any legal or equitable defense of any action brought against the successful Bidder based upon work performed pursuant to the Contract will not waive any defense which the State, its agencies and their respective officers, employees and agents might otherwise have against such claims, specifically including the defense of sovereign immunity, where applicable, and by the terms of this section, the State and all agencies, officers and employees thereof shall not be financially responsible for the consequences of work performed, pursuant to said contract.

4.4 RIGHT TO AUDIT RECORDS

4.4.1 The Owner shall have the right to audit the books and records of a Contractor or any Subcontractor under any Contract or Subcontract to the extent that the books and records relate to the performance of the Contract or Subcontract.

4.4.2 Said books and records shall be maintained by the Contractor for a period of seven (7) years from the date of final payment under the Prime Contract and by the Subcontractor for a period of seven (7) years from the date of final payment under the Subcontract.

ARTICLE 5: SUBCONTRACTORS

5.1 SUBCONTRACTING REQUIREMENTS

5.1.1 All contracts for the construction, reconstruction, alteration or repair of any public building (not a road, street or highway) shall be subject to the following provisions:

1. A contract shall be awarded only to a Bidder whose Bid is accompanied by a statement containing, for each Subcontractor category, the name and address (city or town and State only – street number and P.O. Box addresses not required) of the subcontractor whose services the Bidder intends to use in performing the Work and providing the material for such Subcontractor category.
2. A Bid will not be accepted nor will an award of any Contract be made to any Bidder which, as the Prime Contractor, has listed itself as the Subcontractor for any Subcontractor unless:
 - A. It has been established to the satisfaction of the awarding Agency that the Bidder has customarily performed the specialty work of such Subcontractor category by artisans regularly employed by the Bidder's firm;
 - B. That the Bidder is duly licensed by the State to engage in such specialty work, if the State requires licenses; and

- C. That the Bidder is recognized in the industry as a bona fide Subcontractor or Contractor in such specialty work and Subcontractor category.

5.1.2 The decision of the awarding Agency as to whether a Bidder who list itself as the Subcontractor for a Subcontractor category shall be final and binding upon all Bidders, and no action of any nature shall lie against any awarding agency or its employees or officers because of its decision in this regard.

5.1.3 After such a Contract has been awarded, the successful Bidder shall not substitute another Subcontractor for any Subcontractor whose name was set forth in the statement which accompanied the Bid without the written consent of the awarding Agency.

5.1.4 No Agency shall consent to any substitution of Subcontractors unless the Agency is satisfied that the Subcontractor whose name is on the Bidders accompanying statement:

- A. Is unqualified to perform the work required;
- B. Has failed to execute a timely reasonable Subcontract;
- C. Has defaulted in the performance on the portion of the work covered by the Subcontract; or
- D. Is no longer engaged in such business.

5.2 PENALTY FOR SUBSTITUTION OF SUBCONTRACTORS

5.2.1 Should the Contractor fail to utilize any or all of the Subcontractors in the Contractor's Bid statement in the performance of the Work on the public bidding, the Contractor shall be penalized in the amount of (project specific amount*). The Agency may determine to deduct payments of the penalty from the Contractor or have the amount paid directly to the Agency. Any penalty amount assessed against the Contractor or may be remitted or refunded, in whole or in part, by the Agency awarding the Contract, only if it is established to the satisfaction of the Agency that the Subcontractor in question has defaulted or is no longer engaged in such business. No claim for the remission or refund of any penalty shall be granted unless an application is filed within one year after the liability of the successful Bidder accrues. All penalty amounts assessed and not refunded or remitted to the contractor shall be reverted to the State.

*one (1) percent of contract amount not to exceed \$10,000

5.3 ASBESTOS ABATEMENT

5.3.1 The selection of any Contractor to perform asbestos abatement for State-funded projects shall be approved by the Office of Management and Budget, Division of Facilities Management pursuant to Chapter 78 of Title 16.

5.4 STANDARDS OF CONSTRUCTION FOR THE PROTECTION OF THE PHYSICALLY HANDICAPPED

5.4.1 All Contracts shall conform with the standard established by the Delaware Architectural Accessibility Board unless otherwise exempted by the Board.

5.5 CONTRACT PERFORMANCE

5.5.1 Any firm entering into a Public Works Contract that neglects or refuses to perform or fails to comply with its terms, the Agency may terminate the Contract and proceed to award a new Contract or may require the Surety on the Performance Bond to complete the Contract in accordance with the terms of the Performance Bond.

ARTICLE 6: CONSTRUCTION BY OWNER OR SEPARATE CONTRACTORS

6.1 The Owner reserves the right to simultaneously perform other construction or operations related to the Project with the Owner's own forces, and to award separate contracts in connection with other portions of the Project or other Projects at the same site.

6.2 The Contractor shall afford the Owner and other Contractors reasonable opportunity for access and storage of materials and equipment, and for the performance of their activities, and shall connect and coordinate their activities with other forces as required by the Contract Documents.

ARTICLE 7: CHANGES IN THE WORK

7.1 The Owner, without invalidating the Contract, may order changes in the Work consisting of Additions, Deletions, Modifications or Substitutions, with the Contract Sum and Contract completion date being adjusted accordingly. Such changes in the Work shall be authorized by written Change Order signed by the Professional, as the duly authorized agent, the Contractor and the Owner.

7.2 The Contract Sum and Contract Completion Date shall be adjusted only by a fully executed Change Order.

7.3 The additional cost, or credit to the Owner resulting from a change in the Work shall be by mutual agreement of the Owner, Contractor and the Architect. In all cases, this cost or credit shall be based on the 'DPE' wages required and the "invoice price" of the materials/equipment needed.

7.3.1 "DPE" shall be defined to mean "direct per person expense". Direct payroll expense includes direct salary plus customary fringe benefits (prevailing wage rates) and documented statutory costs such as workman's compensation insurance, Social Security/Medicare, and unemployment insurance (a maximum multiplier of 1.35 times DPE).

7.3.2 "Invoice price" of materials/equipment shall be defined to mean the actual cost of materials and/or equipment that is paid by the Contractor, (or subcontractor), to a material distributor, direct factory vendor, store, material provider, or equipment leasing entity. Rates for equipment that is leased and/or owned by the Contractor or subcontractor(s) shall not exceed those listed in the latest version of the "Means Building Construction Cost Data" publication.

7.3.3 In addition to the above, the General Contractor is allowed a fifteen percent (15%) markup for overhead and profit for additional work performed by the General Contractor's own forces. For additional subcontractor work, the Subcontractor is allowed a fifteen (15) percent overhead and profit on change order work above and beyond the direct costs stated previously. To this amount, the General Contractor will be allowed a mark-up not exceeding seven and one half percent (7.5%) on the subcontractors work. These mark-ups shall include all costs including, but not limited to: overhead, profit, bonds, insurance, supervision, etc. No markup is permitted on the work of the subcontractors

subcontractor. No additional costs shall be allowed for changes related to the Contractor's onsite superintendent/staff, or project manager, unless a change in the work changes the project duration and is identified by the CPM schedule. There will be no other costs associated with the change order.

ARTICLE 8: TIME

- 8.1 Time limits, if any, are as stated in the Project Manual. By executing the Agreement, the Contractor confirms that the stipulated limits are reasonable, and that the Work will be completed within the anticipated time frame.
- 8.2 If progress of the Work is delayed at any time by changes ordered by the Owner, by labor disputes, fire, unusual delay in deliveries, abnormal adverse weather conditions, unavoidable casualties or other causes beyond the Contractor's control, the Contract Time shall be extended for such reasonable time as the Owner may determine.
- 8.3 Any extension of time beyond the date fixed for completion of the construction and acceptance of any part of the Work called for by the Contract, or the occupancy of the building by the Owner, in whole or in part, previous to the completion shall not be deemed a waiver by the Owner of his right to annul or terminate the Contract for abandonment or delay in the matter provided for, nor relieve the Contractor of full responsibility. Time is of the essence for this project. The agreement between the owner and contractor shall stipulate that failure to complete all work by below applicable scheduled dates shall result in liquidated damages being paid to the owner in the amount of \$500/day.

Working Schedule

Start
July 9, 2012

Completion
October 1, 2012

- 8.4 **SUSPENSION AND DEBARMENT**
- 8.4.1 Per Section 6962(d)(14), Title 29, Delaware Code, "Any Contractor who fails to perform a public works contract or complete a public works project within the time schedule established by the Agency in the Invitation To Bid, may be subject to Suspension or Debarment for one or more of the following reasons: a) failure to supply the adequate labor supply ratio for the project; b) inadequate financial resources; or, c) poor performance on the Project."
- 8.4.2 "Upon such failure for any of the above stated reasons, the Agency that contracted for the public works project may petition the Director of the Office of Management and Budget for Suspension or Debarment of the Contractor. The Agency shall send a copy of the petition to the Contractor within three (3) working days of filing with the Director. If the Director concludes that the petition has merit, the Director shall schedule and hold a hearing to determine whether to suspend the Contractor, debar the Contractor or deny the petition. The Agency shall have the burden of proving, by a preponderance of the evidence, that the Contractor failed to perform or complete the public works project within the time schedule established by the Agency and failed to do so for one or more of the following reasons: a) failure to supply the adequate labor supply ratio for the project; b) inadequate financial resources; or, c) poor performance on the project. Upon a finding in

favor of the Agency, the Director may suspend a Contractor from Bidding on any project funded, in whole or in part, with public funds for up to 1 year for a first offense, up to 3 years for a second offense and permanently debar the Contractor for a third offense. The Director shall issue a written decision and shall send a copy to the Contractor and the Agency. Such decision may be appealed to the Superior Court within thirty (30) days for a review on the record.”

8.5 RETAINAGE

8.5.1 Per Section 6962(d)(5) a.3, Title 29, Delaware Code: The Agency may at the beginning of each public works project establish a time schedule for the completion of the project. If the project is delayed beyond the completion date due to the Contractor's failure to meet their responsibilities, the Agency may forfeit, at its discretion, all or part of the Contractor's retainage.

8.5.2 This forfeiture of retainage also applies to the timely completion of the punchlist. A punchlist will only be prepared upon the mutual agreement of the Owner, Architect and Contractor. Once the punchlist is prepared, all three parties will by mutual agreement, establish a schedule for its completion. Should completion of the punchlist be delayed beyond the established date due to the Contractor's failure to meet their responsibilities, the Agency may hold permanently, at its discretion, all or part of the Contractor's retainage.

ARTICLE 9: PAYMENTS AND COMPLETION

9.1 APPLICATION FOR PAYMENT

9.1.1 Applications for payment shall be made upon AIA Document G702. There will be a five percent (5%) retainage on all Contractor's monthly invoices until completion of the project. This retainage may become payable upon receipt of all required closeout documentation, provided all other requirements of the Contract Documents have been met.

9.1.2 A date will be fixed for the taking of the monthly account of work done. Upon receipt of Contractor's itemized application for payment, such application will be audited, modified, if found necessary, and approved for the amount. Statement shall be submitted to the Owner.

9.1.3 Section 6516, Title 29 of the Delaware Code annualized interest is not to exceed 12% per annum beginning thirty (30) days after the "presentation" (as opposed to the date) of the invoice.

9.2 PARTIAL PAYMENTS

9.2.1 Any public works Contract executed by any Agency may provide for partial payments at the option of the Owner with respect to materials placed along or upon the sites or stored at secured locations, which are suitable for use in the performance of the contract.

9.2.2 When approved by the agency, partial payment may include the values of tested and acceptable materials of a nonperishable or noncontaminative nature which have been produced or furnished for incorporation as a permanent part of the work yet to be completed, provided acceptable provisions have been made for storage.

- 9.2.2.1 Any allowance made for materials on hand will not exceed the delivered cost of the materials as verified by invoices furnished by the Contractor, nor will it exceed the contract bid price for the material complete in place.
- 9.2.3 If requested by the Agency, receipted bills from all Contractors, Subcontractors, and material men, etc., for the previous payment must accompany each application for payment. Following such a request, no payment will be made until these receipted bills have been received by the Owner.
- 9.3 SUBSTANTIAL COMPLETION
- 9.3.1 When the building has been made suitable for occupancy, but still requires small items of miscellaneous work, the Owner will determine the date when the project has been substantially completed.
- 9.3.2 If, after the Work has been substantially completed, full completion thereof is materially delayed through no fault of the Contractor, and without terminating the Contract, the Owner may make payment of the balance due for the portion of the Work fully completed and accepted. Such payment shall be made under the terms and conditions governing final payment that it shall not constitute a waiver of claims.
- 9.3.3 On projects where commissioning is included, the commissioning work as defined in the specifications must be complete prior to the issuance of substantial completion.
- 9.4 FINAL PAYMENT
- 9.4.1 Final payment, including the five percent (5%) retainage if determined appropriate, shall be made within thirty (30) days after the Work is fully completed and the Contract fully performed and provided that the Contractor has submitted the following closeout documentation (in addition to any other documentation required elsewhere in the Contract Documents):
- 9.4.1.1 Evidence satisfactory to the Owner that all payrolls, material bills, and other indebtedness connected with the work have been paid,
- 9.4.1.2 An acceptable RELEASE OF LIENS,
- 9.4.1.3 Copies of all applicable warranties,
- 9.4.1.4 As-built drawings,
- 9.4.1.5 Operations and Maintenance Manuals,
- 9.4.1.6 Instruction Manuals,
- 9.4.1.7 Consent of Surety to final payment.
- 9.4.1.8 The Owner reserves the right to retain payments, or parts thereof, for its protection until the foregoing conditions have been complied with, defective work corrected and all unsatisfactory conditions remedied.

ARTICLE 10: PROTECTION OF PERSONS AND PROPERTY

- 10.1 The Contractor shall be responsible for initiating, maintaining, and supervising all safety precautions and programs in connection with the performance of the Contract. The Contractor shall take all reasonable precautions to prevent damage, injury or loss to: workers, persons nearby who may be affected, the Work, materials and equipment to be incorporated, and existing property at the site or adjacent thereto. The Contractor shall give notices and comply with applicable laws, ordinances, rules, regulations, and lawful orders of public authorities bearing on the safety of persons and property and their protection from injury, damage, or loss. The Contractor shall promptly remedy damage and loss to property at the site caused in whole or in part by the Contractor, a Subcontractor, or anyone directly or indirectly employed by any of them, or by anyone for whose acts they may be liable.
- 10.2 PERSONNEL BACKGROUND CHECKS
a. The contractor will be responsible for providing federal (50 State) background checks and photo ID badges for all workers that will be on-site for the duration of this work. Finalized forms are to be provided to the School District for review prior to any work commencing on the site. It is the responsibility of the contractor to coordinate the obtaining of these forms with the work schedule noted above. See specification section 01540 for further information.
- 10.3 SMOKING POLICY
a. There will be no smoking permitted on the project site or school premises for the duration of this project.
- 10.4 The Contractor shall notify the Owner in the event any existing hazardous material such as lead, PCBs, asbestos, etc. is encountered on the project. The Owner will arrange with a qualified specialist for the identification, testing, removal, handling and protection against exposure or environmental pollution, to comply with applicable regulation laws and ordinances. The Contractor will not be required to participate in or to perform this operation. Upon completion of this work, the Owner will notify the Contractor in writing the area has been cleared and approved by the authorities in order for the work to proceed. The Contractor shall attach documentation from the authorities of said approval.
- 10.5 As required in the Hazardous Chemical Information Act of June 1984, all vendors supplying any materials that may be defined as hazardous, must provide Material Safety Data Sheets for those products. Any chemical product should be considered hazardous if it has a warning caution on the label relating to a potential physical or health hazard, if it is known to be present in the work place, and if employees may be exposed under normal conditions or in any foreseeable emergency situation. Material Safety Data Sheets must be provided directly to the Owner along with the shipping slips that include those products.
- 10.6 The Contractor shall certify to the Owner that materials incorporated into the Work are free of all asbestos. This certification may be in the form of Material Safety Data Sheet (MSDS) provided by the product manufacturer for the materials used in construction, as specified or as provided by the Contractor.

ARTICLE 11: INSURANCE AND BONDS

- 11.1 The Contractor shall carry all insurance required by law, such as Unemployment Insurance, etc. The Contractor shall carry such insurance coverage as they desire on their own property such as a field office, storage sheds or other structures erected upon the project site that belong to them and for their own use. The Subcontractors involved with this project shall carry whatever insurance protection they consider necessary to cover the loss of any of their personal property, etc.

- 11.2 Upon being awarded the Contract, the Contractor shall obtain a minimum of two (2) copies of all required insurance certificates called for herein, and submit one (1) copy of each certificate, to the Owner, within 20 days of contract award.
- 11.3 Bodily Injury Liability and Property Damage Liability Insurance shall, in addition to the coverage included herein, include coverage for injury to or destruction of any property arising out of the collapse of or structural injury to any building or structure due to demolition work and evidence of these coverages shall be filed with and approved by the Owner.
- 11.4 The Contractor's Property Damage Liability Insurance shall, in addition to the coverage noted herein, include coverage on all real and personal property in their care, custody and control damaged in any way by the Contractor or their Subcontractors during the entire construction period on this project.
- 11.5 Builders Risk (including Standard Extended Coverage Insurance) on the existing building during the entire construction period, shall not be provided by the Contractor under this contract. The Owner shall insure the existing building and all of its contents and all this new alteration work under this contract during entire construction period for the full insurable value of the entire work at the site. Note, however, that the Contractor and their Subcontractors shall be responsible for insuring their tools and equipment whenever in use on the project, against fire damage, theft, vandalism, etc.
- 11.6 Certificates of the insurance company or companies stating the amount and type of coverage, terms of policies, etc., shall be furnished to the Owner, within 20 days of contract award.
- 11.7 The Contractor shall, at their own expense, (in addition to the above) carry the following forms of insurance:
- 11.7.1 Contractor's Contractual Liability Insurance
- Minimum coverage to be:
- | | | |
|-----------------|--|---|
| Bodily Injury | \$ 500,000
\$1,000,000
\$1,000,000 | for each person
for each occurrence
aggregate |
| Property Damage | \$ 500,000
\$1,000,000 | for each occurrence
aggregate |
- 11.7.2 Contractor's Protective Liability Insurance
- Minimum coverage to be:
- | | | |
|-----------------|--|---|
| Bodily Injury | \$ 500,000
\$1,000,000
\$1,000,000 | for each person
for each occurrence
aggregate |
| Property Damage | \$ 500,000
\$500,000 | for each occurrence
aggregate |
- 11.7.3 Automobile Liability Insurance

Minimum coverage to be:

Bodily Injury	\$1,000,000	for each person
	\$1,000,000	for each occurrence
Property Damage	\$ 500,000	per accident

11.7.4 Prime Contractor's and Subcontractors' policies shall include contingent and contractual liability coverage in the same minimum amounts as 11.7.1 above.

11.7.5 Workmen's Compensation (including Employer's Liability):

11.7.5.1 Minimum Limit on employer's liability to be as required by law.

11.7.5.2 Minimum Limit for all employees working at one site.

11.7.6 Certificates of Insurance must be filed with the Owner guaranteeing fifteen (15) days prior notice of cancellation, non-renewal, or any change in coverages and limits of liability shown as included on certificates.

11.7.7 Social Security Liability

11.7.7.1 With respect to all persons at any time employed by or on the payroll of the Contractor or performing any work for or on their behalf, or in connection with or arising out of the Contractor's business, the Contractor shall accept full and exclusive liability for the payment of any and all contributions or taxes or unemployment insurance, or old age retirement benefits, pensions or annuities now or hereafter imposed by the Government of the United States and the State or political subdivision thereof, whether the same be measured by wages, salaries or other remuneration paid to such persons or otherwise.

11.7.7.2 Upon request, the Contractor shall furnish Owner such information on payrolls or employment records as may be necessary to enable it to fully comply with the law imposing the aforesaid contributions or taxes.

11.7.7.3 If the Owner is required by law to and does pay any and/or all of the aforesaid contributions or taxes, the Contractor shall forthwith reimburse the Owner for the entire amount so paid by the Owner.

ARTICLE 12: UNCOVERING AND CORRECTION OF WORK

12.1 The Contractor shall promptly correct Work rejected by the Owner or failing to conform to the requirements of the Contract Documents, whether observed before or after Substantial Completion and whether or not fabricated, installed or completed, and shall correct any Work found to be not in accordance with the requirements of the Contract Documents within a period of two years from the date of Substantial Completion, or by terms of an applicable special warranty required by the Contract Documents. The provisions of this Article apply to work done by Subcontractors as well as to Work done by direct employees of the Contractor.

12.2 At any time during the progress of the work, or in any case where the nature of the defects shall be such that it is not expedient to have them corrected, the Owner, at their option, shall have the right to deduct such sum, or sums, of money from the amount of the contract as they consider justified to adjust the difference in value between the defective work and that required under contract including any damage to the structure.

ARTICLE 13: MISCELLANEOUS PROVISIONS

13.1 CUTTING AND PATCHING

13.1.1 The Contractor shall be responsible for all cutting and patching. The Contractor shall coordinate the work of the various trades involved.

13.2 DIMENSIONS

13.2.1 All dimensions shown shall be verified by the Contractor by actual measurements at the project site. Any discrepancies between the drawings and specifications and the existing conditions shall be referred to the Owner for adjustment before any work affected thereby has been performed.

13.3 LABORATORY TESTS

13.3.1 Any specified laboratory tests of material and finished articles to be incorporated in the work shall be made by bureaus, laboratories or agencies approved by the Owner and reports of such tests shall be submitted to the Owner. The cost of the testing shall be paid for by the Contractor.

13.3.2 The Contractor shall furnish all sample materials required for these tests and shall deliver same without charge to the testing laboratory or other designated agency when and where directed by the Owner.

13.4 ARCHAEOLOGICAL EVIDENCE

13.4.1 Whenever, in the course of construction, any archaeological evidence is encountered on the surface or below the surface of the ground, the Contractor shall notify the authorities of the Delaware Archaeological Board and suspend work in the immediate area for a reasonable time to permit those authorities, or persons designated by them, to examine the area and ensure the proper removal of the archaeological evidence for suitable preservation in the State Museum.

13.5 GLASS REPLACEMENT AND CLEANING

13.5.1 The General Contractor shall replace without expense to the Owner all glass broken during the construction of the project. If job conditions warrant, at completion of the job the General Contractor shall have all glass cleaned and polished.

13.6 WARRANTY

13.6.1 For a period of two (2) years from the date of substantial completion, as evidenced by the date of final acceptance of the work, the contractor warrants that work performed under this contract conforms to the contract requirements and is free of any defect of equipment, material or workmanship performed by the contractor or any of his subcontractors or suppliers. However, manufacturer's warranties and guarantees, if for a period longer than two (2) years, shall take precedence over the above warranties. The contractor shall remedy, at his own expense, any such failure to conform or any such defect. The protection of this warranty shall be included in the Contractor's Performance Bond.

ARTICLE 14: TERMINATION OF CONTRACT

- 14.1 If the Contractor defaults or persistently fails or neglects to carry out the Work in accordance with the Contract Documents or fails to perform a provision of the Contract, the Owner, after seven days written notice to the Contractor, may make good such deficiencies and may deduct the cost thereof from the payment then or thereafter due the Contractor. Alternatively, at the Owner's option, and the Owner may terminate the Contract and take possession of the site and of all materials, equipment, tools, and machinery thereon owned by the Contractor and may finish the Work by whatever method the Owner may deem expedient. If the costs of finishing the Work exceed any unpaid compensation due the Contractor, the Contractor shall pay the difference to the Owner.
- 14.2 "If the continuation of this Agreement is contingent upon the appropriation of adequate state, or federal funds, this Agreement may be terminated on the date beginning on the first fiscal year for which funds are not appropriated or at the exhaustion of the appropriation. The Owner may terminate this Agreement by providing written notice to the parties of such non-appropriation. All payment obligations of the Owner will cease upon the date of termination. Notwithstanding the foregoing, the Owner agrees that it will use its best efforts to obtain approval of necessary funds to continue the Agreement by taking appropriate action to request adequate funds to continue the Agreement."

END OF GENERAL REQUIREMENTS

UNIT PRICES

Unit prices conform to applicable project specification section.

ADD

UNIT PRICE No. 1: Gypsum deck repair per SF per 3" Depth, less than 1000 SF \$ _____

Description: Remove existing damaged gypsum roof deck by mechanical means to a depth of 3". Provide liquid cementitious repair (Pyro-Fill) to roof deck to make level with surrounding area. Cost will be per Square Foot per 3" depth for a total disturbed area of less than 1000 square feet.

UNIT PRICE No. 2: Gypsum deck repair per SF per 3" Depth, greater than 1000 SF \$ _____

Description: Remove existing damaged gypsum roof deck by mechanical means to a depth of 3". Provide liquid cementitious repair (Pyro-Fill) to roof deck to make level with surrounding area. Cost will be per Square Foot per 3" depth for a total disturbed area of less than 1000 square feet.

UNIT PRICE No. 2: TPA roofing and 1/2" cover board per SF \$ _____

Description: Remove existing roofing material to existing deck. Install 1/2" fiberboard over existing deck. Install TPA membrane roofing over new cover board.

BID FORM

I/We acknowledge Addendums numbered _____ and the price(s) submitted include any cost/schedule impact they may have.

This bid shall remain valid and cannot be withdrawn for _____ days from the date of opening of bids, and the undersigned shall abide by the Bid Security forfeiture provisions. Bid Security is attached to this Bid (if required).

The Owner shall have the right to reject any or all bids, and to waive any informality or irregularity in any bid received.

This bid is based upon work being accomplished by the Sub-Contractors named on the list attached to this bid.

Should I/We be awarded this contract, I/We pledge to achieve substantial completion of all the work within _____ calendar days of the Notice to Proceed.

The undersigned represents and warrants that he has complied and shall comply with all requirements of local, state, and national laws; that no legal requirement has been or shall be violated in making or accepting this bid, in awarding the contract to him or in the prosecution of the work required; that the bid is legal and firm; that he has not, directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken action in restraint of free competitive bidding.

Upon receipt of written notice of the acceptance of this Bid, the Bidder shall, within twenty (20) calendar days, execute the agreement in the required form and deliver the Contract Bonds, and Insurance Certificates, required by the Contract Documents.

I am / We are an Individual / a Partnership / a Corporation

By _____ Trading as _____
(Individual's / General Partner's / Corporate Name)

(State of Corporation)

Business Address: _____

Witness: _____
(SEAL)

By: _____
(Authorized Signature)

(Title)
Date: _____

ATTACHMENTS

- Sub-Contractor List
- Non-Collusion Statement

SEAFORD SCHOOL DISTRICT
CENTRAL E.S. KITCHEN RENOVATIONS PHASE I
Studio JAED Project No. 12016
Bid Documents

BID FORM
May 14, 2012

Bid Security
(Others as Required by Project Manuals)

BID FORM

SUBCONTRACTOR LIST

In accordance with Title 29, Chapter 6962 (d)(10)b Delaware Code, the following sub-contractor listing must accompany the bid submittal. The name and address of the sub-contractor must be listed for each category where the bidder intends to use a sub-contractor to perform that category of work. In order to provide full disclosure and acceptance of the bid by the *Owner*, it is required that bidders list themselves as being the sub-contractor for all categories where he/she is qualified and intends to perform such work.

<u>Subcontractor Category</u>	<u>Subcontractor</u>	<u>Address (City & State)</u>
1. Roofing	_____	_____

NON-COLLUSION STATEMENT

This is to certify that the undersigned bidder has neither directly nor indirectly, entered into any agreement, participated in any collusion or otherwise taken any action in restraint of free competitive bidding in connection with this proposal submitted this date (*to the Office of Management and Budget, Division of Facilities Management*).

All the terms and conditions of (*Project or Contract Number*) have been thoroughly examined and are understood.

NAME OF BIDDER: _____

**AUTHORIZED REPRESENTATIVE
(TYPED):** _____

**AUTHORIZED REPRESENTATIVE
(SIGNATURE):** _____

TITLE: _____

ADDRESS OF BIDDER: _____

PHONE NUMBER: _____

Sworn to and Subscribed before me this _____ day of _____ 20____.

My Commission expires _____. NOTARY PUBLIC _____.

THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.

SEAFORD SCHOOL DISTRICT
CENTRAL E.S. KITCHEN RENOVATIONS PHASE I
Studio JAED Project No. 12016
Bid Documents

GENERAL CONDITIONS
Section G
May 14, 2012

STANDARD

GENERAL

OF

CONSTRUCTION

CONDITIONS

THE

CONTRACT

The General Conditions of this Contract are as stated in the American Institute of Architects Document AIA A201 (2007 Edition) entitled General Conditions of the Contract for Construction and is part of this project manual as if herein written in full.

Copies of the Document are available through the Architect.

SUPPLEMENTARY GENERAL CONDITIONS A201-2007

The following supplements modify the "General Conditions of the Contract for Construction," AIA Document A201-2007. Where a portion of the General Conditions is modified or deleted by the Supplementary Conditions, the unaltered portions of the General Conditions shall remain in effect.

TABLE OF ARTICLES

1. GENERAL PROVISIONS
2. OWNER
3. CONTRACTOR
4. ADMINISTRATION OF THE CONTRACT
5. SUBCONTRACTORS
6. CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS
7. CHANGES IN THE WORK
8. TIME
9. PAYMENTS AND COMPLETION
10. PROTECTION OF PERSONS AND PROPERTY
11. INSURANCE AND BONDS
12. UNCOVERING AND CORRECTION OF WORK
13. MISCELLANEOUS PROVISIONS
14. TERMINATION OR SUSPENSION OF THE CONTRACT

ARTICLE 1: GENERAL PROVISIONS

1.1 BASIC DEFINITIONS

1.1.1 THE CONTRACT DOCUMENTS

Delete the last sentence in its entirety and replace with the following:

“The Contract Documents also include Advertisement for Bid, Instructions to Bidder, sample forms, the Bid Form, the Contractor’s completed Bid and the Award Letter.”

Add the following Paragraph:

1.1.2 In the event of conflict or discrepancies among the Contract Documents, the Documents prepared by the State of Delaware, Division of Facilities Management shall take precedence over all other documents.

1.2 CORRELATION AND INTENT OF THE CONTRACT DOCUMENTS

Add the following Paragraphs:

1.2.4 In the case of an inconsistency between the Drawings and the Specifications, or within either document not clarified by addendum, the better quality or greater quantity of work shall be provided in accordance with the Architect’s interpretation.

1.2.5 The word “PROVIDE” as used in the Contract Documents shall mean “FURNISH AND INSTALL” and shall include, without limitation, all labor, materials, equipment, transportation, services and other items required to complete the Work.

1.2.6 The word “PRODUCT” as used in the Contract Documents means all materials, systems and equipment.

1.5 OWNERSHIP AND USE OF DRAWINGS, SPECIFICATIONS AND OTHER INSTRUMENTS OF SERVICE

Delete Paragraph 1.5.1 in its entirety and replace with the following:

“All pre-design studies, drawings, specifications and other documents, including those in electronic form, prepared by the Architect under this Agreement are, and shall remain, the property of the Owner whether the Project for which they are made is executed or not. Such documents may be used by the Owner to construct one or more like Projects without the approval of, or additional compensation to, the Architect. The Contractor, Subcontractors, Sub-subcontractors and Material or Equipment Suppliers are authorized to use and reproduce applicable portions of the Drawings, Specifications and other documents prepared by the Architect and the Architect’s consultants appropriate to and for use in the execution of their Work under the Contract Documents. They are not to be used by the Contractor or any Subcontractor, Sub-subcontractor or Material and Equipment Supplier on other Projects or for additions to this Project outside the scope of the Work without the specific written consent of the Owner, Architect and Architect’s consultants.

The Architect shall not be liable for injury or damage resulting from the re-use of drawings and specifications if the Architect is not involved in the re-use Project. Prior to re-use of construction documents for a Project in which the Architect is not also involved, the Owner will remove from such documents all identification of the original Architect, including name, address and professional seal or stamp.”

Delete Paragraph 1.5.2 in its entirety.

ARTICLE 2: OWNER

2.2 INFORMATION AND SERVICES REQUIRED OF THE OWNER

To Subparagraph 2.2.3 – Add the following sentence:

“The Contractor, at their expense shall bear the costs to accurately identify the location of all underground utilities in the area of their excavation and shall bear all cost for any repairs required, out of failure to accurately identify said utilities.”

Delete Subparagraph 2.2.5 in its entirety and substitute the following:

2.2.5 The Contractor shall be furnished free of charge up to five (5) sets of the Drawings and Project Manuals. Additional sets will be furnished at the cost of reproduction, postage and handling.

ARTICLE 3: CONTRACTOR

3.2 REVIEW OF CONTRACT DOCUMENTS AND FIELD CONDITIONS BY CONTRACTOR

Amend Paragraph 3.2.2 to state that any errors, inconsistencies or omissions discovered shall be reported to the Architect and Owner immediately.

Delete the third sentence in Paragraph 3.2.3.

3.3 SUPERVISION AND CONSTRUCTION PROCEDURES

Add the following Paragraphs:

3.3.2.1 The Contractor shall immediately remove from the Work, anyone never requested to do so by the Owner, any person who is considered by the Owner or Architect to be incompetent or disposed to be so disorderly, or who for any reason is not satisfactory to the Owner, and that person shall not again be employed on the Work without the consent of the Owner or the Architect.

3.3.4 The Contractor must provide suitable storage facilities at the Site for the proper protection and safe storage of their materials. Consult the Owner and the Architect before storing any materials.

3.3.5 When any room is used as a shop, storeroom, office, etc., by the Contractor or Subcontractor(s) during the construction of the Work, the Contractor making use of these areas will be held responsible for any repairs, patching or cleaning arising from such use.

3.4 LABOR AND MATERIALS

Add the Following Paragraphs:

- 3.4.4 Before starting the Work, each Contractor shall carefully examine all preparatory Work that has been executed to receive their Work. Check carefully, by whatever means are required, to insure that its Work and adjacent, related Work, will finish to proper contours, planes and levels. Promptly notify the General Contractor/Construction Manager of any defects or imperfections in preparatory Work which will in any way affect satisfactory completion of its Work. Absence of such notification will be construed as an acceptance of preparatory Work and later claims of defects will not be recognized.
- 3.4.5 Under no circumstances shall the Contractor's Work proceed prior to preparatory Work proceeding prior to preparatory Work having been completely cured, dried and /or otherwise made satisfactory to receive this Work. Responsibility for timely installation of all materials rests solely with the Contractor responsible for that Work, who shall maintain coordination at all times.

3.5 WARRANTY

Add the following Paragraphs:

- 3.5.1 The Contractor will guarantee all materials and workmanship against original defects, except injury from proper and usual wear when used for the purpose intended, for two years after Acceptance by the Owner, and will maintain all items in perfect condition during the period of guarantee.
- 3.5.2 Defects appearing during the period of guarantee will be made good by the Contractor at his expense upon demand of the Owner, it being required that all work will be in perfect condition when the period of guarantee will have elapsed.
- 3.5.3 In addition to the General Guarantee there are other guarantees required for certain items for different periods of time than the two years as above, and are particularly so stated in that part of the specifications referring to same. The said guarantees will commence at the same time as the General Guarantee.
- 3.5.4 If the Contractor fails to remedy any failure, defect or damage within a reasonable time after receipt of notice, the Owner will have the right to replace, repair, or otherwise remedy the failure, defect or damage at the Contractor's expense.

3.11 DOCUMENTS AND SAMPLES AT THE SITE

Add the following Paragraphs:

- 3.11.1 During the course of the Work, the Contractor shall maintain a record set of drawings on which the Contractor shall mark the actual physical location of all piping, valves, equipment, conduit, outlets, access panels, controls, actuators, including all appurtenances that will be concealed once construction is complete, etc., including all invert elevations.

3.11.2 At the completion of the project, the Contractor shall obtain a set of reproducible drawings from the Architect, and neatly transfer all information outlined in 3.11.1 to provide a complete record of the as-built conditions.

3.11.3 The Contractor shall provide two (2) prints of the as-built conditions, along with the reproducible drawings themselves, to the Owner and one (1) set to the Architect. In addition, attach one complete set to each of the Operating and Maintenance Instructions/Manuals.

3.17 In the first sentence of the paragraph, insert "indemnify" between "shall" and "hold".

ARTICLE 4: ADMINISTRATION OF THE CONTRACT

4.2 ADMINISTRATION OF THE CONTRACT

Delete the first sentence of Paragraph 4.2.7 and replace with the following:

The Architect will review and approve or take other appropriate action upon the Contractor's submittals such as Shop Drawings, Product Data and Samples for the purpose of checking for conformance with the Contract Documents.

Delete the second sentence of Paragraph 4.2.7 and replace with the following:

The Architect's action will be taken with such reasonable promptness as to cause no delay in the Work in the activities of the Owner, Contractor or separate Contractors, while allowing sufficient time in the Owner's professional judgment to permit adequate review.

Add the following Paragraph:

4.2.10.1 There will be no full-time project representative provided by the Owner or Architect on this project.

Add to Paragraph 4.2.13 "and in compliance with all local requirements." to the end of the sentence

ARTICLE 5: SUBCONTRACTORS

5.2 AWARD OF SUBCONTRACTS AND OTHER CONTRACTS FOR PORTIONS OF THE WORK

Delete Paragraph 5.2.3 in its entirety and replace with the following:

5.2.3 If the Owner or Architect has reasonable objection to a person or entity proposed by the Contractor, the Contractor shall propose another to whom the Owner or Architect has no reasonable objection, subject to the statutory requirements of 29 Delaware Code § 6962(d)(10)b.3 and 4.

ARTICLE 6: CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS

6.1 OWNER'S RIGHT TO PERFORM CONSTRUCTION AND TO AWARD SEPARATE CONTRACTS

Delete Paragraph 6.1.4 in its entirety.

6.2 MUTUAL RESPONSIBILITY

6.2.3 In the second sentence, strike the word "shall" and insert the word "may".

ARTICLE 7: CHANGES IN THE WORK

(SEE ARTICLE 7: CHANGES IN WORK IN THE GENERAL REQUIREMENTS)

ARTICLE 8: TIME

8.2 PROGRESS AND COMPLETION

Add the following Paragraphs:

8.2.1.1 Refer to Specification Section SUMMARY OF WORK for Contract time requirements.

8.2.4 If the Work falls behind the Progress Schedule as submitted by the Contractor, the Contractor shall employ additional labor and /or equipment necessary to bring the Work into compliance with the Progress Schedule at no additional cost to the Owner.

8.3 DELAYS AND EXTENSION OF TIME

8.3.1 Strike "arbitration" and insert "remedies at law or in equity".

Add the following Paragraph:

8.3.2.1 The Contractor shall update the status of the suspension, delay, or interruption of the Work with each Application for Payment. (The Contractor shall report the termination of such cause immediately upon the termination thereof.) Failure to comply with this procedure shall constitute a waiver for any claim for adjustment of time or price based upon said cause.

Delete Paragraph 8.3.3 in its entirety and replace with the following:

8.3.3 Except in the case of a suspension of the Work directed by the Owner, an extension of time under the provisions of Paragraph 8.3.1 shall be the Contractor's sole remedy in the progress of the Work and there shall be no payment or compensation to the Contractor for any expense or damage resulting from the delay.

Add the following Paragraph:

8.3.4 By permitting the Contractor to work after the expired time for completion of the project, the Owner does not waive their rights under the Contract.

ARTICLE 9: PAYMENTS AND COMPLETION

9.2 SCHEDULE OF VALUES

Add the following Paragraphs:

9.2.1 The Schedule of Values shall be submitted using AIA Document G702, Continuation Sheet to G703.

9.2.2 The Schedule of Values is to include a line item for Project Closeout Document Submittal. The value of this item is to be no less than 1% of the initial contract amount.

9.3 APPLICATIONS FOR PAYMENT

Add the following Paragraph:

9.3.1.3 Application for Payment shall be submitted on AIA Document G702 "Application and Certificate for Payment", supported by AIA Document G703 "Continuation Sheet". Said Applications shall be fully executed and notarized.

Add the following Paragraphs:

9.3.4 Until Closeout Documents have been received and outstanding items completed the Owner will pay 95% (ninety-five percent) of the amount due the Contractor on account of progress payments.

9.3.5 The Contractor shall provide a current and updated Progress Schedule to the Architect with each Application for Payment. Failure to provide Schedule will be just cause for rejection of Application for Payment.

9.5 DECISIONS TO WITHHOLD CERTIFICATION

Add the following to 9.5.1:

.8 failure to provide a current Progress Schedule;

.9 a lien or attachment is filed;

.10 failure to comply with mandatory requirements for maintaining Record Documents.

9.6 PROGRESS PAYMENTS

Delete Paragraph 9.6.1 in its entirety and replace with the following:

9.6.1 After the Architect has approved and issued a Certificate for Payment, payment shall be made by the Owner within 30 days after Owner's receipt of the Certificate for Payment.

9.7 FAILURE OF PAYMENT

In first sentence, strike "seven" and insert "thirty (30)". Also strike "binding dispute resolution" and insert "remedies at law or in equity".

9.8 SUBSTANTIAL COMPLETION

To Subparagraph 9.8.3- Add the following sentence:

"If the Architect is required to make more than 2 inspections of the same portion of work, the Contractor shall be responsible for all costs associated with subsequent inspections including but not limited to any Architect's fees."

9.8.5 In the second sentence, strike "shall" and insert "may".

ARTICLE 10: PROTECTION OF PERSONS AND PROPERTY

10.1 SAFETY PRECAUTIONS AND PROGRAMS

Add the following Paragraphs:

10.1.1.1.1 Each Contractor shall develop a safety program in accordance with the Occupational Safety and Health Act of 1970. A copy of said plan shall be furnished to the Owner and Architect prior to the commencement of the Contractor's Work.

10.1.2 Each Contractor shall appoint a Safety Representative. Safety Representatives shall be someone who is on site on a full time basis. If deemed necessary by the Owner or Architect, Contractor Safety meetings will be scheduled. The attendance of all Safety Representatives will be required. Minutes will be recorded of said meetings by the Contractor and will be distributed to all parties as well as posted in all job offices/trailers etc.

10.2 SAFETY OF PERSONS AND PROPERTY

Add the following Paragraph:

10.2.4.1 As required in the Hazardous Chemical Act of June 1984, all vendors supplying any material that may be defined as hazardous must provide Material Safety Data Sheets for those products. Any chemical product should be considered hazardous if it has a caution warning on the label relating to a potential physical or health hazard, if it is known to be present in the work place, and if employees may be exposed under normal conditions or in foreseeable emergency situations. Material Safety Data Sheets shall be provided directly to the Owner, along with the shipping slips that include those products.

10.3 HAZARDOUS MATERIALS

Delete Paragraph 10.3.3 in its entirety.

10.5 Delete Paragraphs 10.3.6 in its entirety.

ARTICLE 11: INSURANCE AND BONDS

11.1 CONTRACTOR'S LIABILITY INSURANCE

11.1.4 Strike "the Owner" immediately following "(1)" and strike "and (2) the Owner as an additional insured for claims caused in whole or in part by the Contractor's negligent acts or omissions during the Contractor's completed operations."

11.2 OWNER'S LIABILITY INSURANCE

Delete Paragraph 11.2 in its entirety.

11.3 PROPERTY INSURANCE

Delete Paragraph 11.3 in its entirety and replace with the following:

11.3 The State will not provide Builder's All Risk Insurance for the Project. The Contractor and all Subcontractors shall provide property coverage for their tools and equipment, as necessary. Any mandatory deductible required by the Contractor's Insurance shall be the responsibility of the Contractor.

11.4 PERFORMANCE BOND AND PAYMENT BOND

Add the following sentence: "The bonds will conform to those forms approved by the Office of Management and Budget."

ARTICLE 12: UNCOVERING AND CORRECTION OF WORK

12.2.2 AFTER SUBSTANTIAL COMPLETION

Add the following Paragraph:

12.2.2.1 At any time during the progress of the Work, or in any case where the nature of the defects will be such that it is not expedient to have corrected, the Owner, at its option, will have the right to deduct such sum, or sums, of money from the amount of the Contract as it considers justified to adjust the difference in value between the defective work and that required under contract including any damage to the structure.

12.2.2.1 Strike "one" and insert "two".

12.2.2.2 Strike "one" and insert "two".

12.2.2.3 Strike "one" and insert "two".

12.2.5 In second sentence, strike "one" and insert "two".

ARTICLE 13: MISCELLANEOUS PROVISIONS

13.1 GOVERNING LAW

Strike "except that, if the parties have selected arbitration as the method of binding dispute resolution, the Federal Arbitration Act shall govern Section 15.4."

13.6 INTEREST

Strike "the date payment is due at such rate as the parties may agree upon in writing or, in the absence thereof, at the legal rate prevailing from time to time at the place where the

13.7 Project is located." Insert "30 days of presentment of the authorized Certificate of Payment at the annual rate of 12% or 1% per month.
TIME LIMITS ON CLAIMS

Strike the last sentence.

Add the following Paragraph:

13.8 CONFLICTS WITH FEDERAL STATUTES OR REGULATIONS

13.8.1 If an y pr ovision, sp ecifications or requ irement o f the Contrac t Do cuments con flict or is inconsistent with a ny s tatute, law or regula tion o f th e gover nment of the Unite d State o f America, the Contractor shall notify the Architect and Owner immediately upon discovery.

ARTICLE 14: TERMINATION OR SUSPENSION OF THE CONTRACT

14.4 TERMINATION BY THE OWNER FOR CONVENIENCE

Delete Paragraph 14.4.3 in its entirety and replace with the following:

14.4.3 In case of such termination for the Owner's convenience, the Co ntractor sh all be entitled to receive pa yment for Work executed, and cost incurred by reason of such termination along with reasonable overhead.

ARTICLE 15: CLAIMS AND DISPUTES

15.1.2 Throughout the Paragraph strike "21" and insert "45".

15.1.6 CLAIMS FOR CONSEQUENTIAL DAMAGES

Delete Paragraph 15.1.6 in its entirety.

15.2 INITIAL DECISION

Delete Paragraph 15.2.5 in its entirety and replace with the following:

15.2.5 The Architect will approve or reject Claims by written decision, which shall state the reasons therefore and shall notify the parties of any change in the Contract Sum or Contract Time or both. The approval or r ejection o f a Claim b y the Architect shall be subject to mediation and other remedies at law or in equity.

Delete Paragraph 15.2.6 and its subparagraphs in their entirety.

15.3 MEDIATION

15.3.1 Strike "b inding dispu te res olution" and insert "an y or all re medies at law or in equity".

15.3.2 In the first sentence, de lete "adm inistered b y the Americ an Arbi tration Association in accordance with its Construction Industry Mediation Procedure in effect on the date of the Agreeem nt," Strike "binding dispu te res olution" and insert "remedies at law and in equity".

- 15.4 ARBITRATION
Delete Paragraph 15.4 and its sub-sections in its entirety.

END OF SUPPLEMENTARY GENERAL CONDITIONS

CONTRACT FOR CONSTRUCTION A101-2007

The following supplements modify the "Standard Form of Agreement Between Owner and Constructor," AIA Document A101-2007. Where a portion of the Standard Form of Agreement is modified or deleted by the following, the unaltered portions of the Standard Form of Agreement shall remain in effect.

ARTICLE 5: PAYMENTS

5.1 PROGRESS PAYMENTS

5.1.3 Delete paragraph 5.1.3 in its entirety and replace with the following:

"Provided that a valid Application for Payment is received by the Architect that meets all requirements of the Contract, payment shall be made by the Owner not later than 30 days after the Owner receives the valid Application for Payment."

ARTICLE 6: DISPUTE RESOLUTION

6.2 BINDING DISPUTE RESOLUTION

Check Other – and add the following sentence:

"Any remedies available in law or in equity."

ARTICLE 8: MISCELLANEOUS PROVISIONS

8.2 Insert the following:

"Payments are due 30 days after receipt of a valid Application for Payment. After that 30 day period, interest may be charged at the rate of 1% per month not to exceed 12% per annum."

8.5 Delete paragraph 8.5 in its entirety and replace with the following:

"The Contractor's representative shall not be changed without ten days written notice to the Owner."

END OF CONTRACT FOR CONSTRUCTION



STATE OF DELAWARE
DEPARTMENT OF LABOR
DIVISION OF INDUSTRIAL AFFAIRS
225 Corporate Boulevard, Suite 104
Newark, Delaware 19702

RECEIVED

MAR 22 2012

FACILITIES MANAGEMENT

TELEPHONE (302) 761-8200
(302) 451-3423
Fax (302) 368-6604

March 15, 2012

By Facsimile & Mail

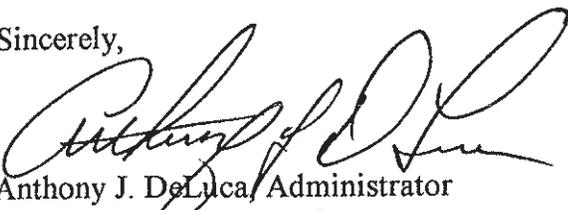
The Honorable Ann Shepard Visalli, Director
Office of Management and Budget
Haslet Armory
122 William Penn Street
Suite 301
Dover, DE 19901

Dear Director Visalli:

Enclosed are the Delaware Prevailing Wage Rates, effective today, March 15, 2012. These rates include adjustments made to the preliminary rates which were sent to you in February.

Copies of these rates are available on our website at www.delawareworks.com or by calling (302) 451-3423.

Sincerely,



Anthony J. DeLuca, Administrator
Office of Labor Law Enforcement

AJD/fc

Enclosures

STATE OF DELAWARE
DEPARTMENT OF LABOR
DIVISION OF INDUSTRIAL AFFAIRS
OFFICE OF LABOR LAW ENFORCEMENT
PHONE: (302) 451-3423

Mailing Address:
225 CORPORATE BOULEVARD
SUITE 104
NEWARK, DE 19702

Located at:
225 CORPORATE BOULEVARD
SUITE 104
NEWARK, DE 19702

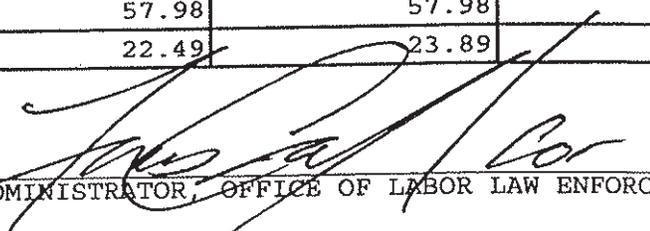
PREVAILING WAGES FOR BUILDING CONSTRUCTION EFFECTIVE MARCH 15, 2012

CLASSIFICATION	NEW CASTLE	KENT	SUSSEX
ASBESTOS WORKERS	23.22	29.83	39.20
BOILERMAKERS	65.47	33.22	48.83
BRICKLAYERS	45.63	45.63	45.63
CARPENTERS	49.06	49.06	39.22
CEMENT FINISHERS	40.38	29.11	21.20
ELECTRICAL LINE WORKERS	43.49	37.29	28.44
ELECTRICIANS	59.10	59.10	59.10
ELEVATOR CONSTRUCTORS	73.14	40.93	30.55
GLAZIERS	62.60	62.60	54.20
INSULATORS	50.38	50.38	50.38
IRON WORKERS	58.70	58.70	58.70
LABORERS	37.20	37.20	37.20
MILLWRIGHTS	60.85	60.85	47.42
PAINTERS	40.62	40.62	40.62
PILEDRIVERS	66.42	37.64	30.45
PLASTERERS	21.61	21.61	17.50
PLUMBERS/PIPEFITTERS/STEAMFITTERS	57.95	43.24	46.28
POWER EQUIPMENT OPERATORS	55.81	55.81	24.13
ROOFERS-COMPOSITION	21.01	20.71	17.02
ROOFERS-SHINGLE/SLATE/TILE	17.59	17.50	16.45
SHEET METAL WORKERS	64.39	62.18	62.18
SOFT FLOOR LAYERS	44.92	44.92	44.92
SPRINKLER FITTERS	50.65	50.65	50.65
TERRAZZO/MARBLE/TILE FNRS	50.50	50.50	45.45
TERRAZZO/MARBLE/TILE STRS	57.98	57.98	52.63
TRUCK DRIVERS	22.49	23.89	20.03

CERTIFIED:

3/15/12

BY:


ADMINISTRATOR, OFFICE OF LABOR LAW ENFORCEMENT

NOTE: THESE RATES ARE PROMULGATED AND ENFORCED PURSUANT TO THE PREVAILING WAGE REGULATIONS ADOPTED BY THE DEPARTMENT OF LABOR ON APRIL 3, 1992.

CLASSIFICATIONS OF WORKERS ARE DETERMINED BY THE DEPARTMENT OF LABOR. FOR ASSISTANCE IN CLASSIFYING WORKERS, OR FOR A COPY OF THE REGULATIONS OR CLASSIFICATIONS, PHONE (302) 451-3423.

NON-REGISTERED APPRENTICES MUST BE PAID THE MECHANIC'S RATE.

THESE RATES ARE BEING PROVIDED IN ACCORDANCE WITH DELAWARE'S FREEDOM OF INFORMATION ACT.

THEY ARE NOT INTENDED TO APPLY TO ANY SPECIFIC PROJECT.

STATE OF DELAWARE
DEPARTMENT OF LABOR
DIVISION OF INDUSTRIAL AFFAIRS
OFFICE OF LABOR LAW ENFORCEMENT
PHONE: (302) 451-3423

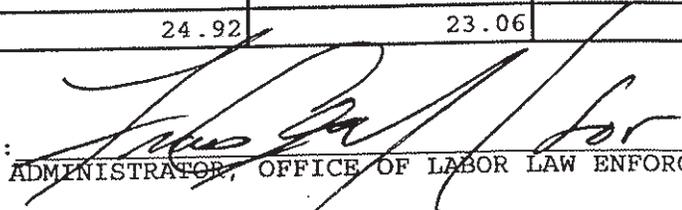
Mailing Address:
225 CORPORATE BOULEVARD
SUITE 104
NEWARK, DE 19702

Located at:
225 CORPORATE BOULEVARD
SUITE 104
NEWARK, DE 19702

PREVAILING WAGES FOR HEAVY CONSTRUCTION EFFECTIVE MARCH 15, 2012

CLASSIFICATION	NEW CASTLE	KENT	SUSSEX
ASBESTOS WORKERS	20.23	18.60	40.43
BOILERMAKERS	65.47	30.73	56.37
BRICKLAYERS	44.98	22.19	23.83
CARPENTERS	49.06	49.06	39.22
CEMENT FINISHERS	23.01	22.94	17.35
ELECTRICAL LINE WORKERS	34.86	26.30	25.89
ELECTRICIANS	59.10	59.10	59.10
GLAZIERS	19.54	16.96	11.48
INSULATORS	50.38	50.38	50.38
IRON WORKERS	58.70	25.54	55.78
LABORERS	37.20	37.20	37.20
MILLWRIGHTS	60.85	60.85	47.42
PAINTERS	56.07	56.07	56.07
PILEDRIVERS	66.42	37.64	29.30
PLASTERERS	18.40	15.97	10.80
PLUMBERS/PIPEFITTERS/STEAMFITTERS	70.08	21.62	17.12
POWER EQUIPMENT OPERATORS	55.81	28.48	55.81
SHEET METAL WORKERS	29.40	18.23	17.13
SPRINKLER FITTERS	31.68	11.99	9.93
TRUCK DRIVERS	24.92	23.06	23.27

CERTIFIED: 3/15/12

BY:  for
ADMINISTRATOR, OFFICE OF LABOR LAW ENFORCEMENT

NOTE: THESE RATES ARE PROMULGATED AND ENFORCED PURSUANT TO THE PREVAILING WAGE REGULATIONS ADOPTED BY THE DEPARTMENT OF LABOR ON APRIL 3, 1992.

CLASSIFICATIONS OF WORKERS ARE DETERMINED BY THE DEPARTMENT OF LABOR. FOR ASSISTANCE IN CLASSIFYING WORKERS, OR FOR A COPY OF THE REGULATIONS OR CLASSIFICATIONS, PHONE (302) 451-3423.

NON-REGISTERED APPRENTICES MUST BE PAID THE MECHANIC'S RATE.

THESE RATES ARE BEING PROVIDED IN ACCORDANCE WITH DELAWARE'S FREEDOM OF INFORMATION ACT.

THEY ARE NOT INTENDED TO APPLY TO ANY SPECIFIC PROJECT.

STATE OF DELAWARE
DEPARTMENT OF LABOR
DIVISION OF INDUSTRIAL AFFAIRS
OFFICE OF LABOR LAW ENFORCEMENT
PHONE: (302) 451-3423

Mailing Address:
225 CORPORATE BOULEVARD
SUITE 104
NEWARK, DE 19702

Located at:
225 CORPORATE BOULEVARD
SUITE 104
NEWARK, DE 19702

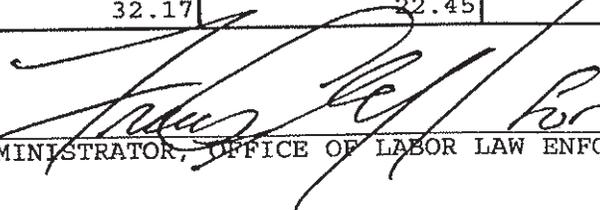
PREVAILING WAGES FOR HIGHWAY CONSTRUCTION EFFECTIVE MARCH 15, 2012

CLASSIFICATION	NEW CASTLE	KENT	SUSSEX
BRICKLAYERS	45.63	45.63	14.51
CARPENTERS	49.06	49.06	39.22
CEMENT FINISHERS	30.40	26.13	23.29
ELECTRICAL LINE WORKERS	22.50	54.05	21.25
ELECTRICIANS	59.10	59.10	59.10
IRON WORKERS	42.20	22.98	25.35
LABORERS	30.23	26.66	29.03
MILLWRIGHTS	16.11	15.63	13.49
PAINTERS	56.07	56.07	56.07
PILEDRIVERS	59.23	23.75	26.95
POWER EQUIPMENT OPERATORS	41.41	27.54	26.43
SHEET METAL WORKERS	22.75	20.31	18.40
TRUCK DRIVERS	32.17	22.45	22.15

CERTIFIED:

3/15/12

BY:


ADMINISTRATOR, OFFICE OF LABOR LAW ENFORCEMENT

NOTE: THESE RATES ARE PROMULGATED AND ENFORCED PURSUANT TO THE PREVAILING WAGE REGULATIONS ADOPTED BY THE DEPARTMENT OF LABOR ON APRIL 3, 1992.

CLASSIFICATIONS OF WORKERS ARE DETERMINED BY THE DEPARTMENT OF LABOR. FOR ASSISTANCE IN CLASSIFYING WORKERS, OR FOR A COPY OF THE REGULATIONS OR CLASSIFICATIONS, PHONE (302) 451-3423.

NON-REGISTERED APPRENTICES MUST BE PAID THE MECHANIC'S RATE.

THESE RATES ARE BEING PROVIDED IN ACCORDANCE WITH DELAWARE'S FREEDOM OF INFORMATION ACT.

THEY ARE NOT INTENDED TO APPLY TO ANY SPECIFIC PROJECT.

The following StudioJAED drawings are part of the design package and contain information essential to bidding the listed bid items.

General

0.0 General Cover

Kitchen Equipment

1.0 Walk-In Cooler-Freezer Equipment Plan

Architectural

4.1 Architectural Plan

Electrical

9.0 Electrical Cover Sheet

9.1 Electrical Demolition and New Plan

Plumbing

10.1 Plumbing Demolition and New Plan

END OF SECTION

SECTION 01 10 00

SUMMARY

PART 1 GENERAL

1.01 PROJECT

- A. Project Name: Seaford Central Elementary School Kitchen Renovations - Phase I.
- B. Seaford School District's Name: Seaford School District.
- C. Engineer's Name: StudioJAED.
- D. The Project consists of the renovation of the dry-storage area and replacement of the walk-in cooler.

1.02 CONTRACT DESCRIPTION

- A. Contract Type: A single prime contract based on a Stipulated Price as described in Document 00 52 00 - Agreement Form.

1.03 DESCRIPTION OF ALTERATION WORK

- A. Scope of demolition and removal work is shown on drawings and specified in Section 02 41 00.
- B. Scope of alterations and new construction work is shown on drawings and specified herein.
- C. Electrical Power and Lighting: Alter existing system and add new construction, keeping existing in operation.

1.04 OWNER OCCUPANCY

- A. Seaford School District intends to continue to occupy the existing building during the entire construction period.
- B. Cooperate with Seaford School District to minimize conflict and to facilitate Seaford School District's operations. Food service will continue throughout the entire construction period.
- C. Schedule the Work to accommodate Seaford School District occupancy.
- D. Provide cleaning services prior to each occupied day to make spaces ready for tenants.

1.05 CONTRACTOR USE OF SITE AND PREMISES

- A. Arrange use of site and premises to allow:
 - 1. Seaford School District occupancy.
 - 2. Work by Others.
 - 3. Work by Seaford School District.
 - 4. Use of site and premises by the public.
- B. Provide access to and from site as required by law and by Seaford School District:
 - 1. Emergency Building Exits During Construction: Keep all exits required by code open during construction period; provide temporary exit signs if exit routes are temporarily altered.
 - 2. Do not obstruct roadways, sidewalks, or other public ways without permit and Owner coordination.
- C. Existing building spaces may not be used for storage.
- D. Utility Outages and Shutdown:

1. Limit disruption of utility services to hours the building is unoccupied.
2. Do not disrupt or shut down life safety systems, including but not limited to fire alarm system, without 7 days notice to Seaford School District and authorities having jurisdiction.
3. Prevent accidental disruption of utility services to other facilities.

END OF SECTION

SECTION 01 20 00

PRICE AND PAYMENT PROCEDURES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Procedures for preparation and submittal of applications for progress payments.

1.02 SCHEDULE OF VALUES

- A. Electronic media printout including equivalent information will be considered in lieu of standard form specified; submit sample to StudioJAED for approval.
- B. Forms filled out by hand will not be accepted.

1.03 APPLICATIONS FOR PROGRESS PAYMENTS

- A. Payment Period: Submit at intervals stipulated in the Agreement, per the General Requirements.
- B. Form to be used: As defined in Article 9 of the General Requirements.
- C. Execute certification by signature of authorized officer.
- D. Submit three copies of each Application for Payment.

END OF SECTION

SECTION 01 30 00

ADMINISTRATIVE REQUIREMENTS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Preconstruction meeting.
- B. Site mobilization meeting.
- C. Progress meetings.
- D. Construction progress schedule.
- E. Coordination drawings.
- F. Submittals for review, information, and project closeout.
- G. Number of copies of submittals.
- H. Submittal procedures.

1.02 RELATED REQUIREMENTS

- A. General Conditions
- B. Supplementary Conditions
- C. Section 01 10 00 - Summary: Stages of the Work, Work covered by each contract, occupancy,.

1.03 PROJECT COORDINATION

- A. During construction, coordinate use of site and facilities through the Owner and Architect.
- B. Comply with instructions for use of temporary utilities and construction facilities.
- C. Make the following types of submittals to StudioJAED:
 - 1. Requests for interpretation.
 - 2. Requests for substitution.
 - 3. Shop drawings, product data, and samples.
 - 4. Test and inspection reports.
 - 5. Manufacturer's instructions and field reports.
 - 6. Applications for payment and change order requests.
 - 7. Progress schedules.
 - 8. Coordination drawings.
 - 9. Closeout submittals.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION

3.01 PRECONSTRUCTION MEETING

- A. Seaford School District will schedule a meeting after Notice of Award.
- B. Attendance Required:
 - 1. Seaford School District.
 - 2. StudioJAED.
 - 3. Contractor.

4. Required Regulatory Agencies (Fire Marshall, DNREC, Local Planning Officials)
- C. Agenda:
 1. Execution of Seaford School District-Contractor Agreement.
 2. Submission of executed bonds and insurance certificates.
 3. Distribution of Contract Documents.
 4. Submission of list of Subcontractors, list of Products, schedule of values, and progress schedule.
 5. Designation of personnel representing the parties to Contract, _____ and StudioJAED.
 6. Designation of personnel representing the parties to Contract, and StudioJAED.
 7. Procedures and processing of field decisions, submittals, substitutions, applications for payments, proposal request, Change Orders, and Contract closeout procedures.
 8. Scheduling.
- D. Record minutes and distribute copies within two days after meeting to participants, with two copies to StudioJAED, Seaford School District, participants, and those affected by decisions made.

3.02 SITE MOBILIZATION MEETING

- A. Seaford School District will schedule a meeting at the Project site prior to Contractor occupancy.
- B. Attendance Required:
 1. Contractor.
 2. Seaford School District.
 3. StudioJAED.
 4. Contractor's Superintendent.
 5. Major Subcontractors.
- C. Agenda:
 1. Use of premises by Seaford School District and Contractor.
 2. Seaford School District's requirements and occupancy prior to completion.
 3. Construction facilities and controls provided by Seaford School District.
 4. Temporary utilities provided by Seaford School District.
 5. Survey and building layout.
 6. Security and housekeeping procedures.
 7. Schedules.
 8. Application for payment procedures.
 9. Procedures for testing.
 10. Procedures for maintaining record documents.
 11. Requirements for start-up of equipment.
 12. Inspection and acceptance of equipment put into service during construction period.
- D. Record minutes and distribute copies within two days after meeting to participants, with two copies to StudioJAED, Seaford School District, participants, and those affected by decisions made.

3.03 PROGRESS MEETINGS

- A. StudioJAED will make arrangements for meetings, prepare agenda with copies for participants, preside at meetings.

- B. Attendance Required: Job superintendent, major Subcontractors and suppliers, Seaford School District, StudioJAED, as appropriate to agenda topics for each meeting.
- C. Agenda:
 - 1. Review minutes of previous meetings.
 - 2. Review of Work progress.
 - 3. Field observations, problems, and decisions.
 - 4. Identification of problems that impede, or will impede, planned progress.
 - 5. Review of submittals schedule and status of submittals.
 - 6. Maintenance of progress schedule.
 - 7. Corrective measures to regain projected schedules.
 - 8. Planned progress during succeeding work period.
 - 9. Maintenance of quality and work standards.
 - 10. Effect of proposed changes on progress schedule and coordination.
 - 11. Other business relating to Work.
- D. Record minutes and distribute copies within two days after meeting to participants, with two copies to StudioJAED, Seaford School District, participants, and those affected by decisions made.

3.04 CONSTRUCTION PROGRESS SCHEDULE

- A. Within 10 days after date of the Agreement, submit preliminary schedule defining planned operations for the first 30 days of Work, with a general outline for remainder of Work.
- B. If preliminary schedule requires revision after review, submit revised schedule within 5 days.
- C. Submit updated schedule with each Application for Payment.

3.05 PROGRESS PHOTOGRAPHS

- A. Submit new photographs at least once a month, within 3 days after exposure.
- B. Photography Type: Digital; electronic files.
- C. Provide photographs of site and construction throughout progress of Work produced by an experienced photographer, acceptable to StudioJAED.
- D. In addition to periodic, recurring views, take photographs of each of the following events:
 - 1. Excavations in progress.
 - 2. Foundations in progress and upon completion.
 - 3. Structural framing in progress and upon completion.
 - 4. Enclosure of building, upon completion.
 - 5. Final completion, minimum of ten (10) photos.
- E. Views:
 - 1. Provide non-aerial photographs from four cardinal views at each specified time, until Date of Substantial Completion.
 - 2. Consult with StudioJAED for instructions on views required.
 - 3. Provide factual presentation.
 - 4. Provide correct exposure and focus, high resolution and sharpness, maximum depth of field, and minimum distortion.
- F. Digital Photographs: 24 bit color, minimum resolution of 1024 by 768, in JPG format; provide files unaltered by photo editing software.

1. Delivery Medium: Via email.
2. File Naming: Include project identification, date and time of view, and view identification.
3. PDF File: Assemble all photos into printable pages in PDF format, with 2 to 3 photos per page, each photo labeled with file name; one PDF file per submittal.

3.06 COORDINATION DRAWINGS

- A. Provide all information required for complete installation between all disciplines for preparation of coordination drawings. General contractor shall create and distribute all coordination drawings necessary.
- B. Review drawings prior to submission to StudioJAED.

3.07 SUBMITTALS FOR REVIEW

- A. When the following are specified in individual sections, submit them for review:
 1. Product data.
 2. Shop drawings.
 3. Samples for selection.
 4. Samples for verification.
- B. Submit to StudioJAED for review for the limited purpose of checking for conformance with information given and the design concept expressed in the contract documents.
- C. Samples will be reviewed only for aesthetic, color, or finish selection.
- D. After review, provide copies and distribute in accordance with SUBMITTAL PROCEDURES article below and for record documents purposes described in Section 01 78 00 - CLOSEOUT SUBMITTALS.

3.08 SUBMITTALS FOR INFORMATION

- A. When the following are specified in individual sections, submit them for information:
 1. Design data.
 2. Certificates.
 3. Test reports.
 4. Inspection reports.
 5. Manufacturer's instructions.
 6. Manufacturer's field reports.
 7. Other types indicated.

3.09 SUBMITTALS FOR PROJECT CLOSEOUT

- A. When the following are specified in individual sections, submit them at project closeout:
 1. Project record documents.
 2. Operation and maintenance data.
 3. Warranties.
 4. Bonds.
- B. Submit for Seaford School District's benefit during and after project completion.

3.10 NUMBER OF COPIES OF SUBMITTALS

- A. Documents for Review:
 1. Small Size Sheets, Not Larger Than 8-1/2 x 11 inches: Submit the number of copies that Contractor requires, plus two copies that will be retained by StudioJAED.
- B. Documents for Information: Submit two copies.

- C. Documents for Project Closeout: Make one reproduction of submittal originally reviewed. Submit one extra of submittals for information.
- D. Samples: Submit the number specified in individual specification sections; one of which will be retained by StudioJAED.
 - 1. After review, produce duplicates.
 - 2. Retained samples will not be returned to Contractor unless specifically so stated.

3.11 SUBMITTAL PROCEDURES

- A. Sequentially number the transmittal form. Revise submittals with original number and a sequential alphabetic suffix.
- B. Identify Project, Contractor, Subcontractor or supplier; pertinent drawing and detail number, and specification section number, as appropriate on each copy.
- C. Apply Contractor's stamp, signed or initialed certifying that review, approval, verification of Products required, field dimensions, adjacent construction Work, and coordination of information is in accordance with the requirements of the Work and Contract Documents.
- D. Schedule submittals to expedite the Project, and coordinate submission of related items.
- E. For each submittal for review, allow 5 days excluding delivery time to and from the Contractor.
- F. Identify variations from Contract Documents and Product or system limitations that may be detrimental to successful performance of the completed Work.
- G. Provide space for Contractor and StudioJAED review stamps.
- H. When revised for resubmission, identify all changes made since previous submission.
- I. Distribute reviewed submittals as appropriate. Instruct parties to promptly report any inability to comply with requirements.
- J. Submittals not requested will not be recognized or processed.

END OF SECTION

SECTION 01 40 00

QUALITY REQUIREMENTS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. References and standards.
- B. Mock-ups.
- C. Control of installation.
- D. Tolerances.
- E. Testing and inspection services.

1.02 REFERENCE STANDARDS

- A. ASTM C1021 - Standard Practice for Laboratories Engaged in Testing of Building Sealants.
- B. ASTM C 1077 - Standard Practice for Laboratories Testing Concrete and Concrete Aggregates for Use in Construction and Criteria for Laboratory Evaluation.
- C. ASTM C1093 - Standard Practice for Accreditation of Testing Agencies for Masonry.
- D. ASTM D 3740 - Standard Practice for Minimum Requirements for Agencies Engaged in the Testing and/or Inspection of Soil and Rock as Used in Engineering Design and Construction.
- E. ASTM E 329 - Standard Specification for Agencies Engaged Construction Inspection and/or Testing.
- F. ASTM E543 - Standard Specification for Agencies Performing Nondestructive Testing.

1.03 TESTING AND INSPECTION AGENCIES

- A. Contractor shall employ and pay for services of an independent testing agency to perform other specified testing.
- B. Employment of agency in no way relieves Contractor of obligation to perform Work in accordance with requirements of Contract Documents.
- C. Contractor Employed Agency:
 - 1. Testing agency: Comply with requirements of ASTM E 329, ASTM E 543, ASTM C 1021, ASTM C 1077, and ASTM C 1093.
 - 2. Inspection agency: Comply with requirements of ASTM D3740 and ASTM E329.
 - 3. Laboratory: Authorized to operate in DE.
 - 4. Testing Equipment: Calibrated at reasonable intervals either by NIST or using an NIST established Measurement Assurance Program, under a laboratory measurement quality assurance program.

PART 3 EXECUTION

2.01 CONTROL OF INSTALLATION

- A. Monitor quality control over suppliers, manufacturers, products, services, site conditions, and workmanship, to produce Work of specified quality.
- B. Comply with manufacturers' instructions, including each step in sequence.

- C. Should manufacturers' instructions conflict with Contract Documents, request clarification from StudioJAED before proceeding.
- D. Comply with specified standards as minimum quality for the Work except where more stringent tolerances, codes, or specified requirements indicate higher standards or more precise workmanship.
- E. Have Work performed by persons qualified to produce required and specified quality.
- F. Verify that field measurements are as indicated on shop drawings or as instructed by the manufacturer.
- G. Secure products in place with positive anchorage devices designed and sized to withstand stresses, vibration, physical distortion, and disfigurement.

2.02 MOCK-UPS

- A. Tests will be performed under provisions identified in this section and identified in the respective product specification sections.
- B. Assemble and erect specified items with specified attachment and anchorage devices, flashings, seals, and finishes.
- C. Accepted mock-ups shall be a comparison standard for the remaining Work.
- D. Where mock-up has been accepted by StudioJAED and is specified in product specification sections to be removed, remove mock-up and clear area when directed to do so.

2.03 TOLERANCES

- A. Monitor fabrication and installation tolerance control of products to produce acceptable Work. Do not permit tolerances to accumulate.
- B. Comply with manufacturers' tolerances. Should manufacturers' tolerances conflict with Contract Documents, request clarification from StudioJAED before proceeding.
- C. Adjust products to appropriate dimensions; position before securing products in place.

2.04 TESTING AND INSPECTION

- A. Testing Agency Duties:
 - 1. Provide qualified personnel at site. Cooperate with StudioJAED and Contractor in performance of services.
 - 2. Perform specified sampling and testing of products in accordance with specified standards.
 - 3. Ascertain compliance of materials and mixes with requirements of Contract Documents.
 - 4. Promptly notify StudioJAED and Contractor of observed irregularities or non-conformance of Work or products.
 - 5. Perform additional tests and inspections required by StudioJAED.
 - 6. Submit reports of all tests/inspections specified.
- B. Limits on Testing/Inspection Agency Authority:
 - 1. Agency may not release, revoke, alter, or enlarge on requirements of Contract Documents.
 - 2. Agency may not approve or accept any portion of the Work.
 - 3. Agency may not assume any duties of Contractor.
 - 4. Agency has no authority to stop the Work.
- C. Contractor Responsibilities:

1. Deliver to agency at designated location, adequate samples of materials proposed to be used that require testing, along with proposed mix designs.
 2. Cooperate with laboratory personnel, and provide access to the Work and to manufacturers' facilities.
 3. Provide incidental labor and facilities:
 - a. To provide access to Work to be tested/inspected.
 - b. To obtain and handle samples at the site or at source of Products to be tested/inspected.
 - c. To facilitate tests/inspections.
 - d. To provide storage and curing of test samples.
 4. Notify StudioJAED and laboratory 24 hours prior to expected time for operations requiring testing/inspection services.
 5. Employ services of an independent qualified testing laboratory and pay for additional samples, tests, and inspections required by Contractor beyond specified requirements.
 6. Arrange with Seaford School District's agency and pay for additional samples, tests, and inspections required by Contractor beyond specified requirements.
- D. Re-testing required because of non-conformance to specified requirements shall be performed by the same agency on instructions by StudioJAED.
- E. Re-testing required because of non-conformance to specified requirements shall be paid for by Contractor.

2.05 DEFECT ASSESSMENT

- A. Replace Work or portions of the Work not conforming to specified requirements.
- B. If, in the opinion of StudioJAED, it is not practical to remove and replace the Work, StudioJAED will direct an appropriate remedy or adjust payment.

END OF SECTION

SECTION 01 50 00

TEMPORARY FACILITIES AND CONTROLS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Temporary telecommunications services.
- B. Temporary sanitary facilities.
- C. Temporary Controls: Barriers, enclosures, and fencing.
- D. Security requirements.
- E. Vehicular access and parking.
- F. Waste removal facilities and services.
- G. Project identification sign.
- H. Field offices.

1.02 RELATED REQUIREMENTS

- A. Section 01 51 00 - Temporary Utilities.
- B. Section 01 52 13 - Field Offices and Sheds.
- C. Section 01 55 00 - Vehicular Access and Parking.

1.03 TEMPORARY UTILITIES - See Section 01 51 00

- A. Seaford School District will provide the following:
 - 1. Electrical power, consisting of connection to existing facilities.
 - 2. Water supply, consisting of connection to existing facilities.
- B. Use trigger-operated nozzles for water hoses, to avoid waste of water.

1.04 TELECOMMUNICATIONS SERVICES

- A. Provide, maintain, and pay for telecommunications services to field office at time of project mobilization.
- B. Telecommunications services shall include:
 - 1. Internet Connections: Minimum of one; DSL modem or faster.
 - 2. Email: Account/address reserved for project use.
 - 3. Facsimile Service: Minimum of one dedicated fax machine/printer.

1.05 TEMPORARY SANITARY FACILITIES

- A. Provide and maintain required facilities and enclosures. Provide at time of project mobilization.
- B. Maintain daily in clean and sanitary condition.
- C. Use of existing school facilities is NOT PERMITTED. This must be visibly posted on the job site by the contractor.

1.06 BARRIERS

- A. Provide barriers to prevent unauthorized entry to construction areas, to prevent access to areas that could be hazardous to workers or the public, to allow for owner's use of site and to protect existing facilities and adjacent properties from damage from construction operations and demolition.
- B. Provide barricades and covered walkways required by governing authorities for public rights-of-way and for public access to existing building.
- C. Protect non-owned vehicular traffic, stored materials, site, and structures from damage.

1.07 INTERIOR ENCLOSURES

- A. Provide temporary partitions and ceilings as indicated or required to separate work areas from Seaford School District-occupied areas, to prevent penetration of dust and moisture into Seaford School District-occupied areas, and to prevent damage to existing materials and equipment.
- B. Construction: Framing and reinforced polyethylene sheet materials with closed joints and sealed edges at intersections with existing surfaces.

1.08 SECURITY

- A. Provide security and facilities to protect Work, existing facilities, and Seaford School District's operations from unauthorized entry, vandalism, or theft.
- B. Coordinate with Seaford School District's security program.

1.09 VEHICULAR ACCESS AND PARKING - See Section 01 55 00

- A. Coordinate access and haul routes with governing authorities and Seaford School District.
- B. Provide and maintain access to fire hydrants, free of obstructions.
- C. Provide means of removing mud from vehicle wheels before entering streets.
- D. Existing parking areas located at areas designated by the Owner may be used for construction parking.

1.10 WASTE REMOVAL

- A. Provide waste removal facilities and services as required to maintain the site in clean and orderly condition.
- B. Provide containers with lids. Remove trash from site weekly.
- C. If materials to be recycled or re-used on the project must be stored on-site, provide suitable non-combustible containers; locate containers holding flammable material outside the structure unless otherwise approved by the authorities having jurisdiction.
- D. Open free-fall chutes are not permitted. Terminate closed chutes into appropriate containers with lids.

1.11 PROJECT IDENTIFICATION

- A. Provide project identification sign of design, construction, and location approved by Seaford School District.
- B. No other signs are allowed without Seaford School District permission except those required by law.

1.12 FIELD OFFICES - See Section 01 52 13

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

SECTION 01 51 00

TEMPORARY UTILITIES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Temporary Utilities: Electricity, lighting, heat, ventilation, and water.

1.02 RELATED REQUIREMENTS

- A. Section 01 50 00 - Temporary Facilities and Controls:
 - 1. Temporary telecommunications services for administrative purposes.
 - 2. Temporary sanitary facilities required by law.

1.03 TEMPORARY ELECTRICITY

- A. Cost: By Owner.
- B. Connect to Owner's existing power service.
 - 1. Do not disrupt Owner's need for continuous service.
 - 2. Exercise measures to conserve energy.
- C. Provide temporary electric feeder from existing building electrical service at location agreed upon by Owner and Architect.
- D. Complement existing power service capacity and characteristics as required.
- E. Provide power outlets for construction operations, with branch wiring and distribution boxes located as required. Provide flexible power cords as required.
- F. Provide main service disconnect and over-current protection at convenient location.
- G. Permanent convenience receptacles may be utilized during construction.
- H. Provide adequate distribution equipment, wiring, and outlets to provide single phase branch circuits for power and lighting.

1.04 TEMPORARY LIGHTING FOR CONSTRUCTION PURPOSES

- A. Provide and maintain 1 watt/sq ft lighting to exterior staging and storage areas after dark for security purposes.
- B. Provide branch wiring from power source to distribution boxes with lighting conductors, pigtails, and lamps as required.
- C. Maintain lighting and provide routine repairs.
- D. Permanent building lighting may be utilized during construction at the risk of the contractor. Any damage incurred during the construction will result in a complete replacement of the lighting fixture.

1.05 TEMPORARY HEATING

- A. Provide heating devices and heat as needed to maintain specified conditions for construction operations.
- B. Maintain minimum ambient temperature of 50 degrees F in areas where construction is in progress, unless indicated otherwise in specifications or required for a specific construction task.

1.06 TEMPORARY VENTILATION

- A. Existing ventilation equipment may not be used.

1.07 TEMPORARY WATER SERVICE

- A. Cost of Water Used: By Owner.
- B. Provide and maintain suitable quality water service for construction operations at time of project mobilization.
- C. Connect to existing water source.
 - 1. Exercise measures to conserve water.
- D. Extend branch piping with outlets located so water is available by hoses with threaded connections. Provide temporary pipe insulation to prevent freezing.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

SECTION 01 52 13

FIELD OFFICES AND SHEDS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Temporary field offices for use of contractor.
- B. Maintenance and removal.

1.02 RELATED REQUIREMENTS

- A. Section 01 10 00 - Summary.
- B. Section 01 50 00 - Temporary Facilities and Controls:
- C. Section 01 55 00 - Vehicular Access and Parking

1.03 USE OF EXISTING FACILITIES

- A. Designated existing spaces may be used for field offices: Owner will direct Contractor to locations for project meetings.

END OF SECTION

SECTION 01 55 00

VEHICULAR ACCESS AND PARKING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Access roads.
- B. Parking.
- C. Existing pavements and parking areas.
- D. Permanent pavements and parking facilities.
- E. Construction parking controls.
- F. Flag persons.
- G. Flares and lights.
- H. Haul routes.
- I. Traffic signs and signals.
- J. Maintenance.
- K. Removal, repair.
- L. Mud from site vehicles.

1.02 RELATED REQUIREMENTS

- A. Section 01 10 00 - Summary.

PART 2 PRODUCTS

2.01 SIGNS, SIGNALS, AND DEVICES

- A. Traffic Cones and Drums, Flares and Lights: As approved by local jurisdictions.
- B. Flag Person Equipment: As required by local jurisdictions.

PART 3 EXECUTION

3.01 PREPARATION

- A. Clear areas, provide surface and storm drainage of road, parking, area premises, and adjacent areas.

3.02 ACCESS ROADS

- A. Use of designated existing on-site streets and driveways for construction traffic is permitted.
- B. Tracked vehicles not allowed on paved areas.
- C. Construct new temporary all-weather access roads from public thoroughfares to serve construction area, of a width and load bearing capacity to provide unimpeded traffic for construction purposes.
- D. Construct temporary bridges and culverts to span low areas and allow unimpeded drainage.

- E. Extend and relocate as Work progress requires, provide detours as necessary for unimpeded traffic flow.
- F. Location as approved by StudioJAED.
- G. Provide unimpeded access for emergency vehicles. Maintain 20 foot width driveways with turning space between and around combustible materials.
- H. Provide and maintain access to fire hydrants and control valves free of obstructions.

3.03 PARKING

- A. Use of existing parking facilities by construction personnel is permitted as identified by Owner.
- B. Do not allow heavy vehicles or construction equipment in parking areas.
- C. When site space is not adequate, provide additional off-site parking.
- D. Locate as approved by StudioJAED and Owner.

3.04 CONSTRUCTION PARKING CONTROL

- A. Control vehicular parking to prevent interference with public traffic and parking, access by emergency vehicles, and Owner's operations.
- B. Monitor parking of construction personnel's vehicles in existing facilities. Maintain vehicular access to and through parking areas.
- C. Prevent parking on or adjacent to access roads or in non-designated areas.

3.05 FLAG PERSONS

- A. Provide trained and equipped flag persons to regulate traffic when construction operations or traffic encroach on public traffic lanes.

3.06 FLARES AND LIGHTS

- A. Use flares and lights during hours of low visibility to delineate traffic lanes and to guide traffic.

3.07 HAUL ROUTES

- A. Consult with authority having jurisdiction, establish public thoroughfares to be used for haul routes and site access.
- B. Confine construction traffic to designated haul routes.
- C. Provide traffic control at critical areas of haul routes to regulate traffic, to minimize interference with public traffic.

3.08 TRAFFIC SIGNS AND SIGNALS

- A. At approaches to site and on site, install at crossroads, detours, parking areas, and elsewhere as needed to direct construction and affected public traffic.
- B. Relocate as Work progresses, to maintain effective traffic control.

3.09 MAINTENANCE

- A. Maintain traffic and parking areas in a sound condition free of excavated material, construction equipment, Products, mud, snow, and ice.

- B. Maintain existing paved areas used for construction; promptly repair breaks, potholes, low areas, standing water, and other deficiencies, to maintain paving and drainage in original, or specified, condition.

3.10 REMOVAL, REPAIR

- A. Remove temporary roads before Substantial Completion.
- B. Remove underground work and compacted materials to a depth of 2 feet; fill and grade site as specified.
- C. Repair existing facilities damaged by use, to original condition.
- D. Remove equipment and devices when no longer required.
- E. Repair damage caused by installation.
- F. Remove post settings to a depth of 2 feet.

3.11 MUD FROM SITE VEHICLES

- A. Provide means of removing mud from vehicle wheels before entering streets.

END OF SECTION

SECTION 01 57 21

INDOOR AIR QUALITY CONTROLS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Construction procedures to promote adequate indoor air quality after construction.

1.02 PROJECT GOALS

- A. Dust and Airborne Particulates: Prevent deposition of dust and other particulates in HVAC ducts and equipment.
 - 1. Cleaning of ductwork is not contemplated under this Contract.
 - 2. Contractor shall bear the cost of cleaning required due to failure to protect ducts and equipment from construction dust.
 - 3. Establish condition of existing ducts and equipment prior to start of alterations.
- B. Airborne Contaminants: Procedures and products have been specified to minimize indoor air pollutants.
 - 1. Furnish products meeting the specifications.
 - 2. Avoid construction practices that could result in contamination of installed products leading to indoor air pollution.

1.03 RELATED REQUIREMENTS

- A. Section 01 40 00 - Quality Requirements.

1.04 REFERENCE STANDARDS

- A. ASHRAE Std 52.2 - Method of Testing General Ventilation Air-Cleaning Devices for Removal Efficiency by Particle Size.
- B. ASHRAE Std 62.1 - Ventilation For Acceptable Indoor Air Quality.
- C. ASHRAE Std 129 - Measuring Air-Change Effectiveness.
- D. ASTM E 779 - Standard Test Method for Determining Air Leakage Rate by Fan Pressurization.
- E. CAL (EESR) - California Energy Efficiency Standards Residential Alternative Calculation Method (ACM) Approval Manual, Chapter 7.
- F. SMACNA (OCC) - IAQ Guideline for Occupied Buildings Under Construction.

1.05 DEFINITIONS

- A. Adsorptive Materials: Gypsum board, acoustical ceiling tile and panels, carpet and carpet tile, fabrics, fibrous insulation, and other similar products.
- B. Contaminants: Gases, vapors, regulated pollutants, airborne mold and mildew, and the like, as specified.
- C. Particulates: Dust, dirt, and other airborne solid matter.
- D. Wet Work: Concrete, plaster, coatings, and other products that emit water vapor or volatile organic compounds during installation, drying, or curing.

1.06 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Indoor Air Quality Management Plan: Describe in detail measures to be taken to promote adequate indoor air quality upon completion; use SMACNA IAQ Guidelines for Occupied Buildings Under Construction as a guide.
 - 1. Identify potential sources of odor and dust.
 - 2. Identify construction activities likely to produce odor or dust.
 - 3. Identify areas of project potentially affected, especially occupied areas.
 - 4. Evaluate potential problems by severity and describe methods of control.
 - 5. Describe construction ventilation to be provided, including type and duration of ventilation, use of permanent HVAC systems, types of filters and schedule for replacement of filters.
 - 6. Describe cleaning and dust control procedures.
 - 7. Describe coordination with commissioning procedures.

1.07 QUALITY ASSURANCE

- A. Testing and Inspection Agency Qualifications: Independent testing agency having minimum of 5 years experience in performing the types of testing specified.

PART 2 PRODUCTS

2.01 MATERIALS

- A. Auxiliary Air Filters: MERV of 8, minimum, when tested in accordance with ASHRAE 52.2.

PART 3 EXECUTION

3.01 CONSTRUCTION PROCEDURES

- A. Prevent the absorption of moisture and humidity by adsorptive materials by:
 - 1. Sequencing the delivery of such materials so that they are not present in the building until wet work is completed and dry.
 - 2. Delivery and storage of such materials in fully sealed moisture-impermeable packaging.
 - 3. Provide sufficient ventilation for drying within reasonable time frame.
- B. Begin construction ventilation when building is substantially enclosed.
- C. If extremely dusty or dirty work must be conducted inside the building, shut down HVAC systems for the duration; remove dust and dirt completely before restarting systems.
- D. When working in a portion of an occupied building, prevent movement of air from construction area to occupied area.
- E. HVAC equipment and ductwork may NOT be used for ventilation during construction:
 - 1. Seal HVAC air inlets and outlets immediately after duct installation.
- F. Do not store construction materials or waste in mechanical or electrical rooms.
- G. Prior to use of return air ductwork without intake filters clean up and remove dust and debris generated by construction activities.
 - 1. Inspect duct intakes, return air grilles, and terminal units for dust.
 - 2. Clean plenum spaces, including top sides of lay-in ceilings, outsides of ducts, tops of pipes and conduit.
 - 3. Clean tops of doors and frames.
 - 4. Clean mechanical and electrical rooms, including tops of pipes, ducts, and conduit, equipment, and supports.
 - 5. Clean return plenums of air handling units.

- 6. Remove intake filters last, after cleaning is complete.
- H. Do not perform dusty or dirty work after starting use of return air ducts without intake filters.
- I. Use other relevant recommendations of SMACNA IAQ Guideline for Occupied Buildings Under Construction for avoiding unnecessary contamination due to construction procedures.

END OF SECTION

SECTION 01 58 13

TEMPORARY PROJECT SIGNAGE

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Project identification sign.
- B. Project informational signs.

1.02 RELATED REQUIREMENTS

- A. Section 01 10 00 - Summary: Responsibility to provide signs.

1.03 REFERENCE STANDARDS

- A. FHWA (SHS) - Standard Highway Signs; Federal Highway Administration, U.S. Department of Transportation.

1.04 QUALITY ASSURANCE

- A. Design sign and structure to withstand 50 miles/hr wind velocity.
- B. Sign Painter: Experienced as a professional sign painter for minimum three years.
- C. Finishes, Painting: Adequate to withstand weathering, fading, and chipping for duration of construction.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements for submittal procedures.
- B. Shop Drawing: Show content, layout, lettering, color, sizes.

PART 2 PRODUCTS

2.01 SIGN MATERIALS

- A. Structure and Framing: New or used wood or metal, structurally adequate.
- B. Sign Surfaces: Exterior grade plywood with medium density overlay, minimum 3/4 inch thick, standard large sizes to minimize joints.
- C. Rough Hardware: Galvanized.
- D. Paint and Primers: Exterior quality, two coats; sign background of color as selected.
- E. Lettering: Exterior quality paint, contrasting colors.

2.02 PROJECT INFORMATIONAL SIGNS

- A. Painted informational signs of same colors and lettering as Project Identification sign, or standard products; size lettering to provide legibility at 100 foot distance.
- B. Provide at each field office, storage shed, and directional signs to direct traffic into and within site. Relocate as Work progress requires.
- C. Provide municipal and state traffic agency directional traffic signs to and within site.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install project identification sign within 14 days prior to construction start.
- B. Erect at location of high public visibility adjacent to main entrance to site.
- C. Erect supports and framing on secure foundation, rigidly braced and framed to resist wind loadings.
- D. Install sign surface plumb and level, with butt joints. Anchor securely.
- E. Paint exposed surfaces of sign, supports, and framing.

3.02 MAINTENANCE

- A. Maintain signs and supports clean, repair deterioration and damage.

3.03 REMOVAL

- A. Remove signs, framing, supports, and foundations at completion of Project and restore the area.

END OF SECTION

SECTION 01 60 00

PRODUCT REQUIREMENTS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. General product requirements.
- B. Transportation, handling, storage and protection.
- C. Product option requirements.
- D. Substitution limitations and procedures.
- E. Procedures for Seaford School District-supplied products.
- F. Maintenance materials, including extra materials, spare parts, tools, and software.

1.02 RELATED REQUIREMENTS

- A. Section 01 40 00 - Quality Requirements: Product quality monitoring.
- B. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions: Requirements for VOC-restricted product categories.

1.03 REFERENCE STANDARDS

- A. NFPA 70 - National Electrical Code; National Fire Protection Association.

1.04 SUBMITTALS

- A. Proposed Products List: Submit list of major products proposed for use, with name of manufacturer, trade name, and model number of each product.
 - 1. Submit within 15 days after date of Agreement.
 - 2. For products specified only by reference standards, list applicable reference standards.
- B. Product Data Submittals: Submit manufacturer's standard published data. Mark each copy to identify applicable products, models, options, and other data. Supplement manufacturers' standard data to provide information specific to this Project.
- C. Shop Drawing Submittals: Prepared specifically for this Project; indicate utility and electrical characteristics, utility connection requirements, and location of utility outlets for service for functional equipment and appliances.
- D. Sample Submittals: Illustrate functional and aesthetic characteristics of the product, with integral parts and attachment devices. Coordinate sample submittals for interfacing work.
 - 1. For selection from standard finishes, submit samples of the full range of the manufacturer's standard colors, textures, and patterns.

PART 2 PRODUCTS

2.01 NEW PRODUCTS

- A. Provide new products unless specifically required or permitted by the Contract Documents.

2.02 PRODUCT OPTIONS

- A. Products Specified by Reference Standards or by Description Only: Use any product meeting those standards or description.

- B. Products Specified by Naming One or More Manufacturers: Use a product of one of the manufacturers named and meeting specifications, no options or substitutions allowed.
- C. Products Specified by Naming One or More Manufacturers with a Provision for Substitutions: Submit a request for substitution for any manufacturer not named.

2.03 MAINTENANCE MATERIALS

- A. Furnish extra materials, spare parts, tools, and software of types and in quantities specified in individual specification sections.
- B. Deliver to Project site; obtain receipt prior to final payment.

PART 3 EXECUTION

3.01 SUBSTITUTION PROCEDURES

- A. Instructions to Bidders specify time restrictions for submitting requests for substitutions during the bidding period. Comply with requirements specified in this section.
- B. Document each request with complete data substantiating compliance of proposed substitution with Contract Documents.
- C. A request for substitution constitutes a representation that the submitter:
 - 1. Has investigated proposed product and determined that it meets or exceeds the quality level of the specified product.
 - 2. Will provide the same warranty for the substitution as for the specified product.
 - 3. Will coordinate installation and make changes to other Work that may be required for the Work to be complete with no additional cost to Seaford School District.
 - 4. Waives claims for additional costs or time extension that may subsequently become apparent.
- D. Substitution Submittal Procedure:
 - 1. Submit three copies of request for substitution for consideration, with one sent directly to the Owner. Limit each request to one proposed substitution.
 - 2. Submit shop drawings, product data, and certified test results attesting to the proposed product equivalence. Burden of proof is on proposer.
 - 3. The StudioJAED will notify Contractor in writing of decision to accept or reject request.
 - 4. Owner retains right to final approval of all substitution requests.

3.02 OWNER-SUPPLIED PRODUCTS

- A. Seaford School District's Responsibilities:
 - 1. Arrange for and deliver Seaford School District reviewed shop drawings, product data, and samples, to Contractor.
 - 2. Arrange and pay for product delivery to site.
 - 3. On delivery, inspect products jointly with Contractor.
 - 4. Submit claims for transportation damage and replace damaged, defective, or deficient items.
 - 5. Arrange for manufacturers' warranties, inspections, and service.
 - 6. Items may include, but are not limited to:
 - a. Radiant flooring under-slab piping and distribution pumps (depending on Alternates accepted at bid).
- B. Contractor's Responsibilities:
 - 1. Review Seaford School District reviewed shop drawings, product data, and samples.

2. Receive and unload products at site; inspect for completeness or damage jointly with Seaford School District.
3. Handle, store, install and finish products.
4. Repair or replace items damaged after receipt.

3.03 TRANSPORTATION AND HANDLING

- A. Coordinate schedule of product delivery to designated prepared areas in order to minimize site storage time and potential damage to stored materials.
- B. Transport and handle products in accordance with manufacturer's instructions.
- C. Transport materials in covered trucks to prevent contamination of product and littering of surrounding areas.
- D. Promptly inspect shipments to ensure that products comply with requirements, quantities are correct, and products are undamaged.
- E. Provide equipment and personnel to handle products by methods to prevent soiling, disfigurement, or damage.
- F. Arrange for the return of packing materials, such as wood pallets, where economically feasible.

3.04 STORAGE AND PROTECTION

- A. Designate receiving/storage areas for incoming products so that they are delivered according to installation schedule and placed convenient to work area in order to minimize waste due to excessive materials handling and misapplication.
- B. Store and protect products in accordance with manufacturers' instructions.
- C. Store with seals and labels intact and legible.
- D. Store sensitive products in weather tight, climate controlled, enclosures in an environment favorable to product.
- E. For exterior storage of fabricated products, place on sloped supports above ground.
- F. Cover products subject to deterioration with impervious sheet covering. Provide ventilation to prevent condensation and degradation of products.
- G. Prevent contact with material that may cause corrosion, discoloration, or staining.
- H. Provide equipment and personnel to store products by methods to prevent soiling, disfigurement, or damage.
- I. Arrange storage of products to permit access for inspection. Periodically inspect to verify products are undamaged and are maintained in acceptable condition.

END OF SECTION

SECTION 01 61 16

VOLATILE ORGANIC COMPOUND (VOC) CONTENT RESTRICTIONS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. VOC restrictions for product categories listed below under "DEFINITIONS."
- B. All products of each category that are installed in the project must comply; Seaford School District's project goals do not allow for partial compliance.

1.02 DEFINITIONS

- A. VOC-Restricted Products: All products of each of the following categories when installed or applied on-site in the building interior:
 - 1. Adhesives, sealants, and sealer coatings.
 - 2. Carpet.
 - 3. Resilient floor coverings.
 - 4. Paints and coatings.
 - 5. Acoustical ceilings and panels.
- B. Interior of Building: Anywhere inside the exterior weather barrier.
- C. Adhesives: All gunnable, trowelable, liquid-applied, and aerosol adhesives, whether specified or not; including flooring adhesives, resilient base adhesives, and pipe jointing adhesives.
- D. Sealants: All gunnable, trowelable, and liquid-applied joint sealants and sealant primers, whether specified or not; including firestopping sealants and duct joint sealers.

1.03 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Evidence of Compliance: Submit for each different product in each applicable category.
- C. Product Data: For each VOC-restricted product used in the project, submit product data showing compliance, except when another type of evidence of compliance is required.
- D. Installer Certifications for Accessory Materials: Require each installer of any type of product (not just the products for which VOC restrictions are specified) to certify that either 1) no adhesives, joint sealants, paints, coatings, or composite wood or agrifiber products have been used in the installation of his products, or 2) that such products used comply with these requirements.

1.04 QUALITY ASSURANCE

- A. Testing Agency Qualifications: Independent firm specializing in performing testing and inspections of the type specified in this section.

PART 2 PRODUCTS

2.01 MATERIALS

- A. Adhesives and Joint Sealants: Provide only products having volatile organic compound (VOC) content not greater than required by South Coast Air Quality Management District Rule No.1168 and the Delaware Department of Natural Resources limits to VOC usage via the Ozone Transportation Commission Model Rule for Sealants and Adhesives.

1. Evidence of Compliance: Acceptable types of evidence are:
 - a. Report of laboratory testing performed in accordance with requirements.
 - b. Published product data showing compliance with requirements.
 - c. Certification by manufacturer that product complies with requirements.
- B. Aerosol Adhesives: Provide only products having volatile organic compound (VOC) content not greater than required by GreenSeal GS-36 the Delaware Department of Natural Resources limits to VOC usage via the Ozone Transportation Commission Model Rule for Sealants and Adhesives.
 1. Evidence of Compliance: Acceptable types of evidence are:
 - a. Current GreenSeal Certification.
 - b. Report of laboratory testing performed in accordance with GreenSeal GS-36 requirements.
 - c. Published product data showing compliance with requirements.
- C. Paints and Coatings:
 1. Provide coatings that comply with the most stringent requirements specified in the following:
 - a. 40 CFR 59, Subpart D--National Volatile Organic Compound Emission Standards for Architectural Coatings.
 - b. Ozone Transport Commission (OTC) Model Rule, Architectural, Industrial, and Maintenance Coatings; www.otcair.org; specifically:
 - 1) Opaque, Flat: 50 g/L, maximum.
 - 2) Opaque, Nonflat: 150 g/L, maximum.
 - 3) Opaque, High Gloss: 250 g/L, maximum.
 - 4) Varnishes: 350 g/L, maximum.
 - c. Architectural coatings VOC limits of state in which the project is located.
 2. Determination of VOC Content: Testing and calculation in accordance with 40 CFR 59, Subpart D (EPA Method 24), exclusive of colorants added to a tint base and water added at project site; or other method acceptable to authorities having jurisdiction.
 3. Evidence of Compliance: Acceptable types of evidence are:
 - a. Report of laboratory testing performed in accordance with requirements.
 - b. Published product data showing compliance with requirements.
 - c. Certification by manufacturer that product complies with requirements.
- D. Carpet and Adhesive: Provide products having VOC content not greater than that required for CRI Green Label Plus certification.
 1. Evidence of Compliance: Acceptable types of evidence are:
 - a. Current Green Label Plus Certification.
 - b. Report of laboratory testing performed in accordance with requirements.

PART 3 EXECUTION

3.01 FIELD QUALITY CONTROL

- A. Seaford School District reserves the right to reject non-compliant products, whether installed or not, and require their removal and replacement with compliant products at no extra cost to Seaford School District.
- B. All additional costs to restore indoor air quality due to installation of non-compliant products will be borne by Contractor.

END OF SECTION

SECTION 01 70 00

EXECUTION AND CLOSEOUT REQUIREMENTS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Examination, preparation, and general installation procedures.
- B. Requirements for alterations work, including selective demolition, except removal, disposal, and/or remediation of hazardous materials and toxic substances.
- C. Cutting and patching.
- D. Surveying for laying out the work.
- E. Cleaning and protection.
- F. Starting of systems and equipment.
- G. Demonstration and instruction of Seaford School District personnel.
- H. Closeout procedures, except payment procedures.
- I. General requirements for maintenance service.

1.02 RELATED REQUIREMENTS

- A. Section 01 10 00 - Summary: Limitations on working in existing building; continued occupancy; work sequence; identification of salvaged and relocated materials.
- B. Section 01 30 00 - Administrative Requirements: Submittals procedures.
- C. Section 01 40 00 - Quality Requirements: Testing and inspection procedures.
- D. Section 01 50 00 - Temporary Facilities and Controls: Temporary exterior enclosures.
- E. Section 01 51 00 - Temporary Utilities: Temporary heating, cooling, and ventilating facilities.
- F. Section 01 78 00 - Closeout Submittals: Project record documents, operation and maintenance data, warranties and bonds.

1.03 REFERENCE STANDARDS

- A. NFPA 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Cutting and Patching: Submit written request in advance of cutting or alteration that affects:
 - 1. Structural integrity of any element of Project.
 - 2. Integrity of weather exposed or moisture resistant element.
 - 3. Efficiency, maintenance, or safety of any operational element.
 - 4. Visual qualities of sight exposed elements.
- C. Project Record Documents: Accurately record actual locations of capped and active utilities.

1.05 QUALIFICATIONS

- A. For demolition work, employ a firm specializing in the type of work required.

1. Minimum of 5 years of documented experience.
- B. For survey work, employ a land surveyor registered in DE and acceptable to StudioJAED. Submit evidence of Surveyor's Errors and Omissions insurance coverage in the form of an Insurance Certificate.
- C. For field engineering, employ a professional engineer of the discipline required for specific service on Project, licensed in DE.

1.06 PROJECT CONDITIONS

- A. Use of explosives is not permitted.
- B. Grade site to drain. Maintain excavations free of water. Provide, operate, and maintain pumping equipment.
- C. Protect site from puddling or running water. Provide water barriers as required to protect site from soil erosion.
- D. Ventilate enclosed areas to assist cure of materials, to dissipate humidity, and to prevent accumulation of dust, fumes, vapors, or gases.
- E. Dust Control: Execute work by methods to minimize raising dust from construction operations. Provide positive means to prevent air-borne dust from dispersing into atmosphere and over adjacent property.
- F. Erosion and Sediment Control: Plan and execute work by methods to control surface drainage from cuts and fills, from borrow and waste disposal areas. Prevent erosion and sedimentation. See drawings for specific details.
 1. Minimize amount of bare soil exposed at one time.
 2. Provide temporary measures such as berms, dikes, and drains, to prevent water flow.
 3. Construct fill and waste areas by selective placement to avoid erosive surface silts or clays.
 4. Periodically inspect earthwork to detect evidence of erosion and sedimentation; promptly apply corrective measures.
- G. Noise Control: Provide methods, means, and facilities to minimize noise produced by construction operations.
 1. Outdoors: Limit conduct of especially noisy exterior work to the hours of 8 am to 5 pm.
- H. Pest and Rodent Control: Provide methods, means, and facilities to prevent pests and insects from damaging the work. Create and implement an Integrated Pest Management plan (IPM) suitable for use around the occupied facility.
 1. Pest Control Service: Weekly treatments.
 2. Rodent Control: Provide methods, means, and facilities to prevent rodents from accessing or invading premises.
- I. Pollution Control: Provide methods, means, and facilities to prevent contamination of soil, water, and atmosphere from discharge of noxious, toxic substances, and pollutants produced by construction operations. Comply with federal, state, and local regulations.

1.07 COORDINATION

- A. Coordinate scheduling, submittals, and work of the various sections of the Project Manual to ensure efficient and orderly sequence of installation of interdependent construction elements, with provisions for accommodating items installed later.
- B. Notify affected utility companies and comply with their requirements.

- C. Verify that utility requirements and characteristics of new operating equipment are compatible with building utilities. Coordinate work of various sections having interdependent responsibilities for installing, connecting to, and placing in service, such equipment.
- D. Coordinate space requirements, supports, and installation of mechanical and electrical work that are indicated diagrammatically on Drawings. Follow routing shown for pipes, ducts, and conduit, as closely as practicable; place runs parallel with lines of building. Utilize spaces efficiently to maximize accessibility for other installations, for maintenance, and for repairs.
- E. In finished areas except as otherwise indicated, conceal pipes, ducts, and wiring within the construction. Coordinate locations of fixtures and outlets with finish elements.
- F. Coordinate completion and clean-up of work of separate sections.
- G. After Seaford School District occupancy of premises, coordinate access to site for correction of defective work and work not in accordance with Contract Documents, to minimize disruption of Seaford School District's activities.

PART 2 PRODUCTS

2.01 PATCHING MATERIALS

- A. New Materials: As specified in product sections; match existing products and work for patching and extending work.
- B. Type and Quality of Existing Products: Determine by inspecting and testing products where necessary, referring to existing work as a standard.
- C. Product Substitution: For any proposed change in materials, submit request for substitution described in Section 01 60 00.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that existing site conditions and substrate surfaces are acceptable for subsequent work. Start of work means acceptance of existing conditions.
- B. Verify that existing substrate is capable of structural support or attachment of new work being applied or attached.
- C. Examine and verify specific conditions described in individual specification sections.
- D. Take field measurements before confirming product orders or beginning fabrication, to minimize waste due to over-ordering or misfabrication.
- E. Verify that utility services are available, of the correct characteristics, and in the correct locations.
- F. Prior to Cutting: Examine existing conditions prior to commencing work, including elements subject to damage or movement during cutting and patching. After uncovering existing work, assess conditions affecting performance of work. Beginning of cutting or patching means acceptance of existing conditions.

3.02 PREPARATION

- A. Clean substrate surfaces prior to applying next material or substance.
- B. Seal cracks or openings of substrate prior to applying next material or substance.

- C. Apply manufacturer required or recommended substrate primer, sealer, or conditioner prior to applying any new material or substance in contact or bond.

3.03 LAYING OUT THE WORK

- A. Verify locations of survey control points prior to starting work.
- B. Promptly notify StudioJAED of any discrepancies discovered.
- C. Contractor shall locate and protect survey control and reference points.
- D. Protect survey control points prior to starting site work; preserve permanent reference points during construction.
- E. Promptly report to StudioJAED the loss or destruction of any reference point or relocation required because of changes in grades or other reasons.
- F. Replace dislocated survey control points based on original survey control. Make no changes without prior written notice to StudioJAED.
- G. Utilize recognized engineering survey practices.
- H. Establish elevations, lines and levels. Locate and lay out by instrumentation and similar appropriate means:
 - 1. Site improvements including pavements; stakes for grading, fill and topsoil placement; utility locations, slopes, and invert elevations.
 - 2. Grid or axis for structures.
 - 3. Building foundation, column locations, ground floor elevations.
- I. Periodically verify layouts by same means.
- J. Maintain a complete and accurate log of control and survey work as it progresses.

3.04 GENERAL INSTALLATION REQUIREMENTS

- A. Install products as specified in individual sections, in accordance with manufacturer's instructions and recommendations, and so as to avoid waste due to necessity for replacement.
- B. Make vertical elements plumb and horizontal elements level, unless otherwise indicated.
- C. Install equipment and fittings plumb and level, neatly aligned with adjacent vertical and horizontal lines, unless otherwise indicated.
- D. Make consistent texture on surfaces, with seamless transitions, unless otherwise indicated.
- E. Make neat transitions between different surfaces, maintaining texture and appearance.

3.05 ALTERATIONS

- A. Drawings showing existing construction and utilities are based on casual field observation and existing record documents only.
 - 1. Verify that construction and utility arrangements are as shown.
 - 2. Report discrepancies to StudioJAED before disturbing existing installation.
 - 3. Beginning of alterations work constitutes acceptance of existing conditions.
- B. Keep areas in which alterations are being conducted separated from other areas that are still occupied.
 - 1. Provide, erect, and maintain temporary dustproof partitions of construction specified in Section 01 50 00.

- C. Maintain weatherproof exterior building enclosure except for interruptions required for replacement or modifications; take care to prevent water and humidity damage.
 - 1. Where openings in exterior enclosure exist, provide construction to make exterior enclosure weatherproof.
 - 2. Insulate existing ducts or pipes that are exposed to outdoor ambient temperatures by alterations work.
- D. Remove existing work as indicated and as required to accomplish new work.
 - 1. Remove items indicated on drawings.
 - 2. Where new surface finishes are to be applied to existing work, perform removals, patch, and prepare existing surfaces as required to receive new finish; remove existing finish if necessary for successful application of new finish.
 - 3. Where new surface finishes are not specified or indicated, patch holes and damaged surfaces to match adjacent finished surfaces as closely as possible.
- E. Services (Including but not limited to HVAC, Plumbing, Fire Protection, Electrical, and Telecommunications): Remove, relocate, and extend existing systems to accommodate new construction.
 - 1. Maintain existing active systems that are to remain in operation; maintain access to equipment and operational components; if necessary, modify installation to allow access or provide access panel.
 - 2. Where existing systems or equipment are not active and Contract Documents require reactivation, put back into operational condition; repair supply, distribution, and equipment as required.
 - 3. Where existing active systems serve occupied facilities but are to be replaced with new services, maintain existing systems in service until new systems are complete and ready for service.
 - a. Disable existing systems only to make switchovers and connections; minimize duration of outages.
 - b. Provide temporary connections as required to maintain existing systems in service.
 - 4. Verify that abandoned services serve only abandoned facilities.
 - 5. Remove abandoned pipe, ducts, conduits, and equipment, including those above accessible ceilings; remove back to source of supply where possible, otherwise cap stub and tag with identification; patch holes left by removal using materials specified for new construction.
- F. Protect existing work to remain.
 - 1. Prevent movement of structure; provide shoring and bracing if necessary.
 - 2. Perform cutting to accomplish removals neatly and as specified for cutting new work.
 - 3. Repair adjacent construction and finishes damaged during removal work.
- G. Adapt existing work to fit new work: Make as neat and smooth transition as possible.
- H. Patching: Where the existing surface is not indicated to be refinished, patch to match the surface finish that existed prior to cutting. Where the surface is indicated to be refinished, patch so that the substrate is ready for the new finish.
- I. Refinish existing surfaces as indicated:
 - 1. Where rooms or spaces are indicated to be refinished, refinish all visible existing surfaces to remain to the specified condition for each material, with a neat transition to adjacent finishes.

2. If mechanical or electrical work is exposed accidentally during the work, re-cover and refinish to match.
- J. Clean existing systems and equipment.
- K. Remove demolition debris and abandoned items from alterations areas and dispose of off-site; do not burn or bury.
- L. Do not begin new construction in alterations areas before demolition is complete.
- M. Comply with all other applicable requirements of this section.

3.06 CUTTING AND PATCHING

- A. Whenever possible, execute the work by methods that avoid cutting or patching.
- B. See Alterations article above for additional requirements.
- C. Perform whatever cutting and patching is necessary to:
 1. Complete the work.
 2. Fit products together to integrate with other work.
 3. Provide openings for penetration of mechanical, electrical, and other services.
 4. Match work that has been cut to adjacent work.
 5. Repair areas adjacent to cuts to required condition.
 6. Repair new work damaged by subsequent work.
 7. Remove samples of installed work for testing when requested.
 8. Remove and replace defective and non-conforming work.
- D. Execute work by methods that avoid damage to other work and that will provide appropriate surfaces to receive patching and finishing. In existing work, minimize damage and restore to original condition.
- E. Employ original installer to perform cutting for weather exposed and moisture resistant elements, and sight exposed surfaces.
- F. Cut rigid materials using masonry saw or core drill. Pneumatic tools not allowed without prior approval.
- G. Restore work with new products in accordance with requirements of Contract Documents.
- H. Fit work air tight to pipes, sleeves, ducts, conduit, and other penetrations through surfaces.
- I. At penetrations of fire rated walls, partitions, ceiling, or floor construction, completely seal voids with fire rated material in accordance with NFPA requirements, to full thickness of the penetrated element.
- J. Patching:
 1. Finish patched surfaces to match finish that existed prior to patching. On continuous surfaces, refinish to nearest intersection or natural break. For an assembly, refinish entire unit.
 2. Match color, texture, and appearance.
 3. Repair patched surfaces that are damaged, lifted, discolored, or showing other imperfections due to patching work. If defects are due to condition of substrate, repair substrate prior to repairing finish.

3.07 PROGRESS CLEANING

- A. Maintain areas free of waste materials, debris, and rubbish. Maintain site in a clean and orderly condition.
- B. Remove debris and rubbish from pipe chases, plenums, attics, crawl spaces, and other closed or remote spaces, prior to enclosing the space.
- C. Broom and vacuum clean interior areas prior to start of surface finishing, and continue cleaning to eliminate dust.
- D. Collect and remove waste materials, debris, and trash/rubbish from site periodically and dispose off-site; do not burn or bury.

3.08 PROTECTION OF INSTALLED WORK

- A. Protect installed work from damage by construction operations.
- B. Provide special protection where specified in individual specification sections.
- C. Provide temporary and removable protection for installed products. Control activity in immediate work area to prevent damage.
- D. Provide protective coverings at walls, projections, jambs, sills, and soffits of openings.
- E. Protect finished floors, stairs, and other surfaces from traffic, dirt, wear, damage, or movement of heavy objects, by protecting with durable sheet materials.
- F. Prohibit traffic or storage upon waterproofed or roofed surfaces. If traffic or activity is necessary, obtain recommendations for protection from waterproofing or roofing material manufacturer.
- G. Prohibit traffic from landscaped areas.
- H. Remove protective coverings when no longer needed; reuse or recycle plastic coverings if possible.

3.09 SYSTEM STARTUP

- A. Coordinate schedule for start-up of various equipment and systems.
- B. Verify that each piece of equipment or system has been checked for proper lubrication, drive rotation, belt tension, control sequence, and for conditions that may cause damage.
- C. Verify tests, meter readings, and specified electrical characteristics agree with those required by the equipment or system manufacturer.
- D. Verify that wiring and support components for equipment are complete and tested.
- E. Execute start-up under supervision of applicable Contractor personnel and manufacturer's representative in accordance with manufacturers' instructions.
- F. When specified in individual specification Sections, require manufacturer to provide authorized representative to be present at site to inspect, check, and approve equipment or system installation prior to start-up, and to supervise placing equipment or system in operation.
- G. Submit a written report that equipment or system has been properly installed and is functioning correctly.

3.10 DEMONSTRATION AND INSTRUCTION

- A. Demonstrate operation and maintenance of products to Seaford School District's personnel two weeks prior to date of Substantial Completion.
- B. Demonstrate start-up, operation, control, adjustment, trouble-shooting, servicing, maintenance, and shutdown of each item of equipment at scheduled time, at equipment location.
- C. For equipment or systems requiring seasonal operation, perform demonstration for other season within six months.
- D. Provide a qualified person who is knowledgeable about the Project to perform demonstration and instruction of owner personnel.

3.11 ADJUSTING

- A. Adjust operating products and equipment to ensure smooth and unhindered operation.

3.12 FINAL CLEANING

- A. Execute final cleaning prior to final project assessment.
 - 1. Clean areas to be occupied by Seaford School District prior to final completion before Seaford School District occupancy.
- B. Use cleaning materials that are nonhazardous.
- C. Clean interior and exterior glass, surfaces exposed to view; remove temporary labels, stains and foreign substances, polish transparent and glossy surfaces, vacuum carpeted and soft surfaces.
- D. Remove all labels that are not permanent. Do not paint or otherwise cover fire test labels or nameplates on mechanical and electrical equipment.
- E. Clean equipment and fixtures to a sanitary condition with cleaning materials appropriate to the surface and material being cleaned.
- F. Clean filters of operating equipment.
- G. Clean debris from roofs, gutters, downspouts, and drainage systems.
- H. Clean site; sweep paved areas, rake clean landscaped surfaces.
- I. Remove waste, surplus materials, trash/rubbish, and construction facilities from the site; dispose of in legal manner; do not burn or bury.

3.13 CLOSEOUT PROCEDURES

- A. Make submittals that are required by governing or other authorities.
 - 1. Provide copies to StudioJAED and Seaford School District.
- B. Notify StudioJAED when work is considered ready for Substantial Completion.
- C. Submit written certification that Contract Documents have been reviewed, work has been inspected, and that work is complete in accordance with Contract Documents and ready for StudioJAED's review.
- D. Correct items of work listed in executed Certificates of Substantial Completion and comply with requirements for access to Seaford School District-occupied areas.
- E. Notify StudioJAED when work is considered finally complete.

- F. Complete items of work determined by StudioJAED's final inspection.

3.14 MAINTENANCE

- A. Provide service and maintenance of components indicated in specification sections.
- B. Maintenance Period: As indicated in specification sections or, if not indicated, not less than one year from the Date of Substantial Completion or the length of the specified warranty, whichever is longer.
- C. Examine system components at a frequency consistent with reliable operation. Clean, adjust, and lubricate as required.
- D. Include systematic examination, adjustment, and lubrication of components. Repair or replace parts whenever required. Use parts produced by the manufacturer of the original component.
- E. Maintenance service shall not be assigned or transferred to any agent or subcontractor without prior written consent of the Seaford School District.

END OF SECTION

SECTION 01 78 00

CLOSEOUT SUBMITTALS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Project Record Documents.
- B. Operation and Maintenance Data.
- C. Warranties and bonds.

1.02 RELATED REQUIREMENTS

- A. Section 01 30 00 - Administrative Requirements: Submittals procedures, shop drawings, product data, and samples.
- B. Section 01 70 00 - Execution and Closeout Requirements: Contract closeout procedures.
- C. Individual Product Sections: Specific requirements for operation and maintenance data.
- D. Individual Product Sections: Warranties required for specific products or Work.

1.03 SUBMITTALS

- A. Project Record Documents: Submit documents to StudioJAED with claim for final Application for Payment.
- B. Operation and Maintenance Data:
 - 1. Submit two copies of preliminary draft or proposed formats and outlines of contents before start of Work. StudioJAED will review draft and return one copy with comments.
 - 2. For equipment, or component parts of equipment put into service during construction and operated by Seaford School District, submit completed documents within ten days after acceptance.
 - 3. Submit one copy of completed documents 15 days prior to final inspection. This copy will be reviewed and returned after final inspection, with StudioJAED comments. Revise content of all document sets as required prior to final submission.
 - 4. Submit two sets of revised final documents in final form within 10 days after final inspection.
- C. Warranties and Bonds:
 - 1. For equipment or component parts of equipment put into service during construction with Seaford School District's permission, submit documents within 10 days after acceptance.
 - 2. Make other submittals within 10 days after Date of Substantial Completion, prior to final Application for Payment.
 - 3. For items of Work for which acceptance is delayed beyond Date of Substantial Completion, submit within 10 days after acceptance, listing the date of acceptance as the beginning of the warranty period.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION

3.01 PROJECT RECORD DOCUMENTS

- A. Maintain on site one set of the following record documents; record actual revisions to the Work:
 - 1. Drawings.

2. Addenda.
 3. Change Orders and other modifications to the Contract.
- B. Ensure entries are complete and accurate, enabling future reference by Seaford School District.
 - C. Store record documents separate from documents used for construction.
 - D. Record information concurrent with construction progress.
 - E. Record Drawings: Legibly mark each item to record actual construction including:
 1. Field changes of dimension and detail.
 2. Details not on original Contract drawings.

3.02 OPERATION AND MAINTENANCE DATA

- A. For Each Product or System: List names, addresses and telephone numbers of Subcontractors and suppliers, including local source of supplies and replacement parts.
- B. Product Data: Mark each sheet to clearly identify specific products and component parts, and data applicable to installation. Delete inapplicable information.
- C. Drawings: Supplement product data to illustrate relations of component parts of equipment and systems, to show control and flow diagrams. Do not use Project Record Documents as maintenance drawings.
- D. Typed Text: As required to supplement product data. Provide logical sequence of instructions for each procedure, incorporating manufacturer's instructions.

3.03 OPERATION AND MAINTENANCE DATA FOR EQUIPMENT AND SYSTEMS

- A. For Each Item of Equipment and Each System:
 1. Description of unit or system, and component parts.
 2. Identify function, normal operating characteristics, and limiting conditions.
 3. Include performance curves, with engineering data and tests.
 4. Complete nomenclature and model number of replaceable parts.
- B. Operating Procedures: Include start-up, break-in, and routine normal operating instructions and sequences. Include regulation, control, stopping, shut-down, and emergency instructions. Include summer, winter, and any special operating instructions.
- C. Maintenance Requirements: Include routine procedures and guide for preventative maintenance and trouble shooting; disassembly, repair, and reassembly instructions; and alignment, adjusting, balancing, and checking instructions.
- D. Provide servicing and lubrication schedule, and list of lubricants required.
- E. Include manufacturer's printed operation and maintenance instructions.
- F. Include sequence of operation by controls manufacturer.
- G. Provide original manufacturer's parts list, illustrations, assembly drawings, and diagrams required for maintenance.
- H. Additional Requirements: As specified in individual product specification sections.

3.04 OPERATION AND MAINTENANCE MANUALS

- A. Prepare instructions and data by personnel experienced in maintenance and operation of described products.

- B. Prepare data in the form of an instructional manual.
- C. Binders: Commercial quality, 8-1/2 by 11 inch three D side ring binders with durable plastic covers; 2 inch maximum ring size. When multiple binders are used, correlate data into related consistent groupings.
- D. Cover: Identify each binder with typed or printed title OPERATION AND MAINTENANCE INSTRUCTIONS; identify title of Project; identify subject matter of contents.
- E. Provide tabbed dividers for each separate product and system, with typed description of product and major component parts of equipment.
- F. Text: Manufacturer's printed data, or typewritten data on 24 pound paper.
- G. Drawings: Provide with reinforced punched binder tab. Bind in with text; fold larger drawings to size of text pages.
- H. Arrange content by systems under section numbers and sequence of Table of Contents of this Project Manual.
- I. Contents: Prepare a Table of Contents for each volume, with each product or system description identified, in three parts as follows:
 - 1. Part 1: Directory, listing names, addresses, and telephone numbers of StudioJAED, Contractor, Subcontractors, and major equipment suppliers.
 - 2. Part 2: Operation and maintenance instructions, arranged by system and subdivided by specification section. For each category, identify names, addresses, and telephone numbers of Subcontractors and suppliers. Identify the following:
 - a. Significant design criteria.
 - b. List of equipment.
 - c. Parts list for each component.
 - d. Operating instructions.
 - e. Maintenance instructions for equipment and systems.
 - 3. Part 3: Project documents and certificates, including the following:
 - a. Shop drawings and product data.
 - b. Air and water balance reports.
 - c. Certificates.
 - d. Photocopies of warranties and bonds.
- J. Provide a listing in Table of Contents for design data, with tabbed dividers and space for insertion of data.

3.05 WARRANTIES AND BONDS

- A. Obtain warranties and bonds, executed in duplicate by responsible Subcontractors, suppliers, and manufacturers, within 10 days after completion of the applicable item of work. Except for items put into use with Seaford School District's permission, leave date of beginning of time of warranty until the Date of Substantial completion is determined.
- B. Verify that documents are in proper form, contain full information, and are notarized.
- C. Co-execute submittals when required.
- D. Retain warranties and bonds until time specified for submittal.
- E. Include originals of each in operation and maintenance manuals, indexed separately on Table of Contents.

Seaford School District
Central ES Kitchen Renovations - Phase I
StudioJAED Project No. 12016
Bid Documents

CLOSEOUT SUBMITTALS
01 78 00
May 14, 2012

END OF SECTION

SECTION 02 41 00

DEMOLITION

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Selective demolition of entire roof assemblies. See 07 01 50.19
- B. Legal disposal of demolished items.

1.02 RELATED REQUIREMENTS

- A. Section 01 10 00 - Summary: Limitations on one's use of site and premises.
- B. Section 01 50 00 - Temporary Facilities and Controls: Site fences, security, protective barriers, and waste removal.
- C. Section 01 70 00 - Execution and Closeout Requirements: Project conditions; protection of existing construction to remain; reinstallation of removed products.
- D. Section 07 01 50.19 - Preparation for Re-Roofing: Removal of existing roofing, roof insulation, flashing, trim, and accessories.

1.03 REFERENCE STANDARDS

- A. 29 CFR 1926 - U.S. Occupational Safety and Health Standards.
- B. NFPA 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Site Plan: Showing:
 - 1. Vegetation to be protected.
 - 2. Areas for temporary construction and field offices.
 - 3. Areas for temporary and permanent placement of removed materials.
- C. Demolition Plan: Submit demolition plan as specified by OSHA and local authorities.
 - 1. Indicate extent of demolition, removal sequence, bracing and shoring, and location and construction of barricades and fences.
 - 2. Identify demolition firm and submit qualifications.
 - 3. Include a summary of safety procedures.

1.05 QUALITY ASSURANCE

- A. Demolition Firm Qualifications: Company specializing in the type of work required.
 - 1. Minimum of 5 years of documented experience.
 - 2. Roof demolition to be by a roofing contractor.

1.06 PROJECT CONDITIONS

- A. Minimize production of dust due to demolition operations; do not use water if that will result in ice, flooding, sedimentation of public waterways or storm sewers, or other pollution.

PART 2 PRODUCTS

PART 3 EXECUTION

3.01 SCOPE

- A. Remove portions of existing buildings in the following sequence:

3.02 GENERAL PROCEDURES AND PROJECT CONDITIONS

- A. Comply with applicable codes and regulations for demolition operations and safety of adjacent structures and the public.
 - 1. Obtain required permits and licenses.
 - 2. Comply with applicable requirements of NFPA 241.
 - 3. Take precautions to prevent catastrophic or uncontrolled collapse of structures to be removed; do not allow worker or public access within range of potential collapse of unstable structures.
 - 4. Provide, erect, and maintain temporary barriers and security devices.
 - 5. Conduct operations to minimize effects on and interference with adjacent structures and occupants.
 - 6. Do not close or obstruct roadways or sidewalks.
 - 7. Conduct operations to minimize obstruction of public and private entrances and exits; do not obstruct required exits at any time; protect persons using entrances and exits from removal operations.
 - 8. Obtain written permission from owners of adjacent properties when demolition equipment will traverse, infringe upon or limit access to their property.
- B. Do not begin removal until receipt of notification to proceed from Seaford School District.
- C. Do not begin removal until built elements to be salvaged or relocated have been removed.
- D. Do not begin removal until measures have been taken to protect vegetation to remain.
- E. Protect existing structures.
- F. Minimize production of dust due to demolition operations; do not use water if that will result in ice, flooding, sedimentation of public waterways or storm sewers, or other pollution.
- G. If hazardous materials are discovered during removal operations, stop work and notify StudioJAED and Seaford School District; hazardous materials include regulated asbestos containing materials, lead, PCB's, and mercury.
- H. Hazardous Materials: Comply with 29 CFR 1926 and state and local regulations.

3.03 EXISTING UTILITIES

- A. Do not close, shut off, or disrupt existing life safety systems that are in use without permission from Architect.

3.04 SELECTIVE DEMOLITION FOR ALTERATIONS

- A. Drawings showing existing construction and utilities are based on field observation and existing record documents only.
 - 1. Verify that construction and utility arrangements are as shown.
 - 2. Report discrepancies to StudioJAED before disturbing existing installation.
 - 3. Beginning of demolition work constitutes acceptance of existing conditions.
- B. Separate areas in which demolition is being conducted from other areas that are still occupied.
 - 1. Provide, erect, and maintain temporary dustproof partitions of construction specified in Section 01 50 00.

- C. Maintain weatherproof exterior building enclosure except for interruptions required for replacement or modifications; take care to prevent water and humidity damage.
- D. Remove existing work as indicated and as required to accomplish new work.
 - 1. Remove rotted wood, corroded metals, and deteriorated masonry and concrete; replace with new construction specified.
 - 2. Remove items indicated on drawings.
- E. Limit amount of roof to be demolished to that which can be protected and remain watertight.
- F. Protect existing work to remain.
 - 1. Prevent movement of structure; provide shoring and bracing if necessary.
 - 2. Perform cutting to accomplish removals neatly and as specified for cutting new work.
 - 3. Repair adjacent construction and finishes damaged during removal work.
 - 4. Patch as specified for patching new work.

3.05 ARTIFICIAL SLATE ROOF DEMOLITION

- A. Protect gutter and down spouts from damage during demolition.
- B. Suppress dust from demolition.
- C. After exposure of roof sheathing, place underlayment in accordance with specification 07 31 13.

3.06 DEBRIS AND WASTE REMOVAL

- A. Contractor to provide a sequence plan of work for approval by Owner.
- B. Identify location of dumpsters on sequence plan of work.
- C. Remove debris, junk, and trash from site.
- D. Remove from site all materials not to be reused on site; comply with requirements of Section 01 74 19 - Waste Management.
- E. Leave site in clean condition, ready for subsequent work.
- F. Do not allow wind-blown debris. Remove all loose debris at end of the day.

END OF SECTION

SECTION 03 10 00

CONCRETE FORMING AND ACCESSORIES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Formwork for cast-in place concrete, with shoring, bracing and anchorage.
- B. Openings for other work.
- C. Form accessories.
- D. Form stripping.

1.02 RELATED REQUIREMENTS

- A. Section 03 20 00 - Concrete Reinforcing.
- B. Section 03 30 00 - Cast-in-Place Concrete.
- C. See Structural Drawings for additional Project Specifications. If Conflicting Project Specifications arise, the Project Specifications on the Structural Drawings govern.
- D. Section 05 12 00 - Structural Steel: Placement of embedded steel anchors and plates in cast-in-place concrete.

1.03 REFERENCE STANDARDS

- A. ACI 117 - Standard Specifications for Tolerances for Concrete Construction and Materials.
- B. ACI 301 - Specifications for Structural Concrete for Buildings; American Concrete Institute.
- C. ACI 318 - Building Code Requirements for Structural Concrete and Commentary; American Concrete Institute.
- D. ACI 347 - Guide to Formwork for Concrete; American Concrete Institute.
- E. PS 1 - Structural Plywood.

1.04 DESIGN REQUIREMENTS

- A. Design and construct formwork, shoring and bracing to conform to code requirements; resultant concrete to conform to required shape, line and dimension.

1.05 SUBMITTALS

- A. See Section 01 33 00 - Administrative Requirements, for submittal procedures.

1.06 QUALITY ASSURANCE

- A. Perform work of this section in accordance with ACI 347, ACI 301, and ACI 318.

1.07 REGULATORY REQUIREMENTS

- A. Conform to applicable code for design, fabrication, erection and removal of formwork.

1.08 DELIVERY, STORAGE, AND HANDLING

- A. Deliver void forms and installation instructions in manufacturer's packaging.

- B. Store void forms off ground in ventilated and protected manner to prevent deterioration from moisture.

PART 2 PRODUCTS

2.01 FORMWORK - GENERAL

- A. Provide concrete forms, accessories, shoring, and bracing as required to accomplish cast-in-place concrete work.
- B. Design and construct to provide resultant concrete that conforms to design with respect to shape, lines, and dimensions.
- C. Comply with applicable State and local codes with respect to design, fabrication, erection, and removal of formwork.

2.02 WOOD FORM MATERIALS

- A. Softwood Plywood: PS 1, B-B High Density Concrete Form Overlay, Class I.
- B. Lumber: HEM-FIR species; #2 grade; with grade stamp clearly visible.

2.03 PREFABRICATED FORMS

- A. Preformed Steel Forms: Minimum 16 gage matched, tight fitting, stiffened to support weight of concrete without deflection detrimental to tolerances and appearance of finished surfaces.

2.04 FORMWORK ACCESSORIES

- A. Form Ties: Removable or snapp off type, galvanized metal or plastic, fixed or adjustable length, cone type, free of defects that could leave holes larger than 1 inch in concrete surface.
- B. Form Release Agent: Capable of releasing forms from hardened concrete without staining or discoloring concrete or forming bugholes and other surface defects, compatible with concrete and form materials, and not requiring removal for satisfactory bonding of coatings to be applied.
- C. Form Release Agent: Colorless mineral oil that will not stain concrete, absorb moisture, impair natural bonding of concrete finish coatings, or affect color characteristics of concrete finish coatings.
- D. Dovetail Anchor Slot: Galvanized steel, 22 gage thick, foam filled, release tape sealed slots, anchors for securing to concrete formwork.
- E. Flashing Reglets: Galvanized steel or Rigid PVC, 22 gage thick, longest possible lengths, with alignment splines for joints, foam filled, release tape sealed slots, anchors for securing to concrete formwork.
- F. Nails, Spikes, Lag Bolts, Through Bolts, Anchorages: Sized as required, of sufficient strength and character to maintain formwork in place while placing concrete.
- G. Embedded Anchor Shapes, Plates, Angles and Bars: As specified in Section 05 12 00.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify lines, levels and centers before proceeding with formwork. Ensure that dimensions agree with drawings.

3.02 ERECTION - FORMWORK

- A. Erect formwork, shoring and bracing to achieve design requirements, in accordance with requirements of ACI 301.
- B. Provide bracing to ensure stability of formwork. Shore or strengthen formwork subject to overstressing by construction loads.
- C. Arrange and assemble formwork to permit dismantling and stripping. Do not damage concrete during stripping. Permit removal of remaining principal shores.
- D. Align joints and make watertight. Keep form joints to a minimum.
- E. Obtain approval before framing openings in structural members that are not indicated on drawings.
- F. Provide fillet strips on external corners of beams, joists, and columns.
- G. Install void forms in accordance with manufacturer's recommendations. Protect forms from moisture or crushing.
- H. Coordinate this section with other sections of work that require attachment of components to formwork.
- I. If formwork is placed after reinforcement, resulting in insufficient concrete cover over reinforcement, request instructions from StudioJAED before proceeding.

3.03 APPLICATION - FORM RELEASE AGENT

- A. Apply form release agent on formwork in accordance with manufacturer's recommendations.
- B. Apply prior to placement of reinforcing steel, anchoring devices, and embedded items.
- C. Do not apply form release agent where concrete surfaces will receive special finishes or applied coverings that are affected by agent. Soak inside surfaces of untreated forms with clean water. Keep surfaces coated prior to placement of concrete.

3.04 INSERTS, EMBEDDED PARTS, AND OPENINGS

- A. Provide formed openings where required for items to be embedded in passing through concrete work.
- B. Locate and set in place items that will be cast directly into concrete.
- C. Coordinate with work of other sections in forming and placing openings, slots, reglets, recesses, sleeves, bolts, anchors, other inserts, and components of other work.
- D. Position recessed anchor slots for brick veneer masonry anchors to spacing and intervals specified in Section 04 20 00.
- E. Install accessories in accordance with manufacturer's instructions, so they are straight, level, and plumb. Ensure items are not disturbed during concrete placement.
- F. Provide temporary ports or openings in formwork where required to facilitate cleaning and inspection. Locate openings at bottom of forms to allow flushing water to drain.
- G. Close temporary openings with tight fitting panels, flush with inside face of forms, and neatly fitted so joints will not be apparent in exposed concrete surfaces.

3.05 FORM CLEANING

- A. Clean forms as erection proceeds, to remove foreign matter within forms.
- B. Clean formed cavities of debris prior to placing concrete.
 - 1. Flush with water or use compressed air to remove remaining foreign matter. Ensure that water and debris drain to exterior through clean-out ports.
 - 2. During cold weather, remove ice and snow from within forms. Do not use de-icing salts. Do not use water to clean out forms, unless formwork and concrete construction proceed within heated enclosure. Use compressed air or other means to remove foreign matter.

3.06 FORMWORK TOLERANCES

- A. Construct formwork to maintain tolerances required by ACI 117.

3.07 FIELD QUALITY CONTROL

- A. Inspect erected formwork, shoring, and bracing to ensure that work is in accordance with formwork design, and to verify that supports, fastenings, wedges, ties, and items are secure.
- B. Do not reuse wood formwork more than 2 times for concrete surfaces to be exposed to view. Do not patch formwork.

3.08 FORM REMOVAL

- A. Do not remove forms or bracing until concrete has gained sufficient strength to carry its own weight and imposed loads.
- B. Loosen forms carefully. Do not wedge pry bars, hammers, or tools against finish concrete surfaces scheduled for exposure to view.
- C. Store removed forms to prevent damage to form materials or to fresh concrete. Discard damaged forms.

END OF SECTION

SECTION 03 20 00

CONCRETE REINFORCING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Reinforcing steel for cast-in-place concrete.
- B. Supports and accessories for steel reinforcement.

1.02 RELATED REQUIREMENTS

- A. Section 03 10 00 - Concrete Forming and Accessories.
- B. Section 03 30 00 - Cast-in-Place Concrete.
- C. Section 04 20 00 - Unit Masonry: Reinforcement for masonry.
- D. See Structural Drawings for additional Project Specifications. If Conflicting Project Specifications arise, the Project Specifications on the Structural Drawings govern.

1.03 REFERENCE STANDARDS

- A. ACI 301 - Specifications for Structural Concrete for Buildings; American Concrete Institute International.
- B. ACI 318 - Building Code Requirements For Structural Concrete and Commentary; American Concrete Institute International.
- C. ACI SP-66 - ACI Detailing Manual; American Concrete Institute International.
- D. ASTM A82/A82M - Standard Specification for Steel Wire, Plain, for Concrete Reinforcement.
- E. ASTM A184/A184M - Standard Specification for Welded Deformed Steel Bar Mats for Concrete Reinforcement.
- F. ASTM A185/A185M - Standard Specification for Steel Welded Wire Reinforcement, Plain, for Concrete.
- G. ASTM A615/A615M - Standard Specification for Deformed and Plain Billet-Steel Bars for Concrete Reinforcement.
- H. ASTM A641/A641M - Standard Specification for Zinc-Coated (Galvanized) Carbon Steel Wire.
- I. ASTM A704/A704M - Standard Specification for Welded Steel Plain Bar or Rod Mats for Concrete Reinforcement.
- J. ASTM A706/A706M - Standard Specification for Low-Alloy Steel Deformed and Plain Bars for Concrete Reinforcement.
- K. ASTM A767/A767M - Standard Specification for Zinc-Coated (Galvanized) Steel Bars for Concrete Reinforcement.
- L. ASTM A775/A775M - Standard Specification for Epoxy-Coated Steel Reinforcing Bars.
- M. ASTM A884/A884M - Standard Specification for Epoxy-Coated Steel Wire and Welded Wire Reinforcement.

- N. ASTM A996/A996M - Standard Specification for Rail-Steel and Axle-Steel Deformed Bars for Concrete Reinforcement.
- O. ASTM D3963/D3963M - Standard Specification for Fabrication and Jobsite Handling of Epoxy Coated Reinforcing Steel Bars.
- P. AWS D1.4/D1.4M - Structural Welding Code - Reinforcing Steel; American Welding Society.
- Q. CRSI (DA4) - Manual of Standard Practice; Concrete Reinforcing Steel Institute.
- R. CRSI (P1) - Placing Reinforcing Bars; Concrete Reinforcing Steel Institute.

1.04 SUBMITTALS

See Section 01 33 00 - Administrative Requirements, for submittal procedures.

- A. Shop Drawings: Comply with requirements of ACI SP-66. Include bar schedules, shapes of bent bars, spacing of bars, and location of splices.
 - 1. Prepare shop drawings under supervision of a Professional Structural Engineer experienced in design of work of this type and licensed in DE.
- B. Manufacturer's Certificate: Certify that reinforcing steel and accessories, products supplied for this project meet or exceed specified requirements.
- C. Reports: Submit certified copies of mill test report of reinforcement materials analysis.

1.05 QUALITY ASSURANCE

- A. Perform work of this section in accordance with ACI 301.
 - 1. Maintain one copy of each document on project site.
- B. Provide StudioJAED with access to fabrication plant to facilitate inspection of reinforcement. Provide notification of commencement and duration of shop fabrication in sufficient time to allow inspection.
- C. Welders' Certificates: Submit certifications for welders employed on the project, verifying AWS qualification within the previous 12 months.

PART 2 PRODUCTS

2.01 REINFORCEMENT

- A. Reinforcing Steel: ASTM A615/A615M Grade 60 (420).
 - 1. Plain billet-steel bars.
- B. Reinforcing Steel Mat: ASTM A704/A704M, using ASTM A 615/A 615M, Grade 60 (420) steel bars or rods, unfinished.
- C. Stirrup Steel: ASTM A82/A82M steel wire, galvanized in accordance with ASTM A 641/A 641M, regular coating.
- D. Steel Welded Wire Reinforcement: Galvanized ASTM A 185/A 185M, plain type.
 - 1. Flat Sheets.
 - 2. Mesh Size and Wire Gage: As indicated on drawings.
- E. Reinforcement Accessories:
 - 1. Tie Wire: Annealed, minimum 16 gage.
 - 2. Chairs, Bolsters, Bar Supports, Spacers: Sized and shaped for adequate support of

reinforcement during concrete placement.

3. Provide galvanized components for placement within 1-1/2 inches of weathering surfaces.

2.02 FABRICATION

- A. Fabricate concrete reinforcing in accordance with CRSI (DA4) - Manual of Standard Practice.
- B. Welding of reinforcement is permitted only with the specific approval of StudioJAED. Perform welding in accordance with AWS D1.4.
- C. Fabricate and handle epoxy-coated reinforcing in accordance with ASTM D3963/D3963M.
- D. Locate reinforcing splices not indicated on drawings at point of minimum stress.
 1. Review locations of splices with StudioJAED.

PART 3 EXECUTION

3.01 PLACEMENT

- A. Place, support and secure reinforcement against displacement. Do not deviate from required position.
- B. Do not displace or damage vapor barrier.
- C. Accommodate placement of formed openings.
- D. Conform to applicable code for concrete cover over reinforcement.
- E. Bond and ground all reinforcement to requirements of Section 26 05 26.

3.02 FIELD QUALITY CONTROL

- A. Inspect installed reinforcement for conformance to contract documents before concrete placement.

END OF SECTION

SECTION 03 30 00

CAST-IN-PLACE CONCRETE

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Floors and slabs on grade.
- B. Concrete foundations.
- C. Joint devices associated with concrete work.

1.02 RELATED REQUIREMENTS

- A. Section 03 10 00 - Concrete Forming and Accessories: Forms and accessories for formwork.
- B. Section 03 20 00 - Concrete Reinforcing.
- C. Section 03 39 00 - Concrete Curing.
- D. Section 07 90 05 - Joint Sealers: Sealants for saw cut joints and isolation joints in slabs.
- E. See Structural Drawings for additional Project Specifications. If Conflicting Project Specifications arise, the Project Specifications on the Structural Drawings govern.

1.03 REFERENCE STANDARDS

- A. ACI 117 - Standard Specifications for Tolerances for Concrete Construction and Materials; American Concrete Institute International.
- B. ACI 211.1 - Standard Practice for Selecting Proportions for Normal, Heavyweight, and Mass Concrete; American Concrete Institute International.
- C. ACI 301 - Specifications for Structural Concrete for Buildings; American Concrete Institute International.
- D. ACI 302.1R - Guide for Concrete Floor and Slab Construction; American Concrete Institute International.
- E. ACI 304R - Guide for Measuring, Mixing, Transporting, and Placing Concrete; American Concrete Institute International.
- F. ACI 305R - Hot Weather Concreting; American Concrete Institute International.
- G. ACI 306R - Cold Weather Concreting; American Concrete Institute International.
- H. ACI 308R - Guide to Curing Concrete; American Concrete Institute International.
- I. ACI 318 - Building Code Requirements for Structural Concrete and Commentary; American Concrete Institute International.
- J. ACI 347 - Guide to Formwork for Concrete; American Concrete Institute International.
- K. ASTM A185/A185M - Standard Specification for Steel Welded Wire Reinforcement, Plain, for Concrete.
- L. ASTM A615/A615M - Standard Specification for Deformed and Plain Billet-Steel Bars for Concrete Reinforcement.

- M. ASTM C 33 - Standard Specification for Concrete Aggregates.
- N. ASTM C 39/C 39M - Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens.
- O. ASTM C 94/C 94M - Standard Specification for Ready-Mixed Concrete.
- P. ASTM C 143/C 143M - Standard Test Method for Slump of Hydraulic-Cement Concrete.
- Q. ASTM C 150 - Standard Specification for Portland Cement.
- R. ASTM C171 - Standard Specification for Sheet Materials for Curing Concrete.
- S. ASTM C 173/C 173M - Standard Test Method for Air Content of Freshly Mixed Concrete by the Volumetric Method.
- T. ASTM C 260 - Standard Specification for Air-Entraining Admixtures for Concrete.
- U. ASTM C309 - Standard Specification for Liquid Membrane-Forming Compounds for Curing Concrete.
- V. ASTM C 494/C 494M - Standard Specification for Chemical Admixtures for Concrete.
- W. ASTM C618 - Standard Specification for Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use in Concrete.
- X. ASTM C 685/C 685M - Standard Specification for Concrete Made by Volumetric Batching and Continuous Mixing.
- Y. ASTM C 881/C 881M - Standard Specification for Epoxy-Resin-Base Bonding Systems for Concrete.
- Z. ASTM C1059/C1059M - Standard Specification for Latex Agents for Bonding Fresh to Hardened Concrete.
- AA. ASTM C 1107/C 1107M - Standard Specification for Packaged Dry, Hydraulic-Cement Grout (Nonshrink).
- AB. ASTM C 1240 - Standard Specification for Silica Fume Used in Cementitious Mixtures.
- AC. ASTM D 994 - Standard Specification for Preformed Expansion Joint Filler for Concrete (Bituminous Type).
- AD. ASTM D1751 - Standard Specification for Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Nonextruding and Resilient Bituminous Types).
- AE. ASTM E1155 - Standard Test Method for Determining F(F) Floor Flatness and F(L) Floor Levelness Numbers.
- AF. ASTM E 1155M - Standard Test Method for Determining F(F) Floor Flatness and F(L) Floor Levelness Numbers [Metric].
- AG. ASTM E1745 - Standard Specification for Plastic Water Vapor Retarders Used in Contact with Soil or Granular Fill under Concrete Slabs.
- AH. COE CRD-C 48 - Method of Test for Water Permeability of Concrete.

1.04 SUBMITTALS

- A. See Section 01 33 00 - Administrative Requirements, for submittal procedures.

- B. Product Data: Submit manufacturers' data on manufactured products showing compliance with specified requirements and installation instructions.
- C. Samples: Submit samples of underslab vapor retarder to be used.
- D. Manufacturer's Installation Instructions: For concrete accessories, indicate installation procedures and interface required with adjacent construction.
- E. Project Record Documents: Accurately record actual locations of embedded utilities and components that will be concealed from view upon completion of concrete work.

1.05 QUALITY ASSURANCE

- A. Perform work of this section in accordance with ACI 301 and ACI 318.
 - 1. Maintain one copy of each document on site.
- B. Follow recommendations of ACI 305R when concreting during hot weather.
- C. Follow recommendations of ACI 306R when concreting during cold weather.

PART 2 PRODUCTS

2.01 CONCRETE MATERIALS

- A. Cement: ASTM C 150, Type I - Normal, Type IA - Air Entraining, Type III - High Early Strength, Type IIIA - Air Entraining Strength, Type IIIA - Air Entraining Portland type.
 - 1. Acquire all cement for entire project from same source.
- B. Fine and Coarse Aggregates: ASTM C 33.
 - 1. Acquire all aggregates for entire project from same source.
 - 2. Exposed aggregate concrete to be as shown on plans and as referenced in specification 03 35 23.
- C. Calcined Pozzolan: ASTM C618, Class N.
- D. Silica Fume: ASTM C1240, proportioned in accordance with ACI 211.1.
- E. Waterproofing Additive: Crystalline waterproofing intended for mixing into concrete to close concrete pores by growth of crystals, with no decrease in concrete strength or chemical resistance.
 - 1. Permeability of Cured Concrete: No measurable leakage when tested in accordance with COE CRD-C 48 at 350 feet of head; provide test reports.
- F. Water: Clean and not detrimental to concrete.
- G. Fiber Reinforcement: Alkali -resistant glass fiber, Synthetic fiber shown to have long-term resistance to deterioration when exposed to moisture and alkalis; 1/2 inch length.
 - 1. Acceptable Products:
 - a. Fibrasol F; Axim concrete technologies.
 - b. Fibermesh; Fibermesh, Div. of Synthetic Industries.
 - c. Grace Fibers, W.R. Grace & Co.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 CHEMICAL ADMIXTURES

- A. Chemical Admixture Manufacturers:
 - 1. W.R. Grace and Compan.
 - 2. Substitutions: See Section 01 60 00 - Product Requirements.

- B. Do not use chemicals that will result in soluble chloride ions in excess of 0.1 percent by weight of cement.
- C. Air Entrainment Admixture: ASTM C260.
 - 1. Acceptable Products:
 - a. Darex by W.R. Grace & Co.
 - b. Substitutions: See Section 01 60 00 - Product Requirements.
- D. High Range Water Reducing and Retarding Admixture: ASTM C494/C494M Type G.
 - 1. Acceptable Products:
 - a. ADVA 140 M by W.R. Grace & Co.
 - b. Substitutions: See Section 01 60 00 - Product Requirements.
- E. High Range Water Reducing Admixture: ASTM C494/C494M Type F.
 - 1. Acceptable Products:
 - a. Daracem 19 by W.R. Grace & Co.
 - b. Substitutions: See Section 01 60 00 - Product Requirements.
- F. Water Reducing and Accelerating Admixture: ASTM C494/C494M Type E.
 - 1. Acceptable Products:
 - a. Plastocrete 161W by Sika Corp.
 - b. Substitutions: See Section 01 60 00 - Product Requirements.
- G. Water Reducing and Retarding Admixture: ASTM C494/C494M Type D.
 - 1. Acceptable Products:
 - a. Darex W.R. Grace & Co.
 - b. Substitutions: See Section 01 60 00 - Product Requirements.
- H. Accelerating Admixture: ASTM C494/C494M Type C.
 - 1. Acceptable Products:
 - a. Polar Set by W.R. Grace & Co.
 - b. Substitutions: See Section 01 60 00 - Product Requirements.
- I. Retarding Admixture: ASTM C494/C494M Type B.
 - 1. Acceptable Products:
 - a. Daratard 17 by W.R. Grace & Co.
 - b. Substitutions: See Section 01 60 00 - Product Requirements.
- J. Water Reducing Admixture: ASTM C494/C494M Type A.
 - 1. Acceptable Products:
 - a. WRDA by W.R. Grace & Co
 - b. Substitutions: See Section 01 60 00 - Product Requirements.

2.03 ACCESSORY MATERIALS

- A. Underslab Vapor Retarder: Multi-layer, fabric-, cord-, grid-, or aluminum-reinforced polyethylene or equivalent, complying with ASTM E1745, Class A; stated by manufacturer as suitable for installation in contact with soil or granular fill under concrete slabs. Single ply polyethylene is prohibited.
 - 1. Accessory Products: Vapor retarder manufacturer's recommended tape, adhesive, mastic, prefabricated boots, etc., for sealing seams and penetrations in vapor retarder.
 - 2. Acceptable Products:
 - a. Premoulded Membrane Vapor Seal by W.R. Meadow, Inc.
- B. Chemical Hardener: Fluosilicate solution designed for densification of cured concrete slabs.

- C. Non-Shrink Cementitious Grout: ASTM C1107/C1107M; premixed compound consisting of non-metallic aggregate, cement, water reducing and plasticizing agents.
 - 1. Minimum Compressive Strength at 48 Hours: 2,400 psi.
 - 2. Minimum Compressive Strength at 28 Days: 7,000 psi.
 - 3. Flowable Products:
 - a. Sika Grout 212 by Sika Corp.
 - b. Substitutions: See Section 01 60 00 - Product Requirements.
- D. Curing Materials: Comply with requirements of Section 03 39 00.
- E. Moisture-Retaining Cover: ASTM C 171; regular curing paper, white curing paper, clear polyethylene, white polyethylene, or white burlap-polyethylene sheet.
- F. Liquid Curing Compound: ASTM C 309, Type 1, clear or translucent; 1-D, clear or translucent with fugitive dye; or 2, white pigmented.
 - 1. Acceptable Products:
 - a. Cure - N - Seal by Sealkret.

2.04 BONDING AND JOINTING PRODUCTS

- A. Latex Bonding Agent: Non-redispersible acrylic latex, complying with ASTM C1059 Type II.
 - 1. Acceptable Products:
 - a. A-H Poli - tite by Anti - Hydro International, Inc.
 - b. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Epoxy Bonding System: Complying with ASTM C881/C881M and of Type required for specific application.
 - 1. Acceptable Products:
 - a. Sikadur 32, Hi-Mod by Sika Corp.
 - b. Substitutions: See Section 01 60 00 - Product Requirements.
- C. Slab Isolation Joint Filler: 1/2 inch thick, height equal to slab thickness, with removable top section that will form 1/2 inch deep sealant pocket after removal.
- D. Joint Filler: Nonextruding, resilient asphalt impregnated fiberboard, felt, or cork, complying with ASTM D 1751, thickness as indicated on drawings and width/depth as indicated.
 - 1. Acceptable Product: Provide Fiber expansion joint manufactured by W.R. Meadows.
- E. Slab Construction Joint Devices: Combination keyed joint form and screed, galvanized steel, with minimum 1 inch diameter holes for conduit or rebars to pass through at 6 inches on center; ribbed steel stakes for setting.
 - 1. Provide removable plastic cap strip that forms wedge-shaped joint for sealant installation.
 - 2. Height: To suit slab thickness.
 - 3. Manufacturers:
 - a. Form - A- Key Products.
 - b. Substitutions: See Section 01 60 00 - Product Requirements.
- F. Sealant and Primer: As specified in Section 07 90 05.

2.05 CONCRETE MIX DESIGN

- A. Proportioning Normal Weight Concrete: Comply with ACI 211.1 recommendations.
- B. Concrete Strength: Establish required average strength for each type of concrete on the basis of field experience or trial mixtures, as specified in ACI 301.

1. For trial mixtures method, employ independent testing agency acceptable to StudioJAED for preparing and reporting proposed mix designs.
- C. Admixtures: Add acceptable admixtures as recommended in ACI 211.1 and at rates recommended by manufacturer.
- D. Fiber Reinforcement: Add to mix at rate of 1.5 pounds per cubic yard, or as recommended by manufacturer for specific project conditions.
- E. Normal Weight Concrete:
 1. Compressive Strength, when tested in accordance with ASTM C39/C39M at 28 days: As indicated on drawings.
 2. Fly Ash Content: Maximum 15 percent of cementitious materials by weight.
 3. Calcined Pozzolan Content: Maximum 10 percent of cementitious materials by weight.
 4. Silica Fume Content: Maximum 5 percent of cementitious materials by weight.
 5. Cement Content: Minimum 526 lb per cubic yard.
 6. Water-Cement Ratio: Maximum .40 percent by weight.
 7. Total Air Content: 6 percent, determined in accordance with ASTM C173/C173M.
 8. Maximum Slump: 4 inches.
 9. Maximum Aggregate Size: 3/4 inch.

2.06 MIXING

- A. Transit Mixers: Comply with ASTM C94/C94M.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify lines, levels, and dimensions before proceeding with work of this section.

3.02 PREPARATION

- A. Verify that forms are clean and free of rust before applying release agent.
- B. Coordinate placement of embedded items with erection of concrete formwork and placement of form accessories.
- C. Where new concrete is to be bonded to previously placed concrete, prepare existing surface by cleaning with steel brush and applying bonding agent in accordance with manufacturer's instructions.
 1. Use epoxy bonding system for bonding to damp surfaces, for structural load-bearing applications, and where curing under humid conditions is required.
 2. Use latex bonding agent only for non-load-bearing applications.
- D. Where new concrete with integral waterproofing is to be bonded to previously placed concrete, prepare surfaces to be treated in accordance with waterproofing manufacturer's instructions. Saturate cold joint surface with clean water, and remove excess water before application of coat of waterproofing admixture slurry. Apply slurry coat uniformly with semi-stiff bristle brush at rate recommended by waterproofing manufacturer.
- E. In locations where new concrete is doweled to existing work, drill holes in existing concrete, insert steel dowels and pack solid with non-shrink grout.

- F. Interior Slabs on Grade: Install vapor retarder under interior slabs on grade. Lap joints minimum 6 inches. Seal joints, seams and penetrations watertight with manufacturer's recommended products and follow manufacturer's written instructions. Repair damaged vapor retarder before covering.

3.03 PLACING CONCRETE

- A. Place concrete in accordance with ACI 304R.
- B. Place concrete for floor slabs in accordance with ACI 302.1R.
- C. Notify StudioJAED not less than 24 hours prior to commencement of placement operations.
- D. Ensure reinforcement, inserts, embedded parts, and formed construction joint devices will not be disturbed during concrete placement.
- E. Finish floors level and flat, unless otherwise indicated, within the tolerances specified below.

3.04 SLAB JOINTING

- A. Locate joints as indicated on the drawings.
- B. Anchor joint fillers and devices to prevent movement during concrete placement.
- C. Isolation Joints: Use preformed joint filler with removable top section for joint sealant, total height equal to thickness of slab, set flush with top of slab.

3.05 FLOOR FLATNESS AND LEVELNESS TOLERANCES

- A. Correct defects by grinding or by removal and replacement of the defective work. Areas requiring corrective work will be identified. Re-measure corrected areas by the same process.

3.06 CONCRETE FINISHING

- A. Repair surface defects, including tie holes, immediately after removing formwork.
- B. Exposed Form Finish: Rub down or chip off and smooth fins or other raised areas 1/8 inch or more in height. Provide finish as follows:
 - 1. Smooth Rubbed Finish: Wet concrete, fill all defects with grout. Wet rub with carborundum brick or other abrasive, not more than 2 hours after form removal.
 - a. This is standard finish for project, including areas to receive sand blasting, unless noted otherwise.
 - 2. Cork Floated Finish: Immediately after form removal, apply grout with trowel or firm rubber float; compress grout with low-speed grinder, and apply final texture with cork float.
- C. Concrete Slabs: Finish to requirements of ACI 302.1R, and as follows:
 - 1. Surfaces to Receive Thin Floor Coverings: "Steel trowel" as described in ACI 301.1R; thin floor coverings include carpeting, resilient flooring, seamless flooring, thin set quarry tile, and thin set ceramic tile.
 - 2. Other Surfaces to Be Left Exposed: "Steel trowel" as described in ACI 302.1R, minimizing burnish marks and other appearance defects.
 - a. Chemical Hardener: After slab has cured, apply water-diluted hardener in three coats per manufacturer's instructions, allowing 24 hours between coats.
- D. In areas with floor drains, maintain floor elevation at walls; pitch surfaces uniformly to drains as indicated on drawings.
- E. Exterior Concrete Finishes:

1. Sidewalks, pads, and ramps: Aluminum float, trowel, and broom finish perpendicular to line of travel.

3.07 FIELD QUALITY CONTROL

- A. Submit proposed mix design of each class of concrete to inspection and testing firm for review prior to commencement of concrete operations.
- B. Testing agency will perform field quality control tests.
- C. Tests of concrete and concrete materials may be performed at any time to ensure conformance with specified requirements.
- D. Compressive Strength Tests: ASTM C 39/C 39M. For each test, mold and cure four concrete test cylinders. Obtain test samples for every 50 cu yd or less of each class of concrete placed, each day.
- E. Take one additional test cylinder during cold weather concreting, cured on job site under same conditions as concrete it represents.
- F. Perform one slump test for each set of test cylinders taken, following procedures of ASTM C143/C143M.

3.08 DEFECTIVE CONCRETE

- A. Test Results: The testing agency shall report test results in writing to StudioJAED and Contractor within 24 hours of test.
- B. Defective Concrete: Concrete not conforming to required lines, details, dimensions, tolerances or specified requirements.
- C. Repair or replacement of defective concrete will be determined by the StudioJAED. The cost of additional testing shall be borne by Contractor when defective concrete is identified.
- D. Do not patch, fill, touch-up, repair, or replace exposed concrete except upon express direction of StudioJAED for each individual area.

END OF SECTION

SECTION 04 05 11

MASONRY MORTARING AND GROUTING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Mortar for masonry.
- B. Grout for masonry.

1.02 RELATED REQUIREMENTS

- A. Section 04 20 00 - Unit Masonry: Installation of mortar and grout.
- B. See Structural Drawings for additional Project Specifications. If Conflicting Project Specifications arise, the Project Specifications on the Structural Drawings govern.

1.03 REFERENCE STANDARDS

- A. ACI 530/530.1/ERTA - Building Code Requirements and Specification for Masonry Structures; American Concrete Institute International.
- B. ACI 530.1/ASCE 6/TMS 602 - Specification for Masonry Structures; American Concrete Institute International.
- C. ASTM C 5 - Standard Specification for Quicklime for Structural Purposes.
- D. ASTM C 94/C 94M - Standard Specification for Ready-Mixed Concrete.
- E. ASTM C144 - Standard Specification for Aggregate for Masonry Mortar.
- F. ASTM C 150 - Standard Specification for Portland Cement.
- G. ASTM C207 - Standard Specification for Hydrated Lime for Masonry Purposes.
- H. ASTM C 270 - Standard Specification for Mortar for Unit Masonry.
- I. ASTM C404 - Standard Specification for Aggregates for Masonry Grout.
- J. ASTM C 476 - Standard Specification for Grout for Masonry.
- K. ASTM C 780 - Standard Test Method for Preconstruction and Construction Evaluation of Mortars for Plain and Reinforced Unit Masonry.
- L. ASTM C 1019 - Standard Test Method for Sampling and Testing Grout.
- M. ASTM C 1072 - Standard Test Method for Measurement of Masonry Flexural Bond Strength.
- N. ASTM C 1314 - Standard Test Method for Compressive Strength of Masonry Prisms.
- O. ASTM E 518 - Standard Test Methods for Flexural Bond Strength of Masonry.
- P. IMIAWC (CW) - Recommended Practices & Guide Specifications for Cold Weather Masonry Construction; International Masonry Industry All-Weather Council.
- Q. IMIAWC (HW) - Recommended Practices & Guide Specifications for Hot Weather Masonry Construction; International Masonry Industry All-Weather Council.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Include design mix based on the Proportion specification of ASTM C 270 is to be used.
- C. Manufacturer's Certificate: Certify that products meet or exceed specified requirements.

1.05 QUALITY ASSURANCE

- A. Comply with provisions of ACI 530/ASCE 5/TMS 402, except where exceeded by requirements of the contract documents.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Maintain packaged materials clean, dry, and protected against dampness, freezing, and foreign matter.

1.07 FIELD CONDITIONS

- A. Maintain materials and surrounding air temperature to minimum 40 degrees F prior to, during, and 48 hours after completion of masonry work.
- B. Maintain materials and surrounding air temperature to maximum 90 degrees F prior to, during, and 48 hours after completion of masonry work.

PART 2 PRODUCTS

2.01 MATERIALS

- A. Portland Cement: ASTM C 150, Type I - Normal; color as required to produce approved color sample. Color must match existing building mortar color.
- B. Hydrated Lime: ASTM C207, Type S.
- C. Quicklime: ASTM C5, non-hydraulic type.
- D. Mortar Aggregate: ASTM C144.
- E. Grout Aggregate: ASTM C404.
- F. Pigments for Colored Mortar: Pure, concentrated mineral pigments specifically intended for mixing into mortar and complying with ASTM C979.
 - 1. Color(s): As selected by StudioJAED from manufacturer's full range, to match existing mortar.
 - 2. Manufacturers:
 - a. Davis Colors
 - b. Lambert Corporation
 - c. Solomon Colors
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
- G. Water: Clean and potable.
- H. Accelerating Admixture: Nonchloride type for use in cold weather.
 - 1. Substitutions: Not permitted.

2.02 MORTAR MIXES

- A. Mortar for Unit Masonry: ASTM C270, Proportion Specification.
 - 1. Engineered masonry: Type S.
 - 2. Masonry below grade and in contact with earth: Type S.

3. Exterior, loadbearing masonry: Type S.
4. Exterior, non-loadbearing masonry: Type S.
5. Interior, loadbearing masonry: Type S.
6. Interior, non-loadbearing masonry: Type N.

2.03 MORTAR MIXING

- A. Thoroughly mix mortar ingredients using mechanical batch mixer, in accordance with ASTM C270 and in quantities needed for immediate use.
- B. Maintain sand uniformly damp immediately before the mixing process.
- C. Add mortar color in accordance with manufacturer's instructions. Provide uniformity of mix and coloration.
- D. Do not use anti-freeze compounds to lower the freezing point of mortar.
- E. If water is lost by evaporation, re-temper only within two hours of mixing.
- F. Use mortar within two hours after mixing at temperatures of 90 degrees F, or two-and-one-half hours at temperatures under 40 degrees F.

2.04 GROUT MIXES

- A. Bond Beams, Lintels, and Grouted Cores: 3,000 psi strength at 28 days; 8-10 inches slump; provide premixed type in accordance with ASTM C 94/C 94M.
 1. Fine grout for spaces with smallest horizontal dimension of 2 inches or less.
 2. Coarse grout for spaces with smallest horizontal dimension greater than 2 inches.
- B. Engineered Masonry: 3,000 psi strength at 28 days; 8-10 inches slump; provide premixed type in accordance with ASTM C 94/C 94M.
 1. Fine grout for spaces with smallest horizontal dimension of 2 inches or less.
 2. Coarse grout for spaces with smallest horizontal dimension greater than 2 inches.

2.05 GROUT MIXING

- A. Mix grout in accordance with ASTM C94/C94M.
- B. Add admixtures in accordance with manufacturer's instructions; mix uniformly.
- C. Do not use anti-freeze compounds to lower the freezing point of grout.

PART 3 EXECUTION

3.01 PREPARATION

- A. Apply bonding agent to existing Masonry surfaces.
- B. Plug clean-out holes for grouted masonry with Brick or block masonry units. Brace masonry to resist wet grout pressure.

3.02 INSTALLATION

- A. Install mortar and grout to requirements of section(s) in which masonry is specified.
- B. Work grout into masonry cores and cavities to eliminate voids.
- C. Do not install grout in lifts greater than 16 inches without consolidating grout by rodding.
- D. Do not displace reinforcement while placing grout.

- E. Remove excess mortar from grout spaces.

3.03 GROUTING

- A. Perform all grouting by means of low-lift technique. Do not employ high-lift grouting.
- B. Low-Lift Grouting:
 - 1. Limit height of pours to 16 inches.
 - 2. Limit height of masonry to 16 inches above each pour.
 - 3. Pour grout only after vertical reinforcing is in place; place horizontal reinforcing as grout is poured. Prevent displacement of bars as grout is poured.
 - 4. Place grout for each pour continuously and consolidate immediately; do not interrupt pours for more than 1-1/2 hours.

END OF SECTION

SECTION 04 20 00

UNIT MASONRY

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Concrete Block.
- B. Clay Facing Brick.
- C. Reinforcement and Anchorage.
- D. Installing Flashings.
- E. Lintels.
- F. Accessories.

1.02 RELATED REQUIREMENTS

- A. Section 03 20 00 - Concrete Reinforcing: Reinforcing steel for grouted masonry.
- B. Section 04 05 11 - Masonry Mortaring and Grouting.
- C. Section 05 50 00 - Metal Fabrications: Loose steel lintels and fabricated steel items.
- D. Section 07 10 00 - Fluid Applied Air and Vapor Barrier System.
- E. Section 07 21 00 - Thermal Insulation: Insulation for cavity spaces.
- F. Section 07 21 23 - Loose Fill Insulation: Granular insulation for masonry unit cores.
- G. Section 07 84 00 - Firestopping: Firestopping at penetrations of fire-rated masonry and at top of fire-rated walls.
- H. Section 07 90 05 - Joint Sealers: Backing rod and sealant at control and expansion joints.
- I. See Structural Drawings for additional Project Specifications. If Conflicting Project Specifications arise, the Project Specifications on the Structural Drawings govern.

1.03 REFERENCE STANDARDS

- A. ACI 530/530.1/ERTA - Building Code Requirements and Specification for Masonry Structures; American Concrete Institute International.
- B. ACI 530.1/ASCE 6/TMS 602 - Specification For Masonry Structures; American Concrete Institute International.
- C. ASTM A82/A82M - Standard Specification for Steel Wire, Plain, for Concrete Reinforcement.
- D. ASTM A153/A153M - Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware.
- E. ASTM A580/A580M - Standard Specification for Stainless Steel Wire.
- F. ASTM A615/A615M - Standard Specification for Deformed and Plain Billet-Steel Bars for Concrete Reinforcement.
- G. ASTM A641/A641M - Standard Specification for Zinc-Coated (Galvanized) Carbon Steel Wire.

- H. ASTM A 653/A 653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.
- I. ASTM A 666 - Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar.
- J. ASTM B370 - Standard Specification for Copper Sheet and Strip for Building Construction.
- K. ASTM C 62 - Standard Specification for Building Brick (Solid Masonry Units Made From Clay or Shale).
- L. ASTM C67 - Standard Test Methods for Sampling and Testing Brick and Structural Clay Tile.
- M. ASTM C 90 - Standard Specification for Loadbearing Concrete Masonry Units.
- N. ASTM C129 - Standard Specification for Nonloadbearing Concrete Masonry Units.
- O. ASTM C 140 - Standard Test Methods of Sampling and Testing Concrete Masonry Units and Related Units.
- P. ASTM C144 - Standard Specification for Aggregate for Masonry Mortar.
- Q. ASTM C 150 - Standard Specification for Portland Cement.
- R. ASTM C207 - Standard Specification for Hydrated Lime for Masonry Purposes.
- S. ASTM C 216 - Standard Specification for Facing Brick (Solid Masonry Units Made From Clay or Shale).
- T. ASTM C 270 - Standard Specification for Mortar for Unit Masonry.
- U. ASTM C404 - Standard Specification for Aggregates for Masonry Grout.
- V. ASTM C 476 - Standard Specification for Grout for Masonry.
- W. ASTM C 652 - Standard Specification for Hollow Brick (Hollow Masonry Units Made From Clay or Shale).
- X. ASTM C 744 - Standard Specification for Prefaced Concrete and Calcium Silicate Masonry Units.
- Y. ASTM C 780 - Standard Test Method for Preconstruction and Construction Evaluation of Mortars for Plain and Reinforced Unit Masonry.
- Z. IMIABC (CW) - Recommended Practices & Guide Specifications for Cold Weather Masonry Construction; International Masonry Industry All-Weather Council.
- AA. IMIABC (HW) - Recommended Practices & Guide Specifications for Hot Weather Masonry Construction; International Masonry Industry All-Weather Council.
- AB. UL (FRD) - Fire Resistance Directory; Underwriters Laboratories Inc..

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide data for masonry units, fabricated wire reinforcement, mortar, and masonry accessories.
- C. Samples: Submit four samples of facing brick and concrete block units to illustrate color, texture, and extremes of color range.

- D. Manufacturer's Certificate: Certify that masonry units and brick meet or exceed specified requirements.
- E. Certify that C.M.U. masonry units used in firewall assemblies are of minimum equivalent thickness of 4" and that there is no calcereous or siliceous gravel aggregate used.

1.05 QUALITY ASSURANCE

- A. Comply with provisions of ACI 530/530.1/ERTA, except where exceeded by requirements of the contract documents.
 - 1. Maintain one copy of each document on project site.
- B. Fire Rated Assemblies: Conform to applicable code for UL Assembly No. .

1.06 MOCK-UP

- A. Construct a masonry wall as a mock-up panel sized 8 feet long by 6 feet high; include mortar and accessories, structural backup, wall openings, flashings, wall insulation, parging, and damp proofing in mock-up.
- B. Locate where directed.
- C. Mock-up may remain as part of the Work.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, handle, and store masonry units by means that will prevent mechanical damage and contamination by other materials.

1.08 ENVIRONMENTAL REQUIREMENTS

- A. Maintain materials and surrounding air temperature to minimum 40 degrees F prior to, during, and 48 hours after completion of masonry work.
- B. Maintain materials and surrounding air temperature to maximum 90 degrees F prior to, during, and 48 hours after completion of masonry work.

1.09 EXTRA MATERIALS

- A. See Section 01 60 00 - Product Requirements, for additional provisions.
- B. Provide 50 of each size, color, and type of brick units for Seaford School District use in maintenance of project.

PART 2 PRODUCTS

2.01 CONCRETE MASONRY UNITS

- A. Concrete Block: Comply with referenced standards and as follows:
 - 1. Size: Standard units with nominal face dimensions of 16 x 8 inches and nominal depths as indicated on the drawings for specific locations.
 - 2. Special Shapes: Provide non-standard blocks configured for corners, lintels, headers, control joint edges, bond beams, and other detailed conditions.
 - 3. Load-Bearing Units: ASTM C90, normal weight.
 - a. Both hollow and solid block, as indicated.
 - 1) Supply grade N for all C.M.U construction.
 - b. Exposed faces: Manufacturer's standard color and texture where indicated. Corridor walls to have ground face block.
 - 4. Non-Loadbearing Units: ASTM C129.

- a. Both hollow and solid block, as indicated.
- b. Normal weight.
5. Ground Faced Units: ASTM C 90, hollow block, with smooth ground face complying with ASTM C 744.
 - a. Colors and styles: Standard options.
 - b. Manufacturer: Trenwyth; Product: Trendstone.
 - c. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 BRICK UNITS

- A. Manufacturers:
 1. Belden Brick Company: www.boralbricks.com.
 2. Endicott Clay Products Co: www.endicott.com.
 3. General Shale Brick: www.generalshale.com.
 4. Substitutions: See section 01 60 00 - Product requirements.
- B. Facing Brick: ASTM C216, Type FBX, Grade SW.
 1. Color and texture: to match existing brick.
 2. Actual size: to match existing brick].
 3. Compressive strength: Min. 2,500 p.s.i.; 5 brick average = 3,000 p.s.i, measured in accordance with ASTM C 67.

2.03 MORTAR AND GROUT MATERIALS

- A. Mortar and grout: As specified in Section 04 05 11.

2.04 REINFORCEMENT AND ANCHORAGE

- A. Manufacturers of Joint Reinforcement and Anchors:
 1. Dur-O-Wal: www.dur-o-wal.com.
 2. Hohmann & Barnard, Inc: www.h-b.com; = Design Basis.
 3. Masonry Reinforcing Corporation of America: www.wirebond.com.
 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Reinforcing Steel: Type specified in Section 03 20 00; size as indicated on drawings; uncoated finish.
- C. Single Wythe Joint Reinforcement: Truss or Ladder type; ASTM A 82/A 82M steel wire, hot dip galvanized after fabrication to ASTM A 153/A 153M, Class B-2; 0.1483 inch side rods with 0.1483 inch cross rods; width as required to provide not more than 1 inch and not less than 1/2 inch of mortar coverage on each exposure.
- D. Multiple Wythe Joint Reinforcement: Truss or Ladder type; ASTM A 82/A 82M steel wire, hot dip galvanized after fabrication to ASTM A 153/153M, Class B-2; 0.1483 inch side rods with 0.1483 inch cross rods; width as required to provide not more than 1 inch and not less than 1/2 inch of mortar coverage on each exposure.
- E. Adjustable Multiple Wythe Joint Reinforcement: Truss or Ladder type with adjustable ties spaced at 16 in on center and fabricated with moisture drip; ASTM A 82/A 82M steel wire, hot dip galvanized after fabrication to ASTM A 153/153M, Class B; or stainless steel wire conforming tot ASTM A 580/A 580M Type 304.0.1875 inch side rods with 0.1483 inch cross rods and adjustable components of 0.1875 inch wire; width of components as required to provide not more than 1 inch and not less than 1/2 inch of mortar coverage from each masonry face.
 1. Vertical adjustment: Not less than 2 inches.

2. Insulation Clips: Provide clips at tabs or ties designed to secure insulation against outer face of inner wythe of masonry.
- F. Strap Anchors: Bent steel shapes configured as required for specific situations, 2 in width, 0.1875 in thick, lengths as required to provide not more than 1 inch and not less than 1/2 inch of mortar coverage from masonry face, corrugated for embedment in masonry joint, hot dip galvanized to ASTM A 153/A 153M, Class B-2 or stainless steel.
- G. Flexible Anchors: 2-piece anchors that permit differential movement between masonry and building frame, sized to provide not more than 1 inch and not less than 1/2 inch of mortar coverage from masonry face.
 1. Steel frame: Crimped wire anchors for welding to frame, 0.25 inch thick, with trapezoidal wire ties 0.1875 inch thick, hot dip galvanized to ASTM A 153/A 153M, Class B-2.
- H. Two-Piece Wall Ties: Formed steel wire, 0.1875 inch thick, adjustable, eye and pintle type, hot dip galvanized to ASTM A 153/A 153M, Class B-2, sized to provide not more than 1 inch and not less than 1/2 inch of mortar coverage from masonry face and to allow vertical adjustment of up to 1-1/4 in.
- I. Masonry Veneer Anchors: 2-piece anchors that permit differential movement between masonry veneer and structural backup, hot dip galvanized to ASTM A 153/A 153M, Class B-2; stainless steel.
 1. Anchor channel: Not less than 0.120 inch thick, designed for fastening to structural backup by non corrodeable fasteners; Design Basis = Hohman & Barnard #362-C.
 2. Wire ties: Triangular; Trapezoidal; Rectangular or Manufacturer's standard shape, 0.1875 inch thick.
 3. Vertical adjustment: Not less than 3-1/2 inches.
 4. Seismic Feature: Provide lip, hook, or clip on end of wire ties to engage or enclose not less than one continuous horizontal joint reinforcement wire of 0.1875 inch diameter.

2.05 FLASHINGS

- A. Metal Flashing Materials: Polymer modified asphalt coated copper, 7oz/sq.ft. Provide "C-Coat" flashing by Hohmann & Bernard, or Architect approved equal.
- B. Lap Sealant: recommended by flashing manufacturer type.

2.06 ACCESSORIES

- A. Preformed Control Joints: Rubber or neoprene material.
 1. Manufacturers:
 - a. Dur-O-Wal: www.dur-o-wal.com.
 - b. Hohmann & Barnard, Inc (including Dur-O-Wal brand); Product RS or VS: www.h-b.com.
 - c. Masonry Reinforcing Corporation of America: www.wirebond.com.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Joint Filler: Closed cell polyethylene; polyurethane or rubber oversized 50 percent to joint width; self expanding; 1 inch wide design width x by maximum lengths available.
 1. Manufacturers:
 - a. Dur-O-Wal; Product Mortar Net: www.dur-o-wal.com.
 - b. Hohmann & Barnard, Inc; Product P.E. Foam Expansion unit fuller: www.h-b.com.
 - c. Substitutions: See Section 01 60 00 - Product Requirements.
- C. Reglets: As specified on Section 07 62 00.

- D. Weeps: Polyethylene tubing.
- E. Cavity Vents: Polyester mesh; insect resistant or polypropylene extrusion.
 - 1. Manufacturers:
 - a. Hohmann & Barnard, Inc; Product Quadro-Vent: www.h-b.com.
 - b. CavClear/Archovations, Inc: www.cavclear.com.
 - c. Dur-O-Wal; Product DA1006 Cell Vents: www.dur-o-wal.com.
 - d. Substitutions: Not permitted.
- F. Mortar Mesh, For cavity wall mortar control where indicated; polyethylene (HDPE) or nylon mesh, 90% open;
 - 1. Manufacturer's:
 - a. Hohmann and Barnard, Inc; Product Mortar Net: www.h-b.com.
 - b. Dur - O - Wall; Product DA1008 Mortar Net: www.dur - o - wall.com.
 - c. Substitutions: See Section 01 60 00 - Product Requirements.
- G. Cleaning Solution: Non-acidic, not harmful to masonry work or adjacent materials.

2.07 LINTELS

- A. Precast Concrete Lintels: Sizes and reinforcing as shown on plans.
- B. See Structural Drawings for Steel Lintel information.

2.08 MORTAR AND GROUT MIXES

- A. Mortar and Grout mixes as specified in Section 04 05 11.
- B. Colored Mortar: As specified in Section 04 05 11. Use like colored mortar where exposed surface of pre-faced units occurs-first course above finished floor.
- C. New Mortar for Old Brick: Proportioned by volume only; not more than 20 percent of the total volume of Portland cement and lime combined shall be Portland cement.
 - 1. Sand: Match original mortar as closely as possible in color, size, and texture, without use of other additives.
 - 2. Do not use modern additives unless permitted in writing by StudioJAED.
 - 3. Repointing Mortar: Use proportions from 1 part lime to 2 parts sand with no Portland cement, up to 2 parts Portland cement to 3 parts lime to 6 parts sand.
 - 4. White Portland Cement: Use for repointing mortar where Portland cement is permitted.
 - 5. Use mortar within 30 minutes after final mixing; do not add more water after the initial mix is prepared.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field conditions are acceptable and are ready to receive masonry.
- B. Verify that related items provided under other sections are properly sized and located.
- C. Verify that built-in items are in proper location, and ready for roughing into masonry work.

3.02 PREPARATION

- A. Direct and coordinate placement of metal anchors supplied for installation under other sections.
- B. Provide temporary bracing during installation of masonry work. Maintain in place until building structure provides permanent bracing.

3.03 COURSING

- A. Establish lines, levels, and coursing indicated. Protect from displacement.
- B. Maintain masonry courses to uniform dimension. Form vertical and horizontal joints of uniform thickness.
- C. Concrete Masonry Units:
 - 1. Bond: Running; Match existing brand.
 - 2. Coursing: One unit and one mortar joint to equal 8 inches.
 - 3. Mortar Joints: Concave struck or to match existing.
 - 4. Use flush joint on cavity side face of C.M.U. where fluid applied air and vapor barrier is applied.
- D. Brick Units:
 - 1. Bond: Running; As indicated for different locations.
 - 2. Vertical Coursing: Three units and three mortar joints to equal 8 inches.
 - 3. Mortar Joints: Concave or to match existing.

3.04 PLACING AND BONDING

- A. Lay solid masonry units in full bed of mortar, with full head joints, uniformly jointed with other work.
- B. Lay hollow masonry units with face shell bedding on head and bed joints.
- C. Buttering corners of joints or excessive furrowing of mortar joints is not permitted.
- D. Remove excess mortar and mortar smears as work progresses.
- E. Interlock intersections and external corners.
- F. Do not shift or tap masonry units after mortar has achieved initial set. Where adjustment must be made, remove mortar and replace.
- G. Set reglets as shown on plans.
- H. Perform job site cutting of masonry units with proper tools to provide straight, clean, unchipped edges. Prevent broken masonry unit corners or edges.
- I. Cut mortar joints flush where wall tile is scheduled, cement parging is required, or resilient base is scheduled. Block exposed cavity space with raiseable steel guard of correct width.
- J. Isolate masonry partitions from vertical structural framing members with a control joint as indicated.
- K. Isolate top joint of masonry partitions from horizontal structural framing members and slabs or decks with compressible joint filler.

3.05 WEEPS

- A. Install weeps in veneer walls at 32 inches on center horizontally above through-wall flashing, above shelf angles and lintels, at bottom of walls, and as shown on plans.

3.06 CAVITY MORTAR CONTROL

- A. Do not permit mortar to drop or accumulate into cavity air space or to plug weep/cavity vents.
- B. For cavity walls, build inner wythe ahead of outer wythe to accommodate accessories.

- C. Install cavity mortar diverter at base of cavity and at other flashing locations as recommended by manufacturer to prevent mortar droppings from blocking weep/cavity vents.

3.07 REINFORCEMENT AND ANCHORAGE - GENERAL

- A. Fasten anchors to structural framing and embed in masonry joints as masonry is laid. Unless otherwise indicated on drawings or closer spacing is indicated under specific wall type, space anchors at maximum of 16 inches horizontally and 16 inches vertically.

3.08 REINFORCEMENT AND ANCHORAGE - SINGLE WYTHE MASONRY

- A. Install horizontal joint reinforcement 16 inches on center.
- B. Place masonry joint reinforcement in first and second horizontal joints above and below openings. Extend minimum 16 inches each side of opening.
- C. Place continuous joint reinforcement in first and second joint below top of walls.
- D. Lap joint reinforcement ends minimum 6 inches.
- E. Reinforce joint corners and intersections with strap anchors 16 inches on center.

3.09 REINFORCEMENT AND ANCHORAGES - CAVITY WALL MASONRY

- A. Install horizontal joint reinforcement 16 inches on center.
- B. Place masonry joint reinforcement in first and second horizontal joints above and below openings. Extend minimum 16 inches each side of openings.
- C. Place continuous joint reinforcement in first and second joint below top of walls.
- D. Lap joint reinforcement ends minimum 6 inches.
- E. Fasten anchors to structural framing and embed in masonry joints as masonry is laid. Space anchors at maximum of 24 inches horizontally and 16 inches vertically.
- F. Reinforce joint corners and intersections with strap anchors 16 inches on center.

3.10 MASONRY FLASHINGS

- A. Whether or not specifically indicated, install masonry flashing to divert water to exterior at all locations where downward flow of water will be interrupted.
 - 1. Extend flashings full width at such interruptions and at least 8 inches into adjacent masonry and turn up at least 2 inches to form watertight pan at non-masonry construction.
 - 2. Remove or cover protrusions or sharp edges that could puncture flashings.
 - 3. Seal lapped ends and penetrations of flashing before covering with mortar.
- B. Extend metal flashings through exterior face of masonry and turn down to form drip. Hemedge. Install joint sealer below drip edge to prevent moisture migration under flashing.
- C. Extend metal flashings to within 3/4" inch past exterior face of masonry.
- D. Lap end joints of flashings at least 4 inches and seal watertight with mastic or elastic sealant, type as recommended by flashing manufacturer.

3.11 LINTELS

- A. Install precast concrete lintels over openings, where shown on plans.
- B. Maintain minimum 8 inch bearing on each side of opening.

3.12 GROUTED COMPONENTS

- A. Reinforce bond beams as shown on plans.
- B. Lap splices minimum 40 bar diameters.
- C. Support and secure reinforcing bars from displacement. Maintain position within 1/2 inch of dimensioned position.
- D. Place and consolidate grout fill without displacing reinforcing.
- E. At bearing locations, fill masonry cores with grout for a minimum 12 inches either side of opening.

3.13 CONTROL AND EXPANSION JOINTS

- A. Do not continue horizontal joint reinforcement through control and expansion joints.
- B. Form control joint with a sheet building paper bond breaker fitted to one side of the hollow contour end of the block unit. Fill the resultant core with grout fill. Rake joint at exposed unit faces for placement of backer rod and sealant.
- C. Install preformed control joint device in continuous lengths. Seal butt and corner joints in accordance with manufacturer's instructions.
- D. Size control joint in accordance with Section 07 90 05 for sealant performance.
- E. Form expansion joint as detailed.

3.14 BUILT-IN WORK

- A. As work progresses, install built-in metal door frames, glazed frames, fabricated metal frames, window frames, anchor bolts, and plates and other items to be built into the work and furnished under other sections.
- B. Install built-in items plumb, level, and true to line.
- C. Bed anchors of metal door and glazed frames in adjacent mortar joints. Fill frame voids solid with grout.
 - 1. Fill adjacent masonry cores with grout minimum 12 inches from framed openings.
- D. Do not build into masonry construction organic materials that are subject to deterioration.

3.15 TOLERANCES

- A. Maximum Variation From Unit to Adjacent Unit: 1/16 inch.
- B. Maximum Variation from Plane of Wall: 1/4 inch in 10 ft.
- C. Maximum Variation from Plumb: 1/4 inch per story non-cumulative; 1/2 inch in two stories or more.
- D. Maximum Variation from Level Coursing: 1/8 inch in 3 ft and 1/4 inch in 20ft.
- E. Maximum Variation of Joint Thickness: 1/8 inch in 3 ft.
- F. Maximum Variation from Cross Sectional Thickness of Walls: 1/4 inch.

3.16 CUTTING AND FITTING

- A. Cut and fit for chases, pipes, conduit, sleeves, and grounds. Coordinate with other sections of work to provide correct size, shape, and location.
- B. Obtain approval prior to cutting or fitting masonry work not indicated or where appearance or strength of masonry work may be impaired.

3.17 FIELD QUALITY CONTROL

- A. Clay Masonry Unit Tests: Test each variety of clay masonry in accordance with ASTM C67 requirements, sampling 5 randomly chosen units for each 50,000 installed.
- B. Concrete Masonry Unit Tests: Test each variety of concrete unit masonry in accordance with ASTM C140 for conformance to requirements of this specification.
- C. Mortar Tests: Test each type of mortar in accordance with ASTM C780, testing with same frequency as masonry samples.

3.18 CLEANING

- A. Remove excess mortar and mortar droppings.
- B. Replace defective mortar. Match adjacent work.
- C. Clean soiled surfaces with cleaning solution.
- D. Use non-metallic tools in cleaning operations.

3.19 PROTECTION

- A. Without damaging completed work, provide protective boards at exposed external corners that are subject to damage by construction activities.

END OF SECTION

SECTION 06 10 00

ROUGH CARPENTRY

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Rough opening framing for doors, windows, and roof openings.
- B. Sheathing.
- C. Roofing nailers.
- D. Preservative treated wood materials.
- E. Fire retardant treated wood materials.
- F. Miscellaneous framing and sheathing.
- G. Communications and electrical room mounting boards.
- H. Concealed wood blocking, nailers, and supports.
- I. Miscellaneous wood nailers, furring, and grounds.

1.02 RELATED REQUIREMENTS

- A. Section 05 50 00 - Metal Fabrications: Miscellaneous steel connectors, support angles, and shapes for wood blocking.
- B. Section 07 62 00 - Sheet Metal Flashing and Trim: Drip flashings.
- C. Section 08 51 13: Window; or Door openings to receive wood blocking.

1.03 REFERENCE STANDARDS

- A. AFPA (WFCM) - Wood Frame Construction Manual for One- and Two-Family Dwellings; American Forest and Paper Association.
- B. ASTM A153/A153M - Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware.
- C. ASTM A 653/A 653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
- D. ASTM C208 - Standard Specification for Cellulosic Fiber Insulating Board.
- E. ASTM C 578 - Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation.
- F. ASTM C1396/C1396M - Standard Specification for Gypsum Board.
- G. ASTM D 2898 - Standard Test Methods for Accelerated Weathering of Fire-Retardant-Treated Wood for Fire Testing.
- H. ASTM E 84 - Standard Test Method for Surface Burning Characteristics of Building Materials.
- I. AWPA C2 - Lumber, Timber, Bridge Ties and Mine Ties -- Preservative Treatment by Pressure Processes; American Wood Protection Association.
- J. AWPA C9 - Plywood -- Preservative Treatment by Pressure Processes; American Wood Protection Association.

- K. AWWA C20 - Structural Lumber -- Fire Retardant Treatment by Pressure Processes; American Wood-Protection Association.
- L. AWWA C27 - Plywood -- Fire-Retardant Treatment by Pressure Processes; American Wood-Protection Association.
- M. AWWA U1 - Use Category System: User Specification for Treated Wood; American Wood Protection Association.
- N. ICC-ES AC38 - Acceptance Criteria for Water-Resistive Barriers; ICC Evaluation Service, Inc.
- O. PS 1 - Structural Plywood.
- P. PS 20 - American Softwood Lumber Standard; National Institute of Standards and Technology (Department of Commerce).
- Q. SPIB (GR) - Grading Rules; Southern Pine Inspection Bureau, Inc..
- R. WCLIB (GR) - Standard Grading Rules for West Coast Lumber No. 17; West Coast Lumber Inspection Bureau.
- S. WWPA G-5 - Western Lumber Grading Rules; Western Wood Products Association.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide technical data on insulated sheathing, wood preservative materials, and application instructions.
- C. Samples: For rough carpentry members that will be exposed to view, submit two samples, 24x2 inch in size illustrating wood grain, color, and general appearance.
- D. Manufacturer's Certificate: Certify that wood products supplied for rough carpentry meet or exceed specified requirements.
- E. LEED Submittals: Submit applicable LEED Submittal Form for each different product made of sustainably harvested wood, salvaged and reused wood, wood fabricated from recovered timber, as well as locally-sourced wood, as specified in Section 01 35 15.

1.05 QUALITY ASSURANCE

- A. Lumber: Comply with PS 20 and approved grading rules and inspection agencies.
 - 1. Lumber of other species or grades, or graded by other agencies, is acceptable provided structural and appearance characteristics are equivalent to or better than products specified.
- B. Fire-Retardant Treated Wood: Mark each piece of wood with producer's stamp indicating compliance with specified requirements.
- C. Preservative-Treated Wood: Provide lumber and plywood marked or stamped by an ALSC-accredited testing agency, certifying level and type of treatment in accordance with AWWA standards.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. General: Cover wood products to protect against moisture. Support stacked products to prevent deformation and to allow air circulation.

- B. Fire Retardant Treated Wood: Prevent exposure to precipitation during shipping, storage, or installation.

PART 2 PRODUCTS

2.01 GENERAL REQUIREMENTS

- A. Dimension Lumber: Comply with PS 20 and requirements of specified grading agencies.
 - 1. Species: Douglas Fir-Larch, unless otherwise indicated.
 - 2. If no species is specified, provide any species graded by the agency specified; if no grading agency is specified, provide lumber graded by any grading agency meeting the specified requirements.
 - 3. Grading Agency: Any grading agency whose rules are approved by the Board of Review, American Lumber Standard Committee (www.alsc.org) and who provides grading service for the species and grade specified; provide lumber stamped with grade mark unless otherwise indicated.

2.02 DIMENSION LUMBER FOR CONCEALED APPLICATIONS

- A. Grading Agency: Southern Pine Inspection Bureau, Inc. (SPIB).
- B. Sizes: Nominal sizes as indicated on drawings, S4S.
- C. Moisture Content: S-dry or MC19.
- D. Miscellaneous Framing, Blocking, Nailers, Grounds, and Furring:
 - 1. Lumber: S4S No. 2 or Standard Grade.
 - 2. Boards: Standard or No. 3.
- E. Miscellaneous Blocking, Furring, Nailers, and Curbs:
 - 1. Lumber: S4S, No. 1 or Construction Grade.
 - 2. Boards: Standard.

2.03 CONSTRUCTION PANELS

- A. Roof Sheathing: APARated Sheathing, Exterior Exposure Class, Fire retardant treated, and as follows:
 - 1. Span Rating: 24/16.
 - 2. Thickness: 5/8 inch, nominal, or as noted w/ panel clips.
- B. Communications and Electrical Room Mounting Boards: PS 1 A-D plywood, or medium density fiberboard; 3/4 inch thick; flame spread index of 25 or less, smoke developed index of 450 or less, when tested in accordance with ASTM E84.
- C. Other Applications:
 - 1. Plywood Concealed From View But Located Within Exterior Enclosure: PS 1, C-C Plugged or better, Exterior grade.
 - 2. Plywood Exposed to View But Not Exposed to Weather: PS 1, A-D, or better.
 - 3. Other Locations: PS 1, C-D Plugged or better.
 - 4. Electrical Component Mounting: APA rated plywood B-C sheathing, fire retardant treated.

2.04 ACCESSORIES

- A. Fasteners and Anchors:
 - 1. Metal and Finish: Hot-dipped galvanized steel per ASTM A 153/A 153M; or Stainless Steel for high humidity and preservative-treated wood locations, unfinished steel elsewhere.

2. Drywall Screws: Bugle head, hardened steel, power driven type, length three times thickness of sheathing.
3. Anchors: Toggle bolt type for anchorage to hollow masonry.

2.05 FACTORY WOOD TREATMENT

- A. Treated Lumber and Plywood: Comply with requirements of AWPA U1 - Use Category System for wood treatments determined by use categories, expected service conditions, and specific applications.
 1. Fire-Retardant Treated Wood: Mark each piece of wood with producer's stamp indicating compliance with specified requirements.
 2. Preservative-Treated Wood: Provide lumber and plywood marked or stamped by an ALSC-accredited testing agency, certifying level and type of treatment in accordance with AWPA standards.
- B. Fire Retardant Treatment:
 1. Manufacturers:
 - a. Arch Wood Protection, Inc: www.wolmanizedwood.com.
 - b. Hoover Treated Wood Products, Inc: www.frtw.com.
 - c. Osmose, Inc: www.osmose.com.
 - d. Substitutions: Not permitted.
 2. Exterior Type: AWPA U1, Category UCFB, Commodity Specification H, chemically treated and pressure impregnated; capable of providing a maximum flame spread rating of 25 when tested in accordance with ASTM E84, with no evidence of significant combustion when test is extended for an additional 20 minutes both before and after accelerated weathering test performed in accordance with ASTM D2898.
 - a. Kiln dry wood after treatment to a maximum moisture content of 19 percent for lumber and 15 percent for plywood.
 - b. Do not use treated wood in direct contact with the ground.
 3. Interior Type A: AWPA U1, Use Category UCFA, Commodity Specification H, low temperature (low hygroscopic) type, chemically treated and pressure impregnated; capable of providing a maximum flame spread rating of 25 when tested in accordance with ASTM E84, with no evidence of significant combustion when test is extended for an additional 20 minutes.
 - a. Kiln dry wood after treatment to a maximum moisture content of 19 percent for lumber and 15 percent for plywood.
 - b. Treat rough carpentry items as scheduled; or as indicated.
 - c. Do not use treated wood in applications exposed to weather or where the wood may become wet.
- C. Preservative Treatment:
 1. Manufacturers:
 - a. Arch Wood Protection, Inc.: www.wolmanizedwood.com.
 - b. Chemical Specialties, Inc: www.treatedwood.com.
 - c. Osmose, Inc: www.osmose.com.
 - d. Substitutions: Not permitted.
- D. Preservative Pressure Treatment of Lumber Above Grade: AWPA U1, Use Category UC3B, Commodity Specification A using waterborne preservative to 0.25 lb/cu ft retention.
 1. Kiln dry lumber after treatment to maximum moisture content of 19 percent.
 2. Treat lumber in contact with roofing, flashing, or waterproofing.
 3. Treat lumber in contact with masonry or concrete.

4. Treat lumber less than 18 inches above grade.
 - a. Treat lumber in other locations as indicated.
 5. Preservative Pressure Treatment of Plywood Above Grade: AWPA U1, Use Category UC2 and UC3B, Commodity Specification F using waterborne preservative to 0.25 lb/cu ft retention.
 - a. Kiln dry plywood after treatment to maximum moisture content of 15 percent.
 - b. Treat plywood in contact with masonry or concrete.
 - c. Treat plywood in other locations as indicated.
- E. Preservative Pressure Treatment of Lumber in Contact with Soil: AWPA U1, Use Category UC4A, Commodity Specification A using waterborne preservative to 0.4 lb/cu ft retention.
1. Preservative for Field Application to Cut Surfaces: As recommended by manufacturer of factory treatment chemicals for brush-application in the field.
 2. Restrictions: Do not use lumber or plywood treated with chromated copper arsenate (CCA) in exposed exterior applications subject to leaching.

PART 3 EXECUTION

3.01 INSTALLATION- GENERAL

- A. Select material sizes to minimize waste.
- B. Reuse scrap to the greatest extent possible; clearly separate scrap for use on site as accessory components, including: shims, bracing, and blocking.
- C. Where treated wood is used on interior, provide temporary ventilation during and immediately after installation sufficient to remove indoor air contaminants.

3.02 FRAMING INSTALLATION

- A. Select material sizes to minimize waste.
- B. Reuse scrap to the greatest extent possible; clearly separate scrap for use on site as accessory components, including: shims, bracing, and blocking.
- C. Set structural members level, plumb, and true to line. Discard pieces with defects that would lower required strength or result in unacceptable appearance of exposed members.
- D. Make provisions for temporary construction loads, and provide temporary bracing sufficient to maintain structure in true alignment and safe condition until completion of erection and installation of permanent bracing.
- E. Install structural members full length without splices unless otherwise specifically detailed.
- F. Comply with member sizes, spacing, and configurations indicated, and fastener size and spacing indicated, but not less than required by applicable codes and AFPA Wood Frame Construction Manual.

3.03 BLOCKING, NAILERS, AND SUPPORTS

- A. Provide framing and blocking members as indicated or as required to support finishes, fixtures, specialty items, and trim.

3.04 ROOF-RELATED CARPENTRY

- A. Coordinate installation of roofing carpentry with deck construction, framing of roof openings, and roofing assembly installation.

3.05 INSTALLATION OF ACCESSORIES AND MISCELLANEOUS WOOD

- A. Curb roof openings except where prefabricated curbs are provided. Form corners by alternating lapping side members.
- B. Coordinate curb installation with installation of decking and support of deck openings, roofing vapor retardant, and parapet construction.

3.06 INSTALLATION OF CONSTRUCTION PANELS

- A. Roof Sheathing: Secure panels with long dimension perpendicular to framing members, with ends staggered and over firm bearing.
 - 1. Use sheathing clips between roof framing members.
 - 2. Provide solid edge blocking between sheets.
 - 3. Screw panels to framing; staples are not permitted.
 - 4. Provide furring for ventilation under roof panel installation and over composite roof deck.
- B. Communications and Electrical Room Mounting Boards: Secure with screws to studs with edges over firm bearing; space fasteners at maximum 24 inches on center on all edges and into studs in field of board.
 - 1. At fire-rated walls, install board over wall board indicated as part of the fire-rated assembly.
 - 2. Where boards are indicated as full floor-to-ceiling height, install with long edge of board parallel to studs.
 - 3. Install adjacent boards without gaps.

3.07 TOLERANCES

- A. Framing Members: 1/4 inch from true position, maximum.
- B. Surface Flatness of Floor: 1/8 inch in 10 feet maximum, and 1/4 inch in 30 feet maximum.
- C. Variation from Plane (Other than Floors): 1/4 inch in 10 feet maximum, and 1/4 inch in 30 feet maximum.

3.08 CLEANING

- A. Waste Disposal: Comply with the requirements of Section 01 74 19.
 - 1. Comply with applicable regulations.
 - 2. Do not burn scrap on project site.
 - 3. Do not burn scraps that have been pressure treated.
 - 4. Do not send materials treated with pentachlorophenol, CCA, or ACA to co-generation facilities or "waste-to-energy" facilities.
- B. Do not leave any wood, shavings, sawdust, etc. on the ground or buried in fill.
- C. Prevent sawdust and wood shavings from entering the storm drainage system.

END OF SECTION

SECTION 06 20 00

FINISH CARPENTRY

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Door Hardware attachment.

1.02 RELATED REQUIREMENTS

- A. Section 06 41 00 - Architectural Wood Casework: Shop fabricated custom cabinet work.
- B. Section 08 71 00 -Door Hardware:

1.03 QUALITY ASSURANCE

- A. Fabricator Qualifications: Company specializing in fabricating the products specified in this section with minimum five years of documented experience.

1.04 DELIVERY, STORAGE, AND HANDLING

- A. Protect work from moisture damage.

PART 2 PRODUCTS

2.01 FINISH CARPENTRY ITEMS

- A. Quality Grade: Unless otherwise indicated provide products of quality specified by AWI//AWMAC/WI Architectural Woodwork Standards for Premium Grade.
- B. Interior Woodwork Items:
 - 1. Custom Casework.

2.02 SHEET MATERIALS

- A. Particleboard: ANSI A208.1; composed of wood chips, sawdust, or flakes of medium density, made with waterproof resin binders; of grade to suit application; sanded faces.

2.03 HARDWARE

- A. Hardware: Comply with BHMA A156.9.

2.04 FABRICATION

- A. Shop assemble work for delivery to site, permitting passage through building openings.
- B. When necessary to cut and fit on site, provide materials with ample allowance for cutting. Provide trim for scribing and site cutting.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify adequacy of backing and support framing.

3.02 INSTALLATION

- A. Install work in accordance with AWI//AWMAC/WI Architectural Woodwork Standards requirements for grade indicated.

- B. Set and secure materials and components in place, plumb and level.
- C. Carefully scribe work abutting other components, with maximum gaps of 1/32 inch. Do not use additional overlay trim to conceal larger gaps.

3.03 TOLERANCES

- A. Maximum Variation from True Position: 1/16 inch.
- B. Maximum Offset from True Alignment with Abutting Materials: 1/32 inch.

END OF SECTION

SECTION 07 21 00

THERMAL INSULATION

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Board insulation at cavity wall construction, perimeter foundation wall, underside of floor slabs, and roof insulation panel.
- B. Batt insulation for filling perimeter window and door shim spaces and crevices in exterior wall and roof.

1.02 RELATED REQUIREMENTS

- A. Section 04 27 23 - Cavity Wall Unit Masonry.

1.03 REFERENCE STANDARDS

- A. ASTM C 240 - Standard Test Methods of Testing Cellular Glass Insulation Block.
- B. ASTM C552 - Standard Specification for Cellular Glass Thermal Insulation.
- C. ASTM C 578 - Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation.
- D. ASTM C 612 - Standard Specification for Mineral Fiber Block and Board Thermal Insulation.
- E. ASTM C665 - Standard Specification for Mineral-Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing.
- F. ASTM C 1289 - Standard Specification for Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board.
- G. ASTM D2842 - Standard Test Method for Water Absorption of Rigid Cellular Plastics.
- H. ASTM E 84 - Standard Test Method for Surface Burning Characteristics of Building Materials.
- I. ASTM E 96/E 96M - Standard Test Methods for Water Vapor Transmission of Materials.
- J. ASTM E 136 - Standard Test Method for Behavior of Materials in a Vertical Tube Furnace At 750 Degrees C.
- K. NFPA 255 - Standard Method of Test of Surface Burning Characteristics of Building Materials; National Fire Protection Association.
- L. UL 723 - Standard for Test for Surface Burning Characteristics of Building Materials; Underwriters Laboratories Inc..

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide data on product characteristics, performance criteria, and product limitations.
- C. Manufacturer's Installation Instructions: Include information on special environmental conditions required for installation and installation techniques.
- D. Manufacturer's Certificate: Certify that products meet or exceed specified requirements.

1.05 FIELD CONDITIONS

- A. Do not install insulation adhesives when temperature or weather conditions are detrimental to successful installation.

1.06 SEQUENCING

- A. Sequence work to ensure fireproofing, firestop, and vapor retarder materials are in place before beginning work of this section.

1.07 COORDINATION

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Insulation:
 - 1. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 APPLICATIONS

- A. Insulation Under Concrete Slabs: Extruded polystyrene board.
- B. Insulation at Perimeter of Foundation: Extruded polystyrene board.
- C. Insulation Inside Masonry Cavity Walls: Extruded polystyrene board.
- D. Insulation at Roof Panel: Extruded polystyrene board.

2.03 FOAM BOARD INSULATION MATERIALS

- A. Extruded Polystyrene Board Insulation: ASTM C 578, Type IV; Extruded polystyrene board with natural skin surfaces; with the following characteristics:
 - 1. Flame Spread Index: 75 or less, when tested in accordance with ASTM E84.
 - 2. Smoke Developed Index: 450 or less, when tested in accordance with ASTM E84.
 - 3. Board Size: 48 x 96 inch or 24 X 96 inch.
 - 4. Board Thickness: 2 inches, 7 inches at Roof Panel
 - 5. Board Edges: Square, Shiplap or Tongue and groove.
 - 6. Thermal Conductivity (k factor) at 75 degrees: or 20.
 - 7. Compressive Resistance: 25 psi and 40 psi.
 - 8. Board Density: 1.8 lb/cu ft.
 - 9. Water Absorption, maximum: 0.1 percent, volume.
 - 10. Manufacturers:
 - 11. Dow Chemical Co(Design Basis):
 - a. Cavity Wall - "Cavity Mate Plus", type IV
 - b. Foundation and slabs - "Styrofoam Highload 40" type VI.
 - 12. Owens Corning Corp.
 - a. Cavity Wall -= "Foamular 250", type IV
 - b. Foundation and Slabs - "Foamular 400 SE", type VI.
 - 13. Pactiv Building Products
 - a. Cavity Wall - "Green Board Score Board", type IV
 - b. Foundation and Slabs - Type VI.
 - 14. Substitutions: See Section 01 60 00 - Product Requirements.

2.04 BATT INSULATION MATERIALS

- A. Batt Insulation: ASTM C 665; preformed batt; friction fit, conforming to the following:
 - 1. Material: Rock or slag fiber, or glass fiber.

2. Flame Spread Index: 25 or less, when tested in accordance with ASTM E84.
3. Smoke Developed Index: 50 or less, when tested in accordance with ASTM E84.
4. Combustibility: Non-combustible, when tested in accordance with ASTM E136.
5. Formaldehyde Content: Zero.
6. Thermal Resistance: in accordance with plans.
7. Thickness: varies.
8. Facing: Unfaced.
9. Manufacturers:
 - a. CertainTeed Corporation: www.certainteed.com.
 - b. Johns Manville Corporation: www.jm.com.
 - c. Owens Corning Corp: www.owenscorning.com.
10. Substitutions: See Section 01 60 00 - Product Requirements.

2.05 ACCESSORIES

- A. Tape: Bright aluminum; Polyethylene or Polyester self-adhering type, mesh reinforced, 2 inch wide.
- B. Insulation Fasteners: Impaling clip of galvanized steel with washer retainer and clips, to be adhered to surface to receive insulation, length to suit insulation thickness and substrate, capable of securely and rigidly fastening insulation in place.
- C. Wire Mesh: Galvanized steel, hexagonal wire mesh.
- D. Adhesive: Type recommended by insulation manufacturer for application.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that substrate, adjacent materials, and insulation materials are dry and that substrates are ready to receive insulation and adhesive.
- B. Verify substrate surfaces are flat, free of irregularities or materials or substances that may impede adhesive bond.

3.02 BOARD INSTALLATION AT FOUNDATION PERIMETER

- A. Adhere a 6 inch wide strip of polyethylene sheet over construction, control, and expansion joints with double beads of adhesive each side of joint.
 1. Tape seal joints.
 2. Extend sheet full height of joint.
- B. Apply adhesive to back of boards:
 1. Three continuous beads per board length.
 2. Full bed 1/8 inch thick.
- C. Install boards horizontally on foundation perimeter.
 1. Place boards to maximize adhesive contact.
 2. Install in running bond pattern.
 3. Butt edges and ends tightly to adjacent boards and to protrusions.
- D. Extend boards over expansion joints, unbonded to foundation on one side of joint.
- E. Cut and fit insulation tightly to protrusions or interruptions to the insulation plane.

3.03 BOARD INSTALLATION AT CAVITY WALLS

- A. Adhere a 6 inch wide strip of polyethylene sheet over expansion joints with double beads of adhesive each side of joint.
 - 1. Tape seal joints between sheets.
 - 2. Extend sheet full height of joint.
- B. Apply compatible adhesive to back of boards:
 - 1. Three continuous beads per board length.
 - 2. Full bed 1/8 inch thick.
- C. Install boards to fit snugly between wall ties. Wedge insulation from outside wythe, 24" O.C. both ways for tight fit against inside wythe of C.M.U.
- D. Make insulation continuous, fill all voids with insulation.
 - 1. Place membrane surface against adhesive.
 - 2. Place membrane surface facing out, and tape seal board joints.
- E. Install boards horizontally on walls.
 - 1. Place boards to maximize adhesive contact.
 - 2. Install in running bond pattern.
 - 3. Butt edges and ends tightly to adjacent boards and to protrusions.
- F. Cut and fit insulation tightly to protrusions or interruptions to the insulation plane.
- G. Place 6 inch wide polyethylene sheet at perimeter of wall openings, from adhesive vapor retarder bed to window, door, and storefront frames. Tape seal in place to ensure continuity of vapor retarder and air seal.

3.04 BOARD INSTALLATION UNDER CONCRETE SLABS

- A. Place insulation under slabs on grade after base for slab has been compacted.
- B. Cut and fit insulation tightly to protrusions or interruptions to the insulation plane.
- C. Prevent insulation from being displaced or damaged while placing vapor retarder and placing slab.

3.05 BATT INSTALLATION

- A. Install insulation in accordance with manufacturer's instructions.
- B. Install in exterior cavities at window, door, wall and roof spaces without gaps or voids. Do not compress insulation.
- C. Trim insulation neatly to fit spaces. Insulate miscellaneous gaps and voids.
- D. Fit insulation tightly in cavities and tightly to exterior side of mechanical and electrical services within the plane of the insulation.

3.06 PROTECTION

- A. Do not permit installed insulation to be damaged prior to its concealment.

END OF SECTION

SECTION 07 62 00

SHEET METAL FLASHING AND TRIM

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Fabricated sheet metal items, including flashings, counterflashings, gutters, downspouts, and vented soffit.
- B. Reglets and accessories.
- C. Precast concrete splash pads.

1.02 RELATED REQUIREMENTS

- A. Section 04-2000: Masonry flashings in masonry.
- B. Section 07 31 13 - Asphalt Shingles: Flashings associated with shingle roofing.
- C. Section 07 72 00 - Roof Accessories.
- D. Section 07 90 05 - Joint Sealers.

1.03 REFERENCE STANDARDS

- A. AAMA 611 - Voluntary Specification for Anodized Architectural Aluminum; American Architectural Manufacturers Association.
- B. AAMA 2604 - Voluntary Specification, Performance Requirements and Test Procedures for High Performance Organic Coatings on Aluminum Extrusions and Panels.
- C. AAMA 2605 - Voluntary Specification, Performance Requirements and Test Procedures for Superior Performing Organic Coatings on Aluminum Extrusions and Panels.
- D. ASTM A 666 - Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar.
- E. ASTM B209 - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate.
- F. ASTM B209M - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate [Metric].
- G. ASTM D 226 - Standard Specification for Asphalt-Saturated Organic Felt Used in Roofing and Waterproofing.
- H. ASTM D2178 - Standard Specification for Asphalt Glass Felt Used in Roofing and Waterproofing.
- I. ASTM D4479 - Standard Specification for Asphalt Roof Coatings - Asbestos-Free.
- J. ASTM D4586 - Standard Specification for Asphalt Roof Cement, Asbestos-Free.
- K. CDA A4050 - Copper in Architecture - Handbook; Copper Development Association, Inc..
- L. SMACNA (ASMM) - Architectural Sheet Metal Manual; Sheet Metal and Air Conditioning Contractors' National Association.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

- B. Shop Drawings: Indicate material profile, jointing pattern, jointing details, fastening methods, flashings, terminations, and installation details.
- C. Samples: Submit two samples, 12 X 36 in size illustrating material, finish, and fabrication details of typical inter locking hooked seam, external corner, internal corner, valley condition, ridge condition, and junction to vertical dissimilar surface.
- D. Samples: Submit two samples 6 X 6 inch in size illustrating metal finish color.

1.05 QUALITY ASSURANCE

- A. Perform work in accordance with SMACNA Architectural Sheet Metal Manual requirements and standard details, by roofing manufacturer except as otherwise indicated.
- B. Maintain one copy of each document on site.
- C. Fabricator and Installer Qualifications: Company specializing in sheet metal work with 10 years of documented experience.

1.06 PRE-INSTALLATION CONFERENCE

- A. Convene one week before starting work of this section.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Stack material to prevent twisting, bending, and abrasion, and to provide ventilation. Slope metal sheets to ensure drainage.
- B. Prevent contact with materials that could cause discoloration or staining.

1.08 PROJECT CONDITIONS

PART 2 PRODUCTS

2.01 SHEET MATERIALS

- A. Pre-finished Aluminum: ASTM B209 (ASTM B209M), 3005 alloy, H12 or H14 temper; .050 inch thick or as noted on plans; plain finish; shop re-located with fluoropolymer (70% kynar 500) coating system; custom color to match existing roof.

2.02 ACCESSORIES

- A. Fasteners: Stainless steel, with soft neoprene washers.
- B. Primer: Zinc chromate type.
- C. Protective Backing Paint: Zinc molybdate alkyd.
- D. Sealant: Type specified in Section 07 90 05.
- E. Plastic Cement: ASTM D4586, Type I.
- F. Reglets: Recessed type, rigid extruded PVC; face and ends covered with plastic tape.

2.03 FABRICATION

- A. Form sections true to shape, accurate in size, square, and free from distortion or defects.
- B. Fabricate cleats of same material as sheet, continuous wide, interlocking with sheet.
- C. Form pieces in longest possible lengths.

- D. Hem exposed edges on underside 1/2 inch; miter and seam corners.
- E. Form material with flat lock seams, except where otherwise indicated. At moving joints, use sealed lapped, bayonet-type or interlocking hooked seams.
- F. Fabricate corners from one piece with minimum 18 inch long legs; seam for rigidity, seal with sealant.
- G. Fabricate vertical faces with bottom edge formed outward 1/4 inch (6 mm) and hemmed to form drip.

2.04 GUTTER AND DOWNSPOUT FABRICATION

- A. Gutters: SMACNA Architectural Sheet Metal Manual, Rectangular profile.
- B. Downspouts: Round profile.
- C. Gutters and Downspouts: 6" wide gutter, 4" diameter downspout.
- D. Accessories: Profiled to suit gutters and downspouts.
 - 1. Anchorage Devices: In accordance with SMACNA requirements.
 - 2. Gutter Supports: 1/8" X 2" Straps.
 - 3. Downspout Supports: Straps 1/8" X 2".
- E. Downspout Boots: Steel As shown on plans.
- F. Seal metal joints.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify roof openings, curbs, pipes, sleeves, ducts, and vents through roof are solidly set, reglets in place, and nailing strips located.
- B. Verify roofing termination and base flashings are in place, sealed, and secure.

3.02 PREPARATION

- A. Install starter and edge strips, and cleats before starting installation.
- B. Back paint concealed metal surfaces with protective backing paint to a minimum dry film thickness of 15 mil.

3.03 INSTALLATION

- A. Conform to drawing details.
 - 1. Per drawings or : SMACNA Architectural Sheet Metal Manual.
- B. See Section 04 20 00 for reglet installation requirements.
- C. Set continuous cleats.
- D. Insert flashings into reglets to form tight fit. Secure in place with lead wedges. Seal flashings into reglets with sealant.
- E. Secure flashings in place using concealed fasteners. Use exposed fasteners only where permitted. Flash in accordance with roof manufacturer's instructions, using standard details.
- F. Fit flashings tight in place. Make corners square, surfaces true and straight in planes, and lines accurate to profiles.

- G. Seal metal joints watertight.
- H. Secure gutters and downspouts in place using concealed fasteners.
- I. Slope gutters 1/16" inch per foot minimum.
- J. Connect downspouts to downspout boots. Seal connection watertight.
- K. Set splash pads under downspouts. Set in place with Manufacturer's recommended adhesive, on roofs.

END OF SECTION

SECTION 07 84 00

FIRESTOPPING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Firestopping systems.
- B. Firestopping of all joints and penetrations in fire-resistance rated and smoke-resistant assemblies, whether indicated on drawings or not, and other openings indicated.

1.02 RELATED REQUIREMENTS

- A. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 01 70 00 - Execution and Closeout Requirements: Cutting and patching.
- C. Section 07 81 00 - Applied Fireproofing.
- D. Section 09 21 16 - Gypsum Board Assemblies: Gypsum wallboard fireproofing.
- E. Section 26-0534: Firestopping of electrical work.

1.03 REFERENCE STANDARDS

- A. ASTM E 119 - Standard Test Methods for Fire Tests of Building Construction and Materials.
- B. ASTM E 814 - Standard Test Method for Fire Tests of Through-Penetration Fire Stops.
- C. ITS (DIR) - Directory of Listed Products; Intertek Testing Services NA, Inc..
- D. FM 4991 - Approval of Firestop Contractors; Factory Mutual Research Corporation.
- E. FM P7825 - Approval Guide; Factory Mutual Research Corporation.
- F. SCAQMD 1168 - South Coast Air Quality Management District Rule No.1168; www.aqmd.gov.
- G. UL (FRD) - Fire Resistance Directory; Underwriters Laboratories Inc..

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Schedule of Firestopping: List each type of penetration, fire rating of the penetrated assembly, and firestopping test or design number.
- C. Product Data: Provide data on product characteristics, performance ratings, and limitations.
- D. LEED Report: Submit VOC content documentation for all non-preformed materials.
- E. Manufacturer's Installation Instructions: Indicate preparation and installation instructions.
- F. Manufacturer's Certificate: Certify that products meet or exceed specified requirements.
- G. Certificate from authority having jurisdiction indicating approval of materials used.
- H. Qualification statements for installing mechanics.

1.05 QUALITY ASSURANCE

- A. Fire Testing: Provide firestopping assemblies of designs that provide the scheduled fire ratings when tested in accordance with methods indicated.
 - 1. Listing in the current-year classification or certification books of UL, FM, or ITS (Warnock Hersey) will be considered as constituting an acceptable test report.
 - 2. Valid evaluation report published by ICC Evaluation Service, Inc. (ICC-ES) at www.icc-es.org will be considered as constituting an acceptable test report.
 - 3. Submission of actual test reports is required for assemblies for which none of the above substantiation exists.
- B. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum ten years documented experience.
- C. Installer Qualifications: Company specializing in performing the work of this section and:
 - 1. Approved by Factory Mutual Research under FM Standard 4991, Approval of Firestop Contractors, or meeting any two of the following requirements:
 - 2. With minimum 5 years documented experience installing work of this type.
 - 3. Able to show at least 3 satisfactorily completed projects of comparable size and type.
 - 4. Licensed by authority having jurisdiction.
 - 5. Approved by firestopping manufacturer.
- D. Installing Mechanic's Qualifications: Trained by firestopping manufacturer and able to provide evidence thereof.

1.06 MOCK-UP

- A. Install one firestopping assembly representative of each fire rating design required on project.
 - 1. Where one design may be used for different penetrating items or in different wall constructions, install one assembly for each different combination.
 - 2. Where firestopping is intended to fill a linear opening, install minimum of 2 linear ft.
- B. Obtain approval of authority having jurisdiction before proceeding.
- C. If accepted, mock-up will represent minimum standard for the Work.
- D. If accepted, mock-up may remain as part of the Work. Remove and replace mock-ups not accepted.

1.07 FIELD CONDITIONS

- A. Comply with firestopping manufacturer's recommendations for temperature and conditions during and after installation. Maintain minimum temperature before, during, and for 3 days after installation of materials.
- B. Provide ventilation in areas where solvent-cured materials are being installed.

PART 2 PRODUCTS

2.01 FIRESTOPPING SYSTEMS

- A. Firestopping: Any material meeting requirements. Foam, caulk, putty or manufactured device.
 - 1. Fire Ratings: Use any system listed by UL, FM, or ITS (Warnock Hersey) or that has F Rating equal to fire rating of penetrated assembly and minimum T Rating of 0 and that meets all other specified requirements.
 - 2. Fire Ratings: See Drawings for required systems and ratings.

- B. Firestopping at Uninsulated Metallic Pipe and Conduit Penetrations, of diameter 4 inches or less: Any material meeting requirements. Foam, caulk, putty or manufactured device.
- C. Firestopping at Cable Tray Penetrations: Any material meeting requirements. Foam, caulk, putty or manufactured device.
- D. Firestopping at Cable Penetrations, not in Conduit or Cable Tray: Any material meeting requirements. Foam, caulk, putty or manufactured device.
 - 1. Firewalls: UL Design No. AJ-3154, F Rating 2 hour. = Design Basis.
- E. Firestopping at Control and Expansion Joints (without Penetrations): Any material meeting requirements and caulk.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify openings are ready to receive the work of this section.

3.02 PREPARATION

- A. Clean substrate surfaces of dirt, dust, grease, oil, loose material, or other matter that could adversely affect bond of firestopping material.
- B. Remove incompatible materials that could adversely affect bond.
- C. Install backing materials to arrest liquid material leakage.

3.03 INSTALLATION

- A. Install materials in manner described in fire test report and in accordance with manufacturer's instructions, completely closing openings.
- B. Do not cover installed firestopping until inspected by authority having jurisdiction.
- C. Install labelling required by code.

3.04 PROTECTION

- A. Clean adjacent surfaces of firestopping materials.
- B. Protect adjacent surfaces from damage by material installation.

END OF SECTION

SECTION 07 90 05

JOINT SEALERS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Sealants and joint backer rods.
- B. Precompressed foam sealers.
- C. Accessories.

1.02 RELATED REQUIREMENTS

- A. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 07 84 00 - Firestopping: Firestopping sealants.
- C. Section 07 62 00: Sealants required in conjunction with flashing.
- D. Section 08 63 00 - Metal-Framed Skylights: Structural and weatherseal sealants and accessories.
- E. Section 08 80 00 - Glazing: Glazing sealants and accessories.
- F. Section 09 21 16 - Gypsum Board Assemblies: Acoustic sealant.
- G. Section 09 30 00 - Tiling: Sealant used as tile grout.

1.03 REFERENCE STANDARDS

- A. ASTM C834 - Standard Specification for Latex Sealants.
- B. ASTM C919 - Standard Practice for Use of Sealants in Acoustical Applications.
- C. ASTM C 920 - Standard Specification for Elastomeric Joint Sealants.
- D. ASTM C1193 - Standard Guide for Use of Joint Sealants.
- E. ASTM D1056 - Standard Specification for Flexible Cellular Materials--Sponge or Expanded Rubber.
- F. ASTM D 1667 - Standard Specification for Flexible Cellular Materials--Poly(Vinyl Chloride) Foam (Closed-Cell).
- G. SCAQMD 1168 - South Coast Air Quality Management District Rule No.1168; www.aqmd.gov.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide data indicating sealant chemical characteristics, performance criteria, substrate preparation, limitations, and color availability.
- C. Samples: Submit two samples, 2 x 1/2 in size illustrating sealant colors for selection.
- D. LEED Report: Submit VOC content documentation for all non-preformed sealants and primers.
- E. Manufacturer's Installation Instructions: Indicate special procedures, surface preparation, and perimeter conditions requiring special attention.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the Products specified in this section with minimum 10 years documented experience.
- B. Applicator Qualifications: Company specializing in performing the work of this section with minimum 5 years experience.

1.06 MOCK-UP

- A. Provide mock-up of sealant joints in conjunction with window, wall, and air barrier system under provisions of Section 01 40 00.
- B. Construct mock-up with specified sealant types and with other components noted.
- C. Locate where directed.
- D. Mock-up may remain as part of the Work.

1.07 FIELD CONDITIONS

- A. Maintain temperature and humidity recommended by the sealant manufacturer during and after installation.

1.08 COORDINATION

- A. Coordinate the work with all sections referencing this section.

1.09 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Polyurethane Sealants:
 - 1. Pecora Corporation: www.pecora.com.
 - 2. Bostik, Inc www.bostik-us.com
 - 3. BASF Construction Chemicals-Building Systems: www.chemrex.com.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Acrylic Sealants (ASTM C920):
 - 1. Pecora Corporation; www.pecora.com.
 - 2. Tremco, Inc www.tremcosealants.com.
 - 3. Bostik, Inc. www.bostik-us.com.
- C. Preformed Compressible Foam Sealers and backer rods:
 - 1. Sandell Manufacturing Company, Inc: www.sandellmfg.com.
 - 2. Emseal Joint Systems, Ltd.
 - 3. Dayton Superior Corporation: www.daytonsuperior.com.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
 - 5. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 SEALANTS

- A. Sealants and Primers - General: Provide only products having lower volatile organic compound (VOC) content than required by South Coast Air Quality Management District Rule No.1168.

- B. Type 1 - General Purpose Exterior Sealant: Polyurethane; ASTM C920, Grade NS, Class 25, Uses M, G, and A; single component.
 - 1. Color: Standard colors matching finished surfaces.
 - 2. Product: Dynatrol II manufactured by Pecora.
 - 3. Applications: Use for:
 - a. Control, expansion, and soft joints in masonry.
 - b. Joints between concrete and other materials.
 - c. Joints between metal frames and other materials.
 - d. Concealed sealant beads in roofings sheet metal work.
 - e. Other exterior joints for which no other sealant is indicated.
- C. Type 2 - General Purpose Interior Sealant: Acrylic emulsion latex; ASTM C 834, Type OP, Grade NF single component, paintable.
 - 1. Color: Standard colors matching finished surfaces.
 - 2. Product: AC-20 + Silicone manufactured by Pecora.
 - 3. Applications: Use for:
 - a. Interior wall and ceiling control joints.
 - b. Joints between door and window frames and wall surfaces.
 - c. Other interior joints for which no other type of sealant is indicated.
- D. Type 3 - Exterior Expansion Joint Sealer: ASTM D 2628, hollow neoprene (polychloroprene) compression gasket.
 - 1. Black color.
 - 2. Size and Shape: As indicated by drawings.
 - 3. Product: Poly seal manufactured by sandell mfg.
 - 4. Applications: Use for:
 - a. Exterior wall expansion joints.
- E. Type 4 - Acoustical Sealant: acrylic sealant; ASTM C 920, Grade NS, Class 12-1/2, Uses M and A; single component, solvent release curing, non-skinning.
 - 1. Product: AIS-919 manufactured by Pecora.
 - 2. Applications: Use for concealed locations only:
 - a. Where shown on plans.
- F. Type 5 - Concrete Paving Joint Sealant: Polyurethane, self-leveling; ASTM C920, Class 25, Uses T, I, M and A; single component.
 - 1. Color: Gray.
 - 2. Product: Dynatred manufactured by Pecora.
 - 3. Applications: Use for:
 - a. Joints in sidewalks and vehicular paving.
 - b. Where shown on plans.
- G. Type 6 - Exterior Metal Lap Joint Sealant: Butyl or polyisobutylene, nondrying, nonskinning, noncuring.

2.03 ACCESSORIES

- A. Primer: Non-staining type, recommended by sealant manufacturer to suit application.
- B. Joint Cleaner: Non-corrosive and non-staining type, recommended by sealant manufacturer; compatible with joint forming materials.
- C. Joint Backing: Round foam rod compatible with sealant; ASTM D 1667, closed cell PVC; oversized 30 to 50 percent larger than joint width.

- D. Bond Breaker: Pressure sensitive tape recommended by sealant manufacturer to suit application.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that substrate surfaces are ready to receive work.
- B. Verify that joint backing and release tapes are compatible with sealant.

3.02 PREPARATION

- A. Remove loose materials and foreign matter that could impair adhesion of sealant.
- B. Clean and prime joints in accordance with manufacturer's instructions.
- C. Perform preparation in accordance with manufacturer's instructions and ASTM C1193.
- D. Protect elements surrounding the work of this section from damage or disfigurement.

3.03 INSTALLATION

- A. Perform work in accordance with sealant manufacturer's requirements for preparation of surfaces and material installation instructions.
- B. Perform installation in accordance with ASTM C1193.
- C. Perform acoustical sealant application work in accordance with ASTM C919.
- D. Measure joint dimensions and size joint backers to achieve width-to-depth ratio, neck dimension, and surface bond area as recommended by manufacturer, except where specific dimensions are indicated.
- E. Measure joint dimensions and size joint backers to achieve the following, unless otherwise indicated:
 - 1. Width/depth ratio of 2:1.
 - 2. Neck dimension no greater than 1/3 of the joint width.
 - 3. Surface bond area on each side not less than 75 percent of joint width.
- F. Install bond breaker where joint backing is not used.
- G. Install sealant free of air pockets, foreign embedded matter, ridges, and sags.
- H. Apply sealant within recommended application temperature ranges. Consult manufacturer when sealant cannot be applied within these temperature ranges.
- I. Tool joints concave.
- J. Precompressed Foam Sealant: Do not stretch; avoid joints except at corners, ends, and intersections; install with face 1/8 to 1/4 inch below adjoining surface.
- K. Compression Gaskets: Avoid joints except at ends, corners, and intersections; seal all joints with adhesive; install with face 1/8 to 1/4 inch below adjoining surface.

3.04 CLEANING

- A. Clean adjacent soiled surfaces.

3.05 PROTECTION

- A. Protect sealants until cured.

3.06 SCHEDULE

- A. Exterior Joints for Which No Other Sealant Type is Indicated: Type 1; colors as selected.
- B. Control and Expansion Joints in Paving: Type 5.
- C. Exterior Wall Seismic Movement Joints: Type 3.
- D. Exterior Wall Expansion Joints: Type 3.
- E. Joints Between Concrete Panels and Between Panels and Adjacent Work: Type 1.
- F. Control, Expansion, and Soft Joints in Masonry, and Between Masonry and Adjacent Work: Type 1.
- G. Lap Joints in Exterior Sheet Metal Work: Type 1 or 6 .
- H. Butt Joints in Exterior Metal Work and Siding: Type 1.
- I. Joints Between Exterior Metal Frames and Adjacent Work (except masonry): Type 1.
- J. Under Exterior Door Thresholds: Type 1.
- K. Interior Joints for Which No Other Sealant is Indicated: Type 2; colors as shown on the drawings.
- L. Control and Expansion Joints in Interior Concrete Slabs and Floors: Type 5.
- M. Joints Between Plumbing Fixtures and Walls and Floors, and Between Countertops and Walls: Type 2.
- N. In STC-Rated Walls, Between Metal Stud Track/Runner and Adjacent Construction and Between Outlet Boxes and Gypsum Board: Type 4.

END OF SECTION

SECTION 08 11 13

HOLLOW METAL DOORS AND FRAMES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Non-fire-rated steel doors and frames.
- B. Steel frames for wood doors.
- C. Fire-rated steel doors and frames.
- D. Thermally insulated steel doors.
- E. Steel glazing frames.
- F. Accessories, including glazing.

1.02 RELATED REQUIREMENTS

- A. Section 08 71 00 - Door Hardware.
- B. Section 08 80 00 - Glazing: Glass for doors and borrowed lites.
- C. Section 09 90 00 - Painting and Coating: Field painting.

1.03 REFERENCE STANDARDS

- A. ANSI/ICC A117.1 - American National Standard for Accessible and Usable Buildings and Facilities; International Code Council.
- B. ANSI A250.3 - Test Procedure and Acceptance Criteria for Factory-Applied Finish Painted Steel Surfaces for Steel Doors and Frames.
- C. ANSI A250.8 - SDI-100 Recommended Specifications for Standard Steel Doors and Frames.
- D. ANSI A250.10 - Test Procedure and Acceptance Criteria for Prime Painted Steel Surfaces for Steel Doors and Frames.
- E. ASTM A 653/A 653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.
- F. ASTM C236 - Standard Test Method for Steady-State Thermal Performance of Building Assemblies by Means of a Guarded Hot Box.
- G. ASTM C1363 - Standard Test Method for Thermal Performance of Building Assemblies by Means of a Hot Box Apparatus.
- H. BHMA A156.115 - Hardware Preparation in Steel Doors and Steel Frames.
- I. DHI A115 Series - Specifications for Steel Doors and Frame Preparation for Hardware; Door and Hardware Institute (ANSI/DHI A115 Series).
- J. ITS (DIR) - Directory of Listed Products; Intertek Testing Services NA, Inc..
- K. NAAMM HMMA 840 - Guide Specifications for Installation and Storage of Hollow Metal Doors and Frames; The National Association of Architectural Metal Manufacturers.

- L. NAAMM HMMA 860 - Guide Specifications for Hollow Metal Doors and Frames; The National Association of Architectural Metal Manufacturers.
- M. NAAMM HMMA 861 - Guide Specifications for Commercial Hollow Metal Doors and Frames; The National Association of Architectural Metal Manufacturers.
- N. NAAMM HMMA 865 - Guide Specifications for Sound Control Hollow Metal Doors and Frames; The National Association of Architectural Metal Manufacturers.
- O. NFPA 80 - Standard for Fire Doors and Other Opening Protectives.
- P. NFPA 252 - Standard Methods of Fire Tests of Door Assemblies; National Fire Protection Association.
- Q. UBC Std 7-2, Part II - Test Standard for Smoke- and Draft-control Assemblies; International Conference of Building Officials.
- R. UL (BMD) - Building Materials Directory; Underwriters Laboratories Inc..
- S. UL 10B - Standard for Fire Tests of Door Assemblies.
- T. UL 10C - Standard for Positive Pressure Fire Tests of Door Assemblies.
- U. UL 1784 - Standard for Air Leakage Tests of Door Assemblies.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements for submittal procedures.
- B. Product Data: Materials and details of design and construction, hardware locations, reinforcement type and locations, anchorage and fastening methods, and finishes; and one copy of referenced grade standard.
- C. Shop Drawings: Details of each opening, showing elevations, glazing, frame profiles, and identifying location of different finishes, if any.
- D. Samples: Submit two samples of metal, 2 x 2 inches in size showing factory finishes, colors, and surface texture.
- E. Installation Instructions: Manufacturer's published instructions, including any special installation instructions relating to this project.
- F. Manufacturer's Certificate: Certification that products meet or exceed specified requirements.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum ten years documented experience.
- B. Maintain at the project site a copy of all reference standards dealing with installation.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Store in accordance with NAAMM HMMA 840.
- B. Protect with resilient packaging; avoid humidity build-up under coverings; prevent corrosion.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Steel Doors and Frames:
 - 1. Assa Abloy Ceco, Curries, or Fleming: www.assaabloydss.com.
 - 2. Ceco Door Products: www.cecodoor.com.
 - 3. De La Fontaine Industries
 - 4. Steelcraft: www.steelcraft.com.
 - 5. Phillip Manufacturing Company
 - 6. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 DOORS AND FRAMES

- A. Requirements for All Doors and Frames:
 - 1. Accessibility: Comply with ANSI/ICC A117.1.
 - 2. Door Top Closures: Flush with top of faces and edges.
 - 3. Door Edge Profile: Beveled on both edges.
 - 4. Door Texture: Smooth faces.
 - 5. Glazed Lights: Non-removable stops on non-secure side; sizes and configurations as indicated on drawings.
 - 6. Hardware Preparation: In accordance with BHMA A156.115, with reinforcement welded in place, in addition to other requirements specified in door grade standard.
 - 7. Galvanizing for Units in Wet Areas: All components hot-dipped zinc-iron alloy-coated (galvannealed), A60/ZF180.
 - 8. Finish: Factory primed, for field finishing.
- B. Combined Requirements: If a particular door and frame unit is indicated to comply with more than one type of requirement, comply with all the specified requirements for each type; for instance, an exterior door that is also indicated as being sound-rated must comply with the requirements specified for exterior doors and for sound-rated doors; where two requirements conflict, comply with the most stringent.

2.03 STEEL DOORS

- A. Exterior Doors:
 - 1. Grade: ANSI A250.8 Level 3, physical performance Level A, Model 1, full flush.
 - 2. Core: Polyurethane.
 - 3. Top Closures for Outswinging Doors: Flush with top of faces and edges.
 - 4. Galvanizing: All components hot-dipped zinc-iron alloy-coated (galvannealed) in accordance with ASTM A653/A653M, with A60/ZF180 coating.
 - 5. Texture: Smooth faces.
 - 6. Insulating Value: U-value of 0.50, when tested in accordance with ASTM C1363 or ASTM C 236.
 - 7. Weatherstripping: Separate, see Section 08 71 00.
 - 8. Finish: Factory primed, for field finishing.
- B. Interior Doors, Non-Fire-Rated:
 - 1. Grade: ANSI A250.8 Level 3, physical performance Level A, Model 1, full flush.
 - 2. Core: Polystyrene foam.
 - 3. Thickness: 1-3/4 inches.
 - 4. Texture: Smooth faces.
 - 5. Finish: Factory primed, for field finishing.
- C. Interior Doors, Fire-Rated:
 - 1. Grade: ANSI A250.8 Level 3, physical performance Level A, Model 1, full flush.

2. Fire Rating: As indicated on Door and Frame Schedule, As indicated on drawings, 1-1/2 hours tested in accordance with UL 10C ("positive pressure"), UL 10B or NFPA 252 ("neutral pressure").
 - a. Provide units listed and labeled by UL or WH.
 - b. Attach fire rating label to each fire rated unit.
3. Core: Mineral fiberboard.
4. Texture: Smooth faces.
5. Finish: Factory primed, for field finishing.

2.04 STEEL FRAMES

- A. General:
 1. Comply with the requirements of grade specified for corresponding door, except:
 - a. Frames for Wood Doors: Comply with frame requirements specified in ANSI A250.8 for Level 2
 - b. Frames for Sound-Rated Wood Doors: Comply with frame requirements specified in ANSI A250.8 for Level 3, 14 gage
 2. Finish: Same as for door, and Factory primed, for field finishing.
 3. Provide mortar guard boxes for hardware cut-outs in frames to be installed in masonry or to be grouted.
 4. Frames in Masonry Walls: Size to suit masonry coursing with head member to fill opening without cutting masonry units.
 5. Frames Wider than 48 Inches: Reinforce with steel channel fitted tightly into frame head, flush with top.
 6. Frames Installed Back-to-Back: Reinforce with steel channels anchored to floor and overhead structure.
- B. Exterior Door Frames: Fully welded.
 1. Galvanizing: All components hot-dipped zinc-iron alloy-coated (galvannealed) in accordance with ASTM A653/A653M, with A60/ZF180 coating.
 2. Finish: Factory primed, for field finishing.
 3. Weatherstripping: Integral, recessed into door edge or frame.
- C. Interior Door Frames, Non-Fire-Rated: Fully welded type.
 1. Finish: Factory primed, for field finishing.
- D. Interior Door Frames, Fire-Rated: Fully welded type.
 1. Fire Rating: Same as door, labeled.
 2. Finish: Factory primed, for field finishing.
- E. Sound-Rated Door Frames: Fully welded type.
 1. Finish: Factory primed, for field finishing.
- F. Mullions for Pairs of Doors: Fixed, except where removable is indicated, of profile similar to jambs.
- G. Frames for Interior Glazing or Borrowed Lights: Construction and face dimensions to match door frames, and as indicated on drawings.
- H. Transom Bars: Fixed, of profile same as jamb and head.

2.05 ACCESSORY MATERIALS

- A. Glazing: As specified in Section 08 80 00, factory installed.

- B. Removable Stops: Formed sheet steel, shape as indicated on drawings, butted corners; prepared for countersink style tamper proof screws.
- C. Astragals for Double Doors: Specified in Section 08 71 00.
 - 1. Exterior Doors: Steel, Z-shaped.
 - 2. Fire-Rated Doors: Steel, shape as required to accomplish fire rating.
- D. Grout for Frames: Portland cement grout of maximum 4-inch slump for hand troweling; thinner pumpable grout is prohibited.
- E. Silencers: Resilient rubber or vinyl, fitted into drilled hole; 3 on strike side of single door, 3 on center mullion of pairs, and 2 on head of pairs without center mullions.
- F. Temporary Frame Spreaders: Provide for all factory- or shop-assembled frames.

2.06 FINISH MATERIALS

- A. Primer: Rust-inhibiting, complying with ANSI A250.10, door manufacturer's standard, baked on.
- B. Bituminous Coating: Asphalt emulsion or other high-build, water-resistant, resilient coating.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify existing conditions before starting work.
- B. Verify that opening sizes and tolerances are acceptable.

3.02 PREPARATION

- A. Coat inside of frames to be installed in masonry or to be grouted, with bituminous coating, prior to installation.
- B. Coat inside of other frames with bituminous coating to a thickness of 1/16 inch.

3.03 INSTALLATION

- A. Install in accordance with the requirements of the specified door grade standard and NAAMM HMMA 840.
- B. In addition, install fire rated units in accordance with NFPA 80.
- C. Coordinate frame anchor placement with wall construction.
- D. Grout frames in masonry construction, using hand trowel methods; brace frames so that pressure of grout before setting will not deform frames.
- E. Coordinate installation of hardware.
- F. Coordinate installation of glazing.
- G. Coordinate installation of electrical connections to electrical hardware items.
- H. Touch up damaged factory finishes.

3.04 TOLERANCES

- A. Clearances Between Door and Frame: As specified in ANSI A250.8.
- B. Maximum Diagonal Distortion: 1/16 in measured with straight edge, corner to corner.

3.05 ADJUSTING

- A. Adjust for smooth and balanced door movement.

3.06 SCHEDULE - See Drawings

END OF SECTION

SECTION 08 14 16

FLUSH WOOD DOORS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Flush wood doors; flush and flush glazed configuration; non-rated.

1.02 RELATED REQUIREMENTS

- A. Section 08 11 13 - Hollow Metal Doors and Frames: Frames.
- B. Section 08 71 00 - Door Hardware.
- C. Section 08 80 00 - Glazing.

1.03 REFERENCE STANDARDS

- A. ANSI A135.4 - American National Standard for Basic Hardboard.
- B. ASTM E 413 - Classification for Rating Sound Insulation.
- C. ASTM E1408 - Standard Test Method for Laboratory Measurement of the Sound Transmission Loss of Door Panels and Door Systems.
- D. AWI/AWMAC (QSI) - Architectural Woodwork Quality Standards Illustrated; Architectural Woodwork Institute and Architectural Woodwork Manufacturers Association of Canada.
- E. ICC (IBC) - International Building Code.
- F. UBC Std 7-2, Part II - Test Standard for Smoke- and Draft-control Assemblies; International Conference of Building Officials.
- G. UL 1784 - Standard for Air Leakage Tests of Door Assemblies.
- H. WDMA I.S.1-A - Architectural Wood Flush Doors; Window and Door Manufacturers Association.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements for submittal procedures.
- B. Product Data: Indicate door core materials and construction; veneer species, type and characteristics.
- C. Specimen warranty.
- D. Test Reports: Show compliance with specified requirements for the following:
 - 1. Sound-retardant doors and frames; sealed panel tests are not acceptable.
- E. Shop Drawings: Illustrate door opening criteria, elevations, sizes, types, swings, undercuts required, special beveling, special blocking for hardware, factory machining criteria, factory finishing criteria, identify cutouts for glazing.
- F. Samples: Submit two samples of door construction, 8 x 12 inch in size cut from top; or bottom corner of door.
- G. Samples: Submit two samples of door veneer, 6 x 6 inch in size illustrating wood grain, stain color, and sheen.

- H. Manufacturer's Installation Instructions: Indicate special installation instructions.
- I. Warranty, executed in Seaford School District's name.

1.05 QUALITY ASSURANCE

- A. Maintain one copy of the specified door quality standard on site for review during installation and finishing.
- B. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum ten years of documented experience.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Package, deliver and store doors in accordance with specified quality standard.
- B. Accept doors on site in manufacturer's packaging. Inspect for damage.
- C. Protect doors with resilient packaging sealed with heat shrunk plastic. Do not store in damp or wet areas; or in areas where sunlight might bleach veneer. Seal top and bottom edges with tinted sealer if stored more than one week. Break seal on site to permit ventilation.

1.07 PROJECT CONDITIONS

- A. Coordinate the work with door opening construction, door frame and door hardware installation.

1.08 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals for additional warranty requirements.
- B. Interior Doors: Provide manufacturer's warranty for the life of the installation.
- C. Provide warranty for the following term:
 - 1. Interior Doors: Warranty - Provide for replacing, including cost of rehangng and refinishing, at no cost to Owner, wood doors exhibiting defects in materials or workmanship including warp and delaminating for the life of installation.
- D. Include coverage for delamination of veneer, warping beyond specified installation tolerances, defective materials, and telegraphing core construction.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Wood Veneer Faced Doors:
 - 1. Eggers Industries: www.eggersondustries.com.
 - 2. VT Industries
 - 3. Marshfield DoorSystems, Inc: www.marshfielddoors.com.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 DOORS

- A. All Doors: See drawings for locations and additional requirements.
 - 1. Quality Level: Custom Grade, Extra Heavy Duty performance, in accordance with WDMA I.S.1-A.
 - 2. Quality Level: Custom Grade, in accordance with AWII/AWMAC Architectural Woodwork Quality Standards Illustrated, Section 1300.
 - 3. Wood Veneer Faced Doors: 5-ply unless otherwise indicated.
- B. Interior Doors: 1-3/4 inches; thick unless otherwise indicated; flush construction.

1. Provide solid composite lumber core doors at all locations.
2. Wood veneer facing for field transparent finish.

2.03 DOOR AND PANEL CORES

- A. Non-Rated Solid Core and 20 Minute Rated Doors: Type structural composite lumber core (SCLC), plies and faces as indicated above.

2.04 DOOR FACINGS

- A. Wood Veneer Facing for Transparent Finish: Natural Birch. Verify in field to match existing, veneer grade as specified by quality standard, rift cut, book; veneer match, balance assembly match.
 1. Vertical Edges: Same species as face veneer.
 2. Pairs: Pair match each pair; set match pairs within 10 feet of each other when doors are closed.
- B. Facing Adhesive: Type II - water resistant.

2.05 ACCESSORIES

- A. Glazing Stops: Wood, of same species as door facing, butted; or mitered corners; prepared for countersink style tamper proof screws.
- B. Astragals for Non-Rated Double Doors: Steel, T shaped, overlapping and recessed at face edge.

2.06 DOOR CONSTRUCTION

- A. Fabricate doors in accordance with door quality standard specified.
- B. Cores Constructed with stiles and rails:
- C. Provide solid blocks at lock edge for hardware reinforcement.
 1. Provide solid blocking for other throughbolted hardware.
- D. Fit door edge trim to edge of stiles after applying veneer facing.
- E. Factory machine doors for hardware other than surface-mounted hardware, in accordance with hardware requirements and dimensions.
- F. Factory fit doors for frame opening dimensions identified on shop drawings, with edge clearances in accordance with specified quality standard.
- G. Provide edge clearances in accordance with the quality standard specified.

2.07 FACTORY FINISHING - WOOD VENEER DOORS

- A. Factory finish doors in accordance with specified quality standard:
 1. Transparent Finish: Transparent catalyzed polyurethane, Custom quality, semi-gloss sheen.
- B. Factory finish doors in accordance with approved sample.
- C. Seal door top edge with color sealer to match door facing.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify existing conditions before starting work.

- B. Verify that opening sizes and tolerances are acceptable.
- C. Do not install doors in frame openings that are not plumb or are out-of-tolerance for size or alignment.

3.02 INSTALLATION

- A. Install doors in accordance with manufacturer's instructions and specified quality standard.
- B. Factory-Finished Doors: Do not field cut or trim; if fit or clearance is not correct, replace door.
- C. Use machine tools to cut or drill for hardware.
- D. Coordinate installation of doors with installation of frames and hardware.
- E. Coordinate installation of glazing.

3.03 TOLERANCES

- A. Conform to specified quality standard for fit and clearance tolerances.
- B. Conform to specified quality standard for telegraphing, warp, and squareness.
- C. Maximum Diagonal Distortion (Warp): 1/8 inch measured with straight edge or taut string, corner to corner, over an imaginary 36 by 84 inches surface area.
- D. Maximum Vertical Distortion (Bow): 1/8 inch measured with straight edge or taut string, top to bottom, over an imaginary 36 by 84 inches surface area.
- E. Maximum Width Distortion (Cup): 1/8 inch measured with straight edge or taut string, edge to edge, over an imaginary 36 by 84 inches surface area.

3.04 ADJUSTING

- A. Adjust doors for smooth and balanced door movement.
- B. Adjust closers for full closure.

END OF SECTION

SECTION 08 71 10

DOOR HARDWARE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
1. Commercial door hardware for the following:
 - a. Swinging doors.
 - b. Other doors to the extent indicated.
 2. Electrified door hardware.
- B. Related Sections include the following:
1. Division 8 Section "Steel Doors and Frames" for astragals provided as part of a fire-rated labeled assembly and for door silencers provided as part of the frame.
 2. Division 8 Section "Flush Wood Doors" for astragals provided as part of a fire-rated labeled assembly.
 3. Division 8 Section "Aluminum Entrances and Storefronts" for entrance door hardware, except cylinders.

1.3 SUBMITTALS

- A. Product Data: Include installation details, material descriptions, dimensions of individual components and profiles, and finishes.
- B. Samples for Initial Selection: Manufacturer's color charts consisting of units or sections of units showing the full range of colors, textures, and patterns available for each type of door hardware indicated.
1. Samples will be returned to Contractor. Units that are acceptable and remain undamaged through submittal, review, and field comparison process may, after final check of operation, be incorporated into the Work, within limitations of keying requirements.

- C. Door Hardware Schedule: Prepared by or under the supervision of supplier, detailing fabrication and assembly of door hardware, as well as procedures and diagrams. Coordinate the final Door Hardware Schedule with doors, frames, and related work to ensure proper size, thickness, hand, function, and finish of door hardware.
1. Format: Comply with scheduling sequence and vertical format in DHI's "Sequence and Format for the Hardware Schedule."
 2. Organization: Organize the Door Hardware Schedule into door hardware sets indicating complete designations of every item required for each door or opening.
 - a. Organize door hardware sets in same order as in the Door Hardware Schedule at the end of Part 3.
 3. Content: Include the following information:
 - a. Type, style, function, size, label, hand, and finish of each door hardware item.
 - b. Manufacturer of each item.
 - c. Fastenings and other pertinent information.
 - d. Location of each door hardware set, cross-referenced to Drawings, both on floor plans and in door and frame schedule.
 - e. Explanation of abbreviations, symbols, and codes contained in schedule.
 - f. Mounting locations for door hardware.
 - g. Door and frame sizes and materials.
 - h. Description of each electrified door hardware function, including location, sequence of operation, and interface with other building control systems.
 - 1) Sequence of Operation: Include description of component functions that occur in the following situations: authorized person wants to enter; authorized person wants to exit; unauthorized person wants to enter; unauthorized person wants to exit.
 4. Submittal Sequence: Submit the final Door Hardware Schedule at earliest possible date, particularly where approval of the Door Hardware Schedule must precede fabrication of other work that is critical in the Project construction schedule. Include Product Data, Samples, Shop Drawings of other work affected by door hardware, and other information essential to the coordinated review of the Door Hardware Schedule.
 5. Submittal Sequence: Submit initial draft of final schedule along with essential Product Data to facilitate the fabrication of other work that is critical in the Project construction schedule. Submit the final Door Hardware Schedule after Samples, Product Data, coordination with Shop Drawings of other work, delivery schedules, and similar information has been completed and accepted.
- D. Keying Schedule: Prepared by or under the supervision of supplier, detailing Owner's final keying instructions for locks. Include schematic keying diagram and index each key set to unique door designations.

- E. Product Certificates: Signed by manufacturers of electrified door hardware certifying that products furnished comply with requirements.
 - 1. Certify that door hardware approved for use on types and sizes of labeled fire doors complies with listed fire door assemblies.
- F. Qualification Data: For firms and persons specified in "Quality Assurance" Article.
 - 1. Include lists of completed projects with project names and addresses of architects and owners, and other information specified.
- G. Product Test Reports: Based on evaluation of comprehensive tests performed by manufacturer and witnessed by a qualified testing agency, indicating current products comply with requirements.
- H. Maintenance Data: For each type of door hardware to include in maintenance manuals specified in Division 1.
- I. Warranties: Special warranties specified in this Section.

1.4 QUALITY ASSURANCE

- A. Installer Qualifications: An experienced installer who has completed door hardware similar in material, design, and extent to that indicated for this Project and whose work has resulted in construction with a record of successful in-service performance.
- B. Supplier Qualifications: Door hardware supplier with warehousing facilities in Project's vicinity and who is or employs a qualified Architectural Hardware Consultant, available during the course of the Work to consult with Contractor, Architect, and Owner about door hardware and keying.
 - 1. Scheduling Responsibility: Preparation of door hardware and keying schedules.
- C. Architectural Hardware Consultant Qualifications: A person who is currently certified by the Door and Hardware Institute as an Architectural Hardware Consultant and who is experienced in providing consulting services for door hardware installations that are comparable in material, design, and extent to that indicated for this Project.
- D. Source Limitations: Obtain each type and variety of door hardware from a single manufacturer, unless otherwise indicated.
 - 1. Provide electrified door hardware from same manufacturer as mechanical door hardware, unless otherwise indicated. Manufacturers that are listed to perform electrical modifications, by a testing and inspecting agency acceptable to authorities having jurisdiction, are acceptable.
- E. Regulatory Requirements: Comply with provisions of the following:

1. Where indicated to comply with accessibility requirements, comply with Americans with Disabilities Act (ADA), "Accessibility Guidelines for Buildings and Facilities (ADAAG)," ANSI A117.1, FED-STD-795, "Uniform Federal Accessibility Standards," as follows:
 - a. Handles, Pulls, Latches, Locks, and other Operating Devices: Shape that is easy to grasp with one hand and does not require tight grasping, tight pinching, or twisting of the wrist.
 - b. Door Closers: Comply with the following maximum opening-force requirements indicated:
 - 1) Interior Hinged Doors: **5 lbf (22.2 N)** applied perpendicular to door.
 - 2) Sliding or Folding Doors: **5 lbf (22.2 N)** applied parallel to door at latch.
 - 3) Fire Doors: Minimum opening force allowable by authorities having jurisdiction.
 - c. Thresholds: Not more than **1/2 inch (13 mm)** high, Not more than **3/4 inch (19 mm)** high for exterior sliding doors. Bevel raised thresholds with a slope of not more than 1:2.
 2. NFPA 101: Comply with the following for means of egress doors:
 - a. Latches, Locks, and Exit Devices: Not more than **15 lbf (67 N)** to release the latch. Locks shall not require the use of a key, tool, or special knowledge for operation.
 - b. Delayed-Egress Locks: Lock releases within 15 seconds after applying a force not more than **15 lbf (67 N)** for not more than 3 seconds.
 - c. Door Closers: Not more than **30 lbf (133 N)** to set door in motion and not more than **15 lbf (67 N)** to open door to minimum required width.
 - d. Thresholds: Not more than **1/2 inch (13 mm)** high.
 3. Electrified Door Hardware: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction.
- F. Fire-Rated Door Assemblies: Provide door hardware for assemblies complying with NFPA 80 that are listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for fire ratings indicated, based on testing according to NFPA 252.
1. Test Pressure: Test at atmospheric pressure.
- G. Keying Conference: Conduct conference at Project site to comply with requirements in Division 1 Section "Project Meetings." Incorporate keying conference decisions in to final keying schedule after reviewing door hardware keying system including, but not limited to, the following:
1. Function of building, flow of traffic, purpose of each area, degree of security required, and plans for future expansion.

2. Preliminary key system schematic diagram.
3. Requirements for key control system.
4. Address for delivery of keys.

- H. Preinstallation Conference: Conduct conference at Project site to comply with requirements in Division 1 Section "Project Meetings."
- I. All Electric Door Hardware shall be furnished and installed by the General Contractor. All Electric Door Hardware shall be wired by the Electrical Contractor. Both the Electrical & General Contractor shall meet and coordinate all work before proceeding.
- J. Preinstallation Conference: Conduct conference at Project site to comply with requirements in Division 1 Section "Project Meetings." Review methods and procedures related to electrified door hardware including, but not limited to, the following:
1. Inspect and discuss electrical roughing-in and other preparatory work performed by other trades.
 2. Review sequence of operation for each type of electrified door hardware.
 3. Review and finalize construction schedule and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.
 4. Review required testing, inspecting, and certifying procedures.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Inventory door hardware on receipt and provide secure lock-up for door hardware delivered to Project site.
- B. Tag each item with Door Number related to the final Approved Door Hardware Schedule, and include basic installation instructions with each item or package.
- C. Deliver keys to manufacturer of key control system, or Owner as Directed.
- D. Deliver keys to Owner by registered mail or overnight package service.

1.6 COORDINATION

- A. Coordinate layout and installation of recessed pivots and closers with floor construction. Cast anchoring inserts into concrete. Concrete, reinforcement, and formwork requirements are specified in Division 3 Section "Cast-in-Place Concrete."
- B. Templates: Obtain and distribute to the parties involved templates for doors, frames, and other work specified to be factory prepared for installing door hardware. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing door hardware to comply with indicated requirements.

- C. Electrical System Roughing-in: Coordinate layout and installation of electrified door hardware with connections to power supplies, fire alarm system and detection devices, access control system, security system, and building control system.

1.7 WARRANTY

- A. General Warranty: Special warranties specified in this Article shall not deprive Owner of other rights Owner may have under other provisions of the Contract Documents and shall be in addition to, and run concurrent with, other warranties made by Contract or under requirements of the Contract Documents.
- B. Special Warranty: Written warranty, executed by manufacturer agreeing to repair or replace components of door hardware that fail in materials or workmanship within specified warranty period. Failures include, but are not limited to, the following:
 - 1. Structural failures including excessive deflection, cracking, or breakage.
 - 2. Faulty operation of operators and door hardware.
 - 3. Deterioration of metals, metal finishes, and other materials beyond normal weathering.
- C. Warranty Period for Locksets: Three, (3) years from date of Substantial Completion, unless otherwise indicated.
- D. Warranty Period for Manual Closers: Ten, (10) years from date of Substantial Completion, unless otherwise indicated.
- E. Warranty Period for Exit Devices: Three, (3) years from date of Substantial Completion, unless otherwise indicated.

1.8 MAINTENANCE SERVICE

- A. Maintenance Tools and Instructions: Furnish a complete set of specialized tools and maintenance instructions as needed for Owner's continued adjustment, maintenance, and removal and replacement of door hardware.
- B. Maintenance Service: Beginning at Substantial Completion, provide six months' full maintenance by skilled employees of door hardware Installer. Include quarterly preventive maintenance, repair or replacement of worn or defective components, lubrication, cleaning, and adjusting as required for proper door hardware operation. Provide parts and supplies as used in the manufacture and installation of original products.
- C. Engage a factory authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain door hardware and door hardware finishes.

PART 2 - PRODUCTS

2.1 SCHE DULED DOOR HARDWARE

- A. General: Provide door hardware for each door to comply with requirements in this Section, door hardware sets indicated in door and frame schedule, and the Door Hardware Schedule at the end of Part 3.
1. Door Hardware Sets: Provide quantity, item, size, finish or color indicated, and named manufacturer's products. Retain subparagraph below for electrified door hardware.
 2. Sequence of Operation: Provide electrified door hardware function, sequence of operation, and interface with other building control systems indicated.
- B. Designations: Requirements for design, grade, function, finish, size, and other distinctive qualities of each type of door hardware are indicated in the Door Hardware Schedule at the end of Part 3. Products are identified by using door hardware designations, as follows:
1. Named Manufacturer's Products: Product designation and manufacturer are listed for each door hardware type required for the purpose of establishing minimum requirements. Manufacturers' names are abbreviated in the Door Hardware Schedule.
 2. References to BHMA Standards: Provide products complying with these standards and requirements for description, quality, and function.

2.2 HINGES

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. Butt Hinges:
 - a. Stanley Commercial Hardware
 2. Continuous Hinges:
 - a. Architectural Builders Hardware Mfg., Inc.
 - b. Stanley Commercial Hardware
- B. Standards: Comply with the following:
1. Hinges ANSI/BHMA Standard A156.1 Grade 1
 2. Continuous Hinges ANSI/BHMA Standard A156.26 Grade 1
- C. Template Requirements: Except for hinges and pivots to be installed entirely (both leaves) into wood doors and frames, provide only template-produced units.
- D. Concealed bearings are made from engineered polymer material with PTFE and Aramid fiber; bearing is maintenance free, no oil, no grease.

- E. Butt hinges equipped with easily seated, non-rising pin. Hole in bottom of pin enables quick pin removal for ease of installation.
- F. Continuous hinge material to be 14 gauge, 304 stainless steel
- G. Continuous hinge steel pin to be .25 diameter, 304 stainless steel
- H. Continuous hinge exterior barrel diameter .438 (7/16)
- I. Continuous hinge knuckle to be 2", including split nylon bearing at each separation for a quiet, smooth, self-lubricating operation
- J. All hinges to carry Warnock Hersey Int. or UL for fire rated doors and frames up to 3 hours
- K. Continuous hinges to have Symmetrically templated hole pattern
- L. Continuous hinge to have a 10 year Warranty
- M. Hinge Weight: Unless otherwise indicated, provide the following:
 - 1. Supports weights up to 600lbs.
- N. Hinge Base Metal: Unless otherwise indicated, provide the following:
 - 1. Exterior Continuous Hinges: Stainless steel, with stainless-steel pin,
 - 2. Interior Continuous Hinges: Stainless steel, with stainless-steel pin.
 - 3. Continuous Hinges for Fire-Rated Assemblies: Stainless steel, with stainless-steel pin.
 - 4. Exterior Butt Hinges: Stainless Steel or Brass or Bronze
 - 5. Interior Butt Hinges: Steel or Brass or Bronze
- O. Hinge Options: Comply with the following where indicated in the Door Hardware Schedule or on Drawings:
 - 1. Hospital Tips: Slope ends of hinge barrel.
 - 2. Maximum Security Pin: Fix pin in hinge barrel after it is inserted.
 - 3. Nonremovable Pins: Provide set screw in hinge barrel that, when tightened into a groove in hinge pin, prevents removal of pin while door is closed; for the following applications:
 - a. Outswinging exterior doors.
 - b. Outswinging corridor doors with locks.
- P. Continuous-Geared Aluminum Hinges: Minimum **0.120-inch- (3.0-mm-)** thick, hinge leaves with minimum overall width of **4 inches (100 mm)** ; fabricated to full height of door and frame. Finish components after milling and drilling are complete. Fabricate hinges to template screw locations.

- Q. All geared hinges to be heavy-gauge aluminum alloy with solid support blocks of self-lubricating DELRIN.
- R. All geared hinges to meet Dynamic and static load test for compliance with ANSI A156.1, (BHMA) for 350,000 cycles at 15 cycles per minute.
- S. Fasteners: Comply with the following:
 - 1. Machine Screws: For metal doors and frames. Install 1 in to drilled and tapped holes.
 - 2. Wood Screws: For wood doors and frames.
 - 3. Threaded-to-the-Head Wood Screws: For fire-rated wood doors.
 - 4. Screws: Phillips flat-head screws; machine screws drilled and tapped holes for metal doors, wood screws for wood doors and frames. Finish screw heads to match surface of hinges.

2.3 LOCKS AND LATCHES

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Mechanical Locks and Latches:
 - a. Best Lock Corporation, School District Standard, No Substitution
- B. Standards: Comply with the following:
 - 1. Bored Locks and Latches: BHMA A156.2.
 - 2. Mortise Locks and Latches: BHMA A156.13.
 - 3. Push-Button Combination Locks: BHMA A156.2.
 - 4. Electromagnetic Locks: BHMA A156.23.
 - 5. Delayed-Egress Locks: BHMA A156.24.
- C. Bored Locks: ANSI A156.2, BHMA Series 4000, Grade 1, and is UL Listed.
- D. Mortise Locks: Stamped steel case with steel or brass parts; ANSI A156.13, Series 1000, BHMA Grade 1 Operational and Grade 2 Security and be UL Listed.
- E. Certified Products: Provide door hardware listed in the following BHMA directories:
 - 1. Mechanical Locks and Latches: BHMA's "Directory of Certified Locks & Latches."
 - 2. Electromagnetic Locks: BHMA's "Directory of Certified Electromagnetic & Delayed Egress Locks."
- F. Lock Trim: Comply with the following:
 - 1. Lever: Mortise Locks & Latches, Forged or Cast brass, bronze or stainless steel construction

2. Lever: Cylindrical Locks & Latches, Zinc material with a minimum wall thickness of .060
 3. Dummy Trim: Match lever lock trim and escutcheons.
- G. Lock Functions: Function numbers and descriptions indicated in the Door Hardware Schedule comply with the following:
1. Bored Locks: BHMA A156.2.
 2. Mortise Locks: BHMA A156.13.
- H. Lock Throw: Comply with testing requirements for length of bolts to comply with labeled fire door requirements, and as follows:
1. Bored Locks: Minimum 9/16-inch latch bolt throw.
 2. Mortise Locks: Minimum 3/4-inch latch bolt throw.
 3. Deadbolts: Minimum 1-inch bolt throw.
- I. Backset: 2-3/4 inches (70 mm), unless otherwise indicated.
- J. Mortise Locks & Latches shall have an anti-friction, 3/4-inch throw latch bolt with an anti-friction piece made of self-lubricated stainless steel. Latch bolt with plastic insert and three-piece latch bolt are unacceptable on this project.
- K. Mortise Locks & Latches shall have levers to be operated with a roller bearing spindle hub mechanism.
- L. Cylindrical Locks & Latches to have solid shaft with no opening for access to keyed lever keeper.

2.4 DOOR BOLTS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. Flush Bolts:
 - a. Burns Manufacturing Company, Inc.
 - b. Triangle Brass Manufacturing Company, Inc.
- B. Standards: Comply with the following:
1. Automatic and Self-Latching Flush Bolts: BHMA A156.3.
 2. Manual Flush Bolts: BHMA A156.16.
- C. Flush Bolts: BHMA Grade 1, designed for mortising into door edge.
- D. Bolt Throw: Comply with testing requirements for length of bolts to comply with labeled fire door requirements, and as follows:

1. Mortise Flush Bolts: Minimum 3/4-inch (19-mm) throw.

2.5 EX IT DEVICES

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 1. Precision Hardware, Inc., School District Standard, No Substitution
- B. Standard: BHMA A156.3.
 1. BHMA Grade: Grade 1
- C. Certified Products: Provide exit devices listed in BHMA's "Directory of Certified Exit Devices."
- D. Panic Exit Devices: Listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for panic protection, based on testing according to UL 305.
- E. Fire Exit Devices: Complying with NFPA 80 that are listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for fire and panic protection, based on testing according to UL 305 and NFPA 252.
- F. Warranty: Exit device to have published Five (5) Year Warranty.
- G. Exit device shall be "touch pad" type with a touch pad that shall extend a minimum of one half (1/2) of the door width.
- H. Exit device shall have a one-quarter (1/4) gap between the face of the door and the touch bar channel eliminating the need for shims or cutting away the glass molding.
- I. Exit device lock stile chassis shall be investment cast steel. Stamped steel units will not be accepted. All device latch bolts shall be stainless steel and shall be deadlocking type.
- J. Exit device strikes shall be adjustable type investment cast stainless steel.
- K. Exit device shall include sound reduction dampening for both depression and extension of the touch pad.
- L. Exit device end cap shall be all metal and secured with a bracket that interlocks both at the touch bar channel base and hinge side filler to prevent end cap "peel-back".
- M. All exposed surfaces of the exit device housing shall be no less than 14 gauge brass or bronze; or no less than 16 gauge stainless steel. Aluminum housing type exit devices are not acceptable.
- N. Dummy Push Bar: Nonfunctioning push bar matching functional push bar.

1. Operation: Rigid

O. Outside Trim: Lever, Lever with cylinder, Pull, Pull with cylinder, material and finish to match locksets, unless otherwise indicated.

1. Match design for locksets and latchsets, unless otherwise indicated.

2.6 CYLINDERS AND KEYING

A. The local Best Access System service center shall furnish new master keys and cores directly to owner. All costs for cores, keys and master keying for this project are part of this bid package. All costs to install cores after construction if required are part of this bid package with hardware supplier installing cores on site. All costs for on site owner training (minimum 8-hours) if required by owner is included in this bid package.

B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Cylinders:

- a. Best Lock Corporation, School District Standard, No Substitution
- b. All cylinders shall be Best Patented MX8, 7-pin interchangeable cores.

C. Standards: Comply with the following:

1. Cylinders: BHMA A156.5.

D. Cylinder Grade: BHMA Grade 1, Cylinders: Manufacturer's standard tumbler type, constructed from brass or bronze, stainless steel, or nickel silver, and complying with the following:

1. Number of Pins: Seven.
2. Mortise Type: Threaded cylinders with rings and straight- or clover-type cam.
3. Rim Type: Cylinders with back plate, flat-type vertical or horizontal tailpiece, and raised trim ring.
4. Bored-Lock Type: Cylinders with tailpieces to suit locks.

E. Permanent Cores: Manufacturer's standard; finish face to match lockset; complying with the following:

1. Removable Cores: Core insert, removable by use of a special key, and for use with only the core manufacturer's locksets.

F. Construction Keying: Comply with the following:

1. Construction Cores: Provide Brass construction cores in all locksets and cylinders that are replaceable by permanent cores.
 - a. Replace Brass construction cores with permanent cores, as indicated in keying schedule

- G. Keying System: Unless otherwise indicated, provide a factory-registered keying system complying with the following requirements:
1. No Master Key System: Cylinders are operated by change keys only.
 2. Master Key System: Cylinders are operated by a change key and a master key.
 3. Grand Master Key System: Cylinders are operated by a change key, a master key, and a grand master key.
 4. Great-Grand Master Key System: Cylinders are operated by a change key, a master key, a grand master key, and a great-grand master key.
 5. Existing System: Master key or grand master key locks to Owner's existing system.
 6. Keyed Alike: Key all cylinders to the same change key.
- H. Keys: Provide nickel-silver keys complying with the following:
1. Stamping: Permanently inscribe each key with a visual key control number and include the following notation:
 - a. Notation: **"DO NOT DUPLICATE."**
 2. Quantity: In addition to one extra blank key for each lock, provide the following:
 - a. Cylinder Change Keys: Three.
 - b. Master Keys: Five.
 - c. Grand Master Keys: Five.
 - d. Great-Grand Master Keys: Five.
 - e. Control Keys: Five
 - f. Construction Master Keys: Ten
 - g. Construction Core Control Keys: Five

2.7 STRIKES

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. Electric Strikes:
 - a. Security Door Controls Inc.
 - b. Folger Adam Security Inc.
- B. Standards: Comply with the following:
1. Strikes for Bored Locks and Latches: BHMA A156.2.
 2. Strikes for Mortise Locks and Latches: BHMA A156.13.
 3. Strikes for Interconnected Locks and Latches: BHMA A156.12.
 4. Strikes for Auxiliary Deadlocks: BHMA A156.5.
 5. Dustproof Strikes: BHMA A156.16.
 6. Electric Strikes: BHMA A156.5.

- C. Strikes: Provide manufacturer's standard strike with strike box for each latch or lock bolt, with curved lip extended to protect frame, finished to match door hardware set, unless otherwise indicated, and as follows:
 - 1. Flat-Lip Strikes: For locks with three-piece antifriction latch bolts, as recommended by manufacturer.
 - 2. Extra-Long-Lip Strikes: For locks used on frames with applied wood casing trim.
 - 3. Aluminum-Frame Strike Box: Provide manufacturer's special strike box fabricated for aluminum framing.
- D. Dustproof Strikes: BHMA Grade 1
- E. Electric Strikes: BHMA Grade 1

2.8 OPERATING TRIM

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Burns Manufacturing Company, Inc.
 - 2. Stanley Commercial Hardware
- B. Standard: Comply with BHMA A156.6.
- C. Materials: Fabricate from aluminum, brass, bronze, stainless steel, unless otherwise indicated.

2.9 ACCESSORIES FOR PAIRS OF DOORS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Coordinators:
 - a. Burns Manufacturing Company, Inc.
 - b. Triangle Brass Manufacturing Company, Inc.
 - 2. Removable Mullions:
 - a. Precision Hardware, Inc.
 - 3. Astragals:
 - a. Stanley Commercial Hardware
 - b. Architectural Builders Hardware, Inc.
- B. Standards: Comply with the following:
 - 1. Coordinators: BHMA A156.3.

2. Removable Mullions: BHMA A156.3.

- C. Fire-Exit Removable Mullions: Provide removable mullions for use with fire exit devices complying with NFPA 80 that are listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for fire and panic protection, based on testing according to UL 305 and NFPA 252. Mullions shall be used only with exit devices for which they have been tested.

2.10 CLOSERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. Surface-Mounted Closers:
 - a. Stanley Commercial Hardware, School District Standard, No Substitution
- B. Standards: Comply with the following:
1. Closers: BHMA A156.4.
- C. Surface Closers: BHMA Grade 1
- D. Certified Products: Provide door closers listed in BHMA's "Directory of Certified Door Closers."
- E. Size of Units: Unless otherwise indicated, comply with manufacturer's written recommendations for size of door closers depending on size of door, exposure to weather, and anticipated frequency of use. Provide factory-sized closers, adjustable to meet field conditions and requirements for opening force.

2.11 PROTECTIVE TRIM UNITS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. Metal Protective Trim Units:
 - a. Burns Manufacturing Company, Inc.
 - b. Triangle Brass Manufacturing Company, Inc.
- B. Standard: Comply with BHMA A156.6.
- C. Materials: Fabricate protection plates from the following:
1. Stainless Steel: 0.050 inch (1.3 mm) thick; beveled 4 sides.
- D. Fasteners: Provide manufacturer's standard exposed fasteners for door trim units consisting of either machine or self-tapping screws.

- E. Furnish protection plates sized 2” less than door width on push side and 1” less than door width on pull side, by height specified in Door Hardware Schedule.

2.12 STOPS AND HOLDERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Architectural Builders Hardware Mfg., Inc.
 - 2. Triangle Brass Manufacturing Company, Inc.
- B. Standards: Comply with the following:
 - 1. Stops and Bumpers: BHMA A156.16.
 - 2. Mechanical Door Holders: BHMA A156.16.
 - 3. Electromagnetic Door Holders: BHMA A156.15.
 - 4. Combination Overhead Holders and Stops: BHMA A156.8.
 - 5. Door Silencers: BHMA A156.16.
- C. Stops and Bumpers: BHMA Grade 1
- D. Mechanical Door Holders: BHMA Grade 1
- E. Combination Overhead Stops and Holders: BHMA Grade 1
- F. Electromagnetic Door Holders for Labeled Fire Door Assemblies: Coordinate with fire detectors and interface with fire alarm system.
- G. Silencers for Metal Door or Frames: BHMA Grade 1; neoprene or rubber, minimum diameter **1/2 inch (13 mm)**; fabricated for drilled-in application to frame.

2.13 DOOR GASKETING

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Door Gasketing:
 - a. K. N. Crowder Manufacturing Co., Inc.
 - b. National Guard Products, Inc.
 - 2. Door Bottoms:
 - a. K. N. Crowder Manufacturing Co., Inc.
 - b. National Guard Products
- B. Standard: Comply with BHMA A156.22.

- C. General: Provide continuous weather-strip gasketing on exterior doors and provide smoke, light, or sound gasketing on interior doors where indicated or scheduled. Provide noncorrosive fasteners for exterior applications and elsewhere as indicated.
1. Perimeter Gasketing: Apply to head and jamb, forming seal between door and frame.
 2. Meeting Stile Gasketing: Fasten to meeting stiles, forming seal when doors are closed.
 3. Door Bottoms: Apply to bottom of door, forming seal with threshold when door is closed.
- D. Air Leakage: Not to exceed **0.50 cfm per foot (0.000774 cu. m/s per m)** of crack length for gasketing other than for smoke control, as tested according to ASTM E 283.
- E. Smoke-Labeled Gasketing: Assemblies complying with NFPA 105 that are listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for smoke-control ratings indicated, based on testing according to UL 1784.
1. Provide smoke-labeled gasketing on 20-minute-rated doors and on smoke-labeled doors.
- F. Fire-Labeled Gasketing: Assemblies complying with NFPA 80 that are listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for fire ratings indicated, based on testing according to UL 10B or NFPA 252.
- G. Sound-Rated Gasketing: Assemblies that are listed and labeled by a testing and inspecting agency, for sound ratings indicated, based on testing according to ASTM E 1408.
- H. Replaceable Seal Strips: Provide only those units where resilient or flexible seal strips are easily replaceable and readily available from stocks maintained by manufacturer.
- I. Gasketing Materials: Comply with ASTM D 2000 and AAMA 701/702.

2.14 THRESHOLDS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. K. N. Crowder Manufacturing Co., Inc.
 2. National Guard Products, Inc.
- B. Standard: Comply with BHMA A156.21.

2.15 FABRICATION

- A. Manufacturer's Nameplate: Do not provide manufacturers' products that have manufacturer's name or trade name displayed in a visible location (omit removable

nameplates) except in conjunction with required fire-rated labels and as otherwise approved by Architect.

1. Manufacturer's identification will be permitted on rim of lock cylinders only.
- B. Base Metals: Produce door hardware units of base metal, fabricated by forming method indicated, using manufacturer's standard metal alloy, composition, temper, and hardness. Furnish metals of a quality equal to or greater than that of specified door hardware units and BHMA A156.18 for finishes. Do not furnish manufacturer's standard materials or forming methods if different from specified standard.
- C. Fasteners: Provide door hardware manufactured to comply with published templates generally prepared for machine, wood, and sheet metal screws. Provide screws according to commercially recognized industry standards for application intended. Provide Phillips flat-head screws with finished heads to match surface of door hardware, unless otherwise indicated.
 1. Concealed Fasteners: For door hardware units that are exposed when door is closed, except for units already specified with concealed fasteners. Do not use through bolts for installation where bolt head or nut on opposite face is exposed unless it is the only means of security attaching the door hardware. Where through bolts are used on hollow door and frame construction, provide sleeves for each through bolt.
 2. Steel Machine or Wood Screws: For the following fire-rated applications:
 - a. Mortise hinges to doors.
 - b. Strike plates to frames.
 - c. Closers to doors and frames.
 3. Steel Through Bolts: For the following fire-rated applications, unless door blocking is provided:
 - a. Surface hinges to doors.
 - b. Closers to doors and frames.
 - c. Surface-mounted exit devices.
 4. Spacers or Sex Bolts: For through bolting of hollow metal doors.
 5. Fasteners for Wood Doors: Comply with requirements of DHI WDHS.2, "Recommended Fasteners for Wood Doors."

2.16 FINISHES

- A. Standard: Comply with BHMA A156.18.
- B. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

- C. Appearance of Finished Work: Variations in appearance of abutting or adjacent pieces are acceptable if they are within one-half of the range of approved Samples. Noticeable variations in the same piece are not acceptable. Variations in appearance of other components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.
- D. BHMA Designations: Comply with base material and finish requirements indicated by the following:
 - 1. BHMA 600: Primed for painting, over steel base metal.
 - 2. BHMA 626: Satin chromium plated over nickel, over brass or bronze base metal.
 - 3. BHMA 628: Satin aluminum, clear anodized, over aluminum base metal.
 - 4. BHMA 630: Satin stainless steel, over stainless steel base metal.
 - 5. BHMA 652: Satin chromium plated over nickel, over steel base metal.
 - 6. BHMA 689: Aluminum painted, over any base metal.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine doors and frames, with Installer present, for compliance with requirements for installation tolerances, labeled fire door assembly construction, wall and floor construction, and other conditions affecting performance.
- B. Examine roughing-in for electrical power systems to verify actual locations of wiring connections before electrified door hardware installation.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Steel Doors and Frames: Comply with DHI A115 series.
 - 1. Surface-Applied Door Hardware: Drill and tap doors and frames according to SDI 107.
- B. Wood Doors: Comply with DHI A115-W series.

3.3 INSTALLATION

- A. Mounting Heights: Mount door hardware units at heights indicated in following applicable publications, unless specifically indicated or required to comply with governing regulations:

1. Standard Steel Doors and Frames: DHI's "Recommended Locations for Architectural Hardware for Standard Steel Doors and Frames."
 2. Custom Steel Doors and Frames: DHI's "Recommended Locations for Builders' Hardware for Custom Steel Doors and Frames."
 3. Wood Doors: DHI WDHS.3, "Recommended Locations for Architectural Hardware for Wood Flush Doors."
- B. Install each door hardware item to comply with manufacturer's written instructions. Where cutting and fitting are required to install door hardware onto or into surfaces that are later to be painted or finished in another way, coordinate removal, storage, and reinstallation of surface protective trim units with finishing work specified in Division 9 Sections. Do not install surface-mounted items until finishes have been completed on substrates involved.
1. Set units level, plumb, and true to line and location. Adjust and reinforce attachment substrates as necessary for proper installation and operation.
 2. Drill and countersink units that are not factory prepared for anchorage fasteners. Space fasteners and anchors according to industry standards.
- C. Key Control System: Place keys on markers and hooks in key control system cabinet, as determined by final keying schedule. Supply key cabinet with 2 5% expansion. Factory install keys in cabinet or in field with owner's representative. Key cabinet to be supplied with a "Complete System" equal to the Telkee System.
- D. Boxed Power Supplies: Locate power supplies as indicated or, if not indicated, above accessible ceilings, in equipment room. Verify location with Architect.
1. Configuration: Provide one power supply for each door opening.
 2. Configuration: Provide the least number of power supplies required to adequately serve doors with electrified door hardware.
- E. Thresholds: Set thresholds for exterior and acoustical doors in full bed of sealant complying with requirements specified in Division 7 Section "Joint Sealants."
- 3.4 FIELD QUALITY CONTROL
- A. Independent Architectural Hardware Consultant: Owner or Architect will engage a qualified independent Architectural Hardware Consultant to perform inspections and to prepare inspection reports.
1. Independent Architectural Hardware Consultant will inspect door hardware and state in each report whether installed work complies with or deviates from requirements, including whether door hardware is properly installed and adjusted.

3.5 ADJUSTING

- A. Initial Adjustment: Adjust and check each operating item of door hardware and each door to ensure proper operation or function of every unit. Replace units that cannot be adjusted to operate as intended. Adjust door control devices to compensate for final operation of heating and ventilating equipment and to comply with referenced accessibility requirements.
 - 1. Spring Hinges: Adjust to achieve positive latching when door is allowed to close freely from an open position of 30 degrees.
 - 2. Electric Strikes: Adjust horizontal and vertical alignment of keeper to properly engage lock bolt.
 - 3. Door Closers: Adjust sweep period so that, from an open position of 70 degrees, the door will take at least 3 seconds to move to a point **3 inches (75 mm)** from the latch, measured to the leading edge of the door.

- B. Six-Month Adjustment: Approximately six months after date of Substantial Completion, Installer shall perform the following:
 - 1. Examine and readjust each item of door hardware as necessary to ensure function of doors, door hardware, and electrified door hardware.
 - 2. Consult with and instruct Owner's personnel on recommended maintenance procedures.
 - 3. Replace door hardware items that have deteriorated or failed due to faulty design, materials, or installation of door hardware units.

3.6 CLEANING AND PROTECTION

- A. Clean adjacent surfaces soiled by door hardware installation.
- B. Clean operating items as necessary to restore proper function and finish.
- C. Provide final protection and maintain conditions that ensure door hardware is without damage or deterioration at time of Substantial Completion.

3.7 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain door hardware and door hardware finishes.

3.8 DOOR HARDWARE SCHEDULE

Hardware Set #: 01 Door 129D

Qty	Description	Finish	Mfg
3	HINGE CB168 4.5 x 4.5 x NRP	652	STANLEY
1	STOREROOM LOCKSET 93K7-D-14C-S3 x ABC x MX8	626	BEST
1	MOP PLATE 6" x 1" LDW .050 B4E x CSK	630	BURNS
1	KICK PLATE 8" x 2" LDW .050 B4E x CSK	630	BURNS
1	O/H CONCEALED STOP 4014 x HO (36" TO 48" DR)	630	ABH
3	SILENCERS 500	GRAY	BURNS

Hardware Set #: 02 Door 129E

Qty	Description	Finish	Mfg
2	Continuous Hinge MCK-25HD x LAR CLEAR		MC
2	Flush Bolt FB01M US26D		MC
1	Deadlock 21 8222 GMK 26D		SA
2	Pull/Push Bar Set OP810 x LAR G-MTG N-MTG	US32D	MC
3	SILENCERS 500	GRAY	BURNS

END OF SECTION

SECTION 09 21 16

GYPSUM BOARD ASSEMBLIES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Metal stud wall framing.
- B. Metal channel ceiling framing.
- C. Gypsum wallboard.
- D. Joint treatment and accessories.

1.02 RELATED REQUIREMENTS

- A. Section 06 10 00 - Rough Carpentry: Wood blocking and sheathing.
- B. Section 07 21 00 - Thermal Insulation: Acoustic insulation.
- C. Section 07 25 00 - Weather Barriers: Water-resistive barrier over sheathing.
- D. Section 07 90 05 - Joint Sealers: Acoustic sealant.

1.03 REFERENCE STANDARDS

- A. AISI SG02-1 - North American Specification for the Design of Cold-Formed Steel Structural Members; American Iron and Steel Institute. (replaced SG-971)
- B. ASTM A 653/A 653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.
- C. ASTM C475/C475M - Standard Specification for Joint Compound and Joint Tape for Finishing Gypsum Board.
- D. ASTM C 514 - Standard Specification for Nails for the Application of Gypsum Board.
- E. ASTM C645 - Standard Specification for Nonstructural Steel Framing Members.
- F. ASTM C665 - Standard Specification for Mineral-Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing.
- G. ASTM C754 - Standard Specification for Installation of Steel Framing Members to Receive Screw-Attached Gypsum Panel Products.
- H. ASTM C840 - Standard Specification for Application and Finishing of Gypsum Board.
- I. ASTM C 954 - Standard Specification for Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Steel Studs From 0.033 in. (0.84 mm) to 0.112 in. (2.84 mm) in Thickness.
- J. ASTM C1002 - Standard Specification for Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs.
- K. ASTM C 1047 - Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base.
- L. ASTM C1280 - Standard Specification for Application of Gypsum Sheathing.

- M. ASTM C1396/C1396M - Standard Specification for Gypsum Board.
- N. ASTM D3273 - Standard Test Method for Resistance to Growth of Mold on the Surface of Interior Coatings in an Environmental Chamber.
- O. ASTM E 84 - Standard Test Method for Surface Burning Characteristics of Building Materials.
- P. ASTM E90 - Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements.
- Q. ASTM E 413 - Classification for Rating Sound Insulation.
- R. GA-214 - Recommended Levels of Gypsum Board Finish; Gypsum Association.
- S. GA-216 - Application and Finishing of Gypsum Board; Gypsum Association.
- T. GA-226 - Application of Gypsum Board to Form Curved Surfaces; Gypsum Association.

1.04 SYSTEM DESCRIPTION

- A. Acoustic Attenuation for Interior Partitions Indicated as Acoustic: STC of 50-54 calculated in accordance with ASTM E 413, based on tests conducted in accordance with ASTM E 90.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Shop Drawings: Indicate special details associated with vertical deflection joints and acoustic seals.
- C. Product Data: Provide data on metal framing, gypsum board, accessories, and joint finishing system.
- D. Product Data: Provide manufacturer's data on partition head to structure connectors, showing compliance with requirements.
- E. Test Reports: For all stud framing products that do not comply with ASTM C645 or C 754, provide independent laboratory reports showing maximum stud heights at required spacings and deflections.
- F. LEED Submittals:
 - 1. For gypsum wallboard, submit documentation of recycled content and location of manufacture.
 - 2. For steel products, submit documentation of steel mill process, location of mill, and location of manufacture.

1.06 QUALITY ASSURANCE

- A. Perform in accordance with ASTM C 840. Comply with requirements of GA-600 for fire-rated assemblies.
 - 1. Maintain one copy of standards at project site.
- B. Installer Qualifications: Company specializing in performing gypsum board application and finishing, with minimum 5 years of documented experience.

1.07 REGULATORY REQUIREMENTS

- A. Conform to applicable code for fire rated assemblies as indicated on drawings.

PART 2 PRODUCTS

2.01 GYPSUM BOARD ASSEMBLIES

- A. Provide completed assemblies complying with ASTM C840 and GA-216.

2.02 METAL FRAMING MATERIALS

- A. Manufacturers - Metal Framing, Connectors, and Accessories:
1. Clarkwestern Dietrich Building Systems LLC: www.clarkdietrich.com.
 2. Dietrich Metal Framing: www.dietrichindustries.com.
 3. MarinoWare: www.marinoware.com.
 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Non-Loadbearing Framing System Components: ASTM C645; galvanized sheet steel, of size and properties necessary to comply with ASTM C754 for the spacing indicated, with maximum deflection of wall framing of L/360 at 5 psf.
1. Exception: The minimum metal thickness and section properties requirements of ASTM C 645 are waived provided steel of 40 ksi minimum yield strength is used, the metal is continuously dimpled, the effective thickness is at least twice the base metal thickness, and maximum stud heights are determined by testing in accordance with ASTM E 72 using assemblies specified by ASTM C 754.
 - a. Acceptable Products:
 - 1) Dietrich Metal Framing; UltraSteel (tm): www.dietrichindustries.com.
 - 2) Clark Western Building Systems; UltraSteel (tm): www.clarkwestern.com.
 2. Studs: "C" shaped with flat or formed webs with knurled faces.
 3. Runners: U shaped, sized to match studs.
 4. Ceiling Channels: C shaped.
 5. Furring: Hat-shaped sections, minimum depth of 7/8 inch.
- C. Shaft Wall Studs and Accessories: ASTM C645; galvanized sheet steel, of size and properties necessary to comply with ASTM C754.
- D. Partition Head to Structure Connections: Provide mechanical anchorage devices that accommodate deflection using slotted holes, screws and anti-friction bushings, preventing rotation of studs while maintaining structural performance of partition.
1. Structural Performance: Maintain lateral load resistance and vertical movement capacity required by applicable code, when evaluated in accordance with AISI North American Specification for the Design of Cold-Formed Steel Structural Members.
 2. Material: ASTM A653/A653M steel sheet, SS Grade 50/340, with G60/Z180 hot dipped galvanized coating.
 3. Provide top track preassembled with connection devices spaced to fit stud spacing indicated on drawings; minimum track length of 12 feet.

2.03 BOARD MATERIALS

- A. Manufacturers - Gypsum-Based Board:
1. CertainTeed Corporation: www.certainteed.com.
 2. Georgia-Pacific Gypsum LLC: www.gp.com/gypsum.
 3. National Gypsum Company: www.nationalgypsum.com.
 4. USG Corporation: www.usg.com.
 5. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Gypsum Wallboard: Paper-faced gypsum panels as defined in ASTM C1396/C1396M; sizes to minimize joints in place; ends square cut.
1. Application: Use for vertical surfaces and ceilings, unless otherwise indicated.

2. Thickness:
 - a. Vertical Surfaces: 1/2 inch.
- C. Gypsum Wallboard: ASTM C 1396/C 1396M. Sizes to minimize joints in place; ends square cut.
 1. Regular Type:
 - a. Application: Use for vertical surfaces and ceilings, unless otherwise indicated.
 - b. Thickness: 5/8 inch.
 - c. Edges: Tapered and featured.
 2. Fire Resistant Type: Complying with Type X requirements; UL or WH rated.
 - a. At Assemblies Indicated with Fire-Rating: Use type required by indicated tested assembly; if no tested assembly is indicated, use Type X.
 - b. Thickness: 5/8 inch.
 - c. Edges: Tapered and featured.
 3. Ceiling Board: Special sag-resistant type.
 - a. Application: Ceilings, unless otherwise indicated.
 - b. Thickness: 1/2 inch.
 - c. Edges: Tapered.
 4. Abuse-Resistant Type: Gypsum wallboard especially formulated for increased impact resistance, with enhanced gypsum core and heavy duty face and back paper.
 - a. Application: High-traffic areas indicated.
 - b. Core Type: Regular and Type X, as indicated.
 - c. Thickness: 5/8 inch.
 - d. Edges: Tapered.
- D. Water-Resistant Gypsum Backing Board: ASTM C 1396/C 1396M; ends square cut.
 1. Application: Vertical surfaces behind thinset tile, except in wet areas.
 2. Core Type: Regular.
 3. Core Type: Regular, as indicated.
 4. Thickness: 5/8 inch.
 5. Edges: Tapered.

2.04 ACCESSORIES

- A. Acoustic Insulation: ASTM C 665; preformed glass fiber, friction fit type, unfaced. Thickness to fit cavity.
- B. Acoustic Insulation: As specified in Section 07 21 00.
- C. Acoustic Sealant: As specified in Section 07 90 05.
- D. Water-Resistive Barrier: As specified in Section 07 25000.
- E. Finishing Accessories: ASTM C1047, rigid plastic, unless otherwise indicated.
 1. Types: As detailed or required for finished appearance.
 2. Special Shapes: In addition to conventional cornerbead and control joints, provide U-bead at exposed panel edges.
- F. Joint Materials: ASTM C475 and as recommended by gypsum board manufacturer for project conditions.
 1. Tape: 2 inch wide, coated glass fiber tape for joints and corners, except as otherwise indicated.
 2. Tape: 2 inch wide, creased paper tape for joints and corners, except as otherwise indicated.
 3. Ready-mixed vinyl-based joint compound.
 4. Powder-type vinyl-based joint compound.

- 5. Chemical hardening type compound.
- G. Screws for Attachment to Steel Members Less Than 0.03 inch In Thickness, to Wood Members, and to Gypsum Board: ASTM C1002; self-piercing tapping type; cadmium-plated for exterior locations.
- H. Screws: ASTM C 1002; self-piercing tapping type; cadmium-plated for exterior locations.
- I. Screws: ASTM C 954; steel drill screws for application of gypsum board to loadbearing steel studs.
- J. Nails for Attachment to Wood Members: ASTM C514.
- K. Staples: ASTM C 840.
- L. Anchorage to Substrate: Tie wire, nails, screws, and other metal supports, of type and size to suit application; to rigidly secure materials in place.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that project conditions are appropriate for work of this section to commence.

3.02 FRAMING INSTALLATION

- A. Metal Framing: Install in accordance with ASTM C754 and manufacturer's instructions.
- B. Suspended Ceilings and Soffits: Space framing and furring members as indicated.
 - 1. Level ceiling system to a tolerance of 1/600.
 - 2. Laterally brace entire suspension system.
 - 3. Install bracing as required at exterior locations to resist wind uplift.
- C. Studs: Space studs as indicated.
 - 1. Extend partition framing to structure where indicated and to ceiling in other locations.
 - 2. Partitions Terminating at Ceiling: Attach ceiling runner securely to ceiling framing in accordance with details.
 - 3. Partitions Terminating at Structure: Attach extended leg top runner to structure, maintain clearance between top of studs and structure, and brace both flanges of studs with continuous bridging.
 - 4. Partitions Terminating at Structure: Attach top runner to structure, maintain clearance between top of studs and structure, and connect studs to track using specified mechanical devices in accordance with manufacturer's instructions; verify free movement of top of stud connections; do not leave studs unattached to track.
- D. Openings: Reinforce openings as required for weight of doors or operable panels, using not less than double studs at jambs.
- E. Standard Wall Furring: Install at concrete and masonry walls scheduled to receive gypsum board, not more than 4 inches from floor and ceiling lines and abutting walls. Secure in place on alternate channel flanges at maximum 24 inches on center.
 - 1. Orientation: Horizontal; or Vertical.
 - 2. Spacing: At 16 inches on center; or As permitted by standard.
- F. Furring for Fire Ratings: Install as required for fire resistance ratings indicated and to GA-600 requirements.

- G. Blocking: Install blocking for support of plumbing fixtures, toilet partitions, wall cabinets, wood fram openings, toilet accessories, and hardware. Comply with Section 06 10 00 for wood blocking.

3.03 ACOUSTIC ACCESSORIES INSTALLATION

- A. Acoustic Insulation: Place tightly within spaces, around cut openings, behind and around electrical and mechanical items within partitions, and tight to items passing through partitions.
- B. Acoustic Sealant: Install as follows:
 - 1. Place two beads continuously on substrate before installation of perimeter framing members.
 - 2. Place continuous bead at perimeter of each layer of gypsum board.
 - 3. In non-fire-rated construction, seal around all penetrations by conduit, pipe, ducts, and rough-in boxes; and other penetrations.

3.04 BOARD INSTALLATION

- A. Comply with ASTM C 840 and manufacturer's instructions. Install to minimize butt end joints, especially in highly visible locations.
- B. Single-Layer Non-Rated: Install gypsum board in most economical direction, with ends and edges occurring over firm bearing.
 - 1. Exception: Tapered edges to receive joint treatment at right angles to framing.
- C. Double-Layer Non-Rated: Use gypsum board for first layer, placed perpendicular to framing or furring members, with ends and edges occurring over firm bearing. Place second layer parallel to framing or furring members. Offset joints of second layer from joints of first layer.
- D. Fire-Rated Construction: Install gypsum board in strict compliance with requirements of assembly listing.
- E. Exterior Sheathing: Comply with ASTM C1280. Install sheathing vertically, with edges butted tight and ends occurring over firm bearing.
 - 1. Paper-Faced Sheathing: Immediately after installation, protect from weather by application of water-resistive barrier.
- F. Exterior Soffit Board: Install perpendicular to framing, with staggered end joints over framing members or other solid backing.
- G. Cementitious Backing Board: Install over steel framing members and plywood substrate where indicated, in accordance with ANSI A108.11 and manufacturer's instructions.
- H. Glass Mat Faced Gypsum Board: Install in strict accordance with manufacturer's instructions.
- I. Installation on Metal Framing: Use screws for attachment of all gypsum board except face layer of non-rated double-layer assemblies, which may be installed by means of adhesive lamination.
- J. Curved Surfaces: Apply gypsum board to curved substrates in accordance with GA-226.
- K. Moisture Protection: Treat cut edges and holes in moisture resistant gypsum board with sealant.

3.05 INSTALLATION OF TRIM AND ACCESSORIES

- A. Control Joints: Place control joints consistent with lines of building spaces and as directed.
 - 1. Not more than 30 feet apart on walls and ceilings over 50 feet long.
- B. Corner Beads: Install at external corners, using longest practical lengths.

- C. Edge Trim: Install at locations where gypsum board abuts dissimilar materials and as indicated.

3.06 JOINT TREATMENT

- A. Paper Faced Gypsum Board: Use fiberglass joint tape, bedded with ready-mixed vinyl-based; or powder-type vinyl-based; or chemical hardening type joint compound and finished with ready-mixed vinyl-based; or powder-type vinyl-based; or chemical hardening type joint compound.
- B. Finish gypsum board in accordance with levels defined in ASTM C840, as follows:
 - 1. Level 4: Walls and ceilings to receive paint finish or wall coverings, unless otherwise indicated.
 - 2. Level 1: Fire rated wall areas above finished ceilings, whether or not accessible in the completed construction.
- C. Finish gypsum board in scheduled areas in accordance with levels defined in GA-214; or ASTM C 840 and as scheduled below.
 - 1. Above Finished Ceilings Concealed From View: Level 1.
 - 2. Utility Areas and Areas Behind Cabinetry: Level 2.
 - 3. Walls and Ceilings to Receive Flat or Eggshell Paint Finish: Level 4.
- D. Tape, fill, and sand exposed joints, edges, and corners to produce smooth surface ready to receive finishes.
 - 1. Feather coats of joint compound so that camber is maximum 1/32 inch.
 - 2. Taping, filling, and sanding is not required at surfaces behind adhesive applied ceramic tile and fixed cabinetry.
 - 3. Taping, filling and sanding is not required at base layer of double layer applications.

3.07 TOLERANCES

- A. Maximum Variation of Finished Gypsum Board Surface from True Flatness: 1/8 inch in 10 feet in any direction.

3.08 FINISH LEVEL SCHEDULE

- A. Level 1: Above finished ceilings concealed from view.
- B. Level 2: Utility areas and areas behind cabinetry.
- C. Level 3: Walls scheduled to receive textured wall finish.
- D. Level 4: Walls and ceilings scheduled to receive flat or eggshell paint finish.
- E. Level 5: Walls and ceilings scheduled to receive semi-gloss or gloss paint finish.

END OF SECTION

SECTION 09 23 00

GYPSUM PLASTERING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Gypsum plaster over gypsum lath.
- B. Gypsum lath.

1.02 REFERENCE STANDARDS

- A. ASTM C 28/C 28M - Standard Specification for Gypsum Plasters.
- B. ASTM C 206 - Standard Specification for Finishing Hydrated Lime.
- C. ASTM C 841 - Standard Specification for Installation of Interior Lathing and Furring.
- D. ASTM C 842 - Standard Specification for Application of Interior Gypsum Plaster.
- E. ASTM C1396/C1396M - Standard Specification for Gypsum Board.

1.03 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittals procedures.
- B. Product Data: Provide data on plaster materials, characteristics, and limitations of products specified.

PART 2 PRODUCTS

2.01 GYPSUM PLASTER ASSEMBLIES

2.02 PLASTER MATERIALS

- A. Ready-Mixed Gypsum Plaster: ASTM C28; mill-mixed type, requiring only the addition of water. For application to monolithic concrete, provide bonding type.
- B. Ready-Mixed Finishing Plaster: Gypsum/Lime putty type, ASTM C 28; mixture of gauging plaster and lime.

2.03 METAL LATH AND FURRING

- A. Metal Lath and Accessories: As specified in Section 09 22 36.23.

2.04 GYPSUM LATH AND ACCESSORIES

- A. Gypsum Lath: ASTM C1396/C1396M, standard type.

2.05 PLASTER MIXES

- A. Over Gypsum Lath: Two-coat application, ready-mixed plaster, mixed and proportioned in accordance with ASTM C842 and manufacturer's instructions.
- B. Ready-Mixed Plaster Materials: Mix in accordance with manufacturer's instructions.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that existing conditions are satisfactory before starting work.

- B. Grounds and Blocking: Verify items within walls for other sections of work have been installed.
- C. Gypsum Lath and Accessories: Verify substrate is flat and surface is ready to receive work of this section. Verify joint and surface perimeter accessories are in place.

3.02 INSTALLATION - GYPSUM LATH AND ACCESSORIES

- A. Install gypsum lath in accordance with ASTM C841.
- B. Install gypsum lath perpendicular to framing members, with lath face exposed. Stagger end joint of alternate courses. Butt joints tight. Maximum gap allowed: 1/8 inch.
- C. Place corner reinforcement diagonally over gypsum lath and across corner immediately above and below openings. Secure to gypsum lath only.
- D. Continuously reinforce internal angles with corner mesh, return 3 inches from corner to form the angle reinforcement; fasten at perimeter edges only.
- E. Place corner bead at external wall corners; fasten at outer edges of lath only.
- F. Place strip mesh diagonally at corners of lathed openings. Secure rigidly in place.
- G. Place 4 inch wide strips of strip mesh centered over junctions of dissimilar backing materials. Secure rigidly in place.
- H. Place casing beads at terminations of plaster finish. Butt and align ends. Secure rigidly in place.

3.03 PLASTERING

- A. Apply gypsum plaster in accordance with ASTM C842 and manufacturer's instructions.
- B. Thickness of Plaster including Finish Coat:
 - 1. Over gypsum lath: 1/2 inch.

END OF SECTION

SECTION 09 65 00

RESILIENT FLOORING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Resilient tile flooring.
- B. Resilient base.
- C. Quartz Tile 18"x18". See Products
- D. Installation accessories.

1.02 RELATED REQUIREMENTS

- A. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 03 30 00 - Cast-in-Place Concrete: Restrictions on curing compounds for concrete slabs and floors.
- C. Section 03 54 00 -.

1.03 REFERENCE STANDARDS

- A. ASTM E 648 - Standard Test Method for Critical Radiant Flux of Floor-Covering Systems Using a Radiant Heat Energy Source.
- B. ASTM F710 - Standard Practice for Preparing Concrete Floors to Receive Resilient Flooring.
- C. ASTM F 1066 - Standard Specification for Vinyl Composition Floor Tile.
- D. ASTM F1303 - Standard Specification for Sheet Vinyl Floor Covering with Backing.
- E. ASTM F 1344 - Standard Specification for Rubber Floor Tile.
- F. ASTM F 1700 - Standard Specification for Solid Vinyl Floor Tile.
- G. ASTM F1861 - Standard Specification for Resilient Wall Base.
- H. ASTM F 1913 - Standard Specification for Vinyl Sheet Floor Covering Without Backing.
- I. BAAQMD 8-51 - Bay Area Air Quality Management District Regulation 8, Rule 51, Adhesive and Sealant Products; www.baaqmd.gov.
- J. FS RR-T-650 - Treads, Metallic and Nonmetallic, Skid Resistant; Federal Specifications and Standards.
- K. NFPA 253 - Standard Method of Test for Critical Radiant Flux of Floor Covering Systems Using a Radiant Heat Energy Source; National Fire Protection Association.
- L. RFCI - Recommended Work Practices for Removal of Resilient Floor Coverings; Resilient Floor Covering Institute.
- M. SCAQMD 1168 - South Coast Air Quality Management District Rule No.1168; www.aqmd.gov.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

- B. Product Data: Provide data on specified products, describing physical and performance characteristics; including sizes, patterns and colors available; and installation instructions.
- C. Shop Drawings: Indicate seaming plan.
- D. Selection Samples: Submit manufacturer's complete set of color samples for StudioJAED's initial selection.
- E. Verification Samples: Submit two samples, 6x6 inch in size illustrating color and pattern for each resilient flooring product specified.
- F. LEED Report: Report recycled content and VOC emission of flooring; VOC content of adhesives.

1.05 DELIVERY, STORAGE, AND HANDLING

- A. Protect roll materials from damage by storing on end.

1.06 FIELD CONDITIONS

- A. Maintain temperature in storage area between 55 degrees F and 90 degrees F.
- B. Store materials for not less than 48 hours prior to installation in area of installation at a temperature of 70 degrees F to achieve temperature stability. Thereafter, maintain conditions above 55 degrees F.

1.07 EXTRA MATERIALS

- A. See Section 01 60 00 - Product Requirements, for additional provisions.
- B. Provide 50 sq ft of flooring, 20 lineal feet of base, and 5 percent of installed stair materials of each type and color specified.

PART 2 PRODUCTS

2.01 QUARTZ TILE

- A. 18"x18" Quartz Tile Resilient Tile Flooring
- B. Basis of Design; FasolPlus. As Manufactured byToli International
- C. Installed per Manufacturer's recommendations.

2.02 RESILIENT BASE

- A. Resilient Base: ASTM F 1861, Type TS rubber, vulcanized thermoset; top set cover and as follows:
 - 1. Critical Radiant Flux (CRF): Minimum 0.45 watt per square centimeter, when tested in accordance with ASTM E 648 or NFPA 253.
 - 2. Height: 6 inch.
 - 3. Thickness: 0.125 inch thick.
 - 4. Finish: Satin.
 - 5. Length: Roll.
 - 6. Color: Color as selected from manufacturer's standards.
 - 7. Accessories: Premolded external corners and end stops.
 - 8. Manufacturers:
 - a. Roppe Corp; Product pinnacle: www.roppe.com.
 - b. Substitutions: See Section 01 60 00 - Product Requirements.

2.03 ACCESSORIES

- A. Subfloor Filler: White premix latex; type recommended by adhesive material manufacturer.
- B. Primers, Adhesives, and Seaming Materials: Waterproof; types recommended by flooring manufacturer.
 - 1. Provide only products having lower volatile organic compound (VOC) content than required by the more stringent of the South Coast Air Quality Management District Rule No.1168 and the Bay Area Air Quality Management District Regulation 8, Rule 51.
- C. Moldings and Edge Strips: Metal or metal.
 - 1. Products: manufactured by Roppe.
- D. Filler for Coved Base: Plastic or as recommended by manufacturer.
- E. Sealer and Wax: Types recommended by flooring manufacturer.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that sub-floor surfaces are smooth and flat within the tolerances specified for that type of work and are ready to receive resilient flooring.
- B. Verify that wall surfaces are smooth and flat within the tolerances specified for that type of work, are dust-free, and are ready to receive resilient base.
- C. Verify that sub-floor surfaces are dust-free and free of substances that could impair bonding of adhesive materials to sub-floor surfaces.
- D. Verify that concrete sub-floor surfaces are dry enough and ready for resilient flooring installation by testing for moisture emission rate and alkalinity in accordance with ASTM F710; obtain instructions if test results are not within limits recommended by resilient flooring manufacturer and adhesive materials manufacturer.
- E. Verify that concrete sub-floor surfaces are ready for resilient flooring installation by testing for moisture emission rate and alkalinity; obtain instructions if test results are not within the following limits:
 - 1. Moisture emission rate: Not greater than 3 lb per 1000 sq ft per 24 hours when tested using calcium chloride moisture test kit for 72 hours.
 - 2. Alkalinity: pH range of 5-9.

3.02 PREPARATION

- A. Remove existing resilient flooring and flooring adhesives; follow the recommendations of RFCI Recommended Work Practices for Removal of Resilient Floor Coverings.
- B. Remove sub-floor ridges and bumps. Fill minor low spots, cracks, joints, holes, and other defects with sub-floor filler to achieve smooth, flat, hard surface.
- C. Prohibit traffic until filler is cured.
- D. Clean substrate.
- E. Apply primer as required to prevent "bleed-through" or interference with adhesion by substances that cannot be removed.

3.03 INSTALLATION

- A. Starting installation constitutes acceptance of sub-floor conditions.
- B. Install in accordance with manufacturer's instructions.
- C. Spread only enough adhesive to permit installation of materials before initial set.
- D. Fit joints tightly.
- E. Set flooring in place, press with heavy roller to attain full adhesion.
- F. Where type of floor finish, pattern, or color are different on opposite sides of door, terminate flooring under centerline of door.
- G. Install edge strips at unprotected or exposed edges, where flooring terminates, and where indicated.
- H. Scribe flooring to walls, columns, cabinets, floor outlets, and other appurtenances to produce tight joints.

3.04 SHEET FLOORING

- A. Install in accordance with manufacturer's instructions.
- B. Spread only enough adhesive to permit installation of materials before initial set.
- C. Set flooring in place, press with heavy roller to attain full adhesion.
- D. Lay flooring with joints and seams parallel to longer room dimensions, to produce minimum number of seams. Lay out seams to avoid widths less than 1/3 of roll width; match patterns carefully at seams.
- E. Seams are prohibited in custodial closets and no more than (1) seam in toilet rooms centered.
- F. Double cut sheet at seams.
- G. Double cut sheet; provide heat welded seams.
- H. Where floor finishes are different on opposite sides of door, terminate flooring under centerline of door.
- I. Install edge strips at unprotected or exposed edges, where flooring terminates, and where indicated. After installation of flooring, secure metal strips with stainless steel screws. Secure resilient strips by adhesive.
- J. Coved Base: Install as detailed on drawings, using coved base filler as backing at floor to wall junction. Extend sheet flooring vertically to height indicated, and cover top edge with metal cap strip.
- K. Scribe flooring to walls, columns, cabinets, and other appurtenances to produce tight joints.
- L. Install flooring in recessed floor access covers. Maintain floor pattern.
- M. At movable partitions, install flooring under partitions without interrupting floor pattern.
- N. Install feature strips and floor markings where indicated. Fit joints tightly.

3.05 TILE FLOORING

- A. Install in accordance with manufacturer's instructions.

- B. Mix tile from container to ensure shade variations are consistent when tile is placed, unless manufacturer's instructions say otherwise.
- C. Spread only enough adhesive to permit installation of materials before initial set.
- D. Set flooring in place, press with heavy roller to attain full adhesion.
- E. Lay flooring with joints and seams parallel or as shown on plans to building lines to produce symmetrical tile pattern.
- F. Install tile to basket weave pattern. Allow minimum 1/2 full size tile width at room or area perimeter.
- G. Where floor finishes are different on opposite sides of door, terminate flooring under centerline of door.
- H. Install edge strips at unprotected or exposed edges, where flooring terminates, and where indicated. After installation of flooring, secure metal strips with stainless steel screws.
- I. Scribe flooring to walls, columns, cabinets, and other appurtenances to produce tight joints.
- J. Install flooring in recessed floor access covers. Maintain floor pattern.
- K. At movable partitions, install flooring under partitions without interrupting floor pattern.
- L. Install feature strips and floor markings where indicated. Fit joints tightly.

3.06 RESILIENT BASE

- A. Fit joints tightly and make vertical. Maintain minimum dimension of 48 inches between joints.
- B. Miter internal corners. At external corners, use premolded units. At exposed ends, use premolded units.
- C. Install base on solid backing. Bond tightly to wall and floor surfaces.
- D. Scribe and fit to door frames and other interruptions.

3.07 STAIR COVERINGS

- A. Install stair coverings in one piece for full width and depth of tread.
- B. Install stringers configured tightly to stair profile.
- C. Adhere over entire surface. Fit accurately and securely.

3.08 CLEANING

- A. Remove excess adhesive from floor, base, and wall surfaces without damage.
- B. Clean in accordance with manufacturer's instructions.
- C. Clean, seal, and wax resilient flooring products in accordance with manufacturer's instructions.

3.09 PROTECTION

- A. Prohibit traffic on resilient flooring for 48 hours after installation.

END OF SECTION

SECTION 09 90 00

PAINTING AND COATING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Surface preparation.
- B. Field application of paints and other coatings.
- C. Scope: Finish all interior and exterior surfaces exposed to view, unless fully factory-finished and unless otherwise indicated, including the following:
- D. Do Not Paint or Finish the Following Items:
 - 1. Items fully factory-finished unless specifically so indicated; materials and products having factory-applied primers are not considered factory finished.
 - 2. Items indicated to receive other finishes.
 - 3. Items indicated to remain unfinished.
 - 4. Fire rating labels, equipment serial number and capacity labels, and operating parts of equipment.
 - 5. Floors, unless specifically so indicated.
 - 6. Glass.
 - 7. Concealed pipes, ducts, and conduits.
- E. Painting materials and methods for conduit identification specified in Section 26 05 53.

1.02 RELATED REQUIREMENTS

- A. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 32 - 1723.13: Pavement markings.
- C. Section 05 50 00 -: Shop-primed items.
- D. Section 33 16 13 - Aboveground Water Utility Storage Tanks: Painting inside and outside of tanks.
- E. Section 22 05 53 - Identification for Plumbing Piping and Equipment: Painted identification.
- F. Section 26 05 53 - Identification for Electrical Systems: Painted identification.

1.03 REFERENCE STANDARDS

- A. 40 CFR 59, Subpart D - National Volatile Organic Compound Emission Standards for Architectural Coatings; U.S. Environmental Protection Agency.
- B. ASTM D 16 - Standard Terminology for Paint, Related Coatings, Materials, and Applications.
- C. ASTM D4442 - Standard Test Methods for Direct Moisture Content Measurement of Wood and Wood-Base Materials.
- D. GreenSeal GS-11 - Paints.
- E. NACE (IMP) - Industrial Maintenance Painting; NACE International.
- F. SSPC (PM1) - Good Painting Practice: SSPC Painting Manual, Vol. 1; Society for Protective Coatings.

- G. USGBC LEED-NC - LEED Green Building Rating System for New Construction and Major Renovations; U.S. Green Building Council.

1.04 DEFINITIONS

- A. Conform to ASTM D 16 for interpretation of terms used in this section.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide data on all finishing products and special coatings, including VOC content.
- C. Samples: Submit two paper chip samples, 1 X 1 inch in size illustrating range of colors and textures available for each surface finishing product scheduled.
- D. Samples: Submit two painted samples, illustrating selected colors and textures for each color and system selected with specified coats cascaded. Submit on aluminum sheet, 6 x 6 inch in size.
- E. Certification: By manufacturer that all paints and coatings comply with VOC limits specified.
- F. Certification: By manufacturer that all paints and coatings do not contain any of the prohibited chemicals specified; GreenSeal GS-11 certification is not required but if provided shall constitute acceptable certification.
- G. LEED Report: VOC content of all interior opaque coatings actually used.
- H. Manufacturer's Instructions: Indicate special surface preparation procedures and substrate conditions requiring special attention.
- I. Maintenance Data: Submit data on cleaning, touch-up, and repair of painted and coated surfaces.

1.06 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the products specified, with minimum 10 years documented experience.
- B. Applicator Qualifications: Company specializing in performing the type of work specified with minimum 10 years experience.

1.07 REGULATORY REQUIREMENTS

- A. Conform to applicable code for flame and smoke rating requirements for products and finishes.

1.08 MOCK-UP

- A. See Section 01 40 00 - Quality Requirements, for general requirements for mock-up.
- B. Provide panel, 10 feet long by 8 feet wide, illustrating coating color, texture, and finish.
- C. Provide door and frame assembly illustrating coating color, texture, and finish.
- D. Locate where directed.
- E. Mock-up may remain as part of the work.

1.09 DELIVERY, STORAGE, AND HANDLING

- A. Deliver products to site in sealed and labeled containers; inspect to verify acceptability.
- B. Container Label: Include manufacturer's name, type of paint, brand name, lot number, brand code, coverage, surface preparation, drying time, cleanup requirements, color designation, and instructions for mixing and reducing.
- C. Paint Materials: Store at minimum ambient temperature of 45 degrees F and a maximum of 90 degrees F, in ventilated area, and as required by manufacturer's instructions.

1.10 FIELD CONDITIONS

- A. Do not apply materials when surface and ambient temperatures are outside the temperature ranges required by the paint product manufacturer.
- B. Follow manufacturer's recommended procedures for producing best results, including testing of substrates, moisture in substrates, and humidity and temperature limitations.
- C. Do not apply exterior coatings during rain or snow, or when relative humidity is outside the humidity ranges required by the paint product manufacturer.
- D. Minimum Application Temperatures for Latex Paints: 45 degrees F for interiors; 50 degrees F for exterior; unless required otherwise by manufacturer's instructions.
- E. Minimum Application Temperature for Varnish Finishes: 65 degrees F for interior or exterior, unless required otherwise by manufacturer's instructions.
- F. Provide lighting level of 80 ft candles measured mid-height at substrate surface.

1.11 EXTRA MATERIALS

- A. See Section 01 60 00 - Product Requirements, for additional provisions.
- B. Supply 1 gallon of each color; store where directed.
- C. Label each container with color, type, texture, and room locations in addition to the manufacturer's label.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Provide all paint and coating products used in any individual system from the same manufacturer; no exceptions.
- B. Paints:
 - 1. Duron, Inc: www.duron.com.
 - 2. Sherwin Williams
 - 3. Benjamin Moore & Co: www.benjaminmoore.com.
- C. Stains (Wood):
 - 1. Base Manufacturer: ICI Paints North America.
 - 2. Duron Inc..
 - 3. Sherwin Williams.
 - 4. Benjamin Moore
- D. Primer Sealers (Opaque):
 - 1. Base Manufacturer: ICI Paints North America.
 - 2. Duron Inc..
 - 3. Sherwin Williams.

4. Benjamin Moore
- E. Block Fillers:
 1. Base Manufacturer: ICI Paints North America.
 2. Duron Inc..
 3. Sherwin Williams.
 4. Benjamin Moore
- F. Field-Catalyzed Coatings:
 1. Base Manufacturer: ICI Paints North America.
 2. Duron Inc..
 3. Sherwin Williams.
 4. Benjamin Moore
- G. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 PAINTS AND COATINGS - GENERAL

- A. Paints and Coatings: Ready mixed, unless intended to be a field-catalyzed coating.
 1. Provide paints and coatings of a soft paste consistency, capable of being readily and uniformly dispersed to a homogeneous coating, with good flow and brushing properties, and capable of drying or curing free of streaks or sags.
 2. Supply each coating material in quantity required to complete entire project's work from a single production run.
 3. Do not reduce, thin, or dilute coatings or add materials to coatings unless such procedure is specifically described in manufacturer's product instructions.
- B. Primers: Where the manufacturer offers options on primers for a particular substrate, use primer categorized as "best" by the manufacturer.
- C. Volatile Organic Compound (VOC) Content: Comply with Section 01 61 16.
- D. Chemical Content: The following compounds are prohibited:
 1. Aromatic Compounds: In excess of 1.0 percent by weight of total aromatic compounds (hydrocarbon compounds containing one or more benzene rings).
 2. Acrolein, acrylonitrile, antimony, benzene, butyl benzyl phthalate, cadmium, di (2-ethylhexyl) phthalate, di-n-butyl phthalate, di-n-octyl phthalate, 1,2-dichlorobenzene, diethyl phthalate, dimethyl phthalate, ethylbenzene, formaldehyde, hexavalent chromium, isophorone, lead, mercury, methyl ethyl ketone, methyl isobutyl ketone, methylene chloride, naphthalene, toluene (methylbenzene), 1,1,1-trichloroethane, vinyl chloride.

2.03 PAINT SYSTEMS - EXTERIOR

- A. Paint ME-OP-3L - Ferrous Metals, Unprimed, Latex, 3 Coat:
 1. One coat of latex primer.
 2. Egg Shell: Two coats of latex enamel; .
- B. Paint MgE-OP-3L - Galvanized Metals, Latex, 3 Coat:
 1. One coat galvanize primer.
 2. Semi-gloss: Two coats of latex enamel.

2.04 PAINT SYSTEMS - INTERIOR

- A. Paint MI-OP-3L - Ferrous Metals, Unprimed, Latex, 3 Coat:
 1. One coat of latex primer.
 2. Egg Shell: Two coats of latex enamel; .

- B. Paint MI-OP-2L - Ferrous Metals, Primed, Latex, 2 Coat:
 - 1. Touch-up with latex primer or manufacturer recommended.
 - 2. Semi-gloss: Two coats of latex enamel.
- C. Paint Mgl-OP-3L - Galvanized Metals, Latex, 3 Coat:
 - 1. One coat galvanize primer.
 - 2. Egg Shell: Two coats of latex enamel; .
- D. Paint Mal-OP-3L - Aluminum, Unprimed, Latex, 3 Coat:
 - 1. One coat etching primer.
 - 2. Egg Shell: Two coats of latex enamel.
- E. Paint CI-OP-3E - Concrete/Masonry, Epoxy Enamel, 3 Coat:
 - 1. One coat of catalyzed epoxy primer.
 - 2. Egg Shell: Two coats of catalyzed epoxy enamel.
- F. Paint GI-OP-3L - Gypsum Board/Plaster, Latex, 3 Coat:
 - 1. One coat of alkyd or latex primer sealer.
 - 2. Eggshell: Two coats of latex enamel.
- G. Paint I-TR-F - Fire-Retardant Coating, Intumescent:
 - 1. One coat of fire-retardant primer sealer.
 - 2. Gloss: One coat of intumescent coating, flame/smoke rating of 25/50.
- H. Paint FI-OP-3A - Fabrics/Insulation Jackets, Alkyd, 3 Coat:
 - 1. One coat of alkyd primer sealer.
 - 2. Eggshell: Two coats of alkyd enamel.

2.05 ACCESSORY MATERIALS

- A. Accessory Materials: Provide all primers, sealers, cleaning agents, cleaning cloths, sanding materials, and clean-up materials required to achieve the finishes specified whether specifically indicated or not; commercial quality.
- B. Patching Material: Latex filler.
- C. Fastener Head Cover Material: Latex filler.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that surfaces are ready to receive work as instructed by the product manufacturer.
- B. Examine surfaces scheduled to be finished prior to commencement of work. Report any condition that may potentially affect proper application.
- C. Test shop-applied primer for compatibility with subsequent cover materials.
- D. Measure moisture content of surfaces using an electronic moisture meter. Do not apply finishes unless moisture content of surfaces are below the following maximums:
 - 1. Gypsum Wallboard: 12 percent.
 - 2. Plaster and Stucco: 12 percent.
 - 3. Masonry, Concrete, and Concrete Unit Masonry: 12 percent.
 - 4. Interior Wood: 15 percent, measured in accordance with ASTM D4442.
 - 5. Exterior Wood: 15 percent, measured in accordance with ASTM D4442.
 - 6. Concrete Floors and Traffic Surfaces: 8 percent.

3.02 PREPARATION

- A. Clean surfaces thoroughly and correct defects prior to coating application.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.
- C. Remove or mask surface appurtenances, including electrical plates, hardware, light fixture trim, escutcheons, and fittings, prior to preparing surfaces or finishing.
- D. Surfaces: Correct defects and clean surfaces which affect work of this section. Remove or repair existing coatings that exhibit surface defects.
- E. Marks: Seal with shellac or stain blocker those which may bleed through surface finishes.
- F. Remove mildew from impervious surfaces by scrubbing with solution of tetra-sodium phosphate and bleach. Rinse with clean water and allow surface to dry.
- G. Concrete and Unit Masonry Surfaces to be Painted: Remove dirt, loose mortar, scale, salt or alkali powder, and other foreign matter. Remove oil and grease with a solution of tri-sodium phosphate; rinse well and allow to dry. Remove stains caused by weathering of corroding metals with a solution of sodium metasilicate after thoroughly wetting with water. Allow to dry.
- H. Gypsum Board Surfaces to be Painted: Fill minor defects with filler compound. Spot prime defects after repair.
- I. Plaster Surfaces to be Painted: Fill hairline cracks, small holes, and imperfections with latex patching plaster. Make smooth and flush with adjacent surfaces. Wash and neutralize high alkali surfaces.
- J. Asphalt, Creosote, or Bituminous Surfaces to be Painted: Remove foreign particles to permit adhesion of finishing materials. Apply latex based sealer or primer.
- K. Insulated Coverings to be Painted: Remove dirt, grease, and oil from canvas and cotton.
- L. Concrete Floors and Traffic Surfaces to be Painted: Remove contamination, acid etch, and rinse floors with clear water. Verify required acid-alkali balance is achieved. Allow to dry.
- M. Aluminum Surfaces to be Painted: Remove surface contamination by steam or high pressure water. Remove oxidation with acid etch and solvent washing. Apply etching primer immediately following cleaning.
- N. Copper Surfaces to be Painted: Remove contamination by steam, high pressure water, or solvent washing. Apply vinyl etch primer immediately following cleaning.
- O. Galvanized Surfaces to be Painted: Remove surface contamination and oils and wash with solvent. Apply coat of etching primer.
- P. Uncorroded Uncoated Steel and Iron Surfaces to be Painted: Remove grease, mill scale, weld splatter, dirt, and rust. Where heavy coatings of scale are evident, remove by power tool wire brushing or sandblasting; clean by washing with solvent. Apply a treatment of phosphoric acid solution, ensuring weld joints, bolts, and nuts are similarly cleaned. Prime paint entire surface; spot prime after repairs.
- Q. Shop-Primed Steel Surfaces to be Finish Painted: Sand and scrape to remove loose primer and rust. Feather edges to make touch-up patches inconspicuous. Clean surfaces with solvent. Prime bare steel surfaces. Re-prime entire shop-primed item.

- R. Interior Wood Surfaces to Receive Opaque Finish: Wipe off dust and grit prior to priming. Seal knots, pitch streaks, and sappy sections with sealer. Fill nail holes and cracks after primer has dried; sand between coats. Back prime concealed surfaces before installation.
- S. Interior Wood Surfaces to Receive Transparent Finish: Wipe off dust and grit prior to sealing, seal knots, pitch streaks, and sappy sections with sealer. Fill nail holes and cracks after sealer has dried; sand lightly between coats. Prime concealed surfaces with gloss varnish reduced 25 percent with thinner.
- T. Exterior Wood Surfaces to Receive Opaque Finish: Remove dust, grit, and foreign matter. Seal knots, pitch streaks, and sappy sections. Fill nail holes with tinted exterior calking compound after prime coat has been applied. Back prime concealed surfaces before installation.
- U. Exterior Wood to Receive Transparent Finish: Remove dust, grit, and foreign matter; seal knots, pitch streaks, and sappy sections with sealer. Fill nail holes with tinted exterior calking compound after sealer has been applied. Prime concealed surfaces.
- V. Glue-Laminated Beams: Prior to finishing, wash surfaces with solvent, remove grease and dirt.
- W. Wood Doors to be Field-Finished: Seal wood door top and bottom edge surfaces with clear sealer.
- X. Metal Doors to be Painted: Prime metal door top and bottom edge surfaces.

3.03 APPLICATION

- A. Exterior Wood to Receive Opaque Finish: If final painting must be delayed more than 2 weeks after installation of woodwork, apply primer within 2 weeks and final coating within 4 weeks.
- B. Apply products in accordance with manufacturer's instructions.
- C. Where adjacent sealant is to be painted, do not apply finish coats until sealant is applied.
- D. Do not apply finishes to surfaces that are not dry. Allow applied coats to dry before next coat is applied.
- E. Apply each coat to uniform appearance.
- F. Sand wood and metal surfaces lightly between coats to achieve required finish.
- G. Vacuum clean surfaces of loose particles. Use tack cloth to remove dust and particles just prior to applying next coat.
- H. Wood to Receive Transparent Finishes: Tint fillers to match wood. Work fillers into the grain before set. Wipe excess from surface.
- I. Reinstall electrical cover plates, hardware, light fixture trim, escutcheons, and fittings removed prior to finishing.

3.04 FINISHING MECHANICAL AND ELECTRICAL EQUIPMENT

- A. Refer to Section 22 05 53 and Section 26 05 53 for schedule of color coding of equipment, duct work, piping, and conduit.
- B. Paint shop-primed equipment, where indicated.
- C. Remove unfinished louvers, grilles, covers, and access panels on mechanical and electrical components and paint separately.

- D. Finish equipment, piping, conduit, and exposed duct work in utility areas in colors according to the color coding scheme indicated.
- E. Reinstall electrical cover plates, hardware, light fixture trim, escutcheons, and fittings removed prior to finishing.

3.05 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for general requirements for field inspection.
- B. Seaford School District will provide field inspection.

3.06 CLEANING

- A. Collect waste material that could constitute a fire hazard, place in closed metal containers, and remove daily from site.

3.07 SCHEDULE - SURFACES TO BE FINISHED

- A. Do Not Paint or Finish the Following Items:
 - 1. Items fully factory-finished unless specifically noted.
 - 2. Fire rating labels, equipment serial number and capacity labels.
 - 3. Stainless steel items.
- B. Paint the surfaces described below under Schedule - Paint Systems.
- C. Mechanical and Electrical: Use paint systems defined for the substrates to be finished.
 - 1. Paint all insulated and exposed pipes, conduit, boxes, insulated and exposed ducts, hangers, brackets, collars and supports, mechanical equipment, and electrical equipment occurring in finished areas to match background surfaces, unless otherwise indicated.
 - 2. Paint all equipment, including that which is factory-finished, exposed to weather or to view on the roof and outdoors.
 - 3. Paint shop-primed items occurring in finished areas.
 - 4. Paint interior surfaces of air ducts and convector and baseboard heating cabinets that are visible through grilles and louvers with one coat of flat black paint to visible surfaces.
 - 5. Paint dampers exposed behind louvers, grilles, and convector and baseboard cabinets to match face panels.
- D. Paint both sides and edges of plywood backboards for electrical and telephone equipment before installing equipment.

3.08 SCHEDULE - PAINT SYSTEMS

- A. Concrete, Concrete Block, Brick Masonry: Finish all surfaces exposed to view, except brick.
 - 1. Exterior: CE-OP-3A, semi gloss.
 - 2. Interior: CI-OP-3L, semi-gloss.
- B. Gypsum Board: Finish all surfaces exposed to view.
 - 1. Exterior Soffits: GE-OP-3A, egg shell.
 - 2. Interior Ceilings and Bulkheads: GI-OP-3L, flat.
 - 3. Interior Walls: GI-OP-3A, egg shell.
- C. Plaster: Finish all surfaces exposed to view.
 - 1. Exterior Soffits: GE-OP-3A, egg shell.
 - 2. Exterior Walls (Stucco) GE-OP-3A, egg shell:
 - 3. Interior Walls and Ceilings GI-OP- 3L; egg shell:

- D. Wood: Finish all surfaces exposed to view.
 - 1. Exterior trim and frames: WE-OP-3A semi-gloss.
 - 2. Exterior siding: WE-TR-S semi-gloss.
 - 3. Exterior shingles and shakes: WE-TR-S semi-gloss.
 - 4. Interior trim and frames: WI-OP-3A, semi-gloss.
 - 5. Interior paneling: WI-TR-VS, semi-gloss.
- E. Wood Cabinets: Finish all exposed and semi-exposed surfaces.
 - 1. Outside Surfaces: WI-TR-VS, semi-gloss.
 - 2. Inside Surfaces: WI-OP-2A, semi-gloss.
- F. Wood Doors: Factory-finished.
- G. Steel Doors and Frames: Finish all surfaces exposed to view; MI-OP-3A, semi-gloss or MI-OP-2A, Semi-gloss.
- H. Steel Fabrications: Finish all surfaces exposed to view.
 - 1. Exterior: ME-OP-3A, semi-gloss; finish all surfaces, including concealed surfaces, before installation.
 - 2. Interior: MI-OP-3A, semi-gloss.
- I. Aluminum: Finish all surfaces exposed to view, except anodized finishes.
 - 1. Exterior MaE-OP-3A, Semi-gloss:
 - 2. Interior Mal-OP-3A, or MaL -OP-3L Semi-Gloss:
- J. Galvanized Steel: Finish all surfaces exposed to view, except Lintels.
 - 1. Exterior Mge-Op-3A, semi-gloss:
 - 2. Interior Mgl-OP-3A, semi-gloss:
- K. Shop-Primed Metal Items: Finish all surfaces exposed to view, except at welds touch up after welding.
 - 1. Finish the following items:
 - a. Exposed surfaces of lintels.
 - b. Elevator pit ladders.
 - c. Exposed surfaces of steel stairs and railings.
 - d. Mechanical equipment.
 - e. Electrical equipment.
 - f. all other equipment.
 - 2. Exterior ME-OP-3A, semi-gloss:
 - 3. Interior MI-OP-3A, semi-gloss:
- L. Wall Surfaces Under Vinyl Wall Covering: GI-P-1A.
- M. Pipe and Duct Insulation Jackets: Finish all surfaces exposed to view; FI-OP-2L, flat.

3.09 SCHEDULE - COLORS

- A. See Plans.

END OF SECTION

Section 11 40 00
FOODSERVICE EQUIPMENT

PART 1 - GENERAL

1.1 RELATED SECTIONS

- A. Drawings and general provisions of contract, including General and Supplementary Conditions and Division 1 Sections, apply to this Section.

1.2 SCOPE

- A. Attention is directed to the detailed Item Specifications, which provide for minimum acceptable products. Item Specifications paragraphs may indicate materials or components that exceed the manufacturer's standards and are required for this project.
- B. Cooperate and coordinate with others engaged on the project in order that work will progress on schedule.
- C. Work to be performed under this Section is shown on Foodservice Equipment Drawings.
- D. Install materials furnished under this Section, other than materials that are expressly noted for installation under other Sections. Installation work shall be performed by workmen compatible with those existent on the project site. Equipment shall be of the latest design; new and unused, complete with all standard parts for normal operations and including such accessories or materials as may be required to comply with these Specifications.
- E. This Specification is to further describe and supplement the applicable Drawings. What is called for by either the Drawings and/or these Specifications shall be furnished and installed as part of this work. Any questions relative to discrepancies or omissions shall be submitted to the Architect.
- F. Provide neatly punched openings or cutouts required to permit passage of plumbing and electrical services by related trades and to accommodate mounted switches and receptacles in the equipment.
- G. Work in this Section shall include but shall not be limited to the following:
 - 1. Catalog items of equipment.
 - 2. Fabricated equipment other than catalog items.
 - 3. Plumbing trim consisting of mechanical system components required for standard operation of equipment items such as faucets and waste outlets. Vacuum breakers shall be furnished for equipment where water is introduced less than 2" above flood level.
 - 4. Electrical equipment forming an integral part of equipment items such as electric motors, heating elements, controls, switches, starters, temperature regulators and internal wiring to a control panel or switch, if mounted on the equipment.

1.3 RELATED WORK SPECIFIED ELSEWHERE

- A. Finished floor and walls, structural supports for all ceiling supported equipment, acoustical ceilings and related building.
- B. Connecting piping, waste lines, traps and vent piping, complete with shut-off valves to all the equipment, and the rough-in for sanitary waste, domestic water, floor drains and plumbing fixtures except those provided under this Section, and related mechanical work.
- C. Exhaust ventilating systems complete with blowers, ductwork, hangers, access panels, and insulation between the exhaust collars and the exhaust blowers.
- D. External wiring, the mounting and wiring of motor starters, solenoid valves, switches and receptacles not integral with the equipment, connecting conduit, and external connections to equipment to the building electrical distribution system.

1.4 SUBMITTALS

- A. Submit Shop Drawings for approval in accordance with the General Conditions.
- B. Stub-in drawings shall indicate the layout of equipment and dimensioned locations of all services to the equipment.
 - 1. CAD drawn scale: 1/4" = 1'-0"
 - 3. Stubbed services shall include electrical, hot and cold water, floor drains or floor sinks, solid wastes and exhaust collar connections. Point of connection services shall include steam supply, condensate return, gas connection and indirect waste connections. Service dimensions shall include height measured from finish floor.
 - 4. Electrical and plumbing services shall be indicated and coordinated on the same drawing.
 - 5. Call-outs for each stub point indicated at the point, or clearly keyed to a schedule on the same drawing.
 - 6. Special conditions plan shall include all floor recesses, curbs and special wall construction indicated and dimensioned
- C. Mechanical refrigeration system submittal shall include the firm name and address of the installation contractor and name of the qualified installer.
- F. Failure to comply with approved shop drawings shall be cause for rejection of an improperly built assembly.

1.5 GUARANTEES AND WARRANTIES

- A. New equipment furnished for this facility shall be guaranteed for a period of not less than one calendar year beginning on the date of final acceptance of the work of this Section. In the case of a manufacturer whose standard warranty exceeds this period the longer period shall apply. Self-contained refrigeration units for reach-in refrigerators, freezers, ice cream chests and ice machines shall carry a five-year replacement warranty for the sealed unit. The guarantee shall protect against defective material, design and workmanship.
- B. In addition to the guarantee called for under the General Conditions, this Contractor shall further agree that in the event of failure of any system or item of equipment or improper functioning of specified work during the guarantee period, he shall have "on call" competent

service personnel available to make the necessary repairs or replacements of specified work promptly at no cost to the Owner. In the event that replacement of an entire item is required, the Owner shall have the option of full use of the defective equipment until a replacement has been delivered and completely installed.

- C. Furnish manufacturer's warranties for each item of standard equipment and a warranty on fabricated equipment. Submit guarantees and warranties to the Architect in accordance with conditions found in "Demonstration and Operating Instructions" paragraphs, contained in Part 3, this Section.

1.6 REGULATORY AGENCIES

- A. Work shall be in accordance with the governing health, building and safety, and fire protection codes and regulations.
- B. Standards of the National Sanitation Foundation (NSF) shall serve as guidelines for the work of this Section.
- C. Electric equipment and accessories shall conform to the standards of the National Electric Manufacturers Association (NEMA), Underwriters Laboratories, Inc. (UL) or Electrical Testing Station (ETS).

1.8 EQUALITY OF MATERIALS AND EQUIPMENT

- A. The words "or equal" are understood to follow the name of any maker, vendor, or proprietary product, any trade name, plate or catalog number, and any detailed description used in the plans or specifications to define the material, article, assembly or system required. An item shall be considered equal to an item named or described in the plans or specifications if in the opinion of the Architect, it is at least equal in quality, durability, appearance, strength and design, it will perform at least equally the function imposed by the general design for the work, it conforms substantially, even with deviations, to the detailed requirements for the item in the plans and specifications, and it does not result in increased cost to the Owner. The words "or equal" shall not be construed to permit substantial departure from the detailed requirements of the plans and specifications for any material, article, assembly or system, or of any component parts hereof. Procedures for determining whether an item complies with the standards of this paragraph shall be those set forth in the Supplementary General Conditions amending AIA Document A-201.

PART 2 - PRODUCTS

2.1 MATERIALS AND FINISHES

A. General

1. Metals shall be free from defects impairing strength, durability or appearance, made of new materials with structural properties to withstand strains and stresses to which normally subject.
2. Stock materials, patterns, products and methods of fabrication shall be approved provided that they conform to the requirements specified under Item Specifications.

B. Stainless Steel

1. Stainless steel shall be non-magnetic corrosion resistant chromium-nickel steel, Type 302 or 304 (18-8 Alloy), polished to a Number 4 finish where exposed, unless otherwise noted. Minimum gauges shall be as specified under Item Specifications.

C. Galvanized (Galvannealed) Steel

1. Galvannealed steel shall be commercial quality with tight coat of zinc galvanizing metal applied to a soft steel sheet, subsequently passed through a 1200° F. oven, resulting in a spangle free paintable surface. Minimum gauges shall be as specified under Item Specifications.

2.2 CONSTRUCTION

A. General

1. The equipment fabricator shall be subject to the approval of the Architect, Owner and Consultant.
2. Fabricated foodservice equipment shall be manufactured by one manufacturer, of uniform design, material and finish.
3. Equipment shall conform to the applicable requirements of current Federal, State, and Local Codes and Regulations.

2.3 BUY-OUT COMPONENTS

- A. CASTERS: 5" diameter polyurethane tired, swivel, plate or stem mount to suit application, 300 pound capacity, brakes only if specified, NSF approved; Component Hardware C-21-3050 (plate/no brake), C21-3051 (plate/brake) C23-3350 (stem/no brake) or C23-3351 (stem/brake), or equal.
- B. SEALANT: Silicone type sealant for sealing equipment to walls or filling crevices between components, TRANSLUCENT, NSF approved; Component Hardware M90-1010, or Dow Corning 732-RTV.

2.4 ELECTRICAL EQUIPMENT AND WIRING

- A. Under this Section, items of equipment having mounted electrical motors, electrical heating units, lighting fixtures, controllers, control stations, switches, receptacles and the like shall be internally wired as specified herein, terminating at a junction box mounted on the equipment and left ready for connection to the building electrical distribution system by the Electrical Contractor.
- B. Provide openings or cutouts required to accommodate the switches and receptacles in the specified work, and the wiring in conduit from terminal blocks in junction boxes.
- C. Electrically operated equipment and fabricator wiring shall conform to the requirements of Underwriter's Laboratories, Inc. Motors over one horsepower shall be equipped with overload protection.
- D. Furnish wiring diagrams for equipment as requested by the Architect or Contractor.

2.5 ITEM SPECIFICATIONS

Item 1

WALK-IN COOLER

Make - American Panel, Thermalrite, Bally or Thermo-Kool

Size - 9'-11-1/2" x 17'-7-1/2" x 7'-10" high minimum inside dimension.

Power - 1.1 KW - 120/60/1 to light fixtures and door defrost heater strip

Installation, Construction, Materials and Accessories - See Item 2

Guarantee - See Item 2

Item 2

WALK-IN FREEZER

Make - American Panel, Thermalrite, Bally or Thermo-Kool

Size - 12'-0" x 17'-7-1/2" x 7'-10" high minimum inside dimension.

Power - 1.3 KW - 120/60/1 to light fixtures, door defrost heater strip, and pressure relief port

Installation - The walk-in refrigerated room shall be installed on an exterior concrete pad recessed to be flush with the finished kitchen floor. The concrete pad shall be furnished and installed by the General Contractor. Shims are not acceptable for leveling material.

Construction - All standard construction per the manufacturer, modified to meet the specific following points:

- Walls to be 4" thick with CFC free urethane foam insulation, UL Class 1 rated and Factory Mutual listed
- Cam type locking devices
- 34" x 76" minimum door clearance
- Polished hardware (hinges and latch to match)
- Three hinges on doors (to include one Kason 1248 spring assist hinge per door)
- Leveraged pull handle (mechanical advantage type, Kason 1236 or equal)
- Quarter turn inside safety release lever handle mechanism (not screw type)
- Prewired door sections with heater wires and light fixtures and switches
- Kason 1806 LED light fixtures
- Dial type thermometers at doors
- Model 200 (with dry contacts) or Modularm 75LC temperature and HACCP monitoring system at doors
- NSF construction throughout with exception of buried floor panels
- Interior and exterior faces of doors and shall be provided with aluminum diamond tread plate protective material to a height of 48" above finished floor.

Minimum materials - Interior and exterior wall surfaces shall be clad with .038" pebble finished aluminum. Interior floors shall be 16 gauge diamond embossed aluminum over 3/4" thick marine plywood with reinforcing ribs and insulation with a total thickness not to exceed 4".

Accessories - Freezer shall be provided with an electrically heated pressure relief port. Each door shall be provided with a heated vision panel, 14-1/2" x 23", constructed of three panels of tempered unbreakable glass, electrically heated, with sealed air spaces between. Provide matching trim strips and closure panels to adjoining surfaces, fabricated per details, made of largest pieces available to minimize number of joints, and installed in accordance with NSF Brochure 770202, Installation Manual for Walk-in Refrigerators and Freezers. Provide six

total extra Kason 1806 LED light fixtures for mounting in the rooms and deliver to Electrical Contractor for field installation. Provide exterior membrane roof and flashing material.

Guarantee - The walk-in refrigerated room panels shall be guaranteed for a period of ten (10) years from the date of approved installation for defects in materials and workmanship when subjected to normal use and service; remainder of rooms for one year.

Item 3

MECHANICAL REFRIGERATION SYSTEMS

Quantity - 2

Make - Bally, Keeprite, or Trenton

Scope - Furnish and install complete refrigeration systems for the walk-in refrigerated rooms in accordance with the plans. The systems shall include condensing units, evaporator coils, piping, all specified accessories, and those components required to provide complete and satisfactory systems in accordance with accepted refrigeration practice.

Important: The installation work shall be performed by a fully qualified refrigeration contractor employing a certified mechanic fully trained in the installation of commercial refrigeration systems. Submittal shall list the installing company and the qualified system installer.

Piping - Furnish and install the interconnecting piping between the condensing units and their respective unit coolers. Piping shall be installed in a neat and workmanlike manner with adjustable hangers spaced at no more than ten foot intervals on horizontal runs; six foot intervals, vertical runs.

Line sizes shall be in accordance with ASHRAE standards and best refrigeration practice to assure proper feed to evaporator, avoid excessive pressure drop, and prevent excessive amounts of lubricating oil from being trapped in any part of the system. Line sizing shall be such that it will protect the compressor from loss of lubrication at all times, prevent liquid refrigerant from entering the compressor during operating or idle time, and maintain a clean and dry system.

Refrigeration piping shall be Type L, ACR grade, hard drawn seamless copper tubing, wrought type copper fittings, and silver soldered joints. Precharged lines are not acceptable.

Furnish and install sleeves for refrigerant and evaporator drain piping wherever piping passes through a wall or ceiling. Sleeves shall be non-conductive gray plastic tubing, with interior dimension sized at least 1/4" larger than piping, and shall be neatly packed with brine putty after installation.

Furnish and install condensate drain piping from the unit cooler to an open drain. Piping shall consist of not less than 7/8" Type L copper tubing, supported 36" on center maximum, in such a way that there will be 1" clearance between the wall and the tubing. Provide a union or slip fitting at the connection to the evaporator drain pan to allow easy disassembly for service and cleaning. Drain piping shall be pitched 4" to the foot and carried through the wall of the refrigerated area. It shall be trapped to prevent entry of warm air and insects to

the refrigerated rooms and discharged to a floor drain with the code required air gap. The exposed drain piping shall be spray painted.

Provide an electric drainline heater tape in the freezer, with a length equal to five wraps per foot of length of the drainline located within the freezer compartment. Wrap and secure in accordance with manufacturer's recommendations.

Provide chrome plated escutcheon plates at all exposed points where piping penetrates the wall or ceilings.

Insulation - Suction lines for refrigerated rooms having a temperature above freezing shall be covered with 3/4" wall thickness Armaflex insulation.

Suction lines for refrigerated rooms having a temperature below freezing shall be covered with 1" wall thickness Armaflex insulation.

The insulation shall be applied to these lines in accordance with manufacturer's recommendations, and as they are being installed so that insulation will not be split. All joints shall be completely sealed with overlapping, cemented material to prevent the formation of frost on the lines.

Controls - Each evaporator shall be provided with a Smart-Vap II electronic control as manufactured by National Refrigeration. The time clock and heater contactor shall be removed from the condensing unit. No control wiring will be required from evaporator to the condensing unit.

Refrigerant Testing - The entire system shall be pressure and leak tested at no less than 100 PSIG, cleaned and dehydrated by maintaining a vacuum of 50 microns or lower for a period of five hours. The required operating charge of refrigerant and oil, if necessary, shall be added and the entire system tested for performance. Each system shall be clearly marked as to the type refrigerant required.

Guarantee - The equipment shall be guaranteed to maintain the specified temperatures. All mechanical refrigeration equipment shall be mechanically guaranteed for a period of one year after date of acceptance by the Owner. The emergency service shall be provided free of charge, whenever necessary on a 24 hour, seven day-per-week basis during the guarantee period.

Any leaks that occur during the first year of operation after acceptance by the Owner, shall be repaired and the necessary refrigerant added at no expense to the Owner.

The year's service shall be provided by the installing company, and under no circumstances will the service policy be sublet to another refrigeration contractor. The name of the installer/service agency for the guarantee period shall be located at a prominent place on the condensing units.

The condensing units shall be provided with an additional four year parts warranty to commence upon the completion of the aforementioned guarantee, bringing the total parts warranty to five years.

Condensing Units - The condensing units shall consist of an EC energy saving motor with variable speed controller, compressor, refrigerant condenser, liquid receiver, compressor service valves, and a dual high-low pressure control. The units shall be as manufactured by National Refrigeration.

The condensing units shall be outdoor type. The compressor shall be serviceable semi-hermetic or scroll type per schedule, and fitted with aluminum fin and copper tube condenser, suction service valve, discharge service valve, compressor contactor, high and low pressure controls, receiver with fusible plug, liquid shut-off valve and charging port, mounted fused disconnect switch, waterproof electrical control box, discharge line vibration eliminator, weather resistant enameled galvanized steel cabinet, access guard, liquid line assembly, suction line filter and vibration eliminator, crankcase heater, and 1-1/2" high raised steel base.

Mount on roof per architectural drawings with structural supports, roof penetrations and weatherproofing provided by the General Contractor.

Evaporator Coils - Each evaporator shall be provided with a Smart-Vap II electronic control as manufactured by National Refrigeration. The time clock and heater contactor shall be removed from the condensing unit. No control wiring will be required from evaporator to the condensing unit.

The freezer shall be provided with an automatic electric defrost system consisting of one evaporator coil as indicated in the schedule. Evaporator shall be low profile type six fins per inch complete with EC energy saving fan motors. Coil shall be NSF and UL Listed.

The cooler shall be provided with one evaporator coil as indicated in the schedule. Evaporator shall be low profile type six fins per inch complete with EC energy saving fan motors. Coil shall be NSF and UL Listed.

Furnish and install 1/4" minimum diameter stainless steel threaded mounting rods for the hanging of the evaporator coils, with stainless steel washers and nuts on the interior ends, and reinforcing angle at the exterior top of the room. Plated steel running thread is not acceptable.

Refrigeration Equipment Schedule

Cooler	Room Temp:	+35°F	TD:	10°F		
Condensing unit	Amps	Ref	BTU/hour	Evap Temp	Cond Temp	
BQZA020H8-HT3A	8.9 - 208/3	R404A	18,420	+25°F	+95°F	
Evaporator coil	BTU/hour	CFM	Fan amps	Defrost amps	Defrost type	
BLP317MA-S1B-ECM	17,000	2,860	3.0 - 120/1	NA	Timed ambient	

Freezer	Room Temp: -10°F	TD: 10°F			
Condensing unit	Amps	Ref	BTU/hour	Evap Temp	Cond Temp
BQZA025L6-HT3A	9.7 - 208/3	R404A	9,770	-20°F	+95°F
Evaporator coil	BTU/hour	CFM	Fan amps	Defrost amps	Defrost type
BLP211LE-S2B-ECM	11,000	1,800	1.2 - 208/1	8.2 - 208/1	Timed electric

Item 4

MOBILE SHELVING UNITS

Quantity - 24

Make - MetroMax Q or equal by Eagle

Size - (9) 48" x 21", (1) 42" x 21", (14) 36" x 21", all 69" high on casters; four tier

Description - Shelving units shall be all standard construction and shall consist of four shelves with removable injection molded polypropylene mats with antimicrobial product protection, supported on epoxy coated steel shelf frames and similar uprights with capped tops, and mounted on 5" diameter polyurethane tired swivel casters with donut bumpers.

Item 5

MOBILE DUNNAGE RACKS

Quantity - 5

Make - Channel MD20(36&48)CA/052 or equal by New Age

Size - (3) 48" x 20" & (2) 36" x 20"

Description - Dunnage platforms shall be all standard construction with 1-1/2" x 1-1/2" x .070" thick wall extruded Type 6063-T5 aluminum tubing with five lateral tubes and heavy duty plate mounted 5" x 2" polyurethane casters with unit capable of supporting 2,000 pounds.

Accessories - Provide two total H24 handles. All casters to swivel.

PART 3 - EXECUTION

3.1 SANITATION REQUIREMENTS

- A. Equipment specified herein shall be fabricated to conform to the "Food Service Equipment Standards" of the National Sanitation Foundation prepared by the Committee on Food Service Standards, and published by the National Sanitation Foundation, Ann Arbor, Michigan. Any differences of opinion on sanitation shall be referred to the State Department of Health for a ruling.
- B. Equipment shall be installed in accordance with the manufacturer's instructions and the best practices of the food service industry, with careful attention to eliminating all cracks, crevices and concealed spaces in wet areas that would be difficult to clean or keep free of vermin and soil.

3.2 EXAMINATION AND ACCEPTANCE

- A. Determine whether the General Contractor will furnish and provide temporary power and light, openings and storage space to permit scheduled delivery of equipment. Verify water pressure and provide necessary reducing valves.
- B. Examine space in which specified work is to be installed to assure that conditions are satisfactory for the installation of specified work. Report in writing to the Architect, any deficiency in the work of other contractors affecting specified work. Commencement of specified work shall be construed as acceptance of space conditions.
- C. Obtain and verify all measurements and conditions on the job, and assume responsibility in respect to same.
- D. Inspect flooring and raised concrete bases, wall finishes, painting, ceiling installation and all related work for readiness to commence installation of foodservice equipment. Verify the existence of required mechanical and electrical rough-ins.

3.3 CLEANING UP

- A. Debris and surplus materials resulting from installation work shall be removed promptly as work progresses, to a location indicated by the General Contractor.
- B. Following completion, and before final acceptance by the Owner, clean finished surfaces in accordance with the manufacturer's instructions, and leave specified work free of imperfections.

3.4 DEMONSTRATION AND OPERATING INSTRUCTIONS

- A. Before final acceptance, and by appointment with the Owner and his representatives, completely demonstrate with power, the correct operation of each new item of operating equipment.
- B. Prior to the demonstration, turn on all mechanical and electrical foodservice equipment. Test for leaks, poor connections, and inadequate or faulty performance and correct if necessary. Adjust for proper operation. Thermostatically controlled equipment and equipment with automatic features shall be operated for a sufficient length of time with proper testing equipment to prove controls are functioning as intended. Recalibrate thermostats if necessary.
- C. Provide Architect or Consultant with a loose leaf bound manual of operating data and maintenance instructions containing complete description, wiring diagrams, operating data, maintenance requirements and other information pertaining to the proper operation and upkeep of the various items of electrical or mechanical equipment. Include names, addresses and telephone numbers of authorized service agencies for all items. Arrange all material in alphabetical order by Manufacturer. Book shall be turned over to Owner after review and approval.
- D. Submit guarantees and warranties to the Architect in the above specified manual with all warranty cards completed and becoming effective at the time the equipment was satisfactorily demonstrated.

3.5 PROTECTION OF WORK

- A. Protect specified work from damage during transportation to the project site, storage at the site, during installation, and after completion until acceptance by the Owner.
- B. Protect adjacent work under other contracts during installation until completion of specified work. After completion, the contractor for other work shall be responsible for the protection of his work until acceptance by the Owner.
- C. Damaged work as determined by the Architect, shall be repaired or replaced as determined by and to the satisfaction of the Architect.

End of Section

SECTION 22 05 53

IDENTIFICATION FOR PLUMBING PIPING AND EQUIPMENT

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Nameplates.
- B. Tags.
- C. Stencils.
- D. Pipe Markers.

1.02 RELATED REQUIREMENTS

- A. Section 09 90 00 - Painting and Coating: Identification painting.
- B. Section 22 60 05 - Medical Air, Gas, and Vacuum Systems: Supply of pipe labels for placement under this section.

1.03 REFERENCE STANDARDS

- A. ASME A13.1 - Scheme for the Identification of Piping Systems; The American Society of Mechanical Engineers.

1.04 SUBMITTALS

- A. List: Submit list of wording, symbols, letter size, and color coding for mechanical identification.
- B. Chart and Schedule: Submit valve chart and schedule, including valve tag number, location, function, and valve manufacturer's name and model number.
- C. Product Data: Provide manufacturers catalog literature for each product required.
- D. Samples: Submit two labels; tags in size.
- E. Manufacturer's Installation Instructions: Indicate special procedures, and installation.
- F. Project Record Documents: Record actual locations of tagged valves.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Brady Corporation: www.bradycorp.com.
- B. Champion America, Inc: www.Champion-America.com.
- C. Seton Identification Products: www.seton.com/aec.
- D. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 NAMEPLATES

- A. Description: Laminated three-layer plastic with engraved letters.
 - 1. Letter Color: Black.
 - 2. Letter Height: 1/2 inch.
 - 3. Background Color: Yellow.

2.03 TAGS

- A. Plastic Tags: Laminated three-layer plastic with engraved black letters on light contrasting background color. Tag size minimum 1-1/2 inch diameter or square.
- B. Metal Tags: Brass, aluminum, or stainless steel with stamped letters; tag size minimum 1-1/2 inch diameter or square with smooth edges.
- C. Chart: Typewritten letter size list in anodized aluminum frame.

2.04 STENCILS

- A. Stencils: With clean cut symbols and letters of following size:
 - 1. 3/4 to 1-1/4 inch Outside Diameter of Insulation or Pipe: 8 inch long color field, 1/2 inch high letters.
 - 2. 1-1/2 to 2 inch Outside Diameter of Insulation or Pipe: 8 inch long color field, 3/4 inch high letters.
 - 3. 2-1/2 to 6 inch Outside Diameter of Insulation or Pipe: 12 inch long color field, 1-1/4 inch high letters.
 - 4. 8 to 10 inch Outside Diameter of Insulation or Pipe: 24 inch long color field, 2-1/2 inch high letters.
 - 5. Over 10 inch Outside Diameter of Insulation or Pipe: 32 inch long color field, 3-1/2 inch high letters.
 - 6. Ductwork and Equipment: 2-1/2 inch high letters.
- B. Stencil Paint: As specified in Section 09 90 00, semi-gloss enamel, colors conforming to ASME A13.1.

2.05 PIPE MARKERS

- A. Comply with ASME A13.1.
- B. Plastic Pipe Markers: Factory fabricated, flexible, semi-rigid plastic, preformed to fit around pipe or pipe covering; minimum information indicating flow direction arrow and identification of fluid being conveyed.
- C. Plastic Tape Pipe Markers: Flexible, vinyl film tape with pressure sensitive adhesive backing and printed markings.
- D. Underground Plastic Pipe Markers: Bright colored continuously printed plastic ribbon tape, minimum 6 inches wide by 4 mil thick, manufactured for direct burial service.

2.06 CEILING TACKS

- A. Description: Steel with 3/4 inch diameter color coded head.
- B. Color code as follows:
 - 1. HVAC Equipment: Yellow.
 - 2. Fire Dampers and Smoke Dampers: Red.
 - 3. Plumbing Valves: Green.
 - 4. Heating/Cooling Valves: Blue.

PART 3 EXECUTION

3.01 PREPARATION

- A. Degrease and clean surfaces to receive adhesive for identification materials.

- B. Prepare surfaces in accordance with Section 09 90 00 for stencil painting.

3.02 INSTALLATION

- A. Install plastic nameplates with corrosive-resistant mechanical fasteners, or adhesive. Apply with sufficient adhesive to ensure permanent adhesion and seal with clear lacquer.
- B. Install tags with corrosion resistant chain.
- C. Apply stencil painting in accordance with Section 09 90 00.
- D. Install plastic pipe markers in accordance with manufacturer's instructions.
- E. Install plastic tape pipe markers complete around pipe in accordance with manufacturer's instructions.
- F. Install underground plastic pipe markers 6 to 8 inches below finished grade, directly above buried pipe.
- G. Identify air handling units, pumps, heat transfer equipment, tanks, and water treatment devices with plastic nameplates or stencil painting. Small devices, such as in-line pumps, may be identified with tags.
- H. Identify control panels and major control components outside panels with plastic nameplates.
- I. Identify thermostats relating to terminal boxes or valves with nameplates.
- J. Identify valves in main and branch piping with tags.
- K. Identify air terminal units and radiator valves with numbered tags.
- L. Tag automatic controls, instruments, and relays. Key to control schematic.
- M. Identify piping, concealed or exposed, with plastic pipe markers or plastic tape pipe markers. Use tags on piping 3/4 inch diameter and smaller. Identify service, flow direction, and pressure. Install in clear view and align with axis of piping. Locate identification not to exceed 20 feet on straight runs including risers and drops, adjacent to each valve and Tee, at each side of penetration of structure or enclosure, and at each obstruction.
- N. Identify ductwork with plastic nameplates or stenciled painting. Identify with air handling unit identification number and area served. Locate identification at air handling unit, at each side of penetration of structure or enclosure, and at each obstruction.
- O. Locate ceiling tacks to locate valves or dampers above lay-in panel ceilings. Locate in corner of panel closest to equipment.

END OF SECTION

SECTION 22 07 19

PLUMBING PIPING INSULATION

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Piping insulation.
- B. Jackets and accessories.

1.02 RELATED REQUIREMENTS

- A. Section 07 84 00 - Firestopping.
- B. Section 22 10 05 - Plumbing Piping: Placement of hangers and hanger inserts.

1.03 REFERENCE STANDARDS

- A. ASTM A 666 - Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar.
- B. ASTM B209 - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate.
- C. ASTM B209M - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate [Metric].
- D. ASTM C 177 - Standard Test Method for Steady-State Heat Flux Measurements and Thermal Transmission Properties by Means of the Guarded Hot Plate Apparatus.
- E. ASTM C195 - Standard Specification for Mineral Fiber Thermal Insulating Cement.
- F. ASTM C449 - Standard Specification for Mineral Fiber Hydraulic-Setting Thermal Insulating and Finishing Cement.
- G. ASTM C 518 - Standard Test Method for Steady-State Thermal Transmission Properties by Means of the Heat Flow Meter Apparatus.
- H. ASTM C534/C534M - Standard Specification for Preformed Flexible Elastomeric Cellular Thermal Insulation in Sheet and Tubular Form.
- I. ASTM C 547 - Standard Specification for Mineral Fiber Pipe Insulation.
- J. ASTM C552 - Standard Specification for Cellular Glass Thermal Insulation.
- K. ASTM C 578 - Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation.
- L. ASTM C 585 - Standard Practice for Inner and Outer Diameters of Rigid Thermal Insulation for Nominal Sizes of Pipe and Tubing (NPS System).
- M. ASTM C591 - Standard Specification for Unfaced Preformed Rigid Cellular Polyisocyanurate Thermal Insulation.
- N. ASTM C795 - Standard Specification for Thermal Insulation for Use in Contact with Austenitic Stainless Steel.
- O. ASTM D1056 - Standard Specification for Flexible Cellular Materials--Sponge or Expanded Rubber.
- P. ASTM D2842 - Standard Test Method for Water Absorption of Rigid Cellular Plastics.

- Q. ASTM E 84 - Standard Test Method for Surface Burning Characteristics of Building Materials.
- R. ASTM E 96/E 96M - Standard Test Methods for Water Vapor Transmission of Materials.
- S. NFPA 255 - Standard Method of Test of Surface Burning Characteristics of Building Materials; National Fire Protection Association.
- T. UL 723 - Standard for Test for Surface Burning Characteristics of Building Materials; Underwriters Laboratories Inc..

1.04 SUBMITTALS

- A. Product Data: Provide product description, thermal characteristics, list of materials and thickness for each service, and locations.
- B. Samples: Submit two samples of any representative size illustrating each insulation type.
- C. Manufacturer's Instructions: Indicate installation procedures that ensure acceptable workmanship and installation standards will be achieved.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the Products specified in this section with not less than three years of experience.
- B. Applicator Qualifications: Company specializing in performing the type of work specified in this section with minimum 3 years of experience, or and approved by manufacturer.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Accept materials on site, labeled with manufacturer's identification, product density, and thickness.

1.07 FIELD CONDITIONS

- A. Maintain ambient conditions required by manufacturers of each product.
- B. Maintain temperature before, during, and after installation for minimum of 24 hours.

PART 2 PRODUCTS

2.01 REQUIREMENTS FOR ALL PRODUCTS OF THIS SECTION

- A. Surface Burning Characteristics: Flame spread/Smoke developed index of 25/50, maximum, when tested in accordance with ASTM E 84, NFPA 255, or UL 723.

2.02 GLASS FIBER

- A. Manufacturers:
 - 1. Knauf Insulation: www.knaufusa.com.
 - 2. Johns Manville Corporation: www.jm.com.
 - 3. Owens Corning Corp: www.owenscorning.com.
 - 4. CertainTeed Corporation; : www.certainteed.com.
 - 5. Substitutions: See Gilbane Project Manual.
- B. Insulation: ASTM C547 and ASTM C 795; rigid molded, noncombustible.
 - 1. 'K' value: ASTM C177, 0.24 at 75 degrees F.
 - 2. Maximum service temperature: 850 degrees F; 1200 degrees F; 1600 degrees F.
 - 3. Maximum moisture absorption: 0.2 percent by volume.

- C. Insulation: ASTM C547; semi-rigid, noncombustible, end grain adhered to jacket.
 - 1. 'K' value: ASTM C177, 0.24 at 75 degrees F.
 - 2. Maximum service temperature: 650 degrees F.
 - 3. Maximum moisture absorption: 0.2 percent by volume.
- D. Vapor Barrier Jacket: White Kraft paper with glass fiber yarn, bonded to aluminized film; moisture vapor transmission when tested in accordance with ASTM E96/E96M of 0.02 perm-inches.
- E. Tie Wire: 0.048 inch stainless steel with twisted ends on maximum 12 inch centers.
- F. Vapor Barrier Lap Adhesive:
 - 1. Compatible with insulation.
- G. Insulating Cement/Mastic:
 - 1. ASTM C195; hydraulic setting on mineral wool.
- H. Fibrous Glass Fabric:
 - 1. Cloth: Untreated; 9 oz/sq yd weight.
 - 2. Blanket: 1.0 lb/cu ft density.
 - 3. Weave: 5x5; 10x10; or 10x20.
- I. Indoor Vapor Barrier Finish:
 - 1. Cloth: Untreated; 9 oz/sq yd weight.
 - 2. Vinyl emulsion type acrylic, compatible with insulation, black or white color.
- J. Outdoor Vapor Barrier Mastic:
 - 1. Vinyl emulsion type acrylic or mastic, compatible with insulation, black color.
- K. Outdoor Breather Mastic:
 - 1. Vinyl emulsion type acrylic or mastic, compatible with insulation, black color.
- L. Insulating Cement:
 - 1. ASTM C449/C449M.

2.03 CELLULAR GLASS

- A. Manufacturers:
 - 1. Pittsburgh Corning Corporation: www.pittsburghcorning.com.
 - 2. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Insulation: ASTM C552, Grade 1.
 - 1. 'K' value: 0.37 at 100 degrees F.
 - 2. Service Temperature: Up to 900 degrees F.
 - 3. Water Vapor Permeability: 0.005 perm inch.
 - 4. Water Absorption: 0.2 percent by volume, maximum.

2.04 EXPANDED POLYSTYRENE

- A. Manufacturers:
- B. Insulation: ASTM C578; rigid closed cell.
 - 1. 'K' value: 0.23 at 75 degrees F.
 - 2. Maximum service temperature: 165 degrees F.
 - 3. Maximum water vapor permeance: 5.0 perms

2.05 EXPANDED PERLITE

- A. Manufacturers:
 - 1. Schundler Company: www.schundler.com.
- B. Insulation: ASTM C610, molded.
 - 1. Maximum service temperature: 1200 degrees F.
 - 2. Maximum water vapor transmission: 0.1 perm.

2.06 POLYISOCYANURATE CELLULAR PLASTIC

- A. Insulation Material: ASTM C591, rigid molded modified polyisocyanurate cellular plastic.
 - 1. Dimension: Comply with requirements of ASTM C585.
 - 2. 'K' value: 0.18 at 75 degrees F, when tested in accordance with ASTM C518.
 - 3. Minimum Service Temperature: -70 degrees F.
 - 4. Maximum Service Temperature: 300 degrees F.
 - 5. Water Absorption: 0.5 percent by volume, maximum, when tested in accordance with ASTM D2842..
 - 6. Moisture Vapor Transmission: 4.0 perm in.
 - 7. Connection: Waterproof vapor barrier adhesive.

2.07 POLYETHYLENE

- A. Manufacturers:
 - 1. Armacell International: www.armacell.com.
- B. Insulation: Flexible closed-cell polyethylene tubing, slit lengthwise for installation, complying with applicable requirements of ASTM D1056.
 - 1. 'K' value: ASTM C177; 0.25 at 75 degrees F.
 - 2. Maximum Service Temperature: 200 degrees F.
 - 3. Density: 2 lb/cu ft.
 - 4. Maximum Moisture Absorption: 1.0 percent by volume.
 - 5. Moisture Vapor Permeability: 0.05 perm inch, when tested in accordance with ASTM E96/E96M.
 - 6. Connection: Contact adhesive.

2.08 FLEXIBLE ELASTOMERIC CELLULAR INSULATION

- A. Manufacturer:
 - 1. Armacell International: www.armacell.com.
 - 2. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Insulation: Preformed flexible elastomeric cellular rubber insulation complying with ASTM C 534 Grade 3; grade 2; grade 1 use molded tubular material wherever possible.
 - 1. Minimum Service Temperature: -40 degrees F.
 - 2. Maximum Service Temperature: 220 degrees F.
 - 3. Connection: Waterproof vapor barrier adhesive.
- C. Elastomeric Foam Adhesive: Air dried, contact adhesive, compatible with insulation.

2.09 JACKETS

- A. PVC Plastic.
 - 1. Manufacturers:
 - a. Johns Manville Corporation: www.jm.com.
 - b. Substitutions: See Section 01 60 00 - Product Requirements.
 - 2. Jacket: One piece molded type fitting covers and sheet material, off-white color.
 - a. Minimum Service Temperature: 0 degrees F.

- b. Maximum Service Temperature: 150 degrees F.
 - c. Moisture Vapor Permeability: 0.002 perm inch, maximum, when tested in accordance with ASTM E96/E96M.
 - d. Thickness: 20 mil; 30 mil.
 - e. Connections: Brush on welding adhesive, tacks, pressure sensitive color matching vinyl tape.
3. Covering Adhesive Mastic:
- B. ABS Plastic:
- 1. Jacket: One piece molded type fitting covers and sheet material, off-white color.
 - a. Minimum Service Temperature: -40 degrees F.
 - b. Maximum Service Temperature of 180 degrees F.
 - c. Moisture Vapor Permeability: 0.012 perm inch, when tested in accordance with ASTM E96/E96M.
 - d. Thickness: 30 mil.
 - e. Connections: Brush on welding adhesive.
- C. Canvas Jacket: UL listed 6 oz/sq yd plain weave cotton fabric treated with dilute fire retardant lagging adhesive.
- 1. Lagging Adhesive:
 - a. Compatible with insulation.
- D. Aluminum Jacket: ASTM B209 (ASTM B209M) formed aluminum sheet.
- 1. Thickness: 0.016 inch, 0.020 inch sheet.
 - 2. Finish: Smooth, embossed.
 - 3. Joining: Longitudinal slip joints and 2 inch laps.
 - 4. Fittings: 0.016 inch thick die shaped fitting covers with factory attached protective liner.
 - 5. Metal Jacket Bands: 3/8 inch wide; 0.015 inch thick aluminum.
 - 6. Metal Jacket Bands: 3/8 inch wide; 0.010 inch thick stainless steel.
- E. Stainless Steel Jacket: ASTM A 666, Type 304 or 316 stainless steel.
- 1. Thickness: 0.010 inch.
 - 2. Finish: Smooth.
 - 3. Metal Jacket Bands: 3/8 inch wide; 0.010 inch thick stainless steel.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that piping has been tested before applying insulation materials.
- B. Verify that surfaces are clean and dry, with foreign material removed.

3.02 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Install in accordance with NAIMA National Insulation Standards.
- C. Exposed Piping: Locate insulation and cover seams in least visible locations.
- D. Insulated pipes conveying fluids below ambient temperature: Insulate entire system including fittings, valves, unions, flanges, strainers, flexible connections, pump bodies, and expansion joints.
- E. Glass fiber insulated pipes conveying fluids below ambient temperature:

1. Provide vapor barrier jackets, factory-applied or field-applied. Secure with self-sealing longitudinal laps and butt strips with pressure sensitive adhesive. Secure with outward clinch expanding staples and vapor barrier mastic.
 2. Insulate fittings, joints, and valves with molded insulation of like material and thickness as adjacent pipe. Finish with glass cloth and vapor barrier adhesive or PVC fitting covers.
- F. For hot piping conveying fluids 140 degrees F or less, do not insulate flanges and unions at equipment, but bevel and seal ends of insulation.
- G. For hot piping conveying fluids over 140 degrees F, insulate flanges and unions at equipment.
- H. Glass fiber insulated pipes conveying fluids above ambient temperature:
1. Provide standard jackets, with or without vapor barrier, factory-applied or field-applied. Secure with self-sealing longitudinal laps and butt strips with pressure sensitive adhesive. Secure with outward clinch expanding staples.
 2. Insulate fittings, joints, and valves with insulation of like material and thickness as adjoining pipe. Finish with glass cloth and adhesive or PVC fitting covers.
- I. Inserts and Shields:
1. Application: Piping 1-1/2 inches diameter or larger.
 2. Shields: Galvanized steel between pipe hangers or pipe hanger rolls and inserts.
 3. Insert location: Between support shield and piping and under the finish jacket.
 4. Insert configuration: Minimum 6 inches long, of same thickness and contour as adjoining insulation; may be factory fabricated.
 5. Insert material: Hydrous calcium silicate insulation or other heavy density insulating material suitable for the planned temperature range.
- J. Continue insulation through walls, sleeves, pipe hangers, and other pipe penetrations. Finish at supports, protrusions, and interruptions. At fire separations, refer to Section 07 84 00.
- K. Pipe Exposed in Mechanical Equipment Rooms or Finished Spaces (less than 10 feet above finished floor): Finish with PVC jacket and fitting covers.
- L. Exterior Applications: Provide vapor barrier jacket. Insulate fittings, joints, and valves with insulation of like material and thickness as adjoining pipe, and finish with glass mesh reinforced vapor barrier cement. Cover with aluminum jacket with seams located on bottom side of horizontal piping.
- M. Buried Piping: Provide factory fabricated assembly with inner all-purpose service jacket with self-sealing lap, and asphalt impregnated open mesh glass fabric, with one mil thick aluminum foil sandwiched between three layers of bituminous compound; outer surface faced with a polyester film.
- N. Heat Traced Piping: Insulate fittings, joints, and valves with insulation of like material, thickness, and finish as adjoining pipe. Size large enough to enclose pipe and heat tracer. Cover with aluminum jacket with seams located on bottom side of horizontal piping.

3.03 SCHEDULES

3.04 INTERIOR INSULATION APPLICATION SCHEDULE

- A. Service: Domestic hot, recirculated hot water and solar piping.
1. Operating Temperature: 60 to 140 deg F.
 2. Insulation Material: Flexible elastomeric or glass fiber.
 3. Insulation Thickness: Apply the following insulation thicknesses:

- a. Pipe, All Sizes: 1.0 inch.
 4. Jacket: None.
 5. Vapor Retarder Required: No.
 6. Finish: None.
- B. Service: Domestic cold water.
1. Operating Temperature: 35 to 60 deg F.
 2. Insulation Material: Flexible elastomeric or glass fiber.
 3. Insulation Thickness: Apply the following insulation thicknesses:
 - a. Pipe, 1" or less: 0.5 inch.
 - b. Pipe, 1¼" to 2" : 0.5 inch.
 - c. Pipe, 2-1/2" to 4": 1.0 inch.
 - d. Pipe, 5" and up : 1.0 inch.
 4. Jacket: Foil and paper.
 5. Vapor Retarder Required: Yes.
 6. Finish: None.
- C. Service: Rainwater conductors.
1. Operating Temperature: 32 to 100 deg F.
 2. Insulation Material: Mineral fiber.
 3. Insulation Thickness: Apply the following insulation thicknesses:
 - a. Pipe, 3" and up: 1.0 inch.
 4. Jacket:
 - a. Concealed Piping - None
 - b. Exposed Piping - PVC
 5. Vapor Retarder Required: Yes.
 6. Finish: None.
- D. Service: Roof drain bodies.
1. Operating Temperature: 32 to 100 deg F.
 2. Insulation Material: Mineral fiber.
 3. Insulation Thickness: 1.0 inch.
 4. Jacket:
 - a. Concealed - None
 - b. Exposed - PVC
 5. Vapor Retarder Required: Yes.
 6. Finish: None
- E. Service: Sanitary waste piping where heat tracing is installed.
1. Operating Temperature: 35 to 100 deg F.
 2. Insulation Material: Mineral fiber.
 3. Insulation Thickness: Apply the following insulation thicknesses:
 - a. Pipe, 3" and up: 1.0 inch.
 4. Jacket: Aluminum.
 5. Vapor Retarder Required: Yes.
 6. Finish: None.
- F. Service: Condensate drain piping.
1. Operating Temperature: 35 to 75 deg F.
 2. Insulation Material: Flexible elastomeric.
 3. Insulation Thickness: 0.5 inch.
 4. Jacket: None.
 5. Vapor Retarder Required: Yes.

6. Finish: None.
- G. Service: Exposed sanitary drains and domestic water supplies and stops for fixtures for the disabled.
 1. Operating Temperature: 35 to 120 deg F.
 2. Insulation Material: Molded closed cell vinyl.
 3. Insulation Thickness: 3/16 inch.
 4. Vapor Retarder Required: No.
 5. Finish: None.

3.05 EXTERIOR INSULATION APPLICATION SCHEDULE

- A. This application schedule is for aboveground insulation outside the building. Loose-fill insulation, for belowground piping, is specified in Division 2 piping distribution Sections.
- B. Service: Domestic water.
 1. Operating Temperature: 60 to 180 deg F.
 2. Insulation Material: Cellular glass, with jacket
 3. Insulation Thickness: Apply the following insulation thicknesses:
 - a. Pipe, 1" or less: 2.0 inch.
 - b. Pipe, 1-1/4" and larger: 2.0 inch.
 4. Jacket: Aluminum.
 5. Vapor Retarder Required: No.
 6. Finish: None.
- C. Service: Storm water.
 1. Operating Temperature: 32 to 100 deg F.
 2. Insulation Material: Flexible elastomeric.
 3. Insulation Thickness: Apply the following insulation thicknesses:
 - a. Pipe, 1-1/4" to 2": 0.5 inch.
 - b. Pipe, 2-1/2" and up: 1.0 inch.
 4. Field-Applied Jacket: Aluminum.
 5. Vapor Retarder Required: Yes.
 6. Finish: None.

END OF SECTION

SECTION 22 10 05

PLUMBING PIPING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Pipe, pipe fittings, valves, and connections for piping systems.
 - 1. Domestic water.

1.02 RELATED REQUIREMENTS

- A. Section 31 23 16 - Excavation.
- B. Section 31 23 23 - Fill.
- C. Section 31 23 16.13 - Trenching.
- D. Section 33 13 00 - Disinfecting of Water Utility Distribution.
- E. Section 07 84 00 - Firestopping.
- F. Section 08 31 00 - Access Doors and Panels.
- G. Section 09 90 00 - Painting and Coating.
- H. Section 22 05 53 - Identification for Plumbing Piping and Equipment.
- I. Section 22 07 19 - Plumbing Piping Insulation.
- J. Section 26 27 17 - Equipment Wiring: Electrical characteristics and wiring connections.

1.03 REFERENCE STANDARDS

- A. ANSI Z21.22 - American National Standard for Relief Valves and Automatic Gas Shutoff Devices for Hot Water Supply Systems.
- B. ASME B16.1 - Gray Iron Pipe Flanges and Flanged Fittings: Classes 25, 125, and 250; The American Society of Mechanical Engineers.
- C. ASME B16.3 - Malleable Iron Threaded Fittings; The American Society of Mechanical Engineers.
- D. ASME B16.4 - Gray Iron Threaded Fittings; The American Society of Mechanical Engineers.
- E. ASME B16.18 - Cast Copper Alloy Solder Joint Pressure Fittings; The American Society of Mechanical Engineers (ANSI B16.18).
- F. ASME B16.22 - Wrought Copper and Copper Alloy Solder Joint Pressure Fittings; The American Society of Mechanical Engineers.
- G. ASME B16.23 - Cast Copper Alloy Solder Joint Drainage Fittings - DWV; The American Society of Mechanical Engineers.
- H. ASME B16.26 - Cast Copper Alloy Fittings for Flared Copper Tubes; The American Society of Mechanical Engineers.
- I. ASME B16.29 - Wrought Copper and Wrought Copper Alloy Solder Joint Drainage Fittings - DWV; The American Society of Mechanical Engineers.

- J. ASME B31.1 - Power Piping; The American Society of Mechanical Engineers (ANSI/ASME B31.1).
- K. ASME B31.2 - Fuel Gas Piping; The American Society of Mechanical Engineers.
- L. ASME B31.9 - Building Services Piping; The American Society of Mechanical Engineers (ANSI/ASME B31.9).
- M. ASME (BPV IV) - Boiler and Pressure Vessel Code, Section IV - Rules for Construction of Heating Boilers; The American Society of Mechanical Engineers.
- N. ASME (BPV IX) - Boiler and Pressure Vessel Code, Section IX - Welding and Brazing Qualifications; The American Society of Mechanical Engineers.
- O. ASTM A47/A47M - Standard Specification for Ferritic Malleable Iron Castings.
- P. ASTM A 53/A 53M - Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless.
- Q. ASTM A74 - Standard Specification for Cast Iron Soil Pipe and Fittings.
- R. ASTM A 234/A 234M - Standard Specification for Piping Fittings of Wrought Carbon Steel and Alloy Steel for Moderate and High Temperature Service.
- S. ASTM B32 - Standard Specification for Solder Metal.
- T. ASTM B 42 - Standard Specification for Seamless Copper Pipe, Standard Sizes.
- U. ASTM B43 - Standard Specification for Seamless Red Brass Pipe, Standard Sizes.
- V. ASTM B 68 - Standard Specification for Seamless Copper Tube, Bright Annealed.
- W. ASTM B 68M - Standard Specification for Seamless Copper Tube, Bright Annealed (Metric).
- X. ASTM B 75 - Standard Specification for Seamless Copper Tube.
- Y. ASTM B75M - Standard Specification for Seamless Copper Tube (Metric).
- Z. ASTM B88 - Standard Specification for Seamless Copper Water Tube.
- AA. ASTM B88M - Standard Specification for Seamless Copper Water Tube (Metric).
- AB. ASTM B280 - Standard Specification for Seamless Copper Tube for Air Conditioning and Refrigeration Field Service.
- AC. ASTM B302 - Standard Specification for Threadless Copper Pipe, Standard Sizes.
- AD. ASTM B306 - Standard Specification for Copper Drainage Tube (DWV).
- AE. ASTM C4 - Standard Specification for Clay Drain Tile and Perforated Clay Drain Tile.
- AF. ASTM C14 - Standard Specification for Concrete Sewer, Storm Drain, and Culvert Pipe.
- AG. ASTM C14M - Standard Specification for Nonreinforced Concrete Sewer, Storm Drain, and Culvert Pipe [Metric].
- AH. ASTM C 76 - Standard Specification for Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe.
- AI. ASTM C 76M - Standard Specification for Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe (Metric).

- AJ. ASTM C425 - Standard Specification for Compression Joints for Vitrified Clay Pipe and Fittings.
- AK. ASTM C 443 - Standard Specification for Joints for Concrete Pipe and Manholes, Using Rubber Gaskets.
- AL. ASTM C 443M - Standard Specification for Joints for Circular Concrete Culvert and Sewer Pipe, Using Rubber Gaskets (Metric).
- AM. ASTM C564 - Standard Specification for Rubber Gaskets for Cast Iron Soil Pipe and Fittings.
- AN. ASTM C 700 - Standard Specification for Vitrified Clay Pipe, Extra Strength, Standard Strength, and Perforated.
- AO. ASTM C 1053 - Standard Specification for Borosilicate Glass Pipe and Fittings for Drain, Waste, and Vent (DWV) Applications.
- AP. ASTM D1785 - Standard Specification for Poly(Vinyl Chloride) (PVC) Plastic Pipe, Schedules 40, 80, and 120.
- AQ. ASTM D 2235 - Standard Specification for Solvent Cement for Acrylonitrile-Butadiene-Styrene (ABS) Plastic Pipe and Fittings.
- AR. ASTM D2239 - Standard Specification for Polyethylene (PE) Plastic Pipe (SIDR-PR) Based on Controlled Inside Diameter.
- AS. ASTM D2241 - Standard Specification for Poly (Vinyl Chloride) (PVC) Pressure-Rated Pipe (SDR Series).
- AT. ASTM D2447 - Standard Specification for Polyethylene (PE) Plastic Pipe, Schedules 40 and 80, Based on Outside Diameter.
- AU. ASTM D2466 - Standard Specification for Poly(Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 40.
- AV. ASTM D 2513 - Standard Specification for Polyethylene (PE) Gas Pressure Pipe, Tubing, and Fittings.
- AW. ASTM D2564 - Standard Specification for Solvent Cements for Poly(Vinyl Chloride) (PVC) Plastic Piping Systems.
- AX. ASTM D2609 - Standard Specification for Plastic Insert Fittings for Polyethylene (PE) Plastic Pipe.
- AY. ASTM D2661 - Standard Specification for Acrylonitrile-Butadiene-Styrene (ABS) Schedule 40 Plastic Drain, Waste, and Vent Pipe and Fittings.
- AZ. ASTM D 2665 - Standard Specification for Poly(Vinyl Chloride) (PVC) Plastic Drain, Waste, and Vent Pipe and Fittings.
- BA. ASTM D2680 - Standard Specification for Acrylonitrile-Butadiene-Styrene (ABS) and Poly(Vinyl Chloride) (PVC) Composite Sewer Piping.
- BB. ASTM D 2683 - Standard Specification for Socket-Type Polyethylene Fittings for Outside Diameter-Controlled Polyethylene Pipe and Tubing.
- BC. ASTM D 2729 - Standard Specification for Poly(Vinyl Chloride) (PVC) Sewer Pipe and Fittings.
- BD. ASTM D2751 - Standard Specification for Acrylonitrile-Butadiene-Styrene (ABS) Sewer Pipe and Fittings.

- BE. ASTM D2846/D2846M - Standard Specification for Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Hot- and Cold-Water Distribution Systems.
- BF. ASTM D 2855 - Standard Practice for Making Solvent-Cemented Joints with Poly(Vinyl Chloride) (PVC) Pipe and Fittings.
- BG. ASTM D2996 - Standard Specification for Filament-Wound "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Pipe.
- BH. ASTM D2997 - Standard Specification for Centrifugally Cast "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Pipe.
- BI. ASTM D3034 - Standard Specification for Type PSM Poly(Vinyl Chloride) (PVC) Sewer Pipe and Fittings.
- BJ. ASTM D3262 - Standard Specification for "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Sewer Pipe.
- BK. ASTM D3517 - Standard Specification for "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Pressure Pipe.
- BL. ASTM D3754 - Standard Specification for "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Sewer and Industrial Pressure Pipe.
- BM. ASTM D 3840 - Standard Specification for "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Pipe Fittings for Nonpressure Applications.
- BN. ASTM F437 - Standard Specification for Threaded Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 80.
- BO. ASTM F438 - Standard Specification for Socket-Type Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 40.
- BP. ASTM F439 - Standard Specification for Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 80.
- BQ. ASTM F441/F441M - Standard Specification for Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe, Schedules 40 and 80.
- BR. ASTM F 442/F 442M - Standard Specification for Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe (SDR-PR).
- BS. ASTM F 477 - Standard Specification for Elastomeric Seals (Gaskets) for Joining Plastic Pipe.
- BT. ASTM F 493 - Standard Specification for Solvent Cements for Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe and Fittings.
- BU. ASTM F628 - Standard Specification for Acrylonitrile-Butadiene-Styrene (ABS) Schedule 40 Plastic Drain, Waste, and Vent Pipe with a Cellular Core.
- BV. ASTM F679 - Standard Specification for Poly(Vinyl Chloride) (PVC) Large-Diameter Plastic Gravity Sewer Pipe and Fittings.
- BW. ASTM F708 - Standard Practice for Design and Installation of Rigid Pipe Hangers.
- BX. ASTM F1281 - Standard Specification for Crosslinked Polyethylene/Aluminum/Crosslinked Polyethylene (PEX-AL-PEX) Pressure Pipe.

- BY. ASTM F 1282 - Standard Specification for Polyethylene/Aluminum/Polyethylene (PE-AL-PE) Composite Pressure Pipe.
- BZ. AWS A5.8/A5.8M - Specification for Filler Metals for Brazing and Braze Welding; American Welding Society.
- CA. AWWA C105/A21.5 - Polyethylene Encasement for Ductile-Iron Pipe Systems; American Water Works Association (ANSI/AWWA C105/A21.5).
- CB. AWWA C110/A21.10 - American National Standard for Ductile-Iron and Gray-Iron Fittings, 3 In. Through 48 In. (75 mm Through 1200 mm), for Water and Other Liquids; American Water Works Association.
- CC. AWWA C111/A21.11 - Rubber-Gasket Joints for Ductile-Iron Pressure Pipe and Fittings; American Water Works Association (ANSI/AWWA C111/A21.11).
- CD. AWWA C151/A21.51 - Ductile-Iron Pipe, Centrifugally Cast, for Water; American Water Works Association (ANSI/AWWA C151/A21.51).
- CE. AWWA C651 - Disinfecting Water Mains; American Water Works Association (ANSI/AWWA C651).
- CF. AWWA C900 - Polyvinyl Chloride (PVC) Pressure Pipe, 4 In. Through 12 In. (100 mm Through 300 mm), for Water Distribution; American Water Works Association (ANSI/AWWA C900).
- CG. AWWA C901 - Polyethylene (PE) Pressure Pipe and Tubing, 1/2 In. (13 mm) Through 3 In. (76 mm), for Water Service; American Water Works Association.
- CH. AWWA C950 - Fiberglass Pressure Pipe; American Water Works Association (ANSI/AWWA C950).
- CI. CISPI 301 - Standard Specification for Hubless Cast Iron Soil Pipe and Fittings for Sanitary and Storm Drain, Waste and Vent Piping Applications; Cast Iron Soil Pipe Institute.
- CJ. CISPI 310 - Specification for Coupling for Use in Connection with Hubless Cast Iron Soil Pipe and Fittings for Sanitary and Storm Drain, Waste, and Vent Piping Applications; Cast Iron Soil Pipe Institute.
- CK. MSS SP-58 - Pipe Hangers and Supports - Materials, Design, Manufacture, Selection, Application, and Installation; Manufacturers Standardization Society of the Valve and Fittings Industry, Inc..
- CL. MSS SP-67 - Butterfly Valves; Manufacturers Standardization Society of the Valve and Fittings Industry, Inc..
- CM. MSS SP-69 - Pipe Hangers and Supports - Selection and Application; Manufacturers Standardization Society of the Valve and Fittings Industry, Inc..
- CN. MSS SP-70 - Cast Iron Gate Valves, Flanged and Threaded Ends; Manufacturers Standardization Society of the Valve and Fittings Industry, Inc..
- CO. MSS SP-71 - Cast Iron Swing Check Valves, Flanged and Threaded Ends; Manufacturers Standardization Society of the Valve and Fittings Industry, Inc..
- CP. MSS SP-78 - Cast Iron Plug Valves, Flanged and Threaded Ends; Manufacturers Standardization Society of the Valve and Fittings Industry, Inc..

- CQ. MSS SP-80 - Bronze Gate, Globe, Angle and Check Valves; Manufacturers Standardization Society of the Valve and Fittings Industry, Inc..
- CR. MSS SP-85 - Cast Iron Globe & Angle Valves, Flanged and Threaded Ends; Manufacturers Standardization Society of the Valve and Fittings Industry, Inc..
- CS. MSS SP-89 - Pipe Hangers and Supports - Fabrication and Installation Practices; Manufacturers Standardization Society of the Valve and Fittings Industry, Inc..
- CT. MSS SP-110 - Ball Valves Threaded, Socket-Welding, Solder Joint, Grooved and Flared Ends; Manufacturers Standardization Society of the Valve and Fittings Industry, Inc..
- CU. NFPA 54 - National Fuel Gas Code; National Fire Protection Association.
- CV. NFPA 58 - Liquefied Petroleum Gas Code; National Fire Protection Association.

1.04 SUBMITTALS

- A. Product Data: Provide data on pipe materials, pipe fittings, valves, and accessories. Provide manufacturers catalog information. Indicate valve data and ratings.
- B. Project Record Documents: Record actual locations of valves.

1.05 QUALITY ASSURANCE

- A. Perform Work in accordance with local standards.
 - 1. Maintain one copy on project site.
- B. Valves: Manufacturer's name and pressure rating marked on valve body.
- C. Welding Materials and Procedures: Conform to ASME (BPV IX) and applicable state labor regulations.
- D. Welder Qualifications: Certified in accordance with ASME (BPV IX).
- E. Identify pipe with marking including size, ASTM material classification, ASTM specification, potable water certification, water pressure rating.

1.06 REGULATORY REQUIREMENTS

- A. Perform Work in accordance with local plumbing code.
- B. Conform to applicable code for installation of backflow prevention devices.
- C. Provide certificate of compliance from authority having jurisdiction indicating approval of installation of backflow prevention devices.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Accept valves on site in shipping containers with labeling in place. Inspect for damage.
- B. Provide temporary protective coating on cast iron and steel valves.
- C. Provide temporary end caps and closures on piping and fittings. Maintain in place until installation.
- D. Protect piping systems from entry of foreign materials by temporary covers, completing sections of the work, and isolating parts of completed system.

1.08 FIELD CONDITIONS

- A. Do not install underground piping when bedding is wet or frozen.

1.09 EXTRA MATERIALS

- A. Provide two repacking kits for each size valve.

PART 2 PRODUCTS

2.01 WATER PIPING, ABOVE GRADE

- A. Copper Tube: ASTM B88 (ASTM B88M), Type L (B), Drawn (H).
 - 1. Fittings: ASME B16.18, cast copper alloy or ASME B16.22, wrought copper and bronze.
 - 2. Joints: ASTM B32, alloy Sn95 solder.

2.02 FLANGES, UNIONS, AND COUPLINGS

- A. Unions for Pipe Sizes 3 Inches and Under:
 - 1. Ferrous pipe: Class 150 malleable iron threaded unions.
 - 2. Copper tube and pipe: Class 150 bronze unions with soldered joints.
- B. Flanges for Pipe Size Over 1 Inch:
 - 1. Ferrous pipe: Class 150 malleable iron threaded or forged steel slip-on flanges; preformed neoprene gaskets.
 - 2. Copper tube and pipe: Class 150 slip-on bronze flanges; preformed neoprene gaskets.
- C. Grooved and Shouldered Pipe End Couplings:
 - 1. Housing: Malleable iron clamps to engage and lock, designed to permit some angular deflection, contraction, and expansion; steel bolts, nuts, and washers; galvanized for galvanized pipe.
 - 2. Sealing gasket: "C" shape composition sealing gasket.
- D. Dielectric Connections: Union with galvanized or plated steel threaded end, copper solder end, water impervious isolation barrier.

2.03 PIPE HANGERS AND SUPPORTS

- A. Provide hangers and supports that comply with MSS SP-58.
 - 1. If type of hanger or support for a particular situation is not indicated, select appropriate type using MSS SP-58 recommendations.
 - 2. Overhead Supports: Individual steel rod hangers attached to structure or to trapeze hangers.
 - 3. Trapeze Hangers: Welded steel channel frames attached to structure.
 - 4. Vertical Pipe Support: Steel riser clamp.
- B. Plumbing Piping - Drain, Waste, and Vent:
 - 1. Conform to ASME B31.9.
 - 2. Hangers for Pipe Sizes 1/2 Inch to 1-1/2 Inches: Malleable iron, adjustable swivel, split ring.
 - 3. Hangers for Pipe Sizes 2 Inches and Over: Carbon steel, adjustable, clevis.
 - 4. Multiple or Trapeze Hangers: Steel channels with welded spacers and hanger rods.
 - 5. Wall Support for Pipe Sizes to 3 Inches: Cast iron hook.
 - 6. Wall Support for Pipe Sizes 4 Inches and Over: Welded steel bracket and wrought steel clamp.
 - 7. Vertical Support: Steel riser clamp.
 - 8. Floor Support: Cast iron adjustable pipe saddle, lock nut, nipple, floor flange, and concrete pier or steel support.
 - 9. Copper Pipe Support: Carbon steel ring, adjustable, copper plated.

- C. Plumbing Piping - Water:
1. Conform to ASME B31.9.
 2. Hangers for Pipe Sizes 1/2 Inch to 1-1/2 Inches: Malleable iron, adjustable swivel, split ring.
 3. Hangers for Cold Pipe Sizes 2 Inches and Over: Carbon steel, adjustable, clevis.
 4. Hangers for Hot Pipe Sizes 2 Inches to 4 Inches: Carbon steel, adjustable, clevis.
 5. Hangers for Hot Pipe Sizes 6 Inches and Over: Adjustable steel yoke, cast iron pipe roll, double hanger.
 6. Multiple or Trapeze Hangers: Steel channels with welded supports or spacers and hanger rods.
 7. Multiple or Trapeze Hangers for Hot Pipe Sizes 6 Inches and Over: Steel channels with welded supports or spacers and hanger rods, cast iron roll.
 8. Wall Support for Pipe Sizes to 3 Inches: Cast iron hook.
 9. Wall Support for Pipe Sizes 4 Inches and Over: Welded steel bracket and wrought steel clamp.
 10. Wall Support for Hot Pipe Sizes 6 Inches and Over: Welded steel bracket and wrought steel clamp with adjustable steel yoke and cast iron pipe roll.
 11. Vertical Support: Steel riser clamp.
 12. Floor Support for Cold Pipe: Cast iron adjustable pipe saddle, lock nut, nipple, floor flange, and concrete pier or steel support.
 13. Floor Support for Hot Pipe Sizes to 4 Inches: Cast iron adjustable pipe saddle, locknut, nipple, floor flange, and concrete pier or steel support.
 14. Floor Support for Hot Pipe Sizes 6 Inches and Over: Adjustable cast iron pipe roll and stand, steel screws, and concrete pier or steel support.
 15. Copper Pipe Support: Carbon steel ring, adjustable, copper plated.

2.04 GATE VALVES

- A. Manufacturers:
1. Conbraco Industries: www.conbraco.com.
 2. Nibco, Inc: www.nibco.com.
 3. Milwaukee Valve Company: www.milwaukeevalve.com.
- B. Up To and Including 3 Inches:
1. MSS SP-80, Class 125, bronze body, bronze trim, rising stem, handwheel, inside screw, solid wedge disc, solder ends.
- C. 2 Inches and Larger:
1. MSS SP-70, Class 125, iron body, bronze trim, outside screw and yoke, handwheel, solid wedge disc, flanged ends. Provide chain-wheel operators for valves 6 inches and larger mounted over 8 feet above floor.

2.05 GLOBE VALVES

- A. Manufacturers:
1. Conbraco Industries: www.conbraco.com.
 2. Nibco, Inc: www.nibco.com.
 3. Milwaukee Valve Company: www.milwaukeevalve.com.
- B. Up To and Including 3 Inches:
1. MSS SP-80, Class 125, bronze body, bronze trim, handwheel, bronze disc, solder ends.
- C. 2 Inches and Larger:
1. MSS SP-85, Class 125, iron body, bronze trim, handwheel, outside screw and yoke, renewable bronze plug-type disc, renewable seat, flanged ends. Provide chain-wheel

operators for valves 6 inches and larger mounted over 8 feet above floor.

2.06 BALL VALVES

- A. Manufacturers:
 - 1. Conbraco Industries: www.conbraco.com.
 - 2. Nibco, Inc: www.nibco.com.
 - 3. Milwaukee Valve Company: www.milwaukeevalve.com.
- B. Construction, 4 Inches and Smaller: MSS SP-110, Class 150, 400 psi CWP, bronze, two piece body, chrome plated brass ball, regular port, teflon seats and stuffing box ring, blow-out proof stem, lever handle with balancing stops, solder ends with union.

2.07 PLUG VALVES

- A. Manufacturers:
 - 1. Conbraco Industries: www.conbraco.com.
 - 2. Nibco, Inc: www.nibco.com.
 - 3. Milwaukee Valve Company: www.milwaukeevalve.com.
- B. Construction 2-1/2 Inches and Larger: MSS SP-78, 175 psi CWP, cast iron body and plug, pressure lubricated, teflon or Buna N packing, flanged or grooved ends. Provide lever operator with set screw.

2.08 BUTTERFLY VALVES

- A. Manufacturers:
 - 1. Hammond Valve: www.hammondvalve.com.
 - 2. Crane Co.: www.cranevalve.com.
 - 3. Milwaukee Valve Company: www.milwaukeevalve.com.
- B. Construction 1-1/2 Inches and Larger: MSS SP-67, 200 psi CWP, cast or ductile iron body, nickel-plated ductile iron disc, resilient replaceable EPDM, Buna N, or EPT seat, wafer, lug, or grooved ends, extended neck, 10 position lever handle.
- C. Provide gear operators for valves 8 inches and larger, and chain-wheel operators for valves mounted over 8 feet above floor.

2.09 FLOW CONTROLS

- A. Manufacturers:
 - 1. ITT Bell & Gossett: www.bellgossett.com.
 - 2. Griswold Controls: www.griswoldcontrols.com.
 - 3. Taco, Inc: www.taco-hvac.com.
- B. Construction: Class 125, Brass or bronze body with union on inlet and outlet, temperature and pressure test plug on inlet and outlet, blowdown/backflush drain.
- C. Calibration: Control flow within 5 percent of selected rating, over operating pressure range of 10 times minimum pressure required for control, maximum minimum pressure 3.5 psi psi.

2.10 SWING CHECK VALVES

- A. Manufacturers:
 - 1. Hammond Valve: www.hammondvalve.com.
 - 2. Nibco, Inc: www.nibco.com.
 - 3. Milwaukee Valve Company: www.milwaukeevalve.com.
- B. Up to 3 Inches:

1. MSS SP-80, Class 125, bronze body and cap, bronze swing disc with rubber seat, solder ends.
- C. Over 3 Inches:
1. MSS SP-71, Class 125, iron body, bronze swing disc, renewable disc seal and seat, flanged or grooved ends.

2.11 SPRING LOADED CHECK VALVES

- A. Manufacturers:
1. Hammond Valve: www.hammondvalve.com.
 2. Crane Co.: www.cranevalve.com.
 3. Milwaukee Valve Company: www.milwaukeevalve.com.
- B. Class 125, iron body, bronze trim, stainless steel springs, bronze disc, Buna N seals, wafer style ends.

2.12 WATER PRESSURE REDUCING VALVES

- A. Manufacturers:
1. Amtrol Inc: www.amtrol.com.
 2. Cla-Val Co: www.cla-val.com.
 3. Watts Regulator Company: www.wattsregulator.com.
- B. Up to 2 Inches:
1. MSS SP-80, bronze body, stainless steel and thermoplastic internal parts, fabric reinforced diaphragm, strainer, threaded single or double union ends.
- C. Over 2 Inches:
1. MSS SP-85, cast iron body, bronze fitted, elastomeric diaphragm and seat disc, flanged.

2.13 RELIEF VALVES

- A. Pressure Relief:
1. Manufacturers:
 - a. Cla-Val Co: www.cla-val.com.
 - b. Henry Technologies: www.henrytech.com.
 - c. Watts Regulator Company: www.wattsregulator.com.
 2. AGA Z21.22 certified, bronze body, teflon seat, steel stem and springs, automatic, direct pressure actuated.
- B. Temperature and Pressure Relief:
1. Manufacturers:
 - a. Cla-Val Co: www.cla-val.com.
 - b. Henry Technologies: www.henrytech.com.
 - c. Watts Regulator Company: www.wattsregulator.com.
 2. AGA Z21.22 certified, bronze body, teflon seat, stainless steel stem and springs, automatic, direct pressure actuated, temperature relief maximum 210 degrees F, capacity ASME (BPV IV) certified and labelled.

2.14 STRAINERS

- A. Manufacturers:
1. Armstrong International, Inc: www.armstronginternational.com.
 2. Green Country Filtration: greencountryfiltration.com.

3. WEAMCO: www.weamco.com.
- B. Size 2 inch and Under:
 1. Threaded brass body for 175 psi CWP, Y pattern with 1/32 inch stainless steel perforated screen.
 2. Class 150, threaded bronze body 300 psi CWP, Y pattern with 1/32 inch stainless steel perforated screen.
- C. Size 1-1/2 inch to 4 inch:
 1. Class 125, flanged iron body, Y pattern with 1/16 inch stainless steel perforated screen.
- D. Size 5 inch and Larger:
 1. Class 125, flanged iron body, basket pattern with 1/8 inch stainless steel perforated screen.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that excavations are to required grade, dry, and not over-excavated.

3.02 PREPARATION

- A. Ream pipe and tube ends. Remove burrs. Bevel plain end ferrous pipe.
- B. Remove scale and dirt, on inside and outside, before assembly.
- C. Prepare piping connections to equipment with flanges or unions.

3.03 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Provide non-conducting dielectric connections wherever jointing dissimilar metals.
- C. Route piping in orderly manner and maintain gradient. Route parallel and perpendicular to walls.
- D. Install piping to maintain headroom, conserve space, and not interfere with use of space.
- E. Group piping whenever practical at common elevations.
- F. Install piping to allow for expansion and contraction without stressing pipe, joints, or connected equipment. Refer to Section 22 05 16.
- G. Provide clearance in hangers and from structure and other equipment for installation of insulation and access to valves and fittings. Refer to Section 22 07 19.
- H. Provide access where valves and fittings are not exposed. Coordinate size and location of access doors with Section 08 31 00.
- I. Establish elevations of buried piping outside the building to ensure not less than 3 ft of cover.
- J. Install vent piping penetrating roofed areas to maintain integrity of roof assembly.
- K. Where pipe support members are welded to structural building framing, scrape, brush clean, and apply one coat of zinc rich primer to welding.
- L. Provide support for utility meters in accordance with requirements of utility companies.
- M. Prepare exposed, unfinished pipe, fittings, supports, and accessories ready for finish painting. Refer to Section 09 90 00.

- N. Excavate in accordance with Section 31 23 16.
- O. Backfill in accordance with Section 31 23 23.
- P. Install bell and spigot pipe with bell end upstream.
- Q. Install valves with stems upright or horizontal, not inverted.
- R. Pipe vents from gas pressure reducing valves to outdoors and terminate in weather proof hood.
- S. Install water piping to ASME B31.9.
- T. Install fuel oil piping to ASME B31.9.
- U. PVC Pipe: Make solvent-welded joints in accordance with ASTM D2855.
- V. Sleeve pipes passing through partitions, walls and floors.
- W. Inserts:
 - 1. Provide inserts for placement in concrete formwork.
 - 2. Provide inserts for suspending hangers from reinforced concrete slabs and sides of reinforced concrete beams.
 - 3. Provide hooked rod to concrete reinforcement section for inserts carrying pipe over 4 inches.
 - 4. Where concrete slabs form finished ceiling, locate inserts flush with slab surface.
 - 5. Where inserts are omitted, drill through concrete slab from below and provide through-bolt with recessed square steel plate and nut flush with top of slab.
- X. Pipe Hangers and Supports:
 - 1. Install in accordance with ASME B31.9.
 - 2. Support horizontal piping as scheduled.
 - 3. Install hangers to provide minimum 1/2 inch space between finished covering and adjacent work.
 - 4. Place hangers within 12 inches of each horizontal elbow.
 - 5. Use hangers with 1-1/2 inch minimum vertical adjustment. Design hangers for pipe movement without disengagement of supported pipe.
 - 6. Support vertical piping at every floor. Support riser piping independently of connected horizontal piping.
 - 7. Where several pipes can be installed in parallel and at same elevation, provide multiple or trapeze hangers.
 - 8. Provide copper plated hangers and supports for copper piping.
 - 9. Prime coat exposed steel hangers and supports. Refer to Section 09 90 00. Hangers and supports located in crawl spaces, pipe shafts, and suspended ceiling spaces are not considered exposed.
 - 10. Provide hangers adjacent to motor driven equipment with vibration isolation; refer to Section 22 05 48.
 - 11. Support cast iron drainage piping at every joint.

3.04 APPLICATION

- A. Use grooved mechanical couplings and fasteners only in accessible locations.
- B. Install unions downstream of valves and at equipment or apparatus connections.
- C. Install brass male adapters each side of valves in copper piped system. Solder adapters to pipe.
- D. Install gate or ball valves for shut-off and to isolate equipment, part of systems, or vertical risers.

- E. Install globe valves for throttling, bypass, or manual flow control services.
- F. Provide lug end butterfly valves adjacent to equipment when provided to isolate equipment.
- G. Provide spring loaded check valves on discharge of water pumps.
- H. Provide plug valves in natural gas systems for shut-off service.
- I. Provide flow controls in water recirculating systems where indicated.

3.05 TOLERANCES

- A. Drainage Piping: Establish invert elevations within 1/2 inch vertically of location indicated and slope to drain at minimum of 1/4 inch per foot slope.
- B. Water Piping: Slope at minimum of 1/32 inch per foot and arrange to drain at low points.

3.06 DISINFECTION OF DOMESTIC WATER PIPING SYSTEM

- A. Disinfect water distribution system in accordance with Section 33 13 00.
- B. Prior to starting work, verify system is complete, flushed and clean.
- C. Ensure Ph of water to be treated is between 7.4 and 7.6 by adding alkali (caustic soda or soda ash) or acid (hydrochloric).
- D. Inject disinfectant, free chlorine in liquid, powder, tablet or gas form, throughout system to obtain 50 to 80 mg/L residual.
- E. Bleed water from outlets to ensure distribution and test for disinfectant residual at minimum 15 percent of outlets.
- F. Maintain disinfectant in system for 24 hours.
- G. If final disinfectant residual tests less than 25 mg/L, repeat treatment.
- H. Flush disinfectant from system until residual equal to that of incoming water or 1.0 mg/L.
- I. Take samples no sooner than 24 hours after flushing, from 10 percent of outlets and from water entry, and analyze in accordance with AWWA C651.

3.07 SERVICE CONNECTIONS

- A. Provide new sanitary and storm sewer services. Before commencing work check invert elevations required for sewer connections, confirm inverts and ensure that these can be properly connected with slope for drainage and cover to avoid freezing.
- B. Provide new water service complete with approved reduced pressure backflow preventer and water meter with by-pass valves, pressure reducing valve.
 - 1. Provide sleeve in wall for service main and support at wall with reinforced concrete bridge. Calk enlarged sleeve and make watertight with pliable material. Anchor service main inside to concrete wall.
 - 2. Provide 18 gage galvanized sheet metal sleeve around service main to 6 inch above floor and 6 feet minimum below grade. Size for minimum of 2 inches of loose batt insulation stuffing.
- C. Provide new gas service complete with gas meter and regulators. Gas service distribution piping to have initial minimum pressure of 7 inch wg. Provide regulators on each line serving gravity type appliances, sized in accordance with equipment.

3.08 SCHEDULES

- A. Pipe Hanger Spacing:
 - 1. Metal Piping:
 - a. Pipe size: 1/2 inches to 1-1/4 inches:
 - 1) Maximum hanger spacing: 6.5 ft.
 - 2) Hanger rod diameter: 3/8 inches.
 - b. Pipe size: 1-1/2 inches to 2 inches:
 - 1) Maximum hanger spacing: 10 ft.
 - 2) Hanger rod diameter: 3/8 inch.
 - c. Pipe size: 2-1/2 inches to 3 inches:
 - 1) Maximum hanger spacing: 10 ft.
 - 2) Hanger rod diameter: 1/2 inch.
 - d. Pipe size: 4 inches to 6 inches:
 - 1) Maximum hanger spacing: 10 ft.
 - 2) Hanger rod diameter: 5/8 inch.
 - e. Pipe size: 8 inches to 12 inches:
 - 1) Maximum hanger spacing: 14 ft.
 - 2) Hanger rod diameter: 7/8 inch.
 - f. Pipe size: 14 inches and Over:
 - 1) Maximum hanger spacing: 20 ft.
 - 2) Hanger rod diameter: 1 inch.
 - 2. Plastic Piping:
 - a. All Sizes:
 - 1) Maximum hanger spacing: 6 ft.
 - 2) Hanger rod diameter: 3/8 inch.

END OF SECTION

SECTION 22 30 00

PLUMBING EQUIPMENT

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Water Heaters.
- B. Expansion Tanks.
- C. Pumps.
 - 1. Circulators.
 - 2. Sump / Sewage Pumps.

1.02 RELATED REQUIREMENTS

- A. Section 26 27 17 - Equipment Wiring: Electrical characteristics and wiring connections.

1.03 REFERENCE STANDARDS

- A. ANSI Z21.10.1 - Gas Water Heaters - Volume I - Storage Water Heaters with Input Ratings of 75,000 Btu per Hour or Less.
- B. ANSI Z21.10.3 - Gas Water Heaters - Volume III - Storage Water Heaters with Input Ratings Above 75,000 Btu per Hour, Circulating and Instantaneous Water Heaters.
- C. ASME (BPV VIII, 1) - Boiler and Pressure Vessel Code, Section VIII, Division 1 - Rules for Construction of Pressure Vessels; The American Society of Mechanical Engineers.

1.04 SUBMITTALS

- A. Product Data:
 - 1. Provide dimension drawings of water heaters indicating components and connections to other equipment and piping.
 - 2. Indicate pump type, capacity, power requirements.
 - 3. Provide certified pump curves showing pump performance characteristics with pump and system operating point plotted. Include NPSH curve when applicable.
 - 4. Provide electrical characteristics and connection requirements.
- B. Shop Drawings:
 - 1. Indicate heat exchanger dimensions, size of tapings, and performance data.
 - 2. Indicate dimensions of tanks, tank lining methods, anchors, attachments, lifting points, tapings, and drains.
- C. Manufacturer's Instructions.
- D. Project Record Documents: Record actual locations of components.
- E. Operation and Maintenance Data: Include operation, maintenance, and inspection data, replacement part numbers and availability, and service depot location and telephone number.
- F. Warranty: Submit manufacturer warranty and ensure forms have been completed in Seaford School District's name and registered with manufacturer.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the type of products specified in this section, with minimum three years of experience.
- B. Identification: Provide pumps with manufacturer's name, model number, and rating/capacity identified by permanently attached label.
- C. Performance: Ensure pumps operate at specified system fluid temperatures without vapor binding and cavitation, are non-overloading in parallel or individual operation, operate within 25 percent of midpoint of published maximum efficiency curve.

1.06 CERTIFICATIONS

- A. Water Heaters: NSF approved.
- B. Gas Water Heaters: Certified by CSA International to ANSI Z21.10.1 or ANSI Z21.10.3, as applicable, in addition to requirements specified elsewhere.
- C. Products Requiring Electrical Connection: Listed and classified by Underwriters Laboratories Inc., or testing firm acceptable to the authority having jurisdiction as suitable for the purpose specified and indicated.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Provide temporary inlet and outlet caps. Maintain caps in place until installation.

1.08 WARRANTY

- A. Provide five year manufacturer warranty for domestic water heaters and in-line circulator.

1.09 EXTRA MATERIALS

- A. Provide two pump seals.

PART 2 PRODUCTS

2.01 COMMERCIAL GAS FIRED WATER HEATERS

- A. Type: Automatic, tankless natural gas-fired.
- B. Manufacturers:
 - 1. Noritz
 - 2. Rinnai
 - 3. Substitutions: See Section 01 60 00 - Product Requirements.
- C. Performance: See plans.
- D. Accessories: Provide:
 - 1. Venting Kit.
 - 2. Isolation Valves
- E. Certification: As water heater by ASME, rated for output temperatures of 100 to 180 degrees F..
- F. Controls: Digital controls for output temperature management (default setting at 120 degrees), safety controls for flame failure, boiling protection, combustion fan failure, over-current, and gas valve failure..

2.02 PACKAGED WATER HEATING SYSTEMS

- A. System: Gas-fired direct heating boiler, circulating pump, controls, piping and valving as indicated, storage tank, all mounted on structural steel skid.
- B. Boiler:
 - 1. Type: Gas-fired water tube boiler, with copper finned tube heat exchanger, steel jacket with glass fiber insulation.
 - 2. Boiler Trim: Gas burner, thermometer and pressure gauge, immersion thermostats for operating and high limit protection, 100 percent safety shut-off electric gas valve with transformer, electronic safety pilot and pilot burner, gas pressure regulator, manual gas shut-off, low water cut off, ASME rated temperature and pressure relief valve, coil relief valve, automatic boiler fill and expansion tank, draft inverter.
 - 3. Performance:
- C. Vertical storage tank:
 - 1. Working pressure: 150 psi ASME labelled.
 - 2. Lining: 15 mils thick epoxy lining extended through flanges and couplings.
 - 3. Support: Two welded tank saddles not less than 4 inches wide by 1/4 inch thick, mounted on 2 inch pipe stand with minimum four cross braced legs; sheet teflon isolation strip between tank and saddle; dielectric unions between tank and piping system.
 - 4. Insulation: 3 inch glass fiber insulation with steel jacket.
- D. Pump:
 - 1. Type: All bronze, in-line circulation pump mounted on boiler, controlled by tank mounted immersion thermostat.
- E. Thermostatic Valve: Three-way, self-contained, full line size, bronze body 1/2 to 2 inches size, iron body 2-1/2 inches and over, set at 140 degrees F.

2.03 DIAPHRAGM-TYPE COMPRESSION TANKS

- A. Manufacturers:
 - 1. Amtrol Inc: www.amtrol.com.
 - 2. ITT Bell & Gossett: www.bellgossett.com.
 - 3. Taco, Inc: www.taco-hvac.com.
- B. Construction: Welded steel, tested and stamped in accordance with ASME (BPV VIII, 1); supplied with National Board Form U-1, rated for working pressure of 125 psig, with flexible diaphragm sealed into tank, and steel legs or saddles.
- C. Accessories: Pressure gage and air-charging fitting, tank drain; precharge to 55 psig.

2.04 IN-LINE CIRCULATOR PUMPS

- A. Manufacturers:
 - 1. Armstrong Pumps Inc: www.armstrongpumps.com.
 - 2. ITT Bell & Gossett: www.bellgossett.com.
 - 3. Sterling Fluid Systems: www.sterlingfluid.com.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Casing: Bronze, rated for 125 psig working pressure.
- C. Impeller: Bronze.
- D. Shaft: Alloy steel with integral thrust collar and two oil lubricated bronze sleeve bearings.

- E. Seal: Carbon rotating against a stationary ceramic seat.
- F. Drive: Flexible coupling.

2.05 SUMP PUMPS

- A. Manufacturers:
 - 1. ITT Bell & Gossett.
 - 2. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Type: Vertical centrifugal, direct connected, duplex arrangement.
- C. Casing: Cast iron volute with radial clearance around impeller.
- D. Impeller: Cast iron; enclosed or semi-open non-clog, keyed to stainless steel shaft.
- E. Support: Cast iron pedestal motor support on steel floor plate with gas tight gaskets.
- F. Bearings: Forced grease lubricated bronze sleeve spaced maximum 48 inches and grease lubricated ball thrust at floor plate.
- G. Drive: Flexible coupling to vertical, solid shaft ball bearing electric motor.
- H. Sump: Fiberglass with lockable painted aluminum inspection cover and alarm fittings.
- I. Controls (Duplex): Float operated mechanical alternator with float rod, stops, and corrosion resistant float to alternate operation of pumps, cut-in second pump on rising level or lead pump failure, separate pressure switch high level alarm with transformer, alarm bell, and standpipe, and emergency float switch with float rod, stops, and corrosion resistant float to operate both pumps on failure of alternator.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install plumbing equipment in accordance with manufacturer's instructions, as required by code, and complying with conditions of certification, if any.
- B. Coordinate with plumbing piping and related gas venting and electrical work to achieve operating system.
- C. Pumps:
 - 1. Provide air cock and drain connection on horizontal pump casings.
 - 2. Provide line sized isolating valve and strainer on suction and line sized soft seated check valve and balancing valve on discharge.
 - 3. Decrease from line size with long radius reducing elbows or reducers. Support piping adjacent to pump such that no weight is carried on pump casings. Provide supports under elbows on pump suction and discharge line sizes 4 inches and over.
 - 4. Ensure pumps operate at specified system fluid temperatures without vapor binding and cavitation, are non-overloading in parallel or individual operation, and operate within 25 percent of midpoint of published maximum efficiency curve.
 - 5. Align and verify alignment of base mounted pumps prior to start-up.

END OF SECTION

SECTION 26 05 01

MINOR ELECTRICAL DEMOLITION

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Electrical demolition.

1.02 RELATED REQUIREMENTS

- A. Section 01 70 00 - Execution and Closeout Requirements: Additional requirements for alterations work.

PART 2 PRODUCTS

2.01 MATERIALS AND EQUIPMENT

- A. Materials and equipment for patching and extending work: As specified in individual sections.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify field measurements and circuiting arrangements are as shown on Drawings.
- B. Verify that abandoned wiring and equipment serve only abandoned facilities.
- C. Demolition drawings are based on casual field observation.
- D. Report discrepancies to Seaford School District before disturbing existing installation.
- E. Report discrepancies to StudioJAED before disturbing existing installation.
- F. Beginning of demolition means installer accepts existing conditions.

3.02 PREPARATION

- A. Disconnect electrical systems in walls, floors, and ceilings to be removed.
- B. Coordinate utility service outages with utility company.
- C. Provide temporary wiring and connections to maintain existing systems in service during construction. When work must be performed on energized equipment or circuits, use personnel experienced in such operations.
- D. Existing Electrical Service: Maintain existing system in service until new system is complete and ready for service. Disable system only to make switchovers and connections. Minimize outage duration.
 - 1. Obtain permission from Seaford School District at least 24 hours before partially or completely disabling system.
 - 2. Make temporary connections to maintain service in areas adjacent to work area.
- E. Existing Fire Alarm System: Maintain existing system in service until new system is accepted. Disable system only to make switchovers and connections. Minimize outage duration.
 - 1. Notify Seaford School District before partially or completely disabling system.
 - 2. Notify local fire service.
 - 3. Make notifications at least 24 hours in advance.
 - 4. Make temporary connections to maintain service in areas adjacent to work area.

3.03 DEMOLITION AND EXTENSION OF EXISTING ELECTRICAL WORK

- A. Remove, relocate, and extend existing installations to accommodate new construction.
- B. Remove abandoned wiring to source of supply.
- C. Remove exposed abandoned conduit, including abandoned conduit above accessible ceiling finishes. Cut conduit flush with walls and floors, and patch surfaces.
- D. Disconnect abandoned outlets and remove devices. Remove abandoned outlets if conduit servicing them is abandoned and removed. Provide blank cover for abandoned outlets that are not removed.
- E. Disconnect and remove abandoned panelboards and distribution equipment.
- F. Disconnect and remove electrical devices and equipment serving utilization equipment that has been removed.
- G. Disconnect and remove abandoned luminaires. Remove brackets, stems, hangers, and other accessories.
- H. Repair adjacent construction and finishes damaged during demolition and extension work.
- I. Maintain access to existing electrical installations that remain active. Modify installation or provide access panel as appropriate.
- J. Extend existing installations using materials and methods compatible with existing electrical installations, or as specified.

3.04 CLEANING AND REPAIR

- A. Clean and repair existing materials and equipment that remain or that are to be reused.
- B. Panelboards: Clean exposed surfaces and check tightness of electrical connections. Replace damaged circuit breakers and provide closure plates for vacant positions. Provide typed circuit directory showing revised circuiting arrangement.
- C. Luminaires: Remove existing luminaires for cleaning. Use mild detergent to clean all exterior and interior surfaces; rinse with clean water and wipe dry. Replace lamps, ballasts and broken electrical parts.
- D. Any lighting or ceiling-mounted devices removed during construction must be reinstalled.

END OF SECTION

SECTION 26 05 19

LV ELEC. POWER CONDUCTORS AND CABLES (600V&LESS)

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Single conductor building wire.
- B. Metal-clad cable.
- C. Wire and cable for 600 volts and less.
- D. Wiring connectors.
- E. Electrical tape.
- F. Wire pulling lubricant.

1.02 RELATED REQUIREMENTS

- A. Section 07 84 00 - Firestopping.
- B. Section 26 05 01 - Minor Electrical Demolition: Disconnection, removal, and/or extension of existing electrical conductors and cables.
- C. Section 26 05 26 - Grounding and Bonding for Electrical Systems: Additional requirements for grounding conductors and grounding connectors.
- D. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.

1.03 REFERENCE STANDARDS

- A. ASTM B3 - Standard Specification for Soft or Annealed Copper Wire.
- B. ASTM B 8 - Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft.
- C. ASTM B787/B787M - Standard Specification for 19 Wire Combination Unilay-Stranded Copper Conductors for Subsequent Insulation.
- D. ASTM D3005 - Standard Specification for Low-Temperature Resistant Vinyl Chloride Plastic Pressure-Sensitive Electrical Insulating Tape.
- E. NECA 1 - Standard for Good Workmanship in Electrical Construction; National Electrical Contractors Association.
- F. NECA 120 - Standard for Installing Armored Cable (AC) and Metal-Clad Cable (MC); National Electrical Contractors Association.
- G. NEMA WC 70 - Power Cables Rated 2000 Volts or Less for the Distribution of Electrical Energy; National Electrical Manufacturers Association (ANSI/NEMA WC 70/ICEA S-95-658).
- H. NETA STD ATS - Acceptance Testing Specifications for Electrical Power Distribution Equipment and Systems; International Electrical Testing Association.
- I. NFPA 70 - National Electrical Code; National Fire Protection Association.
- J. UL 44 - Thermoset-Insulated Wires and Cables.

- K. UL 83 - Thermoplastic-Insulated Wires and Cables.
- L. UL 486A-486B - Wire Connectors.
- M. UL 486C - Splicing Wire Connectors.
- N. UL 486D - Sealed Wire Connector Systems.
- O. UL 510 - Polyvinyl Chloride, Polyethylene, and Rubber Insulating Tape.
- P. UL 1569 - Metal-Clad Cables.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate sizes of raceways, boxes, and equipment enclosures installed under other sections with the actual conductors to be installed, including adjustments for conductor sizes increased for voltage drop.
 - 2. Coordinate with electrical equipment installed under other sections to provide terminations suitable for use with the conductors to be installed.
 - 3. Notify StudioJAED of any conflicts with or deviations from the contract documents. Obtain direction before proceeding with work.

1.05 SUBMITTALS

- A. See Section 01 33 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide for each cable assembly type.
- C. Samples of Actual Product Delivered: Submit one 18 inch length of cable assembly from each reel.
 - 1. Select each length to include complete set of manufacturer markings.
 - 2. Attach tag indicating cable size and application information.
- D. Test Reports: Indicate procedures and values obtained.
- E. Design Data: Indicate voltage drop and ampacity calculations for aluminum conductors substituted for copper conductors. Include proposed modifications to raceways, boxes, wiring gutters, enclosures, etc. to accommodate substituted conductors.
- F. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.
- G. Project Record Documents: Record actual locations of components and circuits.

1.06 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Receive, inspect, handle, and store conductors and cables in accordance with manufacturer's instructions.

1.08 FIELD CONDITIONS

- A. Do not install or otherwise handle thermoplastic-insulated conductors at temperatures lower than 14 degrees F, unless otherwise permitted by manufacturer's instructions. When installation below this temperature is unavoidable, notify StudioJAED and obtain direction before proceeding with work.

PART 2 PRODUCTS

2.01 CONDUCTOR AND CABLE APPLICATIONS

- A. Do not use conductors and cables for applications other than as permitted by NFPA 70 and product listing.
- B. Provide single conductor building wire installed in suitable raceway unless otherwise indicated, permitted, or required.
- C. Concealed Dry Interior Locations: Use only building wire in raceway type THHN/THHW.
- D. Exposed Dry Interior Locations: Use only building wire in raceway type THHN/THHW.
- E. Above Accessible Ceilings: Use only building wire in raceway type THHN.
- F. Wet or Damp Interior Locations: Use only building wire in raceway type THW.
- G. Exterior Locations: Use only building wire in raceway type THHW.
- H. Use solid conductor for feeders and branch circuits 10 AWG and smaller.
- I. Use solid conductors for control circuits.
- J. Use conductor not smaller than 12 AWG for power and lighting circuits.
- K. Use conductor not smaller than 16 AWG for control circuits.
- L. Use 10 AWG conductors for 20 ampere, 120 volt branch circuits longer than 75 feet.
- M. Use 10 AWG conductors for 20 ampere, 277 volt branch circuits longer than 200 feet.

2.02 CONDUCTOR AND CABLE MANUFACTURERS

- A. Cerro Wire LLC: www.cerrowire.com.
- B. Southwire Company: www.southwire.com.
- C. Substitutions: See Section 01 60 00 - Product Requirements.

2.03 ALL CONDUCTORS AND CABLES

- A. Provide products that comply with requirements of NFPA 70.
- B. Provide products listed and classified by Underwriters Laboratories Inc. as suitable for the purpose indicated.
- C. Unless specifically indicated to be excluded, provide all required conduit, boxes, wiring, connectors, etc. as required for a complete operating system.
- D. Comply with NEMA WC 70.
- E. Thermoplastic-Insulated Conductors and Cables: Listed and labeled as complying with UL 83.
- F. Thermoset-Insulated Conductors and Cables: Listed and labeled as complying with UL 44.

- G. Conductor Material:
 - 1. Copper Conductors: Soft drawn annealed, 98 percent conductivity, uncoated copper conductors complying with ASTM B3, ASTM B8, or ASTM B787/B787M unless otherwise indicated.
- H. Minimum Conductor Size: 12 AWG.
 - 1. Branch Circuits: 12 AWG.
 - a. Exceptions:
 - 1) 20 A, 120 V circuits longer than 75 feet: 10 AWG, for voltage drop.
 - 2) 20 A, 120 V circuits longer than 150 feet: 8 AWG, for voltage drop.
 - 3) 20 A, 277 V circuits longer than 150 feet: 10 AWG, for voltage drop.
 - 2. Control Circuits: 14 AWG.
- I. Conductor Color Coding:
 - 1. Color code conductors as indicated unless otherwise required by the authority having jurisdiction. Maintain consistent color coding throughout project.
 - 2. Color Coding Method: Integrally colored insulation.
 - a. Conductors size 4 AWG and larger may have black insulation color coded using vinyl color coding electrical tape.
 - 3. Color Code:
 - a. 480Y/277 V, 3 Phase, 4 Wire System:
 - 1) Phase A: Brown.
 - 2) Phase B: Orange.
 - 3) Phase C: Yellow.
 - 4) Neutral/Grounded: Gray.
 - b. 208Y/120 V, 3 Phase, 4 Wire System:
 - 1) Phase A: Black.
 - 2) Phase B: Red.
 - 3) Phase C: Blue.
 - 4) Neutral/Grounded: White.
 - c. Equipment Ground, All Systems: Green.
 - d. For modifications or additions to existing wiring systems, comply with existing color code when existing code complies with NFPA 70 and is approved by the authority having jurisdiction.
 - e. For control circuits, comply with manufacturer's recommended color code.

2.04 SINGLE CONDUCTOR BUILDING WIRE

- A. Description: Single conductor insulated wire.
- B. Conductor Stranding:
 - 1. Feeders and Branch Circuits:
 - a. Size 10 AWG and Smaller: Solid.
 - b. Size 8 AWG and Larger: Stranded.
- C. Insulation Voltage Rating: 600 V.
- D. Insulation:
 - 1. Copper Building Wire: Type THHN/THWN or THHN/THWN-2, except as indicated below.
- E. Conductor: Copper.
 - 1. For Sizes Smaller Than 4 AWG: Copper.
 - 2. For Sizes 4 AWG and Larger: Copper.

- F. Insulation Voltage Rating: 600 volts.
- G. Insulation: NFPA 70, Type THHW/THWN/THHN/THW.
- H. Insulation: Thermoplastic material rated 75/90 degrees C.

2.05 METAL-CLAD CABLE

- A. Manufacturers:
 - 1. AFC Cable Systems Inc: www.afcweb.com.
 - 2. Encore Wire Corporation: www.encorewire.com.
 - 3. Southwire Company: www.southwire.com.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: NFPA 70, Type MC cable listed and labeled as complying with UL 1569, and listed for use in classified firestop systems to be used.
- C. Conductor Stranding:
 - 1. Size 10 AWG and Smaller: Solid.
 - 2. Size 8 AWG and Larger: Stranded.
- D. Insulation Voltage Rating: 600 V.
- E. Insulation: Type THHN, THHN/THWN, or THHN/THWN-2.
- F. Provide dedicated neutral conductor for each phase conductor where indicated or required.
- G. Grounding: Full-size integral equipment grounding conductor.
- H. Armor: Steel, interlocked tape.
- I. Provide PVC jacket applied over cable armor where indicated or required for environment of installed location.
- J. Insulation Temperature Rating: 75/90 degrees C.

2.06 METAL CLAD CABLE

- A. Description: NFPA 70, Type MC.
- B. Conductor: Copper.
 - 1. For Sizes Smaller Than 4 AWG: Copper.
 - 2. For Sizes 4 AWG and Larger: Copper.
- C. Insulation Voltage Rating: 600 volts.
- D. Insulation Temperature Rating: 90 degrees C.
- E. Insulation Material: Thermoplastic.
- F. Armor Material: Steel.
- G. Armor Design: Interlocked metal tape.
- H. Jacket: PVC.

2.07 WIRING CONNECTORS

- A. Description: Wiring connectors appropriate for the application, suitable for use with the conductors to be connected, and listed as complying with UL 486A-486B or UL 486C as applicable.

- B. Twist-on Insulated Spring Connectors: Rated 600 V, 221 degrees F for standard applications and 302 degrees F for high temperature applications; pre-filled with sealant and listed as complying with UL 486D for damp and wet locations.
 - 1. Manufacturers:
 - a. 3M: www.3m.com.
 - b. Ideal Industries, Inc: www.idealindustries.com.
 - c. NSI Industries LLC: www.nsiindustries.com.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.

2.08 WIRING ACCESSORIES

- A. Electrical Tape:
 - 1. Manufacturers:
 - a. 3M: www.3m.com.
 - b. Plymouth Rubber Europa: www.plymouthrubber.com.
 - c. Substitutions: See Section 01 60 00 - Product Requirements.
 - 2. Vinyl Color Coding Electrical Tape: Integrally colored to match color code indicated; listed as complying with UL 510; minimum thickness of 7 mil; resistant to abrasion, corrosion, and sunlight; suitable for continuous temperature environment up to 221 degrees F.
 - 3. Vinyl Insulating Electrical Tape: Complying with ASTM D3005 and listed as complying with UL 510; minimum thickness of 7 mil; resistant to abrasion, corrosion, and sunlight; conformable for application down to 0 degrees F and suitable for continuous temperature environment up to 221 degrees F.
- B. Wire Pulling Lubricant: Listed; suitable for use with the conductors or cables to be installed and suitable for use at the installation temperature.
 - 1. Manufacturers:
 - a. 3M: www.3m.com.
 - b. American Polywater Corporation: www.polywater.com.
 - c. Ideal Industries, Inc: www.idealindustries.com.
- C. Split Bolt Connectors: Description: Connector suitable for copper to copper connection tested and listed to UL 486A requirements. Black burn type-H or equal.
 - 1. Product: Thomas R Betts or equal
 - 2. Substitutions: See Section 01 60 00 - Product Requirements.
- D. Spring Wire Connectors: Description: Flame retardant thermoplastic shell with plated steel square wire spring gated for 105 degrees C, 600 volts, Thomas and Betts fixed spring wire connectors or equal.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that interior of building has been protected from weather.
- B. Verify that work likely to damage wire and cable has been completed.
- C. Verify that raceways, boxes, and equipment enclosures are installed and are properly sized to accommodate conductors and cables in accordance with NFPA 70.
- D. Verify that raceway installation is complete and supported.
- E. Verify that field measurements are as shown on the drawings.
- F. Verify that conditions are satisfactory for installation prior to starting work.

3.02 PREPARATION

- A. Clean raceways thoroughly to remove foreign materials before installing conductors and cables.

3.03 INSTALLATION

- A. Install products in accordance with manufacturer's instructions.
- B. Install conductors and cable in a neat and workmanlike manner in accordance with NECA 1.
- C. Install metal-clad cable (Type MC) in accordance with NECA 120.
- D. Installation in Raceway:
 - 1. Tape ends of conductors and cables to prevent infiltration of moisture and other contaminants.
 - 2. Pull all conductors and cables together into raceway at same time.
 - 3. Do not damage conductors and cables or exceed manufacturer's recommended maximum pulling tension and sidewall pressure.
 - 4. Use suitable wire pulling lubricant where necessary, except when lubricant is not recommended by the manufacturer.
- E. Paralleled Conductors: Install conductors of the same length and terminate in the same manner.
- F. Secure and support conductors and cables in accordance with NFPA 70 using suitable supports and methods approved by the authority having jurisdiction. Provide independent support from building structure. Do not provide support from raceways, piping, ductwork, or other systems.
- G. Terminate cables using suitable fittings.
 - 1. Metal-Clad Cable (Type MC):
 - a. Use listed fittings.
 - b. Cut cable armor only using specialized tools to prevent damaging conductors or insulation. Do not use hacksaw or wire cutters to cut armor.
- H. Install conductors with a minimum of 12 inches of slack at each outlet.
- I. Neatly train and bundle conductors inside boxes, wireways, panelboards and other equipment enclosures.
- J. Make wiring connections using specified wiring connectors.
 - 1. Make splices and taps only in accessible boxes. Do not pull splices into raceways or make splices in conduit bodies or wiring gutters.
 - 2. Remove appropriate amount of conductor insulation for making connections without cutting, nicking or damaging conductors.
 - 3. Do not remove conductor strands to facilitate insertion into connector.
 - 4. Clean contact surfaces on conductors and connectors to suitable remove corrosion, oxides, and other contaminates. Do not use wire brush on plated connector surfaces.
- K. Insulate splices and taps that are made with uninsulated connectors using methods suitable for the application, with insulation and mechanical strength at least equivalent to unspliced conductors.
- L. Insulate ends of spare conductors using vinyl insulating electrical tape.
- M. Field-Applied Color Coding: Where vinyl color coding electrical tape is used in lieu of integrally colored insulation as permitted in Part 2 under "Color Coding", apply half overlapping turns of tape at each termination and at each location conductors are accessible.

- N. Install firestopping to preserve fire resistance rating of partitions and other elements, using materials and methods specified in Section 07 84 00.
- O. Unless specifically indicated to be excluded, provide final connections to all equipment and devices, including those furnished by others, as required for a complete operating system.
- P. Install wire and cable securely, in a neat and workmanlike manner, as specified in NECA 1.
- Q. Route wire and cable as required to meet project conditions.
 - 1. Wire and cable routing indicated is approximate unless dimensioned.
 - 2. Where wire and cable destination is indicated and routing is not shown, determine exact routing and lengths required.
 - 3. Include wire and cable of lengths required to install connected devices within 10 ft of location shown.
- R. Use wiring methods indicated.
- S. Pull all conductors into raceway at same time.
- T. Use suitable wire pulling lubricant for building wire 4 AWG and larger.
- U. Protect exposed cable from damage.
- V. Support cables above accessible ceiling, using spring metal clips or metal cable ties to support cables from structure or ceiling suspension system. Do not rest cable on ceiling panels.
- W. Use suitable cable fittings and connectors.
- X. Neatly train and lace wiring inside boxes, equipment, and panelboards.
- Y. Clean conductor surfaces before installing lugs and connectors.
- Z. Make splices, taps, and terminations to carry full ampacity of conductors with no perceptible temperature rise.
- AA. Use suitable reducing connectors or mechanical connector adaptors for connecting aluminum conductors to copper conductors.
- AB. Use split bolt connectors for copper conductor splices and taps, 6 AWG and larger. Tape uninsulated conductors and connector with electrical tape to 150 percent of insulation rating of conductor.
- AC. Use solderless pressure connectors with insulating covers for copper conductor splices and taps, 8 AWG and smaller.
- AD. Use insulated spring wire connectors with plastic caps for copper conductor splices and taps, 10 AWG and smaller.
- AE. Identify and color code wire and cable under provisions of Section 26 05 53. Identify each conductor with its circuit number or other designation indicated.

3.04 FIELD QUALITY CONTROL

- A. Perform inspection, testing, and adjusting in accordance with Section 01 45 00.
- B. Perform field inspection and testing in accordance with Section 01 45 00.
- C. Inspect and test in accordance with NETA STD ATS, except Section 4.

- D. Perform inspections and tests listed in NETA STD ATS, Section 7.3.2. The insulation resistance test is required for all conductors. The resistance test for parallel conductors listed as optional is not required.
- E. Correct deficiencies and replace damaged or defective conductors and cables.
- F. Perform inspections and tests listed in NETA STD ATS, Section 7.3.2.

END OF SECTION

SECTION 26 05 26

GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Grounding and bonding components.
- B. Provide all components necessary to complete the grounding system(s) consisting of:
 - 1. Existing metal underground water pipe.
 - 2. Metal frame of the building.
 - 3. Existing metal underground gas piping system.
 - 4. Metal underground gas piping system.

1.02 REFERENCE STANDARDS

- A. NETA STD ATS - Acceptance Testing Specifications for Electrical Power Distribution Equipment and Systems; International Electrical Testing Association.
- B. NETA STD ATS - Acceptance Testing Specifications for Electrical Power Distribution Equipment and Systems; International Electrical Testing Association.
- C. NFPA 70 - National Electrical Code; National Fire Protection Association.

1.03 PERFORMANCE REQUIREMENTS

- A. Grounding System Resistance: 25 ohms.

1.04 SUBMITTALS

- A. See Section 01 33 00 - Administrative Requirements for submittals procedures.
- B. Product Data: Provide for grounding electrodes and connections.
- C. Test Reports: Indicate overall resistance to ground and resistance of each electrode.
- D. Manufacturer's Instructions: Indicate application conditions and limitations of use stipulated by product testing agency specified under Quality Assurance. Include instructions for storage, handling, protection, examination, preparation, and installation of product.
- E. Project Record Documents: Record actual locations of components and grounding electrodes.

1.05 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Cooper Power Systems: www.cooperpower.com.
- B. Framatome Connectors International: www.fciconnect.com.
- C. Lightning Master Corporation: www.lightningmaster.com.
- D. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 CONNECTORS AND ACCESSORIES

- A. Mechanical Connectors: Bronze.
 - 1. Product: manufactured by Thomas and Betts or equal.
 - 2. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Wire: Stranded copper.
- C. Grounding Electrode Conductor: Size to meet NFPA 70 requirements.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify existing conditions prior to beginning work.
- B. Verify that final backfill and compaction has been completed before driving rod electrodes.

3.02 INSTALLATION

- A. Provide bonding to meet requirements described in Quality Assurance.
- B. Equipment Grounding Conductor: Provide separate, insulated conductor within each feeder and branch circuit raceway. Terminate each end on suitable lug, bus, or bushing. Each of branch circuits and feeder circuits shall have dedicated equipment grounding conductor, sharing this conductor with other grounding conductors is not permitted.

3.03 FIELD QUALITY CONTROL

- A. Provide field inspection in accordance with Section 01 45 00.
- B. Inspect and test in accordance with NETA STD ATS except Section 4.
- C. Perform inspections and tests listed in NETA STD ATS, Section 7.13.

END OF SECTION

SECTION 26 05 29

HANGERS AND SUPPORTS FOR ELECTRICAL SYSTEMS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Conduit and equipment supports.
- B. Anchors and fasteners.

1.02 REFERENCE STANDARDS

- A. NECA 1 - Standard for Good Workmanship in Electrical Construction; National Electrical Contractors Association.
- B. NFPA 70 - National Electrical Code; National Fire Protection Association.

1.03 SUBMITTALS

- A. See Section 01 33 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide manufacturer's catalog data for fastening systems.
- C. Manufacturer's Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.

1.04 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Products: Listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Thomas & Betts Corporation: www.tnb.com.
- B. Threaded Rod Company: www.threadedrod.com.
- C. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 MATERIALS

- A. Hangers, Supports, Anchors, and Fasteners - General: Corrosion-resistant materials of size and type adequate to carry the loads of equipment and conduit, including weight of wire in conduit.
- B. Supports: Fabricated of structural steel or formed steel members; galvanized.
- C. Anchors and Fasteners:
 - 1. Do not use powder-actuated anchors.
 - 2. Obtain permission from StudioJAED before using powder-actuated anchors.
 - 3. Concrete Structural Elements: Use precast inserts.
 - 4. Steel Structural Elements: Use beam clamps.
 - 5. Concrete Surfaces: Use self-drilling anchors or expansion anchors.
 - 6. Hollow Masonry, Plaster, and Gypsum Board Partitions: Use hollow wall fasteners.
 - 7. Solid Masonry Walls: Use expansion anchors.

8. Sheet Metal: Use sheet metal screws.
 9. Wood Elements: Use wood screws.
- D. Formed Steel Channel:
1. Product: manufactured by [B-Line].
 2. Substitutions: See Section 01 60 00 - Product Requirements.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install hangers and supports as required to adequately and securely support electrical system components, in a neat and workmanlike manner, as specified in NECA 1.
 1. Do not fasten supports to pipes, ducts, mechanical equipment, or conduit.
 2. Do not drill or cut structural members.
 3. Obtain permission from StudioJAED before drilling or cutting structural members.
- B. Rigidly weld support members or use hexagon-head bolts to present neat appearance with adequate strength and rigidity. Use spring lock washers under all nuts.
- C. Install surface-mounted cabinets and panelboards with minimum of four anchors.
- D. In wet and damp locations use steel channel supports to stand cabinets and panelboards 1 inch off wall.
- E. Use sheet metal channel to bridge studs above and below cabinets and panelboards recessed in hollow partitions.

END OF SECTION

SECTION 26 05 34

CONDUIT

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Flexible metal conduit (FMC).
- B. Liquidtight flexible metal conduit (LFMC).
- C. Electrical metallic tubing (EMT).
- D. Conduit fittings.
- E. Accessories.
- F. Conduit, fittings and conduit bodies.

1.02 RELATED REQUIREMENTS

- A. Section 07 84 00 - Firestopping.
- B. Section 26 05 19 - Low-Voltage Electrical Power Conductors and Cables: Metal clad cable (Type MC) and armored cable (Type AC), including uses permitted.
- C. Section 26 05 26 - Grounding and Bonding for Electrical Systems.
- D. Section 26 05 29 - Hangers and Supports for Electrical Systems.
- E. Section 26 05 53 - Identification for Electrical Systems.
- F. Section 26 05 37 - Boxes.

1.03 REFERENCE STANDARDS

- A. ANSI C80.1 - American National Standard for Electrical Rigid Steel Conduit (ERSC).
- B. ANSI C80.3 - American National Standard for Steel Electrical Metallic Tubing (EMT).
- C. ANSI C80.5 - American National Standard for Electrical Rigid Aluminum Conduit (ERAC).
- D. NECA 1 - Standard for Good Workmanship in Electrical Construction; National Electrical Contractors Association.
- E. NECA 101 - Standard for Installing Steel Conduit (Rigid, IMC, EMT); National Electrical Contractors Association.
- F. NEMA FB 1 - Fittings, Cast Metal Boxes, and Conduit Bodies for Conduit, Electrical Metallic Tubing, and Cable; National Electrical Manufacturers Association.

1.04 SUBMITTALS

- A. See Section 01 33 00 - Administrative Requirements for submittals procedures.
- B. Product Data: Provide for metallic conduit and flexible metal conduit.
- C. Samples of Materials Actually Delivered to Site:
 - 1. Two pieces each of conduit, 2 feet long.
- D. Project Record Documents: Accurately record actual routing of conduits larger than 2 inches.

1.05 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Products: Listed and classified by Underwriters Laboratories Inc. as suitable for purpose specified and shown.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Receive, inspect, handle, and store conduit and fittings in accordance with manufacturer's instructions.
- B. Accept conduit on site. Inspect for damage.
- C. Protect conduit from corrosion and entrance of debris by storing above grade. Provide appropriate covering.
- D. Protect PVC conduit from sunlight.

PART 2 PRODUCTS

2.01 CONDUIT APPLICATIONS

- A. Do not use conduit and associated fittings for applications other than as permitted by NFPA 70 and product listing.
- B. Unless otherwise indicated and where not otherwise restricted, use the conduit types indicated for the specified applications. Where more than one listed application applies, comply with the most restrictive requirements. Where conduit type for a particular application is not specified, use galvanized steel rigid metal conduit.
- C. Concealed Within Masonry Walls: Use galvanized steel rigid metal conduit or electrical metallic tubing (EMT).
- D. Concealed Within Hollow Stud Walls: Use galvanized steel rigid metal conduit or electrical metallic tubing (EMT).
- E. Concealed Above Accessible Ceilings: Use galvanized steel rigid metal conduit or electrical metallic tubing (EMT).
- F. Interior, Damp or Wet Locations: Use galvanized steel rigid metal conduit or electrical metallic tubing (EMT).
- G. Exposed, Interior, Not Subject to Physical Damage: Use galvanized steel rigid metal conduit or electrical metallic tubing (EMT).
- H. Exposed, Interior, Subject to Physical Damage: Use galvanized steel rigid metal conduit.
 - 1. Locations subject to physical damage include, but are not limited to:
 - a. Where exposed below 8 feet, except within electrical and communication rooms or closets.
 - b. Where exposed below 20 feet in warehouse areas.
- I. Exposed, Exterior: Use galvanized steel rigid metal conduit or aluminum rigid metal conduit.
- J. Connections to Vibrating Equipment:
 - 1. Dry Locations: Use flexible metal conduit.

2. Damp, Wet, or Corrosive Locations: Use liquidtight flexible metal conduit.
3. Maximum Length: 6 feet unless otherwise indicated.

K. Fished in Existing Walls, Where Necessary: Use flexible metal conduit.

2.02 CONDUIT REQUIREMENTS

- A. Provide all conduit, fittings, supports, and accessories required for a complete raceway system.
- B. Provide products listed, classified, and labeled by Underwriter's Laboratories Inc. (UL) or testing firm acceptable to authority having jurisdiction as suitable for the purpose indicated.
- C. Minimum Conduit Size, Unless Otherwise Indicated:
 1. Branch Circuit Homeruns: 3/4 inch (21 mm) trade size.
 2. Control Circuits: 1/2 inch (16 mm) trade size.

2.03 GALVANIZED STEEL RIGID METAL CONDUIT (RMC)

- A. Manufacturers:
 1. Allied Tube & Conduit: www.alliedeg.com.
 2. Republic Conduit: www.republic-conduit.com.
 3. Wheatland Tube Company: www.wheatland.com.
- B. Description: NFPA 70, Type RMC galvanized steel rigid metal conduit complying with ANSI C80.1 and listed and labeled as complying with UL 6.
- C. Fittings:
 1. Manufacturers:
 - a. Bridgeport Fittings Inc: www.bptfittings.com.
 - b. O-Z/Gedney, a brand of Emerson Industrial Automation: www.emersonindustrial.com.
 - c. Thomas & Betts Corporation: www.tnb.com.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
 2. Non-Hazardous Locations: Use fittings complying with NEMA FB 1 and listed and labeled as complying with UL 514B.
 3. Connectors and Couplings: Use threaded type fittings only. Threadless set screw and compression (gland) type fittings are not permitted.

2.04 ALUMINUM RIGID METAL CONDUIT (RMC)

- A. Manufacturers:
 1. Allied Tube & Conduit: www.alliedeg.com.
 2. Republic Conduit: www.republic-conduit.com.
 3. Wheatland Tube Company: www.wheatland.com.
 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: NFPA 70, Type RMC aluminum rigid metal conduit complying with ANSI C80.5 and listed and labeled as complying with UL 6A.

2.05 METAL CONDUIT

- A. Manufacturers:
 1. Allied Tube & Conduit: www.alliedtube.com.
 2. Beck Manufacturing, Inc: www.beckmfg.com.
 3. Wheatland Tube Company: www.wheatland.com.
 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Rigid Steel Conduit: ANSI C80.1.

- C. Fittings and Conduit Bodies: NEMA FB 1; material to match conduit.

2.06 FLEXIBLE METAL CONDUIT

- A. Manufacturers:
1. AFC Cable Systems, Inc: www.afcweb.com.
 2. Electri-Flex Company: www.electriflex.com.
 3. International Metal Hose: www.metalhose.com.
 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: NFPA 70, Type FMC standard wall steel flexible metal conduit listed and labeled as complying with UL 1, and listed for use in classified firestop systems to be used.
- C. Fittings:
1. Manufacturers:
 - a. Bridgeport Fittings Inc: www.bptfittings.com.
 - b. O-Z/Gedney, a brand of Emerson Industrial Automation: www.emersonindustrial.com.
 - c. Thomas & Betts Corporation: www.tnb.com.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
 2. Description: Fittings complying with NEMA FB 1 and listed and labeled as complying with UL 514B.
 3. Material: Use steel or malleable iron.
 - a. Do not use die cast zinc fittings.
- D. Description: Interlocked steel construction.
- E. Fittings: NEMA FB 1.

2.07 LIQUIDTIGHT FLEXIBLE METAL CONDUIT

- A. Manufacturers:
1. AFC Cable Systems, Inc: www.afcweb.com.
 2. Electri-Flex Company: www.electriflex.com.
 3. International Metal Hose: www.metalhose.com.
 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: NFPA 70, Type LFMC polyvinyl chloride (PVC) jacketed steel flexible metal conduit listed and labeled as complying with UL 360.
- C. Fittings:
1. Manufacturers:
 - a. Bridgeport Fittings Inc: www.bptfittings.com.
 - b. O-Z/Gedney, a brand of Emerson Industrial Automation: www.emersonindustrial.com.
 - c. Thomas & Betts Corporation: www.tnb.com.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
 2. Description: Fittings complying with NEMA FB 1 and listed and labeled as complying with UL 514B.
 3. Material: Use steel or malleable iron.
 - a. Do not use die cast zinc fittings.
- D. Description: Interlocked steel construction with PVC jacket.
- E. Fittings: NEMA FB 1.

2.08 ELECTRICAL METALLIC TUBING (EMT)

- A. Manufacturers:

1. Allied Tube & Conduit: www.alliedtube.com.
 2. Republic Conduit: www.republic-conduit.com.
 3. Beck Manufacturing, Inc: www.beckmfg.com.
 4. Wheatland Tube Company: www.wheatland.com.
 5. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: NFPA 70, Type EMT steel electrical metallic tubing complying with ANSI C80.3 and listed and labeled as complying with UL 797.
- C. Fittings:
1. Manufacturers:
 - a. Bridgeport Fittings Inc: www.bptfittings.com.
 - b. O-Z/Gedney, a brand of Emerson Industrial Automation: www.emersonindustrial.com.
 - c. Thomas & Betts Corporation: www.tnb.com.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
 2. Description: Fittings complying with NEMA FB 1 and listed and labeled as complying with UL 514B.
 3. Material: Use steel or malleable iron.
 - a. Do not use die cast zinc fittings.
 4. Connectors and Couplings: Use compression (gland) or set-screw type.
 5. Damp or Wet Locations (where permitted): Use fittings listed for use in wet locations.
- D. Fittings and Conduit Bodies: NEMA FB 1; steel set screw type.

2.09 ACCESSORIES

- A. Pull Strings: Use nylon cord with average breaking strength of not less than 200 pound-force.
- B. Sealing Compound for Sealing Fittings: Listed for use with the particular fittings to be installed.
- C. Description: NEMA TC 2.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field measurements are as shown on drawings.
- B. Verify routing and termination locations of conduit prior to rough-in.
- C. Conduit routing is shown on drawings in approximate locations unless dimensioned. Route as required to complete wiring system.

3.02 INSTALLATION

- A. Install products in accordance with manufacturer's instructions.
- B. Install conduit in a neat and workmanlike manner in accordance with NECA 1.
- C. Install galvanized steel rigid metal conduit (RMC) in accordance with NECA 101.
- D. Install aluminum rigid metal conduit (RMC) in accordance with NECA 102.
- E. Install liquidtight flexible nonmetallic conduit (LFNC) in accordance with NECA 111.
- F. Conduit Routing:
 1. Unless dimensioned, conduit routing indicated is diagrammatic.
 2. When conduit destination is indicated and routing is not shown, determine exact routing required.

3. Conceal all conduits unless specifically indicated to be exposed.
 4. Conduits in the following areas may be exposed, unless otherwise indicated:
 - a. Electrical rooms.
 - b. Mechanical equipment rooms.
 5. Unless otherwise approved, do not route conduits exposed:
 - a. Across floors.
 - b. Across roofs.
 - c. Across top of parapet walls.
 - d. Across building exterior surfaces.
 6. Arrange conduit to prevent moisture traps. Provide drain fittings at low points and at sealing fittings where moisture may collect.
 7. Maintain minimum clearance of 6 inches between conduits and piping for other systems.
 8. Maintain minimum clearance of 12 inches between conduits and hot surfaces. This includes, but is not limited to:
 - a. Heaters.
 - b. Hot water piping.
 - c. Flues.
 9. Group parallel conduits in the same area together on a common rack.
- G. Conduit Support:
1. Secure and support conduits in accordance with NFPA 70 and Section 26 05 29 using suitable supports and methods approved by the authority having jurisdiction.
 2. Provide independent support from building structure. Do not provide support from piping, ductwork, or other systems.
 3. Installation Above Suspended Ceilings: Do not provide support from ceiling support system. Do not provide support from ceiling grid or allow conduits to lay on ceiling tiles.
- H. Connections and Terminations:
1. Use approved zinc-rich paint or conduit joint compound on field-cut threads of galvanized steel conduits prior to making connections.
 2. Where two threaded conduits must be joined and neither can be rotated, use three-piece couplings or split couplings. Do not use running threads.
 3. Use suitable adapters where required to transition from one type of conduit to another.
 4. Terminate threaded conduits in boxes and enclosures using threaded hubs or double lock nuts for dry locations and raintight hubs for wet locations.
 5. Provide insulating bushings or insulated throats at all conduit terminations to protect conductors.
 6. Secure joints and connections to provide maximum mechanical strength and electrical continuity.
- I. Penetrations:
1. Do not penetrate or otherwise notch or cut structural members, including footings and grade beams, without approval of Structural Engineer.
 2. Make penetrations perpendicular to surfaces unless otherwise indicated.
 3. Provide sleeves for penetrations as indicated or as required to facilitate installation. Set sleeves flush with exposed surfaces unless otherwise indicated or required.
 4. Conceal bends for conduit risers emerging above ground.
 5. Seal interior of conduits entering the building from underground at first accessible point to prevent entry of moisture and gases.
 6. Where conduits penetrate waterproof membrane, seal as required to maintain integrity of membrane.

- 7. Make penetrations for roof-mounted equipment within associated equipment openings and curbs where possible to minimize roofing system penetrations. Where penetrations are necessary, seal as indicated or as required to preserve integrity of roofing system and maintain roof warranty. Include proposed locations of penetrations and methods for sealing with submittals.
- J. Provide pull string in all empty conduits and in conduits where conductors and cables are to be installed by others. Leave minimum slack of 12 inches at each end.
- K. Provide grounding and bonding in accordance with Section 26 05 26.
- L. Identify conduits in accordance with Section 26 05 53.

3.03 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Repair cuts and abrasions in galvanized finishes using zinc-rich paint recommended by manufacturer. Replace components that exhibit signs of corrosion.
- C. Correct deficiencies and replace damaged or defective conduits.

3.04 CLEANING

- A. Clean interior of conduits to remove moisture and foreign matter.

3.05 PROTECTION

- A. Immediately after installation of conduit, use suitable manufactured plugs to provide protection from entry of moisture and foreign material and do not remove until ready for installation of conductors.
- B. Install conduit securely, in a neat and workmanlike manner, as specified in NECA 1.
- C. Install steel conduit as specified in NECA 101.
- D. Install nonmetallic conduit in accordance with manufacturer's instructions.
- E. Arrange supports to prevent misalignment during wiring installation.
- F. Support conduit using coated steel or malleable iron straps, lay-in adjustable hangers, clevis hangers, and split hangers.
- G. Group related conduits; support using conduit rack. Construct rack using steel channel; provide space on each for 25 percent additional conduits.
- H. Fasten conduit supports to building structure and surfaces under provisions of Section 26 05 29.
- I. Do not support conduit with wire or perforated pipe straps. Remove wire used for temporary supports.
- J. Do not attach conduit to ceiling support wires.
- K. Arrange conduit to maintain headroom and present neat appearance.
- L. Route exposed conduit parallel and perpendicular to walls.
- M. Route conduit installed above accessible ceilings parallel and perpendicular to walls.
- N. Route conduit in and under slab from point-to-point.

- O. Do not cross conduits in slab.
- P. Maintain adequate clearance between conduit and piping.
- Q. Maintain 12 inch clearance between conduit and surfaces with temperatures exceeding 104 degrees F.
- R. Cut conduit square using saw or pipecutter; de-burr cut ends.
- S. Bring conduit to shoulder of fittings; fasten securely.
- T. Join nonmetallic conduit using cement as recommended by manufacturer. Wipe nonmetallic conduit dry and clean before joining. Apply full even coat of cement to entire area inserted in fitting. Allow joint to cure for 20 minutes, minimum.
- U. Use conduit hubs to fasten conduit to sheet metal boxes in damp and wet locations, and to cast boxes.
- V. Install no more than equivalent of three 90 degree bends between boxes. Use conduit bodies to make sharp changes in direction, as around beams. Use hydraulic one shot bender to fabricate bends in metal conduit larger than 2 inch size.
- W. Avoid moisture traps; provide junction box with drain fitting at low points in conduit system.
- X. Provide suitable fittings to accommodate expansion and deflection where conduit crosses seismic, control, and expansion joints.
- Y. Provide suitable pull string in each empty conduit except sleeves and nipples.
- Z. Use suitable caps to protect installed conduit against entrance of dirt and moisture.
- AA. Ground and bond conduit under provisions of Section 26 05 26.
- AB. Identify conduit under provisions of Section 26 05 53.

3.06 INTERFACE WITH OTHER PRODUCTS

- A. Install conduit to preserve fire resistance rating of partitions and other elements, using materials and methods specified in Section 07 84 00.
- B. Route conduit through roof openings for piping and ductwork wherever possible. Where separate roofing penetration is required, coordinate location and installation method with roofing installation specified in Section roofing section.

END OF SECTION

SECTION 26 05 37

BOXES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Wall and ceiling outlet boxes.
- B. Floor boxes.
- C. Pull and junction boxes.

1.02 RELATED REQUIREMENTS

- A. Section 07 84 00 - Firestopping.
- B. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.
- C. Section 26 27 26 - Wiring Devices: Wall plates in finished areas, floor box service fittings, fire-rated poke-through fittings, and access floor boxes.

1.03 REFERENCE STANDARDS

- A. NECA 1 - Standard for Good Workmanship in Electrical Construction; National Electrical Contractors Association.
- B. NEMA FB 1 - Fittings, Cast Metal Boxes, and Conduit Bodies for Conduit, Electrical Metallic Tubing, and Cable; National Electrical Manufacturers Association.
- C. NEMA OS 1 - Sheet Steel Outlet Boxes, Device Boxes, Covers, and Box Supports; National Electrical Manufacturers Association.
- D. NEMA OS 2 - Nonmetallic Outlet Boxes, Device Boxes, Covers and Box Supports; National Electrical Manufacturers Association.
- E. NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum); National Electrical Manufacturers Association.
- F. NFPA 70 - National Electrical Code; National Fire Protection Association.

1.04 SUBMITTALS

- A. See Section 01 33 00 - Administrative Requirements, for submittal procedures.
- B. Project Record Documents: Record actual locations and mounting heights of outlet, pull, and junction boxes on project record documents.

1.05 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Products: Provide products listed and classified by Underwriters Laboratories Inc., as suitable for the purpose specified and indicated.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Appleton Electric: www.appletonelec.com.

- B. Arc-Co./Division of Arcade Technology: www.arc-co.com.
- C. Unity Manufacturing: www.unitymfg.com.
- D. Substitutions: Reco, Inc. See Section 01 60 00 - Product Requirements.
- E. Steelcity

2.02 OUTLET BOXES

- A. Sheet Metal Outlet Boxes: NEMA OS 1, galvanized steel.
 - 1. Luminaire and Equipment Supporting Boxes: Rated for weight of equipment supported; include 1/2 inch male fixture studs where required.
 - 2. Concrete Ceiling Boxes: Concrete type.
- B. Nonmetallic Outlet Boxes: NEMA OS 2.
- C. Cast Boxes: NEMA FB 1, Type FD, aluminum. Provide gasketed cover by box manufacturer. Provide threaded hubs.
- D. Wall Plates for Finished Areas: As specified in Section 26 27 26.

2.03 PULL AND JUNCTION BOXES

- A. Sheet Metal Boxes: NEMA OS 1, galvanized steel.
- B. Surface Mounted Cast Metal Box: NEMA 250, Type 4; flat-flanged, surface mounted junction box:
 - 1. Material: Galvanized cast iron; Cast Aluminum.
 - 2. Cover: Furnish with ground flange, neoprene gasket, and stainless steel cover screws.
- C. In-Ground Cast Metal Box: NEMA 250, Type 6, outside flanged, recessed cover box for flush mounting:
 - 1. Material: Galvanized cast iron; Cast Aluminum.
 - 2. Cover: Nonskid cover with neoprene gasket and stainless steel cover screws.
 - 3. Cover Legend: "ELECTRIC".

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify locations of floor boxes and outlets in offices and work areas prior to rough-in.

3.02 INSTALLATION

- A. Install boxes securely, in a neat and workmanlike manner, as specified in NECA 1.
- B. Install in locations as shown on Drawings, and as required for splices, taps, wire pulling, equipment connections, and as required by NFPA 70.
- C. Coordinate installation of outlet boxes for equipment connected under Section 26 27 17.
- D. Set wall mounted boxes at elevations to accommodate mounting heights indicated.
- E. Electrical boxes are shown on Drawings in approximate locations unless dimensioned.
 - 1. Adjust box locations up to 10 feet if required to accommodate intended purpose.
- F. Orient boxes to accommodate wiring devices oriented as specified in Section 26 27 26.
- G. Maintain headroom and present neat mechanical appearance.

- H. Install pull boxes and junction boxes above accessible ceilings and in unfinished areas only.
- I. Inaccessible Ceiling Areas: Install outlet and junction boxes no more than 6 inches from ceiling access panel or from removable recessed luminaire.
- J. Install boxes to preserve fire resistance rating of partitions and other elements, using materials and methods specified in Section 07 84 00.
- K. Coordinate mounting heights and locations of outlets mounted above counters, benches, and backsplashes.
- L. Locate outlet boxes to allow luminaires positioned as shown on reflected ceiling plan.
- M. Align adjacent wall mounted outlet boxes for switches, thermostats, and similar devices.
- N. Use flush mounting outlet box in finished areas.
- O. Locate flush mounting box in masonry wall to require cutting of masonry unit corner only. Coordinate masonry cutting to achieve neat opening.
- P. Do not install flush mounting box back-to-back in walls; provide minimum 6 inches separation. Provide minimum 24 inches separation in acoustic rated walls.
- Q. Secure flush mounting box to interior wall and partition studs. Accurately position to allow for surface finish thickness.
- R. Use stamped steel bridges to fasten flush mounting outlet box between studs.
- S. Install flush mounting box without damaging wall insulation or reducing its effectiveness.
- T. Use adjustable steel channel fasteners for hung ceiling outlet box.
- U. Do not fasten boxes to ceiling support wires.
- V. Support boxes independently of conduit, except cast box that is connected to two rigid metal conduits both supported within 12 inches of box.
- W. Use gang box where more than one device is mounted together. Do not use sectional box.
- X. Use gang box with plaster ring for single device outlets.
- Y. Use cast outlet box in exterior locations exposed to the weather and wet locations.
- Z. Use cast floor boxes for installations in slab on grade; formed steel boxes are acceptable for other installations.
- AA. Set floor boxes level.
- AB. Large Pull Boxes: Use hinged enclosure in interior dry locations, surface-mounted cast metal box in other locations.

3.03 ADJUSTING

- A. Adjust floor boxes flush with finish flooring material.
- B. Adjust flush-mounting outlets to make front flush with finished wall material.
- C. Install knockout closures in unused box openings.

3.04 CLEANING

- A. Clean interior of boxes to remove dust, debris, and other material.

- B. Clean exposed surfaces and restore finish.

END OF SECTION

SECTION 26 05 53

IDENTIFICATION FOR ELECTRICAL SYSTEMS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Electrical identification requirements.
- B. Identification nameplates and labels.
- C. Wire and cable markers.
- D. Voltage markers.
- E. Warning signs and labels.
- F. Field-painted identification of conduit.

1.02 RELATED REQUIREMENTS

- A. Section 09 90 00 - Painting and Coating.
- B. Section 26 05 19 - Low-Voltage Electrical Power Conductors and Cables: Color coding for power conductors and cables 600 V and less; vinyl color coding electrical tape.
- C. Section 26 27 26 - Wiring Devices: Device and wallplate finishes; factory pre-marked wallplates.

1.03 REFERENCE STANDARDS

- A. ANSI Z535.2 - American National Standard for Environmental and Facility Safety Signs.
- B. ANSI Z535.4 - American National Standard for Product Safety Signs and Labels.
- C. NFPA 70 - National Electrical Code; National Fire Protection Association.
- D. UL 969 - Marking and Labeling Systems.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Verify final designations for equipment, systems, and components to be identified prior to fabrication of identification products.
- B. Sequencing:
 - 1. Do not conceal items to be identified, in locations such as above suspended ceilings, until identification products have been installed.
 - 2. Do not install identification products until final surface finishes and painting are complete.

1.05 SUBMITTALS

- A. See Section 01 33 00 - Administrative Requirements for submittals procedures.
- B. Product Data: Provide catalog data for nameplates, labels, and markers.
- C. Manufacturer's Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation and installation of product.

1.06 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.

1.07 EXTRA MATERIALS

- A. See Section 01 60 00 - Product Requirements for additional requirements.

PART 2 PRODUCTS

2.01 IDENTIFICATION REQUIREMENTS

- A. Existing Work: Unless specifically excluded, identify existing elements to remain that are not already identified in accordance with specified requirements.
- B. Identification for Equipment:
 - 1. Use identification nameplate to identify each piece of electrical distribution and control equipment and associated sections, compartments, and components.
 - a. Switchboards:
 - 1) Identify ampere rating.
 - 2) Identify voltage and phase.
 - 3) Identify power source and circuit number. Include location when not within sight of equipment.
 - 4) Use identification nameplate to identify main overcurrent protective device.
 - 5) Use identification nameplate to identify load(s) served for each branch device. Do not identify spares and spaces.
 - b. Motor Control Centers:
 - 1) Identify ampere rating.
 - 2) Identify voltage and phase.
 - 3) Identify power source and circuit number. Include location when not within sight of equipment.
 - 4) Use identification nameplate to identify main overcurrent protective device.
 - 5) Use identification nameplate to identify load(s) served for each branch device. Do not identify spares and spaces.
 - c. Panelboards:
 - 1) Identify ampere rating.
 - 2) Identify voltage and phase.
 - 3) Identify power source and circuit number. Include location when not within sight of equipment.
 - 4) Identify main overcurrent protective device. Use identification label for panelboards with a door. For power distribution panelboards without a door, use identification nameplate.
 - 5) Use typewritten circuit directory to identify load(s) served for panelboards with a door. Identify spares and spaces using pencil.
 - 6) For power panelboards without a door, use identification nameplate to identify load(s) served for each branch device. Do not identify spares and spaces.
 - d. Enclosed switches, circuit breakers, and motor controllers:
 - 1) Identify voltage and phase.
 - 2) Identify power source and circuit number. Include location when not within sight of equipment.
 - 3) Identify load(s) served. Include location when not within sight of equipment.
 - e. Enclosed Contactors:
 - 1) Identify ampere rating.
 - 2) Identify voltage and phase.

- 3) Identify configuration, e.g., E.O.E.H. (electrically operated, electrically held) or E.O.M.H. (electrically operated, mechanically held).
 - 4) Identify coil voltage.
 - 5) Identify load(s) and associated circuits controlled. Include location.
 - f. Transfer Switches:
 - 1) Identify voltage and phase.
 - 2) Identify power source and circuit number for both normal power source and standby power source. Include location when not within sight of equipment.
 2. Service Equipment:
 - a. Use identification nameplate to identify each service disconnecting means.
 - b. For buildings or structures supplied by more than one service, or any combination of branch circuits, feeders, and services, use identification nameplate or means of identification acceptable to authority having jurisdiction at each service disconnecting means to identify all other services, feeders, and branch circuits supplying that building or structure. Verify format and descriptions with authority having jurisdiction.
 - c. Use identification nameplate at each piece of service equipment to identify the available fault current and the date calculations were performed.
 3. Emergency System Equipment:
 - a. Use identification nameplate or voltage marker to identify emergency system equipment in accordance with NFPA 70.
 - b. Use identification nameplate at each piece of service equipment to identify type and location of on-site emergency power sources.
 4. Use identification nameplate to identify disconnect location for equipment with remote disconnecting means.
 5. Use identification label or handwritten text using indelible marker on inside of door at each fused switch to identify required NEMA fuse class and size.
- C. Identification for Conductors and Cables:
1. Color Coding for Power Conductors 600 V and Less: Comply with Section 26 05 19.
 2. Use identification nameplate or identification label to identify color code for ungrounded and grounded power conductors inside door or enclosure at each piece of feeder or branch-circuit distribution equipment when premises has feeders or branch circuits served by more than one nominal voltage system.
 3. Use wire and cable markers to identify circuit number or other designation indicated for power, control, and instrumentation conductors and cables at the following locations:
 - a. At each source and load connection.
 - b. Within boxes when more than one circuit is present.
 - c. Within equipment enclosures when conductors and cables enter or leave the enclosure.
- D. Identification for Raceways:
1. Use voltage markers to identify highest voltage present for accessible conduits at maximum intervals of 20 feet.
 2. Use voltage markers or color-coded bands to identify systems other than normal power system for accessible conduits at maximum intervals of 20 feet.
 - a. Color-Coded Bands: Use field-painting or vinyl color coding electrical tape to mark bands 3 inches wide.
 - 1) Color Code:
 - 2) Field-Painting: Comply with Section 09 90 00.
 - 3) Vinyl Color Coding Electrical Tape: Comply with Section 26 05 19.

3. Use identification labels, handwritten text using indelible marker, or plastic marker tags to identify circuits enclosed for accessible conduits at wall penetrations, at floor penetrations, at roof penetrations, and at equipment terminations when source is not within sight.
- E. Identification for Boxes:
1. Use voltage markers to identify highest voltage present.
 2. Use voltage markers or color coded boxes to identify systems other than normal power system.
 - a. Color-Coded Boxes: Field-painted in accordance with Section 09 90 00 per the same color code used for raceways.
 - 1) Emergency Power System: Red.
 3. Use identification labels or handwritten text using indelible marker to identify circuits enclosed.
 - a. For exposed boxes in public areas, use only identification labels.
- F. Identification for Devices:
1. Factory Pre-Marked Wallplates: Comply with Section 26 27 26.

2.02 MANUFACTURERS

- A. Brady Corporation: www.bradycorp.com.
- B. Seton Identification Products: www.seton.com/aec.
- C. HellermannTyton: www.hellermanntyton.com.
- D. Substitutions: See Section 01 60 00 - Product Requirements.

2.03 IDENTIFICATION NAMEPLATES AND LABELS

- A. Identification Nameplates:
1. Manufacturers:
 - a. Brimar Industries, Inc: www.brimar.com.
 - b. Kolbi Pipe Marker Co: www.kolbipipemarkers.com.
 - c. Seton Identification Products: www.seton.com.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
 2. Materials:
 - a. Indoor Clean, Dry Locations: Use plastic nameplates.
 - b. Outdoor Locations: Use plastic, stainless steel, or aluminum nameplates suitable for exterior use.
 3. Plastic Nameplates: Two-layer or three-layer laminated acrylic or electrically non-conductive phenolic with beveled edges; minimum thickness of 1/16 inch; engraved text.
 - a. Exception: Provide minimum thickness of 1/8 inch when any dimension is greater than 4 inches.
 4. Stainless Steel Nameplates: Minimum thickness of 1/32 inch; engraved or laser-etched text.
 5. Aluminum Nameplates: Anodized; minimum thickness of 1/32 inch; engraved or laser-etched text.
 6. Mounting Holes for Mechanical Fasteners: Two, centered on sides for sizes up to 1 inch high; Four, located at corners for larger sizes.
- B. Identification Labels:
1. Manufacturers:

- a. Brady Corporation: www.bradyid.com.
 - b. Brother International Corporation: www.brother-usa.com.
 - c. Panduit Corp: www.panduit.com.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
2. Materials: Use self-adhesive laminated plastic labels; UV, chemical, water, heat, and abrasion resistant.
 - a. Use only for indoor locations.
 3. Text: Use factory pre-printed or machine-printed text. Do not use handwritten text unless otherwise indicated.
- C. Format for General Information and Operating Instructions:
1. Minimum Size: 1 inch by 2.5 inches.
 2. Legend: Include information or instructions indicated or as required for proper and safe operation and maintenance.
 3. Text: All capitalized unless otherwise indicated.
 4. Minimum Text Height: 1/4 inch.
 5. Color: Black text on white background unless otherwise indicated.
- D. Format for Control Device Identification:
1. Minimum Size: 3/8 inch by 1.5 inches.
 2. Legend: Load controlled or other designation indicated.
 3. Text: All capitalized unless otherwise indicated.
 4. Minimum Text Height: 3/16 inch.
 5. Color: Black text on clear background.
- E. Nameplates: Engraved three-layer laminated plastic, black letters on white background.
- F. Locations:
1. Each electrical distribution and control equipment enclosure.
 2. Communication cabinets.
 3. Disconnect switches, and starters.
- G. Letter Size:
1. Use 1/8 inch letters for identifying individual equipment and loads.
 2. Use 1/4 inch letters for identifying grouped equipment and loads.

2.04 WIRE AND CABLE MARKERS

- A. Manufacturers:
1. Brady Corporation: www.bradyid.com.
 2. HellermannTyton: www.hellermanntyton.com.
 3. Panduit Corp: www.panduit.com.
 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Markers for Conductors and Cables: Use wrap-around self-adhesive vinyl cloth, wrap-around self-adhesive vinyl self-laminating, heat-shrink sleeve, plastic sleeve, plastic clip-on, or vinyl split sleeve type markers suitable for the conductor or cable to be identified.
- C. Markers for Conductor and Cable Bundles: Use plastic marker tags secured by nylon cable ties.
- D. Legend: Power source and circuit number or other designation indicated.
- E. Text: Use factory pre-printed or machine-printed text, all capitalized unless otherwise indicated.
- F. Minimum Text Height: 1/8 inch.

- G. Color: Black text on white background unless otherwise indicated.
- H. Description: split sleeve type wire markers.
- I. Locations: Each conductor at panelboard gutters, pull boxes, outlet boxes, and junction boxes each load connection.
- J. Legend:
 - 1. Power and Lighting Circuits: Branch circuit or feeder number indicated on drawings.
 - 2. Control Circuits: Control wire number indicated on shop drawings.

2.05 VOLTAGE MARKERS

- A. Manufacturers: Panduit Corp
 - 1. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Markers for Conduits: Use factory pre-printed self-adhesive vinyl, self-adhesive vinyl cloth, or vinyl snap-around type markers.
- C. Markers for Boxes and Equipment Enclosures: Use factory pre-printed self-adhesive vinyl or self-adhesive vinyl cloth type markers.
- D. Minimum Size:
 - 1. Markers for Equipment: 1 1/8 by 4 1/2 inches.
 - 2. Markers for Conduits: As recommended by manufacturer for conduit size to be identified.
 - 3. Markers for Pull Boxes: 1 1/8 by 4 1/2 inches.
 - 4. Markers for Junction Boxes: 1/2 by 2 1/4 inches.
- E. Legend:
 - 1. Markers for Voltage Identification: Highest voltage present.
 - 2. Markers for System Identification:
 - a. Emergency Power System: Text "EMERGENCY".
- F. Color: Black text on orange background unless otherwise indicated.
- G. Location: Furnish markers for each conduit longer than 6 feet.
- H. Spacing: 20 feet on center.
- I. Color:
 - 1. 480 Volt System: Brown.
 - 2. 208 Volt System: Yellow.
 - 3. Fire Alarm System: Red.
- J. Legend:
 - 1. 480 Volt System: brown.
 - 2. 208 Volt System: yellow.
 - 3. Fire Alarm System: red.

2.06 WARNING SIGNS AND LABELS

- A. Manufacturers:
 - 1. Brimar Industries, Inc: www.brimar.com.
 - 2. Clarion Safety Systems, LLC: www.clarionsafety.com.
 - 3. Seton Identification Products: www.seton.com.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Comply with ANSI Z535.2 or ANSI Z535.4 as applicable.

- C. Warning Signs:
 - 1. Materials:
 - a. Indoor Dry, Clean Locations: Use factory pre-printed rigid plastic or self-adhesive vinyl signs.
 - b. Outdoor Locations: Use factory pre-printed rigid aluminum signs.
 - 2. Rigid Signs: Provide four mounting holes at corners for mechanical fasteners.
 - 3. Minimum Size: 7 by 10 inches unless otherwise indicated.
- D. Warning Labels:
 - 1. Materials: Use factory pre-printed or machine-printed self-adhesive polyester, or self-adhesive vinyl labels; UV, chemical, water, heat, and abrasion resistant; produced using materials recognized to UL 969.
 - a. Do not use labels designed to be completed using handwritten text.
 - b. Provide polyester overlamine to protect handwritten text.
 - 2. Machine-Printed Labels: Use thermal transfer process printing machines and accessories recommended by label manufacturer.
 - 3. Minimum Size: 2 by 4 inches unless otherwise indicated.

PART 3 EXECUTION

3.01 PREPARATION

- A. Clean surfaces to receive adhesive products according to manufacturer's instructions.
- B. Degrease and clean surfaces to receive nameplates and labels.

3.02 INSTALLATION

- A. Install products in accordance with manufacturer's instructions.
- B. Install identification products to be plainly visible for examination, adjustment, servicing, and maintenance. Unless otherwise indicated, locate products as follows:
 - 1. Surface-Mounted Equipment: Enclosure front.
 - 2. Flush-Mounted Equipment: Inside of equipment door.
 - 3. Free-Standing Equipment: Enclosure front; also enclosure rear for equipment with rear access.
 - 4. Elevated Equipment: Legible from the floor or working platform.
 - 5. Branch Devices: Adjacent to device.
 - 6. Interior Components: Legible from the point of access.
 - 7. Conduits: Legible from the floor.
 - 8. Boxes: Outside face of cover.
 - 9. Conductors and Cables: Legible from the point of access.
 - 10. Devices: Outside face of cover.
- C. Install identification products centered, level, and parallel with lines of item being identified.
- D. Secure nameplates to exterior surfaces of enclosures using stainless steel screws and to interior surfaces using self-adhesive backing, or epoxy cement.
- E. Install self-adhesive labels and markers to achieve maximum adhesion, with no bubbles or wrinkles and edges properly sealed.
- F. Secure rigid signs using stainless steel screws.

- G. Mark all handwritten text, where permitted, to be neat and legible.

END OF SECTION

SECTION 26 24 16

PANELBOARDS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Power distribution panelboards.
- B. Lighting and appliance panelboards.
- C. Overcurrent protective devices for panelboards.

1.02 RELATED REQUIREMENTS

- A. Section 26 05 26 - Grounding and Bonding for Electrical Systems.
- B. Section 26 05 29 - Hangers and Supports for Electrical Systems.
- C. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.
- D. Section 26 28 13 - Fuses: Fuses for fusible switches and spare fuse cabinets.

1.03 REFERENCE STANDARDS

- A. FS W-C-375 - Circuit Breakers, Molded Case; Branch Circuit and Service; Federal Specification.
- B. NECA 1 - Standard for Good Workmanship in Electrical Construction; National Electrical Contractors Association.
- C. NECA 407 - Standard for Installing and Maintaining Panelboards; National Electrical Contractors Association.
- D. NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum).
- E. NEMA ICS 2 - Industrial Control and Systems: Controllers, Contactors, and Overload Relays, Rated Not More Than 2000 Volts AC or 750 Volts DC; National Electrical Manufacturers Association.
- F. NEMA KS 1 - Enclosed and Miscellaneous Distribution Equipment Switches (600 Volts Maximum); National Electrical Manufacturers Association.
- G. NEMA PB 1 - Panelboards; National Electrical Manufacturers Association.
- H. NEMA PB 1.1 - General Instructions for Proper Installation, Operation and Maintenance of Panelboards Rated 600 Volts or Less; National Electrical Manufacturers Association.
- I. NETA STD ATS - Acceptance Testing Specifications for Electrical Power Distribution Equipment and Systems; International Electrical Testing Association.
- J. NFPA 70 - National Electrical Code; National Fire Protection Association.
- K. UL 50 - Enclosures for Electrical Equipment, Non-Environmental Considerations.
- L. UL 50E - Enclosures for Electrical Equipment, Environmental Considerations.
- M. UL 67 - Panelboards.
- N. UL 489 - Molded-Case Circuit Breakers, Molded-Case Switches and Circuit Breaker Enclosures.

1.04 SUBMITTALS

- A. See Section 01 33 00 - Administrative Requirements, for submittal procedures.
- B. Shop Drawings: Indicate outline and support point dimensions, voltage, main bus ampacity, overcurrent protective device arrangement and sizes, short circuit current ratings, conduit entry locations, conductor terminal information, and installed features and accessories.
- C. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.
- D. Project Record Documents: Record actual installed locations of panelboards and actual installed circuiting arrangements.
- E. Maintenance Data: Include information on replacement parts and recommended maintenance procedures and intervals.

1.05 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.

1.06 MAINTENANCE MATERIALS

- A. See Section 01 60 00 - Product Requirements, for additional provisions.
- B. Furnish two of each panelboard key.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Eaton Corporation; Cutler-Hammer Products: www.eaton.com.
- B. General Electric Company: www.geindustrial.com.
- C. Schneider Electric; Square D Products: www.schneider-electric.us.
- D. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 ALL PANELBOARDS

- A. Provide products listed and labeled by Underwriters Laboratories Inc. as suitable for the purpose indicated.
- B. Unless otherwise indicated, provide products suitable for continuous operation under the following service conditions:
 - 1. Altitude: Less than 6,600 feet.
 - 2. Ambient Temperature:
 - a. Panelboards Containing Circuit Breakers: Between 23 degrees F and 104 degrees F.
- C. Short Circuit Current Rating:
- D. Mains: Configure for top or bottom incoming feed as indicated or as required for the installation.
- E. Branch Overcurrent Protective Devices: Replaceable without disturbing adjacent devices.
- F. Bussing: Sized in accordance with UL 67 temperature rise requirements.

1. Provide solidly bonded equipment ground bus in each panelboard, with a suitable lug for each feeder and branch circuit equipment grounding conductor.
- G. Conductor Terminations: Suitable for use with the conductors to be installed.
- H. Enclosures: Comply with NEMA 250, and list and label as complying with UL 50 and UL 50E.
 1. Environment Type per NEMA 250: Unless otherwise indicated, as specified for the following installation locations:
 2. Boxes: Galvanized steel unless otherwise indicated.
 - a. Provide wiring gutters sized to accommodate the conductors to be installed.
 3. Fronts:
 - a. Fronts for Surface-Mounted Enclosures: Same dimensions as boxes.
 - b. Fronts for Flush-Mounted Enclosures: Overlap boxes on all sides to conceal rough opening.
 4. Lockable Doors: All locks keyed alike unless otherwise indicated.
- I. Future Provisions: Prepare all unused spaces for future installation of devices including bussing, connectors, mounting hardware and all other required provisions.

2.03 POWER DISTRIBUTION PANELBOARDS

- A. Description: Panelboards complying with NEMA PB 1, power and feeder distribution type, circuit breaker type, and listed and labeled as complying with UL 67; ratings, configurations and features as indicated on the drawings.
- B. Conductor Terminations:
 1. Main and Neutral Lug Material: Aluminum, suitable for terminating aluminum or copper conductors.
 2. Main and Neutral Lug Type: Mechanical.
- C. Bussing:
 1. Phase and Neutral Bus Material: Aluminum.
 2. Ground Bus Material: Aluminum.
- D. Circuit Breakers:
 1. Provide bolt-on type or plug-in type secured with locking mechanical restraints.
- E. Enclosures:
 1. Provide surface-mounted enclosures unless otherwise indicated.
- F. Manufacturers:
 1. S.Q.D or Equal.
 2. Substitutions: See Section 01 60 00 - Product Requirements.
- G. Description: NEMA PB 1, circuit breaker type.
- H. Service Conditions:
 1. Altitude: 1000 feet.
 2. Temperature: 55 degrees F.
- I. Panelboard Bus: Copper, ratings as indicated. Provide copper ground bus in each panelboard.
- J. Minimum integrated short circuit rating: As indicated.
 1. 240 Volt Panelboards: 14,000 amperes rms symmetrical.
 2. 480 Volt Panelboards: 21,000 amperes rms symmetrical.

- K. Molded Case Circuit Breakers: With integral thermal and instantaneous magnetic trip in each pole; UL listed. For air conditioning equipment branch circuits provide circuit breakers UL listed as Type HACR.
- L. Molded Case Circuit Breakers with Current Limiters: With replaceable current limiting elements, in addition to integral thermal and instantaneous magnetic trip in each pole; UL listed.
- M. Current Limiting Molded Case Circuit Breakers: With integral thermal and instantaneous magnetic trip in each pole, coordinated with automatically resetting current limiting elements in each pole; UL listed. Interrupting rating 100,000 symmetrical amperes, let-through current and energy level less than permitted for same size Class RK-5 fuse.
- N. Circuit Breaker Accessories: Trip units and auxiliary switches as indicated.
- O. Enclosure: NEMA PB 1, Type 1, 5 34" deep, 20" wide, cabinet box. With continued hinge and lock.
- P. Cabinet Front: Surface type, fastened with, hinged door with flush lock, finished in manufacturer's standard gray enamel.

2.04 LIGHTING AND APPLIANCE PANELBOARDS

- A. Description: Panelboards complying with NEMA PB 1, lighting and appliance branch circuit type, circuit breaker type, and listed and labeled as complying with UL 67; ratings, configurations and features as indicated on the drawings.
- B. Conductor Terminations:
 - 1. Main and Neutral Lug Material: Aluminum, suitable for terminating aluminum or copper conductors.
 - 2. Main and Neutral Lug Type: Mechanical.
- C. Bussing:
 - 1. Phase Bus Connections: Arranged for sequential phasing of overcurrent protective devices.
 - 2. Phase and Neutral Bus Material: Aluminum.
 - 3. Ground Bus Material: Aluminum.
- D. Circuit Breakers: Thermal magnetic bolt-on type unless otherwise indicated.
- E. Enclosures:
 - 1. Provide surface-mounted or flush-mounted enclosures as indicated.
 - 2. Provide clear plastic circuit directory holder mounted on inside of door.
- F. Manufacturers:
 - 1. S.Q.D or Equal.
 - 2. Substitutions: See Section 01 60 00 - Product Requirements.
- G. Description: NEMA PB1, circuit breaker type, lighting and appliance branch circuit panelboard.
- H. Panelboard Bus: Copper, ratings as indicated. Provide copper ground bus in each panelboard; provide insulated ground bus where scheduled.
- I. Minimum Integrated Short Circuit Rating: As indicated.
 - 1. 240 Volt Panelboards: 14,000 amperes rms symmetrical.
 - 2. 480 Volt Panelboards: 21,000 amperes rms symmetrical.
- J. Molded Case Circuit Breakers: Thermal magnetic trip circuit breakers, bolt-on type, with common trip handle for all poles; UL listed.

1. Type SWD for lighting circuits.
 2. Type HACR for air conditioning equipment circuits.
 3. Class A ground fault interrupter circuit breakers where scheduled.
 4. Do not use tandem circuit breakers, or miniature circuit breakers.
- K. Current Limiting Molded Case Circuit Breakers: With integral thermal and instantaneous magnetic trip in each pole, coordinated with automatically resetting current limiting elements in each pole; UL listed. Interrupting rating 100,000 symmetrical amperes, let-through current and energy level less than permitted for same size Class RK-5 fuse.
- L. Enclosure: NEMA PB 1, Type 1.
- M. Cabinet Box: 6 inches deep, 20 inches wide for 240 volt and less panelboards, 20 inches wide for 480 volt panelboards.
- N. Cabinet Front: Flush or Surface cabinet front with concealed trim clamps, concealed hinge, metal directory frame, and flush lock all keyed alike. Finish in manufacturer's standard gray enamel.

2.05 OVERCURRENT PROTECTIVE DEVICES

- A. Molded Case Circuit Breakers:
1. Description: Quick-make, quick-break, over center toggle, trip-free, trip-indicating circuit breakers listed and labeled as complying with UL 489, and complying with FS W-C-375 where applicable; ratings, configurations, and features as indicated on the drawings.
 2. Interrupting Capacity:
 - a. Provide circuit breakers with interrupting capacity as required to provide the short circuit current rating indicated, but not less than:
 - b. Fully Rated Systems: Provide circuit breakers with interrupting capacity not less than the short circuit current rating indicated.
 3. Conductor Terminations:
 - a. Lug Material: Aluminum, suitable for terminating aluminum or copper conductors.
 4. Thermal Magnetic Circuit Breakers: For each pole, furnish thermal inverse time tripping element for overload protection and magnetic instantaneous tripping element for short circuit protection.
 5. Multi-Pole Circuit Breakers: Furnish with common trip for all poles.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install products in accordance with manufacturer's instructions.
- B. Install panelboards securely, in a neat and workmanlike manner in accordance with NECA 1 (general workmanship), NECA 407 (panelboards), and NEMA PB 1.1.
- C. Arrange equipment to provide minimum clearances in accordance with manufacturer's instructions and NFPA 70.
- D. Provide required supports in accordance with Section 26 05 29.
- E. Install panelboards plumb.
- F. Install flush-mounted panelboards so that trims fit completely flush to wall with no gaps and rough opening completely covered.
- G. Mount panelboards such that the highest position of any operating handle for circuit breakers or

switches does not exceed 79 inches above the floor or working platform.

- H. Provide minimum of six spare 1 inch trade size conduits out of each flush-mounted panelboard stubbed into accessible space above ceiling and below floor.
- I. Provide grounding and bonding in accordance with Section 26 05 26.
- J. Install all field-installed branch devices, components, and accessories.
- K. Install panelboards in accordance with NEMA PB 1.1 and NECA 1.
- L. Install panelboards plumb. Install recessed panelboards flush with wall finishes, where installed surface mounted secure or anchor panelboard to brick or cinder block wall.
- M. Height: 6 feet to top of panelboard; install panelboards taller than 6 feet with bottom no more than 4 inches above floor.
- N. Provide filler plates to cover unused spaces in panelboards.
- O. Provide computer-generated circuit directory for each lighting and appliance panelboard, and each power distribution panelboard provided with a door, clearly and specifically indicating the loads served. Identify spares and spaces.
- P. Provide typed or neatly handwritten circuit directory for each branch circuit panelboard. Revise directory to reflect circuiting changes required to balance phase loads.
- Q. Provide identification nameplate for each panelboard in accordance with Section 26 05 53.
- R. Provide arc flash warning labels in accordance with NFPA 70.
- S. Provide spare conduits out of each recessed panelboard to an accessible location above ceiling. Identify each as SPARE.
 - 1. Minimum spare conduits: 5 empty 1 inch.
- T. Ground and bond panelboard enclosure according to Section 26 05 26.

3.02 FIELD QUALITY CONTROL

- A. Perform inspection, testing, and adjusting in accordance with Section 01 45 00.
- B. Inspect and test in accordance with NETA STD ATS, except Section 4.
- C. Correct deficiencies and replace damaged or defective panelboards or associated components.
- D. Perform inspections and tests listed in NETA STD ATS, Section 7.5 for switches, Section 7.6 for circuit breakers.

3.03 ADJUSTING

- A. Adjust tightness of mechanical and electrical connections to manufacturer's recommended torque settings.
- B. Adjust alignment of panelboard fronts.
- C. Load Balancing: For each panelboard, rearrange circuits such that the difference between each measured steady state phase load does not exceed 20 percent and adjust circuit directories accordingly. Maintain proper phasing for multi-wire branch circuits.

END OF SECTION

SECTION 26 27 17

EQUIPMENT WIRING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Electrical connections to equipment.

1.02 RELATED REQUIREMENTS

- A. Section 26 05 34 - Conduit.
- B. Section 26 05 19 - Low-Voltage Electrical Power Conductors and Cables (600 V and Less).
- C. Section 26 05 37 - Boxes.
- D. Section 26 27 26 - Wiring Devices.

1.03 REFERENCE STANDARDS

- A. NEMA WD 1 - General Color Requirements for Wiring Devices; National Electrical Manufacturers Association.
- B. NEMA WD 6 - Wiring Devices - Dimensional Requirements; National Electrical Manufacturers Association.
- C. NFPA 70 - National Electrical Code; National Fire Protection Association.

1.04 SUBMITTALS

- A. See Section 01 33 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide wiring device manufacturer's catalog information showing dimensions, configurations, and construction.
- C. Manufacturer's Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.

1.05 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Products: Listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.

1.06 COORDINATION

- A. Obtain and review shop drawings, product data, manufacturer's wiring diagrams, and manufacturer's instructions for equipment furnished under other sections.
- B. Determine connection locations and requirements.
- C. Sequence rough-in of electrical connections to coordinate with installation of equipment.
- D. Sequence electrical connections to coordinate with start-up of equipment.

PART 2 PRODUCTS

2.01 MATERIALS

- A. Cords and Caps: NEMA WD 6; match receptacle configuration at outlet provided for equipment.
 - 1. Colors: Conform to NEMA WD 1.
 - 2. Cord Construction: NFPA 70, Type SO, multiconductor flexible cord with identified equipment grounding conductor, suitable for use in damp locations.
 - 3. Size: Suitable for connected load of equipment, length of cord, and rating of branch circuit overcurrent protection.
 - 4. Product:
 - 5. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Disconnect Switches: As specified in Section and in individual equipment sections.
- C. Wiring Devices: As specified in Section 26 27 26.
- D. Flexible Conduit: As specified in Section 26 05 34.
- E. Wire and Cable: As specified in Section 26 05 19.
- F. Boxes: As specified in Section 26 05 37.

2.02 EQUIPMENT CONNECTIONS

- A. As required by equipment manufacturer.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that equipment is ready for electrical connection, wiring, and energization.

3.02 ELECTRICAL CONNECTIONS

- A. Make electrical connections in accordance with equipment manufacturer's instructions.
- B. Make conduit connections to equipment using flexible conduit. Use liquidtight flexible conduit with watertight connectors in damp or wet locations.
- C. Connect heat producing equipment using wire and cable with insulation suitable for temperatures encountered.
- D. Provide receptacle outlet to accommodate connection with attachment plug.
- E. Provide cord and cap where field-supplied attachment plug is required.
- F. Install suitable strain-relief clamps and fittings for cord connections at outlet boxes and equipment connection boxes.
- G. Install disconnect switches, controllers, control stations, and control devices to complete equipment wiring requirements.
- H. Install terminal block jumpers to complete equipment wiring requirements.
- I. Install interconnecting conduit and wiring between devices and equipment to complete equipment wiring requirements.
- J. Coolers and Freezers: Cut and seal conduit openings in freezer and cooler walls, floor, and ceilings.

END OF SECTION

SECTION 26 27 26

WIRING DEVICES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Wall switches.
- B. Receptacles.
- C. Wall plates.

1.02 RELATED REQUIREMENTS

- A. Section 26 05 37 - Boxes.

1.03 REFERENCE STANDARDS

- A. FS W-C-596 - Connector, Electrical, Power, General Specification for; Federal Specification.
- B. FS W-S-896 - Switches, Toggle (Toggle and Lock), Flush-mounted (General Specification); Federal Specification.
- C. NECA 1 - Standard for Good Workmanship in Electrical Construction; National Electrical Contractors Association.
- D. NEMA WD 1 - General Color Requirements for Wiring Devices; National Electrical Manufacturers Association.
- E. NEMA WD 6 - Wiring Device -- Dimensional Requirements; National Electrical Manufacturers Association.
- F. NFPA 70 - National Electrical Code; National Fire Protection Association.
- G. UL 20 - General-Use Snap Switches.
- H. UL 498 - Attachment Plugs and Receptacles.
- I. UL 514D - Cover Plates for Flush-Mounted Wiring Devices.

1.04 SUBMITTALS

- A. See Section 01 33 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide manufacturer's catalog information showing dimensions, colors, and configurations.
- C. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.

1.05 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.

1.06 EXTRA MATERIALS

- A. See Section 01 60 00 - Product Requirements, for additional provisions.
- B. Furnish two of each style, size, and finish wall plate.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Cooper Wiring Devices: www.cooperwiringdevices.com.
- B. Leviton Manufacturing, Inc: www.leviton.com.
- C. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 ALL WIRING DEVICES

- A. Provide products listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.

2.03 WALL SWITCHES

- A. All Wall Switches: AC only, quiet operating, general-use snap switches with silver alloy contacts, complying with NEMA WD 1 and NEMA WD 6, and listed as complying with UL 80 and where applicable, FS W-S-896; types as indicated on the drawings.
 - 1. Wiring Provisions: Terminal screws for side wiring and screw actuated binding clamp for back wiring with separate ground terminal screw.
- B. Wall Switches: Heavy Duty, AC only general-use snap switch, complying with NEMA WD 6 and WD 1.
 - 1. Body and Handle: White plastic with toggle handle.
 - 2. Ratings:
 - a. Voltage: 120 - 277 volts, AC.
 - b. Current: 20 amperes.
 - 3. Ratings: Match branch circuit and load characteristics.
- C. Switch Types: Single pole, double pole, 3-way, and 4-way.

2.04 RECEPTACLES

- A. All Receptacles: Self-grounding, complying with NEMA WD 1 and NEMA WD 6, and listed as complying with UL 498, and where applicable, FS W-C-596; types as indicated on the drawings.
 - 1. Wiring Provisions: Terminal screws for side wiring or screw actuated binding clamp for back wiring with separate ground terminal screw.
 - 2. NEMA configurations specified are according to NEMA WD 6.
- B. Receptacles: Heavy duty, complying with NEMA WD 6 and WD 1.
 - 1. Device Body: White plastic.
 - 2. Configuration: NEMA WD 6, type as specified and indicated.
- C. Convenience Receptacles: Type 5 - 20.
- D. Single Convenience Receptacles.
- E. Duplex Convenience Receptacles.
- F. GFCI Receptacles: Convenience receptacle with integral ground fault circuit interrupter to meet regulatory requirements.

2.05 TELEPHONE JACKS

- A. Product: AMP manufacturing
- B. Substitutions: See Section 01 60 00 - Product Requirements.

2.06 WALL PLATES

- A. All Wall Plates: Comply with UL 514D.
 - 1. Configuration: One piece cover as required for quantity and types of corresponding wiring devices.
 - 2. Size: Standard.
 - 3. Screws: Metal with slotted heads finished to match wall plate finish.
- B. Decorative Cover Plates: stainless steel.
- C. Jumbo Cover Plates: stainless steel.
- D. Weatherproof Cover Plates: Gasketed cast metal with hinged cover.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field measurements are as shown on the drawings.
- B. Verify that outlet boxes are installed in proper locations and at proper mounting heights and are properly sized to accommodate devices and conductors in accordance with NFPA 70.
- C. Verify that wall openings are neatly cut and will be completely covered by wall plates.
- D. Verify that final surface finishes are complete, including painting.
- E. Verify that floor boxes are adjusted properly.
- F. Verify that branch circuit wiring installation is completed, tested, and ready for connection to wiring devices.
- G. Verify that openings in access floor are in proper locations.
- H. Verify that conditions are satisfactory for installation prior to starting work.

3.02 PREPARATION

- A. Provide extension rings to bring outlet boxes flush with finished surface.
- B. Clean dirt, debris, plaster, and other foreign materials from outlet boxes.

3.03 INSTALLATION

- A. Perform work in a neat and workmanlike manner in accordance with NECA 1 and, where applicable, NECA 130, including mounting heights specified in those standards unless otherwise indicated.
- B. Perform work in a neat and workmanlike manner in accordance with NECA 1, including mounting heights specified in that standard unless otherwise indicated.
- C. Coordinate locations of outlet boxes provided under Section 26 05 37 as required for installation of wiring devices provided under this section.
- D. Install wiring devices in accordance with manufacturer's instructions.

- E. Install permanent barrier between ganged wiring devices when voltage between adjacent devices exceeds 300 V.
- F. Where required, connect wiring devices using pigtails not less than 6 inches long. Do not connect more than one conductor to wiring device terminals.
- G. Connect wiring devices by wrapping conductor clockwise 3/4 turn around screw terminal and tightening to proper torque specified by the manufacturer. Where present, do not use push-in pressure terminals that do not rely on screw-actuated binding.
- H. Unless otherwise indicated, connect wiring device grounding terminal to branch circuit equipment grounding conductor and to outlet box with bonding jumper.
- I. Install securely, in a neat and workmanlike manner, as specified in NECA 1.
- J. Install wiring devices plumb and level with mounting yoke held rigidly in place.
- K. Install wall switches with OFF position down.
- L. Do not share neutral conductor on branch circuits utilizing wall dimmers.
- M. Install vertically mounted receptacles with grounding pole on top and horizontally mounted receptacles with grounding pole on left.
- N. Install wall plates to fit completely flush to wall with no gaps and rough opening completely covered without strain on wall plate. Repair or reinstall improperly installed outlet boxes or improperly sized rough openings. Do not use oversized wall plates in lieu of meeting this requirement.
- O. Install blank wall plates on junction boxes and on outlet boxes with no wiring devices installed or designated for future use.
- P. Install receptacles with grounding pole on top.
- Q. Connect wiring device grounding terminal to outlet box with bonding jumper.
- R. Install decorative plates on switch, receptacle, and blank outlets in finished areas.
- S. Connect wiring devices by wrapping conductor around screw terminal.
- T. Use jumbo size plates for outlets installed in masonry walls.
- U. Install galvanized steel plates on outlet boxes and junction boxes in unfinished areas, above accessible ceilings, and on surface mounted outlets.

3.04 INTERFACE WITH OTHER PRODUCTS

- A. Coordinate locations of outlet boxes provided under Section 26 05 37 to obtain mounting heights.
- B. Install wall switch 48 inches above finished floor.
- C. Install convenience receptacle 18 inches above finished floor.
- D. Install convenience receptacle 6 inches above backsplash of counter.
- E. Install telephone jack 18 inches above finished floor.
- F. Install telephone jack for side-reach wall telephone to position top of telephone at 54 inches above finished floor.

- G. Install telephone jack for forward-reach wall telephone to position top of telephone at 48 inches above finished floor.

3.05 FIELD QUALITY CONTROL

- A. Perform field inspection, testing, adjusting, and balancing in accordance with Section 01 45 00.
- B. Inspect each wiring device for damage and defects.
- C. Operate each wall switch, wall dimmer, and fan speed controller with circuit energized to verify proper operation.
- D. Operate each wall switch with circuit energized and verify proper operation.
- E. Verify that each receptacle device is energized.
- F. Test each receptacle to verify operation and proper polarity.
- G. Test each GFCI receptacle for proper tripping operation according to manufacturer's instructions.
- H. Correct wiring deficiencies and replace damaged or defective wiring devices.
- I. Verify that each telephone jack is properly connected and circuit is operational.

3.06 ADJUSTING

- A. Adjust devices and wall plates to be flush and level.

3.07 CLEANING

- A. Clean exposed surfaces to remove dirt, paint, or other foreign material and restore to match original factory finish.

END OF SECTION

SECTION 26 28 13

FUSES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Fuses.

1.02 REFERENCE STANDARDS

- A. NEMA FU 1 - Low Voltage Cartridge Fuses; National Electrical Manufacturers Association.
- B. NFPA 70 - National Electrical Code; National Fire Protection Association.
- C. UL 248-1 - Low-Voltage Fuses - Part 1: General Requirements.
- D. UL 248-4 - Low-Voltage Fuses - Part 4: Class CC Fuses.
- E. UL 248-12 - Low-Voltage Fuses - Part 12: Class R Fuses.

1.03 SUBMITTALS

- A. See Section 01 33 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide manufacturer's standard data sheets including voltage and current ratings, interrupting ratings, time-current curves, and current limitation curves.

1.04 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
- C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience and with service facilities within 100 miles of Project.
- D. Products: Listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.

1.05 MAINTENANCE MATERIALS

- A. See Section 01 60 00 - Product Requirements, for additional provisions.
- B. Furnish two fuse pullers.
- C. Furnish three of each size and type fuse installed.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Cooper Bussmann, Inc: www.cooperbussmann.com.
- B. Mersen (formerly Ferraz Shawmut): ferrazshawmut.mersen.com.
- C. Littelfuse, Inc: www.littelfuse.com.
- D. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 APPLICATIONS

- A. Service Entrance:
 - 1. Fusible Switches up to 600 Amperes: Class RK1, time-delay.
- B. Feeders:
 - 1. Fusible Switches up to 600 Amperes: Class RK1, time-delay.
- C. Individual Motor Branch Circuits: Class RK1, time-delay.
- D. Primary Protection for Control Transformers: Class CC, time-delay.

2.03 FUSES

- A. Provide products listed and classified by Underwriters Laboratories Inc. as suitable for the purpose indicated.
- B. Unless specifically indicated to be excluded, provide fuses for all fusible equipment as required for a complete operating system.
- C. Provide fuses of the same type, rating, and manufacturer within the same switch.
- D. Comply with UL 248-1.
- E. Unless otherwise indicated, provide cartridge type fuses complying with NEMA FU 1, Class and ratings as indicated.
- F. Voltage Rating: Suitable for circuit voltage.
- G. Class R Fuses: Comply with UL 248-12.
 - 1. Class RK1, Time-Delay Fuses:
 - a. Products:
 - 1) BUSS MAN.
 - 2) COOPER.
 - 3) Substitutions: See Section 01 60 00 - Product Requirements.
- H. Class CC Fuses: Comply with UL 248-4.
 - 1. Class CC, Time-Delay Fuses:
 - a. Products:
 - 1) BUSSMAN.
 - 2) COOPER.
 - 3) Substitutions: See Section 01 60 00 - Product Requirements.
- I. Power Load Feeder Switches: Class RK1 (time delay).
- J. Motor Load Feeder Switches: Class RK1 (time delay).
- K. Other Feeder Switches: Class RK1 (time delay).
- L. General Purpose Branch Circuits: Class RK1 (time delay).
- M. Motor Branch Circuits: Class L time delay.
- N. Lighting Branch Circuits: Class G.

2.04 CLASS RK1 (TIME DELAY) FUSES

- A. Manufacturers:
 - 1. Bussman Corp.
 - 2. Substitutions: See Section 01 60 00 - Product Requirements.

- B. Construction: Current limiting, dual-element fuse, 10 seconds minimum at 500% rated amps, with copper fuse element.

2.05 CLASS G FUSES

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that fuse ratings are consistent with circuit voltage and manufacturer's recommendations and nameplate data for equipment.
- B. Verify that mounting surfaces are ready to receive spare fuse cabinet.
- C. Verify that conditions are satisfactory for installation prior to starting work.

3.02 INSTALLATION

- A. Do not install fuses until circuits are ready to be energized.
- B. Install fuses with label oriented such that manufacturer, type, and size are easily read.

END OF SECTION

SECTION 26 28 18

ENCLOSED SWITCHES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Enclosed safety switches.
- B. Fusible switches.
- C. Nonfusible switches.

1.02 RELATED REQUIREMENTS

- A. Section 26 05 26 - Grounding and Bonding for Electrical Systems.
- B. Section 26 05 29 - Hangers and Supports for Electrical Systems.
- C. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.
- D. Section 26 28 13 - Fuses.
- E. Section 26 29 13 - Enclosed Controllers: Manual motor controllers.

1.03 REFERENCE STANDARDS

- A. NECA 1 - Standard for Good Workmanship in Electrical Construction; National Electrical Contractors Association.
- B. NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum).
- C. NEMA FU 1 - Low Voltage Cartridge Fuses; National Electrical Manufacturers Association.
- D. NEMA KS 1 - Enclosed and Miscellaneous Distribution Equipment Switches (600 Volts Maximum); National Electrical Manufacturers Association.
- E. NETA STD ATS - Acceptance Testing Specifications for Electrical Power Distribution Equipment and Systems; International Electrical Testing Association.
- F. NFPA 70 - National Electrical Code; National Fire Protection Association.
- G. UL 50 - Enclosures for Electrical Equipment, Non-Environmental Considerations.
- H. UL 50E - Enclosures for Electrical Equipment, Environmental Considerations.
- I. UL 98 - Enclosed and Dead-Front Switches.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate the work with other trades. Avoid placement of ductwork, piping, equipment, or other potential obstructions within the dedicated equipment spaces and within working clearances for electrical equipment required by NFPA 70.
 - 2. Coordinate arrangement of electrical equipment with the dimensions and clearance requirements of the actual equipment to be installed.
 - 3. Verify with manufacturer that conductor terminations are suitable for use with the conductors to be installed.
 - 4. Notify StudioJAED of any conflicts with or deviations from the contract documents. Obtain direction before proceeding with work.

1.05 SUBMITTALS

- A. See Section 01 33 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for enclosed switches and other installed components and accessories.
- C. Shop Drawings: Indicate outline and support point dimensions, voltage and current ratings, short circuit current ratings, conduit entry locations, conductor terminal information, and installed features and accessories.
- D. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, installation, and starting of product.
- E. Project Record Documents: Record actual locations of enclosed switches.
- F. Maintenance Data: Include information on replacement parts and recommended maintenance procedures and intervals.
- G. Maintenance Materials: Furnish the following for Seaford School District's use in maintenance of project.
 - 1. See Section 01 60 00 - Product Requirements, for additional provisions.

1.06 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Store in a clean, dry space. Maintain factory wrapping or provide an additional heavy canvas or heavy plastic cover to protect units from dirt, water, construction debris, and traffic.
- B. Handle carefully in accordance with manufacturer's written instructions to avoid damage to enclosed switch internal components, enclosure, and finish.

1.08 FIELD CONDITIONS

- A. Maintain ambient temperature between 55 degree F and 75 degree F during and after installation of enclosed switches.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Siemens Industry, Inc: www.sea.siemens.com.
- B. Eaton Corporation; Cutler-Hammer Products; Model : www.eaton.com.
- C. General Electric Company; Model : www.geindustrial.com.
- D. Schneider Electric; Square D Products; Model : www.schneider-electric.us.
- E. Substitutions: See Section 01 60 00 - Product Requirements.
- F. Source Limitations: Furnish enclosed switches and associated components produced by the same manufacturer as the other electrical distribution equipment used for this project and obtained from a single supplier.

2.02 ENCLOSED SAFETY SWITCHES

- A. Description: Quick-make, quick-break, enclosed safety switches complying with NEMA KS 1, type HD (heavy duty), and listed and labeled as complying with UL 98; ratings, configurations, and features as indicated on the drawings.
- B. Provide products listed and labeled by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.
- C. Unless otherwise indicated, provide products suitable for continuous operation under the following service conditions:
 - 1. Altitude: Less than 6,600 feet.
- D. Horsepower Rating: Suitable for connected load.
- E. Voltage Rating: Suitable for circuit voltage.
- F. Short Circuit Current Rating:
 - 1. Provide enclosed safety switches, when protected by the fuses or supply side overcurrent protective devices to be installed, with listed short circuit current rating not less than the available fault current at the installed location as indicated on the drawings.
- G. Provide with switch blade contact position that is visible when the cover is open.
- H. Fuse Clips for Fusible Switches: As required to accept fuses indicated.
 - 1. Where NEMA Class R fuses are installed, provide rejection feature to prevent installation of fuses other than Class R.
- I. Conductor Terminations: Suitable for use with the conductors to be installed.
- J. Provide insulated, groundable fully rated solid neutral assembly where a neutral connection is required, with a suitable lug for terminating each neutral conductor.
- K. Provide solidly bonded equipment ground bus in each enclosed safety switch, with a suitable lug for terminating each equipment grounding conductor.
- L. Enclosures: Comply with NEMA KS 1 and NEMA 250, and list and label as complying with UL 50 and UL 50E.
 - 1. Environment Type per NEMA 250: Unless otherwise indicated, as specified for the following installation locations:
 - a. Indoor Clean, Dry Locations: Type 1.
 - b. Outdoor Locations: Type 3R.
- M. Provide safety interlock to prevent opening the cover with the switch in the ON position with capability of overriding interlock for testing purposes.
- N. Heavy Duty Switches:
 - 1. Products:
 - a. SQD.
 - b. SIEMENS.
 - c. GE.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
 - 2. Conductor Terminations:
 - a. Provide mechanical lugs unless otherwise indicated.
 - b. Lug Material: Copper, suitable for terminating copper conductors only.
 - 3. Provide externally operable handle with means for locking in the OFF position, capable of accepting three padlocks.
 - a. Provide means for locking handle in the ON position where indicated.

2.03 COMPONENTS

- A. Fusible Switch Assemblies: NEMA KS 1, Type HD enclosed load interrupter knife switch.
 - 1. Externally operable handle interlocked to prevent opening front cover with switch in ON position.
 - 2. Handle lockable in OFF position.
 - 3. Fuse clips: Designed to accommodate NEMA FU1, Class R fuses.
- B. Nonfusible Switch Assemblies: NEMA KS 1, Type HD enclosed load interrupter knife switch.
 - 1. Externally operable handle interlocked to prevent opening front cover with switch in ON position.
 - 2. Handle lockable in OFF position.
- C. Enclosures: NEMA KS 1.
 - 1. Interior Dry Locations: Type 1.
 - 2. Exterior Locations: Type 3R.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field measurements are as shown on the drawings.
- B. Verify that the ratings of the enclosed switches are consistent with the indicated requirements.
- C. Verify that mounting surfaces are ready to receive enclosed safety switches.
- D. Verify that conditions are satisfactory for installation prior to starting work.

3.02 INSTALLATION

- A. Install enclosed switches in accordance with manufacturer's instructions.
- B. Install enclosed switches securely, in a neat and workmanlike manner in accordance with NECA 1.
- C. Arrange equipment to provide minimum clearances in accordance with manufacturer's instructions and NFPA 70.
- D. Provide required supports in accordance with Section 26 05 29.
- E. Install enclosed switches plumb.
- F. Except where indicated to be mounted adjacent to the equipment they supply, mount enclosed switches such that the highest position of the operating handle does not exceed 79 inches above the floor or working platform.
- G. Provide grounding and bonding in accordance with Section 26 05 26.
- H. Provide fuses complying with Section 26 28 13 for fusible switches as indicated or as required by equipment manufacturer's recommendations.
- I. Provide identification nameplate for each enclosed switch in accordance with Section 26 05 53.
- J. Provide arc flash warning labels in accordance with NFPA 70.
- K. Install fuses in fusible disconnect switches.
- L. Apply adhesive tag on inside door of each fused switch indicating NEMA fuse class and size installed.

3.03 FIELD QUALITY CONTROL

- A. Perform field inspection, testing, and adjusting in accordance with Section 01 40 00.
- B. Inspect and test in accordance with NETA STD ATS, except Section 4.
- C. Perform inspections and tests listed in NETA STD ATS, Section 7.5.1.1.
- D. Correct deficiencies and replace damaged or defective enclosed safety switches or associated components.

3.04 ADJUSTING

- A. Adjust tightness of mechanical and electrical connections to manufacturer's recommended torque settings.

3.05 CLEANING

- A. Clean dirt and debris from switch enclosures and components according to manufacturer's instructions.
- B. Repair scratched or marred exterior surfaces to match original factory finish.

END OF SECTION