

STATE OF DELAWARE
DELAWARE ARMY NATIONAL GUARD
DEARNG CONTRACT NO. 100097

SPECIFICATIONS
FOR
PHYSICAL FITNESS CENTER

AT
BETHANY BEACH TRAINING SITE
163 SCANNEL BLVD
BETHANY BEACH, DE 19930

PREPARED
BY

STUDIO JAED ARCHITECTS & ENGINEERS
2500 WRANGLE HILL ROAD
BEAR, DE 19701
STUDIO JAED PROJECT # 20048

ISSUED FOR
BIDDING / CONSTRUCTION
JULY 23, 2021

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

STATE OF DELAWARE
DELAWARE ARMY NATIONAL GUARD
DEARNG CONTRACT NO. 100097

SPECIFICATIONS
FOR
PHYSICAL FITNESS CENTER

AT
BETHANY BEACH TRAINING SITE
163 SCANNEL BLVD
BETHANY BEACH, DE 19930

PREPARED
BY

STUDIO JAED ARCHITECTS & ENGINEERS
2500 WRANGLE HILL ROAD
BEAR, DE 19701
STUDIO JAED PROJECT # 20048

ISSUED FOR
BIDDING
JULY 23, 2021

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SEALS PAGE

ARCHITECT/PROJECT MANAGER:

PHILIP R. CONTE, AIA, NCARB
DE LICENSE NO. S5-0006959
PRINCIPAL
STUDIO JAED ARCHITECTS & ENGINEERS
2500 WRANGLE HILL ROAD, SUITE 110
BEAR, DE 19701
(302) 832-1652
RESPONSIBLE FOR DIV. 00 THROUGH DIV. 49

STRUCTURAL ENGINEER:

FRANK M. YOUNG, PE
DEL LICENSE NO. 13317
PRINCIPAL
BAKER, INGRAM & ASSOCIATES
1050 SOUTH STATE STREET
DOVER, DE 19901
302-734-7400
RESPONSIBLE FOR DIV. 03

MECHANICAL ENGINEER:

BRIAN ZIGMOND, P.E., C.E.M.
DE LICENSE NO. 12905
PRINCIPAL
STUDIO JAED ARCHITECTS & ENGINEERS
2500 WRANGLE HILL ROAD, SUITE 110
BEAR, DE 19701
(302) 832-1652
RESPONSIBLE FOR DIV. 23

ELECTRICAL ENGINEER:

PARAG H. PATEL, P.E.
DE LICENSE NO. 10552
ELECTRICAL ENGINEER
STUDIO JAED ARCHITECTS & ENGINEERS
2500 WRANGLE HILL ROAD, SUITE 110
BEAR, DE 19701
(302) 832-1652
RESPONSIBLE FOR DIV. 26 AND DIV. 28.

CIVIL ENGINEER:

LISA M. DONLON, P.E.
DEL LICENSE NO. 9589
PRINCIPAL
VANDEMARK & LYNCH, INC.
4305 MILLER ROAD
WILMINGTON, DE 19802
(302) 764-7635 X121
RESPONSIBLE FOR DIV. 31 THROUGH DIV. 35

END OF SECTION

NOT FOR BIDDING

**SECTION 00 01 10
TABLE OF CONTENTS**

A. Specifications for this project are arranged in accordance with the Construction Specification Institute numbering system and format. Section numbering is discontinuous and all numbers not appearing in the Table of Contents are not used for this Project.

B. DOCUMENTS BOUND HEREWITH

DIVISION 00 – PROCUREMENT AND CONTRACTING REQUIREMENTS

INTRODUCTORY INFORMATION

00 01 01 – PROJECT TITLE PAGE

00 01 07 – SEALS PAGE

00 01 10 – TABLE OF CONTENTS

00 01 15 – LIST OF DRAWING SHEETS

PROCUREMENT REQUIREMENTS

00 11 16 – INVITATION TO BID

00 21 13 – INSTRUCTIONS TO BIDDERS

00 31 00 – AVAILABLE PROJECT INFORMATION

00 41 13 – BID FORM

00 43 13 – BID BOND

CONTRACTING REQUIREMENTS

00 52 13 – STANDARD FORM OF AGREEMENT BETWEEN OWNER AND CONTRACTOR

SAMPLE DOCUMENT AIA A101-2017

SAMPLE DOCUMENT AIA A101-2017 – EXHIBIT A – INSURANCE & BONDS

00 54 13 – SUPPLEMENT TO AGREEMENT BETWEEN OWNER AND CONTRACTOR

00 54 14 – SUPPLEMENT TO A101-2017 – EXHIBIT A – INSURANCE & BONDS

00 61 13.13 – PERFORMANCE BOND

00 61 13.16 – PAYMENT BOND

00 62 76 – APPLICATION AND CERTIFICATE FOR PAYMENT

SAMPLE DOCUMENTS AIA G702 & G703

00 65 01 – CLOSEOUT DOCUMENTS CHECKLIST

00 72 13 – GENERAL CONDITIONS TO THE CONTRACT

SAMPLE DOCUMENT AIA A201

00 73 13 – SUPPLEMENTARY GENERAL CONDITIONS TO THE CONTRACT

00 73 46 – WAGE RATE DETERMINATION SCHEDULE

00 81 13 – GENERAL REQUIREMENTS

00 81 13.5 – FEDERAL REGULATIONS – ARTICLE VIII

00 81 14 – DRUG TESTING FORMS

00 81 15 – AFFIDAVIT OF CRAFT TRAINING COMPLIANCE

DIVISION 01 – GENERAL REQUIREMENTS

01 10 00 – SUMMARY

01 20 00 – PRICE AND PAYMENT PROCEDURES

01 23 00 – ALTERNATES

01 25 00 – SUBSTITUTION PROCEDURES

01 30 00 – ADMINISTRATIVE REQUIREMENTS

01 31 00 – PROJECT MANAGEMENT AND COORDINATION

01 32 00 – CONSTRUCTION PROGRESS

01 33 00 – SUBMITTAL PROCEDURES

01 40 00 – QUALITY REQUIREMENTS

01 42 16 - DEFINITIONS

01 50 00 – TEMPORARY FACILITIES AND CONTROLS

01 52 13 – FIELD OFFICES AND SHEDS

01 60 00 – PRODUCT REQUIREMENTS

01 61 16 – VOLATILE ORGANIC COMPOUND (VOC) CONTENT RESTRICTIONS

01 70 00 – EXECUTION AND CLOSEOUT REQUIREMENTS

01 74 19 – CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL

01 78 00 – CLOSEOUT SUBMITTALS

01 79 00 – DEMONSTRATION AND TRAINING

01 91 13 – GENERAL COMMISSIONING REQUIREMENTS

DIVISION 02 – EXISTING CONDITIONS

02 41 00 – DEMOLITION

DIVISION 03 – CONCRETE

03 30 00 - CAST-IN-PLACE CONCRETE

DIVISION 04 – MASONRY

04 05 11 – MASONRY MORTARING AND GROUTING

04 20 00 – UNIT MASONRY

04 72 00 – CAST STONE MASONRY

DIVISION 05 -- METALS

05 12 00 – STRUCTURAL STEEL

05 21 00 – STEEL JOIST FRAMING

05 31 00 – STEEL DECKING

05 40 00 – COLD-FORMED METAL FRAMING

05 50 00 – METAL FABRICATIONS

05 52 13 – PIPE AND TUBE RAILINGS

DIVISION 06 -- WOOD, PLASTICS, AND COMPOSITES

06 10 00 – ROUGH CARPENTRY

06 65 10 – SOLID SURFACE FABRICATIONS

DIVISION 07 -- THERMAL AND MOISTURE PROTECTION

07 11 13 – BITUMINOUS DAMPPROOFING

07 21 00 – THERMAL INSULATION

07 25 00 – WEATHER BARRIERS

07 31 13 – ASPHALT SHINGLES

07 41 13 – METAL ROOF PANELS

07 42 13 – METAL WALL PANELS

07 53 00 – ELASTOMERIC MEMBRANE ROOFING

07 62 00 – SHEET METAL FLASHING AND TRIM

07 71 00 – ROOF SPECIALTIES

07 72 00 – ROOF ACCESSORIES

07 84 00 – FIRESTOPPING

07 90 05 – JOINT SEALERS

DIVISION 08 -- OPENINGS

08 11 13 - HOLLOW METAL DOORS AND FRAMES

08 31 00 - ACCESS DOORS AND PANELS

08 43 13 - ALUMINUM-FRAMED STOREFRONTS

08 71 00 - DOOR HARDWARE

08 80 00 - GLAZING

DIVISION 09 – FINISHES

09 05 61 – COMMON WORK RESULTS FOR FLOORING PREPARATION

09 21 16 – GYPSUM BOARD ASSEMBLIES

09 30 00 – TILING

09 51 00 – ACOUSTICAL CEILINGS

09 65 00 – RESILIENT FLOORING

09 65 66 – RESILIENT ATHLETIC FLOORING

09 90 00 – PAINTS AND COATINGS

DIVISION 10 – SPECIALTIES

10 14 00 – SIGNAGE

10 28 00 – TOILET, BATH, AND LAUNDRY ACCESSORIES

10 44 00 – FIRE PROTECTION SPECIALTIES

10 73 16.13 – METAL CANOPIES

DIVISION 12 - FURNISHINGS

12 24 13 – ROLLER SHADES

12 48 13 – ENTRANCE FLOOR MATS AND FRAMES

DIVISION 22 – PLUMBING

22 05 16 – EXPANSION FITTINGS AND LOOPS FOR PLUMBING PIPING

22 05 19 – METERS AND GAGES FOR PLUMBING PIPING

22 05 48 – VIBRATION AND SEISMIC CONTROLS FOR PLUMBING PIPING AND EQUIPMENT

22 05 53 – IDENTIFICATION FOR PLUMBING PIPING AND EQUIPMENT

22 07 16 – PLUMBING EQUIPMENT INSULATION

22 07 19 - PLUMBING PIPING INSULATION

22 10 05 – PLUMBING PIPING

22 10 06 – PLUMBING PIPING SPECIALTIES

22 30 00 – PLUMBING EQUIPMENT

22 40 00 – PLUMBING FIXTURES

DIVISION 23 -- HEATING, VENTILATING, AND AIR-CONDITIONING (HVAC)

23 05 13 – MOTOR REQUIREMENTS FOR HVAC AND PLUMBING EQUIP

23 05 16 – EXPANSION FITTINGS AND LOOPS FOR HVAC PIPING

23 05 48 – VIBRATION AND SEISMIC CON. FOR EQUIPMENT
23 05 53 – IDENTIFICATION FOR HVAC PIPING AND EQUIPMENT
23 05 93 – TESTING, ADJUSTING, AND BALANCING FOR HVAC
23 07 13 – DUCT INSULATION
23 07 16 – HVAC EQUIPMENT INSULATION
23 08 00 – COMMISSIONING OF HVAC
23 09 13 – INSTRUMENTATION AND CONTROL DEVICES FOR HVAC
23 09 23 – DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC
23 09 93 – SEQUENCE OF OPERATIONS FOR HVAC CONTROLS
23 11 26 – FACILITY LIQUIFIED-PETROLEUM GAS PIPING AND TANKS
23 31 00 – HVAC DUCTS AND CASINGS
23 33 00 – AIR DUCT ACCESSORIES
23 34 23 – HVAC POWER VENTILATORS
23 34 39 – HIGH-VOLUME, LOW-SPEED PROPELLER FANS
23 37 00 – AIR OUTLETS AND INLETS
23 74 13 – PACKAGED OUTDOOR CENTRAL-STATION AIR-HANDLING UNITS
23 81 27 – SMALL SPLIT-SYSTEM HEATING AND COOLING

DIVISION 26 -- ELECTRICAL

26 05 13 – MEDIUM-VOLTAGE CABLES
26 05 19 – LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES
26 05 26 – GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS
26 05 29 – HANGERS AND SUPPORTS FOR ELECTRICAL SYSTEMS
26 05 34 – CONDUIT
26 05 37 – BOXES
26 05 53 – IDENTIFICATION FOR ELECTRICAL SYSTEMS
26 05 73 – OVERCURRENT PROTECTIVE DEVICE COORDINATION STUDY
26 09 19 – ENCLOSED CONTACTORS
26 09 23 – LIGHTING CONTROL DEVICES
26 12 00 – MEDIUM-VOLTAGE TRANSFORMERS

26 24 16 – PANELBOARDS

26 27 01 – ELECTRICAL SERVICE ENTRANCE

26 27 17 – EQUIPMENT WIRING

26 27 26 – WIRING DEVICES

26 28 13 – FUSES

26 28 17 – ENCLOSED CIRCUIT BREAKERS

26 28 18 – ENCLOSED SWITCHES

26 29 13 – ENCLOSED CONTROLLERS

26 29 23 – VARIABLE-FREQUENCY MOTOR CONTROLLERS

26 43 00 – SURGE PROTECTIVE DEVICES

26 51 00 – INTERIOR LIGHTING

26 56 00 – EXTERIOR LIGHTING

DIVISION 27 – COMMUNICATIONS

27 10 05 – STRUCTURED CABLING FOR VOICE AND DATA - INSIDE-PLANT

DIVISION 28 – ELECTRIC SAFETY AND SECURITY

28 13 00 – ACCESS CONTROL

28 31 00 – FIRE DETECTION AND ALARM

DIVISION 31 -- EARTHWORK

31 22 00 – GRADING

31 23 16 - EXCAVATION

31 23 16.13 – TRENCHING

31 23 19 – DEWATERING

31 23 23 – FILL

31 31 16 – TERMITE CONTROL

DIVISION 33 - UTILITIES

33 71 19 – ELECTRICAL UNDERGROUND DUCTS, DUCTBANKS, AND MANHOLES

END OF SECTION

LIST OF DRAWING SHEETS

GENERAL INFORMATION

G-000	COVER SHEET
G-001	SYMBOLS, ABBREVIATIONS, AND CODE COMPLIANCE
G-002	LIFE SAFETY PLAN
G-003	TYPICAL MOUNTING HEIGHTS

CIVIL

C-100	SITE CONSTRUCTION PLAN COVER SHEET
C-110	SITE UTILITY RELOCATION AND DEMOLITION PLAN
C-111	SITE CONSTRUCTION SWM PLAN & DETAILS
C-112	PRE CONSTRUCTION SWM PLAN & DETAILS
C-120	SITE GRADING PLAN
C-121	SITE GRADING PLAN & DETAILS
C-130	SITE UTILITY PLAN
C-140	SITE CONSTRUCTION FIRE MARSHALL PLAN
C-150	STANDARD PLAN
C-160	SITE PLAN

STRUCTURAL

S-100	STRUCTURAL NOTES
S-101	FOUNDATION PLAN
S-102	WIND BEAM & ROOF FRAMING PLAN
S-201	TYPICAL SECTIONS AND DETAILS
S-202	TYPICAL SECTIONS AND DETAILS
S-301	TYPICAL SECTIONS AND DETAILS

ARCHITECTURAL

A-101	NEW FLOOR PLAN
A-102	ROOF PLAN
A-120	ENLARGED STAIR AND RAMP PLANS AND DETAILS
A-121	ROOF DETAILS
A-130	TOILET ROOM PLANS AND ELEVATIONS
A-201	REFLECTED CEILING PLAN
A-301	BUILDING ELEVATIONS
A-401	BUILDING SECTIONS
A-410	WALL SECTIONS
A-411	WALL SECTIONS
A-412	WALL SECTIONS
A-500	INTERIOR ELEVATIONS
A-501	INTERIOR ELEVATIONS
A-601	PARTITION TYPES, DOOR TYPES, SCHEDULE, AND DETAILS
A-602	WINDOW TYPES AND DETAILS
A-603	PLAN DETAILS
A-901	FINISH FLOOR PLAN
A-902	EQUIPMENT PLAN

MECHANICAL

M-000	MECHANICAL COVER SHEET
M-101	MECHANICAL PLANS

ELECTRICAL

E-000	ELECTRICAL COVER SHEET
ED101	ELECTRICAL DEMOLITION PLAN
E-101	ELECTRICAL LIGHTING AND POWER PLANS
E-102	ELECTRICAL ROOF AND ENLARGED POWER PLANS
E-103	ELECTRICAL SITE PLAN
E-500	ELECTRICAL DETAILS
E-501	ELECTRICAL DETAILS
E-600	ELECTRICAL SINGLE LINE DIAGRAM
E-601	ELECTRICAL PANEL SCHEDULES

PLUMBING

P-000	PLUMBING COVER SHEET
P-101	PLUMBING PLANS
P-600	PLUMBING DETAILS, SECTION AND ELEVATIONS

TELECOMMUNICATIONS

T-000	TELECOMMUNICATIONS COVER SHEET
TD101	TELECOMMUNICATIONS DEMOLITION PLAN
T-101	TELECOMMUNICATIONS PLAN
T-500	TELECOMMUNICATIONS DETAILS

END OF SECTION

INVITATION TO BID

Sealed bids for **DEARNG 20015-BBTSPFCCON / NGB 100097 – Bethany Beach Training Site – Physical Fitness Center**, will be received by the Delaware Army National Guard, will be received by the Delaware Army National Guard at the Security Officers desk in the Main Lobby of the Armed Forces Reserve Center, 1 Vavala Way, New Castle, Delaware, 19720 until **2:00 PM local time on Wednesday, September 15, 2021**, at which time they will be publicly opened and read aloud in the Multi-Purpose Room.

Bidders are required to show identification at the Guard Booth when entering the site and must sign in at the Security Officers desk once inside. Please allow sufficient time to comply with these requirements. No exceptions. Bidder bears the risk of late delivery. Any bids received after the stated time will be returned unopened.

The project involves the following at Bethany Beach Training Site – Physical Fitness Center located in Bethany Beach, DE: new construction of a 6,808 SF building to support the Delaware Army National Guard fitness test requirements. There will be demolition of the existing fitness center, with regrading and excavation to prepare the site for the new building. This building will be a steel framed building on concrete foundations, with masonry infill walls. There is a single-slope standing seam metal roof, south facing, with a separate flat roof that houses the rooftop unit. There will be site improvements including sidewalks, storm water management features, bollards and chains, and parking. There will also be HVAC, electrical, and plumbing, telecommunications trades involved.

A **MANDATORY** Pre-Bid Meeting will be held on **Thursday, August 26, 2021, at 11:00 AM** at the Bethany Beach Training Site, 163 Scannell Blvd, Bethany Beach, DE 19930 for the purpose of establishing the listing of subcontractors and to answer questions. Representatives of each party to any Joint Venture must attend this meeting. **ATTENDANCE OF THIS MEETING IS A PREREQUISITE FOR BIDDING ON THIS CONTRACT.**

Sealed bids shall be addressed to the Delaware Army National Guard, Biden National Guard/Reserve Center, 1 Vavala Way, New Castle, Delaware, 19720, **ATTN: Brittney M. Poore**. The outer envelope should clearly indicate: **DEARNG 20015-BBTSPFCCON / NGB 100097 – Bethany Beach Training Site – Physical Fitness Center - SEALED BID - DO NOT OPEN.**

Contract documents may be obtained at Reprographics Center, Inc., 298 Churchmans Road, New Castle, DE 19720, phone (302) 328-5019, upon receipt of \$150.00 per physical set or \$50.00 per electronic set, non-refundable. Checks are to be made payable to “StudioJAED”.

Minority Business Enterprises (MBE), Disadvantaged Business Enterprises (DBE), Women-Owned Business Enterprises (WBE) and Veteran-Owned Business Enterprises (VBE) will be afforded full opportunity to submit bids on this contract and will not be subject to discrimination on the basis of race, color, national origin or sex in consideration of this award.

Each bid must be accompanied by a bid security equivalent to ten percent of the bid amount and all additive alternates. The successful bidder must post a performance bond and payment bond in a sum equal to 100 percent of the contract price upon execution of the contract. The Owner reserves the right to reject any or all bids and to waive any informalities therein. The Owner may extend the time and place for the opening of the bids from that described in the advertisement, with not less than two calendar days' notice by certified delivery, facsimile machine or other electronic means to those bidders receiving plans.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

INSTRUCTIONS TO BIDDERS

TABLE OF ARTICLES

1. DEFINITIONS
2. BIDDER'S REPRESENTATION
3. BIDDING DOCUMENTS
4. BIDDING PROCEDURES
5. CONSIDERATION OF BIDS
6. POST-BID INFORMATION
7. PERFORMANCE BOND AND PAYMENT BOND
8. FORM OF AGREEMENT BETWEEN OWNER AND CONTRACTOR

ARTICLE 1: GENERAL

1.1 DEFINITIONS

1.1.1 Whenever the following terms are used, their intent and meaning shall be interpreted as follows:

1.2 STATE: The State of Delaware.

1.3 AGENCY: Contracting State Agency as noted on cover sheet.

1.4 DESIGNATED OFFICIAL: The agent authorized to act for the Agency.

1.5 BIDDING DOCUMENTS: Bidding Documents include the Bidding Requirements and the proposed Contract Documents. The Bidding Requirements consist of the Advertisement for Bid, Invitation to Bid, Instructions to Bidders, Supplementary Instructions to Bidders (if any), General Conditions, Supplementary General Conditions, General Requirements, Special Provisions (if any), the Bid Form (including the Non-collusion Statement), and other sample bidding and contract forms. The proposed Contract Documents consist of the form of Agreement between the Owner and Contractor, as well as the Drawings, Specifications (Project Manual) and all Addenda issued prior to execution of the Contract.

1.6 CONTRACT DOCUMENTS: The Contract Documents consist of the, Instructions to Bidders, Supplementary Instructions to Bidders (if any), General Conditions, Supplementary General Conditions, General Requirements, Special Provisions (if any), the form of agreement between the Owner and the Contractor, Drawings (if any), Specifications (Project Manual), and all addenda.

1.7 AGREEMENT: The form of the Agreement shall be AIA Document A101, Standard Form of Agreement between Owner and Contractor where the basis of payment is a STIPULATED SUM. In the case of conflict between the instructions contained therein and the General Requirements herein, these General Requirements shall prevail.

1.8 GENERAL REQUIREMENTS (or CONDITIONS): General Requirements (or conditions) are instructions pertaining to the Bidding Documents and to contracts in general. They contain, in summary, requirements of laws of the State; policies of the Agency and instructions to bidders.

1.9 SPECIAL PROVISIONS: Special Provisions are specific conditions or requirements peculiar to the bidding documents and to the contract under consideration and are supplemental to the General Requirements. Should the Special Provisions conflict with the General Requirements, the Special Provisions shall prevail.

1.10 ADDENDA: Written or graphic instruments issued by the Owner/Architect prior to the execution of the contract which modify or interpret the Bidding Documents by additions, deletions, clarifications or corrections.

1.11 BIDDER OR VENDOR: A person or entity who formally submits a Bid for the material or Work contemplated, acting directly or through a duly authorized representative who meets the requirements set forth in the Bidding Documents.

1.12 SUB-BIDDER: A person or entity who submits a Bid to a Bidder for materials or labor, or both for a portion of the Work.

- 1.13 BID: A complete and properly executed proposal to do the Work for the sums stipulated therein, submitted in accordance with the Bidding Documents.
- 1.14 BASE BID: The sum stated in the Bid for which the Bidder offers to perform the Work described in the Bidding Documents as the base, to which Work may be added or from which Work may be deleted for sums stated in Alternate Bids (if any are required to be stated in the bid).
- 1.15 ALTERNATE BID (or ALTERNATE): An amount stated in the Bid, where applicable, to be added to or deducted from the amount of the Base Bid if the corresponding change in the Work, as described in the Bidding Documents is accepted.
- 1.16 UNIT PRICE: An amount stated in the Bid, where applicable, as a price per unit of measurement for materials, equipment or services or a portion of the Work as described in the Bidding Documents.
- 1.17 SURETY: The corporate body which is bound with and for the Contract, or which is liable, and which engages to be responsible for the Contractor's payments of all debts pertaining to and for his acceptable performance of the Work for which he has contracted.
- 1.18 BIDDER'S DEPOSIT: The security designated in the Bid to be furnished by the Bidder as a guaranty of good faith to enter into a contract with the Agency if the Work to be performed or the material or equipment to be furnished is awarded to him.
- 1.19 CONTRACT: The written agreement covering the furnishing and delivery of material or work to be performed.
- 1.20 CONTRACTOR: Any individual, firm or corporation with whom a contract is made by the Agency.
- 1.21 SUBCONTRACTOR: An individual, partnership or corporation which has a direct contract with a contractor to furnish labor and materials at the job site, or to perform construction labor and furnish material in connection with such labor at the job site.
- 1.22 CONTRACT BOND: The approved form of security furnished by the contractor and his surety as a guaranty of good faith on the part of the contractor to execute the work in accordance with the terms of the contract.

ARTICLE 2: BIDDER'S REPRESENTATIONS

- 2.1 PRE-BID MEETING
- 2.1.1 A pre-bid meeting for this project will be held at the time and place designated. Attendance at this meeting is a pre-requisite for submitting a Bid, unless this requirement is specifically waived elsewhere in the Bid Documents.
- 2.2 By submitting a Bid, the Bidder represents that:
- 2.2.1 The Bidder has read and understands the Bidding Documents and that the Bid is made in accordance therewith.
- 2.2.2 The Bidder has visited the site, become familiar with existing conditions under which the Work is to be performed, and has correlated the Bidder's his personal observations with the requirements of the proposed Contract Documents.

2.2.3 The Bid is based upon the materials, equipment, and systems required by the Bidding Documents without exception.

2.3 JOINT VENTURE REQUIREMENTS

2.3.1 For Public Works Contracts, each Joint Venturer shall be qualified and capable to complete the Work with their own forces.

2.3.2 Included with the Bid submission, and as a requirement to bid, a copy of the executed Joint Venture Agreement shall be submitted and signed by all Joint Venturers involved.

2.3.3 All required Bid Bonds, Performance Bonds, Material and Labor Payment Bonds must be executed by both Joint Venturers and be placed in both of their names.

2.3.4 All required insurance certificates shall name both Joint Venturers.

2.3.5 Both Joint Venturers shall sign the Bid Form.

2.3.6 Both Joint Venturers shall include their Federal E.I. Number with the Bid.

2.3.7 In the event of a mandatory Pre-bid Meeting, each Joint Venturer shall have a representative in attendance.

2.3.8 Due to exceptional circumstances and for good cause shown, one or more of these provisions may be waived at the discretion of the State.

2.4 ASSIGNMENT OF ANTITRUST CLAIMS

2.4.1 As consideration for the award and execution by the Owner of this contract, the Contractor hereby grants, conveys, sells, assigns and transfers to the State of Delaware all of its right, title and interests in and to all known or unknown causes of action it presently has or may now or hereafter acquire under the antitrust laws of the United States and the State of Delaware, relating to the particular goods or services purchased or acquired by the Owner pursuant to this contract.

ARTICLE 3: BIDDING DOCUMENTS

3.1 COPIES OF BID DOCUMENTS

3.1.1 Bidders may obtain complete sets of the Bidding Documents from the Architectural/Engineering firm designated in the Advertisement or Invitation to Bid in the number and for the deposit sum, if any, stated therein.

3.1.2 Bidders shall use complete sets of Bidding Documents for preparation of Bids. The issuing Agency nor the Architect assumes no responsibility for errors or misinterpretations resulting from the use of incomplete sets of Bidding Documents.

3.1.3 Any errors, inconsistencies or omissions discovered shall be reported to the Architect immediately.

3.1.4 The Agency and Architect may make copies of the Bidding Documents available on the above terms for the purpose of obtaining Bids on the Work. No license or grant of use is conferred by issuance of copies of the Bidding Documents.

3.2 INTERPRETATION OR CORRECTION OF BIDDING DOCUMENTS

- 3.2.1 The Bidder shall carefully study and compare the Bidding Documents with each other, and with other work being bid concurrently or presently under construction to the extent that it relates to the Work for which the Bid is submitted, shall examine the site and local conditions, and shall report any errors, inconsistencies, or ambiguities discovered to the Architect.
- 3.2.2 Bidders or Sub-bidders requiring clarification or interpretation of the Bidding Documents shall make a written request to the Architect at least seven days prior to the date for receipt of Bids. Interpretations, corrections and changes to the Bidding Documents will be made by written Addendum. Interpretations, corrections, or changes to the Bidding Documents made in any other manner shall not be binding.
- 3.2.3 The apparent silence of the specifications as to any detail, or the apparent omission from it of detailed description concerning any point, shall be regarded as meaning that only the best commercial practice is to prevail and only material and workmanship of the first quality are to be used. Proof of specification compliance will be the responsibility of the Bidder.
- 3.2.4 Unless otherwise provided in the Contract Documents, the Contractor shall provide and pay for all permits, labor, materials, equipment, tools, construction equipment and machinery, water, heat, utilities, transportation, and other facilities and services necessary for the proper execution and completion of the Work.
- 3.2.5 The Owner will bear the costs for all impact and user fees associated with the project.

3.3 SUBSTITUTIONS

- 3.3.1 The materials, products and equipment described in the Bidding Documents establish a standard of quality, required function, dimension, and appearance to be met by any proposed substitution. The specification of a particular manufacturer or model number is not intended to be proprietary in any way. Substitutions of products for those named will be considered, providing that the Vendor certifies that the function, quality, and performance characteristics of the material offered is equal or superior to that specified. It shall be the Bidder's responsibility to assure that the proposed substitution will not affect the intent of the design, and to make any installation modifications required to accommodate the substitution.
- 3.3.2 Requests for substitutions shall be made in writing to the Architect at least ten days prior to the date of the Bid Opening. Such requests shall include a complete description of the proposed substitution, drawings, performance and test data, explanation of required installation modifications due the substitution, and any other information necessary for an evaluation. The burden of proof of the merit of the proposed substitution is upon the proposer. The Architect's decision of approval or disapproval shall be final. The Architect is to notify Owner prior to any approvals.
- 3.3.3 If the Architect approves a substitution prior to the receipt of Bids, such approval shall be set forth in an Addendum. Approvals made in any other manner shall not be binding.
- 3.3.4 The Architect shall have no obligation to consider any substitutions after the Contract award.

3.4 ADDENDA

- 3.4.1 Addenda will be mailed or delivered to all who are known by the Architect to have received a complete set of the Bidding Documents.

- 3.4.2 Copies of Addenda will be made available for inspection wherever Bidding Documents are on file for that purpose.
- 3.4.3 No Addenda will be issued later than 2 calendar days prior to the date for receipt of Bids except an Addendum withdrawing the request for Bids or one which extends the time or changes the location for the opening of bids.
- 3.4.4 Each bidder shall ascertain prior to submitting his Bid that they have received all Addenda issued, and shall acknowledge their receipt in their Bid in the appropriate space. Not acknowledging an issued Addenda could be grounds for determining a bid to be non-responsive.

ARTICLE 4: BIDDING PROCEDURES

4.1 PREPARATION OF BIDS

- 4.1.1 Submit the bids on the Bid Forms included with the Bidding Documents.
- 4.1.2 Submit the original Bid Form for each bid. Bid Forms may be removed from the project manual for this purpose.
- 4.1.3 Execute all blanks on the Bid Form in a non-erasable medium (typewriter or manually in ink).
- 4.1.4 Where so indicated by the makeup on the Bid Form, express sums in both words and figures, in case of discrepancy between the two, the written amount shall govern.
- 4.1.5 Interlineations, alterations or erasures must be initialed by the signer of the Bid.
- 4.1.6 BID ALL REQUESTED ALTERNATES AND UNIT PRICES, IF ANY. If there is no change in the Base Bid for an Alternate, enter "No Change". The Contractor is responsible for verifying that they have received all addenda issued during the bidding period. Work required by Addenda shall automatically become part of the Contract.
- 4.1.7 Make no additional stipulations on the Bid Form and do not qualify the Bid in any other manner.
- 4.1.8 Each copy of the Bid shall include the legal name of the Bidder and a statement whether the Bidder is a sole proprietor, a partnership, a corporation, or any legal entity, and each copy shall be signed by the person or persons legally authorized to bind the Bidder to a contract. A Bid by a corporation shall further give the state of incorporation and have the corporate seal affixed. A Bid submitted by an agent shall have a current Power of Attorney attached, certifying agent's authority to bind the Bidder.
- 4.1.9 Bidder shall complete the Non-Collusion Statement form included with the Bid Forms and include it with their Bid.
- 4.1.10 In the construction of all Public Works projects for the State of Delaware or any agency thereof, preference in employment of laborers, workers or mechanics shall be given to bona fide legal citizens of the State who have established citizenship by residence of at least 90 days in the State.

- 4.1.11 Each bidder shall include a signed Affidavit for the Bidder certifying compliance with OMB Regulation 4104 - "Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on "Large Public Works Projects." "Large Public Works" is based upon the current threshold required for bidding Public Works as set by the Purchasing and Contracting Advisory Council.

4.2 BID SECURITY

- 4.2.1 All bids shall be accompanied by a deposit of either a good and sufficient bond to the agency for the benefit of the agency, with corporate surety authorized to do business in this State, the form of the bond and the surety to be approved by the agency, or a security of the bidder assigned to the agency, for a sum equal to at least 10% of the bid plus all add alternates, or in lieu of the bid bond a security deposit in the form of a certified check, bank treasurer's check, cashier's check, money order, or other prior approved secured deposit assigned to the State. The bid bond need not be for a specific sum, but may be stated to be for a sum equal to 10% of the bid plus all add alternates to which it relates and not to exceed a certain stated sum, if said sum is equal to at least 10% of the bid. The Bid Bond form used shall be the standard OMB form (attached).

- 4.2.2 The Agency has the right to retain the bid security of Bidders to whom an award is being considered until either a formal contract has been executed and bonds have been furnished or the specified time has elapsed so the Bids may be withdrawn or all Bids have been rejected.

- 4.2.3 In the event of any successful Bidder refusing or neglecting to execute a formal contract and bond within 20 days of the awarding of the contract, the bid bond or security deposited by the successful bidder shall be forfeited.

4.3 SUBCONTRACTOR LIST

- 4.3.1 In accordance with Title 29, Chapter 69, Section 6962(d)(10)b of the Delaware Code, each Bidder shall submit with their Bid a completed List of Sub-Contractors included with the Bid Form. **NAME ONLY ONE SUBCONTRACTOR FOR EACH TRADE.** The bidder must list **in each category** the full name and address (City & State) of the sub-contractor that the Bidder will be using to perform the work and provide material for that subcontractor category. Should the Bidder's listed subcontractor intend to provide any of their subcontractor category of work through a third-tier contractor, the Bidder shall list that third-tier contractor's full name and address (City & State). **If the Bidder intends to perform any category of work itself, it must list its full name and address.** For clarification, if the Bidder intends to perform the work themselves, the Bidder **may not** insert "not applicable", "N/A", "self" or anything other than its own full name and address (City & State). To do so shall cause the bid to be rejected. In addition, the failure to produce a completed subcontractor list with the bid submittal shall cause the bid to be rejected. If you have more than three (3) third-tier contractors to report in any subcontractor category, print out additional page(s) containing the appropriate category, complete the rest of your list of third-tier contractors for that category, notate the addition in parentheses as (CONTINUATION) next to the subcontractor category and an asterisk (*) next to any additional third-tier contractors, and submit it with your bid.
- 4.3.2 It is the responsibility of the Contractor to ensure that their Subcontractors are in compliance with the provisions of this law. Also, if a Contractor elects to list themselves as a Subcontractor for any category, they must specifically name themselves on the Bid Form and be able to document their capability to act as Subcontractor in that category in accordance with this law.

4.4 AFFIDAVIT OF CONTRACTOR QUALIFICATIONS

- 4.4.1 In accordance with Title 29, Chapter 69, Section 6962(d)(10)b.3 of the Delaware Code, each Bidder shall submit with their Bid the Affidavit of Contractor Qualifications certifying that the Bidder will abide by the contractor's qualifications outlined in the construction bid specifications for the duration of the contract term. After a contract has been awarded the successful bidder shall not substitute another subcontractor whose name was submitted on the Subcontractor Form except for the reasons in the statute and not without written consent from the awarding agency. Failure to utilize the subcontractors on the list will subject the successful bidder to penalties as outlined in the General Requirements Section 5.2 of the contract.

4.5 AFFIDAVIT OF CRAFT TRAINING COMPLIANCE

- 4.5.1 In accordance with Title 29, Chapter 69, Section 6962(c)(13) of the Delaware Code, contractors and subcontractors must provide craft training for journeyman and apprentice levels if all of the following apply:

- A. A project meets the prevailing wage requirement under Title 29, Chapter 69, Section 6960 of the Delaware Code.
- B. The contractor employs 10 or more total employees.
- C. The project is not a federal highway project

Failure to provide required craft training on the project may subject the successful contractor and/or subcontractor(s) to penalties as outlined in Title 29, Chapter 69, Section 6962(c)(13) of the Delaware Code.

Bidders shall submit the Affidavit of Craft Training Compliance prior to contract execution.

4.6 EQUALITY OF EMPLOYMENT OPPORTUNITY ON PUBLIC WORKS

- 4.6.1 During the performance of this contract, the contractor agrees as follows:

- A. The Contractor will not discriminate against any employee or applicant for employment because of race, creed, sex, color, sexual orientation, gender identity or national origin. The Contractor will take affirmative action to ensure the applicants are employed, and that employees are treated during employment, without regard to their race, creed, sex, color, sexual orientation, gender identity or national origin. Such action shall include, but not be limited to, the following: Employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship. The Contractor agrees to post in conspicuous places available to employees and applicants for employment notices to be provided by the contracting agency setting forth this nondiscrimination clause.
- B. The Contractor will, in all solicitations or advertisements for employees placed by or on behalf of the Contractor, state that all qualified applicants will receive consideration for employment without regard to race, creed, sex, color, sexual orientation, gender identity or national origin."

4.7 PREVAILING WAGE REQUIREMENT

4.7.1 Wage Provisions: For renovation and new construction projects whose costs exceed the thresholds contained in Delaware Code, Title 29, Section 6960, the minimum wage rates for various classes of laborers and mechanics shall be as determined by the Department of Labor, Division of Industrial Affairs of the State of Delaware.

4.7.2 The employer shall pay all mechanics and labors employed directly upon the site of work, unconditionally and not less often than once a week and without subsequent deduction or rebate on any account, the full amounts accrued at time of payment, computed at wage rates not less than those stated in the specifications, regardless of any contractual relationship which may be alleged to exist between the employer and such laborers and mechanics.

4.7.3 The scale of the wages to be paid shall be posted by the employer in a prominent and easily accessible place at the site of the work.

4.7.4 Every contract based upon these specifications shall contain a stipulation that sworn payroll information, as required by the Department of Labor, be furnished weekly. The Department of Labor shall keep and maintain the sworn payroll information for a period of 6 months from the last day of the work week covered by the payroll.

4.8 SUBMISSION OF BIDS

4.8.1 Enclose the Bid, the Bid Security, and any other documents required to be submitted with the Bid in a sealed opaque envelope. Address the envelope to the party receiving the Bids. Identify with the project name, project number, and the Bidder's name and address. If the Bid is sent by mail, enclose the sealed envelope in a separate mailing envelope with the notation "BID ENCLOSED" on the face thereof. The State is not responsible for the opening of bids prior to bid opening date and time that are not properly marked.

4.8.2 Deposit Bids at the designated location prior to the time and date for receipt of bids indicated in the Advertisement for Bids. Bids received after the time and date for receipt of bids will be marked "LATE BID" and returned.

4.8.3 Bidder assumes full responsibility for timely delivery at location designated for receipt of bids.

4.8.4 Oral, telephonic or telegraphic bids are invalid and will not receive consideration.

4.8.5 Withdrawn Bids may be resubmitted up to the date and time designated for the receipt of Bids, provided that they are then fully in compliance with these Instructions to Bidders.

4.9 MODIFICATION OR WITHDRAW OF BIDS

4.9.1 Prior to the closing date for receipt of Bids, a Bidder may withdraw a Bid by personal request and by showing proper identification to the Architect. A request for withdraw by letter or fax, if the Architect is notified in writing prior to receipt of fax, is acceptable. A fax directing a modification in the bid price will render the Bid informal, causing it to be ineligible for consideration of award. Telephone directives for modification of the bid price shall not be permitted and will have no bearing on the submitted proposal in any manner.

4.9.2 Bidders submitting Bids that are late shall be notified as soon as practicable and the bid shall be returned.

- 4.9.3 A Bid may not be modified, withdrawn or canceled by the Bidder during a thirty (30) day period following the time and date designated for the receipt and opening of Bids, and Bidder so agrees in submitting their Bid. Bids shall be binding for 30 days after the date of the Bid opening.

ARTICLE 5: CONSIDERATION OF BIDS

5.1 OPENING/REJECTION OF BIDS

- 5.1.1 Unless otherwise stated, Bids received on time will be publicly opened and will be read aloud. An abstract of the Bids will be made available to Bidders.
- 5.1.2 The Agency shall have the right to reject any and all Bids. A Bid not accompanied by a required Bid Security or by other data required by the Bidding Documents, or a Bid which is in any way incomplete or irregular is subject to rejection.
- 5.1.3 If the Bids are rejected, it will be done within thirty (30) calendar day of the Bid opening.

5.2 COMPARISON OF BIDS

- 5.2.1 After the Bids have been opened and read, the bid prices will be compared and the result of such comparisons will be made available to the public. Comparisons of the Bids may be based on the Base Bid plus desired Alternates. The Agency shall have the right to accept Alternates in any order or combination.
- 5.2.2 The Agency reserves the right to waive technicalities, to reject any or all Bids, or any portion thereof, to advertise for new Bids, to proceed to do the Work otherwise, or to abandon the Work, if in the judgment of the Agency or its agent(s), it is in the best interest of the State.
- 5.2.3 An increase or decrease in the quantity for any item is not sufficient grounds for an increase or decrease in the Unit Price.
- 5.2.4 The prices quoted are to be those for which the material will be furnished F.O.B. Job Site and include all charges that may be imposed during the period of the Contract.
- 5.2.5 No qualifying letter or statements in or attached to the Bid, or separate discounts will be considered in determining the low Bid except as may be otherwise herein noted. Cash or separate discounts should be computed and incorporated into Unit Bid Price(s).

5.3 DISQUALIFICATION OF BIDDERS

- 5.3.1 An agency shall determine that each Bidder on any Public Works Contract is responsible before awarding the Contract. Factors to be considered in determining the responsibility of a Bidder include:
- A. The Bidder's financial, physical, personnel or other resources including Subcontracts;
 - B. The Bidder's record of performance on past public or private construction projects, including, but not limited to, defaults and/or final adjudication or admission of violations of the Prevailing Wage Laws in Delaware or any other state;
 - C. The Bidder's written safety plan;
 - D. Whether the Bidder is qualified legally to contract with the State;

- E. Whether the Bidder supplied all necessary information concerning its responsibility; and,
 - F. Any other specific criteria for a particular procurement, which an agency may establish; provided however, that, the criteria be set forth in the Invitation to Bid and is otherwise in conformity with State and/or Federal law.
- 5.3.2 If an agency determines that a Bidder is nonresponsive and/or nonresponsible, the determination shall be in writing and set forth the basis for the determination. A copy of the determination shall be sent to the affected Bidder within five (5) working days of said determination.
- 5.3.3 In addition, any one or more of the following causes may be considered as sufficient for the disqualification of a Bidder and the rejection of their Bid or Bids.
 - 5.3.3.1 More than one Bid for the same Contract from an individual, firm or corporation under the same or different names.
 - 5.3.3.2 Evidence of collusion among Bidders.
 - 5.3.3.3 Unsatisfactory performance record as evidenced by past experience.
 - 5.3.3.4 If the Unit Prices are obviously unbalanced either in excess or below reasonable cost analysis values.
 - 5.3.3.5 If there are any unauthorized additions, interlineation, conditional or alternate bids or irregularities of any kind which may tend to make the Bid incomplete, indefinite or ambiguous as to its meaning.
 - 5.3.3.6 If the Bid is not accompanied by the required Bid Security and other data required by the Bidding Documents.
 - 5.3.3.7 If any exceptions or qualifications of the Bid are noted on the Bid Form.
- 5.4 ACCEPTANCE OF BID AND AWARD OF CONTRACT
 - 5.4.1 A formal Contract shall be executed with the successful Bidder within twenty (20) calendar days after the award of the Contract.
 - 5.4.2 Per Section 6962(d)(13) a., Title 29, Delaware Code, "The contracting agency shall award any public works contract within thirty (30) days of the bid opening to the lowest responsive and responsible Bidder, unless the Agency elects to award on the basis of best value, in which case the election to award on the basis of best value shall be stated in the Invitation To Bid."
 - 5.4.3 Each Bid on any Public Works Contract must be deemed responsive by the Agency to be considered for award. A responsive Bid shall conform in all material respects to the requirements and criteria set forth in the Contract Documents and specifications.
 - 5.4.4 The Agency shall have the right to accept Alternates in any order or combination, and to determine the low Bidder on the basis of the sum of the Base Bid, plus accepted Alternates.

- 5.4.5 The successful Bidder shall execute a formal contract, submit the required Insurance Certificate, and furnish good and sufficient bonds, unless specifically waived in the General Requirements, in accordance with the General Requirement, within twenty (20) days of official notice of contract award. The successful Bidder shall provide, at least two business days prior to contract execution, copies of the Employee Drug Testing Program for the Bidder and all listed Subcontractors. Bonds shall be for the benefit of the Agency with surety in the amount of 100% of the total contract award. Said Bonds shall be conditioned upon the faithful performance of the contract. Bonds shall remain in affect for period of one year after the date of substantial completion.
- 5.4.6 If the successful Bidder fails to execute the required Contract, Bond and all required information, as aforesaid, within twenty (20) calendar days after the date of official Notice of the Award of the Contract, their Bid guaranty shall immediately be taken and become the property of the State for the benefit of the Agency as liquidated damages, and not as a forfeiture or as a penalty. Award will then be made to the next lowest qualified Bidder of the Work or readvertised, as the Agency may decide.
- 5.4.7 Each bidder shall supply with its bid its taxpayer identification number (i.e., federal employer identification number or social security number) and should the vendor be awarded a contract, such vendor shall provide to the agency the taxpayer identification license numbers of such subcontractors. Such numbers shall be provided on the later of the date on which such subcontractor is required to be identified or the time the contract is executed. The successful Bidder shall provide to the agency to which it is contracting, within 30 days of entering into such public works contract, copies of all Delaware Business licenses of subcontractors and/or independent contractors that will perform work for such public works contract. However, if a subcontractor or independent contractor is hired or contracted more than 20 days after the Bidder entered the public works contract the Delaware Business license of such subcontractor or independent contractor shall be provided to the agency within 10 days of being contracted or hired.
- 5.4.8 The Bid Security shall be returned to the successful Bidder upon the execution of the formal contract. The Bid Securities of unsuccessful bidders shall be returned within thirty (30) calendar days after the opening of the Bids.

ARTICLE 6: POST-BID INFORMATION

- 6.1 CONTRACTOR'S QUALIFICATION STATEMENT
- 6.1.1 Bidders to whom an award of a Contract is under consideration shall, if requested by the Agency, submit a properly executed AIA Document A305, Contractor's Qualification Statement, unless such a statement has been previously required and submitted.
- 6.2 BUSINESS DESIGNATION FORM
- 6.2.1 Successful bidder shall be required to accurately complete an Office of Management and Budget Business Designation Form for Subcontractors.
- 6.3 Bidders to whom an award of a Contract has been made must produce their Delaware Business License before the Contract can be executed.

ARTICLE 7: PERFORMANCE BOND AND PAYMENT BOND

7.1 BOND REQUIREMENTS

7.1.1 The cost of furnishing the required Bonds, that are stipulated in the Bidding Documents, shall be included in the Bid.

7.1.2 If the Bidder is required by the Agency to secure a bond from other than the Bidder's usual sources, changes in cost will be adjusted as provide in the Contract Documents.

7.1.3 The Performance and Payment Bond forms used shall be the standard OMB forms (attached).

7.2 TIME OF DELIVERY AND FORM OF BONDS

7.2.1 The bonds shall be dated on or after the date of the Contract.

7.2.2 The Bidder shall require the attorney-in-fact who executes the required bonds on behalf of the surety to affix a certified and current copy of the power of attorney.

ARTICLE 8: FORM OF AGREEMENT BETWEEN AGENCY AND CONTRACTOR

8.1 Unless otherwise required in the Bidding Documents, the Agreement for the Work will be written on AIA Document A101, Standard Form of Agreement Between Owner and Contractor Where the Basis of Payment is a Stipulated Sum.

END OF INSTRUCTIONS TO BIDDERS

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 00 31 00
AVAILABLE PROJECT INFORMATION

PART 1 GENERAL

1.01 EXISTING CONDITIONS

- A. Certain information relating to existing surface and subsurface conditions and structures is available to bidders, as follows:
 - 1. Geo-technical Report: dated October 19, 2020
- B. Geotechnical Report: Entitled Geotechnical Evaluation / Proposed Fitness Center / Delaware Army National Guard / Bethany Beach Training Site / Bethany Beach, Delaware , dated October 19, 2020.
 - 1. A copy of the report is included as part of the bid documents.
 - 2. This report identifies properties of below grade conditions and offers recommendations for the design of foundations, prepared primarily for the use of Architect.
 - 3. The recommendations described shall not be construed as a requirement of this Contract, unless specifically referenced in the Contract Documents.

PART 2 PRODUCTS (NOT USED)

PART 3 EXECUTION (NOT USED)

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

**Geotechnical Evaluation
Proposed Fitness Center
Delaware Army National Guard
Bethany Beach Training Site
Bethany Beach, Delaware**

October 19, 2020



DUFFIELD
ASSOCIATES
Soil, Water & the Environment

Civil

Water/Natural Resources

Geotechnical

Environmental

Construction Review

Coastal/Waterfront



TABLE OF CONTENTS

EXECUTIVE SUMMARY	1
PROJECT SUMMARY	2
FIELD AND LABORATORY TESTING	3
SUBSURFACE CONDITIONS	5
DISCUSSION OF ANALYSIS	7
DESIGN RECOMMENDATIONS	8
CONSTRUCTION RECOMMENDATIONS	10
QUALIFICATIONS	13
ENCLOSURES	14

EXECUTIVE SUMMARY

The following report summarizes Duffield Associates Inc.'s (Duffield's) Geotechnical Evaluation for the proposed fitness center located at the Delaware Army National Guard Bethany Beach Training Site in Bethany Beach, Delaware. This report includes information regarding the field and laboratory testing programs, the subsurface conditions encountered, and recommendations for the design and construction of the proposed building foundations and slab-on-grade, as well as the stormwater management facilities. These services were performed in general accordance with our agreement with StudioJAED dated August 18, 2020.

Proposed site development is anticipated to include a new single-story 6,800 square-foot fitness center building surrounding the sidewalk and new pavement area. The building will be constructed at-grade (i.e., no basement).

On September 22, 2020, Duffield performed three test pit excavations in the vicinity of the proposed building. In addition, Duffield reviewed subsurface information from previous geotechnical evaluations at the site (performed in 2006 and 2011) for the building adjacent to the proposed fitness center. Beneath a surficial layer of topsoil, the subsurface conditions observed in the test pits can generally be described as loose to medium-dense sand with varying amount of silt to the extent of the test pits, with a thin interbedded layer of clay and clayey-sand observed at depths ranging between approximately 2.8 to 3.7 feet below the existing ground surface. Moderate to rapid water seepage was observed in each of the test pits at depths ranging between approximately 2.8 to 3.2 feet below grade. The seepage appeared to be "perched" water above the clay and sandy clay layer. Groundwater was measured in two of the test pits at depths of approximately 5.5 feet, approximately 30 minutes after excavations were completed.

Based on the observed subsurface conditions and the design information provided by the project team, Duffield provides these comments and recommendations:

- Site preparation is anticipated to include removal of the existing one-story building and other small structures located within the footprint of the proposed fitness center. In addition, existing topsoil and pavement should be removed from the building area. Following removal of existing structures, utilities, and the surficial fill, resulting excavations should be backfilled with structural fill placed and compacted as recommended in this report.
- The proposed fitness center could be supported on a conventional shallow foundation system and slab-on-grade. If encountered during foundation construction, the soft to medium consistency clay soils should be undercut from footing areas. Resulting undercuts should be backfilled with structural fill placed and compacted as recommended in this report.
- Foundations should be designed for a maximum allowable bearing pressure of 2,000 pounds per square foot (psf). Total foundation settlement is estimated to be on the order of 1 inch or less, and a differential settlement on the order of a ½ inch or less over a distance of 25 feet.
- Due to the shallow groundwater conditions at the site, as well as the presence of a shallow "limiting layer" of clay and sandy-clay soils, stormwater management practices that use infiltration of stormwater into the natural site soils, as the primary means of stormwater control, is not considered to be practical at the site.

Additional information, discussion, and recommendations are provide further herein.

PROJECT SUMMARY

PROPOSED CONSTRUCTION

- Site development of the fitness center is anticipated to include a new 1-story building with a footprint of approximately 148-feet by 46 feet, with surrounding sidewalk and pavement areas.
- The building is proposed to be constructed at-grade (i.e., no basement) with assumed finished floor elevation that will approximately match the existing grades (i.e., net cuts/fills of less than 2 feet).
- Structural information (i.e., building type, loads, etc.) was not available at the time of this report. Therefore, Duffield has assumed structural loads on the order of 4 kips per linear foot for walls and maximum column loads on the order of 100 kips.

REFERENCES UTILIZED

- A Request for Proposal document titled “Delaware Army National Guard, Bethany Beach Training Site, Proposed Fitness Center, Geotechnical Scope of Services,” undated.
- An untitled drawing indicating the location and dimensions of the proposed fitness center building relative to other site features, undated.
- A drawing titled “GPRS Project Findings Map, Prepared for StudioJAED, Location: DE Air Nat Guard, Bethany Beach, DE,” prepared by GPRS, which indicates existing delineated utilities located within the proposed fitness center building area.
- A document titled “Geotechnical Evaluation, Delaware Army National Guard, Regional Training Institute, Bethany Beach Training Site, Bethany Beach, Delaware,” prepared by Duffield Associates, Inc., dated September 2011, which contained geotechnical information for the building adjacent to the proposed fitness center.

EXISTING SITE CONDITIONS

The area of the proposed fitness center is located in an area that is currently a relatively flat grass field occupied by a one-story building with a footprint of approximately 1,200 square feet and sand volley-ball court. Several existing below-grade utilities were delineated within the building area including electric, water, gas, communications, sanitary and storm sewer, and unknown utilities.

FIELD AND LABORATORY TESTING

PREVIOUS GEOTECHNICAL EVALUATIONS

- Duffield has performed previous geotechnical evaluations at the site for the Regional Training Institute building located adjacent to the proposed fitness center on the south side in June 2006 and July 2011. During these evaluations, 19 Standard Penetration Test (SPT) borings were performed. The subsurface information from the referenced 2011 report was reviewed by Duffield to assist with the development of this report.

TEST PIT EXCAVATIONS AND INFILTRATION TESTING

- On September 22, 2020, three test pit excavations were performed at the site to review subsurface conditions in the vicinity of the proposed fitness center. The test pits were performed to depths ranging between approximately 3.5 to 7.5 feet below grade. Extensive caving of sidewalls was observed during the performance of the test pits, which made deeper advancement of the test pits difficult.
- The test pit excavations were performed by CGC Geoservices, LLC, an affiliate company of Duffield, utilizing a rubber-tired backhoe.
- In location TP-1, following completion of the test pit, an additional excavation was offset for performance of one single-ring infiltration test. The testing was performed in general accordance with DNREC 3.06.2.A-1 "Soil Investigation Procedures for Stormwater BMPs" and Appendix 1, "Soil Investigation Procedures for Stormwater Best Management Practices" of the "Delaware Post Construction Stormwater BMP Standards & Specifications" (February 2019).
- At completion, the excavations were backfilled with soil cuttings and compacted with backhoe bucket. Additional settlement and softening of the soil replaced in the excavation areas may occur, resulting in a depression or hole in the ground surface. Consequently, future maintenance and restoration of the site may be required.
- The approximate test pit and infiltration test locations are indicated on the enclosed Test Pit and Infiltration Test Location Sketch, in addition to the approximate locations of the previously performed test borings at the site during the referenced 2006 and 2011 evaluations. Test pit logs, which describe the conditions observed during the field exploration program, are enclosed.

LABORATORY TESTING

Following the field program, the samples were returned to Duffield's office and laboratory testing was performed on the selected samples. The results of the laboratory testing are summarized below. No environmental testing or characterization was performed.

LOCATION	SAMPLE NO.	APPROX. DEPTH (FT)	MOISTURE CONTENT (%) (ASTM D2216)	PERCENT PASSING NO. 200 SIEVE (%) (ASTM D1140)
TP-1	S-2	3.5	21.5	35.6
	S-3	5.5	17.6	5.2
TP-2	S-1	1.7	12.2	0.7
	S-3	4.7	15.9	11.1
LOCATION	SAMPLE NO.	APPROX. DEPTH (FT)	MOISTURE CONTENT (%) (ASTM D2216)	PERCENT PASSING NO. 270 SIEVE (%) (USDA)
IT-1	S-1	1.0	7.3	7.6

SUBSURFACE CONDITIONS

GENERALIZED SITE GEOLOGY

Based on Delaware Geologic Survey (DGS) mapping, the project site is located in the Atlantic Coastal Plain Physiographic Province. DGS mapping indicates that the stratigraphy of the Coastal Plain in the vicinity of the site consists of tidal deposits underlain by two major geological units, the Pleistocene Age Omar Formation and the underlying Miocene to Late Pliocene Age Beaverdam Formation. The Omar Formation typically consists of gray clayey-sand to sandy-silt that contains scattered shell fragments. Scattered beds of fine sand and silty-fine sand are common. The underlying Beaverdam Formation typically consists of fine to coarse sand with interbeds of fine silty sand and clayey-silt. The depth to rock in this area is on the order of 2,500 feet below grade.

STRATIGRAPHIC CONDITIONS

Beneath a surficial layer of topsoil, the subsurface conditions observed in the test pits can generally be described as loose to medium dense sand with varying amount of silt to the extent of the test pits. A thin interbedded layer of clay and clayey-sand observed at depths ranging between approximately 2.8 to 3.7 feet below the existing ground surface. These soil conditions generally appeared to be consistent with the nearby test boring logs performed during the previous evaluation at the site.

For discussion purposes, the subsurface conditions can be further described as follows:

SUBSURFACE STRATUM	APPROXIMATE THICKNESS (FEET)	GENERALIZED DESCRIPTION ^[1]
A ^[2]	0.5 – 0.7	TOPSOIL (approx. 6 to 8 inches);
B	2.1 – 3.2	Brown, gray fine to medium SAND, little to trace silt (moist, loose density); USCS: SM, SP
C	0.3 – 0.5	Black, brown, gray CLAY, some fine sand, trace organics, and fine SAND and CLAY, trace organics (moist to wet, soft to medium consistency); USCS: CL, SC
D	--- ^[3]	Brown, light brown, gray fine SAND, little medium to coarse sand, little to trace silt (wet, loose to medium density); USCS: SM, SP-SM, SP
Notes:	1. The soil descriptions utilized herein and on the test pit logs are defined in the attached General Notes. 2. Stratum A not observed in test pit TP-1. 3. Stratum D not fully penetrated in test pits.	

GROUNDWATER

- During performance of the test pits, moderate to rapid water seepage was observed in each of the test pits at depths ranging between approximately 2.8 to 3.2 feet below grade. The seepage appeared to be “perched” water above the clay and sandy clay layer of Stratum C. Groundwater was measured in test pits TP-1 and TP-2 at depths of approximately 5.5 feet, approximately 30 minutes after excavations were completed.

- During the previous evaluations performed at the site in 2006 and 2011, groundwater was observed at depths ranging between approximately 2.4 to 2.8 feet below the existing grade. It is likely that the site's proximity to the Salt Pond (located approximately 1,400 feet west and 950 feet northwest of the site) and the Atlantic Ocean (located approximately ¼ mile east of the site) may influence groundwater elevations at the site.
- Groundwater mapping by DGS and the current DNREC well permit database indicates average groundwater levels in "normal," and "wet" conditions may be less than 3 feet below grade. Due to seasonal and annual variations in precipitation, groundwater fluctuations of several feet should be anticipated.

NOT FOR BIDDING

DISCUSSION OF ANALYSIS

SITE PREPARATION

Site development will include demolition of the existing one-story brick building located within the proposed fitness center footprint. It is Duffield's recommendation that existing foundations and slabs are removed in their entirety. In addition, the existing equipment, tank structures, and pavement areas should be removed from the building area prior to placement of structural fill or concrete for the new building. The resulting excavations during demolition should be backfilled with structural fill placed and compacted as recommended in this report.

SHALLOW FOUNDATION AND SLAB-ON-GRADE SYSTEM

The soft to medium stiff and loose Stratum C clay and sandy clay, was observed at depths ranging between approximately 2.8 to 3.7 feet below the existing grade and was observed to have a thickness ranging between 0.3 to 0.5 feet thick in the test pits. Due to the soft consistency and observed organic content in this Stratum, it is Duffield's opinion that if soft clay soils are observed during foundation construction, they should be undercut to firm granular conditions beneath the footings. Undercut soils can be backfilled with structural fill and compacted as recommended in this report. The granular, natural site soils observed in the test pits are generally suitable for supporting the proposed building on a shallow foundation system and slab-on-grade system. Structural fill, placed and compacted as recommended herein, is also considered suitable for support of proposed building.

INFILTRATION TEST RESULTS

One single-ring infiltration test was performed at the site at a relatively shallow depth. The following table summarizes the results of the infiltration testing.

INFILTRATION TEST LOCATION	APPROX. TEST DEPTH (FT.)	USDA DESCRIPTION	USCS DESCRIPTION	OBSERVED FIELD INFILTRATION RATE (IN/HR)
IT-1	1.0	Sand	Poorly graded silty-sand	4.0

It should be noted that a factor of safety has not been applied to the field infiltration rates indicated above. A factor of safety of 2.0 is typically recommended for design of stormwater management areas based on single-ring infiltration testing.

Although infiltration testing was performed at the site, it is likely that groundwater levels will be higher than those observed during test pit excavations. Furthermore, "DNREC Sediment & Stormwater Technical document Section A-1 Soil Investigation Procedures for Stormwater BMPs," dated February 2019, requires infiltration systems to be founded a minimum of 2 feet above the limiting layer, such as a seasonal high water table or relatively impermeable layer such as clay. The perched water conditions observed in the test pits indicate that the Stratum C clay and sandy-clay layer is an apparent "impermeable" layer. Based on these conditions, it is likely that a stormwater management facility which utilizes infiltration into the soils as a primary means of stormwater control is not practical at this site.

DESIGN RECOMMENDATIONS

1. ALLOWABLE FOUNDATION BEARING CAPACITY AND SETTLEMENT

- It is Duffield's opinion that the natural granular soils encountered below surficial topsoil are generally considered suitable for supporting the proposed building on a shallow spread footing foundation and slab-on-grade system following subgrade preparation and review, as discussed further herein. Structural fill, placed, compacted and reviewed as recommended in this report, is also considered suitable for supporting shallow foundations. If the Stratum C clay soils are encountered during footing construction, it is recommended that the foundations bear below the bottom of the clay on firm and dry Stratum D sands.
- It is recommended that the proposed foundations for the fitness center be designed for a maximum net allowable bearing pressure of 2,000 pounds per square foot.
- Based on the results of the analysis performed as part of this evaluation, it is estimated that maximum total foundation settlement for the proposed structure should be on the order of 1 inch or less, with a post-construction differential settlement on the order of ½ inch over a distance of 25 feet.

2. FOUNDATION BURIAL DEPTH AND SIZE

- The base of all footings in areas exposed to frost should be placed at least 24 inches below final exterior grade.
- Interior foundations in insulated areas should be placed at least 18 inches below the proposed finished floor elevation.
- All continuous wall footings should be at least 2-feet wide, and all isolated column footings should be at least 3-feet wide, regardless of bearing pressure.
- If a winter construction schedule is proposed for the foundations, provisions for the protection of shallow foundations from frost heave during construction should be included in the contract specifications.

3. SLAB-ON-GRADE

- Ground-supported floor slabs should be designed as free floating and should not be connected to the other structural elements (e.g., walls, framing, etc.) of the buildings. Isolation joints should be utilized at the interface of proposed ground-supported floor slabs and structural elements to accommodate potential differential settlement.
- A minimum 10 mil polyethylene vapor barrier and free-draining subbase, consisting of at least 4 inches of poorly graded crushed stone aggregate such as AASHTO SP-57 stone, should be provided beneath all floor slabs.
- Subgrade conditions should be modeled for design utilizing a subgrade modulus, K_s of 150 pci, provided subgrade preparation is performed as recommended in this report.

4. SEISMIC DESIGN PARAMETERS

Based on the subsurface conditions encountered during the field exploration at the site and the review of regional geologic maps, a “D” site classification is recommended for the analysis of seismic conditions, as defined by 1613.3.2 of the 2018 International Building Code and Chapter 20 of the American Society of Civil Engineers Minimum Design Loads for Buildings and Other Structures (ASCE/SEI 7-16).

5. CONTROL JOINTS

Masonry walls should be provided with frequent control joints placed at architecturally convenient locations (e.g., windows and doorways) to provide a “preferred” location for differential settlement to occur to reduce the potential for cracking of the walls.

6. EXISTING UTILITIES

The presence of utilities beneath a structure could result in crushing of pipes and/or undermining of proposed buildings. Therefore, it is recommended that any existing utilities be removed and relocated outside of the proposed building area. The resulting excavations should be backfilled with structural fill, placed and compacted in accordance with the recommendations of this report. Alternatively, existing pipes could be abandoned left in-place, and grouted “full” throughout its length. If the utilities cannot be relocated outside of the proposed building area, foundations should be designed to bear at or below the invert elevations of the pipe.

7. STORMWATER MANAGEMENT AREA DESIGN

It is recommended that the designer of the stormwater management facilities utilize the most recent version of the “DNREC Sediment & Stormwater Technical document Section A-1 Soil Investigation Procedures for Stormwater BMPs,” dated February 2019. It is noted that the minimum infiltration rate for all runoff reduction and infiltration practices is 1.0 in/hr, and infiltration systems are required to be founded a minimum of 2 feet above the limiting layer, such as a seasonal high water table or relatively impermeable layer such as clay.

Based on the subsurface conditions and shallow groundwater in the area of the proposed stormwater management facility, it is Duffield’s opinion that a stormwater management area that uses infiltration of stormwater into the natural soils as a primary means of stormwater control is not practical at the site.

8. SITE GRADING

Site grading should be designed to provide positive drainage away from the proposed construction area. Positive site drainage should be maintained throughout the construction activities.

CONSTRUCTION RECOMMENDATIONS

1. PROOFROLLING AND SUBGRADE PREPARATION

- At the start of construction, the site should be stripped of all topsoil and bituminous concrete pavement and rough excavated to proposed grades. The existing slab and foundation elements located at the site should be removed in their entirety to firm, dry natural soils. The resulting excavations made by existing structure demolition should be backfilled with structural fill, placed and compacted as recommended herein.
- Following rough grading and prior to footing excavation, placement of fill, or construction of the pavements or floor slabs, it is recommended that the exposed subgrade in the building area, as well as the pavement area, be proofrolled. The proofrolling should be performed using a minimum of two passes of a 10-ton static roller or a fully-loaded tandem dump truck in the presence of a qualified soils technician working under the supervision of a geotechnical engineer. The purpose of the proofrolling is to identify yielding subgrade conditions. The proposed construction area should be proofrolled at least 5 feet beyond the construction perimeters.
- Yielding subgrade conditions encountered within the proposed building and pavement areas should be undercut to firm, subgrade conditions, and backfilled with compacted structural fill placed in accordance with the recommendations of this report. If acceptable to the project's engineer, granular soils may also be densified in place. The subgrade review should confirm the consistency and texture of the exposed soils with the conditions encountered by this evaluation, as described herein.

2. FOUNDATION SUBGRADE REVIEW

- All shallow foundations should be placed on firm, dry, non-frozen subgrade consisting of medium dense or denser sand or medium stiff or stiffer clay, or on structural fill, placed and compacted as recommended herein. Foundation excavations should be reviewed by a qualified technician working under the supervision of a geotechnical engineer who is familiar with the recommendations of this report.
- If soft/loose or unsuitable subgrade conditions are encountered at the proposed building or pavement area depths, additional excavation should be performed until they are uniformly encountered across the base of the foundation's excavation or, if acceptable to the project geotechnical engineer, the natural sand soils can be densified in place. Foundation undercut areas should be backfilled with structural fill as recommended herein.

3. RE-USE OF ON-SITE SOILS AS STRUCTURAL FILL

- On-site soils free of organic material, topsoil, miscellaneous fill, debris, and rock fragments in excess of 3 inches in their largest dimension may be suitable as structural fill.
- A majority of the on-site materials that will be available as fill from the excavations will consist of the Stratum B sand. These soils are considered suitable for backfill, as long as they are free of debris and the moisture content of the soils is within the range in which the specified compaction requirements can be achieved. The shallow soils observed in the test pits were generally observed to have moisture contents slightly higher than the range at which specified compaction requirements can be achieved, and therefore, some drying of the soils may be necessary.

- If sufficient quantities of suitable on-site soils are not available for structural fill, imported borrow consisting of predominately granular soils conforming to the requirements of DelDOT Standard Specifications Borrow Type C (Backfill) should be utilized. AASHTO SP-57 stone could also be utilized as structural fill at locations, as recommended by the project engineer, and should be considered for localized, relatively deep fills such as foundation undercuts.

4. COMPACTION REQUIREMENTS

- Structural fill should be placed in loose lifts with a maximum thickness of 8 inches.
- Each lift of fill placed within the proposed building construction area (defined as the area extending at least 5 feet beyond the foundation element perimeters) should be compacted to at least 95% of the maximum dry density, as determined by the Modified Proctor test (ASTM D 1557).
- Structural fill for utility, located outside of the proposed building areas and for site pavements, should be compacted to at least 90% of the Modified Proctor maximum dry density.
- The placement and compaction of structural fill should be monitored on a full-time basis by a qualified technician working under the supervision of a geotechnical engineer.

5. EXCAVATION SAFETY

All utility and foundation excavation should be performed in accordance with OSHA guidelines. Typically, the Strata B sands can be characterized by OSHA CFR Part 1926 Excavation Standards as Type C soils. Should it be required, all temporary sheeting, shoring, benching, and sloping should be designed by a qualified engineer registered in the State of Delaware.

6. PROTECTION OF SUBGRADE SOILS

If foundation excavations are left open, precipitation may result in the collection of water within the excavation. Provisions for removal of water by drainage or sumping are recommended. Subgrade soils disturbed by precipitation and construction traffic should be either scarified and re-compacted, or undercut and replaced with structural fill as previously recommended in this report.

7. GROUNDWATER CONTROL

Based on the depth of groundwater observed in the test pit excavations and previously performed test borings at the site, it is possible that groundwater may be encountered during excavation of building foundations or utility construction, and localized sumping may be required to control stormwater runoff into excavations during construction. It is recommended that wherever groundwater is encountered during shallow foundation or utility excavations, the resulting excavation should be over excavated by at least 4 inches and replaced with AASHTO SP-57 stone to protect the exposed subgrade soils and to facilitate sumping.

8. SUBSURFACE DATA

All contractors interested in bidding on phases of this work, which involve subsurface conditions, should be given full access to this report so that they can develop their own interpretations of the available data.

9. CONSTRUCTION REVIEW

It is recommended that the project budget include provisions for the cost for independent construction monitoring of the earthwork and foundation construction by a qualified engineering firm retained by the Owner, to review conformance of construction with the recommendations of the project geotechnical evaluation, as well as the project plans and specifications.

NOT FOR BIDDING

QUALIFICATIONS

The recommendations of this report have been prepared according to generally accepted soil and foundation engineering practice, and are based on the conditions encountered by the test pit excavations performed at the site. Although soil quality has been inferred from the interpolation of the sampling data, you should explicitly note that subsurface conditions beyond the test pit excavations are, in fact, unknown. Should any conditions encountered during construction differ from those described in this report, this office should be notified immediately in order to review, and possibly modify these recommendations. This report applies solely to the size, type, and location of the structures described herein. In the event that changes are proposed, this report will not be considered valid unless the changes have been reviewed and the recommendations of this report modified and re-approved in writing by Duffield Associates, Inc.

NOT FOR BIDDING

ENCLOSURES

SITE LOCATION SKETCH

TEST PIT LOCATION SKETCH


TEST PIT LOGS

INFILTRATION TEST RESULTS

GENERAL NOTES

NOT FOR BIDDING

SITE LOCATION SKETCH

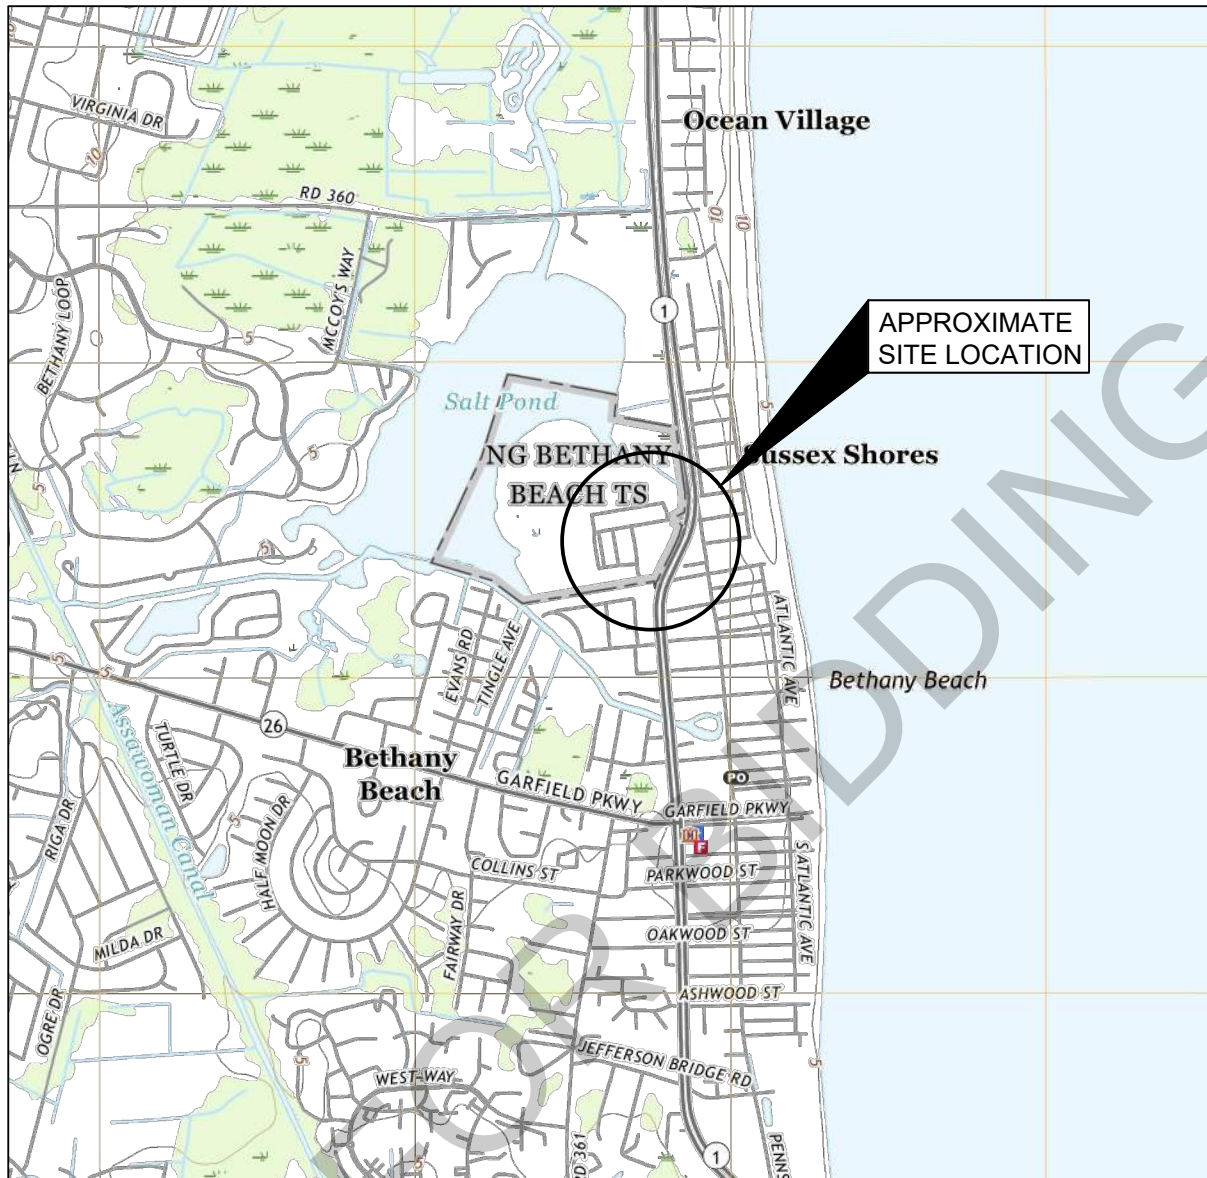


NOTE:

THIS SKETCH IS ADAPTED FROM A 7.5 MINUTE SERIES U.S.G.S TOPOGRAPHIC MAP TITLED "BETHANY BEACH, DE" DATED 2019.

DATE: 19 OCTOBER 2020	SITE LOCATION SKETCH DEARNG BETHANY BEACH TRAINING SITE PROPOSED FITNESS CENTER BETHANY BEACH~ SUSSEX COUNTY ~ DELAWARE	DESIGNED BY: ARS	 DUFFIELD ASSOCIATES Soil, Water & the Environment 5400 LIMESTONE ROAD WILMINGTON, DE 19808-1232 TEL. 302.239.6634 FAX 302.239.8485 OFFICES IN DELAWARE, MARYLAND PENNSYLVANIA AND NEW JERSEY E-MAIL: DUFFIELD@DUFFNET.COM
SCALE: 1"=2000'		DRAWN BY: ARS	
PROJECT. NO. 12440.GE		CHECKED BY: MBV	
SHEET: FIGURE 1		FILE: A-12440GE-01	

TEST PIT LOCATION SKETCH

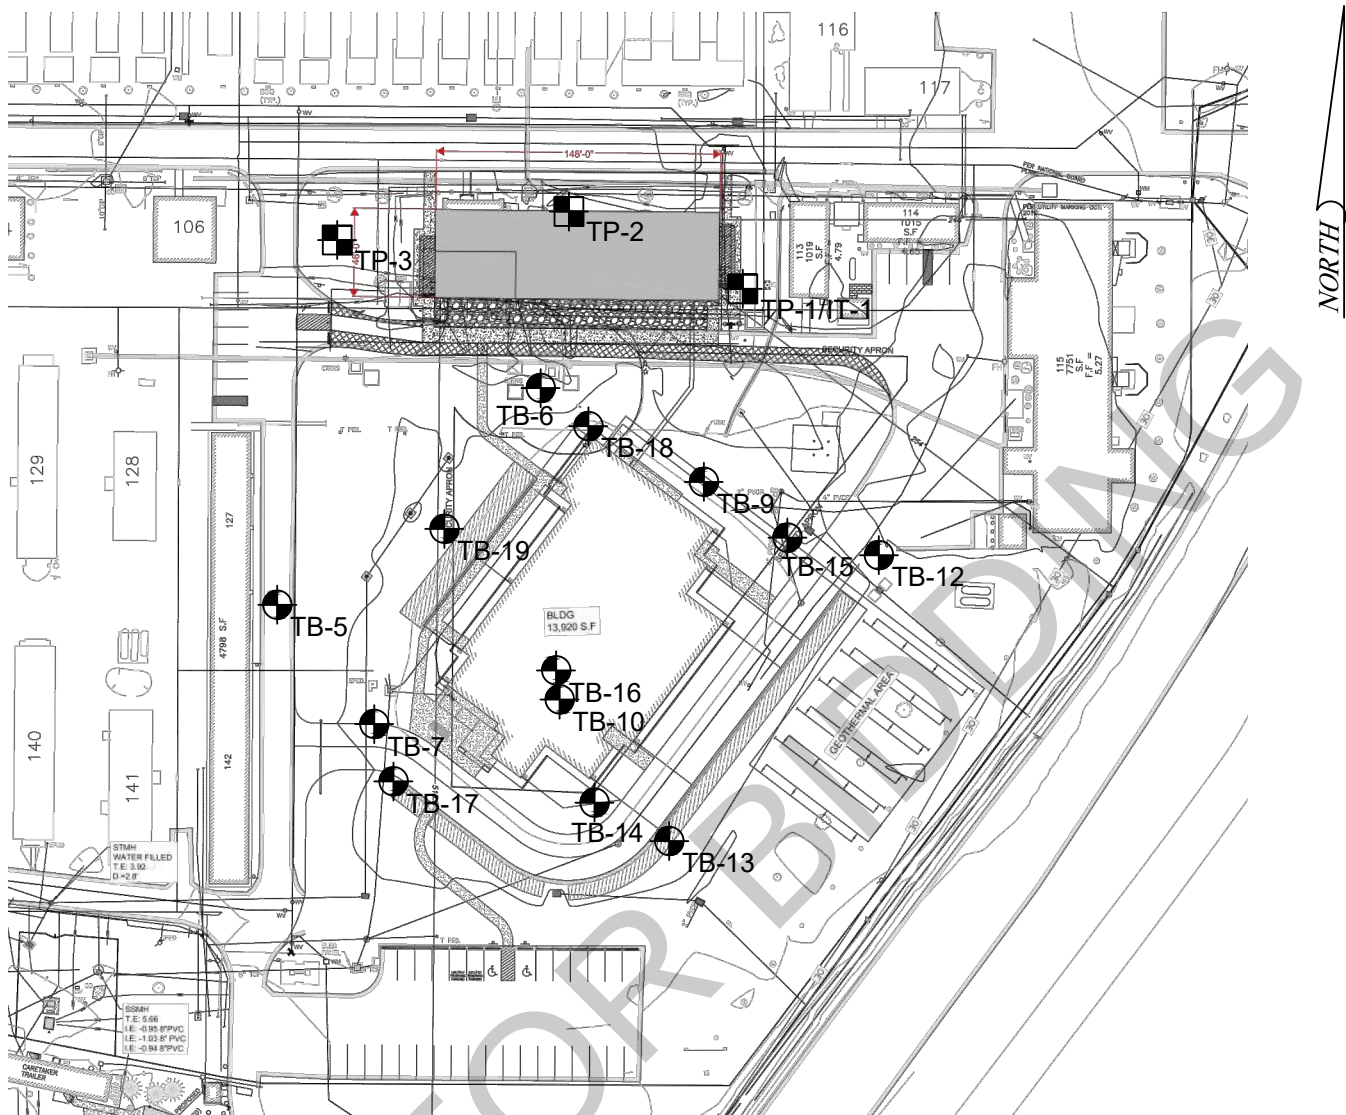

KEY:



TP-1

- APPROXIMATE LOCATION OF TEST PIT/INFILTRATION TEST (CURRENT EVALUATION)



TB-X

- APPROXIMATE LOCATION OF TEST BORING (PREVIOUS EVALUATIONS 2006 & 2011)

NOTE:

THIS SKETCH IS ADAPTED FROM AN UNTITLED, UNDATED DRAWING PROVIDED BY STUDIOJAED.

DATE:
19 OCTOBER 2020

SCALE:
1" = 100'

PROJECT. NO.
12440.GE

SHEET:
FIGURE 2

**TEST PIT AND INFILTRATION TEST
LOCATION SKETCH**

**DEARNG BETHANY BEACH TRAINING SITE
PROPOSED FITNESS CENTER**

BETHANY BEACH~SUSSEX COUNTY~DELAWARE

DESIGNED BY: ARS

DRAWN BY: ARS

CHECKED BY: MBV

FILE: A-12440GE-02



**DUFFIELD
ASSOCIATES**
Soil, Water & the Environment

5400 LIMESTONE ROAD
WILMINGTON, DE 19808-1232
TEL. 302.239.6634
FAX 302.239.8485

OFFICES IN DELAWARE, MARYLAND
PENNSYLVANIA AND NEW JERSEY

E-MAIL: DUFFIELD@DUFFNET.COM

TEST PIT LOGS



TEST PIT TP-1

(Page 1 of 1)

Geotechnical Evaluation
Proposed Fitness Center
Bethany Beach Training Site
Bethany Beach, Delaware
Duffield Associates, Inc. Project No. 12440.GE

Date Started : September 22, 2020 Contractor : CGC Geoservices, LLC
Date Completed : September 22, 2020 Excavation Equip. : Rubber-Tire Backhoe
Logged by : JLR
Weather : Clear, 60s

Depth in feet	Layer Depth feet	GRAPHIC	USCS	Water Levels	Sample Number	Sample Depth (ft)	Moisture Content (%)	Percent Passing 200 Sieve	Remarks	WATER LEVEL
				▼ During Excavation ▽ At completion						
0			SM	Brown fine to medium SAND, little to some silt (moist, loose density)						
1.5			SP	Gray fine to medium SAND, trace silt (moist, loose density)	S-1					
3.2			SC	Black, gray fine SAND and CLAY, trace organics (moist to wet, loose)	S-2		21.5	35.6		▼
3.7			SP	Brown fine to medium SAND, trace silt (wet, loose to medium density)	S-3		17.6	5.2		▽
7.5										
10										

NOTES:

- Test pit excavation performed to ± 7.5 feet below existing ground surface (b.e.g.s.)
- During excavation, moderate to rapid water seepage observed at ± 3.2 feet b.e.g.s. Groundwater level at ± 5.5 feet b.e.g.s, approximately 30 minutes after excavation completed.
- Moderate to extensive sidewall caving observed from ± 1.0 to 3.8 feet b.e.g.s.
- Test pit excavation backfilled with soil cuttings upon completion.
- Soil descriptions performed in general accordance with ASTM D2488, the Practice for Description and Identification of Soils (Visual-Manual Procedure).

during excavation and at ± 7.5 feet b.e.g.s. Test pit depth could not advance due to extensive caving at ± 7.5 feet.



TEST PIT TP-2

(Page 1 of 1)

Geotechnical Evaluation
Proposed Fitness Center
Bethany Beach Training Site
Bethany Beach, Delaware
Duffield Associates, Inc. Project No. 12440.GE

Date Started : September 22, 2020 Contractor : CGC Geoservices, LLC
Date Completed : September 22, 2020 Excavation Equip. : Rubber-Tire Backhoe
Logged by : JLR
Weather : Clear, 60s

Depth in feet	Layer Depth feet	GRAPHIC	USCS	Water Levels	Sample Number	Sample Depth (ft)	Moisture Content (%)	Percent Passing 200 Sieve	Remarks	WATER LEVEL
				▼ During Excavation ▽ At completion						
0										
0.7										
2			SP		S-1		12.2	0.7		
2.8										
3.1			CL		S-2					
4										
			SP-SM		S-3		15.9	11.1		
6										
6.5										
7.5			SP		S-4					
8										
10										

NOTES:

- Test pit excavation performed to ± 7.5 feet below existing ground surface (b.e.g.s.)
- During excavation, moderate to rapid water seepage observed at ± 2.8 feet b.e.g.s. Groundwater level at ± 5.5 feet b.e.g.s, approximately 30 minutes after excavation completed.
- Moderate to extensive sidewall caving observed from ± 1.5 to 3.5 feet b.e.g.s.
- Test pit excavation backfilled with soil cuttings upon completion.
- Soil descriptions performed in general accordance with ASTM D2488, the Practice for Description and Identification of Soils (Visual-Manual Procedure).

during excavation and at ± 7.5 feet b.e.g.s. Test pit depth could not advance due to extensive caving at ± 7.5 feet.



TEST PIT TP-3

(Page 1 of 1)

Geotechnical Evaluation
Proposed Fitness Center
Bethany Beach Training Site
Bethany Beach, Delaware
Duffield Associates, Inc. Project No. 12440.GE

Date Started : September 22, 2020 Contractor : CGC Geoservices, LLC
Date Completed : September 22, 2020 Excavation Equip. : Rubber-Tire Backhoe
Logged by : JLR
Weather : Clear, 60s

Depth in feet	Layer Depth feet	GRAPHIC	USCS	Water Levels ▼ During Excavation	Sample Number	Sample Depth (ft)	Moisture Content (%)	Percent Passing 200 Sieve	Remarks	WATER LEVEL
				DESCRIPTION						
0				TOPSOIL (± 6 inches)						
0.5			SP	Light brown, light gray fine SAND, trace silt (moist, loose density)	S-1					
2										
3.0			CL	Brown CLAY, some fine sand, trace organics (moist to wet, soft to medium consistency)	S-2					
3.3			SM	Light brown fine to medium SAND, little silt (wet, loose density)						
3.5										
4										
6										
8										
10										

NOTES:

- Test pit excavation performed to ± 3.5 feet below existing ground surface (b.e.g.s.)
- During excavation, moderate to rapid water seepage observed at ± 3.0 feet b.e.g.s.
- Moderate to extensive sidewall caving observed from ± 0.5 to 3.0 feet b.e.g.s. during excavation and at ± 3.5 feet b.e.g.s. Test pit depth could not advance due to extensive caving at ± 3.5 feet.
- Test pit excavation backfilled with soil cuttings upon completion.
- Soil descriptions performed in general accordance with ASTM D2488, the Practice for Description and Identification of Soils (Visual-Manual Procedure).

INFILTRATION TEST RESULTS


PROJECT: DEARNG BETHANY BEACH TRAINING SITE
 PROPOSED FITNESS CENTER
 PROJECT NO.: 12440.GE

DATE: 9/22/20

TEST NO. IT-1

TEST TYPE: SINGLE-RING

time	time (min)	Δ time (min)	reading (in)	refilled (in)	drop (in)	k(in/hr)
12:29	--	--	--	7 1/2	--	--
12:44	15	15	5 7/8	6	1.63	6.5
12:59	30	15	5	6	1.00	4.0
13:14	45	15	4 7/8	6	1.13	4.5
13:29	60	15	5	--	1.00	4.0
13:39	70	10	--	6	--	--
13:54	85	15	4 7/8	6	1.13	4.5
14:09	100	15	5.00	6	1.00	4.0
14:24	115	15	5	6	1.00	4.0
14:39	130	15	5	6	1.00	4.0
14:54	145	15	5	--	1.00	4.0

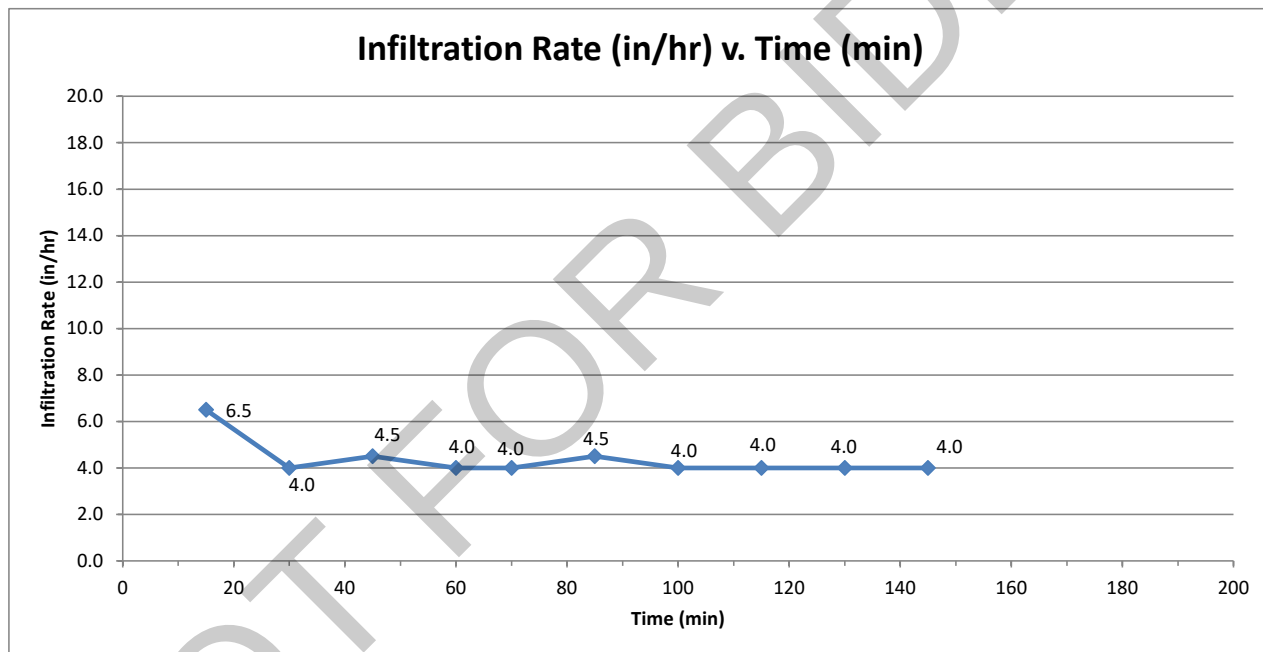

NOTES:

- 1.) Test performed at ± 1.0 feet below existing grade.
- 2.) Presoak performed for 1 hours prior to start of test.

GENERAL NOTES

GENERAL NOTES

DUFFIELD ASSOCIATES uses the following definitions and terminology to classify and correlate the field and laboratory samples.

VISUAL UNIFIED CLASSIFICATIONS: The soil samples are described by color, major constituent, modifiers (by percentage), and density (or consistency). Coarse Grained or Granular Soils have more than 50% of their dry weight retained on a No. 200 sieve; they are described as: boulders, cobbles, gravel or sand. Fine Grained Soils have less than 50% of their dry weight retained on a No. 200 sieve; they are described as: clays or clayey silts if they are cohesive and silts if they are noncohesive. In addition to gradation, granular soils are defined on the basis of their relative in-place density and fine grained soils on the basis of their strength or consistency and their plasticity.

The Unified Soil Classification symbols are:

COARSE GRAINED SOILS

GW - Well graded gravels
 GP - Poorly graded gravels
 GM - Silty gravels
 GC - Clayey gravels
 SW - Well graded sands
 SP - Poorly graded sands
 SM - Silty sands
 SC - Clayey sands

SIZE DESCRIPTION

F - Fine
 M - Medium
 C - Coarse
 G - Gravel

COLOR

Or - Orange	Blk - Black
Yel - Yellow	Gr - Gray
Br - Brown	R - Red

DENSITY: COARSE GRAINED SOILS

Very loose	4 blows/ft or less
Loose	5 to 10 blows/ft
Medium	11 to 30 blows/ft
Dense	31 to 50 blows/ft
Very Dense	51 blows/ft or more

FINE GRAINED SOILS

ML - Silts of low plasticity
 CL - Clays of low to medium plasticity
 OL - Organic silt clays of low plasticity
 MH - Silts of high plasticity
 CH - Clays of high plasticity
 OH - Organic silt clays of high plasticity
 PT - Peat and highly organic soils

MODIFIERS (PERCENTAGE)

Tr - Trace	1 - 10%
Ltl - Little	11 - 20%
Some	21 - 35%
& - And	36 - 50%

Vc - Varicolored
 Dk - Dark
 Lt - Light

CONSISTENCY: FINE GRAINED SOILS

Very soft	2 blows/ft or less
Soft	3 to 4 blows/ft
Medium	5 to 8 blows/ft
Stiff	9 to 15 blows/ft
Very stiff	16 to 30 blows/ft
Hard	31 blows/ft or more

NOTE: The Standard Penetration Test "N" value is the number of blows per foot of a 140 pound hammer falling 30 inches on a 2 inch O.D. split spoon sampler, except where otherwise noted.

Bethany Beach Training Site – Physical Fitness Center
Bethany Beach Training Site, 163 Scannell Blvd, Bethany Beach, DE 19930
Contract No. 100097

BID FORM

ALTERNATE No. 4: Furnish and install sunshades above windows on the south elevation, typ. of 5. Including structural supports as required.

Add: _____

(\$ _____)

ALTERNATE No. 5: Remove ceramic tile scope from floors in rooms 105, 106, 107, and 108. Seal concrete slab in those rooms.

Deduct: _____

(\$ _____)

ALTERNATE No. 6: Remove ceramic tile from walls in Rooms 105, 106, 107, and 108. Paint masonry walls in those rooms.

Deduct: _____

(\$ _____)

ALTERNATE No. 7: Remove all window treatments from scope.

Deduct: _____

(\$ _____)

ALTERNATE No. 8: Remove divider curtain and structural supports from scope.

Deduct: _____

(\$ _____)

Bethany Beach Training Site – Physical Fitness Center
Bethany Beach Training Site, 163 Scannell Blvd, Bethany Beach, DE 19930
Contract No. 100097

BID FORM

I/We acknowledge Addendums numbered _____ and the price(s) submitted include any cost/schedule impact they may have.

This bid shall remain valid and cannot be withdrawn for thirty (30) days from the date of opening of bids (60 days for School Districts and Department of Education), and the undersigned shall abide by the Bid Security forfeiture provisions. Bid Security is attached to this Bid.

The Owner shall have the right to reject any or all bids, and to waive any informality or irregularity in any bid received.

This bid is based upon work being accomplished by the Sub-Contractors named on the list attached to this bid.

Should I/We be awarded this contract, I/We pledge to achieve substantial completion of all the work within _____ calendar days of the Notice to Proceed.

The undersigned represents and warrants that he has complied and shall comply with all requirements of local, state, and national laws; that no legal requirement has been or shall be violated in making or accepting this bid, in awarding the contract to him or in the prosecution of the work required; that the bid is legal and firm; that he has not, directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken action in restraint of free competitive bidding.

Upon receipt of written notice of the acceptance of this Bid, the Bidder shall, within twenty (20) calendar days, execute the agreement in the required form and deliver the Contract Bonds, and Insurance Certificates, required by the Contract Documents.

I am / We are an Individual / a Partnership / a Corporation

By _____ Trading as _____
(Individual's / General Partner's / Corporate Name)

(State of Corporation)

Business Address: _____

Witness: _____ By: _____
(SEAL) (Authorized Signature)

(Title)

Date: _____

ATTACHMENTS

Sub-Contractor List
Non-Collusion Statement
Affidavit of Employee Drug Testing Program
Affidavit of Contractor Qualifications
Bid Security
(Others as Required by Project Manuals)

Bethany Beach Training Site – Physical Fitness Center
Bethany Beach Training Site, 163 Scannell Blvd, Bethany Beach, DE 19930
Contract No. 100097

BID FORM

SUBCONTRACTOR LIST

In accordance with Title 29, Chapter 69, Section 6962(d)(10)b of the Delaware Code, the following subcontractor listing must accompany any bid submittal. The bidder must list **in each category** the full name and address (City & State) of the sub-contractor that the bidder will be using to perform the work and provide material for that subcontractor category. Should the bidder's listed subcontractor intend to provide any of their subcontractor category of work through a third-tier contractor, the bidder shall list that third-tier contractor's full name and address (City & State). **If the bidder intends to perform any category of work itself, it must list its full name and address.** For clarification, if the bidder intends to perform the work themselves, the bidder **may not** insert "not applicable", "N/A", "self" or anything other than its own full name and address (City & State). To do so shall cause the bid to be rejected. In addition, the failure to produce a completed subcontractor list with the bid submittal shall cause the bid to be rejected. If you have more than three (3) third-tier contractors to report in any subcontractor category, print out additional page(s) containing the appropriate category, complete the rest of your list of third-tier contractors for that category, notate the addition in parentheses as (CONTINUATION) next to the subcontractor category and an asterisk (*) next to any additional third-tier contractors, and submit it with your bid.

<u>Subcontractor Category</u>	<u>Subcontractor</u>	<u>Address (City & State)</u>	<u>Subcontractors tax-payer ID # or Delaware Business license #</u>
1.			
A.			
B.			
C.			
2.			
A.			
B.			
C.			

Bethany Beach Training Site – Physical Fitness Center
Bethany Beach Training Site, 163 Scannell Blvd, Bethany Beach, DE 19930
Contract No. 100097

BID FORM (Continued)

3.			
A.			
B.			
C.			
4.			
A.			
B.			
C.			
5.			
A.			
B.			
C.			

Bethany Beach Training Site – Physical Fitness Center
Bethany Beach Training Site, 163 Scannell Blvd, Bethany Beach, DE 19930
Contract No. 100097

BID FORM

NON-COLLUSION STATEMENT

This is to certify that the undersigned bidder has neither directly nor indirectly, entered into any agreement, participated in any collusion or otherwise taken any action in restraint of free competitive bidding in connection with this proposal submitted this date *(to the Office of Management and Budget, Division of Facilities Management)*.

All the terms and conditions of *(Project or Contract Number)* have been thoroughly examined and are understood.

NAME OF BIDDER:

**AUTHORIZED REPRESENTATIVE
(TYPED):**

**AUTHORIZED REPRESENTATIVE
(SIGNATURE):**

TITLE:

ADDRESS OF BIDDER:

E-MAIL:

PHONE NUMBER:

Sworn to and Subscribed before me this _____ day of _____ 20____.

My Commission expires _____. NOTARY PUBLIC _____.

THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.

**AFFIDAVIT
OF
EMPLOYEE DRUG TESTING PROGRAM**

4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects requires that Contractors and Subcontractors implement a program of mandatory drug testing for Employees who work on Large Public Works Contracts funded all or in part with public funds.

We hereby certify that we have in place or will implement during the entire term of the contract a Mandatory Drug Testing Program for our employees on the jobsite, including subcontractors, that complies with this regulation:

Contractor/Subcontractor Name:

Contractor/Subcontractor Address:

Authorized Representative (typed or printed):

Authorized Representative (signature):

Title:

Sworn to and Subscribed before me this _____ day of _____ 20____.

My Commission expires _____. NOTARY PUBLIC _____.

THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.

**Bethany Beach Training Site – Physical Fitness Center
Bethany Beach Training Site, 163 Scannell Blvd, Bethany Beach, DE 19930
Contract No. 100097**

**AFFIDAVIT
OF
CONTRACTOR QUALIFICATIONS**

We hereby certify that we will abide by the contractor's qualifications outlined in the construction bid specifications for the duration of the contract term.

In accordance with Title 29, Chapter 69, Section 6962(d)(10)b.3 of the Delaware Code, after a contract has been awarded the successful bidder shall not substitute another subcontractor whose name was submitted on the Subcontractor Form except for the reasons in the statute and not without written consent from the awarding agency. Failure to utilize the subcontractors on the list will subject the successful bidder to penalties as outlined in the General Requirements Section 5.2 of the contract.

Contractor Name:

Contractor Address:

Authorized Representative (typed or printed):

Authorized Representative (signature):

Title:

Sworn to and Subscribed before me this _____ day of _____ 20____.

My Commission expires _____. NOTARY PUBLIC _____.

THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.

STATE OF DELAWARE
OFFICE OF MANAGEMENT AND BUDGET

BID BOND

TO ACCOMPANY PROPOSAL
(Not necessary if security is used)

KNOW ALL PERSONS BY THESE PRESENTS That: _____
_____ of _____ in the County of _____
_____ and State of _____ as **Principal**, and _____
_____ of _____ in the County of _____
_____ and State of _____ as **Surety**, legally authorized to do business in the State of
Delaware ("**State**"), are held and firmly unto the **State** in the sum of _____
_____ Dollars (\$ _____), or _____ percent not to exceed _____
_____ Dollars (\$ _____)
_____ of amount of bid on Contract No. **100097**, to be paid to the **State** for the use and benefit of
Delaware Army National Guard for which payment well and truly to be made, we do bind ourselves, our and
each of our heirs, executors, administrators, and successors, jointly and severally for and in the whole firmly
by these presents.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH That if the above bonded **Principal**
who has submitted to the Delaware Army National Guard a certain proposal to enter into this contract for the
furnishing of certain material and/or services within the **State**, shall be awarded this Contract, and if said
Principal shall well and truly enter into and execute this Contract as may be required by the terms of this
Contract and approved by the Delaware Army National Guard this Contract to be entered into within twenty
days after the date of official notice of the award thereof in accordance with the terms of said proposal, then
this obligation shall be void or else to be and remain in full force and virtue.

Sealed with _____ seal and dated this _____ day of _____ in the year of our Lord two
thousand and _____ (20____).

SEALED, AND DELIVERED IN THE
Presence of

Corporate
Seal

By:

Name of Bidder (Organization)

Authorized Signature

Attest _____

Title

Witness: _____

By:

Name of Surety

Title

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

STANDARD FORM OF AGREEMENT BETWEEN OWNER AND CONTRACTOR A101-2017

The contract to be utilized on this project shall be the "Standard Form of Agreement Between Owner and Contractor" AIA Document A101-2017, including AIA Document A101 – 2017 Exhibit A, as well as Supplements to A101-2017 and Exhibit A and the State of Delaware's General Requirements.

NOT FOR BIDDING

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

AIA® Document A101® – 2017

Standard Form of Agreement Between Owner and Contractor where the basis of payment is a Stipulated Sum

AGREEMENT made as of the day of in the year
(In words, indicate day, month and year.)

BETWEEN the Owner:
(Name, legal status, address and other information)

and the Contractor:
(Name, legal status, address and other information)

for the following Project:
(Name, location and detailed description)

The Architect:
(Name, legal status, address and other information)

The JAED Corporation
2500 Wrangle Hill Road
Suite 110
Bear, DE 19701

The Owner and Contractor agree as follows.

ADDITIONS AND DELETIONS:

The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added necessary information and where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

The parties should complete A101®–2017, Exhibit A, Insurance and Bonds, contemporaneously with this Agreement. AIA Document A201®–2017, General Conditions of the Contract for Construction, is adopted in this document by reference. Do not use with other general conditions unless this document is modified.

TABLE OF ARTICLES

1	THE CONTRACT DOCUMENTS
2	THE WORK OF THIS CONTRACT
3	DATE OF COMMENCEMENT AND SUBSTANTIAL COMPLETION
4	CONTRACT SUM
5	PAYMENTS
6	DISPUTE RESOLUTION
7	TERMINATION OR SUSPENSION
8	MISCELLANEOUS PROVISIONS
9	ENUMERATION OF CONTRACT DOCUMENTS

EXHIBIT A INSURANCE AND BONDS

ARTICLE 1 THE CONTRACT DOCUMENTS

The Contract Documents consist of this Agreement, Conditions of the Contract (General, Supplementary, and other Conditions), Drawings, Specifications, Addenda issued prior to execution of this Agreement, other documents listed in this Agreement, and Modifications issued after execution of this Agreement, all of which form the Contract, and are as fully a part of the Contract as if attached to this Agreement or repeated herein. The Contract represents the entire and integrated agreement between the parties hereto and supersedes prior negotiations, representations, or agreements, either written or oral. An enumeration of the Contract Documents, other than a Modification, appears in Article 9.

ARTICLE 2 THE WORK OF THIS CONTRACT

The Contractor shall fully execute the Work described in the Contract Documents, except as specifically indicated in the Contract Documents to be the responsibility of others.

ARTICLE 3 DATE OF COMMENCEMENT AND SUBSTANTIAL COMPLETION

§ 3.1 The date of commencement of the Work shall be:

(Check one of the following boxes.)

- ☐ The date of this Agreement.
- ☒ A date set forth in a notice to proceed issued by the Owner.
- ☐ Established as follows:
(Insert a date or a means to determine the date of commencement of the Work.)

If a date of commencement of the Work is not selected, then the date of commencement shall be the date of this Agreement.

§ 3.2 The Contract Time shall be measured from the date of commencement of the Work.

§ 3.3 Substantial Completion

§ 3.3.1 Subject to adjustments of the Contract Time as provided in the Contract Documents, the Contractor shall achieve Substantial Completion of the entire Work:

(Check one of the following boxes and complete the necessary information.)

[☒] Not later than () calendar days from the date of commencement of the Work.

[] By the following date:

§ 3.3.2 Subject to adjustments of the Contract Time as provided in the Contract Documents, if portions of the Work are to be completed prior to Substantial Completion of the entire Work, the Contractor shall achieve Substantial Completion of such portions by the following dates:

Portion of Work
N/A

Substantial Completion Date

§ 3.3.3 If the Contractor fails to achieve Substantial Completion as provided in this Section 3.3, liquidated damages, if any, shall be assessed as set forth in Section 4.5.

ARTICLE 4 CONTRACT SUM

§ 4.1 The Owner shall pay the Contractor the Contract Sum in current funds for the Contractor's performance of the Contract. The Contract Sum shall be (\$), subject to additions and deductions as provided in the Contract Documents.

§ 4.2 Alternates

§ 4.2.1 Alternates, if any, included in the Contract Sum:

Item

Price

§ 4.2.2 Subject to the conditions noted below, the following alternates may be accepted by the Owner following execution of this Agreement. Upon acceptance, the Owner shall issue a Modification to this Agreement.
(Insert below each alternate and the conditions that must be met for the Owner to accept the alternate.)

Item

Price

Conditions for Acceptance

N/A

§ 4.3 Allowances, if any, included in the Contract Sum:
(Identify each allowance.)

Item

Price

#1 Owner's Contingencies

\$10,000.00

§ 4.4 Unit prices, if any:

(Identify the item and state the unit price and quantity limitations, if any, to which the unit price will be applicable.)

Item

Units and Limitations

Price per Unit (\$0.00)

None

§ 4.5 Liquidated damages, if any:

(Insert terms and conditions for liquidated damages, if any.)

N/A

§ 4.6 Other:

(Insert provisions for bonus or other incentives, if any, that might result in a change to the Contract Sum.)

N/A

ARTICLE 5 PAYMENTS

§ 5.1 Progress Payments

§ 5.1.1 Based upon Applications for Payment submitted to the Architect by the Contractor and Certificates for Payment issued by the Architect, the Owner shall make progress payments on account of the Contract Sum to the Contractor as provided below and elsewhere in the Contract Documents.

§ 5.1.2 The period covered by each Application for Payment shall be one calendar month ending on the last day of the month, or as follows:

N/A

§ 5.1.3 Provided that an Application for Payment is received by the Architect not later than the last day of a month, the Owner shall make payment of the amount certified to the Contractor not later than the last day of the following month. If an Application for Payment is received by the Architect after the application date fixed above, payment of the amount certified shall be made by the Owner not later than Thirty (30) days after the Owner receives the valid Application for Payment.

(Federal, state or local laws may require payment within a certain period of time.)

§ 5.1.4 Each Application for Payment shall be based on the most recent schedule of values submitted by the Contractor in accordance with the Contract Documents. The schedule of values shall allocate the entire Contract Sum among the various portions of the Work. The schedule of values shall be prepared in such form, and supported by such data to substantiate its accuracy, as the Architect may require. This schedule of values shall be used as a basis for reviewing the Contractor's Applications for Payment.

§ 5.1.5 Applications for Payment shall show the percentage of completion of each portion of the Work as of the end of the period covered by the Application for Payment.

§ 5.1.6 In accordance with AIA Document A201™–2017, General Conditions of the Contract for Construction, and subject to other provisions of the Contract Documents, the amount of each progress payment shall be computed as follows:

§ 5.1.6.1 The amount of each progress payment shall first include:

- .1 That portion of the Contract Sum properly allocable to completed Work;
- .2 That portion of the Contract Sum properly allocable to materials and equipment delivered and suitably stored at the site for subsequent incorporation in the completed construction, or, if approved in advance by the Owner, suitably stored off the site at a location agreed upon in writing; and
- .3 That portion of Construction Change Directives that the Architect determines, in the Architect's professional judgment, to be reasonably justified.

§ 5.1.6.2 The amount of each progress payment shall then be reduced by:

- .1 The aggregate of any amounts previously paid by the Owner;
- .2 The amount, if any, for Work that remains uncorrected and for which the Architect has previously withheld a Certificate for Payment as provided in Article 9 of AIA Document A201–2017;
- .3 Any amount for which the Contractor does not intend to pay a Subcontractor or material supplier, unless the Work has been performed by others the Contractor intends to pay;
- .4 For Work performed or defects discovered since the last payment application, any amount for which the Architect may withhold payment, or nullify a Certificate of Payment in whole or in part, as provided in Article 9 of AIA Document A201–2017; and
- .5 Retainage withheld pursuant to Section 5.1.7.

§ 5.1.7 Retainage

§ 5.1.7.1 For each progress payment made prior to Substantial Completion of the Work, the Owner may withhold the following amount, as retainage, from the payment otherwise due:

(Insert a percentage or amount to be withheld as retainage from each Application for Payment. The amount of retainage may be limited by governing law.)

Five Percent (5%)

Init.

§ 5.1.7.1.1 The following items are not subject to retainage:
(Insert any items not subject to the withholding of retainage, such as general conditions, insurance, etc.)

N/A

§ 5.1.7.2 Reduction or limitation of retainage, if any, shall be as follows:
(If the retainage established in Section 5.1.7.1 is to be modified prior to Substantial Completion of the entire Work, including modifications for Substantial Completion of portions of the Work as provided in Section 3.3.2, insert provisions for such modifications.)

N/A

§ 5.1.7.3 Except as set forth in this Section 5.1.7.3, upon Substantial Completion of the Work, the Contractor may submit an Application for Payment that includes the retainage withheld from prior Applications for Payment pursuant to this Section 5.1.7. The Application for Payment submitted at Substantial Completion shall not include retainage as follows:
(Insert any other conditions for release of retainage upon Substantial Completion.)

N/A

§ 5.1.8 If final completion of the Work is materially delayed through no fault of the Contractor, the Owner shall pay the Contractor any additional amounts in accordance with Article 9 of AIA Document A201–2017.

§ 5.1.9 Except with the Owner's prior approval, the Contractor shall not make advance payments to suppliers for materials or equipment which have not been delivered and stored at the site.

§ 5.2 Final Payment

§ 5.2.1 Final payment, constituting the entire unpaid balance of the Contract Sum, shall be made by the Owner to the Contractor when

- .1 the Contractor has fully performed the Contract except for the Contractor's responsibility to correct Work as provided in Article 12 of AIA Document A201–2017, and to satisfy other requirements, if any, which extend beyond final payment; and
- .2 a final Certificate for Payment has been issued by the Architect.

§ 5.2.2 The Owner's final payment to the Contractor shall be made no later than 30 days after the issuance of the Architect's final Certificate for Payment, or as follows:

Per Bid Documents

§ 5.3 Interest

Payments due and unpaid under the Contract shall bear interest from the date payment is due at the rate stated below, or in the absence thereof, at the legal rate prevailing from time to time at the place where the Project is located.
(Insert rate of interest agreed upon, if any.)

One percent (1%) per month not to exceed twelve percent (12%) annum beginning thirty days after the owner receives the valid application for payment.

ARTICLE 6 DISPUTE RESOLUTION

§ 6.1 Initial Decision Maker

The Architect will serve as the Initial Decision Maker pursuant to Article 15 of AIA Document A201–2017, unless the parties appoint below another individual, not a party to this Agreement, to serve as the Initial Decision Maker.
(If the parties mutually agree, insert the name, address and other contact information of the Initial Decision Maker, if other than the Architect.)

§ 6.2 Binding Dispute Resolution

For any Claim subject to, but not resolved by, mediation pursuant to Article 15 of AIA Document A201–2017, the method of binding dispute resolution shall be as follows:

(Check the appropriate box.)

☐ Arbitration pursuant to Section 15.4 of AIA Document A201–2017

☐ Litigation in a court of competent jurisdiction

☒ Other *(Specify)*

Remedies at Law or In Equity

If the Owner and Contractor do not select a method of binding dispute resolution, or do not subsequently agree in writing to a binding dispute resolution method other than litigation, Claims will be resolved by litigation in a court of competent jurisdiction.

ARTICLE 7 TERMINATION OR SUSPENSION

§ 7.1 The Contract may be terminated by the Owner or the Contractor as provided in Article 14 of AIA Document A201–2017.

§ 7.1.1 If the Contract is terminated for the Owner's convenience in accordance with Article 14 of AIA Document A201–2017, then the Owner shall pay the Contractor a termination fee as follows:

(Insert the amount of, or method for determining, the fee, if any, payable to the Contractor following a termination for the Owner's convenience.)

N/A

§ 7.2 The Work may be suspended by the Owner as provided in Article 14 of AIA Document A201–2017.

ARTICLE 8 MISCELLANEOUS PROVISIONS

§ 8.1 Where reference is made in this Agreement to a provision of AIA Document A201–2017 or another Contract Document, the reference refers to that provision as amended or supplemented by other provisions of the Contract Documents.

§ 8.2 The Owner's representative:

(Name, address, email address, and other information)

State of Delaware
John Dunham
501 S. DuPont Highway
Suite 1
Dover, DE 19901
302-744-1185

§ 8.3 The Contractor's representative:

(Name, address, email address, and other information)

§ 8.4 Neither the Owner's nor the Contractor's representative shall be changed without ten days' prior notice to the other party.

§ 8.5 Insurance and Bonds

§ 8.5.1 The Owner and the Contractor shall purchase and maintain insurance as set forth in AIA Document A101™–2017, Standard Form of Agreement Between Owner and Contractor where the basis of payment is a Stipulated Sum, Exhibit A, Insurance and Bonds, and elsewhere in the Contract Documents.

§ 8.5.2 The Contractor shall provide bonds as set forth in AIA Document A101™–2017 Exhibit A, and elsewhere in the Contract Documents.

§ 8.6 Notice in electronic format, pursuant to Article 1 of AIA Document A201–2017, may be given in accordance with AIA Document E203™–2013, Building Information Modeling and Digital Data Exhibit, if completed, or as otherwise set forth below:

(If other than in accordance with AIA Document E203–2013, insert requirements for delivering notice in electronic format such as name, title, and email address of the recipient and whether and how the system will be required to generate a read receipt for the transmission.)

N/A

§ 8.7 Other provisions:

Per Specifications and all applicable Addendums.

ARTICLE 9 ENUMERATION OF CONTRACT DOCUMENTS

§ 9.1 This Agreement is comprised of the following documents:

- .1 AIA Document A101™–2017, Standard Form of Agreement Between Owner and Contractor
- .2 AIA Document A101™–2017, Exhibit A, Insurance and Bonds
- .3 AIA Document A201™–2017, General Conditions of the Contract for Construction
- .4 AIA Document E203™–2013, Building Information Modeling and Digital Data Exhibit, dated as indicated below:
(Insert the date of the E203-2013 incorporated into this Agreement.)

N/A

- .5 Drawings

Number	Title	Date
See EXHIBIT B	List of Drawings	

- .6 Specifications

Section	Title	Date	Pages
See EXHIBIT C	Table of Contents		

- .7 Addenda, if any:

Number	Date	Pages
Portions of Addenda relating to bidding or proposal requirements are not part of the Contract Documents unless the bidding or proposal requirements are also enumerated in this Article 9.		

- .8 Other Exhibits:

(Check all boxes that apply and include appropriate information identifying the exhibit where required.)

[] AIA Document E204™-2017, Sustainable Projects Exhibit, dated as indicated below:
(Insert the date of the E204-2017 incorporated into this Agreement.)

[] The Sustainability Plan:

Title	Date	Pages

[X] Supplementary and other Conditions of the Contract:

Document	Title	Date	Pages
00 72 13	General Conditions		42
00 73 13	Supplementary General Conditions		10
00 73 46	Wage Rates		1
00 81 13	General Requirements		42

.9 Other documents, if any, listed below:
(List here any additional documents that are intended to form part of the Contract Documents. AIA Document A201™-2017 provides that the advertisement or invitation to bid, Instructions to Bidders, sample forms, the Contractor's bid or proposal, portions of Addenda relating to bidding or proposal requirements, and other information furnished by the Owner in anticipation of receiving bids or proposals, are not part of the Contract Documents unless enumerated in this Agreement. Any such documents should be listed here only if intended to be part of the Contract Documents.)

Bid Form submitted by Contractor on _____

This Agreement entered into as of the day and year first written above.

OWNER (Signature)

CONTRACTOR (Signature)

(Printed name and title)

(Printed name and title)

AIA® Document A101™ – 2017 Exhibit A

Insurance and Bonds

This Insurance and Bonds Exhibit is part of the Agreement, between the Owner and the Contractor, dated the day of in the year
(In words, indicate day, month and year.)

for the following **PROJECT**:
(Name and location or address)

THE OWNER:
(Name, legal status and address)

THE CONTRACTOR:
(Name, legal status and address)

TABLE OF ARTICLES

- A.1 GENERAL**
- A.2 OWNER'S INSURANCE**
- A.3 CONTRACTOR'S INSURANCE AND BONDS**
- A.4 SPECIAL TERMS AND CONDITIONS**

ARTICLE A.1 GENERAL

The Owner and Contractor shall purchase and maintain insurance, and provide bonds, as set forth in this Exhibit. As used in this Exhibit, the term General Conditions refers to AIA Document A201™–2017, General Conditions of the Contract for Construction.

ARTICLE A.2 OWNER'S INSURANCE

§ A.2.1 General

Prior to commencement of the Work, the Owner shall secure the insurance, and provide evidence of the coverage, required under this Article A.2 and, upon the Contractor's request, provide a copy of the property insurance policy or policies required by Section A.2.3. The copy of the policy or policies provided shall contain all applicable conditions, definitions, exclusions, and endorsements.

§ A.2.2 Liability Insurance

The Owner shall be responsible for purchasing and maintaining the Owner's usual general liability insurance.

ADDITIONS AND DELETIONS:

The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added necessary information and where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

This document is intended to be used in conjunction with AIA Document A201™–2017, General Conditions of the Contract for Construction. Article 11 of A201™–2017 contains additional insurance provisions.

Init.

§ A.2.3 Required Property Insurance

§ A.2.3.1 Unless this obligation is placed on the Contractor pursuant to Section A.3.3.2.1, the Owner shall purchase and maintain, from an insurance company or insurance companies lawfully authorized to issue insurance in the jurisdiction where the Project is located, property insurance written on a builder's risk "all-risks" completed value or equivalent policy form and sufficient to cover the total value of the entire Project on a replacement cost basis. The Owner's property insurance coverage shall be no less than the amount of the initial Contract Sum, plus the value of subsequent Modifications and labor performed and materials or equipment supplied by others. The property insurance shall be maintained until Substantial Completion and thereafter as provided in Section A.2.3.1.3, unless otherwise provided in the Contract Documents or otherwise agreed in writing by the parties to this Agreement. This insurance shall include the interests of the Owner, Contractor, Subcontractors, and Sub-subcontractors in the Project as insureds. This insurance shall include the interests of mortgagees as loss payees.

§ A.2.3.1.1 Causes of Loss. The insurance required by this Section A.2.3.1 shall provide coverage for direct physical loss or damage, and shall not exclude the risks of fire, explosion, theft, vandalism, malicious mischief, collapse, earthquake, flood, or windstorm. The insurance shall also provide coverage for ensuing loss or resulting damage from error, omission, or deficiency in construction methods, design, specifications, workmanship, or materials. Sub-limits, if any, are as follows:

(Indicate below the cause of loss and any applicable sub-limit.)

Causes of Loss	Sub-Limit
§ A.2.3.1.2 Specific Required Coverages. The insurance required by this Section A.2.3.1 shall provide coverage for loss or damage to falsework and other temporary structures, and to building systems from testing and startup. The insurance shall also cover debris removal, including demolition occasioned by enforcement of any applicable legal requirements, and reasonable compensation for the Architect's and Contractor's services and expenses required as a result of such insured loss, including claim preparation expenses. Sub-limits, if any, are as follows: <i>(Indicate below type of coverage and any applicable sub-limit for specific required coverages.)</i>	
Coverage	Sub-Limit
§ A.2.3.1.3 Unless the parties agree otherwise, upon Substantial Completion, the Owner shall continue the insurance required by Section A.2.3.1 or, if necessary, replace the insurance policy required under Section A.2.3.1 with property insurance written for the total value of the Project that shall remain in effect until expiration of the period for correction of the Work set forth in Section 12.2.2 of the General Conditions.	
§ A.2.3.1.4 Deductibles and Self-Insured Retentions. If the insurance required by this Section A.2.3 is subject to deductibles or self-insured retentions, the Owner shall be responsible for all loss not covered because of such deductibles or retentions.	
§ A.2.3.2 Occupancy or Use Prior to Substantial Completion. The Owner's occupancy or use of any completed or partially completed portion of the Work prior to Substantial Completion shall not commence until the insurance company or companies providing the insurance under Section A.2.3.1 have consented in writing to the continuance of coverage. The Owner and the Contractor shall take no action with respect to partial occupancy or use that would cause cancellation, lapse, or reduction of insurance, unless they agree otherwise in writing.	
§ A.2.3.3 Insurance for Existing Structures If the Work involves remodeling an existing structure or constructing an addition to an existing structure, the Owner shall purchase and maintain, until the expiration of the period for correction of Work as set forth in Section 12.2.2 of the General Conditions, "all-risks" property insurance, on a replacement cost basis, protecting the existing structure against direct physical loss or damage from the causes of loss identified in Section A.2.3.1, notwithstanding the undertaking of the Work. The Owner shall be responsible for all co-insurance penalties.	
§ A.2.4 Optional Extended Property Insurance. The Owner shall purchase and maintain the insurance selected and described below.	

(Select the types of insurance the Owner is required to purchase and maintain by placing an X in the box(es) next to the description(s) of selected insurance. For each type of insurance selected, indicate applicable limits of coverage or other conditions in the fill point below the selected item.)

- ☐ **§ A.2.4.1 Loss of Use, Business Interruption, and Delay in Completion Insurance**, to reimburse the Owner for loss of use of the Owner's property, or the inability to conduct normal operations due to a covered cause of loss.
- ☐ **§ A.2.4.2 Ordinance or Law Insurance**, for the reasonable and necessary costs to satisfy the minimum requirements of the enforcement of any law or ordinance regulating the demolition, construction, repair, replacement or use of the Project.
- ☐ **§ A.2.4.3 Expediting Cost Insurance**, for the reasonable and necessary costs for the temporary repair of damage to insured property, and to expedite the permanent repair or replacement of the damaged property.
- ☐ **§ A.2.4.4 Extra Expense Insurance**, to provide reimbursement of the reasonable and necessary excess costs incurred during the period of restoration or repair of the damaged property that are over and above the total costs that would normally have been incurred during the same period of time had no loss or damage occurred.
- ☐ **§ A.2.4.5 Civil Authority Insurance**, for losses or costs arising from an order of a civil authority prohibiting access to the Project, provided such order is the direct result of physical damage covered under the required property insurance.
- ☐ **§ A.2.4.6 Ingress/Egress Insurance**, for loss due to the necessary interruption of the insured's business due to physical prevention of ingress to, or egress from, the Project as a direct result of physical damage.
- ☐ **§ A.2.4.7 Soft Costs Insurance**, to reimburse the Owner for costs due to the delay of completion of the Work, arising out of physical loss or damage covered by the required property insurance: including construction loan fees; leasing and marketing expenses; additional fees, including those of architects, engineers, consultants, attorneys and accountants, needed for the completion of the construction, repairs, or reconstruction; and carrying costs such as property taxes, building permits, additional interest on loans, realty taxes, and insurance premiums over and above normal expenses.

§ A.2.5 Other Optional Insurance.

The Owner shall purchase and maintain the insurance selected below.

(Select the types of insurance the Owner is required to purchase and maintain by placing an X in the box(es) next to the description(s) of selected insurance.)

- ☐ **§ A.2.5.1 Cyber Security Insurance** for loss to the Owner due to data security and privacy breach,

Init.

including costs of investigating a potential or actual breach of confidential or private information.
(Indicate applicable limits of coverage or other conditions in the fill point below.)

[] **§ A.2.5.2 Other Insurance**

(List below any other insurance coverage to be provided by the Owner and any applicable limits.)

Coverage

Limits

ARTICLE A.3 CONTRACTOR'S INSURANCE AND BONDS

§ A.3.1 General

§ A.3.1.1 Certificates of Insurance. The Contractor shall provide certificates of insurance acceptable to the Owner evidencing compliance with the requirements in this Article A.3 at the following times: (1) prior to commencement of the Work; (2) upon renewal or replacement of each required policy of insurance; and (3) upon the Owner's written request. An additional certificate evidencing continuation of commercial liability coverage, including coverage for completed operations, shall be submitted with the final Application for Payment and thereafter upon renewal or replacement of such coverage until the expiration of the periods required by Section A.3.2.1 and Section A.3.3.1. The certificates will show the Owner as an additional insured on the Contractor's Commercial General Liability and excess or umbrella liability policy or policies.

§ A.3.1.2 Deductibles and Self-Insured Retentions. The Contractor shall disclose to the Owner any deductible or self-insured retentions applicable to any insurance required to be provided by the Contractor.

§ A.3.1.3 Additional Insured Obligations. To the fullest extent permitted by law, the Contractor shall cause the commercial general liability coverage to include (1) the Owner, the Architect, and the Architect's consultants as additional insureds for claims caused in whole or in part by the Contractor's negligent acts or omissions during the Contractor's operations; and (2) the Owner as an additional insured for claims caused in whole or in part by the Contractor's negligent acts or omissions for which loss occurs during completed operations. The additional insured coverage shall be primary and non-contributory to any of the Owner's general liability insurance policies and shall apply to both ongoing and completed operations. To the extent commercially available, the additional insured coverage shall be no less than that provided by Insurance Services Office, Inc. (ISO) forms CG 20 10 07 04, CG 20 37 07 04, and, with respect to the Architect and the Architect's consultants, CG 20 32 07 04.

§ A.3.2 Contractor's Required Insurance Coverage

§ A.3.2.1 The Contractor shall purchase and maintain the following types and limits of insurance from an insurance company or insurance companies lawfully authorized to issue insurance in the jurisdiction where the Project is located. The Contractor shall maintain the required insurance until the expiration of the period for correction of Work as set forth in Section 12.2.2 of the General Conditions, unless a different duration is stated below:

(If the Contractor is required to maintain insurance for a duration other than the expiration of the period for correction of Work, state the duration.)

§ A.3.2.2 Commercial General Liability

§ A.3.2.2.1 Commercial General Liability insurance for the Project written on an occurrence form with policy limits of not less than (\$) each occurrence, (\$) general aggregate, and (\$) aggregate for products-completed operations hazard, providing coverage for claims including

- .1 damages because of bodily injury, sickness or disease, including occupational sickness or disease, and death of any person;
- .2 personal injury and advertising injury;
- .3 damages because of physical damage to or destruction of tangible property, including the loss of use of such property;
- .4 bodily injury or property damage arising out of completed operations; and
- .5 the Contractor's indemnity obligations under Section 3.18 of the General Conditions.

§ A.3.2.2 The Contractor's Commercial General Liability policy under this Section A.3.2.2 shall not contain an exclusion or restriction of coverage for the following:

- .1 Claims by one insured against another insured, if the exclusion or restriction is based solely on the fact that the claimant is an insured, and there would otherwise be coverage for the claim.
- .2 Claims for property damage to the Contractor's Work arising out of the products-completed operations hazard where the damaged Work or the Work out of which the damage arises was performed by a Subcontractor.
- .3 Claims for bodily injury other than to employees of the insured.
- .4 Claims for indemnity under Section 3.18 of the General Conditions arising out of injury to employees of the insured.
- .5 Claims or loss excluded under a prior work endorsement or other similar exclusionary language.
- .6 Claims or loss due to physical damage under a prior injury endorsement or similar exclusionary language.
- .7 Claims related to residential, multi-family, or other habitational projects, if the Work is to be performed on such a project.
- .8 Claims related to roofing, if the Work involves roofing.
- .9 Claims related to exterior insulation finish systems (EIFS), synthetic stucco or similar exterior coatings or surfaces, if the Work involves such coatings or surfaces.
- .10 Claims related to earth subsidence or movement, where the Work involves such hazards.
- .11 Claims related to explosion, collapse and underground hazards, where the Work involves such hazards.

§ A.3.2.3 Automobile Liability covering vehicles owned, and non-owned vehicles used, by the Contractor, with policy limits of not less than (\$) per accident, for bodily injury, death of any person, and property damage arising out of the ownership, maintenance and use of those motor vehicles along with any other statutorily required automobile coverage.

§ A.3.2.4 The Contractor may achieve the required limits and coverage for Commercial General Liability and Automobile Liability through a combination of primary and excess or umbrella liability insurance, provided such primary and excess or umbrella insurance policies result in the same or greater coverage as the coverages required under Section A.3.2.2 and A.3.2.3, and in no event shall any excess or umbrella liability insurance provide narrower coverage than the primary policy. The excess policy shall not require the exhaustion of the underlying limits only through the actual payment by the underlying insurers.

§ A.3.2.5 Workers' Compensation at statutory limits.

§ A.3.2.6 Employers' Liability with policy limits not less than (\$) each accident, (\$) each employee, and (\$) policy limit.

§ A.3.2.7 Jones Act, and the Longshore & Harbor Workers' Compensation Act, as required, if the Work involves hazards arising from work on or near navigable waterways, including vessels and docks

§ A.3.2.8 If the Contractor is required to furnish professional services as part of the Work, the Contractor shall procure Professional Liability insurance covering performance of the professional services, with policy limits of not less than (\$) per claim and (\$) in the aggregate.

§ A.3.2.9 If the Work involves the transport, dissemination, use, or release of pollutants, the Contractor shall procure Pollution Liability insurance, with policy limits of not less than (\$) per claim and (\$) in the aggregate.

§ A.3.2.10 Coverage under Sections A.3.2.8 and A.3.2.9 may be procured through a Combined Professional Liability and Pollution Liability insurance policy, with combined policy limits of not less than (\$) per claim and (\$) in the aggregate.

§ A.3.2.11 Insurance for maritime liability risks associated with the operation of a vessel, if the Work requires such activities, with policy limits of not less than (\$) per claim and (\$) in the aggregate.

§ A.3.2.12 Insurance for the use or operation of manned or unmanned aircraft, if the Work requires such activities, with policy limits of not less than (\$) per claim and (\$) in the aggregate.

§ A.3.3 Contractor's Other Insurance Coverage

§ A.3.3.1 Insurance selected and described in this Section A.3.3 shall be purchased from an insurance company or insurance companies lawfully authorized to issue insurance in the jurisdiction where the Project is located. The Contractor shall maintain the required insurance until the expiration of the period for correction of Work as set forth in Section 12.2.2 of the General Conditions, unless a different duration is stated below:

(If the Contractor is required to maintain any of the types of insurance selected below for a duration other than the expiration of the period for correction of Work, state the duration.)

§ A.3.3.2 The Contractor shall purchase and maintain the following types and limits of insurance in accordance with Section A.3.3.1.

(Select the types of insurance the Contractor is required to purchase and maintain by placing an X in the box(es) next to the description(s) of selected insurance. Where policy limits are provided, include the policy limit in the appropriate fill point.)

- ☐ § A.3.3.2.1 Property insurance of the same type and scope satisfying the requirements identified in Section A.2.3, which, if selected in this section A.3.3.2.1, relieves the Owner of the responsibility to purchase and maintain such insurance except insurance required by Section A.2.3.1.3 and Section A.2.3.3. The Contractor shall comply with all obligations of the Owner under Section A.2.3 except to the extent provided below. The Contractor shall disclose to the Owner the amount of any deductible, and the Owner shall be responsible for losses within the deductible. Upon request, the Contractor shall provide the Owner with a copy of the property insurance policy or policies required. The Owner shall adjust and settle the loss with the insurer and be the trustee of the proceeds of the property insurance in accordance with Article 11 of the General Conditions unless otherwise set forth below:
(Where the Contractor's obligation to provide property insurance differs from the Owner's obligations as described under Section A.2.3, indicate such differences in the space below. Additionally, if a party other than the Owner will be responsible for adjusting and settling a loss with the insurer and acting as the trustee of the proceeds of property insurance in accordance with Article 11 of the General Conditions, indicate the responsible party below.)

- ☐ § A.3.3.2.2 Railroad Protective Liability Insurance, with policy limits of not less than (\$) per claim and (\$) in the aggregate, for Work within fifty (50) feet of railroad property.

- ☐ § A.3.3.2.3 Asbestos Abatement Liability Insurance, with policy limits of not less than (\$) per claim and (\$) in the aggregate, for liability arising from the encapsulation, removal, handling, storage, transportation, and disposal of asbestos-containing materials.

- ☐ § A.3.3.2.4 Insurance for physical damage to property while it is in storage and in transit to the construction site on an "all-risks" completed value form.

- ☐ § A.3.3.2.5 Property insurance on an "all-risks" completed value form, covering property owned by the Contractor and used on the Project, including scaffolding and other equipment.

- ☐ § A.3.3.2.6 Other Insurance
(List below any other insurance coverage to be provided by the Contractor and any applicable limits.)

Coverage

Limits

Init.

§ A.3.4 Performance Bond and Payment Bond

The Contractor shall provide surety bonds, from a company or companies lawfully authorized to issue surety bonds in the jurisdiction where the Project is located, as follows:

(Specify type and penal sum of bonds.)

Type	Penal Sum (\$0.00)
Payment Bond	
Performance Bond	

Payment and Performance Bonds shall be AIA Document A312™, Payment Bond and Performance Bond, or contain provisions identical to AIA Document A312™, current as of the date of this Agreement.

ARTICLE A.4 SPECIAL TERMS AND CONDITIONS

Special terms and conditions that modify this Insurance and Bonds Exhibit, if any, are as follows:

NOT FOR BIDDING

Init.

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SUPPLEMENT TO AGREEMENT BETWEEN OWNER AND CONTRACTOR A101-2017

The following supplements modify the "Standard Form of Agreement Between Owner and Constructor," AIA Document A101-2017. Where a portion of the Standard Form of Agreement is modified or deleted by the following, the unaltered portions of the Standard Form of Agreement shall remain in effect.

ARTICLE 3: DATE OF COMMENCEMENT AND SUBSTANTIAL COMPLETION

3.1 Delete paragraph 3.1 in its entirety and replace with the following:

"The date of Commencement of the Work shall be a date set forth in a notice to proceed issued by the Owner."

ARTICLE 5: PAYMENTS

5.1 PROGRESS PAYMENTS

5.1.3 Delete paragraph 5.1.3 in its entirety and replace with the following:

"Provided that a valid Application for Payment is received by the Architect that meets all requirements of the Contract, payment shall be made by the Owner not later than 30 days after the Owner receives the valid Application for Payment."

5.3 Insert the interest rate of "1% per month not to exceed 12% per annum."

ARTICLE 6: DISPUTE RESOLUTION

6.2 BINDING DISPUTE RESOLUTION

Check Other – and add the following sentence:

"Any remedies available in law or in equity."

ARTICLE 7: TERMINATION or SUSPENSION

7.1.1 Delete paragraph 7.1.1 in its entirety.

ARTICLE 8: MISCELLANEOUS PROVISIONS

8.4 Delete paragraph 8.4 in its entirety and replace with the following:

"The Contractor's representative shall not be changed without ten days written notice to the Owner."

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SUPPLEMENT TO A101-2017 – EXHIBIT A INSURANCE AND BONDS

The following supplements modify the "Standard Form of Agreement Between Owner and Contractor," AIA Document A101-2017 Exhibit A Insurance and Bonds. Where a portion of the Standard Form of Agreement is modified or deleted by the following, the unaltered portions of the Standard Form of Agreement shall remain in effect.

ARTICLE A.2 OWNER'S INSURANCE

A.2.1 General

Delete paragraph A.2.1 in its entirety.

A.2.2 Liability Insurance

Delete paragraph A.2.2 in its entirety, except in the case of school projects this paragraph shall remain.

A.2.3 Required Property Insurance

Delete paragraph A.2.3 in its entirety.

A.2.4 Optional Extended Property Insurance

Delete paragraph A.2.4 in its entirety.

A.2.5 Other Optional Insurance

Delete paragraph A.2.5 in its entirety.

ARTICLE A.3 CONTRACTORS INSURANCE AND BONDS

A.3.1.3 Additional Insured Obligations

In the first sentence after "coverage to include (1)" delete "(1) the Owner,".

Strike the remainder of the first sentence beginning at the semicolon "; and (2) the Owner" through the end of the sentence.

Delete the second sentence in its entirety.

A.3.3.2.1 Delete paragraph 3.3.2.1 in its entirety and replace with the following:

Property Insurance of the same type and scope satisfying the requirements identified in Section A.2.3, The Contractor shall comply with all obligations of the Owner under A.2.3 except to the extent provided below. Upon request, the Contractor shall provide the Owner with a copy of the property insurance policy or policies required.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

STATE OF DELAWARE
OFFICE OF MANAGEMENT AND BUDGET

PERFORMANCE BOND

Bond Number: _____

KNOW ALL PERSONS BY THESE PRESENTS, that we, _____, as principal ("**Principal**"), and _____, a _____ corporation, legally authorized to do business in the State of Delaware, as surety ("**Surety**"), are held and firmly bound unto the Delaware Army National Guard ("**Owner**") in the amount of _____ (\$_____), to be paid to **Owner**, for which payment well and truly to be made, we do bind ourselves, our and each and every of our heirs, executors, administrations, successors and assigns, jointly and severally, for and in the whole, firmly by these presents.

Sealed with our seals and dated this _____ day of _____, 20__.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH, that if **Principal**, who has been awarded by **Owner** that certain contract known as Contract No. 100097 dated the _____ day of _____, 20__ (the "Contract"), which Contract is incorporated herein by reference, shall well and truly provide and furnish all materials, appliances and tools and perform all the work required under and pursuant to the terms and conditions of the Contract and the Contract Documents (as defined in the Contract) or any changes or modifications thereto made as therein provided, shall make good and reimburse **Owner** sufficient funds to pay the costs of completing the Contract that **Owner** may sustain by reason of any failure or default on the part of **Principal**, and shall also indemnify and save harmless **Owner** from all costs, damages and expenses arising out of or by reason of the performance of the Contract and for as long as provided by the Contract; then this obligation shall be void, otherwise to be and remain in full force and effect.

Surety, for value received, hereby stipulates and agrees, if requested to do so by **Owner**, to fully perform and complete the work to be performed under the Contract pursuant to the terms, conditions and covenants thereof, if for any cause **Principal** fails or neglects to so fully perform and complete such work.

Surety, for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of **Surety** and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition or change in or to the Contract or the work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any work to be performed or any monies due or to become due thereunder; and **Surety** hereby waives notice of any and all such extensions, modifications, omissions, additions, changes, payments, waivers, assignments, subcontracts and transfers and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to assignees, subcontractors, and other transferees shall have the same effect as to **Surety** as though done or omitted to be done by or in relation to **Principal**.

Surety hereby stipulates and agrees that no modifications, omissions or additions in or to the terms of the Contract shall in any way whatsoever affect the obligation of **Surety** and its bond.

Any proceeding, legal or equitable, under this Bond may be brought in any court of competent jurisdiction in the State of Delaware. Notices to **Surety** or Contractor may be mailed or delivered to them at their respective addresses shown below.

IN WITNESS WHEREOF, **Principal** and **Surety** have hereunto set their hand and seals, and such of them as are corporations have caused their corporate seal to be hereto affixed and these presents to be signed by their duly authorized officers, the day and year first above written.

PRINCIPAL

Name: _____

Witness or Attest: Address: _____

Name:

(Corporate Seal)

By: _____ (SEAL)

Name:

Title:

SURETY

Name: _____

Witness or Attest: Address: _____

Name:

(Corporate Seal)

By: _____ (SEAL)

Name:

Title:

END OF SECTION

STATE OF DELAWARE
OFFICE OF MANAGEMENT AND BUDGET

PAYMENT BOND

Bond Number: _____

KNOW ALL PERSONS BY THESE PRESENTS, that we, _____, as principal ("**Principal**"), and _____, a _____ corporation, legally authorized to do business in the State of Delaware, as surety ("**Surety**"), are held and firmly bound unto the Delaware Army National Guard ("**Owner**"), in the amount of _____ (\$_____), to be paid to **Owner**, for which payment well and truly to be made, we do bind ourselves, our and each and every of our heirs, executors, administrations, successors and assigns, jointly and severally, for and in the whole firmly by these presents.

Sealed with our seals and dated this _____ day of _____, 20__.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH, that if **Principal**, who has been awarded by **Owner** that certain contract known as Contract No. 100097 dated the _____ day of _____, 20__ (the "Contract"), which Contract is incorporated herein by reference, shall well and truly pay all and every person furnishing materials or performing labor or service in and about the performance of the work under the Contract, all and every sums of money due him, her, them or any of them, for all such materials, labor and service for which **Principal** is liable, shall make good and reimburse **Owner** sufficient funds to pay such costs in the completion of the Contract as **Owner** may sustain by reason of any failure or default on the part of **Principal**, and shall also indemnify and save harmless **Owner** from all costs, damages and expenses arising out of or by reason of the performance of the Contract and for as long as provided by the Contract; then this obligation shall be void, otherwise to be and remain in full force and effect.

Surety, for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of **Surety** and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition or change in or to the Contract or the work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any work to be performed or any monies due or to become due thereunder; and **Surety** hereby waives notice of any and all such extensions, modifications, omissions, additions, changes, payments, waivers, assignments, subcontracts and transfers and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to assignees, subcontractors, and other transferees shall have the same effect as to **Surety** as though done or omitted to be done by or in relation to **Principal**.

Surety hereby stipulates and agrees that no modifications, omission or additions in or to the terms of the Contract shall in any way whatsoever affect the obligation of **Surety** and its bond.

Any proceeding, legal or equitable, under this Bond may be brought in any court of competent jurisdiction in the State of Delaware. Notices to **Surety** or Contractor may be mailed or delivered to them at their respective addresses shown below.

IN WITNESS WHEREOF, **Principal** and **Surety** have hereunto set their hand and seals, and such of them as are corporations have caused their corporate seal to be hereto affixed and these presents to be signed by their duly authorized officers, the day and year first above written.

PRINCIPAL

Name: _____

Witness or Attest: Address: _____

Name:

(Corporate Seal)

By: _____ (SEAL)
Name:
Title:

SURETY

Name: _____

Witness or Attest: Address: _____

Name:

(Corporate Seal)

By: _____ (SEAL)
Name:
Title:

END OF SECTION

APPLICATION AND CERTIFICATE FOR PAYMENT FORMS

The Application and Certificate for Payment are as stated in the American Institute of Architects Document AIA G702 & AIA G703 (1992 version) entitled Application and Certificate for Payment and is part of this project manual as if herein written in full. A draft sample has been included for reference.

NOT FOR BIDDING

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

Application and Certificate for Payment

TO OWNER: PROJECT: sample APPLICATION NO: 001
PERIOD TO: OWNER: ☐
FROM CONTRACTOR: VIA ARCHITECT: ARCHITECT: ☐
CONTRACTOR: CONTRACT DATE: ☐
PROJECT NOS: / / CONTRACTOR: ☐
FIELD: ☐
OTHER: ☐

CONTRACTOR'S APPLICATION FOR PAYMENT

Application is made for payment, as shown below, in connection with the Contract. Continuation Sheet, AIA Document G703, is attached.

1. ORIGINAL CONTRACT SUM..... \$ 0.00
2. Net change by Change Orders \$ 0.00
3. CONTRACT SUM TO DATE (Line 1 ± 2)..... \$ 0.00
4. TOTAL COMPLETED & STORED TO DATE (Column G on G703) \$ 0.00
5. RETAINAGE:
 - a. 0 % of Completed Work (Column D + E on G703) \$ 0.00
 - b. 0 % of Stored Material (Column F on G703) \$ 0.00Total Retainage (Lines 5a + 5b or Total in Column I of G703) \$ 0.00
6. TOTAL EARNED LESS RETAINAGE \$ 0.00
(Line 4 Less Line 5 Total)
7. LESS PREVIOUS CERTIFICATES FOR PAYMENT \$ 0.00
(Line 6 from prior Certificate)
8. CURRENT PAYMENT DUE \$ 0.00
9. BALANCE TO FINISH, INCLUDING RETAINAGE (Line 3 less Line 6) \$ 0.00

CHANGE ORDER SUMMARY	ADDITIONS	DEDUCTIONS
Total changes approved in previous months by Owner	\$ 0.00	\$ 0.00
Total approved this Month	\$ 0.00	\$ 0.00
TOTALS	\$ 0.00	\$ 0.00
NET CHANGES by Change Order	\$	0.00

The undersigned Contractor certifies that to the best of the Contractor's knowledge, information and belief the Work covered by this Application for Payment has been completed in accordance with the Contract Documents, that all amounts have been paid by the Contractor for Work for which previous Certificates for Payment were issued and payments received from the Owner, and that current payment shown herein is now due.

CONTRACTOR: By: _____ Date: _____
State of: _____
County of: _____
Subscribed and sworn to before me this _____ day of _____
Notary Public: _____
My Commission expires: _____

ARCHITECT'S CERTIFICATE FOR PAYMENT

In accordance with the Contract Documents, based on on-site observations and the data comprising this application, the Architect certifies to the Owner that to the best of the Architect's knowledge, information and belief the Work has progressed as indicated, the quality of the Work is in accordance with the Contract Documents, and the Contractor is entitled to payment of the AMOUNT CERTIFIED.

AMOUNT CERTIFIED \$ 0.00
(Attach explanation if amount certified differs from the amount applied. Initial all figures on this Application and on the Continuation Sheet that are changed to conform with the amount certified.)

ARCHITECT: By: _____ Date: _____
This Certificate is not negotiable. The AMOUNT CERTIFIED is payable only to the Contractor named herein. Issuance, payment and acceptance of payment are without prejudice to any rights of the Owner or Contractor under this Contract

AIA[®] Document G703[™] – 1992

Continuation Sheet

AIA Document G702, APPLICATION AND CERTIFICATION FOR PAYMENT,

containing Contractor's signed certification is attached.

In tabulations below, amounts are stated to the nearest dollar.

Use Column I on Contracts where variable retainage for line items may apply.

APPLICATION NO: 001

APPLICATION DATE:

PERIOD TO:

ARCHITECT'S PROJECT NO:

A ITEM NO.	B DESCRIPTION OF WORK	C SCHEDULED VALUE	D WORK COMPLETED		E THIS PERIOD	F MATERIALS PRESENTLY STORED (NOT IN D OR E)	G TOTAL COMPLETED AND STORED TO DATE (D+E+F)	H BALANCE TO FINISH (C - G)	I RETAINAGE (IF VARIABLE RATE)
			FROM PREVIOUS APPLICATION (D + E)	THIS PERIOD					
		\$ 0.00	\$ 0.00	\$ 0.00	\$ 0.00	\$ 0.00	\$ 0.00	\$ 0.00	\$ 0.00
	GRAND TOTAL								

Closeout Document Checklist

Project:

Date:

1. 2 original Form G704 Substantial Completion
2. 2 original Form G706 Affidavit of Payment of Debts and Claims
3. 2 original Form 706A Release of Liens Contractor / Subcontractor
4. 2 original Form 707 Consent of Surety Company
5. 3 original Final Payment App
6. Meeting Minutes
7. General Correspondence
8. Certificate of Occupancy
9. Environmental Certificates
10. 2 original of Warranties (Letter of Guarantee and Warranty Info)
11. 2 O&M Manuals
12. 2 Hard Copy of As-Built Drawings
13. 2 sets of drawing discs. Updated CAD files
14. Occupancy Permits
15. Test & Balancing Reports
16. Field Reports/Inspection Reports
17. Pest Control Final Inspection Report & Warranty (Slabs over 400SF)
18. 2 original Substantial Completion Form
19. 2 sets of Record Shop Drawings and submittals
20. Affidavit of Discharge of State Tax Liability
21. Copy of completed final punch list signed off on by Owner's Rep
22. Punch list Closeout Letter.

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

GENERAL CONDITIONS TO THE CONTRACT FOR CONSTRUCTION A201-2017

The General Conditions of this Contract are as stated in the American Institute of Architects Document AIA A201 (2017 Edition) entitled General Conditions of the Contract for Construction as revised by the Supplementary General Conditions and is part of this project manual as if herein written in full.

NOT FOR BIDDING

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING



AIA[®] Document A201[™] – 2017

General Conditions of the Contract for Construction

for the following PROJECT:

(Name and location or address)

Sample

THE OWNER:

(Name, legal status and address)

THE ARCHITECT:

(Name, legal status and address)

TABLE OF ARTICLES

1	GENERAL PROVISIONS
2	OWNER
3	CONTRACTOR
4	ARCHITECT
5	SUBCONTRACTORS
6	CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS
7	CHANGES IN THE WORK
8	TIME
9	PAYMENTS AND COMPLETION
10	PROTECTION OF PERSONS AND PROPERTY
11	INSURANCE AND BONDS
12	UNCOVERING AND CORRECTION OF WORK
13	MISCELLANEOUS PROVISIONS
14	TERMINATION OR SUSPENSION OF THE CONTRACT
15	CLAIMS AND DISPUTES

ADDITIONS AND DELETIONS:

The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added necessary information and where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

For guidance in modifying this document to include supplementary conditions, see AIA Document A503[™], Guide for Supplementary Conditions.

Init.

INDEX

(Topics and numbers in bold are Section headings.)

Acceptance of Nonconforming Work

9.6.6, 9.9.3, **12.3**

Acceptance of Work

9.6.6, 9.8.2, 9.9.3, 9.10.1, 9.10.3, **12.3**

Access to Work

3.16, 6.2.1, **12.1**

Accident Prevention

10

Acts and Omissions

3.2, 3.3.2, 3.12.8, 3.18, 4.2.3, 8.3.1, 9.5.1, 10.2.5,

10.2.8, 13.3.2, 14.1, 15.1.2, 15.2

Addenda

1.1.1

Additional Costs, Claims for

3.7.4, 3.7.5, 10.3.2, 15.1.5

Additional Inspections and Testing

9.4.2, 9.8.3, 12.2.1, **13.4**

Additional Time, Claims for

3.2.4, 3.7.4, 3.7.5, 3.10.2, 8.3.2, **15.1.6**

Administration of the Contract

3.1.3, **4.2**, 9.4, 9.5

Advertisement or Invitation to Bid

1.1.1

Aesthetic Effect

4.2.13

Allowances

3.8

Applications for Payment

4.2.5, 7.3.9, 9.2, **9.3**, 9.4, 9.5.1, 9.5.4, 9.6.3, 9.7, 9.10

Approvals

2.1.1, 2.3.1, 2.5, 3.1.3, 3.10.2, 3.12.8, 3.12.9,

3.12.10.1, 4.2.7, 9.3.2, 13.4.1

Arbitration

8.3.1, 15.3.2, **15.4**

ARCHITECT

4

Architect, Definition of

4.1.1

Architect, Extent of Authority

2.5, 3.12.7, 4.1.2, 4.2, 5.2, 6.3, 7.1.2, 7.3.4, 7.4, 9.2,
9.3.1, 9.4, 9.5, 9.6.3, 9.8, 9.10.1, 9.10.3, 12.1, 12.2.1,
13.4.1, 13.4.2, 14.2.2, 14.2.4, 15.1.4, 15.2.1

Architect, Limitations of Authority and Responsibility

2.1.1, 3.12.4, 3.12.8, 3.12.10, 4.1.2, 4.2.1, 4.2.2, 4.2.3,
4.2.6, 4.2.7, 4.2.10, 4.2.12, 4.2.13, 5.2.1, 7.4, 9.4.2,
9.5.4, 9.6.4, 15.1.4, 15.2

Architect's Additional Services and Expenses

2.5, 12.2.1, 13.4.2, 13.4.3, 14.2.4

Architect's Administration of the Contract

3.1.3, 3.7.4, 15.2, 9.4.1, 9.5

Architect's Approvals

2.5, 3.1.3, 3.5, 3.10.2, 4.2.7

Architect's Authority to Reject Work

3.5, 4.2.6, 12.1.2, 12.2.1

Architect's Copyright

1.1.7, 1.5

Architect's Decisions

3.7.4, 4.2.6, 4.2.7, 4.2.11, 4.2.12, 4.2.13, 4.2.14, 6.3,
7.3.4, 7.3.9, 8.1.3, 8.3.1, 9.2, 9.4.1, 9.5, 9.8.4, 9.9.1,
13.4.2, 15.2

Architect's Inspections

3.7.4, 4.2.2, 4.2.9, 9.4.2, 9.8.3, 9.9.2, 9.10.1, 13.4

Architect's Instructions

3.2.4, 3.3.1, 4.2.6, 4.2.7, 13.4.2

Architect's Interpretations

4.2.11, 4.2.12

Architect's Project Representative

4.2.10

Architect's Relationship with Contractor

1.1.2, 1.5, 2.3.3, 3.1.3, 3.2.2, 3.2.3, 3.2.4, 3.3.1, 3.4.2,
3.5, 3.7.4, 3.7.5, 3.9.2, 3.9.3, 3.10, 3.11, 3.12, 3.16,
3.18, 4.1.2, 4.2, 5.2, 6.2.2, 7, 8.3.1, 9.2, 9.3, 9.4, 9.5,
9.7, 9.8, 9.9, 10.2.6, 10.3, 11.3, 12, 13.3.2, 13.4, 15.2

Architect's Relationship with Subcontractors

1.1.2, 4.2.3, 4.2.4, 4.2.6, 9.6.3, 9.6.4, 11.3

Architect's Representations

9.4.2, 9.5.1, 9.10.1

Architect's Site Visits

3.7.4, 4.2.2, 4.2.9, 9.4.2, 9.5.1, 9.9.2, 9.10.1, 13.4

Asbestos

10.3.1

Attorneys' Fees

3.18.1, 9.6.8, 9.10.2, 10.3.3

Award of Separate Contracts

6.1.1, 6.1.2

Award of Subcontracts and Other Contracts for Portions of the Work

5.2

Basic Definitions

1.1

Bidding Requirements

1.1.1

Binding Dispute Resolution

8.3.1, 9.7, 11.5, 13.1, 15.1.2, 15.1.3, 15.2.1, 15.2.5,
15.2.6.1, 15.3.1, 15.3.2, 15.3.3, 15.4.1

Bonds, Lien

7.3.4.4, 9.6.8, 9.10.2, 9.10.3

Bonds, Performance, and Payment

7.3.4.4, 9.6.7, 9.10.3, **11.1.2**, 11.1.3, **11.5**

Building Information Models Use and Reliance

1.8

Building Permit

3.7.1

Capitalization

1.3

Certificate of Substantial Completion

9.8.3, 9.8.4, 9.8.5

Certificates for Payment

4.2.1, 4.2.5, 4.2.9, 9.3.3, **9.4**, 9.5, 9.6.1, 9.6.6, 9.7, 9.10.1, 9.10.3, 14.1.1.3, 14.2.4, 15.1.4

Certificates of Inspection, Testing or Approval
13.4.4

Certificates of Insurance
9.10.2

Change Orders

1.1.1, 3.4.2, 3.7.4, 3.8.2.3, 3.11, 3.12.8, 4.2.8, 5.2.3, 7.1.2, 7.1.3, **7.2**, 7.3.2, 7.3.7, 7.3.9, 7.3.10, 8.3.1, 9.3.1.1, 9.10.3, 10.3.2, 11.2, 11.5, 12.1.2

Change Orders, Definition of

7.2.1

CHANGES IN THE WORK

2.2.2, 3.11, 4.2.8, 7, 7.2.1, 7.3.1, 7.4, 8.3.1, 9.3.1.1, 11.5

Claims, Definition of

15.1.1

Claims, Notice of
1.6.2, 15.1.3

CLAIMS AND DISPUTES

3.2.4, 6.1.1, 6.3, 7.3.9, 9.3.3, 9.10.4, 10.3.3, **15**, 15.4
Claims and Timely Assertion of Claims
15.4.1

Claims for Additional Cost

3.2.4, 3.3.1, 3.7.4, 7.3.9, 9.5.2, 10.2.5, 10.3.2, **15.1.5**

Claims for Additional Time

3.2.4, 3.3.1, 3.7.4, 6.1.1, 8.3.2, 9.5.2, 10.3.2, **15.1.6**

Concealed or Unknown Conditions, Claims for **3.7.4**

Claims for Damages

3.2.4, 3.18, 8.3.3, 9.5.1, 9.6.7, 10.2.5, 10.3.3, 11.3, 11.3.2, 14.2.4, 15.1.7

Claims Subject to Arbitration
15.4.1

Cleaning Up

3.15, 6.3

Commencement of the Work, Conditions Relating to
2.2.1, 3.2.2, 3.4.1, 3.7.1, 3.10.1, 3.12.6, 5.2.1, 5.2.3, 6.2.2, 8.1.2, 8.2.2, 8.3.1, 11.1, 11.2, **15.1.5**

Commencement of the Work, Definition of **8.1.2**

Communications

3.9.1, 4.2.4

Completion, Conditions Relating to

3.4.1, 3.11, 3.15, 4.2.2, 4.2.9, 8.2, 9.4.2, 9.8, 9.9.1, 9.10, 12.2, 14.1.2, 15.1.2

COMPLETION, PAYMENTS AND

9

Completion, Substantial

3.10.1, 4.2.9, 8.1.1, 8.1.3, 8.2.3, 9.4.2, 9.8, 9.9.1, 9.10.3, 12.2, 15.1.2

Compliance with Laws

2.3.2, 3.2.3, 3.6, 3.7, 3.12.10, 3.13, 9.6.4, 10.2.2, 13.1, 13.3, 13.4.1, 13.4.2, 13.5, 14.1.1, 14.2.1.3, 15.2.8, 15.4.2, 15.4.3

Concealed or Unknown Conditions

3.7.4, 4.2.8, 8.3.1, 10.3

Conditions of the Contract

1.1.1, 6.1.1, 6.1.4

Consent, Written

3.4.2, 3.14.2, 4.1.2, 9.8.5, 9.9.1, 9.10.2, 9.10.3, 13.2, 15.4.4.2

Consolidation or Joinder

15.4.4

CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS

1.1.4, **6**

Construction Change Directive, Definition of
7.3.1

Construction Change Directives

1.1.1, 3.4.2, 3.11, 3.12.8, 4.2.8, 7.1.1, 7.1.2, 7.1.3, **7.3**, 9.3.1.1

Construction Schedules, Contractor's

3.10, 3.11, 3.12.1, 3.12.2, 6.1.3, 15.1.6.2

Contingent Assignment of Subcontracts

5.4, 14.2.2.2

Continuing Contract Performance

15.1.4

Contract, Definition of

1.1.2

CONTRACT, TERMINATION OR SUSPENSION OF THE

5.4.1.1, 5.4.2, 11.5, **14**

Contract Administration

3.1.3, 4, 9.4, 9.5

Contract Award and Execution, Conditions Relating to

3.7.1, 3.10, 5.2, 6.1

Contract Documents, Copies Furnished and Use of
1.5.2, 2.3.6, 5.3

Contract Documents, Definition of

1.1.1

Contract Sum

2.2.2, 2.2.4, 3.7.4, 3.7.5, 3.8, 3.10.2, 5.2.3, 7.3, 7.4, **9.1**, 9.2, 9.4.2, 9.5.1.4, 9.6.7, 9.7, 10.3.2, 11.5, 12.1.2, 12.3, 14.2.4, 14.3.2, 15.1.4.2, **15.1.5**, **15.2.5**

Contract Sum, Definition of

9.1

Contract Time

1.1.4, 2.2.1, 2.2.2, 3.7.4, 3.7.5, 3.10.2, 5.2.3, 6.1.5, 7.2.1.3, 7.3.1, 7.3.5, 7.3.6, 7, 7, 7.3.10, 7.4, 8.1.1, 8.2.1, 8.2.3, 8.3.1, 9.5.1, 9.7, 10.3.2, 12.1.1, 12.1.2, 14.3.2, 15.1.4.2, 15.1.6.1, 15.2.5

Contract Time, Definition of

8.1.1

CONTRACTOR

3

Contractor, Definition of

3.1, 6.1.2

Contractor's Construction and Submittal Schedules

3.10, 3.12.1, 3.12.2, 4.2.3, 6.1.3, 15.1.6.2

Contractor's Employees
2.2.4, 3.3.2, 3.4.3, 3.8.1, 3.9, 3.18.2, 4.2.3, 4.2.6, 10.2, 10.3, 11.3, 14.1, 14.2.1.1

Contractor's Liability Insurance
11.1
Contractor's Relationship with Separate Contractors and Owner's Forces
3.12.5, 3.14.2, 4.2.4, 6, 11.3, 12.2.4
Contractor's Relationship with Subcontractors
1.2.2, 2.2.4, 3.3.2, 3.18.1, 3.18.2, 4.2.4, 5, 9.6.2, 9.6.7, 9.10.2, 11.2, 11.3, 11.4
Contractor's Relationship with the Architect
1.1.2, 1.5, 2.3.3, 3.1.3, 3.2.2, 3.2.3, 3.2.4, 3.3.1, 3.4.2, 3.5.1, 3.7.4, 3.10, 3.11, 3.12, 3.16, 3.18, 4.2, 5.2, 6.2.2, 7, 8.3.1, 9.2, 9.3, 9.4, 9.5, 9.7, 9.8, 9.9, 10.2.6, 10.3, 11.3, 12, 13.4, 15.1.3, 15.2.1
Contractor's Representations
3.2.1, 3.2.2, 3.5, 3.12.6, 6.2.2, 8.2.1, 9.3.3, 9.8.2
Contractor's Responsibility for Those Performing the Work
3.3.2, 3.18, 5.3, 6.1.3, 6.2, 9.5.1, 10.2.8
Contractor's Review of Contract Documents
3.2
Contractor's Right to Stop the Work
2.2.2, 9.7
Contractor's Right to Terminate the Contract
14.1
Contractor's Submittals
3.10, 3.11, 3.12, 4.2.7, 5.2.1, 5.2.3, 9.2, 9.3, 9.8.2, 9.8.3, 9.9.1, 9.10.2, 9.10.3
Contractor's Superintendent
3.9, 10.2.6
Contractor's Supervision and Construction Procedures
1.2.2, 3.3, 3.4, 3.12.10, 4.2.2, 4.2.7, 6.1.3, 6.2.4, 7.1.3, 7.3.4, 7.3.6, 8.2, 10, 12, 14, 15.1.4
Coordination and Correlation
1.2, 3.2.1, 3.3.1, 3.10, 3.12.6, 6.1.3, 6.2.1
Copies Furnished of Drawings and Specifications
1.5, 2.3.6, 3.11
Copyrights
1.5, **3.17**
Correction of Work
2.5, 3.7.3, 9.4.2, 9.8.2, 9.8.3, 9.9.1, 12.1.2, **12.2**, 12.3, 15.1.3.1, 15.1.3.2, 15.2.1
Correlation and Intent of the Contract Documents
1.2
Cost, Definition of
7.3.4
Costs
2.5, 3.2.4, 3.7.3, 3.8.2, 3.15.2, 5.4.2, 6.1.1, 6.2.3, 7.3.3.3, 7.3.4, 7.3.8, 7.3.9, 9.10.2, 10.3.2, 10.3.6, 11.2, 12.1.2, 12.2.1, 12.2.4, 13.4, 14
Cutting and Patching
3.14, 6.2.5

Damage to Construction of Owner or Separate Contractors
3.14.2, 6.2.4, 10.2.1.2, 10.2.5, 10.4, 12.2.4
Damage to the Work
3.14.2, 9.9.1, 10.2.1.2, 10.2.5, 10.4, 12.2.4
Damages, Claims for
3.2.4, 3.18, 6.1.1, 8.3.3, 9.5.1, 9.6.7, 10.3.3, 11.3.2, 11.3, 14.2.4, 15.1.7
Damages for Delay
6.2.3, 8.3.3, 9.5.1.6, 9.7, 10.3.2, 14.3.2
Date of Commencement of the Work, Definition of
8.1.2
Date of Substantial Completion, Definition of
8.1.3
Day, Definition of
8.1.4
Decisions of the Architect
3.7.4, 4.2.6, 4.2.7, 4.2.11, 4.2.12, 4.2.13, 6.3, 7.3.4, 7.3.9, 8.1.3, 8.3.1, 9.2, 9.4, 9.5.1, 9.8.4, 9.9.1, 13.4.2, 14.2.2, 14.2.4, 15.1, 15.2
Decisions to Withhold Certification
9.4.1, **9.5**, 9.7, 14.1.1.3
Defective or Nonconforming Work, Acceptance, Rejection and Correction of
2.5, 3.5, 4.2.6, 6.2.3, 9.5.1, 9.5.3, 9.6.6, 9.8.2, 9.9.3, 9.10.4, 12.2.1
Definitions
1.1, 2.1.1, 3.1.1, 3.5, 3.12.1, 3.12.2, 3.12.3, 4.1.1, 5.1, 6.1.2, 7.2.1, 7.3.1, 8.1, 9.1, 9.8.1, 15.1.1
Delays and Extensions of Time
3.2, **3.7.4**, 5.2.3, 7.2.1, 7.3.1, **7.4**, **8.3**, 9.5.1, **9.7**, 10.3.2, **10.4**, 14.3.2, **15.1.6**, 15.2.5
Digital Data Use and Transmission
1.7
Disputes
6.3, 7.3.9, 15.1, 15.2
Documents and Samples at the Site
3.11
Drawings, Definition of
1.1.5
Drawings and Specifications, Use and Ownership of
3.11
Effective Date of Insurance
8.2.2
Emergencies
10.4, 14.1.1.2, **15.1.5**
Employees, Contractor's
3.3.2, 3.4.3, 3.8.1, 3.9, 3.18.2, 4.2.3, 4.2.6, 10.2, 10.3.3, 11.3, 14.1, 14.2.1.1
Equipment, Labor, or Materials
1.1.3, 1.1.6, 3.4, 3.5, 3.8.2, 3.8.3, 3.12, 3.13, 3.15.1, 4.2.6, 4.2.7, 5.2.1, 6.2.1, 7.3.4, 9.3.2, 9.3.3, 9.5.1.3, 9.10.2, 10.2.1, 10.2.4, 14.2.1.1, 14.2.1.2
Execution and Progress of the Work
1.1.3, 1.2.1, 1.2.2, 2.3.4, 2.3.6, 3.1, 3.3.1, 3.4.1, 3.7.1, 3.10.1, 3.12, 3.14, 4.2, 6.2.2, 7.1.3, 7.3.6, 8.2, 9.5.1, 9.9.1, 10.2, 10.3, 12.1, 12.2, 14.2, 14.3.1, 15.1.4

Extensions of Time
3.2.4, 3.7.4, 5.2.3, 7.2.1, 7.3, 7.4, 9.5.1, 9.7, 10.3.2, 10.4, 14.3, 15.1.6, **15.2.5**

Failure of Payment
9.5.1.3, **9.7**, 9.10.2, 13.5, 14.1.1.3, 14.2.1.2

Faulty Work
(See Defective or Nonconforming Work)

Final Completion and Final Payment
4.2.1, 4.2.9, 9.8.2, **9.10**, 12.3, 14.2.4, 14.4.3

Financial Arrangements, Owner's
2.2.1, 13.2.2, 14.1.1.4

GENERAL PROVISIONS

1

Governing Law

13.1
Guarantees (See Warranty)

Hazardous Materials and Substances
10.2.4, **10.3**

Identification of Subcontractors and Suppliers
5.2.1

Indemnification
3.17, **3.18**, 9.6.8, 9.10.2, 10.3.3, 11.3

Information and Services Required of the Owner
2.1.2, **2.2**, 2.3, 3.2.2, 3.12.10.1, 6.1.3, 6.1.4, 6.2.5, 9.6.1, 9.9.2, 9.10.3, 10.3.3, 11.2, 13.4.1, 13.4.2, 14.1.1.4, 14.1.4, 15.1.4

Initial Decision
15.2

Initial Decision Maker, Definition of
1.1.8
Initial Decision Maker, Decisions
14.2.4, 15.1.4.2, 15.2.1, 15.2.2, 15.2.3, 15.2.4, 15.2.5
Initial Decision Maker, Extent of Authority
14.2.4, 15.1.4.2, 15.2.1, 15.2.2, 15.2.3, 15.2.4, 15.2.5

Injury or Damage to Person or Property
10.2.8, 10.4

Inspections
3.1.3, 3.3.3, 3.7.1, 4.2.2, 4.2.6, 4.2.9, 9.4.2, 9.8.3, 9.9.2, 9.10.1, 12.2.1, 13.4

Instructions to Bidders
1.1.1

Instructions to the Contractor
3.2.4, 3.3.1, 3.8.1, 5.2.1, 7, 8.2.2, 12, 13.4.2

Instruments of Service, Definition of
1.1.7

Insurance
6.1.1, 7.3.4, 8.2.2, 9.3.2, 9.8.4, 9.9.1, 9.10.2, 10.2.5, **11**

Insurance, Notice of Cancellation or Expiration
11.1.4, 11.2.3

Insurance, Contractor's Liability
11.1
Insurance, Effective Date of
8.2.2, 14.4.2

Insurance, Owner's Liability
11.2

Insurance, Property
10.2.5, 11.2, 11.4, 11.5

Insurance, Stored Materials
9.3.2

INSURANCE AND BONDS
11

Insurance Companies, Consent to Partial Occupancy
9.9.1

Insured loss, Adjustment and Settlement of
11.5

Intent of the Contract Documents
1.2.1, 4.2.7, 4.2.12, 4.2.13

Interest
13.5

Interpretation
1.1.8, 1.2.3, **1.4**, 4.1.1, 5.1, 6.1.2, 15.1.1
Interpretations, Written
4.2.11, 4.2.12
Judgment on Final Award
15.4.2

Labor and Materials, Equipment
1.1.3, 1.1.6, **3.4**, 3.5, 3.8.2, 3.8.3, 3.12, 3.13, 3.15.1, 5.2.1, 6.2.1, 7.3.4, 9.3.2, 9.3.3, 9.5.1.3, 9.10.2, 10.2.1, 10.2.4, 14.2.1.1, 14.2.1.2

Labor Disputes
8.3.1

Laws and Regulations
1.5, 2.3.2, 3.2.3, 3.2.4, 3.6, 3.7, 3.12.10, 3.13, 9.6.4, 9.9.1, 10.2.2, 13.1, 13.3.1, 13.4.2, 13.5, 14, 15.2.8, 15.4

Liens
2.1.2, 9.3.1, 9.3.3, 9.6.8, 9.10.2, 9.10.4, 15.2.8

Limitations, Statutes of
12.2.5, 15.1.2, 15.4.1.1

Limitations of Liability
3.2.2, 3.5, 3.12.10, 3.12.10.1, 3.17, 3.18.1, 4.2.6, 4.2.7, 6.2.2, 9.4.2, 9.6.4, 9.6.7, 9.6.8, 10.2.5, 10.3.3, 11.3, 12.2.5, 13.3.1

Limitations of Time
2.1.2, 2.2, 2.5, 3.2.2, 3.10, 3.11, 3.12.5, 3.15.1, 4.2.7, 5.2, 5.3, 5.4.1, 6.2.4, 7.3, 7.4, 8.2, 9.2, 9.3.1, 9.3.3, 9.4.1, 9.5, 9.6, 9.7, 9.8, 9.9, 9.10, 12.2, 13.4, 14, 15, 15.1.2, 15.1.3, 15.1.5

Materials, Hazardous
10.2.4, **10.3**

Materials, Labor, Equipment and
1.1.3, 1.1.6, 3.4.1, 3.5, 3.8.2, 3.8.3, 3.12, 3.13, 3.15.1, 5.2.1, 6.2.1, 7.3.4, 9.3.2, 9.3.3, 9.5.1.3, 9.10.2, 10.2.1.2, 10.2.4, 14.2.1.1, 14.2.1.2

Means, Methods, Techniques, Sequences and Procedures of Construction
3.3.1, 3.12.10, 4.2.2, 4.2.7, 9.4.2

Mechanic's Lien
2.1.2, 9.3.1, 9.3.3, 9.6.8, 9.10.2, 9.10.4, 15.2.8

Mediation
8.3.1, 15.1.3.2, 15.2.1, 15.2.5, 15.2.6, **15.3**, 15.4.1, 15.4.1.1

Minor Changes in the Work
1.1.1, 3.4.2, 3.12.8, 4.2.8, 7.1, **7.4**

MISCELLANEOUS PROVISIONS

13

Modifications, Definition of

1.1.1

Modifications to the Contract

1.1.1, 1.1.2, 2.5, 3.11, 4.1.2, 4.2.1, 5.2.3, 7, 8.3.1, 9.7, 10.3.2

Mutual Responsibility

6.2

Nonconforming Work, Acceptance of

9.6.6, 9.9.3, **12.3**

Nonconforming Work, Rejection and Correction of
2.4, 2.5, 3.5, 4.2.6, 6.2.4, 9.5.1, 9.8.2, 9.9.3, 9.10.4, 12.2

Notice

1.6, 1.6.1, 1.6.2, 2.1.2, 2.2.2., 2.2.3, 2.2.4, 2.5, 3.2.4, 3.3.1, 3.7.4, 3.7.5, 3.9.2, 3.12.9, 3.12.10, 5.2.1, 7.4, 8.2.2, 9.6.8, 9.7, 9.10.1, 10.2.8, 10.3.2, 11.5, 12.2.2.1, 13.4.1, 13.4.2, 14.1, 14.2.2, 14.4.2, 15.1.3, 15.1.5, 15.1.6, 15.4.1

Notice of Cancellation or Expiration of Insurance

11.1.4, 11.2.3

Notice of Claims

1.6.2, 2.1.2, 3.7.4, 9.6.8, 10.2.8, **15.1.3**, 15.1.5, 15.1.6, 15.2.8, 15.3.2, 15.4.1

Notice of Testing and Inspections

13.4.1, 13.4.2

Observations, Contractor's

3.2, 3.7.4

Occupancy

2.3.1, 9.6.6, 9.8

Orders, Written

1.1.1, 2.4, 3.9.2, 7, 8.2.2, 11.5, 12.1, 12.2.2.1, 13.4.2, 14.3.1

OWNER

2

Owner, Definition of

2.1.1

Owner, Evidence of Financial Arrangements

2.2, 13.2.2, 14.1.1.4

Owner, Information and Services Required of the

2.1.2, **2.2**, 2.3, 3.2.2, 3.12.10, 6.1.3, 6.1.4, 6.2.5, 9.3.2, 9.6.1, 9.6.4, 9.9.2, 9.10.3, 10.3.3, 11.2, 13.4.1, 13.4.2, 14.1.1.4, 14.1.4, 15.1.4

Owner's Authority

1.5, 2.1.1, 2.3.32.4, 2.5, 3.4.2, 3.8.1, 3.12.10, 3.14.2, 4.1.2, 4.2.4, 4.2.9, 5.2.1, 5.2.4, 5.4.1, 6.1, 6.3, 7.2.1, 7.3.1, 8.2.2, 8.3.1, 9.3.2, 9.5.1, 9.6.4, 9.9.1, 9.10.2, 10.3.2, 11.4, 11.5, 12.2.2, 12.3, 13.2.2, 14.3, 14.4, 15.2.7

Owner's Insurance

11.2

Owner's Relationship with Subcontractors

1.1.2, 5.2, 5.3, 5.4, 9.6.4, 9.10.2, 14.2.2

Owner's Right to Carry Out the Work

2.5, 14.2.2

Owner's Right to Clean Up

6.3

Owner's Right to Perform Construction and to Award Separate Contracts

6.1

Owner's Right to Stop the Work

2.4

Owner's Right to Suspend the Work

14.3

Owner's Right to Terminate the Contract

14.2, 14.4

Ownership and Use of Drawings, Specifications and Other Instruments of Service

1.1.1, 1.1.6, 1.1.7, **1.5**, 2.3.6, 3.2.2, 3.11, 3.17, 4.2.12, 5.3

Partial Occupancy or Use

9.6.6, **9.9**

Patching, Cutting and

3.14, 6.2.5

Patents

3.17

Payment, Applications for

4.2.5, 7.3.9, 9.2, **9.3**, 9.4, 9.5, 9.6.3, 9.7, 9.8.5, 9.10.1, 14.2.3, 14.2.4, 14.4.3

Payment, Certificates for

4.2.5, 4.2.9, 9.3.3, **9.4**, 9.5, 9.6.1, 9.6.6, 9.7, 9.10.1, 9.10.3, 14.1.1.3, 14.2.4

Payment, Failure of

9.5.1.3, **9.7**, 9.10.2, 13.5, 14.1.1.3, 14.2.1.2

Payment, Final

4.2.1, 4.2.9, **9.10**, 12.3, 14.2.4, 14.4.3

Payment Bond, Performance Bond and

7.3.4.4, 9.6.7, 9.10.3, **11.1.2**

Payments, Progress

9.3, **9.6**, 9.8.5, 9.10.3, 14.2.3, 15.1.4

PAYMENTS AND COMPLETION

9

Payments to Subcontractors

5.4.2, 9.5.1.3, 9.6.2, 9.6.3, 9.6.4, 9.6.7, 14.2.1.2
PCB

10.3.1

Performance Bond and Payment Bond

7.3.4.4, 9.6.7, 9.10.3, **11.1.2**

Permits, Fees, Notices and Compliance with Laws

2.3.1, **3.7**, 3.13, 7.3.4.4, 10.2.2

PERSONS AND PROPERTY, PROTECTION OF

10

Polychlorinated Biphenyl

10.3.1

Product Data, Definition of

3.12.2

Product Data and Samples, Shop Drawings

3.11, **3.12**, 4.2.7

Progress and Completion

4.2.2, **8.2**, 9.8, 9.9.1, 14.1.4, 15.1.4

Progress Payments

9.3, **9.6**, 9.8.5, 9.10.3, 14.2.3, 15.1.4

Project, Definition of
1.1.4
 Project Representatives
 4.2.10
Property Insurance
 10.2.5, **11.2**
Proposal Requirements
 1.1.1
PROTECTION OF PERSONS AND PROPERTY
10
 Regulations and Laws
 1.5, 2.3.2, 3.2.3, 3.6, 3.7, 3.12.10, 3.13, 9.6.4, 9.9.1,
 10.2.2, 13.1, 13.3, 13.4.1, 13.4.2, 13.5, 14, 15.2.8, 15.4
 Rejection of Work
 4.2.6, 12.2.1
 Releases and Waivers of Liens
 9.3.1, 9.10.2
 Representations
 3.2.1, 3.5, 3.12.6, 8.2.1, 9.3.3, 9.4.2, 9.5.1, 9.10.1
 Representatives
 2.1.1, 3.1.1, 3.9, 4.1.1, 4.2.10, 13.2.1
 Responsibility for Those Performing the Work
 3.3.2, 3.18, 4.2.2, 4.2.3, 5.3, 6.1.3, 6.2, 6.3, 9.5.1, 10
 Retainage
 9.3.1, 9.6.2, 9.8.5, 9.9.1, 9.10.2, 9.10.3
Review of Contract Documents and Field
Conditions by Contractor
3.2, 3.12.7, 6.1.3
 Review of Contractor's Submittals by Owner and
 Architect
 3.10.1, 3.10.2, 3.11, 3.12, 4.2, 5.2, 6.1.3, 9.2, 9.8.2
 Review of Shop Drawings, Product Data and Samples
 by Contractor
 3.12
Rights and Remedies
 1.1.2, 2.4, 2.5, 3.5, 3.7.4, 3.15.2, 4.2.6, 5.3, 5.4, 6.1,
 6.3, 7.3.1, 8.3, 9.5.1, 9.7, 10.2.5, 10.3, 12.2.1, 12.2.2,
 12.2.4, **13.3**, 14, 15.4
Royalties, Patents and Copyrights
3.17
 Rules and Notices for Arbitration
 15.4.1
Safety of Persons and Property
10.2, 10.4
Safety Precautions and Programs
 3.3.1, 4.2.2, 4.2.7, 5.3, **10.1**, 10.2, 10.4
Samples, Definition of
3.12.3
Samples, Shop Drawings, Product Data and
3.11, **3.12**, 4.2.7
Samples at the Site, Documents and
3.11
Schedule of Values
9.2, 9.3.1
 Schedules, Construction
 3.10, 3.12.1, 3.12.2, 6.1.3, 15.1.6.2

Separate Contracts and Contractors
 1.1.4, 3.12.5, 3.14.2, 4.2.4, 4.2.7, 6, 8.3.1, 12.1.2
Separate Contractors, Definition of
6.1.1
Shop Drawings, Definition of
3.12.1
Shop Drawings, Product Data and Samples
 3.11, **3.12**, 4.2.7
Site, Use of
3.13, 6.1.1, 6.2.1
 Site Inspections
 3.2.2, 3.3.3, 3.7.1, 3.7.4, 4.2, 9.9.2, 9.4.2, 9.10.1, 13.4
 Site Visits, Architect's
 3.7.4, 4.2.2, 4.2.9, 9.4.2, 9.5.1, 9.9.2, 9.10.1, 13.4
 Special Inspections and Testing
 4.2.6, 12.2.1, 13.4
Specifications, Definition of
1.1.6
Specifications
 1.1.1, **1.1.6**, 1.2.2, 1.5, 3.12.10, 3.17, 4.2.14
 Statute of Limitations
 15.1.2, 15.4.1.1
 Stopping the Work
 2.2.2, 2.4, 9.7, 10.3, 14.1
 Stored Materials
 6.2.1, 9.3.2, 10.2.1.2, 10.2.4
Subcontractor, Definition of
5.1.1
SUBCONTRACTORS
5
 Subcontractors, Work by
 1.2.2, 3.3.2, 3.12.1, 3.18, 4.2.3, 5.2.3, 5.3, 5.4, 9.3.1.2,
 9.6.7
Subcontractual Relations
5.3, 5.4, 9.3.1.2, 9.6, 9.10, 10.2.1, 14.1, 14.2.1
 Submittals
 3.10, 3.11, 3.12, 4.2.7, 5.2.1, 5.2.3, 7.3.4, 9.2, 9.3, 9.8,
 9.9.1, 9.10.2, 9.10.3
 Submittal Schedule
 3.10.2, 3.12.5, 4.2.7
Subrogation, Waivers of
 6.1.1, **11.3**
Substances, Hazardous
10.3
Substantial Completion
 4.2.9, 8.1.1, 8.1.3, 8.2.3, 9.4.2, **9.8**, 9.9.1, 9.10.3, 12.2,
 15.1.2
Substantial Completion, Definition of
9.8.1
 Substitution of Subcontractors
 5.2.3, 5.2.4
 Substitution of Architect
 2.3.3
 Substitutions of Materials
 3.4.2, 3.5, 7.3.8
Sub-subcontractor, Definition of
5.1.2

Subsurface Conditions

3.7.4

Successors and Assigns

13.2

Superintendent

3.9, 10.2.6

Supervision and Construction Procedures

1.2.2, **3.3**, 3.4, 3.12.10, 4.2.2, 4.2.7, 6.1.3, 6.2.4, 7.1.3, 7.3.4, 8.2, 8.3.1, 9.4.2, 10, 12, 14, 15.1.4

Suppliers

1.5, 3.12.1, 4.2.4, 4.2.6, 5.2.1, 9.3, 9.4.2, 9.5.4, 9.6, 9.10.5, 14.2.1

Surety

5.4.1.2, 9.6.8, 9.8.5, 9.10.2, 9.10.3, 11.1.2, 14.2.2, 15.2.7

Surety, Consent of

9.8.5, 9.10.2, 9.10.3

Surveys

1.1.7, 2.3.4

Suspension by the Owner for Convenience

14.3

Suspension of the Work

3.7.5, 5.4.2, 14.3

Suspension or Termination of the Contract

5.4.1.1, 14

Taxes

3.6, 3.8.2.1, 7.3.4.4

Termination by the Contractor

14.1, 15.1.7

Termination by the Owner for Cause

5.4.1.1, **14.2**, 15.1.7

Termination by the Owner for Convenience

14.4

Termination of the Architect

2.3.3

Termination of the Contractor Employment

14.2.2

TERMINATION OR SUSPENSION OF THE CONTRACT

14

Tests and Inspections

3.1.3, 3.3.3, 3.7.1, 4.2.2, 4.2.6, 4.2.9, 9.4.2, 9.8.3, 9.9.2, 9.10.1, 10.3.2, 12.2.1, **13.4**

TIME

8

Time, Delays and Extensions of

3.2.4, 3.7.4, 5.2.3, 7.2.1, 7.3.1, 7.4, **8.3**, 9.5.1, 9.7, 10.3.2, 10.4, 14.3.2, 15.1.6, 15.2.5

Time Limits

2.1.2, 2.2, 2.5, 3.2.2, 3.10, 3.11, 3.12.5, 3.15.1, 4.2, 5.2, 5.3, 5.4, 6.2.4, 7.3, 7.4, 8.2, 9.2, 9.3.1, 9.3.3, 9.4.1, 9.5, 9.6, 9.7, 9.8, 9.9, 9.10, 12.2, 13.4, 14, 15.1.2, 15.1.3, 15.4

Time Limits on Claims

3.7.4, 10.2.8, 15.1.2, 15.1.3

Title to Work

9.3.2, 9.3.3

UNCOVERING AND CORRECTION OF WORK

Uncovering of Work

12.1

Unforeseen Conditions, Concealed or Unknown

3.7.4, 8.3.1, 10.3

Unit Prices

7.3.3.2, 9.1.2

Use of Documents

1.1.1, 1.5, 2.3.6, 3.12.6, 5.3

Use of Site

3.13, 6.1.1, 6.2.1

Values, Schedule of

9.2, 9.3.1

Waiver of Claims by the Architect

13.3.2

Waiver of Claims by the Contractor

9.10.5, 13.3.2, **15.1.7**

Waiver of Claims by the Owner

9.9.3, 9.10.3, 9.10.4, 12.2.2.1, 13.3.2, 14.2.4, **15.1.7**

Waiver of Consequential Damages

14.2.4, 15.1.7

Waiver of Liens

9.3, 9.10.2, 9.10.4

Waivers of Subrogation

6.1.1, **11.3**

Warranty

3.5, 4.2.9, 9.3.3, 9.8.4, 9.9.1, 9.10.2, 9.10.4, 12.2.2, 15.1.2

Weather Delays

8.3, 15.1.6.2

Work, Definition of

1.1.3

Written Consent

1.5.2, 3.4.2, 3.7.4, 3.12.8, 3.14.2, 4.1.2, 9.3.2, 9.10.3, 13.2, 13.3.2, 15.4.4.2

Written Interpretations

4.2.11, 4.2.12

Written Orders

1.1.1, 2.4, 3.9, 7, 8.2.2, 12.1, 12.2, 13.4.2, 14.3.1

ARTICLE 1 GENERAL PROVISIONS

§ 1.1 Basic Definitions

§ 1.1.1 The Contract Documents

The Contract Documents are enumerated in the Agreement between the Owner and Contractor (hereinafter the Agreement) and consist of the Agreement, Conditions of the Contract (General, Supplementary and other Conditions), Drawings, Specifications, Addenda issued prior to execution of the Contract, other documents listed in the Agreement, and Modifications issued after execution of the Contract. A Modification is (1) a written amendment to the Contract signed by both parties, (2) a Change Order, (3) a Construction Change Directive, or (4) a written order for a minor change in the Work issued by the Architect. Unless specifically enumerated in the Agreement, the Contract Documents do not include the advertisement or invitation to bid, Instructions to Bidders, sample forms, other information furnished by the Owner in anticipation of receiving bids or proposals, the Contractor's bid or proposal, or portions of Addenda relating to bidding or proposal requirements.

§ 1.1.2 The Contract

The Contract Documents form the Contract for Construction. The Contract represents the entire and integrated agreement between the parties hereto and supersedes prior negotiations, representations, or agreements, either written or oral. The Contract may be amended or modified only by a Modification. The Contract Documents shall not be construed to create a contractual relationship of any kind (1) between the Contractor and the Architect or the Architect's consultants, (2) between the Owner and a Subcontractor or a Sub-subcontractor, (3) between the Owner and the Architect or the Architect's consultants, or (4) between any persons or entities other than the Owner and the Contractor. The Architect shall, however, be entitled to performance and enforcement of obligations under the Contract intended to facilitate performance of the Architect's duties.

§ 1.1.3 The Work

The term "Work" means the construction and services required by the Contract Documents, whether completed or partially completed, and includes all other labor, materials, equipment, and services provided or to be provided by the Contractor to fulfill the Contractor's obligations. The Work may constitute the whole or a part of the Project.

§ 1.1.4 The Project

The Project is the total construction of which the Work performed under the Contract Documents may be the whole or a part and which may include construction by the Owner and by Separate Contractors.

§ 1.1.5 The Drawings

The Drawings are the graphic and pictorial portions of the Contract Documents showing the design, location and dimensions of the Work, generally including plans, elevations, sections, details, schedules, and diagrams.

§ 1.1.6 The Specifications

The Specifications are that portion of the Contract Documents consisting of the written requirements for materials, equipment, systems, standards and workmanship for the Work, and performance of related services.

§ 1.1.7 Instruments of Service

Instruments of Service are representations, in any medium of expression now known or later developed, of the tangible and intangible creative work performed by the Architect and the Architect's consultants under their respective professional services agreements. Instruments of Service may include, without limitation, studies, surveys, models, sketches, drawings, specifications, and other similar materials.

§ 1.1.8 Initial Decision Maker

The Initial Decision Maker is the person identified in the Agreement to render initial decisions on Claims in accordance with Section 15.2. The Initial Decision Maker shall not show partiality to the Owner or Contractor and shall not be liable for results of interpretations or decisions rendered in good faith.

§ 1.2 Correlation and Intent of the Contract Documents

§ 1.2.1 The intent of the Contract Documents is to include all items necessary for the proper execution and completion of the Work by the Contractor. The Contract Documents are complementary, and what is required by one shall be as binding as if required by all; performance by the Contractor shall be required only to the extent consistent with the Contract Documents and reasonably inferable from them as being necessary to produce the indicated results.

§ 1.2.1.1 The invalidity of any provision of the Contract Documents shall not invalidate the Contract or its remaining provisions. If it is determined that any provision of the Contract Documents violates any law, or is otherwise invalid or unenforceable, then that provision shall be revised to the extent necessary to make that provision legal and enforceable. In such case the Contract Documents shall be construed, to the fullest extent permitted by law, to give effect to the parties' intentions and purposes in executing the Contract.

§ 1.2.2 Organization of the Specifications into divisions, sections and articles, and arrangement of Drawings shall not control the Contractor in dividing the Work among Subcontractors or in establishing the extent of Work to be performed by any trade.

§ 1.2.3 Unless otherwise stated in the Contract Documents, words that have well-known technical or construction industry meanings are used in the Contract Documents in accordance with such recognized meanings.

§ 1.3 Capitalization

Terms capitalized in these General Conditions include those that are (1) specifically defined, (2) the titles of numbered articles, or (3) the titles of other documents published by the American Institute of Architects.

§ 1.4 Interpretation

In the interest of brevity the Contract Documents frequently omit modifying words such as "all" and "any" and articles such as "the" and "an," but the fact that a modifier or an article is absent from one statement and appears in another is not intended to affect the interpretation of either statement.

§ 1.5 Ownership and Use of Drawings, Specifications, and Other Instruments of Service

§ 1.5.1 The Architect and the Architect's consultants shall be deemed the authors and owners of their respective Instruments of Service, including the Drawings and Specifications, and retain all common law, statutory, and other reserved rights in their Instruments of Service, including copyrights. The Contractor, Subcontractors, Sub-subcontractors, and suppliers shall not own or claim a copyright in the Instruments of Service. Submittal or distribution to meet official regulatory requirements or for other purposes in connection with the Project is not to be construed as publication in derogation of the Architect's or Architect's consultants' reserved rights.

§ 1.5.2 The Contractor, Subcontractors, Sub-subcontractors, and suppliers are authorized to use and reproduce the Instruments of Service provided to them, subject to any protocols established pursuant to Sections 1.7 and 1.8, solely and exclusively for execution of the Work. All copies made under this authorization shall bear the copyright notice, if any, shown on the Instruments of Service. The Contractor, Subcontractors, Sub-subcontractors, and suppliers may not use the Instruments of Service on other projects or for additions to the Project outside the scope of the Work without the specific written consent of the Owner, Architect, and the Architect's consultants.

§ 1.6 Notice

§ 1.6.1 Except as otherwise provided in Section 1.6.2, where the Contract Documents require one party to notify or give notice to the other party, such notice shall be provided in writing to the designated representative of the party to whom the notice is addressed and shall be deemed to have been duly served if delivered in person, by mail, by courier, or by electronic transmission if a method for electronic transmission is set forth in the Agreement.

§ 1.6.2 Notice of Claims as provided in Section 15.1.3 shall be provided in writing and shall be deemed to have been duly served only if delivered to the designated representative of the party to whom the notice is addressed by certified or registered mail, or by courier providing proof of delivery.

§ 1.7 Digital Data Use and Transmission

The parties shall agree upon protocols governing the transmission and use of Instruments of Service or any other information or documentation in digital form. The parties will use AIA Document E203™–2013, Building Information Modeling and Digital Data Exhibit, to establish the protocols for the development, use, transmission, and exchange of digital data.

§ 1.8 Building Information Models Use and Reliance

Any use of, or reliance on, all or a portion of a building information model without agreement to protocols governing the use of, and reliance on, the information contained in the model and without having those protocols set forth in AIA Document E203™–2013, Building Information Modeling and Digital Data Exhibit, and the requisite AIA Document

G202™–2013, Project Building Information Modeling Protocol Form, shall be at the using or relying party's sole risk and without liability to the other party and its contractors or consultants, the authors of, or contributors to, the building information model, and each of their agents and employees.

ARTICLE 2 OWNER

§ 2.1 General

§ 2.1.1 The Owner is the person or entity identified as such in the Agreement and is referred to throughout the Contract Documents as if singular in number. The Owner shall designate in writing a representative who shall have express authority to bind the Owner with respect to all matters requiring the Owner's approval or authorization. Except as otherwise provided in Section 4.2.1, the Architect does not have such authority. The term "Owner" means the Owner or the Owner's authorized representative.

§ 2.1.2 The Owner shall furnish to the Contractor, within fifteen days after receipt of a written request, information necessary and relevant for the Contractor to evaluate, give notice of, or enforce mechanic's lien rights. Such information shall include a correct statement of the record legal title to the property on which the Project is located, usually referred to as the site, and the Owner's interest therein.

§ 2.2 Evidence of the Owner's Financial Arrangements

§ 2.2.1 Prior to commencement of the Work and upon written request by the Contractor, the Owner shall furnish to the Contractor reasonable evidence that the Owner has made financial arrangements to fulfill the Owner's obligations under the Contract. The Contractor shall have no obligation to commence the Work until the Owner provides such evidence. If commencement of the Work is delayed under this Section 2.2.1, the Contract Time shall be extended appropriately.

§ 2.2.2 Following commencement of the Work and upon written request by the Contractor, the Owner shall furnish to the Contractor reasonable evidence that the Owner has made financial arrangements to fulfill the Owner's obligations under the Contract only if (1) the Owner fails to make payments to the Contractor as the Contract Documents require; (2) the Contractor identifies in writing a reasonable concern regarding the Owner's ability to make payment when due; or (3) a change in the Work materially changes the Contract Sum. If the Owner fails to provide such evidence, as required, within fourteen days of the Contractor's request, the Contractor may immediately stop the Work and, in that event, shall notify the Owner that the Work has stopped. However, if the request is made because a change in the Work materially changes the Contract Sum under (3) above, the Contractor may immediately stop only that portion of the Work affected by the change until reasonable evidence is provided. If the Work is stopped under this Section 2.2.2, the Contract Time shall be extended appropriately and the Contract Sum shall be increased by the amount of the Contractor's reasonable costs of shutdown, delay and start-up, plus interest as provided in the Contract Documents.

§ 2.2.3 After the Owner furnishes evidence of financial arrangements under this Section 2.2, the Owner shall not materially vary such financial arrangements without prior notice to the Contractor.

§ 2.2.4 Where the Owner has designated information furnished under this Section 2.2 as "confidential," the Contractor shall keep the information confidential and shall not disclose it to any other person. However, the Contractor may disclose "confidential" information, after seven (7) days' notice to the Owner, where disclosure is required by law, including a subpoena or other form of compulsory legal process issued by a court or governmental entity, or by court or arbitrator(s) order. The Contractor may also disclose "confidential" information to its employees, consultants, sureties, Subcontractors and their employees, Sub-subcontractors, and others who need to know the content of such information solely and exclusively for the Project and who agree to maintain the confidentiality of such information.

§ 2.3 Information and Services Required of the Owner

§ 2.3.1 Except for permits and fees that are the responsibility of the Contractor under the Contract Documents, including those required under Section 3.7.1, the Owner shall secure and pay for necessary approvals, easements, assessments and charges required for construction, use or occupancy of permanent structures or for permanent changes in existing facilities.

§ 2.3.2 The Owner shall retain an architect lawfully licensed to practice architecture, or an entity lawfully practicing architecture, in the jurisdiction where the Project is located. That person or entity is identified as the Architect in the Agreement and is referred to throughout the Contract Documents as if singular in number.

§ 2.3.3 If the employment of the Architect terminates, the Owner shall employ a successor to whom the Contractor has no reasonable objection and whose status under the Contract Documents shall be that of the Architect.

§ 2.3.4 The Owner shall furnish surveys describing physical characteristics, legal limitations and utility locations for the site of the Project, and a legal description of the site. The Contractor shall be entitled to rely on the accuracy of information furnished by the Owner but shall exercise proper precautions relating to the safe performance of the Work.

§ 2.3.5 The Owner shall furnish information or services required of the Owner by the Contract Documents with reasonable promptness. The Owner shall also furnish any other information or services under the Owner's control and relevant to the Contractor's performance of the Work with reasonable promptness after receiving the Contractor's written request for such information or services.

§ 2.3.6 Unless otherwise provided in the Contract Documents, the Owner shall furnish to the Contractor one copy of the Contract Documents for purposes of making reproductions pursuant to Section 1.5.2.

§ 2.4 Owner's Right to Stop the Work

If the Contractor fails to correct Work that is not in accordance with the requirements of the Contract Documents as required by Section 12.2 or repeatedly fails to carry out Work in accordance with the Contract Documents, the Owner may issue a written order to the Contractor to stop the Work, or any portion thereof, until the cause for such order has been eliminated; however, the right of the Owner to stop the Work shall not give rise to a duty on the part of the Owner to exercise this right for the benefit of the Contractor or any other person or entity, except to the extent required by Section 6.1.3.

§ 2.5 Owner's Right to Carry Out the Work

If the Contractor defaults or neglects to carry out the Work in accordance with the Contract Documents and fails within a ten-day period after receipt of notice from the Owner to commence and continue correction of such default or neglect with diligence and promptness, the Owner may, without prejudice to other remedies the Owner may have, correct such default or neglect. Such action by the Owner and amounts charged to the Contractor are both subject to prior approval of the Architect and the Architect may, pursuant to Section 9.5.1, withhold or nullify a Certificate for Payment in whole or in part, to the extent reasonably necessary to reimburse the Owner for the reasonable cost of correcting such deficiencies, including Owner's expenses and compensation for the Architect's additional services made necessary by such default, neglect, or failure. If current and future payments are not sufficient to cover such amounts, the Contractor shall pay the difference to the Owner. If the Contractor disagrees with the actions of the Owner or the Architect, or the amounts claimed as costs to the Owner, the Contractor may file a Claim pursuant to Article 15.

ARTICLE 3 CONTRACTOR

§ 3.1 General

§ 3.1.1 The Contractor is the person or entity identified as such in the Agreement and is referred to throughout the Contract Documents as if singular in number. The Contractor shall be lawfully licensed, if required in the jurisdiction where the Project is located. The Contractor shall designate in writing a representative who shall have express authority to bind the Contractor with respect to all matters under this Contract. The term "Contractor" means the Contractor or the Contractor's authorized representative.

§ 3.1.2 The Contractor shall perform the Work in accordance with the Contract Documents.

§ 3.1.3 The Contractor shall not be relieved of its obligations to perform the Work in accordance with the Contract Documents either by activities or duties of the Architect in the Architect's administration of the Contract, or by tests, inspections or approvals required or performed by persons or entities other than the Contractor.

§ 3.2 Review of Contract Documents and Field Conditions by Contractor

§ 3.2.1 Execution of the Contract by the Contractor is a representation that the Contractor has visited the site, become generally familiar with local conditions under which the Work is to be performed, and correlated personal observations with requirements of the Contract Documents.

§ 3.2.2 Because the Contract Documents are complementary, the Contractor shall, before starting each portion of the Work, carefully study and compare the various Contract Documents relative to that portion of the Work, as well as the information furnished by the Owner pursuant to Section 2.3.4, shall take field measurements of any existing conditions related to that portion of the Work, and shall observe any conditions at the site affecting it. These obligations are for the purpose of facilitating coordination and construction by the Contractor and are not for the purpose of discovering errors, omissions, or inconsistencies in the Contract Documents; however, the Contractor shall promptly report to the Architect any errors, inconsistencies or omissions discovered by or made known to the Contractor as a request for information in such form as the Architect may require. It is recognized that the Contractor's review is made in the Contractor's capacity as a contractor and not as a licensed design professional, unless otherwise specifically provided in the Contract Documents.

§ 3.2.3 The Contractor is not required to ascertain that the Contract Documents are in accordance with applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of public authorities, but the Contractor shall promptly report to the Architect any nonconformity discovered by or made known to the Contractor as a request for information in such form as the Architect may require.

§ 3.2.4 If the Contractor believes that additional cost or time is involved because of clarifications or instructions the Architect issues in response to the Contractor's notices or requests for information pursuant to Sections 3.2.2 or 3.2.3, the Contractor shall submit Claims as provided in Article 15. If the Contractor fails to perform the obligations of Sections 3.2.2 or 3.2.3, the Contractor shall pay such costs and damages to the Owner, subject to Section 15.1.7, as would have been avoided if the Contractor had performed such obligations. If the Contractor performs those obligations, the Contractor shall not be liable to the Owner or Architect for damages resulting from errors, inconsistencies or omissions in the Contract Documents, for differences between field measurements or conditions and the Contract Documents, or for nonconformities of the Contract Documents to applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities.

§ 3.3 Supervision and Construction Procedures

§ 3.3.1 The Contractor shall supervise and direct the Work, using the Contractor's best skill and attention. The Contractor shall be solely responsible for, and have control over, construction means, methods, techniques, sequences, and procedures, and for coordinating all portions of the Work under the Contract. If the Contract Documents give specific instructions concerning construction means, methods, techniques, sequences, or procedures, the Contractor shall evaluate the jobsite safety thereof and shall be solely responsible for the jobsite safety of such means, methods, techniques, sequences, or procedures. If the Contractor determines that such means, methods, techniques, sequences or procedures may not be safe, the Contractor shall give timely notice to the Owner and Architect, and shall propose alternative means, methods, techniques, sequences, or procedures. The Architect shall evaluate the proposed alternative solely for conformance with the design intent for the completed construction. Unless the Architect objects to the Contractor's proposed alternative, the Contractor shall perform the Work using its alternative means, methods, techniques, sequences, or procedures.

§ 3.3.2 The Contractor shall be responsible to the Owner for acts and omissions of the Contractor's employees, Subcontractors and their agents and employees, and other persons or entities performing portions of the Work for, or on behalf of, the Contractor or any of its Subcontractors.

§ 3.3.3 The Contractor shall be responsible for inspection of portions of Work already performed to determine that such portions are in proper condition to receive subsequent Work.

§ 3.4 Labor and Materials

§ 3.4.1 Unless otherwise provided in the Contract Documents, the Contractor shall provide and pay for labor, materials, equipment, tools, construction equipment and machinery, water, heat, utilities, transportation, and other facilities and services necessary for proper execution and completion of the Work, whether temporary or permanent and whether or not incorporated or to be incorporated in the Work.

§ 3.4.2 Except in the case of minor changes in the Work approved by the Architect in accordance with Section 3.12.8 or ordered by the Architect in accordance with Section 7.4, the Contractor may make substitutions only with the consent of the Owner, after evaluation by the Architect and in accordance with a Change Order or Construction Change Directive.

§ 3.4.3 The Contractor shall enforce strict discipline and good order among the Contractor's employees and other persons carrying out the Work. The Contractor shall not permit employment of unfit persons or persons not properly skilled in tasks assigned to them.

§ 3.5 Warranty

§ 3.5.1 The Contractor warrants to the Owner and Architect that materials and equipment furnished under the Contract will be of good quality and new unless the Contract Documents require or permit otherwise. The Contractor further warrants that the Work will conform to the requirements of the Contract Documents and will be free from defects, except for those inherent in the quality of the Work the Contract Documents require or permit. Work, materials, or equipment not conforming to these requirements may be considered defective. The Contractor's warranty excludes remedy for damage or defect caused by abuse, alterations to the Work not executed by the Contractor, improper or insufficient maintenance, improper operation, or normal wear and tear and normal usage. If required by the Architect, the Contractor shall furnish satisfactory evidence as to the kind and quality of materials and equipment.

§ 3.5.2 All material, equipment, or other special warranties required by the Contract Documents shall be issued in the name of the Owner, or shall be transferable to the Owner, and shall commence in accordance with Section 9.8.4.

§ 3.6 Taxes

The Contractor shall pay sales, consumer, use and similar taxes for the Work provided by the Contractor that are legally enacted when bids are received or negotiations concluded, whether or not yet effective or merely scheduled to go into effect.

§ 3.7 Permits, Fees, Notices and Compliance with Laws

§ 3.7.1 Unless otherwise provided in the Contract Documents, the Contractor shall secure and pay for the building permit as well as for other permits, fees, licenses, and inspections by government agencies necessary for proper execution and completion of the Work that are customarily secured after execution of the Contract and legally required at the time bids are received or negotiations concluded.

§ 3.7.2 The Contractor shall comply with and give notices required by applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities applicable to performance of the Work.

§ 3.7.3 If the Contractor performs Work knowing it to be contrary to applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of public authorities, the Contractor shall assume appropriate responsibility for such Work and shall bear the costs attributable to correction.

§ 3.7.4 Concealed or Unknown Conditions

If the Contractor encounters conditions at the site that are (1) subsurface or otherwise concealed physical conditions that differ materially from those indicated in the Contract Documents or (2) unknown physical conditions of an unusual nature that differ materially from those ordinarily found to exist and generally recognized as inherent in construction activities of the character provided for in the Contract Documents, the Contractor shall promptly provide notice to the Owner and the Architect before conditions are disturbed and in no event later than 14 days after first observance of the conditions. The Architect will promptly investigate such conditions and, if the Architect determines that they differ materially and cause an increase or decrease in the Contractor's cost of, or time required for, performance of any part of the Work, will recommend that an equitable adjustment be made in the Contract Sum or Contract Time, or both. If the Architect determines that the conditions at the site are not materially different from those indicated in the Contract Documents and that no change in the terms of the Contract is justified, the Architect shall promptly notify the Owner and Contractor, stating the reasons. If either party disputes the Architect's determination or recommendation, that party may submit a Claim as provided in Article 15.

§ 3.7.5 If, in the course of the Work, the Contractor encounters human remains or recognizes the existence of burial markers, archaeological sites or wetlands not indicated in the Contract Documents, the Contractor shall immediately suspend any operations that would affect them and shall notify the Owner and Architect. Upon receipt of such notice, the Owner shall promptly take any action necessary to obtain governmental authorization required to resume the operations. The Contractor shall continue to suspend such operations until otherwise instructed by the Owner but shall continue with all other operations that do not affect those remains or features. Requests for adjustments in the Contract Sum and Contract Time arising from the existence of such remains or features may be made as provided in Article 15.

§ 3.8 Allowances

§ 3.8.1 The Contractor shall include in the Contract Sum all allowances stated in the Contract Documents. Items covered by allowances shall be supplied for such amounts and by such persons or entities as the Owner may direct, but the Contractor shall not be required to employ persons or entities to whom the Contractor has reasonable objection.

§ 3.8.2 Unless otherwise provided in the Contract Documents,

- .1 allowances shall cover the cost to the Contractor of materials and equipment delivered at the site and all required taxes, less applicable trade discounts;
- .2 Contractor's costs for unloading and handling at the site, labor, installation costs, overhead, profit, and other expenses contemplated for stated allowance amounts shall be included in the Contract Sum but not in the allowances; and
- .3 whenever costs are more than or less than allowances, the Contract Sum shall be adjusted accordingly by Change Order. The amount of the Change Order shall reflect (1) the difference between actual costs and the allowances under Section 3.8.2.1 and (2) changes in Contractor's costs under Section 3.8.2.2.

§ 3.8.3 Materials and equipment under an allowance shall be selected by the Owner with reasonable promptness.

§ 3.9 Superintendent

§ 3.9.1 The Contractor shall employ a competent superintendent and necessary assistants who shall be in attendance at the Project site during performance of the Work. The superintendent shall represent the Contractor, and communications given to the superintendent shall be as binding as if given to the Contractor.

§ 3.9.2 The Contractor, as soon as practicable after award of the Contract, shall notify the Owner and Architect of the name and qualifications of a proposed superintendent. Within 14 days of receipt of the information, the Architect may notify the Contractor, stating whether the Owner or the Architect (1) has reasonable objection to the proposed superintendent or (2) requires additional time for review. Failure of the Architect to provide notice within the 14-day period shall constitute notice of no reasonable objection.

§ 3.9.3 The Contractor shall not employ a proposed superintendent to whom the Owner or Architect has made reasonable and timely objection. The Contractor shall not change the superintendent without the Owner's consent, which shall not unreasonably be withheld or delayed.

§ 3.10 Contractor's Construction and Submittal Schedules

§ 3.10.1 The Contractor, promptly after being awarded the Contract, shall submit for the Owner's and Architect's information a Contractor's construction schedule for the Work. The schedule shall contain detail appropriate for the Project, including (1) the date of commencement of the Work, interim schedule milestone dates, and the date of Substantial Completion; (2) an apportionment of the Work by construction activity; and (3) the time required for completion of each portion of the Work. The schedule shall provide for the orderly progression of the Work to completion and shall not exceed time limits current under the Contract Documents. The schedule shall be revised at appropriate intervals as required by the conditions of the Work and Project.

§ 3.10.2 The Contractor, promptly after being awarded the Contract and thereafter as necessary to maintain a current submittal schedule, shall submit a submittal schedule for the Architect's approval. The Architect's approval shall not be unreasonably delayed or withheld. The submittal schedule shall (1) be coordinated with the Contractor's construction schedule, and (2) allow the Architect reasonable time to review submittals. If the Contractor fails to submit a submittal schedule, or fails to provide submittals in accordance with the approved submittal schedule, the Contractor shall not be entitled to any increase in Contract Sum or extension of Contract Time based on the time required for review of submittals.

§ 3.10.3 The Contractor shall perform the Work in general accordance with the most recent schedules submitted to the Owner and Architect.

§ 3.11 Documents and Samples at the Site

The Contractor shall make available, at the Project site, the Contract Documents, including Change Orders, Construction Change Directives, and other Modifications, in good order and marked currently to indicate field changes and selections made during construction, and the approved Shop Drawings, Product Data, Samples, and similar required submittals. These shall be in electronic form or paper copy, available to the Architect and Owner, and

delivered to the Architect for submittal to the Owner upon completion of the Work as a record of the Work as constructed.

§ 3.12 Shop Drawings, Product Data and Samples

§ 3.12.1 Shop Drawings are drawings, diagrams, schedules, and other data specially prepared for the Work by the Contractor or a Subcontractor, Sub-subcontractor, manufacturer, supplier, or distributor to illustrate some portion of the Work.

§ 3.12.2 Product Data are illustrations, standard schedules, performance charts, instructions, brochures, diagrams, and other information furnished by the Contractor to illustrate materials or equipment for some portion of the Work.

§ 3.12.3 Samples are physical examples that illustrate materials, equipment, or workmanship, and establish standards by which the Work will be judged.

§ 3.12.4 Shop Drawings, Product Data, Samples, and similar submittals are not Contract Documents. Their purpose is to demonstrate how the Contractor proposes to conform to the information given and the design concept expressed in the Contract Documents for those portions of the Work for which the Contract Documents require submittals. Review by the Architect is subject to the limitations of Section 4.2.7. Informational submittals upon which the Architect is not expected to take responsive action may be so identified in the Contract Documents. Submittals that are not required by the Contract Documents may be returned by the Architect without action.

§ 3.12.5 The Contractor shall review for compliance with the Contract Documents, approve, and submit to the Architect, Shop Drawings, Product Data, Samples, and similar submittals required by the Contract Documents, in accordance with the submittal schedule approved by the Architect or, in the absence of an approved submittal schedule, with reasonable promptness and in such sequence as to cause no delay in the Work or in the activities of the Owner or of Separate Contractors.

§ 3.12.6 By submitting Shop Drawings, Product Data, Samples, and similar submittals, the Contractor represents to the Owner and Architect that the Contractor has (1) reviewed and approved them, (2) determined and verified materials, field measurements and field construction criteria related thereto, or will do so, and (3) checked and coordinated the information contained within such submittals with the requirements of the Work and of the Contract Documents.

§ 3.12.7 The Contractor shall perform no portion of the Work for which the Contract Documents require submittal and review of Shop Drawings, Product Data, Samples, or similar submittals, until the respective submittal has been approved by the Architect.

§ 3.12.8 The Work shall be in accordance with approved submittals except that the Contractor shall not be relieved of responsibility for deviations from the requirements of the Contract Documents by the Architect's approval of Shop Drawings, Product Data, Samples, or similar submittals, unless the Contractor has specifically notified the Architect of such deviation at the time of submittal and (1) the Architect has given written approval to the specific deviation as a minor change in the Work, or (2) a Change Order or Construction Change Directive has been issued authorizing the deviation. The Contractor shall not be relieved of responsibility for errors or omissions in Shop Drawings, Product Data, Samples, or similar submittals, by the Architect's approval thereof.

§ 3.12.9 The Contractor shall direct specific attention, in writing or on resubmitted Shop Drawings, Product Data, Samples, or similar submittals, to revisions other than those requested by the Architect on previous submittals. In the absence of such notice, the Architect's approval of a resubmission shall not apply to such revisions.

§ 3.12.10 The Contractor shall not be required to provide professional services that constitute the practice of architecture or engineering unless such services are specifically required by the Contract Documents for a portion of the Work or unless the Contractor needs to provide such services in order to carry out the Contractor's responsibilities for construction means, methods, techniques, sequences, and procedures. The Contractor shall not be required to provide professional services in violation of applicable law.

§ 3.12.10.1 If professional design services or certifications by a design professional related to systems, materials, or equipment are specifically required of the Contractor by the Contract Documents, the Owner and the Architect will specify all performance and design criteria that such services must satisfy. The Contractor shall be entitled to rely

upon the adequacy and accuracy of the performance and design criteria provided in the Contract Documents. The Contractor shall cause such services or certifications to be provided by an appropriately licensed design professional, whose signature and seal shall appear on all drawings, calculations, specifications, certifications, Shop Drawings, and other submittals prepared by such professional. Shop Drawings, and other submittals related to the Work, designed or certified by such professional, if prepared by others, shall bear such professional's written approval when submitted to the Architect. The Owner and the Architect shall be entitled to rely upon the adequacy and accuracy of the services, certifications, and approvals performed or provided by such design professionals, provided the Owner and Architect have specified to the Contractor the performance and design criteria that such services must satisfy. Pursuant to this Section 3.12.10, the Architect will review and approve or take other appropriate action on submittals only for the limited purpose of checking for conformance with information given and the design concept expressed in the Contract Documents.

§ 3.12.10.2 If the Contract Documents require the Contractor's design professional to certify that the Work has been performed in accordance with the design criteria, the Contractor shall furnish such certifications to the Architect at the time and in the form specified by the Architect.

§ 3.13 Use of Site

The Contractor shall confine operations at the site to areas permitted by applicable laws, statutes, ordinances, codes, rules and regulations, lawful orders of public authorities, and the Contract Documents and shall not unreasonably encumber the site with materials or equipment.

§ 3.14 Cutting and Patching

§ 3.14.1 The Contractor shall be responsible for cutting, fitting, or patching required to complete the Work or to make its parts fit together properly. All areas requiring cutting, fitting, or patching shall be restored to the condition existing prior to the cutting, fitting, or patching, unless otherwise required by the Contract Documents.

§ 3.14.2 The Contractor shall not damage or endanger a portion of the Work or fully or partially completed construction of the Owner or Separate Contractors by cutting, patching, or otherwise altering such construction, or by excavation. The Contractor shall not cut or otherwise alter construction by the Owner or a Separate Contractor except with written consent of the Owner and of the Separate Contractor. Consent shall not be unreasonably withheld. The Contractor shall not unreasonably withhold, from the Owner or a Separate Contractor, its consent to cutting or otherwise altering the Work.

§ 3.15 Cleaning Up

§ 3.15.1 The Contractor shall keep the premises and surrounding area free from accumulation of waste materials and rubbish caused by operations under the Contract. At completion of the Work, the Contractor shall remove waste materials, rubbish, the Contractor's tools, construction equipment, machinery, and surplus materials from and about the Project.

§ 3.15.2 If the Contractor fails to clean up as provided in the Contract Documents, the Owner may do so and the Owner shall be entitled to reimbursement from the Contractor.

§ 3.16 Access to Work

The Contractor shall provide the Owner and Architect with access to the Work in preparation and progress wherever located.

§ 3.17 Royalties, Patents and Copyrights

The Contractor shall pay all royalties and license fees. The Contractor shall defend suits or claims for infringement of copyrights and patent rights and shall hold the Owner and Architect harmless from loss on account thereof, but shall not be responsible for defense or loss when a particular design, process, or product of a particular manufacturer or manufacturers is required by the Contract Documents, or where the copyright violations are contained in Drawings, Specifications, or other documents prepared by the Owner or Architect. However, if an infringement of a copyright or patent is discovered by, or made known to, the Contractor, the Contractor shall be responsible for the loss unless the information is promptly furnished to the Architect.

§ 3.18 Indemnification

§ 3.18.1 To the fullest extent permitted by law, the Contractor shall indemnify and hold harmless the Owner, Architect, Architect's consultants, and agents and employees of any of them from and against claims, damages, losses, and expenses, including but not limited to attorneys' fees, arising out of or resulting from performance of the Work, provided that such claim, damage, loss, or expense is attributable to bodily injury, sickness, disease or death, or to injury to or destruction of tangible property (other than the Work itself), but only to the extent caused by the negligent acts or omissions of the Contractor, a Subcontractor, anyone directly or indirectly employed by them, or anyone for whose acts they may be liable, regardless of whether or not such claim, damage, loss, or expense is caused in part by a party indemnified hereunder. Such obligation shall not be construed to negate, abridge, or reduce other rights or obligations of indemnity that would otherwise exist as to a party or person described in this Section 3.18.

§ 3.18.2 In claims against any person or entity indemnified under this Section 3.18 by an employee of the Contractor, a Subcontractor, anyone directly or indirectly employed by them, or anyone for whose acts they may be liable, the indemnification obligation under Section 3.18.1 shall not be limited by a limitation on amount or type of damages, compensation, or benefits payable by or for the Contractor or a Subcontractor under workers' compensation acts, disability benefit acts, or other employee benefit acts.

ARTICLE 4 ARCHITECT

§ 4.1 General

§ 4.1.1 The Architect is the person or entity retained by the Owner pursuant to Section 2.3.2 and identified as such in the Agreement.

§ 4.1.2 Duties, responsibilities, and limitations of authority of the Architect as set forth in the Contract Documents shall not be restricted, modified, or extended without written consent of the Owner, Contractor, and Architect. Consent shall not be unreasonably withheld.

§ 4.2 Administration of the Contract

§ 4.2.1 The Architect will provide administration of the Contract as described in the Contract Documents and will be an Owner's representative during construction until the date the Architect issues the final Certificate for Payment. The Architect will have authority to act on behalf of the Owner only to the extent provided in the Contract Documents.

§ 4.2.2 The Architect will visit the site at intervals appropriate to the stage of construction, or as otherwise agreed with the Owner, to become generally familiar with the progress and quality of the portion of the Work completed, and to determine in general if the Work observed is being performed in a manner indicating that the Work, when fully completed, will be in accordance with the Contract Documents. However, the Architect will not be required to make exhaustive or continuous on-site inspections to check the quality or quantity of the Work. The Architect will not have control over, charge of, or responsibility for the construction means, methods, techniques, sequences or procedures, or for the safety precautions and programs in connection with the Work, since these are solely the Contractor's rights and responsibilities under the Contract Documents.

§ 4.2.3 On the basis of the site visits, the Architect will keep the Owner reasonably informed about the progress and quality of the portion of the Work completed, and promptly report to the Owner (1) known deviations from the Contract Documents, (2) known deviations from the most recent construction schedule submitted by the Contractor, and (3) defects and deficiencies observed in the Work. The Architect will not be responsible for the Contractor's failure to perform the Work in accordance with the requirements of the Contract Documents. The Architect will not have control over or charge of, and will not be responsible for acts or omissions of, the Contractor, Subcontractors, or their agents or employees, or any other persons or entities performing portions of the Work.

§ 4.2.4 Communications

The Owner and Contractor shall include the Architect in all communications that relate to or affect the Architect's services or professional responsibilities. The Owner shall promptly notify the Architect of the substance of any direct communications between the Owner and the Contractor otherwise relating to the Project. Communications by and with the Architect's consultants shall be through the Architect. Communications by and with Subcontractors and suppliers shall be through the Contractor. Communications by and with Separate Contractors shall be through the Owner. The Contract Documents may specify other communication protocols.

§ 4.2.5 Based on the Architect's evaluations of the Contractor's Applications for Payment, the Architect will review and certify the amounts due the Contractor and will issue Certificates for Payment in such amounts.

§ 4.2.6 The Architect has authority to reject Work that does not conform to the Contract Documents. Whenever the Architect considers it necessary or advisable, the Architect will have authority to require inspection or testing of the Work in accordance with Sections 13.4.2 and 13.4.3, whether or not the Work is fabricated, installed or completed. However, neither this authority of the Architect nor a decision made in good faith either to exercise or not to exercise such authority shall give rise to a duty or responsibility of the Architect to the Contractor, Subcontractors, suppliers, their agents or employees, or other persons or entities performing portions of the Work.

§ 4.2.7 The Architect will review and approve, or take other appropriate action upon, the Contractor's submittals such as Shop Drawings, Product Data, and Samples, but only for the limited purpose of checking for conformance with information given and the design concept expressed in the Contract Documents. The Architect's action will be taken in accordance with the submittal schedule approved by the Architect or, in the absence of an approved submittal schedule, with reasonable promptness while allowing sufficient time in the Architect's professional judgment to permit adequate review. Review of such submittals is not conducted for the purpose of determining the accuracy and completeness of other details such as dimensions and quantities, or for substantiating instructions for installation or performance of equipment or systems, all of which remain the responsibility of the Contractor as required by the Contract Documents. The Architect's review of the Contractor's submittals shall not relieve the Contractor of the obligations under Sections 3.3, 3.5, and 3.12. The Architect's review shall not constitute approval of safety precautions or of any construction means, methods, techniques, sequences, or procedures. The Architect's approval of a specific item shall not indicate approval of an assembly of which the item is a component.

§ 4.2.8 The Architect will prepare Change Orders and Construction Change Directives, and may order minor changes in the Work as provided in Section 7.4. The Architect will investigate and make determinations and recommendations regarding concealed and unknown conditions as provided in Section 3.7.4.

§ 4.2.9 The Architect will conduct inspections to determine the date or dates of Substantial Completion and the date of final completion; issue Certificates of Substantial Completion pursuant to Section 9.8; receive and forward to the Owner, for the Owner's review and records, written warranties and related documents required by the Contract and assembled by the Contractor pursuant to Section 9.10; and issue a final Certificate for Payment pursuant to Section 9.10.

§ 4.2.10 If the Owner and Architect agree, the Architect will provide one or more Project representatives to assist in carrying out the Architect's responsibilities at the site. The Owner shall notify the Contractor of any change in the duties, responsibilities and limitations of authority of the Project representatives.

§ 4.2.11 The Architect will interpret and decide matters concerning performance under, and requirements of, the Contract Documents on written request of either the Owner or Contractor. The Architect's response to such requests will be made in writing within any time limits agreed upon or otherwise with reasonable promptness.

§ 4.2.12 Interpretations and decisions of the Architect will be consistent with the intent of, and reasonably inferable from, the Contract Documents and will be in writing or in the form of drawings. When making such interpretations and decisions, the Architect will endeavor to secure faithful performance by both Owner and Contractor, will not show partiality to either, and will not be liable for results of interpretations or decisions rendered in good faith.

§ 4.2.13 The Architect's decisions on matters relating to aesthetic effect will be final if consistent with the intent expressed in the Contract Documents.

§ 4.2.14 The Architect will review and respond to requests for information about the Contract Documents. The Architect's response to such requests will be made in writing within any time limits agreed upon or otherwise with reasonable promptness. If appropriate, the Architect will prepare and issue supplemental Drawings and Specifications in response to the requests for information.

ARTICLE 5 SUBCONTRACTORS

§ 5.1 Definitions

§ 5.1.1 A Subcontractor is a person or entity who has a direct contract with the Contractor to perform a portion of the Work at the site. The term "Subcontractor" is referred to throughout the Contract Documents as if singular in number and means a Subcontractor or an authorized representative of the Subcontractor. The term "Subcontractor" does not include a Separate Contractor or the subcontractors of a Separate Contractor.

§ 5.1.2 A Sub-subcontractor is a person or entity who has a direct or indirect contract with a Subcontractor to perform a portion of the Work at the site. The term "Sub-subcontractor" is referred to throughout the Contract Documents as if singular in number and means a Sub-subcontractor or an authorized representative of the Sub-subcontractor.

§ 5.2 Award of Subcontracts and Other Contracts for Portions of the Work

§ 5.2.1 Unless otherwise stated in the Contract Documents, the Contractor, as soon as practicable after award of the Contract, shall notify the Owner and Architect of the persons or entities proposed for each principal portion of the Work, including those who are to furnish materials or equipment fabricated to a special design. Within 14 days of receipt of the information, the Architect may notify the Contractor whether the Owner or the Architect (1) has reasonable objection to any such proposed person or entity or (2) requires additional time for review. Failure of the Architect to provide notice within the 14-day period shall constitute notice of no reasonable objection.

§ 5.2.2 The Contractor shall not contract with a proposed person or entity to whom the Owner or Architect has made reasonable and timely objection. The Contractor shall not be required to contract with anyone to whom the Contractor has made reasonable objection.

§ 5.2.3 If the Owner or Architect has reasonable objection to a person or entity proposed by the Contractor, the Contractor shall propose another to whom the Owner or Architect has no reasonable objection. If the proposed but rejected Subcontractor was reasonably capable of performing the Work, the Contract Sum and Contract Time shall be increased or decreased by the difference, if any, occasioned by such change, and an appropriate Change Order shall be issued before commencement of the substitute Subcontractor's Work. However, no increase in the Contract Sum or Contract Time shall be allowed for such change unless the Contractor has acted promptly and responsively in submitting names as required.

§ 5.2.4 The Contractor shall not substitute a Subcontractor, person, or entity for one previously selected if the Owner or Architect makes reasonable objection to such substitution.

§ 5.3 Subcontractual Relations

By appropriate written agreement, the Contractor shall require each Subcontractor, to the extent of the Work to be performed by the Subcontractor, to be bound to the Contractor by terms of the Contract Documents, and to assume toward the Contractor all the obligations and responsibilities, including the responsibility for safety of the Subcontractor's Work that the Contractor, by these Contract Documents, assumes toward the Owner and Architect. Each subcontract agreement shall preserve and protect the rights of the Owner and Architect under the Contract Documents with respect to the Work to be performed by the Subcontractor so that subcontracting thereof will not prejudice such rights, and shall allow to the Subcontractor, unless specifically provided otherwise in the subcontract agreement, the benefit of all rights, remedies, and redress against the Contractor that the Contractor, by the Contract Documents, has against the Owner. Where appropriate, the Contractor shall require each Subcontractor to enter into similar agreements with Sub-subcontractors. The Contractor shall make available to each proposed Subcontractor, prior to the execution of the subcontract agreement, copies of the Contract Documents to which the Subcontractor will be bound, and, upon written request of the Subcontractor, identify to the Subcontractor terms and conditions of the proposed subcontract agreement that may be at variance with the Contract Documents. Subcontractors will similarly make copies of applicable portions of such documents available to their respective proposed Sub-subcontractors.

§ 5.4 Contingent Assignment of Subcontracts

§ 5.4.1 Each subcontract agreement for a portion of the Work is assigned by the Contractor to the Owner, provided that

- .1 assignment is effective only after termination of the Contract by the Owner for cause pursuant to Section 14.2 and only for those subcontract agreements that the Owner accepts by notifying the Subcontractor and Contractor; and
- .2 assignment is subject to the prior rights of the surety, if any, obligated under bond relating to the Contract.

When the Owner accepts the assignment of a subcontract agreement, the Owner assumes the Contractor's rights and obligations under the subcontract.

§ 5.4.2 Upon such assignment, if the Work has been suspended for more than 30 days, the Subcontractor's compensation shall be equitably adjusted for increases in cost resulting from the suspension.

§ 5.4.3 Upon assignment to the Owner under this Section 5.4, the Owner may further assign the subcontract to a successor contractor or other entity. If the Owner assigns the subcontract to a successor contractor or other entity, the Owner shall nevertheless remain legally responsible for all of the successor contractor's obligations under the subcontract.

ARTICLE 6 CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS

§ 6.1 Owner's Right to Perform Construction and to Award Separate Contracts

§ 6.1.1 The term "Separate Contractor(s)" shall mean other contractors retained by the Owner under separate agreements. The Owner reserves the right to perform construction or operations related to the Project with the Owner's own forces, and with Separate Contractors retained under Conditions of the Contract substantially similar to those of this Contract, including those provisions of the Conditions of the Contract related to insurance and waiver of subrogation.

§ 6.1.2 When separate contracts are awarded for different portions of the Project or other construction or operations on the site, the term "Contractor" in the Contract Documents in each case shall mean the Contractor who executes each separate Owner-Contractor Agreement.

§ 6.1.3 The Owner shall provide for coordination of the activities of the Owner's own forces and of each Separate Contractor with the Work of the Contractor, who shall cooperate with them. The Contractor shall participate with any Separate Contractors and the Owner in reviewing their construction schedules. The Contractor shall make any revisions to its construction schedule deemed necessary after a joint review and mutual agreement. The construction schedules shall then constitute the schedules to be used by the Contractor, Separate Contractors, and the Owner until subsequently revised.

§ 6.1.4 Unless otherwise provided in the Contract Documents, when the Owner performs construction or operations related to the Project with the Owner's own forces or with Separate Contractors, the Owner or its Separate Contractors shall have the same obligations and rights that the Contractor has under the Conditions of the Contract, including, without excluding others, those stated in Article 3, this Article 6, and Articles 10, 11, and 12.

§ 6.2 Mutual Responsibility

§ 6.2.1 The Contractor shall afford the Owner and Separate Contractors reasonable opportunity for introduction and storage of their materials and equipment and performance of their activities, and shall connect and coordinate the Contractor's construction and operations with theirs as required by the Contract Documents.

§ 6.2.2 If part of the Contractor's Work depends for proper execution or results upon construction or operations by the Owner or a Separate Contractor, the Contractor shall, prior to proceeding with that portion of the Work, promptly notify the Architect of apparent discrepancies or defects in the construction or operations by the Owner or Separate Contractor that would render it unsuitable for proper execution and results of the Contractor's Work. Failure of the Contractor to notify the Architect of apparent discrepancies or defects prior to proceeding with the Work shall constitute an acknowledgment that the Owner's or Separate Contractor's completed or partially completed construction is fit and proper to receive the Contractor's Work. The Contractor shall not be responsible for discrepancies or defects in the construction or operations by the Owner or Separate Contractor that are not apparent.

§ 6.2.3 The Contractor shall reimburse the Owner for costs the Owner incurs that are payable to a Separate Contractor because of the Contractor's delays, improperly timed activities or defective construction. The Owner shall be responsible to the Contractor for costs the Contractor incurs because of a Separate Contractor's delays, improperly timed activities, damage to the Work or defective construction.

§ 6.2.4 The Contractor shall promptly remedy damage that the Contractor wrongfully causes to completed or partially completed construction or to property of the Owner or Separate Contractor as provided in Section 10.2.5.

§ 6.2.5 The Owner and each Separate Contractor shall have the same responsibilities for cutting and patching as are described for the Contractor in Section 3.14.

§ 6.3 Owner's Right to Clean Up

If a dispute arises among the Contractor, Separate Contractors, and the Owner as to the responsibility under their respective contracts for maintaining the premises and surrounding area free from waste materials and rubbish, the Owner may clean up and the Architect will allocate the cost among those responsible.

ARTICLE 7 CHANGES IN THE WORK

§ 7.1 General

§ 7.1.1 Changes in the Work may be accomplished after execution of the Contract, and without invalidating the Contract, by Change Order, Construction Change Directive or order for a minor change in the Work, subject to the limitations stated in this Article 7 and elsewhere in the Contract Documents.

§ 7.1.2 A Change Order shall be based upon agreement among the Owner, Contractor, and Architect. A Construction Change Directive requires agreement by the Owner and Architect and may or may not be agreed to by the Contractor. An order for a minor change in the Work may be issued by the Architect alone.

§ 7.1.3 Changes in the Work shall be performed under applicable provisions of the Contract Documents. The Contractor shall proceed promptly with changes in the Work, unless otherwise provided in the Change Order, Construction Change Directive, or order for a minor change in the Work.

§ 7.2 Change Orders

§ 7.2.1 A Change Order is a written instrument prepared by the Architect and signed by the Owner, Contractor, and Architect stating their agreement upon all of the following:

- .1 The change in the Work;
- .2 The amount of the adjustment, if any, in the Contract Sum; and
- .3 The extent of the adjustment, if any, in the Contract Time.

§ 7.3 Construction Change Directives

§ 7.3.1 A Construction Change Directive is a written order prepared by the Architect and signed by the Owner and Architect, directing a change in the Work prior to agreement on adjustment, if any, in the Contract Sum or Contract Time, or both. The Owner may by Construction Change Directive, without invalidating the Contract, order changes in the Work within the general scope of the Contract consisting of additions, deletions, or other revisions, the Contract Sum and Contract Time being adjusted accordingly.

§ 7.3.2 A Construction Change Directive shall be used in the absence of total agreement on the terms of a Change Order.

§ 7.3.3 If the Construction Change Directive provides for an adjustment to the Contract Sum, the adjustment shall be based on one of the following methods:

- .1 Mutual acceptance of a lump sum properly itemized and supported by sufficient substantiating data to permit evaluation;
- .2 Unit prices stated in the Contract Documents or subsequently agreed upon;
- .3 Cost to be determined in a manner agreed upon by the parties and a mutually acceptable fixed or percentage fee; or
- .4 As provided in Section 7.3.4.

§ 7.3.4 If the Contractor does not respond promptly or disagrees with the method for adjustment in the Contract Sum, the Architect shall determine the adjustment on the basis of reasonable expenditures and savings of those performing the Work attributable to the change, including, in case of an increase in the Contract Sum, an amount for overhead and profit as set forth in the Agreement, or if no such amount is set forth in the Agreement, a reasonable amount. In such case, and also under Section 7.3.3.3, the Contractor shall keep and present, in such form as the Architect may prescribe, an itemized accounting together with appropriate supporting data. Unless otherwise provided in the Contract Documents, costs for the purposes of this Section 7.3.4 shall be limited to the following:

- .1 Costs of labor, including applicable payroll taxes, fringe benefits required by agreement or custom, workers' compensation insurance, and other employee costs approved by the Architect;
- .2 Costs of materials, supplies, and equipment, including cost of transportation, whether incorporated or consumed;
- .3 Rental costs of machinery and equipment, exclusive of hand tools, whether rented from the Contractor or others;
- .4 Costs of premiums for all bonds and insurance, permit fees, and sales, use, or similar taxes, directly related to the change; and
- .5 Costs of supervision and field office personnel directly attributable to the change.

§ 7.3.5 If the Contractor disagrees with the adjustment in the Contract Time, the Contractor may make a Claim in accordance with applicable provisions of Article 15.

§ 7.3.6 Upon receipt of a Construction Change Directive, the Contractor shall promptly proceed with the change in the Work involved and advise the Architect of the Contractor's agreement or disagreement with the method, if any, provided in the Construction Change Directive for determining the proposed adjustment in the Contract Sum or Contract Time.

§ 7.3.7 A Construction Change Directive signed by the Contractor indicates the Contractor's agreement therewith, including adjustment in Contract Sum and Contract Time or the method for determining them. Such agreement shall be effective immediately and shall be recorded as a Change Order.

§ 7.3.8 The amount of credit to be allowed by the Contractor to the Owner for a deletion or change that results in a net decrease in the Contract Sum shall be actual net cost as confirmed by the Architect. When both additions and credits covering related Work or substitutions are involved in a change, the allowance for overhead and profit shall be figured on the basis of net increase, if any, with respect to that change.

§ 7.3.9 Pending final determination of the total cost of a Construction Change Directive to the Owner, the Contractor may request payment for Work completed under the Construction Change Directive in Applications for Payment. The Architect will make an interim determination for purposes of monthly certification for payment for those costs and certify for payment the amount that the Architect determines, in the Architect's professional judgment, to be reasonably justified. The Architect's interim determination of cost shall adjust the Contract Sum on the same basis as a Change Order, subject to the right of either party to disagree and assert a Claim in accordance with Article 15.

§ 7.3.10 When the Owner and Contractor agree with a determination made by the Architect concerning the adjustments in the Contract Sum and Contract Time, or otherwise reach agreement upon the adjustments, such agreement shall be effective immediately and the Architect will prepare a Change Order. Change Orders may be issued for all or any part of a Construction Change Directive.

§ 7.4 Minor Changes in the Work

The Architect may order minor changes in the Work that are consistent with the intent of the Contract Documents and do not involve an adjustment in the Contract Sum or an extension of the Contract Time. The Architect's order for minor changes shall be in writing. If the Contractor believes that the proposed minor change in the Work will affect the Contract Sum or Contract Time, the Contractor shall notify the Architect and shall not proceed to implement the change in the Work. If the Contractor performs the Work set forth in the Architect's order for a minor change without prior notice to the Architect that such change will affect the Contract Sum or Contract Time, the Contractor waives any adjustment to the Contract Sum or extension of the Contract Time.

ARTICLE 8 TIME

§ 8.1 Definitions

§ 8.1.1 Unless otherwise provided, Contract Time is the period of time, including authorized adjustments, allotted in the Contract Documents for Substantial Completion of the Work.

§ 8.1.2 The date of commencement of the Work is the date established in the Agreement.

§ 8.1.3 The date of Substantial Completion is the date certified by the Architect in accordance with Section 9.8.

§ 8.1.4 The term "day" as used in the Contract Documents shall mean calendar day unless otherwise specifically defined.

§ 8.2 Progress and Completion

§ 8.2.1 Time limits stated in the Contract Documents are of the essence of the Contract. By executing the Agreement, the Contractor confirms that the Contract Time is a reasonable period for performing the Work.

§ 8.2.2 The Contractor shall not knowingly, except by agreement or instruction of the Owner in writing, commence the Work prior to the effective date of insurance required to be furnished by the Contractor and Owner.

§ 8.2.3 The Contractor shall proceed expeditiously with adequate forces and shall achieve Substantial Completion within the Contract Time.

§ 8.3 Delays and Extensions of Time

§ 8.3.1 If the Contractor is delayed at any time in the commencement or progress of the Work by (1) an act or neglect of the Owner or Architect, of an employee of either, or of a Separate Contractor; (2) by changes ordered in the Work; (3) by labor disputes, fire, unusual delay in deliveries, unavoidable casualties, adverse weather conditions documented in accordance with Section 15.1.6.2, or other causes beyond the Contractor's control; (4) by delay authorized by the Owner pending mediation and binding dispute resolution; or (5) by other causes that the Contractor asserts, and the Architect determines, justify delay, then the Contract Time shall be extended for such reasonable time as the Architect may determine.

§ 8.3.2 Claims relating to time shall be made in accordance with applicable provisions of Article 15.

§ 8.3.3 This Section 8.3 does not preclude recovery of damages for delay by either party under other provisions of the Contract Documents.

ARTICLE 9 PAYMENTS AND COMPLETION

§ 9.1 Contract Sum

§ 9.1.1 The Contract Sum is stated in the Agreement and, including authorized adjustments, is the total amount payable by the Owner to the Contractor for performance of the Work under the Contract Documents.

§ 9.1.2 If unit prices are stated in the Contract Documents or subsequently agreed upon, and if quantities originally contemplated are materially changed so that application of such unit prices to the actual quantities causes substantial inequity to the Owner or Contractor, the applicable unit prices shall be equitably adjusted.

§ 9.2 Schedule of Values

Where the Contract is based on a stipulated sum or Guaranteed Maximum Price, the Contractor shall submit a schedule of values to the Architect before the first Application for Payment, allocating the entire Contract Sum to the various portions of the Work. The schedule of values shall be prepared in the form, and supported by the data to substantiate its accuracy, required by the Architect. This schedule, unless objected to by the Architect, shall be used as a basis for reviewing the Contractor's Applications for Payment. Any changes to the schedule of values shall be submitted to the Architect and supported by such data to substantiate its accuracy as the Architect may require, and unless objected to by the Architect, shall be used as a basis for reviewing the Contractor's subsequent Applications for Payment.

§ 9.3 Applications for Payment

§ 9.3.1 At least ten days before the date established for each progress payment, the Contractor shall submit to the Architect an itemized Application for Payment prepared in accordance with the schedule of values, if required under Section 9.2, for completed portions of the Work. The application shall be notarized, if required, and supported by all data substantiating the Contractor's right to payment that the Owner or Architect require, such as copies of requisitions, and releases and waivers of liens from Subcontractors and suppliers, and shall reflect retainage if provided for in the Contract Documents.

§ 9.3.1.1 As provided in Section 7.3.9, such applications may include requests for payment on account of changes in the Work that have been properly authorized by Construction Change Directives, or by interim determinations of the Architect, but not yet included in Change Orders.

§ 9.3.1.2 Applications for Payment shall not include requests for payment for portions of the Work for which the Contractor does not intend to pay a Subcontractor or supplier, unless such Work has been performed by others whom the Contractor intends to pay.

§ 9.3.2 Unless otherwise provided in the Contract Documents, payments shall be made on account of materials and equipment delivered and suitably stored at the site for subsequent incorporation in the Work. If approved in advance by the Owner, payment may similarly be made for materials and equipment suitably stored off the site at a location agreed upon in writing. Payment for materials and equipment stored on or off the site shall be conditioned upon compliance by the Contractor with procedures satisfactory to the Owner to establish the Owner's title to such materials and equipment or otherwise protect the Owner's interest, and shall include the costs of applicable insurance, storage, and transportation to the site, for such materials and equipment stored off the site.

§ 9.3.3 The Contractor warrants that title to all Work covered by an Application for Payment will pass to the Owner no later than the time of payment. The Contractor further warrants that upon submittal of an Application for Payment all Work for which Certificates for Payment have been previously issued and payments received from the Owner shall, to the best of the Contractor's knowledge, information, and belief, be free and clear of liens, claims, security interests, or encumbrances, in favor of the Contractor, Subcontractors, suppliers, or other persons or entities that provided labor, materials, and equipment relating to the Work.

§ 9.4 Certificates for Payment

§ 9.4.1 The Architect will, within seven days after receipt of the Contractor's Application for Payment, either (1) issue to the Owner a Certificate for Payment in the full amount of the Application for Payment, with a copy to the Contractor; or (2) issue to the Owner a Certificate for Payment for such amount as the Architect determines is properly due, and notify the Contractor and Owner of the Architect's reasons for withholding certification in part as provided in Section 9.5.1; or (3) withhold certification of the entire Application for Payment, and notify the Contractor and Owner of the Architect's reason for withholding certification in whole as provided in Section 9.5.1.

§ 9.4.2 The issuance of a Certificate for Payment will constitute a representation by the Architect to the Owner, based on the Architect's evaluation of the Work and the data in the Application for Payment, that, to the best of the Architect's knowledge, information, and belief, the Work has progressed to the point indicated, the quality of the Work is in accordance with the Contract Documents, and that the Contractor is entitled to payment in the amount certified. The foregoing representations are subject to an evaluation of the Work for conformance with the Contract Documents upon Substantial Completion, to results of subsequent tests and inspections, to correction of minor deviations from the Contract Documents prior to completion, and to specific qualifications expressed by the Architect. However, the issuance of a Certificate for Payment will not be a representation that the Architect has (1) made exhaustive or continuous on-site inspections to check the quality or quantity of the Work; (2) reviewed construction means, methods, techniques, sequences, or procedures; (3) reviewed copies of requisitions received from Subcontractors and suppliers and other data requested by the Owner to substantiate the Contractor's right to payment; or (4) made examination to ascertain how or for what purpose the Contractor has used money previously paid on account of the Contract Sum.

§ 9.5 Decisions to Withhold Certification

§ 9.5.1 The Architect may withhold a Certificate for Payment in whole or in part, to the extent reasonably necessary to protect the Owner, if in the Architect's opinion the representations to the Owner required by Section 9.4.2 cannot be made. If the Architect is unable to certify payment in the amount of the Application, the Architect will notify the Contractor and Owner as provided in Section 9.4.1. If the Contractor and Architect cannot agree on a revised amount, the Architect will promptly issue a Certificate for Payment for the amount for which the Architect is able to make such representations to the Owner. The Architect may also withhold a Certificate for Payment or, because of subsequently discovered evidence, may nullify the whole or a part of a Certificate for Payment previously issued, to such extent as may be necessary in the Architect's opinion to protect the Owner from loss for which the Contractor is responsible, including loss resulting from acts and omissions described in Section 3.3.2, because of

- .1 defective Work not remedied;
- .2 third party claims filed or reasonable evidence indicating probable filing of such claims, unless security acceptable to the Owner is provided by the Contractor;
- .3 failure of the Contractor to make payments properly to Subcontractors or suppliers for labor, materials or equipment;

- .4 reasonable evidence that the Work cannot be completed for the unpaid balance of the Contract Sum;
- .5 damage to the Owner or a Separate Contractor;
- .6 reasonable evidence that the Work will not be completed within the Contract Time, and that the unpaid balance would not be adequate to cover actual or liquidated damages for the anticipated delay; or
- .7 repeated failure to carry out the Work in accordance with the Contract Documents.

§ 9.5.2 When either party disputes the Architect's decision regarding a Certificate for Payment under Section 9.5.1, in whole or in part, that party may submit a Claim in accordance with Article 15.

§ 9.5.3 When the reasons for withholding certification are removed, certification will be made for amounts previously withheld.

§ 9.5.4 If the Architect withholds certification for payment under Section 9.5.1.3, the Owner may, at its sole option, issue joint checks to the Contractor and to any Subcontractor or supplier to whom the Contractor failed to make payment for Work properly performed or material or equipment suitably delivered. If the Owner makes payments by joint check, the Owner shall notify the Architect and the Contractor shall reflect such payment on its next Application for Payment.

§ 9.6 Progress Payments

§ 9.6.1 After the Architect has issued a Certificate for Payment, the Owner shall make payment in the manner and within the time provided in the Contract Documents, and shall so notify the Architect.

§ 9.6.2 The Contractor shall pay each Subcontractor, no later than seven days after receipt of payment from the Owner, the amount to which the Subcontractor is entitled, reflecting percentages actually retained from payments to the Contractor on account of the Subcontractor's portion of the Work. The Contractor shall, by appropriate agreement with each Subcontractor, require each Subcontractor to make payments to Sub-subcontractors in a similar manner.

§ 9.6.3 The Architect will, on request, furnish to a Subcontractor, if practicable, information regarding percentages of completion or amounts applied for by the Contractor and action taken thereon by the Architect and Owner on account of portions of the Work done by such Subcontractor.

§ 9.6.4 The Owner has the right to request written evidence from the Contractor that the Contractor has properly paid Subcontractors and suppliers amounts paid by the Owner to the Contractor for subcontracted Work. If the Contractor fails to furnish such evidence within seven days, the Owner shall have the right to contact Subcontractors and suppliers to ascertain whether they have been properly paid. Neither the Owner nor Architect shall have an obligation to pay, or to see to the payment of money to, a Subcontractor or supplier, except as may otherwise be required by law.

§ 9.6.5 The Contractor's payments to suppliers shall be treated in a manner similar to that provided in Sections 9.6.2, 9.6.3 and 9.6.4.

§ 9.6.6 A Certificate for Payment, a progress payment, or partial or entire use or occupancy of the Project by the Owner shall not constitute acceptance of Work not in accordance with the Contract Documents.

§ 9.6.7 Unless the Contractor provides the Owner with a payment bond in the full penal sum of the Contract Sum, payments received by the Contractor for Work properly performed by Subcontractors or provided by suppliers shall be held by the Contractor for those Subcontractors or suppliers who performed Work or furnished materials, or both, under contract with the Contractor for which payment was made by the Owner. Nothing contained herein shall require money to be placed in a separate account and not commingled with money of the Contractor, create any fiduciary liability or tort liability on the part of the Contractor for breach of trust, or entitle any person or entity to an award of punitive damages against the Contractor for breach of the requirements of this provision.

§ 9.6.8 Provided the Owner has fulfilled its payment obligations under the Contract Documents, the Contractor shall defend and indemnify the Owner from all loss, liability, damage or expense, including reasonable attorney's fees and litigation expenses, arising out of any lien claim or other claim for payment by any Subcontractor or supplier of any tier. Upon receipt of notice of a lien claim or other claim for payment, the Owner shall notify the Contractor. If approved by the applicable court, when required, the Contractor may substitute a surety bond for the property against which the lien or other claim for payment has been asserted.

§ 9.7 Failure of Payment

If the Architect does not issue a Certificate for Payment, through no fault of the Contractor, within seven days after receipt of the Contractor's Application for Payment, or if the Owner does not pay the Contractor within seven days after the date established in the Contract Documents, the amount certified by the Architect or awarded by binding dispute resolution, then the Contractor may, upon seven additional days' notice to the Owner and Architect, stop the Work until payment of the amount owing has been received. The Contract Time shall be extended appropriately and the Contract Sum shall be increased by the amount of the Contractor's reasonable costs of shutdown, delay and start-up, plus interest as provided for in the Contract Documents.

§ 9.8 Substantial Completion

§ 9.8.1 Substantial Completion is the stage in the progress of the Work when the Work or designated portion thereof is sufficiently complete in accordance with the Contract Documents so that the Owner can occupy or utilize the Work for its intended use.

§ 9.8.2 When the Contractor considers that the Work, or a portion thereof which the Owner agrees to accept separately, is substantially complete, the Contractor shall prepare and submit to the Architect a comprehensive list of items to be completed or corrected prior to final payment. Failure to include an item on such list does not alter the responsibility of the Contractor to complete all Work in accordance with the Contract Documents.

§ 9.8.3 Upon receipt of the Contractor's list, the Architect will make an inspection to determine whether the Work or designated portion thereof is substantially complete. If the Architect's inspection discloses any item, whether or not included on the Contractor's list, which is not sufficiently complete in accordance with the Contract Documents so that the Owner can occupy or utilize the Work or designated portion thereof for its intended use, the Contractor shall, before issuance of the Certificate of Substantial Completion, complete or correct such item upon notification by the Architect. In such case, the Contractor shall then submit a request for another inspection by the Architect to determine Substantial Completion.

§ 9.8.4 When the Work or designated portion thereof is substantially complete, the Architect will prepare a Certificate of Substantial Completion that shall establish the date of Substantial Completion; establish responsibilities of the Owner and Contractor for security, maintenance, heat, utilities, damage to the Work and insurance; and fix the time within which the Contractor shall finish all items on the list accompanying the Certificate. Warranties required by the Contract Documents shall commence on the date of Substantial Completion of the Work or designated portion thereof unless otherwise provided in the Certificate of Substantial Completion.

§ 9.8.5 The Certificate of Substantial Completion shall be submitted to the Owner and Contractor for their written acceptance of responsibilities assigned to them in the Certificate. Upon such acceptance, and consent of surety if any, the Owner shall make payment of retainage applying to the Work or designated portion thereof. Such payment shall be adjusted for Work that is incomplete or not in accordance with the requirements of the Contract Documents.

§ 9.9 Partial Occupancy or Use

§ 9.9.1 The Owner may occupy or use any completed or partially completed portion of the Work at any stage when such portion is designated by separate agreement with the Contractor, provided such occupancy or use is consented to by the insurer and authorized by public authorities having jurisdiction over the Project. Such partial occupancy or use may commence whether or not the portion is substantially complete, provided the Owner and Contractor have accepted in writing the responsibilities assigned to each of them for payments, retainage, if any, security, maintenance, heat, utilities, damage to the Work and insurance, and have agreed in writing concerning the period for correction of the Work and commencement of warranties required by the Contract Documents. When the Contractor considers a portion substantially complete, the Contractor shall prepare and submit a list to the Architect as provided under Section 9.8.2. Consent of the Contractor to partial occupancy or use shall not be unreasonably withheld. The stage of the progress of the Work shall be determined by written agreement between the Owner and Contractor or, if no agreement is reached, by decision of the Architect.

§ 9.9.2 Immediately prior to such partial occupancy or use, the Owner, Contractor, and Architect shall jointly inspect the area to be occupied or portion of the Work to be used in order to determine and record the condition of the Work.

§ 9.9.3 Unless otherwise agreed upon, partial occupancy or use of a portion or portions of the Work shall not constitute acceptance of Work not complying with the requirements of the Contract Documents.

§ 9.10 Final Completion and Final Payment

§ 9.10.1 Upon receipt of the Contractor's notice that the Work is ready for final inspection and acceptance and upon receipt of a final Application for Payment, the Architect will promptly make such inspection. When the Architect finds the Work acceptable under the Contract Documents and the Contract fully performed, the Architect will promptly issue a final Certificate for Payment stating that to the best of the Architect's knowledge, information and belief, and on the basis of the Architect's on-site visits and inspections, the Work has been completed in accordance with the Contract Documents and that the entire balance found to be due the Contractor and noted in the final Certificate is due and payable. The Architect's final Certificate for Payment will constitute a further representation that conditions listed in Section 9.10.2 as precedent to the Contractor's being entitled to final payment have been fulfilled.

§ 9.10.2 Neither final payment nor any remaining retained percentage shall become due until the Contractor submits to the Architect (1) an affidavit that payrolls, bills for materials and equipment, and other indebtedness connected with the Work for which the Owner or the Owner's property might be responsible or encumbered (less amounts withheld by Owner) have been paid or otherwise satisfied, (2) a certificate evidencing that insurance required by the Contract Documents to remain in force after final payment is currently in effect, (3) a written statement that the Contractor knows of no reason that the insurance will not be renewable to cover the period required by the Contract Documents, (4) consent of surety, if any, to final payment, (5) documentation of any special warranties, such as manufacturers' warranties or specific Subcontractor warranties, and (6) if required by the Owner, other data establishing payment or satisfaction of obligations, such as receipts and releases and waivers of liens, claims, security interests, or encumbrances arising out of the Contract, to the extent and in such form as may be designated by the Owner. If a Subcontractor refuses to furnish a release or waiver required by the Owner, the Contractor may furnish a bond satisfactory to the Owner to indemnify the Owner against such lien, claim, security interest, or encumbrance. If a lien, claim, security interest, or encumbrance remains unsatisfied after payments are made, the Contractor shall refund to the Owner all money that the Owner may be compelled to pay in discharging the lien, claim, security interest, or encumbrance, including all costs and reasonable attorneys' fees.

§ 9.10.3 If, after Substantial Completion of the Work, final completion thereof is materially delayed through no fault of the Contractor or by issuance of Change Orders affecting final completion, and the Architect so confirms, the Owner shall, upon application by the Contractor and certification by the Architect, and without terminating the Contract, make payment of the balance due for that portion of the Work fully completed, corrected, and accepted. If the remaining balance for Work not fully completed or corrected is less than retainage stipulated in the Contract Documents, and if bonds have been furnished, the written consent of the surety to payment of the balance due for that portion of the Work fully completed and accepted shall be submitted by the Contractor to the Architect prior to certification of such payment. Such payment shall be made under terms and conditions governing final payment, except that it shall not constitute a waiver of Claims.

§ 9.10.4 The making of final payment shall constitute a waiver of Claims by the Owner except those arising from

- .1 liens, Claims, security interests, or encumbrances arising out of the Contract and unsettled;
- .2 failure of the Work to comply with the requirements of the Contract Documents;
- .3 terms of special warranties required by the Contract Documents; or
- .4 audits performed by the Owner, if permitted by the Contract Documents, after final payment.

§ 9.10.5 Acceptance of final payment by the Contractor, a Subcontractor, or a supplier, shall constitute a waiver of claims by that payee except those previously made in writing and identified by that payee as unsettled at the time of final Application for Payment.

ARTICLE 10 PROTECTION OF PERSONS AND PROPERTY

§ 10.1 Safety Precautions and Programs

The Contractor shall be responsible for initiating, maintaining, and supervising all safety precautions and programs in connection with the performance of the Contract.

§ 10.2 Safety of Persons and Property

§ 10.2.1 The Contractor shall take reasonable precautions for safety of, and shall provide reasonable protection to prevent damage, injury, or loss to

- .1 employees on the Work and other persons who may be affected thereby;
- .2 the Work and materials and equipment to be incorporated therein, whether in storage on or off the site, under care, custody, or control of the Contractor, a Subcontractor, or a Sub-subcontractor; and
- .3 other property at the site or adjacent thereto, such as trees, shrubs, lawns, walks, pavements, roadways, structures, and utilities not designated for removal, relocation, or replacement in the course of construction.

§ 10.2.2 The Contractor shall comply with, and give notices required by applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities, bearing on safety of persons or property or their protection from damage, injury, or loss.

§ 10.2.3 The Contractor shall implement, erect, and maintain, as required by existing conditions and performance of the Contract, reasonable safeguards for safety and protection, including posting danger signs and other warnings against hazards; promulgating safety regulations; and notifying the owners and users of adjacent sites and utilities of the safeguards.

§ 10.2.4 When use or storage of explosives or other hazardous materials or equipment, or unusual methods are necessary for execution of the Work, the Contractor shall exercise utmost care and carry on such activities under supervision of properly qualified personnel.

§ 10.2.5 The Contractor shall promptly remedy damage and loss (other than damage or loss insured under property insurance required by the Contract Documents) to property referred to in Sections 10.2.1.2 and 10.2.1.3 caused in whole or in part by the Contractor, a Subcontractor, a Sub-subcontractor, or anyone directly or indirectly employed by any of them, or by anyone for whose acts they may be liable and for which the Contractor is responsible under Sections 10.2.1.2 and 10.2.1.3. The Contractor may make a Claim for the cost to remedy the damage or loss to the extent such damage or loss is attributable to acts or omissions of the Owner or Architect or anyone directly or indirectly employed by either of them, or by anyone for whose acts either of them may be liable, and not attributable to the fault or negligence of the Contractor. The foregoing obligations of the Contractor are in addition to the Contractor's obligations under Section 3.18.

§ 10.2.6 The Contractor shall designate a responsible member of the Contractor's organization at the site whose duty shall be the prevention of accidents. This person shall be the Contractor's superintendent unless otherwise designated by the Contractor in writing to the Owner and Architect.

§ 10.2.7 The Contractor shall not permit any part of the construction or site to be loaded so as to cause damage or create an unsafe condition.

§ 10.2.8 Injury or Damage to Person or Property

If either party suffers injury or damage to person or property because of an act or omission of the other party, or of others for whose acts such party is legally responsible, notice of the injury or damage, whether or not insured, shall be given to the other party within a reasonable time not exceeding 21 days after discovery. The notice shall provide sufficient detail to enable the other party to investigate the matter.

§ 10.3 Hazardous Materials and Substances

§ 10.3.1 The Contractor is responsible for compliance with any requirements included in the Contract Documents regarding hazardous materials or substances. If the Contractor encounters a hazardous material or substance not addressed in the Contract Documents and if reasonable precautions will be inadequate to prevent foreseeable bodily injury or death to persons resulting from a material or substance, including but not limited to asbestos or polychlorinated biphenyl (PCB), encountered on the site by the Contractor, the Contractor shall, upon recognizing the condition, immediately stop Work in the affected area and notify the Owner and Architect of the condition.

§ 10.3.2 Upon receipt of the Contractor's notice, the Owner shall obtain the services of a licensed laboratory to verify the presence or absence of the material or substance reported by the Contractor and, in the event such material or substance is found to be present, to cause it to be rendered harmless. Unless otherwise required by the Contract Documents, the Owner shall furnish in writing to the Contractor and Architect the names and qualifications of persons or entities who are to perform tests verifying the presence or absence of the material or substance or who are to perform the task of removal or safe containment of the material or substance. The Contractor and the Architect will

promptly reply to the Owner in writing stating whether or not either has reasonable objection to the persons or entities proposed by the Owner. If either the Contractor or Architect has an objection to a person or entity proposed by the Owner, the Owner shall propose another to whom the Contractor and the Architect have no reasonable objection. When the material or substance has been rendered harmless, Work in the affected area shall resume upon written agreement of the Owner and Contractor. By Change Order, the Contract Time shall be extended appropriately and the Contract Sum shall be increased by the amount of the Contractor's reasonable additional costs of shutdown, delay, and start-up.

§ 10.3.3 To the fullest extent permitted by law, the Owner shall indemnify and hold harmless the Contractor, Subcontractors, Architect, Architect's consultants, and agents and employees of any of them from and against claims, damages, losses, and expenses, including but not limited to attorneys' fees, arising out of or resulting from performance of the Work in the affected area if in fact the material or substance presents the risk of bodily injury or death as described in Section 10.3.1 and has not been rendered harmless, provided that such claim, damage, loss, or expense is attributable to bodily injury, sickness, disease or death, or to injury to or destruction of tangible property (other than the Work itself), except to the extent that such damage, loss, or expense is due to the fault or negligence of the party seeking indemnity.

§ 10.3.4 The Owner shall not be responsible under this Section 10.3 for hazardous materials or substances the Contractor brings to the site unless such materials or substances are required by the Contract Documents. The Owner shall be responsible for hazardous materials or substances required by the Contract Documents, except to the extent of the Contractor's fault or negligence in the use and handling of such materials or substances.

§ 10.3.5 The Contractor shall reimburse the Owner for the cost and expense the Owner incurs (1) for remediation of hazardous materials or substances the Contractor brings to the site and negligently handles, or (2) where the Contractor fails to perform its obligations under Section 10.3.1, except to the extent that the cost and expense are due to the Owner's fault or negligence.

§ 10.3.6 If, without negligence on the part of the Contractor, the Contractor is held liable by a government agency for the cost of remediation of a hazardous material or substance solely by reason of performing Work as required by the Contract Documents, the Owner shall reimburse the Contractor for all cost and expense thereby incurred.

§ 10.4 Emergencies

In an emergency affecting safety of persons or property, the Contractor shall act, at the Contractor's discretion, to prevent threatened damage, injury, or loss. Additional compensation or extension of time claimed by the Contractor on account of an emergency shall be determined as provided in Article 15 and Article 7.

ARTICLE 11 INSURANCE AND BONDS

§ 11.1 Contractor's Insurance and Bonds

§ 11.1.1 The Contractor shall purchase and maintain insurance of the types and limits of liability, containing the endorsements, and subject to the terms and conditions, as described in the Agreement or elsewhere in the Contract Documents. The Contractor shall purchase and maintain the required insurance from an insurance company or insurance companies lawfully authorized to issue insurance in the jurisdiction where the Project is located. The Owner, Architect, and Architect's consultants shall be named as additional insureds under the Contractor's commercial general liability policy or as otherwise described in the Contract Documents.

§ 11.1.2 The Contractor shall provide surety bonds of the types, for such penal sums, and subject to such terms and conditions as required by the Contract Documents. The Contractor shall purchase and maintain the required bonds from a company or companies lawfully authorized to issue surety bonds in the jurisdiction where the Project is located.

§ 11.1.3 Upon the request of any person or entity appearing to be a potential beneficiary of bonds covering payment of obligations arising under the Contract, the Contractor shall promptly furnish a copy of the bonds or shall authorize a copy to be furnished.

§ 11.1.4 Notice of Cancellation or Expiration of Contractor's Required Insurance. Within three (3) business days of the date the Contractor becomes aware of an impending or actual cancellation or expiration of any insurance required by the Contract Documents, the Contractor shall provide notice to the Owner of such impending or actual cancellation or

expiration. Upon receipt of notice from the Contractor, the Owner shall, unless the lapse in coverage arises from an act or omission of the Owner, have the right to stop the Work until the lapse in coverage has been cured by the procurement of replacement coverage by the Contractor. The furnishing of notice by the Contractor shall not relieve the Contractor of any contractual obligation to provide any required coverage.

§ 11.2 Owner's Insurance

§ 11.2.1 The Owner shall purchase and maintain insurance of the types and limits of liability, containing the endorsements, and subject to the terms and conditions, as described in the Agreement or elsewhere in the Contract Documents. The Owner shall purchase and maintain the required insurance from an insurance company or insurance companies lawfully authorized to issue insurance in the jurisdiction where the Project is located.

§ 11.2.2 Failure to Purchase Required Property Insurance. If the Owner fails to purchase and maintain the required property insurance, with all of the coverages and in the amounts described in the Agreement or elsewhere in the Contract Documents, the Owner shall inform the Contractor in writing prior to commencement of the Work. Upon receipt of notice from the Owner, the Contractor may delay commencement of the Work and may obtain insurance that will protect the interests of the Contractor, Subcontractors, and Sub-Subcontractors in the Work. When the failure to provide coverage has been cured or resolved, the Contract Sum and Contract Time shall be equitably adjusted. In the event the Owner fails to procure coverage, the Owner waives all rights against the Contractor, Subcontractors, and Sub-subcontractors to the extent the loss to the Owner would have been covered by the insurance to have been procured by the Owner. The cost of the insurance shall be charged to the Owner by a Change Order. If the Owner does not provide written notice, and the Contractor is damaged by the failure or neglect of the Owner to purchase or maintain the required insurance, the Owner shall reimburse the Contractor for all reasonable costs and damages attributable thereto.

§ 11.2.3 Notice of Cancellation or Expiration of Owner's Required Property Insurance. Within three (3) business days of the date the Owner becomes aware of an impending or actual cancellation or expiration of any property insurance required by the Contract Documents, the Owner shall provide notice to the Contractor of such impending or actual cancellation or expiration. Unless the lapse in coverage arises from an act or omission of the Contractor: (1) the Contractor, upon receipt of notice from the Owner, shall have the right to stop the Work until the lapse in coverage has been cured by the procurement of replacement coverage by either the Owner or the Contractor; (2) the Contract Time and Contract Sum shall be equitably adjusted; and (3) the Owner waives all rights against the Contractor, Subcontractors, and Sub-subcontractors to the extent any loss to the Owner would have been covered by the insurance had it not expired or been cancelled. If the Contractor purchases replacement coverage, the cost of the insurance shall be charged to the Owner by an appropriate Change Order. The furnishing of notice by the Owner shall not relieve the Owner of any contractual obligation to provide required insurance.

§ 11.3 Waivers of Subrogation

§ 11.3.1 The Owner and Contractor waive all rights against (1) each other and any of their subcontractors, sub-subcontractors, agents, and employees, each of the other; (2) the Architect and Architect's consultants; and (3) Separate Contractors, if any, and any of their subcontractors, sub-subcontractors, agents, and employees, for damages caused by fire, or other causes of loss, to the extent those losses are covered by property insurance required by the Agreement or other property insurance applicable to the Project, except such rights as they have to proceeds of such insurance. The Owner or Contractor, as appropriate, shall require similar written waivers in favor of the individuals and entities identified above from the Architect, Architect's consultants, Separate Contractors, subcontractors, and sub-subcontractors. The policies of insurance purchased and maintained by each person or entity agreeing to waive claims pursuant to this section 11.3.1 shall not prohibit this waiver of subrogation. This waiver of subrogation shall be effective as to a person or entity (1) even though that person or entity would otherwise have a duty of indemnification, contractual or otherwise, (2) even though that person or entity did not pay the insurance premium directly or indirectly, or (3) whether or not the person or entity had an insurable interest in the damaged property.

§ 11.3.2 If during the Project construction period the Owner insures properties, real or personal or both, at or adjacent to the site by property insurance under policies separate from those insuring the Project, or if after final payment property insurance is to be provided on the completed Project through a policy or policies other than those insuring the Project during the construction period, to the extent permissible by such policies, the Owner waives all rights in accordance with the terms of Section 11.3.1 for damages caused by fire or other causes of loss covered by this separate property insurance.

§ 11.4 Loss of Use, Business Interruption, and Delay in Completion Insurance

The Owner, at the Owner's option, may purchase and maintain insurance that will protect the Owner against loss of use of the Owner's property, or the inability to conduct normal operations, due to fire or other causes of loss. The Owner waives all rights of action against the Contractor and Architect for loss of use of the Owner's property, due to fire or other hazards however caused.

§11.5 Adjustment and Settlement of Insured Loss

§ 11.5.1 A loss insured under the property insurance required by the Agreement shall be adjusted by the Owner as fiduciary and made payable to the Owner as fiduciary for the insureds, as their interests may appear, subject to requirements of any applicable mortgagee clause and of Section 11.5.2. The Owner shall pay the Architect and Contractor their just shares of insurance proceeds received by the Owner, and by appropriate agreements the Architect and Contractor shall make payments to their consultants and Subcontractors in similar manner.

§ 11.5.2 Prior to settlement of an insured loss, the Owner shall notify the Contractor of the terms of the proposed settlement as well as the proposed allocation of the insurance proceeds. The Contractor shall have 14 days from receipt of notice to object to the proposed settlement or allocation of the proceeds. If the Contractor does not object, the Owner shall settle the loss and the Contractor shall be bound by the settlement and allocation. Upon receipt, the Owner shall deposit the insurance proceeds in a separate account and make the appropriate distributions. Thereafter, if no other agreement is made or the Owner does not terminate the Contract for convenience, the Owner and Contractor shall execute a Change Order for reconstruction of the damaged or destroyed Work in the amount allocated for that purpose. If the Contractor timely objects to either the terms of the proposed settlement or the allocation of the proceeds, the Owner may proceed to settle the insured loss, and any dispute between the Owner and Contractor arising out of the settlement or allocation of the proceeds shall be resolved pursuant to Article 15. Pending resolution of any dispute, the Owner may issue a Construction Change Directive for the reconstruction of the damaged or destroyed Work.

ARTICLE 12 UNCOVERING AND CORRECTION OF WORK

§ 12.1 Uncovering of Work

§ 12.1.1 If a portion of the Work is covered contrary to the Architect's request or to requirements specifically expressed in the Contract Documents, it must, if requested in writing by the Architect, be uncovered for the Architect's examination and be replaced at the Contractor's expense without change in the Contract Time.

§ 12.1.2 If a portion of the Work has been covered that the Architect has not specifically requested to examine prior to its being covered, the Architect may request to see such Work and it shall be uncovered by the Contractor. If such Work is in accordance with the Contract Documents, the Contractor shall be entitled to an equitable adjustment to the Contract Sum and Contract Time as may be appropriate. If such Work is not in accordance with the Contract Documents, the costs of uncovering the Work, and the cost of correction, shall be at the Contractor's expense.

§ 12.2 Correction of Work

§ 12.2.1 Before Substantial Completion

The Contractor shall promptly correct Work rejected by the Architect or failing to conform to the requirements of the Contract Documents, discovered before Substantial Completion and whether or not fabricated, installed or completed. Costs of correcting such rejected Work, including additional testing and inspections, the cost of uncovering and replacement, and compensation for the Architect's services and expenses made necessary thereby, shall be at the Contractor's expense.

§ 12.2.2 After Substantial Completion

§ 12.2.2.1 In addition to the Contractor's obligations under Section 3.5, if, within one year after the date of Substantial Completion of the Work or designated portion thereof or after the date for commencement of warranties established under Section 9.9.1, or by terms of any applicable special warranty required by the Contract Documents, any of the Work is found to be not in accordance with the requirements of the Contract Documents, the Contractor shall correct it promptly after receipt of notice from the Owner to do so, unless the Owner has previously given the Contractor a written acceptance of such condition. The Owner shall give such notice promptly after discovery of the condition. During the one-year period for correction of Work, if the Owner fails to notify the Contractor and give the Contractor an opportunity to make the correction, the Owner waives the rights to require correction by the Contractor and to make a claim for breach of warranty. If the Contractor fails to correct nonconforming Work within a reasonable time during

that period after receipt of notice from the Owner or Architect, the Owner may correct it in accordance with Section 2.5.

§ 12.2.2.2 The one-year period for correction of Work shall be extended with respect to portions of Work first performed after Substantial Completion by the period of time between Substantial Completion and the actual completion of that portion of the Work.

§ 12.2.2.3 The one-year period for correction of Work shall not be extended by corrective Work performed by the Contractor pursuant to this Section 12.2.

§ 12.2.3 The Contractor shall remove from the site portions of the Work that are not in accordance with the requirements of the Contract Documents and are neither corrected by the Contractor nor accepted by the Owner.

§ 12.2.4 The Contractor shall bear the cost of correcting destroyed or damaged construction of the Owner or Separate Contractors, whether completed or partially completed, caused by the Contractor's correction or removal of Work that is not in accordance with the requirements of the Contract Documents.

§ 12.2.5 Nothing contained in this Section 12.2 shall be construed to establish a period of limitation with respect to other obligations the Contractor has under the Contract Documents. Establishment of the one-year period for correction of Work as described in Section 12.2.2 relates only to the specific obligation of the Contractor to correct the Work, and has no relationship to the time within which the obligation to comply with the Contract Documents may be sought to be enforced, nor to the time within which proceedings may be commenced to establish the Contractor's liability with respect to the Contractor's obligations other than specifically to correct the Work.

§ 12.3 Acceptance of Nonconforming Work

If the Owner prefers to accept Work that is not in accordance with the requirements of the Contract Documents, the Owner may do so instead of requiring its removal and correction, in which case the Contract Sum will be reduced as appropriate and equitable. Such adjustment shall be effected whether or not final payment has been made.

ARTICLE 13 MISCELLANEOUS PROVISIONS

§ 13.1 Governing Law

The Contract shall be governed by the law of the place where the Project is located, excluding that jurisdiction's choice of law rules. If the parties have selected arbitration as the method of binding dispute resolution, the Federal Arbitration Act shall govern Section 15.4.

§ 13.2 Successors and Assigns

§ 13.2.1 The Owner and Contractor respectively bind themselves, their partners, successors, assigns, and legal representatives to covenants, agreements, and obligations contained in the Contract Documents. Except as provided in Section 13.2.2, neither party to the Contract shall assign the Contract as a whole without written consent of the other. If either party attempts to make an assignment without such consent, that party shall nevertheless remain legally responsible for all obligations under the Contract.

§ 13.2.2 The Owner may, without consent of the Contractor, assign the Contract to a lender providing construction financing for the Project, if the lender assumes the Owner's rights and obligations under the Contract Documents. The Contractor shall execute all consents reasonably required to facilitate the assignment.

§ 13.3 Rights and Remedies

§ 13.3.1 Duties and obligations imposed by the Contract Documents and rights and remedies available thereunder shall be in addition to and not a limitation of duties, obligations, rights, and remedies otherwise imposed or available by law.

§ 13.3.2 No action or failure to act by the Owner, Architect, or Contractor shall constitute a waiver of a right or duty afforded them under the Contract, nor shall such action or failure to act constitute approval of or acquiescence in a breach thereunder, except as may be specifically agreed upon in writing.

§ 13.4 Tests and Inspections

§ 13.4.1 Tests, inspections, and approvals of portions of the Work shall be made as required by the Contract Documents and by applicable laws, statutes, ordinances, codes, rules, and regulations or lawful orders of public authorities. Unless otherwise provided, the Contractor shall make arrangements for such tests, inspections, and approvals with an independent testing laboratory or entity acceptable to the Owner, or with the appropriate public authority, and shall bear all related costs of tests, inspections, and approvals. The Contractor shall give the Architect timely notice of when and where tests and inspections are to be made so that the Architect may be present for such procedures. The Owner shall bear costs of tests, inspections, or approvals that do not become requirements until after bids are received or negotiations concluded. The Owner shall directly arrange and pay for tests, inspections, or approvals where building codes or applicable laws or regulations so require.

§ 13.4.2 If the Architect, Owner, or public authorities having jurisdiction determine that portions of the Work require additional testing, inspection, or approval not included under Section 13.4.1, the Architect will, upon written authorization from the Owner, instruct the Contractor to make arrangements for such additional testing, inspection, or approval, by an entity acceptable to the Owner, and the Contractor shall give timely notice to the Architect of when and where tests and inspections are to be made so that the Architect may be present for such procedures. Such costs, except as provided in Section 13.4.3, shall be at the Owner's expense.

§ 13.4.3 If procedures for testing, inspection, or approval under Sections 13.4.1 and 13.4.2 reveal failure of the portions of the Work to comply with requirements established by the Contract Documents, all costs made necessary by such failure, including those of repeated procedures and compensation for the Architect's services and expenses, shall be at the Contractor's expense.

§ 13.4.4 Required certificates of testing, inspection, or approval shall, unless otherwise required by the Contract Documents, be secured by the Contractor and promptly delivered to the Architect.

§ 13.4.5 If the Architect is to observe tests, inspections, or approvals required by the Contract Documents, the Architect will do so promptly and, where practicable, at the normal place of testing.

§ 13.4.6 Tests or inspections conducted pursuant to the Contract Documents shall be made promptly to avoid unreasonable delay in the Work.

§ 13.5 Interest

Payments due and unpaid under the Contract Documents shall bear interest from the date payment is due at the rate the parties agree upon in writing or, in the absence thereof, at the legal rate prevailing from time to time at the place where the Project is located.

ARTICLE 14 TERMINATION OR SUSPENSION OF THE CONTRACT

§ 14.1 Termination by the Contractor

§ 14.1.1 The Contractor may terminate the Contract if the Work is stopped for a period of 30 consecutive days through no act or fault of the Contractor, a Subcontractor, a Sub-subcontractor, their agents or employees, or any other persons or entities performing portions of the Work, for any of the following reasons:

- .1 Issuance of an order of a court or other public authority having jurisdiction that requires all Work to be stopped;
- .2 An act of government, such as a declaration of national emergency, that requires all Work to be stopped;
- .3 Because the Architect has not issued a Certificate for Payment and has not notified the Contractor of the reason for withholding certification as provided in Section 9.4.1, or because the Owner has not made payment on a Certificate for Payment within the time stated in the Contract Documents; or
- .4 The Owner has failed to furnish to the Contractor reasonable evidence as required by Section 2.2.

§ 14.1.2 The Contractor may terminate the Contract if, through no act or fault of the Contractor, a Subcontractor, a Sub-subcontractor, their agents or employees, or any other persons or entities performing portions of the Work, repeated suspensions, delays, or interruptions of the entire Work by the Owner as described in Section 14.3, constitute in the aggregate more than 100 percent of the total number of days scheduled for completion, or 120 days in any 365-day period, whichever is less.

§ 14.1.3 If one of the reasons described in Section 14.1.1 or 14.1.2 exists, the Contractor may, upon seven days' notice to the Owner and Architect, terminate the Contract and recover from the Owner payment for Work executed, as well as reasonable overhead and profit on Work not executed, and costs incurred by reason of such termination.

§ 14.1.4 If the Work is stopped for a period of 60 consecutive days through no act or fault of the Contractor, a Subcontractor, a Sub-subcontractor, or their agents or employees or any other persons or entities performing portions of the Work because the Owner has repeatedly failed to fulfill the Owner's obligations under the Contract Documents with respect to matters important to the progress of the Work, the Contractor may, upon seven additional days' notice to the Owner and the Architect, terminate the Contract and recover from the Owner as provided in Section 14.1.3.

§ 14.2 Termination by the Owner for Cause

§ 14.2.1 The Owner may terminate the Contract if the Contractor

- .1 repeatedly refuses or fails to supply enough properly skilled workers or proper materials;
- .2 fails to make payment to Subcontractors or suppliers in accordance with the respective agreements between the Contractor and the Subcontractors or suppliers;
- .3 repeatedly disregards applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of a public authority; or
- .4 otherwise is guilty of substantial breach of a provision of the Contract Documents.

§ 14.2.2 When any of the reasons described in Section 14.2.1 exist, and upon certification by the Architect that sufficient cause exists to justify such action, the Owner may, without prejudice to any other rights or remedies of the Owner and after giving the Contractor and the Contractor's surety, if any, seven days' notice, terminate employment of the Contractor and may, subject to any prior rights of the surety:

- .1 Exclude the Contractor from the site and take possession of all materials, equipment, tools, and construction equipment and machinery thereon owned by the Contractor;
- .2 Accept assignment of subcontracts pursuant to Section 5.4; and
- .3 Finish the Work by whatever reasonable method the Owner may deem expedient. Upon written request of the Contractor, the Owner shall furnish to the Contractor a detailed accounting of the costs incurred by the Owner in finishing the Work.

§ 14.2.3 When the Owner terminates the Contract for one of the reasons stated in Section 14.2.1, the Contractor shall not be entitled to receive further payment until the Work is finished.

§ 14.2.4 If the unpaid balance of the Contract Sum exceeds costs of finishing the Work, including compensation for the Architect's services and expenses made necessary thereby, and other damages incurred by the Owner and not expressly waived, such excess shall be paid to the Contractor. If such costs and damages exceed the unpaid balance, the Contractor shall pay the difference to the Owner. The amount to be paid to the Contractor or Owner, as the case may be, shall be certified by the Initial Decision Maker, upon application, and this obligation for payment shall survive termination of the Contract.

§ 14.3 Suspension by the Owner for Convenience

§ 14.3.1 The Owner may, without cause, order the Contractor in writing to suspend, delay or interrupt the Work, in whole or in part for such period of time as the Owner may determine.

§ 14.3.2 The Contract Sum and Contract Time shall be adjusted for increases in the cost and time caused by suspension, delay, or interruption under Section 14.3.1. Adjustment of the Contract Sum shall include profit. No adjustment shall be made to the extent

- .1 that performance is, was, or would have been, so suspended, delayed, or interrupted, by another cause for which the Contractor is responsible; or
- .2 that an equitable adjustment is made or denied under another provision of the Contract.

§ 14.4 Termination by the Owner for Convenience

§ 14.4.1 The Owner may, at any time, terminate the Contract for the Owner's convenience and without cause.

§ 14.4.2 Upon receipt of notice from the Owner of such termination for the Owner's convenience, the Contractor shall

- .1 cease operations as directed by the Owner in the notice;

- .2 take actions necessary, or that the Owner may direct, for the protection and preservation of the Work; and
- .3 except for Work directed to be performed prior to the effective date of termination stated in the notice, terminate all existing subcontracts and purchase orders and enter into no further subcontracts and purchase orders.

§ 14.4.3 In case of such termination for the Owner's convenience, the Owner shall pay the Contractor for Work properly executed; costs incurred by reason of the termination, including costs attributable to termination of Subcontracts; and the termination fee, if any, set forth in the Agreement.

ARTICLE 15 CLAIMS AND DISPUTES

§ 15.1 Claims

§ 15.1.1 Definition

A Claim is a demand or assertion by one of the parties seeking, as a matter of right, payment of money, a change in the Contract Time, or other relief with respect to the terms of the Contract. The term "Claim" also includes other disputes and matters in question between the Owner and Contractor arising out of or relating to the Contract. The responsibility to substantiate Claims shall rest with the party making the Claim. This Section 15.1.1 does not require the Owner to file a Claim in order to impose liquidated damages in accordance with the Contract Documents.

§ 15.1.2 Time Limits on Claims

The Owner and Contractor shall commence all Claims and causes of action against the other and arising out of or related to the Contract, whether in contract, tort, breach of warranty or otherwise, in accordance with the requirements of the binding dispute resolution method selected in the Agreement and within the period specified by applicable law, but in any case not more than 10 years after the date of Substantial Completion of the Work. The Owner and Contractor waive all Claims and causes of action not commenced in accordance with this Section 15.1.2.

§ 15.1.3 Notice of Claims

§ 15.1.3.1 Claims by either the Owner or Contractor, where the condition giving rise to the Claim is first discovered prior to expiration of the period for correction of the Work set forth in Section 12.2.2, shall be initiated by notice to the other party and to the Initial Decision Maker with a copy sent to the Architect, if the Architect is not serving as the Initial Decision Maker. Claims by either party under this Section 15.1.3.1 shall be initiated within 21 days after occurrence of the event giving rise to such Claim or within 21 days after the claimant first recognizes the condition giving rise to the Claim, whichever is later.

§ 15.1.3.2 Claims by either the Owner or Contractor, where the condition giving rise to the Claim is first discovered after expiration of the period for correction of the Work set forth in Section 12.2.2, shall be initiated by notice to the other party. In such event, no decision by the Initial Decision Maker is required.

§ 15.1.4 Continuing Contract Performance

§ 15.1.4.1 Pending final resolution of a Claim, except as otherwise agreed in writing or as provided in Section 9.7 and Article 14, the Contractor shall proceed diligently with performance of the Contract and the Owner shall continue to make payments in accordance with the Contract Documents.

§ 15.1.4.2 The Contract Sum and Contract Time shall be adjusted in accordance with the Initial Decision Maker's decision, subject to the right of either party to proceed in accordance with this Article 15. The Architect will issue Certificates for Payment in accordance with the decision of the Initial Decision Maker.

§ 15.1.5 Claims for Additional Cost

If the Contractor wishes to make a Claim for an increase in the Contract Sum, notice as provided in Section 15.1.3 shall be given before proceeding to execute the portion of the Work that is the subject of the Claim. Prior notice is not required for Claims relating to an emergency endangering life or property arising under Section 10.4.

§ 15.1.6 Claims for Additional Time

§ 15.1.6.1 If the Contractor wishes to make a Claim for an increase in the Contract Time, notice as provided in Section 15.1.3 shall be given. The Contractor's Claim shall include an estimate of cost and of probable effect of delay on progress of the Work. In the case of a continuing delay, only one Claim is necessary.

§ 15.1.6.2 If adverse weather conditions are the basis for a Claim for additional time, such Claim shall be documented by data substantiating that weather conditions were abnormal for the period of time, could not have been reasonably anticipated, and had an adverse effect on the scheduled construction.

§ 15.1.7 Waiver of Claims for Consequential Damages

The Contractor and Owner waive Claims against each other for consequential damages arising out of or relating to this Contract. This mutual waiver includes

- .1 damages incurred by the Owner for rental expenses, for losses of use, income, profit, financing, business and reputation, and for loss of management or employee productivity or of the services of such persons; and
- .2 damages incurred by the Contractor for principal office expenses including the compensation of personnel stationed there, for losses of financing, business and reputation, and for loss of profit, except anticipated profit arising directly from the Work.

This mutual waiver is applicable, without limitation, to all consequential damages due to either party's termination in accordance with Article 14. Nothing contained in this Section 15.1.7 shall be deemed to preclude assessment of liquidated damages, when applicable, in accordance with the requirements of the Contract Documents.

§ 15.2 Initial Decision

§ 15.2.1 Claims, excluding those where the condition giving rise to the Claim is first discovered after expiration of the period for correction of the Work set forth in Section 12.2.2 or arising under Sections 10.3, 10.4, and 11.5, shall be referred to the Initial Decision Maker for initial decision. The Architect will serve as the Initial Decision Maker, unless otherwise indicated in the Agreement. Except for those Claims excluded by this Section 15.2.1, an initial decision shall be required as a condition precedent to mediation of any Claim. If an initial decision has not been rendered within 30 days after the Claim has been referred to the Initial Decision Maker, the party asserting the Claim may demand mediation and binding dispute resolution without a decision having been rendered. Unless the Initial Decision Maker and all affected parties agree, the Initial Decision Maker will not decide disputes between the Contractor and persons or entities other than the Owner.

§ 15.2.2 The Initial Decision Maker will review Claims and within ten days of the receipt of a Claim take one or more of the following actions: (1) request additional supporting data from the claimant or a response with supporting data from the other party, (2) reject the Claim in whole or in part, (3) approve the Claim, (4) suggest a compromise, or (5) advise the parties that the Initial Decision Maker is unable to resolve the Claim if the Initial Decision Maker lacks sufficient information to evaluate the merits of the Claim or if the Initial Decision Maker concludes that, in the Initial Decision Maker's sole discretion, it would be inappropriate for the Initial Decision Maker to resolve the Claim.

§ 15.2.3 In evaluating Claims, the Initial Decision Maker may, but shall not be obligated to, consult with or seek information from either party or from persons with special knowledge or expertise who may assist the Initial Decision Maker in rendering a decision. The Initial Decision Maker may request the Owner to authorize retention of such persons at the Owner's expense.

§ 15.2.4 If the Initial Decision Maker requests a party to provide a response to a Claim or to furnish additional supporting data, such party shall respond, within ten days after receipt of the request, and shall either (1) provide a response on the requested supporting data, (2) advise the Initial Decision Maker when the response or supporting data will be furnished, or (3) advise the Initial Decision Maker that no supporting data will be furnished. Upon receipt of the response or supporting data, if any, the Initial Decision Maker will either reject or approve the Claim in whole or in part.

§ 15.2.5 The Initial Decision Maker will render an initial decision approving or rejecting the Claim, or indicating that the Initial Decision Maker is unable to resolve the Claim. This initial decision shall (1) be in writing; (2) state the reasons therefor; and (3) notify the parties and the Architect, if the Architect is not serving as the Initial Decision Maker, of any change in the Contract Sum or Contract Time or both. The initial decision shall be final and binding on the parties but subject to mediation and, if the parties fail to resolve their dispute through mediation, to binding dispute resolution.

§ 15.2.6 Either party may file for mediation of an initial decision at any time, subject to the terms of Section 15.2.6.1.

§ 15.2.6.1 Either party may, within 30 days from the date of receipt of an initial decision, demand in writing that the other party file for mediation. If such a demand is made and the party receiving the demand fails to file for mediation within 30 days after receipt thereof, then both parties waive their rights to mediate or pursue binding dispute resolution proceedings with respect to the initial decision.

§ 15.2.7 In the event of a Claim against the Contractor, the Owner may, but is not obligated to, notify the surety, if any, of the nature and amount of the Claim. If the Claim relates to a possibility of a Contractor's default, the Owner may, but is not obligated to, notify the surety and request the surety's assistance in resolving the controversy.

§ 15.2.8 If a Claim relates to or is the subject of a mechanic's lien, the party asserting such Claim may proceed in accordance with applicable law to comply with the lien notice or filing deadlines.

§ 15.3 Mediation

§ 15.3.1 Claims, disputes, or other matters in controversy arising out of or related to the Contract, except those waived as provided for in Sections 9.10.4, 9.10.5, and 15.1.7, shall be subject to mediation as a condition precedent to binding dispute resolution.

§ 15.3.2 The parties shall endeavor to resolve their Claims by mediation which, unless the parties mutually agree otherwise, shall be administered by the American Arbitration Association in accordance with its Construction Industry Mediation Procedures in effect on the date of the Agreement. A request for mediation shall be made in writing, delivered to the other party to the Contract, and filed with the person or entity administering the mediation. The request may be made concurrently with the filing of binding dispute resolution proceedings but, in such event, mediation shall proceed in advance of binding dispute resolution proceedings, which shall be stayed pending mediation for a period of 60 days from the date of filing, unless stayed for a longer period by agreement of the parties or court order. If an arbitration is stayed pursuant to this Section 15.3.2, the parties may nonetheless proceed to the selection of the arbitrator(s) and agree upon a schedule for later proceedings.

§ 15.3.3 Either party may, within 30 days from the date that mediation has been concluded without resolution of the dispute or 60 days after mediation has been demanded without resolution of the dispute, demand in writing that the other party file for binding dispute resolution. If such a demand is made and the party receiving the demand fails to file for binding dispute resolution within 60 days after receipt thereof, then both parties waive their rights to binding dispute resolution proceedings with respect to the initial decision.

§ 15.3.4 The parties shall share the mediator's fee and any filing fees equally. The mediation shall be held in the place where the Project is located, unless another location is mutually agreed upon. Agreements reached in mediation shall be enforceable as settlement agreements in any court having jurisdiction thereof.

§ 15.4 Arbitration

§ 15.4.1 If the parties have selected arbitration as the method for binding dispute resolution in the Agreement, any Claim subject to, but not resolved by, mediation shall be subject to arbitration which, unless the parties mutually agree otherwise, shall be administered by the American Arbitration Association in accordance with its Construction Industry Arbitration Rules in effect on the date of the Agreement. The Arbitration shall be conducted in the place where the Project is located, unless another location is mutually agreed upon. A demand for arbitration shall be made in writing, delivered to the other party to the Contract, and filed with the person or entity administering the arbitration. The party filing a notice of demand for arbitration must assert in the demand all Claims then known to that party on which arbitration is permitted to be demanded.

§ 15.4.1.1 A demand for arbitration shall be made no earlier than concurrently with the filing of a request for mediation, but in no event shall it be made after the date when the institution of legal or equitable proceedings based on the Claim would be barred by the applicable statute of limitations. For statute of limitations purposes, receipt of a written demand for arbitration by the person or entity administering the arbitration shall constitute the institution of legal or equitable proceedings based on the Claim.

§ 15.4.2 The award rendered by the arbitrator or arbitrators shall be final, and judgment may be entered upon it in accordance with applicable law in any court having jurisdiction thereof.

§ 15.4.3 The foregoing agreement to arbitrate and other agreements to arbitrate with an additional person or entity duly consented to by parties to the Agreement, shall be specifically enforceable under applicable law in any court having jurisdiction thereof.

§ 15.4.4 Consolidation or Joinder

§ 15.4.4.1 Subject to the rules of the American Arbitration Association or other applicable arbitration rules, either party may consolidate an arbitration conducted under this Agreement with any other arbitration to which it is a party provided that (1) the arbitration agreement governing the other arbitration permits consolidation, (2) the arbitrations to be consolidated substantially involve common questions of law or fact, and (3) the arbitrations employ materially similar procedural rules and methods for selecting arbitrator(s).

§ 15.4.4.2 Subject to the rules of the American Arbitration Association or other applicable arbitration rules, either party may include by joinder persons or entities substantially involved in a common question of law or fact whose presence is required if complete relief is to be accorded in arbitration, provided that the party sought to be joined consents in writing to such joinder. Consent to arbitration involving an additional person or entity shall not constitute consent to arbitration of any claim, dispute or other matter in question not described in the written consent.

§ 15.4.4.3 The Owner and Contractor grant to any person or entity made a party to an arbitration conducted under this Section 15.4, whether by joinder or consolidation, the same rights of joinder and consolidation as those of the Owner and Contractor under this Agreement.

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SUPPLEMENTARY GENERAL CONDITIONS A201-2017

The following supplements modify the "General Conditions of the Contract for Construction," AIA Document A201-2017. Where a portion of the General Conditions is modified or deleted by the Supplementary Conditions, the unaltered portions of the General Conditions shall remain in effect.

TABLE OF ARTICLES

1. GENERAL PROVISIONS
2. OWNER
3. CONTRACTOR
4. ADMINISTRATION OF THE CONTRACT
5. SUBCONTRACTORS
6. CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS
7. CHANGES IN THE WORK
8. TIME
9. PAYMENTS AND COMPLETION
10. PROTECTION OF PERSONS AND PROPERTY
11. INSURANCE AND BONDS
12. UNCOVERING AND CORRECTION OF WORK
13. MISCELLANEOUS PROVISIONS
14. TERMINATION OR SUSPENSION OF THE CONTRACT

ARTICLE 1: GENERAL PROVISIONS

1.1 BASIC DEFINITIONS

1.1.1 THE CONTRACT DOCUMENTS

Strike the last sentence of Section 1.1.1 in its entirety and replace with the following:

"The Contract Documents also include Advertisement for Bid, Instructions to Bidder, sample forms, the Bid Form, the Contractor's completed Bid and the Award Letter."

Add the following Section:

"1.1.1.1 In the event of conflict or discrepancies among the Contract Documents, the Documents prepared by the State of Delaware, Division of Facilities Management shall take precedence over all other documents."

1.1.8 INITIAL DECISION MAKER

Strike the last sentence of Section 1.1.8 in its entirety and add the following to the end of the remaining sentence:

" and certify termination of the Agreement under Section 14.2.2."

1.2 CORRELATION AND INTENT OF THE CONTRACT DOCUMENTS

1.2.1.1 Insert "if possible" at the end of the second sentence.

Add the following Sections:

"1.2.4 In the case of an inconsistency between the Drawings and the Specifications, or within either document not clarified by addendum, the better quality or greater quantity of work shall be provided in accordance with the Architect's interpretation."

"1.2.5 The word "PROVIDE" as used in the Contract Documents shall mean "FURNISH AND INSTALL" and shall include, without limitation, all labor, materials, equipment, transportation, services and other items required to complete the Work."

"1.2.6 The word "PRODUCT" as used in the Contract Documents means all materials, systems and equipment."

1.5 OWNERSHIP AND USE OF DRAWINGS, SPECIFICATIONS AND OTHER INSTRUMENTS OF SERVICE

Strike Section 1.5.1 in its entirety and replace with the following:

"All pre-design studies, drawings, specifications and other documents, including those in electronic form, prepared by the Architect under this Agreement are, and shall remain, the property of the Owner whether the Project for which they are made is executed or not. Such documents may be used by the Owner to construct one or more like Projects without the approval of, or additional compensation to, the Architect. The Contractor, Subcontractors, Sub-subcontractors, and Material or Equipment Suppliers are authorized to use and reproduce applicable portions of the Drawings, Specifications and other documents prepared by the Architect and the Architect's consultants appropriate to and for use in the execution of their Work under the Contract Documents. They are not to be used by the Contractor or any Subcontractor,

Sub-subcontractor or Material and Equipment Supplier on other Projects or for additions to this Project outside the scope of the Work without the specific written consent of the Owner, Architect and Architect's consultants.

The Architect shall not be liable for injury or damage resulting from the re-use of drawings and specifications if the Architect is not involved in the re-use Project. Prior to re-use of construction documents for a Project in which the Architect is not also involved, the Owner will remove from such documents all identification of the original Architect, including name, address and professional seal or stamp."

Strike Section 1.5.2 in its entirety.

1.7 DIGITAL DATA USE AND TRANSMISSION

Strike Section 1.7 in its entirety and replace with the following:

"The parties shall agree upon protocols governing transmission and use of Instruments of Service or any other information or documentation in digital form."

1.8 BUILDING INFORMATION MODELS USE AND RELIANCE

Strike Section 1.8 in its entirety.

ARTICLE 2: OWNER

2.2 EVIDENCE OF THE OWNERS FINANCIAL ARRANGEMENTS

Strike Section 2.2 in its entirety.

2.3 INFORMATION AND SERVICES REQUIRED OF THE OWNER

2.3.3 Strike 2.3.3 in its entirety.

2.3.4 Add the following sentence at the end of the paragraph:

"The Contractor, at their expense shall bear the costs to accurately identify the location of all underground utilities in the area of their excavation and shall bear all cost for any repairs required, out of failure to accurately identify said utilities."

Strike Section 2.3.6 in its entirety and replace with the following:

"2.3.6 The Contractor shall be furnished free of charge (1) electronic set of the Drawings and Project Manuals. Additional sets will be furnished at the cost of reproduction, postage and handling."

2.5 OWNER'S RIGHT TO CARRY OUT THE WORK

Add ", except as outlined in Section 3.15" after the reference to "Article 15" at the end of the last sentence of the Section.

ARTICLE 3: CONTRACTOR

3.2 REVIEW OF CONTRACT DOCUMENTS AND FIELD CONDITIONS BY CONTRACTOR

3.2.2 Add "and Owner" after "report to the Architect" in the second sentence.

3.2.4 Strike "subject to Section 15.1.7" in the second sentence.

3.2.4 Strike the third sentence.

3.3 SUPERVISION AND CONSTRUCTION PROCEDURES

Add the following Sections:

"3.3.2.1 The Contractor shall immediately remove from the Work, whenever requested to do so by the Owner, any person who is considered by the Owner or Architect to be incompetent or disposed to be so disorderly, or who for any reason is not satisfactory to the Owner, and that person shall not again be employed on the Work without the consent of the Owner or the Architect."

"3.3.4 The Contractor must provide suitable storage facilities at the Site for the proper protection and safe storage of their materials, or as otherwise identified by the specifications. Consult the Owner and the Architect before storing any materials."

"3.3.5 When any room is used as a shop, storeroom, office, etc., by the Contractor or Subcontractor(s) during the construction of the Work, the Contractor making use of these areas will be held responsible for any repairs, patching or cleaning arising from such use."

3.4 LABOR AND MATERIALS

Add the Following Sections:

"3.4.4 Before starting the Work, each Contractor shall carefully examine all preparatory Work that has been executed to receive their Work. Check carefully, by whatever means are required, to insure that its Work and adjacent, related Work, will finish to proper contours, planes and levels. Promptly notify the Architect & Owner of any defects or imperfections in preparatory Work which will in any way affect satisfactory completion of its Work. Absence of such notification will be construed as an acceptance of preparatory Work and later claims of defects will not be recognized."

"3.4.5 Under no circumstances shall the Contractor's Work proceed prior to preparatory Work having been completely cured, dried and/or otherwise made satisfactory to receive this Work. Responsibility for timely installation of all materials rests solely with the Contractor responsible for that Work, who shall maintain coordination at all times."

3.5 WARRANTY

Add the following Sections:

"3.5.3 The Contractor will guarantee all materials and workmanship against original defects, except injury from proper and usual wear when used for the purpose intended, for two years after Acceptance by the Owner, and will maintain all items in perfect condition during the period of warranty."

"3.5.4 Defects appearing during the period of warranty will be made good by the Contractor at his expense upon demand of the Owner, it being required that all work will be in perfect condition when the period of warranty will have elapsed."

"3.5.5 Upon notification by the Owner of a defect covered by the Contractor's warranty, the Contractor shall respond within 4 hours of the notification."

"3.5.6 In addition to the General Warranty there are other warranties required for certain items for different periods of time than the two years as above, and are particularly so stated in that part of the specifications referring to same. The said warranties will commence at the same time as the General Warranty."

"3.5.7 If the Contractor fails to remedy any failure, defect or damage within a reasonable time after receipt of notice, the Owner will have the right to replace, repair, or otherwise remedy the failure, defect or damage at the Contractor's expense."

3.8 ALLOWANCES

Add the following Section:

"3.8.1.1 For costs to be covered under a project allowance, (included in the schedule of values) the Contractor shall submit a summary of those costs anticipated and an Allowance Access Authorization Form to the Architect and Owner, reflecting the projected costs. The Allowance Access Authorization Form must be signed by the Owner prior to initiating any work associated with the allowance."

3.10 CONTRACTOR'S CONSTRUCTION AND SUBMITTAL SCHEDULES

3.10.1 Add "estimated" after "and the" and before "date of" in the second sentence.

3.10.2 Strike "and thereafter as necessary to maintain a current submittal schedule" in the first sentence.

Add the following section:

"3.10.4 The Contractor's Construction and Submittal Schedules shall be in accordance with the DFM - Supplemental Project Scheduling Guidelines."

3.11 DOCUMENTS AND SAMPLES AT THE SITE

Add the following Sections:

"3.11.1 During the course of the Work, the Contractor shall maintain a record set of drawings on which the Contractor shall mark the actual physical location of all piping, valves, equipment, conduit, outlets, access panels, controls, actuators, including all appurtenances that will be concealed once construction is complete, etc., including all invert elevations."

"3.11.2 At the completion of the project, the Contractor shall obtain a set of the conformed contract drawings from the Architect, and neatly transfer all information outlined in 3.11.1 to provide a complete record of the as-built conditions."

"3.11.3 Upon completion of the work noted in 3.11.2 the contractor shall schedule a meeting with the Architect/Engineer and Owner to review the final record drawings and closeout documents prior to submission. After this meeting the Contractor shall make adjustments per the review, and submit one (1) original markup and (2) copies of the red line drawings (as-built conditions, to the Owner and one (1) print to the Architect. In addition, attach one complete set of the as-built documents to each of the Operating and Maintenance Instructions/Manuals. The Contractor will include (2) USB drives, each containing all "red line drawings (as-built) and Closeout Documents properly tabbed in accordance with closeout requirements as defined elsewhere in the contract documents."

- 3.12 SHOP DRAWINGS, PRODUCT DATA AND SAMPLES
- 3.12.10.2 Strike "If the Contract Documents require" from the beginning of the sentence.
- 3.12.10.2 Strike "to" between "professional" and certify" and replace with "shall".
- 3.17 Insert "indemnify and" between "shall" and "hold" in the second sentence.

ARTICLE 4: ADMINISTRATION OF THE CONTRACT

4.2 ADMINISTRATION OF THE CONTRACT

4.2.7 Strike the first sentence and replace with the following:

"The Architect will review and approve or take other appropriate action upon the Contractor's submittals such as Shop Drawings, Product Data and Samples for the purpose of checking for conformance with the Contract Documents."

4.2.7 Strike the second sentence and replace with the following:

"The Architect's action will be taken with such reasonable promptness as to cause no delay in the Work in the activities of the Owner, Contractor or separate Contractors, while allowing sufficient time in the Owner's professional judgment to permit adequate review."

Add the following Section:

"4.2.10.1 There will be no full-time Project Representative provided by the Owner or Architect on this project."

"4.2.13 Add "and in compliance with all local requirements." to the end of the sentence."

ARTICLE 5: SUBCONTRACTORS

5.2 AWARD OF SUBCONTRACTS AND OTHER CONTRACTS FOR PORTIONS OF THE WORK

5.2.3 Strike Section 5.2.3 in its entirety and replace with the following:

"If the Owner or Architect has reasonable objection to a person or entity proposed by the Contractor, the Contractor shall propose another to whom the Owner or Architect has no reasonable objection, subject to the statutory requirements of 29 Delaware Code § 6962(d)(10)b.3 and 4."

5.2.4 Strike Section 5.2.4 in its entirety and replace with the following:

"The Contractor may not substitute any Subcontractor listed in its Bid unless the Contractor complies with the requirements of 29 Delaware Code § 6962(d)(10)b.3 and 4. Failure to comply with this requirement shall subject the Contractor to a penalty as outlined in Section 5.2 of the Owner's General Requirements."

Add the following Section:

"5.2.5 The Contractor shall comply and shall ensure all Subcontractors comply with all requirements for drug testing as set forth in TITLE 19 LABOR DELAWARE ADMINISTRATIVE CODE 4000 Office of Management and Budget 4100 Division

of Facilities Management **4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects.”**

ARTICLE 6: CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS

6.1 OWNER'S RIGHT TO PERFORM CONSTRUCTION AND TO AWARD SEPARATE CONTRACTS

6.1.1 Strike “and waiver of subrogation” from the end of the second sentence.

6.1.4 Strike Section 6.1.4 in its entirety.

6.2 MUTUAL RESPONSIBILITY

6.2.3 Strike “shall” and replace with “may” in the second sentence.

ARTICLE 7: CHANGES IN THE WORK

(SEE ARTICLE 7: CHANGES IN WORK IN THE STATE OF DELAWARE DIVISION OF FACILITIES MANAGEMENT GENERAL REQUIREMENTS)

7.3.4.1 Strike “and other employee costs approved by the Architect” after “worker’s compensation insurance,”

7.3.4.4 Add “work attributable to the” before “change” at the end of the sentence.

7.4 MINOR CHANGES IN WORK

Add “unless such changes are approved” at the end of the third sentence.

ARTICLE 8: TIME

8.2 PROGRESS AND COMPLETION

8.2.1 Add the following Section:

“8.2.1.1 Refer to Project Specifications Section SUMMARY OF WORK for Contract time requirements.”

8.2.2 After “by the Contractor” strike “and” and insert “to”.

8.2.4 Add the following Section:

“8.2.4 If the Work falls behind the Progress Schedule as submitted by the Contractor, the Contractor shall employ additional labor and/or equipment necessary to bring the Work into compliance with the Progress Schedule at no additional cost to the Owner.”

8.3 DELAYS AND EXTENSION OF TIME

8.3.1 Strike “binding dispute resolution” and insert “any and all remedies at law or in equity”.

Add the following Section:

"8.3.2.1 The Contractor shall update the status of the suspension, delay, or interruption of the Work with each Application for Payment. (The Contractor shall report the termination of such cause immediately upon the termination thereof.) Failure to comply with this procedure shall constitute a waiver for any claim for adjustment of time or price based upon said cause."

Strike Section 8.3.3 in its entirety and replace with the following:

8.3.3 "Except in the case of a suspension of the Work directed by the Owner, an extension of time under the provisions of Section 8.3.1 shall be the Contractor's sole remedy in the progress of the Work and there shall be no payment or compensation to the Contractor for any expense or damage resulting from the delay."

Add the following Section:

"8.3.4 By permitting the Contractor to work after the expired time for completion of the project, the Owner does not waive their rights under the Contract."

ARTICLE 9: PAYMENTS AND COMPLETION

9.2 SCHEDULE OF VALUES

Add the following Sections:

"9.2.1 The Schedule of Values shall be submitted using AIA Document G703, Continuation Sheet to G702."

"9.2.2 The Schedule of Values is to include a line item for Project Closeout Document Submittal. The value of this item is to be no less than 1.5% of the initial contract amount."

9.3 APPLICATIONS FOR PAYMENT

9.3.1 Strike Section 9.3.1 in its entirety and replace with the following:

"At least ten days before the date established for each progress payment, the Contractor shall submit to the Architect an itemized Application for Payment prepared in accordance with the schedule of values for completed portions of the Work. The application shall be notarized, and supported by all data substantiating the Contractor's right to payment that the Owner or Architect require, such as copies of requisitions, and releases and waivers of liens from Subcontractors and suppliers, and shall reflect retainage."

Add the following Sections:

"9.3.1.3 Application for Payment shall be submitted on AIA Document G702 "Application and Certificate for Payment", supported by AIA Document G703 "Continuation Sheet". Said Applications shall be fully executed and notarized."

"9.3.4 Until Closeout Documents have been received and outstanding items completed the Owner will pay 95% (ninety-five percent) of the amount due the Contractor on account of progress payments."

"9.3.5 The Contractor shall provide a current and updated Progress Schedule to the Architect with each Application for Payment. Failure to provide Schedule will be just cause for rejection of Application for Payment."

9.5 DECISIONS TO WITHHOLD CERTIFICATION

Add the following Subsections to 9.5.1:

- .8 failure to provide a current Progress Schedule;
- .9 a lien or attachment is filed;
- .10 failure to comply with mandatory requirements for maintaining Record Documents.

9.6 PROGRESS PAYMENTS

9.6.1 Strike Section 9.6.1 in its entirety and replace with the following:

"9.6.1 After the Architect has approved and issued a Certificate for Payment, payment shall be made by the Owner within 30 days after Owner's receipt of the Certificate for Payment."

9.6.8 Strike "Provided the Owner has fulfilled its payment obligations under the Contract Documents," in the first sentence.

9.7 FAILURE OF PAYMENT

Strike Section 9.7 in its entirety and replace with the following:

"If the Architect does not issue a Certificate for Payment, through no fault of the Contractor, within fourteen days after receipt of the Contractor's Application for Payment, or if the Owner does not pay the Contractor within thirty days after the date established in the Contract Documents, the amount certified by the Architect, then the Contractor may, upon thirty additional days' notice to the Owner and Architect, stop the Work until payment of the amount owing has been received. The Contract Time shall be extended appropriately and the Contract Sum shall be increased by the amount of the Contractor's reasonable costs of shutdown, delay and start-up, plus interest as provided for in the Contract Documents."

9.8 SUBSTANTIAL COMPLETION

9.8.3 At the end of Section 9.8.3, add the following sentence:

"If the Architect is required to make more than 2 inspections of the same portion of work, the Contractor shall be responsible for all costs associated with subsequent inspections including but not limited to any Architect's fees."

9.8.5 Strike "shall" and insert "may" in the second sentence.

9.8.5 Insert "1/2 of the" after "make payment of" in the second sentence.

9.9 PARTIAL OCCUPANCY OR USE

9.9.1 Strike the the first sentence and replace with the following (the remainder of the Section remains as written):

"The Owner may occupy or use any completed or partially completed portion of the Work at any stage when such portion is designated by separate agreement with the Contractor, provided such occupancy or use authorized by public authorities having jurisdiction over the Project."

9.10.2 Strike "to remain in force after final payment is currently in effect" after "required by the Contract Documents" and replace with "shall remain in force until final payment is completed" in the first sentence.

9.10.4.4 Strike "if permitted by the Contract Documents,"

ARTICLE 10: PROTECTION OF PERSONS AND PROPERTY

10.1 SAFETY PRECAUTIONS AND PROGRAMS

Add the following Sections:

10.1.1 Each Contractor shall develop a safety program in accordance with the Occupational Safety and Health Act of 1970. A copy of said plan shall be furnished to the Owner and Architect prior to the commencement of that Contractor's Work.

10.1.2 Each Contractor shall appoint a Safety Representative. Safety Representatives shall be someone who is on site on a full time basis. If deemed necessary by the Owner or Architect, Contractor Safety meetings will be scheduled. The attendance of all Safety Representatives will be required. Minutes will be recorded of said meetings by the Contractor and will be distributed to all parties as well as posted in all job offices/trailers etc.

10.2 SAFETY OF PERSONS AND PROPERTY

Add the following Section:

10.2.4.1 As required in the Hazardous Chemical Act of June 1984, all vendors supplying any material that may be defined as hazardous must provide Material Safety Data Sheets for those products. Any chemical product should be considered hazardous if it has a caution warning on the label relating to a potential physical or health hazard, if it is known to be present in the work place, and if employees may be exposed under normal conditions or in foreseeable emergency situations. Material Safety Data Sheets shall be provided directly to the Owner, along with the shipping slips that include those products.

10.2.5 Strike the second sentence in its entirety.

10.3 HAZARDOUS MATERIALS AND SUBSTANCES

10.3.3 Strike Section 10.3.3 in its entirety.

10.3.4 Insert "hazardous" in the last sentence after "handling of such" .

10.3.6 Strike Section 10.3.6 in its entirety.

ARTICLE 11: INSURANCE AND BONDS

11.1 CONTRACTOR'S INSURANCE AND BONDS

11.1.1 Strike "Owner" from the the third sentence .

11.2 OWNER'S LIABILITY INSURANCE

Strike 11.2 in its entirety, except that in the case of school projects in which case Section 11.2 shall remain.

11.3 WAIVERS OF SUBROGATION

Delete Section 11.3 in its entirety

11.4 LOSS OF USE, BUSINESS INTERRUPTION, AND DELAY IN COMPLETION INSURANCE

Delete Section 11.4 in its entirety

ARTICLE 12: UNCOVERING AND CORRECTION OF WORK

12.2.2 AFTER SUBSTANTIAL COMPLETION

Add the following Section:

“12.2.2.1.1 At any time during the progress of the Work, or in any case where the nature of the defects will be such that it is not expedient to have corrected, the Owner, at its option, will have the right to deduct such sum, or sums, of money from the amount of the Contract as it considers justified to adjust the difference in value between the non-conforming work and that required under contract including any damage to the structure.”

12.2.2.1 Strike all references to “one year” or “one-year” and replace with “two years”.

12.2.2.2 Strike “one-year” and replace with “two years”.

12.2.2.3 Strike “one-year” and replace with “two years”.

12.2.5 Strike “one-year” and replaced with “two years”.

ARTICLE 13: MISCELLANEOUS PROVISIONS

13.1 GOVERNING LAW

Strike the last sentence.

13.4 TESTS AND INSPECTIONS

13.4.1 Strike the last sentence and replace with the following:

“The Owner shall pay for tests, inspections, or approvals where building codes or applicable laws or regulations prohibit the Owner from delegating their cost to the Contractor.”

13.5 INTEREST

Strike “the date payment is due at such rate as the parties may agree upon in writing or, in the absence thereof, at the legal rate prevailing from time to time at the place where the Project is located” and replace with “30 days of presentment of the authorized Certificate of Payment at the annual rate of 12% or 1% per month.”

Insert the following Section:

“13.6 CONFLICTS WITH FEDERAL STATUTES OR REGULATIONS

13.6.1 If any provision, specifications or requirement of the Contract Documents conflict or is inconsistent with any statute, law or regulation of the government of the United State of America, the Contractor shall notify the Architect and Owner immediately upon discovery.”

ARTICLE 14: TERMINATION OR SUSPENSION OF THE CONTRACT

14.1 TERMINATION BY THE CONTRACTOR

14.1.1.4 Insert “, upon the Contractors’ request,” after “furnish to the Contractor” .

14.1.3 Strike “and profit on Work not executed, and” after “as well as reasonable overhead” and replace with “, profit, and reasonable”

14.3 SUSPENSION BY OWNER FOR CONVENIENCE

14.3.2 Strike “Adjustment of the Contract Sum shall include profit”.

14.4 TERMINATION BY THE OWNER FOR CONVENIENCE

14.4.3 Strike Section 14.4.3 in its entirety and replace with the following:

“In case of such termination for the Owner’s convenience, the Contractor shall be entitled to receive payment for Work executed, and reasonable costs incurred by reason of such termination along with reasonable overhead.”

ARTICLE 15: CLAIMS AND DISPUTES

15.1 CLAIMS

15.1.2 TIME LIMITS ON CLAIMS

Strike the last sentence.

15.1.3 NOTICE OF CLAIM

Strike all references to “21” and replace with “45”.

15.1.5 CLAIMS FOR ADDITIONAL COSTS

Strike the first sentence and replace with the following:

“Contractor shall not proceed to execute any portion of the Work that is subject to the Claim without prior approval of the costs or method of payment for the costs associated with the Claim as determined by the Architect and approved by the Owner.”

15.1.7 WAIVER OF CLAIMS FOR CONSEQUENTIAL DAMAGES

Strike Section 15.1.7 in its entirety.

15.2 INITIAL DECISION

15.2.1 Strike “and binding dispute resolution” in the fourth sentence and replace with “or any and all remedies at law or in equity”.

15.2.5 Strike Section 15.2.5 in its entirety and replace with the following:

“The Architect will approve or reject Claims by written decision, which shall state the reasons therefore and shall notify the parties of any change in the Contract Sum or Contract Time or

both. The approval or rejection of a Claim by the Architect shall be subject to mediation and any or all remedies at law or in equity.”

15.2.6 Strike Section 15.2.6 and its subSections in their entirety.

15.3 MEDIATION

15.3.1 Strike “binding dispute resolution” and replace with “any or all remedies at law or in equity”.

15.3.2 Strike “, shall be administered by the American Arbitration Association in accordance with its Construction Industry Mediation Procedure in effect on the date of the Agreement,” in the first sentence.

15.3.2 Strike all references to “binding dispute resolution” and replace with “any or all remedies at law and in equity”.

15.3.3 Strike Section 15.3.3 in its entirety.

15.4 ARBITRATION

Strike Section 15.4 and its Subsections in their entirety.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

WAGE RATE DETERMINATION SCHEDULE

The Delaware Department of Labor Division of Industrial Affairs has established the category and associated prevailing wage rate for this project. The project approved prevailing wage rate determination schedule follows.

NOT FOR BIDDING

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

STATE OF DELAWARE
DEPARTMENT OF LABOR
DIVISION OF INDUSTRIAL AFFAIRS
OFFICE OF LABOR LAW ENFORCEMENT
PHONE: (302) 761-8200

Mailing Address:
4425 North Market Street
3rd Floor
Wilmington, DE 19802

Located at:
4425 North Market Street
3rd Floor
Wilmington, DE 19802

PREVAILING WAGES FOR BUILDING CONSTRUCTION EFFECTIVE MARCH 15, 2021

CLASSIFICATION	NEW CASTLE	KENT	SUSSEX
ASBESTOS WORKERS	24.65	30.36	44.19
BOILERMAKERS	73.81	37.45	55.05
BRICKLAYERS	60.24	60.24	60.24
CARPENTERS	57.31	57.31	45.55
CEMENT FINISHERS	77.86	55.37	23.90
ELECTRICAL LINE WORKERS	49.03	42.04	32.05
ELECTRICIANS	74.70	74.70	74.70
ELEVATOR CONSTRUCTORS	102.70	69.54	89.08
GLAZIERS	78.55	78.55	61.09
INSULATORS	61.48	61.48	61.48
IRON WORKERS	70.81	70.81	70.81
LABORERS	50.55	50.55	50.55
MILLWRIGHTS	78.38	78.38	63.08
PAINTERS	55.26	55.26	55.26
PILEDRIVERS	81.12	42.44	34.32
PLASTERERS	32.18	32.18	23.85
PLUMBERS/PIPEFITTERS/STEAMFITTERS	73.05	56.98	64.01
POWER EQUIPMENT OPERATORS	75.29	75.29	75.29
ROOFERS-COMPOSITION	26.72	26.84	26.03
ROOFERS-SHINGLE/SLATE/TILE	19.83	23.58	18.55
SHEET METAL WORKERS	77.53	77.53	77.53
SOFT FLOOR LAYERS	55.81	55.81	55.81
SPRINKLER FITTERS	63.67	63.67	63.67
TERRAZZO/MARBLE/TILE FNRS	68.10	68.10	67.57
TERRAZZO/MARBLE/TILE STRS	75.52	75.52	74.93
TRUCK DRIVERS	34.57	29.58	23.03

CERTIFIED: 07/09/2021

BY:

ADMINISTRATOR, OFFICE OF LABOR LAW ENFORCEMENT

NOTE: THESE RATES ARE PROMULGATED AND ENFORCED PURSUANT TO THE PREVAILING WAGE REGULATIONS ADOPTED BY THE DEPARTMENT OF LABOR ON APRIL 3, 1992.

CLASSIFICATIONS OF WORKERS ARE DETERMINED BY THE DEPARTMENT OF LABOR. FOR ASSISTANCE IN CLASSIFYING WORKERS, OR FOR A COPY OF THE REGULATIONS OR CLASSIFICATIONS, PHONE (302) 761-8200.

NON-REGISTERED APPRENTICES MUST BE PAID THE MECHANIC'S RATE.

PROJECT: 20048 Bethany Beach Training Site - Physical Fitness Center, Sussex County

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

GENERAL REQUIREMENTS

TABLE OF ARTICLES

1. GENERAL PROVISIONS
2. OWNER
3. CONTRACTOR
4. ADMINISTRATION OF THE CONTRACT
5. SUBCONTRACTORS
6. CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS
7. CHANGES IN THE WORK
8. TIME
9. PAYMENTS AND COMPLETION
10. PROTECTION OF PERSONS AND PROPERTY
11. INSURANCE AND BONDS
12. UNCOVERING AND CORRECTION OF WORK
13. MISCELLANEOUS PROVISIONS
14. TERMINATION OR SUSPENSION OF THE CONTRACT

ARTICLE 1: GENERAL

1.1 CONTRACT DOCUMENTS

1.1.1 The intent of the Contract Documents is to include all items necessary for the proper execution and completion of the Work by the Contractor. The Contract Documents are complementary and what is required by one shall be as binding as if required by all. Performance by the Contractor shall be required to an extent consistent with the Contract Documents and reasonably inferable from them as being necessary to produce the intended results.

1.1.2 Work including material purchases shall not begin until the Contractor is in receipt of a bonafide State of Delaware Purchase Order. Any work performed or material purchases prior to the issuance of the Purchase Order is done at the Contractor's own risk and cost.

1.2 EQUALITY OF EMPLOYMENT OPPORTUNITY ON PUBLIC WORKS

1.2.1 For Public Works Projects financed in whole or in part by state appropriation the Contractor agrees that during the performance of this contract:

1. The Contractor will not discriminate against any employee or applicant for employment because of race, creed, sex, color, sexual orientation, gender identity or national origin. The Contractor will take positive steps to ensure that applicants are employed and that employees are treated during employment without regard to their race, creed, sex, color, sexual orientation, gender identity or national origin. Such action shall include, but not be limited to, the following: employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship. The Contractor agrees to post in conspicuous places available to employees and applicants for employment notices to be provided by the contracting agency setting forth this nondiscrimination clause.
2. The Contractor will, in all solicitations or advertisements for employees placed by or on behalf of the Contractor, state that all qualified applicants will receive consideration for employment without regard to race, creed, sex, color, sexual orientation, gender identity or national origin."

ARTICLE 2: OWNER

(NO ADDITIONAL GENERAL REQUIREMENTS – SEE SUPPLEMENTARY GENERAL CONDITIONS)

ARTICLE 3: CONTRACTOR

3.1 Schedule of Values: The successful Bidder shall within twenty (20) days after receiving notice to proceed with the work, furnish to the Owner a complete schedule of values on the various items comprising the work.

3.2 Subcontracts: Upon approval of Subcontractors, the Contractor shall award their Subcontracts as soon as possible after the signing of their own contract and see that all material, their own and those of their Subcontractors, are promptly ordered so that the work will not be delayed by failure of materials to arrive on time.

- 3.3 Before commencing any work or construction, the General Contractor is to consult with the Owner as to matters in connection with access to the site and the allocation of Ground Areas for the various features of hauling, storage, etc.
- 3.4 The Contractor shall supervise and direct the Work, using the Contractor's best skill and attention. The Contractor shall be solely responsible for and have control over construction means, methods, techniques, sequences and procedures and for coordinating all portions of the Work under the Contract, unless the Contract Documents give other specific instructions.
- 3.5 The Contractor shall enforce strict discipline and good order among the Contractor's employees and other persons carrying out the Contract. The Contractor shall not permit employment of unfit persons or persons not skilled in tasks assigned to them.
- 3.6 The Contractor warrants to the Owner that materials and equipment furnished will be new and of good quality, unless otherwise permitted, and that the work will be free from defects and in conformance with the Contract Documents. Work not conforming to these requirements, including substitutions not properly approved, may be considered defective. If required by the Owner, the Contractor shall furnish evidence as to the kind and quality of materials and equipment provided.
- 3.7 Unless otherwise provided, the Contractor shall pay all sales, consumer, use and other similar taxes, and shall secure and pay for required permits, fees, licenses, and inspections necessary for proper execution of the Work.
- 3.8 The Contractor shall comply with and give notices required by laws, ordinances, rules, regulations, and lawful orders of public authorities bearing on performance of the Work. The Contractor shall promptly notify the Owner if the Drawings and Specifications are observed to be at variance therewith.
- 3.9 The Contractor shall be responsible to the Owner for the acts and omissions of the Contractor's employees, Subcontractors and their agents and employees, and other persons performing portions of the Work under contract with the Contractor.
- 3.10 The Contractor shall keep the premises and surrounding area free from accumulation of waste materials or rubbish caused by operations under the Contract. At completion of the Work the Contractor shall remove from and about the Project all waste materials, rubbish, the Contractor's tools, construction equipment, machinery and surplus materials. The Contractor shall be responsible for returning all damaged areas to their original conditions.
- 3.11 STATE LICENSE AND TAX REQUIREMENTS
- 3.11.1 Each Contractor and Subcontractor shall be licensed to do business in the State of Delaware and shall pay all fees and taxes due under State laws. In conformance with Section 2503, Chapter 25, Title 30, Delaware Code, "the Contractor shall furnish the Delaware Department of Finance within ten (10) days after entering into any contract with a contractor or subcontractor not a resident of this State, a statement of total value of such contract or contracts together with the names and addresses of the contracting parties."
- 3.12 The Contractor shall comply with all requirements set forth in Section 6962, Chapter 69, Title 29 of the Delaware Code.
- 3.13 During the contract Work, the Contractor and each Subcontractor, shall implement an Employee Drug Testing Program in accordance with OMB Regulation 4104 - "Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on "Large Public Works Projects". "Large Public Works" is based upon the current threshold required for bidding Public Works as set by the Purchasing and Contracting Advisory Council.

ARTICLE 4: ADMINISTRATION OF THE CONTRACT

4.1 CONTRACT SURETY

4.1.1 PERFORMANCE BOND AND LABOR AND MATERIAL PAYMENT BOND

4.1.2 All bonds will be required as follows unless specifically waived elsewhere in the Bidding Documents.

4.1.3 Contents of Performance Bonds – The bond shall be in the form approved by the Office of Management and Budget. The bond shall be conditioned upon the faithful compliance and performance by the successful bidder of each and every term and condition of the contract and the proposal, plans, specifications, and bid documents thereof. Each term and condition shall be met at the time and in the manner prescribed by the Contract, Bid documents and the specifications, including the payment in full to every person furnishing material or performing labor in the performance of the Contract, of all sums of money due the person for such labor and material. (The bond shall also contain the successful bidder's guarantee to indemnify and save harmless the State and the agency from all costs, damages and expenses growing out of or by reason of the Contract in accordance with the Contract.)

4.1.4 Invoking a Performance Bond – The agency may, when it considers that the interest of the State so require, cause judgement to be confessed upon the bond.

4.1.5 Within twenty (20) days after the date of notice of award of contract, the Bidder to whom the award is made shall furnish a Performance Bond and Labor and Material Payment Bond, each equal to the full amount of the Contract price to guarantee the faithful performance of all terms, covenants and conditions of the same. The bonds are to be issued by an acceptable Bonding Company licensed to do business in the State of Delaware and shall be issued in duplicate.

4.1.6 Performance and Payment Bonds shall be maintained in full force (warranty bond) for a period of two (2) years after the date of the Certificate for Final Payment. The Performance Bond shall guarantee the satisfactory completion of the Project and that the Contractor will make good any faults or defects in his work which may develop during the period of said guarantees as a result of improper or defective workmanship, material or apparatus, whether furnished by themselves or their Sub-Contractors. The Payment Bond shall guarantee that the Contractor shall pay in full all persons, firms or corporations who furnish labor or material or both labor and material for, or on account of, the work included herein. The bonds shall be paid for by this Contractor. The Owner shall have the right to demand that the proof parties signing the bonds are duly authorized to do so.

4.2 FAILURE TO COMPLY WITH CONTRACT

4.2.1 If any firm entering into a contract with the State, or Agency that neglects or refuses to perform or fails to comply with the terms thereof, the Agency which signed the Contract may terminate the Contract and proceed to award a new contract in accordance with this Chapter 69, Title 29 of the Delaware Code or may require the Surety on the Performance Bond to complete the Contract in accordance with the terms of the Performance Bond. Nothing herein shall preclude the Agency from pursuing additional remedies as otherwise provided by law.

4.3 CONTRACT INSURANCE AND CONTRACT LIABILITY

4.3.1 In addition to the bond requirements stated in the Bid Documents, each successful Bidder shall purchase adequate insurance for the performance of the Contract and, by

submission of a Bid, agrees to indemnify and save harmless and to defend all legal or equitable actions brought against the State, any Agency, officer and/or employee of the State, for and from all claims of liability which is or may be the result of the successful Bidder's actions during the performance of the Contract.

- 4.3.2 The purchase or nonpurchase of such insurance or the involvement of the successful Bidder in any legal or equitable defense of any action brought against the successful Bidder based upon work performed pursuant to the Contract will not waive any defense which the State, its agencies and their respective officers, employees and agents might otherwise have against such claims, specifically including the defense of sovereign immunity, where applicable, and by the terms of this section, the State and all agencies, officers and employees thereof shall not be financially responsible for the consequences of work performed, pursuant to said contract.

4.4 RIGHT TO AUDIT RECORDS

- 4.4.1 The Owner shall have the right to audit the books and records of a Contractor or any Subcontractor under any Contract or Subcontract to the extent that the books and records relate to the performance of the Contract or Subcontract.

- 4.4.2 Said books and records shall be maintained by the Contractor for a period of seven (7) years from the date of final payment under the Prime Contract and by the Subcontractor for a period of seven (7) years from the date of final payment under the Subcontract.

ARTICLE 5: SUBCONTRACTORS

5.1 SUBCONTRACTING REQUIREMENTS

- 5.1.1 All contracts for the construction, reconstruction, alteration or repair of any public building (not a road, street or highway) shall be subject to the following provisions:
1. A contract shall be awarded only to a Bidder whose Bid is accompanied by a statement containing, for each Subcontractor category, the name and address (city or town and State only – street number and P.O. Box addresses not required) of the subcontractor whose services the Bidder intends to use in performing the Work and providing the material for such Subcontractor category.
 2. A Bid will not be accepted nor will an award of any Contract be made to any Bidder which, as the Prime Contractor, has listed itself as the Subcontractor for any Subcontractor unless:
 - A. It has been established to the satisfaction of the awarding Agency that the Bidder has customarily performed the specialty work of such Subcontractor category by artisans regularly employed by the Bidder's firm;
 - B. That the Bidder is duly licensed by the State to engage in such specialty work, if the State requires licenses; and
 - C. That the Bidder is recognized in the industry as a bona fide Subcontractor or Contractor in such specialty work and Subcontractor category.
- 5.1.2 The decision of the awarding Agency as to whether a Bidder who list itself as the Subcontractor for a Subcontractor category shall be final and binding upon all Bidders, and no action of any nature shall lie against any awarding agency or its employees or officers because of its decision in this regard.

- 5.1.3 After such a Contract has been awarded, the successful Bidder shall not substitute another Subcontractor for any Subcontractor whose name was set forth in the statement which accompanied the Bid without the written consent of the awarding Agency.
- 5.1.4 No Agency shall consent to any substitution of Subcontractors unless the Agency is satisfied that the Subcontractor whose name is on the Bidders accompanying statement:
- A. Is unqualified to perform the work required;
 - B. Has failed to execute a timely reasonable Subcontract;
 - C. Has defaulted in the performance on the portion of the work covered by the Subcontract; or
 - D. Is no longer engaged in such business.
- 5.1.5 Should a Bidder be awarded a contract, such successful Bidder shall provide to the agency the taxpayer identification license numbers of such subcontractors. Such numbers shall be provided on the later of the date on which such subcontractor is required to be identified or the time the contract is executed. The successful Bidder shall provide to the agency to which it is contracting, within 30 days of entering into such public works contract, copies of all Delaware Business licenses of subcontractors and/or independent contractors that will perform work for such public works contract. However, if a subcontractor or independent contractor is hired or contracted more than 20 days after the Bidder entered the public works contract the Delaware Business license of such subcontractor or independent contractor shall be provided to the agency within 10 days of being contracted or hired.
- 5.1.6 The Contractor may employ additional Subcontractors on the jobsite only after submitting a copy of the Subcontractor's Employee Drug Testing Program to the Owner for approval. A Contractor or Subcontractor shall not commence work until the Owner has concluded its review and determined that the submitted Employee Drug Testing Program complies with OMB Regulation 4104.
- 5.2 PENALTY FOR SUBSTITUTION OF SUBCONTRACTORS
- 5.2.1 Should the Contractor fail to utilize any or all of the Subcontractors in the Contractor's Bid statement in the performance of the Work on the public bidding, the Contractor shall be penalized in the amount of (project specific amount*). The Agency may determine to deduct payments of the penalty from the Contractor or have the amount paid directly to the Agency. Any penalty amount assessed against the Contractor may be remitted or refunded, in whole or in part, by the Agency awarding the Contract, only if it is established to the satisfaction of the Agency that the Subcontractor in question has defaulted or is no longer engaged in such business. No claim for the remission or refund of any penalty shall be granted unless an application is filed within one year after the liability of the successful Bidder accrues. All penalty amounts assessed and not refunded or remitted to the contractor shall be reverted to the State.
- *one (1) percent of contract amount not to exceed \$10,000
- 5.3 ASBESTOS ABATEMENT
- 5.3.1 The selection of any Contractor to perform asbestos abatement for State-funded projects shall be approved by the Office of Management and Budget, Division of Facilities Management pursuant to Chapter 78 of Title 16.

5.4 STANDARDS OF CONSTRUCTION FOR THE PROTECTION OF THE PHYSICALLY HANDICAPPED

5.4.1 All Contracts shall conform with the standard established by the Delaware Architectural Accessibility Board unless otherwise exempted by the Board.

5.5 CONTRACT PERFORMANCE

5.5.1 Any firm entering into a Public Works Contract that neglects or refuses to perform or fails to comply with its terms, the Agency may terminate the Contract and proceed to award a new Contract or may require the Surety on the Performance Bond to complete the Contract in accordance with the terms of the Performance Bond.

ARTICLE 6: CONSTRUCTION BY OWNER OR SEPARATE CONTRACTORS

6.1 The Owner reserves the right to simultaneously perform other construction or operations related to the Project with the Owner's own forces, and to award separate contracts in connection with other portions of the Project or other Projects at the same site.

6.2 The Contractor shall afford the Owner and other Contractors reasonable opportunity for access and storage of materials and equipment, and for the performance of their activities, and shall connect and coordinate their activities with other forces as required by the Contract Documents.

ARTICLE 7: CHANGES IN THE WORK

7.1 The Owner, without invalidating the Contract, may order changes in the Work consisting of Additions, Deletions, Modifications or Substitutions, with the Contract Sum and Contract completion date being adjusted accordingly. Such changes in the Work shall be authorized by written Change Order signed by the Professional, as the duly authorized agent, the Contractor and the Owner.

7.2 The Contract Sum and Contract Completion Date shall be adjusted only by a fully executed Change Order.

7.3 The additional cost, or credit to the Owner resulting from a change in the Work shall be by mutual agreement of the Owner, Contractor and the Architect. In all cases, this cost or credit shall be based on the 'DPE' wages required and the "invoice price" of the materials/equipment needed.

7.3.1 "DPE" shall be defined to mean "direct personnel expense". Direct payroll expense includes prevailing wage rates plus a maximum multiplier of 1.35 times DPE. For example, if the prevailing wage rate is \$50/hour, the DPE would be \$67.50/hour (50 x 1.35).

7.3.2 "Invoice price" of materials/equipment shall be defined to mean the actual cost of materials and/or equipment that is paid by the Contractor, (or subcontractor), to a material distributor, direct factory vendor, store, material provider, or equipment leasing entity. Rates for equipment that is leased and/or owned by the Contractor or subcontractor(s) shall not exceed those listed in the latest version of the "Means Building Construction Cost Data" publication.

7.3.3 In addition to the above, the General Contractor is allowed a fifteen percent (15%) markup for overhead and profit for additional work performed by the General Contractor's own forces. For additional subcontractor work, the Subcontractor is allowed a fifteen (15) percent overhead and profit on change order work above and beyond the direct costs stated previously. To this amount, the General Contractor will be allowed a mark-up not exceeding seven and one half percent (7.5%) on the subcontractors work. These mark-

ups shall include all costs including, but not limited to: overhead, profit, bonds, insurance, supervision, etc. No markup is permitted on the work of the subcontractors subcontractor. No additional costs shall be allowed for changes related to the Contractor's onsite superintendent/staff, or project manager, unless a change in the work changes the project duration and is identified by the CPM schedule. There will be no other costs associated with the change order.

ARTICLE 8: TIME

8.1 Time limits, if any, are as stated in the Project Manual. By executing the Agreement, the Contractor confirms that the stipulated limits are reasonable, and that the Work will be completed within the anticipated time frame.

8.2 If progress of the Work is delayed at any time by changes ordered by the Owner, by labor disputes, fire, unusual delay in deliveries, abnormal adverse weather conditions, unavoidable casualties or other causes beyond the Contractor's control, the Contract Time shall be extended for such reasonable time as the Owner may determine.

8.3 Any extension of time beyond the date fixed for completion of the construction and acceptance of any part of the Work called for by the Contract, or the occupancy of the building by the Owner, in whole or in part, previous to the completion shall not be deemed a waiver by the Owner of his right to annul or terminate the Contract for abandonment or delay in the matter provided for, nor relieve the Contractor of full responsibility.

8.4 SUSPENSION AND DEBARMENT

8.4.1 Per Section 6962(d)(14), Title 29, Delaware Code, "Any Contractor who fails to perform a public works contract or complete a public works project within the time schedule established by the Agency in the Invitation To Bid, may be subject to Suspension or Debarment for one or more of the following reasons: a) failure to supply the adequate labor supply ratio for the project; b) inadequate financial resources; or, c) poor performance on the Project."

8.4.2 "Upon such failure for any of the above stated reasons, the Agency that contracted for the public works project may petition the Director of the Office of Management and Budget for Suspension or Debarment of the Contractor. The Agency shall send a copy of the petition to the Contractor within three (3) working days of filing with the Director. If the Director concludes that the petition has merit, the Director shall schedule and hold a hearing to determine whether to suspend the Contractor, debar the Contractor or deny the petition. The Agency shall have the burden of proving, by a preponderance of the evidence, that the Contractor failed to perform or complete the public works project within the time schedule established by the Agency and failed to do so for one or more of the following reasons: a) failure to supply the adequate labor supply ratio for the project; b) inadequate financial resources; or, c) poor performance on the project. Upon a finding in favor of the Agency, the Director may suspend a Contractor from Bidding on any project funded, in whole or in part, with public funds for up to 1 year for a first offense, up to 3 years for a second offense and permanently debar the Contractor for a third offense. The Director shall issue a written decision and shall send a copy to the Contractor and the Agency. Such decision may be appealed to the Superior Court within thirty (30) days for a review on the record."

8.5 RETAINAGE

8.5.1 Per Section 6962(d)(5) a.3, Title 29, Delaware Code: The Agency may at the beginning of each public works project establish a time schedule for the completion of the project. If the project is delayed beyond the completion date due to the Contractor's failure to meet

their responsibilities, the Agency may forfeit, at its discretion, all or part of the Contractor's retainage.

- 8.5.2 This forfeiture of retainage also applies to the timely completion of the punchlist. A punchlist will only be prepared upon the mutual agreement of the Owner, Architect and Contractor. Once the punchlist is prepared, all three parties will by mutual agreement, establish a schedule for its completion. Should completion of the punchlist be delayed beyond the established date due to the Contractor's failure to meet their responsibilities, the Agency may hold permanently, at its discretion, all or part of the Contractor's retainage.

ARTICLE 9: PAYMENTS AND COMPLETION

9.1 APPLICATION FOR PAYMENT

- 9.1.1 Applications for payment shall be made upon AIA Document G702. There will be a five percent (5%) retainage on all Contractor's monthly invoices until completion of the project. This retainage may become payable upon receipt of all required closeout documentation, provided all other requirements of the Contract Documents have been met.
- 9.1.2 A date will be fixed for the taking of the monthly account of work done. Upon receipt of Contractor's itemized application for payment, such application will be audited, modified, if found necessary, and approved for the amount. Statement shall be submitted to the Owner.
- 9.1.3 Section 6516, Title 29 of the Delaware Code annualized interest is not to exceed 12% per annum beginning thirty (30) days after the "presentment" (as opposed to the date) of the invoice.

9.2 PARTIAL PAYMENTS

- 9.2.1 Any public works Contract executed by any Agency may provide for partial payments at the option of the Owner with respect to materials placed along or upon the sites or stored at secured locations, which are suitable for use in the performance of the contract.
- 9.2.2 When approved by the agency, partial payment may include the values of tested and acceptable materials of a nonperishable or noncontaminative nature which have been produced or furnished for incorporation as a permanent part of the work yet to be completed, provided acceptable provisions have been made for storage.
- 9.2.2.1 Any allowance made for materials on hand will not exceed the delivered cost of the materials as verified by invoices furnished by the Contractor, nor will it exceed the contract bid price for the material complete in place.
- 9.2.3 If requested by the Agency, receipted bills from all Contractors, Subcontractors, and material, men, etc., for the previous payment must accompany each application for payment. Following such a request, no payment will be made until these receipted bills have been received by the Owner.

9.3 SUBSTANTIAL COMPLETION

- 9.3.1 When the building has been made suitable for occupancy, but still requires small items of miscellaneous work, the Owner will determine the date when the project has been substantially completed.
- 9.3.2 If, after the Work has been substantially completed, full completion thereof is materially delayed through no fault of the Contractor, and without terminating the Contract, the Owner may make payment of the balance due for the portion of the Work fully completed and

accepted. Such payment shall be made under the terms and conditions governing final payment that it shall not constitute a waiver of claims.

- 9.3.3 On projects where commissioning is included, the commissioning work as defined in the specifications must be complete prior to the issuance of substantial completion.

9.4 FINAL PAYMENT

- 9.4.1 Final payment, including the five percent (5%) retainage if determined appropriate, shall be made within thirty (30) days after the Work is fully completed and the Contract fully performed and provided that the Contractor has submitted the following closeout documentation (in addition to any other documentation required elsewhere in the Contract Documents):

- 9.4.1.1 Evidence satisfactory to the Owner that all payrolls, material bills, and other indebtedness connected with the work have been paid,

- 9.4.1.2 An acceptable RELEASE OF LIENS,

- 9.4.1.3 Copies of all applicable warranties,

- 9.4.1.4 As-built drawings,

- 9.4.1.5 Operations and Maintenance Manuals,

- 9.4.1.6 Instruction Manuals,

- 9.4.1.7 Consent of Surety to final payment.

- 9.4.1.8 The Owner reserves the right to retain payments, or parts thereof, for its protection until the foregoing conditions have been complied with, defective work corrected and all unsatisfactory conditions remedied.

ARTICLE 10: PROTECTION OF PERSONS AND PROPERTY

- 10.1 The Contractor shall be responsible for initiating, maintaining, and supervising all safety precautions and programs in connection with the performance of the Contract. The Contractor shall take all reasonable precautions to prevent damage, injury or loss to: workers, persons nearby who may be affected, the Work, materials and equipment to be incorporated, and existing property at the site or adjacent thereto. The Contractor shall give notices and comply with applicable laws ordinances, rules regulations, and lawful orders of public authorities bearing on the safety of persons and property and their protection from injury, damage, or loss. The Contractor shall promptly remedy damage and loss to property at the site caused in whole or in part by the Contractor, a Subcontractor, or anyone directly or indirectly employed by any of them, or by anyone for whose acts they may be liable.

- 10.2 The Contractor shall notify the Owner in the event any existing hazardous material such as lead, PCBs, asbestos, etc. is encountered on the project. The Owner will arrange with a qualified specialist for the identification, testing, removal, handling and protection against exposure or environmental pollution, to comply with applicable regulation laws and ordinances. The Contractor and Architect will not be required to participate in or to perform this operation. Upon completion of this work, the Owner will notify the Contractor and Architect in writing the area has been cleared and approved by the authorities in order for the work to proceed. The Contractor shall attach documentation from the authorities of said approval.

- 10.3 As required in the Hazardous Chemical Information Act of June 1984, all vendors supplying any materials that may be defined as hazardous, must provide Material Safety Data Sheets for those products. Any chemical product should be considered hazardous if it has a warning caution on the label relating to a potential physical or health hazard, if it is known to be present in the work place, and if employees may be exposed under normal conditions or in any foreseeable emergency situation. Material Safety Data Sheets must be provided directly to the Owner along with the shipping slips that include those products.
- 10.4 The Contractor shall certify to the Owner that materials incorporated into the Work are free of all asbestos. This certification may be in the form of Material Safety Data Sheet (MSDS) provided by the product manufacturer for the materials used in construction, as specified or as provided by the Contractor.

ARTICLE 11: INSURANCE AND BONDS

- 11.1 The Contractor shall carry all insurance required by law, such as Unemployment Insurance, etc. The Contractor shall carry such insurance coverage as they desire on their own property such as a field office, storage sheds or other structures erected upon the project site that belong to them and for their own use. The Subcontractors involved with this project shall carry whatever insurance protection they consider necessary to cover the loss of any of their personal property, etc.
- 11.2 Upon being awarded the Contract, the Contractor shall obtain a minimum of two (2) copies of all required insurance certificates called for herein, and submit one (1) copy of each certificate, to the Owner, within 20 days of contract award.
- 11.3 Bodily Injury Liability and Property Damage Liability Insurance shall, in addition to the coverage included herein, include coverage for injury to or destruction of any property arising out of the collapse of or structural injury to any building or structure due to demolition work and evidence of these coverages shall be filed with and approved by the Owner.
- 11.4 The Contractor's Property Damage Liability Insurance shall, in addition to the coverage noted herein, include coverage on all real and personal property in their care, custody and control damaged in any way by the Contractor or their Subcontractors during the entire construction period on this project.
- 11.5 Builders Risk (including Standard Extended Coverage Insurance) on the existing building during the entire construction period, shall not be provided by the Contractor under this contract. The Owner shall insure the existing building and all of its contents and all this new alteration work under this contract during entire construction period for the full insurable value of the entire work at the site. Note, however, that the Contractor and their Subcontractors shall be responsible for insuring building materials (installed and stored) and their tools and equipment whenever in use on the project, against fire damage, theft, vandalism, etc.
- 11.6 Certificates of the insurance company or companies stating the amount and type of coverage, terms of policies, etc., shall be furnished to the Owner, within 20 days of contract award.
- 11.7 The Contractor shall, at their own expense, (in addition to the above) carry the following forms of insurance:
- 11.7.1 Contractor's Contractual Liability Insurance

Minimum coverage to be:

Bodily Injury	\$500,000	for each person
	\$1,000,000	for each occurrence
	\$1,000,000	aggregate
Property Damage	\$500,000	for each occurrence
	\$1,000,000	aggregate

11.7.2 Contractor's Protective Liability Insurance

Minimum coverage to be:

Bodily Injury	\$500,000	for each person
	\$1,000,000	for each occurrence
	\$1,000,000	aggregate
Property Damage	\$500,000	for each occurrence
	\$500,000	aggregate

11.7.3 Automobile Liability Insurance

Minimum coverage to be:

Bodily Injury	\$1,000,000	for each person
	\$1,000,000	for each occurrence
Property Damage	\$500,000	per accident

11.7.4 Prime Contractor's and Subcontractors' policies shall include contingent and contractual liability coverage in the same minimum amounts as 11.7.1 above.

11.7.5 Workmen's Compensation (including Employer's Liability):

11.7.5.1 Minimum Limit on employer's liability to be as required by law.

11.7.5.2 Minimum Limit for all employees working at one site.

11.7.6 Certificates of Insurance must be filed with the Owner guaranteeing fifteen (15) days prior notice of cancellation, non-renewal, or any change in coverages and limits of liability shown as included on certificates.

11.7.7 Social Security Liability

11.7.7.1 With respect to all persons at any time employed by or on the payroll of the Contractor or performing any work for or on their behalf, or in connection with or arising out of the Contractor's business, the Contractor shall accept full and exclusive liability for the payment of any and all contributions or taxes or unemployment insurance, or old age retirement benefits, pensions or annuities now or hereafter imposed by the Government of the United States and the State or political subdivision thereof, whether the same be measured by wages, salaries or other remuneration paid to such persons or otherwise.

11.7.7.2 Upon request, the Contractor shall furnish Owner such information on payrolls or employment records as may be necessary to enable it to fully comply with the law imposing the aforesaid contributions or taxes.

- 11.7.7.3 If the Owner is required by law to and does pay any and/or all of the aforesaid contributions or taxes, the Contractor shall forthwith reimburse the Owner for the entire amount so paid by the Owner.

ARTICLE 12: UNCOVERING AND CORRECTION OF WORK

- 12.1 The Contractor shall promptly correct Work rejected by the Owner or failing to conform to the requirements of the Contract Documents, whether observed before or after Substantial Completion and whether or not fabricated, installed or completed, and shall correct any Work found to be not in accordance with the requirements of the Contract Documents within a period of two years from the date of Substantial Completion, or by terms of an applicable special warranty required by the Contract Documents. The provisions of this Article apply to work done by Subcontractors as well as to Work done by direct employees of the Contractor.
- 12.2 At any time during the progress of the work, or in any case where the nature of the defects shall be such that it is not expedient to have them corrected, the Owner, at their option, shall have the right to deduct such sum, or sums, of money from the amount of the contract as they consider justified to adjust the difference in value between the defective work and that required under contract including any damage to the structure.

ARTICLE 13: MISCELLANEOUS PROVISIONS

13.1 CUTTING AND PATCHING

- 13.1.1 The Contractor shall be responsible for all cutting and patching. The Contractor shall coordinate the work of the various trades involved.

13.2 DIMENSIONS

- 13.2.1 All dimensions shown shall be verified by the Contractor by actual measurements at the project site. Any discrepancies between the drawings and specifications and the existing conditions shall be referred to the Owner for adjustment before any work affected thereby has been performed.

13.3 LABORATORY TESTS

- 13.3.1 Any specified laboratory tests of material and finished articles to be incorporated in the work shall be made by bureaus, laboratories or agencies approved by the Owner and reports of such tests shall be submitted to the Owner. The cost of the testing shall be paid for by the Contractor.
- 13.3.2 The Contractor shall furnish all sample materials required for these tests and shall deliver same without charge to the testing laboratory or other designated agency when and where directed by the Owner.

13.4 ARCHAEOLOGICAL EVIDENCE

- 13.4.1 Whenever, in the course of construction, any archaeological evidence is encountered on the surface or below the surface of the ground, the Contractor shall notify the authorities of the State Historic Preservation Office and suspend work in the immediate area for a reasonable time to permit those authorities, or persons designated by them, to examine the area and ensure the proper removal of the archaeological evidence for suitable preservation by the Division of Historical and Cultural Affairs.

13.5 GLASS REPLACEMENT AND CLEANING

13.5.1 The General Contractor shall replace without expense to the Owner all glass broken during the construction of the project. If job conditions warrant, at completion of the job the General Contractor shall have all glass cleaned and polished.

13.6 WARRANTY

13.6.1 For a period of two (2) years from the date of substantial completion, as evidenced by the date of final acceptance of the work, the contractor warrants that work performed under this contract conforms to the contract requirements and is free of any defect of equipment, material or workmanship performed by the contractor or any of his subcontractors or suppliers. However, manufacturer's warranties and guarantees, if for a period longer than two (2) years, shall take precedence over the above warranties. The contractor shall remedy, at his own expense, any such failure to conform or any such defect. The protection of this warranty shall be included in the Contractor's Performance Bond.

ARTICLE 14: TERMINATION OF CONTRACT

14.1 If the Contractor defaults or persistently fails or neglects to carry out the Work in accordance with the Contract Documents or fails to perform a provision of the Contract, the Owner, after seven days written notice to the Contractor, may make good such deficiencies and may deduct the cost thereof from the payment then or thereafter due the Contractor. Alternatively, at the Owner's option, and the Owner may terminate the Contract and take possession of the site and of all materials, equipment, tools, and machinery thereon owned by the Contractor and may finish the Work by whatever method the Owner may deem expedient. If the costs of finishing the Work exceed any unpaid compensation due the Contractor, the Contractor shall pay the difference to the Owner.

14.2 "If the continuation of this Agreement is contingent upon the appropriation of adequate state, or federal funds, this Agreement may be terminated on the date beginning on the first fiscal year for which funds are not appropriated or at the exhaustion of the appropriation. The Owner may terminate this Agreement by providing written notice to the parties of such non-appropriation. All payment obligations of the Owner will cease upon the date of termination. Notwithstanding the foregoing, the Owner agrees that it will use its best efforts to obtain approval of necessary funds to continue the Agreement by taking appropriate action to request adequate funds to continue the Agreement."

END OF SECTION

FEDERAL REGULATIONS – ARTICLE VIII

Article VIII follows.

NOT FOR BIDDING

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

ARTICLE VIII – APPLICABLE LAWS AND REGULATIONS**Section 801. Applicable Law.**

This MCCA is incidental to implementation of a federal program. Accordingly, this MCCA shall be governed by and construed according to federal law as it may affect rights, remedies, and obligations of the United States.

Section 802. Governing Regulations.

To the extent not inconsistent with express terms of this MCCA, provisions of 32 CFR Part 33, Uniform Administrative Requirements for Grants and Cooperative Agreements, the DoD 3210.6R, DoD Grant and Agreement Regulations (4/13/98), OMB Circular A-87, and NGR 5-1/ANGI 63-101, which circular and regulations are hereby incorporated into this MCCA by reference as if fully set forth herein, shall govern this MCCA.

Section 803. Officials Not to Benefit

No member of or delegate to Congress, or resident commissioner, shall be admitted to any share or part of this agreement, or to any benefit arising from it, in accordance with 41 U.S.C. 22.

Section 804. Nondiscrimination.

The State covenants and agrees that by signing this agreement or accepting funds under this agreement, the recipient assures that it will comply with applicable provision of the following, national policies prohibiting discrimination:

- a. On the basis of race, color, or national origin, in Title VII of the Civil Rights Act of 1964 (42 U.S.C. § 2000d et seq.), as implemented by DOD regulations 32 CFR Part 195.
- b. On the basis of race, color, religion, sex, or national origin, in Executive Order 11246 [3 CFR, 1964-1965 Comp. p. 339], as implemented by Department of Labor regulations issued thereunder (41 CFR Part 60);
- c. On the basis of handicap, in Section 504 of the Rehabilitation Act of 1973 (29 U.S.C. § 794) as implemented by Department of Justice regulations at 28 CFR part 41 and DoD Regulations at 32 CFR Part 56; and,
- d. On the basis of Age, in the Age Discrimination Act of 1975 (42 U.S.C. § 6101 et seq.) as implemented by Department of Health and Human Services regulations at 45 CFR Part 90.

Section 805. Lobbying.

a. The State covenants and agrees that it will not expend any funds appropriated by Congress to pay any person for influencing or attempting to influence an officer or employee of any agency or a member of Congress in connection with any of the following covered federal actions: The awarding of any federal contract; the making of any federal grant; the making of any federal loan; the entering into of any cooperative agreement; and the extension, continuation, renewal, amendment, or modification of any federal contract, grant, loan, or cooperative agreement.

b. New Restrictions on Lobbying, issued by the Office of Management and Budget and the Department of Defense (32 CFR Part 28) to implement provisions of Section 319 of Public Law 102-121 (31 U.S.C. § 1352) is incorporated by reference and the State agrees to comply with provisions thereof, including amendments to the that may hereafter be issued.

Section 806. Drug-Free Work Place.

a. The State covenants and agrees that it will comply with provisions of the Drug-Free Work Place Act of 1988 (Public Law 100-690, Title V, Subtitle D; 41 U.S.C. § 701 et seq.) and will maintain a drug-free workplace.

b. Government-Wide Requirements for Drug-Free Workplace (Grants), issued by the Office of Management and Budget and the Department of Defense (41 USC 702) to implement provisions of the Drug-Free Work Place Act of 1988, is incorporated by reference and the State covenants and agrees to comply with provisions thereof, including amendments that may hereafter be issued.

Section 807. Environmental Standards. (By signing this agreement or accepting funds under this agreement, the recipient assure that it will):

a. Comply with applicable provision of the Clean Air Act (42 U.S.C. § 7401, et seq) and Clean Water Act (33 USC 1251, et seq.), as implemented by Executive Order 11738 [3 CFR, 1971-1975 comp., p.799] and Environmental Protection Agency (EPA) rules at 40 CFR Part 15. In accordance with the EPA rules, the recipient further agrees that it will:

- Not use any facility on the EPA's List of Violating Facilities in performing any award that is nonexempt under 40 CFR 15.5 (awards of less than \$100,000, and certain other awards, exempt from the EPA regulations), as long as the facility remains on the list.
- Notify the awarding agency if it intends to use a facility in performing this award that is on the List of Violating Facilities or that the recipient knows has been recommended to be placed on the List of Violating Facilities.

b. Identify to the awarding agency any impact this award may have on:

(1) The quality of the human environment, and provide help the agency may need to comply with the National Environmental Policy Act (NEPA, at 42 U.S.C 4321, et seq.) and to prepare Environment Impact Statements or other required environmental documentation. In such cases, the recipient agrees to take no action that will have an adverse environmental impact (e.g., physical disturbance of a site such as breaking of ground) until the agency provides written notification of compliance with the environmental impact analysis process.

(2) Flood-prone areas, and provide help the agency may need to comply with the National Flood Insurance Act of 1968 and Flood Disaster Protection Act of 1973 (42 U.S.C. 4001, et. Seq.), which require flood insurance, when available, for Federally assisted construction or acquisition in flood-prone areas.

(3) Coastal zones, and provide help the agency may need to comply with the Coastal Zone Management Act of 1972 (16 U.S.C. 1451, et seq.), concerning protection of U.S. coastal resources.

(4) Coastal barriers, and provide help the agency may need to comply with the Coastal Barriers Resource Act (16 U.S.C. 3501 et seq.), concerning preservation of barrier resources.

(5) Any existing or proposed component of the National Wild and Scenic Rivers system, and provide help the agency may need to comply with the Wild and Scenic Rivers Act of 1968 (16 U.S.C. 1271 et seq.).

(6) Underground sources of drinking water in areas that have an aquifer that is the sole or principal drinking water source, and provide help the agency may need to comply with the Safe Drinking Water Act (42 U.S.C 300h-3).

Section 808. Preference for U.S. Flag Air Carriers.

(Any agreement under which international air travel may be supported by U.S. Government funds)

Travel supported by U.S. Government funds under this agreement shall use U.S flag air carriers (air carriers holding certificates under 49 U.S.C. 41102) for international air transportation of people and property to the extent that such service is available, in accordance with the International Air Transportation Fair Competitive Practices Act of 1974 (49 U.S.C. 40118) and the interpretative guidelines issued by the Comptroller General of the United States in the March 31, 1981, amendment to Comptroller General Decision B138942.

Section 809. Debarment and Suspension.

a. The State shall not make any award or permit any award (subgrant or contract) at any tier to any party which is debarred or suspended or is otherwise excluded from or ineligible for participation in federal assistance programs under Executive Order 12549 "Debarment and Suspension".

b. Government-Wide Debarment and Suspension (Nonprocurement), issued by the Office of Management and Budget and the Department of Defense (32 CFR Part 25) to implement provisions of Executive Order 12549 "Debarment and Suspension," is incorporated by reference and the State covenants and agrees to comply with provisions thereof, including amendments that may hereafter be issued.

Section 810. Buy American Act.

The State covenants and agrees that it will not expend any funds appropriated by Congress without complying with The Buy American Act (41 U.S.C. 10). The Buy American Act gives preference to domestic end products and domestic construction material. In addition, the Memorandum of Understanding between the United States of America and the European Economic Community (EEC) on Government Procurement, and the North American Free Trade Agreement (NAFTA), provide that EEC and NAFTA end products and construction materials are exempted from application of the Buy American Act.

Section 811. Relocation Assistance and Real Property Acquisition Policies.

The State covenants and assures that it will comply with 49 CFR part 24, which implements the Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970 (42 U.S.C. § 4601 *et seq.*) and provides for fair and equitable treatment of persons displaced by Federally assisted programs or persons whose property is acquired as a result of such programs.

Section 812. Copeland "Anti-Kickback" Act. *(All contracts and subgrants for construction or repair)*

The State covenants and agrees that it will comply with the Copeland "Anti-Kickback" Act (18 U.S.C. 874), as supplemented in Department of Labor regulations (29 CFR Part 3). As applied to this MCCA, the Copeland "Anti-Kickback" Act makes it unlawful to induce, by force, intimidation, threat of procuring dismissal from employment, or otherwise, any person employed in the construction or repair of public buildings or public works, financed in whole or in part by the United States, to give up any part of the compensation to which that person is entitled under a contract of employment.

Section 813. Contract Work Hours and Safety Standards Act. *(Construction contracts awarded by grantees and subgrantees in excess of \$2,000, and in excess of \$2,500 for other contracts which involve the employment of mechanics and laborers)*

The State covenants and agrees that it will comply with Sections 103 and 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 327-330), as supplemented by Department of Labor regulations (29 CFR Part 5). As applied to this MCCA, the Contract Work Hours and Safety Standards Act specifies that no laborer or mechanic doing any part of the work contemplated by this MCCA shall be required or permitted to work more than 40 hours in any work week unless paid for all additional hours at not less than 1 1/2 times the basic rate of pay.

Section 814. Davis-Bacon Act. Contractor to comply with State of Delaware prevailing wage requirements, pursuant to Delaware Code, Title 29, Section 6960
~~DO NOT USE THIS CLAUSE UNLESS AUTHORIZED BY NCB ARI.~~

~~The State covenants and agrees that it will comply with the Davis-Bacon (40 U.S.C. 276 a to a-7) as supplemented by U.S. Department of Labor regulations (29 CFR Part 5). (Construction contracts in excess of \$2,000 awarded by grantees and subgrantees when required by Federal grant program legislation). All rulings and interpretations of the Davis-Bacon Act contained in 29 CFR Part 5 are incorporated by reference in this MCCA. As applied to this MCCA, the Davis-Bacon Act (40 U.S.C. 276a-276a-7) provides that contracts in excess of \$2,000 to which the Federal Government provides assistance funding for construction, alteration, or repair (including painting and decorating) of public buildings or public works within the United States, shall contain a provision that no laborer or mechanic employed directly upon the site of the work shall receive less than the prevailing wage rates as determined by the U.S. Secretary of Labor.~~

Section 815. National Historic Preservation. *(Any construction, acquisition, modernization, or other activity that may impact a historic property.)*

The State covenants and agrees to identify to the awarding agency any property listed or eligible for listing on the National Register of Historic Places that will be affected by this award, and to provide any help the awarding agency may need, with respect to this award, to comply with Section 106 of the National Historic Preservation Act of 1966 (16 U.S.C. 470, *et seq.*), as implemented by the Advisory Council on Historic Preservation regulations at 36 CFR Part 800 and Executive Order 11593 (3 CFR, 1971-1975 Comp., p. 559).

(36 CFR Part 800 requires Grants Officers to get comments from the Advisory Council on Historic Preservation before proceeding with Federally assisted projects that may affect properties listed on or eligible for listing on the National Register of Historic Places.)

Section 816. Hatch Act.

The State covenants and agrees to comply with the Hatch Act (5 U.S.C. 1501 - 1508 and 7324 - 7326), as implemented by the Office of Personnel Management at 5 CFR Part 151, which limits political activity of employees or officers of State or local governments whose employment is connected to an activity financed in whole or part with Federal funds.

Section 817. Equal Employment Opportunity. *(All construction contracts awarded in excess of \$10,000 by grantees and their contractors or subgrantees.)*

The State covenants and agrees to comply with Executive Order 11246 of September 24, 1965 entitled "Equal Employment Opportunity," as amended by Executive Order 11375 of October 13, 1967 and as supplemented in Department of Labor regulations (41 CFR Chapter 60).

Section 818. Cargo Preference. *(Any agreement under which international air travel may be supported by U.S. Government funds.)*

The State covenants and agrees that it will comply with the Cargo Preference Act of 1954 (46 USC 1241), as implemented by Department of Transportation regulations at 46 CFR 381.7, which require that at least 50 percent of equipment, materials or commodities procured or otherwise obtained with U.S. Government funds under this Grant, and which may be transported by ocean vessel, shall be transported on privately owned U.S. flag commercial vessels, if available.

Section 819. Preservation of Open Competition and Government Neutrality Towards Government Contractors' Labor Relations on Federal and Federally Funded Construction Projects.

The State covenants and agrees that it will comply with Executive Order 13202 of February 17, 2001, Preservation of Open Competition and Government Neutrality Towards Government Contractors' Labor Relations on Federal and Federally Funded Construction Projects, as amended on April 6, 2001.

DRUG TESTING FORMS

The Office of Management and Budget (OMB) has developed the 4014 regulations as part of the Delaware Code that requires Contractors and Subcontractors to implement a program of mandatory drug testing for Employees who work on Large Public Works Contracts funded all or in part without public funds pursuant to 29 **Del.C.** §6908(a)(6). The regulations establish the mechanism, standards and requirements of a Mandatory Drug Testing Program that will be incorporated for reference into the Contract awarded pursuant to 29 **Del.C.** §6962. Sample copies of Testing Report Forms maintained and/or submitted pursuant to the requirements of 4104 regulations for this Project are included herewith.

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

EMPLOYEE DRUG TESTING REPORT FORM

Period Ending: _____

4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects requires that Contractors and Subcontractors who work on Large Public Works Contracts funded all or in part with public funds maintain testing data that includes but is not limited to the data elements below.

Project Number: _____

Project Name: _____

Contractor/Subcontractor Name: _____

Contractor/Subcontractor Address: _____

Number of employees who worked on the jobsite during the report period: _____

Number of employees subject to random testing during the report period: _____

Number of Negative Results _____ Number of Positive Results _____

Action taken on employee(s) in response to a failed or positive random test:

Date: _____

This form is not required to be submitted to the Owner. Included as a reference to show information required to be maintained by the Contractor. The Owner shall have the right to periodically audit all Contractor and Subcontractor test results at the Contractor's or Subcontractor's offices (or by other means to make the data available for inspection by the Owner).

**EMPLOYEE DRUG TESTING
REPORT OF POSITIVE RESULTS**

4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects requires that Contractors and Subcontractors who work on Large Public Works Contracts funded all or in part with public funds to notify the Owner in writing of a positive random drug test.

Project Number: _____

Project Name: _____

Contractor/Subcontractor Name: _____

Contractor/Subcontractor Address: _____

Name of employee with positive test result: _____

Last 4 digits of employee SSN: _____

Date test results received: _____

Action taken on employee in response to a positive test result:

Authorized Representative of Contractor/Subcontractor: _____
(typed or printed)

Authorized Representative of Contractor/Subcontractor: _____
(signature)

Date: _____

This form shall be sent by mail to the Owner within 24 hours of receipt of test results.

Enclose this test results form in a sealed envelope with the notation "Drug Testing Form – DO NOT OPEN" on the face thereof and place in a separate mailing envelope.

Bethany Beach Training Site – Physical Fitness Center
Bethany Beach Training Site, 163 Scannell Blvd, Bethany Beach, DE 19930
Contract No. 100097

**AFFIDAVIT OF
CRAFT TRAINING COMPLIANCE**

We, the contractor, hereby certify that we and all applicable subcontractors will abide by the contractor and subcontractor craft training requirements outlined below for the duration of the contract. Craft training must be provided by a contractor and/or subcontractor for each craft on a project for which there are Delaware Department of Labor approved and registered training programs. A list of crafts for which there are approved and registered training programs is maintained by the Delaware Department of Labor and can be found at [https://det.delawareworks.com/apprenticeship/documents/Apprenticeship Occupation List for 29Del6962 Compliance.pdf](https://det.delawareworks.com/apprenticeship/documents/Apprenticeship%20Occupation%20List%20for%20Del6962%20Compliance.pdf). If you have questions regarding craft training programs, please submit them in writing to the Delaware Department of Labor at: apprenticeship@delaware.gov. The Craft Training Compliance Affidavit must be submitted prior to contract execution.

In accordance with Title 29, Chapter 69, Section 6962(c)(13) of the Delaware Code, contractors and subcontractors must provide craft training for journeyman and apprentice levels if **all** of the following apply:

- A. A project meets the prevailing wage requirement under Title 29, Chapter 69, Section 6960 of the Delaware Code.
- B. The contractor employs 10 or more total employees.
- C. The project is not a federal highway project

Failure to provide required craft training on the project may subject the successful contractor and/or subcontractor(s) to penalties as outlined in Title 29, Chapter 69, Section 6962(c)(13) of the Delaware Code.

Craft(s)

Contractor Name:

Contractor Address:

Contractor Program

Registration Number(s)

On this line also indicate whether DE, Other State (identify) or US Registration Number

Or

☐ **Craft Training requirements are not applicable because:**

Authorized Representative (typed or printed):

Authorized Representative (signature):

Title:

Sworn to and Subscribed before me this _____ day of _____, 20____.

My Commission expires _____. NOTARY PUBLIC _____.

THIS PAGE MUST BE SIGNED AND NOTARIZED TO BE CONSIDERED.

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 01 10 00

SUMMARY

PART 1 GENERAL

1.01 PROJECT

- A. Project Name: BBTS Physical Fitness Center.
- B. Owner's Name: Delaware Army National Guard.
- C. Architect / Engineer's Name: StudioJAED

1.02 CONTRACT DESCRIPTION

- A. Contract Type: A single prime contract based on a Stipulated Price as described in Division 00.

1.03 DESCRIPTION OF WORK

- A. Scope of demolition and removal work is generally as shown on drawings, indicated in specification section 02 41 00 and as indicated below.
 - 1. Demolish and remove existing building 109 including foundations, utility feeds to building and associated site improvements.
 - 2. Demolish and remove existing paving as indicated on plans.
 - 3. Demolish and remove existing utility services as indicated on plans.
- B. Scope of alterations work is generally shown on drawings, indicated in the specifications and as indicated below.
 - 1. Reroute and/or extend asphalt and concrete paving as indicated on plans.
- C. Scope of new work is generally as shown on drawings, indicated in the specifications and indicated below:
 - 1. Prepare site for new construction.
 - 2. Provide utility services to building.
 - 3. Construct new asphalt and concrete paving.
 - 4. Provide rough grading, final grading, new lawns and landscaping.
 - 5. Construct a new $\pm$ 6,830 square foot, one-story building as indicated on drawings and specifications, and as noted below:
 - a. Shallow concrete footings.
 - b. CMU foundations.
 - c. Concrete slab-on-grade.
 - d. Structural steel frame with steel beam and steel joist roof framing.
 - e. CMU exterior wall with ground-face CMU veneer.
 - f. Metal stud exterior wall with ground-face CMU veneer and metal panel siding.
 - g. EPDM roof system with tapered insulation on corrugated steel deck.
 - h. Standing seam metal roof system on rigid insulation on corrugated steel deck.
 - i. Painted CMU interior partitions.
 - j. Hollow metal doors and frames, aluminum storefront systems, aluminum framed window systems.
 - k. Interior fitout as indicated on drawings and specifications.
 - l. Packaged heat pump roof top unit with energy recovery and propane back-up and distribution system
 - m. Stand alone DX split system at IDF room.
 - n. Domestic hot and cold water and sanitary systems and fixtures.
 - o. 300KVA transformer with 600A, 206Y.120V panel, 225A, 206Y.120V sub-panel, 100A, 206Y.120V emergency panel, power distribution, devices and LED lighting.
 - p. Fire detection and alarm system.
 - q. Fiber optic infrastructure system with rack, patch panels, switches, distribution system and devices.

- r. Coaxial cable and CATV system.
- s. Copper cable infrastructure system with surge protection at MDF end and IDF, distribution system and devices.
- t. Access controls system.
- u. Audio/speaker system.

1.04 WORK BY OWNER

- A. The Owner reserves the right to perform additional work by Others as directed during the course of this contract.

1.05 OWNER OCCUPANCY

- A. Owner intends to occupy the Project upon Substantial Completion.
- B. The Owner intends to continue to occupy adjacent portions of the site during the entire construction period.
- C. Cooperate with Owner to minimize conflict and to facilitate Owner's operations.
- D. Schedule the Work to accommodate Owner's occupancy.

1.06 CONTRACTOR USE OF SITE AND PREMISES

- A. Construction Operations: Limited to areas noted on Drawings
 - 1. Construction Hours shall be 7:00 AM – 4:30 PM, Monday through Friday, unless noted otherwise. Alternative hours will only be considered on a special-need basis.
 - 2. Background checks are required.
- B. This project may require electrical shutdowns and natural gas shutdowns to facilitate demolition and relocation of site utilities. The work must be coordinated with the Owner's schedule, which may include work during off-hours.
- C. Provide access to and from site as required by law and by Owner:
 - 1. Emergency Building Exits During Construction: Keep all exits required by code open during construction period; provide temporary exit signs if exit routes are temporarily altered.
 - 2. Do not obstruct roadways, sidewalks, or other public ways without permit.
 - 3. Adhere to National Guard guidelines regarding entrance and egress to the site as identified during the pre-bid meeting.
- D. Utility Outages and Shutdown:
 - 1. Coordinate any interruption and/or shutdown of utilities with the Delaware Army National Guard at least 7 days in advance of the anticipated interruption and/or shutdown. Limit any interruptions/shutdowns to the absolute minimum amount of time.
 - 2. Delaware Army National Guard reserves the right to reschedule construction shutdowns with minimal warning to the contractor as required to respond to emergencies.

1.07 GENERAL STANDARDS

- A. Civil / Architectural / Structural Systems
 - 1. Prior to submitting bid, the contractor shall visit the site and be thoroughly familiar with the existing conditions and proposed construction. Contractor shall include in their bid all materials, labor and all incidentals for a complete installation whether specifically indicated or not. All errors, discrepancies and missed items shall be brought to the attention of the architect during the bidding process by the contractor. These items shall be included in the bid price. No extra cost will be allowed for any discrepancy which could have been noticed at the site by the contractor.
 - 2. Perform work as required by applicable codes, regulations, and laws of local, state, and federal governments and other authorities with lawful jurisdiction. All work shall be in accordance with the adopted edition of the International Existing Building Code and the International Building Code.

B. Mechanical Systems

1. Prior to submitting bid, the contractor shall visit the site and be thoroughly familiar with the existing conditions and proposed construction. Contractor shall include in their bid all materials, labor and all incidentals for a complete installation whether specifically indicated or not. All errors, discrepancies and missed items shall be brought to the attention of the engineer during the bidding process by the contractor. These items shall be included in the bid price. No extra cost will be allowed for any discrepancy which could have been noticed at the site by the contractor.
2. Perform work as required by applicable codes, regulations, and laws of local, state, and federal governments and other authorities with lawful jurisdiction. All work shall be in accordance with the adopted edition of the international mechanical code.
3. Provide mechanical services required to complete roof work and flashing at mechanical equipment including, but not limited to, shutdown, restart, removal and replacement of select components, and other such work as may be required to complete work specified under this contract.
4. All gas piping is to be installed per NFPA 54, and all local and national codes.
5. Provide splash blocks for all condensate drains.

C. Electrical Systems

1. Prior to submitting bid, the contractor shall visit the site and be thoroughly familiar with the existing conditions and proposed construction. Contractor shall include in their bid all material, labor, and all incidentals for a complete installation whether specifically indicated or not. All errors, discrepancies and missed items shall be brought to the attention of the engineer during the bidding process by the contractor. These items shall be included in the bid price. No extra cost will be allowed for any discrepancy which could have been noticed at the site visit by the contractor.
2. Perform work as required by applicable codes, regulations, and laws of local, state, and federal governments and other authorities with lawful jurisdiction. All work shall be in accordance with the latest edition of the national electric code.
3. Material and equipment shall be UL, NEMA, ANSI, IEEE, ADA & CMB approved for intended purpose. Material and installation shall meet requirements of national and local electrical code.
4. Provide electrical services required to complete roof work and flashing at rooftop equipment including, but not limited to, shutdown, restart, removal and replacement of select components, and other such work as may be required to complete work specified under this contract.

D. Plumbing Systems

1. For all equipment requirements, refer to specifications, plumbing schedule or drawings. Contractor shall not install equipment/materials until same is approved.
2. Prior to submitting bid, the contractor shall visit the site and be thoroughly familiar with the existing conditions and proposed construction. Contractor shall include in their bid all materials, labor and all incidentals for a complete installation whether specifically indicated or not. All errors, discrepancies and missed items shall be brought to the attention of the engineer during the bidding process by the contractor. These items shall be included in the bid price. No extra cost will be allowed for any discrepancy which could have been noticed at the site by the contractor.
3. All installations shall comply with all codes or regulations, local, state, or national having jurisdiction over the project.
4. All fixtures and piping installations shall be properly braced, rigidly supported, and installed with adequate vibration isolation and insulation.

1.08 WORK SEQUENCE

- A. Work shall, generally, proceed as one continuous phase.

B. Coordinate construction schedule and operations with Owner.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

NOT FOR BIDDING

SECTION 01 20 00
PRICE AND PAYMENT PROCEDURES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Procedures for preparation and submittal of applications for progress payments.
- B. Change procedures.

1.02 SCHEDULE OF VALUES

- A. Use Schedule of Values Form: AIA G703, edition stipulated in the Agreement.
- B. Forms filled out by hand will not be accepted.
- C. Submit Schedule of Values in duplicate within 15 days after date of Owner-Contractor Agreement.
- D. Format: Utilize the Table of Contents of this Project Manual. Identify each line item with number and title of the specification section. Identify site mobilization.
- E. Include line item for insurance, bonds and permits.
- F. Include line item for general conditions.
- G. Include line item(s) for each allowance.
- H. Revise schedule to list approved Change Orders, with each Application For Payment.

1.03 APPLICATIONS FOR PROGRESS PAYMENTS

- A. Payment Period: Submit at intervals stipulated in the Agreement.
- B. Use Form AIA G702 and Form AIA G703, edition stipulated in the Agreement.
- C. Forms filled out by hand will not be accepted.
- D. Execute certification by signature of authorized officer.
- E. Submit three copies of each Application for Payment.
- F. Include the following with the application:
 - 1. Transmittal letter as specified for submittals in Section 01 30 00.
 - 2. Construction progress schedule, revised and current as specified in Section 01 30 00.
 - 3. Current construction photographs specified in Section 01 30 00.
 - 4. Partial release of liens from major subcontractors and vendors.

1.04 MODIFICATION PROCEDURES

- A. For minor changes not involving an adjustment to the Contract Price or Contract Time, see Section 01 31 00.
- B. For changes for which advance pricing is desired, Architect will issue a document that includes a detailed description of a proposed change with supplementary or revised drawings and specifications, a change in Contract Time for executing the change and the period of time during which the requested price will be considered valid. Contractor shall prepare and submit a fixed price quotation within 5 days.
- C. Computation of Change in Contract Amount: As specified in the Agreement and Conditions of the Contract.
 - 1. For change requested by Architect for work falling under a fixed price contract, the amount will be based on Contractor's price quotation.
 - 2. For change requested by Contractor, the amount will be based on the Contractor's request for a Change Order as approved by Architect.
 - 3. For pre-determined unit prices and quantities, the amount will be based on the fixed unit prices.

- D. Substantiation of Costs: Provide full information required for evaluation.
 - 1. Provide the following data:
 - a. Quantities of products, labor, and equipment.
 - b. Taxes, insurance, and bonds.
 - c. Overhead and profit.
 - d. Justification for any change in Contract Time.
 - e. Credit for deletions from Contract, similarly documented.
 - 2. For Time and Material work, submit itemized account and supporting data after completion of change, within time limits indicated in the Conditions of the Contract.
- E. Execution of Change Orders: Architect will issue Change Orders for signatures of parties as provided in the Conditions of the Contract.
- F. After execution of Change Order, promptly revise Schedule of Values and Application for Payment forms to record each authorized Change Order as a separate line item and adjust the Contract Price.
- G. Promptly revise progress schedules to reflect any change in Contract Time, revise sub-schedules to adjust times for other items of work affected by the change, and resubmit.
- H. Promptly enter changes in Project Record Documents.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

SECTION 01 23 00
ALTERNATES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Description of alternates.

1.02 ACCEPTANCE OF ALTERNATES

- A. Alternates quoted on Bid Forms will be reviewed and accepted or rejected at Owner's option. Accepted alternates will be identified in the Owner-Contractor Agreement.
- B. Coordinate related work and modify surrounding work to integrate the Work of each alternate.

1.03 SCHEDULE OF ALTERNATES

- A. Deduct Alternate No. 1 - Asphalt Shingle Roof:
1. Cost to install Asphalt Shingle Roof in lieu of Standing Seam Metal Roof.
- B. Deduct Alternate No. 2 - Parapet Wall:
1. Cost to build parapet wall 11" high in lieu of 6'-11" high. Furnish and install roof hatch railing guards.
- C. Deduct Alternate No. 3 - Pre-Engineered Aluminum Canopy:
1. Cost to remove Pre-Engineered Aluminum Canopies from scope, typical of 2.
- D. Add Alternate No. 4 - Sunshades:
1. Cost to furnish and install sunshades above windows on the south elevation, typ. of 5. including structural supports as required.
- E. Deduct Alternate No. 5 - Ceramic Tile Floors
1. Remove ceramic tile scope from floors in Rooms 105, 106, 107. and 108. Seal concrete slab in those rooms.
- F. Deduct Alternate No. 6 - Ceramic Tile Walls
1. Remove ceramic tile scope from walls in Rooms 105, 106, 107. and 108. Paint masonry walls in those rooms.
- G. Deduct Alternate No. 7 - Window Treatments
1. Remove all window treatments from scope.
- H. Deduct Alternate No. 8 - Divider Curtain
1. Remove divider curtain and structural supports from scope.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 01 25 00
SUBSTITUTION PROCEDURES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Procedural requirements for proposed substitutions.

1.02 RELATED REQUIREMENTS

- A. Section 00 21 13 - Instructions to Bidder; for substitution requirements.
- B. Requests for substitution must be made ten days prior to bid. Requests for substitution made after the bid may be considered by the Owner/Architect at their discretion and only under extra-ordinary conditions that could not be determined during the bidding period.
- C. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.03 SUMMARY

- A. This Section includes administrative and procedural requirements for handling requests for substitutions.
- B. Related Sections: The following Divisions contain requirements that relate to this Section:
 - 1. Division 01 specifies that applicability of industry standards to products specified.
 - 2. Division 01 specifies requirements for submitting the Contractor's Construction Schedule and the Submittal Schedule.
 - 3. Division 01 specifies requirements governing the Contractor's selection of products and product options.

1.04 DEFINITIONS

- A. Definitions in this Article do not change or modify the meaning of other terms used in the Contract Documents
- B. Substitutions: Changes in products, materials, equipment, and methods of construction required by the Contract Documents proposed by the Contractor. The following are not considered to be requests for substitutions:
 - 1. Revisions to the Contract Documents requested by the Owner or Architect.
 - 2. Specified options of products and construction methods included in the Contract Documents.
 - 3. The Contractor's determination of and compliance with governing regulations and orders issued by governing authorities.

1.05 SUBMITTALS

- A. Substitution Request Submittal: Substitution requests will only be considered during the bidding period. Substitutions will not be considered after the bids are accepted.
 - 1. Submit three copies of each request for substitution for consideration. Submit requests in the form and according to procedures required for change order proposals and utilizing the CSI Substitution Request Form 13.1A. The contractor is solely responsible for obtaining the required forms to submit before the stated time period expires.
 - 2. Identify the product or the fabrication or installation method to be replaced in each request. Include related Specification Section and Drawing numbers.
 - 3. Provide complete documentation showing compliance with the requirements for substitutions, and the following information, as appropriate:
 - a. Coordination information, including a list of changes or modifications needed to other parts of the Work and to construction performed by the Owner and separate contractors that will be necessary to accommodate the proposed substitution.

- b. A detailed comparison of significant qualities of the proposed substitution with those of the Work specified. Significant qualities may include elements, such as performance, weight, size, durability, and visual effect.
 - c. Product Data, including Drawings and descriptions of products and fabrication and installation procedures.
 - d. Samples, where applicable or requested.
 - e. A statement indicating the substitution's effect on the Contractor's Construction Schedule compared to the schedule without approval of the substitution. Indicate the effect of the proposed substitution on overall Contract Time.
 - f. Cost information, including a proposal of the net change, if any in the Contract Sum.
 - g. The Contractor's certification that the proposed substitution conforms to requirements in the Contract Documents in every respect and is appropriate for the applications indicated.
 - h. The Contractor's waiver of rights to additional payment or time that may subsequently become necessary because of the failure of the substitution to perform adequately.
4. Architect's Action: If necessary, the Architect will request additional information or documentation for evaluation within one week of receipt of a request for substitution. The Architect will notify the Contractor of acceptance or rejection of the substitution within two weeks of receipt of the request, or one week of receipt of additional information or documentation, whichever is later.
- a. Use the product specified if the Architect cannot make a decision on the use of a proposed substitute within the time allocated.

B. Section 00 21 13 - Instructions to Bidders: Restrictions on timing of substitution requests.

PART 2 PRODUCTS

2.01 SUBSTITUTIONS

- A. Conditions: The Architect will receive and consider the Contractor's request for substitution when the following conditions are satisfied, as determined by the Architect. If the following conditions are not satisfied, the Architect will return the requests without action except to record noncompliance with these requirements.
- 1. Revisions to the Contract Documents are not required.
 - 2. Proposed changes are in keeping with the general intent of the Contract Documents.
 - 3. The request is timely, fully documented, and properly submitted.
 - 4. The specified product or method of construction cannot be provided within the Contract Time. The Architect will not consider the request if the product or method cannot be provided as a result of failure to pursue the Work promptly or coordinate activities properly.
 - 5. The requested substitution offers the Owner a substantial advantage, in cost, time, energy conservation, or other considerations, after deducting additional responsibilities the Owner must assume. The Owner's additional responsibilities may include compensation to the Architect for redesign and evaluation services, increased cost of other construction by the Owner, and similar considerations.
 - 6. The specified product or method of construction cannot receive necessary approval by a governing authority, and the requested substitution can be approved.
 - 7. The specified product or method of construction cannot be provided in a manner that is compatible with other materials and where the Contractor certifies that the substitution will overcome the incompatibility.
 - 8. The specified product or method of construction cannot be coordinated with other materials and where the Contractor certifies that the proposed substitution can be coordinated.
- B. The Contractor's submittal and the Architect's acceptance of Shop Drawings, Product Data, or Samples for construction activities not complying with the Contract Documents do not constitute an acceptable or valid request for substitution, nor do they constitute approval.

PART 3 EXECUTION (NOT APPLICABLE)

3.01 GENERAL REQUIREMENTS

- A. A Substitution Request for products, assemblies, materials, and equipment constitutes a representation that the submitter:
 - 1. Has investigated proposed product and determined that it meets or exceeds the quality level of the specified product, equipment, assembly, or system.
 - 2. Agrees to provide the same warranty for the substitution as for the specified product.
 - 3. Agrees to provide same or equivalent maintenance service and source of replacement parts, as applicable.
 - 4. Agrees to coordinate installation and make changes to other work that may be required for the work to be complete, with no additional cost to Owner.
 - 5. Waives claims for additional costs or time extension that may subsequently become apparent.
- B. Document each request with complete data substantiating compliance of proposed substitution with Contract Documents. Burden of proof is on proposer.
- C. Content: Include information necessary for tracking the status of each Substitution Request, and information necessary to provide an actionable response.
 - 1. Contractor's Substitution Request documentation must include the following:
 - a. Project Information:
 - 1) Official project name and number, and any additional required identifiers established in Contract Documents.
 - 2) Owner's, Architect's, and Contractor's names.
 - b. Substitution Request Information:
 - 1) Discrete and consecutive Substitution Request number, and descriptive subject/title.
 - 2) Indication of whether the substitution is for cause or convenience.
 - 3) Issue date.
 - 4) Reference to particular Contract Document(s) specification section number, title, and article/paragraph(s).
 - 5) Description of Substitution.
 - 6) Reason why the specified item cannot be provided.
 - 7) Differences between proposed substitution and specified item.
 - 8) Description of how proposed substitution affects other parts of work.
 - c. Attached Comparative Data: Provide point-by-point, side-by-side comparison addressing essential attributes specified, as appropriate and relevant for the item:
 - 1) Physical characteristics.
 - 2) In-service performance.
 - 3) Expected durability.
 - 4) Visual effect.
 - 5) Sustainable design features.
 - 6) Warranties.
 - 7) Other salient features and requirements.
 - 8) Include, as appropriate or requested, the following types of documentation for proposed substitution and for specified product in order to expedite review:
 - (a) Product Data:
 - (b) Samples.
 - (c) Certificates, test, reports or similar qualification data.
 - (d) Drawings, when required to show impact on adjacent construction elements.
 - d. Impact of Substitution:

- 1) Savings to Owner for accepting substitution.
 - 2) Change to Contract Time due to accepting substitution.
- D. Limit each request to a single proposed substitution item.
1. Submit an electronic document, combining the request form with supporting data into single document.

3.02 SUBSTITUTION PROCEDURES DURING PROCUREMENT

- A. Section 00 21 13 - Instructions to Bidders specifies time restrictions for submitting requests for substitutions during the bidding period, and the documents required.

3.03 SUBSTITUTION PROCEDURES DURING CONSTRUCTION

- A. Under extra-ordinary conditions, submit request for Substitution for Cause immediately upon discovery of need for substitution, but not later than 14 days prior to time required for review and approval by Architect, in order to stay on approved project schedule.
- B. Substitutions will not be considered under one or more of the following circumstances:
1. When they are indicated or implied on shop drawing or product data submittals, without having received prior approval.
 2. Without a separate written request.
 3. When acceptance will require revisions to Contract Documents.

3.04 RESOLUTION

- A. Architect may request additional information and documentation prior to rendering a decision. Provide this data in an expeditious manner.

END OF SECTION

SECTION 01 30 00
ADMINISTRATIVE REQUIREMENTS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. General administrative requirements.
- B. Electronic document submittal service.
- C. Preconstruction meeting.
- D. Site mobilization meeting.
- E. Progress meetings.
- F. Construction progress schedule.
- G. Progress photographs.
- H. Coordination drawings.
- I. Submittals for review, information, and project closeout.
- J. Number of copies of submittals.
- K. Requests for Interpretation (RFI) procedures.
- L. Submittal procedures.

1.02 RELATED REQUIREMENTS

- A. Section 01 32 16 - Construction Progress Schedule: Form, content, and administration of schedules.
- B. Section 01 60 00 - Product Requirements: General product requirements.
- C. Section 01 70 00 - Execution and Closeout Requirements: Additional coordination requirements.
- D. Section 01 78 00 - Closeout Submittals: Project record documents; operation and maintenance data; warranties and bonds.
- E. Section 01 91 13 - General Commissioning Requirements: Additional procedures for submittals relating to commissioning.
 - 1. Where submittals are indicated for review by both Architect and the Commissioning Authority, submit one extra and route to Architect first, for forwarding to the Commissioning Authority.
 - 2. Where submittals are not indicated to be reviewed by Architect, submit directly to the Commissioning Authority; otherwise, the procedures specified in this section apply to commissioning submittals.

1.03 GENERAL ADMINISTRATIVE REQUIREMENTS

- A. Comply with requirements of Section 01 70 00 - Execution and Closeout Requirements for coordination of execution of administrative tasks with timing of construction activities.
- B. Make the following types of submittals to Architect:
 - 1. Requests for Interpretation (RFI).
 - 2. Requests for substitution.
 - 3. Shop drawings, product data, and samples.
 - 4. Test and inspection reports.
 - 5. Design data.
 - 6. Manufacturer's instructions and field reports.
 - 7. Applications for payment and change order requests.
 - 8. Progress schedules.

9. Correction Punch List and Final Correction Punch List for Substantial Completion.
10. Closeout submittals.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION

3.01 ELECTRONIC DOCUMENT SUBMITTAL SERVICE

- A. Electronic Document and Submittal Service will be set up and administered by the Architect.
- B. All documents transmitted for purposes of administration of the contract are to be in electronic (PDF, MS Word, or MS Excel) format, as appropriate to the document, and transmitted via an Internet-based submittal service that receives, logs and stores documents, provides electronic stamping and signatures, and notifies addressees via email.
 1. In addition to submittals for review, information and closeout, the Electronic Document Submittal Service shall be used for Requests for Information (RFIs) and Architect's Supplementary Instructions (ASIs).
 2. Contractor and Architect are required to use this service.
 3. It is Contractor's responsibility to submit documents in allowable format.
 4. Users of the service need an email address, internet access, and PDF review software that includes ability to mark up and apply electronic stamps (such as Adobe Acrobat, www.adobe.com, or Bluebeam PDF Revu, www.bluebeam.com), unless such software capability is provided by the service provider.
 5. Paper document transmittals will not be reviewed; emailed electronic documents will not be reviewed.
 6. All other specified submittal and document transmission procedures apply, except that electronic document requirements do not apply to samples or color selection charts.
- C. Cost: Contractor's cost associated with use of the submittal service shall be included in the Contract Sum.
- D. Submittal Service: The selected service is:
 1. Buildingblok.
- E. Project Closeout: Architect will determine when to terminate the service for the project and is responsible for obtaining archive copies of files for Owner.

3.02 PRECONSTRUCTION MEETING

- A. Owner will schedule a meeting after Notice of Award.
- B. Attendance Required:
 1. Owner.
 2. Architect.
 3. Contractor.
- C. Agenda:
 1. Execution of Owner-Contractor Agreement.
 2. Submission of executed bonds and insurance certificates.
 3. Distribution of Contract Documents.
 4. Submission of list of Subcontractors, list of Products, schedule of values, and progress schedule.
 5. Submission of initial Submittal schedule.
 6. Designation of personnel representing the parties to Contract and Architect.
 7. Procedures and processing of field decisions, submittals, substitutions, applications for payments, proposal request, Change Orders, and Contract closeout procedures.
 8. Scheduling.
- D. Architect will record minutes and distribute copies to participants and those affected by decisions made.

3.03 SITE MOBILIZATION MEETING

- A. Owner will schedule a meeting at the Project site prior to Contractor occupancy.
- B. Attendance Required:
 - 1. Contractor.
 - 2. Owner.
 - 3. Architect.
 - 4. Contractor's Superintendent.
 - 5. Contractor's Project Manager.
 - 6. Major Subcontractors.
- C. Agenda:
 - 1. Use of premises by Owner and Contractor.
 - 2. Owner's requirements and occupancy prior to completion.
 - 3. Construction facilities and controls provided by Contractor and Owner.
 - 4. Temporary utilities provided by Owner.
 - 5. Security and housekeeping procedures.
 - 6. Schedules.
 - 7. Application for payment procedures.
 - 8. Procedures for maintaining record documents.
 - 9. Requirements for start-up of equipment.
- D. Architect will record minutes and distribute copies to participants and those affected by decisions made.

3.04 OWNER'S PROGRESS MEETINGS

- A. Owner will schedule meetings at the project site throughout progress of the Work at two-week intervals.
- B. Architect will make arrangements for meetings, prepare agenda with copies for participants, preside at meetings.
- C. Attendance Required: Job superintendent, Owner, and Architect, as appropriate to agenda topics for each meeting.
- D. Agenda:
 - 1. Review minutes of previous meetings.
 - 2. Review of Work progress.
 - 3. Field observations, problems, and decisions.
 - 4. Identification of problems that impede, or will impede, planned progress.
 - 5. Review of submittals schedule and status of submittals.
 - 6. Review of RFIs log and status of responses.
 - 7. Review of off-site fabrication and delivery schedules.
 - 8. Maintenance of progress schedule.
 - 9. Corrective measures to regain projected schedules.
 - 10. Planned progress during succeeding work period.
 - 11. Coordination of projected progress.
 - 12. Maintenance of quality and work standards.
 - 13. Effect of proposed changes on progress schedule and coordination.
 - 14. Other business relating to Work.
- E. Architect will record minutes and distribute copies to participants and those affected by decisions made.

3.05 CONSTRUCTION PROGRESS SCHEDULE

- A. Within 5 days after date of the Agreement, submit preliminary schedule defining planned operations for the first 60 days of Work, with a general outline for remainder of Work.
- B. If preliminary schedule requires revision after review, submit revised schedule within 10 days.
- C. Within 20 days after review of preliminary schedule, submit draft of proposed complete schedule for review.
 - 1. Include written certification that major contractors have reviewed and accepted proposed schedule.
- D. Within 5 days after joint review, submit complete schedule.
- E. Submit updated schedule with each Application for Payment.

3.06 LOOK AHEAD SCHEDULE

- A. Prepare three-week Look Ahead Schedule for review at each Progress Meeting.
- B. Submit Look Ahead Schedule at least one day before each Progress Meeting.

3.07 PROGRESS PHOTOGRAPHS

- A. Submit photographs with each application for payment, taken not more than 3 days prior to submission of application for payment.
- B. Photography Type: Digital; electronic files.
- C. Provide photographs of site and construction throughout progress of work produced by an experienced photographer, acceptable to Architect.
- D. Views:
 - 1. Provide non-aerial photographs from four cardinal views at each specified time, until date of Substantial Completion.
 - 2. Provide photographs to document milestones and progress completed during the subject pay period.
 - 3. Consult with Architect for instructions on views required.
 - 4. Provide factual presentation.
 - 5. Provide correct exposure and focus, high resolution and sharpness, maximum depth of field, and minimum distortion.
- E. Digital Photographs: 24 bit color, minimum resolution of 1024 by 768, in JPG format; provide files unaltered by photo editing software.
 - 1. Delivery Medium: Via email, with Application for Payment.
 - 2. File Naming: Include project identification, date and time of view, and view identification.
 - 3. PDF File: Assemble all photos into printable pages in PDF format, with 2 to 3 photos per page, each photo labeled with file name; one PDF file per submittal.

3.08 COORDINATION DRAWINGS

- A. Prepare and submit coordination drawings for work above ceilings and overhead work in areas without ceilings.
 - 1. Include mechanical, plumbing, fire protection, electrical, tel/data, alarm and special systems.
 - 2. Include cross-section views in areas of critical dimensions.
 - 3. Demonstrate coordination of system within space provided.

3.09 REQUESTS FOR INTERPRETATION (RFI)

- A. Whenever possible, request clarifications at the next appropriate project progress meeting, with response entered into meeting minutes, rendering unnecessary the issuance of a formal RFI.

- B. Preparation: Prepare an RFI immediately upon discovery of a need for interpretation of Contract Documents. Failure to submit a RFI in a timely manner is not a legitimate cause for claiming additional costs or delays in execution of the work.
 - 1. Prepare a separate RFI for each specific item.
 - a. Review, coordinate, and comment on requests originating with subcontractors and/or materials suppliers.
 - b. Do not forward requests which solely require internal coordination between subcontractors.
 - 2. Prepare using software provided by the Electronic Document Submittal Service.
 - 3. Combine RFI and its attachments into a single electronic file. PDF format is preferred.
- C. Reason for the RFI: Prior to initiation of an RFI, carefully study all Contract Documents to confirm that information sufficient for their interpretation is definitely not included.
 - 1. Include in each request Contractor's signature attesting to good faith effort to determine from Contract Documents information requiring interpretation.
 - 2. Improper RFIs: Requests not prepared in compliance with requirements of this section, and/or missing key information required to render an actionable response. They will be returned without a response, with an explanatory notation.
- D. Content: Include identifiers necessary for tracking the status of each RFI, and information necessary to provide an actionable response.
 - 1. Official Project name and number, and any additional required identifiers established in Contract Documents.
 - 2. Owner's, Architect's, and Contractor's names.
 - 3. Discrete and consecutive RFI number, and descriptive subject/title.
 - 4. Issue date, and requested reply date.
 - 5. Reference to particular Contract Document(s) requiring additional information/interpretation. Identify pertinent drawing and detail number and/or specification section number, title, and paragraph(s).
 - 6. Annotations: Field dimensions and/or description of conditions which have engendered the request.
 - 7. Contractor's suggested resolution: A written and/or a graphic solution, to scale, is required in cases where clarification of coordination issues is involved, for example; routing, clearances, and/or specific locations of work shown diagrammatically in Contract Documents. If applicable, state the likely impact of the suggested resolution on Contract Time or the Contract Sum.
- E. Attachments: Include sketches, coordination drawings, descriptions, photos, submittals, and other information necessary to substantiate the reason for the request.
- F. RFI Log: Prepare and maintain a tabular log of RFIs for the duration of the project.
 - 1. Indicate current status of every RFI. Update log promptly and on a regular basis.
 - 2. Note dates of when each request is made, and when a response is received.
 - 3. Highlight items requiring priority or expedited response.
- G. Review Time: Architect will respond and return RFIs to Contractor within seven calendar days of receipt. For the purpose of establishing the start of the mandated response period, RFIs received after 12:00 noon will be considered as having been received on the following regular working day.
- H. Responses: Content of answered RFIs will not constitute in any manner a directive or authorization to perform extra work or delay the project. If in Contractor's belief it is likely to lead to a change to Contract Sum or Contract Time, promptly issue a notice to this effect, and follow up with an appropriate Change Order request to Owner.

1. Response may include a request for additional information, in which case the original RFI will be deemed as having been answered, and an amended one is to be issued forthwith. Identify the amended RFI with an R suffix to the original number.
2. Do not extend applicability of a response to specific item to encompass other similar conditions, unless specifically so noted in the response.
3. Upon receipt of a response, promptly review and distribute it to all affected parties, and update the RFI Log.
4. Notify Architect within seven calendar days if an additional or corrected response is required by submitting an amended version of the original RFI, identified as specified above.

3.10 SUBMITTAL SCHEDULE

- A. Submit to Architect for review a schedule for submittals in tabular format.
 1. Coordinate with Contractor's construction schedule and schedule of values.
 2. Format schedule to allow tracking of status of submittals throughout duration of construction.
 3. Arrange information to include scheduled date for initial submittal, specification number and title, submittal category (for review or for information), description of item of work covered, and role and name of subcontractor.
 4. Account for time required for preparation, review, manufacturing, fabrication and delivery when establishing submittal delivery and review deadline dates.
 - a. For assemblies, equipment, systems comprised of multiple components and/or requiring detailed coordination with other work, allow for additional time to make corrections or revisions to initial submittals, and time for their review.

3.11 SUBMITTALS FOR REVIEW

- A. When the following are specified in individual sections, submit them for review:
 1. Product data.
 2. Shop drawings.
 3. Samples for selection.
 4. Samples for verification.
- B. Submit to Architect for review for the limited purpose of checking for conformance with information given and the design concept expressed in the contract documents.
- C. Samples will be reviewed only for aesthetic, color, or finish selection.
- D. After review, provide copies and distribute in accordance with SUBMITTAL PROCEDURES article below and for record documents purposes described in Section 01 78 00 - Closeout Submittals.

3.12 SUBMITTALS FOR INFORMATION

- A. When the following are specified in individual sections, submit them for information:
 1. Design data.
 2. Certificates.
 3. Test reports.
 4. Inspection reports.
 5. Manufacturer's instructions.
 6. Manufacturer's field reports.
 7. Other types indicated.
- B. Submit for Architect's knowledge as contract administrator or for Owner. No action will be taken.

3.13 SUBMITTALS FOR PROJECT CLOSEOUT

- A. When the following are specified in individual sections, submit them at project closeout:

1. Project record documents.
2. Operation and maintenance data.
3. Warranties.
4. Bonds.
5. Other types as indicated.

B. Submit for Owner's benefit during and after project completion.

3.14 NUMBER OF COPIES OF SUBMITTALS

- A. Electronic Documents: Submit one electronic copy in PDF format; an electronically-marked up file will be returned. Create PDFs at native size and right-side up; illegible files will be rejected.
- B. Extra Copies at Project Closeout: See Section 01 78 00.
- C. Samples: Submit the number specified in individual specification sections; one of which will be retained by Architect.
 1. After review, produce duplicates.
 2. Retained samples will not be returned to Contractor unless specifically so stated.

3.15 SUBMITTAL PROCEDURES

- A. General Requirements:
 1. Use a single transmittal for related items.
 2. Submit separate packages of submittals for review and submittals for information, when included in the same specification section.
 3. Preface each submittal with the appropriate specification section number and follow with a sequential identifying number. For revised submittals use original number and append a sequential numerical revision number.
 4. Identify: Project; Contractor; subcontractor or supplier; pertinent drawing and detail number; and specification section number and article/paragraph, as appropriate on each copy.
 5. Apply Contractor's stamp, signed or initialed certifying that review, approval, verification of products required, field dimensions, adjacent construction work, and coordination of information is in accordance with the requirements of the work and Contract Documents.
 - a. Submittals from sources other than the Contractor, or without Contractor's stamp will be returned without review.
 6. Schedule submittals to expedite the Project, and coordinate submission of related items.
 - a. For each submittal for review, allow 15 days excluding delivery time to and from the Contractor.
 - b. For sequential reviews involving Architect's consultants, Owner, or another affected party, allow an additional 7 days.
 7. Identify variations from Contract Documents and product or system limitations that may be detrimental to successful performance of the completed work.
 8. Provide space for Contractor and Architect review stamps.
 9. When revised for resubmission, identify all changes made since previous submission.
 10. Distribute reviewed submittals. Instruct parties to promptly report inability to comply with requirements.
 11. Incomplete submittals will not be reviewed, unless they are partial submittals for distinct portion(s) of the work, and have received prior approval for their use.
 12. Submittals not requested will be recognized, and will be returned "Not Reviewed",
- B. Product Data Procedures:
 1. Submit only information required by individual specification sections.
 2. Collect required information into a single submittal.
 3. Do not submit (Material) Safety Data Sheets for materials or products.
- C. Shop Drawing Procedures:

1. Prepare accurate, drawn-to-scale, original shop drawing documentation by interpreting Contract Documents and coordinating related work.
 2. Generic, non-project-specific information submitted as shop drawings do not meet the requirements for shop drawings.
- D. Samples Procedures:
1. Transmit related items together as single package.
 2. Identify each item to allow review for applicability in relation to shop drawings showing installation locations.

END OF SECTION

SECTION 01 31 00
PROJECT MANAGEMENT AND COORDINATION

PART 1 - GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.02 SUMMARY

- A. This Section includes administrative provisions for coordinating construction operations on the project including, but not limited to, the following:
 - 1. General project coordination procedures.
 - 2. Coordination Drawings.
 - 3. Administrative and supervisory personnel.
 - 4. Project meetings.
- B. Related Sections
 - 1. Division 01 Section "Closeout Procedures" for coordinating Contract closeout.
- C. Each contractor shall participate in coordination requirements. Certain areas of responsibility will be assigned to a specific contractor.

1.03 DEFINITIONS

- A. RFI: Request from Owner, Architect, or Contractor seeking information from each other during construction.

1.04 COORDINATION

- A. Coordination: Coordinate construction operations included in various Sections of the Specifications to ensure efficient and orderly installation of each part of the Work. Coordinate construction operations, included in different Sections that depend on each other for proper installation, connection, and operation.
 - 1. Schedule construction operations in sequence required to obtain the best results where installation of one part of the Work depends on installation of other components, before or after its own installation.
 - 2. Coordinate installation of different components with other contractors to ensure maximum accessibility for required maintenance, service, and repair.
 - 3. Make adequate provisions to accommodate items scheduled for later installation.
- B. If necessary, prepare memoranda for distribution to each party involved, outlining special procedures required for coordination. Include such items as required notices, reports, and list of attendees at meetings.
 - 1. Prepare similar memoranda for the Owner and separate contractors if coordination of their Work is required.
- C. Administrative Procedures: Coordinate scheduling and timing of required administrative procedures with other construction activities and activities of other contractors to avoid conflicts and to ensure orderly progress of the Work. Such administrative activities include, but are not limited to, the following:
 - 1. Preparation of the Contractor's Construction Schedule.
 - 2. Preparation of the Schedule of Values.
 - 3. Installation and removal of temporary facilities and controls.
 - 4. Delivery and processing of submittals.
 - 5. Progress meetings.
 - 6. Pre-installation conferences.
 - 7. Project closeout activities.

- D. Conservation: Coordinate construction activities to ensure that operations are carried out with consideration given to conservation of energy, water, and materials.

1.05 REQUESTS FOR INFORMATION (RFIS)

- A. General: Immediately on discovery of the need for additional information or interpretation of the Contract Documents, Contractor shall prepare and submit an RFI in the form specified.
1. Architect will return RFIs submitted to Architect by other entities controlled by Contractor with no response.
 2. Coordinate and submit RFIs in a prompt manner so as to avoid delays in Contractor's work or work of subcontractors.
- B. Content of the RFI: Include a detailed, legible description of item needing information or interpretation and the following:
1. Project name
 2. Project number
 3. Date
 4. Name of Contractor
 5. Name of Architect
 6. RFI number, numbered sequentially
 7. RFI subject
 8. Specification Section number and title and related paragraphs, as appropriate
 9. Drawing number and detail references, as appropriate
 10. Field dimensions and conditions, as appropriate
 11. Contractor's suggested resolution. If Contractor's solution(s) impacts the Contract Time or the Contract Sum, Contractor shall state impact in the RFI
 12. Contractor's signature
 13. Attachments: Include sketches, descriptions, measurements, photos, Product Data, Shop Drawings, coordination drawings, and other information necessary to fully describe items needing interpretation.
 - a. If Contractor believes the RFI response warrants change in the Contract Time or the Contract Sum, notify Architect in writing within [10] ten days of receipt of the RFI response
- C. On receipt of Architect's action, update the RFI log and immediately distribute the RFI response to affected parties. Review response and notify Architect within seven days if Contractor disagrees with response.
- D. RFI Log: Prepare, maintain, and submit a tabular log of RFIs organized by the RFI number. Submit log bi-weekly.
- E. SUBMITTALS
1. Coordination Drawings: Prepare Coordination Drawings if limited space availability necessitates maximum utilization of space for efficient installation of different components or if coordination is required for installation of products and materials fabricated by separate entities.
 - a. Indicate relationship of components shown on separate Shop Drawings.
 - b. Indicate required installation sequences.
 - c. Refer to Division 15 Section "Basic Mechanical Materials and Methods" and Division 16 Section "Basic Electrical Materials and Methods" for specific Coordination Drawing requirements for mechanical and electrical installations.
- F. Staff Names: Within 15 days of starting construction operations, submit a list of principal staff
1. assignments, including superintendent and other personnel in attendance at the Project site. Identify individuals and their duties and responsibilities; list addresses and telephone numbers, including home and office telephone numbers. Provide names, addresses, and

telephone numbers of individuals assigned as standbys in the absence of individuals assigned to the Project.

2. Post copies of list in the Project meeting room, in temporary field office, and by each temporary telephone.

1.06 PROJECT MEETINGS

- A. General: Meetings shall be schedule by the Owner and shall be conducted at the Project site, unless otherwise indicated.
 1. Attendees: Architect shall inform participants and others involved, and individuals whose presence is required, of date and time of each meeting.
 2. Agenda: Architect shall prepare the meeting agenda and distribute the agenda to all invited attendees.
 3. Minutes: Architect shall record significant discussions and agreements achieved and distribute the meeting minutes to everyone concerned within 5 days of the meeting.
- B. Preconstruction Conference: Owner shall schedule a preconstruction conference before starting Construction. Conference shall be held at the the Project site or another convenient location. Conduct the meeting to review responsibilities and personnel assignments.
 1. Attendees: Authorized representatives of the Owner, the Architect and their consultants, the Contractor and its superintendent, and other concerned parties shall attend the conference. All participants at the conference shall be familiar with the Project and authorized to conclude matters relating to the Work.
 2. Agenda: Discuss items of significance that could affect progress, including the following:
 - a. Tentative construction schedule
 - b. Phasing
 - c. Critical work sequencing
 - d. Designation of responsible personnel
 - e. Procedures for processing field decisions and Change Orders
 - f. Procedures for processing Applications for Payment
 - g. Distribution of the Contract Documents
 - h. Submittal procedures
 - i. Preparation of Record Documents
 - j. Use of the premises
 - k. Responsibility for temporary facilities and controls
 - l. Parking availability
 - m. Office, work, and storage areas
 - n. Equipment deliveries and priorities
 - o. First aid
 - p. Security
 - q. Progress cleaning
 - r. Working hours
- C. Progress Meetings: Owner shall schedule the Progress Meetings at bi-weekly intervals.
 1. Agenda:
 - a. Review and correct or approve minutes of previous progress meeting. Review other items of significance that could affect progress. Include topics for discussion as appropriate to status of the Project.
 - b. Contractor's Construction Schedule: Review progress since the last meeting. Determine whether each activity is on time, ahead of schedule, or behind schedule, in relation to the Contractor's Construction Schedule. Determine how construction behind schedule will be expedited; secure commitments from parties involved to do so. Discuss whether schedule revisions are required to ensure that current and subsequent activities will be completed within the Contract Time.

- 1) Contractor shall issue a three-week look ahead schedule in advance of each Progress Meeting.
- 2) Contractor shall revised the Construction Schedule after each progress meeting where revisions to the schedule have been made or recognized. At a minimum, the updated Construction Schedule shall be issued with each Application for Payment.
- c. Review present and future needs of each entity present, including the following:
 - 1) Interface requirements
 - 2) Sequence of operations
 - 3) Status of submittals
 - 4) Deliveries
 - 5) Off-site fabrication
 - 6) Access
 - 7) Site utilization
 - 8) Temporary facilities and controls
 - 9) Work hours
 - 10) Hazards and risks
 - 11) Progress cleaning
 - 12) Quality and work standard
 - 13) Change Orders
 - 14) Documentation of information for payment requests
2. Reporting: Architect shall distribute minutes of the meeting to each party present and to parties who should have been present.

PART 3 - EXECUTION (NOT USED)

END OF SECTION

SECTION 01 32 00
CONSTRUCTION PROGRESS

PART 1 - GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.02 SUMMARY

- A. This Section includes administrative and procedural requirements for documenting the progress of construction during performance of the Work, including the following:
 - 1. Preliminary Construction Schedule.
 - 2. Contractor's Construction Schedule.
 - 3. Submittals Schedule.
 - 4. Daily construction reports.
 - 5. Material location reports.
 - 6. Field condition reports.
 - 7. Preconstruction Photographs
 - 8. Construction photographs.
- B. Related Sections include the following:
 - 1. Division 01 Section "Payment Procedures" for submitting the Schedule of Values.
 - 2. Division 01 Section "Project Management and Coordination" for submitting and distributing meeting and conference minutes.
 - 3. Division 01 Section "Submittal Procedures" for submitting schedules and reports.
 - 4. Division 01 Section "Closeout Procedures" for submitting construction photographs as Project Record Documents at Project closeout.

1.03 DEFINITIONS

- A. Activity: A discrete part of a project that can be identified for planning, scheduling, monitoring, and controlling the construction project. Activities included in a construction schedule consume time and resources.
 - 1. Critical activities are activities on the critical path. They must start and finish on the planned early start and finish times.
 - 2. Predecessor activity is an activity that must be completed before a given activity can be started.
- B. CPM: Critical path method, which is a method of planning and scheduling a construction project where activities are arranged based on activity relationships. Network calculations determine when activities can be performed and the critical path of Project.
- C. Critical Path: The longest continuous chain of activities through the network schedule that establishes the minimum overall Project duration and contains no float.
- D. Event: The starting or ending point of an activity.
- E. Float: The measure of leeway in starting and completing an activity.
 - 1. Float time is not for the exclusive use or benefit of either Owner or Contractor, but is a jointly owned, expiring Project resource available to both parties as needed to meet schedule milestones and Contract completion date.
 - 2. Free float is the amount of time an activity can be delayed without adversely affecting the early start of the following activity.
 - 3. Total float is the measure of leeway in starting or completing an activity without adversely affecting the planned Project completion date.

- F. Major Area: A story of construction, a separate building, or a similar significant construction element.
- G. Milestone: A key or critical point in time for reference or measurement.
- H. Network Diagram: A graphic diagram of a network schedule, showing activities and activity relationships.
- I. Resource Loading: The allocation of manpower and equipment necessary for the completion of an activity as scheduled.

1.04 SUBMITTALS

- A. Qualification Data: For firms and persons specified in "Quality Assurance" Article and in-house scheduling personnel to demonstrate their capabilities and experience. Include lists of completed projects with project names and addresses, names and addresses of architects and owners, and other information specified.
- B. Submittals Schedule: Submit electronic copy of schedule. Arrange the following information in a tubular format:
 - 1. Scheduled date for first submittal.
 - 2. Specification Section number and title.
 - 3. Submittal category (action or informational).
 - 4. Name of subcontractor.
 - 5. Description of the Work covered.
- C. Contractor's Construction Schedule: Submit electronic copy of initial schedule, formatted to show entire schedule for entire construction period on one page. Page size may be up to 30"x42".
- D. CPM Reports: Concurrent with CPM schedule, submit electronic copy of each of the following computer-generated reports. Format for each activity in reports shall contain activity number, activity description, original duration, remaining duration, early start date, early finish date, late start date, late finish date, and total float.
 - 1. Activity Report: List of all activities sorted by activity number and then early start date, or actual start date if known.
 - 2. Logic Report: List of preceding and succeeding activities for all activities, sorted in ascending order by activity number and then early start date, or actual start date if known.
 - 3. Total Float Report: List of all activities sorted in ascending order of total float.
- E. Photographic Documentation:
 - 1. Preconstruction Photographs: Before commencement of demolition, take color, digital photographs of Project site and surrounding properties, including existing items to remain during construction, from different vantage points, as directed by Architect.
 - 2. Periodic Construction Photographs: Take 12, color, digital photographs monthly with timing each month adjust to coincide with the cutoff date associated with each Application for Payment. Select vantage points to show status of construction and progress since last photographs were taken.
 - a. Photographer Qualifications: An individual who has been regularly engaged as a professional photographer of construction projects for not less than three years.
 - b. Format: 4-by-6-inch (101-by-152-mm) smooth-surface matte prints on single weight commercial grade stock.
 - c. Identification: On back of each print, provide an applied label or rubber stamped impression with the following information:
 - 1) Name of project
 - 2) Name and address of photographer
 - 3) Name of Architect
 - 4) Name of Contractor

- 5) Date photograph was taken
- 6) Description of vantage point, indicating location, direction (by compass point) and elevation or story of construction.
- d. Digital Images: Submit a complete set of digital image electronic files with each submittal of prints on CD-ROM. Identify electronic media with date photographs were taken. Submit images that have same aspect ratio as the sensor, uncropped.
- e. Obtain and transfer copyright usage rights from photographer to Owner for unlimited reproduction of photographic documentation.
- f. Daily Construction Reports: Submit two copies at weekly intervals.
- g. Material Location Reports: Submit two copies at weekly intervals.
- h. Field Condition Reports: Submit two copies at weekly intervals.

1.05 QUALITY ASSURANCE

- A. Scheduling Consultant Qualifications: An experienced specialist in CPM scheduling and reporting.

1.06 COORDINATION

- A. Coordinate preparation and processing of schedules and reports with performance of construction activities and with scheduling and reporting of separate contractors.
- B. Coordinate Contractor's Construction Schedule with the Schedule of Values, list of subcontracts, Submittals Schedule, progress reports, payment requests, and other required schedules and reports.
 - 1. Secure time commitments for performing critical elements of the Work from parties involved.
 - 2. Coordinate each construction activity in the network with other activities and schedule them in proper sequence.

PART 2 - PRODUCTS

2.01 SUBMITTALS SCHEDULE

- A. Preparation: Submit a schedule of submittals, arranged in chronological order by dates required by construction schedule. Include time required for review, resubmittal, ordering, manufacturing, fabrication, and delivery when establishing dates.
 - 1. Coordinate Submittals Schedule with list of subcontracts, the Schedule of Values, and Contractor's Construction Schedule.
 - 2. Final Submittal: Submit concurrently with the first complete submittal of Contractor's Construction Schedule.

2.02 CONTRACTOR'S CONSTRUCTION SCHEDULE (CPM SCHEDULE)

- A. CPM Schedule: Prepare Contractor's Construction Schedule using a CPM network analysis diagram.
 - 1. Develop network diagram in sufficient time to submit CPM schedule so it can be accepted for use no later than 15 days after date established for the Notice to Proceed..
 - 2. Establish procedures for monitoring and updating CPM schedule and for reporting progress. Coordinate procedures with progress meeting and payment request dates.
 - 3. Use "one workday" as the unit of time.
- B. CPM Schedule Preparation: Prepare a list of all activities required to complete the Work. Using the preliminary network diagram, prepare a skeleton network to identify probable critical paths. Using the preliminary network diagram, prepare a skeleton network to identify probable critical paths.
 - 1. Activities: Indicate the estimated time duration, sequence requirements, and relationship of each activity in relation to other activities. Include estimated time frames for the following activities:

- a. Preparation and processing of submittals
 - b. Mobilization and demobilization
 - c. Purchase of materials
 - d. Delivery
 - e. Fabrication
 - f. Utility interruptions
 - g. Installation
 - h. Work by Owner that may affect or be affected by Contractor's activities
 - i. Testing
2. Processing: Process data to produce output data or a computer-drawn, time-scaled network. Revise data, reorganize activity sequences, and reproduce as often as necessary to produce the CPM schedule within the limitations of the Contract Time.
3. Format: Mark the critical path. Locate the critical path near center of network; locate paths with most float near the edges.
 - a. Subnetworks on separate sheets are permissible for activities clearly off the critical
 - b. path.
- C. Schedule Updating: At monthly intervals, update schedule to reflect actual construction progress and activities. Issue schedule one week before each regularly scheduled progress meeting. Include the following:
 1. Identification of activities that have changed.
 2. Changes in early and late start dates.
 3. Changes in early and late finish dates.
 4. Changes in activity durations in workdays.
 5. Changes in the critical path.
 6. Changes in total float or slack time.
 7. Changes in the Contract Time
 - a. Revise schedule immediately after each meeting or other activity where revisions have been recognized or made. Issue updated schedule concurrently with the report of each such meeting.

2.03 REPORTS

- A. Daily Construction Reports: Prepare a daily construction report recording the following information concerning events at Project site:
 1. List of subcontractors at Project site.
 2. List of separate contractors at Project site.
 3. Approximate count of personnel at Project site.
 4. High and low temperatures and general weather conditions.
 5. Accidents.
 6. Meetings and significant decisions.
 7. Unusual events (refer to special reports).
 8. Stoppages, delays, shortages, and losses.
 9. Meter readings and similar recordings.
 10. Emergency procedures.
 11. Orders and requests of authorities having jurisdiction.
 12. Change Orders received and implemented.
 13. Construction Change Directives received.
 14. Services connected and disconnected.
 15. Equipment or system tests and startups.
 16. Partial Completions and occupancies.
 17. Substantial Completions authorized.

- B. Material Location Reports: At monthly intervals, prepare a comprehensive list of materials delivered to and stored at Project site. List shall be cumulative, showing materials previously reported plus items recently delivered. Include with list a statement of progress on and delivery dates for materials or items of equipment fabricated or stored away from Project site.
- C. Field Condition Reports: Immediately on discovery of a difference between field conditions and the Contract Documents, prepare a detailed report. Submit with a request for information. Include a detailed description of the differing conditions, together with recommendations for changing the Contract Documents.

PART 3 - EXECUTION (NOT USED)

END OF SECTION

NOT FOR BIDDING

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 01 33 00
SUBMITTAL PROCEDURES

PART 1 - GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.02 SUMMARY

- A. Section includes requirements for the submittal schedule and administrative and procedural requirements for submitting Shop Drawings, Product Data, Samples, and other submittals.
 - 1. Process designated submittals for the Project electronically through designated email system.

1.03 DEFINITIONS

- A. Action Submittals: Written and graphic information and physical samples that require Architect's responsive action. Action submittals are those submittals indicated in individual Specification Sections as "action submittals."
- B. Informational Submittals: Written and graphic information and physical samples that do not require Architect's and responsive action. Submittals may be rejected for not complying with requirements. Informational submittals are those submittals indicated in individual Specification Sections as "informational submittals."
- C. Portable Document Format (PDF): An open standard file format licensed by Adobe Systems used for representing documents in a device-independent and display resolution-independent fixed-layout document format.
- D. Email System: A method to transmit certain electronic submittals between the Contractor, Architect, and Owner, via email.
 - 1. For consistency, the standard file format will be PDF. Convert paper originals and other file formats to PDF prior to submission.
 - 2. In the event of system malfunction, submittals shall be processed in accordance with the Architect's instructions, until the system malfunction has been corrected.
 - 3. For this Project, process the following submittal types through the designated email system:
 - a. Product Data.
 - b. Shop Drawings.
 - c. Product Schedules.
 - d. Qualification Data.
 - e. Certificates (Welding, Installer, Manufacturer, Product, and Material, as applicable).
 - f. Test Reports (Material, Product, Preconstruction, Compatibility, and Field, as applicable).
 - g. Research Reports.
 - h. Warranty (sample).
 - i. Design Data, including calculations.
 - j. Coordination Drawings.
 - k. Delegated-Design Services Certifications.
 - 4. For Samples, provide electronic submittal of Sample cover sheet, identifying location and actual delivery date of Samples. Deliver Samples to location (Architect's office, Project site, etc.) as directed by the Architect.
 - a. Architect will identify delivery location(s) after receipt and review of Contractor's Submittal Schedule.

1.04 SUBMITTAL SCHEDULE

- A. Submittal Schedule: Submit a schedule of submittals indicating scheduled date for each submission. Factor time required for review, ordering, manufacturing, fabrication, and delivery when establishing submission dates. Include additional time required for making corrections or revisions to submittals noted by Architect and additional time for handling and reviewing submittals required by those corrections.
 - 1. Submit concurrently with the first complete submittal of Contractor's construction schedule.
 - 2. Format: Arrange the following information in a tabular format:
 - a. Specification Section number and title.
 - b. A/E Number.
 - 1) Architect will furnish Contractor with unique "A/E Number" designation for each required submittal.
 - c. Submittal category: Action; informal.
 - d. Submittal type: Product Data, Shop Drawings, Samples, etc.
 - e. Description of the Work covered.
 - f. Scheduled date for first submittal.

1.05 COLOR SCHEDULE

- A. Color Schedule: Within 30 days after date of Notice of Award, submit a complete list of proposed manufacturers and complete product designations (i.e. model, grade, series, product line, etc.) for each item requiring color selection by Architect.

1.06 SUBMITTAL ADMINISTRATIVE REQUIREMENTS

- A. Coordination: Coordinate preparation and processing of submittals with performance of construction activities.
 - 1. Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals, and related activities that require sequential activity.
 - 2. Where indicated, submit all submittal items required for each Specification Section concurrently.
 - 3. Coordinate transmittal of different types of submittals for related parts of the Work so processing will not be delayed because of need to review submittals concurrently for coordination.
 - a. Architect reserves the right to withhold action on a submittal requiring coordination with other submittals until related submittals are received.
- B. Processing Time: Allow sufficient time for submittal review, including time for resubmittals. No extension of the Contract Time will be authorized because of failure to transmit submittals enough in advance of the Work to permit processing, including resubmittals.
- C. Electronic Submittals: Identify and incorporate information in each electronic submittal file as follows:
 - 1. Include a cover sheet on each submittal item for identification. Do not combine different submittals under same cover sheet; only one submittal is to be provided per email.
 - a. Cover Sheet: Use PDF version of sample form included in Project Manual. Complete each item on form, sign and date. Architect will furnish PDF version of sample form.
 - 2. Name submittal file as directed by Architect.
 - 3. Transmit each submittal via email using subject line as directed by Architect.
 - 4. Send submittal to designated Project-specific email address:
 - a. Use the following email address: zigmondb@studiojaed.com.
- D. Resubmittals: Make resubmittals in same form and, for non-electronic submittals, in the same number of copies as initial submittal.
 - 1. Note date and content of revision in label or title block and clearly indicate extent of revision.

2. Resubmit submittals until they are marked with approval notation from Architect.
 3. Refer to Supplementary Conditions for provisions allowing Owner to obtain reimbursement from the Contractor for amounts paid to the Architect for evaluation of certain resubmittals.
- E. Distribution: Furnish copies of final submittals to manufacturers, subcontractors, suppliers, fabricators, installers, authorities having jurisdiction, and others as necessary for performance of construction activities.
- F. Use for Construction: Retain complete copies of submittals on Project site. Use only final action submittals that are marked with approval notation from Architect.

PART 2 - PRODUCTS

2.01 SUBMITTAL PROCEDURES, GENERAL

- A. General Submittal Procedure Requirements: Prepare and submit submittals required by individual Specification Sections. Types of submittals are indicated in individual Specification Sections.

2.02 ELECTRONIC SUBMITTAL PROCEDURES

- A. Use the designated email system for submittals in this Article.
1. Submit electronic submittals via email as PDF electronic files.
 - a. Architect will return annotated file. Annotate and retain one copy of file as an electronic Project record document file.
- B. Product Data: Collect information into a single submittal for each element of construction and type of product or equipment.
1. Mark submittal to show which products and options are applicable.
 2. Include the following information, as applicable:
 - a. Manufacturer's catalog cuts.
 - b. Statement of compliance with specified referenced standards.
 - c. Testing by recognized testing agency.
 3. For equipment, include the following in addition to the above, as applicable:
 - a. Printed performance curves.
 - b. Clearances required to other construction, if not indicated on accompanying Shop Drawings.
- C. Shop Drawings: Prepare Project-specific information, drawn accurately to scale. Do not base Shop Drawings on reproductions of the Contract Documents or standard printed data, unless submittal based on Architect's digital data drawing files is otherwise permitted.
1. Preparation: Fully illustrate requirements in the Contract Documents. Include the following information, as applicable:
 - a. Identification of products.
 - b. Schedules.
 - c. Compliance with specified standards.
 - d. Notation of dimensions established by field measurement.
 - e. Relationship and attachment to adjoining construction clearly indicated.
 - f. Seal and signature of professional engineer if specified.
- D. Qualification Data: Prepare written information that demonstrates capabilities and experience of firm or person. Include lists of completed projects with project names and addresses, contact information of architects and owners, and other information specified.
- E. Certificates:
1. Welding Certificates: Prepare written certification that welding procedures and personnel comply with requirements in the Contract Documents. Submit record of Welding Procedure Specification and Procedure Qualification Record on AWS forms. Include names of firms and personnel certified.

2. Installer Certificates: Submit written statements on manufacturer's letterhead certifying that Installer complies with requirements in the Contract Documents and, where required, is authorized by manufacturer for this specific Project.
 3. Manufacturer Certificates: Submit written statements on manufacturer's letterhead certifying that manufacturer complies with requirements in the Contract Documents. Include evidence of manufacturing experience where required.
 4. Product Certificates: Submit written statements on manufacturer's letterhead certifying that product complies with requirements in the Contract Documents.
 5. Material Certificates: Submit written statements on manufacturer's letterhead certifying that material complies with requirements in the Contract Documents.
- F. Test Reports:
1. Material Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting test results of material for compliance with requirements in the Contract Documents.
 2. Product Test Reports: Submit written reports indicating that current product produced by manufacturer complies with requirements in the Contract Documents. Base reports on evaluation of tests performed by manufacturer and witnessed by a qualified testing agency, or on comprehensive tests performed by a qualified testing agency.
 3. Preconstruction Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of tests performed before installation of product, for compliance with performance requirements in the Contract Documents.
 4. Compatibility Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of compatibility tests performed before installation of product. Include written recommendations for primers and substrate preparation needed for adhesion.
 5. Field Test Reports: Submit written reports indicating and interpreting results of field tests performed either during installation of product or after product is installed in its final location, for compliance with requirements in the Contract Documents.
- G. Research Reports: Submit written evidence, from a model code organization acceptable to authorities having jurisdiction, that product complies with building code in effect for Project.
- H. Warranty: Submit sample warranties as required in individual Specification Sections.
- I. Design Data: Prepare and submit written and graphic information, including, but not limited to, performance and design criteria, list of applicable codes and regulations, and calculations. Include list of assumptions and other performance and design criteria and a summary of loads. Include load diagrams if applicable. Provide name and version of software, if any, used for calculations. Include page numbers.
- J. Coordination Drawing Submittals: Comply with requirements specified in Division 01 Section "Project Management and Coordination."
- K. Delegated-Design Services Certification: Submit certificate, signed and sealed by the responsible design professional, for each product and system specifically assigned to Contractor to be designed or certified by a design professional.
1. Indicate that products and systems comply with performance and design criteria in the Contract Documents. Include list of codes, loads, and other factors used in performing these services.
 2. In addition, for a project in New Jersey, provide three paper copies of certificate, signed and sealed (with raised seal) by the responsible design professional.

2.03 NON-ELECTRONIC SUBMITTAL PROCEDURES

- A. Samples: Submit Samples for review of kind, color, pattern, and texture for a check of these characteristics with other elements and for a comparison of these characteristics between submittal and actual component as delivered and installed.
1. Transmit Samples that contain multiple, related components such as accessories together in one submittal package.
 2. Identification: Attach label on unexposed side of Samples that includes the following:
 - a. Generic description of Sample.
 - b. Product name and name of manufacturer.
 - c. Sample source.
 - d. Number and title of applicable Specification Section.
 3. Disposition: Maintain sets of approved Samples at Project site, available for quality-control comparisons throughout the course of construction activity. Sample sets may be used to determine final acceptance of construction associated with each set.
 4. Samples for Initial Selection: Submit manufacturer's color charts consisting of units or sections of units showing the full range of colors, textures, and patterns available. Number of Samples: Submit three full sets of available choices where color, pattern, texture, or similar characteristics are required to be selected from manufacturer's product line. Architect will return one submittal with options selected.
 5. Samples for Verification: Submit full-size units or Samples of size indicated, prepared from same material to be used for the Work, cured and finished in manner specified, and physically identical with material or product proposed for use, and that show full range of color and texture variations expected. Samples include, but are not limited to, the following: partial sections of manufactured or fabricated components; small cuts or containers of materials; complete units of repetitively used materials; swatches showing color, texture, and pattern; color range sets; and components used for independent testing and inspection.
 - a. Number of Samples: Submit three sets of Samples. Architect will return one set.
 - 1) If variation in color, pattern, texture, or other characteristic is inherent in material or product represented by a Sample, submit at least three sets of paired units that show approximate limits of variations.
- B. Subcontract List: Prepare a written summary identifying individuals or firms proposed for each portion of the Work, including those who are to furnish products or equipment fabricated to a special design. Include the following information in tabular form:
1. Name, address, and telephone number of entity performing subcontract or supplying products
 2. Number and title of related Specification Section(s) covered by subcontract.
 3. Submit subcontract list in the following format:
 - a. Number of Copies: Four paper copies of subcontractor list, unless otherwise indicated. Architect will return one copy.
- C. Key Personnel Names: No later than 15 days after date of Notice of Award, submit a list of key personnel assignments, including superintendent and other personnel in attendance at Project site.
1. Identify individuals and their duties and responsibilities; list addresses and telephone numbers, including emergency, office, and cellular telephone numbers and email addresses.
 - a. Number of Copies: Four paper copies of key personnel list, unless otherwise indicated.
- D. Closeout Submittals and Maintenance Material Submittals: Comply with requirements specified in Division 01 Section "Closeout Procedures."

- E. Maintenance Data: Comply with requirements specified in Division 01 Section "Operation and Maintenance Data."

2.04 DELEGATED-DESIGN SERVICES

- A. Performance and Design Criteria: Where professional design services or certifications by a design professional are specifically required of Contractor by the Contract Documents, provide products and systems complying with specific performance and design criteria indicated.
- B. If criteria indicated are not sufficient to perform services or certification required, submit a written request for additional information to Architect.

PART 3 - EXECUTION

3.01 CONTRACTOR'S REVIEW

- A. Action and Informational Submittals: Review each submittal and check for coordination with other Work of the Contract and for compliance with the Contract Documents. Note corrections and field dimensions. Identify any deviations from Contract Document requirements. Mark cover sheet with approval before submitting to Architect.
 - 1. Sign and date statement certifying that submittal has been reviewed, checked, and approved for compliance with the Contract Documents.

3.02 ARCHITECT'S ACTION

- A. General: Architect will not review submittals that do not bear Contractor's approval and will return them without action.
- B. Action Submittals: Architect will review each submittal, make marks to indicate corrections or revisions required, and return it. Architect will mark submittal appropriately to indicate action, as follows:
 - 1. Final Unrestricted Release: Where the submittal is marked "Approved," the Work covered by the submittal may proceed provided it complies with the Contract Documents. Final acceptance will depend on that compliance.
 - 2. Final-but-Restricted Release: Where the submittal is marked "Approved as Noted," the Work covered by the submittal may proceed provided it complies both with Architect's notations and corrections on the submittal and the Contract Documents. Final acceptance will depend on that compliance.
 - 3. Resubmit: Where the submittal is marked "Approved, Revise and Return Corrected Copies," the Work covered by the submittal may proceed provided it complies both with Architect's notations and corrections on the submittal and the Contract Documents. Revise submittal according to Architect's notations and corrections and return corrected copies. Final acceptance will depend on that compliance.
 - 4. Rejected: Where the submittal is marked "Rejected," do not proceed with the Work covered by the submittal. Prepare a new submittal for a product that complies with the Contract Documents.
 - 5. Incomplete - Resubmit: Where the submittal is marked "Incomplete, Submit Additional Information," do not proceed with the Work covered by the submittal. Prepare additional information requested, or required by the Contract Documents, that indicates compliance with requirements, and resubmit.
- C. Informational Submittals: Architect will review each submittal and will not return it, or will return it if it does not comply with requirements.
- D. Incomplete submittals are unacceptable, will be considered nonresponsive, and will be returned for resubmittal without review.
- E. Limit information submitted to specific products indicated. Do not submit extraneous matter. Submittals containing excessive extraneous matter will be returned for resubmittal without review.

- F. Submittals not required by the Contract Documents may be returned by the Architect without action.

END OF SECTION

NOT FOR BIDDING

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 01 40 00
QUALITY REQUIREMENTS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Control of installation.
- B. Tolerances.
- C. Testing and inspection services.
- D. Mock-ups.
- E. Manufacturers' field services.

1.02 TESTING AND INSPECTION AGENCIES AND SERVICES

- A. Owner will employ and pay for services of an independent testing agency to perform specified testing and inspection.
- B. Testing and inspections will generally be performed on subgrade, fill, concrete, rebar, masonry & grout, and structural steel.
- C. Testing and inspection requirements are included in the specific technical divisions of the specifications.
- D. Contractor is responsible to coordinate testing requirements with the Owner's testing agency and provide material samples to them.
- E. Employment of agency in no way relieves Contractor of obligation to perform Work in accordance with requirements of Contract Documents.

PART 3 EXECUTION

2.01 CONTROL OF INSTALLATION

- A. Monitor quality control over suppliers, manufacturers, products, services, site conditions, and workmanship, to produce Work of specified quality.
- B. Comply with manufacturers' instructions, including each step in sequence.
- C. Should manufacturers' instructions conflict with Contract Documents, request clarification from Architect before proceeding.
- D. Comply with specified standards as minimum quality for the Work except where more stringent tolerances, codes, or specified requirements indicate higher standards or more precise workmanship.
- E. Have Work performed by persons qualified to produce required and specified quality.
- F. Verify that field measurements are as indicated on shop drawings or as instructed by the manufacturer.
- G. Secure products in place with positive anchorage devices designed and sized to withstand stresses, vibration, physical distortion, and disfigurement.

2.02 MOCK-UPS

- A. Before installing portions of the Work where mock-ups are required, construct mock-ups in location and size indicated for each form of construction and finish required to comply with the following requirements, using materials indicated for the completed Work. The purpose of mock-up is to demonstrate the proposed range of aesthetic effects and workmanship.
- B. Accepted mock-ups establish the standard of quality the Architect will use to judge the Work.
- C. Integrated Exterior Mock-ups: Construct integrated exterior mock-up as indicated on drawings. Coordinate installation of exterior envelope materials and products as required in individual

Specification Sections. Provide adequate supporting structure for mock-up materials as necessary.

- D. Assemble and erect specified items with specified attachment and anchorage devices, flashings, seals, and finishes.
- E. Obtain Architect's approval of mock-ups before starting work, fabrication, or construction.
 - 1. Architect will issue written comments within seven (7) working days of initial review and each subsequent follow up review of each mock-up.
 - 2. Make corrections as necessary until Architect's approval is issued.
- F. Architect will use accepted mock-ups as a comparison standard for the remaining Work.
- G. Where mock-up has been accepted by Architect and is specified in product specification sections to be removed, protect mock-up throughout construction, remove mock-up and clear area when directed to do so by Architect.
- H. Where possible salvage and recycle the demolished mock-up materials.

2.03 TOLERANCES

- A. Monitor fabrication and installation tolerance control of products to produce acceptable Work. Do not permit tolerances to accumulate.
- B. Comply with manufacturers' tolerances. Should manufacturers' tolerances conflict with Contract Documents, request clarification from Architect before proceeding.
- C. Adjust products to appropriate dimensions; position before securing products in place.

2.04 MANUFACTURERS' FIELD SERVICES

- A. When specified in individual specification sections, require material or product suppliers or manufacturers to provide qualified staff personnel to observe site conditions, conditions of surfaces and installation, quality of workmanship, as applicable, and to initiate instructions when necessary.
- B. Report observations and site decisions or instructions given to applicators or installers that are supplemental or contrary to manufacturers' written instructions.

2.05 DEFECT ASSESSMENT

- A. Replace Work or portions of the Work not conforming to specified requirements.
- B. If, in the opinion of Architect, it is not practical to remove and replace the Work, Architect will direct an appropriate remedy or adjust payment.

END OF SECTION

SECTION 01 42 16
DEFINITIONS

PART 1 GENERAL

1.01 SUMMARY

- A. Other definitions are included in individual specification sections.

1.02 DEFINITIONS

- A. Furnish: To supply, deliver, unload, and inspect for damage.
- B. Install: To unpack, assemble, erect, apply, place, finish, cure, protect, clean, start up, and make ready for use.
- C. Product: Material, machinery, components, equipment, fixtures, and systems forming the work result. Not materials or equipment used for preparation, fabrication, conveying, or erection and not incorporated into the work result. Products may be new, never before used, or re-used materials or equipment.
- D. Project Manual: The book-sized volume that includes the procurement requirements (if any), the contracting requirements, and the specifications.
- E. Provide: To furnish and install.
- F. Supply: Same as Furnish.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 01 50 00
TEMPORARY FACILITIES AND CONTROLS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Dewatering
- B. Temporary utilities.
- C. Temporary sanitary facilities.
- D. Temporary Controls: Barriers, enclosures, and fencing.
- E. Security requirements.
- F. Vehicular access and parking.
- G. Waste removal facilities and services.

1.02 DEWATERING

- A. Provide temporary means and methods for dewatering all temporary facilities and controls.

1.03 TEMPORARY UTILITIES

- A. Owner will provide the following:
 - 1. Electrical power, consisting of connection to existing facilities at adjacent structures or supply line at metered pole.
 - 2. Water supply, consisting of connection to existing facilities at adjacent structures or temporary connection to existing supply line.
 - 3. Contractor shall be responsible to tie to existing utility services and make distribution to the construction site.
 - 4. Contractor shall be responsible for removing temporary connection after completion of the work and restoration service lines.

1.04 TEMPORARY SANITARY FACILITIES

- A. Provide and maintain required portable toilets and enclosures. Provide at time of project mobilization.
- B. Maintain daily in clean and sanitary condition.

1.05 BARRIERS

- A. Provide barriers to prevent unauthorized entry to construction areas, to prevent access to areas that could be hazardous to workers or the public, to allow for owner's use of site and to protect existing facilities and adjacent properties from damage from construction operations and demolition.
- B. Provide barricades and covered walkways required by governing authorities for public rights-of-way and for public access to existing building.
- C. Protect non-owned vehicular traffic, stored materials, site, and structures from damage.
- D. Traffic Controls: Coordinate with the Owner.

1.06 FENCING

- A. Provide 6 foot high fence around on-grade storage areas; equip with vehicular and pedestrian gates with locks.

1.07 SECURITY

- A. Provide security and facilities to protect Work, existing facilities, and Owner's operations from unauthorized entry, vandalism, or theft.
- B. Coordinate with Owner's security program.

- C. Provide background check for any/all employees who enter building.

1.08 VEHICULAR ACCESS AND PARKING

- A. Comply with regulations relating to use of streets and sidewalks, access to emergency facilities, and access for emergency vehicles.
- B. Coordinate access and haul routes with governing authorities and Owner.
- C. Provide and maintain access to fire hydrants, free of obstructions.
- D. Provide means of removing mud from vehicle wheels before entering streets.
- E. Provide temporary parking areas to accommodate construction personnel. When site space is not adequate, provide additional off-site parking.

1.09 WASTE REMOVAL

- A. See Section 01 74 19 - Construction Waste Management and Disposal, for additional requirements.
- B. Provide waste removal facilities and services as required to maintain the site in clean and orderly condition.
- C. Provide containers with lids. Remove trash from site daily.
- D. If materials to be recycled or re-used on the project must be stored on-site, provide suitable non-combustible containers; locate containers holding flammable material outside the structure unless otherwise approved by the authorities having jurisdiction.
- E. Open free-fall chutes are not permitted. Terminate closed chutes into appropriate containers with lids.

1.10 REMOVAL OF UTILITIES, FACILITIES, AND CONTROLS

- A. Remove temporary utilities, equipment, facilities, materials, prior to Substantial Completion inspection.
- B. Clean and repair damage caused by installation or use of temporary work.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

SECTION 01 52 13
FIELD OFFICES AND SHEDS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Temporary field offices for use of Contractor.
- B. Maintenance and removal.

1.02 RELATED REQUIREMENTS

- A. Section 01 10 00 - Summary: use of premises.
- B. Section 01 50 00 - Temporary Facilities and Controls:
 - 1. Temporary sanitary facilities required by law.
- C. Section 01 50 00: Parking and access to field offices.

PART 2 PRODUCTS

2.01 MATERIALS, EQUIPMENT, FURNISHINGS

- A. Materials, Equipment, Furnishings: Serviceable, new or used, adequate for required purpose.

2.02 CONSTRUCTION

- A. Portable or mobile buildings, or buildings constructed with floors raised above ground, securely fixed to foundations, with steps and landings at entrance doors.
- B. Construction: Structurally sound, secure, weather tight enclosures for office. Maintain during progress of Work; remove when no longer needed.
- C. Temperature Transmission Resistance of Floors, Walls, and Ceilings: Compatible with occupancy requirements.
- D. Fire Extinguishers: Appropriate type fire extinguisher at each office.

2.03 ENVIRONMENTAL CONTROL

- A. Heating, Cooling, and Ventilating: Automatic equipment to maintain comfort conditions.

2.04 CONTRACTOR OFFICE AND FACILITIES

- A. Size: For Contractor's needs and to provide space for project meetings.
- B. Furnishings in Meeting Area: Conference table and chairs to seat at least eight persons; racks and files for Contract Documents, submittals, and project record documents.

2.05 OWNER AND ARCHITECT/ENGINEER OFFICE

PART 3 EXECUTION

3.01 PREPARATION

- A. Fill and grade sites for temporary structures to provide drainage away from buildings.

3.02 INSTALLATION

3.03 MAINTENANCE AND CLEANING

- A. Weekly janitorial services for offices; periodic cleaning and maintenance for offices.

3.04 REMOVAL

- A. At completion of Work remove buildings, foundations, utility services, and debris. Restore areas.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 01 60 00
PRODUCT REQUIREMENTS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Transportation, handling, storage and protection.
- B. Product option requirements.
- C. Substitution limitations and procedures.
- D. Maintenance materials, including extra materials, spare parts, tools, and software.

1.02 RELATED REQUIREMENTS

- A. Section 01 25 00 - Substitution Procedures: Substitutions made during procurement and/or construction phases.
- B. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions: Requirements for VOC-restricted product categories.

1.03 SUBMITTALS

- A. Product Data Submittals: Submit manufacturer's standard published data. Mark each copy to identify applicable products, models, options, and other data. Supplement manufacturers' standard data to provide information specific to this Project.
- B. Shop Drawing Submittals: Prepared specifically for this Project; indicate utility and electrical characteristics, utility connection requirements, and location of utility outlets for service for functional equipment and appliances.
- C. Sample Submittals: Illustrate functional and aesthetic characteristics of the product, with integral parts and attachment devices. Coordinate sample submittals for interfacing work.
 - 1. For selection from standard finishes, submit samples of the full range of the manufacturer's standard colors, textures, and patterns.

PART 2 PRODUCTS

2.01 NEW PRODUCTS

- A. Provide new products unless specifically required or permitted by the Contract Documents.
- B. Motors: Refer to Section 22 05 13 - Common Motor Requirements for Plumbing Equipment, NEMA MG 1 Type. Specific motor type is specified in individual specification sections.

2.02 PRODUCT OPTIONS

- A. Products Specified by Reference Standards or by Description Only: Use any product meeting those standards or description.
- B. Products Specified by Naming One or More Manufacturers: Use a product of one of the manufacturers named and meeting specifications, no options or substitutions allowed.
- C. Products Specified by Naming One or More Manufacturers with a Provision for Substitutions: Submit a request for substitution for any manufacturer not named.

2.03 MAINTENANCE MATERIALS

- A. Furnish extra materials, spare parts, tools, and software of types and in quantities specified in individual specification sections.
- B. Deliver to Project site; obtain receipt prior to final payment.

PART 3 EXECUTION

3.01 SUBSTITUTION PROCEDURES

- A. See Section 01 25 00 - Substitution Procedures.

- B. Instructions to Bidders specify time restrictions for submitting requests for substitutions during the bidding period. Comply with requirements specified in this section.
- C. Document each request with complete data substantiating compliance of proposed substitution with Contract Documents.
- D. A request for substitution constitutes a representation that the submitter:
 - 1. Has investigated proposed product and determined that it meets or exceeds the quality level of the specified product.
 - 2. Will provide the same warranty for the substitution as for the specified product.
 - 3. Will coordinate installation and make changes to other Work that may be required for the Work to be complete with no additional cost to Owner.
 - 4. Waives claims for additional costs or time extension that may subsequently become apparent.
- E. Substitution Submittal Procedure:
 - 1. Submit one electronic copy of request for substitution for consideration, including all required supporting materials. Limit each request to one proposed substitution.
 - 2. Submit shop drawings, product data, and certified test results attesting to the proposed product equivalence. Burden of proof is on proposer.
 - 3. Where color selections or physical comparison must be made, submit physical samples.
 - 4. The Architect will notify Contractor in writing of decision to accept or reject request.

3.02 TRANSPORTATION AND HANDLING

- A. Package products for shipment in manner to prevent damage; for equipment, package to avoid loss of factory calibration.
- B. If special precautions are required, attach instructions prominently and legibly on outside of packaging.
- C. Coordinate schedule of product delivery to designated prepared areas in order to minimize site storage time and potential damage to stored materials.
- D. Transport and handle products in accordance with manufacturer's instructions.
- E. Transport materials in covered trucks to prevent contamination of product and littering of surrounding areas.
- F. Promptly inspect shipments to ensure that products comply with requirements, quantities are correct, and products are undamaged.
- G. Provide equipment and personnel to handle products by methods to prevent soiling, disfigurement, or damage.
- H. Arrange for the return of packing materials, such as wood pallets, where economically feasible.

3.03 STORAGE AND PROTECTION

- A. Designate receiving/storage areas for incoming products so that they are delivered according to installation schedule and placed convenient to work area in order to minimize waste due to excessive materials handling and misapplication.
- B. Store and protect products in accordance with manufacturers' instructions.
- C. Store with seals and labels intact and legible.
- D. Store sensitive products in weather tight, climate controlled, enclosures in an environment favorable to product.
- E. For exterior storage of fabricated products, place on sloped supports above ground.
- F. Protect products from damage or deterioration due to construction operations, weather, precipitation, humidity, temperature, sunlight and ultraviolet light, dirt, dust, and other contaminants.

- G. Comply with manufacturer's warranty conditions, if any.
- H. Cover products subject to deterioration with impervious sheet covering. Provide ventilation to prevent condensation and degradation of products.
- I. Prevent contact with material that may cause corrosion, discoloration, or staining.
- J. Provide equipment and personnel to store products by methods to prevent soiling, disfigurement, or damage.
- K. Arrange storage of products to permit access for inspection. Periodically inspect to verify products are undamaged and are maintained in acceptable condition.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 01 61 16

VOLATILE ORGANIC COMPOUND (VOC) CONTENT RESTRICTIONS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Requirements for VOC-Content-Restricted products.

1.02 DEFINITIONS

- A. VOC-Content-Restricted Products: All products in the following product categories, whether specified or not:
 - 1. Interior paints and coatings.
 - 2. Interior adhesives and sealants, including flooring adhesives.
- B. Interior of Building: Anywhere inside the exterior weather barrier.
- C. Adhesives: All gunnable, trowelable, liquid-applied, and aerosol adhesives, whether specified or not; including flooring adhesives, resilient base adhesives, and pipe jointing adhesives.
- D. Sealants: All gunnable, trowelable, and liquid-applied joint sealants and sealant primers, whether specified or not; including firestopping sealants and duct joint sealers.

1.03 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: For each VOC-restricted product used in the project, submit evidence of compliance.

1.04 QUALITY ASSURANCE

- A. VOC Content Test Method: 40 CFR 59, Subpart D (EPA Method 24), or ASTM D3960, unless otherwise indicated.
 - 1. Evidence of Compliance: Acceptable types of evidence are:
 - a. Report of laboratory testing performed in accordance with requirements.
- B. Testing Agency Qualifications: Independent firm specializing in performing testing and inspections of the type specified in this section.

PART 2 PRODUCTS

2.01 MATERIALS

- A. All Products: Comply with the most stringent of federal, State, and local requirements, or these specifications.
- B. VOC-Content-Restricted Products: VOC content not greater than required by the following:
 - 1. Adhesives, Including Flooring Adhesives: SCAQMD 1168 Rule.
 - 2. Joint Sealants: SCAQMD 1168 Rule.
 - 3. Paints and Coatings: Each color; most stringent of the following:
 - a. 40 CFR 59, Subpart D.
 - b. SCAQMD 1113 Rule.
 - c. CARB (SCM).

PART 3 EXECUTION

3.01 FIELD QUALITY CONTROL

- A. Owner reserves the right to reject non-compliant products, whether installed or not, and require their removal and replacement with compliant products at no extra cost to Owner.
- B. Additional costs to restore indoor air quality due to installation of non-compliant products will be borne by Contractor.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 01 70 00
EXECUTION AND CLOSEOUT REQUIREMENTS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Examination, preparation, and general installation procedures.
- B. Requirements for alterations work, including selective demolition, except removal, disposal, and/or remediation of hazardous materials and toxic substances.
- C. Pre-installation meetings.
- D. Cutting and patching.
- E. Surveying for laying out the work.
- F. Cleaning and protection.
- G. Starting of systems and equipment.
- H. Demonstration and instruction of Owner personnel.
- I. Closeout procedures, except payment procedures.
- J. General requirements for maintenance service.

1.02 RELATED REQUIREMENTS

- A. Section 01 10 00 - Summary: Limitations on working in existing building; continued occupancy; work sequence; identification of salvaged and relocated materials.
- B. Section 01 30 00 - Administrative Requirements: Submittals procedures.
- C. Section 01 40 00 - Quality Requirements: Testing and inspection procedures.
- D. Section 01 79 00 - Demonstration and Training: Demonstration of products and systems to be commissioned and where indicated in specific specification sections

1.03 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Cutting and Patching: Submit written request in advance of cutting or alteration that affects:
 - 1. Structural integrity of any element of Project.
 - 2. Integrity of weather exposed or moisture resistant element.
 - 3. Efficiency, maintenance, or safety of any operational element.
 - 4. Visual qualities of sight exposed elements.
 - 5. Work of Owner or separate Contractor.

1.04 QUALIFICATIONS

- A. For demolition work, employ a firm specializing in the type of work required.
 - 1. Minimum of 10 years of documented experience.
- B. For surveying work, employ a land surveyor registered in the State in which the Project is located and acceptable to Architect. Submit evidence of surveyor's Errors and Omissions insurance coverage in the form of an Insurance Certificate. Employ only individual(s) trained and experienced in collecting and recording accurate data relevant to ongoing construction activities,

1.05 PROJECT CONDITIONS

- A. Protect site from puddling or running water. Provide water barriers as required to protect site from soil erosion.
- B. Ventilate enclosed areas to assist cure of materials, to dissipate humidity, and to prevent accumulation of dust, fumes, vapors, or gases.

- C. Dust Control: Execute work by methods to minimize raising dust from construction operations. Provide positive means to prevent air-borne dust from dispersing into atmosphere and over adjacent property.
- D. Erosion and Sediment Control: Plan and execute work by methods to control surface drainage from cuts and fills, from borrow and waste disposal areas. Prevent erosion and sedimentation.
- E. Noise Control: Provide methods, means, and facilities to minimize noise produced by construction operations.
- F. Pest Control: Provide methods, means, and facilities to prevent pests and insects from damaging the work.
- G. Rodent Control: Provide methods, means, and facilities to prevent rodents from accessing or invading premises.

1.06 COORDINATION

- A. See Section 01 10 00 for occupancy-related requirements.
- B. Coordinate scheduling, submittals, and work of the various sections of the Project Manual to ensure efficient and orderly sequence of installation of interdependent construction elements, with provisions for accommodating items installed later.
- C. Notify affected utility companies and comply with their requirements.
- D. Verify that utility requirements and characteristics of new operating equipment are compatible with building utilities. Coordinate work of various sections having interdependent responsibilities for installing, connecting to, and placing in service, such equipment.
- E. Coordinate space requirements, supports, and installation of mechanical and electrical work that are indicated diagrammatically on drawings. Follow routing indicated for pipes, ducts, and conduit, as closely as practicable; place runs parallel with lines of building. Utilize spaces efficiently to maximize accessibility for other installations, for maintenance, and for repairs.
- F. In finished areas except as otherwise indicated, conceal pipes, ducts, and wiring within the construction. Coordinate locations of fixtures and outlets with finish elements.
- G. Coordinate completion and clean-up of work of separate sections.
- H. After Owner occupancy of premises, coordinate access to site for correction of defective work and work not in accordance with Contract Documents, to minimize disruption of Owner's activities.

PART 2 PRODUCTS

2.01 PATCHING MATERIALS

- A. New Materials: As specified in product sections; match existing products and work for patching and extending work.
- B. Type and Quality of Existing Products: Determine by inspecting and testing products where necessary, referring to existing work as a standard.
- C. Product Substitution: For any proposed change in materials, submit request for substitution described in Section 01 60 00.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that existing site conditions and substrate surfaces are acceptable for subsequent work. Start of work means acceptance of existing conditions.
- B. Verify that existing substrate is capable of structural support or attachment of new work being applied or attached.
- C. Examine and verify specific conditions described in individual specification sections.

- D. Take field measurements before confirming product orders or beginning fabrication, to minimize waste due to over-ordering or misfabrication.
- E. Verify that utility services are available, of the correct characteristics, and in the correct locations.
- F. Prior to Cutting: Examine existing conditions prior to commencing work, including elements subject to damage or movement during cutting and patching. After uncovering existing work, assess conditions affecting performance of work. Beginning of cutting or patching means acceptance of existing conditions.

3.02 PREPARATION

- A. Clean substrate surfaces prior to applying next material or substance.
- B. Seal cracks or openings of substrate prior to applying next material or substance.
- C. Apply manufacturer required or recommended substrate primer, sealer, or conditioner prior to applying any new material or substance in contact or bond.

3.03 PREINSTALLATION MEETINGS

- A. When required in individual specification sections, convene a preinstallation meeting at the site prior to commencing work of the section.
- B. Require attendance of parties directly affecting, or affected by, work of the specific section.
- C. Notify Architect 14 days in advance of meeting date.
- D. Prepare agenda and preside at meeting:
 - 1. Review conditions of examination, preparation and installation procedures.
 - 2. Review coordination with related work.
- E. Record minutes and distribute copies within two days after meeting to participants, with two copies to Architect, Owner, participants, and those affected by decisions made.

3.04 LAYING OUT THE WORK

- A. Verify locations of survey control points prior to starting work.
- B. Promptly notify Architect of any discrepancies discovered.
- C. Protect survey control points prior to starting site work; preserve permanent reference points during construction.
- D. Promptly report to Architect the loss or destruction of any reference point or relocation required because of changes in grades or other reasons.
- E. Replace dislocated survey control points based on original survey control. Make no changes without prior written notice to Architect.
- F. Utilize recognized engineering survey practices.
- G. Establish elevations, lines and levels. Locate and lay out by instrumentation and similar appropriate means:
 - 1. Site improvements including pavements; stakes for grading, fill and topsoil placement; utility locations, slopes, and invert elevations.
 - 2. Grid or axis for structures.
 - 3. Building foundation, column locations, ground floor elevations.
- H. Periodically verify layouts by same means.
- I. Maintain a complete and accurate log of control and survey work as it progresses.
- J. On completion of foundation walls and major site improvements, prepare a certified survey illustrating dimensions, locations, angles, and elevations of construction and site work.

3.05 GENERAL INSTALLATION REQUIREMENTS

- A. Install products as specified in individual sections, in accordance with manufacturer's instructions and recommendations, and so as to avoid waste due to necessity for replacement.
- B. Make vertical elements plumb and horizontal elements level, unless otherwise indicated.
- C. Install equipment and fittings plumb and level, neatly aligned with adjacent vertical and horizontal lines, unless otherwise indicated.
- D. Make consistent texture on surfaces, with seamless transitions, unless otherwise indicated.
- E. Make neat transitions between different surfaces, maintaining texture and appearance.

3.06 ALTERATIONS

- A. Drawings showing existing construction and utilities are based on casual field observation and existing record documents only.
 - 1. Verify that construction and utility arrangements are as shown.
 - 2. Report discrepancies to Architect before disturbing existing installation.
 - 3. Beginning of alterations work constitutes acceptance of existing conditions.
- B. Remove existing work as indicated and as required to accomplish new work.
 - 1. Remove items indicated on drawings.
 - 2. Relocate items indicated on drawings.
 - 3. Where new surface finishes are to be applied to existing work, perform removals, patch, and prepare existing surfaces as required to receive new finish; remove existing finish if necessary for successful application of new finish.
 - 4. Where new surface finishes are not specified or indicated, patch holes and damaged surfaces to match adjacent finished surfaces as closely as possible.
- C. Protect existing work to remain.
 - 1. Prevent movement of structure; provide shoring and bracing if necessary.
 - 2. Perform cutting to accomplish removals neatly and as specified for cutting new work.
 - 3. Repair adjacent construction and finishes damaged during removal work.
- D. Patching: Where the existing surface is not indicated to be refinished, patch to match the surface finish that existed prior to cutting. Where the surface is indicated to be refinished, patch so that the substrate is ready for the new finish.
- E. Remove demolition debris and abandoned items from alterations areas and dispose of off-site; do not burn or bury.
- F. Comply with all other applicable requirements of this section.

3.07 CUTTING AND PATCHING

- A. Whenever possible, execute the work by methods that avoid cutting or patching.
- B. See Alterations article above for additional requirements.
- C. Perform whatever cutting and patching is necessary to:
 - 1. Complete the work.
 - 2. Fit products together to integrate with other work.
 - 3. Provide openings for penetration of mechanical, electrical, and other services.
 - 4. Match work that has been cut to adjacent work.
 - 5. Repair areas adjacent to cuts to required condition.
 - 6. Repair new work damaged by subsequent work.
 - 7. Remove samples of installed work for testing when requested.
 - 8. Remove and replace defective and non-conforming work.

- D. Execute work by methods that avoid damage to other work and that will provide appropriate surfaces to receive patching and finishing. In existing work, minimize damage and restore to original condition.
- E. Cut rigid materials using masonry saw or core drill. Pneumatic tools not allowed without prior approval.
- F. Restore work with new products in accordance with requirements of Contract Documents.
- G. Fit work air tight to pipes, sleeves, ducts, conduit, and other penetrations through surfaces.
- H. Patching:
 - 1. Finish patched surfaces to match finish that existed prior to patching. On continuous surfaces, refinish to nearest intersection or natural break. For an assembly, refinish entire unit.
 - 2. Match color, texture, and appearance.
 - 3. Repair patched surfaces that are damaged, lifted, discolored, or showing other imperfections due to patching work. If defects are due to condition of substrate, repair substrate prior to repairing finish.

3.08 PROGRESS CLEANING

- A. Maintain areas free of waste materials, debris, and rubbish. Maintain site in a clean and orderly condition.
- B. Remove debris and rubbish from pipe chases, plenums, attics, crawl spaces, and other closed or remote spaces, prior to enclosing the space.
- C. Collect and remove waste materials, debris, and trash/rubbish from site periodically and dispose off-site; do not burn or bury.

3.09 PROTECTION OF INSTALLED WORK

- A. Protect installed work from damage by construction operations.
- B. Provide special protection where specified in individual specification sections.
- C. Remove protective coverings when no longer needed; reuse or recycle plastic coverings if possible.

3.10 SYSTEM STARTUP

- A. Coordinate schedule for start-up of various equipment and systems.
- B. Notify Architect and Owner seven days prior to start-up of each item.
- C. Verify that each piece of equipment or system has been checked for proper lubrication, drive rotation, belt tension, control sequence, and for conditions that may cause damage.
- D. Verify tests, meter readings, and specified electrical characteristics agree with those required by the equipment or system manufacturer.
- E. Verify that wiring and support components for equipment are complete and tested.
- F. Execute start-up under supervision of applicable Contractor personnel and manufacturer's representative in accordance with manufacturers' instructions.
- G. When specified in individual specification Sections, require manufacturer to provide authorized representative to be present at site to inspect, check, and approve equipment or system installation prior to start-up, and to supervise placing equipment or system in operation.
- H. Submit a written report that equipment or system has been properly installed and is functioning correctly.

3.11 DEMONSTRATION AND INSTRUCTION

- A. See Section 01 79 00 - Demonstration and Training.

- B. Utilize operation and maintenance manuals as basis for instruction. Review contents of manual with Owner personnel in detail to explain all aspects of operation and maintenance.
- C. Prepare and insert additional data in operations and maintenance manuals when need for additional data becomes apparent during instruction.

3.12 ADJUSTING

- A. Adjust operating products and equipment to ensure smooth and unhindered operation.
- B. Testing, adjusting, and balancing HVAC systems: See Section 23 05 93.

3.13 FINAL CLEANING

- A. Use cleaning materials that are nonhazardous.
- B. Clean interior and exterior glass, surfaces exposed to view; remove temporary labels, stains and foreign substances, polish transparent and glossy surfaces, vacuum carpeted and soft surfaces.
- C. Remove all labels that are not permanent. Do not paint or otherwise cover fire test labels or nameplates on mechanical and electrical equipment.
- D. Clean equipment and fixtures to a sanitary condition with cleaning materials appropriate to the surface and material being cleaned.
- E. Replace filters of operating equipment.
- F. Clean debris from roofs, gutters, downspouts, and drainage systems.
- G. Clean site; sweep paved areas, rake clean landscaped surfaces.
- H. Remove waste, surplus materials, trash/rubbish, and construction facilities from the site; dispose of in legal manner; do not burn or bury.

3.14 CLOSEOUT PROCEDURES

- A. Make submittals that are required by governing or other authorities.
- B. Notify Architect when work is considered ready for Substantial Completion.
- C. Submit written certification that Contract Documents have been reviewed, work has been inspected, and that work is complete in accordance with Contract Documents and ready for Architect's review.
- D. Prepare Punch List containing a comprehensive list of items to be completed or corrected and submit to Architect. Architect will review Punch List at Substantial Completion inspection and annotate and/or expand Punch List as appropriate.
- E. Correct items of work listed in executed Punch List and Certificates of Substantial Completion and comply with requirements for access to Owner-occupied areas.
- F. Notify Architect when work is considered finally complete.
- G. Complete items of work determined by Architect's final inspection.
- H. Provide completed documentation as follows:
 - 1. Consent to Surety of Final Payment
 - 2. Certificate of Substantial Completion
 - 3. Contractor Satisfaction of Debt and Claims
 - 4. Release of Liens for the Contractor, his Subcontractors, and his Suppliers

3.15 MAINTENANCE

- A. Provide service and maintenance of components indicated in specification sections.
- B. Maintenance Period: As indicated in specification sections or, if not indicated, not less than one year from the Date of Substantial Completion or the length of the specified warranty, whichever is longer.

- C. Maintenance service shall not be assigned or transferred to any agent or subcontractor without prior written consent of the Owner.

END OF SECTION

NOT FOR BIDDING

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

CONSTRUCTION WASTE MANAGEMENT

PART 1 – GENERAL

1.1 SUMMARY

- A. Section includes: Administrative and procedural requirements for construction waste management activities.

1.2 DEFINITIONS

- A. Construction, Demolition, and Land clearing (CDL) Waste: Includes all non-hazardous solid wastes resulting from construction, remodeling, alterations, repair, demolition and land clearing. Includes material that is recycled, reused, salvaged or disposed as garbage.
- B. Salvage: Recovery of materials for on-site reuse, sale or donation to a third party.
- C. Reuse: Making use of a material without altering its form. Materials can be reused on-site or reused on other projects off-site. Examples include, but are not limited to the following: Crushing or grinding of concrete for use as sub-base material. Chipping of land clearing debris for use as mulch.
- D. Recycling: The process of sorting, cleaning, treating, and reconstituting materials for the purpose of using the material in the manufacture of a new product.
- E. Source-Separated CDL Recycling: The process of separating recyclable materials in separate containers as they are generated on the job-site. The separated materials are hauled directly to a recycling facility or transfer station.
- F. Co-mingled CDL Recycling: The process of collecting mixed recyclable materials in one container on-site. The container is taken to a material recovery facility where materials are separated for recycling.
- G. Approved Recycling Facility: Any of the following:
 - 1. A facility that can legally accept CDL waste materials for the purpose of processing the materials into an altered form for the manufacture of a new product.
 - 2. Material Recovery Facility: A general term used to describe a waste-sorting facility. Mechanical, hand-separation, or a combination of both procedures, are used to recover recyclable materials.

1.3 SUBMITTALS

- A. Contractor shall develop a Waste Management Plan: Submit 3 copies of plan within 14 days of date established for the **Notice to Proceed**.
- B. Contractor shall provide Waste Management Report: Concurrent with each Application for Payment, submit **3** copies of report.

1.4 PERFORMANCE REQUIREMENTS

- A. General: Divert a minimum of **75%** CDL waste, by weight, from the landfill by one, or a combination of the following activities:
1. Salvage
 2. Reuse
 3. Source-Separated CDL Recycling
 4. Co-mingled CDL Recycling
- B. CDL waste materials that can be salvaged, reused or recycled include, but are not limited to, the following:
1. Acoustical ceiling tiles
 2. Asphalt
 3. Asphalt shingles
 4. Cardboard packaging
 5. Carpet and carpet pad
 6. Concrete
 7. Drywall
 8. Fluorescent lights and ballasts
 9. Land clearing debris (vegetation, stumpage, dirt)
 10. Metals
 11. Paint (through hazardous waste outlets)
 12. Wood
 13. Plastic film (sheeting, shrink wrap, packaging)
 14. Window glass
 15. Wood
 16. Field office waste, including office paper, aluminum cans, glass, plastic, and office cardboard.

1.4 QUALITY ASSURANCE

- A. Waste Management Coordinator Qualifications: Experienced firm, with a record of successful waste management coordination of projects with similar requirements, that employs a LEED Accredited Professional, certified by the USGBC as waste management coordinator.
- B. Refrigerant Recovery Technician Qualifications: Certified by EPA-approved certification program.
- C. Regulatory Requirements: Conduct construction waste management activities in accordance with hauling and disposal regulations of all authorities having jurisdiction and all other applicable laws and ordinances.
- D. Preconstruction Conference: Schedule and conduct meeting at Project site prior to construction activities.
1. Attendees: Inform the following individuals, whose presence is required, of date and time of meeting.
 - a. Owner
 - b. Architect
 - c. Contractor's superintendent
 - d. Major subcontractors
 - e. Waste Management Coordinator
 - f. Other concerned parties
 2. Agenda Items: Review methods and procedures related to waste management including, but not

limited to, the following:

- a. Review and discuss waste management plan including responsibilities of Waste Management Coordinator.
- b. Review requirements for documenting quantities of each type of waste and its disposition.
- c. Review and finalize procedures for materials separation and verify availability of containers and bins needed to avoid delays.
- d. Review procedures for periodic waste collection and transportation to recycling and disposal facilities.
- e. Review waste management requirements for each trade.

3. Minutes: Record discussion. Distribute meeting minutes to all participants.

Note: If there is a Project Architect, they will perform this role.

1.5 WASTE MANAGEMENT PLAN – Contractor shall develop and document the following:

- A. Develop a plan to meet the requirements listed in this section at a minimum. Plan shall consist of waste identification, waste reduction plan and cost/revenue analysis. Distinguish between demolition and construction waste. Indicate quantities by weight throughout the plan.
- B. Indicate anticipated types and quantities of demolition, site-cleaning and construction waste generated by the project. List all assumptions made for the quantities estimates.
- C. List each type of waste and whether it will be salvaged, recycled, or disposed of in a landfill. The plan should include the following information:
 1. Types and estimated quantities, by weight, of CDL waste expected to be generated during demolition and construction.
 2. Proposed methods for CDL waste salvage, reuse, recycling and disposal during demolition including, but not limited to, one or more of the following:
 - a. Contracting with a deconstruction specialist to salvage materials generated,
 - b. Selective salvage as part of demolition contractor's work,
 - c. Reuse of materials on-site or sale or donation to a third party.
 3. Proposed methods for salvage, reuse, recycling and disposal during construction including, but not limited to, one or more of the following:
 - a. Requiring subcontractors to take their CDL waste to a recycling facility;
 - b. Contracting with a recycling hauler to haul recyclable CDL waste to an approved recycling or material recovery facility;
 - c. Processing and reusing materials on-site;
 - d. Self-hauling to a recycling or material recovery facility.
 4. Name of recycling or material recovery facility receiving the CDL wastes.
 5. Handling and Transportation Procedures: Include method that will be used for separating recyclable waste including sizes of containers, container labeling, and designated location on project site where materials separation will be located.

- D. Cost/Revenue Analysis: Indicate total cost of waste disposal as if there was no waste management plan and net additional cost or net savings resulting from implementing waste management plan. Include the following:
1. Total quantity of waste.
 2. Estimated cost of disposal (cost per unit). Include hauling and tipping fees and cost of collection containers for each type of waste.
 3. Total cost of disposal (with no waste management).
 4. Revenue from salvaged materials.
 5. Revenue from recycled materials.
 6. Savings in hauling and tipping fees by donating materials.
 7. Savings in hauling and tipping fees that are avoided.
 8. Handling and transportation costs. Including cost of collection containers for each type of waste.
 9. Net additional cost or net savings from waste management plan.

PART 2 - PRODUCTS (Not Used)

PART 3 – EXECUTION

3.1 CONSTRUCTION WASTE MANAGEMENT, GENERAL

- A. Provide containers for CDL waste that is to be recycled clearly labeled as such with a list of acceptable and unacceptable materials. The list of acceptable materials must be the same as the materials recycled at the receiving material recovery facility or recycling processor.
- B. The collection containers for recyclable CDL waste must contain no more than 10% non-recyclable material, by volume.
- C. Provide containers for CDL waste that is disposed in a landfill clearly labeled as such.
- D. Use detailed material estimates to reduce risk of unplanned and potentially wasteful cuts.
- E. To the greatest extent possible, include in material purchasing agreements a waste reduction provision requesting that materials and equipment be delivered in packaging made of recyclable material, that they reduce the amount of packaging, that packaging be taken back for reuse or recycling, and to take back all unused product. Insure that subcontractors require the same provisions in their purchase agreements.
- F. Conduct regular visual inspections of dumpsters and recycling bins to remove contaminants.

3.2 SOURCE SEPARATION

- A. General: Contractor shall separate recyclable materials from CDL waste to the maximum extent possible.

Separate recyclable materials by type.

1. Provide containers, clearly labeled, by type of separated materials or provide other storage method for managing recyclable materials until they are removed from Project site.
2. Stockpile processed materials on-site without intermixing with other materials. Place, grade, and shape stockpiles to drain surface water and to minimize pest attraction. Cover to prevent windblown dust.
3. Stockpile materials away from demolition area. Do not store within drip line of remaining trees.
4. Store components off the ground and protect from weather.

3.3 CO-MINGLED RECYCLING

- A. General: Do not put CDL waste that will be disposed in a landfill into a co-mingled CDL waste recycling container.

REMOVAL OF CONSTRUCTION WASTE MATERIALS

- A. Remove CDL waste materials from project site on a regular basis. Do not allow CDL waste to accumulate on-site.
- B. Transport CDL waste materials off Owner's property and legally dispose of them.
- C. Burning of CDL waste is not permitted.

END OF SECTION

WASTE MANAGEMENT PROGRESS REPORT				
MATERIAL CATEGORY	DISPOSED IN MUNICIPAL SOLID WASTE LANDFILL	DIVERTED FROM LANDFILL BY RECYCLING, SALVAGE OR REUSE		
		Recycled	Salvaged	Reused
1. Acoustical Ceiling Tiles				
2. Asphalt				
3. Asphalt Shingles				
4. Cardboard Packaging				
5. Carpet and Carpet Pad				
6. Concrete				
7. Drywall				
8. Fluorescent Lights and Ballasts				
9. Land Clearing Debris				
10. Metals				
11. Paint (through hazardous waste outlets)				
12. Wood				
13. Plastic Film (sheeting, shrink wrap, packaging)				
14. Window Glass				
15. Field Office Waste (office paper, aluminum cans, glass, plastic, and coffee cardboard)				
16. Other (insert description)				
17. Other (insert description)				
Total (In Weight)		(TOTAL OF ALL ABOVE VALUES – IN WEIGHT)		
		Percentage of Waste Diverted	(TOTAL WASTE DIVIDED BY TOTAL DIVERTED)	

SECTION 01 78 00
CLOSEOUT SUBMITTALS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Project Record Documents.
- B. Operation and Maintenance Data.
- C. Warranties and bonds.

1.02 RELATED REQUIREMENTS

- A. Section 00 65 01 - Closeout Document Checklist: List of required submittals for closeout.
- B. Section 00 72 13 - General Conditions: Performance bond and labor and material payment bonds, warranty, and correction of work.
- C. Section 01 30 00 - Administrative Requirements: Submittals procedures, shop drawings, product data, and samples.
- D. Section 01 70 00 - Execution and Closeout Requirements: Contract closeout procedures.
- E. Individual Product Sections: Specific requirements for operation and maintenance data.
- F. Individual Product Sections: Warranties required for specific products or Work.

1.03 SUBMITTALS

- A. Project Record Documents: Submit documents to Architect with claim for final Application for Payment.
- B. Operation and Maintenance Data:
 - 1. Submit two copies of preliminary draft or proposed formats and outlines of contents before start of Work. Architect will review draft and return one copy with comments.
 - 2. For equipment, or component parts of equipment put into service during construction and operated by Owner, submit completed documents within ten days after acceptance.
 - 3. Submit one copy of completed documents 15 days prior to final inspection. This copy will be reviewed and returned after final inspection, with Architect comments. Revise content of all document sets as required prior to final submission.
 - 4. Submit two sets of revised final documents in final form within 10 days after final inspection.
- C. Warranties and Bonds:
 - 1. For equipment or component parts of equipment put into service during construction with Owner's permission, submit documents within 10 days after acceptance.
 - 2. Make other submittals within 10 days after Date of Substantial Completion, prior to final Application for Payment.
 - 3. For items of Work for which acceptance is delayed beyond Date of Substantial Completion, submit within 10 days after acceptance, listing the date of acceptance as the beginning of the warranty period.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION

3.01 PROJECT RECORD DOCUMENTS

- A. Maintain on site one set of the following record documents; record actual revisions to the Work:
 - 1. Drawings.
 - 2. Specifications.
 - 3. Addenda.
 - 4. Change Orders and other modifications to the Contract.

- B. Ensure entries are complete and accurate, enabling future reference by Owner.
- C. Store record documents separate from documents used for construction.
- D. Record information concurrent with construction progress.
- E. Specifications: Legibly mark and record at each product section description of actual products installed, including the following:
 - 1. Changes made by Addenda and modifications.
- F. Record Drawings : Legibly mark each item to record actual construction including:
 - 1. Measured depths of foundations in relation to finish first floor datum.
 - 2. Measured horizontal and vertical locations of underground utilities and appurtenances, referenced to permanent surface improvements.
 - 3. Measured locations of internal utilities and appurtenances concealed in construction, referenced to visible and accessible features of the Work.
 - 4. Field changes of dimension and detail.
 - 5. Details not on original Contract drawings.

3.02 OPERATION AND MAINTENANCE DATA

- A. Source Data: For each product or system, list names, addresses and telephone numbers of Subcontractors and suppliers, including local source of supplies and replacement parts.
- B. Product Data: Mark each sheet to clearly identify specific products and component parts, and data applicable to installation. Delete inapplicable information.
- C. Drawings: Supplement product data to illustrate relations of component parts of equipment and systems, to show control and flow diagrams. Do not use Project Record Documents as maintenance drawings.
- D. Typed Text: As required to supplement product data. Provide logical sequence of instructions for each procedure, incorporating manufacturer's instructions.

3.03 OPERATION AND MAINTENANCE DATA FOR MATERIALS AND FINISHES

- A. For Each Product, Applied Material, and Finish:
 - 1. Product data, with catalog number, size, composition, and color and texture designations.
 - 2. Information for re-ordering custom manufactured products.
- B. Instructions for Care and Maintenance: Manufacturer's recommendations for cleaning agents and methods, precautions against detrimental cleaning agents and methods, and recommended schedule for cleaning and maintenance.
- C. Additional information as specified in individual product specification sections.
- D. Where additional instructions are required, beyond the manufacturer's standard printed instructions, have instructions prepared by personnel experienced in the operation and maintenance of the specific products.

3.04 OPERATION AND MAINTENANCE DATA FOR EQUIPMENT AND SYSTEMS

- A. For Each Item of Equipment and Each System:
 - 1. Description of unit or system, and component parts.
 - 2. Identify function, normal operating characteristics, and limiting conditions.
 - 3. Include performance curves, with engineering data and tests.
 - 4. Complete nomenclature and model number of replaceable parts.
- B. Where additional instructions are required, beyond the manufacturer's standard printed instructions, have instructions prepared by personnel experienced in the operation and maintenance of the specific products.
- C. Panelboard Circuit Directories: Provide electrical service characteristics, controls, and communications; typed.

- D. Operating Procedures: Include start-up, break-in, and routine normal operating instructions and sequences. Include regulation, control, stopping, shut-down, and emergency instructions. Include summer, winter, and any special operating instructions.
- E. Maintenance Requirements: Include routine procedures and guide for preventative maintenance.
- F. Maintenance Requirements: Include routine procedures and guide for preventative maintenance and trouble shooting; disassembly, repair, and reassembly instructions; and alignment, adjusting, balancing, and checking instructions.
- G. Provide servicing and lubrication schedule, and list of lubricants required.
- H. Include manufacturer's printed operation and maintenance instructions.
- I. Include sequence of operation by controls manufacturer.
- J. Provide original manufacturer's parts list, illustrations, assembly drawings, and diagrams required for maintenance.
- K. Additional Requirements: As specified in individual product specification sections.

3.05 ASSEMBLY OF OPERATION AND MAINTENANCE MANUALS

- A. Assemble operation and maintenance data into durable manuals for Owner's personnel use, with data arranged in the same sequence as, and identified by, the specification sections.
- B. Where systems involve more than one specification section, provide separate tabbed divider for each system.
- C. Binders: Commercial quality, 8-1/2 by 11 inch three D side ring binders with durable plastic covers; 2 inch maximum ring size. When multiple binders are used, correlate data into related consistent groupings.
- D. Cover: Identify each binder with typed or printed title OPERATION AND MAINTENANCE INSTRUCTIONS; identify title of Project; identify subject matter of contents.
- E. Project Directory: Title and address of Project; names, addresses, and telephone numbers of Architect, Consultants, Contractor and subcontractors, with names of responsible parties.
- F. Tables of Contents: List every item separated by a divider, using the same identification as on the divider tab; where multiple volumes are required, include all volumes Tables of Contents in each volume, with the current volume clearly identified.
- G. Dividers: Provide tabbed dividers for each separate product and system; identify the contents on the divider tab; immediately following the divider tab include a description of product and major component parts of equipment.
- H. Text: Manufacturer's printed data, or typewritten data on 20 pound paper.
- I. Drawings: Provide with reinforced punched binder tab. Bind in with text; fold larger drawings to size of text pages.
- J. Arrangement of Contents: Organize each volume in parts as follows:
 - 1. Project Directory.
 - 2. Table of Contents, of all volumes, and of this volume.
 - 3. Operation and Maintenance Data: Arranged by system, then by product category.
 - a. Source data.
 - b. Product data, shop drawings, and other submittals.
 - c. Operation and maintenance data.
 - d. Field quality control data.
 - e. Photocopies of warranties and bonds.

3.06 WARRANTIES AND BONDS

- A. Obtain warranties and bonds, executed in duplicate by responsible Subcontractors, suppliers, and manufacturers, within 10 days after completion of the applicable item of work. Except for items put into use with Owner's permission, leave date of beginning of time of warranty until the Date of Substantial completion is determined.
- B. Verify that documents are in proper form, contain full information, and are notarized.
- C. Co-execute submittals when required.
- D. Retain warranties and bonds until time specified for submittal.
- E. Manual: Bind in commercial quality 8-1/2 by 11 inch three D side ring binders with durable plastic covers.
- F. Cover: Identify each binder with typed or printed title WARRANTIES AND BONDS, with title of Project; name, address and telephone number of Contractor and equipment supplier; and name of responsible company principal.
- G. Table of Contents: Neatly typed, in the sequence of the Table of Contents of the Project Manual, with each item identified with the number and title of the specification section in which specified, and the name of product or work item.
- H. Separate each warranty or bond with index tab sheets keyed to the Table of Contents listing. Provide full information, using separate typed sheets as necessary. List Subcontractor, supplier, and manufacturer, with name, address, and telephone number of responsible principal.

END OF SECTION

SECTION 01 79 00
DEMONSTRATION AND TRAINING

PART 1 GENERAL

1.01 SUMMARY

- A. Demonstration of products and systems to be commissioned and where indicated in specific specification sections.
- B. Training of Owner personnel in operation and maintenance is required for:
 - 1. All software-operated systems.
 - 2. HVAC systems and equipment.
 - 3. Electrical systems and equipment.

1.02 RELATED REQUIREMENTS

- A. Section 01 78 00 - Closeout Submittals: Operation and maintenance manuals.
- B. Section 01 91 13 - General Commissioning Requirements: Additional requirements applicable to demonstration and training.
- C. Other Specification Sections: Additional requirements for demonstration and training.

1.03 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures; except:
 - 1. Make all submittals specified in this section, and elsewhere where indicated for commissioning purposes, directly to the Commissioning Authority.
 - 2. Submit one copy to the Commissioning Authority, not to be returned.
 - 3. Make commissioning submittals on time schedule specified by Commissioning Authority.
 - 4. Submittals indicated as "Draft" are intended for the use of the Commissioning Authority in preparation of overall Training Plan; submit in editable electronic format, Microsoft Word 2003 preferred.
- B. Draft Training Plans: Owner will designate personnel to be trained; tailor training to needs and skill-level of attendees.
 - 1. Submit to Commissioning Authority for review and inclusion in overall training plan.
 - 2. Submit not less than four weeks prior to start of training.
 - 3. Revise and resubmit until acceptable.
 - 4. Provide an overall schedule showing all training sessions.
 - 5. Include at least the following for each training session:
 - a. Identification, date, time, and duration.
 - b. Description of products and/or systems to be covered.
 - c. Name of firm and person conducting training; include qualifications.
 - d. Intended audience, such as job description.
 - e. Objectives of training and suggested methods of ensuring adequate training.
 - f. Methods to be used, such as classroom lecture, live demonstrations, hands-on, etc.
 - g. Media to be used, such as slides, hand-outs, etc.
 - h. Training equipment required, such as projector, projection screen, etc., to be provided by Contractor.
- C. Training Manuals: Provide training manual for each attendee; allow for minimum of two attendees per training session.
 - 1. Include applicable portion of O&M manuals.
 - 2. Include copies of all hand-outs, slides, overheads, video presentations, etc., that are not included in O&M manuals.
 - 3. Provide one extra copy of each training manual to be included with operation and maintenance data.

- D. Training Reports:
 - 1. Identification of each training session, date, time, and duration.
 - 2. Sign-in sheet showing names and job titles of attendees.
 - 3. List of attendee questions and written answers given, including copies of and references to supporting documentation required for clarification; include answers to questions that could not be answered in original training session.
 - 4. Include Commissioning Authority's formal acceptance of training session.
- E. Video Recordings: Submit digital video recording of each demonstration and training session for Owner's subsequent use.
 - 1. Format: DVD Disc.
 - 2. Label each disc and container with session identification and date.

1.04 QUALITY ASSURANCE

- A. Instructor Qualifications: Familiar with design, operation, maintenance and troubleshooting of the relevant products and systems.
 - 1. Provide as instructors the most qualified trainer of those contractors and/or installers who actually supplied and installed the systems and equipment.
 - 2. Where a single person is not familiar with all aspects, provide specialists with necessary qualifications.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION

3.01 DEMONSTRATION - GENERAL

- A. Demonstrations conducted during system start-up do not qualify as demonstrations for the purposes of this section, unless approved in advance by Owner.
- B. Demonstrations conducted during Functional Testing need not be repeated unless Owner personnel training is specified.
- C. Demonstration may be combined with Owner personnel training if applicable.
- D. Operating Equipment and Systems: Demonstrate operation in all modes, including start-up, shut-down, seasonal changeover, emergency conditions, and troubleshooting, and maintenance procedures, including scheduled and preventive maintenance.
 - 1. Perform demonstrations not less than two weeks prior to Substantial Completion.
 - 2. For equipment or systems requiring seasonal operation, perform demonstration for other season within six months.
- E. Non-Operating Products: Demonstrate cleaning, scheduled and preventive maintenance, and repair procedures.
 - 1. Perform demonstrations not less than two weeks prior to Substantial Completion.

3.02 TRAINING - GENERAL

- A. Commissioning Authority will prepare the Training Plan based on draft plans submitted.
- B. Conduct training on-site unless otherwise indicated.
- C. Owner will provide classroom and seating at no cost to Contractor.
- D. Do not start training until Functional Testing is complete, unless otherwise specified or approved by the Commissioning Authority.
- E. Provide training in minimum two hour segments.
- F. The Commissioning Authority is responsible for determining that the training was satisfactorily completed and will provide approval forms.

- G. Training schedule will be subject to availability of Owner's personnel to be trained; re-schedule training sessions as required by Owner; once schedule has been approved by Owner failure to conduct sessions according to schedule will be cause for Owner to charge Contractor for personnel "show-up" time.
- H. Review of Facility Policy on Operation and Maintenance Data: During training discuss:
 - 1. The location of the O&M manuals and procedures for use and preservation; backup copies.
 - 2. Typical contents and organization of all manuals, including explanatory information, system narratives, and product specific information.
 - 3. Typical uses of the O&M manuals.
- I. Product- and System-Specific Training:
 - 1. Review the applicable O&M manuals.
 - 2. For systems, provide an overview of system operation, design parameters and constraints, and operational strategies.
 - 3. Review instructions for proper operation in all modes, including start-up, shut-down, seasonal changeover and emergency procedures, and for maintenance, including preventative maintenance.
 - 4. Provide hands-on training on all operational modes possible and preventive maintenance.
 - 5. Emphasize safe and proper operating requirements; discuss relevant health and safety issues and emergency procedures.
 - 6. Discuss common troubleshooting problems and solutions.
 - 7. Discuss any peculiarities of equipment installation or operation.
 - 8. Discuss warranties and guarantees, including procedures necessary to avoid voiding coverage.
 - 9. Review recommended tools and spare parts inventory suggestions of manufacturers.
 - 10. Review spare parts and tools required to be furnished by Contractor.
 - 11. Review spare parts suppliers and sources and procurement procedures.
- J. Be prepared to answer questions raised by training attendees; if unable to answer during training session, provide written response within three days.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 01 91 13
GENERAL COMMISSIONING REQUIREMENTS

PART 1 GENERAL

1.01 SUMMARY

- A. Commissioning is intended to achieve the following specific objectives; this section specifies the Contractor's responsibilities for commissioning:
 - 1. Verify that the work is installed in accordance with the Contract Documents and the manufacturer's recommendations and instructions, and that it receives adequate operational checkout prior to startup: Startup reports and Prefunctional Checklists executed by Contractor are utilized to achieve this.
 - 2. Verify and document that functional performance is in accordance with the Contract Documents: Functional Tests executed by Contractor and witnessed by the Commissioning Authority are utilized to achieve this.
 - 3. Verify that operation and maintenance manuals submitted to Owner are complete: Detailed operation and maintenance (O&M) data submittals by Contractor are utilized to achieve this.
 - 4. Verify that the Owner's operating personnel are adequately trained: Formal training conducted by Contractor is utilized to achieve this.
- B. Commissioning, including Functional Tests, O&M documentation review, and training, is to occur after startup and initial checkout and be completed before Substantial Completion
- C. The Commissioning Authority is synonymous with the Engineer of Record.

1.02 SCOPE OF COMMISSIONING

- A. The following are to be commissioned:
- B. HVAC System, including:
 - 1. Refer to Section 23 08 00 - Commissioning of HVAC.
- C. Electrical Systems:
 - 1. Emergency power systems.
- D. Other equipment and systems explicitly identified elsewhere in Contract Documents as requiring commissioning.

1.03 RELATED REQUIREMENTS

- A. Section 01 78 00 - Closeout Submittals: Scope and procedures for operation and maintenance manuals and project record documents.
- B. Section 01 79 00 - Demonstration and Training: Scope and procedures for Owner personnel training.
- C. Section 23 08 00 - Commissioning of HVAC: HVAC control system testing; other requirements.

1.04 REFERENCE STANDARDS

- A. ASHRAE Std 202 - Commissioning Process for Buildings and Systems.
- B. PEI (Samples) - Sample Forms for Prefunctional Checklists and Functional Performance Tests.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures; except:
 - 1. Make all submittals specified in this section, and elsewhere where indicated for commissioning purposes, directly to the Commissioning Authority, unless they require review by Architect; in that case, submit to Architect first.
 - 2. Submit one copy to the Commissioning Authority, not to be returned.

3. Make commissioning submittals on time schedule specified by Commissioning Authority.
 4. Submittals indicated as "Draft" are intended for the use of the Commissioning Authority in preparation of Prefunctional Checklists or Functional Test requirements; submit in editable electronic format, Microsoft Word 2010 preferred.
 5. As soon as possible after submittals made to Architect are approved, submit copy of approved submittal to the Commissioning Authority.
- B. Manufacturers' Instructions: Submit copies of all manufacturer-provided instructions that are shipped with the equipment as soon as the equipment is delivered.
- C. Product Data: If submittals to Architect do not include the following, submit copies as soon as possible:
1. Manufacturer's product data, cut sheets, and shop drawings.
 2. Manufacturer's installation instructions.
 3. Startup, operating, and troubleshooting procedures.
 4. Fan and pump curves.
 5. Factory test reports.
 6. Warranty information, including details of Owner's responsibilities in regard to keeping warranties in force.
- D. Manufacturers' Instructions: Submit copies of all manufacturer-provided instructions that are shipped with the equipment as soon as the equipment is delivered.
- E. Startup Plans and Reports.
- F. Completed Prefunctional Checklists.

PART 2 PRODUCTS

2.01 TEST EQUIPMENT

- A. Provide all standard testing equipment required to perform startup and initial checkout and required Functional Testing; unless otherwise noted such testing equipment will NOT become the property of Owner.
- B. Equipment-Specific Tools: Where special testing equipment, tools and instruments are specific to a piece of equipment, are only available from the vendor, and are required in order to accomplish startup or Functional Testing, provide such equipment, tools, and instruments as part of the work at no extra cost to Owner; such equipment, tools, and instruments are to become the property of Owner.
- C. Dataloggers: Independent equipment and software for monitoring flows, currents, status, pressures, etc. of equipment.
1. Dataloggers required to for Functional Tests will be provided by the Commissioning Authority and will not become the property of Owner.

PART 3 EXECUTION

3.01 COMMISSIONING PLAN

- A. Commissioning Authority has prepared the Commissioning Plan.
1. Attend meetings called by the Commissioning Authority for purposes of completing the commissioning plan.
 2. Require attendance and participation of relevant subcontractors, installers, suppliers, and manufacturer representatives.
- B. Contractor is responsible for compliance with the Commissioning Plan.
- C. Commissioning Plan: The commissioning schedule, procedures, and coordination requirements for all parties in the commissioning process.
- D. Commissioning Schedule:

1. Submit anticipated dates of startup of each item of equipment and system to Commissioning Authority within 60 days after award of Contract.
2. Re-submit anticipated startup dates monthly, but not less than 4 weeks prior to startup.
3. Prefunctional Checklists and Functional Tests are to be performed in sequence from components, to subsystems, to systems.
4. Provide sufficient notice to Commissioning Authority for delivery of relevant Checklists and Functional Test procedures, to avoid delay.

3.02 STARTUP PLANS AND REPORTS

- A. Startup Plans: For each item of equipment and system for which the manufacturer provides a startup plan, submit the plan not less than 8 weeks prior to startup.
- B. Startup Reports: For each item of equipment and system for which the manufacturer provides a startup checklist (or startup plan or field checkout sheet), document compliance by submitting the completed startup checklist prior to startup, signed and dated by responsible entity.
- C. Submit directly to the Commissioning Authority.

3.03 PREFUNCTIONAL CHECKLISTS

- A. A Prefunctional Checklist is required to be filled out for each item of equipment or other assembly specified to be commissioned.
 1. No sampling of identical or near-identical items is allowed.
 2. These checklists do not replace manufacturers' recommended startup checklists, regardless of apparent redundancy.
 3. Prefunctional Checklist forms will not be complete until after award of the contract; the following types of information will be gathered via the completed Checklist forms:
 - a. Certification by installing contractor that the unit is properly installed, started up, and operating and ready for Functional Testing.
 - b. Confirmation of receipt of each shop drawing and commissioning submittal specified, itemized by unit.
 - c. Manufacturer, model number, and relevant capacity information; list information "as specified," "as submitted," and "as installed."
 - d. Serial number of installed unit.
 - e. List of inspections to be conducted to document proper installation prior to startup and Functional Testing; these will be primarily static inspections and procedures; for equipment and systems may include normal manufacturer's start-up checklist items and minor testing.
 - f. Sensor and actuator calibration information.
 4. Samples of Prefunctional Checklist forms that indicate anticipated level of detail can be found at <http://www.peci.org/library/mcpgs.htm>.
- B. Contractor is responsible for filling out Prefunctional Checklists, after completion of installation and before startup; witnessing by the Commissioning Authority is not required unless otherwise specified.
 1. Each line item without deficiency is to be witnessed, initialed, and dated by the actual witness; checklists are not complete until all line items are initialed and dated complete without deficiencies.
 2. Checklists with incomplete items may be submitted for approval provided the Contractor attests that incomplete items do not preclude the performance of safe and reliable Functional Testing; re-submission of the Checklist is required upon completion of remaining items.
 3. Individual Checklists may contain line items that are the responsibility of more than one installer; Contractor shall assign responsibility to appropriate installers or subcontractors, with identification recorded on the form.
 4. If any Checklist line item is not relevant, record reasons on the form.

5. Contractor may independently perform startup inspections and/or tests, at his option.
 6. Regardless of these reporting requirements, Contractor is responsible for correct startup and operation.
 7. Submit completed Checklists to Commissioning Authority within two days of completion.
- C. Commissioning Authority is responsible for furnishing the Prefunctional Checklists to Contractor.
1. Initial Drafts: Contractor is responsible for initial draft of Prefunctional Checklist where so indicated in the Contract Documents.
 2. Provide all additional information requested by Commissioning Authority to aid in preparation of checklists, such as shop drawing submittals, manufacturers' startup checklists, and O&M data.
 3. Commissioning Authority may add any relevant items deemed necessary regardless of whether they are explicitly mentioned in the Contract Documents or not.
 4. When asked to review the proposed Checklists, do so in a timely manner.
- D. Commissioning Authority Witnessing: Required for:
1. Each piece of primary equipment, unless sampling of multiple similar units is allowed by the commissioning plan.
 2. A sampling of non-primary equipment, as allowed by the commissioning plan.
- E. Deficiencies: Correct deficiencies and re-inspect or re-test, as applicable, at no extra cost to Owner.
1. If difficulty in correction would delay progress, report deficiency to the Commissioning Authority immediately.

3.04 FUNCTIONAL TESTS

- A. A Functional Test is required for each item of equipment, system, or other assembly specified to be commissioned, unless sampling of multiple identical or near-identical units is allowed by the final test procedures.
- B. Contractor is responsible for execution of required Functional Tests, after completion of Prefunctional Checklist and before closeout.
- C. Commissioning Authority is responsible for witnessing and reporting results of Functional Tests, including preparation and completion of forms for that purpose.
- D. Contractor is responsible for correction of deficiencies and re-testing at no extra cost to Owner; if a deficiency is not corrected and re-tested immediately, the Commissioning Authority will document the deficiency and the Contractor's stated intentions regarding correction.
1. Deficiencies are any condition in the installation or function of a component, piece of equipment or system that is not in compliance with the Contract Documents or does not perform properly.
 2. When the deficiency has been corrected, the Contractor completes the form certifying that the item is ready to be re-tested and returns the form to the Commissioning Authority; the Commissioning Authority will reschedule the test and the Contractor shall re-test.
 3. Identical or Near-Identical Items: If 10 percent, or three, whichever is greater, of identical or near-identical items fail to perform due to material or manufacturing defect, all items will be considered defective; provide a proposal for correction within 2 weeks after notification of defect, including provision for testing sample installations prior to replacement of all items.
 4. Contractor shall bear the cost of Owner and Commissioning Authority personnel time witnessing re-testing.
 5. Contractor shall bear the cost of Owner and Commissioning Authority personnel time witnessing re-testing if the test failed due to failure to execute the relevant Prefunctional Checklist correctly; if the test failed for reasons that would not have been identified in the Prefunctional Checklist process, Contractor shall bear the cost of the second and subsequent re-tests.

- E. Functional Test Procedures:
1. Some test procedures are included in the Contract Documents; where Functional Test procedures are not included in the Contract Documents, test procedures will be determined by the Commissioning Authority with input by and coordination with Contractor.
 2. Examples of Functional Testing:
 - a. Test the dynamic function and operation of equipment and systems (rather than just components) using manual (direct observation) or monitoring methods under full operation (e.g., the chiller pump is tested interactively with the chiller functions to see if the pump ramps up and down to maintain the differential pressure setpoint).
 - b. Systems are tested under various modes, such as during low cooling or heating loads, high loads, component failures, unoccupied, varying outside air temperatures, fire alarm, power failure, etc.
 - c. Systems are run through all the HVAC control system's sequences of operation and components are verified to be responding as the sequence's state.
 - d. Traditional air or water test and balancing (TAB) is not Functional Testing; spot checking of TAB by demonstration to the Commissioning Authority is Functional Testing.
 3. Samples of Functional Test forms that indicate anticipated level of detail can be found at <http://www.peci.org/library/mcpgs.htm>.
- F. Deferred Functional Tests: Some tests may need to be performed later, after substantial completion, due to partial occupancy, equipment, seasonal requirements, design or other site conditions; performance of these tests remains the Contractor's responsibility regardless of timing.

3.05 TEST PROCEDURES - GENERAL

- A. Provide skilled technicians to execute starting of equipment and to execute the Functional Tests. Ensure that they are available and present during the agreed upon schedules and for sufficient duration to complete the necessary tests, adjustments and problem-solving.
- B. Provide all necessary materials and system modifications required to produce the flows, pressures, temperatures, and conditions necessary to execute the test according to the specified conditions. At completion of the test, return all affected equipment and systems to their pre-test condition.
- C. Sampling: Where Functional Testing of fewer than the total number of multiple identical or near-identical items is explicitly permitted, perform sampling as follows:
1. Identical Units: Defined as units with same application and sequence of operation; only minor size or capacity difference.
 2. Sampling is not allowed for:
 - a. Major equipment.
 - b. Life-safety-critical equipment.
 - c. Prefunctional Checklist execution.
 3. XX = the percent of the group of identical equipment to be included in each sample; defined for specific type of equipment.
 4. YY = the percent of the sample that if failed will require another sample to be tested; defined for specific type of equipment.
 5. Randomly test at least XX percent of each group of identical equipment, but not less than three units. This constitutes the "first sample."
 6. If YY percent of the units in the first sample fail, test another XX percent of the remaining identical units.
 7. If YY percent of the units in the second sample fail, test all remaining identical units.

8. If frequent failures occur, resulting in more troubleshooting than testing, the Commissioning Authority may stop the testing and require Contractor to perform and document a checkout of the remaining units prior to continuing testing.
- D. Manual Testing: Use hand-held instruments, immediate control system readouts, or direct observation to verify performance (contrasted to analyzing monitored data taken over time to make the "observation").
- E. Simulating Conditions: Artificially create the necessary condition for the purpose of testing the response of a system; for example apply hot air to a space sensor using a hair dryer to see the response in a VAV box.
- F. Simulating Signals: Disconnect the sensor and use a signal generator to send an amperage, resistance or pressure to the transducer and control system to simulate the sensor value.
- G. Over-Writing Values: Change the sensor value known to the control system in the control system to see the response of the system; for example, change the outside air temperature value from 50 degrees F to 75 degrees F to verify economizer operation.
- H. Indirect Indicators: Remote indicators of a response or condition, such as a reading from a control system screen reporting a damper to be 100 percent closed, are considered indirect indicators.
- I. Monitoring: Record parameters (flow, current, status, pressure, etc.) of equipment operation using dataloggers or the trending capabilities of the relevant control systems; where monitoring of specific points is called for in Functional Test Procedures:
 1. All points that are monitored by the relevant control system shall be trended by Contractor; at the Commissioning Authority's request, Contractor shall trend up to 20 percent more points than specified at no extra charge.
 2. Other points will be monitored by the Commissioning Authority using dataloggers.
 3. At the option of the Commissioning Authority, some control system monitoring may be replaced with datalogger monitoring.
 4. Provide hard copies of monitored data in columnar format with time down left column and at least 5 columns of point values on same page.
 5. Graphical output is desirable and is required for all output if the system can produce it.
 6. Monitoring may be used to augment manual testing.

3.06 OPERATION AND MAINTENANCE MANUALS

- A. See Section 01 78 00 - Closeout Submittals for additional requirements.
- B. Add design intent documentation furnished by Architect to manuals prior to submission to Owner.
- C. Submit manuals related to items that were commissioned to Commissioning Authority for review; make changes recommended by Commissioning Authority.
- D. Commissioning Authority will add commissioning records to manuals after submission to Owner.

END OF SECTION

SECTION 02 41 00
DEMOLITION

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Building demolition .
- B. Selective demolition of built site elements.
- C. Abandonment and removal of existing utilities and utility structures.
- D. Legal disposal of demolished items.

1.02 RELATED REQUIREMENTS

- A. Section 00 31 00 - Available Project Information: Existing building survey conducted by Owner; information about known hazardous materials.
- B. Section 01 10 00 - Summary: Limitations on Contractor's use of site and premises.
- C. Section 01 10 00 - Summary: Sequencing and staging requirements.
- D. Section 01 50 00 - Temporary Facilities and Controls: Site fences, security, protective barriers, and waste removal.
- E. Section 01 60 00 - Product Requirements: Handling and storage of items removed for salvage and relocation.
- F. Section 01 70 00 - Execution and Closeout Requirements: Project conditions; protection of bench marks, survey control points, and existing construction to remain; reinstallation of removed products; temporary bracing and shoring.
- G. Section 01 74 19 - Construction Waste Management and Disposal: Limitations on disposal of removed materials; requirements for recycling.
- H. Section 31 10 00 - Site Clearing
- I. Section 31 20 00 - Excavating, Filling, and Grading
- J. Section 31 50 00 - Excavating Support and Protection

1.03 REFERENCE STANDARDS

- A. 29 CFR 1926 - U.S. Occupational Safety and Health Standards.
- B. NFPA 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations.

1.04 SUBMITTALS

- A. See Section 01 33 00 - Administrative Requirements, for submittal procedures.
- B. Demolition Plan: Submit demolition plan as specified by OSHA and local authorities.
 - 1. Indicate extent of demolition, removal sequence, bracing and shoring, and location and construction of barricades and fences.
 - 2. Identify demolition firm and submit qualifications.
 - 3. Include a summary of safety procedures.
- C. Project Record Documents: Accurately record actual locations of capped and active utilities and subsurface construction.

1.05 QUALITY ASSURANCE

- A. Demolition Firm Qualifications: Company specializing in the type of work required.
 - 1. Minimum of 10 years of documented experience.

1.06 PROJECT CONDITIONS

- A. Minimize production of dust due to demolition operations; do not use water if that will result in ice, flooding, sedimentation of public waterways or storm sewers, or other pollution.

PART 2 PRODUCTS -- NOT USED

PART 3 EXECUTION

3.01 SCOPE

- A. As indicated on Drawings and herein specified.
 - 1. Remove the entire building designated as Building 109.
 - 2. Remove utility structures and services as indicated on the drawings.
 - 3. Remove paving and curbs as indicated on the drawings and as required to accomplish new work.
 - 4. Remove foundation walls and footings in their entirety.
- B. Fill excavations, open pits, and holes in ground areas generated as result of removals, using specified fill; compact fill as required so that required rough grade elevations do not subside within one year after completion.

3.02 GENERAL PROCEDURES AND PROJECT CONDITIONS

- A. Comply with other requirements specified in Section 01 70 00 Execution and Closeout Requirements.
- B. Comply with applicable codes and regulations for demolition operations and safety of the public.
 - 1. Obtain required permits.
 - 2. Comply with applicable requirements of NFPA 241.
 - 3. Use of explosives is not permitted.
 - 4. Take precautions to prevent catastrophic or uncontrolled collapse of structures to be removed; do not allow worker or public access within range of potential collapse of unstable structures.
 - 5. Provide, erect, and maintain temporary dust proof partitions/wall assembly barriers and security devices.
 - 6. Conduct operations to minimize effects on and interference with adjacent construction and occupants.
 - 7. Conduct operations to minimize obstruction of public and private entrances and exits; do not obstruct required exits at any time; protect persons using entrances and exits from removal operations.
- C. Do not begin removal until receipt of notification to proceed from Owner.
- D. Do not begin removal until built elements to be salvaged or relocated have been removed.
- E. Protect existing structures and other elements that are not to be removed.
 - 1. Provide bracing and shoring as required.
 - 2. Prevent movement or settlement of adjacent structures.
 - 3. Stop work immediately if adjacent structures appear to be in danger.
- F. Minimize production of dust due to demolition operations; do not use water if that will result in ice, flooding, sedimentation of public waterways or storm sewers, or other pollution.
- G. If hazardous materials are discovered during removal operations, stop work and notify Architect and Owner; hazardous materials include regulated asbestos containing materials, lead, PCB's, and mercury.
- H. Perform demolition in a manner that maximizes salvage and recycling of materials.
 - 1. Comply with requirements of Section 01 74 19 - Waste Management.
 - 2. Dismantle existing construction and separate materials.

3. Set aside reusable, recyclable, and salvageable materials; store and deliver to collection point or point of reuse.

- I. Partial Removal of Paving and Curbs: Neatly saw cut at right angle to surface.

3.03 EXISTING UTILITIES

- A. Coordinate work with the Delaware Army National Guard; notify before starting work and comply with their requirements; obtain required permits.
- B. Protect existing utilities to remain from damage.
- C. Do not close, shut off, or disrupt existing life safety systems that are in use without permission from the Owner.
- D. Do not close, shut off, or disrupt existing utility branches or take-offs that are in use without permission from the Owner.
- E. Locate and mark utilities to remain; mark using highly visible tags or flags, with identification of utility type; protect from damage due to subsequent construction, using substantial barricades if necessary. Call "Miss Utility" (1-800-257-7777) at least 48 hours prior to starting work.
- F. Remove exposed piping, valves, meters, equipment, supports, and foundations of disconnected and abandoned utilities.
- G. Prepare building demolition areas by disconnecting and capping utilities outside the demolition zone; identify and mark utilities to be subsequently reconnected, in same manner as other utilities to remain.

3.04 EXISTING SUBSURFACE CONDITIONS

- A. Verify existing pavement material and respective thicknesses during pre-bid inspection. Obtain written authorization from the Owner before conducting test hole explorations of existing pavements within the project site. Conditions existing during prebid inspections will not be altered or modified.

3.05 EXISTING PAVEMENTS

- A. Demolish existing pavements to limits indicated. Neatly cut existing bituminous concrete pavement to straight, smooth and sharp edges perpendicular to pavement surface

3.06 EXISTING WALKS

- A. Demolish existing walks to the nearest joint to limits indicated on the contract documents.

3.07 EXISTING CURBING

- A. Demolish existing curbing to the nearest joint to limits indicated on the contract documents.

3.08 MISCELLANEOUS

- A. Demolish additional miscellaneous existing site improvements indicated, specified and required to construct project.

3.09 EXISTING SITE IMPROVEMENTS DEMOLITION

- A. Existing Subsurface Conditions: Verify existing pavement materials and respective thicknesses during pre-bid inspection. Obtain written authorization from the Owner before conducting test hole explorations of existing pavements within the project site. Conditions existing during prebid inspections will not be altered or modified.
- B. Existing Pavements: Demolish existing pavements to limits indicated. Neatly cut existing bituminous concrete pavement to straight, smooth and sharp edges perpendicular to pavement surface.
- C. Existing Walks: Demolish existing walks to the nearest joint to limits indicated on the contract documents.

- D. Existing Curbing: Demolish existing curbing to the nearest joint to limits indicated on the contract documents.
- E. Miscellaneous: Demolish additional miscellaneous existing site improvements indicated, specified and required to construct project.

3.10 EXISTING UNDERGROUND UTILITY DEMOLITION

- A. Excavate and expose existing underground utilities and related structures designated for, or as required to implement, removals. For excavation operations refer to Section 31 20 00 - Excavating, Filling and Grading. Remove existing utility structure castings. Backfill excavations, upon completion of utility demolition operations. For backfill operations refer to Section 31 20 00 - Excavation, Filling and Grading.

3.11 REMOVE DEBRIS, AND TRASH FROM SITE.

- A. Remove from site all materials not to be reused on site.
- B. Leave site in clean condition, ready for subsequent work.
- C. Clean up spillage and wind-blown debris from public and private lands.
- D. See Section 01 78 39 Construction Waste Management and Disposal.

END OF SECTION

SECTION 03 30 00
CAST-IN-PLACE CONCRETE

PART 1 - GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.02 SUMMARY

- A. This Section specifies cast-in place concrete, including formwork, reinforcement, concrete materials, mixture design, placement procedures, and finishes, for the following:
 - 1. Footings.
 - 2. Foundation walls.
 - 3. Slabs-on-grade.

1.03 DEFINITIONS

- A. Cementitious Materials: Portland cement alone or in combination with one or more of the following: blended hydraulic cement, fly ash and other pozzolans, ground granulated blast-furnace slag, and silica fume; subject to compliance with requirements.

1.04 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Design Mixtures: For each concrete mixture. Submit alternate design mixtures when characteristics of materials, Project conditions, weather, test results, or other circumstances warrant adjustments.
 - 1. Indicate amounts of mixing water to be withheld for later addition at Project site.
- C. Steel Reinforcement Shop Drawings: Placing drawings that detail fabrication, bending, and placement. Include bar sizes, lengths, material, grade, bar schedules, stirrup spacing, bent bar diagrams, bar arrangement, splices and laps, mechanical connections, tie spacing, hoop spacing, and supports for concrete reinforcement.
- D. Samples: For waterstops and vapor retarder.
- E. Welding certificates.
- F. Qualification Data: For Installer, manufacturer, testing agency.
- G. Material Test Reports: For the following, from a qualified testing agency, indicating compliance with requirements:
 - 1. Aggregates.
- H. Material Certificates: For each of the following, signed by manufacturers:
 - 1. Cementitious materials.
 - 2. Admixtures.
 - 3. Form materials and form-release agents.
 - 4. Steel reinforcement and accessories.
 - 5. Waterstops.
 - 6. Curing compounds.
 - 7. Floor and slab treatments.
 - 8. Bonding agents.
 - 9. Adhesives.
 - 10. Vapor retarders.
 - 11. Semirigid joint filler.
 - 12. Joint-filler strips.
 - 13. Repair materials.

- I. Floor surface flatness and levelness measurements to determine compliance with specified tolerances.
- J. Field quality-control test reports.
- K. Minutes of preinstallation conference.

1.05 QUALITY ASSURANCE

- A. Installer Qualifications: A qualified installer who employs on Project personnel qualified as ACI-certified Flatwork Technician and Finisher and a supervisor who is an ACI-certified Concrete Flatwork Technician.
- B. Manufacturer Qualifications: A firm experienced in manufacturing ready-mixed concrete products and that complies with ASTM C 94/C 94M requirements for production facilities and equipment.
 - 1. Manufacturer certified according to NRMCA's "Certification of Ready Mixed Concrete Production Facilities."
- C. Testing Agency Qualifications: An independent agency, acceptable to authorities having jurisdiction, qualified according to ASTM C 1077 and ASTM E 329 for testing indicated, as documented according to ASTM E 548.
 - 1. Personnel conducting field tests shall be qualified as ACI Concrete Field Testing Technician, Grade 1, according to ACI CP-01 or an equivalent certification program.
 - 2. Personnel performing laboratory tests shall be ACI-certified Concrete Strength Testing Technician and Concrete Laboratory Testing Technician -Grade I. Testing Agency laboratory supervisor shall be an ACI-certified Concrete Laboratory Testing Technician - Grade II.
- D. Source Limitations: Obtain each type or class of cementitious material of the same brand from the same manufacturer's plant, obtain aggregate from one source, and obtain admixtures through one source from a single manufacturer.
- E. Welding: Qualify procedures and personnel according to AWS D1.4, "Structural Welding Code--Reinforcing Steel."
- F. ACI Publications: Comply with the following unless modified by requirements in the Contract Documents:
 - 1. ACI 301, "Specification for Structural Concrete,"
 - 2. ACI 117, "Specifications for Tolerances for Concrete Construction and Materials."
- G. Concrete Testing Service: Engage a qualified independent testing agency to perform material evaluation tests and to design concrete mixtures.
- H. Preinstallation Conference: Conduct conference at Project site to comply with requirements in Division 1 Section "Project Management and Coordination."
 - 1. Before submitting design mixtures, review concrete design mixture and examine procedures for ensuring quality of concrete materials. Require representatives of each entity directly concerned with cast-in-place concrete to attend, including the following:
 - a. Contractor's superintendent.
 - b. Independent testing agency responsible for concrete design mixtures.
 - c. Ready-mix concrete manufacturer.
 - d. Concrete subcontractor.
 - 2. Review special inspection and testing and inspecting agency procedures for field quality control, concrete finishes and finishing, cold- and hot-weather concreting procedures, [curing procedures, construction contraction and isolation joints, and joint-filler strips, forms and form removal limitations, vapor-retarder installation, steel reinforcement installation, floor and slab flatness and levelness measurement, and concrete protection.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Steel Reinforcement: Deliver, store, and handle steel reinforcement to prevent bending and damage.
- B. Waterstops: Store waterstops under cover to protect from moisture, sunlight, dirt, oil, and other contaminants.

PART 2 - PRODUCTS

2.01 MANUFACTURERS

- A. In other Part 2 articles where titles below introduce lists, the following requirements apply to product selection:
 - 1. Available Products: Subject to compliance with requirements, products that may be incorporated into the Work include, but are not limited to, products specified.
 - 2. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, manufacturers specified.

2.02 FORM-FACING MATERIALS

- A. Smooth-Formed Finished Concrete: Form-facing panels that will provide continuous, true, and smooth concrete surfaces. Furnish in largest practicable sizes to minimize number of joints.
 - 1. Plywood, metal, or other approved panel materials.
 - 2. Exterior-grade plywood panels, suitable for concrete forms, complying with DOC PS 1, and as follows:
 - a. High-density overlay, Class 1 or better.
 - b. Medium-density overlay, Class 1 or better; mill-release agent treated and edge sealed.
 - c. Structural 1, B-B or better; mill oiled and edge sealed.
 - d. B-B (Concrete Form), Class 1 or better; mill oiled and edge sealed.
- B. Rough-Formed Finished Concrete: Plywood, lumber, metal, or another approved material. Provide lumber dressed on at least two edges and one side for tight fit.
- C. Chamfer Strips: Wood, metal, PVC, or rubber strips, 3/4 by 3/4 inch (19 by 19 mm), minimum.
- D. Form-Release Agent: Commercially formulated form-release agent that will not bond with, stain, or adversely affect concrete surfaces and will not impair subsequent treatments of concrete surfaces.
 - 1. Formulate form-release agent with rust inhibitor for steel form-facing materials.
- E. Form Ties: Factory-fabricated, removable or snap-off metal or glass-fiber-reinforced plastic form ties designed to resist lateral pressure of fresh concrete on forms and to prevent spalling of concrete on removal.
 - 1. Furnish units that will leave no corrodible metal closer than 1 inch (25 mm) to the plane of exposed concrete surface.
 - 2. Furnish ties that, when removed, will leave holes no larger than 1 inch (25 mm) in diameter in concrete surface.
 - 3. Furnish ties with integral water-barrier plates to walls indicated to receive dampproofing or waterproofing.

2.03 STEEL REINFORCEMENT

- A. Reinforcing Bars: ASTM A 615/A 615M, Grade 60 (Grade 420), deformed.
- B. Steel Bar Mats: ASTM A 184/A 184M, fabricated from ASTM A 615/A 615M, Grade 60 (Grade 420), deformed bars, assembled with clips.
- C. Plain-Steel Welded Wire Reinforcement: ASTM A 185, plain, fabricated from as-drawn steel wire into flat sheets.

2.04 REINFORCEMENT ACCESSORIES

- A. Joint Dowel Bars: ASTM A 615/A 615M, Grade 60 (Grade 420), plain-steel bars, cut bars true to length with ends square and free of burrs.
- B. Bar Supports: Bolsters, chairs, spacers, and other devices for spacing, supporting, and fastening reinforcing bars and welded wire reinforcement in place. Manufacture bar supports from steel wire, plastic, or precast concrete according to CRSI's "Manual of Standard Practice," of greater compressive strength than concrete and as follows:
 - 1. For concrete surfaces exposed to view where legs of wire bar supports contact forms, use CRSI Class 1 plastic-protected steel wire or CRSI Class 2 stainless-steel bar supports.

2.05 CONCRETE MATERIALS

- A. Cementitious Material: Use the following cementitious materials, of the same type, brand, and source, throughout Project:
 - 1. Portland Cement: ASTM C 150, Type I/II, gray. Supplement with the following:
 - a. Fly Ash: ASTM C 618, Class C.
 - b. Ground Granulated Blast-Furnace Slag: ASTM C 989, Grade 100 or 120.
- B. Silica Fume: ASTM C 1240, amorphous silica.
- C. Normal-Weight Aggregates: ASTM C 33, Class 3S coarse aggregate or better, graded. Provide aggregates from a single source.
 - 1. Maximum Coarse-Aggregate Size: 1 inch (25 mm) nominal.
 - 2. Fine Aggregate: Free of materials with deleterious reactivity to alkali in cement.
- D. Water: ASTM C 94/C 94M and potable.

2.06 ADMIXTURES

- A. Air-Entraining Admixture: ASTM C 260.
- B. Chemical Admixtures: Provide admixtures certified by manufacturer to be compatible with other admixtures and that will not contribute water-soluble chloride ions exceeding those permitted in hardened concrete. Do not use calcium chloride or admixtures containing calcium chloride.
 - 1. Water-Reducing Admixture: ASTM C 494/C 494M, Type A.
 - 2. Retarding Admixture: ASTM C 494/C 494M, Type B.
 - 3. High-Range, Water-Reducing Admixture: ASTM C 494/C 494M, Type F.
 - 4. Plasticizing and Retarding Admixture: ASTM C 1017/C 1017M, Type II.
- C. Set-Accelerating Corrosion-Inhibiting Admixture: Commercially formulated, anodic inhibitor or mixed cathodic and anodic inhibitor; capable of forming a protective barrier and minimizing chloride reactions with steel reinforcement in concrete and complying with ASTM C 494/C 494M, Type C.
 - 1. Products:
 - a. Boral Material Technologies, Inc.; Boral BCN.
 - b. Euclid Chemical Company (The); Eucon CIA.
 - c. Grace Construction Products, W. R. Grace & Co.; DCI.
 - d. Master Builders, Inc.; Rheocrete CNI.
 - e. Sika Corporation; Sika CNI.
- D. Non-Set-Accelerating Corrosion-Inhibiting Admixture: Commercially formulated, non-set-accelerating, anodic inhibitor or mixed cathodic and anodic inhibitor; capable of forming a protective barrier and minimizing chloride reactions with steel reinforcement in concrete.
 - 1. Products:
 - a. Axim Concrete Technologies; Catexol 1000CI.
 - b. Boral Material Technologies, Inc.; Boral BCN2.
 - c. Cortec Corporation; MCI [2000] [2005NS].
 - d. Grace Construction Products, W. R. Grace & Co.; DCI-S.

- e. Master Builders, Inc.; Rheocrete 222+.
- f. Sika Corporation; FerroGard-901.
- E. Color Pigment: ASTM C 979, synthetic mineral-oxide pigments or colored water-reducing admixtures; color stable, free of carbon black, nonfading, and resistant to lime and other alkalis.
 - 1. Manufacturers:
 - a. Bayer Corporation.
 - b. ChemMasters.
 - c. Conspec Marketing & Manufacturing Co., Inc.; a Dayton Superior Company.
 - d. Davis Colors.
 - e. Elementis Pigments, Inc.
 - f. Hoover Color Corporation.
 - g. Lambert Corporation.
 - h. Scofield, L. M. Company.
 - i. Solomon Colors.
 - 2. Color: As selected by Architect from manufacturer's full range.

2.07 WATERSTOPS

- A. Self-Expanding Butyl Strip Waterstops: Manufactured rectangular or trapezoidal strip, butyl rubber with sodium bentonite or other hydrophilic polymers, for adhesive bonding to concrete, 3/4 by 1 inch (19 by 25 mm).
 - 1. Products:
 - a. Colloid Environmental Technologies Company; Volclay Waterstop-RX.
 - b. Approved equal

2.08 VAPOR RETARDERS

- A. Plastic Vapor Retarder: ASTM E 1745, Class C, or polyethylene sheet, ASTM D 4397, not less than 10 mils (0.25 mm) thick. Include manufacturer's recommended adhesive or pressure-sensitive joint tape.
 - 1. Products:
 - a. Fortifiber Corporation; Moistop Plus.
 - b. Raven Industries Inc.; Dura Skrim 8.
 - c. Reef Industries, Inc.; Griffolyn Type-85.
 - d. Stego Industries, LLC; Stego Wrap, 10 mils.
- B. Granular Fill: Clean mixture of crushed stone or crushed or uncrushed gravel; ASTM D 448, Size 57, with 100 percent passing a 1-1/2-inch (37.5-mm) sieve and 0 to 5 percent passing a No. 8 (2.36-mm) sieve.

2.09 FLOOR AND SLAB TREATMENTS

- A. Penetrating Liquid Floor Treatment: Clear, chemically reactive, waterborne solution of inorganic silicate or silicate materials and proprietary components; odorless; colorless; that penetrates, hardens, and densifies concrete surfaces.
 - 1. Products:
 - a. Dayton Superior Corporation; Day-Chem Sure Hard.
 - b. Euclid Chemical Company (The); Euco Diamond Hard.
 - c. L&M Construction Chemicals, Inc.; Seal Hard.
 - d. Meadows, W. R., Inc.; Liqui-Hard.

2.10 CURING MATERIALS

- A. Evaporation Retarder: Waterborne, monomolecular film forming, manufactured for application to fresh concrete.
 - 1. Products:
 - a. Conspec Marketing & Manufacturing Co., Inc., a Dayton Superior Company; Aquafil.

- b. Dayton Superior Corporation; Sure Film.
 - c. Euclid Chemical Company (The); Eucobar.
 - d. L&M Construction Chemicals, Inc.; E-Con.
 - e. Meadows, W. R., Inc.; Sealtight Evapre.
 - f. Sika Corporation, Inc.; SikaFilm.
- B. Absorptive Cover: AASHTO M 182, Class 2, burlap cloth made from jute or kenaf, weighing approximately 9 oz./sq. yd. (305 g/sq. m) when dry.
- C. Moisture-Retaining Cover: ASTM C 171, polyethylene film or white burlap-polyethylene sheet.
- D. Water: Potable.
- E. Clear, Waterborne, Membrane-Forming Curing Compound: ASTM C 309, Type 1, Class B, dissipating.
- 1. Products:
 - a. Dayton Superior Corporation; Day Chem Rez Cure (J-11-W).
 - b. Euclid Chemical Company (The); Kurez DR VOX.
 - c. L&M Construction Chemicals, Inc.; L&M Cure R.
 - d. Meadows, W. R., Inc.; 1100 Clear.
 - e. Tamms Industries, Inc.; Horncure WB 30.

2.11 RELATED MATERIALS

- A. Expansion-and Isolation-Joint-Filler Strips: ASTM D 1751, asphalt-saturated cellulosic fiber or ASTM D 1752, cork or self-expanding cork.
- B. Bonding Agent: ASTM C 1059, Type II, non-redispersible, acrylic emulsion or styrene butadiene.
- C. Reglets: Fabricate reglets of not less than 0.0217-inch-(0.55-mm-) thick, galvanized steel sheet. Temporarily fill or cover face opening of reglet to prevent intrusion of concrete or debris.
- D. Dovetail Anchor Slots: Hot-dip galvanized steel sheet, not less than 0.0336 inch (0.85 mm) thick, with bent tab anchors. Temporarily fill or cover face opening of slots to prevent intrusion of concrete or debris.

2.12 REPAIR MATERIALS

- A. Repair Underlayment: Cement-based, polymer-modified, self-leveling product that can be applied in thicknesses from 1/8 inch (3.2 mm) and that can be feathered at edges to match adjacent floor elevations.
 - 1. Cement Binder: ASTM C 150, portland cement or hydraulic or blended hydraulic cement as defined in ASTM C 219.
 - 2. Primer: Product of underlayment manufacturer recommended for substrate, conditions, and application.
 - 3. Aggregate: Well-graded, washed gravel, 1/8 to 1/4 inch (3.2 to 6 mm) or coarse sand as recommended by underlayment manufacturer.
 - 4. Compressive Strength: Not less than 4100 psi (29 MPa) at 28 days when tested according to ASTM C 109/C 109M.
- B. Repair Overlayment: Cement-based, polymer-modified, self-leveling product that can be applied in thicknesses from 1/8 inch (3.2 mm) and that can be feathered at edges to match adjacent floor elevations.
 - 1. Cement Binder: ASTM C 150, portland cement or hydraulic or blended hydraulic cement as defined in ASTM C 219.
 - 2. Primer: Product of topping manufacturer recommended for substrate, conditions, and application.
 - 3. Aggregate: Well-graded, washed gravel, 1/8 to 1/4 inch (3.2 to 6 mm) or coarse sand as recommended by topping manufacturer.

4. Compressive Strength: Not less than 5000 psi (34.5 MPa) at 28 days when tested according to ASTM C 109/C 109M.

2.13 CONCRETE MIXTURES, GENERAL

- A. Prepare design mixtures for each type and strength of concrete, proportioned on the basis of laboratory trial mixture or field test data, or both, according to ACI 301.
 1. Use a qualified independent testing agency for preparing and reporting proposed mixture designs based on laboratory trial mixtures.
- B. Cementitious Materials: Limit percentage, by weight, of cementitious materials other than portland cement in concrete as follows:
 1. Fly Ash: 25 percent.
 2. Combined Fly Ash and Pozzolan: 25 percent.
 3. Ground Granulated Blast-Furnace Slag: 50 percent.
 4. Combined Fly Ash or Pozzolan and Ground Granulated Blast-Furnace Slag: 50 percent portland cement minimum, with fly ash or pozzolan not exceeding 25 percent.
 5. Silica Fume: 10 percent.
 6. Combined Fly Ash, Pozzolans, and Silica Fume: 35 percent with fly ash or pozzolans not exceeding 25 percent and silica fume not exceeding 10 percent.
 7. Combined Fly Ash or Pozzolans, Ground Granulated Blast-Furnace Slag, and Silica Fume: 50 percent with fly ash or pozzolans not exceeding 25 percent and silica fume not exceeding 10 percent.
- C. Limit water-soluble, chloride-ion content in hardened concrete to 0.06 percent by weight of cement.
- D. Admixtures: Use admixtures according to manufacturer's written instructions.
 1. Use water-reducing or plasticizing admixture in concrete, as required, for placement and workability.
 2. Use water-reducing and retarding admixture when required by high temperatures, low humidity, or other adverse placement conditions.
 3. Use water-reducing admixture in pumped concrete, concrete for heavy-use industrial slabs and parking structure slabs, concrete required to be watertight, and concrete with a water-cementitious materials ratio below 0.50.
 4. Use corrosion-inhibiting admixture in concrete mixtures where indicated.
- E. Color Pigment: Add color pigment to concrete mixture according to manufacturer's written instructions and to result in hardened concrete color consistent with approved mockup.

2.14 CONCRETE MIXTURES FOR BUILDING ELEMENTS

- A. Footings: Proportion normal-weight concrete mixture as follows:
 1. Minimum Compressive Strength: 4000 psi (27.6 MPa) at 28 days.
 2. Maximum Water-Cementitious Materials Ratio: 0.50.
 3. Slump Limit: 3 inch minimum and 5 inch maximum (at point of concrete placement), plus or minus 1 inch (25 mm).
- B. Foundation Walls: Proportion normal-weight concrete mixture as follows:
 1. Minimum Compressive Strength: 4000 psi (27.6 MPa) at 28 days.
 2. Maximum Water-Cementitious Materials Ratio: 0.50.
 3. Slump Limit: 3 inch minimum and 5 inch maximum (at point of concrete placement), plus or minus 1 inch (25 mm).
- C. Slabs-on-Grade - Interior: Proportion normal-weight concrete mixture as follows:
 1. Minimum Compressive Strength: 4000 psi (27.6 MPa) at 28 days.
 2. Minimum Cementitious Materials Content: 520 lb/cu. yd. (309 kg/cu. m).
 3. Slump Limit: 3 inch minimum and 5 inch maximum (at point of concrete placement), plus or minus 1 inch (25 mm).

- D. Slabs-on-Grade - Exterior (Exposed to Exterior Conditions): Proportion normal-weight concrete mixture as follows:
 - 1. Minimum Compressive Strength: 4500 psi (31 MPa) at 28 days.
 - 2. Minimum Cementitious Materials Content: 520 lb/cu. yd. (309 kg/cu. m).
 - 3. Slump Limit: 3 inch minimum and 5 inch maximum (at point of concrete placement), plus or minus 1 inch (25 mm).
 - 4. Air Content: 6 percent, plus or minus 1.5 percent at point of delivery for 1-inch (25-mm) nominal maximum aggregate size.
 - 5. Air Content: Do not allow air content of troweled finished floors to exceed 3 percent.
- E. Suspended Slabs: Proportion normal-weight concrete mixture as follows:
 - 1. Minimum Compressive Strength: 3500 psi (24.1 MPa) at 28 days.
 - 2. Minimum Cementitious Materials Content: 470 lb/cu. yd. (309 kg/cu. m).
 - 3. Slump Limit: 3 inch minimum and 5 inch maximum (at point of concrete placement), plus or minus 1 inch (25 mm). For pumpable concrete, slumps may be increased by 3 inches.

2.15 FABRICATING REINFORCEMENT

- A. Fabricate steel reinforcement according to CRSI's "Manual of Standard Practice."

2.16 CONCRETE MIXING

- A. Ready-Mixed Concrete: Measure, batch, mix, and deliver concrete according to ASTM C 94/C 94M, and furnish batch ticket information.
 - 1. When air temperature is between 85 and 90 deg F (30 and 32 deg C), reduce mixing and delivery time from 1-1/2 hours to 75 minutes; when air temperature is above 90 deg F (32 deg C), reduce mixing and delivery time to 60 minutes.
- B. Project-Site Mixing: Measure, batch, and mix concrete materials and concrete according to ASTM C 94/C 94M. Mix concrete materials in appropriate drum-type batch machine mixer.
 - 1. For mixer capacity of 1 cu. yd. (0.76 cu. m) or smaller, continue mixing at least 1-1/2 minutes, but not more than 5 minutes after ingredients are in mixer, before any part of batch is released.
 - 2. For mixer capacity larger than 1 cu. yd. (0.76 cu. m), increase mixing time by 15 seconds for each additional 1 cu. yd. (0.76 cu. m).
 - 3. Provide batch ticket for each batch discharged and used in the Work, indicating Project identification name and number, date, mixture type, mixture time, quantity, and amount of water added. Record approximate location of final deposit in structure.

PART 3 - EXECUTION

3.01 FORMWORK

- A. Design, erect, shore, brace, and maintain formwork, according to ACI 301, to support vertical, lateral, static, and dynamic loads, and construction loads that might be applied, until structure can support such loads.
- B. Construct formwork so concrete members and structures are of size, shape, alignment, elevation, and position indicated, within tolerance limits of ACI 117.
- C. Limit concrete surface irregularities, designated by ACI 347R as abrupt or gradual, as follows:
 - 1. Class A, 1/8 inch (3.2 mm) for smooth-formed finished surfaces.
 - 2. Class C, 1/2 inch (13 mm) for rough-formed finished surfaces.
- D. Construct forms tight enough to prevent loss of concrete mortar.
- E. Fabricate forms for easy removal without hammering or prying against concrete surfaces. Provide crush or wrecking plates where stripping may damage cast concrete surfaces. Provide top forms for inclined surfaces steeper than 1.5 horizontal to 1 vertical.
 - 1. Install keyways, reglets, recesses, and the like, for easy removal.

2. Do not use rust-stained steel form-facing material.
- F. Set edge forms, bulkheads, and intermediate screed strips for slabs to achieve required elevations and slopes in finished concrete surfaces. Provide and secure units to support screed strips; use strike-off templates or compacting-type screeds.
- G. Provide temporary openings for cleanouts and inspection ports where interior area of formwork is inaccessible. Close openings with panels tightly fitted to forms and securely braced to prevent loss of concrete mortar. Locate temporary openings in forms at inconspicuous locations.
- H. Chamfer exterior corners and edges of permanently exposed concrete.
- I. Form openings, chases, offsets, sinkages, keyways, reglets, blocking, screeds, and bulkheads required in the Work. Determine sizes and locations from trades providing such items.
- J. Clean forms and adjacent surfaces to receive concrete. Remove chips, wood, sawdust, dirt, and other debris just before placing concrete.
- K. Retighten forms and bracing before placing concrete, as required, to prevent mortar leaks and maintain proper alignment.
- L. Coat contact surfaces of forms with form-release agent, according to manufacturer's written instructions, before placing reinforcement.

3.02 EMBEDDED ITEMS

- A. Place and secure anchorage devices and other embedded items required for adjoining work that is attached to or supported by cast-in-place concrete. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
 1. Install anchor rods, accurately located, to elevations required and complying with tolerances in Section 7.5 of AISC's "Code of Standard Practice for Steel Buildings and Bridges."
 2. Install reglets to receive waterproofing and to receive through-wall flashings in outer face of concrete frame at exterior walls, where flashing is shown at lintels, shelf angles, and other conditions.
 3. Install dovetail anchor slots in concrete structures as indicated.

3.03 REMOVING AND REUSING FORMS

- A. General: Formwork for sides of beams, walls, columns, and similar parts of the Work that does not support weight of concrete may be removed after cumulatively curing at not less than 50 deg F (10 deg C) for 24 hours after placing concrete, if concrete is hard enough to not be damaged by form-removal operations and curing and protection operations are maintained.
 1. Leave formwork for beam soffits, joists, slabs, and other structural elements that supports weight of concrete in place until concrete has achieved[at least 70 percent of] its 28-day design compressive strength.
 2. Remove forms only if shores have been arranged to permit removal of forms without loosening or disturbing shores.
- B. Clean and repair surfaces of forms to be reused in the Work. Split, frayed, delaminated, or otherwise damaged form-facing material will not be acceptable for exposed surfaces. Apply new form-release agent.
- C. When forms are reused, clean surfaces, remove fins and laitance, and tighten to close joints. Align and secure joints to avoid offsets. Do not use patched forms for exposed concrete surfaces unless approved by Architect.

3.04 SHORES AND RESHORES

- A. Comply with ACI 318 (ACI 318M) and ACI 301 for design, installation, and removal of shoring and reshoring.

1. Do not remove shoring or reshoring until measurement of slab tolerances is complete.
- B. In multistory construction, extend shoring or reshoring over a sufficient number of stories to distribute loads in such a manner that no floor or member will be excessively loaded or will induce tensile stress in concrete members without sufficient steel reinforcement.
- C. Plan sequence of removal of shores and reshore to avoid damage to concrete. Locate and provide adequate reshoring to support construction without excessive stress or deflection.

3.05 VAPOR RETARDERS

- A. Plastic Vapor Retarders: Place, protect, and repair vapor retarders according to ASTM E 1643 and manufacturer's written instructions.
 1. Lap joints 6 inches (150 mm) and seal with manufacturer's recommended tape.
- B. Bituminous Vapor Retarders: Place, protect, and repair vapor retarders according to manufacturer's written instructions.
- C. Granular Course: Cover vapor retarder with granular fill, moisten, and compact with mechanical equipment to elevation tolerances of plus 0 inch (0 mm) or minus 3/4 inch (19 mm).

3.06 STEEL REINFORCEMENT

- A. General: Comply with CRSI's "Manual of Standard Practice" for placing reinforcement.
 1. Do not cut or puncture vapor retarder. Repair damage and reseal vapor retarder before placing concrete.
- B. Clean reinforcement of loose rust and mill scale, earth, ice, and other foreign materials that would reduce bond to concrete.
- C. Accurately position, support, and secure reinforcement against displacement. Locate and support reinforcement with bar supports to maintain minimum concrete cover. Do not tack weld crossing reinforcing bars.
 1. Weld reinforcing bars according to AWS D1.4, where indicated.
- D. Set wire ties with ends directed into concrete, not toward exposed concrete surfaces.
- E. Install welded wire reinforcement in longest practicable lengths on bar supports spaced to minimize sagging. Lap edges and ends of adjoining sheets at least one mesh spacing. Offset laps of adjoining sheet widths to prevent continuous laps in either direction. Lace overlaps with wire.

3.07 JOINTS

- A. General: Construct joints true to line with faces perpendicular to surface plane of concrete.
- B. Construction Joints: Install so strength and appearance of concrete are not impaired, at locations indicated or as approved by Architect.
 1. Place joints perpendicular to main reinforcement. Continue reinforcement across construction joints, unless otherwise indicated. Do not continue reinforcement through sides of strip placements of floors and slabs.
 2. Form keyed joints as indicated. Embed keys at least 1-1/2 inches (38 mm) into concrete.
 3. Locate joints for beams, slabs, joists, and girders in the middle third of spans. Offset joints in girders a minimum distance of twice the beam width from a beam-girder intersection.
 4. Locate horizontal joints in walls and columns at underside of floors, slabs, beams, and girders and at the top of footings or floor slabs.
 5. Space vertical joints in walls as indicated. Locate joints beside piers integral with walls, near corners, and in concealed locations where possible.
 6. Use a bonding agent at locations where fresh concrete is placed against hardened or partially hardened concrete surfaces.
 7. Use epoxy-bonding adhesive at locations where fresh concrete is placed against hardened or partially hardened concrete surfaces.

- C. Contraction Joints in Slabs-on-Grade: Form weakened-plane contraction joints, sectioning concrete into areas as indicated. Construct contraction joints for a depth equal to at least one-fourth of concrete thickness as follows:
 - 1. Grooved Joints: Form contraction joints after initial floating by grooving and finishing each edge of joint to a radius of 1/8 inch (3.2 mm). Repeat grooving of contraction joints after applying surface finishes. Eliminate groover tool marks on concrete surfaces.
 - 2. Sawed Joints: Form contraction joints with power saws equipped with shatterproof abrasive or diamond-rimmed blades. Cut 1/8-inch-(3.2-mm-) wide joints into concrete when cutting action will not tear, abrade, or otherwise damage surface and before concrete develops random contraction cracks.
- D. Isolation Joints in Slabs-on-Grade: After removing formwork, install joint-filler strips at slab junctions with vertical surfaces, such as column pedestals, foundation walls, grade beams, and other locations, as indicated.
 - 1. Extend joint-filler strips full width and depth of joint, terminating flush with finished concrete surface, unless otherwise indicated.
 - 2. Terminate full-width joint-filler strips not less than 1/2 inch (13 mm) or more than 1 inch (25 mm) below finished concrete surface where joint sealants, specified in Division 7 Section "Joint Sealants," are indicated.
 - 3. Install joint-filler strips in lengths as long as practicable. Where more than one length is required, lace or clip sections together.
- E. Doweled Joints: Install dowel bars and support assemblies at joints where indicated. Lubricate or asphalt coat one-half of dowel length to prevent concrete bonding to one side of joint.

3.08 WATERSTOPS

- A. Flexible Waterstops: Install in construction joints and at other joints indicated to form a continuous diaphragm. Install in longest lengths practicable. Support and protect exposed waterstops during progress of the Work. Field fabricate joints in waterstops according to manufacturer's written instructions.
- B. Self-Expanding Strip Waterstops: Install in construction joints and at other locations indicated, according to manufacturer's written instructions, adhesive bonding, mechanically fastening, and firmly pressing into place. Install in longest lengths practicable.

3.09 CONCRETE PLACEMENT

- A. Before placing concrete, verify that installation of formwork, reinforcement, and embedded items is complete and that required inspections have been performed.
- B. Do not add water to concrete during delivery, at Project site, or during placement unless approved by Architect.
- C. Before test sampling and placing concrete, water may be added at Project site, subject to limitations of ACI 301.
 - 1. Do not add water to concrete after adding high-range water-reducing admixtures to mixture.
- D. Deposit concrete continuously in one layer or in horizontal layers of such thickness that no new concrete will be placed on concrete that has hardened enough to cause seams or planes of weakness. If a section cannot be placed continuously, provide construction joints as indicated. Deposit concrete to avoid segregation.
 - 1. Deposit concrete in horizontal layers of depth to not exceed formwork design pressures and in a manner to avoid inclined construction joints.
 - 2. Consolidate placed concrete with mechanical vibrating equipment according to ACI 301.
 - 3. Do not use vibrators to transport concrete inside forms. Insert and withdraw vibrators vertically at uniformly spaced locations to rapidly penetrate placed layer and at least 6 inches (150 mm) into preceding layer. Do not insert vibrators into lower layers of concrete

that have begun to lose plasticity. At each insertion, limit duration of vibration to time necessary to consolidate concrete and complete embedment of reinforcement and other embedded items without causing mixture constituents to segregate.

- E. Deposit and consolidate concrete for floors and slabs in a continuous operation, within limits of construction joints, until placement of a panel or section is complete.
 - 1. Consolidate concrete during placement operations so concrete is thoroughly worked around reinforcement and other embedded items and into corners.
 - 2. Maintain reinforcement in position on chairs during concrete placement.
 - 3. Screed slab surfaces with a straightedge and strike off to correct elevations.
 - 4. Slope surfaces uniformly to drains where required.
 - 5. Begin initial floating using bull floats or darbies to form a uniform and open-textured surface plane, before excess bleedwater appears on the surface. Do not further disturb slab surfaces before starting finishing operations.
- F. Cold-Weather Placement: Comply with ACI 306.1 and as follows. Protect concrete work from physical damage or reduced strength that could be caused by frost, freezing actions, or low temperatures.
 - 1. When average high and low temperature is expected to fall below 40 deg F (4.4 deg C) for three successive days, maintain delivered concrete mixture temperature within the temperature range required by ACI 301.
 - 2. Do not use frozen materials or materials containing ice or snow. Do not place concrete on frozen subgrade or on subgrade containing frozen materials.
 - 3. Do not use calcium chloride, salt, or other materials containing antifreeze agents or chemical accelerators unless otherwise specified and approved in mixture designs.
- G. Hot-Weather Placement: Comply with ACI 301 and as follows:
 - 1. Maintain concrete temperature below 90 deg F (32 deg C) at time of placement. Chilled mixing water or chopped ice may be used to control temperature, provided water equivalent of ice is calculated to total amount of mixing water. Using liquid nitrogen to cool concrete is Contractor's option.
 - 2. Fog-spray forms, steel reinforcement, and subgrade just before placing concrete. Keep subgrade uniformly moist without standing water, soft spots, or dry areas.

3.10 FINISHING FORMED SURFACES

- A. Rough-Formed Finish: As-cast concrete texture imparted by form-facing material with tie holes and defects repaired and patched. Remove fins and other projections that exceed specified limits on formed-surface irregularities.
 - 1. Apply to concrete surfaces not exposed to public view.
- B. Smooth-Formed Finish: As-cast concrete texture imparted by form-facing material, arranged in an orderly and symmetrical manner with a minimum of seams. Repair and patch tie holes and defects. Remove fins and other projections that exceed specified limits on formed-surface irregularities.
 - 1. Apply to concrete surfaces exposed to public view, to be covered with a coating or covering material applied directly to concrete.
- C. Related Unformed Surfaces: At tops of walls, horizontal offsets, and similar unformed surfaces adjacent to formed surfaces, strike off smooth and finish with a texture matching adjacent formed surfaces. Continue final surface treatment of formed surfaces uniformly across adjacent unformed surfaces, unless otherwise indicated.

3.11 FINISHING FLOORS AND SLABS

- A. General: Comply with ACI 302.1R recommendations for screeding, restraightening, and finishing operations for concrete surfaces. Do not wet concrete surfaces.

- B. Scratch Finish: While still plastic, texture concrete surface that has been screeded and bull-floated or darbied. Use stiff brushes, brooms, or rakes to produce a profile amplitude of 1/4 inch (6 mm) in 1 direction.
 - 1. Apply scratch finish to surfaces indicated and to receive concrete floor toppings.
- C. Float Finish: Consolidate surface with power-driven floats or by hand floating if area is small or inaccessible to power driven floats. Restraighten, cut down high spots, and fill low spots. Repeat float passes and restraightening until surface is left with a uniform, smooth, granular texture.
 - 1. Apply float finish to surfaces indicated to receive trowel finish and to be covered with fluid-applied or sheet waterproofing, built-up or membrane roofing, or sand-bed terrazzo.
- D. Trowel Finish: After applying float finish, apply first troweling and consolidate concrete by hand or power-driven trowel. Continue troweling passes and restraighten until surface is free of trowel marks and uniform in texture and appearance. Grind smooth any surface defects that would telegraph through applied coatings or floor coverings.
 - 1. Apply a trowel finish to surfaces indicated, exposed to view or to be covered with resilient flooring, carpet, ceramic or quarry tile set over a cleavage membrane, paint, or another thin-film-finish coating system.
 - 2. Finish surfaces to the following tolerances, according to ASTM E 1155 (ASTM E 1155M), for a randomly trafficked floor surface:
 - a. Specified overall values of flatness, F(F) 25; and of levelness, F(L) 20; with minimum local values of flatness, F(F) 17; and of levelness, F(L) 15.
 - 3. Finish and measure surface so gap at any point between concrete surface and an unleveled, freestanding, 10-foot-(3.05-m-) long straightedge resting on 2 high spots and placed anywhere on the surface does not exceed 1/4 inch (6 mm).
- E. Broom Finish: Apply a broom finish to exterior concrete platforms, steps, and ramps, and elsewhere as indicated.
 - 1. Immediately after float finishing, slightly roughen trafficked surface by brooming with fiber-bristle broom perpendicular to main traffic route. Coordinate required final finish with Architect before application.

3.12 MISCELLANEOUS CONCRETE ITEMS

- A. Filling In: Fill in holes and openings left in concrete structures, unless otherwise indicated, after work of other trades is in place. Mix, place, and cure concrete, as specified, to blend with in-place construction. Provide other miscellaneous concrete filling indicated or required to complete the Work.
- B. Curbs: Provide monolithic finish to interior curbs by stripping forms while concrete is still green and by steel-troweling surfaces to a hard, dense finish with corners, intersections, and terminations slightly rounded.
- C. Equipment Bases and Foundations: Provide machine and equipment bases and foundations as shown on Drawings. Set anchor bolts for machines and equipment at correct elevations, complying with diagrams or templates from manufacturer furnishing machines and equipment.
- D. Steel Pan Stairs: Provide concrete fill for steel pan stair treads, landings, and associated items. Cast-in inserts and accessories as shown on Drawings. Screed, tamp, and trowel-finish concrete surfaces.

3.13 CONCRETE PROTECTING AND CURING

- A. General: Protect freshly placed concrete from premature drying and excessive cold or hot temperatures. Comply with ACI 306.1 for cold-weather protection and ACI 301 for hot-weather protection during curing.
- B. Evaporation Retarder: Apply evaporation retarder to unformed concrete surfaces if hot, dry, or windy conditions cause moisture loss approaching 0.2 lb/sq. ft. x h (1 kg/sq. m x h) before and

during finishing operations. Apply according to manufacturer's written instructions after placing, screeding, and bull floating or darbying concrete, but before float finishing.

- C. Formed Surfaces: Cure formed concrete surfaces, including underside of beams, supported slabs, and other similar surfaces. If forms remain during curing period, moist cure after loosening forms. If removing forms before end of curing period, continue curing for the remainder of the curing period.
- D. Unformed Surfaces: Begin curing immediately after finishing concrete. Cure unformed surfaces, including floors and slabs, concrete floor toppings, and other surfaces.
- E. Cure concrete according to ACI 308.1, by one or a combination of the following methods:
 - 1. Moisture Curing: Keep surfaces continuously moist for not less than seven days with the following materials:
 - a. Water.
 - b. Continuous water-fog spray.
 - c. Absorptive cover, water saturated, and kept continuously wet. Cover concrete surfaces and edges with 12-inch (300-mm) lap over adjacent absorptive covers.
 - 2. Moisture-Retaining-Cover Curing: Cover concrete surfaces with moisture-retaining cover for curing concrete, placed in widest practicable width, with sides and ends lapped at least 12 inches (300 mm), and sealed by waterproof tape or adhesive. Cure for not less than seven days. Immediately repair any holes or tears during curing period using cover material and waterproof tape.
 - a. Moisture cure or use moisture-retaining covers to cure concrete surfaces to receive floor coverings.
 - b. Moisture cure or use moisture-retaining covers to cure concrete surfaces to receive penetrating liquid floor treatments.
 - c. Cure concrete surfaces to receive floor coverings with either a moisture-retaining cover or a curing compound that the manufacturer certifies will not interfere with bonding of floor covering used on Project..
 - 3. Curing Compound: Apply uniformly in continuous operation by power spray or roller according to manufacturer's written instructions. Recoat areas subjected to heavy rainfall within three hours after initial application. Maintain continuity of coating and repair damage during curing period.
 - a. After curing period has elapsed, remove curing compound without damaging concrete surfaces by method recommended by curing compound manufacturer unless manufacturer certifies curing compound will not interfere with bonding of floor covering used on Project.
 - 4. Curing and Sealing Compound: Apply uniformly to floors and slabs indicated in a continuous operation by power spray or roller according to manufacturer's written instructions. Recoat areas subjected to heavy rainfall within three hours after initial application. Repeat process 24 hours later and apply a second coat. Maintain continuity of coating and repair damage during curing period.

3.14 JOINT FILLING

- A. Prepare, clean, and install joint filler according to manufacturer's written instructions.
 - 1. Defer joint filling until concrete has aged at least one month(s). Do not fill joints until construction traffic has permanently ceased.
- B. Remove dirt, debris, saw cuttings, curing compounds, and sealers from joints; leave contact faces of joint clean and dry.
- C. Install semirigid joint filler full depth in saw-cut joints and at least 2 inches (50 mm) deep in formed joints. Overfill joint and trim joint filler flush with top of joint after hardening.

3.15 CONCRETE SURFACE REPAIRS

- A. Defective Concrete: Repair and patch defective areas when approved by Architect. Remove and replace concrete that cannot be repaired and patched to Architect's approval.
- B. Patching Mortar: Mix dry-pack patching mortar, consisting of one part portland cement to two and one-half parts fine aggregate passing a No. 16 (1.18-mm) sieve, using only enough water for handling and placing.
- C. Repairing Formed Surfaces: Surface defects include color and texture irregularities, cracks, spalls, air bubbles, honeycombs, rock pockets, fins and other projections on the surface, and stains and other discolorations that cannot be removed by cleaning.
 - 1. Immediately after form removal, cut out honeycombs, rock pockets, and voids more than 1/2 inch (13 mm) in any dimension in solid concrete, but not less than 1 inch (25 mm) in depth. Make edges of cuts perpendicular to concrete surface. Clean, dampen with water, and brush-coat holes and voids with bonding agent. Fill and compact with patching mortar before bonding agent has dried. Fill form-tie voids with patching mortar or cone plugs secured in place with bonding agent.
 - 2. Repair defects on surfaces exposed to view by blending white portland cement and standard portland cement so that, when dry, patching mortar will match surrounding color. Patch a test area at inconspicuous locations to verify mixture and color match before proceeding with patching. Compact mortar in place and strike off slightly higher than surrounding surface.
 - 3. Repair defects on concealed formed surfaces that affect concrete's durability and structural performance as determined by Architect.
- D. Repairing Unformed Surfaces: Test unformed surfaces, such as floors and slabs, for finish and verify surface tolerances specified for each surface. Correct low and high areas. Test surfaces sloped to drain for trueness of slope and smoothness; use a sloped template.
 - 1. Repair finished surfaces containing defects. Surface defects include spalls, popouts, honeycombs, rock pockets, crazing and cracks in excess of 0.01 inch (0.25 mm) wide or that penetrate to reinforcement or completely through unreinforced sections regardless of width, and other objectionable conditions.
 - 2. After concrete has cured at least 14 days, correct high areas by grinding.
 - 3. Correct localized low areas during or immediately after completing surface finishing operations by cutting out low areas and replacing with patching mortar. Finish repaired areas to blend into adjacent concrete.
 - 4. Correct other low areas scheduled to receive floor coverings with a repair underlayment. Prepare, mix, and apply repair underlayment and primer according to manufacturer's written instructions to produce a smooth, uniform, plane, and level surface. Feather edges to match adjacent floor elevations.
 - 5. Correct other low areas scheduled to remain exposed with a repair topping. Cut out low areas to ensure a minimum repair topping depth of 1/4 inch (6 mm) to match adjacent floor elevations. Prepare, mix, and apply repair topping and primer according to manufacturer's written instructions to produce a smooth, uniform, plane, and level surface.
 - 6. Repair defective areas, except random cracks and single holes 1 inch (25 mm) or less in diameter, by cutting out and replacing with fresh concrete. Remove defective areas with clean, square cuts and expose steel reinforcement with at least a 3/4-inch (19-mm) clearance all around. Dampen concrete surfaces in contact with patching concrete and apply bonding agent. Mix patching concrete of same materials and mixture as original concrete except without coarse aggregate. Place, compact, and finish to blend with adjacent finished concrete. Cure in same manner as adjacent concrete.
 - 7. Repair random cracks and single holes 1 inch (25 mm) or less in diameter with patching mortar. Groove top of cracks and cut out holes to sound concrete and clean off dust, dirt, and loose particles. Dampen cleaned concrete surfaces and apply bonding agent. Place

patching mortar before bonding agent has dried. Compact patching mortar and finish to match adjacent concrete. Keep patched area continuously moist for at least 72 hours.

- E. Perform structural repairs of concrete, subject to Architect's approval, using epoxy adhesive and patching mortar.
- F. Repair materials and installation not specified above may be used, subject to Architect's approval.

3.16 FIELD QUALITY CONTROL

- A. Testing and Inspecting: Owner will engage a qualified testing and inspecting agency to perform field tests and inspections and prepare test reports.
- B. Testing and Inspecting: Engage a qualified testing and inspecting agency to perform tests and inspections and to submit reports.
- C. Inspections:
 - 1. Steel reinforcement placement.
 - 2. Steel reinforcement welding.
 - 3. Headed bolts and studs.
 - 4. Verification of use of required design mixture.
 - 5. Concrete placement, including conveying and depositing.
 - 6. Curing procedures and maintenance of curing temperature.
 - 7. Verification of concrete strength before removal of shores and forms from beams and slabs.
- D. Concrete Tests: Testing of composite samples of fresh concrete obtained according to ASTM C 172 shall be performed according to the following requirements:
 - 1. Testing Frequency: Obtain one composite sample for each day's pour of each concrete mixture exceeding 5 cu. yd. (4 cu. m), but less than 25 cu. yd. (19 cu. m), plus one set for each additional 50 cu. yd. (38 cu. m) or fraction thereof.
 - 2. Testing Frequency: Obtain at least one composite sample for each 100 cu. yd. (76 cu. m) or fraction thereof of each concrete mixture placed each day.
 - a. When frequency of testing will provide fewer than five compressive-strength tests for each concrete mixture, testing shall be conducted from at least five randomly selected batches or from each batch if fewer than five are used.
 - 3. Slump: ASTM C 143/C 143M; one test at point of placement for each composite sample, but not less than one test for each day's pour of each concrete mixture. Perform additional tests when concrete consistency appears to change.
 - 4. Air Content: ASTM C 231, pressure method, for normal-weight concrete; one test for each composite sample, but not less than one test for each day's pour of each concrete mixture.
 - 5. Concrete Temperature: ASTM C 1064/C 1064M; one test hourly when air temperature is 40 deg F (4.4 deg C) and below and when 80 deg F (27 deg C) and above, and one test for each composite sample.
 - 6. Unit Weight: ASTM C 567, fresh unit weight of structural lightweight concrete; one test for each composite sample, but not less than one test for each day's pour of each concrete mixture.
 - 7. Compression Test Specimens: ASTM C 31/C 31M.
 - a. Cast and laboratory cure two sets of two standard cylinder specimens for each composite sample.
 - b. Cast and field cure two sets of two standard cylinder specimens for each composite sample.
 - 8. Compressive-Strength Tests: ASTM C 39/C 39M; test one set of two laboratory-cured specimens at 7 days and one set of two specimens at 28 days.
 - a. Test one set of two field-cured specimens at 7 days and one set of two specimens at 28 days.

- b. A compressive-strength test shall be the average compressive strength from a set of two specimens obtained from same composite sample and tested at age indicated.
- 9. When strength of field-cured cylinders is less than 85 percent of companion laboratory-cured cylinders, Contractor shall evaluate operations and provide corrective procedures for protecting and curing in-place concrete.
- 10. Strength of each concrete mixture will be satisfactory if every average of any three consecutive compressive-strength tests equals or exceeds specified compressive strength and no compressive-strength test value falls below specified compressive strength by more than 500 psi (3.4 MPa).
- 11. Test results shall be reported in writing to Architect, concrete manufacturer, and Contractor within 48 hours of testing. Reports of compressive-strength tests shall contain Project identification name and number, date of concrete placement, name of concrete testing and inspecting agency, location of concrete batch in Work, design compressive strength at 28 days, concrete mixture proportions and materials, compressive breaking strength, and type of break for both 7- and 28-day tests.
- 12. Nondestructive Testing: Impact hammer, sonoscope, or other nondestructive device may be permitted by Architect but will not be used as sole basis for approval or rejection of concrete.
- 13. Additional Tests: Testing and inspecting agency shall make additional tests of concrete when test results indicate that slump, air entrainment, compressive strengths, or other requirements have not been met, as directed by Architect. Testing and inspecting agency may conduct tests to determine adequacy of concrete by cored cylinders complying with ASTM C 42/C 42M or by other methods as directed by Architect.
- 14. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.
- 15. Correct deficiencies in the Work that test reports and inspections indicate does not comply with the Contract Documents.
- E. Measure floor and slab flatness and levelness according to ASTM E 1155 (ASTM E 1155M) within 48 hours of finishing.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 04 05 11
MASONRY MORTARING AND GROUTING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Mortar for unit masonry.
- B. Grout for masonry.
- C. Mortar for cast stone masonry.

1.02 RELATED REQUIREMENTS

- A. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 01 74 19 - Construction Waste Management and Disposal: Limitations on disposal of removed materials; requirements for recycling.
- C. Section 04 20 00 - Unit Masonry: Installation of mortar and grout.
- D. See Structural Drawings for additional Project Specifications. If Conflicting Project Specifications arise, the Project Specifications on the Structural Drawings govern.

1.03 REFERENCE STANDARDS

- A. ACI 530/530.1/ERTA - Building Code Requirements and Specification for Masonry Structures and Related Commentaries.
- B. ACI 530.1/ASCE 6/TMS 602 - Specification for Masonry Structures; American Concrete Institute International.
- C. ASTM C5 - Standard Specification for Quicklime for Structural Purposes.
- D. ASTM C94/C94M - Standard Specification for Ready-Mixed Concrete.
- E. ASTM C144 - Standard Specification for Aggregate for Masonry Mortar.
- F. ASTM C150/C150M - Standard Specification for Portland Cement.
- G. ASTM C207 - Standard Specification for Hydrated Lime for Masonry Purposes.
- H. ASTM C270 - Standard Specification for Mortar for Unit Masonry.
- I. ASTM C404 - Standard Specification for Aggregates for Masonry Grout.
- J. ASTM C476 - Standard Specification for Grout for Masonry.
- K. ASTM C780 - Standard Test Method for Preconstruction and Construction Evaluation of Mortars for Plain and Reinforced Unit Masonry.
- L. ASTM C1019 - Standard Test Method for Sampling and Testing Grout.
- M. ASTM C1072 - Standard Test Method for Measurement of Masonry Flexural Bond Strength.
- N. ASTM C1314 - Standard Test Method for Compressive Strength of Masonry Prisms.
- O. ASTM E518/E518M - Standard Test Methods for Flexural Bond Strength of Masonry.
- P. IMIABC (CW) - Recommended Practices & Guide Specifications for Cold Weather Masonry Construction; International Masonry Industry All-Weather Council; 1993.
- Q. IMIABC (HW) - Recommended Practices & Guide Specifications for Hot Weather Masonry Construction; International Masonry Industry All-Weather Council; current edition.

1.04 SUBMITTALS

- A. See Section 01 33 00 - Submittal Procedures, for submittal procedures.
- B. Product Data: Include design mix based on the Proportion specification of ASTM C 270 is to be used.

- C. Manufacturer's Certificate: Certify that products meet or exceed specified requirements.

1.05 QUALITY ASSURANCE

- A. Comply with provisions of ACI 530/530.1/ERTA, except where exceeded by requirements of the contract documents.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Maintain packaged materials clean, dry, and protected against dampness, freezing, and foreign matter.

1.07 FIELD CONDITIONS

- A. Maintain materials and surrounding air temperature to minimum 40 degrees F prior to, during, and 48 hours after completion of masonry work.
- B. Maintain materials and surrounding air temperature to maximum 90 degrees F prior to, during, and 48 hours after completion of masonry work.

PART 2 PRODUCTS

2.01 MORTAR AND GROUT APPLICATIONS

- A. At Contractor's option, mortar and grout may be field-mixed from packaged dry materials, made from factory premixed dry materials with addition of water only, or ready-mixed.
- B. Mortar Mix Designs: ASTM C270, Property Specification.
- C. Grout Mix Designs:
1. Bond Beams and Lintels: 3,000 psi strength at 28 days; 8-10 inches slump; provide premixed type in accordance with ASTM C 94/C 94M.
 2. Engineered Masonry: 3,000 psi strength at 28 days; 8-10 inches slump; provide premixed type in accordance with ASTM C 94/C 94M.

2.02 MATERIALS

- A. Packaged Dry Material for Mortar for Unit Masonry: Premixed Portland cement, hydrated lime, and sand; complying with ASTM C387/C387M and capable of producing mortar of the specified strength in accordance with ASTM C270 with the addition of water only.
1. Color: Mineral pigments added as required to produce approved color sample.
 2. Products:
 - a. Amerimix, an Oldcastle brand; AMX 400: www.amerimix.com/#sle.
 - b. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Packaged Dry Material for Mortar for Repointing: Premixed Portland cement, hydrated lime, and graded sand; capable of producing Type O mortar in accordance with ASTM C270 with the addition of water only.
1. Color: Mineral pigments added as required to produce approved color sample.
 2. Products:
 - a. Amerimix, an Oldcastle brand; AMX 420: www.amerimix.com/#sle.
 - b. Substitutions: See Section 01 60 00 - Product Requirements.
- C. Packaged Dry Material for Grout for Masonry: Premixed cementitious materials and dried aggregates; capable of producing grout of the specified strength in accordance with ASTM C476 with the addition of water only.
- D. Masonry Cement: ASTM C91.
1. Type: Type N.
 2. Colored Mortar: Premixed cement as required to match Architect's color sample.
 3. Manufacturers:
 - a. Solomon Colors; Solomon Colors Concentrated A, H, and X Series: www.solomoncolors.com/#sle.

- b. Substitutions: See Section 01 60 00 - Product Requirements.
- E. Portland Cement: ASTM C 150, Type I - Normal; color as required to produce approved color sample. Color must match existing building mortar color.
- F. Hydrated Lime: ASTM C207, Type S.
- G. Quicklime: ASTM C5, non-hydraulic type.
- H. Mortar Aggregate: ASTM C144.
- I. Grout Aggregate: ASTM C404.
- J. Pigments for Colored Mortar: Pure, concentrated mineral pigments specifically intended for mixing into mortar and complying with ASTM C979/C979M.
 - 1. Color(s): As selected by Architect from manufacturer's full range, to match existing mortar.
 - 2. Manufacturers:
 - a. Davis Colors
 - b. Lambert Corporation
 - c. Solomon Colors
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
- K. Water: Clean and potable.
- L. Accelerating Admixture: Nonchloride type for use in cold weather.
 - 1. Substitutions: Not permitted.

2.03 MORTAR MIXES

- A. Mortar for Unit Masonry: ASTM C270, Property Specification.
 - 1. Engineered masonry: Type S.
 - 2. Masonry below grade and in contact with earth: Type M.
 - 3. Exterior, loadbearing masonry: Type S.
 - 4. Exterior, non-loadbearing masonry: Type N.
 - 5. Interior, loadbearing masonry: Type S.
 - 6. Interior, non-loadbearing masonry: Type N.

2.04 MORTAR MIXING

- A. Thoroughly mix mortar ingredients using mechanical batch mixer, in accordance with ASTM C270 and in quantities needed for immediate use.
- B. Maintain sand uniformly damp immediately before the mixing process.
- C. Add mortar color in accordance with manufacturer's instructions. Provide uniformity of mix and coloration.
- D. Do not use anti-freeze compounds to lower the freezing point of mortar.
- E. If water is lost by evaporation, re-temper only within two hours of mixing.
- F. Use mortar within two hours after mixing at temperatures of 90 degrees F, or two-and-one-half hours at temperatures under 40 degrees F.

2.05 GROUT MIXES

- A. Bond Beams, Lintels, and Grouted Cores: 3,000 psi strength at 28 days; 8-10 inches slump; provide premixed type in accordance with ASTM C 94/C 94M.
 - 1. Fine grout for spaces with smallest horizontal dimension of 2 inches or less.
 - 2. Coarse grout for spaces with smallest horizontal dimension greater than 2 inches.
- B. Engineered Masonry: 3,000 psi strength at 28 days; 8-10 inches slump; provide premixed type in accordance with ASTM C 94/C 94M.
 - 1. Fine grout for spaces with smallest horizontal dimension of 2 inches or less.

2. Coarse grout for spaces with smallest horizontal dimension greater than 2 inches.

2.06 GROUT MIXING

- A. Mix grout in accordance with ASTM C94/C94M.
- B. Add admixtures in accordance with manufacturer's instructions; mix uniformly.
- C. Do not use anti-freeze compounds to lower the freezing point of grout.

PART 3 EXECUTION

3.01 PREPARATION

- A. Apply bonding agent to existing Masonry surfaces.
- B. Plug clean-out holes for grouted masonry with Brick or block masonry units. Brace masonry to resist wet grout pressure.

3.02 INSTALLATION

- A. Install mortar and grout to requirements of section(s) in which masonry is specified.
- B. Work grout into masonry cores and cavities to eliminate voids.
- C. Do not install grout in lifts greater than 16 inches without consolidating grout by rodding.
- D. Do not displace reinforcement while placing grout.
- E. Remove excess mortar from grout spaces.

3.03 GROUTING

- A. Perform all grouting by means of low-lift technique. Do not employ high-lift grouting.
- B. Low-Lift Grouting:
 1. Limit height of pours to 16 inches.
 2. Limit height of masonry to 16 inches above each pour.
 3. Pour grout only after vertical reinforcing is in place; place horizontal reinforcing as grout is poured. Prevent displacement of bars as grout is poured.
 4. Place grout for each pour continuously and consolidate immediately; do not interrupt pours for more than 1-1/2 hours.

END OF SECTION

SECTION 04 20 00
UNIT MASONRY

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Concrete Block.
- B. Reinforcement and Anchorage.
- C. Installing Flashings.
- D. Lintels.
- E. Accessories.

1.02 RELATED REQUIREMENTS

- A. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 01 74 19 - Construction Waste Management and Disposal: Limitations on disposal of removed materials; requirements for recycling.
- C. Section 03 30 00 - Cast-in-Place Concrete: Reinforcing steel.
- D. Section 04 05 11 - Masonry Mortaring and Grouting.
- E. Section 05 50 00 - Metal Fabrications: Loose steel lintels and fabricated steel items.
- F. Section 07 27 27 - Fluid Applied Air and Vapor Barrier System.
- G. Section 07 21 00 - Thermal Insulation: Insulation for cavity spaces.
- H. Section 07 84 00 - Firestopping: Firestopping at penetrations of fire-rated masonry and at top of fire-rated walls.
- I. Section 07 90 05 - Joint Sealers: Backing rod and sealant at control and expansion joints.
- J. See Structural Drawings for additional Project Specifications. If Conflicting Project Specifications arise, the Project Specifications on the Structural Drawings govern.

1.03 REFERENCE STANDARDS

- A. ACI 530/530.1/ERTA - Building Code Requirements and Specification for Masonry Structures and Related Commentaries.
- B. ACI 530.1/ASCE 6/TMS 602 - Specification For Masonry Structures; American Concrete Institute International.
- C. ASTM A82/A82M - Standard Specification for Steel Wire, Plain, for Concrete Reinforcement.
- D. ASTM A153/A153M - Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware.
- E. ASTM A580/A580M - Standard Specification for Stainless Steel Wire.
- F. ASTM A615/A615M - Standard Specification for Deformed and Plain Carbon Steel Bars for Concrete Reinforcement.
- G. ASTM A641/A641M - Standard Specification for Zinc-Coated (Galvanized) Carbon Steel Wire.
- H. ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.
- I. ASTM A666 - Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar.
- J. ASTM B370 - Standard Specification for Copper Sheet and Strip for Building Construction.
- K. ASTM C62 - Standard Specification for Building Brick (Solid Masonry Units Made From Clay or Shale).

- L. ASTM C67 - Standard Test Methods for Sampling and Testing Brick and Structural Clay Tile.
- M. ASTM C90 - Standard Specification for Loadbearing Concrete Masonry Units.
- N. ASTM C129 - Standard Specification for Nonloadbearing Concrete Masonry Units.
- O. ASTM C140/C140M - Standard Test Methods of Sampling and Testing Concrete Masonry Units and Related Units.
- P. ASTM C144 - Standard Specification for Aggregate for Masonry Mortar.
- Q. ASTM C150/C150M - Standard Specification for Portland Cement.
- R. ASTM C207 - Standard Specification for Hydrated Lime for Masonry Purposes.
- S. ASTM C216 - Standard Specification for Facing Brick (Solid Masonry Units Made From Clay or Shale).
- T. ASTM C270 - Standard Specification for Mortar for Unit Masonry.
- U. ASTM C404 - Standard Specification for Aggregates for Masonry Grout.
- V. ASTM C476 - Standard Specification for Grout for Masonry.
- W. ASTM C652 - Standard Specification for Hollow Brick (Hollow Masonry Units Made From Clay or Shale).
- X. ASTM C744 - Standard Specification for Prefaced Concrete and Calcium Silicate Masonry Units.
- Y. ASTM C780 - Standard Test Method for Preconstruction and Construction Evaluation of Mortars for Plain and Reinforced Unit Masonry.
- Z. TMS 402/602 - Building Code Requirements and Specification for Masonry Structures.
- AA. IMIABC (CW) - Recommended Practices & Guide Specifications for Cold Weather Masonry Construction; International Masonry Industry All-Weather Council; 1993.
- AB. IMIABC (HW) - Recommended Practices & Guide Specifications for Hot Weather Masonry Construction; International Masonry Industry All-Weather Council; current edition.
- AC. UL (FRD) - Fire Resistance Directory.

1.04 SUBMITTALS

- A. See Section 01 33 00 - Submittal Procedures, for submittal procedures.
- B. Product Data: Provide data for masonry units, fabricated wire reinforcement, mortar, and masonry accessories.
- C. Shop Drawings: Indicate pertinent dimensions, materials, anchorage, size and type of fasteners, and accessories for brickwork support system.
- D. Samples for Initial Selection: Submit sample boards from multiple manufacturers for initial selection.
- E. Samples: Submit four samples of concrete block units to illustrate color, texture, and extremes of color range.
- F. Manufacturer's Certificate: Certify that masonry units meet or exceed specified requirements.
- G. Manufacturer's Certificate: Certify that water repellent admixture manufacturer has certified masonry unit manufacturer as an approved user of water repellent admixture in the manufacture of concrete block.
- H. Manufacturer's Qualification Statement.
- I. Installer's Qualification Statement.
- J. Certify that CMU masonry units used in firewall assemblies are of minimum equivalent thickness of 4" and that there is no calcereous or siliceous gravel aggregate used.

1.05 QUALITY ASSURANCE

- A. Comply with provisions of ACI 530/530.1/ERTA, except where exceeded by requirements of the contract documents.
 - 1. Maintain one copy of each document on project site.
- B. Fire Rated Assemblies: Conform to applicable code for UL Assembly No.
- C. Manufacturer Qualifications: Company specializing in manufacturing the type of products specified in this section with minimum ten years of documented experience.
- D. Installer Qualifications: Company specializing in performing work of the type specified and with at least ten years of documented experience.

1.06 MOCK-UP

- A. Construct a masonry wall as a mock-up panel sized 8 feet long by 6 feet high; include mortar and accessories, structural backup, wall openings, flashings, wall insulation, and parging in mock-up.
- B. Locate where directed.
- C. Mock-up may remain as part of the Work.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, handle, and store masonry units by means that will prevent mechanical damage and contamination by other materials.

1.08 ENVIRONMENTAL REQUIREMENTS

- A. Maintain materials and surrounding air temperature to minimum 40 degrees F prior to, during, and 48 hours after completion of masonry work.
- B. Maintain materials and surrounding air temperature to maximum 90 degrees F prior to, during, and 48 hours after completion of masonry work.

1.09 EXTRA MATERIALS

- A. See Section 01 60 00 - Product Requirements, for additional provisions.
- B. Provide 50 of each size, color, and type of brick units for Owner use in maintenance of project.

PART 2 PRODUCTS

2.01 CONCRETE MASONRY UNITS

- A. Concrete Block: Comply with referenced standards fire rated, non fire rated and as follows:
 - 1. Size: Standard units with nominal face dimensions of 16 x 8 inches and nominal depth of 2, 4, 6, 8 inches, 10, 12, 14 inches and/or as indicated on drawings.
 - 2. Special Shapes: Provide non-standard blocks configured for bull nose corners, lintels, headers, control joint edges, and bond beams and other conditions.
 - 3. Load-Bearing Units: ASTM C90, normal weight.
 - a. Both hollow and solid block, as indicated.
 - 1) Supply grade N for all C.M.U construction.
 - b. Exposed Faces for Painted Finish: Manufacturer's standard color and texture.
 - c. Exposed Faces for Decorative Finish: Ground Face to be selected from manufacturer's full range.
 - d. Exposed corners at interior are to be bull nose.
 - e. First course is square to accommodate cove base.
 - 4. Non-Loadbearing Units: ASTM C129.
 - a. Both hollow and solid block, as indicated.
 - b. Normal weight.
 - c. Exposed corners to be bull nose.

- d. First course is square to accommodate cove base.
- 5. Ground Faced Units: ASTM C 90, hollow block, with smooth ground face complying with ASTM C 744.
 - a. Finish: Filled and polished ground face unit
 - b. Colors and styles: Manufacturer's full range.
 - c. Manufacturers:
 - 1) York Building Products; Gemstone Plus..
 - 2) Echelon Masonry, Trenwith, Trendstone Plus.
 - 3) Westbrook Concrete Block, Polished Face.
 - 4) Substitutions: See Section 01 60 00 - Product Requirements.
 - d. Exposed corners at interior are to be bull nose.
 - e. First course is square to accommodate cove base.

2.02 MORTAR AND GROUT MATERIALS

- A. Mortar and grout: As specified in Section 04 05 11.

2.03 REINFORCEMENT AND ANCHORAGE

- A. Manufacturers of Joint Reinforcement and Anchors:
 - 1. Dur-O-Wal: www.dur-o-wal.com.
 - 2. Hohmann & Barnard, Inc: www.h-b.com.
 - 3. WIRE-BOND: www.wirebond.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Reinforcing Steel: ASTM A615/A615M Grade 40 (280) deformed billet bars. ____
- C. Adjustable Multiple Wythe Joint Reinforcement: Truss or Ladder type with adjustable ties spaced at 16 in on center and fabricated with moisture drip; ASTM A 82/A 82M steel wire, hot dip galvanized after fabrication to ASTM A 153/153M, Class B; or stainless steel wire conforming tot ASTM A 580/A 580M Type 304.0.1875 inch side rods with 0.1483 inch cross rods and adjustable components of 0.1875 inch wire; width of components as required to provide not more than 1 inch and not less than 1/2 inch of mortar coverage from each masonry face.
 - 1. Vertical adjustment: Not less than 2 inches.
 - 2. Insulation Clips: Provide clips at tabs or ties designed to secure insulation against outer face of inner wythe of masonry.
- D. Flexible Anchors: 2-piece anchors that permit differential movement between masonry and building frame, sized to provide not more than 1 inch and not less than 1/2 inch of mortar coverage from masonry face.
 - 1. Steel frame: Crimped wire anchors for welding to frame, 0.25 inch thick, with trapezoidal wire ties 0.1875 inch thick, hot dip galvanized to ASTM A 153/A 153M, Class B-2.
- E. Masonry Veneer Anchors: 2-piece anchors that permit differential movement between masonry veneer and structural backup, hot dip galvanized to ASTM A 153/A 153M, Class B-2; stainless steel.
 - 1. Anchor channel: Not less than 0.120 inch thick, designed for fastening to structural backup by non corrodeable fasteners;Design Basis = Hohman & Barnard #362-C.
 - 2. Wire ties: Triangular; Trapezoidal; Rectangular or Manufacturer's standard shape, 0.1875 inch thick.
 - 3. Vertical adjustment: Not less than 3-1/2 inches.
 - 4. Seismic Feature: Provide lip, hook, or clip on end of wire ties to engage or enclose not less than one continuous horizontal joint reinforcement wire of 0.1875 inch diameter.

2.04 FLASHINGS

- A. Metal Flashing Materials: Polymer modified asphalt coated copper, 7oz/sq.ft. Provide "C-Coat" flashing by Hohmann & Bernard, or Architect approved equal.

- B. Metal Flashing Materials:
 - 1. Copper Flashing: ASTM B370, 060 soft annealed; 20 oz/sq ft thick; natural finish.
- C. Lap Sealant: recommended by flashing manufacturer type.

2.05 ACCESSORIES

- A. Preformed Control Joints: Rubber or neoprene material.
 - 1. Manufacturers:
 - a. Dur-O-Wal: www.dur-o-wal.com.
 - b. Hohmann & Barnard, Inc (including Dur-O-Wal brand); Product RS or VS: www.h-b.com/#sle.
 - c. WIRE-BOND: www.wirebond.com/#sle.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Joint Filler: Closed cell polyethylene; polyurethane or rubber oversized 50 percent to joint width; self expanding; 1 inch wide design width x by maximum lengths available.
 - 1. Manufacturers:
 - a. Dur-O-Wal; Product Mortar Net: www.dur-o-wal.com.
 - b. Hohmann & Barnard, Inc (including Dur -O-Wal brand); Product P.E. Foam Expansion unit fuller: www.h-b.com/#sle.
 - c. Substitutions: See Section 01 60 00 - Product Requirements.
- C. Reglets: As specified on Section 07 62 00.
- D. Weeps: Polyethylene tubing.
- E. Cavity Vents: Polyester mesh; insect resistant or polypropylene extrusion.
- F. Mortar Mesh, For cavity wall mortar control where indicated; polyethylene (HDPE) or nylon mesh, 90% open;
 - 1. Manufacturer's:
 - a. Hohmann and Barnard, Inc; Product Mortar Net: www.h-b.com.
 - b. Dur - O - Wall; Product DA1008 Mortar Net: www.dur - o - wall.com.
 - c. Substitutions: See Section 01 60 00 - Product Requirements.
- G. Cleaning Solution: Non-acidic, not harmful to masonry work or adjacent materials.

2.06 LINTELS

- A. Precast Concrete Lintels: Sizes and reinforcing as shown on plans. Precast units made from concrete matching concrete masonry units in color, texture, and compressive strength and with reinforcing bars required to support loads indicated. Cure precast lintels by same method used for concrete masonry units.
- B. Masonry Lintels: prefabricated or built-in-place masonry lintels made from bond beam concrete masonry units with reinforcing bars placed as required and filled with coarse grout.
- C. See Structural Drawings for Steel Lintel information.

2.07 MORTAR AND GROUT MIXES

- A. Mortar and Grout mixes as specified in Section 04 05 11.
- B. Colored Mortar: As specified in Section 04 05 11. Use like colored mortar where exposed surface of pre-faced units occurs-first course above finished floor.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field conditions are acceptable and are ready to receive masonry.
- B. Verify that related items provided under other sections are properly sized and located.
- C. Verify that built-in items are in proper location, and ready for roughing into masonry work.

3.02 PREPARATION

- A. Direct and coordinate placement of items supplied for installation under other sections.
- B. Provide temporary bracing during installation of masonry work. Maintain in place until building structure provides permanent bracing.

3.03 COLD AND HOT WEATHER REQUIREMENTS

- A. Comply with requirements of ACI 530/530.1/ERTA or applicable building code, whichever is more stringent.

3.04 COURSING

- A. Establish lines, levels, and coursing indicated. Protect from displacement.
- B. Maintain masonry courses to uniform dimension. Form vertical and horizontal joints of uniform thickness.
- C. Concrete Masonry Units:
 - 1. Bond: Running; Match existing brand.
 - 2. Coursing: One unit and one mortar joint to equal 8 inches.
 - 3. Common CMU Mortar Joints: Concave struck.
 - 4. Ground Face CMU Mortar Joints: Grooved struck on interior at ground face only.
 - 5. Use flush joint on cavity side face of C.M.U. where fluid applied air and vapor barrier is applied.
- D. Brick Units:
 - 1. Bond: Running; As indicated for different locations.
 - 2. Vertical Coursing: Three units and three mortar joints to equal 8 inches.
 - 3. Mortar Joints: Concave.

3.05 PLACING AND BONDING

- A. Lay solid masonry units in full bed of mortar, with full head joints, uniformly jointed with other work.
- B. Lay hollow masonry units with face shell bedding on head and bed joints.
- C. Buttering corners of joints or excessive furrowing of mortar joints is not permitted.
- D. Remove excess mortar and mortar smears as work progresses.
- E. Interlock intersections and external corners.
- F. Do not shift or tap masonry units after mortar has achieved initial set. Where adjustment must be made, remove mortar and replace.
- G. Set reglets as shown on plans.
- H. Perform job site cutting of masonry units with proper tools to provide straight, clean, unchipped edges. Prevent broken masonry unit corners or edges.
- I. Cut mortar joints flush where wall tile is scheduled, cement parging is required, or resilient base is scheduled. Block exposed cavity space with raiseable steel guard of correct width.
- J. Isolate masonry partitions from vertical structural framing members with a control joint as indicated.
- K. Isolate top joint of masonry partitions from horizontal structural framing members and slabs or decks with compressible joint filler.

3.06 WEEPS

- A. Install weeps in veneer walls at 32 inches on center horizontally above opening, above through-wall flashing, above shelf angles and lintels, at bottom of walls, and as shown on drawings.

3.07 CAVITY MORTAR CONTROL

- A. Do not permit mortar to drop or accumulate into cavity air space or to plug weep/cavity vents.
- B. For cavity walls, build inner wythe ahead of outer wythe to accommodate accessories.
- C. Install cavity mortar diverter at base of cavity and at other flashing locations as recommended by manufacturer to prevent mortar droppings from blocking weep/cavity vents.

3.08 REINFORCEMENT AND ANCHORAGE - GENERAL

- A. Fasten anchors to structural framing and embed in masonry joints as masonry is laid. Unless otherwise indicated on drawings or closer spacing is indicated under specific wall type, space anchors at maximum of 16 inches horizontally and 16 inches vertically.

3.09 REINFORCEMENT AND ANCHORAGES - CAVITY WALL MASONRY

- A. Install horizontal joint reinforcement 16 inches on center.
- B. Place masonry joint reinforcement in first and second horizontal joints above and below openings. Extend minimum 16 inches each side of openings.
- C. Place continuous joint reinforcement in first and second joint below top of walls.
- D. Lap joint reinforcement ends minimum 6 inches.
- E. Fasten anchors to structural framing and embed in masonry joints as masonry is laid. Space anchors at maximum of 24 inches horizontally and 16 inches vertically.
- F. Reinforce joint corners and intersections with strap anchors 16 inches on center.

3.10 MASONRY FLASHINGS

- A. Whether or not specifically indicated, install masonry flashing to divert water to exterior at all locations where downward flow of water will be interrupted.
 - 1. Extend flashings full width at such interruptions and at least 8 inches into adjacent masonry and turn up at least 2 inches to form watertight pan at non-masonry construction.
 - 2. Remove or cover protrusions or sharp edges that could puncture flashings.
 - 3. Seal lapped ends and penetrations of flashing before covering with mortar.
- B. Extend metal flashings through exterior face of masonry and turn down to form drip. Hemedge. Install joint sealer below drip edge to prevent moisture migration under flashing.
- C. Lap end joints of flashings at least 4 inches and seal watertight with mastic or elastic sealant, type as recommended by flashing manufacturer.

3.11 LINTELS

- A. Install precast concrete lintels over openings, where shown on drawings.
- B. Install pre-cast lintels over openings where steel or precast concrete lintels are not scheduled.
- C. Maintain minimum 8 inch bearing on each side of opening.

3.12 GROUTED COMPONENTS

- A. Reinforce bond beams as shown on plans.
- B. Lap splices minimum 40 bar diameters.
- C. Support and secure reinforcing bars from displacement. Maintain position within 1/2 inch of dimensioned position.
- D. Place and consolidate grout fill without displacing reinforcing.
- E. At bearing locations, fill masonry cores with grout for a minimum 12 inches either side of opening.

3.13 CONTROL AND EXPANSION JOINTS

- A. Do not continue horizontal joint reinforcement through control and expansion joints.

- B. Form control joint with a sheet building paper bond breaker fitted to one side of the hollow contour end of the block unit. Fill the resultant core with grout fill. Rake joint at exposed unit faces for placement of backer rod and sealant.
- C. Install preformed control joint device in continuous lengths. Seal butt and corner joints in accordance with manufacturer's instructions.
- D. Size control joint in accordance with Section 07 90 05 for sealant performance.
- E. Form expansion joint as detailed.
- F. Locate per drawings.

3.14 BUILT-IN WORK

- A. As work progresses, install built-in metal door frames, glazed frames, fabricated metal frames, window frames, anchor bolts, plates, and boxes and other items to be built into the work and furnished under other sections.
- B. Install built-in items plumb, level, and true to line.
- C. Bed anchors of metal door and glazed frames in adjacent mortar joints. Fill frame voids solid with grout.
 - 1. Fill adjacent masonry cores with grout minimum 12 inches from framed openings.
- D. Do not build into masonry construction organic materials that are subject to deterioration.

3.15 TOLERANCES

- A. Maximum Variation From Unit to Adjacent Unit: 1/16 inch.
- B. Maximum Variation from Plane of Wall: 1/4 inch in 10 ft.
- C. Maximum Variation from Plumb: 1/4 inch per story non-cumulative; 1/2 inch in two stories or more.
- D. Maximum Variation from Level Coursing: 1/8 inch in 3 ft and 1/4 inch in 20ft.
- E. Maximum Variation of Joint Thickness: 1/8 inch in 3 ft.
- F. Maximum Variation from Cross Sectional Thickness of Walls: 1/4 inch.

3.16 CUTTING AND FITTING

- A. Cut and fit for chases, pipes, conduit, sleeves, and grounds. Coordinate with other sections of work to provide correct size, shape, and location.
- B. Obtain approval prior to cutting or fitting masonry work not indicated or where appearance or strength of masonry work may be impaired.

3.17 FIELD QUALITY CONTROL

- A. Clay Masonry Unit Tests: Test each variety of clay masonry in accordance with ASTM C67 requirements, sampling 5 randomly chosen units for each 50,000 installed.
- B. Concrete Masonry Unit Tests: Test each variety of concrete unit masonry in accordance with ASTM C140 for conformance to requirements of this specification.
- C. Mortar Tests: Test each type of mortar in accordance with ASTM C780, testing with same frequency as masonry samples.

3.18 CLEANING

- A. Remove excess mortar and mortar droppings.
- B. Replace defective mortar. Match adjacent work.
- C. Clean soiled surfaces with cleaning solution.
- D. Use non-metallic tools in cleaning operations.

3.19 PROTECTION

- A. Without damaging completed work, provide protective boards at exposed external corners that are subject to damage by construction activities.

END OF SECTION

NOT FOR BIDDING

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 04 72 00
CAST STONE MASONRY

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Architectural cast stone.
- B. Units required are indicated on the drawings as "cast stone".
- C. Units required are:
 - 1. Exterior window sills.

1.02 RELATED REQUIREMENTS

- A. Section 01 78 39 - Construction Waste Management and Disposal: Limitations on disposal of removed materials; requirements for recycling.
- B. Section 04 05 11 - Masonry Mortaring and Grouting: Mortar for setting cast stone.
- C. Section 04 20 00 - Unit Masonry: Installation of cast stone in conjunction with masonry.
- D. Section 07 90 05 - Joint Sealers: Materials and execution methods for sealing soft joints in cast stone work.

1.03 REFERENCE STANDARDS

- A. ACI 318 - Building Code Requirements for Structural Concrete and Commentary.
- B. ASTM A123/A123M - Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.
- C. ASTM A185/A185M - Standard Specification for Steel Welded Wire Reinforcement, Plain, for Concrete.
- D. ASTM A615/A615M - Standard Specification for Deformed and Plain Carbon Steel Bars for Concrete Reinforcement.
- E. ASTM C33/C33M - Standard Specification for Concrete Aggregates.
- F. ASTM C150/C150M - Standard Specification for Portland Cement.
- G. ASTM C270 - Standard Specification for Mortar for Unit Masonry.
- H. ASTM C494/C494M - Standard Specification for Chemical Admixtures for Concrete.
- I. ASTM C642 - Standard Test Method for Density, Absorption, and Voids in Hardened Concrete.
- J. ASTM C979/C979M - Standard Specification for Pigments for Integrally Colored Concrete.
- K. ASTM C1364 - Standard Specification for Architectural Cast Stone.

1.04 SUBMITTALS

- A. See Section 01 33 00 - Administrative Requirements, for submittal procedures.
- B. Manufacturer's Qualification Data: Documentation showing compliance with specified requirements.
- C. Product Data: Test results of cast stone components made previously by the manufacturer.
 - 1. Include one copy of ASTM C1364 for Architect's use.
- D. Shop Drawings: Include elevations, dimensions, layouts, profiles, cross sections, reinforcement, exposed faces, arrangement of joints, anchoring methods, anchors, and piece numbers.
- E. Mortar Color Selection Samples.
- F. Verification Samples: Pieces of actual cast stone components not less than 12 inches square, illustrating range of color and texture to be anticipated in components furnished for the project.

- G. Full-Size Samples: One unit of each shape, for review.
- H. Source Quality Control Test Reports.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: A current producer member of the Cast Stone Institute with a minimum of 10 years of experience in producing cast stone of the types required for project.
 - 1. Adequate plant capacity to furnish quality, sizes, and quantity of cast stone required without delaying progress of the work.
 - 2. Products previously produced by plant and exposed to weather that exhibit satisfactory appearance.

1.06 MOCK-UP

- A. Mock-Up: Provide full size cast stone components for installation in mock-up of exterior wall.
- B. See Section 01 40 00 - Quality Requirements for additional requirements.
 - 1. Approved mock-up will become standard for appearance and workmanship.
 - 2. Remove mock-up not incorporated into the work and dispose of debris.
- C. Source Quality Control: Test compressive strength and absorption of specimens selected at random from plant production.
 - 1. Test in accordance with ASTM C642.
 - 2. Select specimens at rate of 3 per 500 cubic feet, with a minimum of 3 per production week.
 - 3. Submit reports of tests by independent testing agency, showing compliance with requirements.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Deliver cast stone components secured to shipping pallets and protected from damage and discoloration. Protect corners from damage.
- B. Number each piece individually to match shop drawings and schedule.
- C. Store cast stone components and installation materials in accordance with manufacturer's instructions.
- D. Store cast stone components on pallets with nonstaining, waterproof covers. Ventilate under covers to prevent condensation. Prevent contact with dirt.
- E. Protect cast stone components during handling and installation to prevent chipping, cracking, or other damage.
- F. Store mortar materials where contamination can be avoided.
- G. Schedule and coordinate production and delivery of cast stone components with unit masonry work to optimize on-site inventory and to avoid delaying the work.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Architectural Cast Stone:
 - 1. Any current producer member of the Cast Stone Institute
 - 2. Continental Cast Stone Manufacturing Company
 - 3. D. C. Kerckoff Company
 - 4. Pineapple Grove Designs
 - 5. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 ARCHITECTURAL CAST STONE

- A. Cast Stone: Architectural concrete product manufactured to simulate appearance of natural limestone, complying with ASTM C1364.

1. Compressive Strength: As specified in ASTM C1364; calculate strength of pieces to be field cut at 80 percent of uncut piece.
 2. Freeze-Thaw Resistance: Demonstrated by laboratory testing in accordance with ASTM C 1364.
 3. Surface Texture: Fine grained texture, with no bugholes, air voids, or other surface blemishes visible from distance of 10 feet.
 4. Color: Custom color. Match CMU veneer.
 5. Remove cement film from exposed surfaces before packaging for shipment.
- B. Shapes: Provide shapes indicated on drawings.
1. Variation from Any Dimension, Including Bow, Camber, and Twist: Maximum of plus/minus 1/8 inch or length divided by 360, whichever is greater, but not more than 1/4 inch.
 2. Unless otherwise indicated on drawings, provide:
 - a. Wash or slope of 1:12 on exterior horizontal surfaces.
 - b. Drips on projecting components, wherever possible.
 - c. Raised fillets at back of sills and at ends to be built in.
- C. Reinforcement: Provide reinforcement as required to withstand handling and structural stresses; comply with ACI 318.
1. Pieces More than 12 inches Wide: Provide full length two-way reinforcement of cross-sectional area not less than 0.25 percent of unit cross-sectional area. Use epoxy coated reinforcement.

2.03 MATERIALS

- A. Portland Cement: ASTM C150.
1. For Units: Type I, white or gray as required to match Architect 's selection.
 2. For Mortar: Type I or II, except Type III may be used in cold weather to match mortar on existing building.
- B. Coarse Aggregate: ASTM C33, except for gradation; granite, quartz, or limestone.
- C. Fine Aggregate: ASTM C33, except for gradation; natural or manufactured sands.
- D. Pigments: ASTM C979, inorganic iron oxides; do not use carbon black.
- E. Admixtures: ASTM C494/C494M.
- F. Water: Potable.
- G. Reinforcing Bars: ASTM A615/A615M deformed bars, galvanized or epoxy coated.
- H. Steel Welded Wire Reinforcement: ASTM A185/A185M, galvanized or epoxy coated.
- I. Embedded Anchors, Dowels, and Inserts: Type 304 stainless steel, of type and size as required for conditions.
- J. Mortar: Portland cement-lime, ASTM C270, Type N; as specified in Section 04 0511.
- K. Sealant: As specified in Section .
- L. Cleaner: General-purpose cleaner designed for removing mortar and grout stains, efflorescence, and other construction stains from new masonry surfaces without discoloring or damaging masonry surfaces; approved for intended use by cast stone manufacturer and by cleaner manufacturer for use on cast stone and adjacent masonry materials.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Examine construction to receive cast stone components. Notify Architect if construction is not acceptable.
- B. Do not begin installation until unacceptable conditions have been corrected.

3.02 INSTALLATION

- A. Install cast stone components in conjunction with masonry, complying with requirements of Section 04 20 00.
- B. Mechanically anchor cast stone units indicated; set remainder in mortar.
- C. Setting:
 - 1. Drench cast stone components with clear, running water immediately before installation.
 - 2. Set units in a full bed of mortar unless otherwise indicated.
 - 3. Fill vertical joints with mortar.
 - 4. Fill dowel holes and anchor slots completely with mortar or non-shrink grout.

3.03 CLEANING

- A. Repair chips and other surface damage noticeable when viewed in direct daylight at 10 feet.
 - 1. Repair with matching touchup material provided by the manufacturer and in accordance with manufacturer's instructions.
 - 2. Repair methods and results subject to Architect 's approval.
- B. Keep cast stone components clean as work progresses.
- C. Clean completed exposed cast stone after mortar is thoroughly set and cured.
 - 1. Wet surfaces with water before applying cleaner.
 - 2. Apply cleaner to cast stone in accordance with manufacturer's instructions.
 - 3. Remove cleaner promptly by rinsing thoroughly with clear water.
 - 4. Do not use acidic cleaners.

3.04 PROTECTION

- A. Protect completed work from damage.
- B. Clean, repair, or restore damaged or mortar-splashed work to condition of new work.

END OF SECTION

SECTION 05 12 00
STRUCTURAL STEEL

PART 1 - GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.02 SUMMARY

- A. This Section includes the following:
 - 1. Structural steel.
 - 2. Grout.
- B. Related Sections include the following:
 - 1. Division 1 Section "Quality Requirements" for independent testing agency procedures and administrative requirements.
 - 2. Division 5 Section "Metal Fabrications" for steel lintels or shelf angles not attached to structural-steel frame miscellaneous steel fabrications and other metal items not defined as structural steel.
 - 3. Division 9 painting Sections for surface preparation and priming requirements.

1.03 DEFINITIONS

- A. Structural Steel: Elements of structural-steel frame, as classified by AISC's "Code of Standard Practice for Steel Buildings and Bridges," that support design loads.

1.04 PERFORMANCE REQUIREMENTS

- A. Connections: Provide details of simple shear connections required by the Contract Documents to be selected or completed by structural-steel fabricator to withstand ASD-service loads indicated and comply with other information and restrictions indicated.
 - 1. Select and complete connections using schematic details indicated and AISC's "Manual of Steel Construction, Allowable Stress Design," Part 4
 - 2. Engineering Responsibility: Fabricator's responsibilities include using a qualified professional engineer to prepare structural analysis data for structural-steel connections.
- B. Construction: Type 2, simple framing.

1.05 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: Show fabrication of structural-steel components.
 - 1. Include details of cuts, connections, splices, camber, holes, and other pertinent data.
 - 2. Include embedment drawings.
 - 3. Indicate welds by standard AWS symbols, distinguishing between shop and field welds, and show size, length, and type of each weld.
 - 4. Indicate type, size, and length of bolts, distinguishing between shop and field bolts. Identify pretensioned and slip-critical high-strength bolted connections.
 - 5. For structural-steel connections indicated to comply with design loads, include structural analysis data prepared by the qualified professional engineer responsible for their preparation.
- C. Welding certificates.
- D. Qualification Data: For Installer, fabricator, professional engineer, testing agency.
- E. Mill Test Reports: Signed by manufacturers certifying that the following products comply with requirements:
 - 1. Structural steel including chemical and physical properties.

2. Bolts, nuts, and washers including mechanical properties and chemical analysis.
3. Direct-tension indicators.
4. Tension-control, high-strength bolt-nut-washer assemblies.
5. Shear stud connectors.
6. Shop primers.
7. Nonshrink grout.

F. Source quality-control test reports.

1.06 QUALITY ASSURANCE

- A. Shop-Painting Applicators: Qualified according to AISC's Sophisticated Paint Endorsement P1 or SSPC-QP 3, "Standard Procedure for Evaluating Qualifications of Shop Painting Applicators."
- B. Welding: Qualify procedures and personnel according to AWS D1.1, "Structural Welding Code--Steel."
- C. Comply with applicable provisions of the following specifications and documents:
 1. AISC's "Code of Standard Practice for Steel Buildings and Bridges."
 2. AISC's "Seismic Provisions for Structural Steel Buildings" and "Supplement No. 2."
 3. AISC's "Specification for Structural Steel Buildings--Allowable Stress Design and Plastic Design."
 4. AISC's "Specification for the Design of Steel Hollow Structural Sections."
 5. AISC's "Specification for Allowable Stress Design of Single-Angle Members"
 6. RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts."
- D. Preinstallation Conference: Conduct conference at Project site to comply with requirements in Division 1 Section "Project Management and Coordination."

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Store materials to permit easy access for inspection and identification. Keep steel members off ground and spaced by using pallets, dunnage, or other supports and spacers. Protect steel members and packaged materials from erosion and deterioration.
 1. Store fasteners in a protected place. Clean and relubricate bolts and nuts that become dry or rusty before use.
 2. Do not store materials on structure in a manner that might cause distortion, damage, or overload to members or supporting structures. Repair or replace damaged materials or structures as directed.

1.08 COORDINATION

- A. Furnish anchorage items to be embedded in or attached to other construction without delaying the Work. Provide setting diagrams, sheet metal templates, instructions, and directions for installation.

PART 2 - PRODUCTS

2.01 STRUCTURAL-STEEL MATERIALS

- A. W-Shapes: ASTM A 992/A 992M.
- B. Channels, Angles, M, S-Shapes: ASTM A 36/A 36M.
- C. Plate and Bar: ASTM A 36/A 36M.
- D. Corrosion-Resisting Structural Steel: ASTM A 588/A 588M, Grade 50 (345).
- E. Cold-Formed Hollow Structural Sections: ASTM A 500, Grade B, structural tubing.
- F. Corrosion-Resisting Cold-Formed Hollow Structural Sections: ASTM A 847, structural tubing.
- G. Steel Pipe: ASTM A 53/A 53M, Type E or S, Grade B.
 1. Weight Class: Standard, Extra strong, or Double-extra strong, as indicated.
 2. Finish: Black, except where indicated to be galvanized.

H. Welding Electrodes: Comply with AWS requirements.

2.02 BOLTS, CONNECTORS, AND ANCHORS

- A. High-Strength Bolts, Nuts, and Washers: ASTM A 325 (ASTM A 325M), Type 1, heavy hex steel structural bolts; ASTM A 563 (ASTM A 563M) heavy hex carbon-steel nuts; and ASTM F 436 (ASTM F 436M) hardened carbon-steel washers.
 - 1. Finish: Plain.
 - 2. Direct-Tension Indicators: ASTM F 959, Type 325 (ASTM F 959M, Type 8.8,) compressible-washer type.
 - a. Finish: Plain
- B. Unheaded Anchor Rods: ASTM F 1554, Grade 36
 - 1. Configuration: Straight or Hooked, as indicated.
 - 2. Nuts: ASTM A 563 (ASTM A 563M) heavy hex carbon steel.
 - 3. Plate Washers: ASTM A 36/A 36M carbon steel.
 - 4. Washers: ASTM F 436 (ASTM F 436M) hardened carbon steel.
 - 5. Finish: Plain
- C. Headed Anchor Rods: ASTM F 1554, Grade 36 straight.
 - 1. Nuts: ASTM A 563 (ASTM A 563M) heavy hex carbon steel.
 - 2. Plate Washers: ASTM A 36/A 36M carbon steel.
 - 3. Washers: ASTM F 436 (ASTM F 436M) hardened carbon steel.
 - 4. Finish: Plain
- D. Threaded Rods: ASTM A 36/A 36M
 - 1. Nuts: ASTM A 563 (ASTM A 563M) heavy hex carbon steel.
 - 2. Washers: ASTM F 436 (ASTM F 436M) hardened carbon steel.
 - 3. Finish: Plain
- E. Eye Bolts and Nuts: ASTM A 108, Grade 1030, cold-finished carbon steel.
- F. Sleeve Nuts: ASTM A 108, Grade 1018, cold-finished carbon steel.

2.03 PRIMER

- A. Primer: SSPC-Paint 25, Type I, iron oxide, zinc oxide, raw linseed oil, and alkyd.
- B. Primer: Fabricator's standard lead- and chromate-free, nonasphaltic, rust-inhibiting primer.
- C. Galvanizing Repair Paint: ASTM A 780.

2.04 GROUT

- A. Cement Grout: Portland cement, ASTM C 150, Type I; and clean, natural sand, ASTM C 404, Size No. 2. Mix at ratio of 1 part cement to 2-1/2 parts sand, by volume, with minimum water required for placement and hydration.
- B. Metallic, Shrinkage-Resistant Grout: ASTM C 1107, factory-packaged, metallic aggregate grout, mixed with water to consistency suitable for application and a 30-minute working time.

2.05 FABRICATION

- A. Structural Steel: Fabricate and assemble in shop to greatest extent possible. Fabricate according to AISC's "Code of Standard Practice for Steel Buildings and Bridges" and AISC's "Specification for Structural Steel Buildings--Allowable Stress Design and Plastic Design"
 - 1. Camber structural-steel members where indicated.
 - 2. Identify high-strength structural steel according to ASTM A 6/ A 6M and maintain markings until structural steel has been erected.
 - 3. Mark and match-mark materials for field assembly.
 - 4. Complete structural-steel assemblies, including welding of units, before starting shop-priming operations.

- B. Thermal Cutting: Perform thermal cutting by machine to greatest extent possible.
 - 1. Plane thermally cut edges to be welded to comply with requirements in AWS D1.1.
- C. Bolt Holes: Cut, drill, mechanically thermal cut, or punch standard bolt holes perpendicular to metal surfaces.
- D. Finishing: Accurately finish ends of columns and other members transmitting bearing loads.
- E. Cleaning: Clean and prepare steel surfaces that are to remain unpainted according to SSPC-SP 3, "Power Tool Cleaning."
- F. Holes: Provide holes required for securing other work to structural steel and for passage of other work through steel framing members.
 - 1. Cut, drill, or punch holes perpendicular to steel surfaces. Do not thermally cut bolt holes or enlarge holes by burning.
 - 2. Base-Plate Holes: Cut, drill, mechanically thermal cut, or punch holes perpendicular to steel surfaces.
 - 3. Weld threaded nuts to framing and other specialty items indicated to receive other work.

2.06 SHOP CONNECTIONS

- A. High-Strength Bolts: Shop install high-strength bolts according to RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts" for type of bolt and type of joint specified.
 - 1. Joint Type: Snug tightened.
- B. Weld Connections: Comply with AWS D1.1 for welding procedure specifications, tolerances, appearance, and quality of welds and for methods used in correcting welding work.
 - 1. Remove backing bars or runoff tabs, back gouge, and grind steel smooth.
 - 2. Assemble and weld built-up sections by methods that will maintain true alignment of axes without exceeding tolerances of AISC's "Code of Standard Practice for Steel Buildings and Bridges" for mill material.
 - 3. Verify that weld sizes, fabrication sequence, and equipment used for architecturally exposed structural steel will limit distortions to allowable tolerances. Prevent weld show-through on exposed steel surfaces.
 - a. Grind butt welds flush.
 - b. Grind or fill exposed fillet welds to smooth profile. Dress exposed welds.

2.07 SHOP PRIMING

- A. Shop prime steel surfaces except the following:
 - 1. Surfaces embedded in concrete or mortar. Extend priming of partially embedded members to a depth of 2 inches (50 mm).
 - 2. Surfaces to be field welded.
 - 3. Surfaces to be high-strength bolted with slip-critical connections.
 - 4. Surfaces to receive sprayed fire-resistive materials.
 - 5. Galvanized surfaces.
- B. Surface Preparation: Clean surfaces to be painted. Remove loose rust and mill scale and spatter, slag, or flux deposits. Prepare surfaces according to the following specifications and standards:
 - 1. SSPC-SP 3, "Power Tool Cleaning."
- C. Priming: Immediately after surface preparation, apply primer according to manufacturer's written instructions and at rate recommended by SSPC to provide a dry film thickness of not less than 1.5 mils (0.038 mm). Use priming methods that result in full coverage of joints, corners, edges, and exposed surfaces.
 - 1. Stripe paint corners, crevices, bolts, welds, and sharp edges.
 - 2. Apply two coats of shop paint to inaccessible surfaces after assembly or erection. Change color of second coat to distinguish it from first.

- D. Painting: Apply a 1-coat, nonasphaltic primer complying with SSPC-PS Guide 7.00, "Painting System Guide 7.00: Guide for Selecting One-Coat Shop Painting Systems," to provide a dry film thickness of not less than 1.5 mils (0.038 mm).

2.08 GALVANIZING

- A. Hot-Dip Galvanized Finish: Apply zinc coating by the hot-dip process to structural steel according to ASTM A 123/ A 123M.
 - 1. Fill vent holes and grind smooth after galvanizing.
 - 2. Galvanize lintels and shelf angles attached to structural-steel frame and located in exterior walls.

2.09 SOURCE QUALITY CONTROL

- A. Owner will engage an independent testing and inspecting agency to perform shop tests and inspections and prepare test reports.
 - 1. Provide testing agency with access to places where structural-steel work is being fabricated or produced to perform tests and inspections.
- B. Correct deficiencies in Work that test reports and inspections indicate does not comply with the Contract Documents.
- C. Bolted Connections: Shop-bolted connections will be tested and inspected according to RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts."
- D. Welded Connections: In addition to visual inspection, shop-welded connections will be tested and inspected according to AWS D1.1 and the following inspection procedures, at testing agency's option:
 - 1. Liquid Penetrant Inspection: ASTM E 165.
 - 2. Magnetic Particle Inspection: ASTM E 709; performed on root pass and on finished weld. Cracks or zones of incomplete fusion or penetration will not be accepted.
 - 3. Ultrasonic Inspection: ASTM E 164.
 - 4. Radiographic Inspection: ASTM E 94.
- E. In addition to visual inspection, shop-welded shear connectors will be tested and inspected according to requirements in AWS D1.1 for stud welding and as follows:
 - 1. Bend tests will be performed if visual inspections reveal either a less-than- continuous 360-degree flash or welding repairs to any shear connector.
 - 2. Tests will be conducted on additional shear connectors if weld fracture occurs on shear connectors already tested, according to requirements in AWS D1.1.

PART 3 - EXECUTION

3.01 EXAMINATION

- A. Verify elevations of concrete- and masonry-bearing surfaces and locations of anchor rods, bearing plates, and other embedments, with steel erector present, for compliance with requirements.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.02 PREPARATION

- A. Provide temporary shores, guys, braces, and other supports during erection to keep structural steel secure, plumb, and in alignment against temporary construction loads and loads equal in intensity to design loads. Remove temporary supports when permanent structural steel, connections, and bracing are in place, unless otherwise indicated.

3.03 ERECTION

- A. Set structural steel accurately in locations and to elevations indicated and according to AISC's "Code of Standard Practice for Steel Buildings and Bridges" and "Specification for Structural Steel Buildings--Allowable Stress Design and Plastic Design."

- B. Base and Bearing Plates: Clean concrete- and masonry-bearing surfaces of bond-reducing materials, and roughen surfaces prior to setting base and bearing plates. Clean bottom surface of base and bearing plates.
 - 1. Set base and bearing plates for structural members on wedges, shims, or setting nuts as required.
 - 2. Weld plate washers to top of base plate.
 - 3. Snug-tighten anchor rods after supported members have been positioned and plumbed. Do not remove wedges or shims but, if protruding, cut off flush with edge of base or bearing plate before packing with grout.
 - 4. Promptly pack grout solidly between bearing surfaces and base or bearing plates so no voids remain. Neatly finish exposed surfaces; protect grout and allow to cure. Comply with manufacturer's written installation instructions for shrinkage-resistant grouts.
- C. Maintain erection tolerances of structural steel and architecturally exposed structural steel within AISC's "Code of Standard Practice for Steel Buildings and Bridges."
- D. Align and adjust various members forming part of complete frame or structure before permanently fastening. Before assembly, clean bearing surfaces and other surfaces that will be in permanent contact with members. Perform necessary adjustments to compensate for discrepancies in elevations and alignment.
 - 1. Level and plumb individual members of structure.
 - 2. Make allowances for difference between temperature at time of erection and mean temperature when structure is completed and in service.
- E. Splice members only where indicated.
- F. Remove erection bolts on welded, architecturally exposed structural steel; fill holes with plug welds; and grind smooth at exposed surfaces.
- G. Do not use thermal cutting during erection unless approved by Architect. Finish thermally cut sections within smoothness limits in AWS D1.1].
- H. Do not enlarge unfair holes in members by burning or using drift pins. Ream holes that must be enlarged to admit bolts.

3.04 FIELD CONNECTIONS

- A. High-Strength Bolts: Install high-strength bolts according to RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts" for type of bolt and type of joint specified.
 - 1. Joint Type: Snug tightened.
- B. Weld Connections: Comply with AWS D1.1 for welding procedure specifications, tolerances, appearance, and quality of welds and for methods used in correcting welding work.
 - 1. Comply with AISC's "Code of Standard Practice for Steel Buildings and Bridges" and "Specification for Structural Steel Buildings--Allowable Stress Design and Plastic Design for bearing, adequacy of temporary connections, alignment, and removal of paint on surfaces adjacent to field welds.
 - 2. Remove backing bars or runoff tabs, back gouge, and grind steel smooth.
 - 3. Assemble and weld built-up sections by methods that will maintain true alignment of axes without exceeding tolerances of AISC's "Code of Standard Practice for Steel Buildings and Bridges" for mill material.
 - 4. Verify that weld sizes, fabrication sequence, and equipment used for architecturally exposed structural steel will limit distortions to allowable tolerances. Prevent weld show-through on exposed steel surfaces.
 - a. Grind butt welds flush.
 - b. Grind or fill exposed fillet welds to smooth profile. Dress exposed welds.

3.05 FIELD QUALITY CONTROL

- A. Testing Agency: Owner will engage a qualified independent testing and inspecting agency to inspect field welds and high-strength bolted connections.
- B. Bolted Connections: Shop-bolted connections will be tested and inspected according to RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts."
- C. Welded Connections: Field welds will be visually inspected according to AWS D1.1.
 - 1. In addition to visual inspection, field welds will be tested according to AWS D1.1 and the following inspection procedures, at testing agency's option:
 - a. Liquid Penetrant Inspection: ASTM E 165.
 - b. Magnetic Particle Inspection: ASTM E 709; performed on root pass and on finished weld. Cracks or zones of incomplete fusion or penetration will not be accepted.
 - c. Ultrasonic Inspection: ASTM E 164.
 - d. Radiographic Inspection: ASTM E 94.
- D. In addition to visual inspection, test and inspect field-welded shear connectors according to requirements in AWS D1.1 for stud welding and as follows:
 - 1. Perform bend tests if visual inspections reveal either a less-than- continuous 360-degree flash or welding repairs to any shear connector.
 - 2. Conduct tests on additional shear connectors if weld fracture occurs on shear connectors already tested, according to requirements in AWS D1.1.
- E. Correct deficiencies in Work that test reports and inspections indicate does not comply with the Contract Documents.

3.06 REPAIRS AND PROTECTION

- A. Repair damaged galvanized coatings on galvanized items with galvanized repair paint according to ASTM A 780 and manufacturer's written instructions.
- B. Touchup Painting: After installation, promptly clean, prepare, and prime or reprime field connections, rust spots, and abraded surfaces of prime-painted joists and accessories, bearing plates, and abutting structural steel.
 - 1. Clean and prepare surfaces by SSPC-SP 2 hand-tool cleaning or SSPC-SP 3 power-tool cleaning.
 - 2. Apply a compatible primer of same type as shop primer used on adjacent surfaces.
- C. Touchup Painting: Cleaning and touchup painting are specified in Division 9 painting Sections.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 05 21 00
STEEL JOIST FRAMING

PART 1 - GENERAL

1.01 SUMMARY

- A. Section Includes:
 - 1. K-series steel joists.
 - 2. K-series steel joist substitutes.
 - 3. Joist accessories.

1.02 ACTION SUBMITTALS

- A. Product Data: For each type of joist, accessory, and product.
- B. Shop Drawings:
 - 1. Include layout, designation, number, type, location, and spacing of joists.
 - 2. Include joining and anchorage details, bracing, bridging, and joist accessories; splice and connection locations and details; and attachments to other construction.

1.03 QUALITY ASSURANCE

- A. Manufacturer Qualifications: A manufacturer certified by SJI to manufacture joists complying with applicable standard specifications and load tables in SJI's "Specifications."
- B. Welding Qualifications: Qualify field-welding procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code - Steel."

1.04 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, and handle joists as recommended in SJI's "Specifications."

PART 2 - PRODUCTS

2.01 K-SERIES STEEL JOISTS

- A. Manufacture steel joists of type indicated according to "Standard Specifications for Open Web Steel Joists, K-Series" in SJI's "Specifications," with steel-angle top- and bottom-chord members, underslung ends, and parallel top chord.
- B. Steel Joist Substitutes: Manufacture according to "Standard Specifications for Open Web Steel Joists, K-Series" in SJI's "Specifications," with steel-angle or -channel members.

2.02 PRIMERS

- A. Low-Emitting Materials: Paints and coatings shall comply with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers."
- B. Primer: SSPC-Paint 15, or manufacturer's standard shop primer complying with performance requirements in SSPC-Paint 15.

2.03 JOIST ACCESSORIES

- A. Bridging: Provide bridging anchors and number of rows of horizontal or diagonal bridging of material, size, and type required by SJI's "Specifications" for type of joist, chord size, spacing, and span. Furnish additional erection bridging if required for stability.
- B. Furnish miscellaneous accessories including splice plates and bolts required by joist manufacturer to complete joist assembly.

2.04 CLEANING AND SHOP PAINTING

- A. Clean and remove loose scale, heavy rust, and other foreign materials from fabricated joists and accessories.

- B. Apply one coat of shop primer.

PART 3 - EXECUTION

3.01 INSTALLATION

- A. Do not install joists until supporting construction is in place and secured.
- B. Install joists and accessories plumb, square, and true to line; securely fasten to supporting construction according to SJI's "Specifications," joist manufacturer's written recommendations, and requirements in this Section.
1. Before installation, splice joists delivered to Project site in more than one piece.
 2. Space, adjust, and align joists accurately in location before permanently fastening.
 3. Install temporary bracing and erection bridging, connections, and anchors to ensure that joists are stabilized during construction.
- C. Field weld joists to supporting steel bearing plates and framework. Coordinate welding sequence and procedure with placement of joists. Comply with AWS requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.
- D. Bolt joists to supporting steel framework using high-strength structural bolts. Comply with Research Council on Structural Connection's "Specification for Structural Joints Using ASTM A 325 or ASTM A 490 Bolts" for high-strength structural bolt installation and tightening requirements.
- E. Install and connect bridging concurrently with joist erection, before construction loads are applied. Anchor ends of bridging lines at top and bottom chords if terminating at walls or beams.

END OF SECTION

SECTION 05 31 00
STEEL DECK

PART 1 - GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.02 SUMMARY

- A. This Section includes the following:
 - 1. Roof deck.
- B. Related Sections include the following:
 - 1. Division 05 Section "Metal Fabrications" for framing deck openings with miscellaneous steel shapes.
 - 2. Division 09 painting Sections for repair painting of primed deck.

1.03 SUBMITTALS

- A. Product Data: For each type of deck, accessory, and product indicated.
- B. Shop Drawings: Show layout and types of deck panels, anchorage details, reinforcing channels, pans, cut deck openings, special jointing, accessories, and attachments to other construction.
- C. Product Certificates: For each type of steel deck, signed by product manufacturer.
- D. Welding certificates.
- E. Field quality-control test and inspection reports.
- F. Product Test Reports: Based on evaluation of comprehensive tests performed by a qualified testing agency, indicating that each of the following complies with requirements:
 - 1. Power-actuated mechanical fasteners.
- G. Research/Evaluation Reports: For steel deck.

1.04 QUALITY ASSURANCE

- A. Testing Agency Qualifications: An independent agency qualified according to ASTM E 329 for testing indicated.
- B. Welding: Qualify procedures and personnel according to AWS D1.3, "Structural Welding Code - Sheet Steel."
- C. Fire-Test-Response Characteristics: Where indicated, provide steel deck units identical to those tested for fire resistance per ASTM E 119 by a testing and inspecting agency acceptable to authorities having jurisdiction.
 - 1. Fire-Resistance Ratings: Indicated by design designations of applicable testing and inspecting agency.
 - 2. Steel deck units shall be identified with appropriate markings of applicable testing and inspecting agency.
- D. AISI Specifications: Comply with calculated structural characteristics of steel deck according to AISI's "North American Specification for the Design of Cold-Formed Steel Structural Members."
- E. FMG Listing: Provide steel roof deck evaluated by FMG and listed in its "Approval Guide, Building Materials" for Class 1 fire rating and Class 1-90 windstorm ratings.

1.05 DELIVERY, STORAGE, AND HANDLING

- A. Protect steel deck from corrosion, deformation, and other damage during delivery, storage, and handling.

- B. Stack steel deck on platforms or pallets and slope to provide drainage. Protect with a waterproof covering and ventilate to avoid condensation.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Steel Deck:
 - a. ASC Profiles, Inc.
 - b. Canam Steel Corp.; The Canam Manac Group.
 - c. Consolidated Systems, Inc.
 - d. DACS, Inc.
 - e. D-Mac Industries Inc.
 - f. Epic Metals Corporation.
 - g. Marlyn Steel Decks, Inc.
 - h. New Millennium Building Systems, LLC.
 - i. Nucor Corp.; Vulcraft Division.
 - j. Roof Deck, Inc.
 - k. United Steel Deck, Inc.
 - l. Valley Joist; Division of EBSCO Industries, Inc.
 - m. Verco Manufacturing Co.
 - n. Wheeling Corrugating Company; Div. of Wheeling-Pittsburgh Steel Corporation.

2.02 ROOF DECK

- A. Steel Roof Deck: Fabricate panels, without top-flange stiffening grooves, to comply with "SDI Specifications and Commentary for Steel Roof Deck," in SDI Publication No. 30, and with the following:
 - 1. Galvanized Steel Sheet: ASTM A 653/A 653M, Structural Steel (SS), Grade 33 zinc coating.
 - 2. Galvanized and Shop-Primed Steel Sheet at Exposed Field Painted Deck: ASTM A 653/A 653M, Structural Steel (SS), Grade 33 zinc coating; cleaned, pretreated, and primed with manufacturer's standard baked-on, rust-inhibitive primer.
 - a. Color: Manufacturer's standard.
 - 3. Deck Profile: As indicated.
 - 4. Profile Depth: As indicated.
 - 5. Design Uncoated-Steel Thickness: As indicated.
 - 6. Span Condition: Triple span or more.
 - 7. Side Laps: Overlapped.

2.03 ACCESSORIES

- A. General: Provide manufacturer's standard accessory materials for deck that comply with requirements indicated.
- B. Mechanical Fasteners: Corrosion-resistant, low-velocity, power-actuated or pneumatically driven carbon-steel fasteners; or self-drilling, self-threading screws.
- C. Side-Lap Fasteners: Corrosion-resistant, hexagonal washer head; self-drilling, carbon-steel screws, No. 10 (4.8-mm) minimum diameter.
- D. Flexible Closure Strips: Vulcanized, closed-cell, synthetic rubber.

- E. Miscellaneous Sheet Metal Deck Accessories: Steel sheet, minimum yield strength of 33,000 psi (230 MPa), not less than 0.0359-inch (0.91-mm) design uncoated thickness, of same material and finish as deck; of profile indicated or required for application.
- F. Pour Stops and Girder Fillers: Steel sheet, minimum yield strength of 33,000 psi (230 MPa), of same material and finish as deck, and of thickness and profile As indicated.
- G. Column Closures, End Closures, Z-Closures, and Cover Plates: Steel sheet, of same material, finish, and thickness as deck, unless otherwise indicated.
- H. Piercing Hanger Tabs: Piercing steel sheet hanger attachment devices for use with floor deck.
- I. Weld Washers: Uncoated steel sheet, shaped to fit deck rib, 0.0598 inch (1.52 mm) thick, with factory-punched hole of 3/8-inch (9.5-mm) minimum diameter.
- J. Recessed Sump Pans: Single-piece steel sheet, 0.0747 inch (1.90 mm) thick, of same material and finish as deck, with 3-inch- (76-mm-) wide flanges and sloped recessed pans of 1-1/2-inch (38-mm) minimum depth. For drains, cut holes in the field.
- K. Flat Sump Plate: Single-piece steel sheet, 0.0747 inch (1.90 mm) thick, of same material and finish as deck. For drains, cut holes in the field.
- L. Galvanizing Repair Paint: SSPC-Paint 20 or DOD-P-21035, with dry film containing a minimum of 94 percent zinc dust by weight.
- M. Repair Paint: Manufacturer's standard rust-inhibitive primer of same color as primer.

PART 3 - EXECUTION

3.01 EXAMINATION

- A. Examine supporting frame and field conditions for compliance with requirements for installation tolerances and other conditions affecting performance.

3.02 INSTALLATION, GENERAL

- A. Install deck panels and accessories according to applicable specifications and commentary in SDI Publication No. 30, manufacturer's written instructions, and requirements in this Section.
- B. Install temporary shoring before placing deck panels, if required to meet deflection limitations.
- C. Locate deck bundles to prevent overloading of supporting members.
- D. Place deck panels on supporting frame and adjust to final position with ends accurately aligned and bearing on supporting frame before being permanently fastened. Do not stretch or contract side-lap interlocks.
- E. Place deck panels flat and square and fasten to supporting frame without warp or deflection.
- F. Cut and neatly fit deck panels and accessories around openings and other work projecting through or adjacent to deck.
- G. Provide additional reinforcement and closure pieces at openings as required for strength, continuity of deck, and support of other work.
- H. Comply with AWS requirements and procedures for manual shielded metal arc welding, appearance and quality of welds, and methods used for correcting welding work.
- I. Mechanical fasteners may be used in lieu of welding to fasten deck. Locate mechanical fasteners and install according to deck manufacturer's written instructions.

3.03 ROOF-DECK INSTALLATION

- A. Fasten roof-deck panels to steel supporting members by arc spot (puddle) welds of the surface diameter indicated or arc seam welds with an equal perimeter that is not less than 1-1/2 inches (38 mm) long, and as follows:
 - 1. Weld Diameter: 5/8 inch (16 mm) nominal.

2. Weld Spacing: Weld edge and interior ribs of deck units with a minimum of two welds per deck unit at each support. Space welds 18 inches (450 mm) apart, maximum or as indicated.
- B. Side-Lap and Perimeter Edge Fastening: Fasten side laps and perimeter edges of panels between supports, at intervals not exceeding the lesser of $\frac{1}{2}$ of the span or 36 inches (910 mm)], and as follows:
 1. Mechanically fasten with self-drilling, No. 10 (4.8-mm-) diameter or larger, carbon-steel screws.
- C. End Bearing: Install deck ends over supporting frame with a minimum end bearing of 1-1/2 inches (38 mm), with end joints as follows:
 1. End Joints: Lapped 2 inches (51 mm) minimum.
- D. Roof Sump Pans and Sump Plates: Install over openings provided in roof deck and weld or mechanically fasten flanges to top of deck. Space welds or mechanical fasteners not more than 12 inches (305 mm) apart with at least one weld or fastener at each corner.
 1. Install reinforcing channels or zees in ribs to span between supports and weld or mechanically fasten.
- E. Miscellaneous Roof-Deck Accessories: Install ridge and valley plates, finish strips, end closures, and reinforcing channels according to deck manufacturer's written instructions. Weld or mechanically fasten to substrate to provide a complete deck installation.
 1. Weld cover plates at changes in direction of roof-deck panels, unless otherwise indicated.
- F. Flexible Closure Strips: Install flexible closure strips over partitions, walls, and where indicated. Install with adhesive according to manufacturer's written instructions to ensure complete closure.
- G. Sound-Absorbing Insulation: Installation into topside ribs of deck as specified in Division 07

3.04 FIELD QUALITY CONTROL

- A. Testing Agency: Engage a qualified independent testing and inspecting agency to perform field tests and inspections and prepare test reports.
- B. Field welds will be subject to inspection.
- C. Testing agency will report inspection results promptly and in writing to Contractor and Architect.
- D. Remove and replace work that does not comply with specified requirements.
- E. Additional inspecting, at Contractor's expense, will be performed to determine compliance of corrected work with specified requirements.

3.05 REPAIRS AND PROTECTION

- A. Galvanizing Repairs: Prepare and repair damaged galvanized coatings on both surfaces of deck with galvanized repair paint according to ASTM A 780 and manufacturer's written instructions.
- B. Repair Painting: Wire brush and clean rust spots, welds, and abraded areas on both surfaces of prime-painted deck immediately after installation, and apply repair paint.
 1. Apply repair paint, of same color as adjacent shop-primed deck, to bottom surfaces of deck exposed to view.
 2. Wire brushing, cleaning, and repair painting of bottom deck surfaces are included in Division 09 Section.
- C. Provide final protection and maintain conditions to ensure that steel deck is without damage or deterioration at time of Substantial Completion.

END OF SECTION

SECTION 05 40 00
COLD-FORMED METAL FRAMING

PART 1 - GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.02 SUMMARY

- A. This Section includes the following:
 - 1. Exterior non-load-bearing wall framing.
- B. Related Sections include the following:
 - 1. Division 05 Section "Metal Fabrications" for masonry shelf angles and connections.
 - 2. Section 09 21 16 - Gypsum Board Assemblies for gypsum wall board, accessories and assembly execution.

1.03 SUBMITTALS

- A. Product Data: For each type of cold-formed metal framing product and accessory indicated.
- B. Shop Drawings: Show typical connection details and attachment to adjoining work.
- C. Welding certificates.
- D. Qualification Data: For testing agency.
- E. Product Test Reports: From a qualified testing agency, unless otherwise stated, indicating that each of the following complies with requirements, based on evaluation of comprehensive tests for current products:
 - 1. Steel sheet.
 - 2. Expansion anchors.
 - 3. Power-actuated anchors.
 - 4. Mechanical fasteners.
 - 5. Vertical deflection clips.
 - 6. Horizontal drift deflection clips
 - 7. Miscellaneous structural clips and accessories.
- F. Research/Evaluation Reports: For cold-formed metal framing.

1.04 QUALITY ASSURANCE

- A. Testing Agency Qualifications: An independent testing agency, acceptable to authorities having jurisdiction, qualified according to ASTM E 329 to conduct the testing indicated.
- B. Product Tests: Mill certificates or data from a qualified independent testing agency indicating steel sheet complies with requirements, including base-metal thickness, yield strength, tensile strength, total elongation, chemical requirements, and metallic-coating thickness.
- C. Welding: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code--Steel," and AWS D1.3, "Structural Welding Code--Sheet Steel."
- D. Fire-Test-Response Characteristics: Where indicated, provide cold-formed metal framing identical to that of assemblies tested for fire resistance per ASTM E 119 by a testing and inspecting agency acceptable to authorities having jurisdiction.
- E. AISI Specifications and Standards: Comply with AISI's "North American Specification for the Design of Cold-Formed Steel Structural Members" and its "Standard for Cold-Formed Steel Framing -General Provisions."
 - 1. Comply with AISI's "Standard for Cold-Formed Steel Framing - Truss Design."
 - 2. Comply with AISI's "Standard for Cold-Formed Steel Framing - Header Design."

- F. Preinstallation Conference: Conduct conference at Project site to comply with requirements in Division 01 Section "Project Management and Coordination."

1.05 DELIVERY, STORAGE, AND HANDLING

- A. Protect cold-formed metal framing from corrosion, deformation, and other damage during delivery, storage, and handling.
- B. Store cold-formed metal framing, protect with a waterproof covering, and ventilate to avoid condensation.

PART 2 - PRODUCTS

2.01 MANUFACTURERS

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering cold-formed metal framing that may be incorporated into the Work include, but are not limited to, the following:
- B. Manufacturers: Subject to compliance with requirements, provide cold-formed metal framing by one of the following:
 - 1. AllSteel Products, Inc.
 - 2. Craco Metals Manufacturing, LLC.
 - 3. Dale/Incor.
 - 4. Dietrich Metal Framing; a Worthington Industries Company.
 - 5. MarinoWare; a division of Ware Industries.
 - 6. United Metal Products, Inc.

2.02 MATERIALS

- A. Recycled Content of Steel Products: Provide products with an average recycled content of steel products so postconsumer recycled content plus one-half of preconsumer recycled content is not less than 25 percent.
- B. Steel Sheet: ASTM A 1003/A 1003M, Structural Grade, Type H, metallic coated, of grade and coating weight as follows:
 - 1. Grade: As Indicated.
 - 2. Coating: G60 (Z180).
- C. Steel Sheet for Vertical Deflection and Drift Clips: ASTM A 653/A 653M, structural steel, zinc coated, of grade and coating as follows:
 - 1. Grade: 50 (340), Class 1 or 2.
 - 2. Coating: G60 (Z275).

2.03 EXTERIOR NON-LOAD-BEARING WALL FRAMING

- A. Steel Studs: Manufacturer's standard C-shaped steel studs, of web depths indicated, punched, with stiffened flanges, and as follows:
 - 1. Minimum Base-Metal Thickness: As Indicated
 - 2. Section Properties: As Indicated
- B. Steel Track: Manufacturer's standard U-shaped steel track, of web depths indicated, unpunched, with unstiffened flanges, and as follows:
 - 1. Minimum Base-Metal Thickness: As Indicated
 - 2. Flange Width: As Indicated
- C. Vertical Deflection Clips: Manufacturer's standard bypass clips, capable of accommodating upward and downward vertical displacement of primary structure through positive mechanical attachment to stud web.
 - 1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

2. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Dietrich Metal Framing; a Worthington Industries Company.
 - b. MarinoWare, a division of Ware Industries.
 - c. SCAFCO Corporation
 - d. The Steel Network, Inc.
- D. Double Deflection Tracks: Manufacturer's double, deep-leg, U-shaped steel tracks, consisting of nested inner and outer tracks; unpunched, with unstiffened flanges.
 1. Outer Track: Of web depth to allow free vertical movement of inner track, with flanges designed to support horizontal and lateral loads and transfer them to the primary structure, and as follows:
 - a. Minimum Base-Metal Thickness: As Indicated
 - b. Flange Width: As Indicated.
 2. Inner Track: Of web depth indicated, and as follows:
 - a. Minimum Base-Metal Thickness: As Indicated
 - b. Flange Width: As Indicated

2.04 FRAMING ACCESSORIES

- A. Fabricate steel-framing accessories from steel sheet, ASTM A 1003/A 1003M, Structural Grade, Type H, metallic coated, of same grade and coating weight used for framing members.
- B. Provide accessories of manufacturer's standard thickness and configuration, unless otherwise indicated, as follows:
 1. Supplementary framing.
 2. Bracing, bridging, and solid blocking.
 3. Web stiffeners.
 4. Anchor clips.
 5. End clips.
 6. Foundation clips.
 7. Gusset plates.
 8. Stud kickers, knee braces, and girts.
 9. Joist hangers and end closures.
 10. Hole reinforcing plates.
 11. Backer plates.

2.05 ANCHORS, CLIPS, AND FASTENERS

- A. Steel Shapes and Clips: ASTM A 36/A 36M, zinc coated by hot-dip process according to ASTM A 123/A 123M.
- B. Anchor Bolts: ASTM F 1554, Grade 36, threaded carbon-steel bolts and carbon-steel nuts; and flat, hardened-steel washers; zinc coated.
- C. Expansion Anchors: Fabricated from corrosion-resistant materials, with capability to sustain, without failure, a load equal to 5 times design load, as determined by testing per ASTM E 488 conducted by a qualified independent testing agency.
- D. Power-Actuated Anchors: Fastener system of type suitable for application indicated, fabricated from corrosion-resistant materials, with capability to sustain, without failure, a load equal to 10 times design load, as determined by testing per ASTM E 1190 conducted by a qualified independent testing agency.
- E. Mechanical Fasteners: ASTM C 1513, corrosion-resistant-coated, self-drilling, self-tapping steel drill screws.
 1. Head Type: Low-profile head beneath sheathing, manufacturer's standard elsewhere.
- F. Welding Electrodes: Comply with AWS standards.

2.06 MISCELLANEOUS MATERIALS

- A. Galvanizing Repair Paint: ASTM A 780.
- B. Cement Grout: Portland cement, ASTM C 150, Type I; and clean, natural sand, ASTM C 404. Mix at ratio of 1 part cement to 2-1/2 parts sand, by volume, with minimum water required for placement and hydration.
- C. Nonmetallic, Nonshrink Grout: Premixed, nonmetallic, noncorrosive, nonstaining grout containing selected silica sands, portland cement, shrinkage-compensating agents, and plasticizing and water-reducing agents, complying with ASTM C 1107, with fluid consistency and 30-minute working time.
- D. Shims: Load bearing, high-density multimonomer plastic, nonleaching.
- E. Sealer Gaskets: Closed-cell neoprene foam, 1/4 inch (6.4 mm) thick, selected from manufacturer's standard widths to match width of bottom track or rim track members.

2.07 FABRICATION

- A. Fabricate cold-formed metal framing and accessories plumb, square, and true to line, and with connections securely fastened, according to referenced AISI's specifications and standards, manufacturer's written instructions, and requirements in this Section.
 - 1. Fabricate framing assemblies using jigs or templates.
 - 2. Cut framing members by sawing or shearing; do not torch cut.
 - 3. Fasten cold-formed metal framing members by welding, screw fastening, clinch fastening, or riveting as standard with fabricator. Wire tying of framing members is not permitted.
 - a. Comply with AWS D1.3 requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.
 - b. Locate mechanical fasteners and install according to Shop Drawings, with screw penetrating joined members by not less than three exposed screw threads.
 - 4. Fasten other materials to cold-formed metal framing by welding, bolting, or screw fastening, according to Shop Drawings.
- B. Reinforce, stiffen, and brace framing assemblies to withstand handling, delivery, and erection stresses. Lift fabricated assemblies to prevent damage or permanent distortion.
- C. Fabrication Tolerances: Fabricate assemblies level, plumb, and true to line to a maximum allowable tolerance variation of 1/8 inch in 10 feet (1:960) and as follows:
- D. Spacing: Space individual framing members no more than plus or minus 1/8 inch (3 mm) from plan location. Cumulative error shall not exceed minimum fastening requirements of sheathing or other finishing materials.
- E. Squareness: Fabricate each cold-formed metal framing assembly to a maximum out-of-square tolerance of 1/8 inch (3 mm).

PART 3 - EXECUTION

3.01 EXAMINATION

- A. Examine supporting substrates and abutting structural framing for compliance with requirements for installation tolerances and other conditions affecting performance.
 - 1. Proceed with installation only after unsatisfactory conditions have been corrected.

3.02 PREPARATION

- A. Install load bearing shims or grout between the underside of wall bottom track or rim track and the top of wall or slab at stud or joist locations to ensure a uniform bearing surface on supporting concrete or masonry construction.
- B. Install sealer gaskets to isolate the underside of wall bottom track or rim track and the top of wall or slab at stud or joist locations.

3.03 INSTALLATION, GENERAL

- A. Cold-formed metal framing may be shop or field fabricated for installation, or it may be field assembled.
- B. Install cold-formed metal framing according to AISI's "Standard for Cold-Formed Steel Framing -General Provisions" and to manufacturer's written instructions unless more stringent requirements are indicated.
- C. Install shop- or field-fabricated, cold-formed framing and securely anchor to supporting structure.
 - 1. Screw, bolt, or weld wall panels at horizontal and vertical junctures to produce flush, even, true-to-line joints with maximum variation in plane and true position between fabricated panels not exceeding 1/16 inch (1.6 mm).
- D. Install cold-formed metal framing and accessories plumb, square, and true to line, and with connections securely fastened.
 - 1. Cut framing members by sawing or shearing; do not torch cut.
 - 2. Fasten cold-formed metal framing members by welding, screw fastening, clinch fastening, or riveting. Wire tying of framing members is not permitted.
 - a. Comply with AWS D1.3 requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.
 - b. Locate mechanical fasteners and install according to Shop Drawings, and complying with requirements for spacing, edge distances, and screw penetration.
- E. Install framing members in one-piece lengths unless splice connections are indicated for track or tension members.
- F. Install temporary bracing and supports to secure framing and support loads comparable in intensity to those for which structure was designed. Maintain braces and supports in place, undisturbed, until entire integrated supporting structure has been completed and permanent connections to framing are secured.
- G. Do not bridge building expansion and control joints with cold-formed metal framing. Independently frame both sides of joints.
- H. Install insulation, specified in Division 07 Section "Thermal Insulation," in built-up exterior framing members, such as headers, sills, boxed joists, and multiple studs at openings, that are inaccessible on completion of framing work.
- I. Fasten hole reinforcing plate over web penetrations that exceed size of manufacturer's standard punched openings.
- J. Erection Tolerances: Install cold-formed metal framing level, plumb, and true to line to a maximum allowable tolerance variation of 1/8 inch in 10 feet (1:960) and as follows:
 - 1. Space individual framing members no more than plus or minus 1/8 inch (3 mm) from plan location. Cumulative error shall not exceed minimum fastening requirements of sheathing or other finishing materials.

3.04 EXTERIOR NON-LOAD-BEARING WALL INSTALLATION

- A. Install continuous tracks sized to match studs. Align tracks accurately and securely anchor to supporting structure as indicated.
- B. Fasten both flanges of studs to top and bottom track, unless otherwise indicated. Space studs as follows:
 - 1. Stud Spacing: As Indicated
- C. Set studs plumb, except as needed for diagonal bracing or required for nonplumb walls or warped surfaces and similar requirements.

- D. Isolate non-load-bearing steel framing from building structure to prevent transfer of vertical loads while providing lateral support.
 - 1. Install double deep-leg deflection tracks and anchor outer track to building structure.
 - 2. Connect vertical deflection clips to bypassing studs and anchor to building structure.
- E. Install horizontal bridging in wall studs, spaced in rows indicated on Shop Drawings but not more than 48 inches (1220 mm) apart. Fasten at each stud intersection.
 - 1. Top Bridging for Single Deflection Track: Install row of horizontal bridging within 12 inches (305 mm) of single deflection track. Install a combination of flat, taut, steel sheet straps of width and thickness indicated and stud or stud-track solid blocking of width and thickness matching studs. Fasten flat straps to stud flanges and secure solid blocking to stud webs or flanges.
 - a. Install solid blocking at centers indicated.
 - 2. Bridging: Cold-rolled steel channel, welded or mechanically fastened to webs of punched studs.
 - 3. Bridging: Combination of flat, taut, steel sheet straps of width and thickness indicated and stud-track solid blocking of width and thickness to match studs. Fasten flat straps to stud flanges and secure solid blocking to stud webs or flanges.
 - 4. Bridging: Proprietary bridging bars installed according to manufacturer's written instructions.
- F. Install miscellaneous framing and connections, including stud kickers, web stiffeners, clip angles, continuous angles, anchors, fasteners, and stud girts, to provide a complete and stable wall-framing system.

3.05 FIELD QUALITY CONTROL

- A. Testing: Owner will engage a qualified independent testing and inspecting agency to perform field tests and inspections and prepare test reports.
- B. Field and shop welds will be subject to testing and inspecting.
- C. Testing agency will report test results promptly and in writing to Contractor and Architect.
- D. Remove and replace work where test results indicate that it does not comply with specified requirements.
- E. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.

3.06 REPAIRS AND PROTECTION

- A. Galvanizing Repairs: Prepare and repair damaged galvanized coatings on fabricated and installed cold-formed metal framing with galvanized repair paint according to ASTM A 780 and manufacturer's written instructions.
- B. Provide final protection and maintain conditions, in a manner acceptable to manufacturer and Installer, that ensure that cold-formed metal framing is without damage or deterioration at time of Substantial Completion.

END OF SECTION

SECTION 05 50 00
METAL FABRICATIONS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Shop fabricated steel items.
- B. Prefabricated ladders and ship ladders.
- C. Bollards
- D. Structural supports for miscellaneous attachments
- E. Loose base plates and anchors for structural steel and steel joists
- F. Door frames for overhead door openings
- G. Loose lintels
- H. Ledge angles; shelf angles; channels; and plates

1.02 RELATED REQUIREMENTS

- A. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 01 74 19 - Construction Waste Management and Disposal: Limitations on disposal of removed materials; requirements for recycling.
- C. Section 03 30 00 - Cast-in-Place Concrete: Placement of metal fabrications in concrete.
- D. Section 04 20 00 - Unit Masonry: Placement of metal fabrications in masonry.
- E. Section 09 90 00 - Paints and Coatings: Paint finish.

1.03 REFERENCE STANDARDS

- A. AAMA 611 - Voluntary Specification for Anodized Architectural Aluminum.
- B. AAMA 2603 - Voluntary Specification, Performance Requirements and Test Procedures for Pigmented Organic Coatings on Aluminum Extrusions and Panels (with Coil Coating Appendix).
- C. AAMA 2604 - Voluntary Specification, Performance Requirements and Test Procedures for High Performance Organic Coatings on Aluminum Extrusions and Panels.
- D. ASTM A36/A36M - Standard Specification for Carbon Structural Steel.
- E. ASTM A53/A53M - Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless.
- F. ASTM A123/A123M - Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.
- G. ASTM A153/A153M - Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware.
- H. ASTM A283/A283M - Standard Specification for Low and Intermediate Tensile Strength Carbon Steel Plates.
- I. ASTM A307 - Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60 000 PSI Tensile Strength.
- J. ASTM A325 - Standard Specification for Structural Bolts, Steel, Heat Treated, 120/105 ksi Minimum Tensile Strength.
- K. ASTM B209 - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate.
- L. ASTM B221 - Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.
- M. AWS A2.4 - Standard Symbols for Welding, Brazing, and Nondestructive Examination.

- N. AWS D1.1/D1.1M - Structural Welding Code - Steel.
- O. IAS AC172 - Accreditation Criteria for Fabricator Inspection Programs for Structural Steel; International Accreditation Service, Inc.
- P. SSPC-Paint 15 - Steel Joist Shop Primer/Metal Building Primer.
- Q. SSPC-Paint 20 - Zinc-Rich Primers (Type I, "Inorganic," and Type II, "Organic").
- R. SSPC-SP 2 - Hand Tool Cleaning.

1.04 SUBMITTALS

- A. See Section 01 33 00 - Submittal Procedures, for submittal procedures.
- B. Shop Drawings: Indicate profiles, sizes, connection attachments, reinforcing, anchorage, size and type of fasteners, and accessories. Include erection drawings, elevations, and details where applicable.
 - 1. Indicate welded connections using standard AWS A2.4 welding symbols. Indicate net weld lengths.
- C. Welders' Certificates: Submit certification for welders employed on the project, verifying AWS qualification within the previous 12 months.

1.05 QUALITY ASSURANCE

- A. Fabricator Qualifications: A qualified steel fabricator that is accredited by IAS AC172.

PART 2 PRODUCTS

2.01 MATERIALS - STEEL

- A. Steel Sections: ASTM A36/A36M; or ASTM A 572 / A 572M Grade 50.
- B. Plates: ASTM A283; or A 36.
- C. Pipe: ASTM A53/A53M, Grade B Schedule 40, black and hot-dip galvanized finish, as indicated. All exterior fabrications to be hot-dip galvanized.
- D. Bolts, Nuts, and Washers: ASTM A325 (ASTM A325M), Type 1, galvanized to ASTM A153/A153M where connecting galvanized components.
- E. Welding Materials: AWS D1.1/D1.1M; type required for materials being welded.
- F. Shop and Touch-Up Primer: SSPC-Paint 15, complying with VOC limitations of authorities having jurisdiction.
- G. Touch-Up Primer for Galvanized Surfaces: SSPC-Paint 20, Type I - Inorganic; SSPC-Paint 20, Type II - Organic, complying with VOC limitations of authorities having jurisdiction.

2.02 FABRICATION

- A. Fit and shop assemble items in largest practical sections, for delivery to site.
- B. Fabricate items with joints tightly fitted and secured.
- C. Continuously seal joined members by intermittent welds and plastic filler at interior; or continuous welds at exterior.
- D. Grind exposed joints flush and smooth with adjacent finish surface. Make exposed joints butt tight, flush, and hairline. Ease exposed edges to small uniform radius.
- E. Exposed Mechanical Fastenings: Flush countersunk screws or bolts; unobtrusively located; consistent with design of component, except where specifically noted otherwise.
- F. Supply components required for anchorage of fabrications. Fabricate anchors and related components of same material and finish as fabrication, except where specifically noted otherwise.

2.03 FABRICATED ITEMS

- A. Bollards: Steel pipe 6" diameter, concrete filled, crowned cap, as detailed; galvanized finish.
- B. Ledge Angles, Shelf Angles, Channels, and Plates not attached to Structural Framing: For support of metal decking, joists, and masonry; prime paint or galvanized finish. Galvanized at all exterior locations.
- C. Loose Lintels: As detailed; prime paint; galvanized; or de-scaled mill finish. Galvanized at all exterior locations.
- D. Plate & Platform Walk Framing: As detailed on the Structural Drawings. Galvanized at all exterior locations.
- E. Structural supports for miscellaneous attachments: As detailed; prime paint; galvanized finish.
- F. Loose base plates and anchors for structural steel and steel joists: As detailed; prime paint.

2.04 PREFABRICATED LADDERS

- A. Prefabricated Ship Ladder: Welded metal unit complying with ANSI A14.3; factory fabricated to greatest degree practical and in the largest components possible.
 - 1. Manufacturers:
 - a. Industrial Ladder & Scaffolding, Inc.: www.anyladder.com/#sle.
 - b. O'Keeffe's Inc: www.okeeffes.com/#sle.
 - c. Precision Ladders, LLC: www.precisionladders.com/#sle.
 - d. FS Industries: fsindustries.com/catalog.shtml.
 - e. Substitutions: See Section 01 60 00 - Product Requirements.

2.05 FINISHES - STEEL

- A. Prime paint all steel items.
 - 1. Exceptions: Galvanize all fabrications on the exterior of the building.
- B. Prepare surfaces to be primed in accordance with SSPC-SP2.
- C. Clean surfaces of rust, scale, grease, and foreign matter prior to finishing.
- D. Prime Painting: Two coats.
- E. Galvanizing of Structural Steel Members exposed to the exterior: Galvanize after fabrication to ASTM A 123/A 123M requirements. Provide minimum 2.0 oz/sq ft galvanized coating.

2.06 FABRICATION TOLERANCES

- A. Squareness: 1/8 inch maximum difference in diagonal measurements.
- B. Maximum Offset Between Faces: 1/16 inch.
- C. Maximum Misalignment of Adjacent Members: 1/16 inch.
- D. Maximum Bow: 1/8 inch in 48 inches.
- E. Maximum Deviation From Plane: 1/16 inch in 48 inches.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field conditions are acceptable and are ready to receive work.

3.02 PREPARATION

- A. Clean and strip primed steel items to bare metal and aluminum, where site welding is required.
- B. Supply setting templates to the appropriate entities for steel items required to be cast into concrete or embedded in masonry.

3.03 INSTALLATION

- A. Install items plumb and level, accurately fitted, free from distortion or defects.
- B. Provide for erection loads, and for sufficient temporary bracing to maintain true alignment until completion of erection and installation of permanent attachments.
- C. Field weld components indicated on drawings and on shop drawings.
- D. Perform field welding in accordance with AWS D1.1/D1.1M.
- E. Obtain approval prior to site cutting or making adjustments not scheduled.
- F. After erection, prime welds, abrasions, and surfaces not shop primed or galvanized.

3.04 TOLERANCES

- A. Maximum Variation From Plumb: 1/4 inch per story, non-cumulative.
- B. Maximum Offset From True Alignment: 1/4 inch.
- C. Maximum Out-of-Position: 1/4 inch.

END OF SECTION

SECTION 05 52 13
PIPE AND TUBE RAILINGS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Wall mounted handrails.
- B. Stair and ramp railings and guardrails.

1.02 RELATED REQUIREMENTS

- A. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 01 74 19 - Construction Waste Management and Disposal: Limitations on disposal of removed materials; requirements for recycling.
- C. Section 03 30 00 - Cast-in-Place Concrete: Placement of anchors in concrete.
- D. Section 04 20 00 - Unit Masonry: Placement of anchors in masonry.
- E. Section 09 90 00 - Paints and Coatings: Paint finish.

1.03 REFERENCE STANDARDS

- A. AISC 201 - AISC Certification Program for Structural Steel Fabricators, Standard for Steel Building Structures.
- B. ASTM A53/A53M - Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless.
- C. ASTM A123/A123M - Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.
- D. ASTM A500/A500M - Standard Specification for Cold-Formed Welded and Seamless Carbon Steel Structural Tubing in Rounds and Shapes.
- E. ASTM E935 - Standard Test Methods for Performance of Permanent Metal Railing Systems and Rails for Buildings.
- F. ASTM E985 - Standard Specification for Permanent Metal Railing Systems and Rails for Buildings.
- G. SSPC-Paint 20 - Zinc-Rich Primers (Type I, "Inorganic," and Type II, "Organic").

1.04 SUBMITTALS

- A. See Section 01 33 00 - Submittal Procedures, for submittal procedures.
- B. Shop Drawings: Indicate profiles, sizes, connection attachments, anchorage, size and type of fasteners, and accessories.

1.05 QUALITY ASSURANCE

- A. Structural Designer Qualifications: Professional Structural Engineer experienced in design of this work and licensed in the State in which the Project is located, or personnel under direct supervision of such an engineer.
- B. Fabricator Qualifications:
 - 1. A qualified steel fabricator that is certified by the American Institute for Steel Construction (AISC) under AISC 201.

PART 2 PRODUCTS

2.01 RAILINGS - GENERAL REQUIREMENTS

- A. Design, fabricate, and test railing assemblies in accordance with the most stringent requirements of ASTM E985 and applicable local code.

- B. Distributed Loads: Design railing assembly, wall rails, and attachments to resist distributed force of 75 pounds per linear foot applied to the top of the assembly and in any direction, without damage or permanent set. Test in accordance with ASTM E935.
- C. Concentrated Loads: Design railing assembly, wall rails, and attachments to resist a concentrated force of 200 pounds applied at any point on the top of the assembly and in any direction, without damage or permanent set. Test in accordance with ASTM E935.
- D. Allow for expansion and contraction of members and building movement without damage to connections or members.
- E. Dimensions: See drawings for configurations and heights.
 - 1. Top Rails and Wall Rails: 1-1/2 inches diameter, round.
 - 2. Intermediate Rails: 1-1/2 inches diameter, round.
 - 3. Posts: 1-1/2 inches diameter, round.
 - 4. Balusters: 1/2 inch square solid bar.
- F. Provide anchors and other components as required to attach to structure, made of same materials as railing components unless otherwise indicated; where exposed fasteners are unavoidable provide flush countersunk fasteners.
 - 1. For anchorage to concrete, provide inserts to be cast into concrete, for bolting anchors.
 - 2. For anchorage to masonry, provide brackets to be embedded in masonry, for bolting anchors.
 - 3. For anchorage to stud walls, provide backing plates, for bolting anchors.
 - 4. Posts: Provide adjustable flanged brackets.

2.02 STEEL RAILING SYSTEM

- A. Steel Tube: ASTM A500, Grade B cold-formed structural tubing.
- B. Steel Pipe: ASTM A53/A53M, Grade B Schedule 80, black finish.
- C. Welding Fittings: Factory- or shop-welded from matching pipe or tube; seams continuously welded; joints and seams ground smooth.
- D. Exposed Fasteners: No exposed bolts or screws.
- E. Straight Splice Connectors: Steel concealed spigots.
- F. Galvanizing at exterior railings: In accordance with requirements of ASTM A123/A123M.
 - 1. Touch-Up Primer for Galvanized Surfaces: SSPC-Paint 20, Type I - Inorganic.

2.03 FABRICATION

- A. Accurately form components to suit specific project conditions and for proper connection to building structure.
- B. Fit and shop assemble components in largest practical sizes for delivery to site.
- C. Fabricate components with joints tightly fitted and secured. Provide spigots and sleeves to accommodate site assembly and installation.
- D. Welded Joints:
 - 1. Exterior Components: Continuously seal joined pieces by intermittent welds and plastic filler. Drill condensate drainage holes at bottom of members at locations that will not encourage water intrusion.
 - 2. Interior Components: Continuously seal joined pieces by intermittent welds and plastic filler.
 - 3. Grind exposed joints flush and smooth with adjacent finish surface. Make exposed joints butt tight, flush, and hairline. Ease exposed edges to small uniform radius.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field conditions are acceptable and are ready to receive work.

3.02 PREPARATION

- A. Clean and strip primed steel items to bare metal where site welding is required.
- B. Supply items required to be cast into concrete or embedded in masonry with setting templates, for installation as work of other sections.

3.03 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Install components plumb and level, accurately fitted, free from distortion or defects, with tight joints.
- C. Anchor railings securely to structure.
- D. Conceal anchor bolts and screws whenever possible. Where not concealed, use flush countersunk fastenings.

3.04 TOLERANCES

- A. Maximum Variation From Plumb: 1/4 inch per floor level, non-cumulative.
- B. Maximum Offset From True Alignment: 1/4 inch.
- C. Maximum Out-of-Position: 1/4 inch.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 06 10 00
ROUGH CARPENTRY

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Rough opening framing for doors, windows, and roof openings.
- B. Sheathing.
- C. Roofing nailers.
- D. Roofing cant strips.
- E. Preservative treated wood materials.
- F. Fire retardant treated wood materials.
- G. Miscellaneous framing and sheathing.
- H. Communications and electrical room mounting boards.
- I. Wood nailers and curbs for roofing and items installed on roof.
- J. Concealed wood blocking, nailers, and supports.
- K. Miscellaneous wood nailers, furring, and grounds.

1.02 RELATED REQUIREMENTS

- A. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 01 74 19 - Construction Waste Management and Disposal: Limitations on disposal of removed materials; requirements for recycling.
- C. Section 05 12 00 - Structural Steel Framing: Prefabricated girders, beams, columns, and hangers for support of wood blocking.
- D. Section 05 50 00 - Metal Fabrications: Miscellaneous steel connectors, support angles, and shapes for wood blocking.
- E. Section 07 62 00 - Sheet Metal Flashing and Trim: Drip flashings.
- F. Section 09 21 16 - Gypsum Board Assemblies: Gypsum-based sheathing.

1.03 REFERENCE STANDARDS

- A. AFPA (WFCM) - Wood Frame Construction Manual for One- and Two-Family Dwellings; American Forest and Paper Association.
- B. ASTM A153/A153M - Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware.
- C. ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.
- D. ASTM C208 - Standard Specification for Cellulosic Fiber Insulating Board.
- E. ASTM C578 - Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation.
- F. ASTM C1396/C1396M - Standard Specification for Gypsum Board.
- G. ASTM D2898 - Standard Test Methods for Accelerated Weathering of Fire-Retardant-Treated Wood for Fire Testing.
- H. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials.
- I. AWPA C2 - Lumber, Timber, Bridge Ties and Mine Ties -- Preservative Treatment by Pressure Processes; American Wood Protection Association.
- J. AWPA C9 - Plywood -- Preservative Treatment by Pressure Processes; American Wood Protection Association.

- K. AWPAC20 - Structural Lumber -- Fire Retardant Treatment by Pressure Processes; American Wood-Protection Association.
- L. AWPAC27 - Plywood -- Fire-Retardant Treatment by Pressure Processes; American Wood-Protection Association.
- M. AWPACU1 - Use Category System: User Specification for Treated Wood.
- N. ICC-ES AC308 - Acceptance Criteria for Water-Resistive Barriers; ICC Evaluation Service, Inc.
- O. PS 1 - Structural Plywood.
- P. PS 20 - American Softwood Lumber Standard.
- Q. SPIB (GR) - Grading Rules.
- R. WCLIB (GR) - Standard Grading Rules for West Coast Lumber No. 17.
- S. WWPACG-5 - Western Lumber Grading Rules.

1.04 SUBMITTALS

- A. See Section 01 33 00 - Submittal Procedures for submittal procedures.
- B. Product Data: Provide technical data on insulated sheathing, wood preservative materials, and application instructions.
- C. Manufacturer's Certificate: Certify that wood products supplied for rough carpentry meet or exceed specified requirements.

1.05 QUALITY ASSURANCE

- A. Lumber: Comply with PS 20 and approved grading rules and inspection agencies.
 - 1. Lumber of other species or grades, or graded by other agencies, is acceptable provided structural and appearance characteristics are equivalent to or better than products specified.
- B. Fire-Retardant Treated Wood: Mark each piece of wood with producer's stamp indicating compliance with specified requirements.
- C. Preservative-Treated Wood: Provide lumber and plywood marked or stamped by an ALSC-accredited testing agency, certifying level and type of treatment in accordance with AWPAC standards.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. General: Cover wood products to protect against moisture. Support stacked products to prevent deformation and to allow air circulation.
- B. Fire Retardant Treated Wood: Prevent exposure to precipitation during shipping, storage, or installation.

PART 2 PRODUCTS

2.01 GENERAL REQUIREMENTS

- A. Dimension Lumber: Comply with PS 20 and requirements of specified grading agencies.
 - 1. Species: Douglas Fir-Larch, unless otherwise indicated.
 - 2. If no species is specified, provide any species graded by the agency specified; if no grading agency is specified, provide lumber graded by any grading agency meeting the specified requirements.
 - 3. Grading Agency: Any grading agency whose rules are approved by the Board of Review, American Lumber Standard Committee (www.alsc.org) and who provides grading service for the species and grade specified; provide lumber stamped with grade mark unless otherwise indicated.
- B. Lumber fabricated from old growth timber is not permitted.

- C. Provide sustainably harvested wood.

2.02 DIMENSION LUMBER FOR CONCEALED APPLICATIONS

- A. Grading Agency: Southern Pine Inspection Bureau, Inc. (SPIB).
- B. Sizes: Nominal sizes as indicated on drawings, S4S.
- C. Moisture Content: S-dry or MC19.
- D. Miscellaneous Framing, Blocking, Nailers, Grounds, and Furring:
 - 1. Lumber: S4S No. 2 or Standard Grade.
 - 2. Boards: Standard or No. 3.
- E. Miscellaneous Blocking, Furring, Nailers, and Curbs:
 - 1. Lumber: S4S, No. 1 or Construction Grade.
 - 2. Boards: Standard.

2.03 CONSTRUCTION PANELS

- A. Wall Sheathing, For roof locations at parapets: Plywood, PS 1, Grade C-D Exposure I; Exterior Exposure, Fire retardant treated.
 - 1. Thickness: 5/8", nominal, or as noted.
- B. Communications and Electrical Room Mounting Boards: PS 1 A-D plywood, or medium density fiberboard; 3/4 inch thick; flame spread index of 25 or less, smoke developed index of 450 or less, when tested in accordance with ASTM E84.
- C. Other Applications:
 - 1. Plywood Concealed From View But Located Within Exterior Enclosure: PS 1, C-C Plugged or better, Exterior grade.
 - 2. Plywood Exposed to View But Not Exposed to Weather: PS 1, A-D, or better.
 - 3. Other Locations: PS 1, C-D Plugged or better.
 - 4. Electrical Component Mounting: APA rated plywood B-C sheathing, fire retardant treated.

2.04 ACCESSORIES

- A. Fasteners and Anchors:
 - 1. Metal and Finish: Hot-dipped galvanized steel per ASTM A 153/A 153M; or Stainless Steel for high humidity and preservative-treated wood locations, unfinished steel elsewhere.
 - 2. Drywall Screws: Bugle head, hardened steel, power driven type, length three times thickness of sheathing.
 - 3. Anchors: Toggle bolt type for anchorage to hollow masonry.

2.05 FACTORY WOOD TREATMENT

- A. Treated Lumber and Plywood: Comply with requirements of AWPA U1 - Use Category System for wood treatments determined by use categories, expected service conditions, and specific applications.
 - 1. Fire-Retardant Treated Wood: Mark each piece of wood with producer's stamp indicating compliance with specified requirements.
 - 2. Preservative-Treated Wood: Provide lumber and plywood marked or stamped by an ALSC-accredited testing agency, certifying level and type of treatment in accordance with AWPA standards.
- B. Fire Retardant Treatment:
 - 1. Manufacturers:
 - a. Arch Wood Protection, Inc: www.wolmanizedwood.com/#sle.
 - b. Hoover Treated Wood Products, Inc: www.frtw.com/#sle.
 - c. Osmose, Inc: www.osmose.com/#sle.
 - d. Substitutions: Not permitted.

2. Exterior Type: AWP A U1, Category UCFB, Commodity Specification H, chemically treated and pressure impregnated; capable of providing a maximum flame spread rating of 25 when tested in accordance with ASTM E84, with no evidence of significant combustion when test is extended for an additional 20 minutes both before and after accelerated weathering test performed in accordance with ASTM D2898.
 - a. Kiln dry wood after treatment to a maximum moisture content of 19 percent for lumber and 15 percent for plywood.
 - b. Do not use treated wood in direct contact with the ground.
 3. Interior Type A: AWP A U1, Use Category UCFA, Commodity Specification H, low temperature (low hygroscopic) type, chemically treated and pressure impregnated; capable of providing a maximum flame spread rating of 25 when tested in accordance with ASTM E84, with no evidence of significant combustion when test is extended for an additional 20 minutes.
 - a. Kiln dry wood after treatment to a maximum moisture content of 19 percent for lumber and 15 percent for plywood.
 - b. Treat rough carpentry items as scheduled; or as indicated.
 - c. Do not use treated wood in applications exposed to weather or where the wood may become wet.
- C. Preservative Treatment:
1. Manufacturers:
 - a. Arch Wood Protection, Inc.: www.wolmanizedwood.com.
 - b. Viance, LLC: www.treatedwood.com.
 - c. Osmose, Inc: www.osmose.com.
 - d. Substitutions: Not permitted.
- D. Preservative Pressure Treatment of Lumber Above Grade: AWP A U1, Use Category UC3B, Commodity Specification A using waterborne preservative to 0.25 lb/cu ft retention.
1. Kiln dry lumber after treatment to maximum moisture content of 19 percent.
 2. Treat lumber in contact with roofing, flashing, or waterproofing.
 3. Treat lumber in contact with masonry or concrete.
 4. Treat lumber less than 18 inches above grade.
 - a. Treat lumber in other locations as indicated.
 5. Preservative Pressure Treatment of Plywood Above Grade: AWP A U1, Use Category UC2 and UC3B, Commodity Specification F using waterborne preservative to 0.25 lb/cu ft retention.
 - a. Kiln dry plywood after treatment to maximum moisture content of 15 percent.
 - b. Treat plywood in contact with masonry or concrete.
 - c. Treat plywood in other locations as indicated.

PART 3 EXECUTION

3.01 INSTALLATION - GENERAL

- A. Select material sizes to minimize waste.
- B. Reuse scrap to the greatest extent possible; clearly separate scrap for use on site as accessory components, including: shims, bracing, and blocking.
- C. Where treated wood is used on interior, provide temporary ventilation during and immediately after installation sufficient to remove indoor air contaminants.

3.02 FRAMING INSTALLATION

- A. Select material sizes to minimize waste.
- B. Reuse scrap to the greatest extent possible; clearly separate scrap for use on site as accessory components, including: shims, bracing, and blocking.

- C. Set structural members level, plumb, and true to line. Discard pieces with defects that would lower required strength or result in unacceptable appearance of exposed members.
- D. Make provisions for temporary construction loads, and provide temporary bracing sufficient to maintain structure in true alignment and safe condition until completion of erection and installation of permanent bracing.
- E. Install structural members full length without splices unless otherwise specifically detailed.
- F. Comply with member sizes, spacing, and configurations indicated, and fastener size and spacing indicated, but not less than required by applicable codes and AFPA Wood Frame Construction Manual.

3.03 BLOCKING, NAILERS, AND SUPPORTS

- A. Provide framing and blocking members as indicated or as required to support finishes, fixtures, specialty items, and trim.
- B. In metal stud walls, provide continuous blocking around door and window openings for anchorage of frames, securely attached to stud framing.
- C. In walls, provide blocking attached to studs as backing and support for wall-mounted items, unless item can be securely fastened to two or more studs or other method of support is explicitly indicated.
- D. Where ceiling-mounting is indicated, provide blocking and supplementary supports above ceiling, unless other method of support is explicitly indicated.
- E. Specifically, provide the following non-structural framing and blocking:
 - 1. Cabinets and shelf supports.
 - 2. Wall brackets.
 - 3. Handrails.
 - 4. Grab bars.
 - 5. Bath accessories.
 - 6. Wall-mounted door stops.
 - 7. Visual display and marker boards.

3.04 ROOF-RELATED CARPENTRY

- A. Coordinate installation of roofing carpentry with deck construction, framing of roof openings, and roofing assembly installation.

3.05 INSTALLATION OF ACCESSORIES AND MISCELLANEOUS WOOD

- A. Curb roof openings except where prefabricated curbs are provided. Form corners by alternating lapping side members.
- B. Coordinate curb installation with installation of decking and support of deck openings, roofing vapor retardant, and parapet construction.

3.06 INSTALLATION OF CONSTRUCTION PANELS

- A. Wall Sheathing: Secure with long dimension perpendicular to wall studs, with ends over firm bearing and staggered, using screws.
 - 1. Place water-resistive barrier horizontally over wall sheathing, weather lapping edges and ends.
- B. Communications and Electrical Room Mounting Boards: Secure with screws to studs with edges over firm bearing; space fasteners at maximum 24 inches on center on all edges and into studs in field of board.
 - 1. At fire-rated walls, install board over wall board indicated as part of the fire-rated assembly.
 - 2. Where boards are indicated as full floor-to-ceiling height, install with long edge of board parallel to studs.

3. Install adjacent boards without gaps.

3.07 TOLERANCES

- A. Framing Members: 1/4 inch from true position, maximum.
- B. Surface Flatness of Floor: 1/8 inch in 10 feet maximum, and 1/4 inch in 30 feet maximum.
- C. Variation from Plane (Other than Floors): 1/4 inch in 10 feet maximum, and 1/4 inch in 30 feet maximum.

3.08 CLEANING

- A. Waste Disposal: Comply with the requirements of Section 01 78 39.
 1. Comply with applicable regulations.
 2. Do not burn scrap on project site.
 3. Do not burn scraps that have been pressure treated.
 4. Do not send materials treated with pentachlorophenol, CCA, or ACA to co-generation facilities or "waste-to-energy" facilities.
- B. Do not leave any wood, shavings, sawdust, etc. on the ground or buried in fill.
- C. Prevent sawdust and wood shavings from entering the storm drainage system.

END OF SECTION

SECTION 06 65 10
SOLID SURFACE FABRICATIONS

PART 1 GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of the contract, including general and supplementary conditions and Division 1 Specification Sections, apply to this Section.

1.02 SUMMARY

- A. This Section includes the following horizontal and trim solid surface product types:
 - 1. Window sills.

1.03 DEFINITION

- A. Solid surface is defined as nonporous, homogeneous material maintaining the same composition throughout the part with a composition of acrylic polymer, aluminum trihydrate filler and pigment.

1.04 SUBMITTALS

- A. Shop drawings:
 - 1. Show location of each item, dimensioned plans and elevations, large-scale details, attachment devices and other components.
 - a. Show full-size details, edge details, thermoforming requirements, attachments, etc.
 - b. Show locations and sizes of furring, blocking, including concealed blocking and reinforcement specified in other Sections.
 - c. Show locations and sizes of cutouts and holes for plumbing fixtures, sinks, faucets, soap dispensers, waste receptacle and other items installed in solid surface.
- B. Samples:
 - 1. For each type of product indicated.
 - a. Submit minimum 6-inch by 6-inch sample in specified gloss.
 - b. Cut sample and seam together for representation of inconspicuous seam.
 - c. Indicate full range of color and pattern variation.
 - 2. Approved samples will be retained as a standard for work.
- C. Product data:
 - 1. Indicate product description, fabrication information and compliance with specified performance requirements.
- D. Product certificates:
 - 1. For each type of product, signed by product manufacturer.
- E. Manufacturer certificates:
 - 1. Signed by manufacturers certifying that they comply with requirements.
- F. Maintenance data:
 - 1. Submit manufacturer's care and maintenance data, including repair and cleaning instructions.
 - a. Maintenance kit for finishes shall be submitted.
 - 2. Include in project closeout documents.

1.05 QUALITY ASSURANCE

- A. Fabricator/Installer Qualifications: Company specializing in manufacturing the products specified in this section with minimum five years of documented experience.
- B. Applicable standards:
 - 1. Standards of the following, as referenced herein:
 - a. American National Standards Institute (ANSI)

- b. American Society for Testing and Materials (ASTM)
 - c. NSF International
- 2. Fire test response characteristics:
 - a. Provide with the following Class A (Class I) surface burning characteristics as determined by testing identical products per UL 723 (ASTM E84) or another testing and inspecting agency acceptable to authorities having jurisdiction:
 - 1) Flame Spread Index: 25 or less.
 - 2) Smoke Developed Index: 450 or less.

1.06 DELIVERY, STORAGE AND HANDLING

- A. Deliver no components to project site until areas are ready for installation.
- B. Store components indoors prior to installation.
- C. Handle materials to prevent damage to finished surfaces.
 - 1. Provide protective coverings to prevent physical damage or staining following installation for duration of project.

1.07 WARRANTY

- A. Provide manufacturer's warranty against defects in materials.
 - 1. Warranty shall provide material and labor to repair or replace defective materials.
 - 2. Damage caused by physical or chemical abuse or damage from excessive heat will not be warranted.
- B. Manufacturer's warranty period:
 - 1. Ten years from date of substantial completion.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Manufacturers:
 - 1. Subject to compliance with requirements, provide products by one of the following:
 - a. Corian® surfaces from the DuPont company (basis of design).
 - b. Approved equal.

2.02 MATERIALS

- A. Solid polymer components
 - 1. Cast, nonporous, filled polymer, not coated, laminated or of composite construction with through body colors meeting ANSI Z124.3 or ANSI Z124.6, having minimum physical and performance properties specified.
 - 2. Superficial damage to a depth of 0.010 inch (.25 mm) shall be repairable by sanding and/or polishing.
- B. Thickness:
 - 1. 1 inch
- C. Edge treatment:
 - 1. See drawings

2.03 ACCESSORIES

- A. Joint adhesive:
 - 1. Manufacturer's standard one- or two-part adhesive kit to create inconspicuous, nonporous joints.
- B. Sealant:
 - 1. Manufacturer's standard mildew-resistant, FDA-compliant, NSF 51-compliant UL-listed silicone sealant in colors matching components.

2.04 2.4 FACTORY FABRICATION

- A. Shop assembly
 - 1. Fabricate components to greatest extent practical to sizes and shapes indicated, in accordance with approved shop drawings and manufacturer's printed instructions and technical bulletins.
 - 2. Form joints between components using manufacturer's standard joint adhesive without conspicuous joints.
 - a. Reinforce with strip of solid polymer material, 2" wide.
 - 3. Provide factory cutouts for plumbing fittings and bath accessories as indicated on the drawings.
 - 4. Rout and finish component edges with clean, sharp returns.
 - a. Rout cutouts, radii and contours to template.
 - b. Smooth edges.
 - c. Repair or reject defective and inaccurate work.

2.05 FINISHES

- A. Color group A, B, and C

PART 3 EXECUTION

3.01 EXAMINATION

- A. Examine substrates and conditions, with fabricator present for compliance with requirements for installation tolerances and other conditions affecting performance of work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.02 INSTALLATION

- A. Install components plumb, level and rigid, scribed to adjacent finishes, in accordance with approved shop drawings and product data.
 - 1. Provide product in the largest pieces available.
 - 2. Form field joints using manufacturer's recommended adhesive, with joints inconspicuous in finished work.
 - 3. Exposed joints/seams shall not be allowed.
 - 4. Reinforce field joints with solid surface strips extending a minimum of 1 inch on either side of the seam with the strip being the same thickness as the top.
 - 5. Cut and finish component edges with clean, sharp returns.
 - 6. Rout radii and contours to template.
 - 7. Anchor securely to base cabinets or other supports.
 - 8. Align adjacent countertops and form seams to comply with manufacturer's written recommendations using adhesive in color to match countertop.
 - 9. Carefully dress joints smooth, remove surface scratches and clean entire surface.
 - 10. Install countertops with no more than 1/8-inch sag, bow or other variation from a straight line.

3.03 REPAIR

- A. Repair or replace damaged work which cannot be repaired to architect's satisfaction.

3.04 CLEANING AND PROTECTION

- A. Keep components clean during installation.
- B. Remove adhesives, sealants and other stains.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 07 11 13
BITUMINOUS DAMPPROOFING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Bituminous dampproofing.
- B. Protection boards.

1.02 RELATED REQUIREMENTS

- A. Section 31 23 23 - Fill.

1.03 REFERENCE STANDARDS

- A. ASTM D4479/D4479M - Standard Specification for Asphalt Roof Coatings - Asbestos-Free.
- B. NRCA (WM) - The NRCA Waterproofing Manual.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. See Section 01 33 00 - Submittal Procedures.
- C. Product Data: Provide properties of primer, bitumen, and mastics.
- D. Manufacturer's Installation Instructions: Indicate special procedures and perimeter conditions requiring special attention.

1.05 QUALITY ASSURANCE

- A. Installer Qualifications: Company specializing in performing the work of this section with at least three years of documented experience.

1.06 FIELD CONDITIONS

- A. Maintain ambient temperatures above 40 degrees F for 24 hours before and during application until dampproofing has cured.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Bituminous Dampproofing Manufacturers:
 - 1. Karnak Corporation: www.karnakcorp.com/#sle.
 - 2. Mar-Flex Systems, Inc: www.mar-flex.com/#sle.
 - 3. W. R. Meadows, Inc: www.wrmeadows.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 BITUMINOUS DAMPPROOFING

- A. Bituminous Dampproofing: Cold-applied, spray-grade; asphalt base, volatile petroleum solvents, and other content, suitable for application by spray, brush, roller, or squeegee; asbestos-free; suitable for application on vertical and horizontal surfaces.
 - 1. Composition: ASTM D4479/D4479M Type I, minimum, asbestos free.
 - 2. VOC Content: Not more than permitted by local, State, and federal regulations.
 - 3. Applied Thickness: 1/16 inch, minimum, wet film.
 - 4. Basis of Design Product:
 - a. W. R. Meadows, Inc; Sealastic Spray-Mastic: www.wrmeadows.com/#sle.
- B. Primers, Mastics, and Related Materials: Type as recommended by dampproofing manufacturer.

2.03 ACCESSORIES

- A. Protection Board: 1/8 inch thick biodegradable hardboard.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify existing conditions are acceptable prior to starting this work.
- B. Verify substrate surfaces are durable, free of matter detrimental to adhesion or application of dampproofing system.
- C. Verify that items penetrating surfaces to receive dampproofing are securely installed.

3.02 PREPARATION

- A. Protect adjacent surfaces not designated to receive dampproofing.
- B. Clean and prepare surfaces to receive dampproofing in accordance with manufacturer's instructions.
- C. Do not apply dampproofing to surfaces unacceptable to manufacturer.
- D. Apply mastic to seal penetrations, small cracks, or minor honeycombs in substrate.

3.03 APPLICATION

- A. Foundation Walls: Apply two coats of asphalt dampproofing.
- B. Perform this work in accordance with manufacturer's instructions and NRCA (WM) applicable requirements.
- C. Prime surfaces in accordance with manufacturer's instructions and NRCA (WM) applicable requirements.
- D. Apply bitumen with roller.
- E. Seal items watertight with mastic, that project through dampproofing surface.
- F. Place protection board directly over dampproofing, butt joints, and adhere to tacky dampproofing.
- G. Scribe and cut boards around projections, penetrations, and interruptions.

END OF SECTION

SECTION 07 21 00
THERMAL INSULATION

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Board insulation at perimeter foundation wall and underside of floor slabs.
- B. Board insulation at cavity wall construction.
- C. Batt insulation and vapor retarder in exterior wall construction.
- D. Batt insulation for filling perimeter window and door shim spaces and crevices in exterior wall and roof.
- E. Acoustic Batt insulation. See Section 09 21 16 Gypsum Board Assemblies.

1.02 RELATED REQUIREMENTS

- A. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 01 74 19 - Construction Waste Management and Disposal: Limitations on disposal of removed materials; requirements for recycling.
- C. Section 05 40 00 - Cold-Formed Metal Framing: Board insulation as wall sheathing.
- D. Section 06 10 00 - Rough Carpentry: Supporting construction for batt insulation.
- E. Section 07 53 00 - Elastomeric Membrane Roofing: Installation requirements for board insulation over low slope roof deck specified in this section.

1.03 REFERENCE STANDARDS

- A. ASTM C240 - Standard Test Methods of Testing Cellular Glass Insulation Block.
- B. ASTM C552 - Standard Specification for Cellular Glass Thermal Insulation.
- C. ASTM C578 - Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation.
- D. ASTM C612 - Standard Specification for Mineral Fiber Block and Board Thermal Insulation.
- E. ASTM C665 - Standard Specification for Mineral-Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing.
- F. ASTM C1289 - Standard Specification for Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board.
- G. ASTM D2842 - Standard Test Method for Water Absorption of Rigid Cellular Plastics.
- H. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials.
- I. ASTM E96/E96M - Standard Test Methods for Water Vapor Transmission of Materials.
- J. ASTM E136 - Standard Test Method for Behavior of Materials in a Vertical Tube Furnace At 750 Degrees C.
- K. NFPA 255 - Standard Method of Test of Surface Burning Characteristics of Building Materials; National Fire Protection Association.
- L. UL 723 - Standard for Test for Surface Burning Characteristics of Building Materials; Underwriters Laboratories Inc..

1.04 SUBMITTALS

- A. See Section 01 33 00 - Submittal Procedures, for submittal procedures.
- B. Product Data: Provide data on product characteristics, performance criteria, and product limitations.
- C. Manufacturer's Installation Instructions: Include information on special environmental conditions required for installation and installation techniques.

- D. Manufacturer's Certificate: Certify that products meet or exceed specified requirements.

1.05 FIELD CONDITIONS

- A. Do not install insulation adhesives when temperature or weather conditions are detrimental to successful installation.

1.06 SEQUENCING

- A. Sequence work to ensure fireproofing, firestop, and vapor retarder materials are in place before beginning work of this section.

1.07 COORDINATION

- A. Coordinate the work with Section 07 25 00 for installation of vapor retarder

PART 2 PRODUCTS

2.01 MANUFACTURERS

2.02 APPLICATIONS

- A. Insulation Under Concrete Slabs: Extruded polystyrene board.
B. Insulation at Perimeter of Foundation: Extruded polystyrene board.
C. Insulation Inside Masonry Cavity Walls: Polyisocyanurate board.
D. Insulation in Metal Framed Walls: Batt insulation with integral vapor retarder.

2.03 FOAM BOARD INSULATION MATERIALS

- A. Extruded Polystyrene Board Insulation: ASTM C 578, Type IV; Extruded polystyrene board with natural skin surfaces; with the following characteristics:
1. Flame Spread Index: 25 or less, when tested in accordance with ASTM E84.
 2. Flame Spread Index: 75 or less, when tested in accordance with ASTM E84.
 3. Smoke Developed Index: 450 or less, when tested in accordance with ASTM E84.
 4. Board Size: 48 x 96 inch or 24 X 96 inch.
 5. Board Thickness: 2 inches,
 6. Board Edges: Square, Shiplap or Tongue and groove.
 7. Thermal Conductivity (k factor) at 75 degrees: or 20.
 8. Compressive Resistance: 25 psi and 40 psi.
 9. Board Density: 1.8 lb/cu ft.
 10. Water Absorption, maximum: 0.1 percent, volume.
- B. Manufacturers:
1. Dow Chemical Co(Design Basis):
 - a. Cavity Wall - "Cavity Mate Plus", type IV
 - b. Foundation and slabs - "Styrofoam Highload 40" type VI.
 2. Owens Corning Corp.
 - a. Cavity Wall -= "Foamular 250", type IV
 - b. Foundation and Slabs - "Foamular 400 SE", type VI.
 3. Pactiv Building Products
 - a. Cavity Wall - "Green Board Score Board", type IV
 - b. Foundation and Slabs - Type VI.
 - c. Substitutions: See Section 01 60 00 - Product Requirements.
- C. Polyisocyanurate (ISO) Board Insulation: Rigid cellular foam, complying with ASTM C1289.
1. Classifications:
 - a. Type I: Faced with aluminum foil on both major surfaces of the core foam.
 - 1) Class 1 - Non-reinforced core foam.
 - 2) Compressive Strength: 16 psi, minimum.

- 3) Thermal Resistance, R-value: At 1-1/2 inch thick; 9.8 at 75 degrees F.
2. Flame Spread Index (FSI): Class A - 0 to 25, when tested in accordance with ASTM E84.
3. Board Size: 16 inch by 96 inch.
4. Board Thickness: 1.5 inch.
5. Products:
 - a. Atlas Roofing Corporation; EnergyShield Pro Continuous Wall Insulation: www.atlasroofing.com/#sle.
 - b. Carlisle Coatings & Waterproofing, Inc; R2+ Matte: www.carlisleccw.com/#sle.
 - c. DuPont de Nemours, Inc; Thermax Sheathing: building.dupont.com/#sle.
 - d. Hunter Panels; Xci Foil (Class A): www.hunterpanels.com/#sle.
 - e. Johns Manville; AP Foil-Faced: www.jm.com/#sle.
 - f. Substitutions: See Section 01 60 00 - Product Requirements.

2.04 BATT INSULATION MATERIALS

- A. Batt Insulation: ASTM C 665; preformed batt; friction fit, conforming to the following:
 1. Material: Rock or slag fiber, or glass fiber.
 2. Flame Spread Index: 25 or less, when tested in accordance with ASTM E84.
 3. Smoke Developed Index: 50 or less, when tested in accordance with ASTM E84.
 4. Combustibility: Non-combustible, when tested in accordance with ASTM E136.
 5. Formaldehyde Content: Zero.
 6. Thermal Resistance: in accordance with plans.
 7. Thickness: Varies.
 8. Facing: Aluminum foil, flame spread 25 rated; one side.
 9. Manufacturers:
 - a. CertainTeed Corporation: www.certainteed.com/#sle.
 - b. Johns Manville Corporation: www.jm.com/#sle.
 - c. Owens Corning Corp: www.owenscorning.com.
 10. Substitutions: See Section 01 60 00 - Product Requirements.

2.05 ACCESSORIES

- A. Tape: Bright aluminum; Polyethylene or Polyester self-adhering type, mesh reinforced, 2 inch wide.
- B. Insulation Fasteners: Impaling clip of galvanized steel with washer retainer and clips, to be adhered to surface to receive insulation, length to suit insulation thickness and substrate, capable of securely and rigidly fastening insulation in place.
- C. Wire Mesh: Galvanized steel, hexagonal wire mesh.
- D. Adhesive: Type recommended by insulation manufacturer for application and in compliance with Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that substrate, adjacent materials, and insulation materials are dry and that substrates are ready to receive insulation and adhesive.
- B. Verify substrate surfaces are flat, free of irregularities or materials or substances that may impede adhesive bond.

3.02 BOARD INSTALLATION AT FOUNDATION PERIMETER

- A. Adhere a 6 inch wide strip of polyethylene sheet over construction, control, and expansion joints with double beads of adhesive each side of joint.
 1. Tape seal joints.
 2. Extend sheet full height of joint.

- B. Apply adhesive to back of boards:
 - 1. Three continuous beads per board length.
 - 2. Full bed 1/8 inch thick.
- C. Install boards horizontally on foundation perimeter.
 - 1. Place boards to maximize adhesive contact.
 - 2. Install in running bond pattern.
 - 3. Butt edges and ends tightly to adjacent boards and to protrusions.
- D. Extend boards over expansion joints, unbonded to foundation on one side of joint.
- E. Cut and fit insulation tightly to protrusions or interruptions to the insulation plane.
- F. Immediately following application of board insulation, place protective boards over exposed insulation surfaces.
 - 1. Apply adhesive in five continuous beads per board length.
 - 2. Install boards horizontally from base of foundation to top of insulation.
 - 3. Butt boards tightly, with joints staggered from insulation joints.

3.03 BOARD INSTALLATION AT CAVITY WALLS

- A. Install board insulation per manufacturer's instructions.
- B. Adhere a 6 inch wide strip of polyethylene sheet over expansion joints with double beads of adhesive each side of joint.
 - 1. Tape seal joints between sheets.
 - 2. Extend sheet full height of joint.
- C. Apply compatible adhesive to back of boards:
 - 1. Three continuous beads per board length.
 - 2. Full bed 1/8 inch thick.
- D. Install boards to fit snugly between wall ties at 16" O.C.
- E. Make insulation continuous, fill all voids with insulation.
 - 1. Place membrane surface against adhesive.
 - 2. Place membrane surface facing out, and tape seal board joints.
- F. Install boards horizontally on walls.
 - 1. Place boards to maximize adhesive contact.
 - 2. Install in running bond pattern.
 - 3. Butt edges and ends tightly to adjacent boards and to protrusions.
- G. Cut and fit insulation tightly to protrusions or interruptions to the insulation plane.
- H. Place 6 inch wide polyethylene sheet at perimeter of wall openings, from adhesive vapor retarder bed to window, door, and storefront frames. Tape seal in place to ensure continuity of vapor retarder and air seal.

3.04 BOARD INSTALLATION UNDER CONCRETE SLABS

- A. Place insulation under slabs on grade after base for slab has been compacted.
- B. Cut and fit insulation tightly to protrusions or interruptions to the insulation plane.
- C. Prevent insulation from being displaced or damaged while placing vapor retarder and placing slab.

3.05 BATT INSTALLATION

- A. Install insulation and vapor retarder in accordance with manufacturer's instructions.
- B. Install in exterior cavities at window, door, wall and roof spaces without gaps or voids. Do not compress insulation.
- C. Trim insulation neatly to fit spaces. Insulate miscellaneous gaps and voids.

- D. Fit insulation tightly in cavities and tightly to exterior side of mechanical and electrical services within the plane of the insulation.
- E. Install with factory applied vapor retarder membrane facing warm side of building spaces. Lap ends and side flanges of membrane over framing members.
- F. Tape seal butt ends, lapped flanges, and tears or cuts in membrane.
- G. At metal framing, place vapor retarder on warm side of insulation; lap and seal sheet retarder joints over member face.
- H. Tape seal tears or cuts in vapor retarder.
- I. Extend vapor retarder tightly to full perimeter of adjacent window and door frames and other items interrupting the plane of the membrane. Tape seal in place.
- J. Coordinate work of this section with construction of air barrier seal specified in Section 07 27 26.

3.06 PROTECTION

- A. Do not permit installed insulation to be damaged prior to its concealment.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 07 25 00
WEATHER BARRIERS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Vapor Retarders (Air Barrier and Water Resistive): Materials to make exterior walls, joints between exterior walls and roof, and joints around frames of openings in exterior walls water vapor resistant and air tight.

1.02 RELATED REQUIREMENTS

1.03 DEFINITIONS

- A. Weather Barrier: Assemblies that form either water-resistive barriers, air barriers, or vapor retarders.
- B. Air Barrier: Air tight barrier made of material that is relatively air impermeable but water vapor permeable, both to the degree specified, with sealed seams and with sealed joints to adjacent surfaces. Note: For the purposes of this specification, vapor impermeable air barriers are classified as vapor retarders.
- C. Vapor Retarder: Air tight barrier made of material that is relatively water vapor impermeable, to the degree specified, with sealed seams and with sealed joints to adjacent surfaces.
 - 1. Water Vapor Permeance: For purposes of conversion, $57.2 \text{ ng}/(\text{Pa s sq m}) = 1 \text{ perm}$.
- D. Water-Resistive Barrier: Water-shedding barrier made of material that is moisture resistant, to the degree specified, intended to be installed to shed water without sealed seams.

1.04 REFERENCE STANDARDS

- A. 40 CFR 59, Subpart D - National Volatile Organic Compound Emission Standards for Architectural Coatings; U.S. Environmental Protection Agency.
- B. ASTM E96/E96M - Standard Test Methods for Water Vapor Transmission of Materials.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. See Section 01 33 00 - Submittal Procedures
- C. Product Data: Provide data on material characteristics.
- D. Shop Drawings: Provide drawings of special joint conditions.
- E. Manufacturer's Installation Instructions: Indicate preparation.
- F. Warranty Documentation for Installation of Building Rainscreen Assembly: Submit installer warranty and ensure that forms have been completed in Owner's name and registered with installer.

1.06 QUALITY ASSURANCE

- A. Single Source Responsibility: Obtain all system components from a single manufacturer.

1.07 MOCK-UP

- A. Construct a mock-up panel of size, detail and configuration indicated on the drawings. Mock-up shall include all components of the exterior wall construction.

1.08 FIELD CONDITIONS

- A. Maintain temperature and humidity recommended by the materials manufacturers before, during and after installation.

PART 2 PRODUCTS

2.01 WEATHER BARRIER ASSEMBLIES

- A. Exterior Vapor Retarder (Air Barrier and Water Resistive):
 - 1. On outside surface of sheathing use vapor retarder, air barrier and water resistive coating.

2.02 VAPOR RETARDER MATERIALS (AIR BARRIER AND WATER-RESISTIVE)

- A. Vapor Retarder Coating: Liquid applied, resilient, UV-resistant coating and associated joint treatment.
 - 1. Water Vapor Permeance: 1.0 perm, maximum, when tested in accordance with ASTM E96/E96M.
 - 2. VOC Content: Less than 50 g per L when tested in accordance with 40 CFR 59, Subpart D (EPA Method 24).
 - 3. Suitable for use on concrete, masonry, plywood and gypsum sheathing.
 - 4. Joint Preparation Treatment: Coating manufacturer's recommended method, either tape or reinforcing mesh saturated with coating material.
 - 5. Manufacturers:
 - a. Carlisle Coatings and Waterproofing, Inc; Barriseal-R: www.carlisleccw.com/#sle.
 - b. Henry Company; Air-Bloc 16MR: www.henry.com/#sle.
 - c. W.R. Meadows, Inc; Air-Shield LM or Air-Shield LM (All Season): www.wrmeadows.com/#sle.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
 - 6. Joint Filler: As recommended by coating manufacturer and suitable to the substrate.

2.03 ACCESSORIES

- A. Sealants, Tapes, and Accessories for Sealing Weather Barrier and Sealing Weather Barrier to Adjacent Substrates: As specified or as recommended by weather barrier manufacturer.
- B. Stainless Steel Flashing: Flexible flashing with 8 mil, 0.008 inch thick sheet of Type 304 stainless steel, 8 mil, 0.008 inch of butyl adhesive and a siliconized release liner.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that surfaces and conditions are ready to accept the work of this section.

3.02 PREPARATION

- A. Remove projections, protruding fasteners, and loose or foreign matter that might interfere with proper installation.
- B. Clean and prime substrate surfaces to receive adhesives in accordance with manufacturer's instructions.

3.03 INSTALLATION

- A. Install materials in accordance with manufacturer's instructions.
- B. Vapor Retarders (Air Barrier and Water Resistive): Install continuous air tight barrier over surfaces indicated, with sealed seams and with sealed joints to adjacent surfaces.
- C. Coatings:
 - 1. Prepare substrate in manner recommended by coating manufacturer; treat joints in substrate and between dissimilar materials as recommended by manufacturer.
 - 2. Use flashing to seal to adjacent construction and to bridge joints.
- D. Openings and Penetrations in Exterior Weather Barriers:
 - 1. Install flashing over sills, covering entire sill frame member, extending at least 5 inches onto weather barrier and at least 6 inches up jambs; mechanically fasten stretched edges.

2. At openings to be filled with frames having nailing flanges, seal head and jamb flanges using a continuous bead of sealant compressed by flange and cover flanges with sealing tape at least 4 inches wide; do not seal sill flange.
3. At openings to be filled with non-flanged frames, seal weather barrier to each side of opening framing, using flashing at least 9 inches wide, covering entire depth of framing.
4. At head of openings, install flashing under weather barrier extending at least 2 inches beyond face of jambs; seal weather barrier to flashing.
5. At interior face of openings, seal gap between window/door frame and rough framing, using joint sealant over backer rod.
6. Service and Other Penetrations: Form flashing around penetrating item and seal to weather barrier surface.

3.04 PROTECTION

- A. Do not leave materials exposed to weather longer than recommended by manufacturer.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 07 31 13
ASPHALT SHINGLES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Asphalt shingle roofing.
- B. Flexible sheet membranes for underlayment.
- C. Associated metal flashings and accessories.

1.02 REFERENCE STANDARDS

- A. ASTM D1970/D1970M - Standard Specification for Self-Adhering Polymer Modified Bituminous Sheet Materials Used as Steep Roofing Underlayment for Ice Dam Protection.
- B. ASTM D3161/D3161M - Standard Test Method for Wind-Resistance of Steep Slope Roofing Products (Fan-Induced Method).
- C. ASTM D3462/D3462M - Standard Specification for Asphalt Shingles Made From Glass Felt and Surfaced with Mineral Granules.
- D. ASTM D4586/D4586M - Standard Specification for Asphalt Roof Cement, Asbestos-Free.
- E. ASTM E108 - Standard Test Methods for Fire Tests of Roof Coverings.
- F. NRCA (RM) - The NRCA Roofing Manual.
- G. UL (DIR) - Online Certifications Directory.

1.03 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide data indicating material characteristics.
- C. Shop Drawings: For metal flashings, indicate specially configured metal flashings.
- D. Samples: Submit two samples of each shingle color indicating color range and finish texture/pattern; for color selection.
- E. Manufacturer's Installation Instructions: Indicate installation criteria and procedures.
- F. Warranty Documentation: Submit manufacturer warranty and ensure that forms have been completed in Owner's name and registered with manufacturer.
- G. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
 - 1. See Section 01 60 00 - Product Requirements, for additional provisions.

1.04 QUALITY ASSURANCE

- A. Roofing Firm's Qualifications: Company specializing in the type of work required.
 - 1. Minimum of five years of experience.
- B. Products are Required to Comply with Fire Resistance Criteria: UL (DIR) listed and labeled.

1.05 MOCK-UP

- A. Provide mock-up of _____ sq ft, including underlayment.
- B. Locate where directed.

1.06 FIELD CONDITIONS

- A. Do not install shingles or eave protection membrane when surface temperatures are below 45 degrees F.

1.07 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.

- B. Provide manufacturer's lifetime transferable warranty.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Asphalt Shingles:
1. GAF; Timberline HD Reflector Series: www.gaf.com/#sle.
 2. Certainteed; Independence: www.certainteed.com..
 3. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 ASPHALT SHINGLES

- A. Asphalt Shingles: Asphalt-coated glass felt, mineral granule surfaced, complying with ASTM D3462/D3462M.
1. Fire Resistance: Class A, conforming to ASTM E108.
 2. Wind Resistance: Class F, when tested in accordance with ASTM D3161/D3161M.
 3. Weight: 250 lb/100 sq ft.
 4. Self-sealing type.
 5. Color: As selected by Owner.
 6. Warranty: Lifetime.

2.03 SHEET MATERIALS

- A. Underlayment: Self-adhering rubber-modified asphalt sheet complying with ASTM D1970/D1970M; 22 mil total thickness; with strippable release film and woven polypropylene sheet top surface.
1. Self Sealability: Passing nail sealability test specified in ASTM D1970/D1970M.
 2. Low Temperature Flexibility: Passing test specified in ASTM D1970/D1970M.

2.04 ACCESSORIES

- A. Nails: Standard round wire shingle type, of hot-dipped zinc coated steel, 10 wire gage, 0.1019 inch shank diameter, 3/8 inch head diameter, of sufficient length to penetrate through roof sheathing or 3/4 inch into roof sheathing or decking.
- B. Plastic Cement: ASTM D4586/D4586M, asphalt roof cement.

2.05 METAL FLASHINGS

- A. Metal Flashings: Provide sheet metal eave edge, gable edge, and other flashing indicated.
- B. Aluminum Sheet Metal: Prefinished aluminum, 26 gage, 0.017 inch minimum thickness; PVC coating, color as selected by Owner.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify existing conditions prior to beginning work.
- B. Verify deck surfaces are dry, free of ridges, warps, or voids.

3.02 PREPARATION

- A. Seal roof deck joints wider than 1/16 inch as recommended by shingle manufacturer.

3.03 INSTALLATION - UNDERLAYMENT

- A. Underlayment At Roof Slopes Greater Than 4:12: Install underlayment perpendicular to slope of roof, with ends and edges weather lapped minimum 4 inches, stagger end laps of each consecutive layer, nail in place, and weather lap minimum 4 inches over eave protection.
- B. Weather lap and seal watertight with plastic cement any items projecting through or mounted on roof.

3.04 INSTALLATION - SHINGLES

- A. Install shingles in accordance with manufacturer's instructions manufacturer's instructions and NRCA (RM) applicable requirements.
 - 1. Fasten individual shingles using two nails per shingle, or as required by code, whichever is greater.
 - 2. Fasten strip shingles using four nails per strip, or as required by code, whichever is greater.
- B. Place shingles in straight coursing pattern with 5 inch weather exposure to produce double thickness over full roof area. Provide double course of shingles at eaves.
- C. Project first course of shingles 3/4 inch beyond fascia boards.
- D. Extend shingles 1/2 inch beyond face of gable edge fascia boards.
- E. Complete installation to provide weather tight service.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 07 41 13
METAL ROOF PANELS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Architectural roofing system of preformed aluminum panels.

1.02 REFERENCE STANDARDS

- A. AAMA 2605 - Voluntary Specification, Performance Requirements and Test Procedures for Superior Performing Organic Coatings on Aluminum Extrusions and Panels.
- B. ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.
- C. ASTM A1011/A1011M - Standard Specification for Steel, Sheet and Strip, Hot-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, and Ultra-High Strength.
- D. ASTM B209 - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate.
- E. ASTM B209M - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate [Metric].
- F. ASTM D1970/D1970M - Standard Specification for Self-Adhering Polymer Modified Bituminous Sheet Materials Used as Steep Roofing Underlayment for Ice Dam Protection.
- G. ASTM E96/E96M - Standard Test Methods for Water Vapor Transmission of Materials.
- H. ICC-ES AC188 - Acceptance Criteria for Roof Underlayments.

1.03 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. See Section 01 33 00 - Submittal Procedures.
- C. Product Data: Manufacturer's data sheets on each product to be used, including:
 - 1. Storage and handling requirements and recommendations.
 - 2. Installation methods.
 - 3. Specimen warranty.
- D. Shop Drawings: Include layouts of roof panels, details of edge and penetration conditions, spacing and type of connections, flashings, underlayments, and special conditions.
 - 1. Show work to be field-fabricated or field-assembled.
- E. Selection Samples: For each roofing system specified, submit color chips representing manufacturer's full range of available colors and patterns.
- F. Verification Samples: For each roofing system specified, submit samples of minimum size 12 inches square, representing actual roofing metal, thickness, profile, color, and texture.
- G. Warranty: Submit specified manufacturer's warranty and ensure that forms have been completed in Owner's name and are registered with manufacturer.

1.04 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing products specified in this section, with not less than ten years of documented experience.
- B. Installer Qualifications: Company specializing in performing work of the type specified and with at least five years of documented experience.

1.05 DELIVERY, STORAGE, AND HANDLING

- A. Provide strippable plastic protection on prefinished roofing panels for removal after installation.

- B. Store roofing panels on project site as recommended by manufacturer to minimize damage to panels prior to installation.

1.06 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.
- B. Finish Warranty: Provide manufacturer's special warranty covering failure of factory-applied exterior finish on metal roof panels and agreeing to repair or replace panels that show evidence of finish degradation, including significant fading, chalking, cracking, or peeling within specified warranty period of twenty five years from Date of Substantial Completion.
- C. Waterproofing Warranty: Provide manufacturer's warranty for weathertightness of roofing system, including agreement to repair or replace roofing that fails to keep out water within specified warranty period of twenty five years from Date of Substantial Completion.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Basis of Design:
 - 1. Metal Roof Panels: DMC 175S Profile manufactured by Drexel Metals
- B. Other Acceptable Manufacturers; Metal Roof Panels:
 - 1. ATAS International, Inc: www.atas.com/#sle.
 - 2. Berridge Manufacturing Company: www.berridge.com/#sle.
 - 3. Fabral: www.fabral.com/#sle.
 - 4. Petersen Aluminum Corporation: www.pac-clad.com/#sle.
 - 5. Substitutions: See Section 01 60 00 - Product Requirements.
- C. Metal Soffit Panels:
 - 1. Drexel Metals: www.drexmet.com/#sle.
 - 2. ATAS International, Inc: www.atas.com/#sle.
 - 3. Berridge Manufacturing Company: www.berridge.com/#sle.
 - 4. Fabral: www.fabral.com/#sle.
 - 5. Petersen Aluminum Corporation: www.pac-clad.com/#sle.

2.02 METAL ROOF PANELS

- A. Metal Roof Panels: Provide complete engineered system complying with specified requirements and capable of remaining weathertight while withstanding anticipated movement of substrate and thermally induced movement of roofing system.
 - 1. Comply with requirements for the IBC design wind speeds for building location, risk category, and exposure category as indicated on the structural drawings.
- B. Metal Panels: Factory-formed panels with factory-applied finish.
 - 1. Aluminum Panels:
 - a. Alloy and Temper: Aluminum complying with ASTM B209 (ASTM B209M); temper as required for forming.
 - b. Thickness: Minimum 20 gauge (0.032 inch).
 - 2. Profile: Standing seam, with minimum 1.75 inch seam height; concealed fastener system for snap-on application of matching standing seam batten.
 - 3. Texture: Smooth.
 - 4. Color: As selected by Architect from manufacturer's full line.
 - 5. Length: Full length of roof slope, without lapped horizontal joints.
 - 6. Width: Panel coverage of 16 inches, nominal.
- C. Metal Soffit Panels:
 - 1. Basis-of-Design:

- a. Metal Soffit Panels: Linear Ceiling, LCR738 with recessed filler strips manufactured by ATAS International, Inc.
2. Profile: Linear Ceiling, with venting not provided.
3. Material: Precoated aluminum sheet, 20 gage, 0.032 inch minimum thickness.
4. Color: As selected by Architect from manufacturer's full line.

2.03 ATTACHMENT SYSTEM

- A. Concealed System: Provide manufacturer's standard stainless steel or nylon-coated aluminum concealed anchor clips designed for specific roofing system and engineered to meet performance requirements, including anticipated thermal movement.

2.04 SECONDARY FRAMING

- A. Miscellaneous Secondary Framing: Light gauge steel framing incidental to structural supports; fabricated from steel sheet.
- B. Framing Material: ASTM A 1011/A 1011M, Designation SS steel sheet.
 1. Profile: Manufacturer's standard cee, zee, asymmetrical zee, hat channel, plain channel, single slope eave strut, double slope eave strut, and angle.
 2. Thickness: 12 gauge, 0.1046 inch.
 3. Finish: Galvanized per ASTM A653/A653M, G90.
- C. Framing Connectors: Factory-made formed steel sheet, ASTM A653/A653M SS Grade 50, with G60/Z180 hot dipped galvanized coating and factory punched holes.

2.05 FABRICATION

- A. Panels: Provide factory or field fabricated panels with applied finish and accessory items, using manufacturer's standard processes as required to achieve specified appearance and performance requirements.

2.06 FINISHES

- A. Fluoropolymer Coil Coating System: Manufacturer's standard multi-coat aluminum coil coating system complying with AAMA 2605, including at least 70 percent polyvinylidene fluoride (PVDF) resin, and at least 80 percent of coil coated aluminum surfaces having minimum total dry film thickness (DFT) of 0.9 mil, 0.0009 inch; color and gloss to match sample.

2.07 ACCESSORIES

- A. Miscellaneous Sheet Metal Items: Provide flashings, trim, moldings, closure strips, preformed crickets, caps, and similar sheet metal items of the same material, thickness, and finish as used for the roofing panels. Items completely concealed after installation may optionally be made of stainless steel.
 1. Downspouts: Open face, rectangular profile.
- B. Rib and Ridge Closures: Provide prefabricated, close-fitting components of steel with corrosion resistant finish or combination steel and closed-cell foam.
- C. Sealants:
 1. Exposed Sealant: Elastomeric; silicone, polyurethane, or silyl-terminated polyether/polyurethane.
 2. Concealed Sealant: Non-curing butyl sealant or tape sealant.
- D. Underlayment: Self-adhering rubber-modified asphalt sheet complying with ASTM D1970/D1970M; 22 mil total thickness; with strippable release film and woven polypropylene sheet top surface.
 1. Minimum Requirements: Comply with requirements of ICC-ES AC188 for non-self-adhesive sheet.
 2. Sheet Thickness: 22 mil, 0.022 inch minimum total thickness.
 3. Self Sealability: Passing nail sealability test specified in ASTM D1970/D1970M.

4. Low Temperature Flexibility: Passing test specified in ASTM D1970/D1970M.
5. Water Vapor Permeance: 0.1 perm, maximum, when tested in accordance with ASTM E96/E96M Procedure A (desiccant method).
6. Manufacturers:
 - a. Henry Company: www.henry.com/#sle.
 - b. Polyglass USA, Inc: www.polyglass.us/#sle.
 - c. System Components Corporation, Inc: www.systemcomponents.net/#sle.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Do not begin installation of preformed metal roof panels until substrates have been properly prepared.
- B. If substrate preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.

3.02 PREPARATION

- A. Coordinate roofing work with provisions for roof drainage, flashing, trim, penetrations, and other adjoining work to assure that the completed roof will be free of leaks.
- B. Remove protective film from surface of roof panels immediately prior to installation. Strip film carefully, to avoid damage to prefinished surfaces.
- C. Separate dissimilar metals by applying a bituminous coating, self-adhering rubberized asphalt sheet, or other permanent method approved by roof panel manufacturer.
- D. Where metal will be in contact with wood or other absorbent material subject to wetting, seal joints with sealing compound and apply one coat of heavy-bodied bituminous paint.

3.03 INSTALLATION

- A. Overall: Install roofing system in accordance with approved shop drawings and panel manufacturer's instructions and recommendations, as applicable to specific project conditions. Anchor all components of roofing system securely in place while allowing for thermal and structural movement.
 1. Install roofing system with concealed clips and fasteners, except as otherwise recommended by manufacturer for specific circumstances.
 2. Minimize field cutting of panels. Where field cutting is absolutely required, use methods that will not distort panel profiles. Use of torches for field cutting is absolutely prohibited.
- B. Accessories: Install all components required for a complete roofing assembly, including flashings, gutters, downspouts, trim, moldings, closure strips, preformed crickets, caps, equipment curbs, rib closures, ridge closures, and similar roof accessory items.
- C. Roof Panels: Install panels in strict accordance with manufacturer's instructions, minimizing transverse joints except at junction with penetrations.

3.04 CLEANING

- A. Clean exposed sheet metal work at completion of installation. Remove grease and oil films, excess joint sealer, handling marks, and debris from installation, leaving the work clean and unmarked, free from dents, creases, waves, scratch marks, or other damage to the finish.

3.05 PROTECTION

- A. Do not permit storage of materials or roof traffic on installed roof panels. Provide temporary walkways or planks as necessary to avoid damage to completed work. Protect roofing until completion of project.

- B. Touch-up, repair, or replace damaged roof panels or accessories before Date of Substantial Completion.

END OF SECTION

NOT FOR BIDDING

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 07 42 13
METAL WALL PANELS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Manufactured metal panels for exterior wall panels and subgirt framing assembly, with related flashings and accessory components.

1.02 RELATED REQUIREMENTS

- A. Section 07 92 00 - Joint Sealants: Sealing joints between metal wall panel system and adjacent construction.

1.03 REFERENCE STANDARDS

- A. AAMA 609 & 610 - Cleaning and Maintenance Guide for Architecturally Finished Aluminum (Combined Document).
- B. ASCE 7 - Minimum Design Loads for Buildings and Other Structures.
- C. ASTM B209 - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate.
- D. ASTM B209M - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate [Metric].

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. See Section 01 33 00 - Submittal Procedures.
- C. Product Data - Wall System: Manufacturer's data sheets on each product to be used, including:
 - 1. Physical characteristics of components shown on shop drawings.
 - 2. Storage and handling requirements and recommendations.
 - 3. Installation instructions and recommendations.
- D. Shop Drawings: Indicate dimensions, layout, joints, construction details, and methods of anchorage.
- E. Samples for Initial Selection: Submit box of color chips for manufacturer's full color range.
- F. Samples for Verification: Submit two samples of wall panel, 12 inch by 12 inch in size illustrating finish color, sheen, and texture.
- G. Manufacturer's Qualification Statement.
- H. Installer's Qualification Statement.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum ten years of documented experience.
- B. Installer Qualifications: Company specializing in installing products of the type specified in this section with minimum ten years of documented experience.

1.06 MOCK-UP

- A. Construct mock-up as indicated on the drawings.
- B. Locate where directed by Architect.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Protect panels from accelerated weathering by removing or venting sheet plastic shipping wrap.
- B. Store prefinished material off the ground and protected from weather; prevent twisting, bending, or abrasion; provide ventilation; slope metal sheets to ensure proper drainage.

- C. Prevent contact with materials that may cause discoloration or staining of products.

1.08 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.
- B. Correct defective work within a five year period after Date of Substantial Completion, including defects in water tightness and integrity of seals.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Basis of Design:
 - 1. Metal Wall Panels - Concealed Fasteners: Versa-Seam VSS120 Horizontal Wall Panel manufactured by Atas.
- B. Other Acceptable Manufacturers - Metal Wall Panels - Concealed Fasteners:
 - 1. ATAS International, Inc: www.atas.com/#sle.
 - 2. Berridge Manufacturing Company: www.berridge.com/#sle.
 - 3. Fabral: www.fabral.com/#sle.
 - 4. Petersen Aluminum Corporation: www.pac-clad.com/#sle.
 - 5. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 MANUFACTURED METAL PANELS

- A. Wall Panel System: Factory fabricated prefinished metal panel system, site assembled.
 - 1. Provide exterior wall panels.
 - 2. Design and size components to support assembly dead loads, and to withstand live loads caused by positive and negative wind pressure acting normal to plane of wall.
 - a. Comply with requirements for the IBC design wind speeds for building location, risk category, and exposure category as indicated on the structural drawings.
 - 3. Maximum Allowable Deflection of Panel: L/180 for length(L) of span.
 - 4. Movement: Accommodate movement within system without damage to components or deterioration of seals, movement between system and perimeter components when subject to seasonal temperature cycling; dynamic loading and release of loads; and deflection of structural support framing.
 - 5. Airl Leakage: Less than 0.01 cfm/sf when tested at 20 psf differential pressure in accordance with ASTM E283.
 - 6. Water Leakage: No uncontrolled water leakage when tested at 20 psf differential pressure in accordance with ASTM E331.
 - 7. Drainage: Provide positive drainage to exterior for moisture entering or condensation occurring within panel system.
 - 8. Fabrication: Formed true to shape, accurate in size, square, and free from distortion or defects; pieces of longest practical lengths.
 - 9. Corners: Factory-fabricated in one continuous piece with minimum 24 inch returns.
- B. Exterior Wall Panels:
 - 1. Profile: Horizontal; flat profile with twelve inch reveal..
 - 2. Side Seams: Double-interlocked with reveal, sealed with continuous gaskets.
 - 3. Material: Precoated aluminum sheet, 20 gage, 0.032 inch minimum thickness.
 - 4. Panel Width: 12 inches.
 - 5. Reveal: 1/4 inch.
 - 6. Color: Two colors. Colors selected by Architect from manufacturer's full line.
- C. Internal and External Corners: Same material, thickness, and finish as exterior sheets; profile to suit system; shop cut and factory mitered to required angles.
- D. Expansion Joints: Same material, thickness and finish as exterior sheets; 20 gage, 0.032 inch thick; manufacturer's standard brake formed type, of profile to suit system.

- E. Trim: Same material, thickness and finish as exterior sheets; brake formed to required profiles.
- F. Anchors: Galvanized steel.

2.03 MATERIALS

- A. Precoated Aluminum Sheet: ASTM B209 (ASTM B209M), 3105 alloy, O temper, smooth surface texture; continuous-coil-coated on exposed surfaces with specified finish coating and on panel back with specified panel back coating.

2.04 FINISHES

- A. Exposed Surface Finish: Panel manufacturer's standard polyvinylidene fluoride (PVDF) coating, top coat over epoxy primer.

2.05 ACCESSORIES

- A. Gaskets: Manufacturer's standard type suitable for use with system, permanently resilient; ultraviolet and ozone resistant.
- B. Concealed Sealants: Non-curing butyl sealant or tape sealant.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that building framing members are ready to receive panels.

3.02 INSTALLATION

- A. Install panels on walls in accordance with manufacturer's instructions.
- B. Protect surfaces in contact with cementitious materials and dissimilar metals with bituminous paint. Allow to dry prior to installation.
- C. Fasten panels to structural supports; aligned, level, and plumb.
- D. Locate joints over supports.
- E. Use concealed fasteners unless otherwise approved by Architect.
- F. Seal and place gaskets to prevent weather penetration. Maintain neat appearance.

3.03 TOLERANCES

- A. Maximum Offset From True Alignment Between Adjacent Members Butting or In Line: 1/16 inch.
- B. Maximum Variation from Plane or Location Indicated on Drawings: 1/4 inch.

3.04 CLEANING

- A. Remove site cuttings from finish surfaces.
- B. Remove protective material from wall panel surfaces.
- C. See Section 01 74 19 - Construction Waste Management and Disposal, for additional requirements.
- D. Clean and wash prefinished surfaces with mild soap and water; rinse with clean water.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 07 53 00
ELASTOMERIC MEMBRANE ROOFING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Elastomeric roofing membrane, mechanically fastened conventional and adhered conventional application.
- B. Insulation, flat and tapered.
- C. Vapor retarder.
- D. Deck sheathing.
- E. Flashings.

1.02 RELATED REQUIREMENTS

- A. Section 06 10 00 - Rough Carpentry: Wood nailers and curbs.
- B. Section 06 10 00 - Rough Carpentry: Wood cant strips.
- C. Section 07 71 00 - Roof Specialties: Prefabricated coping.
- D. Section 07 72 00 - Roof Accessories: Roof hatch, curbs and rails.

1.03 REFERENCE STANDARDS

- A. ASTM C1177/C1177M - Standard Specification for Glass Mat Gypsum Substrate for Use as Sheathing.
- B. ASTM C1289 - Standard Specification for Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board.
- C. ASTM D4637/D4637M - Standard Specification for EPDM Sheet Used in Single-Ply Roof Membrane.
- D. FM DS 1-28 - Wind Design.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. See Section 01 33 00 - Submittal Procedures.
- C. Product Data: Provide data indicating membrane materials, flashing materials, insulation, vapor retarder, surfacing, and fasteners.
- D. Warranty: Submit manufacturer warranty and ensure forms have been completed in Owner's name and registered with manufacturer.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum ten years of documented experience.
- B. Installer Qualifications: Company specializing in performing the work of this section with minimum five years documented experience.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Deliver materials in manufacturer's original containers, dry and undamaged, with seals and labels intact.
- B. Store materials in weather protected environment, clear of ground and moisture.
- C. Ensure storage and staging of materials does not exceed static and dynamic load-bearing capacities of roof decking.
- D. Protect foam insulation from direct exposure to sunlight.

1.07 FIELD CONDITIONS

- A. Do not apply roofing membrane during unsuitable weather.
- B. Do not apply roofing membrane when ambient temperature is below 40 degrees F or above 90 degrees F.
- C. Do not apply roofing membrane to damp or frozen deck surface or when precipitation is expected or occurring.
- D. Do not expose materials vulnerable to water or sun damage in quantities greater than can be weatherproofed the same day.
- E. Schedule applications so that no partially completed sections of roof are left exposed at end of workday.

1.08 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.
- B. Correct defective Work within a two year period after Date of Substantial Completion.
- C. Provide twenty year manufacturer's NDL, material and labor warranty to cover failure and to prevent penetration of water.
 - 1. Warranty shall cover the IBC design wind speeds for building location, risk category, and exposure category as indicated on the structural drawings.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. EPDM Membrane Materials:
 - 1. Carlisle Roofing Systems, Inc: www.carlisle-syntec.com/#sle.
 - 2. Firestone Building Products, LLC: www.firestonebpco.com/#sle.
 - 3. Johns Manville: www.jm.com/#sle.
 - 4. Versico Roofing Systems: www.versico.com/#sle.
 - 5. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 ROOFING - UNBALLASTED APPLICATIONS

- A. Elastomeric Membrane Roofing: One ply membrane, fully adhered, over insulation.
- B. System Design Requirements: Comply with requirements for the IBC design wind speeds for building location, risk category, and exposure category as indicated on the structural drawings.

2.03 ROOFING MEMBRANE AND ASSOCIATED MATERIALS

- A. Membrane: Ethylene-propylene-diene-terpolymer (EPDM); non-reinforced; complying with minimum properties of ASTM D4637/D4637M.
 - 1. Thickness: 0.060 inch (60 mil).
 - 2. Color: White.
- B. Seaming Materials: As recommended by membrane manufacturer.
- C. Membrane Fasteners: As recommended by and approved by membrane manufacturer.
- D. Vapor Retarder: Reinforced Kraft paper laminate, complying with requirements of fire rating classification; compatible with roofing and insulation materials.
 - 1. Fire-retardant adhesive.
- E. Flexible Flashing Material: Same material as membrane; complying with the following:

2.04 DECK SHEATHING AND COVER BOARDS

- A. Deck Sheathing: Glass mat faced gypsum panels, ASTM C1177/C1177M, fire resistant type, 1/2 inch thick.

2.05 INSULATION

- A. Polyisocyanurate (ISO) Board Insulation: Rigid cellular foam, complying with ASTM C1289.
 - 1. Classifications:
 - a. Type VII: Faced with glass mat faced gypsum board on one major surface of core foam and glass fiber reinforced cellulosic felt or uncoated or coated polymer-bonded glass fiber mat facer on other major surface of core foam.
 - 1) Compressive Strength: 16 psi, minimum.
 - 2) Thermal Resistance, R-value: At 1-1/2 inch thick; 7.0 at 75 degrees F.
 - 2. Board Size: 48 by 96 inch.
 - 3. Tapered Board: Slope as indicated; minimum thickness 1/4 inch; fabricate of fewest layers possible.
 - 4. Board Edges: Square.
 - 5. Manufacturers:
 - a. Dow Chemical Company: www.dow.com/#sle.
 - b. GAF; EnergyGuard Polyiso Insulation: www.gaf.com/#sle.
 - c. Substitutions: See Section 01 60 00 - Product Requirements.

2.06 ACCESSORIES

- A. Sheathing Adhesive: Non-combustible type, for adhering gypsum sheathing to metal deck.
- B. Membrane Adhesive: As recommended by membrane manufacturer.
- C. Thinners and Cleaners: As recommended by adhesive manufacturer, compatible with membrane.
- D. Insulation Adhesive: As recommended by insulation manufacturer.
- E. Roofing Nails: Galvanized, hot dipped type, size and configuration as required to suit application.
- F. Sealants: As recommended by membrane manufacturer.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that surfaces and site conditions are ready to receive work.
- B. Verify deck is supported and secure.
- C. Verify deck is clean and smooth, flat, free of depressions, waves, or projections, properly sloped and suitable for installation of roof system.
- D. Verify deck surfaces are dry and free of snow or ice.
- E. Verify that roof openings, curbs, and penetrations through roof are solidly set, and cant strips are in place.

3.02 METAL DECK PREPARATION

- A. Install deck sheathing on metal deck.
 - 1. Lay with long side at right angle to flutes; stagger end joints; provide support at ends.
 - 2. Cut sheathing cleanly and accurately at roof breaks and protrusions to provide smooth surface.
 - 3. Tape joints.
- B. Mechanically fasten sheathing to roof deck, in accordance with Factory Mutual recommendations and roofing manufacturer's instructions.
 - 1. Over entire roof area, fasten sheathing using six fasteners with washers per sheathing board.

3.03 INSULATION - UNDER MEMBRANE

- A. Apply vapor retarder to deck surface with adhesive in accordance with manufacturer's instructions.
 - 1. Extend vapor retarder under cant strips and blocking to deck edge.
 - 2. Install flexible flashing from vapor retarder to air seal material of wall construction, lap and seal to provide continuity of the air barrier plane.
- B. Ensure vapor retarder is clean and dry, continuous, and ready for application of insulation.
- C. Attachment of Insulation: Embed insulation in adhesive in full contact, in accordance with roofing and insulation manufacturers' instructions.
- D. Cover Boards: Adhere cover boards in accordance with roofing manufacturer's instructions.
- E. Lay subsequent layers of insulation with joints staggered minimum 6 inch from joints of preceding layer.
- F. Place tapered insulation to the required slope pattern in accordance with manufacturer's instructions.
- G. On metal deck, place boards parallel to flutes with insulation board edges bearing on deck flutes.
- H. Lay boards with edges in moderate contact without forcing. Cut insulation to fit neatly to perimeter blocking and around penetrations through roof.
- I. At roof drains, use factory-tapered boards to slope down to roof drains over a distance of 18 inches.
- J. Do not apply more insulation than can be covered with membrane in same day.

3.04 MEMBRANE APPLICATION

- A. Roll out membrane, free from wrinkles or tears. Place sheet into place without stretching.
- B. Shingle joints on sloped substrate in direction of drainage.
- C. Fully Adhered Application: Apply adhesive to substrate at rate of approximately 0.85 gal per 100 sq ft, and as recommended by the manufacturer. Fully embed membrane in adhesive except in areas directly over or within 3 inches of expansion joints. Fully adhere one roll before proceeding to adjacent rolls.
- D. Overlap edges and ends and seal seams by contact adhesive, minimum 3 inches. Seal permanently waterproof. Apply uniform bead of sealant to joint edge.
- E. At intersections with vertical surfaces:
 - 1. Extend membrane over cant strips and up a minimum of 4 inches onto vertical surfaces.
 - 2. Fully adhere flexible flashing over membrane and up to nailing strips.
- F. Around roof penetrations, seal flanges and flashings with flexible flashing.
- G. Coordinate installation of roof drains and sumps and related flashings.

3.05 CLEANING

- A. See Section 01 74 19 - Construction Waste Management and Disposal, for additional requirements.
- B. Remove bituminous markings from finished surfaces.
- C. In areas where finished surfaces are soiled by work of this section, consult manufacturer of surfaces for cleaning advice and comply with their documented instructions.
- D. Repair or replace defaced or damaged finishes caused by work of this section.

3.06 PROTECTION

- A. Protect installed roofing and flashings from construction operations.

- B. Where traffic must continue over finished roof membrane, protect surfaces using durable materials.

END OF SECTION

NOT FOR BIDDING

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 07 62 00
SHEET METAL FLASHING AND TRIM

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Fabricated sheet metal items, including flashings, counterflashings, gutters, and downspouts.
- B. Reglets and accessories.
- C. Precast concrete splash pads.

1.02 RELATED REQUIREMENTS

- A. Section 06 10 00 - Rough Carpentry: Wood nailers.
- B. Section 06 10 00 - Rough Carpentry: Wood blocking for batten seams.
- C. Section 09 90 00 - Painting and Coating: Field painting.

1.03 REFERENCE STANDARDS

- A. AAMA 2603 - Voluntary Specification, Performance Requirements and Test Procedures for Pigmented Organic Coatings on Aluminum Extrusions and Panels (with Coil Coating Appendix).
- B. AAMA 2604 - Voluntary Specification, Performance Requirements and Test Procedures for High Performance Organic Coatings on Aluminum Extrusions and Panels.
- C. AAMA 2605 - Voluntary Specification, Performance Requirements and Test Procedures for Superior Performing Organic Coatings on Aluminum Extrusions and Panels.
- D. ASTM A666 - Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar.
- E. ASTM B209 - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate.
- F. ASTM B209M - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate [Metric].
- G. SMACNA (ASMM) - Architectural Sheet Metal Manual.

1.04 SUBMITTALS

- A. See Section 01 33 00 - Administrative Requirements, for submittal procedures.
- B. Shop Drawings: Indicate material profile, jointing pattern, jointing details, fastening methods, flashings, terminations, and installation details.

1.05 QUALITY ASSURANCE

- A. Perform work in accordance with SMACNA Architectural Sheet Metal Manual requirements and standard details, except as otherwise indicated.
- B. Fabricator and Installer Qualifications: Company specializing in sheet metal work with 5 years of documented experience.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Stack material to prevent twisting, bending, and abrasion, and to provide ventilation. Slope metal sheets to ensure drainage.
- B. Prevent contact with materials that could cause discoloration or staining.

PART 2 PRODUCTS

2.01 SHEET MATERIALS

- A. Pre-Finished Aluminum: ASTM B209 (ASTM B209M); 0,040 inch thick; plain finish shop pre-coated with modified silicone coating.

1. Modified Silicone Polyester Coating: Pigmented Organic Coating System, AAMA 2603; baked enamel finish system.
 2. Color: As selected by Architect from manufacturer's full colors.
- B. Stainless Steel: ASTM A666, Type 304 alloy, soft temper, 28 gauge, (0.0156 inch) thick; smooth No. 4 - Brushed finish.

2.02 ACCESSORIES

- A. Fasteners: Galvanized steel, with soft neoprene washers.
- B. Primer: Zinc chromate type.
- C. Protective Backing Paint: Zinc molybdate alkyd.
- D. Sealant: Type specified in Section 07 90 05.
- E. Plastic Cement: ASTM D4586, Type I.

2.03 FABRICATION

- A. Form sections true to shape, accurate in size, square, and free from distortion or defects.
- B. Form pieces in longest possible lengths.
- C. Hem exposed edges on underside 1/2 inch; miter and seam corners.
- D. Form material with flat lock seams, except where otherwise indicated. At moving joints, use sealed lapped, bayonet-type or interlocking hooked seams.
- E. Fabricate corners from one piece with minimum 18 inch long legs; seam for rigidity, seal with sealant.
- F. Fabricate vertical faces with bottom edge formed outward 1/4 inch (6 mm) and hemmed to form drip.

2.04 GUTTER AND DOWNSPOUT FABRICATION

- A. Gutters: SMACNA (ASMM), Rectangular profile.
1. Size: As indicated on drawings.
- B. Downspouts: Rectangular profile.
1. Size: As indicated on drawings.
- C. Accessories: Profiled to suit gutters and downspouts.
1. Anchorage Devices: In accordance with SMACNA requirements.
 2. Gutter Supports: Brackets.
 3. Downspout Supports: Brackets.
- D. Splash Pads: Precast concrete type, of size and profiles indicated; minimum 3000 psi at 28 days, with minimum 5 percent air entrainment.
1. 4 feet long by 1 foot wide by 3 inch deep.
- E. Seal metal joints.

2.05

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify roof openings, curbs, pipes, sleeves, ducts, and vents through roof are solidly set, reglets in place, and nailing strips located.
- B. Verify roofing termination and base flashings are in place, sealed, and secure.

3.02 PREPARATION

- A. Install starter and edge strips, and cleats before starting installation.

- B. Back paint concealed metal surfaces with protective backing paint to a minimum dry film thickness of 15 mil.

3.03 INSTALLATION

- A. Conform to drawing details.
- B. Insert flashings into reglets to form tight fit. Secure in place with lead wedges. Pack remaining spaces with lead wool. Seal flashings into reglets with sealant.
- C. Secure flashings in place using concealed fasteners. Use exposed fasteners only where permitted.
- D. Apply plastic cement compound between metal flashings and felt flashings.
- E. Fit flashings tight in place. Make corners square, surfaces true and straight in planes, and lines accurate to profiles.
- F. Seal metal joints watertight.

3.04 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for field inspection requirements.
- B. Inspection will involve surveillance of work during installation to ascertain compliance with specified requirements.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 07 71 00
ROOF SPECIALTIES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Manufactured roof specialties, including copings.

1.02 REFERENCE STANDARDS

- A. ANSI/SPRI/FM 4435/ES-1 - Test Standard for Edge Systems Used with Low Slope Roofing Systems.
- B. NRCA (RM) - The NRCA Roofing Manual.

1.03 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. See Section 01 33 00 - Submittal Procedures
- C. Product Data: Provide data on shape of components, materials and finishes, anchor types and locations.
- D. Shop Drawings: Indicate configuration and dimension of components, adjacent construction, required clearances and tolerances, and other affected work.
- E. Samples for Initial Selection: Submit chip set of Manufacturer's full range of colors.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Roof Edge Flashings and Copings:
 - 1. ATAS International, Inc; _____: www.atas.com/#sle.
 - 2. Metal-Era Inc: www.metalera.com/#sle.
 - 3. Metal Roofing Systems, Inc: www.metalroofingsystems.biz/#sle.
 - 4. OMG Roofing Products; _____: www.omgroofing.com/#sle.
 - 5. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 COMPONENTS

- A. Copings: Factory fabricated to sizes required; mitered, welded corners; concealed fasteners.
 - 1. Configuration: Concealed continuous hold down cleat at both legs; internal splice piece at joints of same material, thickness and finish as cap; concealed stainless steel fasteners.
 - 2. Pull-Off Resistance: Tested in accordance with ANSI/SPRI/FM 4435/ES-1 using test method RE-3 to positive and negative design wind pressure as defined by applicable local building code.
 - 3. Wall Width: As indicated on drawings.
 - 4. Outside Face Height: As indicated on drawings.
 - 5. Inside Face Height: As indicated on drawings.
 - 6. Material: Formed aluminum sheet, 0.050 inch thick, minimum.
 - 7. Finish: 70 percent polyvinylidene fluoride.
 - 8. Color: To be selected by Architect from manufacturer's full range.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that deck, curbs, roof membrane, base flashing, and other items affecting work of this Section are in place and positioned correctly.

3.02 INSTALLATION

- A. Install components in accordance with manufacturer's instructions and NRCA (RM) applicable requirements.
- B. Seal joints within components when required by component manufacturer.
- C. Anchor components securely.

END OF SECTION

NOT FOR BIDDING

SECTION 07 72 00
ROOF ACCESSORIES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Manufactured equipment rails, and pedestals.
- B. Roof hatches.
- C. Non-penetrating pedestals.
- D. Roof curbs.
- E. Snow guards.

1.02 REFERENCE STANDARDS

- A. 29 CFR 1910.23 - Guarding floor and wall openings and holes.
- B. ASTM A123/A123M - Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.
- C. ASTM A153/A153M - Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware.
- D. ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.
- E. ASTM B221 - Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.
- F. ASTM B221M - Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes [Metric].

1.03 SUBMITTALS

- A. See Section 01 33 00 - Submittal Procedures, for submittal procedures.
- B. Product Data: Manufacturer's data sheets on each product to be used.
 - 1. Preparation instructions and recommendations.
 - 2. Storage and handling requirements and recommendations.
 - 3. Installation methods.
 - 4. Maintenance requirements.
- C. Shop Drawings: Submit detailed layout developed for this project. Show dimensioned location and number for each type of roof accessory.
 - 1. Snow Guards: Submit design calculations for loadings and spacings based on manufacturer testing.
 - 2. Submit shop drawings sealed and signed by a Professional Engineer experienced in design of this type of work and licensed in the State in which the Project is located.
- D. Warranty Documentation:
 - 1. Submit manufacturer warranty.
 - 2. Ensure that forms have been completed in Owner's name and registered with manufacturer.
 - 3. Submit documentation that roof accessories accessories are acceptable to roofing manufacturer, and do not limit the roofing warranty.

1.04 DELIVERY, STORAGE, AND HANDLING

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Store products under cover and elevated above grade.

1.05 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.

PART 2 PRODUCTS

2.01 MANUFACTURED CURBS

- A. Manufactured Curbs, Equipment Rails, and Other Roof Mounting Assemblies: Factory-assembled hollow sheet metal construction, insulated, with fully mitered and welded corners, integral counterflashing, internal reinforcing, and top side and edges formed to shed water.
1. Sheet Metal: Hot-dip zinc coated steel sheet complying with ASTM A653/A653M, SS Grade 33 ; G60 coating designation; 18 gage, 0.048 inch thick.
 2. Roofing Cants: Provide integral sheet metal roofing cants dimensioned to begin slope at top of roofing insulation; 1:1 slope; minimum cant height 4 inches.
 3. Manufacture curb bottom and mounting flanges for installation directly on roof deck, not on insulation; match slope and configuration of roof deck.
 4. Provide the layouts and configurations shown on the drawings.
- B. Curbs Adjacent to Roof Openings: Provide curb on all sides of opening, with top of curb horizontal for equipment mounting.
1. Provide preservative treated wood nailers along top of curb.
 2. Insulate inside curbs with 1-1/2 inch thick fiberglass insulation.
- C. Equipment Rails: Two-sided curbs in straight lengths, with top horizontal for equipment mounting.
1. Provide preservative treated wood nailers along top of rails.
 2. Height Above Finished Roof Surface: 12 inches, minimum.
- D. Pipe, Duct, and Conduit Mounting Pedestals: Vertical posts, minimum 8 inches square unless otherwise indicated.
1. Height Above Finished Roof Surface: 12 inches, minimum.

2.02 ROOF HATCHES

- A. Manufacturers - Roof Hatches:
1. Acudor Products Inc; Galvanized Steel Roof Hatch: www.acudor.com/#sle.
 2. Babcock-Davis; ThermalMAX: www.babcockdavis.com/#sle.
 3. Bilco Company; Type TB (all types & special size): www.bilco.com/#sle.
 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Roof Hatches and Smoke Vents, General: Factory-assembled steel frame and cover, complete with operating and release hardware.
1. Style: Provide flat metal covers unless otherwise indicated.
 2. Mounting: Provide frames and curbs suitable for mounting conditions as indicated on drawings.
 3. Thermally Broken Hatches: Added insulation to frame and cover; available in manufacturer's standard, single leaf sizes; special sizes available upon request
 4. For Ladder Access: Single leaf; 30 by 36 inches.
 5. For Ships Ladder Access: Single leaf; 30 by 54 inches.
- C. Frames and Curbs: One-piece curb and frame with integral cap flashing to receive roof flashings; extended bottom flange to suit mounting.
1. Material: Stainless steel, Type 304, 14 gauge, 0.0747 inch thick.
 2. Insulation: Manufacturer's standard; 1 inch rigid glass fiber, located on outside face of curb.
 3. Curb Height: 12 inches from finished surface of roof, minimum.
- D. Metal Covers: Flush, insulated, hollow metal construction.

1. Capable of supporting 40 psf live load.
 2. Material: Galvanized steel; outer cover 14 gauge, 0.0747 inch thick, liner 22 gauge, 0.03 inch thick.
 3. Finish: Factory prime paint.
 4. Insulation: Manufacturer's standard 1 inch rigid glass fiber.
 5. Gasket: Neoprene, continuous around cover perimeter.
- E. Safety Railing System: Manufacturer's standard accessory safety rail system mounted directly to curb.
1. Railing: Comply with 29 CFR 1910.23 for ladder safety, with a safety factor of two.
 2. Posts and Rails: Aluminum or steel tube.
 3. Gate: Same material as railing; automatic closing with latch.
 4. Finish: Manufacturer's standard, factory applied finish.
 5. Gate Hinges and Post Guides: ASTM B221 (ASTM B221M), 6063 alloy, T5 temper aluminum.
 6. Manufacturers:
 - a. Same as roof hatch manufacturer.
 - b. Substitutions: See Section 01 60 00 - Product Requirements.
- F. Hardware: Steel, zinc coated and chromate sealed, unless otherwise indicated or required by manufacturer.
1. Lifting Mechanisms: Compression or torsion spring operator with shock absorbers that automatically opens upon release of latch; capable of lifting covers despite 10 psf load.
 2. Hinges: Heavy duty pintle type.
 3. Hold open arm with vinyl-coated handle for manual release.
 4. Latch: Upon closing, engage latch automatically and reset manual release.
 5. Manual Release: Pull handle on interior.
 6. Locking: Padlock hasp on interior.

2.03 NON-PENETRATING ROOFTOP SUPPORTS/ASSEMBLIES

- A. Non-Penetrating Rooftop Assemblies: Manufacturer-engineered and factory-fabricated, with pedestal bases that rest on top of roofing membrane, not requiring any attachment to the roof structure and not penetrating the roofing assembly.
1. Design Loadings and Configurations: As required by applicable codes.
 2. Height: Provide minimum clearance of 8 inches under supported items to top of roofing.
 3. Support Spacing and Base Sizes: As required to distribute load sufficiently to prevent indentation of roofing assembly.
 4. Steel Components: Stainless steel, or carbon steel hot-dip galvanized after fabrication in accordance with ASTM A123/A123M.
 5. Hardware, Bolts, Nuts, and Washers: Stainless steel, or carbon steel hot-dip galvanized after fabrication in accordance with ASTM A153/A153M.
- B. Non-Penetrating Pedestals: Steel pedestals with square, round, or rectangular bases.
1. Bases: High density polypropylene.
 2. Base Sizes: As required to distribute load sufficiently to prevent indentation of roofing assembly.
 3. Steel Components: Stainless steel, or carbon steel hot-dip galvanized after fabrication in accordance with ASTM A123/A123M.

2.04 SNOW GUARDS

- A. Unit Snow Guards: Individual projecting polycarbonate shapes, set between roofing shingles/tiles, and mechanically fastened to roof deck.
1. Projecting Polycarbonate Shapes: Clear polycarbonate plastic with UV stabilizers, semi-circular design.

2. Placement: Intervals of one foot along length of roof, staggered one foot vertically.
- B. Fence Type Snow Guard: Continuous snow guard; manufacturer's standard pipe, bar, channel, or solid rod, set in brackets or posts, with optional plates and metal trim to match roof.
 1. Basis-of-Design: Metal Roof Innovations, LTD, S-5, SnoRail and Sno Fence.
 2. Manufacturers:
 - a. Metal Roof Innovations, Ltd. S-5! Attachment Solutions: www.s-5.com/#sle.
 - b. PMC Industries, Inc: www.aceclamp.com/#sle.
 - c. Rocky Mountain Snow Guards, Inc: www.rockymountainsnowguards.com/#sle.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
 3. Compatibility:
 - a. Snow guard system components shall be compatible with metal panel roof system specified under Section 07 41 13.
 4. Clamps:
 - a. Manufactured from 6061-T6 aluminum extrusions conforming to ASTM B221 or aluminum castings conforming to ASTM B85 and to AA Aluminum Standards and Data.
 - 1) Clamp model: No. S-5-A and S-5-AE.
 - 2) Set screws: 300 Series stainless steel, 18-8 alloy, 3/8 inch diameter, with round nose point.
 5. Cross Members [and Posts]:
 - a. Manufactured from Type 300 Series stainless steel conforming to ASTM A581/A581M or ASTM A 582.
 - b. Provide coupler ensuring alignment and structural continuity at end joints.
 6. Ice and Snow Clips:
 - a. Aluminum, with rubber foot, minimum 3 inches wide.
 - 1) Model: SnoClip II for standing seam heights 1" to 1.75"
 - 2) Model: SnoClip III for standing seam heights 1.75" to 3"

PART 3 EXECUTION

3.01 EXAMINATION

- A. Do not begin installation until substrates have been properly prepared.
- B. If substrate preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.

3.02 PREPARATION

- A. Clean surfaces thoroughly prior to installation.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.

3.03 INSTALLATION - GENERAL

- A. Install in accordance with manufacturer's instructions, in manner that maintains roofing weather integrity.

3.04 SNOW GUARD INSTALLATION

- A. SnoRail and SnoFence Snow Retention Systems
 1. Place clamps at maximum 32 inches on center or as required by in-service loads.
 2. Place clamps in straight, aligned rows.
 3. Place both set screws on same side of clamp.
 4. Tighten set screws to manufacturer's recommended torque. Randomly test set screw torque using calibrated torque wrench.
 5. Use End-Condition clamps in lieu of standard clamp at each end of each assembly, and at a frequency and spacing of one for each 50 feet of assembly.

6. Install SnoPosts vertically in each clamp.
 - a. Install cross members through holes in clamps and posts.
7. Install coupler at cross member end joints.
8. Tighten set screws against cross members at all End Condition clamp and post locations.
9. Do not cantilever cross members more than 4 inches beyond last clamp at ends.
 - a. Install two SnoClips per panel between panel seams.

3.05 CLEANING

- A. Clean installed work to like-new condition.

3.06 PROTECTION

- A. Protect installed products until completion of project.
- B. Touch-up, repair or replace damaged products before Substantial Completion.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 07 84 00
FIRESTOPPING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Firestopping systems.
- B. Firestopping of all joints and penetrations in fire-resistance rated and smoke-resistant assemblies, whether indicated on drawings or not, and other openings indicated.

1.02 RELATED REQUIREMENTS

- A. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 01 74 19 - Construction Waste Management and Disposal: Limitations on disposal of removed materials; requirements for recycling.
- C. Section 01 70 00 - Execution and Closeout Requirements: Cutting and patching.
- D. Section 09 21 16 - Gypsum Board Assemblies: Gypsum wallboard fireproofing.

1.03 REFERENCE STANDARDS

- A. ASTM E119 - Standard Test Methods for Fire Tests of Building Construction and Materials.
- B. ASTM E814 - Standard Test Method for Fire Tests of Through-Penetration Fire Stops.
- C. ASTM E1966 - Standard Test Method for Fire Resistive Joint Systems.
- D. ASTM E2837 - Standard Test Method for Determining the Fire Resistance of Continuity Head-of-Wall Joint Systems Installed Between Rated Wall Assemblies and Nonrated Horizontal Assemblies.
- E. ITS (DIR) - Directory of Listed Products.
- F. FM 4991 - Approval Standard for Firestop Contractors.
- G. FM P7825 - Approval Guide; Factory Mutual Research Corporation.
- H. SCAQMD 1168 - South Coast Air Quality Management District Rule No.1168.
- I. UL 2079 - Standard for Tests for Fire Resistance of Building Joint Systems.
- J. UL (FRD) - Fire Resistance Directory.

1.04 SUBMITTALS

- A. See Section 01 33 00 - Submittal Procedures, for submittal procedures.
- B. Schedule of Firestopping: List each type of penetration, fire rating of the penetrated assembly, and firestopping test or design number.
- C. Product Data: Provide data on product characteristics, performance ratings, and limitations.
- D. Manufacturer's Installation Instructions: Indicate preparation and installation instructions.
- E. Manufacturer's Certificate: Certify that products meet or exceed specified requirements.
- F. Certificate from authority having jurisdiction indicating approval of materials used.
- G. Qualification statements for installing mechanics.

1.05 QUALITY ASSURANCE

- A. Fire Testing: Provide firestopping assemblies of designs that provide the scheduled fire ratings when tested in accordance with methods indicated.
 - 1. Listing in the current-year classification or certification books of UL, FM, or ITS (Warnock Hersey) will be considered as constituting an acceptable test report.
 - 2. Valid evaluation report published by ICC Evaluation Service, Inc. (ICC-ES) at www.icc-es.org will be considered as constituting an acceptable test report.

3. Submission of actual test reports is required for assemblies for which none of the above substantiation exists.
- B. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum ten years documented experience.
- C. Installer Qualifications: Company specializing in performing the work of this section and:
 1. Approved by Factory Mutual Research under FM Standard 4991, Approval of Firestop Contractors, or meeting any two of the following requirements:
 2. With minimum 5 years documented experience installing work of this type.
 3. Able to show at least 3 satisfactorily completed projects of comparable size and type.
 4. Licensed by authority having jurisdiction.
 5. Approved by firestopping manufacturer.
- D. Installing Mechanic's Qualifications: Trained by firestopping manufacturer and able to provide evidence thereof.

1.06 MOCK-UP

- A. Install one firestopping assembly representative of each fire rating design required on project.
 1. Where one design may be used for different penetrating items or in different wall constructions, install one assembly for each different combination.
 2. Where firestopping is intended to fill a linear opening, install minimum of 2 linear ft.
- B. Obtain approval of authority having jurisdiction before proceeding.
- C. If accepted, mock-up will represent minimum standard for the Work.
- D. If accepted, mock-up may remain as part of the Work. Remove and replace mock-ups not accepted.

1.07 FIELD CONDITIONS

- A. Comply with firestopping manufacturer's recommendations for temperature and conditions during and after installation. Maintain minimum temperature before, during, and for 3 days after installation of materials.
- B. Provide ventilation in areas where solvent-cured materials are being installed.

PART 2 PRODUCTS

2.01 FIRESTOPPING - GENERAL REQUIREMENTS

- A. Manufacturers:
 1. A/D Fire Protection Systems Inc: www.adfire.com.
 2. 3M Fire Protection Products: www.3m.com/firestop.
 3. Hilti, Inc: www.us.hilti.com.
 4. Nelson FireStop Products: www.nelsonfirestop.com.
- B. Firestopping Materials with Volatile Content: Provide only products having lower volatile organic compound (VOC) content than required by South Coast Air Quality Management District Rule No.1168.
- C. Primers, Sleeves, Forms, Insulation, Packing, Stuffing, and Accessories: Type required for tested assembly design.

2.02 FIRESTOPPING ASSEMBLY REQUIREMENTS

- A. Head-of-Wall Firestopping at Joints Between Non-Rated Floor and Fire-Rated Wall: Use any system that has been tested according to ASTM E2837 to have fire resistance F Rating equal to required fire rating of floor or wall, whichever is greater.
 1. Movement: In addition, provide systems that have been tested to show movement capability as indicated.

- B. Floor-to-Floor, Wall-to-Wall, and Wall-to-Floor Joints, Except Perimeter, Where Both Are Fire-Rated: Use any system that has been tested according to ASTM E1966 or UL 2079 to have fire resistance F Rating equal to required fire rating of the assembly in which the joint occurs.
 - 1. Movement: In addition, provide systems that have been tested to show movement capability as indicated.
 - 2. Air Leakage: In addition, provide systems that have been tested to show L Rating as indicated.
 - 3. Watertightness: In addition, provide systems that have been tested to show W Rating as indicated.
 - 4. Listing by UL, FM, or Intertek in their certification directory will be considered evidence of successful testing.
- C. Through Penetration Firestopping: Use any system that has been tested according to ASTM E814 to have fire resistance F Rating equal to required fire rating of penetrated assembly.
 - 1. Temperature Rise: In addition, provide systems that have been tested to show T Rating as indicated.
 - 2. Air Leakage: In addition, provide systems that have been tested to show L Rating as indicated.
 - 3. Listing by UL, FM, or Intertek in their certification directory will be considered evidence of successful testing.

2.03 FIRESTOPPING FOR FLOOR-TO-FLOOR, WALL-TO-FLOOR, AND WALL-TO-WALL JOINTS

- A. Concrete and Concrete Masonry Walls and Floors:
 - 1. Top of Wall Joints at Concrete/Concrete Masonry Wall to Concrete Over Metal Deck Floor:
 - a. 2 Hour Construction: UL System HW-D-0181; Hilti CFS-SP WB Firestop Joint Spray and CP 672.
 - b. 2 Hour Construction: UL System HW-D-1037; Hilti CFS-SP WB Firestop Joint Spray and CP 672.
 - 2. Concrete/Concrete Masonry Wall to Wall Joints:
 - a. 2 Hour Construction: UL System WW-D-0017; Hilti CFS-SP WB Firestop Joint Spray and CP 672.
 - b. 2 Hour Construction: UL System WW-D-0032; Hilti CP 606 Flexible Firestop Sealant.
- B. Gypsum Board Walls:
 - 1. Wall to Wall Joints:
 - a. 2 Hour Construction: UL System WW-D-0067; Hilti CP 606 Flexible Firestop Sealant.
 - b. 1 Hour Construction: UL System WW-D-0067; Hilti CP 606 Flexible Firestop Sealant.

2.04 FIRESTOPPING PENETRATIONS THROUGH CONCRETE AND CONCRETE MASONRY CONSTRUCTION

- A. Blank Openings:
 - 1. In Walls:
 - a. 2 Hour Construction: UL System C-AJ-0090; Hilti FS-ONE Intumescent Firestop Sealant.
- B. Penetrations Through Walls By:
 - 1. Multiple Penetrations in Large Openings:
 - a. 2 Hour Construction: UL System C-AJ-8143; Hilti FS-ONE Intumescent Firestop Sealant.
 - 2. Uninsulated Metallic Pipe, Conduit, and Tubing:
 - a. 2 Hour Construction: UL System C-AJ-1421; Hilti FS-ONE Intumescent Firestop Sealant or CP 604 Self-Leveling Firestop Sealant.

- b. 2 Hour Construction: UL System C-AJ-1498; Hilti CP 680-P/M Cast-In Device.
 - 3. Uninsulated Non-Metallic Pipe, Conduit, and Tubing:
 - a. 2 Hour Construction: UL System C-AJ-2109; Hilti CP 643N/644 Firestop Collar.
 - b. 2 Hour Construction: UL System C-BJ-2021; Hilti CP 643N Firestop Collar.
 - 4. Electrical Cables Not In Conduit:
 - a. 2 Hour Construction: UL System C-AJ-3216; Hilti CP 658 Firestop Plug.
 - b. 2 Hour Construction: UL System W-J-3198; Hilti CFS-SL RK Retrofit Sleeve Kit for existing cables.
 - c. 2 Hour Construction: UL System W-J-3199; Hilti CFS-SL SK Firestop Sleeve Kit.
 - 5. Cable Trays with Electrical Cables:
 - a. 3 Hour Construction: UL System C-AJ-4035; Hilti FS-ONE Intumescent Firestop Sealant.
 - 6. Insulated Pipes:
 - a. 2 Hour Construction: UL System C-AJ-5048; Hilti FS-ONE Intumescent Firestop Sealant, CP 606 Flexible Firestop Sealant, CP 601S Elastomeric Firestop Sealant, or CP 604 Self-Leveling Firestop Sealant.
 - 7. HVAC Ducts, Uninsulated:
 - a. 2 Hour Construction: UL System C-AJ-7111; Hilti FS-ONE Intumescent Firestop Sealant.
 - b. 2 Hour Construction: UL System C-AJ-7084; Hilti FS-ONE Intumescent Firestop Sealant, CP 606 Flexible Firestop Sealant, CP 601S Elastomeric Firestop Sealant, or CP 604 Self-Leveling Firestop Sealant.
- C. Penetrations Through Walls By:
 - 1. Uninsulated Metallic Pipe, Conduit, and Tubing:
 - a. 2 Hour Construction: UL System W-J-1067; Hilti FS-ONE Intumescent Firestop Sealant.
 - 2. Electrical Cables Not In Conduit:
 - a. 2 Hour Construction: UL System W-J-3060; Hilti FS-ONE Intumescent Firestop Sealant, CP 606 Flexible Firestop Sealant, CD 601S Elastomeric Firestop Sealant, or CP 618 Firestop Putty Stick.
 - b. 2 Hour Construction: UL System W-J-3143; Hilti CP 658T Firestop Plug.
 - 3. Insulated Pipes:
 - a. 2 Hour Construction: UL System W-J-5041; Hilti FS-ONE Intumescent Firestop Sealant.
 - b. 2 Hour Construction: UL System W-J-5042; Hilti FS-ONE Intumescent Firestop Sealant.
 - c. 2 Hour Construction: UL System W-J-5028; Hilti FS-ONE Intumescent Firestop Sealant.
 - 4. HVAC Ducts, Uninsulated:
 - a. 2 Hour Construction: UL System W-J-7109; Hilti FS-ONE Intumescent Firestop Sealant or CP 606 Flexible Firestop Sealant.
 - 5. HVAC Ducts, Insulated:
 - a. 2 Hour Construction: UL System W-J-7112; Hilti FS-ONE Intumescent Firestop Sealant.

2.05 FIRESTOPPING PENETRATIONS THROUGH GYPSUM BOARD WALLS

- A. Blank Openings:
 - 1. 2 Hour Construction: UL System W-L-3334; Hilti CP 653 Speed Sleeve.
- B. Penetrations By:
 - 1. Multiple Penetrations in Large Openings:

- a. 2 Hour Construction: UL System W-L-1389; Hilti FS-ONE Intumescent Firestop Sealant.
- b. 2 Hour Construction: UL System W-L-1408; Hilti FS-ONE Intumescent Firestop Sealant.
- c. 2 Hour Construction: UL System W-L-8071; Hilti FS-ONE Intumescent Firestop Sealant.
- d. 2 Hour Construction: UL System W-L-8079; Hilti FS-ONE Intumescent Firestop Sealant.
- e. 2 Hour Construction: UL System W-L-8087; Hilti FS 657 Fire Block.
2. Uninsulated Metallic Pipe, Conduit, and Tubing:
 - a. 2 Hour Construction: UL System W-L-1054; Hilti FS-ONE Intumescent Firestop Sealant.
 - b. 2 Hour Construction: UL System W-L-1164; Hilti FS-ONE Intumescent Firestop Sealant.
 - c. 2 Hour Construction: UL System W-L-1206; Hilti FS-ONE Intumescent Firestop Sealant.
3. Uninsulated Non-Metallic Pipe, Conduit, and Tubing:
 - a. 2 Hour Construction: UL System W-L-2078; Hilti CP 643N/644 Firestop Collar.
 - b. 2 Hour Construction: UL System W-L-2411; Hilti CP 648-E Firestop Wrap Strip.
 - c. 2 Hour Construction: UL System W-L-2128; Hilti FS-ONE Intumescent Firestop Sealant.
4. Electrical Cables Not In Conduit:
 - a. 2 Hour Construction: UL System W-L-3065; Hilti FS-ONE Intumescent Firestop Sealant, CP 606 Flexible Firestop Sealant, CD 601S Elastomeric Firestop Sealant, or CP 618 Firestop Putty Stick.
 - b. 2 Hour Construction: UL System W-L-3334; Hilti CP 653 Speed Sleeve.
 - c. 2 Hour Construction: UL System W-L-3393; Hilti CFS-SL RK Retrofit Sleeve Kit for existing cables.
 - d. 2 Hour Construction: UL System W-L-3394; Hilti CFS-SL SK Firestop Sleeve Kit.
 - e. 2 Hour Construction: UL System W-L-3395; Hilti CP653 Speed Sleeve.
5. Cable Trays with Electrical Cables:
 - a. 2 Hour Construction: UL System W-L-4011; Hilti FS 657 Fire Block.
 - b. 2 Hour Construction: UL System W-L-4060; Hilti FS-ONE Intumescent Firestop Sealant.
6. Insulated Pipes:
 - a. 2 Hour Construction: UL System W-L-5028; Hilti FS-ONE Intumescent Firestop Sealant.
 - b. 2 Hour Construction: UL System W-L-5029; Hilti FS-ONE Intumescent Firestop Sealant.
 - c. 2 Hour Construction: UL System W-L-5096; Hilti FS-ONE Intumescent Firestop Sealant.
 - d. 2 Hour Construction: UL System W-L-5257; Hilti FS-ONE Intumescent Firestop Sealant, CP 606 Flexible Firestop Sealant, or CP 601S Elastomeric Firestop Sealant.
 - e. 2 Hour Construction: UL System W-L-5244; Hilti CP 648-E Firestop Wrap Strip.
7. HVAC Ducts, Insulated:
 - a. 2 Hour Construction: UL System W-L-7156; Hilti FS-ONE Intumescent Firestop Sealant.

2.06 FIRESTOPPING SYSTEMS

- A. Firestopping: Any material meeting requirements. Foam, caulk, putty or manufactured device.

1. Fire Ratings: Use any system listed by UL, FM, or ITS (Warnock Hersey) or that has F Rating equal to fire rating of penetrated assembly and minimum T Rating of 0 and that meets all other specified requirements.
2. Fire Ratings: See Drawings for required systems and ratings.
- B. Firestopping at Uninsulated Metallic Pipe and Conduit Penetrations, of diameter 4 inches or less: Any material meeting requirements. Foam, caulk, putty or manufactured device.
- C. Firestopping at Cable Tray Penetrations: Any material meeting requirements. Foam, caulk, putty or manufactured device.
- D. Firestopping at Cable Penetrations, not in Conduit or Cable Tray: Any material meeting requirements. Foam, caulk, putty or manufactured device.
- E. Firestopping at Control and Expansion Joints (without Penetrations): Any material meeting requirements and caulk.

2.07 MATERIALS

- A. Firestopping Sealants: Provide only products having lower volatile organic compound (VOC) content than required by South Coast Air Quality Management District Rule No.1168.
- B. Elastomeric Silicone Firestopping: Single component silicone elastomeric compound and compatible silicone sealant.
- C. Foam Firestopping: Single component silicone foam compound.
- D. Fibered Compound Firestopping: Formulated compound mixed with incombustible non-asbestos fibers.
- E. Fiber Firestopping: Mineral fiber insulation used in conjunction with elastomeric surface sealer forming airtight bond to opening.
- F. Primers, Sleeves, Forms, Insulation, Packing, Stuffing, and Accessories: Type required for tested assembly design.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify openings are ready to receive the work of this section.

3.02 PREPARATION

- A. Clean substrate surfaces of dirt, dust, grease, oil, loose material, or other matter that could adversely affect bond of firestopping material.
- B. Remove incompatible materials that could adversely affect bond.
- C. Install backing materials to arrest liquid material leakage.

3.03 INSTALLATION

- A. Install materials in manner described in fire test report and in accordance with manufacturer's instructions, completely closing openings.
- B. Do not cover installed firestopping until inspected by authority having jurisdiction.
- C. Install labeling required by code.

CLEANING

4.01 CLEAN ADJACENT SURFACES OF FIRESTOPPING MATERIALS.

4.02 PROTECTION

- A. Clean adjacent surfaces of firestopping materials.
- B. Protect adjacent surfaces from damage by material installation.

END OF SECTION

SECTION 07 90 05
JOINT SEALERS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Sealants and joint backer rods.
- B. Precompressed foam sealers.

1.02 RELATED REQUIREMENTS

- A. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 01 74 19 - Construction Waste Management and Disposal: Limitations on disposal of removed materials; requirements for recycling.
- C. Section 07 25 00 - Weather Barriers: Sealants required in conjunction with air barriers and vapor retarders:
- D. Section 08 80 00 - Glazing: Glazing sealants and accessories.

1.03 REFERENCE STANDARDS

- A. ASTM C834 - Standard Specification for Latex Sealants.
- B. ASTM C920 - Standard Specification for Elastomeric Joint Sealants.
- C. ASTM C1193 - Standard Guide for Use of Joint Sealants.
- D. ASTM D1056 - Standard Specification for Flexible Cellular Materials--Sponge or Expanded Rubber.
- E. ASTM D1667 - Standard Specification for Flexible Cellular Materials--Poly(Vinyl Chloride) Foam (Closed-Cell).

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordinate the work with other sections referencing this section.

1.05 SUBMITTALS

- A. See Section 01 33 00 - Submittal Procedures, for submittal procedures.
- B. Product Data: Provide data indicating sealant chemical characteristics, performance criteria, substrate preparation, limitations, and color availability.
- C. Samples: Submit two samples, 2 x 1/2 in size illustrating sealant colors for selection.
- D. Manufacturer's Installation Instructions: Indicate special procedures, surface preparation, and perimeter conditions requiring special attention.

1.06 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the Products specified in this section with minimum ten years documented experience.
- B. Applicator Qualifications: Company specializing in performing the work of this section with minimum five years experience.

1.07 FIELD CONDITIONS

- A. Maintain temperature and humidity recommended by the sealant manufacturer during and after installation.

1.08 COORDINATION

- A. Coordinate the work with all sections referencing this section.

1.09 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.
- B. Correct defective work within a five year period after Date of Substantial Completion.
- C. Warranty: Include coverage for installed sealants and accessories which fail to achieve airtight seal, exhibit loss of adhesion or cohesion, or do not cure.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Polyurethane Sealants:
 - 1. Pecora Corporation: www.pecora.com.
 - 2. Bostik, Inc www.bostik-us.com
 - 3. BASF Construction Chemicals-Building Systems: www.buildingsystems.basf.com.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Acrylic Sealants (ASTM C920):
 - 1. Pecora Corporation; www.pecora.com.
 - 2. Tremco, Inc www.tremcosealants.com.
 - 3. Bostik, Inc. www.bostik-us.com.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- C. Preformed Compressible Foam Sealers and backer rods:
 - 1. Sandell Manufacturing Company, Inc: www.sandellmfg.com.
 - 2. Emseal Joint Systems, Ltd.
 - 3. Dayton Superior Corporation: www.daytonsuperior.com.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 SEALANTS

- A. Sealants and Primers - General: Provide only products having lower volatile organic compound (VOC) content than required by South Coast Air Quality Management District Rule No.1168.
- B. Type 1 - General Purpose Exterior Sealant: Polyurethane; ASTM C920, Grade NS, Class 25, Uses M, G, and A; single component.
 - 1. Color: Standard colors matching finished surfaces.
 - 2. Product: Dynatrol II manufactured by Pecora.
 - 3. Applications: Use for:
 - a. Control, expansion, and soft joints in masonry.
 - b. Joints between concrete and other materials.
 - c. Joints between metal frames and other materials.
 - d. Other exterior joints for which no other sealant is indicated.
- C. Type 2 - General Purpose Interior Sealant: Acrylic emulsion latex; ASTM C 834, Type OP, Grade NF single component, paintable.
 - 1. Color: Standard colors matching finished surfaces.
 - 2. Product: AC-20 + Silicone manufactured by Pecora.
 - 3. Applications: Use for:
 - a. Interior wall and ceiling control joints.
 - b. Joints between door and window frames and wall surfaces.
 - c. Other interior joints for which no other type of sealant is indicated.
- D. Type 3 - Exterior Expansion Joint Sealer: ASTM D 2628, hollow neoprene (polychloroprene) compression gasket.
 - 1. Black color.
 - 2. Size and Shape: . As indicated by drawings.
 - 3. Product: Poly seal manufactured by Sandell mfg.

4. Applications: Use for:
 - a. Exterior wall expansion joints.
- E. Type 4 - Acoustical Sealant: acrylic sealant; ASTM C 920, Grade NS, Class 12-1/2, Uses M and A; single component, solvent release curing, non-skinning.
 1. Product: AIS-919 manufactured by Pecora.
 2. Applications: Use for concealed locations only:
 - a. Sealant bead between top stud runner and structure and between bottom stud track and floor and where shown on plans.
- F. Type 5 - Concrete Paving Joint Sealant: Polyurethane, self-leveling; ASTM C920, Class 25, Uses T, I, M and A; single component.
 1. Color: Gray.
 2. Product: Dynatred manufactured by Pecora.
 3. Applications: Use for:
 - a. Joints in sidewalks and vehicular paving.
 - b. Where shown on plans.

2.03 ACCESSORIES

- A. Primer: Non-staining type, recommended by sealant manufacturer to suit application.
- B. Joint Cleaner: Non-corrosive and non-staining type, recommended by sealant manufacturer; compatible with joint forming materials.
- C. Joint Backing: Round foam rod compatible with sealant; ASTM D 1667, closed cell PVC; oversized 30 to 50 percent larger than joint width.
- D. Bond Breaker: Pressure sensitive tape recommended by sealant manufacturer to suit application.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that substrate surfaces and joint openings are ready to receive work.
- B. Verify that joint backing and release tapes are compatible with sealant.

3.02 PREPARATION

- A. Remove loose materials and foreign matter that could impair adhesion of sealant.
- B. Clean and prime joints in accordance with manufacturer's instructions.
- C. Perform preparation in accordance with manufacturer's instructions and ASTM C1193.
- D. Protect elements surrounding the work of this section from damage or disfigurement.

3.03 INSTALLATION

- A. Perform work in accordance with sealant manufacturer's requirements for preparation of surfaces and material installation instructions.
- B. Perform installation in accordance with ASTM C1193.
- C. Perform acoustical sealant application work in accordance with ASTM C919.
- D. Measure joint dimensions and size joint backers to achieve width-to-depth ratio, neck dimension, and surface bond area as recommended by manufacturer, except where specific dimensions are indicated.
- E. Measure joint dimensions and size joint backers to achieve the following, unless otherwise indicated:
 1. Width/depth ratio of 2:1.
 2. Neck dimension no greater than 1/3 of the joint width.
 3. Surface bond area on each side not less than 75 percent of joint width.

- F. Install bond breaker where joint backing is not used.
- G. Install sealant free of air pockets, foreign embedded matter, ridges, and sags.
- H. Apply sealant within recommended application temperature ranges. Consult manufacturer when sealant cannot be applied within these temperature ranges.
- I. Tool joints concave.
- J. Precompressed Foam Sealant: Do not stretch; avoid joints except at corners, ends, and intersections; install with face 1/8 to 1/4 inch below adjoining surface.

3.04 CLEANING

- A. Clean adjacent soiled surfaces.

3.05 PROTECTION

- A. Protect sealants until cured.

END OF SECTION

SECTION 08 11 13
HOLLOW METAL DOORS AND FRAMES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Non-fire-rated steel door frames.
- B. Non-fire-rated steel doors.

1.02 RELATED REQUIREMENTS

- A. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 08 71 00 - Door Hardware.
- C. Section 08 80 00 - Glazing: Glass for doors and borrowed lites.
- D. Section 09 90 00 - Paints and Coatings: Field painting.

1.03 REFERENCE STANDARDS

- A. ANSI/ICC A117.1 - American National Standard for Accessible and Usable Buildings and Facilities; International Code Council.
- B. ANSI/SDI A250.8 - Specifications for Standard Steel Doors and Frames (SDI-100).
- C. ANSI/SDI A250.10 - Test Procedure and Acceptance Criteria for Prime Painted Steel Surfaces for Steel Doors and Frames.
- D. ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.
- E. BHMA A156.115 - American National Standard for Hardware Preparation in Steel Doors and Steel Frames.
- F. DHI A115 Series - Specifications for Steel Doors and Frame Preparation for Hardware; Door and Hardware Institute (ANSI/DHI A115 Series).
- G. NAAMM HMMA 840 - Guide Specifications for Installation and Storage of Hollow Metal Doors and Frames.
- H. NAAMM HMMA 861 - Guide Specifications for Commercial Hollow Metal Doors and Frames.

1.04 SUBMITTALS

- A. See Section 01 33 00 - Submittal procedures for submittal procedures.
- B. Product Data: Materials and details of design and construction, hardware locations, reinforcement type and locations, anchorage and fastening methods, and finishes; and one copy of referenced grade standard.
- C. Shop Drawings: Details of each opening, showing elevations, glazing, frame profiles, and identifying location of different finishes, if any.
- D. Installation Instructions: Manufacturer's published instructions, including any special installation instructions relating to this project.
- E. Manufacturer's Certificate: Certification that products meet or exceed specified requirements.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum ten years documented experience.
- B. Installer Qualifications: Company specializing in performing work of the type specified and with at least five years of documented experience.
- C. Maintain at the project site a copy of all reference standards dealing with installation.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Store in accordance with NAAMM HMMA 840.
- B. Protect with resilient packaging; avoid humidity build-up under coverings; prevent corrosion.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Steel Door Frames:
 - 1. Assa Abloy Ceco, Curries, or Fleming: www.assaabloydss.com/#sle.
 - 2. Republic Doors, an Allegion brand; ____: www.republicdoor.com/#sle.
 - 3. Steelcraft: www.steelcraft.com.
 - 4. Phillip Manufacturing Company
 - 5. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 DOORS AND FRAMES

- A. Requirements for All Door Frames:
 - 1. Accessibility: Comply with ANSI/ICC A117.1.
 - 2. Finish: Factory primed, for field finishing.

2.03 STEEL DOORS

- A. Interior Doors, Non-Fire-Rated:
 - 1. Grade: ANSI A250.8 Level 3, physical performance Level A, Model 1, full flush.
 - 2. Core: Polystyrene foam.
 - 3. Thickness: 1-3/4 inches.
 - 4. Texture: Smooth faces.
 - 5. Finish: Factory primed, for field finishing.

2.04 STEEL FRAMES

- A. General:
 - 1. Comply with the requirements of grade specified for corresponding door.
 - a. Frames for Wood Doors: Comply with frame requirements specified in ANSI A250.8 for Level 1, 16 gage
 - 2. Finish: Factory primed, for field finishing.
 - 3. Frames Wider than 48 Inches: Reinforce with steel channel fitted tightly into frame head, flush with top.
- B. Interior Door Frames, Non-Fire-Rated: Fully welded type.
 - 1. Frame Metal Thickness: 16 gage, 0.053 inch, minimum.
 - 2. Finish: Factory primed, for field finishing.
- C. Sound-Rated Door Frames: Knock-down type.
 - 1. Frame Metal Thickness: 16 gage, 0.053 inch, minimum.
 - 2. Finish: Factory primed, for field finishing.
- D. Frames for Wood Doors: Comply with frame requirements in accordance with corresponding door.
- E. Provide mortar guard boxes for hardware cut-outs in frames to be installed in masonry or to be grouted.
- F. Frames in Masonry Walls: Size to suit masonry coursing with head member 4 inch high to fill opening without cutting masonry units.

2.05 ACCESSORY MATERIALS

- A. Astragals for Double Doors: Specified in Section 08 71 00.
 - 1. Interior - Removable

- 2. Exterior Doors: Steel, Z-shaped.
- B. Silencers: Resilient rubber or vinyl, fitted into drilled hole; 3 on strike side of single door, 3 on center mullion of pairs, and 2 on head of pairs without center mullions.
- C. Temporary Frame Spreaders: Provide for all factory- or shop-assembled frames.

2.06 FINISH MATERIALS

- A. Primer: Rust-inhibiting, complying with ANSI A250.10, door manufacturer's standard, baked on.
- B. Bituminous Coating: Asphalt emulsion or other high-build, water-resistant, resilient coating.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify existing conditions before starting work.
- B. Verify that opening sizes and tolerances are acceptable.
- C. Verify that finished walls are in plane to ensure proper door alignment.

3.02 INSTALLATION

- A. Coordinate frame anchor placement with wall construction.
- B. Coordinate installation of hardware.
- C. Touch up damaged factory finishes.

3.03 TOLERANCES

- A. Maximum Diagonal Distortion: 1/16 in measured with straight edge, corner to corner.

3.04 ADJUSTING

- A. Adjust for smooth and balanced door movement.

3.05 SCHEDULE - SEE DRAWINGS

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 08 31 00
ACCESS DOORS AND PANELS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Wall access door and frame units.
- B. Ceiling access door and frame units.

1.02 RELATED REQUIREMENTS

- A. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 01 74 19 - Construction Waste Management and Disposal: Limitations on disposal of removed materials; requirements for recycling.
- C. Section 09 90 00 - Paints and Coatings: Field paint finish.

1.03 REFERENCE STANDARDS

- A. ITS (DIR) - Directory of Listed Products.
- B. UL (FRD) - Fire Resistance Directory.

1.04 SUBMITTALS

- A. See Section 01 33 00 - Submittal Requirements, for submittal procedures.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum ten years documented experience.
- B. Installer Qualifications: Company specializing in performing work of the type specified and with at least five years documented experience.

PART 2 PRODUCTS

2.01 ACCESS DOOR AND PANEL APPLICATIONS

- A. Walls, Unless Otherwise Indicated:
 - 1. Material: Steel.
 - 2. Size: 18 x18 inches, unless otherwise indicated.
 - 3. Standard duty, hinged door.
 - 4. Tool-operated spring or cam lock; no handle.
 - 5. In All Wall Types: Surface mounted face frame and door surface flush with frame surface.
 - 6. In Gypsum Board: Drywall bead frame with door surface flush with wall surface.
 - 7. In Masonry: Surface mounted frame with door surface flush with frame surface.
- B. Walls in Wet Areas:
 - 1. Material: Steel, hot-dipped galvanized.
 - 2. Size: 18 x18 inches, unless otherwise indicated.
 - 3. Standard duty, hinged door.
 - 4. Tool-operated spring or cam lock; no handle.
 - 5. In All Wall Types: Surface mounted face frame and door surface flush with frame surface.
 - 6. In Gypsum Board: Drywall bead frame with door surface flush with wall surface.
 - 7. In Plaster: Drywall bead frame with door surface flush with wall surface.
 - 8. In Masonry: Surface mounted frame with door surface flush with frame surface.
- C. Ceilings, Unless Otherwise Indicated: Same type as for walls.
 - 1. Material: Steel.
 - 2. Size in Lay-in Grid Ceilings: To match grid module.
 - 3. Size in Other Ceilings: 18 x18 inches, unless otherwise indicated.

4. Standard duty, hinged door.
5. Tool-operated spring or cam lock; no handle.

2.02 WALL AND CEILING UNITS

- A. Manufacturers:
 1. Acudor Products Inc: www.acudor.com/#sle.
 2. Cendrex, Inc: www.cendrex.com/#sle.
 3. Karp Associates, Inc: www.karpinc.com/#sle.
 4. Milcor by Commercial Products Group of Hart & Cooley, Inc: www.milcorinc.com/#sle.
 5. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Access Doors: Factory fabricated door and frame units, fully assembled units with corner joints welded, filled, and ground flush; square and without rack or warp; coordinate requirements with assemblies units are to be installed in.
 1. Door Style: Single thickness with rolled or turned in edges.
 2. Steel Finish: Primed.
 3. Primed Finish: Polyester powder coat; manufacturer's standard color.
 4. Hardware:
 - a. Hinges for Non-Fire-Rated Units: Concealed, constant force closure spring type.
 - b. Handle: Fixed.
 - c. Latch/Lock: Tamperproof tool-operated cam latch.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that rough openings are correctly sized and located.

3.02 INSTALLATION

- A. Install units in accordance with manufacturer's instructions.
- B. Install frames plumb and level in openings. Secure rigidly in place.
- C. Position units to provide convenient access to the concealed work requiring access.

END OF SECTION

SECTION 08 43 13
ALUMINUM-FRAMED STOREFRONTS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Aluminum-framed storefront, with vision glass.
- B. Aluminum doors and frames.
- C. Weatherstripping.

1.02 RELATED REQUIREMENTS

- A. Section 07 92 00 - Joint Sealants: Sealing joints between frames and adjacent construction.
- B. Section 08 71 00 - Door Hardware: Hardware items other than specified in this section.
- C. Section 08 80 00 - Glazing: Glass and glazing accessories.

1.03 REFERENCE STANDARDS

- A. AAMA CW-10 - Care and Handling of Architectural Aluminum From Shop to Site.
- B. AAMA 501.2 - Field Check of Metal Storefronts, Curtain Walls, and Sloped Glazing Systems for Water Leakage.
- C. AAMA 609 & 610 - Cleaning and Maintenance Guide for Architecturally Finished Aluminum (Combined Document).
- D. AAMA 611 - Voluntary Specification for Anodized Architectural Aluminum.
- E. ASTM B221 - Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.
- F. ASTM E283 - Standard Test Method for Determining the Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen.
- G. ASTM E330/E330M - Standard Test Method for Structural Performance of Exterior Windows, Doors, Skylights and Curtain Walls by Uniform Static Air Pressure Difference.
- H. ASTM E331 - Standard Test Method for Water Penetration of Exterior Windows, Skylights, Doors, and Curtain Walls by Uniform Static Air Pressure Difference.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordinate with installation of other components that comprise the exterior enclosure.
- B. Preinstallation Meeting: Conduct a preinstallation meeting one week before starting work of this section; require attendance by all affected installers.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Submittal Procedures, for submittal procedures.
- B. Qualifications: Submit manufacturer's qualifications.
- C. Product Data: Provide component dimensions, describe components within assembly, anchorage and fasteners, glass and infill, internal drainage details.
- D. Shop Drawings: Indicate system dimensions, framed opening requirements and tolerances, affected related Work, expansion and contraction joint location and details, and field welding required.
- E. Manufacturer's Certificate: Certify that the products supplied meet or exceed the specified requirements.
- F. Design Data: Provide framing member structural and physical characteristics, engineering calculations, and dimensional limitations.

- G. Hardware Schedule: Complete itemization of each item of hardware to be provided for each door, cross-referenced to door identification numbers in Contract Documents.
- H. Manufacturer's Qualification Statement.
- I. Installer's Qualification Statement.
- J. Warranty: Submit manufacturer warranty and ensure forms have been completed in Owner's name and registered with manufacturer.

1.06 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing aluminum glazing systems with minimum ten years of documented experience.
- B. Installer Qualifications: Company specializing in performing work of type specified and with at least five years of documented experience.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Handle products of this section in accordance with AAMA CW-10.
- B. Protect finished aluminum surfaces with wrapping. Do not use adhesive papers or sprayed coatings that bond to aluminum when exposed to sunlight or weather.

1.08 FIELD CONDITIONS

- A. Do not install sealants when ambient temperature is less than 40 degrees F. Maintain this minimum temperature during and 48 hours after installation.

1.09 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.
- B. Correct defective Work within a five year period after Date of Substantial Completion.

PART 2 PRODUCTS

2.01 SYSTEM DESIGN REQUIREMENTS

- A. Wind Loads: Comply with requirements for the IBC design wind speeds for building location, risk category, and exposure category as indicated on the structural drawings.

2.02 MANUFACTURERS

- A. Basis of Design: Kawneer.
- B. Other Acceptable - Subject to the requirements of the specification, products from the following manufacturers may be provided:
 - 1. Kawneer North America: www.kawneer.com/#sle.
 - 2. Oldcastle BuildingEnvelope: www.oldcastlebe.com/#sle.
 - 3. Tubelite, Inc: www.tubeliteinc.com/#sle.
 - 4. YKK.
 - 5. Substitutions: See Section 01 60 00 - Product Requirements.

2.03 BASIS OF DESIGN -- FRAMING FOR INSULATING GLAZING

- A. Center-Set Style, Thermally-Broken:
 - 1. Basis of Design: Kawneer; IR 501T Framing System (Impact Glazing and Blast Mitigation)
- B. Substitutions: See Section 01 60 00 - Product Requirements.
 - 1. For any product not identified as "Basis of Design", submit information as specified for substitutions.

2.04 BASIS OF DESIGN -- SWINGING DOORS

- A. Medium Stile, Insulating Glazing, Thermally-Broken with 10 inch bottom rail:

1. Basis of Design: Kawneer; 500T Insulpour Thermal Entrance (Impact Glazing and Blast Mitigation).
- B. Substitutions: See Section 01 60 00 - Product Requirements.
 1. For any product not identified as "Basis of Design", submit information as specified for substitutions.

2.05 STOREFRONT

- A. Aluminum-Framed Storefront: Factory fabricated, factory finished aluminum framing members with infill, and related flashings, anchorage and attachment devices.
 1. Glazing Rabbet: For 1-5/16 inch insulating glazing.
 2. Fabrication: Joints and corners flush, hairline, and weatherproof, accurately fitted and secured; prepared to receive anchors and hardware; fasteners and attachments concealed from view; reinforced as required for imposed loads.
 3. Construction: Eliminate noises caused by wind and thermal movement, prevent vibration harmonics, and prevent "stack effect" in internal spaces.
 4. System Internal Drainage: Drain to the exterior by means of a weep drainage network any water entering joints, condensation occurring in glazing channel, and migrating moisture occurring within system.
 5. Expansion/Contraction: Provide for expansion and contraction within system components caused by cycling temperature range of 170 degrees F over a 12 hour period without causing detrimental effect to system components, anchorages, and other building elements.
 6. Movement: Allow for movement between storefront and adjacent construction, without damage to components or deterioration of seals.
 7. Perimeter Clearance: Minimize space between framing members and adjacent construction while allowing expected movement.
 8. Air and Vapor Seal: Maintain continuous air barrier and vapor retarder throughout assembly, primarily in line with inside pane of glazing and inner sheet of infill panel and heel bead of glazing compound.
 9. Preparation for Window Treatments: Provide reinforced interior horizontal head rail.
- B. Performance Requirements:
 1. Wind Loads: Design and size components to withstand the specified load requirements without damage or permanent set, when tested in accordance with ASTM E330/E330M, using loads 1.5 times the design wind loads and 10 second duration of maximum load.
 - a. Design Wind Loads: Comply with requirements for the IBC design wind speeds for building location, risk category, and exposure category as indicated on the structural drawings.
 - b. Member Deflection: Limit member deflection to flexure limit of glass in any direction, with full recovery of glazing materials.
 2. Water Penetration Resistance: No uncontrolled water on interior face, when tested in accordance with ASTM E331 at pressure differential of 8 psf.
 3. Air Leakage: Maximum of 0.06 cu ft/min sq ft of wall area, when tested in accordance with ASTM E283 at 6.27 psf pressure differential across assembly.
 4. Blast Mitigation Performance: Shall be tested or proven through analysis to meet ASTM F1642, GSA-TS01, and UFC 04-010.01 performance criteria. To meet UFC 04-010.01, B-3.1 Standard 10 for Windows and Skylights, the following options are available:
 - a. Section B-3.1.1 Dynamic analysis.
 - b. Section B-3.1.2 Testing.
 - c. Section B-3.1.3 ASTM F2248 Design Approach.

2.06 COMPONENTS

- A. Aluminum Framing Members: Tubular aluminum sections, thermally broken with interior section insulated from exterior, drainage holes and internal weep drainage system.
 - 1. Glazing Stops: Flush, outside glazed.
 - 2. Bottom Mullion: 10 inch.
- B. Glazing: As specified in Section 08 80 00.
- C. Swing Doors: Glazed aluminum.
 - 1. Thickness: 2-1/4 inches, thermally broken.
 - 2. Top Rail: 5 inches wide.
 - 3. Vertical Stiles: 5 inches wide.
 - 4. Bottom Rail: 10 inches wide.
 - 5. Glazing Type: Insulated.
 - 6. Glazing Stops: Square.
 - 7. Finish: Same as storefront.

2.07 MATERIALS

- A. Extruded Aluminum: ASTM B221 (ASTM B221M).
- B. Fasteners: Stainless steel.
- C. Glazing Gaskets: Type to suit application to achieve weather, moisture, and air infiltration requirements.

2.08 FINISHES

- A. Class I Color Anodized Finish: AAMA 611 AA-M12C22A42 Integrally colored anodic coating not less than 0.7 mils thick.
- B. Color: Dark bronze.
- C. Touch-Up Materials: As recommended by coating manufacturer for field application.

2.09 HARDWARE

- A. Door Hardware: As specified in Section 08 71 00..

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify dimensions, tolerances, and method of attachment with other work.
- B. Verify that wall openings and adjoining air and vapor seal materials are ready to receive work of this section.

3.02 INSTALLATION

- A. Install wall system in accordance with manufacturer's instructions.
- B. Attach to structure to permit sufficient adjustment to accommodate construction tolerances and other irregularities.
- C. Provide alignment attachments and shims to permanently fasten system to building structure.
- D. Align assembly plumb and level, free of warp or twist. Maintain assembly dimensional tolerances, aligning with adjacent work.
- E. Provide thermal isolation where components penetrate or disrupt building insulation.
- F. Install sill flashings. Turn up ends and edges; seal to adjacent work to form water tight dam.
- G. Where fasteners penetrate sill flashings, make watertight by seating and sealing fastener heads to sill flashing.

- H. Pack fibrous insulation in shim spaces at perimeter of assembly to maintain continuity of thermal barrier.
- I. Set thresholds in bed of sealant and secure.
- J. Install hardware using templates provided.
- K. Install glass and infill panels in accordance with Section 08 80 00, using glazing method required to achieve performance criteria.
- L. Touch-up minor damage to factory applied finish; replace components that cannot be satisfactorily repaired.

3.03 TOLERANCES

- A. Maximum Variation from Plumb: 0.06 inch per 3 feet non-cumulative or 0.06 inch per 10 feet, whichever is less.
- B. Maximum Misalignment of Two Adjoining Members Abutting in Plane: 1/32 inch.

3.04 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for independent testing and inspection requirements. Inspection will monitor quality of installation and glazing.

3.05 ADJUSTING

- A. Adjust operating hardware and sash for smooth operation.

3.06 CLEANING

- A. Remove protective material from pre-finished aluminum surfaces.
- B. Wash down surfaces with a solution of mild detergent in warm water, applied with soft, clean wiping cloths. Take care to remove dirt from corners. Wipe surfaces clean.

3.07 PROTECTION

- A. Protect installed products from damage until Date of Substantial Completion.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 08 71 00 – DOOR HARDWARE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Commercial door hardware for the following:
 - a. Swinging doors.
 - b. Other doors to the extent indicated.
- B. Related Sections include the following:
 - 1. Division 8 Section "Steel Doors and Frames"
 - 2. Division 8 Section "Flush Wood Doors"
 - 3. Division 8 Section "Aluminum Entrances and Storefronts"
 - 4. Division 8 Section "Power Door Operators" for automatic door operators.

1.3 SUBMITTALS

- A. Product Data: Include installation details, material descriptions, dimensions of individual components and profiles, and finishes.
- B. Shop Drawings: Details of electrified door hardware, indicating the following:
 - 1. Wiring Diagrams: Detail wiring for power, signal, and control systems and differentiate between manufacturer-installed and field-installed wiring. Include the following:
 - a. System schematic.
 - b. Point-to-point wiring diagram.
 - c. Riser diagram.
 - d. Elevation of each door.
 - 2. Detail interface between electrified door hardware and access fire alarm, control, and security building control system.
- C. Samples for Initial Selection: Manufacturer's color charts consisting of units or sections of units showing the full range of colors, textures, and patterns available for each type of door hardware indicated.

1. Samples will be returned to Contractor. Units that are acceptable and remain undamaged through submittal, review, and field comparison process may, after final check of operation, be incorporated into the Work, within limitations of keying requirements.
- D. Door Hardware Schedule: Prepared by or under the supervision of supplier, detailing fabrication and assembly of door hardware, as well as procedures and diagrams. Coordinate the final Door Hardware Schedule with doors, frames, and related work to ensure proper size, thickness, hand, function, and finish of door hardware.
1. Format: Comply with scheduling sequence and vertical format in DHI's "Sequence and Format for the Hardware Schedule."
 2. Organization: Organize the Door Hardware Schedule into door hardware sets indicating complete designations of every item required for each door or opening.
 - a. Organize door hardware sets in same order as in the Door Hardware Schedule at the end of Part 3.
 3. Content: Include the following information:
 - a. Type, style, function, size, label, hand, and finish of each door hardware item.
 - b. Manufacturer of each item.
 - c. Fastenings and other pertinent information.
 - d. Location of each door hardware set, cross-referenced to Drawings, both on floor plans and in door and frame schedule.
 - e. Explanation of abbreviations, symbols, and codes contained in schedule.
 - f. Mounting locations for door hardware.
 - g. Door and frame sizes and materials.
 - h. Description of each electrified door hardware function, including location, sequence of operation, and interface with other building control systems.
 - 1) Sequence of Operation: Include description of component functions that occur in the following situations: authorized person wants to enter; authorized person wants to exit; unauthorized person wants to enter; unauthorized person wants to exit.
 4. Submittal Sequence: Submit the final Door Hardware Schedule at earliest possible date, particularly where approval of the Door Hardware Schedule must precede fabrication of other work that is critical in the Project construction schedule. Include Product Data, Samples, Shop Drawings of other work affected by door hardware, and other information essential to the coordinated review of the Door Hardware Schedule.
 5. Submittal Sequence: Submit initial draft of final schedule along with essential Product Data to facilitate the fabrication of other work that is critical in the Project construction schedule. Submit the final Door Hardware Schedule after Samples, Product Data, coordination with Shop Drawings of other work, delivery schedules, and similar information has been completed and accepted.
- E. Keying Schedule: Prepared by or under the supervision of supplier, detailing Owner's final keying instructions for locks. Include schematic keying diagram and index each key set to unique door designations.
- F. Product Certificates: Signed by manufacturers of electrified door hardware certifying that products furnished comply with requirements.

1. Certify that door hardware approved for use on types and sizes of labeled fire doors complies with listed fire door assemblies.
- G. Qualification Data: For firms and persons specified in "Quality Assurance" Article.
 1. Include lists of completed projects with project names and addresses of architects and owners, and other information specified.
- H. Product Test Reports: Based on evaluation of comprehensive tests performed by manufacturer and witnessed by a qualified testing agency, indicating current products comply with requirements.
- I. Maintenance Data: For each type of door hardware to include in maintenance manuals specified in Division 1.
- J. Warranties: Special warranties specified in this Section.

1.4 QUALITY ASSURANCE

- A. Installer Qualifications: An experienced installer who has completed door hardware similar in material, design, and extent to that indicated for this Project and whose work has resulted in construction with a record of successful in-service performance.
- B. Supplier Qualifications: Door hardware supplier with warehousing facilities in Project's vicinity and who is or employs a qualified Architectural Hardware Consultant, available during the course of the Work to consult with Contractor, Architect, and Owner about door hardware and keying.
 1. Electrified Door Hardware Supplier Qualifications: An experienced door hardware supplier who has completed projects with electrified door hardware similar in material, design, and extent to that indicated for this Project, whose work has resulted in construction with a record of successful in-service performance, and who is acceptable to manufacturer of primary materials.
 - a. Engineering Responsibility: Prepare data for electrified door hardware, including Shop Drawings, based on testing and engineering analysis of manufacturer's standard units in assemblies similar to those indicated for this Project.
 2. Scheduling Responsibility: Preparation of door hardware and keying schedules.
- C. Architectural Hardware Consultant Qualifications: A person who is currently certified by the Door and Hardware Institute as an Architectural Hardware Consultant and who is experienced in providing consulting services for door hardware installations that are comparable in material, design, and extent to that indicated for this Project.
 1. Electrified Door Hardware Qualifications: Experienced in providing consulting services for electrified door hardware installations.
- D. Source Limitations: Obtain each type and variety of door hardware from a single manufacturer, unless otherwise indicated.

1. Provide electrified door hardware from same manufacturer as mechanical door hardware, unless otherwise indicated. Manufacturers that are listed to perform electrical modifications, by a testing and inspecting agency acceptable to authorities having jurisdiction, are acceptable.
- E. Regulatory Requirements: Comply with provisions of the following:
1. Where indicated to comply with accessibility requirements, comply with Americans with Disabilities Act (ADA), "Accessibility Guidelines for Buildings and Facilities (ADAAG)," ANSI A117.1, FED-STD-795, "Uniform Federal Accessibility Standards," as follows:
 - a. Handles, Pulls, Latches, Locks, and other Operating Devices: Shape that is easy to grasp with one hand and does not require tight grasping, tight pinching, or twisting of the wrist.
 - b. Door Closers: Comply with the following maximum opening-force requirements indicated:
 - 1) Interior Hinged Doors: 5 lbf (22.2 N) applied perpendicular to door.
 - 2) Sliding or Folding Doors: 5 lbf (22.2 N) applied parallel to door at latch.
 - 3) Fire Doors: Minimum opening force allowable by authorities having jurisdiction.
 - c. Thresholds: Not more than 1/2 inch (13 mm) high, Not more than 3/4 inch (19 mm) high for exterior sliding doors. Bevel raised thresholds with a slope of not more than 1:2.
 2. NFPA 101: Comply with the following for means of egress doors:
 - a. Latches, Locks, and Exit Devices: Not more than 15 lbf (67 N) to release the latch. Locks shall not require the use of a key, tool, or special knowledge for operation.
 - b. Delayed-Egress Locks: Lock releases within 15 seconds after applying a force not more than 15 lbf (67 N) for not more than 3 seconds.
 - c. Door Closers: Not more than 30 lbf (133 N) to set door in motion and not more than 15 lbf (67 N) to open door to minimum required width.
 - d. Thresholds: Not more than 1/2 inch (13 mm) high.
 3. Electrified Door Hardware: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction.
- F. Fire-Rated Door Assemblies: Provide door hardware for assemblies complying with NFPA 80 that are listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for fire ratings indicated, based on testing according to NFPA 252.
1. Test Pressure: Test at atmospheric pressure.
- G. Keying Conference: Conduct conference at Project site to comply with requirements in Division 1 Section "Project Meetings." Incorporate keying conference decisions into final keying schedule after reviewing door hardware keying system including, but not limited to, the following:

1. Function of building, flow of traffic, purpose of each area, degree of security required, and plans for future expansion.
 2. Preliminary key system schematic diagram.
 3. Requirements for key control system.
 4. Address for delivery of keys.
- H. Preinstallation Conference: Conduct conference at Project site to comply with requirements in Division 1 Section "Project Meetings."
- I. All Electric Door Hardware shall be furnished and installed by the General Contractor. All Electric Door Hardware shall be wired by the Electrical Contractor. Both the Electrical & General Contractor shall meet and coordinate all work before proceeding.
- J. Preinstallation Conference: Conduct conference at Project site to comply with requirements in Division 1 Section "Project Meetings." Review methods and procedures related to electrified door hardware including, but not limited to, the following:
1. Inspect and discuss electrical roughing-in and other preparatory work performed by other trades.
 2. Review sequence of operation for each type of electrified door hardware.
 3. Review and finalize construction schedule and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.
 4. Review required testing, inspecting, and certifying procedures.
- 1.5 DELIVERY, STORAGE, AND HANDLING
- A. Inventory door hardware on receipt and provide secure lock-up for door hardware delivered to Project site.
 - B. Tag each item with Door Number related to the final Approved Door Hardware Schedule, and include basic installation instructions with each item or package.
 - C. Deliver keys to manufacturer of key control system, or Owner as Directed.
 - D. Deliver keys to Owner by registered mail or overnight package service.
- 1.6 COORDINATION
- A. Coordinate layout and installation of recessed pivots and closers with floor construction. Cast anchoring inserts into concrete. Concrete, reinforcement, and formwork requirements are specified in Division 3 Section "Cast-in-Place Concrete."
 - B. Templates: Obtain and distribute to the parties involved templates for doors, frames, and other work specified to be factory prepared for installing door hardware. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing door hardware to comply with indicated requirements.
 - C. Electrical System Roughing-in: Coordinate layout and installation of electrified door hardware with connections to power supplies, fire alarm system and detection devices, access control system, security system, and building control system.

1.7 WARRANTY

- A. General Warranty: Special warranties specified in this Article shall not deprive Owner of other rights Owner may have under other provisions of the Contract Documents and shall be in addition to, and run concurrent with, other warranties made by Contractor under requirements of the Contract Documents.
- B. Special Warranty: Written warranty, executed by manufacturer agreeing to repair or replace components of door hardware that fail in materials or workmanship within specified warranty period. Failures include, but are not limited to, the following:
 - 1. Structural failures including excessive deflection, cracking, or breakage.
 - 2. Faulty operation of operators and door hardware.
 - 3. Deterioration of metals, metal finishes, and other materials beyond normal weathering.
- C. Warranty Period for Locksets: Ten, (10) years from date of Substantial Completion, unless otherwise indicated.
- D. Warranty Period for Manual Closers: Twenty Five, (25) years from date of Substantial Completion, unless otherwise indicated.
- E. Warranty Period for Exit Devices: Ten, (10) years from date of Substantial Completion, unless otherwise indicated.
- F. Warranty Period for Electrical Exit Devices: Two, (2) years from date of Substantial Completion, unless otherwise indicated.

1.8 MAINTENANCE SERVICE

- A. Maintenance Tools and Instructions: Furnish a complete set of specialized tools and maintenance instructions as needed for Owner's continued adjustment, maintenance, and removal and replacement of door hardware.
- B. Maintenance Service: Beginning at Substantial Completion, provide six months' full maintenance by skilled employees of door hardware Installer. Include quarterly preventive maintenance, repair or replacement of worn or defective components, lubrication, cleaning, and adjusting as required for proper door hardware operation. Provide parts and supplies as used in the manufacture and installation of original products.
- C. Engage a factory authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain door hardware and door hardware finishes.

PART 2 - PRODUCTS

2.1 SCHEDULED DOOR HARDWARE

- A. General: Provide door hardware for each door to comply with requirements in this Section, door hardware sets indicated in door and frame schedule, and the Door Hardware Schedule at the end of Part 3.

1. Door Hardware Sets: Provide quantity, item, size, finish or color indicated, and named manufacturer's products. Retain subparagraph below for electrified door hardware.
 2. Sequence of Operation: Provide electrified door hardware function, sequence of operation, and interface with other building control systems indicated.
- B. Designations: Requirements for design, grade, function, finish, size, and other distinctive qualities of each type of door hardware are indicated in the Door Hardware Schedule at the end of Part 3. Products are identified by using door hardware designations, as follows:
1. Named Manufacturer's Products: Product designation and manufacturer are listed for each door hardware type required for the purpose of establishing minimum requirements. Manufacturers' names are abbreviated in the Door Hardware Schedule.
 2. References to BHMA Standards: Provide products complying with these standards and requirements for description, quality, and function.

2.2 HINGES

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. Butt Hinges:
 - a. Dormakaba / Stanley Hinge Company, Inc.
 - b. Bommer Hinge Company, Inc.
 2. Continuous Hinges:
 - a. Architectural Builders Hardware Mfg., Inc.
 - b. Dormakaba / Stanley Hinge Company, Inc.
- B. Standards: Comply with the following:
1. Hinges ANSI/BHMA Standard A156.1 Grade 1
 2. Continuous Hinges ANSI/BHMA Standard A156.26 Grade 1
- C. Template Requirements: Except for hinges and pivots to be installed entirely (both leaves) into wood doors and frames, provide only template-produced units.
- D. Concealed bearings are made from engineered polymer material with PTFE and Aramid fiber; bearing is maintenance free, no oil, no grease.
- E. Butt hinges equipped with easily seated, non-rising pin. Hole in bottom of pin enables quick pin removal for ease of installation.
- F. Continuous hinge material to be 14 gauge, 304 stainless steel
- G. Continuous hinge steel pin to be .25 diameter, 304 stainless steel
- H. Continuous hinge exterior barrel diameter .438 (7/16)
- I. Continuous hinge knuckle to be 2", including split nylon bearing at each separation for a quiet, smooth, self-lubricating operation
- J. All hinges to carry Warnock Hersey Int. or UL for fire rated doors and frames up to 3 hours

- K. Continuous hinges to have Symmetrically templated hole pattern
- L. Continuous hinge to have a 10 year Warranty
- M. Hinge Weight: Unless otherwise indicated, provide the following:
 - 1. Supports weights up to 600lbs.
- N. Hinge Base Metal: Unless otherwise indicated, provide the following:
 - 1. Exterior Continuous Hinges: Stainless steel, with stainless-steel pin,
 - 2. Interior Continuous Hinges: Stainless steel, with stainless-steel pin.
 - 3. Continuous Hinges for Fire-Rated Assemblies: Stainless steel, with stainless-steel pin.
 - 4. Exterior Butt Hinges: Stainless Steel or Brass or Bronze
 - 5. Interior Butt Hinges: Steel or Brass or Bronze
- O. Hinge Options: Comply with the following where indicated in the Door Hardware Schedule or on Drawings:
 - 1. Hospital Tips: Slope ends of hinge barrel.
 - 2. Maximum Security Pin: Fix pin in hinge barrel after it is inserted.
 - 3. Nonremovable Pins: Provide set screw in hinge barrel that, when tightened into a groove in hinge pin, prevents removal of pin while door is closed; for the following applications:
 - a. Outswinging exterior doors.
 - b. Outswinging corridor doors with locks.
- P. Continuous-Geared Aluminum Hinges: Minimum ~~0.120-inch-~~ (3.0-mm-) thick, hinge leaves with minimum overall width of ~~4 inches~~ (100 mm); fabricated to full height of door and frame. Finish components after milling and drilling are complete. Fabricate hinges to template screw locations.
- Q. All geared hinges to be heavy-gauge aluminum alloy with solid support blocks of self-lubricating DELRIN.
- R. All geared hinges to meet Dynamic and static load test for compliance with ANSI A156.1, (BHMA) for 350,000 cycles at 15 cycles per minute.
- S. Fasteners: Comply with the following:
 - 1. Machine Screws: For metal doors and frames. Install into drilled and tapped holes.
 - 2. Wood Screws: For wood doors and frames.
 - 3. Threaded-to-the-Head Wood Screws: For fire-rated wood doors.
 - 4. Screws: Phillips flat-head screws; machine screws drilled and tapped holes for metal doors, wood screws for wood doors and frames. Finish screw heads to match surface of hinges.

2.3 LOCKS AND LATCHES

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Mechanical Locks and Latches:

- a. Dormakaba / Best Locking Systems, Inc.
- B. Standards: Comply with the following:
 - 1. Bored Locks and Latches: BHMA A156.2.
 - 2. Mortise Locks and Latches: BHMA A156.13.
- C. Bored Locks: ANSI A156.2, BHMA Series 4000, Grade 1, and is UL Listed.
- D. Mortise Locks: Stamped steel case with steel or brass parts; ANSI A156.13, Series 1000, BHMA Grade 1 Operational and Grade 2 Security and be UL Listed.
- E. Certified Products: Provide door hardware listed in the following BHMA directories:
 - 1. Mechanical Locks and Latches: BHMA's "Directory of Certified Locks & Latches."
 - 2. Electromagnetic Locks: BHMA's "Directory of Certified Electromagnetic & Delayed Egress Locks."
- F. Lock Trim: Comply with the following:
 - 1. Lever: Mortise Locks & Latches, Forged or Cast brass, bronze or stainless steel construction
 - 2. Lever: Cylindrical Locks & Latches, Zinc material with a minimum wall thickness of .060
 - 3. Dummy Trim: Match lever lock trim and escutcheons.
- G. Lock Functions: Function numbers and descriptions indicated in the Door Hardware Schedule comply with the following:
 - 1. Bored Locks: BHMA A156.2.
 - 2. Mortise Locks: BHMA A156.13.
- H. Lock Throw: Comply with testing requirements for length of bolts to comply with labeled fire door requirements, and as follows:
 - 1. Bored Locks: Minimum 9/16-inch latch bolt throw.
 - 2. Mortise Locks: Minimum 3/4-inch latch bolt throw.
 - 3. Deadbolts: Minimum 1-inch bolt throw.
- I. Backset: 2-3/4 inches (70 mm), unless otherwise indicated.
- J. Mortise Locks & Latches shall have an anti-friction, 3/4-inch throw latch bolt with anti-friction piece made of self-lubricated stainless steel. Latch bolt with plastic insert and three-piece latch bolt are unacceptable on this project.
- K. Mortise Locks & Latches shall have levers to be operated with a roller bearing spindle hub mechanism.
- L. Cylindrical Locks & Latches to have solid shank with no opening for access to keyed lever keeper.

2.4 EXIT DEVICES

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Precision Manufacturing, Inc.
 - 2. Dormakaba Manufacturing, Inc.
 - 3. Commercial Hardware, Inc.
- B. Standard: BHMA A156.3.
 - 1. BHMA Grade: Grade 1
- C. Certified Products: Provide exit devices listed in BHMA's "Directory of Certified Exit Devices."
- D. Panic Exit Devices: Listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for panic protection, based on testing according to UL 305.
- E. Fire Exit Devices: Complying with NFPA 80 that are listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for fire and panic protection, based on testing according to UL 305 and NFPA 252.
- F. Exit device shall be "touch pad" type with a touch pad that shall extend a minimum of one half (1/2) of the door width.
- G. Exit device shall have a one-quarter (1/4) gap between the face of the door and the touch bar channel eliminating the need for shims or cutting away the glass molding.
- H. Exit device lock stile chassis shall be investment cast steel. Stamped steel units will not be accepted. All device latch bolts shall be stainless steel and shall be deadlocking type.
- I. Exit device strikes shall be adjustable type investment cast stainless steel.
- J. Exit device shall include sound reduction dampening for both depression and extension of the touch pad.
- K. Exit device end cap shall be all metal and secured with a bracket that interlocks both at the touch bar channel base and hinge side filler to prevent end cap "peel-back".
- L. All exposed surfaces of the exit device housing shall be no less than 14 gauge brass or bronze; or no less than 16 gauge stainless steel. Aluminum housing type exit devices are not acceptable.
- M. Dummy Push Bar: Nonfunctioning push bar matching functional push bar.
 - 1. Operation: Rigid
- N. Outside Trim: Lever, Lever with cylinder, Pull, Pull with cylinder, material and finish to match locksets, unless otherwise indicated.
 - 1. Match design for locksets and latchsets, unless otherwise indicated.

2.5 CYLINDERS AND KEYING

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Cylinders:
 - a. Dormakaba / Best Locking Systems, Inc.
 - b. All cylinders shall be 7-pin Cormax interchangeable cores.
- B. Standards: Comply with the following:
 - 1. Cylinders: BHMA A156.5.
- C. Cylinder Grade: BHMA Grade 1, Cylinders: Manufacturer's standard tumbler type, constructed from brass or bronze, stainless steel, or nickel silver, and complying with the following:
 - 1. Number of Pins: Seven.
 - 2. Mortise Type: Threaded cylinders with rings and straight- or clover-type cam.
 - 3. Rim Type: Cylinders with back plate, flat-type vertical or horizontal tailpiece, and raised trim ring.
 - 4. Bored-Lock Type: Cylinders with tailpieces to suit locks.
- D. Permanent Cores: Manufacturer's standard; finish face to match lockset; complying with the following:
 - 1. Removable Cores: Core insert, removable by use of a special key, and for use with only the core manufacturer's locksets.
- E. Construction Keying: Comply with the following:
 - 1. Construction Cores: Provide Brass construction cores in all locksets and cylinders that are replaceable by permanent cores.
 - a. Replace Brass construction cores with permanent cores, as indicated in keying schedule
- F. Keying System: Unless otherwise indicated, provide a factory-registered keying system complying with the following requirements:
 - 1. No Master Key System: Cylinders are operated by change keys only.
 - 2. Master Key System: Cylinders are operated by a change key and a master key.
 - 3. Grand Master Key System: Cylinders are operated by a change key, a master key, and a grand master key.
 - 4. Great-Grand Master Key System: Cylinders are operated by a change key, a master key, a grand master key, and a great-grand master key.
 - 5. Existing System: Master key or grand master key locks to Owner's existing system.
 - 6. Keyed Alike: Key all cylinders to the same change key.
- G. Keys: Provide nickel-silver keys complying with the following:
 - 1. Stamping: Permanently inscribe each key with a visual key control number and include the following notation:
 - a. Notation: **"DO NOT DUPLICATE."**

2. Quantity: In addition to one extra blank key for each lock, provide the following:

- a. Cylinder Change Keys: Three.
- b. Master Keys: Five.
- c. Grand Master Keys: Five.
- d. Great-Grand Master Keys: Five.
- e. Control Keys: Five
- f. Construction Master Keys: Ten
- g. Construction Core Control Keys: Five

2.6 STRIKES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Electric Strikes:

- a. RCI Manufacturing, Inc.
- b. Dormakaba, Inc.

B. Standards: Comply with the following:

1. Strikes for Bored Locks and Latches: BHMA A156.2.
2. Strikes for Mortise Locks and Latches: BHMA A156.13.
3. Electric Strikes: BHMA A156.5.

C. Strikes: Provide manufacturer's standard strike with strike box for each latch or lock bolt, with curved lip extended to protect frame, finished to match door hardware set, unless otherwise indicated, and as follows:

1. Flat-Lip Strikes: For locks with three-piece antifriction latch bolts, as recommended by manufacturer.
2. Extra-Long-Lip Strikes: For locks used on frames with applied wood casing trim.
3. Aluminum-Frame Strike Box: Provide manufacturer's special strike box fabricated for aluminum framing.

D. Electric Strikes: BHMA Grade 1

2.7 CLOSERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Surface-Mounted Closers:
 - a. Dormakaba USA, Inc.
 - b. Commercial Hardware, Inc.
 - c. Best Door Closers

B. Standards: Comply with the following:

1. Closers: BHMA A156.4.

- C. Surface Closers: BHMA Grade 1
- D. Certified Products: Provide door closers listed in BHMA's "Directory of Certified Door Closers."
- E. Size of Units: Unless otherwise indicated, comply with manufacturer's written recommendations for size of door closers depending on size of door, exposure to weather, and anticipated frequency of use. Provide factory-sized closers, adjustable to meet field conditions and requirements for opening force.

2.8 PROTECTIVE TRIM UNITS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Metal Protective Trim Units:
 - a. Triangle Brass Manufacturing Company, Inc.
 - b. Burns Manufacturing Company, Inc.
- B. Standard: Comply with BHMA A156.6.
- C. Materials: Fabricate protection plates from the following:
 - 1. Stainless Steel: 0.050 inch (1.3 mm) thick; beveled 4 sides.
- D. Fasteners: Provide manufacturer's standard exposed fasteners for door trim units consisting of either machine or self-tapping screws.
- E. Furnish protection plates sized 2" less than door width on push side and 1" less than door width on pull side, by height specified in Door Hardware Schedule.

2.9 STOPS AND HOLDERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Architectural Builders Hardware Mfg., Inc.
 - 2. Triangle Brass Manufacturing Company, Inc.
- B. Standards: Comply with the following:
 - 1. Stops and Bumpers: BHMA A156.16.
 - 2. Combination Overhead Holders and Stops: BHMA A156.8.
 - 3. Door Silencers: BHMA A156.16.
- C. Stops and Bumpers: BHMA Grade 1
- D. Combination Overhead Stops and Holders: BHMA Grade 1
- E. Silencers for Metal Door Frames: BHMA Grade 1; neoprene or rubber, minimum diameter 1/2 inch (13 mm); fabricated for drilled-in application to frame.

2.10 DOOR GASKETING

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Door Gasketing:
 - a. Reese Manufacturing Co., Inc.
 - b. National Guard Products, Inc.
 - 2. Door Bottoms:
 - a. Reese Manufacturing Co., Inc.
 - b. National Guard Products
- B. Standard: Comply with BHMA A156.22.
- C. General: Provide continuous weather-strip gasketing on exterior doors and provide smoke, light, or sound gasketing on interior doors where indicated or scheduled. Provide noncorrosive fasteners for exterior applications and elsewhere as indicated.
 - 1. Perimeter Gasketing: Apply to head and jamb, forming seal between door and frame.
 - 2. Meeting Stile Gasketing: Fasten to meeting stiles, forming seal when doors are closed.
 - 3. Door Bottoms: Apply to bottom of door, forming seal with threshold when door is closed.
- D. Air Leakage: Not to exceed **0.50 cfm per foot** (**0.000774 cu. m/s per m**) of crack length for gasketing other than for smoke control, as tested according to ASTM E 283.
- E. Smoke-Labeled Gasketing: Assemblies complying with NFPA 105 that are listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for smoke-control ratings indicated, based on testing according to UL 1784.
 - 1. Provide smoke-labeled gasketing on 20-minute-rated doors and on smoke-labeled doors.
- F. Fire-Labeled Gasketing: Assemblies complying with NFPA 80 that are listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for fire ratings indicated, based on testing according to UL 10B or NFPA 252.
- G. Sound-Rated Gasketing: Assemblies that are listed and labeled by a testing and inspecting agency, for sound ratings indicated, based on testing according to ASTM E 1408.
- H. Replaceable Seal Strips: Provide only those units where resilient or flexible seal strips are easily replaceable and readily available from stocks maintained by manufacturer.
- I. Gasketing Materials: Comply with ASTM D 2000 and AAMA 701/702.

2.11 THRESHOLDS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Reese Manufacturing Co., Inc.
 - 2. National Guard Products, Inc.

- B. Standard: Comply with BHMA A156.21.

2.12 FABRICATION

- A. Manufacturer's Nameplate: Do not provide manufacturers' products that have manufacturer's name or trade name displayed in a visible location (omit removable nameplates) except in conjunction with required fire-rated labels and as otherwise approved by Architect.
1. Manufacturer's identification will be permitted on rim of lock cylinders only.
- B. Base Metals: Produce door hardware units of base metal, fabricated by forming method indicated, using manufacturer's standard metal alloy, composition, temper, and hardness. Furnish metals of a quality equal to or greater than that of specified door hardware units and BHMA A156.18 for finishes. Do not furnish manufacturer's standard materials or forming methods if different from specified standard.
- C. Fasteners: Provide door hardware manufactured to comply with published templates generally prepared for machine, wood, and sheet metal screws. Provide screws according to commercially recognized industry standards for application intended. Provide Phillips flat-head screws with finished heads to match surface of door hardware, unless otherwise indicated.
1. Concealed Fasteners: For door hardware units that are exposed when door is closed, except for units already specified with concealed fasteners. Do not use through bolts for installation where bolt head or nut on opposite face is exposed unless it is the only means of securely attaching the door hardware. Where through bolts are used on hollow door and frame construction, provide sleeves for each through bolt.
2. Steel Machine or Wood Screws: For the following fire-rated applications:
- a. Mortise hinges to doors.
 - b. Strike plates to frames.
 - c. Closers to doors and frames.
3. Steel Through Bolts: For the following fire-rated applications, unless door blocking is provided:
- a. Surface hinges to doors.
 - b. Closers to doors and frames.
 - c. Surface-mounted exit devices.
4. Spacers or Sex Bolts: For through bolting of hollow metal doors.
5. Fasteners for Wood Doors: Comply with requirements of DHI WDHS.2, "Recommended Fasteners for Wood Doors."

2.13 FINISHES

- A. Standard: Comply with BHMA A156.18.
- B. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

- C. Appearance of Finished Work: Variations in appearance of abutting or adjacent pieces are acceptable if they are within one-half of the range of approved Samples. Noticeable variations in the same piece are not acceptable. Variations in appearance of other components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.
- D. BHMA Designations: Comply with base material and finish requirements indicated by the following:
 - 1. BHMA 600: Primed for painting, over steel base metal.
 - 2. BHMA 626: Satin chromium plated over nickel, over brass or bronze base metal.
 - 3. BHMA 628: Satin aluminum, clear anodized, over aluminum base metal.
 - 4. BHMA 630: Satin stainless steel, over stainless steel base metal.
 - 5. BHMA 652: Satin chromium plated over nickel, over steel base metal.
 - 6. BHMA 689: Aluminum painted, over any base metal.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine doors and frames, with Installer present, for compliance with requirements for installation tolerances, labeled fire door assembly construction, wall and floor construction, and other conditions affecting performance.
- B. Examine roughing-in for electrical power systems to verify actual locations of wiring connections before electrified door hardware installation.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Steel Doors and Frames: Comply with DHI A115 series.
 - 1. Surface-Applied Door Hardware: Drill and tap doors and frames according to SDI 107.
- B. Wood Doors: Comply with DHI A115-W series.

3.3 INSTALLATION

- A. Mounting Heights: Mount door hardware units at heights indicated in following applicable publications, unless specifically indicated or required to comply with governing regulations:
 - 1. Standard Steel Doors and Frames: DHI's "Recommended Locations for Architectural Hardware for Standard Steel Doors and Frames."
 - 2. Custom Steel Doors and Frames: DHI's "Recommended Locations for Builders' Hardware for Custom Steel Doors and Frames."
 - 3. Wood Doors: DHI WDHS.3, "Recommended Locations for Architectural Hardware for Wood Flush Doors."

- B. Install each door hardware item to comply with manufacturer's written instructions. Where cutting and fitting are required to install door hardware onto or into surfaces that are later to be painted or finished in another way, coordinate removal, storage, and reinstallation of surface protective trim units with finishing work specified in Division 9 Sections. Do not install surface-mounted items until finishes have been completed on substrates involved.
 - 1. Set units level, plumb, and true to line and location. Adjust and reinforce attachment substrates as necessary for proper installation and operation.
 - 2. Drill and countersink units that are not factory prepared for anchorage fasteners. Space fasteners and anchors according to industry standards.
- C. Key Control System: Place keys on markers and hooks in key control system cabinet, as determined by final keying schedule. Supply key cabinet with 25% expansion. Factory install keys in cabinet or in field with owner's representative. Key cabinet to be supplied with a "Complete System" equal to the Telkee System.
- D. Boxed Power Supplies: Locate power supplies as indicated or, if not indicated, above accessible ceilings, in equipment room. Verify location with Architect.
 - 1. Configuration: Provide one power supply for each door opening.
 - 2. Configuration: Provide the least number of power supplies required to adequately serve doors with electrified door hardware.
- E. Thresholds: Set thresholds for exterior and acoustical doors in full bed of sealant complying with requirements specified in Division 7 Section "Joint Sealants."

3.4 FIELD QUALITY CONTROL

- A. Independent Architectural Hardware Consultant: Owner or Architect will engage a qualified independent Architectural Hardware Consultant to perform inspections and to prepare inspection reports.
 - 1. Independent Architectural Hardware Consultant will inspect door hardware and state in each report whether installed work complies with or deviates from requirements, including whether door hardware is properly installed and adjusted.

3.5 ADJUSTING

- A. Initial Adjustment: Adjust and check each operating item of door hardware and each door to ensure proper operation or function of every unit. Replace units that cannot be adjusted to operate as intended. Adjust door control devices to compensate for final operation of heating and ventilating equipment and to comply with referenced accessibility requirements.
 - 1. Spring Hinges: Adjust to achieve positive latching when door is allowed to close freely from an open position of 30 degrees.
 - 2. Electric Strikes: Adjust horizontal and vertical alignment of keeper to properly engage lock bolt.
 - 3. Door Closers: Adjust sweep period so that, from an open position of 70 degrees, the door will take at least 3 seconds to move to a point 3 inches (75 mm) from the latch, measured to the leading edge of the door.

- B. Six-Month Adjustment: Approximately six months after date of Substantial Completion, Installer shall perform the following:
 - 1. Examine and readjust each item of door hardware as necessary to ensure function of doors, door hardware, and electrified door hardware.
 - 2. Consult with and instruct Owner's personnel on recommended maintenance procedures.
 - 3. Replace door hardware items that have deteriorated or failed due to faulty design, materials, or installation of door hardware units.

3.6 CLEANING AND PROTECTION

- A. Clean adjacent surfaces soiled by door hardware installation.
- B. Clean operating items as necessary to restore proper function and finish.
- C. Provide final protection and maintain conditions that ensure door hardware is without damage or deterioration at time of Substantial Completion.

3.7 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain door hardware and door hardware finishes.

3.8 DOOR HARDWARE SCHEDULE

- A. Door Hardware Schedule is included on the following pages.

HARDWARE SCHEDULE BBTS PHYSICAL FITNESS CENTER

Hardware Set #: 0001 - DBL DRS ALUM & ALUM EXTERIOR
Doors: 101A

Opening to Have:

Qty	Description	Finish	Mfg
2	CONTINUOUS HINGE A110HDC x SC x FULL HEIGHT	628	ABH
4	RIM CYLINDER (IC) 1E72 x RP x ABC x CORMAX	626	BEST
1	POWER TRANSFER PT1000 x EZ	628	ABH
1	POWER SUPPLY RPSMLR2	600	PRECISION
1	RIM EXIT DEVICE MLR-TS-C-2110-CD x 4908D x S301	630	PRECISION
1	RIM EXIT DEVICE 2110-CD x 4908D x S301	630	PRECISION
1	WIRE HARNESS WH-26"		STANLEY
1	WIRE HARNESS WH-192"		STANLEY
1	WIRE HARNESS WH-6E"		STANLEY
1	KEYED REMOVABLE MULLION KR822-KMC822-MB822	689	PRECISION
1	RIM CYLINDER (IC) 1E72 x RP x ABC x CORMAX	628	BEST
2	SURFACE CLOSER 8916 SDS FC LSN 689	689	DORMAKABA
2	KICK PLATE 10" x 2" LDW .050 x B4E x CTSK	630	TRIMCO
2	O/H CONCEALED STOP N1022A x STOP (30" TO 36" DR)	630	ABH
1	WEATHERSTRIP 769D x HEAD & JAMBS x MULLION	DK BRZ	REESE
1	THRESHOLD S483APR x SRS x FHSL x FULL WIDTH	628	REESE
2	DOOR SWEEP 772A x FULL WIDTH	628	REESE
2	DOOR CONTACT MC-7 x SPDT x 1" DIA		DORMAKABA
1	CARD READER		

Hardware Set #: 0002 - DBL DRS ALUM & ALUM EXTERIOR
Doors: 111

Opening to Have:

Qty	Description	Finish	Mfg
2	CONTINUOUS HINGE A110HDC x SC x FULL HEIGHT	628	ABH
4	RIM CYLINDER (IC) 1E72 x RP x ABC x CORMAX	626	BEST
2	RIM EXIT DEVICE 2110-CD x 4908D x S301	630	PRECISION
1	KEYED REMOVABLE MULLION KR822-KMC822-MB822	689	PRECISION
1	RIM CYLINDER (IC) 1E72 x RP x ABC x CORMAX	628	BEST
2	SURFACE CLOSER 8916 SDS FC LSN 689	689	DORMAKABA
2	KICK PLATE 10" x 2" LDW .050 x B4E x CTSK	630	TRIMCO
2	O/H CONCEALED STOP N1022A x STOP (30" TO 36" DR)	630	ABH
1	WEATHERSTRIP 769D x HEAD & JAMBS x MULLION	DK BRZ	REESE
1	RAIN DRIP R201A x FULL WIDTH + 4"	628	REESE
1	THRESHOLD S483APR x SRS x FHSL x FULL WIDTH	628	REESE
2	DOOR SWEEP 772A x FULL WIDTH	628	REESE
2	DOOR CONTACT MC-7 x SPDT x 1" DIA		DORMAKABA

Hardware Set #: 0003 - DBL DRS ALUM & ALUM EXTERIOR
Doors: 101B

Opening to Have:

Qty	Description	Finish	Mfg
2	CONTINUOUS HINGE A110HDC x SC x FULL HEIGHT	628	ABH
2	OFFSET PUSH/PULL 1738	630	TRIMCO
2	SURFACE CLOSER 8916 SDS FC LSN 689	689	DORMAKABA
2	KICK PLATE 10" x 2" LDW .050 x B4E x CTSK	630	TRIMCO
2	O/H CONCEALED STOP N1022A x STOP (30" TO 36" DR)	630	ABH
1	WEATHERSTRIP 769D x HEAD & JAMBS x MULLION	DK BRZ	REESE
2	DOOR SWEEP 772A x FULL WIDTH	628	REESE

Hardware Set #: 004 - SGL DRS HMD & HMF
Doors: 103, 105, 106

Opening to Have:

Qty	Description	Finish	Mfg
3	HINGE FBB168 4.5 x 4.5 x NRP	652	STANLEY
1	STOREROOM LOCKSET 93K7-D-14C-S3 x ABC x CORMAX	626	BEST
1	DOOR CLOSER 8916FC x SDS x LSN	689	DORMAKABA
1	KICK PLATE 10" x 2" LDW .050 x B4E x CTSK	630	TRIMCO
1	MOP PLATE 6" x 1" LDW .050 x B4E x CTSK	630	TRIMCO
3	SILENCERS 1229A	GRAY	TRIMCO
1	POWER SUPPLY PS615RF	600	DORMAKABA
1	DOOR CONTACT MC-7 x SPDT x 1" DIA		DORMAKABA
1	ELECTRIC STRIKE ES74F x 24VDC	630	DORMAKABA
1	CARD READER BY GENERAL CONTRACTOR		

Hardware Set #: 0005 - SGL DRS HMD & HMF
Doors: 102, 104

Opening to Have:

Qty	Description	Finish	Mfg
3	HINGE FBB168 4.5 x 4.5 x NRP	652	STANLEY
1	STOREROOM LOCKSET 93K7-D-14C-S3 x ABC x CORMAX	626	BEST
1	KICK PLATE 10" x 2" LDW .050 x B4E x CTSK	630	TRIMCO
1	WALL STOP 1270WV	630	TRIMCO
3	SILENCERS 1229A	GRAY	TRIMCO

Hardware Set #: 0006 - SGL DRS HMD & HMF
Doors: 107, 108

Opening to Have:

Qty	Description	Finish	Mfg
3	HINGE FBB168 4.5 x 4.5 x NRP	652	STANLEY
1	PASSAGE SET 93K7-N-14C-S3	626	BEST
1	DOOR BOLT OCCUPANCY INDICATOR B571 x 61-509 RELEASE KEY	626	SCHLAGE
1	DOOR CLOSER 8916FC x SDS x LSN	689	DORMAKABA
1	KICK PLATE 10" x 2" LDW .050 x B4E x CTSK	630	TRIMCO
1	MOP PLATE 6" x 1" LDW .050 x B4E x CTSK	630	TRIMCO
1	WALL STOP 1270WV	630	TRIMCO
3	SILENCERS 1229A	GRAY	TRIMCO

Hardware Set #: 0007 - SGL DRS HMD & HMF
Doors: 112

Opening to Have:

Qty	Description	Finish	Mfg
3	HINGE FBB168 4.5 x 4.5 x NRP	652	STANLEY
1	PASSAGE SET 93K7-N-14C-S3	626	BEST
1	KICK PLATE 10" x 2" LDW .050 x B4E x CTSK	630	TRIMCO
1	MOP PLATE 6" x 1" LDW .050 x B4E x CTSK	630	TRIMCO
3	SILENCERS 1229A	GRAY	TRIMCO

END OF SECTION 08 70 00

SECTION 08 80 00

GLAZING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Glass.
- B. Glazing compounds and accessories.

1.02 RELATED REQUIREMENTS

- A. Section 07 90 05 - Joint Sealers: Sealant and back-up material.

1.03 REFERENCE STANDARDS

- A. 16 CFR 1201 - Safety Standard for Architectural Glazing Materials.
- B. ANSI Z97.1 - American National Standard for Safety Glazing Materials Used in Buildings, Safety Performance Specifications and Methods of Test.
- C. ASTM C864 - Standard Specification for Dense Elastomeric Compression Seal Gaskets, Setting Blocks, and Spacers.
- D. ASTM C920 - Standard Specification for Elastomeric Joint Sealants.
- E. ASTM C1036 - Standard Specification for Flat Glass.
- F. ASTM C1048 - Standard Specification for Heat-Strengthened and Fully Tempered Flat Glass.
- G. ASTM C1172 - Standard Specification for Laminated Architectural Flat Glass.
- H. ASTM C1193 - Standard Guide for Use of Joint Sealants.
- I. ASTM E330/E330M - Standard Test Method for Structural Performance of Exterior Windows, Doors, Skylights and Curtain Walls by Uniform Static Air Pressure Difference.
- J. ASTM E 773 - Standard Test Method for Accelerated Weathering of Sealed Insulating Glass Units.
- K. ASTM E 774 - Standard Specification for the Classification of the Durability of Sealed Insulating Glass Units; 1997.
- L. ASTM E1300 - Standard Practice for Determining Load Resistance of Glass in Buildings.
- M. ASTM E2190 - Standard Specification for Insulating Glass Unit Performance and Evaluation.
- N. GANA (GM) - GANA Glazing Manual.
- O. GANA (SM) - GANA Sealant Manual.
- P. GANA (LGRM) - Laminated Glazing Reference Manual.
- Q. IGMA TM-3000 - North American Glazing Guidelines for Sealed Insulating Glass Units for Commercial & Residential Use.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Preinstallation Meeting: Convene a preinstallation meeting one week before starting work of this section; require attendance by all affected installers.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. See Section 01 33 00 - Administrative Requirements, for submittal procedures.
- C. Product Data on Glass Types: Provide structural, physical and environmental characteristics, size limitations, special handling or installation requirements.
- D. Product Data on Glazing Compounds: Provide chemical, functional, and environmental characteristics, limitations, special application requirements. Identify available colors.

- E. Samples: Submit two samples 12 x12 inch in size of glass and plastic units, showing coloration and design.
- F. Certificates: Certify that products meet or exceed specified requirements.

1.06 QUALITY ASSURANCE

- A. Perform Work in accordance with GANA Glazing Manual and FGMA Sealant Manual for glazing installation methods.
- B. Installer Qualifications: Company specializing in performing the work of this section with minimum 10 years documented experience.

1.07 MOCK-UP

- A. See Section 01 40 00 - Quality Requirements, for additional mock-up requirements.
- B. Provide mockup of sample including glass and air barrier and vapor retarder seal.

1.08 FIELD CONDITIONS

- A. Do not install glazing when ambient temperature is less than 50 degrees F.
- B. Maintain minimum ambient temperature before, during and 24 hours after installation of glazing compounds.

1.09 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.
- B. Sealed Insulating Glass Units: Provide a five (5) year warranty to include coverage for seal failure, interpane dusting or misting, including replacement of failed units.

1.10 PERFORMANCE REQUIREMENTS

- A. General: Provide glass capable of withstanding thermal movement and wind and impact loads (where applicable) as specified in paragraph B following.
- B. Glass Design: Glass thickness designations indicated are minimums and are for detailing only. Confirm glass thicknesses by analyzing Project loads and in-service conditions. Provide glass lites in the thickness designations indicated for various size openings, but not less than thicknesses and in strengths (annealed or heat treated) required to meet or exceed the following criteria:
 - 1. Glass Thicknesses: Select minimum glass thicknesses to comply with ASTM E 1300, according to the following requirements:
- C. Performance Requirements:
 - 1. Wind Loads: Design and size components to withstand the specified load requirements without damage or permanent set, when tested in accordance with ASTM E330/E330M, using loads 1.5 times the design wind loads and 10 second duration of maximum load.
 - a. Design Wind Loads: Comply with requirements for the IBC design wind speeds for building location, risk category, and exposure category as indicated on the structural drawings.
 - 2. Blast Mitigation Performance: Shall be tested or proven through analysis to meet ASTM F1642, GSA-TS01, and UFC 04-010.01 performance criteria. To meet UFC 04-010.01, B-3.1 Standard 10 for Windows and Skylights, the following options are available:
 - a. Section B-3.1.1 Dynamic analysis.
 - b. Section B-3.1.2 Testing.
 - c. Section B-3.1.3 ASTM F2248 Design Approach.
- D. Thermal Movements: Provide glazing that allows for thermal movements resulting from ambient and surface temperatures changes acting on glass framing members and glazing components.

- E. Thermal and Optical Performance Properties: Provide glass with performance properties specified based on manufacturer's published test data, as determined according to procedures indicated below:
1. For monolithic-glass lites, properties are based on units with lites 1/4 inch (6.0 mm) thick.
 2. For insulating-glass units, properties are based on units of thickness indicated for overall unit and for each lite.
 3. Center-of-Glass Values: Based on using LBL-44789 WINDOW 5.0 computer program for the following methodologies:
 - a. U-Factors: NFRC 100 expressed as Btu/ sq. ft. per h per degree F.
 - b. Solar Heat Gain Coefficient: NFRC 200.
 - c. Solar Optical Properties: NFRC 300.

PART 2 PRODUCTS

2.01 GLAZING TYPES

2.02 BASIS OF DESIGN - INSULATING GLASS UNITS

- A. Sealed Insulating Glass Units: Vision glazing, low-E.
1. Application(s): All exterior glazing unless otherwise indicated.
 2. Basis-of-Design: Viracon 1-5/16 inch insulating Laminated VE1-42.
 3. Substitutions: Refer to Section 01 60 00 - Product Requirements.
 4. Between-lite space filled with argon.
 5. Tint: Clear.
 6. Thermal Resistance (U-Value):.24.
 7. Total Solar Heat Gain Coefficient:.22.
 8. Total Visible Light Transmittance: 45 percent.
 9. Outboard Lite: Fully tempered float glass, 1/4 inch thick, minimum.
 - a. Coating: VE-42 on #2 surface.
 10. Total Thickness: 1-5/16 inch.

2.03 GLASS MATERIALS

- A. Float Glass Manufacturers:
1. Guardian Industries Corp: www.sunguardglass.com.
 2. Pilkington North America Inc: www.pilkington.com/na.
 3. PPG Industries, Inc: www.ppgideascales.com.
 4. Viracon: www.viracon.com
 5. Substitutions: Refer to Section 01 60 00 - Product Requirements.
- B. Float Glass: All glazing is to be float glass unless otherwise indicated.
1. Annealed Type: ASTM C1036, Type I - Transparent Flat, Class 1 - Clear, Quality-Q3.
 2. Heat-Strengthened and Fully Tempered Types: ASTM C1048.
 3. Tinted Types: Color and performance characteristics as indicated.
 4. Thicknesses: As indicated; for exterior glazing comply with specified requirements for wind load design regardless of specified thickness.
- C. Laminated Glass: Float glass laminated in accordance with ASTM C1172.
1. Laminated Safety Glass: Comply with 16 CFR 1201 test requirements for Category II.
 2. Plastic Interlayer:
 - a. Polyvinyl Butyral (PVB) Interlayer: 0.060 inch thick, minimum.

2.04 SEALED INSULATING GLASS UNITS

- A. Manufacturers:
1. Any of the manufacturers specified for float glass.
 2. Substitutions: Refer to Section 01 60 00 - Product Requirements.

- B. Sealed Insulating Glass Units: Types as indicated.
 - 1. Durability: Certified by an independent testing agency to comply with ASTM E2190.
 - 2. Edge Spacers: Aluminum, bent and soldered corners.
 - 3. Edge Seal: Glass to elastomer with supplementary silicone sealant.
 - 4. Purge interpane space with dry hermetic air.

2.05 GLAZING COMPOUNDS

- A. Manufacturers:
 - 1. Pecora Corporation: www.pecora.com.
 - 2. Substitutions: Refer to Section 01 60 00 - Product Requirements.
- B. Silicone Sealant : Single component; neutral curing; capable of water immersion without loss of properties; non-bleeding, non-staining; ASTM C 920, Type S, Grade NS, Class 25, Uses M, A, and G; cured Shore A hardness of 15 to 25; color as selected.

2.06 GLAZING ACCESSORIES

- A. Setting Blocks: Neoprene, 80 to 90 Shore A durometer hardness, ASTM C864 Option I. Length of 0.1 inch for each square foot of glazing or minimum 4 inch x width of glazing rabbet space minus 1/16 inch x height to suit glazing method and pane weight and area.
- B. Spacer Shims: Neoprene, 50 to 60 Shore A durometer hardness, ASTM C 864 Option I. Minimum 3 inch long x one half the height of the glazing stop x thickness to suit application, self adhesive on one face.
- C. Glazing Tape: Preformed butyl compound with integral resilient tube spacing device; 10 to 15 Shore A durometer hardness; coiled on release paper; black color.
 - 1. Manufacturers:
 - a. Pecora Corporation: www.pecora.com.
 - b. Substitutions: Refer to Section 01 60 00 - Product Requirements.
- D. Glazing Gaskets: Resilient silicone extruded shape to suit glazing channel retaining slot; ASTM C864 Option I; black color.
- E. Glazing Clips: Manufacturer's standard type.

2.07 SOURCE QUALITY CONTROL AND TESTS

- A. Provide shop inspection and testing for all glass.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that openings for glazing are correctly sized and within tolerance.
- B. Verify that surfaces of glazing channels or recesses are clean, free of obstructions that may impede moisture movement, weeps are clear, and ready to receive glazing.

3.02 PREPARATION

- A. Clean contact surfaces with solvent and wipe dry.
- B. Seal porous glazing channels or recesses with substrate compatible primer or sealer.
- C. Prime surfaces scheduled to receive sealant.
- D. Install sealants in accordance with ASTM C1193 and GANA Sealant Manual.
- E. Install sealant in accordance with manufacturer's instructions.

3.03 GLAZING METHODS

3.04 INSTALLATION - EXTERIOR WET/DRY METHOD (PREFORMED TAPE AND EXTERIOR GASKET)

- A. Cut glazing tape to length and set against interior, permanent stops, 3/16 inch below sight line. Seal corners by butting tape and dabbing with butyl sealant.
 - 1. Bite: Two times the thickness of the laminated glass.
- B. Apply heel bead of butyl sealant along intersection of permanent stop with frame ensuring full perimeter seal between glass and frame to complete the continuity of the air and vapor seal.
- C. Place setting blocks at 1/4 points with edge block no more than 6 inches from corners.
- D. Rest glazing on setting blocks and push against tape and heel bead of sealant with sufficient pressure to attain full contact at perimeter of pane or glass unit.
- E. Install outer, removable stops with manufacturer's standard gasket between glazing and applied stops.
- F. Install removable stops, with spacer strips inserted between glazing and applied stops 1/4 inch below sight lines.
 - 1. Place glazing tape on glazing pane of unit with tape flush with sight line.
- G. Apply cap bead of silicone type sealant along void between the stop and the glazing at interior stop, to uniform line, flush with sight line. Tool or wipe sealant surface smooth.

3.05 INSTALLATION - EXTERIOR WET/DRY METHOD (SEALANT AND EXTERIOR GASKET)

- A. Apply continuous bead of structural silicone sealant at face of interior, permanent stops.
 - 1. Bite: The larger of 3/8 inch or the thickness of the laminated glass.
- B. Apply heel bead of structural silicone sealant along intersection of permanent stop with frame ensuring full perimeter seal between glass and frame to complete the continuity of the air and vapor seal.
- C. Place setting blocks at 1/4 points with edge block no more than 6 inches from corners.
- D. Rest glazing on setting blocks and push against sealant with sufficient pressure to attain full contact at perimeter of pane or glass unit.
 - 1. Minimum thickness of sealant shall be 3/16 inch.
- E. Install outer, removable stops with manufacturer's standard gasket between glazing and applied stops.
- F. Tool or wipe sealant surface smooth to sight line at interior stop.

3.06 INSTALLATION - INTERIOR DRY METHOD (TAPE AND TAPE)

- A. Cut glazing tape to length and set against permanent stops, projecting 1/16 inch (1.6 mm) above sight line.
- B. Place setting blocks at 1/4 points with edge block no more than 6 inches from corners.
- C. Rest glazing on setting blocks and push against tape for full contact at perimeter of pane or unit.
- D. Place glazing tape on free perimeter of glazing in same manner described above.
- E. Install removable stop without displacement of tape. Exert pressure on tape for full continuous contact.
- F. Knife trim protruding tape.

3.07 MANUFACTURER'S FIELD SERVICES

- A. Glass and Glazing product manufacturers to provide field surveillance of the installation of their products.
- B. Monitor and report installation procedures and unacceptable conditions.

3.08 CLEANING

- A. Remove glazing materials from finish surfaces.
- B. Remove labels after Work is complete.
- C. Clean glass and adjacent surfaces.

3.09 PROTECTION

- A. After installation, mark pane with an 'X' by using removable plastic tape or paste; do not mark heat absorbing or reflective glass units.

END OF SECTION

NOT FOR BIDDING

SECTION 09 05 61

COMMON WORK RESULTS FOR FLOORING PREPARATION

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. This section applies to floors identified in Contract Documents that are receiving the following types of floor coverings:
 - 1. Resilient tile and sheet.
 - 2. Carpet tile.
 - 3. Thin-set ceramic tile and stone tile.
 - 4. Resilient Athletic Flooring.
 - 5. Synthetic Turf.
- B. Preparation of new concrete floor slabs for installation of floor coverings.
- C. Testing of concrete floor slabs for moisture and alkalinity (pH).
- D. Remediation of concrete floor slabs due to unsatisfactory moisture or alkalinity (pH) conditions.
 - 1. Contractor shall perform all specified remediation of concrete floor slabs. If such remediation is indicated by testing agency's report and is due to a condition not under Contractor's control or could not have been predicted by examination prior to entering into the contract, a contract modification will be issued.
- E. Patching compound.
- F. Remedial floor coatings.

1.02 RELATED REQUIREMENTS

1.03 PRICE AND PAYMENT PROCEDURES

- A. Testing and remediation shall be included in the base bid.

1.04 REFERENCE STANDARDS

- A. ASTM C109/C109M - Standard Test Method for Compressive Strength of Hydraulic Cement Mortars (Using 2-in. or (50-mm) Cube Specimens).
- B. ASTM C472 - Standard Test Methods for Physical Testing of Gypsum, Gypsum Plasters and Gypsum Concrete.
- C. ASTM F1869 - Standard Test Method for Measuring Moisture Vapor Emission Rate of Concrete Subfloor Using Anhydrous Calcium Chloride.
- D. ASTM F2170 - Standard Test Method for Determining Relative Humidity in Concrete Floor Slabs Using in situ Probes.

1.05 ADMINISTRATIVE REQUIREMENTS

- A. Coordinate scheduling of cleaning and testing, so that preliminary cleaning has been completed for at least 24 hours prior to testing.

1.06 SUBMITTALS

- A. Floor Covering and Adhesive Manufacturers' Product Literature: For each specific combination of substrate, floor covering, and adhesive to be used; showing:
 - 1. Moisture and alkalinity (pH) limits and test methods.
 - 2. Manufacturer's required bond/compatibility test procedure.
- B. Remedial Materials Product Data: Manufacturer's published data on each product to be used for remediation.
- C. Testing Agency's Report:
 - 1. Description of areas tested; include floor plans and photographs if helpful.

2. Summary of conditions encountered.
3. Moisture and alkalinity (pH) test reports.
4. Copies of specified test methods.
5. Recommendations for remediation of unsatisfactory surfaces.
6. Product data for recommended remedial coating.
7. Submit report to Architect.
8. Submit report not more than two business days after conclusion of testing.

D. Adhesive Bond and Compatibility Test Report.

1.07 QUALITY ASSURANCE

- A. Moisture and alkalinity (pH) testing shall be performed by an independent testing agency employed and paid by Contractor.
- B. Contractor's Responsibility Relating to Independent Agency Testing:
 1. Provide access for and cooperate with testing agency.
 2. Confirm date of start of testing at least 10 days prior to actual start.
 3. Allow at least 4 business days on site for testing agency activities.
 4. Achieve and maintain specified ambient conditions.
 5. Notify Architect when specified ambient conditions have been achieved and when testing will start.

1.08 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, handle, and protect products in accordance with manufacturer's instructions and recommendations.
- B. Deliver materials in manufacturer's packaging; include installation instructions.
- C. Keep materials from freezing.

1.09 FIELD CONDITIONS

- A. Maintain ambient temperature in spaces where concrete testing is being performed, and for at least 48 hours prior to testing, at not less than 65 degrees F or more than 85 degrees F.
- B. Maintain relative humidity in spaces where concrete testing is being performed, and for at least 48 hours prior to testing, at not less than 40 percent and not more than 60 percent.

PART 2 PRODUCTS

2.01 MATERIALS

- A. Patching Compound: Floor covering manufacturer's recommended product, suitable for conditions, and compatible with adhesive and floor covering. In the absence of any recommendation from flooring manufacturer, provide a product with the following characteristics:
 1. Cementitious moisture-, mildew-, and alkali-resistant compound, compatible with floor, floor covering, and floor covering adhesive, and capable of being feathered to nothing at edges.
 2. Latex or polyvinyl acetate additions are permitted; gypsum content is prohibited.
 3. Compressive Strength: 3000 psi, minimum, after 28 days, when tested in accordance with ASTM C109/C109M or ASTM C472, whichever is appropriate.
- B. Remedial Floor Coating: Single- or multi-layer coating or coating/overlay combination intended by its manufacturer to resist water vapor transmission to degree sufficient to meet flooring manufacturer's emission limits, resistant to the level of alkalinity (pH) found, and suitable for adhesion of flooring without further treatment.
 1. Thickness: As required for application and in accordance with manufacturer's installation instructions.
 2. Use product recommended by testing agency and flooring system manufacturer.

3. Products: Subject to compliance with flooring manufacturer's requirements, the following products may be provided.
 - a. Allied Construction Technologies, Inc; AC Tech 2170: www.actechperforms.com/#sle.
 - b. ARDEX Engineered Cements; ARDEX MC RAPID: www.ardexamericas.com/#sle.
 - c. Crown Polymers, a division of American Polymers Corporation; CrownShield 8303 MVB: www.crownpolymers.com/#sle.
 - d. Custom Building Products; TechMVC Moisture Vapor and Alkalinity Barrier: www.custombuildingproducts.com/#sle.
 - e. H.B. Fuller Construction Products, Inc; TEC LiquidDam with TEC Level Set 200 SLU: www.tecspecialty.com/#sle.
 - f. LATICRETE International, Inc; LATICRETE NXT Vapor Reduction Coating with LATICRETE NXT Level Plus: www.laticrete.com/#sle.
 - g. Maxxon Corporation; Aquafin SG2: www.maxxon.com/#sle.
 - h. Sika Corporation; Sikafloor Moisture Tolerance Epoxy Primer and Sikafloor Self-Leveling Moisture Tolerant Resurfacer: www.sikafloorusa.com/#sle.
 - i. Tnemec Company, Inc; Series 208 Epoxoprime MVT: www.tnemec.com/#sle.
 - j. Substitutions: See Section 01 60 00 - Product Requirements.

PART 3 EXECUTION

3.01 CONCRETE SLAB PREPARATION

- A. Perform following operations in the order indicated:
 1. Preliminary cleaning.
 2. Moisture vapor emission tests; 3 tests in the first 1000 square feet and one test in each additional 1000 square feet, unless otherwise indicated or required by flooring manufacturer.
 3. Internal relative humidity tests; in same locations as moisture vapor emission tests, unless otherwise indicated.
 4. Alkalinity (pH) tests; in same locations as moisture vapor emission tests, unless otherwise indicated.
 5. Specified remediation, if required.
 6. Remove subfloor ridges and bumps. Fill low spots, cracks, joints, holes, and other defects with subfloor filler.
 7. Apply, trowel, and float filler to achieve smooth, flat, hard surface. Grind irregularities above the surface level. Prohibit traffic until filler is cured.
 8. Other preparation specified.
 9. Adhesive bond and compatibility test.
 10. Protection.
- B. Remediations:
 1. Active Water Leaks or Continuing Moisture Migration to Surface of Slab: Correct this condition before doing any other remediation; re-test after correction.
 2. Excessive Moisture Emission or Relative Humidity: If an adhesive that is resistant to the level of moisture present is available and acceptable to flooring manufacturer, use that adhesive for installation of the flooring; if not, apply remedial floor coating or remedial sheet membrane over entire suspect floor area.
 3. Excessive Alkalinity (pH): If remedial floor coating is necessary to address excessive moisture, no additional remediation is required; if not, if an adhesive that is resistant to the level present is available and acceptable to the flooring manufacturer, use that adhesive for installation of the flooring; otherwise, apply a skim coat of specified patching compound over entire suspect floor area.

3.02 PRELIMINARY CLEANING

- A. Clean floors of dust, solvents, paint, wax, oil, grease, asphalt, residual adhesive, adhesive removers, film-forming curing compounds, sealing compounds, alkaline salts, excessive laitance, mold, mildew, and other materials that might prevent adhesive bond.
- B. Do not use solvents or other chemicals for cleaning.

3.03 MOISTURE VAPOR EMISSION TESTING

- A. Where the floor covering manufacturer's requirements conflict with either the referenced test method or this specification, comply with the manufacturer's requirements.
- B. Where this specification conflicts with the referenced test method, comply with the requirements of this section.
- C. Test in accordance with ASTM F1869 and as follows.
- D. Plastic sheet test and mat bond test may not be substituted for the specified ASTM test method, as those methods do not quantify the moisture content sufficiently.
- E. In the event that test values exceed floor covering manufacturer's limits, perform remediation as indicated. In the absence of manufacturer limits, perform remediation if test values exceed 3 pounds per 1000 square feet per 24 hours.
- F. Report: Report the information required by the test method.

3.04 INTERNAL RELATIVE HUMIDITY TESTING

- A. Where the floor covering manufacturer's requirements conflict with either the referenced test method or this specification, comply with the manufacturer's requirements.
- B. Where this specification conflicts with the referenced test method, comply with the requirements of this section.
- C. Test in accordance with ASTM F2170 Procedure A and as follows.
- D. Testing with electrical impedance or resistance apparatus may not be substituted for the specified ASTM test method, as the values determined are not comparable to the ASTM test values and do not quantify the moisture content sufficiently.
- E. In the event that test values exceed floor covering manufacturer's limits, perform remediation as indicated. In the absence of manufacturer limits, perform remediation if any test value exceeds 75 percent relative humidity.
- F. Report: Report the information required by the test method.

3.05 ALKALINITY TESTING

- A. Where the floor covering manufacturer's requirements conflict with either the referenced test method or this specification, comply with the manufacturer's requirements.
- B. In the event that test values exceed floor covering manufacturer's limits, perform remediation as indicated. In the absence of manufacturer limits, perform remediation if alkalinity (pH) test value is over 10.

3.06 PREPARATION

- A. See individual floor covering section(s) for additional requirements.
- B. Comply with requirements and recommendations of floor covering manufacturer.
- C. Fill and smooth surface cracks, grooves, depressions, control joints and other non-moving joints, and other irregularities with patching compound.
- D. Do not fill expansion joints, isolation joints, or other moving joints.

3.07 ADHESIVE BOND AND COMPATIBILITY TESTING

- A. Comply with requirements and recommendations of floor covering manufacturer.

3.08 APPLICATION OF REMEDIAL FLOOR COATING

- A. Comply with requirements and recommendations of coating manufacturer.

END OF SECTION

NOT FOR BIDDING

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 09 21 16
GYPSUM BOARD ASSEMBLIES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Acoustic insulation.
- B. Gypsum sheathing.
- C. Gypsum wallboard.
- D. Cementitious backer board.
- E. Joint treatment and accessories.

1.02 RELATED REQUIREMENTS

- A. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 01 74 19 - Construction Waste Management and Disposal: Limitations on disposal of removed materials; requirements for recycling.
- C. Section 06 10 00 - Rough Carpentry: Building Framing and Wood blocking .
- D. Section 06 10 00 - Rough Carpentry: Wood blocking product and execution requirements.
- E. Section 07 90 05 - Joint Sealers: Acoustic sealant.

1.03 REFERENCE STANDARDS

- A. ASTM C475/C475M - Standard Specification for Joint Compound and Joint Tape for Finishing Gypsum Board.
- B. ASTM C665 - Standard Specification for Mineral-Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing.
- C. ASTM C754 - Standard Specification for Installation of Steel Framing Members to Receive Screw-Attached Gypsum Panel Products.
- D. ASTM C840 - Standard Specification for Application and Finishing of Gypsum Board.
- E. ASTM C954 - Standard Specification for Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Steel Studs From 0.033 in. (0.84 mm) to 0.112 in. (2.84 mm) in Thickness.
- F. ASTM C1002 - Standard Specification for Steel Self-Piercing Tapping Screws for Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs.
- G. ASTM C1047 - Standard Specification for Accessories For Gypsum Wallboard and Gypsum Veneer Base.
- H. ASTM C1288 - Standard Specification for Discrete Non-Asbestos Fiber-Cement Interior Substrate Sheets.
- I. ASTM C1325 - Specification for Non-Asbestos Fiber-Mat Reinforced Cementitious Backer Units.
- J. ASTM C1396/C1396M - Standard Specification for Gypsum Board.
- K. ASTM C1629/C1629M - Standard Classification for Abuse-Resistant Nondecorated Interior Gypsum Panel Products and Fiber-Reinforced Cement Panels.
- L. ASTM D3273 - Standard Test Method for Resistance to Growth of Mold on the Surface of Interior Coatings in an Environmental Chamber.
- M. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials.
- N. ASTM E90 - Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements.

- O. ASTM E413 - Classification for Rating Sound Insulation.
- P. GA-214 - Recommended Levels of Gypsum Board Finish; Gypsum Association.
- Q. GA-216 - Application and Finishing of Gypsum Board.

1.04 SUBMITTALS

- A. See Section 01 33 00 - Submittal Requirements, for submittal procedures.
- B. Shop Drawings: Indicate special details associated with vertical deflection joints and acoustic seals. Provide special details for suspended ceilings. Indicate layout, anchorage to structure, type and location of fasteners, framed openings, accessories, and items of related work.
- C. Product Data: Provide data on metal framing, gypsum board, accessories, and joint finishing system.
- D. Product Data: Provide manufacturer's data on partition head to structure connectors, showing compliance with requirements.

1.05 QUALITY ASSURANCE

- A. Perform in accordance with ASTM C 840. Comply with requirements of GA-600 for fire-rated assemblies.
- B. Installer Qualifications: Company specializing in performing gypsum board application and finishing, with minimum 5 years of documented experience.

PART 2 PRODUCTS

2.01 GYPSUM BOARD ASSEMBLIES

- A. Provide completed assemblies per drawings.

2.02 METAL FRAMING MATERIALS

- A. See Section 05 40 00 - Cold-Formed Metal Framing.

2.03 BOARD MATERIALS

- A. Manufacturers - Gypsum-Based Board:
 - 1. CertainTeed Corporation: www.certainteed.com/#sle.
 - 2. Georgia-Pacific Gypsum: www.gpgypsum.com/#sle.
 - 3. National Gypsum Company: www.nationalgypsum.com/#sle.
 - 4. USG Corporation: www.usg.com/#sle.
 - 5. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Gypsum Wallboard: Paper-faced gypsum panels as defined in ASTM C1396/C1396M; sizes to minimize joints in place; ends square cut.
 - 1. Application: Use for ceilings, unless otherwise indicated.
- C. Impact-Rated Wallboard: Tested to Level 3 soft-body and hard-body impact in accordance with ASTM C1629.
 - 1. Application: Walls.
 - 2. Paper-Faced Type: Gypsum wallboard as defined in ASTM C1396/C1396M.
 - 3. Type: Fire resistance rated Type X, UL or WH listed.
 - 4. Thickness: 5/8 inch.
 - 5. Edges: Tapered.
 - 6. Products:
 - a. National Gypsum Company; Gold Bond Hi-Impact Brand XP Wallboard.
 - b. USG Corporation; Fiberock Brand Panels--VHI Abuse-Resistant.
- D. Backing Board For Wet Areas: One of the following products:
 - 1. Application: Surfaces behind tile in wet areas. .

2. ANSI Cement-Based Board: Non-gypsum-based; aggregated Portland cement panels with glass fiber mesh embedded in front and back surfaces complying with ANSI A118.9-SystemDeleted or ASTM C1325.
 - a. Thickness: 1/2 inch.
 - b. Products:
 - 1) Custom Building Products; Wonderboard.
 - 2) National Gypsum Company; PermaBase Brand Cement Board.
 - 3) National Gypsum Company; PermaBase Flex Brand Cement Board.
 - 4) Substitutions: See Section 01 60 00 - Product Requirements.
3. ASTM Cement-Based Board: Non-gypsum-based, cementitious board complying with ASTM C1288.
 - a. Thickness: 1/2 inch.
- E. Ceiling Board: Special sag resistant gypsum ceiling board as defined in ASTM C1396/C1396M; sizes to minimize joints in place; ends square cut.
 1. Application: Ceilings, unless otherwise indicated.
 2. Thickness: 1/2 inch.
 3. Edges: Tapered.
- F. Exterior Sheathing Board: Sizes to minimize joints in place; ends square cut.
 1. Application: Exterior sheathing, unless otherwise indicated.
 2. Mold Resistance: Score of 10, when tested in accordance with ASTM D3273.
 3. Glass-Mat-Faced Sheathing: Glass mat faced gypsum substrate as defined in ASTM C1177/C1177M.
 4. Core Type: Regular.
 5. Regular Board Thickness: 1/2 inch and 5/8"
 6. Edges: Square, for vertical application.
 7. Glass-Mat-Faced Products:
 - a. CertainTeed Corporation; GlasRoc Brand.
 - b. Georgia-Pacific Gypsum; DensGlass Sheathing.
 - c. National Gypsum Company; Gold Bond Brand e2XP Extended Exposure Sheathing.
 - d. Temple-Inland Inc; GreenGlass Exterior Sheathing.
 - e. Substitutions: See Section 01 60 00 - Product Requirements.

2.04 ACCESSORIES

- A. Acoustic Insulation: ASTM C 665; preformed glass fiber, friction fit type, unfaced. Thickness to fit cavity. As specified in Section 07 21 00.
- B. Acoustic Sealant: As specified in Section 07 90 05.
- C. Water-Resistive Barrier: As specified in Section 07 25 00.
- D. Finishing Accessories: ASTM C1047, rigid plastic, unless otherwise indicated.
 1. Types: As detailed or required for finished appearance.
 2. Special Shapes: In addition to conventional cornerbead and control joints, provide U-bead at exposed panel edges.
- E. Joint Materials: ASTM C475 and as recommended by gypsum board manufacturer for project conditions.
 1. Tape: 2 inch wide, coated glass fiber tape for joints and corners, except as otherwise indicated.
 2. Tape: 2 inch wide, creased paper tape for joints and corners, except as otherwise indicated.
 3. Ready-mixed vinyl-based joint compound.
 4. Powder-type vinyl-based joint compound.
 5. Chemical hardening type compound.

- F. Screws for Attachment to Steel Members Less Than 0.03 inch In Thickness, to Wood Members, and to Gypsum Board: ASTM C1002; self-piercing tapping type; cadmium-plated for exterior locations.
- G. Screws for Attachment to Steel Members From 0.033 to 0.112 Inch in Thickness: ASTM C954; steel drill screws for application of gypsum board to loadbearing steel studs.
- H. Screws: ASTM C 1002; self-piercing tapping type; cadmium-plated for exterior locations.
- I. Staples: ASTM C 840.
- J. Anchorage to Substrate: Tie wire, screws, and other metal supports, of type and size to suit application; to rigidly secure materials in place.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that project conditions are appropriate for work of this section to commence.

3.02 FRAMING INSTALLATION

- A. Metal Framing: Install in accordance with ASTM C754 and manufacturer's instructions.
- B. Suspended Ceilings and Soffits: Space framing and furring members as indicated.
 - 1. Level ceiling system to a tolerance of 1/600.
 - 2. Laterally brace entire suspension system, to structure above.
 - 3. Install bracing as required at exterior locations to resist wind uplift.
- C. Studs: Space studs as indicated.
 - 1. Extend partition framing to structure where indicated and to ceiling in other locations.
 - 2. Partitions Terminating at Ceiling: Attach ceiling runner securely to ceiling framing in accordance with details.
 - 3. Partitions Terminating at Structure: Attach extended leg top runner to structure, maintain clearance between top of studs and structure, and brace both flanges of studs with continuous bridging.
 - 4. Partitions Terminating at Structure: Attach top runner to structure, maintain clearance between top of studs and structure, and connect studs to track using specified mechanical devices in accordance with manufacturer's instructions; verify free movement of top of stud connections; do not leave studs unattached to track.
- D. Openings: Reinforce openings as required for weight of doors or operable panels, using not less than double studs at jambs.
- E. Connections: Minimum (4) #12 screws per connection of cold formed metal framing members.
- F. Blocking: Install blocking for support of plumbing fixtures, toilet partitions, wall cabinets, wood frame openings, toilet accessories, and hardware. Comply with Section 06 10 00 for wood blocking.

3.03 ACOUSTIC ACCESSORIES INSTALLATION

- A. Acoustic Insulation: Place tightly within spaces, around cut openings, behind and around electrical and mechanical items within partitions, and tight to items passing through partitions.
- B. Acoustic Sealant: Install as follows:
 - 1. Place two beads continuously on substrate before installation of perimeter framing members.
 - 2. Place continuous bead at perimeter of each layer of gypsum board.
 - 3. In non-fire-rated construction, seal around all penetrations by conduit, pipe, ducts, and rough-in boxes; and other penetrations.

3.04 BOARD INSTALLATION

- A. Comply with ASTM C 840 and manufacturer's instructions. Install to minimize butt end joints, especially in highly visible locations.
- B. Single-Layer Non-Rated: Install gypsum board in most economical direction, with ends and edges occurring over firm bearing.
 - 1. Exception: Tapered edges to receive joint treatment at right angles to framing.
- C. Installation on Metal Framing: Use screws for attachment of all gypsum board except face layer of non-rated double-layer assemblies, which may be installed by means of adhesive lamination.
- D. Curved Surfaces: Apply gypsum board to curved substrates in accordance with GA-226.

3.05 INSTALLATION OF TRIM AND ACCESSORIES

- A. Control Joints: Place control joints consistent with lines of building spaces and as directed.
 - 1. Not more than 30 feet apart on walls and ceilings over 50 feet long.
- B. Corner Beads: Install at external corners, using longest practical lengths.
- C. Edge Trim: Install at locations where gypsum board abuts dissimilar materials and as indicated.

3.06 JOINT TREATMENT

- A. Paper Faced Gypsum Board: Use fiberglass joint tape, bedded with ready-mixed vinyl-based; or powder-type vinyl-based; or chemical hardening type joint compound and finished with ready-mixed vinyl-based; or powder-type vinyl-based; or chemical hardening type joint compound.
- B. Finish gypsum board in accordance with levels defined in ASTM C840, as follows:
 - 1. Level 4: Walls and ceilings to receive paint finish or wall coverings, unless otherwise indicated.
 - 2. Level 2: In utility areas, behind cabinetry, and on backing board to receive tile finish or where FRP panel to be installed.
 - 3. Level 1: Fire rated wall areas above finished ceilings, whether or not accessible in the completed construction.
- C. Finish gypsum board in scheduled areas in accordance with levels defined in GA-214; or ASTM C 840 and as scheduled below.
 - 1. Above Finished Ceilings Concealed From View: Level 1.
 - 2. Utility Areas and Areas Behind Cabinetry: Level 2.
 - 3. Walls and Ceilings to Receive Flat Paint Finish: Level 4.
- D. Tape, fill, and sand exposed joints, edges, and corners to produce smooth surface ready to receive finishes.
 - 1. Feather coats of joint compound so that camber is maximum 1/32 inch.
 - 2. Taping, filling, and sanding is not required at surfaces behind adhesive applied ceramic tile and fixed cabinetry.
 - 3. Taping, filling and sanding is not required at base layer of double layer applications.

3.07 TOLERANCES

- A. Maximum Variation of Finished Gypsum Board Surface from True Flatness: 1/8 inch in 10 feet in any direction.

3.08 FINISH LEVEL SCHEDULE (SEE 1.03 REFERENCES FOR DEFINITION)

- A. Level 1: Above finished ceilings concealed from view.
- B. Level 2: Utility areas and areas behind cabinetry or where FRP will be applied.
- C. Level 4: Walls and ceilings scheduled to receive flat paint finish.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 09 30 00

TILING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Tile for floor applications.
- B. Tile for wall applications.
- C. Ceramic trim.

1.02 RELATED REQUIREMENTS

- A. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 01 74 19 - Construction Waste Management and Disposal: Limitations on disposal of removed materials; requirements for recycling.
- C. Section 07 90 05 - Joint Sealers.
- D. Section 09 05 61 - Common Work Results for Flooring Preparation: Concrete slab moisture and alkalinity testing and remediation procedures.

1.03 REFERENCE STANDARDS

- A. ANSI A108/A118/A136.1 - American National Standard Specifications for the Installation of Ceramic Tile (Compendium).
 - 1. ANSI A108.1a - American National Standard Specifications for Installation of Ceramic Tile in the Wet-Set Method, with Portland Cement Mortar.
 - 2. ANSI A108.1b - American National Standard Specifications for Installation of Ceramic Tile on a Cured Portland Cement Mortar Setting Bed with Dry-Set or Latex-Portland Cement Mortar.
 - 3. ANSI A108.1c - Specifications for Contractors Option: Installation of Ceramic Tile in the Wet-Set Method with Portland Cement Mortar or Installation of Ceramic Tile on a Cured Portland Cement Mortar Bed with Dry-Set or Latex-Portland Cement.
 - 4. ANSI A108.4 - American National Standard Specifications for Installation of Ceramic Tile with Organic Adhesives or Water Cleanable Tile-Setting Epoxy Adhesive.
 - 5. ANSI A108.5 - American National Standard Specifications for Installation of Ceramic Tile with Dry-Set Portland Cement Mortar or Latex-Portland Cement Mortar.
 - 6. ANSI A108.6 - American National Standard Specifications for Installation of Ceramic Tile with Chemical Resistant, Water Cleanable Tile-Setting and -Grouting Epoxy.
 - 7. ANSI A108.8 - American National Standard Specifications for Installation of Ceramic Tile with Chemical Resistant Furan Resin Mortar and Grout.
 - 8. ANSI A108.9 - American National Standard Specifications for Installation of Ceramic Tile with Modified Epoxy Emulsion Mortar/Grout.
 - 9. ANSI A108.10 - American National Standard Specifications for Installation of Grout in Tilework.
 - 10. ANSI A108.11-SystemDeleted - American National Standard for Interior Installation of Cementitious Backer Units.
 - 11. ANSI A108.12 - American National Standard for Installation of Ceramic Tile with EGP (Exterior glue plywood) Latex-Portland Cement Mortar.
 - 12. ANSI A108.13 - American National Standard for Installation of Load Bearing, Bonded, Waterproof Membranes for Thin-Set Ceramic Tile and Dimension Stone.
 - 13. ANSI A118.1 - American National Standard Specifications for Dry-Set Cement Mortar.
 - 14. ANSI A118.4 - American National Standard Specifications for Modified Dry-Set Cement Mortar.
 - 15. ANSI A118.5 - American National Standard Specifications for Chemical Resistant Furan Mortars and Grouts for Tile Installation.

16. ANSI A118.6 - American National Standard Specifications for Standard Cement Grouts for Tile Installation.
17. ANSI A118.7 - American National Standard Specifications for High Performance Cement Grouts for Tile Installation.
18. ANSI A118.10 - American National Standard Specifications for Load Bearing, Bonded, Waterproof Membranes For Thin-Set Ceramic Tile And Dimension Stone Installation.
- B. ANSI A118.15 - American National Standard Specifications for Improved Modified Dry-Set Cement Mortar.
- C. TCNA (HB) - Handbook for Ceramic, Glass, and Stone Tile Installation.

1.04 SUBMITTALS

- A. See Section 01 33 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide manufacturers' data sheets on tile, mortar, grout, and accessories. Include instructions for using grouts and adhesives.
- C. Shop Drawings: Indicate tile layout, patterns, color arrangement, perimeter conditions, junctions with dissimilar materials, control and expansion joints, thresholds, ceramic accessories, and setting details.
- D. Samples: Mount tile and apply grout on two plywood panels, minimum 18 x 18 inches in size illustrating pattern, color variations, and grout joint size variations.
- E. Manufacturer's Certificate: Certify that products meet or exceed specified requirements.
- F. Installer's Qualification Statement:
- G. Maintenance Data: Include recommended cleaning methods, cleaning materials, stain removal methods, and polishes and waxes.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the types of products specified in this section, with minimum 10 years of documented experience.
- B. Installer Qualifications: Company specializing in performing tile installation, with minimum of 5 years of documented experience.

1.06 MOCK-UP

- A. See Section 01 40 00 - Quality Requirements, for general requirements for mock-up.
- B. Construct tile mock-up where indicated on the drawings, incorporating all components specified for the location.
 1. Minimum size of mock-up is indicated on the drawings.
 2. Approved mock-up may remain as part of the Work.
 3. Demolish mock-up when directed by Architect, and remove debris from the site.

1.07 PRE-INSTALLATION MEETING

- A. Convene one week before starting work of this section.

1.08 DELIVERY, STORAGE, AND HANDLING

- A. Protect materials from freezing or overheating in accordance with manufacturer's instructions.

1.09 FIELD CONDITIONS

- A. Do not install solvent-based products in an unventilated environment.
- B. Maintain ambient and substrate temperature of 50 degrees F during installation of mortar materials.

1.10 EXTRA MATERIALS

- A. Provide 2 percent (or one box, minimum) of each size, color, and surface finish of tile specified.

PART 2 PRODUCTS

2.01 TILE

- A. Manufacturers: All products by the same manufacturer.
 - 1. American Olean Corporation: www.americanolean.com/#sle.
 - 2. Dal-Tile Corporation: www.daltile.com.
 - 3. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Porcelain Tile: ANSI A137.1, standard grade.
 - 1. Harmonist manufactured by Daltile.
 - 2. Moisture Absorption: 0 to 0.5 percent as tested in accordance with ASTM C373.
 - 3. Size: 12 by 12 inch, nominal.
 - 4. Thickness: 3/8 inch.
 - 5. Edges: Cushioned.
 - 6. Surface Finish: Unglazed.
 - 7. Color(s): To be selected by Architect from manufacturer's full range.
- C. Glazed Wall Tile : ANSI A137.1, and as follows:
 - 1. Color Wheel Collection manufactured by Daltile .
 - 2. Allow 4 to 6 week lead time.
 - 3. Moisture Absorption: 3.0 to 7.0 percent.
 - 4. Size and Shape: 4-1/4 inch square.
 - 5. Edges: Cushioned.
 - 6. Surface Finish: High gloss.
 - 7. Pattern: (3) color random pattern.
 - 8. Trim Units: Matching bullnose, cove, and base shapes in sizes coordinated with field tile.

2.02 TRIM AND ACCESSORIES

- A. Non-Ceramic Trim: Brushed stainless steel, style and dimensions to suit application, as indicated on drawings for setting using tile mortar or adhesive.
 - 1. Applications: Use in the following locations:
 - a. Open edges of floor tile.
 - b. Transition between floor finishes of different heights.
 - c. Expansion and control joints, floor and wall.
 - d. Floor to wall joints.
 - 2. Manufacturer:
 - a. Schluter-Systems: www.schluter.com/#sle.
 - b. Substitutions: See Section 01 60 00 - Product Requirements.

2.03 SETTING MATERIALS

- A. Provide setting and grout materials from same manufacturer.
- B. Manufacturers:
 - 1. ARDEX Engineered Cements: www.ardexamericas.com/#sle.
 - 2. Bostik Inc: www.bostik-us.com/#sle.
 - 3. LATICRETE International, Inc: www.laticrete.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- C. Improved Latex-Portland Cement Mortar Bond Coat: ANSI A118.15.

2.04 ADHESIVE MATERIALS

- A. Manufacturers:
 - 1. LATICRETE International, Inc; LATICRETE 254 Platinum: www.laticrete.com.
 - 2. Substitutions: See Section 01 60 00 - Product Requirements.

2.05 GROUTS

- A. Manufacturers:
 - 1. ARDEX Engineered Cements: www.ardexamericas.com/#sle.
 - 2. Bostik Inc; Product Hydroment Plus: www.bostik-us.com/#sle.
 - 3. LATICRETE International, Inc; LATICRETE PERMACOLOR Grout: www.laticrete.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. High Performance Polymer Modified Grout: ANSI A118.7 polymer modified cement grout.
 - 1. Applications: Use this type of grout where indicated and where no other type of grout is indicated.
 - 2. Use sanded grout for joints 1/8 inch wide and larger; use unsanded grout for joints less than 1/8 inch wide.
 - 3. Color(s): As selected by Architect from manufacturer's full line.
- C. Standard Grout: Polymer modified cement grout, sanded, as specified in ANSI A118.7.

2.06 MAINTENANCE MATERIALS

- A. Grout Sealer: Liquid-applied, moisture and stain protection for existing or new Portland cement grout.
 - 1. Composition: Water-based colorless silicone.

2.07 THIN-SET ACCESSORY MATERIALS

- A. Floor Patch/Leveler
 - 1. Acceptable Product: Bostik, Floor Patch 101.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that sub-floor surfaces are smooth and flat within the tolerances specified for that type of work and are ready to receive tile.
- B. Verify that wall surfaces are smooth and flat within the tolerances specified for that type of work, are dust-free, and are ready to receive tile.
- C. Verify that sub-floor surfaces are dust-free and free of substances that could impair bonding of setting materials to sub-floor surfaces.
- D. Cementitious Subfloor Surfaces: Verify that substrates are ready for tiling installation by testing for moisture and alkalinity (pH).
 - 1. Obtain instructions if test results are not within limits recommended by tiling material manufacturer and setting material manufacturer.
- E. Verify that concrete sub-floor surfaces are ready for tile installation by testing for moisture emission rate and alkalinity; obtain instructions if test results are not within limits recommended by tile manufacturer and setting materials manufacturer.
- F. Verify that required floor-mounted utilities are in correct location.

3.02 PREPARATION

- A. Protect surrounding work from damage.
- B. Vacuum clean surfaces and damp clean.
- C. Seal substrate surface cracks with filler. Level existing substrate surfaces to acceptable flatness tolerances. With floor patch leveler.

3.03 INSTALLATION - GENERAL

- A. Install tile, thresholds, and stair treads and grout in accordance with applicable requirements of ANSI A108.1 through A108.13, manufacturer's instructions, and The Tile Council of North America Handbook recommendations.
- B. Lay tile to pattern indicated. Do not interrupt tile pattern through openings.
- C. Cut and fit tile to penetrations through tile, leaving sealant joint space. Form corners and bases neatly. Align floor joints.
- D. Place tile joints uniform in width, subject to variance in tolerance allowed in tile size. Make grout joints without voids, cracks, excess mortar or excess grout, or too little grout.
- E. Form internal angles square and external angles bullnosed.
- F. Sound tile after setting. Replace hollow sounding units.
- G. Keep expansion joints free of adhesive or grout. Apply sealant to joints.
- H. Prior to grouting, allow installation to completely cure; minimum of 48 hours.
- I. Grout tile joints. Use standard grout unless otherwise indicated.
- J. Apply sealant to junction of tile and dissimilar materials and junction of dissimilar planes.

3.04 INSTALLATION - FLOORS - THIN-SET METHODS

- A. Over concrete substrates, install in accordance with TCA Handbook Method F122, dry-set or latex-portland cement bond coat, over crack - isolation membrane with standard grout, unless otherwise indicated.

3.05 INSTALLATION - WALL TILE

- A. Over interior concrete and masonry install in accordance with The Tile Council of North America Handbook Method W202, thin-set with dry-set or latex-Portland cement bond coat.

3.06 CLEANING

- A. Clean tile and grout surfaces.

3.07 PROTECTION

- A. Do not permit traffic over finished floor surface for 4 days or manufacturer's recommended curing time after installation.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 09 51 00
ACOUSTICAL CEILINGS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Suspended metal grid ceiling system.
- B. Acoustical units.
- C. Support hangers, channels, and wires.
- D. Supplementary acoustical insulation above ceiling.

1.02 RELATED REQUIREMENTS

- A. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 01 74 19 - Construction Waste Management and Disposal: Limitations on disposal of removed materials; requirements for recycling.
- C. Section 07 21 00 - Thermal Insulation: Acoustical insulation.
- D. Section 23 37 00 - Air Outlets and Inlets: Air diffusion devices in ceiling.
- E. Section 26 51 00 - Interior Lighting: Light fixtures in ceiling system.

1.03 REFERENCE STANDARDS

- A. ASTM C635/C635M - Standard Specification for the Manufacture, Performance, and Testing of Metal Suspension Systems for Acoustical Tile and Lay-in Panel Ceilings.
- B. ASTM C636/C636M - Standard Practice for Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-In Panels.
- C. ASTM E1264 - Standard Classification for Acoustical Ceiling Products.

1.04 SUBMITTALS

- A. See Section 01 33 00 - Submittal Procedures, for submittal procedures.
- B. Shop Drawings: Indicate grid layout and related dimensioning, junctions with other ceiling finishes, and mechanical and electrical items installed in the ceiling.
- C. Product Data: Provide data on suspension system components, acoustical units, and supplementary acoustical insulation.
- D. Samples: Submit two samples 4x4 inch in size illustrating material and finish of acoustical units.
- E. Samples: Submit two samples each, 6 inches long, of suspension system main runner, cross runner, and perimeter molding.
- F. Manufacturer's Installation Instructions: Indicate special procedures and perimeter conditions requiring special attention.
- G. Designer's Qualification Statement.
- H. Manufacturer's Qualification Statement.

1.05 QUALITY ASSURANCE

- A. Suspension System Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum ten years documented experience.
- B. Acoustical Unit Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum five years documented experience.

1.06 FIELD CONDITIONS

- A. Maintain uniform temperature of minimum 60 degrees F, and maximum humidity of 40 percent prior to, during, and after acoustical unit installation.

1.07 PROJECT CONDITIONS

- A. Sequence work to ensure acoustical ceilings are not installed until building is enclosed, sufficient heat is provided, dust generating activities have terminated, and overhead work is completed, tested, and approved.
- B. Install acoustical units after interior wet work is dry.

1.08 EXTRA MATERIALS

- A. See Section 01 60 00 - Product Requirements, for additional provisions.
- B. Extra Acoustic Units: Quantity equal to 5 percent, of each type and size, of total installed (or one box, minimum).

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Acoustic Tiles/Panels:
 - 1. Armstrong World Industries, Inc: www.armstrongceilings.com/#sle.
 - 2. CertainTeed Corporation: www.certainteed.com/#sle.
 - 3. USG Corporation: www.usg.com/ceilings/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 ACOUSTICAL UNITS

- A. Acoustical Units - General: ASTM E1264, Class A.
- B. Acoustical Tile Type A: Painted mineral fiber, ASTM E 1264 Type III, with to the following characteristics:
 - 1. VOC Content: As specified in Section 01 61 16.
 - 2. Size: 24 x 48 inches.
 - 3. Thickness: 3/4 inches.
 - 4. Edge: Square.
 - 5. Surface Color: White.
 - 6. Surface Pattern: Fine fissured.
 - 7. Product: School Zone Fine Fissured #1714 by Armstrong.
 - 8. Suspension System: See specifications below. Where indicated only, provide Axiom Knife Edge profile, color white at Integrated Arts Studio.
- C. Acoustical Tile Type B: Washable faced mineral fiber, ASTM E 1264 Type IV, with the following characteristics:
 - 1. VOC Content: As specified in Section 01 61 16.
 - 2. Size: 24 x 48 inches.
 - 3. Thickness: 5/8 inches.
 - 4. Edge: Square.
 - 5. Surface Color: White.
 - 6. Surface Pattern: Unperforated.
 - 7. Product: Ceramaguard #605 by Armstrong.

2.03 SUSPENSION SYSTEM(S) UNLESS NOTED OTHERWISE ABOVE.

- A. Manufacturers:
 - 1. Same as for acoustical units.
- B. Suspension Systems - General: ASTM C 635; die cut and interlocking components, with stabilizer bars, clips, splices, perimeter moldings, and hold down clips as required.
- C. Exposed Tee Steel Suspension System: Formed galvanized steel, commercial quality cold rolled; heavy-duty.
 - 1. Profile: Tee; for square edge panels 15/16 inch wide face.

2. Construction: Double web.
3. Finish: White painted.
4. Product: Prelude XL, 15/16" by Armstrong.

2.04 ACCESSORIES

- A. Support Channels and Hangers: Galvanized steel; size and type to suit application and ceiling system flatness requirement specified.
- B. Perimeter Moldings: Same material and finish as grid.
- C. Acoustical Sealant For Perimeter Moldings: Specified in Section 07 90 05.
- D. Gasket For Perimeter Moldings: Closed cell rubber sponge tape.
- E. Touch-up Paint: Type and color to match acoustical and grid units.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify existing conditions before starting work.
- B. Verify that layout of hangers will not interfere with other work.

3.02 INSTALLATION - SUSPENSION SYSTEM

- A. Install suspension system in accordance with ASTM C 636, ASTM E 580, and manufacturer's instructions and as supplemented in this section.
- B. Rigidly secure system, including integral mechanical and electrical components, for maximum deflection of 1:240.
- C. Lay out system to a balanced grid design with edge units no less than 50 percent of acoustical unit size.
- D. Locate system on room axis according to reflected plan.
- E. Install after major above-ceiling work is complete. Coordinate the location of hangers with other work.
- F. Hang suspension system independent of walls, columns, ducts, pipes and conduit. Where carrying members are spliced, avoid visible displacement of face plane of adjacent members.
- G. Where ducts or other equipment prevent the regular spacing of hangers, reinforce the nearest affected hangers and related carrying channels to span the extra distance.
- H. Do not support components on main runners or cross runners if weight causes total dead load to exceed deflection capability.
- I. Support fixture loads using supplementary hangers located within 6 inches of each corner, or support components independently.
- J. Do not eccentrically load system or induce rotation of runners.
- K. Perimeter Molding: Install at intersection of ceiling and vertical surfaces and at junctions with other interruptions.
 1. Install in bed of acoustical sealant or in bed of acoustical sealant.
 2. Use longest practical lengths.
 3. Miter or Overlap and rivet corners.
- L. Form expansion joints as detailed. Form to accommodate plus or minus 1 inch movement. Maintain visual closure.

3.03 INSTALLATION - ACOUSTICAL UNITS

- A. Install acoustical units in accordance with manufacturer's instructions.
- B. Fit acoustical units in place, free from damaged edges or other defects detrimental to appearance and function.

- C. Fit border trim neatly against abutting surfaces.
- D. Install units after above-ceiling work is complete.
- E. Install acoustical units level, in uniform plane, and free from twist, warp, and dents.
- F. Cutting Acoustical Units:
 - 1. Cut to fit irregular grid and perimeter edge trim.
 - 2. Make field cut edges of same profile as factory edges.
 - 3. Double cut and field paint exposed reveal edges.
- G. Where round obstructions and bullnose corners occur, provide preformed closures to match perimeter molding.
- H. Install hold-down clips on panels within 20 ft of an exterior door.

3.04 TOLERANCES

- A. Maximum Variation from Flat and Level Surface: 1/8 inch in 10 feet.
- B. Maximum Variation from Plumb of Grid Members Caused by Eccentric Loads: 2 degrees.

END OF SECTION

SECTION 09 65 00
RESILIENT FLOORING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Resilient base.
- B. Installation accessories.

1.02 RELATED REQUIREMENTS

- A. Section 09 05 61 - Common Work Results for Flooring Preparation: Concrete slab moisture and alkalinity testing and remediation procedures.

1.03 REFERENCE STANDARDS

- A. ASTM E648 - Standard Test Method for Critical Radiant Flux of Floor-Covering Systems Using a Radiant Heat Energy Source.
- B. ASTM F710 - Standard Practice for Preparing Concrete Floors to Receive Resilient Flooring.
- C. ASTM F1066 - Standard Specification for Vinyl Composition Floor Tile.
- D. ASTM F1861 - Standard Specification for Resilient Wall Base.
- E. RFCI (RWP) - Recommended Work Practices for Removal of Resilient Floor Coverings; Resilient Floor Covering Institute.
- F. SCAQMD 1168 - South Coast Air Quality Management District Rule No.1168; www.aqmd.gov.
- G. SCS (CPD) - SCS Certified Products; Scientific Certification Systems.

1.04 SUBMITTALS

- A. See Section 01 33 00 - Submittal Procedures, for submittal procedures.
- B. Product Data: Provide data on specified products, describing physical and performance characteristics; including sizes, patterns and colors available; and installation instructions.
- C. Selection Samples: Submit manufacturer's complete set of color samples for Architect's initial selection.
- D. Maintenance Data: Include maintenance procedures, recommended maintenance materials, and suggested schedule for cleaning, stripping, and re-waxing.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing specified flooring with minimum ten years documented experience.
- B. Installer Qualifications: Company specializing in installing specified flooring with minimum five years documented experience.
- C. Testing Agency Qualifications: Independent firm specializing in performing concrete slab moisture testing and inspections of the type specified in this section.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Upon receipt, immediately remove any shrink-wrap and check materials for damage and the correct style, color, quantity and run numbers.
- B. Store all materials off of the floor in an acclimatized, weather-tight space.
- C. Protect roll materials from damage by storing on end.
- D. Do not double stack pallets.

1.07 FIELD CONDITIONS

- A. Maintain temperature in storage area between 55 degrees F and 90 degrees F.

- B. Store materials for not less than 48 hours prior to installation in area of installation at a temperature of 70 degrees F to achieve temperature stability. Thereafter, maintain conditions above 55 degrees F.

1.08 EXTRA MATERIALS

- A. See Section 01 60 00 - Product Requirements, for additional provisions.
- B. Provide [20] lineal feet of base, of each type and color specified.

PART 2 PRODUCTS

2.01 RESILIENT BASE

- A. Resilient Base: ASTM F 1861, Type TS rubber, vulcanized thermoset; top set cover and as follows:
 - 1. Critical Radiant Flux (CRF): Minimum 0.45 watt per square centimeter, when tested in accordance with ASTM E 648 or NFPA 253.
 - 2. Height: 4 inch.
 - 3. Thickness: 0.125 inch thick.
 - 4. Finish: Matte.
 - 5. Length: Roll.
 - 6. Color: Color as selected from manufacturer's standards.
 - 7. Accessories: Premolded external corners and end stops.
 - 8. Manufacturers:
 - a. Burke Flooring: www.burkemercer.com.
 - b. Johnsonite, Inc: www.johnsonite.com.
 - c. Roppe Corp: www.roppe.com.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 ACCESSORIES

- A. Moldings and Edge Strips: Rubber.
 - 1. Manufacturers:
 - a. Burke Flooring: www.burkeflooring.com/#sle.
 - b. Johnsonite, Inc: www.johnsonite.com.
 - c. Roppe Corp: www.roppe.com.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Filler for Coved Base: Plastic or as recommended by manufacturer.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that wall surfaces are smooth and flat within the tolerances specified for that type of work, are dust-free, and are ready to receive resilient base.

3.02 RESILIENT BASE

- A. Fit joints tightly and make vertical. Maintain minimum dimension of 48 inches between joints.
- B. Miter internal corners. At external corners, use premolded units. At exposed ends, use premolded units.
- C. Install base on solid backing. Bond tightly to wall and floor surfaces.
- D. Scribe and fit to door frames and other interruptions.

3.03 CLEANING

- A. Clean in accordance with manufacturer's instructions.

END OF SECTION

SECTION 09 65 66
RESILIENT ATHLETIC FLOORING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Rubber sheet flooring, adhesively installed.

1.02 RELATED REQUIREMENTS

- A. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 03 30 00 - Cast-in-Place Concrete: Restrictions on curing compounds for concrete slabs and floors to receive adhesive-applied flooring.

1.03 REFERENCE STANDARDS

- A. ASTM D412 - Standard Test Methods for Vulcanized Rubber and Thermoplastic Elastomers--Tension.
- B. ASTM D2240 - Standard Test Method for Rubber Property--Durometer Hardness.
- C. ASTM F710 - Standard Practice for Preparing Concrete Floors to Receive Resilient Flooring.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Manufacturer's printed data sheets for products specified.
- C. Shop Drawings: Fabrication and installation details, and layout, colors, and widths of game lines and equipment locations.
- D. Selection Samples: Manufacturer's color charts for flooring materials specified, indicating full range of colors and textures available.

1.05 QUALITY ASSURANCE

- A. Installer Qualifications: An experienced installer certified in writing by the flooring manufacturer to be qualified for installation of specified flooring system and with five years of documented experience.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Deliver materials to project site in unopened containers clearly labeled with manufacturer's name and identification of contents.
- B. Store materials in dry and clean location until needed for installation. During installation, handle in a manner that will prevent marring and soiling of finished surfaces.

1.07 FIELD CONDITIONS

- A. Maintain temperature in spaces to receive adhesively installed resilient flooring within range of 70 to 95 degrees F for not less than 48 hours before the beginning of installation and for not less than 48 hours after installation has been completed. Subsequently, do not allow temperature in installed spaces to drop below 50 degrees F or to go above 100 degrees F.

PART 2 PRODUCTS

2.01 PREFORMED ATHLETIC FLOORING

- A. Manufacturers: All products by the same manufacturer.
 - 1. Burke Flooring: www.burkeflooring.com/#sle.
 - 2. Ultimate RB: www.ultimaterb.com/#sle.
 - 3. Regupol America LLC; www.regupolamerica.com.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.

- B. Rubber Tile Flooring: Recycled SBR (styrene butadiene rubber) and colored EPDM granules with urethane binder.
 - 1. VOC Content: As specified in Section 01 61 16.
 - 2. Thickness: Minimum 1/2 inch.
 - 3. Size: Nominal 48 inch wide rolls.
 - 4. Tensile Strength: Minimum 150 psi, per ASTM D412.
 - 5. Surface Texture: Smooth.
 - 6. Color: As selected from manufacturer's standard range.
 - 7. Products:
 - a. Burke Flooring; Ecofitness Athletic Rubber Flooring: www.burkeflooring.com/#sle.
 - b. Ultimate RB; Ultimate Tough: www.ultimaterb.com/#sle.
 - c. Regupol America LLC; AktivPlus 10000 Series: www.regupolamerica.com.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 ACCESSORIES

- A. Leveling Compound: Latex-modified cement formulation as recommended by flooring manufacturer for substrate conditions.
- B. Flooring Adhesive: Waterproof; types recommended by flooring manufacturer.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Examine substrates for conditions detrimental to installation of athletic flooring. Proceed with installation only after unsatisfactory conditions have been corrected.
- B. Verify that surfaces are flat to tolerances acceptable to flooring manufacturer, free of cracks that might telegraph through flooring, clean, dry, and free of curing compounds, surface hardeners, and other chemicals that might interfere with bonding of athletic flooring to substrate.
- C. Cementitious Subfloor Surfaces: Verify that substrates are ready for resilient flooring installation by testing for moisture and alkalinity (pH).
 - 1. Obtain instructions if test results are not within limits recommended by resilient flooring manufacturer and adhesive materials manufacturer.

3.02 PREPARATION

- A. Prepare floor substrates as recommended by flooring and adhesive manufacturers.
- B. Concrete: Use leveling compound as necessary to achieve substrate flatness of plus or minus 1/8 inch within 10 ft radius.
- C. Remove coatings that are incompatible with flooring adhesives, using methods recommended by flooring manufacturer.
- D. Broom clean areas to receive athletic flooring immediately before beginning installation.

3.03 INSTALLATION

- A. Starting installation constitutes acceptance of subfloor conditions.
- B. Install in accordance with manufacturer's written instructions.
- C. Rubber Tile Flooring:
 - 1. Lay out center lines in spaces to receive tile flooring, based on location of principal walls. Start tile installation from center, and adjust as necessary to avoid tiles less than one-half width at perimeter.
 - 2. Lay tiles square with room axis, matching for color and pattern by selecting from cartons and mixing as recommended by manufacturer.
 - 3. Spread only enough adhesive to permit installation of materials before initial set.
 - 4. Fit joints and butt seams tightly; press with heavy roller to attain full adhesion.

3.04 CLEANING

- A. Clean flooring using methods recommended by manufacturer.

3.05 PROTECTION

- A. Protect finished athletic flooring from construction traffic to ensure that it is without damage upon Date of Substantial Completion.

END OF SECTION

NOT FOR BIDDING

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 09 90 00
PAINTS AND COATINGS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Surface preparation.
- B. Field application of paints and other coatings.
- C. Scope: Finish all interior and exterior surfaces exposed to view, unless fully factory-finished and unless otherwise indicated.
 - 1. Both sides and edges of plywood backboards for electrical and telecom equipment before installing equipment.
 - 2. Exposed surfaces of steel lintels and ledge angles.
 - 3. Mechanical and Electrical:
 - a. In finished areas, paint all insulated and exposed pipes, conduit, boxes, insulated and exposed ducts, hangers, brackets, collars and supports, mechanical equipment, and electrical equipment, unless otherwise indicated.
 - b. In finished areas, paint shop-primed items.
- D. Do Not Paint or Finish the Following Items:
 - 1. Items fully factory-finished unless specifically so indicated; materials and products having factory-applied primers are not considered factory finished.
 - 2. Items indicated to receive other finishes.
 - 3. Items indicated to remain unfinished.
 - 4. Fire rating labels, equipment serial number and capacity labels, and operating parts of equipment.
 - 5. Stainless steel, anodized aluminum, bronze, terne, and lead items.
 - 6. Floors, unless specifically so indicated.
 - 7. Glass.
 - 8. Acoustical materials, unless specifically so indicated.
 - 9. Concealed pipes, ducts, and conduits.
- E. Painting materials and methods for conduit identification specified in Section 26 05 53.

1.02 RELATED REQUIREMENTS

- A. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 01 74 19 - Construction Waste Management and Disposal: Limitations on disposal of removed materials; requirements for recycling.

1.03 REFERENCE STANDARDS

- A. 40 CFR 59, Subpart D - National Volatile Organic Compound Emission Standards for Architectural Coatings; U.S. Environmental Protection Agency.
- B. ASTM D16 - Standard Terminology for Paint, Related Coatings, Materials, and Applications.
- C. NACE (IMP) - Industrial Maintenance Painting; NACE International; Edition date unknown.
- D. SSPC (PM1) - Good Painting Practice: SSPC Painting Manual, Vol. 1; Society for Protective Coatings.

1.04 DEFINITIONS

- A. Conform to ASTM D 16 for interpretation of terms used in this section.

1.05 SUBMITTALS

- A. See Section 01 33 00 - Submittal Procedures, for submittal procedures.

- B. Product Data: Provide data on all finishing products and special coatings, including VOC content.
- C. Samples: Submit two paper chip samples, 1 X 1 inch in size illustrating range of colors and textures available for each surface finishing product scheduled.
- D. Samples: Submit two painted samples, illustrating selected colors and textures for each color and system selected with specified coats cascaded. Submit on aluminum sheet, 6 x 6 inch in size.
- E. Certification: By manufacturer that all paints and coatings comply with VOC limits specified.
- F. Certification: By manufacturer that all paints and coatings do not contain any of the prohibited chemicals specified; GreenSeal GS-11 certification is not required but if provided shall constitute acceptable certification.
- G. Manufacturer's Instructions: Indicate special surface preparation procedures and substrate conditions requiring special attention.
- H. Maintenance Data: Submit data on cleaning, touch-up, and repair of painted and coated surfaces.

1.06 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the products specified, with minimum ten years documented experience.
- B. Applicator Qualifications: Company specializing in performing the type of work specified with minimum five years experience.

1.07 REGULATORY REQUIREMENTS

- A. Conform to applicable code for flame and smoke rating requirements for products and finishes.

1.08 MOCK-UP

- A. See Section 01 40 00 - Quality Requirements, for general requirements for mock-up.
- B. Provide panel, 10 feet long by 8 feet wide, illustrating coating color, texture, and finish.
- C. Provide door and frame assembly illustrating coating color, texture, and finish.
- D. Locate where directed.
- E. Mock-up may remain as part of the work.

1.09 DELIVERY, STORAGE, AND HANDLING

- A. Deliver products to site in sealed and labeled containers; inspect to verify acceptability.
- B. Container Label: Include manufacturer's name, type of paint, brand name, lot number, brand code, coverage, surface preparation, drying time, cleanup requirements, color designation, and instructions for mixing and reducing.
- C. Paint Materials: Store at minimum ambient temperature of 45 degrees F and a maximum of 90 degrees F, in ventilated area, and as required by manufacturer's instructions.

1.10 FIELD CONDITIONS

- A. Do not apply materials when surface and ambient temperatures are outside the temperature ranges required by the paint product manufacturer.
- B. Follow manufacturer's recommended procedures for producing best results, including testing of substrates, moisture in substrates, and humidity and temperature limitations.
- C. Minimum Application Temperatures for Latex Paints: 45 degrees F for interiors; 50 degrees F for exterior; unless required otherwise by manufacturer's instructions.
- D. Minimum Application Temperature for Varnish Finishes: 65 degrees F for interior or exterior, unless required otherwise by manufacturer's instructions.

- E. Provide lighting level of 80 ft candles measured mid-height at substrate surface.

1.11 EXTRA MATERIALS

- A. See Section 01 60 00 - Product Requirements, for additional provisions.
- B. Supply 1 gallon of each color; store where directed.
- C. Label each container with color, type, texture, and room locations in addition to the manufacturer's label.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Provide all paint and coating products used in any individual system from the same manufacturer; no exceptions.
- B. Paints:
 - 1. ICI Paints North America: www.icipaints.com
 - 2. Duron, Inc: www.duron.com/#sle.
 - 3. Sherwin Williams: www.sherwin-williams.com
 - 4. Benjamin Moore & Co: www.benjaminmoore.com/#sle.
- C. Field-Catalyzed Coatings:
- D. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 PAINTS AND COATINGS - GENERAL

- A. Paints and Coatings: Ready mixed, unless intended to be a field-catalyzed coating.
 - 1. Provide paints and coatings of a soft paste consistency, capable of being readily and uniformly dispersed to a homogeneous coating, with good flow and brushing properties, and capable of drying or curing free of streaks or sags.
 - 2. For opaque finishes, tint each coat including primer coat and intermediate coats, one-half shade lighter than succeeding coat, with final finish coat as base color.
 - 3. Supply each coating material in quantity required to complete entire project's work from a single production run.
 - 4. Do not reduce, thin, or dilute coatings or add materials to coatings unless such procedure is specifically described in manufacturer's product instructions.
- B. Primers: Where the manufacturer offers options on primers for a particular substrate, use primer categorized as "best" by the manufacturer.
- C. Volatile Organic Compound (VOC) Content: Comply with Section 01 61 16.
- D. Chemical Content: The following compounds are prohibited:
 - 1. Aromatic Compounds: In excess of 1.0 percent by weight of total aromatic compounds (hydrocarbon compounds containing one or more benzene rings).
 - 2. Acrolein, acrylonitrile, antimony, benzene, butyl benzyl phthalate, cadmium, di (2-ethylhexyl) phthalate, di-n-butyl phthalate, di-n-octyl phthalate, 1,2-dichlorobenzene, diethyl phthalate, dimethyl phthalate, ethylbenzene, formaldehyde, hexavalent chromium, isophorone, lead, mercury, methyl ethyl ketone, methyl isobutyl ketone, methylene chloride, naphthalene, toluene (methylbenzene), 1,1,1-trichloroethane, vinyl chloride.
- E. Colors: As indicated on drawings
 - 1. Allow for minimum of three colors for each system, unless otherwise indicated, without additional cost to Owner.
 - 2. In finished areas with exposed structure and no ceilings ducts, conduit, and equipment to be painted a separate color from the wall.

2.03 PAINT SYSTEMS - EXTERIOR

- A. Paint CE-OP-3L - Masonry/Concrete, Opaque, Latex, 3 Coat:

1. One coat of block filler.
2. Satin: Two coats of latex enamel.
- B. Paint ME-OP-3A - Ferrous Metals, Unprimed, Alkyd, 3 Coat:
 1. One coat of alkyd primer.
 2. Semi-gloss: Two coats of alkyd enamel.

2.04 PAINT SYSTEMS - INTERIOR

- A. Paint WI-OP-3L - Wood, Opaque, Latex, 3 Coat:
 1. One coat of latex primer sealer.
 2. Semi-gloss: Two coats of latex enamel
- B. Paint WI-TR-V - Wood, Transparent, Varnish, No Stain:
 1. One coat sealer.
 2. Satin: One coat of varnish.
- C. Paint CI-OP-3L - Concrete/Masonry, Opaque, Latex, 3 Coat:
 1. One coat of block filler.
 2. Egg Shell: Two coats of latex enamel.
- D. Paint MI-OP-2L - Ferrous Metals, Primed, Latex, 2 Coat:
 1. Touch-up with latex primer or manufacturer recommended.
 2. Flat: Two coats of latex enamel.
- E. Paint GI-OP-3L - Gypsum Board/Plaster, Latex, 3 Coat:
 1. One coat of alkyd or latex primer sealer.
 2. Eggshell: Two coats of latex enamel.

2.05 ACCESSORY MATERIALS

- A. Accessory Materials: Provide all primers, sealers, cleaning agents, cleaning cloths, sanding materials, and clean-up materials required to achieve the finishes specified whether specifically indicated or not; commercial quality.
- B. Patching Material: Latex filler.
- C. Fastener Head Cover Material: Latex filler.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that surfaces are ready to receive work as instructed by the product manufacturer.
- B. Examine surfaces scheduled to be finished prior to commencement of work. Report any condition that may potentially affect proper application.
- C. Test shop-applied primer for compatibility with subsequent cover materials.
- D. Measure moisture content of surfaces using an electronic moisture meter. Do not apply finishes unless moisture content of surfaces are below the following maximums:
 1. Gypsum Wallboard: 12 percent.
 2. Plaster and Stucco: 12 percent.
 3. Masonry, Concrete, and Concrete Unit Masonry: 12 percent.
 4. Interior Wood: 15 percent, measured in accordance with ASTM D4442.
 5. Concrete Floors and Traffic Surfaces: 8 percent.

3.02 PREPARATION

- A. Clean surfaces thoroughly and correct defects prior to coating application.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.

- C. Remove or mask surface appurtenances, including electrical plates, hardware, light fixture trim, escutcheons, and fittings, prior to preparing surfaces or finishing.
- D. Surfaces: Correct defects and clean surfaces which affect work of this section. Remove or repair existing coatings that exhibit surface defects.
- E. Marks: Seal with shellac or stain blocker those which may bleed through surface finishes.
- F. Remove mildew from impervious surfaces by scrubbing with solution of tetra-sodium phosphate and bleach. Rinse with clean water and allow surface to dry.
- G. Concrete and Unit Masonry Surfaces to be Painted: Remove dirt, loose mortar, scale, salt or alkali powder, and other foreign matter. Remove oil and grease with a solution of tri-sodium phosphate; rinse well and allow to dry. Remove stains caused by weathering of corroding metals with a solution of sodium metasilicate after thoroughly wetting with water. Allow to dry.
- H. Gypsum Board Surfaces to be Painted: Fill minor defects with filler compound. Spot prime defects after repair.
- I. Insulated Coverings to be Painted: Remove dirt, grease, and oil from canvas and cotton.
- J. Aluminum Surfaces to be Painted: Remove surface contamination by steam or high pressure water. Remove oxidation with acid etch and solvent washing. Apply etching primer immediately following cleaning.
- K. Galvanized Surfaces to be Painted: Remove surface contamination and oils and wash with solvent. Apply coat of etching primer.
- L. Corroded Steel and Iron Surfaces to be Painted: Prepare using at least SSPC-PC 2 (hand tool cleaning) or SSPC-SP 3 (power tool cleaning) followed by SSPC-SP 1 (solvent cleaning).
- M. Uncorroded Uncoated Steel and Iron Surfaces to be Painted: Remove grease, mill scale, weld splatter, dirt, and rust. Where heavy coatings of scale are evident, remove by power tool wire brushing or sandblasting; clean by washing with solvent. Apply a treatment of phosphoric acid solution, ensuring weld joints, bolts, and nuts are similarly cleaned. Prime paint entire surface; spot prime after repairs.
- N. Shop-Primed Steel Surfaces to be Finish Painted: Sand and scrape to remove loose primer and rust. Feather edges to make touch-up patches inconspicuous. Clean surfaces with solvent. Prime bare steel surfaces. Re-prime entire shop-primed item.
- O. Interior Wood Surfaces to Receive Opaque Finish: Wipe off dust and grit prior to priming. Seal knots, pitch streaks, and sappy sections with sealer. Fill nail holes and cracks after primer has dried; sand between coats. Back prime concealed surfaces before installation.
- P. Interior Wood Surfaces to Receive Transparent Finish: Wipe off dust and grit prior to sealing, seal knots, pitch streaks, and sappy sections with sealer. Fill nail holes and cracks after sealer has dried; sand lightly between coats. Prime concealed surfaces with gloss varnish reduced 25 percent with thinner.
- Q. Exterior and Interior Wood to Receive Opaque Latex Stain Finish: Remove dust, grit, and foreign matter. Seal knots, pitch streaks, and sappy sections. Fill nail holes with tinted exterior caulking compound after initial coat has been applied. Back stain concealed surfaces before installation.
- R. Metal Doors to be Painted: Prime metal door top and bottom edge surfaces.

3.03 APPLICATION

- A. Remove unfinished louvers, grilles, covers, and access panels on mechanical and electrical components and paint separately.
- B. Exterior Wood to Receive Opaque Finish: If final painting must be delayed more than 2 weeks after installation of woodwork, apply primer within 2 weeks and final coating within 4 weeks.

- C. Apply products in accordance with manufacturer's instructions.
- D. Where adjacent sealant is to be painted, do not apply finish coats until sealant is applied.
- E. Do not apply finishes to surfaces that are not dry. Allow applied coats to dry before next coat is applied.
- F. Apply each coat to uniform appearance.
- G. Dark Colors and Deep Clear Colors: Regardless of number of coats specified, apply as many coats as necessary for complete hide.
- H. Sand wood and metal surfaces lightly between coats to achieve required finish.
- I. Vacuum clean surfaces of loose particles. Use tack cloth to remove dust and particles just prior to applying next coat.
- J. Wood to Receive Transparent Finishes: Tint fillers to match wood. Work fillers into the grain before set. Wipe excess from surface.
- K. Reinstall electrical cover plates, hardware, light fixture trim, escutcheons, and fittings removed prior to finishing.

3.04 FINISHING MECHANICAL AND ELECTRICAL EQUIPMENT

- A. Refer to Section 22 05 53, Section 23 05 53 and Section 26 05 53 for schedule of color coding of equipment, duct work, piping, and conduit.
- B. Paint shop-primed equipment, where indicated.
- C. Remove unfinished louvers, grilles, covers, and access panels on mechanical and electrical components and paint separately.
- D. Finish equipment, piping, conduit, and exposed duct work in utility areas in colors according to the color coding scheme indicated.
- E. Reinstall electrical cover plates, hardware, light fixture trim, escutcheons, and fittings removed prior to finishing.

3.05 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for general requirements for field inspection.

3.06 CLEANING

- A. Collect waste material that could constitute a fire hazard, place in closed metal containers, and remove daily from site.

3.07 PROTECTION

- A. Protect finished coatings until completion of project.
- B. Touch-up damaged coatings after Substantial Completion.

3.08 SCHEDULE - SURFACES TO BE FINISHED

- A. Do Not Paint or Finish the Following Items:
 - 1. Items fully factory-finished unless specifically noted.
 - 2. Fire rating labels, equipment serial number and capacity labels.
 - 3. Stainless steel items.
- B. Paint the surfaces described below under Schedule - Paint Systems.
- C. Mechanical and Electrical: Use paint systems defined for the substrates to be finished.
 - 1. Where indicated as exposed, paint all insulated and exposed pipes, conduit, boxes, insulated and exposed ducts, hangers, brackets, collars and supports, mechanical equipment, and electrical equipment occurring in finished areas to match background surfaces.

2. Paint all equipment, including that which is factory-finished, exposed to weather or to view on the roof and outdoors.
 3. Paint shop-primed items occurring in finished areas.
 4. Paint interior surfaces of air ducts and convactor and baseboard heating cabinets that are visible through grilles and louvers with one coat of flat black paint to visible surfaces.
 5. Paint dampers exposed behind louvers, grilles, and convactor and baseboard cabinets to match face panels.
- D. Paint both sides and edges of plywood backboards for electrical and telephone equipment before installing equipment.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 10 14 00

SIGNAGE

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Room and door signs.
- B. Building identification signs on wall.

1.02 REFERENCE STANDARDS

- A. ICC A117.1 - Accessible and Usable Buildings and Facilities.

1.03 SUBMITTALS

- A. See Section 01 33 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Manufacturer's printed product literature for each type of sign, indicating sign styles, font, foreground and background colors, locations, overall dimensions of each sign.
- C. Samples: Submit two samples of each type of sign, of size similar to that required for project, illustrating sign style, font, and method of attachment.
- D. Selection Samples: Where colors are not specified, submit two sets of color selection charts or chips.
- E. Verification Samples: Submit samples showing colors specified.
- F. Manufacturer's Qualification Statement.

1.04 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum five years of documented experience.

1.05 DELIVERY, STORAGE, AND HANDLING

- A. Package signs as required to prevent damage before installation.
- B. Package room and door signs in sequential order of installation, labeled by floor or building.
- C. Store tape adhesive at normal room temperature.

1.06 FIELD CONDITIONS

- A. Do not install tape adhesive when ambient temperature is lower than recommended by manufacturer.
- B. Maintain this minimum temperature during and after installation of signs.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Flat Signs:
 - 1. Best Sign Systems, Inc: www.bestsigns.com/#sle.
 - 2. InPro Corporation; Aspen produced in one piece photopolymer media: www.inprocorp.com.
 - 3. Mohawk Sign Systems, Inc: www.mohawksign.com/#sle.
 - 4. Seton Identification Products: www.seton.com/aec.
 - 5. Bayuk Graphic Systems, Inc.
 - 6. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Dimensional Letter Signs on Wall:
 - 1. Impact Signs Inc.: www.impactsigns.com.
 - 2. iSign Inc.: isigninc.com
 - 3. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 SIGNAGE APPLICATIONS

- A. Accessibility Compliance: All signs are required to comply with ADA Standards for Accessible Design and ANSI/ICC A 117.1 and applicable building codes, unless otherwise indicated; in the event of conflicting requirements, comply with the most comprehensive and specific requirements.
- B. Room and Door Signs: As indicated in schedule.
- C. Building Identification Signs on Wall:
 - 1. Use individual metal letters.
 - 2. Mount on outside wall in location shown on drawings.

2.03 ROOM AND DOOR SIGN TYPES

- A. The following applies to all sign types:
 - 1. Process: Graphic Blast raised 1/32"
 - 2. Material: .125" MP Plastic
 - 3. Material Finish: Matte
 - 4. Edge Treatment: Standard Bevel
 - 5. Corner Treatment: 1/2 inch Radius
 - 6. Border: N/A
 - 7. Copy Size: 3/4 inch
 - 8. Typestyle: Helvetica Bold Condensed
 - 9. Braille: Grade II
 - 10. Attachment: Silicone Adhesive & VFT
 - 11. Letter Color: Standard Range
 - 12. Background Color: Standard Range

2.04 DIMENSIONAL LETTERS FOR WALL

- A. Fabricated Metal Letters:
 - 1. Metal: Aluminum sheet, formed channel letters.
 - 2. Depth: 2 inch.
 - 3. Height: 12 inch.
 - 4. Finish: Dark bronze, high performance organic coating.
 - 5. Mounting: Pin mount.

2.05 ACCESSORIES

- A. Concealed Screws: Stainless steel, galvanized steel, chrome plated, or other non-corroding metal.
- B. Tape Adhesive: Double sided tape, permanent adhesive.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that substrate surfaces are ready to receive work.

3.02 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Install neatly, with horizontal edges level.
- C. Locate signs where indicated:
 - 1. Room and Door Signs: Locate on wall at latch side of door with centerline of sign at 60 inches above finished floor.
 - 2. Dimensional Letter Sign: Locate as indicated on the drawings.
 - 3. If no location is indicated obtain Owner's instructions.

- D. Protect from damage until Substantial Completion; repair or replace damage items.
- E. When flat sign must be glass mounted, provide blank sign for other side of glass to cover tape adhesive.

3.03 DIMENSIONAL LETTER, BUILDING IDENTIFICATION SIGN SCHEDULE

- A. Message as indicated on the drawings

3.04 ROOM AND DOOR SIGN SCHEDULE

A.	Room Number	Message	Braille	Pictogram
	102	MECHANICAL	Yes	No
	103	IDF ROOM	Yes	No
	104	JANITOR	Yes	No
	105	WOMENS SHOWER	Yes	Yes
	106	MENS SHOWER	Yes	Yes
	107	WOMENS RESTROOM	Yes	Yes
	108	MENS RESTROOM	Yes	Yes
	112	CLOSET	Yes	Yes

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 10 28 00
TOILET, BATH, AND LAUNDRY ACCESSORIES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Commercial toilet accessories.
- B. Commercial shower and bath accessories.
- C. Under-lavatory pipe supply covers.
- D. Utility room accessories.

1.02 RELATED REQUIREMENTS

- A. Section 06 10 00: Concealed supports for accessories, including in wall framing and plates.

1.03 REFERENCE STANDARDS

- A. ADA Standards - Americans with Disabilities Act (ADA) Standards for Accessible Design.
- B. ASTM A269/A269M - Standard Specification for Seamless and Welded Austenitic Stainless Steel Tubing for General Service.
- C. ASTM A666 - Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar.
- D. ASTM C1048 - Standard Specification for Heat-Strengthened and Fully Tempered Flat Glass.
- E. ASTM C1503 - Standard Specification for Silvered Flat Glass Mirror.
- F. ASTM C1822 - Standard Specification for Insulating Covers on Accessible Lavatory Piping.
- G. ICC A117.1 - Accessible and Usable Buildings and Facilities.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordinate the work with the placement of internal wall reinforcement, concealed ceiling supports, and reinforcement of toilet partitions to receive anchor attachments.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. See Section 01 33 00 - Submittal Procedures.
- C. Product Data: Submit data on accessories describing size, finish, details of function, and attachment methods.
- D. Schedule: Submit schedule indicating accessories, quantity and location.
- E. Manufacturer's Installation Instructions: Indicate special procedures and conditions requiring special attention.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Commercial Toilet, Shower, and Bath Accessories:
 - 1. American Specialties, Inc: www.americanspecialties.com/#sle.
 - 2. Bobrick Washroom Equipment, Inc: www.bobrick.com
 - 3. Bradley Corporation: www.bradleycorp.com/#sle.
 - 4. Substitutions: Section 01 60 00 - Product Requirements.
- B. Under-Lavatory Pipe Supply Covers:
 - 1. ISP Corporation: Trubro, Lav Guard 2.

2.02 MATERIALS

- A. Accessories - General: Shop assembled, free of dents and scratches and packaged complete with anchors and fittings, steel anchor plates, adapters, and anchor components for installation.
- B. Stainless Steel Sheet: ASTM A666, Type 304.
- C. Stainless Steel Tubing: ASTM A269/A269M, Grade TP304 or TP316.

2.03 FINISHES

- A. Stainless Steel: Satin finish, unless otherwise noted.

2.04 COMMERCIAL TOILET ACCESSORIES

- A. Refer to Schedule on Drawings.

2.05 COMMERCIAL SHOWER AND BATH ACCESSORIES

- A. Refer to schedule on drawings.

2.06 UNDER-LAVATORY PIPE AND SUPPLY COVERS

- A. Under-Lavatory Pipe and Supply Covers:
 - 1. Insulate exposed drainage piping including hot, cold, and tempered water supplies under lavatories or sinks to comply with ADA Standards.
 - 2. Construction: 1/8 inch flexible PVC.
 - 3. Color: White.
 - 4. Fasteners: Reusable, snap-locking fasteners with no sharp or abrasive external surfaces.
 - 5. Products:
 - a. ISP Corporation: Trubro, Lav Guard 2.

2.07 UTILITY ROOM ACCESSORIES

- A. Combination Utility Shelf/Mop and Broom Holder with Shelf: 0.05 inch thick stainless steel, Type 304, with 1/2 inch returned edges, 0.06 inch steel wall brackets.
 - 1. Hooks: Four, 0.06 inch stainless steel rag hooks at shelf front.
 - 2. Mop/broom holders: Three spring-loaded rubber cam holders at shelf front.
 - 3. Length: Manufacturer's standard length for number of holders/hooks.
 - 4. Products:
 - a. Bobrick-239 x 34.
 - b. Substitutions: Section 01 60 00 - Product Requirements.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify existing conditions before starting work.
- B. Verify exact location of accessories for installation.
- C. See Section 06 10 00 for installation of blocking, reinforcing plates, and concealed anchors in walls and ceilings.

3.02 INSTALLATION

- A. Install accessories in accordance with manufacturers' instructions in locations indicated on drawings.
- B. Install plumb and level, securely and rigidly anchored to substrate.
- C. Mounting Heights: As required by accessibility regulations, unless otherwise indicated.

END OF SECTION

SECTION 10 44 00
FIRE PROTECTION SPECIALTIES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Fire extinguishers.
- B. Fire extinguisher cabinets.
- C. Accessories.

1.02 RELATED REQUIREMENTS

- A. Section 06 10 00 - Rough Carpentry: Wood blocking product and execution requirements.
- B. Section 04 20 00 - Unit Masonry: Roughed-in wall openings.
- C. Section 09 21 16 - Gypsum Board Assemblies: Roughed-in wall openings.

1.03 REFERENCE STANDARDS

- A. NFPA 10 - Standard for Portable Fire Extinguishers.
- B. UL (DIR) - Online Certifications Directory.

1.04 PERFORMANCE REQUIREMENTS

- A. Conform to NFPA 10 and applicable code.
- B. Provide extinguishers classified and labeled by Underwriters Laboratories Inc., or testing firm acceptable to the authority having jurisdiction, for the purpose specified and indicated.

1.05 SUBMITTALS

- A. See Section 01 33 00 - Administrative Requirements, for submittal procedures.
- B. Shop Drawings: Indicate cabinet physical dimensions, rough-in measurements for recessed cabinets, and location.
- C. Product Data: Provide extinguisher operational features, color and finish, and anchorage details.
- D. Manufacturer's Installation Instructions: Indicate special criteria and wall opening coordination requirements.
- E. Manufacturer's Certificate: Certify that products meet or exceed specified requirements.
- F. Maintenance Data: Include test, refill or recharge schedules and re-certification requirements.

1.06 FIELD CONDITIONS

- A. Do not install extinguishers when ambient temperature may cause freezing of extinguisher ingredients.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Fire Extinguisher Cabinets and Accessories:
 - 1. JL Industries, Inc: www.jlindustries.com.
 - 2. Kidde, a unit of United Technologies Corp: www.kidde.com/#sle.
 - 3. Larsen's Manufacturing Co: www.larsensmfg.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 FIRE EXTINGUISHERS

- A. Fire Extinguishers - General: Comply with product requirements of NFPA 10 and applicable codes, whichever is more stringent.
- B. Dry Chemical Type Fire Extinguishers: Cast steel tank, with pressure gage.

1. Class A,B,C.
2. Size 10 lb.

2.03 FIRE EXTINGUISHER CABINETS

- A. Cabinet Construction: Non-fire rated.
 1. Formed stainless steel sheet; 0.036 inch thick base metal.
- B. Metal: Formed primed steel sheet; 0.036 inch thick base metal.
- C. Cabinet Configuration: Semi-recessed type.
 1. Sized to accommodate accessories.
 2. Trim: Returned to wall surface, with 3 inch projection, 1-3/4 inch wide face, rolled edge.
 3. Form cabinet enclosure with right angle inside corners and seams. Form perimeter trim and door stiles.
- D. Door: 0.036 inch thick, reinforced for flatness and rigidity; latch. Hinge doors for 180 degree opening with continuous piano hinge. Provide nylon or roller type catch.
- E. Door Glazing: Plastic, clear, 1/8 inch thick acrylic. Set in resilient channel gasket glazing.
- F. Cabinet Mounting Hardware: Appropriate to cabinet. Pre-drill for anchors.
- G. Weld, fill, and grind components smooth.
- H. Finish of Cabinet Exterior Trim and Door: Satin chrome.
- I. Finish of Cabinet Interior: White enamel.

2.04 ACCESSORIES

- A. Extinguisher Brackets: Formed steel, chrome-plated.
- B. Graphic Identification: "FIRE EXTINGUISHER".

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify existing conditions before starting work.
- B. Verify rough openings for cabinet are correctly sized and located.

3.02 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Install cabinets plumb and level in wall openings, maximum 54 inches from finished floor to to handle.
- C. Place extinguishers in cabinets.

END OF SECTION

SECTION 10 73 16.13
METAL CANOPIES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Building mounted, shop fabricated metal canopies.

1.02 REFERENCE STANDARDS

- A. ASCE 7 - Minimum Design Loads for Buildings and Other Structures.
- B. ASTM A307 - Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60 000 PSI Tensile Strength.
- C. ASTM E2950 - Standard Specification for Metal Canopy Systems.
- D. ASTM F593 - Standard Specification for Stainless Steel Bolts, Hex Cap Screws, and Studs.
- E. ASTM F3125/F3125M - Standard Specification for High Strength Structural Bolts, Steel and Alloy Steel, Heat Treated, 120 ksi (830 MPa) and 150 ksi (1040 MPa) Minimum Tensile Strength, Inch and Metric Dimensions.

1.03 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. See Section 01 33 00 - Submittal Procedures.
- C. Product Data: Submit product data sheets, including material descriptions and finishes, and preparation instructions and recommendations.
- D. Shop Drawings: Prior to commencement of fabrication, submit detailed shop drawings, showing profiles, sections of components, finishes, and fastening details.
- E. Design Data: Submit comprehensive structural analysis of design for the specified loads. Stamp and sign calculations by professional engineer.
- F. Warranty Documentation: Submit manufacturer warranty and ensure that forms have been completed in Owner's name and registered with manufacturer.

1.04 QUALITY ASSURANCE

- A. Designer Qualifications: Perform design under direct supervision of a Professional Engineer experienced in design of this type of work and licensed in the State in which the Project is located.
 - 1. Comply with applicable code for submission of reviewed shop and erection drawings as required for acquiring permits.
- B. Manufacturer Qualifications: Company specializing in the manufacture of products similar to those required for this project.

1.05 DELIVERY, STORAGE, AND HANDLING

- A. Deliver materials to project site ready for erection.
- B. Package using methods that prevent damage during shipping and storage on site.
- C. Store materials under cover and elevated above grade.

1.06 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.
- B. Metal Canopies: Correct defective work within a two year period after Date of Substantial Completion.
- C. Finish Warranty: Provide manufacturer's one year warranty on factory finish against cracking, peeling, and blistering.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Basis of Design Product:
 - 1. Mapes Canopies; Lumishade Hanger Rod Supported: www.mapescanopies.com.
 - 2. Mapes Canopies; Supershade Rod Supported: www.mapescanopies.com.
 - 3. Substitutions: See Section 01 60 00 - Product Requirements.
 - a. Substitutions must be made as indicated in Section 01 25 00. Substitutions will be accepted only if approved by the Owner and Architect prior to submission of the bid.

2.02 METAL CANOPIES

- A. Shop Fabricated Metal Canopy
 - 1. Pre-engineered system complying with ASTM E2950.
 - 2. Design and fabricate metal canopy system to resist wind, snow, live, and seismic loads without failure, damage, or permanent deflection in accordance with ASCE 7:
 - a. Loads: In compliance with local building codes.
 - 3. Thermal Movement: Design canopy system to accommodate thermal movement caused by ambient temperature range of 120 degrees F and surface temperature range of 180 degrees F without buckling, failure of joint seals, undue stress on fasteners or other detrimental effects on assembly components.

2.03 DOOR CANOPY

- A. Materials:
 - 1. Decking shall consist of an interlocking roll-formed 2 1/2 W style pan (minimum .032 aluminum).
 - 2. Intermediate framing members shall be extruded aluminum, alloy 6063-T6, in manufacturer's standard profile and thickness.
 - 3. Hanger rods and attachment hardware shall be powder coated.
 - 4. Fascia shall be standard 8" extruded J style (minimum .125 aluminum).
- B. Fabrication:
 - 1. Shipped in preassembled sections for ease of installation.
 - 2. All connections shall be mechanically assembled utilizing 3/16 fasteners with a minimum shear stress of 350 lb. Pre-welded or factory-welded connections are not acceptable.
 - 3. Decking shall be designed with interlocking roll-formed aluminum members.
 - 4. Concealed drainage. Water shall drain from covered surfaces into intermediate trough and be directed to either the front for front drainage or to the rear for ground level discharge via one or more designated downspouts.
- C. Finish: Dark Bronze, high performance organic coating.

2.04 WINDOW SHADE

- A. Materials:
 - 1. Sun shading elements shall consist of extruded aluminum louver blades.(minimum .110 thickness).
 - 2. Intermediate framing members shall be extruded aluminum, alloy 6063-T6, in manufacturer's standard profile and thickness.
 - 3. Intermediate framing members shall be extruded aluminum, alloy 6063-T6, in profile and thickness shown in current Mapes brochures.
 - 4. Fascia shall be standard extruded 8" J style.
- B. Fabrication:
 - 1. Shipped in preassembled sections for ease of installation.
 - 2. All connections shall be mechanically assembled utilizing 3/16 fasteners with a minimum shear stress of 350 lb. Pre-welded or factory-welded connections are not acceptable.

3. Louver blades shall be all extruded aluminum set on a nominal 45 degree backslant.

C. Finish: Dark Bronze, high performance organic coating.

2.05 SHOP FABRICATION

A. Provide a complete system ready for erection at project site.

B. Shop fabricate to the greatest extent possible; disassemble if necessary for shipping.

2.06 FINISHES

A. Finish type shall be -- Class II Clear Anodized.

2.07 ACCESSORIES

A. Structural Bolts: ASTM F3125/F3125M, Grade A325, minimum 3/4 inch diameter.

B. Trim, Closure Pieces, and Flashings: Same material, thickness and finish as sheet metal decking; factory-fabricated to required profiles.

C. Fasteners, Non-Structural: ASTM F593 stainless steel or ASTM A307 carbon steel.

PART 3 EXECUTION

3.01 EXAMINATION

A. Examine substrates and site area for conditions that might prevent satisfactory installation.

B. Verify that bearing surfaces are ready to receive this work.

C. Do not proceed with installation until all conditions are satisfactory.

D. Installer shall confirm dimensions and elevations to be as shown on drawings provided by Mapes Industries.

E. Erection shall be performed by an approved installer and scheduled after all concrete, masonry and roofing in the area is completed.

3.02 INSTALLATION - FRAMING

A. Provide for erection and wind loads. Provide temporary bracing to maintain structure plumb and in alignment until completion of erection and installation.

B. Installation shall be in strict accordance with manufacturer's shop drawings. Particular attention should be given to protecting the finish during handling and erection.

3.03 CLEANING

A. Clean surfaces of dust and debris; follow manufacturer's cleaning instructions for the finish used.

3.04 PROTECTION

A. Protect canopy after installation to prevent damage due to other work until Date of Substantial Completion.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 12 24 13
ROLLER SHADES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Sunscreen roller shades.

1.02 RELATED REQUIREMENTS

- A. See Section 01 74 19 - Construction Waste Management and Disposal.

1.03 REFERENCE STANDARDS

- A. ASTM G 21 - Standard Practice for Determining Resistance of Synthetic Polymeric Materials to Fungi.
- B. NFPA 701 - Fire Tests for Flame-Resistant Textiles and Films.

1.04 SUBMITTALS

- A. See Section 01 33 00 - Submittal Procedures, for submittal procedures.
- B. Product Data: Provide Manufacturer's data sheets on each product to be used, including:
 - 1. Preparation instructions and recommendations.
 - 2. Styules, material descriptions, dimensions of individual components, profiles, features, finishes and operating instructions.
 - 3. Storage and handling requirements and recommendations.
 - 4. Mounting details and installation methods.
- C. Shop Drawings: Indicate Plans, elevations, sections, product details, installation details, operational clearances, and relationship to adjacent work.
- D. Selection Samples: For each finished product specified, one set of shade cloth options and aluminum finish color samples representing manufacturer's full range of available colors and patterns.
- E. Maintenance Data: Methods for maintaining roller shades, precautions regarding cleaning materials and methods, and instructions for operating hardware.
- F. Samples: Submit two __, 6"x6" inch in size, illustrating color.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing products specified in this section, with not less than ten years of documented experience.
- B. Installer Qualifications: Company specializing in performing the work of this section with minimum five years of experience.
- C. Fire-Test-Response Characteristics: Passes NFPA 701 small and large-scale vertical burn. Materials tested shall be identical to products proposed for use.
- D. Anti-Microbial Characteristics: 'No Growth' per ASTM G 21 reresults for fungi ATCC9642, ATCC 9644, ATCC 9645.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Deliver shades to project site in factory-labeled packages, marked with manufacturer and product name, fire-test-response characteristics, and location of installation using same room designations as on Drawings.

1.07 FIELD CONDITIONS

- A. Environmental Limitations: Install roller shades after finish work including painting is complete and ambient temperature and humidity conditions are maintained at the levels indicated for Project when occupied for its intended use.

1.08 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.
- B. Roller Shade Hardware and Chain Warranty: Manufacturer's standard non-depreciating twenty-five year limited warranty.
- C. Standard Shadecloth: Manufacturer's standard twenty-five year warranty.
- D. Roller Shade Installation: One year from date of Substantial Completion.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Manually Operated Roller Shades:
 - 1. Basis-of-Design: Mechoshade Systems, Inc.
 - 2. Subject to the requirements of the specification, products by the following manufacturer may be provided:
 - a. Caco,, Inc, Serenity Shades.
 - b. Draper, Inc.
- B. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 ROLLER SHADE TYPE

- A. Manually Operated Shades:
 - 1. Basis-of-Design: Mech/5.
 - 2. Mounting: Jamb Mounted.
 - 3. Configuration: Double Shade Clothe.
 - 4. Solar Shade Clothe:
 - a. Fabric: MechoShade's ThermoVeil 1300, 3 percent open, 2 x 2 open basket-weave pattern (or equal)
 - b. Color: Selected from manufacturer's standard colors.
 - 5. Blackout Shade Clothe:
 - a. Fabric: MechoShade's Classic Blackout.
 - b. Color: Selected from manufacturer's standard colors.
 - c. Accessories: Room darkening shadeclothe guides.

2.03 SHADE CLOTH

- A. Visually Transparent Shadecloth: Single thickness non-raveling 0.030-inch (0.762 mm) thick vinyl fabric, woven from 0.018-inch (457 mm) diameter extruded vinyl yarn comprising of 21 percent polyester and 79 percent reinforced vinyl.

2.04 SHADE BAND

- A. Shade Bands: Construction of shade band includes the fabric, the hem weight, hem-pocket, shade roller tube, and the attachment of the shade band to the roller tube. Sewn hems and open hem pockets are not acceptable.
 - 1. Hem Pockets and Hem Weights: Fabric hem pocket with RF-welded seams (including welded ends) and concealed hem weights. Hem weights shall be of appropriate size and weight for shade band. Hem weight shall be continuous inside a sealed hem pocket. Hem pocket construction and hem weights shall be similar, for all shades within one room.
 - 2. Shade Band and Shade Roller Attachment:
 - a. Use extruded aluminum shade roller tube of a diameter and wall thickness required to support shade fabric without excessive deflection. Roller tubes less than 1.55 inch (39.37 mm) in diameter for manual shades are not acceptable.
 - b. Provide for positive mechanical engagement with drive/brake mechanism.

- c. Provide for positive mechanical attachment of shade band to roller tube; shade band shall be made removable/replaceable with a "snap-on" "snap-off" spline mounting, without having to remove shade roller from shade brackets.
- d. Mounting spline shall not require use of adhesives, adhesive tapes, staples, and/or rivets.

2.05 SHADE FABRICATION

- A. Fabricate units to completely fill existing openings from head to sill and jamb to jamb, unless specifically indicated otherwise.

2.06 COMPONENTS

- A. Access and Material Requirements:
 - 1. Provide shade hardware allowing for the removal of shade roller tube from brackets without removing hardware from opening and without requiring end or center supports to be removed.
 - 2. Provide shade hardware that allows for removal and re-mounting of the shade bands without having to remove the shade tube, drive or operating support brackets.
 - 3. Use only Delrin engineered plastics by DuPont for all plastic components of shade hardware. Styrene based plastics, and /or polyester, or reinforced polyester will not be acceptable.
- B. Manual Operated Chain Drive Hardware and Brackets:
 - 1. Provide for universal, regular and offset drive capacity, allowing drive chain to fall at front, rear or non-offset for all shade drive and brackets. Universal offset shall be adjustable for future change.
 - 2. Provide hardware capable for installation of a removable fascia, for both regular and/or reverse roll, which shall be installed without exposed fastening devices of any kind.
 - 3. Provide positive mechanical engagement of drive mechanism to shade roller tube. Friction fit connectors for drive mechanism connection to shade roller tube are not acceptable.
 - 4. Provide shade hardware constructed of minimum 1/8-inch (3.18 mm) thick plated steel or heavier as required to support 150 percent of the full weight of each shade.
 - 5. Drive Bracket/Brake Assembly:
 - a. Drive sprocket and brake assembly shall rotate and be supported on a welded 3/8 inch (9.525 mm) steel pin.
 - b. The brake shall be an over-running clutch design which disengages to 90 percent during the raising and lowering of a shade. the brake shall withstand a pull force of 50 lbs. (22 kg) in the stopped position.
 - c. The braking mechanism shall be applied to an oil-impregnated hub on to which the brake system is mounted. The oil impregnated hub design includes an articulated brake assembly. The assembly shall be permanently lubricated. Products that require externally applied lubrication and/or not permanently lubricated are not acceptable.
 - d. The entire assembly shall be fully mounted on the steel support bracket, and fully independent of the shade tube assembly, which may be removed and reinstalled without effecting the roller shade limit adjustments.
 - e. Drive Chain: #10 qualified stainless steel chain rated to 90 lbs. (41 kg) minimum breaking strength. Nickel plate chain shall not be acceptable.
 - 6. Include Mecho / 5 Extended and/or slimline bracket with optional Mecho SnapLoc fascia

PART 3 EXECUTION

3.01 EXAMINATION

- A. Do not begin installation until substrates have been properly prepared.

3.02 PREPARATION

- A. Clean surfaces thoroughly prior to installation.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.

3.03 INSTALLATION

- A. Install roller shades level, plumb, square, and true according to manufacturer's written instructions, and located so shade band is not closer than 2 inches (50 mm) to interior face of glass. Allow proper clearances for window operation hardware.
- B. Adjust and balance roller shades to operate smoothly, easily, safely, and free from binding or malfunction throughout entire operational range.
- C. Clean roller shade surfaces after installation, according to manufacturer's written instructions.

3.04 PROTECTION

- A. Protect installed products until completion of project.
- B. Touch-up, repair or replace damaged products before Substantial Completion.

END OF SECTION

SECTION 12 48 13
ENTRANCE FLOOR MATS AND FRAMES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Extruded aluminum entrance floor grilles.
- B. Recessed mat frames.

1.02 RELATED SECTIONS AND SUBMITTALS

- A. See Section 01 33 00 - Submittal Procedures, for submittal procedures.
- B. Product Data: Provide data indicating properties of walk-off surface, component dimensions and recessed frame characteristics.
- C. Shop Drawings: Indicate dimensions and details for recessed frame.
 - 1. For recessed frames located within a dimensionally restricted area, show dimensions of space within which the frame will be installed.
- D. Samples: Submit two samples, 4x4 inch in size illustrating pattern, color, finish, edging .
- E. Maintenance Data: Include cleaning instructions, stain removal procedures.
- F. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions.
- G. Section 01 74 19 - Construction Waste Management and Disposal: Limitations on disposal of removed materials; requirements for recycling.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Entrance Floor Grilles and Gratings:
 - 1. Babcock-Davis: www.babcockdavis.com/#sle.
 - 2. Construction Specialties, Inc: www.c-sgroup.com/#sle.
 - 3. Nystrom, Inc: www.nystrom.com/#sle.
 - 4. Reese Enterprises, Inc: www.reeseusa.com/#sle.
 - 5. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 ENTRANCE FLOOR GRILLES AND GRATINGS

- A. Entrance Floor Grilles: Recessed extruded aluminum grille assembly with nominal 1 inch wide tread strips running perpendicular to traffic flow, slots between treads, and perimeter frame forming sides of recess; grille hinged for access to recess.
 - 1. Recess Depth: 3/4 inches.
 - 2. Colors: To be selected by Architect from manufacturer's standard selection.
 - 3. Frame: Anodized aluminum for embedding in concrete; minimal exposed trim; stud or hook concrete anchors.
 - 4. Pan: Anodized aluminum bottom pan with drain, sealed to frame.
- B. Mounting: Top of non-resilient members level with adjacent floor.
- C. Structural Capacity: Capable of supporting a rolling load of 500 pounds without permanent deformation or noticeable deflection.
- D. Vibration Resistant Fabrication: All members welded, riveted, or bolted; no snap or friction connections.

2.03 FABRICATION

- A. Construct recessed mat frames square, tight joints at corners, rigid. Coat surfaces with protective coating where in contact with cementitious materials.
- B. Fabricate mats in single unit sizes; fabricate multiple mats where indicated.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that floor opening for mats are ready to receive work.

3.02 PREPARATION

- A. Verify size of floor recess before laying tiles
- B. Vacuum clean floor recess.

3.03 INSTALLATION

- A. Install frames to achieve flush plane with finished floor surface.
- B. Install walk-off surface after cleaning of finish flooring.

3.04 TOLERANCES

- A. Maximum Gap Formed at Recessed Frame From Mat Size: 1/4 inch.

END OF SECTION

SECTION 22 05 16

EXPANSION FITTINGS AND LOOPS FOR PLUMBING PIPING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Flexible pipe connectors.
- B. Expansion joints and compensators.
- C. Pipe loops, offsets, and swing joints.

1.02 RELATED REQUIREMENTS

- A. Section 21 05 00 - Common Work Results for Fire Suppression.
- B. Section 22 10 05 - Plumbing Piping.

1.03 REFERENCE STANDARDS

- A. ASTM A269/A269M - Standard Specification for Seamless and Welded Austenitic Stainless Steel Tubing for General Service.
- B. EJMA (STDS) - EJMA Standards.

1.04 SUBMITTALS

- A. Product Data:
 - 1. Flexible Pipe Connectors: Indicate maximum temperature and pressure rating, face-to-face length, live length, hose wall thickness, hose convolutions per foot and per assembly, fundamental frequency of assembly, braid structure, and total number of wires in braid.
 - 2. Expansion Joints: Indicate maximum temperature and pressure rating, and maximum expansion compensation.
- B. Design Data: Indicate selection calculations.
- C. Manufacturer's Instructions: Indicate manufacturer's installation instructions, special procedures, and external controls.
- D. Project Record Documents: Record installed locations of flexible pipe connectors, expansion joints, anchors, and guides.
- E. Maintenance Data: Include adjustment instructions.

1.05 REGULATORY REQUIREMENTS

- A. Conform to UL or Warnock Hersey requirements.

1.06 EXTRA MATERIALS

- A. Supply two sets of packing for each packed expansion joint.

PART 2 PRODUCTS

2.01 FLEXIBLE PIPE CONNECTORS - STEEL PIPING

- A. Manufacturers:
 - 1. Mercer Rubber Company: www.mercer-rubber.com/#sle.
 - 2. Metraflex Company: www.metraflex.com/#sle.
 - 3. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Inner Hose: Carbon Steel, Stainless Steel or Bronze.
- C. Exterior Sleeve: Single braided or Double braided, stainless steel or bronze.
- D. Exterior Sleeve: None.
- E. Pressure Rating: 125 psi and 450 degrees F or 200 psi and 250 degrees F.

- F. Joint: As specified for pipe joints.
- G. Size: Use pipe sized units.
- H. Maximum offset: 3/4 inch on each side of installed center line.

2.02 FLEXIBLE PIPE CONNECTORS - COPPER PIPING

- A. Manufacturer:
 - 1. Mercer Rubber Company: www.mercer-rubber.com/#sle.
 - 2. Metraflex Company: www.metraflex.com/#sle.
 - 3. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Inner Hose: Bronze.
- C. Exterior Sleeve: Braided bronze.
- D. Pressure Rating: 125 psi and 450 degrees F or 200 psi and 250 degrees F.
- E. Joint: As specified for pipe joints.
- F. Size: Use pipe sized units.
- G. Maximum offset: 3/4 inch on each side of installed center line.
- H. Application: Copper piping.

2.03 EXPANSION JOINTS - STEEL WITH PACKED SLIDING SLEEVE

- A. Working Pressure and Temperature: Class 150 or Class 300.
- B. Joint: As specified for pipe joints.
- C. Size: Use pipe sized units.
- D. Application: Steel piping 2 inches and over.

2.04 EXPANSION JOINTS - COPPER WITH PACKED SLIDING SLEEVE

- A. Working Pressure: 125 psi.
- B. Maximum Temperature: 250 degrees F.
- C. Joint: As specified for pipe joints.
- D. Size: Use pipe sized units.
- E. Application: Copper or steel piping 2 inches and over.

2.05 ACCESSORIES

- A. Stainless Steel Pipe: ASTM A269.
- B. Pipe Alignment Guides:
 - 1. Two piece welded steel with enamel paint, bolted, with spider to fit standard pipe, frame with four mounting holes, clearance for minimum 1 inch thick insulation, minimum 3 inches travel.
- C. Swivel Joints:
 - 1. Fabricated steel, Bronze, Ductile Iron or Cast steel body, double ball bearing race, field lubricated, with rubber (Buna-N) o-ring seals.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Install in accordance with EJMA (Expansion Joint Manufacturers Association) Standards.
- C. Install flexible pipe connectors on pipes connected to vibration isolated equipment. Provide line size flexible connectors.

- D. Install flexible connectors at right angles to displacement. Install one end immediately adjacent to isolated equipment and anchor other end. Install in horizontal plane unless indicated otherwise.
- E. Anchor pipe to building structure where indicated. Provide pipe guides so movement is directed along axis of pipe only. Erect piping such that strain and weight is not on cast connections or apparatus.
- F. Provide support and equipment required to control expansion and contraction of piping. Provide loops, pipe offsets, and swing joints, or expansion joints where required.
- G. Substitute grooved piping for vibration isolated equipment instead of flexible connectors. Grooved piping need not be anchored.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 22 05 19
METERS AND GAGES FOR PLUMBING PIPING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Positive displacement meters.
- B. Pressure gages and pressure gage taps.
- C. Thermometers and thermometer wells.
- D. Static pressure gages.
- E. Filter gages.

1.02 REFERENCE STANDARDS

- A. ASME B40.100 - Pressure Gauges and Gauge Attachments.
- B. ASME MFC-3M - Measurement of Fluid Flow in Pipes Using Orifice, Nozzle and Venturi.
- C. ASTM E1 - Standard Specification for ASTM Liquid-in-Glass Thermometers.
- D. ASTM E77 - Standard Test Method for Inspection and Verification of Thermometers.
- E. AWWA C700 - Cold-Water Meters -- Displacement Type, Metal Alloy Main Case.
- F. AWWA C701 - Cold-Water Meters -- Turbine Type, for Customer Service.
- G. AWWA C702 - Cold-Water Meters -- Compound Type.
- H. AWWA C706 - Direct-Reading, Remote-Registration Systems for Cold Water Meters; American Water Works Association (ANSI/AWWA C706).
- I. AWWA M6 - Water Meters -- Selection, Installation, Testing, and Maintenance.
- J. UL 393 - Indicating Pressure Gauges for Fire-Protection Service.

1.03 SUBMITTALS

- A. Product Data: Provide list that indicates use, operating range, total range and location for manufactured components.
- B. Project Record Documents: Record actual locations of components and instrumentation.
- C. Operation and Maintenance Data: .

1.04 FIELD CONDITIONS

- A. Do not install instrumentation when areas are under construction, except for required rough-in, taps, supports and test plugs.

1.05 EXTRA MATERIALS

- A. Supply two bottles of red gage oil for static pressure gages.
- B. Supply two pressure gages with pulsation damper or dial thermometers.

PART 2 PRODUCTS

2.01 LIQUID FLOW METERS

- A. Manufacturers:
 - 1. Dwyer Instruments, Inc: www.dwyer-inst.com.
 - 2. Venture Measurement, a Danaher Corporation Company: www.venturemeasurement.com.
 - 3. Omega Meters: www.omega.com.
- B. Description: Totalizing turbine-type flow meter with rate indication and pulse output.
 - 1. Maximum Working Pressure:

- a. PVC: 150 psi
 - b. Carbon Steel: 200 psi
2. Maximum Temperature:
 - a. PVC: 49°C (120°F)
 - b. Carbon Steel: 93°C (200°F)
3. Accuracy: $\pm 1\%$ FS
4. Signal: Squarewave pulse
5. Power :6 to 24 Vdc
6. Materials
 - a. Meter Body: PVC or carbon steel
 - b. Flanges: Van Stone w/steel backing flange for PVC bodies, 150# ANSI for carbon steel bodies
 - c. Turbine Rotor: PVDF
 - d. Rotor Shafts: Zirconia ceramic
 - e. Bearings: Sapphire journal, ruby ball
7. Display
 - a. Power: 11 to 24 Vdc, 20 mA max
 - b. Rate: 8-digit autorange
 - c. Total: 8-digit, selectable decimal
 - d. Memory: Non-volatile (no battery needed)
 - e. Pulse Output: 0.1 sec, open collector Analog Option 4 to 20 mA, user-programmable
8. Transmitter
 - a. Output: 4 to 20 mA
 - b. Loop Power: 12 to 26 Vdc (isolated)
 - c. Accuracy: $\pm 1\%$
 - d. Response Time: 3 sec, 95% FS

2.02 PRESSURE GAGES

- A. Manufacturers:
 1. Dwyer Instruments, Inc: www.dwyer-inst.com/#sle.
 2. Moeller Instrument Co., Inc: www.moellerinstrument.com/#sle.
 3. Omega Engineering, Inc: www.omega.com/#sle.
- B. Pressure Gages: ASME B40.100, UL 393 drawn steel case, phosphor bronze bourdon tube, rotary brass movement, brass socket, with front recalibration adjustment, black scale on white background.
 1. Case: Steel with brass bourdon tube.
 2. Size: 4-1/2 inch diameter.
 3. Size: 2 inch diameter.
 4. Mid-Scale Accuracy: One percent.
 5. Scale: Psi.

2.03 PRESSURE GAGE TAPPINGS

- A. Gage Cock: Tee or lever handle, brass for maximum 150 psi.
- B. Needle Valve: Brass or Stainless Steel, 1/4 inch NPT for minimum 150 psi.
- C. Pulsation Damper: Pressure snubber, brass with 1/4 inch connections.
- D. Syphon: Steel, Schedule 40, 1/4 inch angle or straight pattern.

2.04 STEM TYPE THERMOMETERS

- A. Manufacturers:
 1. Dwyer Instruments, Inc: www.dwyer-inst.com/#sle.
 2. Omega Engineering, Inc: www.omega.com/#sle.

3. Weksler Glass Thermometer Corp: www.wekslerglass.com/#sle.
4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Thermometers - Fixed Mounting: Red- or blue-appearing non-toxic liquid in glass; ASTM E1; lens front tube, cast aluminum case with enamel finish.
 1. Size: 9 inch scale.
 2. Window: Clear Lexan.
 3. Size: 9 inch scale.
 4. Window: Clear glass or Lexan.
 5. Accuracy: 2 percent, per ASTM E77.
 6. Calibration: Degrees F.
- C. Thermometers - Adjustable Angle: Red- or blue-appearing non-toxic liquid in glass; ASTM E1; lens front tube, cast aluminum case with enamel finish, cast aluminum adjustable joint with positive locking device; adjustable 360 degrees in horizontal plane, 180 degrees in vertical plane.
 1. Size: 9 inch scale.
 2. Window: Clear Lexan.
 3. Size: 9 inch scale.
 4. Window: Clear glass or Lexan.
 5. Stem: 3/4 inch NPT brass.
 6. Accuracy: 2 percent, per ASTM E77.
 7. Calibration: Degrees F.

2.05 THERMOMETER SUPPORTS

- A. Socket: Brass separable sockets for thermometer stems with or without extensions as required, and with cap and chain.
- B. Flange: 3 inch outside diameter reversible flange, designed to fasten to sheet metal air ducts, with brass perforated stem.

2.06 TEST PLUGS

- A. Test Plug: 1/4 inch or 1/2 inch brass or stainless steel fitting and cap for receiving 1/8 inch outside diameter pressure or temperature probe with Nordel core for temperatures up to 350 degrees F.
- B. Test Kit: Carrying case, internally padded and fitted containing one 2-1/2 inch diameter pressure gages, one gage adapters with 1/8 inch probes, two 1 inch dial thermometers.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Install positive displacement meters with isolating valves on inlet and outlet to AWWA M6. Provide full line size valved bypass with globe valve for liquid service meters.
- C. Provide one pressure gage per pump, installing taps before strainers and on suction and discharge of pump. Pipe to gage.
- D. Install pressure gages with pulsation dampers. Provide gage cock or needle valve to isolate each gage. Extend nipples and siphons to allow clearance from insulation.
- E. Install thermometers in piping systems in sockets in short couplings. Enlarge pipes smaller than 2-1/2 inch for installation of thermometer sockets. Ensure sockets allow clearance from insulation.
- F. Install thermometer sockets adjacent to controls systems thermostat, transmitter, or sensor sockets. Refer to Section 23 09 43.

- G. Coil and conceal excess capillary on remote element instruments.
- H. Provide instruments with scale ranges selected according to service with largest appropriate scale.
- I. Install gages and thermometers in locations where they are easily read from normal operating level. Install vertical to 45 degrees off vertical.
- J. Adjust gages and thermometers to final angle, clean windows and lenses, and calibrate to zero.
- K. Locate test plugs adjacent thermometers and thermometer sockets, adjacent to pressure gages and pressure gage taps, adjacent to control device sockets or where indicated.

3.02 SCHEDULES

- A. Positive Displacement Meters, Location:
 - 1. Domestic cold water.
 - 2. Expansion tank make-up.
- B. Pressure Gages, Location and Scale Range:
 - 1. Pumps, 0 to 100 psi.
 - 2. Expansion tanks, 0 to 100 psi.
 - 3. Sprinkler system, 0 to 100 psi.
 - 4. Backflow preventers, 0 to 100 psi.
- C. Pressure Gage Tappings, Location:
 - 1. Control valves 3/4 inch & larger - inlets and outlets.
 - 2. Major coils - inlets and outlets.
 - 3. Heat exchangers - inlets and outlets.
- D. Stem Type Thermometers, Location and Scale Range:
 - 1. Domestic hot water supply and recirculation, 0 to 220 degrees F.

END OF SECTION

SECTION 22 05 48

VIBRATION AND SEISMIC CONTROLS FOR PLUMBING PIPING AND EQUIPMENT

SEE SPECIFICATION SECTION 23 05 48

END OF SECTION

NOT FOR BIDDING

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 22 05 53

IDENTIFICATION FOR PLUMBING PIPING AND EQUIPMENT

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Nameplates.
- B. Tags.
- C. Stencils.
- D. Pipe Markers.

1.02 RELATED REQUIREMENTS

- A. Section 09 90 00 - Paints and Coatings: Identification painting.
- B. Section 22 60 05 - Medical Air, Gas, and Vacuum Systems: Supply of pipe labels for placement under this section.

1.03 REFERENCE STANDARDS

- A. ASME A13.1 - Scheme for the Identification of Piping Systems; The American Society of Mechanical Engineers.

1.04 SUBMITTALS

- A. List: Submit list of wording, symbols, letter size, and color coding for mechanical identification.
- B. Chart and Schedule: Submit valve chart and schedule, including valve tag number, location, function, and valve manufacturer's name and model number.
- C. Product Data: Provide manufacturers catalog literature for each product required.
- D. Samples: Submit two labels; tags in size.
- E. Manufacturer's Installation Instructions: Indicate special procedures, and installation.
- F. Project Record Documents: Record actual locations of tagged valves.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Brady Corporation: www.bradycorp.com.
- B. Champion America, Inc: www.Champion-America.com.
- C. Seton Identification Products: www.seton.com/aec.
- D. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 NAMEPLATES

- A. Description: Laminated three-layer plastic with engraved letters.
 - 1. Letter Color: Black.
 - 2. Letter Height: 1/2 inch.
 - 3. Background Color: Yellow.

2.03 TAGS

- A. Plastic Tags: Laminated three-layer plastic with engraved black letters on light contrasting background color. Tag size minimum 1-1/2 inch diameter or square.
- B. Metal Tags: Brass, aluminum, or stainless steel with stamped letters; tag size minimum 1-1/2 inch diameter or square with smooth edges.
- C. Chart: Typewritten letter size list in anodized aluminum frame.

2.04 STENCILS

- A. Stencils: With clean cut symbols and letters of following size:
 - 1. 3/4 to 1-1/4 inch Outside Diameter of Insulation or Pipe: 8 inch long color field, 1/2 inch high letters.
 - 2. 1-1/2 to 2 inch Outside Diameter of Insulation or Pipe: 8 inch long color field, 3/4 inch high letters.
 - 3. 2-1/2 to 6 inch Outside Diameter of Insulation or Pipe: 12 inch long color field, 1-1/4 inch high letters.
 - 4. 8 to 10 inch Outside Diameter of Insulation or Pipe: 24 inch long color field, 2-1/2 inch high letters.
 - 5. Over 10 inch Outside Diameter of Insulation or Pipe: 32 inch long color field, 3-1/2 inch high letters.
 - 6. Ductwork and Equipment: 2-1/2 inch high letters.
- B. Stencil Paint: As specified in Section 09 90 00, semi-gloss enamel, colors conforming to ASME A13.1.

2.05 PIPE MARKERS

- A. Comply with ASME A13.1.
- B. Plastic Pipe Markers: Factory fabricated, flexible, semi-rigid plastic, preformed to fit around pipe or pipe covering; minimum information indicating flow direction arrow and identification of fluid being conveyed.
- C. Plastic Tape Pipe Markers: Flexible, vinyl film tape with pressure sensitive adhesive backing and printed markings.
- D. Underground Plastic Pipe Markers: Bright colored continuously printed plastic ribbon tape, minimum 6 inches wide by 4 mil thick, manufactured for direct burial service.

2.06 CEILING TACKS

- A. Description: Steel with 3/4 inch diameter color coded head.
- B. Color code as follows:
 - 1. HVAC Equipment: Yellow.
 - 2. Fire Dampers and Smoke Dampers: Red.
 - 3. Plumbing Valves: Green.
 - 4. Heating/Cooling Valves: Blue.

PART 3 EXECUTION

3.01 PREPARATION

- A. Degrease and clean surfaces to receive adhesive for identification materials.
- B. Prepare surfaces in accordance with Section 09 90 00 for stencil painting.

3.02 INSTALLATION

- A. Install plastic nameplates with corrosive-resistant mechanical fasteners, or adhesive. Apply with sufficient adhesive to ensure permanent adhesion and seal with clear lacquer.
- B. Install tags with corrosion resistant chain.
- C. Apply stencil painting in accordance with Section 09 90 00.
- D. Install plastic pipe markers in accordance with manufacturer's instructions.
- E. Install plastic tape pipe markers complete around pipe in accordance with manufacturer's instructions.
- F. Install underground plastic pipe markers 6 to 8 inches below finished grade, directly above buried pipe.

- G. Identify air handling units, pumps, heat transfer equipment, tanks, and water treatment devices with plastic nameplates or stencil painting. Small devices, such as in-line pumps, may be identified with tags.
- H. Identify control panels and major control components outside panels with plastic nameplates.
- I. Identify thermostats relating to terminal boxes or valves with nameplates.
- J. Identify valves in main and branch piping with tags.
- K. Identify air terminal units and radiator valves with numbered tags.
- L. Tag automatic controls, instruments, and relays. Key to control schematic.
- M. Identify piping, concealed or exposed, with plastic pipe markers or plastic tape pipe markers. Use tags on piping 3/4 inch diameter and smaller. Identify service, flow direction, and pressure. Install in clear view and align with axis of piping. Locate identification not to exceed 20 feet on straight runs including risers and drops, adjacent to each valve and Tee, at each side of penetration of structure or enclosure, and at each obstruction.
- N. Identify ductwork with plastic nameplates or stenciled painting. Identify with air handling unit identification number and area served. Locate identification at air handling unit, at each side of penetration of structure or enclosure, and at each obstruction.
- O. Locate ceiling tacks to locate valves or dampers above lay-in panel ceilings. Locate in corner of panel closest to equipment.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 22 07 16
PLUMBING EQUIPMENT INSULATION

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Equipment insulation.
- B. Covering.

1.02 RELATED REQUIREMENTS

- A. Section 09 90 00 - Paints and Coatings: Painting insulation covering.
- B. Section 22 05 53 - Identification for Plumbing Piping and Equipment.
- C. Section 22 10 05 - Plumbing Piping: Placement of hangers and hanger inserts.
- D. Section 23 21 13 - Hydronic Piping: Placement of hangers and hanger inserts.
- E. Section 23 21 14 - Hydronic Specialties.

1.03 REFERENCE STANDARDS

- A. ASTM A666 - Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar.
- B. ASTM B209 - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate.
- C. ASTM B209M - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate [Metric].
- D. ASTM C177 - Standard Test Method for Steady-State Heat Flux Measurements and Thermal Transmission Properties by Means of the Guarded-Hot-Plate Apparatus.
- E. ASTM C195 - Standard Specification for Mineral Fiber Thermal Insulating Cement.
- F. ASTM C518 - Standard Test Method for Steady-State Thermal Transmission Properties by Means of the Heat Flow Meter Apparatus.
- G. ASTM C592 - Standard Specification for Mineral Fiber Blanket Insulation and Blanket-Type Pipe Insulation (Metal-Mesh Covered) (Industrial Type).
- H. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials.
- I. ASTM E96/E96M - Standard Test Methods for Water Vapor Transmission of Materials.
- J. NFPA 255 - Standard Method of Test of Surface Burning Characteristics of Building Materials; National Fire Protection Association.
- K. UL 723 - Standard for Test for Surface Burning Characteristics of Building Materials.

1.04 SUBMITTALS

- A. See Gilbane Project Manual.
- B. Product Data: Provide product description, thermal characteristics, list of materials and thickness for equipment scheduled.
- C. Samples: Submit two samples of any representative size illustrating each insulation type.
- D. Manufacturer's Instructions: Indicate installation procedures that ensure acceptable workmanship and installation standards will be achieved.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with not less than three years of experience.
- B. Applicator Qualifications: Company specializing in performing the type of work specified in this section with minimum three years of experience and approved by manufacturer.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Accept materials on site in original factory packaging, labeled with manufacturer's identification, including product density and thickness.
- B. Protect insulation from weather and construction traffic, dirt, water, chemical, and mechanical damage, by storing in original wrapping.

1.07 FIELD CONDITIONS

- A. Maintain ambient temperatures and conditions required by manufacturers of adhesives, mastics, and insulation cements.
- B. Maintain temperature during and after installation for minimum period of 24 hours.

PART 2 PRODUCTS

2.01 REQUIREMENTS FOR ALL PRODUCTS OF THIS SECTION

- A. Surface Burning Characteristics: Flame spread/Smoke developed index of 25/50, maximum, when tested in accordance with ASTM E84, NFPA 255, or UL 723.

2.02 GLASS FIBER, FLEXIBLE

- A. Manufacturers:
 - 1. Knauf Insulation; : www.knaufusa.com.
 - 2. Johns Manville Corporation; : www.jm.com.
 - 3. Owens Corning Corp; : www.owenscorning.com/#sle.
 - 4. CertainTeed Corporation; : www.certainteed.com.
 - 5. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Insulation: ASTM C553; flexible, noncombustible.
 - 1. 'K' Value: 0.36 at 75 degrees F, when tested in accordance with ASTM C177 or ASTM C518.
 - 2. Maximum Service Temperature: 450 degrees F, 850 degrees F, 1000 degrees F or 1200 degrees F.
 - 3. Maximum Water Vapor Sorption: 5.0 percent by weight.
- C. Vapor Barrier Jacket: Kraft paper reinforced with glass fiber yarn and bonded to aluminized film or Vinyl.
 - 1. Moisture Vapor Permeability: 0.02 perm inch, when tested in accordance with ASTM E96/E96M.
 - 2. Secure with self-sealing longitudinal laps and butt strips.
 - 3. Secure with outward clinch expanding staples and vapor barrier mastic.
- D. Tie Wire: 0.048 inch stainless steel with twisted ends on maximum 12 inch centers.
- E. Vapor Barrier Lap Adhesive:
 - 1. Compatible with insulation.
- F. Insulating Cement/Mastic:
 - 1. ASTM C195; hydraulic setting on mineral wool.

2.03 GLASS FIBER, RIGID

- A. Manufacturer:
 - 1. Knauf Insulation: www.knaufusa.com.
 - 2. Johns Manville Corporation: www.jm.com.
 - 3. Owens Corning Corp: www.owenscorning.com/#sle.
 - 4. CertainTeed Corporation; www.certainteed.com.
 - 5. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Insulation: ASTM C612 or ASTM C592; rigid, noncombustible.

1. 'K' Value: 0.25 at 75 degrees F, when tested in accordance with ASTM C177 or ASTM C518.
 2. Maximum Service Temperature: 850 degrees F or 1200 degrees F.
 3. Maximum Water Vapor Sorption: 5.0 percent by weight.
 4. Maximum Density: 8.0 lb/cu ft or 12.0 lb/cu ft.
- C. Vapor Barrier Jacket:
1. Kraft paper reinforced with glass fiber yarn and bonded to aluminized film or Vinyl.
 2. Moisture Vapor Permeability: 0.02 perm inch, when tested in accordance with ASTM E96/E96M.
 3. Secure with self-sealing longitudinal laps and butt strips.
 4. Secure with outward clinch expanding staples and vapor barrier mastic.
- D. Facing: 1 inch galvanized steel hexagonal wire mesh stitched on one face of insulation.
- E. Vapor Barrier Lap Adhesive:
1. Compatible with insulation.
- F. Insulating Cement/Mastic:
1. ASTM C195; hydraulic setting on mineral wool.

2.04 CELLULAR GLASS

- A. Manufacturer:
1. Pittsburgh Corning Corporation: www.foamglasinsulation.com/#sle.
 2. Substitutions: See Gilbane Project Manual.
- B. Insulation: ASTM C552, Grade 2.
1. 'K' Value: 0.41 at 100 degrees F.
 2. Service Temperature: Up to 900 degrees F.
 3. Water Vapor Permeability: 0.005 perm inch.
 4. Water Absorption: 0.2 percent by volume, maximum.
 5. Density: Minimum 6.80 lb/cu ft.

2.05 FLEXIBLE ELASTOMERIC CELLULAR INSULATION

- A. Manufacturer:
1. Armacell International: www.armacell.com/#sle.
- B. Insulation: Preformed flexible elastomeric cellular rubber insulation complying with ASTM C 534 Grade 3, Grade 2 or Grade 1, in sheet form.
1. Minimum Service Temperature: -40 degrees F.
 2. Maximum Service Temperature: 220 degrees F.
 3. Connection: Waterproof vapor barrier adhesive.
- C. Elastomeric Foam Adhesive: Air dried, contact adhesive, compatible with insulation.

2.06 JACKETS

- A. PVC Plastic:
1. Manufacturers:
 - a. Johns Manville Corporation: www.jm.com/#sle.
 - b. Substitutions: See Gilbane Project Manual.
 2. Jacket: Sheet material, off-white color.
 - a. Minimum Service Temperature: -40 degrees F.
 - b. Maximum Service Temperature: 150 degrees F.
 - c. Moisture Vapor Permeability: 0.02 perm inch, when tested in accordance with ASTM E96/E96M.
 - d. Thickness: 10 mil.

- e. Connections: Brush on welding adhesive or Pressure sensitive color matching vinyl tape.
- 3. Covering Adhesive Mastic:
 - a. Compatible with insulation.
- B. Canvas Jacket: UL listed 6 oz/sq yd plain weave cotton fabric treated with dilute fire retardant lagging adhesive.
 - 1. Lagging Adhesive:
 - a. Compatible with insulation.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that equipment has been tested before applying insulation materials.
- B. Verify that surfaces are clean and dry, with foreign material removed.

3.02 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Factory Insulated Equipment: Do not insulate.
- C. Exposed Equipment: Locate insulation and cover seams in least visible locations.
- D. Apply insulation close to equipment by grooving, scoring, and beveling insulation. Fasten insulation to equipment with studs, pins, clips, adhesive, wires, or bands.
- E. Fill joints, cracks, seams, and depressions with bedding compound to form smooth surface. On cold equipment, use vapor barrier cement.
- F. Insulated equipment containing fluids below ambient temperature: Insulate entire system.
- G. Fiber glass insulated equipment containing fluids below ambient temperature: Provide vapor barrier jackets, factory-applied or field-applied. Finish with glass cloth and vapor barrier adhesive.
- H. For hot equipment containing fluids 140 degrees F or less, do not insulate flanges and unions, but bevel and seal ends of insulation.
- I. For hot equipment containing fluids over 140 degrees F, insulate flanges and unions with removable sections and jackets.
- J. Fiber glass insulated equipment containing fluids above ambient temperature: Provide standard jackets, with or without vapor barrier, factory-applied or field-applied. Finish with glass cloth and adhesive.
- K. Inserts and Shields:
 - 1. Application: Equipment 1-1/2 inches diameter or larger.
 - 2. Shields: Galvanized steel or Steel between hangers and inserts.
 - 3. Insert location: Between support shield and equipment and under the finish jacket.
 - 4. Insert configuration: Minimum 6 inches long, of same thickness and contour as adjoining insulation; may be factory fabricated.
 - 5. Insert material: Hydrous calcium silicate insulation or other heavy density insulating material suitable for the planned temperature range.
- L. Finish insulation at supports, protrusions, and interruptions.
- M. Cover glass fiber insulation with metal mesh and finish with heavy coat of insulating cement.
- N. Nameplates and ASME Stamps: Bevel and seal insulation around; do not insulate over.
- O. Equipment Requiring Access for Maintenance, Repair, or Cleaning: Install insulation so it can be easily removed and replaced without damage.

3.03 SCHEDULES

- A. Equipment: Domestic hot-water storage tanks, heat exchangers, and expansion tanks, not factory insulated.
 - 1. Operating Temperature: 55 to 140 degrees F.
 - 2. Insulation Material: Glass Fiber
 - 3. Insulation Thickness: 2 inch.
 - 4. Field-Applied Jacket: PVC
 - 5. Vapor Retarder Required: No
 - 6. Finish: None.

END OF SECTION

NOT FOR BIDDING

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 22 07 19
PLUMBING PIPING INSULATION

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Piping insulation.
- B. Jackets and accessories.

1.02 RELATED REQUIREMENTS

- A. Section 07 84 00 - Firestopping.
- B. Section 22 10 05 - Plumbing Piping: Placement of hangers and hanger inserts.

1.03 REFERENCE STANDARDS

- A. ASTM A666 - Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar.
- B. ASTM B209 - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate.
- C. ASTM B209M - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate [Metric].
- D. ASTM C177 - Standard Test Method for Steady-State Heat Flux Measurements and Thermal Transmission Properties by Means of the Guarded-Hot-Plate Apparatus.
- E. ASTM C195 - Standard Specification for Mineral Fiber Thermal Insulating Cement.
- F. ASTM C449 - Standard Specification for Mineral Fiber Hydraulic-Setting Thermal Insulating and Finishing Cement.
- G. ASTM C518 - Standard Test Method for Steady-State Thermal Transmission Properties by Means of the Heat Flow Meter Apparatus.
- H. ASTM C534/C534M - Standard Specification for Preformed Flexible Elastomeric Cellular Thermal Insulation in Sheet and Tubular Form.
- I. ASTM C547 - Standard Specification for Mineral Fiber Pipe Insulation.
- J. ASTM C552 - Standard Specification for Cellular Glass Thermal Insulation.
- K. ASTM C578 - Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation.
- L. ASTM C585 - Standard Practice for Inner and Outer Diameters of Thermal Insulation for Nominal Sizes of Pipe and Tubing.
- M. ASTM C591 - Standard Specification for Unfaced Preformed Rigid Cellular Polyisocyanurate Thermal Insulation.
- N. ASTM C795 - Standard Specification for Thermal Insulation for Use in Contact with Austenitic Stainless Steel.
- O. ASTM D1056 - Standard Specification for Flexible Cellular Materials--Sponge or Expanded Rubber.
- P. ASTM D2842 - Standard Test Method for Water Absorption of Rigid Cellular Plastics.
- Q. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials.
- R. ASTM E96/E96M - Standard Test Methods for Water Vapor Transmission of Materials.
- S. NFPA 255 - Standard Method of Test of Surface Burning Characteristics of Building Materials; National Fire Protection Association.
- T. UL 723 - Standard for Test for Surface Burning Characteristics of Building Materials.

1.04 SUBMITTALS

- A. Product Data: Provide product description, thermal characteristics, list of materials and thickness for each service, and locations.
- B. Samples: Submit two samples of any representative size illustrating each insulation type.
- C. Manufacturer's Instructions: Indicate installation procedures that ensure acceptable workmanship and installation standards will be achieved.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the Products specified in this section with not less than three years of experience.
- B. Applicator Qualifications: Company specializing in performing the type of work specified in this section with minimum 3 years of experience, or and approved by manufacturer.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Accept materials on site, labeled with manufacturer's identification, product density, and thickness.

1.07 FIELD CONDITIONS

- A. Maintain ambient conditions required by manufacturers of each product.
- B. Maintain temperature before, during, and after installation for minimum of 24 hours.

PART 2 PRODUCTS

2.01 REQUIREMENTS FOR ALL PRODUCTS OF THIS SECTION

- A. Surface Burning Characteristics: Flame spread/Smoke developed index of 25/50, maximum, when tested in accordance with ASTM E84, NFPA 255, or UL 723.

2.02 GLASS FIBER

- A. Manufacturers:
 - 1. Knauf Insulation: www.knaufusa.com.
 - 2. Johns Manville Corporation: www.jm.com.
 - 3. Owens Corning Corp: www.owenscorning.com.
 - 4. CertainTeed Corporation; : www.certainteed.com.
 - 5. Substitutions: See Gilbane Project Manual.
- B. Insulation: ASTM C547 and ASTM C795; rigid molded, noncombustible.
 - 1. 'K' value: ASTM C177, 0.24 at 75 degrees F.
 - 2. Maximum service temperature: 850 degrees F; 1200 degrees F; 1600 degrees F.
 - 3. Maximum moisture absorption: 0.2 percent by volume.
- C. Insulation: ASTM C547 ; semi-rigid, noncombustible, end grain adhered to jacket.
 - 1. 'K' value: ASTM C177, 0.24 at 75 degrees F.
 - 2. Maximum service temperature: 650 degrees F.
 - 3. Maximum moisture absorption: 0.2 percent by volume.
- D. Vapor Barrier Jacket: White Kraft paper with glass fiber yarn, bonded to aluminized film; moisture vapor transmission when tested in accordance with ASTM E96/E96M of 0.02 perm-inches.
- E. Tie Wire: 0.048 inch stainless steel with twisted ends on maximum 12 inch centers.
- F. Vapor Barrier Lap Adhesive:
 - 1. Compatible with insulation.
- G. Insulating Cement/Mastic:
 - 1. ASTM C195; hydraulic setting on mineral wool.

- H. Fibrous Glass Fabric:
 - 1. Cloth: Untreated; 9 oz/sq yd weight.
 - 2. Blanket: 1.0 lb/cu ft density.
 - 3. Weave: 5x5; 10x10; or 10x20.
- I. Indoor Vapor Barrier Finish:
 - 1. Cloth: Untreated; 9 oz/sq yd weight.
 - 2. Vinyl emulsion type acrylic, compatible with insulation, black or white color.
- J. Outdoor Vapor Barrier Mastic:
 - 1. Vinyl emulsion type acrylic or mastic, compatible with insulation, black color.
- K. Outdoor Breather Mastic:
 - 1. Vinyl emulsion type acrylic or mastic, compatible with insulation, black color.
- L. Insulating Cement:
 - 1. ASTM C449/C449M.

2.03 CELLULAR GLASS

- A. Manufacturers:
 - 1. Pittsburgh Corning Corporation: www.foamglasinsulation.com/#sle.
 - 2. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Insulation: ASTM C552, Grade 1.
 - 1. 'K' value: 0.37 at 100 degrees F.
 - 2. Service Temperature: Up to 900 degrees F.
 - 3. Water Vapor Permeability: 0.005 perm inch.
 - 4. Water Absorption: 0.2 percent by volume, maximum.

2.04 EXPANDED POLYSTYRENE

- A. Manufacturers:
- B. Insulation: ASTM C578; rigid closed cell.
 - 1. 'K' value: 0.23 at 75 degrees F.
 - 2. Maximum service temperature: 165 degrees F.
 - 3. Maximum water vapor permeance: 5.0 perms

2.05 EXPANDED PERLITE

- A. Manufacturers:
 - 1. Schundler Company: www.schundler.com/#sle.
- B. Insulation: ASTM C610, molded.
 - 1. Maximum service temperature: 1200 degrees F.
 - 2. Maximum water vapor transmission: 0.1 perm.

2.06 POLYISOCYANURATE CELLULAR PLASTIC

- A. Insulation Material: ASTM C591, rigid molded modified polyisocyanurate cellular plastic.
 - 1. Dimension: Comply with requirements of ASTM C585.
 - 2. 'K' value: 0.18 at 75 degrees F, when tested in accordance with ASTM C518.
 - 3. Minimum Service Temperature: -70 degrees F.
 - 4. Maximum Service Temperature: 300 degrees F.
 - 5. Water Absorption: 0.5 percent by volume, maximum, when tested in accordance with ASTM D2842..
 - 6. Moisture Vapor Transmission: 4.0 perm in.
 - 7. Connection: Waterproof vapor barrier adhesive.

2.07 POLYETHYLENE

- A. Manufacturers:
 - 1. Armacell International: www.armacell.com/#sle.
- B. Insulation: Flexible closed-cell polyethylene tubing, slit lengthwise for installation, complying with applicable requirements of ASTM D1056.
 - 1. 'K' value: ASTM C177; 0.25 at 75 degrees F.
 - 2. Maximum Service Temperature: 200 degrees F.
 - 3. Density: 2 lb/cu ft.
 - 4. Maximum Moisture Absorption: 1.0 percent by volume.
 - 5. Moisture Vapor Permeability: 0.05 perm inch, when tested in accordance with ASTM E96/E96M.
 - 6. Connection: Contact adhesive.

2.08 FLEXIBLE ELASTOMERIC CELLULAR INSULATION

- A. Manufacturer:
 - 1. Armacell International: www.armacell.com/#sle.
 - 2. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Insulation: Preformed flexible elastomeric cellular rubber insulation complying with ASTM C 534 Grade 3; grade 2; grade 1 use molded tubular material wherever possible.
 - 1. Minimum Service Temperature: -40 degrees F.
 - 2. Maximum Service Temperature: 220 degrees F.
 - 3. Connection: Waterproof vapor barrier adhesive.
- C. Elastomeric Foam Adhesive: Air dried, contact adhesive, compatible with insulation.

2.09 JACKETS

- A. PVC Plastic.
 - 1. Manufacturers:
 - a. Johns Manville Corporation: www.jm.com/#sle.
 - b. Substitutions: See Section 01 60 00 - Product Requirements.
 - 2. Jacket: One piece molded type fitting covers and sheet material, off-white color.
 - a. Minimum Service Temperature: 0 degrees F.
 - b. Maximum Service Temperature: 150 degrees F.
 - c. Moisture Vapor Permeability: 0.002 perm inch, maximum, when tested in accordance with ASTM E96/E96M.
 - d. Thickness: 20 mil; 30 mil.
 - e. Connections: Brush on welding adhesive, tacks, pressure sensitive color matching vinyl tape.
 - 3. Covering Adhesive Mastic:
- B. ABS Plastic:
 - 1. Jacket: One piece molded type fitting covers and sheet material, off-white color.
 - a. Minimum Service Temperature: -40 degrees F.
 - b. Maximum Service Temperature of 180 degrees F.
 - c. Moisture Vapor Permeability: 0.012 perm inch, when tested in accordance with ASTM E96/E96M.
 - d. Thickness: 30 mil.
 - e. Connections: Brush on welding adhesive.
- C. Canvas Jacket: UL listed 6 oz/sq yd plain weave cotton fabric treated with dilute fire retardant lagging adhesive.
 - 1. Lagging Adhesive:
 - a. Compatible with insulation.

- D. Aluminum Jacket: ASTM B209 (ASTM B209M) formed aluminum sheet.
 - 1. Thickness: 0.016 inch, 0.020 inch sheet.
 - 2. Finish: Smooth, embossed.
 - 3. Joining: Longitudinal slip joints and 2 inch laps.
 - 4. Fittings: 0.016 inch thick die shaped fitting covers with factory attached protective liner.
 - 5. Metal Jacket Bands: 3/8 inch wide; 0.015 inch thick aluminum.
 - 6. Metal Jacket Bands: 3/8 inch wide; 0.010 inch thick stainless steel.
- E. Stainless Steel Jacket: ASTM A 666, Type 304 or 316 stainless steel.
 - 1. Thickness: 0.010 inch.
 - 2. Finish: Smooth.
 - 3. Metal Jacket Bands: 3/8 inch wide; 0.010 inch thick stainless steel.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that piping has been tested before applying insulation materials.
- B. Verify that surfaces are clean and dry, with foreign material removed.

3.02 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Install in accordance with NAIMA National Insulation Standards.
- C. Exposed Piping: Locate insulation and cover seams in least visible locations.
- D. Insulated pipes conveying fluids below ambient temperature: Insulate entire system including fittings, valves, unions, flanges, strainers, flexible connections, pump bodies, and expansion joints.
- E. Glass fiber insulated pipes conveying fluids below ambient temperature:
 - 1. Provide vapor barrier jackets, factory-applied or field-applied. Secure with self-sealing longitudinal laps and butt strips with pressure sensitive adhesive. Secure with outward clinch expanding staples and vapor barrier mastic.
 - 2. Insulate fittings, joints, and valves with molded insulation of like material and thickness as adjacent pipe. Finish with glass cloth and vapor barrier adhesive or PVC fitting covers.
- F. For hot piping conveying fluids 140 degrees F or less, do not insulate flanges and unions at equipment, but bevel and seal ends of insulation.
- G. For hot piping conveying fluids over 140 degrees F, insulate flanges and unions at equipment.
- H. Glass fiber insulated pipes conveying fluids above ambient temperature:
 - 1. Provide standard jackets, with or without vapor barrier, factory-applied or field-applied. Secure with self-sealing longitudinal laps and butt strips with pressure sensitive adhesive. Secure with outward clinch expanding staples.
 - 2. Insulate fittings, joints, and valves with insulation of like material and thickness as adjoining pipe. Finish with glass cloth and adhesive or PVC fitting covers.
- I. Inserts and Shields:
 - 1. Application: Piping 1-1/2 inches diameter or larger.
 - 2. Shields: Galvanized steel between pipe hangers or pipe hanger rolls and inserts.
 - 3. Insert location: Between support shield and piping and under the finish jacket.
 - 4. Insert configuration: Minimum 6 inches long, of same thickness and contour as adjoining insulation; may be factory fabricated.
 - 5. Insert material: Hydrous calcium silicate insulation or other heavy density insulating material suitable for the planned temperature range.

- J. Continue insulation through walls, sleeves, pipe hangers, and other pipe penetrations. Finish at supports, protrusions, and interruptions. At fire separations, refer to Section 07 84 00.
- K. Pipe Exposed in Mechanical Equipment Rooms or Finished Spaces (less than 10 feet above finished floor): Finish with PVC jacket and fitting covers.
- L. Exterior Applications: Provide vapor barrier jacket. Insulate fittings, joints, and valves with insulation of like material and thickness as adjoining pipe, and finish with glass mesh reinforced vapor barrier cement. Cover with aluminum jacket with seams located on bottom side of horizontal piping.
- M. Buried Piping: Provide factory fabricated assembly with inner all-purpose service jacket with self-sealing lap, and asphalt impregnated open mesh glass fabric, with one mil thick aluminum foil sandwiched between three layers of bituminous compound; outer surface faced with a polyester film.
- N. Heat Traced Piping: Insulate fittings, joints, and valves with insulation of like material, thickness, and finish as adjoining pipe. Size large enough to enclose pipe and heat tracer. Cover with aluminum jacket with seams located on bottom side of horizontal piping.

3.03 SCHEDULES

3.04 INTERIOR INSULATION APPLICATION SCHEDULE

- A. Service: Domestic hot, recirculated hot water.
 - 1. Operating Temperature: 60 to 140 deg F.
 - 2. Insulation Material: Flexible elastomeric or glass fiber.
 - 3. Insulation Thickness: Apply the following insulation thicknesses:
 - a. Pipe, All Sizes: 1.0 inch.
 - 4. Jacket:
 - a. Exposed Spaces (mechanical rooms, closets, etc.) = PVC
 - b. Concealed Spaces = None
 - 5. Vapor Retarder Required: No.
 - 6. Finish: None.
- B. Service: Domestic cold water.
 - 1. Operating Temperature: 35 to 60 deg F.
 - 2. Insulation Material: Flexible elastomeric or glass fiber.
 - 3. Insulation Thickness: Apply the following insulation thicknesses:
 - a. Pipe, 1" or less: 0.5 inch.
 - b. Pipe, 1¼" to 2": 0.5 inch.
 - c. Pipe, 2-1/2" to 4": 1.0 inch.
 - d. Pipe, 5" and up : 1.0 inch.
 - 4. Jacket:
 - a. Exposed Spaces (mechanical rooms, closets, etc.) = PVC
 - b. Concealed Spaces = None
 - 5. Vapor Retarder Required: Yes.
 - 6. Finish: None.
- C. Service: Rainwater conductors.
 - 1. Operating Temperature: 32 to 100 deg F.
 - 2. Insulation Material: Mineral fiber.
 - 3. Insulation Thickness: Apply the following insulation thicknesses:
 - a. Pipe, 3" and up: 1.0 inch.
 - 4. Jacket:
 - a. Concealed Piping - None
 - b. Exposed Piping - PVC

5. Vapor Retarder Required: Yes.
6. Finish: None.
- D. Service: Roof drain bodies.
 1. Operating Temperature: 32 to 100 deg F.
 2. Insulation Material: Mineral fiber.
 3. Insulation Thickness: 1.0 inch.
 4. Jacket:
 - a. Concealed - None
 - b. Exposed - PVC
 5. Vapor Retarder Required: Yes.
 6. Finish: None
- E. Service: Sanitary waste piping where heat tracing is installed.
 1. Operating Temperature: 35 to 100 deg F.
 2. Insulation Material: Mineral fiber.
 3. Insulation Thickness: Apply the following insulation thicknesses:
 - a. Pipe, 3" and up: 1.0 inch.
 4. Jacket: Aluminum.
 5. Vapor Retarder Required: Yes.
 6. Finish: None.
- F. Service: Condensate drain piping.
 1. Operating Temperature: 35 to 75 deg F.
 2. Insulation Material: Flexible elastomeric.
 3. Insulation Thickness: 0.5 inch.
 4. Jacket: None.
 5. Vapor Retarder Required: Yes.
 6. Finish: None.
- G. Service: Exposed sanitary drains and domestic water supplies and stops for fixtures for the disabled.
 1. Operating Temperature: 35 to 120 deg F.
 2. Insulation Material: Molded closed cell vinyl.
 3. Insulation Thickness: 3/16 inch.
 4. Vapor Retarder Required: No.
 5. Finish: None.

3.05 EXTERIOR INSULATION APPLICATION SCHEDULE

- A. This application schedule is for aboveground insulation outside the building. Loose-fill insulation, for belowground piping, is specified in Division 2 piping distribution Sections.
- B. Service: Domestic water.
 1. Operating Temperature: 60 to 180 deg F.
 2. Insulation Material: Cellular glass, with jacket
 3. Insulation Thickness: Apply the following insulation thicknesses:
 - a. Pipe, 1" or less: 2.0 inch.
 - b. Pipe, 1-1/4" and larger: 2.0 inch.
 4. Jacket: Aluminum.
 5. Vapor Retarder Required: No.
 6. Finish: None.
- C. Service: Storm water.
 1. Operating Temperature: 32 to 100 deg F.
 2. Insulation Material: Flexible elastomeric.
 3. Insulation Thickness: Apply the following insulation thicknesses:

- a. Pipe, 1-1/4" to 2": 0.5 inch.
- b. Pipe, 2-1/2" and up: 1.0 inch.
- 4. Field-Applied Jacket: Aluminum.
- 5. Vapor Retarder Required: Yes.
- 6. Finish: None.

END OF SECTION

NOT FOR BIDDING

SECTION 22 10 05
PLUMBING PIPING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Pipe, pipe fittings, valves, and connections for piping systems.
 - 1. Sanitary sewer.
 - 2. Chemical resistant sewer.
 - 3. Acid Waste (Chemical Resistant).
 - 4. Domestic water.
 - 5. Storm water.
 - 6. Gas.
 - 7. Flanges, unions, and couplings.
 - 8. Pipe hangers and supports.
 - 9. Ball valves.
 - 10. Valves.
 - 11. Flow controls.
 - 12. Check.
 - 13. Water pressure reducing valves.
 - 14. Relief valves.
 - 15. Strainers.

1.02 RELATED REQUIREMENTS

- A. Section 31 23 16 - Excavation.
- B. Section 31 23 23 - Fill.
- C. Section 31 23 16.13 - Trenching.
- D. Section 33 13 00 - Disinfecting of Water Utility Distribution.
- E. Section 07 84 00 - Firestopping.
- F. Section 08 31 00 - Access Doors and Panels.
- G. Section 09 90 00 - Paints and Coatings.
- H. Section 22 05 16 - Expansion Fittings and Loops for Plumbing Piping.
- I. Section 22 05 53 - Identification for Plumbing Piping and Equipment.
- J. Section 22 07 19 - Plumbing Piping Insulation.
- K. Section 26 27 17 - Equipment Wiring: Electrical characteristics and wiring connections.
- L. Section 33 13 00 - Disinfecting of Water Utility Distribution.

1.03 REFERENCE STANDARDS

- A. ANSI Z21.22 - American National Standard for Relief Valves and Automatic Gas Shutoff Devices for Hot Water Supply Systems.
- B. ASME B16.1 - Gray Iron Pipe Flanges and Flanged Fittings: Classes 25, 125, and 250.
- C. ASME B16.3 - Malleable Iron Threaded Fittings: Classes 150 and 300.
- D. ASME B16.4 - Gray Iron Threaded Fittings: Classes 125 and 250.
- E. ASME B16.18 - Cast Copper Alloy Solder Joint Pressure Fittings.
- F. ASME B16.22 - Wrought Copper and Copper Alloy Solder-Joint Pressure Fittings.
- G. ASME B16.23 - Cast Copper Alloy Solder Joint Drainage Fittings - DWV.
- H. ASME B16.26 - Cast Copper Alloy Fittings for Flared Copper Tubes.

- I. ASME B16.29 - Wrought Copper and Wrought Copper Alloy Solder Joint Drainage Fittings - DWV.
- J. ASME B31.1 - Power Piping.
- K. ASME B31.2 - Fuel Gas Piping; The American Society of Mechanical Engineers.
- L. ASME B31.9 - Building Services Piping.
- M. ASME BPVC-IV - Boiler and Pressure Vessel Code, Section IV - Rules for Construction of Heating Boilers.
- N. ASME BPVC-IX - Boiler and Pressure Vessel Code, Section IX - Welding, Brazing, and Fusing Qualifications.
- O. ASTM A47/A47M - Standard Specification for Ferritic Malleable Iron Castings.
- P. ASTM A53/A53M - Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless.
- Q. ASTM A74 - Standard Specification for Cast Iron Soil Pipe and Fittings.
- R. ASTM A234/A234M - Standard Specification for Piping Fittings of Wrought Carbon Steel and Alloy Steel for Moderate and High Temperature Service.
- S. ASTM B32 - Standard Specification for Solder Metal.
- T. ASTM B42 - Standard Specification for Seamless Copper Pipe, Standard Sizes.
- U. ASTM B43 - Standard Specification for Seamless Red Brass Pipe, Standard Sizes.
- V. ASTM B68/B68M - Standard Specification for Seamless Copper Tube, Bright Annealed.
- W. ASTM B68M - Standard Specification for Seamless Copper Tube, Bright Annealed (Metric).
- X. ASTM B75/B75M - Standard Specification for Seamless Copper Tube.
- Y. ASTM B75M - Standard Specification for Seamless Copper Tube (Metric).
- Z. ASTM B88 - Standard Specification for Seamless Copper Water Tube.
- AA. ASTM B88M - Standard Specification for Seamless Copper Water Tube (Metric).
- AB. ASTM B280 - Standard Specification for Seamless Copper Tube for Air Conditioning and Refrigeration Field Service.
- AC. ASTM B302 - Standard Specification for Threadless Copper Pipe, Standard Sizes.
- AD. ASTM B306 - Standard Specification for Copper Drainage Tube (DWV).
- AE. ASTM C4 - Standard Specification for Clay Drain Tile and Perforated Clay Drain Tile.
- AF. ASTM C14 - Standard Specification for Nonreinforced Concrete Sewer, Storm Drain, and Culvert Pipe.
- AG. ASTM C14M - Standard Specification for Nonreinforced Concrete Sewer, Storm Drain, and Culvert Pipe (Metric).
- AH. ASTM C76 - Standard Specification for Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe.
- AI. ASTM C76M - Standard Specification for Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe (Metric).
- AJ. ASTM C425 - Standard Specification for Compression Joints for Vitrified Clay Pipe and Fittings.
- AK. ASTM C443 - Standard Specification for Joints for Concrete Pipe and Manholes, Using Rubber Gaskets.
- AL. ASTM C443M - Standard Specification for Joints for Concrete Pipe and Manholes, Using Rubber Gaskets (Metric).

- AM. ASTM C564 - Standard Specification for Rubber Gaskets for Cast Iron Soil Pipe and Fittings.
- AN. ASTM C700 - Standard Specification for Vitrified Clay Pipe, Extra Strength, Standard Strength, and Perforated.
- AO. ASTM C1053 - Standard Specification for Borosilicate Glass Pipe and Fittings for Drain, Waste, and Vent (DWV) Applications.
- AP. ASTM D1785 - Standard Specification for Poly(Vinyl Chloride) (PVC) Plastic Pipe, Schedules 40, 80, and 120.
- AQ. ASTM D2235 - Standard Specification for Solvent Cement for Acrylonitrile-Butadiene-Styrene (ABS) Plastic Pipe and Fittings.
- AR. ASTM D2239 - Standard Specification for Polyethylene (PE) Plastic Pipe (SDR-PR) Based on Controlled Inside Diameter.
- AS. ASTM D2241 - Standard Specification for Poly (Vinyl Chloride) (PVC) Pressure-Rated Pipe (SDR Series).
- AT. ASTM D2447 - Standard Specification for Polyethylene (PE) Plastic Pipe, Schedules 40 and 80, Based on Outside Diameter; 2003.
- AU. ASTM D2466 - Standard Specification for Poly(Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 40.
- AV. ASTM D2513 - Standard Specification for Polyethylene (PE) Gas Pressure Pipe, Tubing, and Fittings.
- AW. ASTM D2564 - Standard Specification for Solvent Cements for Poly(Vinyl Chloride) (PVC) Plastic Piping Systems.
- AX. ASTM D2609 - Standard Specification for Plastic Insert Fittings for Polyethylene (PE) Plastic Pipe.
- AY. ASTM D2661 - Standard Specification for Acrylonitrile-Butadiene-Styrene (ABS) Schedule 40 Plastic Drain, Waste, and Vent Pipe and Fittings.
- AZ. ASTM D2665 - Standard Specification for Poly(Vinyl Chloride) (PVC) Plastic Drain, Waste, and Vent Pipe and Fittings.
- BA. ASTM D2680 - Standard Specification for Acrylonitrile-Butadiene-Styrene (ABS) and Poly(Vinyl Chloride) (PVC) Composite Sewer Piping.
- BB. ASTM D2683 - Standard Specification for Socket-Type Polyethylene Fittings for Outside Diameter-Controlled Polyethylene Pipe and Tubing.
- BC. ASTM D2729 - Standard Specification for Poly(Vinyl Chloride) (PVC) Sewer Pipe and Fittings.
- BD. ASTM D2751 - Standard Specification for Acrylonitrile-Butadiene-Styrene (ABS) Sewer Pipe and Fittings.
- BE. ASTM D2846/D2846M - Standard Specification for Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Hot- and Cold-Water Distribution Systems.
- BF. ASTM D2855 - Standard Practice for Making Solvent-Cemented Joints with Poly(Vinyl Chloride) (PVC) Pipe and Fittings.
- BG. ASTM D2996 - Standard Specification for Filament-Wound "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Pipe.
- BH. ASTM D2997 - Standard Specification for Centrifugally Cast "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Pipe.
- BI. ASTM D3034 - Standard Specification for Type PSM Poly(Vinyl Chloride) (PVC) Sewer Pipe and Fittings.

- BJ. ASTM D3262 - Standard Specification for "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Sewer Pipe.
- BK. ASTM D3517 - Standard Specification for "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Pressure Pipe.
- BL. ASTM D3754 - Standard Specification for "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Sewer and Industrial Pressure Pipe.
- BM. ASTM D3840 - Standard Specification for "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Pipe Fittings for Nonpressure Applications.
- BN. ASTM F437 - Standard Specification for Threaded Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 80.
- BO. ASTM F438 - Standard Specification for Socket-Type Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 40.
- BP. ASTM F439 - Standard Specification for Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 80.
- BQ. ASTM F441/F441M - Standard Specification for Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe, Schedules 40 and 80.
- BR. ASTM F442/F442M - Standard Specification for Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe (SDR-PR).
- BS. ASTM F477 - Standard Specification for Elastomeric Seals (Gaskets) for Joining Plastic Pipe.
- BT. ASTM F493 - Standard Specification for Solvent Cements for Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe and Fittings.
- BU. ASTM F628 - Standard Specification for Acrylonitrile-Butadiene-Styrene (ABS) Schedule 40 Plastic Drain, Waste, and Vent Pipe With a Cellular Core.
- BV. ASTM F679 - Standard Specification for Poly(Vinyl Chloride) (PVC) Large-Diameter Plastic Gravity Sewer Pipe and Fittings.
- BW. ASTM F708 - Standard Practice for Design and Installation of Rigid Pipe Hangers.
- BX. ASTM F1281 - Standard Specification for Crosslinked Polyethylene/Aluminum/Crosslinked Polyethylene (PEX-AL-PEX) Pressure Pipe.
- BY. ASTM F1282 - Standard Specification for Polyethylene/Aluminum/Polyethylene (PE-AL-PE) Composite Pressure Pipe.
- BZ. AWS A5.8M/A5.8 - Specification for Filler Metals for Brazing and Braze Welding.
- CA. AWWA C105/A21.5 - Polyethylene Encasement for Ductile-Iron Pipe Systems.
- CB. AWWA C110/A21.10 - Ductile-Iron and Gray-Iron Fittings.
- CC. AWWA C111/A21.11 - Rubber-Gasket Joints for Ductile-Iron Pressure Pipe and Fittings.
- CD. AWWA C151/A21.51 - Ductile-Iron Pipe, Centrifugally Cast.
- CE. AWWA C651 - Disinfecting Water Mains.
- CF. AWWA C900 - Polyvinyl Chloride (PVC) Pressure Pipe, 4 In. Through 12 In. (100 mm Through 300 mm), for Water Transmission and Distribution.
- CG. AWWA C901 - Polyethylene (PE) Pressure Pipe and Tubing, 1/2 In. (13 mm) Through 3 In. (76 mm), for Water Service.
- CH. AWWA C950 - Fiberglass Pressure Pipe.
- CI. CISPI 301 - Standard Specification for Hubless Cast Iron Soil Pipe and Fittings for Sanitary and Storm Drain, Waste and Vent Piping Applications.

- CJ. CISPI 310 - Specification for Coupling for Use in Connection with Hubless Cast Iron Soil Pipe and Fittings for Sanitary and Storm Drain, Waste, and Vent Piping Applications.
- CK. MSS SP-58 - Pipe Hangers and Supports - Materials, Design, Manufacture, Selection, Application, and Installation.
- CL. MSS SP-67 - Butterfly Valves.
- CM. MSS SP-69 - Pipe Hangers and Supports - Selection and Application; Manufacturers Standardization Society of the Valve and Fittings Industry, Inc..
- CN. MSS SP-70 - Cast Iron Gate Valves, Flanged and Threaded Ends.
- CO. MSS SP-71 - Cast Iron Swing Check Valves, Flanged and Threaded Ends.
- CP. MSS SP-78 - Cast Iron Plug Valves, Flanged and Threaded Ends.
- CQ. MSS SP-80 - Bronze Gate, Globe, Angle and Check Valves.
- CR. MSS SP-85 - Cast Iron Globe & Angle Valves, Flanged and Threaded Ends.
- CS. MSS SP-89 - Pipe Hangers and Supports - Fabrication and Installation Practices; Manufacturers Standardization Society of the Valve and Fittings Industry, Inc..
- CT. MSS SP-110 - Ball Valves Threaded, Socket-Welding, Solder Joint, Grooved and Flared Ends.
- CU. NFPA 54 - National Fuel Gas Code; National Fire Protection Association.
- CV. NFPA 58 - Liquefied Petroleum Gas Code; National Fire Protection Association.

1.04 SUBMITTALS

- A. Product Data: Provide data on pipe materials, pipe fittings, valves, and accessories. Provide manufacturers catalog information. Indicate valve data and ratings.
- B. Project Record Documents: Record actual locations of valves.

1.05 QUALITY ASSURANCE

- A. Perform Work in accordance with local standards.
 - 1. Maintain one copy on project site.
- B. Valves: Manufacturer's name and pressure rating marked on valve body.
- C. Welding Materials and Procedures: Conform to ASME (BPV IX) and applicable state labor regulations.
- D. Welder Qualifications: Certified in accordance with ASME (BPV IX).
- E. Identify pipe with marking including size, ASTM material classification, ASTM specification, potable water certification, water pressure rating.

1.06 REGULATORY REQUIREMENTS

- A. Perform Work in accordance with local plumbing code.
- B. Conform to applicable code for installation of backflow prevention devices.
- C. Provide certificate of compliance from authority having jurisdiction indicating approval of installation of backflow prevention devices.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Accept valves on site in shipping containers with labeling in place. Inspect for damage.
- B. Provide temporary protective coating on cast iron and steel valves.
- C. Provide temporary end caps and closures on piping and fittings. Maintain in place until installation.
- D. Protect piping systems from entry of foreign materials by temporary covers, completing sections of the work, and isolating parts of completed system.

1.08 FIELD CONDITIONS

- A. Do not install underground piping when bedding is wet or frozen.

1.09 EXTRA MATERIALS

- A. Provide two repacking kits for each size valve.

PART 2 PRODUCTS

2.01 SANITARY SEWER PIPING, BURIED BEYOND 5 FEET OF BUILDING

- A. Cast Iron Pipe: ASTM A74 service weight.
 - 1. Fittings: Cast iron.
 - 2. Joint Seals: ASTM C564 neoprene gaskets, or lead and oakum.
- B. PVC Pipe: ASTM D 3034 SDR 35. As permitted by code.
 - 1. Fittings: PVC.
 - 2. Joints: Push-on, using ASTM F477 elastomeric gaskets.
- C. PVC Pipe: ASTM D 2665 or ASTM D 3034. As permitted by code.
 - 1. Fittings: PVC.
 - 2. Joints: Solvent welded, with ASTM D2564 solvent cement.

2.02 SANITARY SEWER PIPING, BURIED WITHIN 5 FEET OF BUILDING

- A. Cast Iron Pipe: ASTM A74 service weight.
 - 1. Fittings: Cast iron.
 - 2. Joints: Hub-and-spigot, CISPI HSN compression type with ASTM C564 neoprene gaskets or lead and oakum.
- B. Cast Iron Pipe: CISPI 301, hubless.
 - 1. Fittings: Cast iron.
 - 2. Joints: CISPI 310, neoprene gasket and stainless steel clamp and shield assemblies.

2.03 SANITARY SEWER PIPING, ABOVE GRADE

- A. Cast Iron Pipe: ASTM A74, service weight.
 - 1. Fittings: Cast iron.
 - 2. Joint Seals: ASTM C564 neoprene gaskets, or lead and oakum.
- B. Cast Iron Pipe: CISPI 301, hubless, service weight.
 - 1. Fittings: Cast iron.
 - 2. Joints: CISPI 310, neoprene gaskets and stainless steel clamp-and-shield assemblies.
- C. PVC Pipe: ASTM D1785 Schedule 40, or ASTM D2241 SDR 26 for not less than 150 psi pressure rating.
 - 1. Fittings: ASTM D2466, PVC.
 - 2. Joints: Solvent welded, with ASTM D2564 Solvent cement.

2.04 CHEMICAL RESISTANT SEWER PIPING

- A. PPFR Pipe: Polypropylene, flame retardant. By Orion/Watts MFG or approved equal.
 - 1. Fittings: Polypropylene, PVDF
 - 2. Joints: Electrical resistance fusion or no-hub coupling

2.05 WATER PIPING, BURIED BEYOND 5 FEET OF BUILDING

- A. Ductile Iron Pipe: AWWA C151/A21.51.
 - 1. Fittings: AWWA C110, ductile or gray iron, standard thickness.
 - 2. Joints: AWWA C111/A21.11, rubber gasket with 3/4 inch diameter rods.
- B. Copper Pipe: ASTM B42, hard drawn.
 - 1. Fittings: ASME B16.18, cast copper alloy or ASME B16.22 wrought copper and bronze.
 - 2. Joints: ASTM B 32, alloy Sn95 solder.

- C. Copper Pipe: ASTM B42, annealed.
 - 1. Fittings: ASME B16.26, cast bronze.
 - 2. Joints: Flared.

2.06 WATER PIPING, BURIED WITHIN 5 FEET OF BUILDING

- A. Copper Pipe: ASTM B42, hard drawn.
 - 1. Fittings: ASME B16.18, cast copper alloy or ASME B16.22 wrought copper and bronze.
 - 2. Joints: ASTM B 32, alloy Sn95 solder.
- B. Copper Pipe: ASTM B42, annealed.
 - 1. Fittings: ASME B16.26, cast bronze.
 - 2. Joints: Flared.

2.07 WATER PIPING, ABOVE GRADE

- A. Copper Tube: ASTM B88 (ASTM B88M), Type L (B), Drawn (H).
 - 1. Fittings: ASME B16.18, cast copper alloy or ASME B16.22 wrought copper and bronze.
 - 2. Joints: ASTM B32, alloy Sn95 solder.

2.08 STORM WATER PIPING, BURIED BEYOND 5 FEET OF BUILDING

- A. Cast Iron Pipe: ASTM A74 service weight.
 - 1. Fittings: Cast iron.
 - 2. Joint Seals: ASTM C564 neoprene gaskets, or lead and oakum.
- B. Concrete Pipe: Nonreinforced, ASTM C14 (ASTM C14M) Class 1.
 - 1. Fittings: Concrete, as specified for pipe.
 - 2. Joints: Elastomeric gaskets; ASTM C443 (ASTM C443M).
- C. PVC Pipe: ASTM D2665 or ASTM D3034.
 - 1. Fittings: PVC.
 - 2. Joints: Solvent welded, with ASTM D2564 solvent cement.

2.09 STORM WATER PIPING, BURIED WITHIN 5 FEET OF BUILDING

- A. Cast Iron Pipe: ASTM A74 service weight.
 - 1. Fittings: Cast iron.
 - 2. Joint Seals: ASTM C564 neoprene gaskets, or lead and oakum.
- B. Cast Iron Pipe: CISPI 301, hubless, service weight.
 - 1. Fittings: Cast iron.
 - 2. Joints: Neoprene gaskets and stainless steel clamp-and-shield assemblies.
- C. PVC Pipe: ASTM D2665 or ASTM D3034.
 - 1. Fittings: PVC.
 - 2. Joints: Solvent welded, with ASTM D2564 solvent cement.

2.10 STORM WATER PIPING, ABOVE GRADE

- A. Cast Iron Pipe: ASTM A74 service weight.
 - 1. Fittings: Cast iron.
 - 2. Joint Seals: ASTM C564 neoprene gaskets, or lead and oakum.
- B. Cast Iron Pipe: CISPI 301, hubless, service weight.
 - 1. Fittings: Cast iron.
 - 2. Joints: Neoprene gaskets and stainless steel clamp-and-shield assemblies.
- C. PVC Pipe: ASTM D2665 or ASTM D3034.
 - 1. Fittings: PVC.
 - 2. Joints: Solvent welded, with ASTM D2564 solvent cement.

2.11 PROPANE/NATURAL GAS PIPING, BURIED BEYOND 5 FEET OF BUILDING

- A. Steel Pipe: ASTM A53/A53M Schedule 40 black.
 - 1. Fittings: ASTM A234/A234M, wrought steel welding type, with AWWA C105/A21.5 polyethylene jacket or double layer, half-lapped 10 mil polyethylene tape.
 - 2. Joints: ASME B31.1, welded.
 - 3. Jacket: AWWA C105/A21.5 polyethylene jacket or double layer, half-lapped 10 mil polyethylene tape.

2.12 PROPANE/NATURAL GAS PIPING, BURIED WITHIN 5 FEET OF BUILDING

- A. Steel Pipe: ASTM A53/A53M Schedule 40 black.
 - 1. Fittings: ASTM A234/A234M, wrought steel welding type.
 - 2. Joints: ASME B31.1 or ASME B31.9, welded.
 - 3. Jacket: AWWA C105/A21.5 polyethylene jacket or double layer, half-lapped 10 mil polyethylene tape.

2.13 PROPANE/NATURAL GAS PIPING, ABOVE GRADE

- A. Steel Pipe: ASTM A53/A53M Schedule 40 black.
 - 1. Fittings: ASME B16.3, malleable iron, or ASTM A234/A234M, wrought steel welding type.
 - 2. Joints: NFPA 54, threaded or welded to ASME B31.1 or ASME B31.9.

2.14 FLANGES, UNIONS, AND COUPLINGS

- A. Unions for Pipe Sizes 3 Inches and Under:
 - 1. Ferrous pipe: Class 150 malleable iron threaded unions.
 - 2. Copper tube and pipe: Class 150 bronze unions with soldered joints.
- B. Flanges for Pipe Size Over 1 Inch:
 - 1. Ferrous pipe: Class 150 malleable iron threaded or forged steel slip-on flanges; preformed neoprene gaskets.
 - 2. Copper tube and pipe: Class 150 slip-on bronze flanges; preformed neoprene gaskets.
- C. Grooved and Shouldered Pipe End Couplings:
 - 1. Housing: Malleable iron clamps to engage and lock, designed to permit some angular deflection, contraction, and expansion; steel bolts, nuts, and washers; galvanized for galvanized pipe.
 - 2. Sealing gasket: "C" shape composition sealing gasket.
- D. Dielectric Connections: Union with galvanized or plated steel threaded end, copper solder end, water impervious isolation barrier.

2.15 PIPE HANGERS AND SUPPORTS

- A. Provide hangers and supports that comply with MSS SP-58.
 - 1. If type of hanger or support for a particular situation is not indicated, select appropriate type using MSS SP-58 recommendations.
 - 2. Overhead Supports: Individual steel rod hangers attached to structure or to trapeze hangers.
 - 3. Trapeze Hangers: Welded steel channel frames attached to structure.
 - 4. Vertical Pipe Support: Steel riser clamp.
- B. Plumbing Piping - Drain, Waste, and Vent:
 - 1. Conform to ASME B31.9.
 - 2. Hangers for Pipe Sizes 1/2 Inch to 1-1/2 Inches: Malleable iron, adjustable swivel, split ring.
 - 3. Hangers for Pipe Sizes 2 Inches and Over: Carbon steel, adjustable, clevis.
 - 4. Multiple or Trapeze Hangers: Steel channels with welded spacers and hanger rods.
 - 5. Wall Support for Pipe Sizes to 3 Inches: Cast iron hook.

6. Wall Support for Pipe Sizes 4 Inches and Over: Welded steel bracket and wrought steel clamp.
7. Vertical Support: Steel riser clamp.
8. Floor Support: Cast iron adjustable pipe saddle, lock nut, nipple, floor flange, and concrete pier or steel support.
9. Copper Pipe Support: Carbon steel ring, adjustable, copper plated.
- C. Plumbing Piping - Water:
 1. Conform to ASME B31.9.
 2. Hangers for Pipe Sizes 1/2 Inch to 1-1/2 Inches: Malleable iron, adjustable swivel, split ring.
 3. Hangers for Cold Pipe Sizes 2 Inches and Over: Carbon steel, adjustable, clevis.
 4. Hangers for Hot Pipe Sizes 2 Inches to 4 Inches: Carbon steel, adjustable, clevis.
 5. Hangers for Hot Pipe Sizes 6 Inches and Over: Adjustable steel yoke, cast iron pipe roll, double hanger.
 6. Multiple or Trapeze Hangers: Steel channels with welded supports or spacers and hanger rods.
 7. Multiple or Trapeze Hangers for Hot Pipe Sizes 6 Inches and Over: Steel channels with welded supports or spacers and hanger rods, cast iron roll.
 8. Wall Support for Pipe Sizes to 3 Inches: Cast iron hook.
 9. Wall Support for Pipe Sizes 4 Inches and Over: Welded steel bracket and wrought steel clamp.
 10. Wall Support for Hot Pipe Sizes 6 Inches and Over: Welded steel bracket and wrought steel clamp with adjustable steel yoke and cast iron pipe roll.
 11. Vertical Support: Steel riser clamp.
 12. Floor Support for Cold Pipe: Cast iron adjustable pipe saddle, lock nut, nipple, floor flange, and concrete pier or steel support.
 13. Floor Support for Hot Pipe Sizes to 4 Inches: Cast iron adjustable pipe saddle, locknut, nipple, floor flange, and concrete pier or steel support.
 14. Floor Support for Hot Pipe Sizes 6 Inches and Over: Adjustable cast iron pipe roll and stand, steel screws, and concrete pier or steel support.
 15. Copper Pipe Support: Carbon steel ring, adjustable, copper plated.

2.16 GATE VALVES

- A. Manufacturers:
 1. Conbraco Industries: www.conbraco.com.
 2. Nibco, Inc: www.nibco.com.
 3. Milwaukee Valve Company: www.milwaukeevalve.com.
- B. Up To and Including 3 Inches:
 1. 1, Class 125, bronze body, bronze trim, rising stem, handwheel, inside screw, solid wedge disc, solder ends.
- C. 2 Inches and Larger:
 1. 1, Class 125, iron body, bronze trim, outside screw and yoke, handwheel, solid wedge disc, flanged ends. Provide chain-wheel operators for valves 6 inches and larger mounted over 8 feet above floor.

2.17 GLOBE VALVES

- A. Manufacturers:
 1. Conbraco Industries: www.conbraco.com.
 2. Nibco, Inc: www.nibco.com.
 3. Milwaukee Valve Company: www.milwaukeevalve.com.
- B. Up To and Including 3 Inches:

1. 1, Class 125, bronze body, bronze trim, handwheel, bronze disc, solder ends.
- C. 2 Inches and Larger:
 1. 1, Class 125, iron body, bronze trim, handwheel, outside screw and yoke, renewable bronze plug-type disc, renewable seat, flanged ends. Provide chain-wheel operators for valves 6 inches and larger mounted over 8 feet above floor.

2.18 BALL VALVES

- A. Manufacturers:
 1. Conbraco Industries: www.conbraco.com.
 2. Nibco, Inc: www.nibco.com.
 3. Milwaukee Valve Company: www.milwaukeevalve.com.
- B. Construction, 4 Inches and Smaller: MSS SP-110, Class 150, 400 psi CWP, bronze or ductile iron body, 304 stainless steel or chrome plated brass ball, regular port, teflon seats and stuffing box ring, blow-out proof stem, lever handle with balancing stops, threaded or grooved ends with union.
- C. Construction, 4 Inches and Smaller: MSS SP-110, Class 150, 400 psi CWP, bronze, two piece body, chrome plated brass ball, regular port, teflon seats and stuffing box ring, blow-out proof stem, lever handle with balancing stops, solder ends with union.

2.19 PLUG VALVES

- A. Manufacturers:
 1. Conbraco Industries: www.conbraco.com.
 2. Nibco, Inc: www.nibco.com.
 3. Milwaukee Valve Company: www.milwaukeevalve.com.
- B. Construction 2-1/2 Inches and Larger: 1, 175 psi CWP, cast iron body and plug, pressure lubricated, teflon or Buna N packing, flanged or grooved ends. Provide lever operator with set screw.

2.20 BUTTERFLY VALVES

- A. Manufacturers:
 1. Hammond Valve: www.hammondvalve.com.
 2. Crane Co.: www.cranevalve.com.
 3. Milwaukee Valve Company: www.milwaukeevalve.com.
- B. Construction 1-1/2 Inches and Larger: MSS SP-67, 200 psi CWP, cast or ductile iron body, nickel-plated ductile iron disc, resilient replaceable EPDM, Buna N, or EPT seat, wafer, lug, or grooved ends, extended neck, 10 position lever handle.
- C. Provide gear operators for valves 8 inches and larger, and chain-wheel operators for valves mounted over 8 feet above floor.

2.21 FLOW CONTROLS

- A. Manufacturers:
 1. ITT Bell & Gossett: www.bellgossett.com.
 2. Griswold Controls: www.griswoldcontrols.com.
 3. Taco, Inc: www.taco-hvac.com.
- B. Construction: Class 125, Brass or bronze body with union on inlet and outlet, temperature and pressure test plug on inlet and outlet, blowdown/backflush drain.
- C. Calibration: Control flow within 5 percent of selected rating, over operating pressure range of 10 times minimum pressure required for control, maximum minimum pressure 3.5 psi psi.

2.22 SWING CHECK VALVES

- A. Manufacturers:

1. Hammond Valve: www.hammondvalve.com.
 2. Nibco, Inc: www.nibco.com.
 3. Milwaukee Valve Company: www.milwaukeevalve.com.
- B. Up to 3 Inches:
1. 1, Class 125, bronze body and cap, bronze swing disc with rubber seat, solder ends.
- C. Over 3 Inches:
1. 1, Class 125, iron body, bronze swing disc, renewable disc seal and seat, flanged or grooved ends.

2.23 SPRING LOADED CHECK VALVES

- A. Manufacturers:
1. Hammond Valve: www.hammondvalve.com.
 2. Crane Co.: www.cranevalve.com.
 3. Milwaukee Valve Company: www.milwaukeevalve.com.
- B. Class 125, iron body, bronze trim, stainless steel springs, bronze disc, Buna N seals, wafer style ends.

2.24 WATER PRESSURE REDUCING VALVES

- A. Manufacturers:
1. Amtrol Inc: www.amtrol.com/#sle.
 2. Cla-Val Co: www.cla-val.com/#sle.
 3. Watts Regulator Company: www.wattsregulator.com/#sle.
- B. Up to 2 Inches:
1. MSS SP-80, bronze body, stainless steel and thermoplastic internal parts, fabric reinforced diaphragm, strainer, threaded single or double union ends.
- C. Over 2 Inches:
1. MSS SP-85, cast iron body, bronze fitted, elastomeric diaphragm and seat disc, flanged.

2.25 RELIEF VALVES

2.26 STRAINERS

2.27 RELIEF VALVES

- A. Pressure Relief:
1. Manufacturers:
 - a. Cla-Val Co: www.cla-val.com.
 - b. Henry Technologies: www.henrytech.com.
 - c. Watts Regulator Company: www.wattsregulator.com.
 2. AGA Z21.22 certified, bronze body, teflon seat, steel stem and springs, automatic, direct pressure actuated.
- B. Temperature and Pressure Relief:
1. Manufacturers:
 - a. Cla-Val Co: www.cla-val.com.
 - b. Henry Technologies: www.henrytech.com.
 - c. Watts Regulator Company: www.wattsregulator.com.
 2. AGA Z21.22 certified, bronze body, teflon seat, stainless steel stem and springs, automatic, direct pressure actuated, temperature relief maximum 210 degrees F, capacity ASME (BPV IV) certified and labelled.

2.28 STRAINERS

- A. Manufacturers:
1. Armstrong International, Inc: www.armstronginternational.com.

2. Green Country Filter Manufacturing: www.greencountryfilter.com.
3. WEAMCO: www.weamco.com.
- B. Size 2 inch and Under:
 1. Threaded brass body for 175 psi CWP, Y pattern with 1/32 inch stainless steel perforated screen.
 2. Class 150, threaded bronze body 300 psi CWP, Y pattern with 1/32 inch stainless steel perforated screen.
- C. Size 1-1/2 inch to 4 inch:
 1. Class 125, flanged iron body, Y pattern with 1/16 inch stainless steel perforated screen.
- D. Size 5 inch and Larger:
 1. Class 125, flanged iron body, basket pattern with 1/8 inch stainless steel perforated screen.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that excavations are to required grade, dry, and not over-excavated.

3.02 PREPARATION

- A. Ream pipe and tube ends. Remove burrs. Bevel plain end ferrous pipe.
- B. Remove scale and dirt, on inside and outside, before assembly.
- C. Prepare piping connections to equipment with flanges or unions.

3.03 INSTALLATION

- A. All gas piping shall be painted standard ANSI yellow.
- B. Install in accordance with manufacturer's instructions.
- C. Provide non-conducting dielectric connections wherever jointing dissimilar metals.
- D. Route piping in orderly manner and maintain gradient. Route parallel and perpendicular to walls.
- E. Install piping to maintain headroom, conserve space, and not interfere with use of space.
- F. Group piping whenever practical at common elevations.
- G. Install piping to allow for expansion and contraction without stressing pipe, joints, or connected equipment. Refer to Section 22 05 16.
- H. Provide clearance in hangers and from structure and other equipment for installation of insulation and access to valves and fittings. Refer to Section 22 07 19.
- I. Provide access where valves and fittings are not exposed. Coordinate size and location of access doors with Section 08 31 00.
- J. Establish elevations of buried piping outside the building to ensure not less than 3 ft of cover.
- K. Install vent piping penetrating roofed areas to maintain integrity of roof assembly .
- L. Where pipe support members are welded to structural building framing, scrape, brush clean, and apply one coat of zinc rich primer to welding.
- M. Provide support for utility meters in accordance with requirements of utility companies.
- N. Prepare exposed, unfinished pipe, fittings, supports, and accessories ready for finish painting. Refer to Section 09 90 00.
- O. Excavate in accordance with Section 31 23 16.
- P. Backfill in accordance with Section 31 23 23.
- Q. Install bell and spigot pipe with bell end upstream.

- R. Install valves with stems upright or horizontal, not inverted.
- S. Pipe vents from gas pressure reducing valves to outdoors and terminate in weather proof hood.
- T. Install water piping to ASME B31.9.
- U. Install fuel oil piping to ASME B31.9.
- V. PVC Pipe: Make solvent-welded joints in accordance with ASTM D2855.
- W. Sleeve pipes passing through partitions, walls and floors.
- X. Inserts:
 - 1. Provide inserts for placement in concrete formwork.
 - 2. Provide inserts for suspending hangers from reinforced concrete slabs and sides of reinforced concrete beams.
 - 3. Provide hooked rod to concrete reinforcement section for inserts carrying pipe over 4 inches.
 - 4. Where concrete slabs form finished ceiling, locate inserts flush with slab surface.
 - 5. Where inserts are omitted, drill through concrete slab from below and provide through-bolt with recessed square steel plate and nut flush with top of slab.
- Y. Pipe Hangers and Supports:
 - 1. Install in accordance with ASME B31.9.
 - 2. Support horizontal piping as scheduled.
 - 3. Install hangers to provide minimum 1/2 inch space between finished covering and adjacent work.
 - 4. Place hangers within 12 inches of each horizontal elbow.
 - 5. Use hangers with 1-1/2 inch minimum vertical adjustment. Design hangers for pipe movement without disengagement of supported pipe.
 - 6. Support vertical piping at every floor. Support riser piping independently of connected horizontal piping.
 - 7. Where several pipes can be installed in parallel and at same elevation, provide multiple or trapeze hangers.
 - 8. Provide copper plated hangers and supports for copper piping.
 - 9. Prime coat exposed steel hangers and supports. Refer to Section 09 90 00. Hangers and supports located in crawl spaces, pipe shafts, and suspended ceiling spaces are not considered exposed.
 - 10. Provide hangers adjacent to motor driven equipment with vibration isolation; refer to Section 22 05 48.
 - 11. Support cast iron drainage piping at every joint.

3.04 APPLICATION

- A. Use grooved mechanical couplings and fasteners only in accessible locations.
- B. Install unions downstream of valves and at equipment or apparatus connections.
- C. Install brass male adapters each side of valves in copper piped system. Solder adapters to pipe.
- D. Install gate or ball valves for shut-off and to isolate equipment, part of systems, or vertical risers.
- E. Install globe valves for throttling, bypass, or manual flow control services.
- F. Provide lug end butterfly valves adjacent to equipment when provided to isolate equipment.
- G. Provide spring loaded check valves on discharge of water pumps.
- H. Provide plug valves in natural gas systems for shut-off service.
- I. Provide flow controls in water recirculating systems where indicated.

3.05 TOLERANCES

- A. Drainage Piping: Establish invert elevations within 1/2 inch vertically of location indicated and slope to drain at minimum of 1/4 inch per foot slope.
- B. Water Piping: Slope at minimum of 1/32 inch per foot and arrange to drain at low points.

3.06 DISINFECTION OF DOMESTIC WATER PIPING SYSTEM

- A. Disinfect water distribution system in accordance with Section 33 13 00.
- B. Prior to starting work, verify system is complete, flushed and clean.
- C. Ensure Ph of water to be treated is between 7.4 and 7.6 by adding alkali (caustic soda or soda ash) or acid (hydrochloric).
- D. Inject disinfectant, free chlorine in liquid, powder, tablet or gas form, throughout system to obtain 50 to 80 mg/L residual.
- E. Bleed water from outlets to ensure distribution and test for disinfectant residual at minimum 15 percent of outlets.
- F. Maintain disinfectant in system for 24 hours.
- G. If final disinfectant residual tests less than 25 mg/L, repeat treatment.
- H. Flush disinfectant from system until residual equal to that of incoming water or 1.0 mg/L.
- I. Take samples no sooner than 24 hours after flushing, from 10 percent of outlets and from water entry, and analyze in accordance with AWWA C651.

3.07 SERVICE CONNECTIONS

- A. Provide new sanitary and storm sewer services. Before commencing work check invert elevations required for sewer connections, confirm inverts and ensure that these can be properly connected with slope for drainage and cover to avoid freezing.
- B. Provide new water service complete with approved reduced pressure backflow preventer and water meter with by-pass valves, pressure reducing valve.
 - 1. Provide sleeve in wall for service main and support at wall with reinforced concrete bridge. Calk enlarged sleeve and make watertight with pliable material. Anchor service main inside to concrete wall.
 - 2. Provide 18 gage galvanized sheet metal sleeve around service main to 6 inch above floor and 6 feet minimum below grade. Size for minimum of 2 inches of loose batt insulation stuffing.
- C. Provide new gas service complete with gas meter and regulators. Gas service distribution piping to have initial minimum pressure of 7 inch wg. Provide regulators on each line serving gravity type appliances, sized in accordance with equipment.

3.08 SCHEDULES

- A. Pipe Hanger Spacing:
 - 1. Metal Piping:
 - a. Pipe size: 1/2 inches to 1-1/4 inches:
 - 1) Maximum hanger spacing: 6.5 ft.
 - 2) Hanger rod diameter: 3/8 inches.
 - b. Pipe size: 1-1/2 inches to 2 inches:
 - 1) Maximum hanger spacing: 10 ft.
 - 2) Hanger rod diameter: 3/8 inch.
 - c. Pipe size: 2-1/2 inches to 3 inches:
 - 1) Maximum hanger spacing: 10 ft.
 - 2) Hanger rod diameter: 1/2 inch.
 - d. Pipe size: 4 inches to 6 inches:

- 1) Maximum hanger spacing: 10 ft.
 - 2) Hanger rod diameter: 5/8 inch.
 - e. Pipe size: 8 inches to 12 inches:
 - 1) Maximum hanger spacing: 14 ft.
 - 2) Hanger rod diameter: 7/8 inch.
 - f. Pipe size: 14 inches and Over:
 - 1) Maximum hanger spacing: 20 ft.
 - 2) Hanger rod diameter: 1 inch.
- 2. Plastic Piping:
 - a. Pipe Size 1" to 6":
 - 1) Maximum hanger spacing: 6 ft.
 - 2) Hanger rod diameter: 3/8 inch.
 - b. Pipe Size 8" and Over:
 - 1) Maximum hanger spacing: 6 ft.
 - 2) Hanger rod diameter: 7/8 inch.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 22 10 06
PLUMBING PIPING SPECIALTIES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Roof and floor drains.
- B. Cleanouts.
- C. Hydrants.
- D. Backflow preventers.
- E. Water hammer arrestors.
- F. Interceptors.
- G. Thermostatic mixing valves.
- H. Catch basins and manholes.

1.02 RELATED REQUIREMENTS

- A. Section 33 05 13 - Manholes and Structures.
- B. Section 03 30 00 - Cast-in-Place Concrete: Manhole bottoms.
- C. Section 22 10 05 - Plumbing Piping.
- D. Section 22 40 00 - Plumbing Fixtures.
- E. Section 22 30 00 - Plumbing Equipment.
- F. Section 26 27 17 - Equipment Wiring: Electrical characteristics and wiring connections.

1.03 REFERENCE STANDARDS

- A. ASME A112.6.3 - Floor and Trench Drains.
- B. ASME A112.6.4 - Roof, Deck, and Balcony Drains.
- C. ASSE 1011 - Hose Connection Vacuum Breakers.
- D. ASSE 1012 - Backflow Preventer with Intermediate Atmospheric Vent.
- E. ASSE 1013 - Reduced Pressure Principle Backflow Preventers and Reduced Pressure Principle Fire Protection Backflow Preventers.
- F. ASSE 1019 - Performance Requirements for Wall Hydrant with Backflow Protection and Freeze Resistance.
- G. ASTM C478 - Standard Specification for Circular Precast Reinforced Concrete Manhole Sections.
- H. ASTM C478M - Standard Specification for Circular Precast Reinforced Concrete Manhole Sections [Metric].
- I. PDI-WH 201 - Water Hammer Arresters.

1.04 SUBMITTALS

- A. Product Data: Provide component sizes, rough-in requirements, service sizes, and finishes.
- B. Shop Drawings: Indicate dimensions, weights, and placement of openings and holes.
- C. Certificates: Certify that grease or oil interceptors meet or exceed specified requirements.
- D. Manufacturer's Instructions: Indicate Manufacturer's Installation Instructions: Indicate assembly and support requirements.
- E. Project Record Documents: Record actual locations of equipment, cleanouts, backflow preventers, water hammer arrestors.

- F. Operation Data: Indicate frequency of treatment required for interceptors.
- G. Maintenance Data: Include installation instructions, spare parts lists, exploded assembly views.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the Products specified in this section with not less than three years documented experience.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Accept specialties on site in original factory packaging. Inspect for damage.

1.07 EXTRA MATERIALS

- A. Supply for Owner's use in maintenance of project:
 - 1. Two loose keys for outside hose bibbs.
 - 2. Two hose end vacuum breakers for hose bibbs.

PART 2 PRODUCTS

2.01 DRAINS

- A. Manufacturers:
 - 1. Josam Company: www.josam.com/#sle.
 - 2. Jay R. Smith Manufacturing Company: www.jayrsmith.com.
 - 3. Zurn Industries, Inc: www.zurn.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Roof Drains:
 - 1. Assembly: ASME A112.6.4.
 - 2. Body: Lacquered cast iron with sump.
 - 3. Strainer: Removable polyethylene, cast metal, cast bronze, or cast iron dome with vandal proof screws.
 - 4. Accessories: Coordinate with roofing type.
 - a. Membrane flange and membrane clamp with integral gravel stop.
 - b. Adjustable under deck clamp.
 - c. Roof sump receiver.
 - d. Waterproofing flange.
 - e. Controlled flow weir.
 - f. Leveling frame.
 - g. Adjustable extension sleeve for roof insulation.
 - h. Perforated or slotted ballast guard extension for inverted roof.
 - i. Perforated stainless steel ballast guard extension.
- C. Parapet Drains:
 - 1. Lacquered or Galvanized cast iron body with aluminum flashing clamp collar and epoxy coated or nickel bronze sloping grate.
- D. Canopy and Cornice Drains:
 - 1. Lacquered or Galvanized cast iron body with aluminum flashing clamp collar and epoxy coated or nickel bronze flat strainer.
- E. Roof Overflow Drains:
 - 1. Lacquered or Galvanized cast iron body and clamp collar and bottom clamp ring; pipe extended to above flood elevation.
- F. Downspout Nozzles:
 - 1. Bronze round with straight bottom section.
- G. Area Drains:
 - 1. Assembly: ASME A112.6.4.

2. Body: Lacquered cast iron with sump.
3. Strainer: Round nickel-bronze.
4. Accessories: Membrane flange and membrane clamp with integral gravel stop, with adjustable under deck clamp, roof sump receiver, waterproofing flange, levelling frame, adjustable extension sleeve (for insulation), and perforated stainless steel ballast guard extension.

H. Floor Drain:

1. Round, type 304 stainless steel adjustable floor drain with anchor flange and medium-duty vertically adjustable satin finish top.

2.02 CLEANOUTS

A. Manufacturers:

1. Jay R. Smith Manufacturing Company: www.jayrsmith.com/#sle.
2. Josam Company: www.josam.com/#sle.
3. Zurn Industries, Inc: www.zurn.com/#sle.
4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Cleanouts at Exterior Surfaced Areas:

1. Round cast nickel bronze access frame and non-skid cover.

C. Cleanouts at Exterior Unsurfaced Areas:

1. Line type with lacquered cast iron body and round epoxy coated gasketed cover.

D. Cleanouts at Interior Finished Floor Areas:

1. Lacquered cast iron body with anchor flange, reversible clamping collar, threaded top assembly, and round gasketed scored cover in service areas and round gasketed depressed cover to accept floor finish in finished floor areas.

E. Cleanouts at Interior Finished Wall Areas:

1. Line type with lacquered cast iron body and round epoxy coated gasketed cover, and round stainless steel access cover secured with machine screw.

F. Cleanouts at Interior Unfinished Accessible Areas: Calked or threaded type. Provide bolted stack cleanouts on vertical rainwater leaders.

2.03 HYDRANTS

A. Manufacturers:

1. Arrowhead Brass Company: www.arrowheadbrass.com/#sle.
2. Jay R. Smith Manufacturing Company: www.jayrsmith.com/#sle.
3. Zurn Industries, Inc: www.zurn.com/#sle.

B. Wall Hydrants: Exterior

1. ASSE 1019; tamper-proof, freeze resistant, self-draining type with chrome plated wall plate hose thread spout, handwheel, and integral vacuum breaker.

C. Roof Hydrant:

1. Freezeless, cast iron support components. Drain connection, EPDM Boot.

2.04 BACKFLOW PREVENTERS

A. Manufacturers:

1. Conbraco Industries: www.conbraco.com/#sle.
2. Watts Regulator Company: www.wattsregulator.com/#sle.
3. Zurn Industries, Inc: www.zurn.com/#sle.
4. Substitutions: See Section 01 60 00 - Product Requirements.

B. Reduced Pressure Backflow Preventers:

1. ASSE 1013; bronze body with bronze internal parts and stainless steel springs; two independently operating, spring loaded check valves; diaphragm type differential pressure

relief valve located between check valves; third check valve that opens under back pressure in case of diaphragm failure; non-threaded vent outlet; assembled with two gate valves, strainer, and four test cocks.

2.05 DOUBLE CHECK VALVE ASSEMBLIES

- A. Manufacturers:
 - 1. Conbraco Industries: www.conbraco.com/#sle.
 - 2. Watts Regulator Company: www.wattsregulator.com/#sle.
 - 3. Zurn Industries, Inc: www.zurn.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Double Check Valve Assemblies:
 - 1. ASSE 1012; Bronze body with corrosion resistant internal parts and stainless steel springs; two independently operating check valves with intermediate atmospheric vent.

2.06 WATER HAMMER ARRESTORS

- A. Manufacturers:
 - 1. Jay R. Smith Manufacturing Company: www.jayrsmith.com/#sle.
 - 2. Watts Regulator Company: www.wattsregulator.com/#sle.
 - 3. Zurn Industries, Inc: www.zurn.com/#sle.
 - 4. Souix Chief Company.
 - 5. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Water Hammer Arrestors:
 - 1. Stainless steel construction, bellows or piston type sized in accordance with PDI-WH 201, precharged suitable for operation in temperature range -100 to 300 degrees F and maximum 250 psi working pressure.

2.07 MIXING VALVES

- A. Thermostatic Mixing Valves:
 - 1. Manufacturers:
 - a. ESBE: www.esbe.se/en.
 - b. Leonard Valve Company: www.leonardvalve.com.
 - c. Honeywell Water Controls: <http://yourhome.honeywell.com/#sle>.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
 - 2. Valve: Chrome plated cast brass body, stainless steel or copper alloy bellows, integral temperature adjustment.
 - 3. Accessories:
 - a. Check valve on inlets.
 - b. Volume control shut-off valve on outlet.
 - c. Stem thermometer on outlet.
 - d. Strainer stop checks on inlets.
 - 4. Cabinet: 16 gage prime coated steel, for recessed mounting with keyed lock.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Extend cleanouts to finished floor or wall surface. Lubricate threaded cleanout plugs with mixture of graphite and linseed oil. Ensure clearance at cleanout for rodding of drainage system.
- C. Encase exterior cleanouts in concrete flush with grade.
- D. Install floor cleanouts at elevation to accommodate finished floor.

- E. Install approved portable water protection devices on plumbing lines where contamination of domestic water may occur; on boiler feed water lines, janitor rooms, fire sprinkler systems, premise isolation, irrigation systems, flush valves, interior and exterior hose bibbs.
- F. Pipe relief from backflow preventer to nearest drain.
- G. Install water hammer arrestors complete with accessible isolation valve on hot and cold water supply piping to lavatories, sinks, washing machines, toilets, urinal and any other quick closing valves .

END OF SECTION

NOT FOR BIDDING

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 22 30 00
PLUMBING EQUIPMENT

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Water heaters.
- B. Expansion Tanks.
- C. Pumps.
 - 1. Circulators.

1.02 RELATED REQUIREMENTS

- A. Section 26 27 17 - Equipment Wiring: Electrical characteristics and wiring connections.

1.03 REFERENCE STANDARDS

- A. ANSI Z21.10.1 - Gas Water Heaters - Volume I - Storage Water Heaters with Input Ratings of 75,000 Btu per Hour or Less.
- B. ANSI Z21.10.3 - Gas-Fired Water Heaters - Volume III - Storage Water Heaters with Input Ratings Above 75,000 Btu per Hour, Circulating and Instantaneous.
- C. ASME BPVC-VIII-1 - Boiler and Pressure Vessel Code, Section VIII, Division 1 - Rules for Construction of Pressure Vessels; The American Society of Mechanical Engineers.

1.04 SUBMITTALS

- A. Product Data:
 - 1. Provide dimension drawings of water heaters indicating components and connections to other equipment and piping.
 - 2. Indicate pump type, capacity, power requirements.
 - 3. Provide certified pump curves showing pump performance characteristics with pump and system operating point plotted. Include NPSH curve when applicable.
 - 4. Provide electrical characteristics and connection requirements.
- B. Shop Drawings:
 - 1. Indicate heat exchanger dimensions, size of tapings, and performance data.
 - 2. Indicate dimensions of tanks, tank lining methods, anchors, attachments, lifting points, tapings, and drains.
- C. Manufacturer's Instructions .
- D. Project Record Documents: Record actual locations of components .
- E. Operation and Maintenance Data: Include operation, maintenance, and inspection data, replacement part numbers and availability, and service depot location and telephone number.
- F. Warranty: Submit manufacturer warranty and ensure forms have been completed in Owner's name and registered with manufacturer.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the type of products specified in this section, with minimum three years of experience.
- B. Identification: Provide pumps with manufacturer's name, model number, and rating/capacity identified by permanently attached label.
- C. Performance: Ensure pumps operate at specified system fluid temperatures without vapor binding and cavitation, are non-overloading in parallel or individual operation, operate within 25 percent of midpoint of published maximum efficiency curve.

1.06 CERTIFICATIONS

- A. Water Heaters: NSF approved.
- B. Gas Water Heaters: Certified by CSA International to 1 or 2, as applicable, in addition to requirements specified elsewhere.
- C. Products Requiring Electrical Connection: Listed and classified by Underwriters Laboratories Inc., or testing firm acceptable to the authority having jurisdiction as suitable for the purpose specified and indicated.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Provide temporary inlet and outlet caps. Maintain caps in place until installation.

1.08 WARRANTY

- A. Provide five year manufacturer warranty for domestic water heaters and in-line circulator.

1.09 EXTRA MATERIALS

- A. Provide two pump seals.

PART 2 PRODUCTS

2.01 COMMERCIAL GAS FIRED WATER HEATERS

- A. Type: Automatic, tankless natural gas-fired.
- B. Manufacturers:
 - 1. Intellihot
 - 2. Noritz
 - 3. Substitutions: See Section 01 60 00 - Product Requirements.
- C. Performance: See plans.
- D. Description: Water heater shall be direct fired, fully condensing, water-tube design. Power burner shall have full modulation. The minimum firing rate shall not exceed 30,000 BTU/Hr input. Water heaters that have an input greater than 30,000 BTU/Hr at minimum fire will not be considered equal. The water heater shall have the capability of discharging into a positive pressure vent. Water heater thermal efficiency shall increase with decreasing load (output), while maintaining set point. Water heater shall have an operational set point capability of 90 °F to 185 °F and shall maintain the outlet temperature within an accuracy of +/- 2 oF during load changes of up to 100% rated capacity. Heater shall operate quietly, less than 55 dba. Water heater shall be factory-fabricated, factory-assembled and factory-tested, water-tube condensing water heater with heat exchanger sealed pressure-tight, built on a steel base, including a sealed insulated sheet metal enclosure that acts as combustion-air intake plenum.
- E. Heat Exchanger: The heat exchanger shall be constructed with 316L stainless steel helical water tubes, fully floating with no welded joints in the exchanger. The exchanger will have a single-pass combustion gas flow design. The water tubes shall be 3/4" ID, with no less than 0.0469" wall thickness.
- F. Hybrid Tank: The shell assembly of the hybrid tank vessel shall have a maximum water volume of less than .6 gallon. The water heater water connections shall be 3/4 inch Flanged O Ring connections. The shell assembly shall be constructed of 316L stainless steel of 0.0488 inch wall thickness or above.
- G. Modulating Air/Fuel Valve and Burner: The water heater burner shall be capable of a 7 to 1 turndown ratio of the firing rate without loss of combustion efficiency or staging of gas valves. The burner shall be stainless fiber mesh covering a stainless steel body with spark ignition and flame rectification. All burner material exposed to the combustion zone shall be of stainless steel construction. There shall be no moving parts within the burner itself. A modulating air/fuel valve shall meter the air and fuel input. A variable frequency drive (VFD), controlled pre-mix

blower shall be used to ensure the optimum mixing of air and fuel between the air/fuel valve and the burner.

- H. The exhaust manifold shall be of PVC, CPVC, polypropylene, stainless steel (AL29-4C) with a 3 inch diameter flue connection.
 - 1. The exhaust vent must be for use UL Listed for use with positive pressure, condensing flue gas service. Vents of PVC, CPVC, PP, SS (AL29-4C) must be used with water heaters.
 - 2. The minimum exhaust vent duct size for each water heater is three-inch diameter.
 - 3. Combustion-Air Intake: Water heaters shall be capable of drawing combustion air from the outdoors via a metal or PVC, CPVC or Polypropylene duct connected between the water heater and the outdoors.
 - 4. The minimum sealed combustion air duct size for each water heater is three-inch diameter.
 - 5. Common Vent and Common Combustion Air up to 10 heat exchangers. Consult manufacturer for common vent and combustion air sizing.
- I. Ignition: Ignition shall be via spark ignition with 100 percent main-valve shutoff and electronic flame supervision.
- J. Accessories: Provide:
 - 1. Venting Kit.
 - 2. Isolation Valves
 - 3. Condensate neutralization system
- K. Certification: As water heater by ASME, rated for output temperatures of 100 to 180 degrees F.
- L. Single-Point Field Power Connection: Factory-installed and factory-wired switches, motor controllers, transformers and other electrical devices shall provide a single-point field power connection to the water heater.
- M. Controls: . .
 - 1. The water heater control system shall be a Masterless Cascading design. Lead Lag - Master / Slave control systems will not be permitted. The entire system shall be ETL recognized.
 - 2. The control panel shall consist of one individual circuit board using state-of-the-art surface-mount technology in a single enclosure. The circuit boards shall include:
 - a. A Digital touch display to indicate temperature and status
 - b. A CPU board housing all control functions
 - 3. Each board shall be individually field replaceable.
 - 4. The combustion safeguard/flame monitoring system shall use spark ignition and a rectification-type flame sensor.
 - 5. The unit shall have a selectable exhaust temperature limit suitable for venting with PVC or CPVC/Polypropylene/Stainless Steel (AL29-4C).
 - 6. The controls shall annunciate water heater and sensor status and include extensive self-diagnostic capabilities.
 - 7. The water heater control system shall incorporate the following additional features for enhanced external system interface:
 - a. Temperature set point
 - b. High Exhaust temp monitor and control. Turn down the Gas valve until the exhaust temp is kept below selected material (PVC, CPVC).
 - c. Cascading via RS232
 - d. Error Code Display / Error Code History
 - 1) Blower Fault
 - 2) Blocked Flue Fault
 - 3) Ignition Failure

- 4) Temp Sensor Short
 - 5) Temp Sensor Wiring Fault
 - 6) Flue Temp Fault
 - 7) Heat Exchanger Temp Fault
 - 8) Cascading Fault
 - 9) Water Valve Fault
 - 10) Pump Fault
 - 11) Software Fault
8. Monitor and access to daily, weekly, monthly water usages data.
 9. Monitor inlet/outlet temperatures, flow rates, flue gas temperatures, combustion rates via onboard touchscreen.
 - a. Water Heater Management: the water heater control system shall incorporate onboard multi-unit sequencing logic that would allow Masterless Cascading (Not Lead/Lag - Master/Slave) functionality & sequencing between multiple water heaters operating in parallel and must have the following capabilities:
 - 1) Efficiently sequence 2 up to 10 heat exchangers on the same system to meet the load requirement.
 - 2) Individual heat exchanger logic to enable accurate temperature control.
 - 3) Operate one motorized valve per heat exchanger as an element of the load sequencing, Valves shall close with decreased load as heaters turn off, minimum of one (depending upon Mode selection) must always stay open for recirculation.
 - 4) Automatically rotate Start/Stop amongst the heat exchangers in the chain based upon an internal calculation of run hours, water through put, burner starts and stops and length of time each burner has been firing. Sequencing is not based upon next in line (Lead/Lag), it is based upon the most logical (least used) heat exchanger in an effort to equalize unit run hours.
 - 5) Automatic bump-less transfer of sequencing in case of heat exchanger failure. All systems must be able to fail all but one heat exchanger in any order or for any reason and the last will continue to operate.
 - 6) Each heat exchanger will default to individual control upon failure of the sequencing chain.
 - 7) Masterless control, change any parameter in any one of the units and all the rest in the series will automatically adjust to the most recent parameter change.
 - N. Burner and Hydrostatic Test: Factory adjust burner to eliminate excess oxygen, carbon dioxide, oxides of nitrogen emissions and carbon monoxide in flue gas, and to achieve combustion efficiency. Perform hydrostatic testing.
 - O. Test and inspect factory-assembled water heaters, before shipping.,
 - P. Allow Owner access to source quality-control testing of water heaters. Notify Architect fourteen days in advance of testing.
 - Q.

2.02 DIAPHRAGM-TYPE COMPRESSION TANKS

- A. Manufacturers:
 1. Amtrol Inc: www.amtrol.com/#sle.
 2. ITT Bell & Gossett: www.bellgossett.com/#sle.
 3. Taco, Inc: www.taco-hvac.com/#sle.
- B. Construction: Welded steel, tested and stamped in accordance with ASME (BPV VIII, 1); supplied with National Board Form U-1, rated for working pressure of 125 psig, with flexible diaphragm sealed into tank, and steel legs or saddles.
- C. Accessories: Pressure gage and air-charging fitting, tank drain; precharge to 55 psig.

2.03 IN-LINE CIRCULATOR PUMPS

- A. Manufacturers:
 - 1. Armstrong Pumps Inc: www.armstrongpumps.com/#sle.
 - 2. ITT Bell & Gossett: www.bellgossett.com/#sle.
 - 3. SIHI Group: www.sterlingsihi.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Casing: Bronze, rated for 125 psig working pressure.
- C. Impeller: Bronze.
- D. Shaft: Alloy steel with integral thrust collar and two oil lubricated bronze sleeve bearings.
- E. Seal: Carbon rotating against a stationary ceramic seat.
- F. Drive: Flexible coupling.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install plumbing equipment in accordance with manufacturer's instructions, as required by code, and complying with conditions of certification, if any.
- B. Coordinate with plumbing piping and related gas venting and electrical work to achieve operating system.
- C. Pumps:
 - 1. Provide air cock and drain connection on horizontal pump casings.
 - 2. Provide line sized isolating valve and strainer on suction and line sized soft seated check valve and balancing valve on discharge.
 - 3. Decrease from line size with long radius reducing elbows or reducers. Support piping adjacent to pump such that no weight is carried on pump casings. Provide supports under elbows on pump suction and discharge line sizes 4 inches and over.
 - 4. Ensure pumps operate at specified system fluid temperatures without vapor binding and cavitation, are non-overloading in parallel or individual operation, and operate within 25 percent of midpoint of published maximum efficiency curve.
 - 5. Align and verify alignment of base mounted pumps prior to start-up.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 22 40 00
PLUMBING FIXTURES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Water closets.
- B. Lavatories.
- C. Sinks.
- D. Service sinks.
- E. Drinking fountains.

1.02 RELATED REQUIREMENTS

- A. Section 07 90 05 - Joint Sealers: Seal fixtures to walls and floors.
- B. Section 22 10 05 - Plumbing Piping.
- C. Section 22 10 06 - Plumbing Piping Specialties.
- D. Section 22 30 00 - Plumbing Equipment.
- E. Section 26 27 17 - Equipment Wiring: Electrical characteristics and wiring connections.

1.03 REFERENCE STANDARDS

- A. ANSI Z124.1 - American National Standard for Plastic Bathtub Units; 1995.
- B. ANSI Z124.2 - American National Standard for Plastic Shower Units; 1995.
- C. ANSI Z124.1.2 - American National Standard for Plastic Bathtub and Shower Units.
- D. ANSI Z358.1 - American National Standard for Emergency Eyewash and Shower Equipment.
- E. ARI 1010 - Self-Contained, Mechanically-Refrigerated Drinking-Water Coolers; Air-Conditioning and Refrigeration Institute.
- F. ASME A112.6.1M - Supports for Off-the-Floor Plumbing Fixtures for Public Use.
- G. ASME A112.18.1 - Plumbing Supply Fittings.
- H. ASME A112.19.1M - Enameled Cast Iron Plumbing Fixtures; The American Society of Mechanical Engineers.
- I. ASME A112.19.2 - Ceramic Plumbing Fixtures.
- J. ASME A112.19.3 - Stainless Steel Plumbing Fixtures (Designed for Residential Use).
- K. ASME A112.19.4M - Porcelain Enameled Formed Steel Plumbing Fixtures.
- L. ASME A112.19.5 - Flush Valves and Spuds for Water Closets, Urinals, and Tanks.
- M. ASME A112.19.14 - Six Liter Water Closets Equipped with Dual Flushing Device.

1.04 SUBMITTALS

- A. Product Data: Provide catalog illustrations of fixtures, sizes, rough-in dimensions, utility sizes, trim, and finishes.
- B. Samples: Submit two sets of color chips for each standard color.
- C. Manufacturer's Instructions: Indicate installation methods and procedures.
- D. Maintenance Data: Include fixture trim exploded view and replacement parts lists.
- E. Warranty: Submit manufacturer warranty and ensure forms have been completed in Owner's name and registered with manufacturer.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the type of products specified in this section, with minimum ten years of experience.

1.06 REGULATORY REQUIREMENTS

- A. Products Requiring Electrical Connection: Listed and classified by Underwriters Laboratories Inc., or testing firm acceptable to the authority having jurisdiction as suitable for the purpose specified and indicated.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Accept fixtures on site in factory packaging. Inspect for damage.
- B. Protect installed fixtures from damage by securing areas and by leaving factory packaging in place to protect fixtures and prevent use.

1.08 WARRANTY

- A. Provide five year manufacturer warranty for electric water cooler.

1.09 EXTRA MATERIALS

- A. Supply two sets of faucet washers, flush valve service kits, and lavatory supply fittings.

PART 2 PRODUCTS

2.01 FLUSH VALVE WATER CLOSETS

- A. Water Closets: Vitreous china, ASME A112.19.2, floor mounted, siphon jet flush action, china bolt caps.
 - 1. Flush Volume: 1.28 gallon, maximum.
 - 2. Flush Valve: Exposed (top spud).
 - 3. Flush Operation: Sensor operated, push-button override.
 - 4. Handle Height: 44 inches or less.
 - 5. Manufacturers:
 - a. American Standard Inc: www.americanstandard.com.
 - b. Kohler.
 - c. Toto USA: www.totousa.com.
 - d. Zurn Industries, Inc: www.zurn.com/#sle.
 - e. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Flush Valves: ASME A112.18.1, diaphragm type, complete with vacuum breaker stops and accessories.
 - 1. Sensor-Operated Type: Solenoid operator, battery powered with self-generating hydro-electric turbine, infrared sensor and over-ride push button.
 - 2. ASME A112.19.2; floor mounted, siphon jet or wall hung blow out vitreous china closet bowl, with elongated rim, 1-1/2 inch top spud, china bolt caps.
 - 3. Manufacturers:
 - a. Toto USA: www.totousa.com
 - b. Sloan Valve Company: www.sloanvalve.com.
 - c. Zurn Industries, Inc: www.zurn.com.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
- C. Seats:
 - 1. Manufacturers:
 - a. Kohler
 - b. Bemis Manufacturing Company: www.bemismfg.com/#sle.
 - c. Church Seat Company: www.churchseats.com/#sle.
 - d. Olsonite: www.olsonite.com/#sle.

- e. Substitutions: See Section 01 60 00 - Product Requirements.
- 2. Solid plastic, open front, extended back, brass bolts, with cover.
- D. Water Closet Carriers:
 - 1. Manufacturers:
 - a. JR Smith.
 - b. Sloan Valve Company: www.sloanvalve.com.
 - c. Zurn Industries, Inc: www.zurn.com/#sle.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
 - 2. ASME A112.6.1M; adjustable cast iron frame, integral drain hub and vent, adjustable spud, lugs for floor and wall attachment, threaded fixture studs with nuts and washers.

2.02 LAVATORIES

- A. Lavatory Manufacturers:
 - 1. American Standard Inc
 - 2. Eljer
 - 3. Kohler Company: www.kohler.com/#sle.
 - 4. Zurn Industries, Inc: www.zurn.com/#sle.
 - 5. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Sensor Operated Faucet: Cast brass, chrome plated, deck mounted with sensor located on neck of spout.
 - 1. Spout Style: Standard,
 - 2. Power Supply: Self-generating, hydro-powered turbine charging rechargeable battery.
 - 3. Mixing Valve: automatic.
 - 4. Water Supply: 1/2 inch compression connections.
 - 5. Aerator: Vandal resistant, 1 GPM, .
 - 6. Automatic Shut-off: 30 seconds.
 - 7. Sensor range: Automatically adjusts.
 - a. Accessory: Optional remote reprogrammer module to adjust pre-set factory functions.
 - 8. Finish: Polished chrome.
 - 9. Accessory: 4 inch or 8 inch deck plate.
 - 10. Sensor Operated Faucet Manufacturers:
 - a. American Standard Inc: www.americanstandard.com.
 - b. Sloan Valve Company: www.sloanvalve.com/#sle.
 - c. Toto USA: www.totousa.com/#sle.
 - d. Zurn industries, Inc: www.zurn.com.
- C. Accessories:
 - 1. Chrome plated 17 gage brass P-trap with clean-out plug and arm with escutcheon.
 - 2. Offset waste with perforated open strainer.
 - 3. Screwdriver stops.
 - 4. Rigid supplies.
 - 5. Carrier:
 - a. Manufacturers:
 - 1) JR Smith
 - 2) Sloan Valve Company: www.sloanvalve.com.
 - 3) Zurn Industries, Inc: www.zurn.com/#sle.
 - b. ASME A112.6.1M; cast iron and steel frame with tubular legs, lugs for floor and wall attachment, threaded studs for fixture hanger, or concealed arm supports bearing plate and studs.

2.03 WATER FOUNTAINS

- A. Electric Water Cooler Manufacturers:

1. Tri Palm International/Oasis: www.tripalmint.com.
 2. Elkay Manufacturing Company: www.elkay.com/#sle.
 3. Haws Corporation: www.hawscorp.com/#sle.
- B. Fountain:
1. A surface handicapped-height, fully ADA compliant mounted water fountain with stainless steel top, stainless steel; stainless steel body, elevated anti-squirt bubbler with stream guard, automatic stream regulator, push button, bottle filling station, and mounting bracket.

2.04 SERVICE SINKS

- A. Service Sink Manufacturers:
1. Kohler
 2. Elkay Manufacturing Company: www.elkay.com/#sle.
- B. Bowl:
1. White floor mounted, with one inch wide shoulders. Vinyl bumper guard stainless steel strainer.
- C. Trim:
1. ASME A112.18.1 exposed wall type supply with cross handles, spout wall brace, vacuum breaker, hose end spout, strainers, eccentric adjustable inlets, integral screwdriver stops with covering caps and adjustable threaded wall flanges.
- D. Accessories:
1. 5 feet of 1/2 inch diameter plain end reinforced plastic or rubber hose.
 2. Hose clamp hanger.
 3. Mop hanger.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that walls and floor finishes are prepared and ready for installation of fixtures.
- B. Verify that electric power is available and of the correct characteristics.
- C. Confirm that millwork is constructed with adequate provision for the installation of counter top lavatories and sinks.

3.02 PREPARATION

- A. Rough-in fixture piping connections in accordance with minimum sizes indicated in fixture rough-in schedule for particular fixtures.

3.03 INSTALLATION

- A. Install each fixture with trap, easily removable for servicing and cleaning.
- B. Provide chrome plated rigid or flexible supplies to fixtures with screwdriver stops, reducers, and escutcheons.
- C. Install components level and plumb.
- D. Install and secure fixtures in place with wall supports or wall carriers and bolts.
- E. Seal fixtures to wall and floor surfaces with sealant as specified in Section 07 90 05, color to match fixture.
- F. Solidly attach water closets to floor with lag screws. Lead flashing is not intended hold fixture in place.

3.04 INTERFACE WITH WORK OF OTHER SECTIONS

- A. Review millwork shop drawings. Confirm location and size of fixtures and openings before rough-in and installation.

3.05 ADJUSTING

- A. Adjust stops or valves for intended water flow rate to fixtures without splashing, noise, or overflow.

3.06 CLEANING

- A. Clean plumbing fixtures and equipment.

END OF SECTION

NOT FOR BIDDING

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 23 05 13

MOTOR REQUIREMENTS FOR HVAC AND PLUMBING EQUIP

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Single phase electric motors.
- B. Three phase electric motors.

1.02 RELATED REQUIREMENTS

- A. Section 26 27 17 - Equipment Wiring: Electrical characteristics and wiring connections.
- B. Section 26 29 13 - Enclosed Controllers.

1.03 REFERENCE STANDARDS

- A. ABMA STD 9 - Load Ratings and Fatigue Life for Ball Bearings.
- B. IEEE 112 - IEEE Standard Test Procedure for Polyphase Induction Motors and Generators.
- C. NEMA MG 1 - Motors and Generators.
- D. NFPA 70 - National Electrical Code.
- E. National Grid "Motor-Up" Rebate Program/Initiative.

1.04 SUBMITTALS

- A. Product Data: Provide wiring diagrams with electrical characteristics and connection requirements.
- B. Test Reports: Indicate test results verifying nominal efficiency and power factor for three phase motors larger than 1/2 horsepower.
- C. Manufacturer's Installation Instructions: Indicate setting, mechanical connections, lubrication, and wiring instructions.
- D. Operation Data: Include instructions for safe operating procedures.
- E. Maintenance Data: Include assembly drawings, bearing data including replacement sizes, and lubrication instructions.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacture of electric motors for HVAC use, and their accessories, with minimum three years documented product development, testing, and manufacturing experience.
- B. Conform to applicable electrical code, NFPA 70 and local energy code.
- C. Provide certificate of compliance from authority having jurisdiction indicating approval of high efficiency motors.
- D. Products Requiring Electrical Connection: Listed and classified by Underwriters' Laboratories, Inc. or testing firm acceptable to the authority having jurisdiction as suitable for the purpose specified and indicated.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Protect motors stored on site from weather and moisture by maintaining factory covers and suitable weather-proof covering. For extended outdoor storage, remove motors from equipment and store separately.

1.07 WARRANTY

- A. Provide five year manufacturer warranty for motors larger than 20 horsepower.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Lincoln Motors: www.lincolnmotors.com/#sle.
- B. A. O. Smith Electrical Products Company: www.aosmithmotors.com/#sle.
- C. Reliance Electric/Rockwell Automation: www.reliance.com.

2.02 GENERAL CONSTRUCTION AND REQUIREMENTS

- A. Electrical Service: Refer to Section 26 27 17 for required electrical characteristics.
- B. Electrical Service, General. See drawings for specific details:
 - 1. Motors 1/2 HP and Smaller: 115 volts, single phase, 60 Hz
 - 2. Motors Larger than 1/2 Horsepower: 460 volts, three phase, 60 Hz.
- C. Construction:
 - 1. Open drip-proof type except where specifically noted otherwise.
 - 2. Design for continuous operation in 40 degrees C environment.
 - 3. Design for temperature rise in accordance with NEMA MG 1 limits for insulation class, service factor, and motor enclosure type.
 - 4. Motors with frame sizes 254T and larger: Premium Efficiency Type.
- D. Explosion-Proof Motors: UL approved and labelled for hazard classification, with over temperature protection.
- E. Visible Nameplate: Indicating motor horsepower, voltage, phase, cycles, RPM, full load amps, locked rotor amps, frame size, manufacturer's name and model number, service factor, power factor.
- F. Wiring Terminations:
 - 1. Provide terminal lugs to match branch circuit conductor quantities, sizes, and materials indicated. Enclose terminal lugs in terminal box sized to NFPA 70, threaded for conduit.
 - 2. For fractional horsepower motors where connection is made directly, provide conduit connection in end frame.

2.03 APPLICATIONS

- A. Exception: Motors less than 250 watts, for intermittent service may be the equipment manufacturer's standard and need not conform to these specifications.
- B. Single phase motors for shaft mounted fans and centrifugal pumps: Split phase type.
- C. Single phase motors for shaft mounted fans or blowers: Permanent split capacitor type or electronically commutated (ECM) type. See schedules for requirements.
- D. Single phase motors for fans, pumps, and blowers: Capacitor start type.
- E. Single phase motors for fans, blowers, and pumps: Capacitor start, capacitor run type.
- F. Motors located in outdoors and in draw through cooling towers: Totally enclosed weatherproof epoxy-treated type.

2.04 SINGLE PHASE POWER - SPLIT PHASE MOTORS

- A. Starting Torque: Less than 150 percent of full load torque.
- B. Starting Current: Up to seven times full load current.
- C. Breakdown Torque: Approximately 200 percent of full load torque.
- D. Drip-proof Enclosure: Class A (50 degrees C temperature rise) insulation, NEMA Service Factor, prelubricated sleeve or ball bearings.
- E. Enclosed Motors: Class A (50 degrees C temperature rise) insulation, 1.0 Service Factor, prelubricated ball bearings.

2.05 SINGLE PHASE POWER - PERMANENT-SPLIT CAPACITOR MOTORS

- A. Starting Torque: Exceeding one fourth of full load torque.
- B. Starting Current: Up to six times full load current.
- C. Multiple Speed: Through tapped windings.
- D. Open Drip-proof or Enclosed Air Over Enclosure: Class A (50 degrees C temperature rise) insulation, minimum 1.0 Service Factor, prelubricated sleeve or ball bearings, automatic reset overload protector.

2.06 SINGLE PHASE POWER - CAPACITOR START MOTORS

- A. Starting Torque: Three times full load torque.
- B. Starting Current: Less than five times full load current.
- C. Pull-up Torque: Up to 350 percent of full load torque.
- D. Breakdown Torque: Approximately 250 percent of full load torque.
- E. Motors: Capacitor in series with starting winding; provide capacitor-start/capacitor-run motors with two capacitors in parallel with run capacitor remaining in circuit at operating speeds.
- F. Drip-proof Enclosure: Class A (50 degrees C temperature rise) insulation, NEMA Service Factor, prelubricated sleeve bearings.
- G. Enclosed Motors: Class A (50 degrees C temperature rise) insulation, 1.0 Service Factor, prelubricated ball bearings.

2.07 THREE PHASE POWER - SQUIRREL CAGE MOTORS

- A. Starting Torque: Between 1 and 1-1/2 times full load torque.
- B. Starting Current: Six times full load current.
- C. Power Output, Locked Rotor Torque, Breakdown or Pull Out Torque: NEMA Design B characteristics.
- D. Design, Construction, Testing, and Performance: Conform to NEMA MG 1 for Design B motors.
- E. Insulation System: NEMA Class B or better.
- F. Testing Procedure: In accordance with IEEE 112. Load test motors to determine free from electrical or mechanical defects in compliance with performance data.
- G. Motor Frames: NEMA Standard T-Frames of steel, aluminum, or cast iron with end brackets of cast iron or aluminum with steel inserts.
- H. Thermistor System (Motor Frame Sizes 254T and Larger): Three PTC thermistors embedded in motor windings and epoxy encapsulated solid state control relay for wiring into motor starter; refer to Section 26 29 13.
- I. Bearings: Grease lubricated anti-friction ball bearings with housings equipped with plugged provision for relubrication, rated for minimum ABMA STD 9, L-10 life of 20,000 hours. Calculate bearing load with NEMA minimum V-belt pulley with belt center line at end of NEMA standard shaft extension. Stamp bearing sizes on nameplate.
- J. Sound Power Levels: To NEMA MG 1.
- K. Part Winding Start Above 254T Frame Size: Use part of winding to reduce locked rotor starting current to approximately 60 percent of full winding locked rotor current while providing approximately 50 percent of full winding locked rotor torque.
- L. Weatherproof Epoxy Sealed Motors: Epoxy seal windings using vacuum and pressure with rotor and starter surfaces protected with epoxy enamel; bearings double shielded with waterproof non-washing grease.

- M. Nominal Efficiency: As scheduled at full load and rated voltage when tested in accordance with IEEE 112.
- N. Nominal Power Factor: As scheduled at full load and rated voltage when tested in accordance with IEEE 112.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Install securely on firm foundation. Mount ball bearing motors with shaft in any position.
- C. Check line voltage and phase and ensure agreement with nameplate.
- D. Provide detailed installation and purchase information for reimbursement by Utility for rebate program.

3.02 SCHEDULE - PREMIUM EFFICIENCY

- A. NEMA Open Motor Service Factors.
 - 1. 1/6-1/3 hp:
 - a. 3600 rpm: 1.35.
 - b. 1800 rpm: 1.35.
 - c. 1200 rpm: 1.35.
 - d. 900 rpm: 1.35.
 - 2. 1/2 hp:
 - a. 3600 rpm: 1.25.
 - b. 1800 rpm: 1.25.
 - c. 1200 rpm: 1.25.
 - d. 900 rpm: 1.15.
 - 3. 3/4 hp:
 - a. 3600 rpm: 1.25.
 - b. 1800 rpm: 1.25.
 - c. 1200 rpm: 1.15.
 - d. 900 rpm: 1.15.
 - 4. 1 hp:
 - a. 3600 rpm: 1.25.
 - b. 1800 rpm: 1.15.
 - c. 1200 rpm: 1.15.
 - d. 900 rpm: 1.15.
 - 5. 1.5-150 hp:
 - a. 3600 rpm: 1.15.
 - b. 1800 rpm: 1.15.
 - c. 1200 rpm: 1.15.
 - d. 900 rpm: 1.15.
- B. Three Phase - Premium Efficiency, Open Drip-Proof Performance:
 - 1. Ratings.
 - a. 1 hp:
 - 1) NEMA Frame: 145T.
 - 2) Minimum Percent Power Factor: 72.
 - 3) Minimum Percent Efficiency: 82.5% @ 1200 RPM, 85.5% @ 1800 RPM, 77% @ 3600 RPM
 - b. 1-1/2 hp:
 - 1) NEMA Frame: 182T.
 - 2) Minimum Percent Power Factor: 73.

- 3) Minimum Percent Efficiency: 86.5% @ 1200 RPM, 86.5% @ 1800 RPM, 84% @ 3600 RPM
- c. 2 hp:
 - 1) NEMA Frame: 184T.
 - 2) Minimum Percent Power Factor: 75.
 - 3) Minimum Percent Efficiency: 87.5% @ 1200 RPM, 86.5% @ 1800 RPM, 85.5% @ 3600 RPM
- d. 3 hp:
 - 1) NEMA Frame: 213T.
 - 2) Minimum Percent Power Factor: 60.
 - 3) Minimum Percent Efficiency: 88.5% @ 1200 RPM, 89.5% @ 1800 RPM, 85.5% @ 3600 RPM
- e. 5 hp:
 - 1) NEMA Frame: 215T.
 - 2) Minimum Percent Power Factor: 65.
 - 3) Minimum Percent Efficiency: 89.5% @ 1200 RPM, 89.5% @ 1800 RPM, 86.5% @ 3600 RPM
- f. 7-1/2 hp:
 - 1) NEMA Frame: 254T.
 - 2) Minimum Percent Power Factor: 73.
 - 3) Minimum Percent Efficiency: 90.2% @ 1200 RPM, 91% @ 1800 RPM, 88.5% @ 3600 RPM
- g. 10 hp:
 - 1) NEMA Frame: 256T.
 - 2) Minimum Percent Power Factor: 74.
 - 3) Minimum Percent Efficiency: 91.7% @ 1200 RPM, 91.7% @ 1800 RPM, 89.5% @ 3600 RPM
- h. 15 hp:
 - 1) NEMA Frame: 284T.
 - 2) Minimum Percent Power Factor: 77.
 - 3) Minimum Percent Efficiency: 91.7% @ 1200 RPM, 93% @ 1800 RPM, 90.2% @ 3600 RPM.
- i. 20 hp:
 - 1) NEMA Frame: 286T.
 - 2) Minimum Percent Power Factor: 78.
 - 3) Minimum Percent Efficiency: 92.4% @ 1200 RPM, 93% @ 1800 RPM, 91% @ 3600 RPM
- j. 25 hp:
 - 1) NEMA Frame: 324T.
 - 2) Minimum Percent Power Factor: 74.
 - 3) Minimum Percent Efficiency: 93% @ 1200 RPM, 93.6% @ 1800 RPM, 91.7% @ 3600 RPM
- k. 30 hp:
 - 1) NEMA Frame: 326T.
 - 2) Minimum Percent Power Factor: 78.
 - 3) Minimum Percent Efficiency: 93.6% @ 1200 RPM, 94.1% @ 1800 RPM, 91.7% @ 3600 RPM
- l. 40 hp:
 - 1) NEMA Frame: 364T.
 - 2) Minimum Percent Power Factor: 77.

- 3) Minimum Percent Efficiency: 94.1% @ 1200 RPM, 94.1 @ 1800 RPM, 92.4% @ 3600 RPM
- m. 50 hp:
 - 1) NEMA Frame: 365T.
 - 2) Minimum Percent Power Factor: 79.
 - 3) Minimum Percent Efficiency: 94.1% @ 1200 RPM, 94.5% @ 1800 RPM, 93% @ 3600 RPM
- n. 60 hp:
 - 1) NEMA Frame: 404T.
 - 2) Minimum Percent Power Factor: 82.
 - 3) Minimum Percent Efficiency: 93.
- o. 75 hp:
 - 1) NEMA Frame: 405T.
 - 2) Minimum Percent Power Factor: 80.
 - 3) Minimum Percent Efficiency: 93.
- p. 100 hp:
 - 1) NEMA Frame: 444T.
 - 2) Minimum Percent Power Factor: 80.
 - 3) Minimum Percent Efficiency: 93.
- C. Three Phase - Premium Efficiency, Totally Enclosed, Fan Cooled Performance:
 - 1. 1200 rpm.
 - a. 1 hp:
 - 1) NEMA Frame: 145T.
 - 2) Minimum Percent Power Factor: 72.
 - 3) Minimum Percent Efficiency: 82.5% @ 1200 RPM, 85.5% @ 1800 RPM, 77% @ 3600 RPM
 - b. 1-1/2 hp:
 - 1) NEMA Frame: 182T.
 - 2) Minimum Percent Power Factor: 73.
 - 3) Minimum Percent Efficiency: 87.5% @ 1200 RPM, 86.5% @ 1800 RPM, 84% @ 3600 RPM
 - c. 2 hp:
 - 1) NEMA Frame: 184T.
 - 2) Minimum Percent Power Factor: 68.
 - 3) Minimum Percent Efficiency: 88.5% @ 1200 RPM, 86.5% @ 1800 RPM, 85.5% @ 3600 RPM
 - d. 3 hp:
 - 1) NEMA Frame: 213T.
 - 2) Minimum Percent Power Factor: 63.
 - 3) Minimum Percent Efficiency: 89.5% @ 1200 RPM, 89.5% @ 1800 RPM, 86.5% @ 3600 RPM
 - e. 5 hp:
 - 1) NEMA Frame: 215T.
 - 2) Minimum Percent Power Factor: 66.
 - 3) Minimum Percent Efficiency: 89.5% @ 1200 RPM, 89.5% @ 1800 RPM, 88.5% @ 3600 RPM
 - f. 7-1/2 hp:
 - 1) NEMA Frame: 254T.
 - 2) Minimum Percent Power Factor: 68.
 - 3) Minimum Percent Efficiency: 91% @ 1200 RPM, 91.7% @ 1800 RPM, 89.5% @ 3600 RPM

- g. 10 hp:
 - 1) NEMA Frame: 256T.
 - 2) Minimum Percent Power Factor: 75.
 - 3) Minimum Percent Efficiency: 91% @ 1200 RPM, 91.7% @ 1800 RPM, 90.2% @ 3600 RPM
- h. 15 hp:
 - 1) NEMA Frame: 284T.
 - 2) Minimum Percent Power Factor: 72.
 - 3) Minimum Percent Efficiency: 91.7% @ 1200 RPM, 92.4% @ 1800 RPM, 91% @ 3600 RPM
- i. 20 hp:
 - 1) NEMA Frame: 286T.
 - 2) Minimum Percent Power Factor: 76.
 - 3) Minimum Percent Efficiency: 91.7% @ 1200 RPM, 93% @ 1800 RPM, 91% @ 3600 RPM
- j. 25 hp:
 - 1) NEMA Frame: 324T.
 - 2) Minimum Percent Power Factor: 71.
 - 3) Minimum Percent Efficiency: 93% @ 1200 RPM, 93.6% @ 1800 RPM, 91.7% @ 3600 RPM
- k. 30 hp:
 - 1) NEMA Frame: 326T.
 - 2) Minimum Percent Power Factor: 79.
 - 3) Minimum Percent Efficiency: 93% @ 1200 RPM, 93.6% @ 1800 RPM, 91.7% @ 3600 RPM.
- l. 40 hp:
 - 1) NEMA Frame: 364T.
 - 2) Minimum Percent Power Factor: 78.
 - 3) Minimum Percent Efficiency: 94.1% @ 1200 RPM, 94.1% @ 1800 RPM, 92.4% @ 3600 RPM
- m. 50 hp:
 - 1) NEMA Frame: 365T.
 - 2) Minimum Percent Power Factor: 81.
 - 3) Minimum Percent Efficiency: 94.1% @ 1200 RPM, 94.5% @ 1800 RPM, 93% @ 3600 RPM
- n. Over 50 HP - Refer to National Grid "Motor Up" Energy Efficiency requirements for reimbursement.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 23 05 16
EXPANSION FITTINGS AND LOOPS FOR HVAC PIPING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Flexible pipe connectors.
- B. Expansion joints and compensators.
- C. Pipe loops, offsets, and swing joints.

1.02 RELATED REQUIREMENTS

- A. Section 23 21 13 - Hydronic Piping.
- B. Section 23 23 00 - Refrigerant Piping.

1.03 REFERENCE STANDARDS

- A. ASTM A269/A269M - Standard Specification for Seamless and Welded Austenitic Stainless Steel Tubing for General Service.
- B. EJMA (STDS) - EJMA Standards.

1.04 SUBMITTALS

- A. Product Data:
 - 1. Flexible Pipe Connectors: Indicate maximum temperature and pressure rating, face-to-face length, live length, hose wall thickness, hose convolutions per foot and per assembly, fundamental frequency of assembly, braid structure, and total number of wires in braid.
 - 2. Expansion Joints: Indicate maximum temperature and pressure rating, and maximum expansion compensation.
- B. Design Data: Indicate selection calculations.
- C. Manufacturer's Instructions: Indicate manufacturer's installation instructions, special procedures, and external controls.
- D. Project Record Documents: Record installed locations of flexible pipe connectors, expansion joints, anchors, and guides.
- E. Maintenance Data: Include adjustment instructions.

1.05 REGULATORY REQUIREMENTS

- A. Conform to UL requirements.

1.06 EXTRA MATERIALS

- A. Supply two sets of packing for each packed expansion joint.

PART 2 PRODUCTS

2.01 FLEXIBLE PIPE CONNECTORS - STEEL PIPING

- A. Manufacturers:
 - 1. Mercer Rubber Company: www.mercer-rubber.com/#sle.
 - 2. Metraflex Company: www.metraflex.com.
- B. Inner Hose: Carbon Steel.
- C. Exterior Sleeve: Single braided, stainless steel or bronze.
- D. Pressure Rating: 125 psi and 450 degrees F.
- E. Joint: As specified for pipe joints.
- F. Size: Use pipe sized units.

- G. Maximum offset: 3/4 inch on each side of installed center line.

2.02 FLEXIBLE PIPE CONNECTORS - COPPER PIPING

- A. Manufacturer:
 - 1. Mercer Rubber Company: www.mercer-rubber.com/#sle.
 - 2. Metraflex Company: www.metraflex.com/#sle.
- B. Inner Hose: Bronze.
- C. Exterior Sleeve: Braided bronze.
- D. Pressure Rating: 125 psi and 450 degrees F.
- E. Joint: As specified for pipe joints.
- F. Size: Use pipe sized units.
- G. Maximum offset: 3/4 inch on each side of installed center line.
- H. Application: Copper piping.

2.03 EXPANSION JOINTS - STAINLESS STEEL BELLOWS TYPE

- A. Manufacturers:
 - 1. Mercer Rubber Company: www.mercer-rubber.com/#sle.
 - 2. Metraflex Company: www.metraflex.com/#sle.
- B. Pressure Rating: 125 psi and 400 degrees F.
- C. Maximum Compression: 1-3/4 inches.
- D. Maximum Extension: 1/4 inch.
- E. Joint: As specified for pipe joints.
- F. Size: Use pipe sized units.
- G. Application: Steel piping 3 inches and under.

2.04 EXPANSION JOINTS - EXTERNAL RING CONTROLLED STAINLESS STEEL BELLOWS TYPE

- A. Manufacturers:
 - 1. Mercer Rubber Company: www.mercer-rubber.com/#sle.
 - 2. Metraflex Company: www.metraflex.com/#sle.
- B. Pressure Rating: 125 psi and 400 degrees F.
- C. Maximum Compression: 15/16 inch.
- D. Maximum Extension: 5/16 inch.
- E. Maximum Offset: 1/8 inch.
- F. Joint: Flanged.
- G. Size: Use pipe sized units.
- H. Accessories: Internal flow liner.
- I. Application: Steel piping over 2 inches.

2.05 EXPANSION JOINTS - SINGLE SPHERE, ELBOW OR FLEXIBLE COMPENSATOR

- A. Manufacturers:
 - 1. Mercer Rubber Company: www.mercer-rubber.com/#sle.
 - 2. Metraflex Company: www.metraflex.com/#sle.
- B. Body: Teflon.
- C. Pressure Rating, Sizes 3/4 Inch to 2 Inch: 150 psi and 210 degrees F.
- D. Pressure Rating, Sizes 1-1/2 Inch to 12 Inch: 150 psi and 250 degrees F.

- E. Pressure Rating, Sizes 14 Inch to 24 Inch: 105 psi and 250 degrees F.
- F. Maximum Compression: 3/4 inch.
- G. Maximum Elongation: 1/2 inch.
- H. Maximum Offset: 1/2 inch.
- I. Maximum Angular Movement: 15 degrees.
- J. Joint: Tapped steel flanges.
- K. Size: Use pipe sized units.
- L. Accessories: Control rods.
- M. Application: Steel piping 2 inches and over.

2.06 EXPANSION JOINTS - TWO-PLY BRONZE BELLOWS TYPE

- A. Manufacturers:
 - 1. Mercer Rubber Company: www.mercer-rubber.com/#sle.
 - 2. Metraflex Company: www.metraflex.com/#sle.
- B. Construction: Bronze with anti-torque device, limit stops, internal guides.
- C. Pressure Rating: 125 psi and 400 degrees F.
- D. Maximum Compression: 1-3/4 inches.
- E. Maximum Extension: 1/4 inch.
- F. Joint: As specified for pipe joints.
- G. Size: Use pipe sized units.
- H. Application: Copper piping.

2.07 EXPANSION JOINTS - LOW PRESSURE COMPENSATOR WITH TWO-PLY BRONZE BELLOWS

- A. Manufacturers:
 - 1. Mercer Rubber Company: www.mercer-rubber.com/#sle.
 - 2. Metraflex Company: www.metraflex.com/#sle.
- B. Working Pressure: 75 psi.
- C. Maximum Temperatures: 250 degrees F.
- D. Maximum Compression: 1/2 inch.
- E. Maximum Extension: 5/32 inch.
- F. Joint: Soldered.
- G. Size: Use pipe sized units.
- H. Application: Copper or steel piping 3 inches and under.

2.08 EXPANSION JOINTS - STEEL WITH PACKED SLIDING SLEEVE

- A. Working Pressure and Temperature: Class 150.
- B. Joint: As specified for pipe joints.
- C. Size: Use pipe sized units.
- D. Application: Steel piping 2 inches and over.

2.09 EXPANSION JOINTS - COPPER WITH PACKED SLIDING SLEEVE

- A. Working Pressure: 125 psi.
- B. Maximum Temperature: 250 degrees F.

- C. Joint: As specified for pipe joints.
- D. Size: Use pipe sized units.
- E. Application: Copper or steel piping 2 inches and over.

2.10 ACCESSORIES

- A. Stainless Steel Pipe: ASTM A269.
- B. Pipe Alignment Guides:
 - 1. Two piece welded steel with enamel paint, bolted, with spider to fit standard pipe, frame with four mounting holes, clearance for minimum 1 inch thick insulation, minimum 3 inches travel.
- C. Swivel Joints:
 - 1. Fabricated steel body, double ball bearing race, field lubricated, with rubber (Buna-N) o-ring seals.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Install in accordance with EJMA (Expansion Joint Manufacturers Association) Standards.
- C. Install flexible pipe connectors on pipes connected to vibration isolated equipment. Provide line size flexible connectors.
- D. Install flexible connectors at right angles to displacement. Install one end immediately adjacent to isolated equipment and anchor other end. Install in horizontal plane unless indicated otherwise.
- E. Anchor pipe to building structure where indicated. Provide pipe guides so movement is directed along axis of pipe only. Erect piping such that strain and weight is not on cast connections or apparatus.
- F. Provide support and equipment required to control expansion and contraction of piping. Provide loops, pipe offsets, and swing joints, or expansion joints where required.
- G. Substitute grooved piping for vibration isolated equipment instead of flexible connectors. Grooved piping need not be anchored.

END OF SECTION

SECTION 23 05 48
VIBRATION AND SEISMIC CON. FOR EQUIPMENT

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Equipment support bases.
- B. Vibration isolators.
- C. Inertia bases.
- D. Vibration isolators.
- E. Seismic restraints.

1.02 RELATED REQUIREMENTS

- A. Section 03 30 00 - Cast-in-Place Concrete.

1.03 SUBMITTALS

- A. Product Data: Provide schedule of vibration isolator type with location and load on each.
- B. Shop Drawings: Indicate inertia bases and locate vibration isolators, with static and dynamic load on each. Indicate seismic control measures.
- C. Manufacturer's Instructions: Indicate installation instructions with special procedures and setting dimensions.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Isolation Technology, Inc: www.isolationtech.com.
- B. Kinetics Noise Control, Inc: www.kineticsnoise.com/#sle.
- C. Mason Industries: www.mason-ind.com/#sle.

2.02 PERFORMANCE REQUIREMENTS

- A. General:
 - 1. All vibration isolators, base frames and inertia bases to conform to all uniform deflection and stability requirements under all operating loads.
 - 2. Steel springs to function without undue stress or overloading.

2.03 EQUIPMENT SUPPORT BASES

2.04 VIBRATION ISOLATORS

2.05 INERTIA BASES

- A. Concrete Inertia Bases:
 - 1. Construction: Structural steel channel perimeter frame, with gusseted brackets and anchor bolts, reinforcing; concrete filled.
 - 2. Mass: Minimum of 1.5 times weight of isolated equipment.
 - 3. Connecting Point: Reinforced to connect isolators and snubbers to base.
 - 4. Concrete: Minimum 3000 psi concrete.

2.06 VIBRATION ISOLATORS

- A. Open Spring Isolators:
 - 1. Springs: Minimum horizontal stiffness equal to 75 percent vertical stiffness, with working deflection between 0.3 and 0.6 of maximum deflection. Color code springs for load carrying capacity.
 - 2. Spring Mounts: Provide with leveling devices, minimum 0.25 inch thick neoprene sound pads, and zinc chromate plated hardware.

3. Sound Pads: Size for minimum deflection of 0.05 inch; meet requirements for neoprene pad isolators.
 4. For Exterior and Humid Areas: Hot dipped galvanized housings and neoprene coated springs.
- B. Restrained Open Spring Isolators:
1. Springs: Minimum horizontal stiffness equal to 75 percent vertical stiffness, with working deflection between 0.3 and 0.6 of maximum deflection. Color code springs for load carrying capacity.
 2. Spring Mounts: Provide with leveling devices, minimum 0.25 inch thick neoprene sound pads, and zinc chromate plated hardware.
 3. Sound Pads: Size for minimum deflection of 0.05 inch; meet requirements for neoprene pad isolators.
 4. Restraint: Provide heavy mounting frame and limit stops.
 5. For Exterior and Humid Areas: Hot dipped galvanized housings and neoprene coated springs.
- C. Closed Spring Isolators:
1. Type : Closed spring mount with top and bottom housing separated with neoprene rubber stabilizers.
 2. Springs: Minimum horizontal stiffness equal to 75 percent vertical stiffness, with working deflection between 0.3 and 0.6 of maximum deflection. Color code springs for load carrying capacity.
 3. Housings: Incorporate neoprene isolation pad meeting requirements for neoprene pad isolators, and neoprene side stabilizers with minimum 0.25 inch clearance.
 4. For Exterior and Humid Areas: Hot dipped galvanized housings and neoprene coated springs.
- D. Restrained Closed Spring Isolators:
1. Type : Closed spring mount with top and bottom housing separated with neoprene rubber stabilizers.
 2. Springs: Minimum horizontal stiffness equal to 75 percent vertical stiffness, with working deflection between 0.3 and 0.6 of maximum deflection. Color code springs for load carrying capacity.
 3. Housings: Incorporate neoprene isolation pad meeting requirements for neoprene pad isolators, and neoprene side stabilizers with minimum 0.25 inch clearance and limit stops.
 4. For Exterior and Humid Areas: Hot dipped galvanized housings and neoprene coated springs.
- E. Spring Hangers:
1. Springs: Minimum horizontal stiffness equal to 75 percent vertical stiffness, with working deflection between 0.3 and 0.6 of maximum deflection. Color code springs for load carrying capacity.
 2. Housings: Incorporate neoprene isolation pad meeting requirements for neoprene pad isolators.
 3. Misalignment: Capable of 20 degree hanger rod misalignment.
 4. For Exterior and Humid Areas: Hot dipped galvanized housings and neoprene coated springs.
- F. Neoprene Pad Isolators:
1. Rubber or neoprene waffle pads.
 - a. Hardness: 30 durometer.
 - b. Thickness: Minimum 1/2 inch.
 - c. Maximum Loading: 50 psi.
 - d. Rib Height: Maximum 0.7 times width.

2. Configuration: Single layer.
3. Configuration: 1/2 inch thick waffle pads bonded each side of 1/4 inch thick steel plate.
- G. Rubber Mount or Hanger: Molded rubber designed for 0.4 inch deflection with threaded insert.
- H. Glass Fiber Pads: Neoprene jacketed pre-compressed molded glass fiber.
- I. Seismic Snubbers:
 1. Type: Non-directional and double acting unit consisting of interlocking steel members restrained by neoprene elements.
 2. Elements: Replaceable neoprene, minimum of 0.75 inch thick with minimum 1/8 inch air gap.
 3. Capacity: 4 times load assigned to mount groupings at 0.4 inch deflection.
 4. Attachment Points and Fasteners: Capable of withstanding 3 times rated load capacity of seismic snubber.
- J. Roof Mounting Curb: 14 inches high with rigid steel lower section containing adjustable spring pockets with restrained spring isolators, steel upper section to support rooftop equipment, and continuous elastomeric membrane extending from upper section for counterflashing over roofing. Provide acoustical package consisting of interior perimeter angles and cross members to support up to two layers of gypsum board.

PART 3 EXECUTION

3.01 INSTALLATION - GENERAL

- A. Install in accordance with manufacturer's instructions.
- B. Bases:
 1. Set steel bases for one inch clearance between housekeeping pad and base.
 2. Set concrete inertia bases for 2 inches clearance between housekeeping pad and base.
 3. Adjust equipment level.
- C. On closed spring isolators, adjust so side stabilizers are clear under normal operating conditions.
- D. Prior to making piping connections to equipment with operating weights substantially different from installed weights, block up equipment with temporary shims to final height. When full load is applied, adjust isolators to load to allow shim removal.
- E. Provide pairs of horizontal limit springs on fans with more than 6.0 inches WC static pressure, and on hanger supported, horizontally mounted axial fans.
- F. Provide seismic snubbers for all equipment, piping, and ductwork mounted on isolators. Each inertia base shall have minimum of four seismic snubbers located close to isolators. Snub equipment designated for post-disaster use to 0.05 inch maximum clearance. Other snubbers shall have clearance between 0.15 inch and 0.25 inch.
- G. Support piping connections to equipment mounted on isolators using isolators or resilient hangers as follows:
 1. Up to 4 Inches Pipe Size: First three points of support.
 2. 5 to 8 Inches Pipe Size: First four points of support.
 3. 10 inches Pipe Size and Over: First six points of support.
 4. Select three hangers closest to vibration source for minimum 1.0 inch static deflection or static deflection of isolated equipment. Select remaining isolators for minimum 1.0 inch static deflection or 1/2 static deflection of isolated equipment.

3.02 FIELD QUALITY CONTROL

- A. Inspect isolated equipment after installation and submit report. Include static deflections.

3.03 SCHEDULE

- A. Pipe Isolation Schedule.
 - 1. 1 Inch Pipe Size: Isolate 120 diameters from equipment.
 - 2. 2 Inch Pipe Size: Isolate 90 diameters from equipment.
 - 3. 3 Inch Pipe Size: Isolate 80 diameters from equipment.
 - 4. 4 Inch Pipe Size: Isolate 75 diameters from equipment.
 - 5. 6 Inch Pipe Size: Isolate 60 diameters from equipment.
 - 6. 8 Inch Pipe Size: Isolate 60 diameters from equipment.
 - 7. 10 Inch Pipe Size: Isolate 54 diameters from equipment.
 - 8. 12 Inch Pipe Size: Isolate 50 diameters from equipment.
 - 9. 16 Inch Pipe Size: Isolate 45 diameters from equipment.
 - 10. 24 Inch Pipe Size: Isolate 38 diameters from equipment.
 - 11. Over 24 Inch Pipe Size: As indicated.
- B. Equipment Isolation Schedule.
 - 1. Pumps.

END OF SECTION

SECTION 23 05 53
IDENTIFICATION FOR HVAC PIPING AND EQUIPMENT

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Nameplates.
- B. Tags.
- C. Stencils.
- D. Pipe Markers.

1.02 RELATED REQUIREMENTS

- A. Section 09 90 00 - Paints and Coatings: Identification painting.

1.03 REFERENCE STANDARDS

- A. ASME A13.1 - Scheme for the Identification of Piping Systems.

1.04 SUBMITTALS

- A. List: Submit list of wording, symbols, letter size, and color coding for mechanical identification.
- B. Chart and Schedule: Submit valve chart and schedule, including valve tag number, location, function, and valve manufacturer's name and model number.
- C. Product Data: Provide manufacturers catalog literature for each product required.
- D. Samples: Submit two labels or tags 1/2 x 4 inch in size.
- E. Manufacturer's Installation Instructions: Indicate special procedures, and installation.
- F. Project Record Documents: Record actual locations of tagged valves.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Brady Corporation: www.bradycorp.com.
- B. Champion America, Inc: www.Champion-America.com.
- C. Seton Identification Products: www.seton.com/aec.

2.02 NAMEPLATES

- A. Description: Laminated three-layer plastic with engraved letters.
 - 1. Letter Color: White.
 - 2. Letter Height: 1/2 inch.
 - 3. Background Color: Black.

2.03 TAGS

- A. Plastic Tags: Laminated three-layer plastic with engraved black letters on light contrasting background color. Tag size minimum 1-1/2 inch diameter.
- B. Metal Tags: Aluminum with stamped letters; tag size minimum 1-1/2 inch diameter with smooth edges.
- C. Valve Tag Chart: Typewritten letter size list in anodized aluminum frame.

2.04 STENCILS

- A. Stencils: With clean cut symbols and letters of following size:
 - 1. 3/4 to 1-1/4 inch Outside Diameter of Insulation or Pipe: 8 inch long color field, 1/2 inch high letters.
 - 2. 1-1/2 to 2 inch Outside Diameter of Insulation or Pipe: 8 inch long color field, 3/4 inch high letters.

3. 2-1/2 to 6 inch Outside Diameter of Insulation or Pipe: 12 inch long color field, 1-1/4 inch high letters.
 4. 8 to 10 inch Outside Diameter of Insulation or Pipe: 24 inch long color field, 2-1/2 inch high letters.
 5. Over 10 inch Outside Diameter of Insulation or Pipe: 32 inch long color field, 3-1/2 inch high letters.
 6. Ductwork and Equipment: 2-1/2 inch high letters.
- B. Stencil Paint: As specified in Section 09 90 00, semi-gloss enamel, colors conforming to ASME A13.1.

2.05 PIPE MARKERS

- A. Color: Conform to ASME A13.1.
- B. Plastic Pipe Markers: Factory fabricated, flexible, semi-rigid plastic, preformed to fit around pipe or pipe covering; minimum information indicating flow direction arrow and identification of fluid being conveyed.
- C. Plastic Tape Pipe Markers: Flexible, vinyl film tape with pressure sensitive adhesive backing and printed markings.
- D. Underground Plastic Pipe Markers: Bright colored continuously printed plastic ribbon tape, minimum 6 inches wide by 4 mil thick, manufactured for direct burial service.

2.06 CEILING TACKS

- A. Description: Steel with 3/4 inch diameter color coded head.
- B. Color code as follows:
 1. HVAC Equipment: Yellow.
 2. Fire Dampers and Smoke Dampers: Red.
 3. Heating/Cooling Valves: Blue.

PART 3 EXECUTION

3.01 PREPARATION

- A. Degrease and clean surfaces to receive adhesive for identification materials.
- B. Prepare surfaces in accordance with Section 09 90 00 for stencil painting.

3.02 INSTALLATION

- A. Install nameplates with corrosive-resistant mechanical fasteners, or adhesive. Apply with sufficient adhesive to ensure permanent adhesion and seal with clear lacquer.
- B. Install tags with corrosion resistant chain.
- C. Apply stencil painting in accordance with Section 09 90 00.
- D. Install plastic pipe markers in accordance with manufacturer's instructions.
- E. Install plastic tape pipe markers complete around pipe in accordance with manufacturer's instructions.
- F. Install underground plastic pipe markers 6 to 8 inches below finished grade, directly above buried pipe.
- G. Identify air handling units, pumps, heat transfer equipment, tanks, and water treatment devices with plastic nameplates. Small devices, such as in-line pumps, may be identified with tags.
- H. Identify control panels and major control components outside panels with plastic nameplates.
- I. Identify thermostats relating to terminal boxes or valves with nameplates.
- J. Identify valves in main and branch piping with tags.
- K. Identify air terminal units and radiator valves with numbered tags.

- L. Tag automatic controls, instruments, and relays. Key to control schematic.
- M. Identify piping, concealed or exposed, with plastic pipe markers, plastic tape pipe markers or stencilled painting. Use tags on piping 3/4 inch diameter and smaller. Identify service, flow direction, and pressure. Install in clear view and align with axis of piping. Locate identification not to exceed 20 feet on straight runs including risers and drops, adjacent to each valve and Tee, at each side of penetration of structure or enclosure, and at each obstruction.
- N. Identify ductwork with plastic nameplates or stencilled painting. Identify with air handling unit identification number and area served. Locate identification at air handling unit, at each side of penetration of structure or enclosure, and at each obstruction.
- O. Locate ceiling tacks to locate valves, units, or dampers above lay-in panel ceilings. Locate in corner of panel closest to equipment.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 23 05 93
TESTING, ADJUSTING, AND BALANCING FOR HVAC

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Testing, adjustment, and balancing of air systems.
- B. Testing, adjustment, and balancing of hydronic and refrigerating systems.
- C. Measurement of final operating condition of HVAC systems.
- D. Sound measurement of equipment operating conditions.
- E. Vibration measurement of equipment operating conditions.
- F. Commissioning activities.

1.02 RELATED REQUIREMENTS

- A. Section 01 91 10 - General Commissioning Requirements: Commissioning requirements that apply to all types of work.
- B. Section 01 91 10 - Functional Testing Procedures
- C. Section 23 08 00 - Mechanical Systems Commissioning
- D. Section 23 08 10 - Control Systems Commissioning

1.03 REFERENCE STANDARDS

- A. AABC MN-1 - AABC National Standards for Total System Balance; Associated Air Balance Council.
- B. ASHRAE Std 111 - Measurement, Testing, Adjusting, and Balancing of Building HVAC Systems.
- C. NEBB (TAB) - Procedural Standards for Testing Adjusting and Balancing of Environmental Systems.
- D. SMACNA (TAB) - HVAC Systems Testing, Adjusting and Balancing.

1.04 SUBMITTALS

- A. Qualifications: Submit name of adjusting and balancing agency and TAB supervisor for approval within 30 days after award of Contract.
- B. TAB Plan: Submit a written plan indicating the testing, adjusting, and balancing standard to be followed and the specific approach for each system and component.
 - 1. Submit to Architect.
 - 2. Submit to the Commissioning Authority, Construction Manager, and HVAC controls contractor.
 - 3. Submit six weeks prior to starting the testing, adjusting, and balancing work.
 - 4. Include certification that the plan developer has reviewed the contract documents, the equipment and systems, and the control system with the Architect and other installers to sufficiently understand the design intent for each system.
 - 5. Include at least the following in the plan:
 - a. Preface: An explanation of the intended use of the control system.
 - b. List of all air flow, water flow, sound level, system capacity and efficiency measurements to be performed and a description of specific test procedures, parameters, formulas to be used.
 - c. Copy of field checkout sheets and logs to be used, listing each piece of equipment to be tested, adjusted and balanced with the data cells to be gathered for each.
 - d. Identification and types of measurement instruments to be used and their most recent calibration date.

- e. Discussion of what notations and markings will be made on the duct and piping drawings during the process.
 - f. Final test report forms to be used.
 - g. Detailed step-by-step procedures for TAB work for each system and issue, including:
 - 1) Terminal flow calibration (for each terminal type).
 - 2) Diffuser proportioning.
 - 3) Branch/submain proportioning.
 - 4) Total flow calculations.
 - 5) Rechecking.
 - 6) Diversity issues.
 - h. Expected problems and solutions, etc.
 - i. Criteria for using air flow straighteners or relocating flow stations and sensors.
 - j. Details of how TOTAL flow will be determined; for example:
 - 1) Air: Sum of terminal flows via control system calibrated readings or via hood readings of all terminals, supply (SA) and return air (RA) pitot traverse, SA or RA flow stations.
 - 2) Water: Pump curves, circuit setter, flow station, ultrasonic, etc.
 - k. Specific procedures that will ensure that both air and water side are operating at the lowest possible pressures and methods to verify this.
 - l. Confirmation of understanding of the outside air ventilation criteria under all conditions.
 - m. Method of verifying and setting minimum outside air flow rate will be verified and set and for what level (total building, zone, etc.).
 - n. Method of checking building static and exhaust fan and/or relief damper capacity.
 - o. Proposed selection points for sound measurements and sound measurement methods.
 - p. Methods for making coil or other system plant capacity measurements, if specified.
 - q. Time schedule for TAB work to be done in phases (by floor, etc.).
 - r. Description of TAB work for areas to be built out later, if any.
 - s. Time schedule for deferred or seasonal TAB work, if specified.
 - t. False loading of systems to complete TAB work, if specified.
 - u. Exhaust fan balancing and capacity verifications, including any required room pressure differentials.
 - v. Interstitial cavity differential pressure measurements and calculations, if specified.
 - w. Procedures for field technician logs of discrepancies, deficient or uncompleted work by others, contract interpretation requests and lists of completed tests (scope and frequency).
 - x. Procedures for formal progress reports, including scope and frequency.
 - y. Procedures for formal deficiency reports, including scope, frequency and distribution.
- C. Field Logs: Submit at least once a week to Commissioning Authority and Construction Manager.
- D. Control System Coordination Reports: Communicate in writing to the controls installer all setpoint and parameter changes made or problems and discrepancies identified during TAB that affect, or could affect, the control system setup and operation.
- E. Progress Reports.
- F. Final Report: Indicate deficiencies in systems that would prevent proper testing, adjusting, and balancing of systems and equipment to achieve specified performance.
- 1. Submit to the Commissioning Authority, Construction Manager, and HVAC controls contractor within two weeks after completion of testing, adjusting, and balancing.
 - 2. Revise TAB plan to reflect actual procedures and submit as part of final report.

3. Submit draft copies of report for review prior to final acceptance of Project. Provide final copies for Architect and for inclusion in operating and maintenance manuals.
 4. Provide reports in soft cover, letter size, 3-ring binder manuals, complete with index page and indexing tabs, with cover identification at front and side. Include set of reduced drawings with air outlets and equipment identified to correspond with data sheets, and indicating thermostat locations.
 5. Include actual instrument list, with manufacturer name, serial number, and date of calibration.
 6. Form of Test Reports: Where the TAB standard being followed recommends a report format use that; otherwise, follow ASHRAE Std 111.
 7. Units of Measure: Report data in I-P (inch-pound) units only.
 8. Include the following on the title page of each report:
 - a. Name of Testing, Adjusting, and Balancing Agency.
 - b. Address of Testing, Adjusting, and Balancing Agency.
 - c. Telephone number of Testing, Adjusting, and Balancing Agency.
 - d. Project name.
 - e. Project location.
 - f. Project Architect.
 - g. Project Engineer.
 - h. Project Contractor.
 - i. Project altitude.
 - j. Report date.
- G. Project Record Documents: Record actual locations of flow measuring stations and balancing valves and rough setting.

1.05 QUALITY ASSURANCE (MOVED TO PART 3)

1.06 PRE-BALANCING MEETING (MOVED TO PART 3)

1.07 SEQUENCING AND SCHEDULING (MOVED TO PART 3)

1.08 WARRANTY (MOVED TO PART 3)

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION

3.01 GENERAL REQUIREMENTS

- A. Perform total system balance in accordance with one of the following:
 1. AABC MN-1, AABC National Standards for Total System Balance.
 2. ASHRAE Std 111, Practices for Measurement, Testing, Adjusting and Balancing of Building Heating, Ventilation, Air-Conditioning, and Refrigeration Systems.
 3. NEBB Procedural Standards for Testing Adjusting Balancing of Environmental Systems.
 4. SMACNA HVAC Systems Testing, Adjusting, and Balancing.
 5. Maintain at least one copy of the standard to be used at project site at all times.
- B. Begin work after completion of systems to be tested, adjusted, or balanced and complete work prior to Substantial Completion of the project.
- C. Where HVAC systems and/or components interface with life safety systems, including fire and smoke detection, alarm, and control, coordinate scheduling and testing and inspection procedures with the authorities having jurisdiction.
- D. TAB Agency Qualifications:
 1. Company specializing in the testing, adjusting, and balancing of systems specified in this section.
 2. Having minimum of three years documented experience.
 3. Certified by one of the following:

- a. AABC, Associated Air Balance Council: www.aabchq.com; upon completion submit AABC National Performance Guaranty.
 - b. NEBB, National Environmental Balancing Bureau: www.nebb.org/#sle.
 - c. TABB, The Testing, Adjusting, and Balancing Bureau of National Energy Management Institute: www.tabbcertified.org/#sle.
- E. TAB Supervisor and Technician Qualifications: Certified by same organization as TAB agency.
- F. TAB Supervisor Qualifications: Professional Engineer licensed in the State in which the Project is located.

3.02 EXAMINATION

- A. Verify that systems are complete and operable before commencing work. Ensure the following conditions:
- 1. Systems are started and operating in a safe and normal condition.
 - 2. Temperature control systems are installed complete and operable.
 - 3. Proper thermal overload protection is in place for electrical equipment.
 - 4. Final filters are clean and in place. If required, install temporary media in addition to final filters.
 - 5. Duct systems are clean of debris.
 - 6. Fans are rotating correctly.
 - 7. Fire and volume dampers are in place and open.
 - 8. Air coil fins are cleaned and combed.
 - 9. Access doors are closed and duct end caps are in place.
 - 10. Air outlets are installed and connected.
 - 11. Duct system leakage is minimized.
 - 12. Hydronic systems are flushed, filled, and vented.
 - 13. Pumps are rotating correctly.
 - 14. Proper strainer baskets are clean and in place.
 - 15. Service and balance valves are open.
- B. Submit field reports. Report defects and deficiencies that will or could prevent proper system balance.
- C. Beginning of work means acceptance of existing conditions.

3.03 PREPARATION

- A. Hold a pre-balancing meeting at least one week prior to starting TAB work.
- 1. Require attendance by all installers whose work will be tested, adjusted, or balanced.
- B. Provide instruments required for testing, adjusting, and balancing operations. Make instruments available to Architect to facilitate spot checks during testing.
- C. Provide additional balancing devices as required.

3.04 ADJUSTMENT TOLERANCES

- A. Air Handling Systems: Adjust to within plus or minus 10 percent of design for supply systems and plus or minus 10 percent of design for return and exhaust systems.
- B. Air Outlets and Inlets: Adjust total to within plus 10 percent and minus 10 percent of design to space. Adjust outlets and inlets in space to within plus or minus 10 percent of design.
- C. Hydronic Systems: Adjust to within plus or minus 10 percent of design.

3.05 RECORDING AND ADJUSTING

- A. Field Logs: Maintain written logs including:
- 1. Running log of events and issues.
 - 2. Discrepancies, deficient or uncompleted work by others.

3. Contract interpretation requests.
 4. Lists of completed tests.
- B. Ensure recorded data represents actual measured or observed conditions.
 - C. Permanently mark settings of valves, dampers, and other adjustment devices allowing settings to be restored. Set and lock memory stops.
 - D. Mark on drawings the locations where traverse and other critical measurements were taken and cross reference the location in the final report.
 - E. After adjustment, take measurements to verify balance has not been disrupted or that such disruption has been rectified.
 - F. Leave systems in proper working order, replacing belt guards, closing access doors, closing doors to electrical switch boxes, and restoring thermostats to specified settings.
 - G. At final inspection, recheck random selections of data recorded in report. Recheck points or areas as selected and witnessed by the Owner.
 - H. Check and adjust systems approximately six months after final acceptance and submit report.

3.06 AIR SYSTEM PROCEDURE

- A. Adjust air handling and distribution systems to provide required or design supply, return, and exhaust air quantities .
- B. Make air quantity measurements in ducts by Pitot tube traverse of entire cross sectional area of duct.
- C. Measure air quantities at air inlets and outlets.
- D. Adjust distribution system to obtain uniform space temperatures free from objectionable drafts and noise.
- E. Use volume control devices to regulate air quantities only to extend that adjustments do not create objectionable air motion or sound levels. Effect volume control by duct internal devices such as dampers and splitters.
- F. Vary total system air quantities by adjustment of fan speeds. Provide drive and sheave changes required. Vary branch air quantities by damper regulation.
- G. Provide system schematic with required and actual air quantities recorded at each outlet or inlet.
- H. Measure static air pressure conditions on air supply units, including filter and coil pressure drops, and total pressure across the fan. Make allowances for 50 percent loading of filters.
- I. Adjust outside air automatic dampers, outside air, return air, and exhaust dampers for design conditions.
- J. Measure temperature conditions across outside air, return air, and exhaust dampers to check leakage.
- K. Where modulating dampers are provided, take measurements and balance at extreme conditions. Balance variable volume systems at maximum air flow rate, full cooling, and at minimum air flow rate, full heating.
- L. Measure building static pressure and adjust supply, return, and exhaust air systems to provide required relationship between each to maintain approximately 0.05 inches positive static pressure near the building entries.
- M. Check multi-zone units for motorized damper leakage. Adjust air quantities with mixing dampers set first for cooling, then heating, then modulating.
- N. For variable air volume system powered units set volume controller to air flow setting indicated. Confirm connections properly made and confirm proper operation for automatic variable air volume temperature control.

- O. On fan powered VAV boxes, adjust air flow switches for proper operation.
- P. For laboratories, lab classrooms, and prep rooms, offset CFM values (differential between exhaust/return and supply airflows) shall be required to maintain a plus 10% minus 5% offset.

3.07 WATER SYSTEM PROCEDURE

- A. Adjust water systems to provide required or design quantities.
- B. Use calibrated Venturi tubes, orifices, or other metered fittings and pressure gauges to determine flow rates for system balance. Where flow metering devices are not installed, base flow balance on temperature difference across various heat transfer elements in the system.
- C. Adjust systems to provide specified pressure drops and flows through heat transfer elements prior to thermal testing. Perform balancing by measurement of temperature differential in conjunction with air balancing.
- D. Effect system balance with automatic control valves fully open to heat transfer elements.
- E. Effect adjustment of water distribution systems by means of balancing cocks, valves, and fittings. Do not use service or shut-off valves for balancing unless indexed for balance point.
- F. Where available pump capacity is less than total flow requirements or individual system parts, full flow in one part may be simulated by temporary restriction of flow to other parts.

3.08 COMMISSIONING

- A. Perform prerequisites prior to starting commissioning activities.
- B. Fill out Prefunctional Checklists for:
 - 1. Air side systems.
 - 2. Water side systems.
 - 3. Refrigeration systems
- C. Furnish to the Commissioning Authority, upon request, any data gathered but not shown in the final TAB report.
- D. Re-check minimum outdoor air intake flows and maximum and intermediate total airflow rates for 10 percent of the air handlers plus a random sample equivalent to 5 percent of the final TAB report data as directed by Commissioning Authority.
 - 1. Original TAB agency shall execute the re-checks, witnessed by the Commissioning Authority.
 - 2. Use the same test instruments as used in the original TAB work.
 - 3. Failure of more than 10 percent of the re-checked items of a given system shall result in the rejection of the system TAB report; rebalance the system, provide a new system TAB report, and repeat random re-checks.
 - 4. For purposes of re-check, failure is defined as follows:
 - a. Air Flow of Supply and Return: Deviation of more than 10 percent of instrument reading.
 - b. Minimum Outside Air Flow: Deviation of more than 20 percent of instrument reading; for inlet vane or VFD OSA compensation system using linear proportional control, deviation of more than 30 percent at intermediate supply flow.
 - c. Temperatures: Deviation of more than one degree F.
 - d. Air and Water Pressures: Deviation of more than 10 percent of full scale of test instrument reading.
 - e. Sound Pressures: Deviation of more than 3 decibels, with consideration for variations in background noise.
 - 5. For purposes of re-check, a whole system is defined as one in which inaccuracies will have little or no impact on connected systems; for example, the air distribution system served by one air handler or the hydronic chilled water supply system served by a chiller or the condenser water system.

- E. In the presence of the Commissioning Authority, verify that:
 - 1. Final settings of all valves, splitters, dampers and other adjustment devices have been permanently marked.
 - 2. The air system is being controlled to the lowest possible static pressure while still meeting design loads, less diversity; this shall include a review of TAB methods, established control setpoints, and physical verification of at least one leg from fan to diffuser having all balancing dampers wide open and that during full cooling of all terminal units taking off downstream of the static pressure sensor, the terminal unit on the critical leg has its damper 90 percent or more open.
 - 3. The water system is being controlled to the lowest possible pressure while still meeting design loads, less diversity; this shall include a review of TAB methods, established control setpoints, and physical verification of at least one leg from the pump to the coil having all balancing valves wide open and that during full cooling the cooling coil valve of that leg is 90 percent or more open.
- F. No seasonal tests are required.
- G. No further monitoring is required.
- H. No deferred testing is required.

3.09 SCOPE

- A. Test, adjust, and balance the following:
 - 1. Plumbing Pumps
 - 2. HVAC Pumps/Hydronic Systems
 - 3. Packaged Boilers
 - 4. Cooling towers
 - 5. Air Cooled Water Chillers
 - 6. Air Cooled Refrigerant Condensers
 - 7. Terminal Heat Transfer Units
 - 8. Heat Exchangers
 - 9. Air Handling Units/Rooftop Mounted Air handling units
 - 10. Fans
 - 11. Air Filters
 - 12. Air Terminal Units/Chilled Beams (air and hydronic)
 - 13. Air Inlets and Outlets

3.10 MINIMUM DATA TO BE REPORTED

- A. Electric Motors:
 - 1. Manufacturer
 - 2. Model/Frame
 - 3. HP/BHP
 - 4. Phase, voltage, amperage; nameplate, actual, no load
 - 5. RPM
 - 6. Service factor
 - 7. Starter size, rating, heater elements
 - 8. Sheave Make/Size/Bore
- B. V-Belt Drives:
 - 1. Identification/location
 - 2. Required driven RPM
 - 3. Driven sheave, diameter and RPM
 - 4. Belt, size and quantity
 - 5. Motor sheave diameter and RPM
 - 6. Center to center distance, maximum, minimum, and actual

- C. Pumps:
1. Identification/number
 2. Manufacturer
 3. Size/model
 4. Impeller
 5. Service
 6. Design flow rate, pressure drop, BHP
 7. Actual flow rate, pressure drop, BHP
 8. Discharge pressure
 9. Suction pressure
 10. Total operating head pressure
 11. Shut off, discharge and suction pressures
 12. Shut off, total head pressure
- D. Hydronic System Control
1. Differential pressure setpoints for BAS contractor / commissioning.
- E. Combustion Equipment:
1. Boiler manufacturer
 2. Model number
 3. Serial number
 4. Firing rate
 5. Overfire draft
 6. Gas meter timing dial size
 7. Gas meter time per revolution
 8. Gas pressure at meter outlet
 9. Gas flow rate
 10. Heat input
 11. Burner manifold gas pressure
 12. Percent carbon monoxide (CO)
 13. Percent carbon dioxide (CO₂)
 14. Percent oxygen (O₂)
 15. Percent excess air
 16. Flue gas temperature at outlet
 17. Ambient temperature
 18. Net stack temperature
 19. Percent stack loss
 20. Percent combustion efficiency
 21. Heat output
- F. Air Cooled Condensers:
1. Identification/number
 2. Location
 3. Manufacturer
 4. Model number
 5. Serial number
 6. Entering DB air temperature, design and actual
 7. Leaving DB air temperature, design and actual
 8. Number of compressors
- G. Chillers:
1. Identification/number
 2. Manufacturer

3. Capacity
 4. Model number
 5. Serial number
 6. Evaporator entering water temperature, design and actual
 7. Evaporator leaving water temperature, design and actual
 8. Evaporator pressure drop, design and actual
 9. Evaporator water flow rate, design and actual
 10. Condenser entering water temperature, design and actual
 11. Condenser pressure drop, design and actual
 12. Condenser water flow rate, design and actual
- H. Heat Exchangers:
1. Identification/number
 2. Location
 3. Service
 4. Manufacturer
 5. Model number
 6. Serial number
 7. Steam pressure, design and actual
 8. Primary water entering temperature, design and actual
 9. Primary water leaving temperature, design and actual
 10. Primary water flow, design and actual
 11. Primary water pressure drop, design and actual
 12. Secondary water leaving temperature, design and actual
 13. Secondary water leaving temperature, design and actual
 14. Secondary water flow, design and actual
 15. Secondary water pressure drop, design and actual
- I. Cooling Coils:
1. Identification/number
 2. Location
 3. Service
 4. Manufacturer
 5. Air flow, design and actual
 6. Entering air DB temperature, design and actual
 7. Entering air WB temperature, design and actual
 8. Leaving air DB temperature, design and actual
 9. Leaving air WB temperature, design and actual
 10. Water flow, design and actual
 11. Water pressure drop, design and actual
 12. Entering water temperature, design and actual
 13. Leaving water temperature, design and actual
 14. Saturated suction temperature, design and actual
 15. Air pressure drop, design and actual
- J. Heating Coils:
1. Identification/number
 2. Location
 3. Service
 4. Manufacturer
 5. Air flow, design and actual
 6. Water flow, design and actual
 7. Water pressure drop, design and actual

8. Entering water temperature, design and actual
 9. Leaving water temperature, design and actual
 10. Entering air temperature, design and actual
 11. Leaving air temperature, design and actual
 12. Air pressure drop, design and actual
- K. Air Moving Equipment:
1. Location
 2. Manufacturer
 3. Model number
 4. Serial number
 5. Arrangement/Class/Discharge
 6. Air flow, specified and actual
 7. Return air flow, specified and actual
 8. Outside air flow, specified and actual
 9. Total static pressure (total external), specified and actual
 10. Inlet pressure
 11. Discharge pressure
 12. Sheave Make/Size/Bore
 13. Number of Belts/Make/Size
 14. Fan RPM
- L. Return Air/Outside Air:
1. Identification/location
 2. Design air flow
 3. Actual air flow
 4. Design return air flow
 5. Actual return air flow
 6. Design outside air flow
 7. Actual outside air flow
 8. Return air temperature
 9. Outside air temperature
 10. Required mixed air temperature
 11. Actual mixed air temperature
 12. Design outside/return air ratio
 13. Actual outside/return air ratio
- M. Exhaust Fans:
1. Location
 2. Manufacturer
 3. Model number
 4. Serial number
 5. Air flow, specified and actual
 6. Total static pressure (total external), specified and actual
 7. Inlet pressure
 8. Discharge pressure
 9. Sheave Make/Size/Bore
 10. Number of Belts/Make/Size
 11. Fan RPM
 12. Associated with Fume Hoods, Include:
 - a. Face velocity test at max/min sash position.
- N. Duct Traverses:
1. System zone/branch

2. Duct size
 3. Area
 4. Design velocity
 5. Design air flow
 6. Test velocity
 7. Test air flow
 8. Duct static pressure
 9. Air temperature
 10. Air correction factor
- O. Duct Leak Tests:
1. Description of ductwork under test
 2. Duct design operating pressure
 3. Duct design test static pressure
 4. Duct capacity, air flow
 5. Maximum allowable leakage duct capacity times leak factor
 6. Test apparatus
 - a. Blower
 - b. Orifice, tube size
 - c. Orifice size
 - d. Calibrated
 7. Test static pressure
 8. Test orifice differential pressure
 9. Leakage
- P. Flow Measuring Stations:
1. Identification/number
 2. Location
 3. Size
 4. Manufacturer
 5. Model number
 6. Serial number
 7. Design Flow rate
 8. Design pressure drop
 9. Actual/final pressure drop
 10. Actual/final flow rate
 11. Station calibrated setting
- Q. Terminal Unit Data:
1. Manufacturer
 2. Type, constant, variable, single, dual duct
 3. Identification/number
 4. Location
 5. Model number
 6. Size
 7. Minimum static pressure
 8. Minimum design air flow
 9. Maximum design air flow
 10. Maximum actual air flow
 11. Inlet static pressure
- R. Air Distribution Tests:
1. Air terminal number
 2. Room number/location

3. Terminal type
 4. Terminal size
 5. Area factor
 6. Design velocity
 7. Design air flow
 8. Test (final) velocity
 9. Test (final) air flow
 10. Percent of design air flow
- S. Sound Level Reports:
1. Location
 2. Octave bands - equipment off
 3. Octave bands - equipment on
- T. Vibration Tests:
1. Location of points:
 - a. Fan bearing, drive end
 - b. Fan bearing, opposite end
 - c. Motor bearing, center (if applicable)
 - d. Motor bearing, drive end
 - e. Motor bearing, opposite end
 - f. Casing (bottom or top)
 - g. Casing (side)
 - h. Duct after flexible connection (discharge)
 - i. Duct after flexible connection (suction)
 2. Test readings:
 - a. Horizontal, velocity and displacement
 - b. Vertical, velocity and displacement
 - c. Axial, velocity and displacement
 3. Normally acceptable readings, velocity and acceleration
 4. Unusual conditions at time of test
 5. Vibration source (if non-complying)

END OF SECTION

SECTION 23 07 13
DUCT INSULATION

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Duct insulation.
- B. Duct Lagging.
- C. Insulation jackets.

1.02 RELATED REQUIREMENTS

- A. Section 09 90 00 - Paints and Coatings: Painting insulation jackets.
- B. Section 22 05 53 - Identification for Plumbing Piping and Equipment.
- C. Section 23 05 53 - Identification for HVAC Piping and Equipment.
- D. Section 23 31 00 - HVAC Ducts and Casings: Glass fiber ducts.

1.03 REFERENCE STANDARDS

- A. ASTM B209 - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate.
- B. ASTM B209M - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate [Metric].
- C. ASTM C518 - Standard Test Method for Steady-State Thermal Transmission Properties by Means of the Heat Flow Meter Apparatus.
- D. ASTM C553 - Standard Specification for Mineral Fiber Blanket Thermal Insulation for Commercial and Industrial Applications.
- E. ASTM C612 - Standard Specification for Mineral Fiber Block and Board Thermal Insulation.
- F. ASTM C916 - Standard Specification for Adhesives for Duct Thermal Insulation.
- G. ASTM C1071 - Standard Specification for Fibrous Glass Duct Lining Insulation (Thermal and Sound Absorbing Material).
- H. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials.
- I. ASTM E96/E96M - Standard Test Methods for Water Vapor Transmission of Materials.
- J. ASTM G21 - Standard Practice for Determining Resistance of Synthetic Polymeric Materials to Fungi.
- K. NFPA 255 - Standard Method of Test of Surface Burning Characteristics of Building Materials; National Fire Protection Association.
- L. SMACNA (DCS) - HVAC Duct Construction Standards Metal and Flexible.
- M. UL 723 - Standard for Test for Surface Burning Characteristics of Building Materials.

1.04 SUBMITTALS

- A. Product Data: Provide product description, thermal characteristics, list of materials and thickness for each service, and locations.
- B. Manufacturer's Instructions: Indicate installation procedures necessary to ensure acceptable workmanship and that installation standards will be achieved.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing products of the type specified in this section with not less than three years of documented experience.
- B. Applicator Qualifications: Company specializing in performing the type of work specified in this section, with minimum three years of experience and approved by manufacturer.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Accept materials on site in original factory packaging, labelled with manufacturer's identification, including product density and thickness.
- B. Protect insulation from weather and construction traffic, dirt, water, chemical, and mechanical damage, by storing in original wrapping.

1.07 FIELD CONDITIONS

- A. Maintain ambient temperatures and conditions required by manufacturers of adhesives, mastics, and insulation cements.
- B. Maintain temperature during and after installation for minimum period of 24 hours.

PART 2 PRODUCTS

2.01 REQUIREMENTS FOR ALL PRODUCTS OF THIS SECTION

- A. Surface Burning Characteristics: Flame spread/Smoke developed index of 25/50, maximum, when tested in accordance with ASTM E84, NFPA 255, or UL 723.

2.02 GLASS FIBER, FLEXIBLE

- A. Manufacturer:
 - 1. Knauf Insulation: www.knaufusa.com.
 - 2. Johns Manville Corporation: www.jm.com/#sle.
 - 3. Owens Corning Corp: www.owenscorning.com/#sle.
 - 4. CertainTeed Corporation: www.certainteed.com/#sle.
- B. Insulation: ASTM C553; flexible, noncombustible blanket.
 - 1. Minimum "R" Value: Minimum R value of (6) is required for interior installations and a minimum R value of (8) is required for exterior installations.
 - 2. Maximum Service Temperature: 450 degrees F.
 - 3. Maximum Water Vapor Sorption: 5.0 percent by weight.
- C. Vapor Barrier Jacket:
 - 1. Moisture Vapor Permeability: 0.02 perm inch, when tested in accordance with ASTM E96/E96M.
 - 2. Secure with pressure sensitive tape.
- D. Vapor Barrier Tape:
 - 1. Kraft paper reinforced with glass fiber yarn and bonded to aluminized film, with pressure sensitive rubber based adhesive.
- E. Outdoor Vapor Barrier Mastic:
 - 1. Vinyl emulsion type acrylic or mastic, compatible with insulation, black color.
- F. Tie Wire: Annealed steel, 16 gage.

2.03 GLASS FIBER, RIGID

- A. Manufacturer:
 - 1. Knauf Insulation: www.knaufusa.com.
 - 2. Johns Manville Corporation: www.jm.com/#sle.
 - 3. Owens Corning Corp: www.owenscorning.com.
 - 4. CertainTeed Corporation: www.certainteed.com/#sle.
- B. Insulation: ASTM C612; rigid, noncombustible blanket.
 - 1. Minimum "R" Value: Minimum R value of (6) is required for interior installations and a minimum R value of (8) is required for exterior installations.
 - 2. Maximum service temperature: 450 degrees F.
 - 3. Maximum Water Vapor Sorption: 5.0 percent.

- C. Vapor Barrier Jacket:
 - 1. Moisture Vapor Permeability: 0.02 perm inch, when tested in accordance with ASTM E96/E96M.
 - 2. Secure with pressure sensitive tape.
- D. Vapor Barrier Tape:
 - 1. Kraft paper reinforced with glass fiber yarn and bonded to aluminized film, with pressure sensitive rubber based adhesive.
- E. Indoor Vapor Barrier Finish:
 - 1. Cloth: Untreated; 9 oz/sq yd weight, glass fabric.
 - 2. Vinyl emulsion type acrylic, compatible with insulation, black color.

2.04 JACKETS

- A. Aluminum Jacket: ASTM B209 (ASTM B209M).
 - 1. Thickness: 0.016 inch sheet.
 - 2. Finish: Smooth.
 - 3. Joining: Longitudinal slip joints and 2 inch laps.
 - 4. Fittings: 0.016 inch thick die shaped fitting covers with factory attached protective liner.
 - 5. Metal Jacket Bands: 3/8 inch wide; 0.015 inch thick aluminum.
 - 6. Metal Jacket Bands: 3/8 inch wide; 0.010 inch thick stainless steel.

2.05 DUCT LAGGING

- A. Manufacturers:
 - 1. Sound Seal: www.soundseal.com
 - 2. Kinetics Noise Control: www.kineticsnoise.com.
 - 3. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Lagging: Loaded vinyl noise barrier with a scrim reinforced aluminum foil facing on one side with a 1" thick fiberglass decoupler.
 - 1. Apparent Thermal Conductivity: Maximum of .25 at 75 degrees F
 - 2. Service Temperature: Up to 350 degrees F.
- C. Adhesive: Waterproof, fire-retardant type, ASTM C916.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that ducts have been tested before applying insulation materials.
- B. Verify that surfaces are clean, foreign material removed, and dry.

3.02 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Install in accordance with NAIMA National Insulation Standards.
- C. Insulated ducts conveying air below ambient temperature:
 - 1. Provide insulation with vapor barrier jackets.
 - 2. Finish with tape and vapor barrier jacket.
 - 3. Continue insulation through walls, sleeves, hangers, and other duct penetrations.
 - 4. Insulate entire system including fittings, joints, flanges, fire dampers, flexible connections, and expansion joints.
- D. Insulated ducts conveying air above ambient temperature:
 - 1. Provide with or without standard vapor barrier jacket.
 - 2. Insulate fittings and joints. Where service access is required, bevel and seal ends of insulation.

- E. Exterior Applications: Provide insulation with vapor barrier jacket. Cover with with calked aluminum jacket with seams located on bottom side of horizontal duct section.
- F. External Duct Insulation Application:
 - 1. Secure insulation with vapor barrier with wires and seal jacket joints with vapor barrier adhesive or tape to match jacket.
 - 2. Secure insulation without vapor barrier with staples, tape, or wires.
 - 3. Install without sag on underside of duct. Use adhesive or mechanical fasteners where necessary to prevent sagging. Lift duct off trapeze hangers and insert spacers.
 - 4. Seal vapor barrier penetrations by mechanical fasteners with vapor barrier adhesive.
 - 5. Stop and point insulation around access doors and damper operators to allow operation without disturbing wrapping.

3.03 SCHEDULES

A. INDOOR DUCT AND PLENUM APPLICATION SCHEDULE

- 1. NOTE: Apply duct lagging where indicated on drawings.
- 2. Service: Round, supply-air ducts, concealed.
 - a. Material: Mineral-fiber blanket.
 - b. Thickness: 2 inches.
 - c. Minimum "R" value: 6.
 - d. Jacket: Foil and paper.
 - e. Vapor Retarder Required: Yes.
- 3. Service: Round, return-air ducts, concealed.
 - a. Material: Mineral-fiber blanket.
 - b. Thickness: 2 inches.
 - c. Minimum "R" value: 6.
 - d. Jacket: Foil and paper.
 - e. Vapor Retarder Required: No.
- 4. Service: Round, outside-air ducts, concealed.
 - a. Material: Mineral-fiber blanket
 - b. Thickness: 2 inches.
 - c. Minimum "R" value: 6.
 - d. Jacket: Foil and paper.
 - e. Vapor Retarder Required: Yes.
- 5. Service: Rectangular, supply-air ducts, concealed.
 - a. Material: Mineral-fiber blanket
 - b. Thickness: 2 inches.
 - c. Minimum "R" value: 6.
 - d. Jacket: Foil and paper.
 - e. Vapor Retarder Required: Yes.
- 6. Service: Rectangular, return-air ducts, concealed.
 - a. Material: Mineral-fiber blanket
 - b. Thickness: 2 inches.
 - c. Minimum "R" value: 6.
 - d. Jacket: Foil and paper.
 - e. Vapor Retarder Required: No.
- 7. Service: Rectangular, outside-air ducts, concealed.
 - a. Material: Mineral-fiber blanket
 - b. Thickness: 2 inches.
 - c. Minimum "R" value: 6.
 - d. Jacket: Foil and paper.
 - e. Vapor Retarder Required: Yes.

8. Service: Round, supply-air ducts, exposed.
 - a. Material: Mineral-fiber blanket
 - b. Thickness: 2 inches.
 - c. Minimum "R" value: 6.
 - d. Jacket: Spiral-wound steel, paintable.
 - e. Vapor Retarder Required: Yes.
 - f. NOTE: Provide double-walled spiral ductwork in areas noted on drawings as defined in specification section 15890.
9. Service: Round, return-air ducts, exposed.
 - a. Material: Mineral-fiber blanket.
 - b. Thickness: 2 inches.
 - c. Minimum "R" value: 6.
 - d. Jacket: Spiral-wound steel, paintable.
 - e. Vapor Retarder Required: No.
 - f. NOTE: Provide double-walled spiral ductwork in areas noted on drawings as defined in specification section 15890.
10. Service: Round, outside-air ducts, exposed.
 - a. Material: Mineral-fiber blanket.
 - b. Thickness: 3 inches.
 - c. Minimum "R" value: 8.
 - d. Jacket: Spiral-wound steel, paintable.
 - e. Vapor Retarder Required: Yes.
 - f. NOTE: Provide double-walled spiral ductwork in areas noted on drawings as defined in specification section 15890.
11. Service: Rectangular, supply-air ducts, exposed.
 - a. Material: Mineral-fiber board.
 - b. Thickness: 3 inches.
 - c. Minimum "R" value: 8.
 - d. Jacket: Aluminum, painted to architects specifications.
 - e. Vapor Retarder Required: Yes.
 - f. NOTE: Provide double-wall insulated rectangular ductwork where noted on drawings
12. Service: Rectangular, return-air ducts, exposed.
 - a. Material: Mineral-fiber board.
 - b. Thickness: 2 inches.
 - c. Minimum "R" value: 6.
 - d. Jacket: Aluminum, painted to architects specifications
 - e. Vapor Retarder Required: No.
13. Service: Rectangular, outside-air ducts, exposed.
 - a. Material: Mineral-fiber board.
 - b. Thickness: 2 inches.
 - c. Minimum "R" value: 8.
 - d. Jacket: Aluminum, painted to architects specifications.
 - e. Vapor Retarder Required: Yes.
14. Service: Rectangular, range-hood exhaust ducts, concealed.
 - a. Material: Calcium silicate.
 - b. Thickness: 2 inches.
 - c. Field-Applied Jacket: Glass cloth.
 - d. Vapor Retarder Required: No.
15. Service: Rectangular, range-hood exhaust ducts, exposed.
 - a. Material: Calcium silicate.
 - b. Thickness: 2 inches.

- c. Field Applied Jacket: Stainless steel.
- d. Vapor Retarder Required: No.

B. OUTDOOR DUCT AND PLENUM APPLICATION SCHEDULE

- 1. Service: Round, supply-air ducts.
 - a. Material: Mineral-fiber board.
 - b. Thickness: 3 inches.
 - c. Minimum "R" value: 8.
 - d. Field-Applied Jacket: aluminum
 - 1) Aluminum Thickness: 0.032 inch
 - e. Vapor Retarder Required: Yes.
- 2. Service: Round, return-air ducts.
 - a. Material: Mineral-fiber board.
 - b. Thickness: 3 inches.
 - c. Minimum "R" value: 8.
 - d. Field-Applied Jacket: aluminum
 - 1) Aluminum Thickness: 0.032 inch
 - e. Vapor Retarder Required: Yes.
- 3. Service: Rectangular, supply-air ducts.
 - a. Material: Mineral-fiber board.
 - b. Thickness: 3 inches.
 - c. Minimum "R" value: 8.
 - d. Field-Applied Jacket: aluminum
 - 1) Aluminum Thickness: 0.032 inch
 - e. Vapor Retarder Required: Yes.
- 4. Service: Rectangular, return-air ducts.
 - a. Material: Mineral-fiber board.
 - b. Thickness: 3 inches.
 - c. Minimum "R" value: 8.
 - d. Field-Applied Jacket: aluminum
 - 1) Aluminum Thickness: 0.032 inch
 - e. Vapor Retarder Required: Yes.

END OF SECTION

SECTION 23 07 16
HVAC EQUIPMENT INSULATION

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Equipment insulation.
- B. Covering.
- C. Breeching insulation.

1.02 RELATED REQUIREMENTS

- A. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 09 90 00 - Paints and Coatings: Painting insulation covering.
- C. Section 23 05 53 - Identification for HVAC Piping and Equipment.
- D. Section 23 21 13 - Hydronic Piping: Placement of hangers and hanger inserts.
- E. Section 23 21 14 - Hydronic Specialties.
- F. Section 23 23 00 - Refrigerant Piping: Placement of inserts.

1.03 REFERENCE STANDARDS

- A. ASTM A666 - Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar.
- B. ASTM B209 - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate.
- C. ASTM B209M - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate [Metric].
- D. ASTM C177 - Standard Test Method for Steady-State Heat Flux Measurements and Thermal Transmission Properties by Means of the Guarded-Hot-Plate Apparatus.
- E. ASTM C449 - Standard Specification for Mineral Fiber Hydraulic-Setting Thermal Insulating and Finishing Cement.
- F. ASTM C518 - Standard Test Method for Steady-State Thermal Transmission Properties by Means of the Heat Flow Meter Apparatus.
- G. ASTM C533 - Standard Specification for Calcium Silicate Block and Pipe Thermal Insulation.
- H. ASTM C534/C534M - Standard Specification for Preformed Flexible Elastomeric Cellular Thermal Insulation in Sheet and Tubular Form.
- I. ASTM C552 - Standard Specification for Cellular Glass Thermal Insulation.
- J. ASTM C553 - Standard Specification for Mineral Fiber Blanket Thermal Insulation for Commercial and Industrial Applications.
- K. ASTM C592 - Standard Specification for Mineral Fiber Blanket Insulation and Blanket-Type Pipe Insulation (Metal-Mesh Covered) (Industrial Type).
- L. ASTM C612 - Standard Specification for Mineral Fiber Block and Board Thermal Insulation.
- M. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials.
- N. ASTM E96/E96M - Standard Test Methods for Water Vapor Transmission of Materials.
- O. NFPA 255 - Standard Method of Test of Surface Burning Characteristics of Building Materials; National Fire Protection Association.
- P. UL 723 - Standard for Test for Surface Burning Characteristics of Building Materials.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

- B. Product Data: Provide product description, thermal characteristics, list of materials and thickness for equipment scheduled.
- C. Manufacturer's Instructions: Indicate installation procedures that ensure acceptable workmanship and installation standards will be achieved.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with not less than three years of documented experience.
- B. Applicator Qualifications: Company specializing in performing the type of work specified in this section and approved by manufacturer.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Accept materials on site in original factory packaging, labeled with manufacturer's identification, including product density and thickness.
- B. Protect insulation from weather and construction traffic, dirt, water, chemical, and mechanical damage, by storing in original wrapping.

1.07 FIELD CONDITIONS

- A. Maintain ambient temperatures and conditions required by manufacturers of adhesives, mastics, and insulation cements.
- B. Maintain temperature during and after installation for minimum period of 24 hours.

PART 2 PRODUCTS

2.01 REQUIREMENTS FOR ALL PRODUCTS OF THIS SECTION

- A. Surface Burning Characteristics: Flame spread/Smoke developed index of 25/50, maximum, when tested in accordance with ASTM E84, NFPA 255, or UL 723.

2.02 GLASS FIBER, FLEXIBLE

- A. Manufacturers:
 - 1. Knauf Insulation; : www.knaufusa.com.
 - 2. Johns Manville Corporation; : www.jm.com.
 - 3. Owens Corning Corp; : www.owenscorning.com/#sle.
 - 4. CertainTeed Corporation; : www.certainteed.com.
- B. Insulation: ASTM C553; flexible, noncombustible.
 - 1. 'K' Value: 0.36 at 75 degrees F, when tested in accordance with ASTM C177 or ASTM C518.
 - 2. Maximum Service Temperature: 450 degrees F.
 - 3. Maximum Water Vapor Sorption: 5.0 percent by weight.
- C. Vapor Barrier Jacket: Kraft paper reinforced with glass fiber yarn and bonded to aluminized film.
 - 1. Moisture Vapor Permeability: 0.02 perm inch, when tested in accordance with ASTM E96/E96M.
 - 2. Secure with self-sealing longitudinal laps and butt strips.
- D. Tie Wire: 0.048 inch stainless steel with twisted ends on maximum 12 inch centers.

2.03 GLASS FIBER, RIGID

- A. Manufacturer:
 - 1. Knauf Insulation: www.knaufusa.com.
 - 2. Johns Manville Corporation: www.jm.com.
 - 3. Owens Corning Corp: www.owenscorning.com/#sle.
 - 4. CertainTeed Corporation; : www.certainteed.com.

- B. Insulation: ASTM C612 or ASTM C592; rigid, noncombustible.
 - 1. 'K' Value: 0.25 at 75 degrees F, when tested in accordance with ASTM C177 or ASTM C518.
 - 2. Maximum Service Temperature: 850 degrees F.
 - 3. Maximum Water Vapor Sorption: 5.0 percent by weight.
 - 4. Maximum Density: 8.0 lb/cu ft.
- C. Vapor Barrier Jacket:
 - 1. Kraft paper reinforced with glass fiber yarn and bonded to aluminized film.
 - 2. Moisture Vapor Permeability: 0.02 perm inch, when tested in accordance with ASTM E96/E96M.
 - 3. Secure with self-sealing longitudinal laps and butt strips.

2.04 FLEXIBLE ELASTOMERIC CELLULAR INSULATION

- A. Manufacturer:
 - 1. Armacell International: www.armacell.com/#sle.
 - 2. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Insulation: Preformed flexible elastomeric cellular rubber insulation complying with ASTM C534 Grade 3, in sheet form.
 - 1. Minimum Service Temperature: -40 degrees F.
 - 2. Maximum Service Temperature: 220 degrees F.
 - 3. Connection: Waterproof vapor barrier adhesive.

2.05 JACKETS

- A. PVC Plastic:
 - 1. Jacket: Sheet material, off-white color.
 - a. Minimum Service Temperature: -40 degrees F.
 - b. Maximum Service Temperature: 150 degrees F.
 - c. Moisture Vapor Permeability: 0.02 perm inch, when tested in accordance with ASTM E96/E96M.
 - d. Thickness: 10 mil.
 - e. Connections: Brush on welding adhesive.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that equipment has been tested before applying insulation materials.
- B. Verify that surfaces are clean and dry, with foreign material removed.

3.02 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Factory Insulated Equipment: Do not insulate.
- C. Exposed Equipment: Locate insulation and cover seams in least visible locations.
- D. Apply insulation close to equipment by grooving, scoring, and beveling insulation. Fasten insulation to equipment with studs, pins, clips, adhesive, wires, or bands.
- E. Fill joints, cracks, seams, and depressions with bedding compound to form smooth surface. On cold equipment, use vapor barrier cement.
- F. Insulated equipment containing fluids below ambient temperature: Insulate entire system.
- G. Fiber glass insulated equipment containing fluids below ambient temperature: Provide vapor barrier jackets, factory-applied or field-applied. Finish with glass cloth and vapor barrier adhesive.

- H. For hot equipment containing fluids 140 degrees F or less, do not insulate flanges and unions, but bevel and seal ends of insulation.
- I. For hot equipment containing fluids over 140 degrees F, insulate flanges and unions with removable sections and jackets.
- J. Fiber glass insulated equipment containing fluids above ambient temperature: Provide standard jackets, with or without vapor barrier, factory-applied or field-applied. Finish with glass cloth and adhesive.
- K. Inserts and Shields:
 - 1. Application: Equipment 1-1/2 inches diameter or larger.
 - 2. Shields: Galvanized steel between hangers and inserts.
 - 3. Insert location: Between support shield and equipment and under the finish jacket.
 - 4. Insert configuration: Minimum 6 inches long, of same thickness and contour as adjoining insulation; may be factory fabricated.
 - 5. Insert material: Hydrous calcium silicate insulation or other heavy density insulating material suitable for the planned temperature range.
- L. Finish insulation at supports, protrusions, and interruptions.
- M. Equipment in Mechanical Equipment Rooms or Finished Spaces: Finish with canvas jacket sized for finish painting.
- N. Exterior Applications: Provide vapor barrier jacket or finish with glass mesh reinforced vapor barrier cement. Cover with aluminum jacket with seams located on bottom side of horizontal equipment.
- O. Cover glass fiber insulation with metal mesh and finish with heavy coat of insulating cement aluminum jacket.
- P. Nameplates and ASME Stamps: Bevel and seal insulation around; do not insulate over.
- Q. Equipment Requiring Access for Maintenance, Repair, or Cleaning: Install insulation so it can be easily removed and replaced without damage.

3.03 SCHEDULE

- A. Heating, cooling, and dual temperature hydronic systems:
 - 1. Pump Bodies: 1.5" thick fiberglass insulation, vapor barrier, PVC jacket.
 - 2. Heat Exchangers/Converters: 1.5" thick fiberglass insulation, vapor barrier, PVC jacket.
 - 3. Air Separators: 1.5" thick fiberglass insulation, vapor barrier, PVC jacket.
 - 4. Expansion Tanks: 1.5" thick fiberglass insulation, vapor barrier, PVC jacket.
 - 5. Chiller Cold Surfaces (Not Factory Insulated): 1.5" thick fiberglass insulation, vapor barrier, PVC jacket.

END OF SECTION

SECTION 23 08 00
COMMISSIONING OF HVAC

PART 1 GENERAL

1.01 SUMMARY

- A. See Section 01 91 13 - General Commissioning Requirements for overall objectives; comply with the requirements of Section 01 91 13.
- B. This section covers the Contractor's responsibilities for commissioning; each subcontractor or installer responsible for the installation of a particular system or equipment item to be commissioned is responsible for the commissioning activities relating to that system or equipment item.
- C. The Commissioning Authority (CA) directs and coordinates all commissioning activities and provides Prefunctional Checklists and Functional Test Procedures for Contractor's use.
- D. The entire HVAC system is to be commissioned, including commissioning activities for the following specific items:
 - 1. Other equipment and systems explicitly identified elsewhere in Contract Documents as requiring commissioning.
- E. The Prefunctional Checklist and Functional Test requirements specified in this section are in addition to, not a substitute for, inspection or testing specified in other sections.

1.02 SUBMITTALS

- A. Updated Submittals: Keep the Commissioning Authority informed of all changes to control system documentation made during programming and setup; revise and resubmit when substantial changes are made.
- B. DRAFT Prefunctional Checklists and Functional Test Procedures for Control System: Detailed written plan indicating the procedures to be followed to test, checkout and adjust the control system prior to full system Functional Testing; include at least the following for each type of equipment controlled:
 - 1. System name.
 - 2. List of devices.
 - 3. Step-by-step procedures for testing each controller after installation, including:
 - a. Process of verifying proper hardware and wiring installation.
 - b. Process of downloading programs to local controllers and verifying that they are addressed correctly.
 - c. Process of performing operational checks of each controlled component.
 - d. Plan and process for calibrating valve and damper actuators and all sensors.
 - e. Description of the expected field adjustments for transmitters, controllers and control actuators should control responses fall outside of expected values.
 - 4. Copy of proposed log and field checkout sheets to be used to document the process; include space for initial and final read values during calibration of each point and space to specifically indicate when a sensor or controller has "passed" and is operating within the contract parameters.
 - 5. Description of the instrumentation required for testing.
 - 6. Indicate what tests on what systems should be completed prior to TAB using the control system for TAB work. Coordinate with the Commissioning Authority and TAB contractor for this determination.
- C. Startup Reports, Prefunctional Checklists, and Trend Logs: Submit for approval of Commissioning Authority.
- D. HVAC Control System O&M Manual Requirements. In addition to documentation specified elsewhere, compile and organize at minimum the following data on the control system:

1. Specific step-by-step instructions on how to perform and apply all functions, features, modes, etc. mentioned in the controls training sections of this specification and other features of this system. Provide an index and clear table of contents. Include the detailed technical manual for programming and customizing control loops and algorithms.
2. Full as-built set of control drawings.
3. Full as-built sequence of operations for each piece of equipment.
4. Full points list; in addition to the information on the original points list submittal, include a listing of all rooms with the following information for each room:
 - a. Floor.
 - b. Room number.
 - c. Room name.
 - d. Air handler unit ID.
 - e. Reference drawing number.
 - f. Air terminal unit tag ID.
 - g. Heating and/or cooling valve tag ID.
 - h. Minimum air flow rate.
 - i. Maximum air flow rate.
5. Full print out of all schedules and set points after testing and acceptance of the system.
6. Full as-built print out of software program.
7. Electronic copy on disk of the entire program for this facility.
8. Marking of all system sensors and thermostats on the as-built floor plan and HVAC drawings with their control system designations.
9. Maintenance instructions, including sensor calibration requirements and methods by sensor type, etc.
10. Control equipment component submittals, parts lists, etc.
11. Warranty requirements.
12. Copies of all checkout tests and calibrations performed by the Contractor (not commissioning tests).
13. Organize and subdivide the manual with permanently labeled tabs for each of the following data in the given order:
 - a. Sequences of operation.
 - b. Control drawings.
 - c. Points lists.
 - d. Controller and/or module data.
 - e. Thermostats and timers.
 - f. Sensors and DP switches.
 - g. Valves and valve actuators.
 - h. Dampers and damper actuators.
 - i. Program setups (software program printouts).
- E. Project Record Documents: See Section 01 78 00 for additional requirements.
 1. Submit updated version of control system documentation, for inclusion with operation and maintenance data.
 2. Show actual locations of all static and differential pressure sensors (air, water and building pressure) and air-flow stations on project record drawings.
- F. Draft Training Plan: In addition to requirements specified in Section 01 79 00, include:
 1. Follow the recommendations of ASHRAE Guideline 1.
 2. Control system manufacturer's recommended training.
 3. Demonstration and instruction on function and overrides of any local packaged controls not controlled by the HVAC control system.
- G. Training Manuals: See Section 01 79 00 for additional requirements.

1. Provide three extra copies of the controls training manuals in a separate manual from the O&M manuals.

PART 2 PRODUCTS

2.01 TEST EQUIPMENT

- A. Provide all standard testing equipment required to perform startup and initial checkout and required functional performance testing; unless otherwise noted such testing equipment will NOT become the property of Owner.
- B. Equipment-Specific Tools: Where special testing equipment, tools and instruments are specific to a piece of equipment, are only available from the vendor, and are required in order to accomplish startup or Functional Testing, provide such equipment, tools, and instruments as part of the work at no extra cost to Owner; such equipment, tools, and instruments are to become the property of Owner.

PART 3 EXECUTION

3.01 PREPARATION

- A. Cooperate with the Commissioning Authority in development of the Prefunctional Checklists and Functional Test Procedures.
- B. Furnish additional information requested by the Commissioning Authority.
- C. Prepare a preliminary schedule for HVAC pipe and duct system testing, flushing and cleaning, equipment start-up and testing, adjusting, and balancing start and completion for use by the Commissioning Authority; update the schedule as appropriate.
- D. Notify the Commissioning Authority when pipe and duct system testing, flushing, cleaning, startup of each piece of equipment and testing, adjusting, and balancing will occur; when commissioning activities not yet performed or not yet scheduled will delay construction notify ahead of time and be proactive in seeing that the Commissioning Authority has the scheduling information needed to efficiently execute the commissioning process.
- E. Put all HVAC equipment and systems into operation and continue operation during each working day of testing, adjusting, and balancing and commissioning, as required.
- F. Provide test holes in ducts and plenums where directed to allow air measurements and air balancing; close with an approved plug.
- G. Provide temperature and pressure taps in accordance with the contract documents.

3.02 INSPECTING AND TESTING - GENERAL

- A. Submit startup plans, startup reports, and Prefunctional Checklists for each item of equipment or other assembly to be commissioned.
- B. Perform the Functional Tests directed by the Commissioning Authority for each item of equipment or other assembly to be commissioned.
- C. Provide two-way radios for use during the testing.
- D. Valve/Damper Stroke Setup and Check:
 1. For all valve/damper actuator positions checked, verify the actual position against the control system readout.
 2. Set pump/fan to normal operating mode.
 3. Command valve/damper closed; visually verify that valve/damper is closed and adjust output zero signal as required.
 4. Command valve/damper open; verify position is full open and adjust output signal as required.
 5. Command valve/damper to a few intermediate positions.

6. If actual valve/damper position does not reasonably correspond, replace actuator or add pilot positioner (for pneumatics).
- E. Isolation Valve or System Valve Leak Check: For valves not by coils.
 1. With full pressure in the system, command valve closed.
 2. Use an ultra-sonic flow meter to detect flow or leakage.
- F. Deficiencies: Correct deficiencies and re-inspect or re-test, as applicable, at no extra cost to Owner.

3.03 TAB COORDINATION

- A. TAB: Testing, adjusting, and balancing of HVAC.
- B. Coordinate commissioning schedule with TAB schedule.
- C. Review the TAB plan to determine the capabilities of the control system toward completing TAB.
- D. Provide all necessary unique instruments and instruct the TAB technicians in their use; such as handheld control system interface for setting terminal unit boxes, etc.
- E. Have all required Prefunctional Checklists, calibrations, startup and component Functional Tests of the system completed and approved by the Commissioning Authority prior to starting TAB.
- F. Provide a qualified control system technician to operate the controls to assist the TAB technicians or provide sufficient training for the TAB technicians to operate the system without assistance.

3.04 CONTROL SYSTEM FUNCTIONAL TESTING

- A. Prefunctional Checklists for control system components will require a signed and dated certification that all system programming is complete as required to accomplish the requirements of the Contract Documents and the detailed Sequences of Operation documentation submittal.
- B. Do not start Functional Testing until all controlled components have themselves been successfully Functionally Tested in accordance with the contract documents.
- C. Using a skilled technician who is familiar with this building, execute the Functional Testing of the control system as required by the Commissioning Authority.
- D. Functional Testing of the control system constitutes demonstration and trend logging of control points monitored by the control system.
 1. The scope of trend logging is partially specified; trend log up to 50 percent more points than specified at no extra cost to Owner.
 2. Perform all trend logging specified in Prefunctional Checklists and Functional Test procedures.
- E. Functionally Test integral or stand-alone controls in conjunction with the Functional Tests of the equipment they are attached to, including any interlocks with other equipment or systems; further testing during control system Functional Test is not required unless specifically indicated below.
- F. Demonstrate the following to the Commissioning Authority during testing of controlled equipment; coordinate with commissioning of equipment.
 1. Setpoint changing features and functions.
 2. Sensor calibrations.
- G. Demonstrate to the Commissioning Authority:
 1. That all specified functions and features are set up, debugged and fully operable.
 2. That scheduling features are fully functional and setup, including holidays.
 3. That all graphic screens and value readouts are completed.
 4. Correct date and time setting in central computer.

5. That field panels read the same time as the central computer; sample 10 percent of field panels; if any of those fail, sample another 10 percent; if any of those fail test all remaining units at no extra cost to Owner.
 6. Functionality of field panels using local operator keypads and local ports (plug-ins) using portable computer/keypad; demonstrate 100 percent of panels and 10 percent of ports; if any ports fail, sample another 10 percent; if any of those fail, test all remaining units at no extra cost to Owner.
 7. Power failure and battery backup and power-up restart functions.
 8. Global commands features.
 9. Security and access codes.
 10. Occupant over-rides (manual, telephone, key, keypad, etc.).
 11. O&M schedules and alarms.
 12. Occupancy sensors and controls.
 13. All control strategies and sequences not tested during controlled equipment testing.
- H. If the control system, integral control components, or related equipment do not respond to changing conditions and parameters appropriately as expected, as specified and according to acceptable operating practice, under any of the conditions, sequences, or modes tested, correct all systems, equipment, components, and software required at no additional cost to Owner.

3.05 OPERATION AND MAINTENANCE MANUALS

- A. See Section 01 78 00 for additional requirements.
- B. Add design intent documentation furnished by Architect to manuals prior to submission to Owner.
- C. Submit manuals related to items that were commissioned to Commissioning Authority for review; make changes recommended by Commissioning Authority.
- D. Commissioning Authority will add commissioning records to manuals after submission to Owner.

3.06 DEMONSTRATION AND TRAINING

- A. See Section 01 79 00 for additional requirements.
- B. Demonstrate operation and maintenance of HVAC system to Owner's personnel; if during any demonstration, the system fails to perform in accordance with the information included in the O&M manual, stop demonstration, repair or adjust, and repeat demonstration. Demonstrations may be combined with training sessions if appropriate.
- C. These demonstrations are in addition to, and not a substitute for, Prefunctional Checklists and demonstrations to the Commissioning Authority during Functional Testing.
- D. Provide classroom and hands-on training of Owner's designated personnel on operation and maintenance of the HVAC system, control system, and all equipment items indicated to be commissioned. Provide the following minimum durations of training:
- E. TAB Review: Instruct Owner's personnel for minimum ____ hours, after completion of TAB, on the following:
 1. Review final TAB report, explaining the layout and meanings of each data type.
 2. Discuss any outstanding deficient items in control, ducting or design that may affect the proper delivery of air or water.
 3. Identify and discuss any terminal units, duct runs, diffusers, coils, fans and pumps that are close to or are not meeting their design capacity.
 4. Discuss any temporary settings and steps to finalize them for any areas that are not finished.
 5. Other salient information that may be useful for facility operations, relative to TAB.
- F. HVAC Control System Training: Perform training in at least three phases:

1. Phase 1 - Basic Control System: Provide minimum of ____ hours of actual training on the control system itself. Upon completion of training, each attendee, using appropriate documentation, should be able to perform elementary operations and describe general hardware architecture and functionality of the system.
 - a. This training may be held on-site or at the manufacturer's facility.
 - b. If held off-site, the training may occur prior to final completion of the system installation.
 - c. For off-site training, Contractor shall pay expenses of up to two attendees.
 2. Phase 2 - Integrating with HVAC Systems: Provide minimum of ____ hours of on-site, hands-on training after completion of Functional Testing. Include instruction on:
 - a. The specific hardware configuration of installed systems in this facility and specific instruction for operating the installed system, including interfaces with other systems, if any.
 - b. Security levels, alarms, system start-up, shut-down, power outage and restart routines, changing setpoints and alarms and other typical changed parameters, overrides, freeze protection, manual operation of equipment, optional control strategies that can be considered, energy savings strategies and set points that if changed will adversely affect energy consumption, energy accounting, procedures for obtaining vendor assistance, etc.
 - c. Trend logging and monitoring features (values, change of state, totalization, etc.), including setting up, executing, downloading, viewing both tabular and graphically and printing trends; provide practice in setting up trend logging and monitoring during training session.
 - d. Every display screen, allowing time for questions.
 - e. Point database entry and modifications.
 3. Phase 3 - Post-Occupancy: Six months after occupancy conduct minimum of ____ hours of training. Tailor training session to questions and topics solicited beforehand from Owner. Also be prepared to address topics brought up and answer questions concerning operation of the system.
- G. Provide the services of manufacturer representatives to assist instructors where necessary.
- H. Provide the services of the HVAC controls instructor at other training sessions, when requested, to discuss the interaction of the controls system as it relates to the equipment being discussed.

END OF SECTION

SECTION 23 09 13
INSTRUMENTATION AND CONTROL DEVICES FOR HVAC

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Input/Output Sensors:
- B. Thermostats, Temperature Sensors.
- C. Control valves.
- D. Automatic dampers.
- E. Damper operators.
- F. Miscellaneous accessories.

1.02 RELATED REQUIREMENTS

- A. Section 23 21 13 - Hydronic Piping: Installation of control valves, flow switches, temperature sensor sockets, gage taps.
- B. Section 23 33 00 - Air Duct Accessories: Installation of automatic dampers.
- C. Section 26 27 17 - Equipment Wiring: Electrical characteristics and wiring connections.
- D. Section 23 09 23 - Direct-Digital Control System for HVAC.
- E. Section 23 09 93 - Sequence of Operations for HVAC Controls.

1.03 REFERENCE STANDARDS

- A. AMCA 500-D - Laboratory Methods of Testing Dampers for Rating.
- B. ASME B16.22 - Wrought Copper and Copper Alloy Solder-Joint Pressure Fittings.
- C. ASTM B32 - Standard Specification for Solder Metal.
- D. ASTM B88 - Standard Specification for Seamless Copper Water Tube.
- E. ASTM D1693 - Standard Test Method for Environmental Stress-Cracking of Ethylene Plastics.
- F. NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum); National Electrical Manufacturers Association.
- G. NFPA 90A - Standard for the Installation of Air-Conditioning and Ventilating Systems.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide description and engineering data for each control system component. Include sizing as requested. Provide data for each system component and software module.
- C. Shop Drawings: Indicate complete operating data, system drawings, wiring diagrams, and written detailed operational description of sequences. Submit schedule of valves indicating size, flow, and pressure drop for each valve. For automatic dampers indicate arrangement, velocities, and static pressure drops for each system.
- D. Manufacturer's Instructions: Provide for all manufactured components.
- E. Project Record Documents: Record actual locations of control components, including panels, thermostats, and sensors. Accurately record actual location of control components, including panels, thermostats, and sensors.
 - 1. Revise shop drawings to reflect actual installation and operating sequences.
- F. Operation and Maintenance Data: Include inspection period, cleaning methods, recommended cleaning materials, and calibration tolerances.

- G. Warranty: Submit manufacturers warranty and ensure forms have been filled out in Owner's name and registered with manufacturer.
- H. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
 - 1. See Section 01 60 00 - Product Requirements, for additional provisions.

1.05 QUALITY ASSURANCE

- A. Designer Qualifications: Design system under direct supervision of a Professional Engineer experienced in design of this work and licensed in the State in which the Project is located.

PART 2 PRODUCTS

2.01 EQUIPMENT - GENERAL

- A. Products Requiring Electrical Connection: Listed and classified by Underwriters Laboratories Inc., as suitable for the purpose specified and indicated.

2.02 CONTROL VALVES

- A. Pressure Independent Balancing and Control Valves:
 - 1. Application: Fan Coils, radiant units, chilled beams, and other terminal units.,
 - 2. Pressure independent balancing and control valves shall combine the functions of control, balancing, presetting, measuring, shut-off and differential pressure control in one valve body to maintain full controllability at any opening positions of the control part regardless of any pressure variations in other parts of the systems through the lifecycle of heating and cooling systems.
 - 3. Manufacturers
 - a. IMI-TA/Tour & Andersson/TA Hydronics Model COMPACT-P or approved equal by Owner and Engineer. Application for approval required at least 10 days prior to bid opening.
 - 4. Design
 - a. The valve shall have an in-built linear control valve characteristic, best suited for on-off control.
 - b. The valve shall have flow balancing, isolation, a two-way control valve and differential pressure regulator in the same body.
 - c. The valve shall have an integrated differential pressure controller to maintain full controllability at any opening of the control part regardless of pressure changes in the system up to the max Dp rating of the valve (58 psi).
 - d. The valve isolation for system maintenance should be achieved by the control actuator or through the in-built dial position.
 - e. The valve internals shall have a plug and seat for balancing and controlling flow from the regulated position.
 - f. The valve should be able to have an in-built manual adjustment to preset maximum flow values in the field in a conventional manner. The adjustment mechanism should be covered with the actuator during the operation to prevent tampering.
 - g. The valve shall have a capability of bypassing DP controller to enable measurement of available head.
 - h. The valve shall have a capability to measure the flow, temperature, pressure drop and available head directly through the standard pressure and temperature ports available on the front side of the valve body.
 - i. The pressure independent balancing and control valve for small terminal units shall have a startup pressure of no more than 2.2 psi (1/2" and 3/4") and no more than 3.7 psi (1" and 1 1/4").
 - j. The pressure independent balancing and control valve for small terminal units shall require no maintenance and shall not include replaceable cartridges.

- k. The valves shall be available with a Normally Open or Normally Closed on-off actuator (IMI-TA Model. EMO-T) having a M30 X 1.5 threads on the actuator-locking nut. (Normally closed modulating actuator (IMI-TA Model. EMO-TM) may be installed directly on the valve via the M30 X 1.5 threads if desired.)
- l. The valve shall have availability of different connections like female NPT and female SWT connections available via a union connection nut.
- 5. Size:
 - a. Pressure Independent Balancing and Control valve shall be available in following sizes and connections:
 - 1) Valve size $\frac{1}{2}$ " - Connections $\frac{1}{2}$ " FPT/SWT
 - 2) Valve size $\frac{3}{4}$ " - Connections $\frac{1}{2}$ " FPT/SWT, $\frac{3}{4}$ " FPT/SWT
 - 3) Valve size 1" - Connections $\frac{1}{2}$ " FPT/SWT, $\frac{3}{4}$ " FPT/SWT, 1" FPT/SWT
 - 4) Valve size 1 $\frac{1}{4}$ " - Connections 1" FPT/SWT, 1 $\frac{1}{4}$ " FPT/SWT
- 6. Material and Construction
 - a. The valve body and the self-sealing pressure test points shall be made of a dezincification resistant alloy
 - b. The insert and plug shall consists of Stainless Steel and/or Ametal® material
 - c. The return spring shall be stainless steel
 - d. The valve insert shall be dezincification resistant alloy (Ametal®) and PPS (polyphenylsulphide)
 - e. The valve spindle shall be of Stainless Steel
 - f. The valve shall be fitted with two standard PT test points.
- 7. Testing and Ratings
 - a. Tests- Valves shall be leak proof and tested at 85 psi of air.
 - b. Ratings
 - c. The valves shall be rated for a pressure class of PN 16 (230 psi) at 32°F to 176 °F
- 8. Installation
 - a. Install in accordance with manufacturer's instructions.
- 9. Measuring and Verification
 - a. Flow shall be measured at each combined control and balancing valve for small terminal units, through the available P/T ports on the body and the use of IMI-TA balancing instrument Model TA-SCOPE by having the actuator fully open.
- 10. Packaging
 - a. The valves and actuators shall be shipped in individual boxes combined in a single package box.
 - b. The end connections will be ordered separately and shipped in their own packing.
- B. Globe Pattern Type:
 - 1. Application: Air handlers, equipment shut-off and isolation.
 - 2. Up to 2 inches: Bronze body, bronze trim, rising stem, renewable composition disc, screwed ends with backseating capacity repackable under pressure.
 - a. Product:
 - 1) Substitutions: See Section 01 60 00 - Product Requirements.
 - 3. Over 2 inches: Iron body, bronze trim, rising stem, plug-type disc, flanged ends, renewable seat and disc.
 - a. Product:
 - 1) Substitutions: See Section 01 60 00 - Product Requirements.
 - 4. Hydronic Systems:
 - a. Rate for service pressure of 125 psig at 250 degrees F.
 - b. Replaceable plugs and seats of stainless steel.
 - c. Size for 3 psig maximum pressure drop at design flow rate.

- d. Two way valves shall have equal percentage characteristics, three way valves linear characteristics. Size two way valve operators to close valves against pump shut off head.
- 5. Steam Systems:
 - a. Rate for service pressure of 125 psig at 250 degrees F.
 - b. Replaceable plugs and seats of stainless steel. Pressure drop across any steam valve at maximum flow shall be as shown on the Drawings.
 - c. Size for 10 psig inlet pressure and 5 psig pressure drop.
 - d. Valves shall have modified linear characteristics.
- C. Butterfly Pattern:
 - 1. Application: Air handlers, equipment shutoff, mixing and diverting.
 - 2. Iron body, bronze disc, resilient replaceable seat for service to 180 degrees F wafer or lug ends, extended neck.
 - 3. Hydronic Systems:
 - a. Rate for service pressure of 125 psig at 250 degrees F.
 - b. Size for 1 psig maximum pressure drop at design flow rate.
- D. Electronic Actuators:
 - 1. 24 V powered, 4-20 mA proportional signal electronic actuator for valves and dampers.
 - 2. Actuators shall spring return to normal open position as indicated on freeze, fire, or temperature protection.
 - 3. Select operator for full shut off at maximum pump differential pressure.

2.03 DAMPERS

- A. Performance: Test in accordance with AMCA 500-D.
- B. Frames: Galvanized steel, welded or riveted with corner reinforcement, minimum 12 gage.
- C. Blades: Galvanized steel, maximum blade size 8 inches wide, 48 inches long, minimum 22 gage, attached to minimum 1/2 inch shafts with set screws.
- D. Blade Seals: Synthetic elastomeric inflatable mechanically attached, field replaceable.
- E. Jamb Seals: Spring stainless steel.
- F. Shaft Bearings: Oil impregnated sintered bronze.
- G. Linkage Bearings: Oil impregnated sintered bronze.
- H. Leakage: Less than one percent based on approach velocity of 2000 ft/min and 4 inches wg.
- I. Maximum Pressure Differential: 6 inches wg.
- J. Temperature Limits: -40 to 200 degrees F.

2.04 DAMPER OPERATORS

- A. General: Provide smooth proportional control with sufficient power for air velocities 20 percent greater than maximum design velocity and to provide tight seal against maximum system pressures. Provide spring return for two position control and for fail safe operation.
 - 1. Provide sufficient number of operators to achieve unrestricted movement throughout damper range.
 - 2. Provide one operator for maximum 36 sq ft damper section.
- B. Electric Operators:
 - 1. Spring return, adjustable stroke motor having oil immersed gear train, with auxiliary end switch.

2.05 INPUT/OUTPUT SENSORS

- A. Temperature Sensors:
 - 1. Sensor range shall provide a resolution of no worse than .4°F (unless noted otherwise).

2. Room temperature sensor shall be an element contained within a ventilated cover, suitable for wall mounting with digital output. Sensors located in mechanical areas, plenums, garages, gymnasiums, or designated institutional locations shall be a flat plate sensor with no possible adjustment or shall be provided with aesthetically-pleasing lockable protective cover. Security screws shall be used in institutional settings as deemed necessary by the design engineer. ATC contractor shall coordinate requirements with the design engineer during the submittal process. Provide insulated base. Following sensing elements are acceptable:
 - a. Sensing element - Platinum RTD, Thermistor, or integrated circuit, $\pm 0.8^{\circ}\text{F}$ accuracy at calibration point.
 - b. Units shall be capable of ± 2 degrees (F) adjustment by the occupant, with display showing current temperature and setpoint.
3. Single point duct temperature sensor shall consist of sensing element, junction box for wiring connections and gasket to prevent air leakage or vibration noise. Temperature range as required for resolution indicated in paragraph A. Sensor probe shall be 316 stainless steel.
 - a. Sensing element - Platinum RTD, Thermistor, or integrated circuit, $\pm 0.8^{\circ}\text{F}$ accuracy at calibration point.
4. Averaging duct temperature sensor shall consist of an averaging element, junction box for wiring connections and gasket to prevent air leakage. Provide enough sensors to give one lineal foot of sensing element for each square foot of cooling coil face area. Temperature range as required for resolution indicated in paragraph A.
 - a. Sensing element - Platinum RTD, Thermistor, or integrated circuit, $\pm 0.8^{\circ}\text{F}$ accuracy at calibration point.
5. Liquid immersion temperature sensor shall include stainless steel thermowell, sensor and connection head for wiring connections.
 - a. Sensing element for chilled water applications - Platinum RTD, Thermistor, or integrated circuit, $\pm 0.8^{\circ}\text{F}$ accuracy at calibration point. Temperature range shall be as required for resolution indicated in paragraph A.
 - b. Sensing element for non-chilled water applications - Platinum RTD, $\pm 0.2^{\circ}\text{F}$ accuracy at calibration point. Temperature range shall be as required for resolution of no worse than 0.1°F .
- B. Carbon Dioxide Sensors:
 1. General: Provide non-dispersive infrared (NDIR), diffusion sampling CO₂ sensors with integral transducers and linear output.
 2. Air Temperature: Range of 32 to 122 degrees F.
 3. Relative Humidity: Range of 0 to 95 percent (non-condensing).
 4. Power Input: Class 2; 12 to 30VDC or 24VAC 50/60 Hz; 100mA max.
 5. Calibration Characteristics:
 - a. Maximum Drift: 2 percent.
 - b. User calibratable with a minimum calibration interval of 5 years.
 6. Construction:
 - a. Sensor Chamber: Non-corrosive material for neutral effect on carbon dioxide sample.
 - b. Provide duct mounted sensors with duct probe designed to protect sensing element from dust accumulation and mechanical damage.
 - c. Housing: High impact plastic.
- C. Equipment Operation Sensors:
 1. Status Inputs for Fans: Differential pressure switch with adjustable range of 0 to 5 inches wg.
 2. Status Inputs for Pumps: Differential pressure switch piped across pump with adjustable pressure differential range of 8 to 60 psi.

3. Status Inputs for Electric Motors: Current sensing relay with current transformers, adjustable and set to 175 percent of rated motor current.
- D. Damper Position Indication: Potentiometer mounted in enclosure with adjustable crank arm assembly connected to damper to transmit 0 - 100 percent damper travel.
- E. Carbon Dioxide Level Sensors:
 1. Wall or duct-mounted as required by control sequence or plans.
 2. Demand-control ventilation sensor for measuring and transmitting CO2 levels ranging from 0-2,000 ppm.
 3. Single-beam, dual-wavelength design with five-year stability for calibration..
 4. Proportional output, 4-20 mA signal.

2.06 THERMOSTATS

- A. Line Voltage Thermostats:
 1. Integral manual On/Off/Auto selector switch, single or two pole as required.
 2. Dead band: Maximum 2 degrees F.
 3. Cover: Locking with set point adjustment, with thermometer.
 4. Rating: Motor load.
- B. Outdoor Reset Thermostat:
 1. Remote bulb or bimetal rod and tube type, proportioning action with adjustable throttling range, adjustable setpoint.
 2. Scale range: -10 to 70 degrees F.
- C. Immersion Thermostat:
 1. Remote bulb or bimetallic rod and tube type, proportional action with adjustable setpoint and adjustable throttling range.
- D. Airstream Thermostats:
 1. Remote bulb or bimetallic rod and tube type, proportional action with adjustable setpoint in middle of range and adjustable throttling range.
 2. Averaging service remote bulb element: 7.5 feet.
- E. Electric Low Limit Duct Thermostat:
 1. Snap acting, single pole, single throw, manual reset switch that trips if temperature sensed across any 12 inches of bulb length is equal to or below setpoint,
 2. Bulb length: Minimum 20 feet.
 3. Provide one thermostat for every 20 sq ft of coil surface.
- F. Electric High Limit Duct Thermostat:
 1. Snap acting, single pole, single throw, manual reset switch that trips if temperature sensed across any 12 inches of bulb length is equal to or above setpoint,
 2. Bulb length: Minimum 20 feet.
 3. Provide one thermostat for every 20 sq ft of coil surface.
- G. Fire Thermostats:
 1. UL labeled, factory set in accordance with NFPA 90A.
 2. Normally closed contacts, manual reset.
- H. Heating/Cooling Valve Top Thermostats:
 1. Proportional acting for proportional flow, molded rubber diaphragm, remote bulb liquid filled element, direct and reverse acting at differential pressure to 25 psig, cast housing with position indicator and adjusting knob.

2.07 TRANSMITTERS

- A. Pressure Transmitters:

1. One pipe direct acting indicating type for gas, liquid, or steam service, range suitable for system, proportional electronic output.
- B. Temperature Transmitters:
 1. One pipe, directly proportional output signal to measured variable, linearity within plus or minus 1/2 percent of range for 200 degree F span and plus or minus 1 percent for 50 degree F span, with 50 degrees F temperature range, compensated bulb, averaging capillary, or rod and tube operation on 20 psig input pressure and 3 to 15 psig output.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify existing conditions before starting work.
- B. Verify that systems are ready to receive work.
- C. Beginning of installation means installer accepts existing conditions.
- D. Sequence work to ensure installation of components is complementary to installation of similar components in other systems.
- E. Coordinate installation of system components with installation of mechanical systems equipment such as air handling units and air terminal units.
- F. Ensure installation of components is complementary to installation of similar components.
- G. Coordinate installation of system components with installation of mechanical systems equipment such as air handling units and air terminal units.

3.02 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Check and verify location of thermostats with plans and room details before installation. Locate 48 inches above floor. Align with lighting switches, CO2 sensors, and humidistats. Refer to Section 26 27 26.
- C. Mount freeze protection thermostats using flanges and element holders.
- D. Mount outdoor reset thermostats and outdoor sensors indoors, with sensing elements outdoors with sun shield.
- E. Provide separable sockets for liquids and flanges for air bulb elements.
- F. Provide thermostats in aspirating boxes in front entrances.
- G. Provide guards on thermostats in entrances.
- H. Provide valves with position indicators and with pilot positioners where sequenced with other controls.
- I. Provide mixing dampers of opposed blade construction arranged to mix streams. Provide separate minimum outside air damper section adjacent to return air dampers with separate damper motor.
- J. Provide isolation (two position) dampers of parallel blade construction.
- K. Install damper motors on outside of duct in warm areas. Do not install motors in locations at outdoor temperatures.
- L. Mount control panels adjacent to associated equipment on vibration free walls or free standing angle iron supports. One cabinet may accommodate more than one system in same equipment room. Provide engraved plastic nameplates for instruments and controls inside cabinet and engraved plastic nameplates on cabinet face.
- M. Install "hand/off/auto" selector switches to override automatic interlock controls when switch is in "hand" position.

- N. Provide conduit and electrical wiring in accordance with Section 26 27 17. Electrical material and installation shall be in accordance with appropriate requirements of Division 26.
- O. Install pressure independent balancing and control valves for small terminal units on the supply or return lines of coils.
 - 1. For accuracy in flow measurements try to avoid mounting taps and pumps immediately before or after the valve. A minimum distance of five times the pipe diameter and ten times the pipe diameter before the valve for taps and pump respectively is recommended before the valve. A minimum distance of two times the pipe diameter is recommended after the valve.
 - 2. The actuator for the combined manual balancing and control valves for small terminal units can be installed in any position as per manufacturer's recommendations.
 - 3. Install in accordance with manufacturer's instructions.

3.03 MAINTENANCE

- A. See Section 01 70 00 - Execution Requirements, for additional requirements relating to maintenance service.
- B. Provide service and maintenance of control system for one year from Date of Substantial Completion.

END OF SECTION

SECTION 23 09 23

DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC

- .01 NOTE: THE OWNER WOULD LIKE THE ABILITY TO MONITOR THIS BUILDING WITH THEIR CAMPUS-WIDE BUILDING MANAGEMENT SYSTEM IN THE FUTURE. CONFIRM AND COORDINATE WITH OWNER THAT THE LOCAL BUILDING MANAGEMENT SYSTEM BEING PROVIDED UNDER THIS CONTRACT IS COMPATIBLE WITH THEIR EXISTING OR FUTURE CAMPUS-WIDE BUILDING MANAGEMENT SYSTEM.**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. System Description
- B. Operator Interface
- C. Controllers
- D. Power Supplies and Line Filtering
- E. System Software
- F. Controller Software
- G. HVAC Control Programs
- H. Control equipment.
- I. Software.

1.02 RELATED REQUIREMENTS

- A. Section 28 31 00 - Fire Detection and Alarm.
- B. Section 23 09 13 - Instrumentation and Control Devices for HVAC.
- C. Section 23 09 93 - Sequence of Operations for HVAC Controls.
- D. Section 26 27 17 - Equipment Wiring: Electrical characteristics and wiring connections.
- E. Section 27 52 23.50 - Educational Intercommunications and Programs - Education For Sustainability Systems

1.03 REFERENCE STANDARDS

- A. NFPA 70 - National Electrical Code.

1.04 SYSTEM DESCRIPTION

- A. Automatic temperature control field monitoring and control system using field programmable micro-processor based units .
- B. Base system on distributed system of fully intelligent, stand-alone controllers, operating in a multi-tasking, multi-user environment on token passing network, with central and remote hardware, software, and interconnecting wire and conduit.
- C. Include computer software and all hardware, operator input/output devices, control units, local area networks (LAN), sensors, control devices, actuators.
- D. Controls for variable air volume terminals, radiation, reheat coils, unit heaters, fan coils, and the like when directly connected to the control units. Individual terminal unit control is specified in Section 23 09 13.
- E. Provide control systems consisting of thermostats, control valves, dampers and operators, indicating devices, interface equipment, power transformers and electrical feeds, and other apparatus and accessories required to operate mechanical systems, and to perform functions specified.

- F. Include installation and calibration, supervision, adjustments, and fine tuning necessary for complete and fully operational system.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide data for each system component and software module.
- C. Shop Drawings:
 - 1. Indicate trunk cable schematic showing programmable control unit locations, and trunk data conductors.
 - 2. List connected data points, including connected control unit and input device.
 - 3. Indicate system graphics indicating monitored systems, data (connected and calculated) point addresses, and operator notations. Provide demonstration diskette containing graphics.
 - 4. Show system configuration with peripheral devices, batteries, power supplies, diagrams, modems, and interconnections.
 - 5. Indicate description and sequence of operation of operating, user, and application software.
- D. Manufacturer's Instructions: Indicate manufacturer's installation instructions for all manufactured components.
- E. Project Record Documents: Record actual locations of control components, including control units, thermostats, and sensors.
 - 1. Revise shop drawings to reflect actual installation and operating sequences.
 - 2. Include submittals data in final "Record Documents" form.
- F. Operation and Maintenance Data:
 - 1. Include interconnection wiring diagrams complete field installed systems with identified and numbered, system components and devices.
 - 2. Include keyboard illustrations and step-by-step procedures indexed for each operator function.
 - 3. Include inspection period, cleaning methods, cleaning materials recommended, and calibration tolerances.
- G. Warranty: Submit manufacturer's warranty and ensure forms have been filled out in Owner's name and registered with manufacturer.

1.06 QUALITY ASSURANCE

- A. Perform work in accordance with NFPA 70.
- B. Design system software under direct supervision of a Professional Engineer experienced in design of this Work and licensed at the State in which the Project is located.
- C. Manufacturer Qualifications: Company specializing in manufacturing the Products specified in this section with minimum 10 years documented experience.
- D. Installer Qualifications: Company specializing in performing the work of this section 5 years documented experience approved by manufacturer.
- E. Products Requiring Electrical Connection: Listed and classified by Underwriters Laboratories Inc., as suitable for the purpose specified and indicated.

1.07 PRE-INSTALLATION MEETING

- A. Convene one week before starting work of this Section.
- B. Require attendance of parties directly affecting the work of this Section.

1.08 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.

- B. Correct defective Work within a five year period after Substantial Completion.
- C. Provide five year manufacturer's warranty for field programmable micro-processor based units.

1.09 MAINTENANCE SERVICE

- A. Provide service and maintenance of energy management and control systems for one years from Date of Substantial Completion.
- B. Provide four complete inspections per year, two in each season, to inspect, calibrate, and adjust controls as required, and submit written reports.
- C. Provide complete service of systems, including call backs. Make minimum of 4 complete normal inspections of approximately 4 hours duration in addition to normal service calls to inspect, calibrate, and adjust controls, and submit written reports.

1.10 EXTRA MATERIALS

- A. See Section 01 60 00 - Product Requirements, for additional provisions.

1.11 PROTECTION OF SOFTWARE RIGHTS

- A. Prior to delivery of software, the Owner and the party providing the software will enter into a software license agreement with provisions for the following:
 - 1. Limiting use of software to equipment provided under these specifications.
 - 2. Limiting copying.
 - 3. Preserving confidentiality.
 - 4. Prohibiting transfer to a third party.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Honeywell International, Inc; _____: www.honeywell.com/#sle.
- B. Siemens AG, Building Technologies Division; _____: www.siemens.com/#sle.
- C. Johnson Controls, Inc: www.johnsoncontrols.com.
- D. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 SYSTEM DESCRIPTION

- A. Automatic temperature control field monitoring and control system using field programmable micro-processor based units .
- B. Base system on distributed system of fully intelligent, stand-alone controllers, operating in a multi-tasking, multi-user environment on token passing network, with central and remote hardware, software, and interconnecting wire and conduit.
- C. Include computer software and hardware, operator input/output devices, control units, local area networks (LAN), sensors, control devices, actuators.
- D. Controls for variable air volume terminals, radiation, reheat coils, unit heaters, fan coils, and the like when directly connected to the control units. Individual terminal unit control is specified in Section 23 09 13.
- E. Provide control systems consisting of thermostats, control valves, dampers and operators, indicating devices, interface equipment and other apparatus and accessories required to operate mechanical systems, and to perform functions specified.
- F. Include installation and calibration, supervision, adjustments, and fine tuning necessary for complete and fully operational system.

2.03 CONTROLLERS

- A. BUILDING LEVEL CONTROLLERS
 - 1. General:

- a. Manage global strategies by one or more, independent, standalone, microprocessor based controllers.
- b. Provide sufficient memory to support controller's operating system, database, and programming requirements.
- c. Share data between networked controllers.
- d. Controller operating system manages input and output communication signals allowing distributed controllers to share real and virtual object information and allowing for central monitoring and alarms.
- e. Utilize real-time clock for scheduling.
- f. Continuously check processor status and memory circuits for abnormal operation.
- g. Controller to assume predetermined failure mode and generate alarm notification upon detection of abnormal operation.
- h. Communication with other network devices to be based on assigned protocol.
- 2. Communication:
 - a. Controller to reside on a BACnet network using ISO 8802-3 (ETHERNET) Data Link/Physical layer protocol.
 - b. Perform routing when connected to a network of custom application and application specific controllers.
 - c. Provide service communication port for connection to a portable operator's terminal or hand held device with compatible protocol.
- 3. Anticipated Environmental Ambient Conditions:
 - a. Outdoors and/or in Wet Ambient Conditions:
 - 1) Mount within waterproof enclosures.
 - 2) Rated for operation at 40 to 150 degrees F.
 - b. Conditioned Space:
 - 1) Mount within dustproof enclosures.
 - 2) Rated for operation at 32 to 120 degrees F.
- 4. Provisions for Serviceability:
 - a. Diagnostic LEDs for power, communication, and processor.
 - b. Make all wiring connections to field removable, modular terminal strips, or to a termination card connected by a ribbon cable.
- 5. Memory: In the event of a power loss, maintain all BIOS and programming information for a minimum of 72 hours.
- 6. Power and Noise Immunity:
 - a. Maintain operation at 90 to 110 percent of nominal voltage rating.
 - b. Perform orderly shutdown below 80 percent of nominal voltage.
 - c. Operation protected against electrical noise of 5 to 120 Hz and from keyed radios up to 5 W. at 3 feet.
- B. INPUT/OUTPUT INTERFACE
 - 1. Hardwired inputs and outputs tie into the DDC system through building, custom application, or application specific controllers.
 - 2. All Input/Output Points:
 - a. Protect controller from damage resulting from any point short-circuiting or grounding and from voltage up to 24 volts of any duration.
 - b. Provide universal type for building and custom application controllers where input or output is software designated as either binary or analog type with appropriate properties.
 - 3. Binary Inputs:
 - a. Allow monitoring of On/Off signals from remote devices.
 - b. Provide wetting current of 12 mA minimum, compatible with commonly available control devices and protected against the effects of contact bounce and noise.

- c. Sense dry contact closure with power provided only by the controller.
- 4. Pulse Accumulation Input Objects: Conform to all requirements of binary input objects and accept up to 10 pulses per second.
- 5. Analog Inputs:
 - a. Allow for monitoring of low voltage 0 to 10 VDC, 4 to 20 mA current, or resistance signals (thermistor, RTD).
 - b. Compatible with and field configurable to commonly available sensing devices.
- 6. Binary Outputs:
 - a. Used for On/Off operation or a pulsed low-voltage signal for pulse width modulation control.
 - b. Outputs provided with three position (On/Off/Auto) override switches.
 - c. Status lights for building and custom application controllers to be selectable for normally open or normally closed operation.
- 7. Analog Outputs:
 - a. Monitoring signal provides a 0 to 10 VDC or a 4 to 20 mA output signal for end device control.
 - b. Provide status lights and two position (AUTO/MANUAL) switch for building and custom application controllers with manually adjustable potentiometer for manual override on building and custom application controllers.
 - c. Drift to not exceed 0.4 percent of range per year.
- 8. Tri State Outputs:
 - a. Coordinate two binary outputs to control three point, floating type, electronic actuators without feedback.
 - b. Limit the use of three point, floating devices to the following zone and terminal unit control applications:
 - 1) VAV or duct terminal units.
 - 2) Duct mounted heating coils.
 - 3) Zone dampers.
 - 4) Radiation.
 - c. Control algorithms run the zone actuator to one end of its stroke once every 24 hours for verification of operator tracking.
- 9. System Object Capacity:
 - a. System size to be expandable to twice the number of input output objects required by providing additional controllers, including associated devices and wiring.
 - b. Hardware additions or software revisions for the installed operator interfaces are not to be required for future, system expansions.

2.04 POWER SUPPLIES AND LINE FILTERING

- A. Power Supplies:
 - 1. Provide UL listed control transformers with Class 2 current limiting type or over-current protection in both primary and secondary circuits for Class 2 service as required by the NEC.
 - 2. Limit connected loads to 80 percent of rated capacity.
 - 3. Match DC power supply to current output and voltage requirements.
 - 4. Unit to be full wave rectifier type with output ripple of 5.0 mV maximum peak to peak.
 - 5. Regulation to be 1 percent combined line and load with 100 microsecond response time for 50 percent load changes.
 - 6. Provide over-voltage and over-current protection to withstand a 150 percent current overload for 3 seconds minimum without trip-out or failure.
 - 7. Operational Ambient Conditions: 32 to 120 degrees F.
 - 8. EM/RF meets FCC Class B and VDE 0871 for Class B and MIL-STD 810 for shock and vibration.

9. Line voltage units UL recognized and CSA approved.
- B. Power Line Filtering:
 1. Provide external or internal transient voltage and surge suppression component for all workstations and controllers.
 2. Minimum surge protection attributes:
 - a. Dielectric strength of 1000 volts minimum.
 - b. Response time of 10 nanoseconds or less.
 - c. Transverse mode noise attenuation of 65 dB or greater.
 - d. Common mode noise attenuation of 150 dB or greater at 40 to 100 Hz.

2.05 OPERATOR STATION

- A. Work Station:
- B. System Support: Minimum ten (10) work stations connected to multi-user, multi-tasking environment with concurrent capability to:
 1. Access DDC network.
 2. Access or control same control unit.
 3. Access or modify same control unit data base.
 4. Archive data, alarms, and network actions to hard disk regardless of what application programs are being currently executed.
 5. Develop and edit data base.
 6. Implement and tune DDC control.
 7. Develop graphics.
 8. Control facility.

2.06 CONTROL UNITS

- A. Units: Modular in design and consisting of processor board with programmable RAM memory, local operator access and display panel, and integral interface equipment.
- B. Battery Backup: For minimum of 48 hours for complete system including RAM without interruption, with automatic battery charger.
- C. Control Units Functions:
 1. Monitor or control each input/output point.
 2. Completely independent with hardware clock/calendar and software to maintain control independently.
 3. Acquire, process, and transfer information to operator station or other control units on network.
 4. Accept, process, and execute commands from other control unit's or devices or operator stations.
 5. Access both data base and control functions simultaneously.
 6. Record, evaluate, and report changes of state or value that occur among associated points. Continue to perform associated control functions regardless of status of network.
 7. Perform in stand-alone mode:
 - a. Start/stop.
 - b. Duty cycling.
 - c. Automatic Temperature Control.
 - d. Demand control via a sliding window, predictive algorithm.
 - e. Event initiated control.
 - f. Calculated point.
 - g. Scanning and alarm processing.
 - h. Full direct digital control.
 - i. Trend logging.
 - j. Global communications.

- k. Maintenance scheduling.
- D. Global Communications:
 - 1. Broadcast point data onto network, making that information available to all other system control units.
 - 2. Transmit any or all input/output points onto network for use by other control units and utilize data from other control units.
- E. Input/Output Capability:
 - 1. Discrete/digital input (contact status).
 - 2. Discrete/digital output.
 - 3. Analog input.
 - 4. Analog output.
 - 5. Pulse input (5 pulses/second).
 - 6. Pulse output (0-655 seconds in duration with 0.01 second resolution).
- F. Monitor, control, or address data points. Mix shall include analog inputs, analog outputs, pulse inputs, pulse outputs and discrete inputs/outputs, as required. Install control unit's with minimum 30 percent spare capacity.
- G. Point Scanning: Set scan or execution speed of each point to operator selected time from 1 to 250 seconds.
- H. Upload/Download Capability: Download from or upload to operator station. Upload/Download time for entire control unit database maximum 10 seconds on hard wired LAN, or 60 seconds over voice grade phone lines.
- I. Test Mode Operation: Place input/output points in test mode to allow testing and developing of control algorithms on line without disrupting field hardware and controlled environment. In test mode:
 - 1. Inhibit scanning and calculation of input points. Issue manual control to input points (set analog or digital input point to operator determined test value) from work station.
 - 2. Control output points but change only data base state or value; leave external field hardware unchanged.
 - 3. Enable control actions on output points but change only data base state or value.
- J. Local display and adjustment panel: Portable control unit, containing digital display, and numerical keyboard. Display and adjust:
 - 1. Input/output point information and status.
 - 2. Controller set points.
 - 3. Controller tuning constants.
 - 4. Program execution times.
 - 5. High and low limit values.
 - 6. Limit differential.
 - 7. Set/display date and time.
 - 8. Control outputs connected to the network.
 - 9. Automatic control outputs.
 - 10. Perform control unit diagnostic testing.
 - 11. Points in "Test" mode.

2.07 LOCAL AREA NETWORK (LAN)

- A. Provide communication between control units over local area network (LAN).
- B. LAN Capacity: Not less than 100 stations or nodes.
- C. Break in Communication Path: Alarm and automatically initiate LAN reconfiguration.
- D. LAN Data Speed: Minimum 19.2 Kb.

- E. Communication Techniques: Allow interface into network by multiple operation stations and by auto-answer/auto-dial modems. Support communication over telephone lines utilizing modems.
- F. Transmission Median: Fiber optic or single pair of solid 24 gauge twisted, shielded copper cable.
- G. Network Support: Time for global point to be received by any station, shall be less than 3 seconds. Provide automatic reconfiguration if any station is added or lost. If transmission cable is cut, reconfigure two sections with no disruption to system's operation, without operator intervention.

2.08 SYSTEM SOFTWARE

- A. Operating System:
 - 1. Concurrent, multi-tasking capability.
 - a. Common Software Applications Supported: Microsoft Excel.
 - 2. System Graphics:
 - a. Allow up to 10 graphic screens, simultaneously displayed for comparison and monitoring of system status.
 - b. Animation displayed by shifting image files based on object status.
 - c. Provide method for operator with password to perform the following:
 - 1) Move between, change size, and change location of graphic displays.
 - 2) Modify on-line.
 - 3) Add, delete, or change dynamic objects consisting of:
 - (a) Analog and binary values.
 - (b) Dynamic text.
 - (c) Static text.
 - (d) Animation files.
 - 3. Custom Graphics Generation Package:
 - a. Create, modify, and save graphic files and visio format graphics in PCX formats.
 - b. HTML graphics to support web browser compatible formats.
 - c. Capture or convert graphics from AutoCAD.
 - 4. Standard HVAC Graphics Library:
 - a. HVAC Equipment:
 - b. Ancillary Equipment:
- B. Workstation System Applications:
 - 1. Automatic System Database Save and Restore Functions:
 - a. Current database copy of each Building Controller is automatically stored on hard disk.
 - b. Automatic update occurs upon change in any system panel.
 - c. In the event of database loss in any system panel, the first workstation to detect the loss automatically restores the database for that panel unless disabled by the operator.
 - 2. Manual System Database Save and Restore Functions by Operator with Password Clearance:
 - a. Save database from any system panel.
 - b. Clear a panel database.
 - c. Initiate a download of a specified database to any system panel.
 - 3. Software provided allows system configuration and future changes or additions by operators under proper password protection.
 - 4. On-line Help:
 - a. Context-sensitive system assists operator in operation and editing.
 - b. Available for all applications.
 - c. Relevant screen data provided for particular screen display.

- d. Additional help available via hypertext.
- 5. Security:
 - a. Operator log-on requires user name and password to view, edit, add, or delete data.
 - b. System security selectable for each operator.
 - c. System supervisor sets passwords and security levels for all other operators.
 - d. Operator passwords to restrict functions accessible to viewing and/or changing system applications, editor, and object.
 - e. Automatic, operator log-off results from keyboard or mouse inactivity during user-adjustable, time period.
 - f. All system security data stored in encrypted format.
- 6. System Diagnostics:
 - a. Operations Automatically Monitored:
 - 1) Workstations.
 - 2) Printers.
 - 3) Modems.
 - 4) Network connections.
 - 5) Building management panels.
 - 6) Controllers.
 - b. Device failure is annunciated to the operator.
- 7. Alarm Processing:
 - a. All system objects are configurable to "alarm in" and "alarm out" of normal state.
 - b. Configurable Objects:
 - 1) Alarm limits.
 - 2) Alarm limit differentials.
 - 3) States.
 - 4) Reactions for each object.
- 8. Alarm Messages:
 - a. Descriptor: English language.
 - b. Recognizable Features:
 - 1) Source.
 - 2) Location.
 - 3) Nature.
- 9. Configurable Alarm Reactions by Workstation and Time of Day:
 - a. Logging.
 - b. Printing.
 - c. Starting programs.
 - d. Displaying messages.
 - e. Dialing out to remote locations.
 - f. Paging.
 - g. Providing audible annunciation.
 - h. Displaying specific system graphics.
- 10. Custom Trend Logs:
 - a. Definable for any data object in the system including interval, start time, and stop time.
 - b. Trend Data:
 - 1) Sampled and stored on the building controller panel.
 - 2) Archivable on hard disk.
 - 3) Retrievable for use in reports, spreadsheets and standard database programs.
 - 4) Archival on LAN accessible storage media including hard disk, tape, Raid array drive, and virtual cloud environment.

- 5) Protected and encrypted format to prevent manipulation, or editing of historical data and event logs.
11. Alarm and Event Log:
 - a. View all system alarms and change of states from any system location.
 - b. Events listed chronologically.
 - c. Operator with proper security acknowledges and clears alarms.
 - d. Alarms not cleared by operator are archived to the workstation hard disk.
12. Object, Property Status and Control:
 - a. Provide a method to view, edit if applicable, the status of any object and property in the system.
 - b. Status Available by the Following Methods:
 - 1) Menu.
 - 2) Graphics.
 - 3) Custom Programs.
13. Reports and Logs:
 - a. Reporting Package:
 - 1) Allows operator to select, modify, or create reports.
 - 2) Definable as to data content, format, interval, and date.
 - 3) Archivable to hard disk.
 - b. Real-time logs available by type or status such as alarm, lockout, normal, etc.
 - c. Stored on hard disk and readily accessible by standard software applications, including spreadsheets and word processing.
 - d. Set to be printed on operator command or specific time(s).
14. Reports:
 - a. Standard:
 - 1) Objects with current values.
 - 2) Current alarms not locked out.
 - 3) Disabled and overridden objects, points and SNVTs.
 - 4) Objects in manual or automatic alarm lockout.
 - 5) Objects in alarm lockout currently in alarm.
 - 6) Logs:
 - (a) Alarm History.
 - (b) System messages.
 - (c) System events.
 - (d) Trends.
 - b. Custom:
 - 1) Daily.
 - 2) Weekly.
 - 3) Monthly.
 - 4) Annual.
 - 5) Time and date stamped.
 - 6) Title.
 - 7) Facility name.
 - c. Tenant Override:
 - 1) Monthly report showing total, requested, after-hours HVAC and lighting services on a daily basis for each tenant.
 - 2) Annual report showing override usage on a monthly basis.
 - d. Electrical, Fuel, and Weather:
 - 1) Electrical Meter(s):
 - (a) Monthly showing daily electrical consumption and peak electrical demand with time and date stamp for each meter.

- (b) Annual summary showing monthly electrical consumption and peak demand with time and date stamp for each meter.
 - 2) Fuel Meter(s):
 - (a) Monthly showing daily natural gas consumption for each meter.
 - (b) Annual summary showing monthly consumption for each meter.
 - 3) Weather:
 - (a) Monthly showing minimum, maximum, average outdoor air temperature and heating/cooling degree-days for the month.
- C. Workstation Applications Editors:
 - 1. Provide editing software for all system applications at the PC workstation.
 - 2. Downloaded application is executed at controller panel.
 - 3. Full screen editor for each application allows operator to view and change:
 - a. Configuration.
 - b. Name.
 - c. Control parameters.
 - d. Set-points.
 - 4. Scheduling:
 - a. Monthly calendar indicates schedules, holidays, and exceptions.
 - b. Allows several related objects to be scheduled and copied to other objects or dates.
 - c. Start and stop times adjustable from master schedule.
 - 5. Custom Application Programming:
 - a. Create, modify, debug, edit, compile, and download custom application programming during operation and without disruption of all other system applications.
 - b. Programming Features:
 - 1) English oriented language, based on BASIC, FORTRAN, C, or PASCAL syntax allowing for free form programming.
 - 2) Alternative language graphically based using appropriate function blocks suitable for all required functions and amenable to customizing or compounding.
 - 3) Insert, add, modify, and delete custom programming code that incorporates word processing features such as cut/paste and find/replace.
 - 4) Allows the development of independently, executing, program modules designed to enable and disable other modules.
 - 5) Debugging/simulation capability that displays intermediate values and/or results including syntax/execution error messages.
 - 6) Support for conditional statements (IF/THEN/ELSE/ELSE-F) using compound Boolean (AND, OR, and NOT) and/or relations (EQUAL, LESS THAN, GREATER THAN, NOT EQUAL) comparisons.
 - 7) Support for floating-point arithmetic utilizing plus, minus, divide, times, square root operators; including absolute value; minimum/maximum value from a list of values for mathematical functions.
 - 8) Language consisting of resettable, predefined, variables representing time of day, day of the week, month of the year, date; and elapsed time in seconds, minutes, hours, and days where the variable values can be used in IF/THEN comparisons, calculations, programming statement logic, etc.
 - 9) Language having predefined variables representing status and results of the system software enables, disables, and changes the set points of the controller software.

2.09 CONTROLLER SOFTWARE

- A. All applications reside and operate in the system controllers and editing of all applications occurs at the operator workstation.

- B. System Security:
 - 1. User access secured via user passwords and user names.
 - 2. Passwords restrict user to the objects, applications, and system functions as assigned by the system manager.
 - 3. User Log On/Log Off attempts are recorded.
 - 4. Automatic Log Off occurs following the last keystroke after a user defined delay time.
- C. Object or Object Group Scheduling:
 - 1. Weekly Schedules Based on Separate, Daily Schedules:
 - a. Include start, stop, optimal stop, and night economizer.
 - b. 10 events maximum per schedule.
 - c. Start/stop times adjustable for each group object.
- D. Provide standard application for equipment coordination and grouping based on function and location to be used for scheduling and other applications.
- E. Alarms:
 - 1. Binary object is set to alarm based on the operator specified state.
 - 2. Analog object to have high/low alarm limits.
 - 3. All alarming is capable of being automatically and manually disabled.
 - 4. Alarm Reporting:
 - a. Operator determines action to be taken for alarm event.
 - b. Alarms to be routed to appropriate workstation.
 - c. Reporting Options:
- F. Maintenance Management: System monitors equipment status and generates maintenance messages based upon user-designated run-time limits.
- G. Sequencing: Application software based upon specified sequences of operation in Section 23 09 93.
- H. PID Control Characteristics:
 - 1. Direct or reverse action.
 - 2. Anti-windup.
 - 3. Calculated, time-varying, analog value, positions an output or stages a series of outputs.
 - 4. User selectable controlled variable, set-point, and PED gains.
- I. Staggered Start Application:
 - 1. Prevents all controlled equipment from simultaneously restarting after power outage.
 - 2. Order of equipment startup is user selectable.
- J. Energy Calculations:
 - 1. Accumulated instantaneous power or flow rates are converted to energy use data.
 - 2. Algorithm calculates a rolling average and allows window of time to be user specified in minute intervals.
 - 3. Algorithm calculates a fixed window average with a digital input signal from a utility meter defining the start of the window period that in turn synchronizes the fixed-window average with that used by the power company.
- K. Anti-Short Cycling:
 - 1. All binary output objects protected from short-cycling.
 - 2. Allows minimum on-time and off-time to be selected.
- L. On-Off Control with Differential:
 - 1. Algorithm allows binary output to be cycled based on a controlled variable and set-point.
 - 2. Algorithm to be direct-acting or reverse-acting incorporating an adjustable differential.
- M. Run-Time Totalization:
 - 1. Totalize run-times for all binary input objects.

2. Provides operator with capability to assign high run-time alarm.

2.10 OPERATING SYSTEM SOFTWARE

- A. Input/Output Capability From Operator Station:
 1. Request display of current values or status in tabular or graphic format.
 2. Command selected equipment to specified state.
 3. Initiate logs and reports.
 4. Change analog limits.
 5. Add, delete, or change points within each control unit or application routine.
 6. Change point input/output descriptors, status, alarm descriptors, and engineering unit descriptors.
 7. Add new control units to system.
 8. Modify and set up maintenance scheduling parameters.
 9. Develop, modify, delete or display full range of color graphic displays.
 10. Automatically archive select data even when running third party software.
 11. Provide capability to sort and extract data from archived files and to generate custom reports.
 12. Support two printer operations.
 - a. Alarm printer: Print alarms, operator acknowledgements, action messages, system alarms, operator sign-on and sign-off.
 - b. Data printer: Print reports, page prints, and data base prints.
 13. Select daily, weekly or monthly as scheduled frequency to synchronize time and date in digital control units. Accommodate daylight savings time adjustments.
 14. Print selected control unit data base.
- B. Operator System Access: Via software password with minimum 30 access levels at work station and minimum 3 access levels at each control unit.
- C. Data Base Creation and Support: Changes shall utilize standard procedures. Control unit shall automatically check work station data base files upon connection and verify data base match. Minimum capability shall include:
 1. Add and delete points.
 2. Modify any point parameter.
 3. Change, add, or delete English language descriptors.
 4. Add, modify, or delete alarm limits.
 5. Add, modify, or delete points in start/stop programs, trend logs, etc.
 6. Create custom relationship between points.
 7. Create or modify DDC loops and parameters.
 8. Create or modify override parameters.
 9. Add, modify, and delete any applications program.
 10. Add, delete, develop, or modify dynamic color graphic displays.
- D. Dynamic Color Graphic Displays:
 1. Utilizes custom symbols or system supported library of symbols.
 2. Sixteen (16) colors.
 3. Sixty (60) outputs of real time, live dynamic data per graphic.
 4. Dynamic graphic data.
 5. 1,000 separate graphic pages.
 6. Modify graphic screen refresh rate between 1 and 60 seconds.
- E. Operator Station:
 1. Accept data from LAN as needed without scanning entire network for updated point data.
 2. Interrogate LAN for updated point data when requested.
 3. Allow operator command of devices.

4. Allow operator to place specific control units in or out of service.
 5. Allow parameter editing of control units.
 6. Store duplicate data base for every control unit and allow down loading while system is on line.
 7. Control or modify specific programs.
 8. Develop, store and modify dynamic color graphics.
 9. Provide data archiving of assigned points and support overlay graphing of this data utilizing up to four (4) variables.
- F. Alarm Processing:
1. Off normal condition: Cause alarm and appropriate message, including time, system, point descriptor, and alarm condition. Select alarm state/value and which alarms shall cause automatic dial-out.
 2. Critical alarm or change-of-state: Display message, stored on disk for review and sort, or print.
 3. Print on line changeable message, up to 100 characters in length, for each alarm point specified.
 4. Display alarm reports on video. Display multiple alarms in order of occurrence.
 5. Define time delay for equipment start-up or shutdown.
 6. Allow unique routing of specific alarms.
 7. Operator specifies if alarm requires acknowledgement.
 8. Continue to indicate unacknowledged alarms after return to normal.
 9. Alarm notification:
 - a. Automatic print.
 - b. Display indicating alarm condition.
 - c. Selectable audible alarm indication.
- G. Event Processing: Automatically initiate commands, user defined messages, take specific control actions or change control strategy and application programs resulting from event condition. Event condition may be value crossing operator defined limit, change-of-state, specified state, or alarm occurrence or return to normal.
- H. Automatic Restart: Automatically restart field equipment on restoration of power. Provide time delay between individual equipment restart and time of day start/stop.
- I. Messages:
1. Automatically display or print user-defined message subsequent to occurrence of selected events.
 2. Compose, change, or delete any message.
 3. Display or log any message at any time.
 4. Assign any message to any event.
- J. Reports:
1. Manually requested with time and date.
 2. Long term data archiving to hard disk.
 3. Automatic directives to download to transportable media such as floppy diskettes for storage.
 4. Data selection methods to include data base search and manipulation.
 5. Data extraction with mathematical manipulation.
 6. Data reports shall allow development of XY curve plotting, tabular reports (both statistical and summary), and multi-point timed based plots with not less than four (4) variables displayed.
 7. Generating reports either normally at operator direction, or automatically under work station direction.

8. Reports may either manually displayed or printed, or may be printed automatically on daily, weekly, monthly, yearly or scheduled basis.
 9. Include capability for statistical data manipulation and extraction.
 10. Provide capability to generate four types of reports: Statistical detail reports, summary reports, trend graphic plots, x-y graphic plots.
- K. Parameter Save/Restore: Store most current operating system, parameter changes, and modifications on disk or diskette.
- L. Data Collection:
1. Automatically collect and store in disk files.
 2. Daily electrical energy consumption, peak demand, and time of peak demand for up to electrical meters over 2 year period.
 3. Daily consumption for up to 30 meters over a 2 year period.
 4. Daily billable electrical energy consumption and time for up to 1024 zones over a 10 year period.
 5. Provide archiving of stored data for use with system supplied custom reports.
- M. Graphic Display: Support graphic development on work station with software features:
1. Page linking.
 2. Generate, store, and retrieve library symbols.
 3. Single or double height characters.
 4. Sixty (60) dynamic points of data per graphic page.
 5. Pixel level resolution.
 6. Animated graphics for discrete points.
 7. Analog bar graphs.
 8. Display real time value of each input or output line diagram fashion.
- N. Maintenance Management:
1. Run time monitoring, per point.
 2. Maintenance scheduling targets with automatic annunciation, scheduling and shutdown.
 3. Equipment safety targets.
 4. Display of maintenance material and estimated labor.
 5. Target point reset, per point.
- O. Advisories:
1. Summary which contains status of points in locked out condition.
 2. Continuous operational or not operational report of interrogation of system hardware and programmable control units for failure.
 3. Report of power failure detection, time and date.
 4. Report of communication failure with operator device, field interface unit, point, programmable control unit.

2.11 LOAD CONTROL PROGRAMS

- A. General: Support inch-pounds and SI (metric) units of measurement.
- B. Demand Limiting:
1. Monitor total power consumption per power meter and shed associated loads automatically to reduce power consumption to an operator set maximum demand level.
 2. Input: Pulse count from incoming power meter connected to pulse accumulator in control unit.
 3. Forecast demand (kW): Predicted by sliding window method.
 4. Automatically shed loads throughout the demand interval selecting loads with independently adjustable on and off time of between one and 255 minutes.
 5. Demand Target: Minimum of 3 per demand meter; change targets based upon (1) time, (2) status of pre-selected points, or (3) temperature.

6. Load: Assign load shed priority, minimum "ON" time and maximum "OFF" time.
 7. Limits: Include control band (upper and lower limits).
 8. Output advisory if loads are not available to satisfy required shed amount, advise shed requirements and requiring operator acknowledgement.
- C. Duty Cycling:
1. Periodically stop and start loads, based on space temperature, and according to various On/Off patterns.
 2. Modify off portion of cycle based on operator specified comfort parameters. Maintain total cycle time by increasing on portion of cycle by same amount that off portion is reduced.
 3. Set and modify following parameters for each individual load.
 - a. Minimum and maximum Off time.
 - b. On/Off time in one minute increments.
 - c. Time period from beginning of interval until load can be cycled.
 - d. Manually override the DCC program and place a load in an On or Off state.
 - e. Cooling Target Temperature and Differential.
 - f. Heating Target Temperature and Differential.
 - g. Cycle off adjustment.
- D. Automatic Time Scheduling:
1. Self-contained programs for automatic start/stop/scheduling of building loads.
 2. Support up to seven (7) normal day schedules, seven (7) "special day" schedules and two (2) temporary day schedules.
 3. Special days schedule shall support up to 30 unique date/duration combinations.
 4. Any number of loads assigned to any time program; each load can have individual time program.
 5. Each load assigned at least 16 control actions per day with 1 minute resolution.
 6. Time schedule operations may be:
 - a. Start.
 - b. Optimized Start.
 - c. Stop.
 - d. Optimized Stop.
 - e. Cycle.
 - f. Optimized Cycle.
 7. Minimum of 30 holiday periods up to 100 days in length may be specified for the year.
 8. Create temporary schedules.
 9. Broadcast temporary "special day" date and duration.
- E. Start/Stop Time Optimization:
1. Perform optimized start/stop as function of outside conditions, inside conditions, or both.
 2. Adaptive and self-tuning, adjusting to changing conditions unattended.
 3. For each point under control, establish and modify:
 - a. Occupancy period.
 - b. Desired temperature at beginning of occupancy period.
 - c. Desired temperature at end of occupancy period.
- F. Night Setback/Setup Program: Reduce heating space temperature setpoint or raise cooling space temperature setpoint during unoccupied hours; in conjunction with scheduled start/stop and optimum start/stop programs.
- G. Calculated Points: Define calculations and totalization computed from monitored points (analog/digital points), constants, or other calculated points.
1. Employ arithmetic, algebraic, Boolean, and special function operations.
 2. Treat calculated values like any other analog value, use for any function that a "hard wired point" might be used.

- H. Event Initiated Programming: Event may be initiated by any data point, causing series of controls in a sequence.
 - 1. Define time interval between each control action between 0 to 3600 seconds.
 - 2. Output may be analog value.
 - 3. Provide for "skip" logic.
 - 4. Verify completion of one action before proceeding to next. If not verified, program shall be able to skip to next action.
- I. Direct Digital Control: Each control unit shall provide Direct Digital Control software so that the operator may customize control strategies and sequences of operation by defining the appropriate control loop algorithms and choosing the optimum loop parameters.
 - 1. Control loops: Defined using "modules" that are analogous to standard control devices.
 - 2. Output: Paired or individual digital outputs for pulse-width modulation, and analog outputs, as required.
 - 3. Firmware:
 - a. PID with analog or pulse-width modulation output.
 - b. Floating control with pulse-width modulated outputs.
 - c. Two-position control.
 - d. Primary and secondary reset schedule selector.
 - e. Hi/Lo signal selector.
 - f. Single pole double throw relay.
 - g. Single pole double throw time delay relay with delay before break, delay before make and interval time capabilities.
 - 4. Direct Digital Control loops: Downloaded upon creation or on operator request. On sensor failure, program shall execute user defined failsafe output.
 - 5. Display: Value or state of each of the lines which interconnect DDC modules.
- J. Fine Tuning Direct Digital Control PID or floating loops:
 - 1. Display information:
 - a. Control loop being tuned
 - b. Input (process) variable
 - c. Output (control) variable
 - d. Setpoint of loop
 - e. Proportional band
 - f. Integral (reset) Interval
 - g. Derivative (rate) Interval
 - 2. Display format: Graphic, with automatic scaling; with input and output variable superimposed on graph of "time" vs "variable".
- K. Trend logging:
 - 1. Each control unit will store samples of control unit's data points.
 - 2. Update file continuously at discretely assignable intervals.
 - 3. Automatically initiate upload request and then store data on hard disk.
 - 4. Time synchronize sampling at operator specified times and intervals with sample resolution of one minute.
 - 5. Co-ordinate sampling with on/off state of specified point.
 - 6. Display trend samples on work station in graphic format. Automatically scale trend graph with minimum 60 samples of data in plot of time vs data.

2.12 HVAC CONTROL PROGRAMS

- A. General:
 - 1. Support Inch-pounds and SI (metric) units of measurement.
 - 2. Identify each HVAC Control system.

B. Optimal Run Time:

1. Control start-up and shutdown times of HVAC equipment for both heating and cooling.
2. Base on occupancy schedules, outside air temperature, seasonal requirements, and interior room mass temperature.
3. Start-up systems by using outside air temperature, room mass temperatures, and adaptive model prediction for how long building takes to warm up or cool down under different conditions.
4. Use outside air temperature to determine early shut down with ventilation override.
5. Analyze multiple building mass sensors to determine seasonal mode and worse case condition for each day.
6. Operator commands:
 - a. Define term schedule
 - b. Add/delete fan status point.
 - c. Add/delete outside air temperature point.
 - d. Add/delete mass temperature point.
 - e. Define heating/cooling parameters.
 - f. Define mass sensor heating/cooling parameters.
 - g. Lock/unlock program.
 - h. Request optimal run time control summary.
 - i. Request optimal run time mass temperature summary.
 - j. Request HVAC point summary.
 - k. Request HVAC saving profile summary.
7. Control Summary:
 - a. HVAC Control system begin/end status.
 - b. Optimal run time lock/unlock control status.
 - c. Heating/cooling mode status.
 - d. Optimal run time schedule.
 - e. Start/Stop times.
 - f. Selected mass temperature point ID.
 - g. Optimal run time system normal start times.
 - h. Occupancy and vacancy times.
 - i. Optimal run time system heating/cooling mode parameters.
8. Mass temperature summary:
 - a. Mass temperature point type and ID.
 - b. Desired and current mass temperature values.
 - c. Calculated warm-up/cool-down time for each mass temperature.
 - d. Heating/cooling season limits.
 - e. Break point temperature for cooling mode analysis.
9. HVAC point summary:
 - a. Control system identifier and status.
 - b. Point ID and status.
 - c. Outside air temperature point ID and status.
 - d. Mass temperature point ID and point.
 - e. Calculated optimal start and stop times.
 - f. Period start.

C. Supply Air Reset:

1. Monitor heating and cooling loads in building spaces, terminal reheat systems, both hot deck and cold deck temperatures on dual duct and multizone systems, single zone unit discharge temperatures.
2. Adjust discharge temperatures to most energy efficient levels satisfying measured load by:
 - a. Raising cooling temperatures to highest possible value.

- b. Reducing heating temperatures to lowest possible level.
- 3. Operator commands:
 - a. Add/delete fan status point.
 - b. Lock/unlock program.
 - c. Request HVAC point summary.
 - d. Add/Delete discharge controller point.
 - e. Define discharge controller parameters.
 - f. Add/delete air flow rate.
 - g. Define space load and load parameters.
 - h. Request space load summary.
- 4. Control summary:
 - a. HVAC control system status (begin/end).
 - b. Supply air reset system status.
 - c. Optimal run time system status.
 - d. Heating and cooling loop.
 - e. High/low limits.
 - f. Deadband.
 - g. Response timer.
 - h. Reset times.
- 5. Space load summary:
 - a. HVAC system status.
 - b. Optimal run time status.
 - c. Heating/cooling loop status.
 - d. Space load point ID.
 - e. Current space load point value.
 - f. Control heat/cool limited.
 - g. Gain factor.
 - h. Calculated reset values.
 - i. Fan status point ID and status.
 - j. Control discharge temperature point ID and status.
 - k. Space load point ID and status.
 - l. Air flow rate point ID and status.
- D. Enthalpy Switchover:
 - 1. Calculate outside and return air enthalpy using measured temperature and relative humidity; determine energy expended and control outside and return air dampers.
 - 2. Operator commands:
 - a. Add/delete fan status point.
 - b. Add/delete outside air temperature point.
 - c. Add/delete discharge controller point.
 - d. Define discharge controller parameters.
 - e. Add/delete return air temperature point.
 - f. Add/delete outside air dew point/humidity point.
 - g. Add/delete return air dew point/humidity point.
 - h. Add/delete damper switch.
 - i. Add/delete minimum outside air.
 - j. Add/delete atmospheric pressure.
 - k. Add/delete heating override switch.
 - l. Add/delete evaporative cooling switch.
 - m. Add/delete air flow rate.
 - n. Define enthalpy deadband.
 - o. Lock/unlock program.

- p. Request control summary.
- q. Request HVAC point summary.
- 3. Control summary:
 - a. HVAC control system begin/end status.
 - b. Enthalpy switchover optimal system status.
 - c. Optimal return time system status.
 - d. Current outside air enthalpy.
 - e. Calculated mixed air enthalpy.
 - f. Calculated cooling coil enthalpy using outside air.
 - g. Calculated cooling coil enthalpy using mixed air.
 - h. Calculated enthalpy difference.
 - i. Enthalpy switchover deadband.
 - j. Status of damper mode switch.

2.13 PROGRAMMING APPLICATION FEATURES

- A. Trend Point:
 - 1. Sample up to 150 points, real or computed, with each point capable of collecting 100 samples at intervals specified in minutes, hours, days, or month.
 - 2. Output trend logs as line graphs or bar graphs. Output graphic on terminal, with each point for line and bar graphs designated with a unique pattern, vertical scale either actual values or percent of range, and horizontal scale time base. Print trend logs up to 12 columns of one point/column.
- B. Alarm Messages:
 - 1. Allow definition of minimum of 100 messages, each having minimum length of 100 characters for each individual message.
 - 2. Assign alarm messages to system messages including point's alarm condition, point's off-normal condition, totalized point's warning limit, hardware elements advisories.
 - 3. Output assigned alarm with "message requiring acknowledgement".
 - 4. Operator commands include define, modify, or delete; output summary listing current alarms and assignments; output summary defining assigned points.
- C. Weekly Scheduling:
 - 1. Automatically initiate equipment or system commands, based on preselected time schedule for points specified.
 - 2. Provide program times for each day of week, per point, with one minute resolution.
 - 3. Automatically generate alarm output for points not responding to command.
 - 4. Provide for holidays, minimum of 366 consecutive holidays.
 - 5. Operator commands:
 - a. System logs and summaries.
 - b. Start or stop point.
 - c. Lock or unlock control or alarm input.
 - d. Add, delete, or modify analog limits and differentials.
 - e. Adjust point operation position.
 - f. Change point operational mode.
 - g. Open or close point.
 - h. Enable/disable, lock/unlock, or execute interlock sequence or computation profile.
 - i. Begin or end point totalization.
 - j. Modify totalization values and limits.
 - k. Access or secure point.
 - l. Begin or end HVAC or load control system.
 - m. Modify load parameter.
 - n. Modify demand limiting and duty cycle targets.

6. Output summary: Listing of programmed function points, associated program times, and respective day of week programmed points by software groups or time of day.
- D. Interlocking:
 1. Permit events to occur, based on changing condition of one or more associated master points.
 2. Binary contact, high/low limit of analog point or computed point shall be capable of being utilized as master. Same master may monitor or command multiple slaves.
 3. Operator commands:
 - a. Define single master/multiple master interlock process.
 - b. Define logic interlock process.
 - c. Lock/unlock program.
 - d. Enable/disable interlock process.
 - e. Execute terminate interlock process.
 - f. Request interlock type summary.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify existing conditions before starting work.
- B. Verify that conditioned power supply is available to the control units and to the operator work station. Verify that field end devices, wiring, and pneumatic tubing is installed prior to installation proceeding.

3.02 INSTALLATION

- A. Install all Owner-provided equipment along with all contractor-provided equipment as required to provide a complete, fully functional building automation system.
- B. Install control units and other hardware in position on permanent walls where not subject to excessive vibration.
- C. Install software in control units and in operator work station. Implement all features of programs to specified requirements and appropriate to sequence of operation. Refer to Section 23 09 93.
- D. Provide with 120v AC, 15 amp dedicated emergency power circuit to each programmable control unit.
- E. Provide conduit and electrical wiring in accordance with Section 26 27 17. Electrical material and installation shall be in accordance with appropriate requirements of Division 26.
- F. Ensure that all components necessary to execute the sequences of operation are coordinated and installed by all contractors.

3.03 MANUFACTURER'S FIELD SERVICES

- A. Start and commission systems. Allow sufficient time for start-up and commissioning prior to placing control systems in permanent operation.
- B. Provide service engineer to instruct Owner's representative in operation of systems plant and equipment for 2 day period.
- C. Provide basic operator training for 4 persons on data display, alarm and status descriptors, requesting data, execution of commands and request of logs. Include a minimum of 8 hours dedicated instructor time. Provide training on site.

3.04 DEMONSTRATION AND INSTRUCTIONS

- A. Demonstrate complete and operating system to Owner.

3.05 SCHEDULES

- A. Input/Output Schedule:

1. Point Description:
2. Digital Input:
 - a. Demand Meter (kW):
 - b. Auxiliary Contact:
 - c. Switches:
 - 1) Switch Closing:
 - 2) Flow Switch:
 - 3) Optical:
 - d. Current:
 - e. Pressure:
3. Digital Output:
 - a. Control Relay:
 - b. Solenoid:
 - c. Contactor:
4. Analog Input:
 - a. Temperature:
 - b. Relative Humidity:
 - c. Pressure/Vacuum:
 - d. Filter:
 - e. Flow:
 - f. Current:
 - g. Liquid Level:
 - h. Photocell:
5. Analog Output:
 - a. Pneumatic Transducer:
 - b. 4-20 ma Module:
 - c. 0-16 v DC:
6. Alarm:
- B. Input/Output Schedule:
 1. Point Description:
 2. Inputs:
 - a. Temperature:
 - b. Relative Humidity:
 - c. Pressure:
 - d. Flow:
 - e. Level:
 - f. Position:
 - g. Energy:
 - h. Power:
 3. Outputs:
 - a. Status:
 - b. Alarm:
 - c. Pneumatic Position:
 - d. Electronic Position:
 - e. Set Point Adjust:
 - f. Start/Stop:
 - g. Off/Low/High:
 4. Software Features:
 - a. PID Control (DDC):
 - b. High Limit:
 - c. Low Limit:

- d. Run Time Totalization:
 - e. Consumption Totalization:
 - f. Program Start/Stop:
 - g. Load Shed:
 - h. Duty Cycle:
 - i. Enthalpy Switchover:
 - j. Optimal Run Time:
 - k. Supply Air Reset:
 - l. O.A. Interlock:
 - m. O.A. Temperature Reset:
 - n. Free Cooling Mode:
 - o. Warm-up Mode:
 - p. Boiler Interlock:
 - q. Chiller Sequencing:
 - r. Energy Calculation:
- C. Alarm Schedule:
- 1. High Limit: A1.
 - 2. Low Limit: A2.
 - 3. Run Time: A3.
 - 4. Maintenance: A4.
 - 5. Status: A5.
 - 6. Override: A6.
 - 7. Freeze: A7.
 - 8. Low Pressure: A8.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 23 09 93

SEQUENCE OF OPERATIONS FOR HVAC CONTROLS

THE MECHANICAL CONTRACTOR SHALL PROVIDE ALL NECESSARY LABOR MATERIALS TO PROVIDE A FULLY FUNCTIONAL BUILDING AUTOMATION SYSTEM FOR THE PROJECT. THIS INCLUDES ALL CONTROL COMPONENTS, CONTROLLERS, WIRING, PROGRAMMING, AND COORDINATION BETWEEN TRADES TO ACCOMPLISH THE SEQUENCE OF OPERATIONS HEREIN. CONTRACTOR SHALL ENSURE THAT ALL COMPONENTS ARE COORDINATED BETWEEN EQUIPMENT SUPPLIERS AND CONTROLS VENDOR FOR ALL EQUIPMENT.

1.01 PART 1 GENERAL

1.02 SECTION INCLUDES

- A. This section defines the manner and method by which controls function. Requirements for each type of control system operation are specified. Equipment, devices, and system components required for control systems are specified in other sections.
- B. Sequence of operation for:
 - 1. Exhaust Fans
 - 2. Packaged Rooftop Units

1.03 RELATED SECTIONS

- A. Section 23 09 23 - Direct-Digital Control System for HVAC.
- B. Section 23 09 13 - Instrumentation and Control Devices for HVAC.
- C. Section 26 27 17 - Equipment Wiring: Electrical characteristics and wiring connections.

1.04 SYSTEM DESCRIPTION

- A. This Section defines the manner and method by which controls function. Requirements for each type of control system operation are specified. Equipment, devices, and system components required for control systems are specified in other Sections.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Sequence of Operation Documentation: Submit written sequence of operation for entire HVAC system and each piece of equipment.
 - 1. Preface: 1 or 2 paragraph overview narrative of the system describing its purpose, components and function.
 - 2. State each sequence in small segments and give each segment a unique number for referencing in Functional Test procedures; provide a complete description regardless of the completeness and clarity of the sequences specified in the contract documents.
 - 3. Include at least the following sequences:
 - a. Start-up.
 - b. Warm-up mode.
 - c. Normal operating mode.
 - d. Unoccupied mode.
 - e. Shutdown.
 - f. Capacity control sequences and equipment staging.
 - g. Temperature and pressure control, such as setbacks, setups, resets, etc.
 - h. Detailed sequences for all control strategies, such as economizer control, optimum start/stop, staging, optimization, demand limiting, etc.
 - i. Effects of power or equipment failure with all standby component functions.
 - j. Sequences for all alarms and emergency shut downs.
 - k. Seasonal operational differences and recommendations.
 - l. Interactions and interlocks with other systems.

4. Include initial and recommended values for all adjustable settings, setpoints and parameters that are typically set or adjusted by operating staff; and any other control settings or fixed values, delays, etc. that will be useful during testing and operating the equipment.
5. For packaged controlled equipment, include manufacturer's furnished sequence of operation amplified as required to describe the relationship between the packaged controls and the control system, indicating which points are adjustable control points and which points are only monitored.
6. Include schedules, if known.
- C. Control System Diagrams: Submit graphic schematic of the control system showing each control component and each component controlled, monitored, or enabled.
 1. Label with settings, adjustable range of control and limits.
 2. Include flow diagrams for each control system, graphically depicting control logic.
 3. Include the system and component layout of all equipment that the control system monitors, enables or controls, even if the equipment is primarily controlled by packaged or integral controls.
 4. Include draft copies of graphic displays indicating mechanical system components, control system components, and controlled function status and value.
 5. Include all monitoring, control and virtual points specified in elsewhere.
 6. Include a key to all abbreviations.
- D. Points List: Submit list of all control points indicating at least the following for each point.
 1. Name of controlled system.
 2. Point abbreviation.
 3. Point description; such as dry bulb temperature, airflow, etc.
 4. Display unit.
 5. Control point or setpoint (Yes / No); i.e. a point that controls equipment and can have its setpoint changed.
 6. Monitoring point (Yes / No); i.e. a point that does not control or contribute to the control of equipment but is used for operation, maintenance, or performance verification.
 7. Intermediate point (Yes / No); i.e. a point whose value is used to make a calculation which then controls equipment, such as space temperatures that are averaged to a virtual point to control reset.
 8. Calculated point (Yes / No); i.e. a "virtual" point generated from calculations of other point values.
- E. Project Record Documents: Record actual locations of components and setpoints of controls, including changes to sequences made after submission of shop drawings.

1.06 QUALITY ASSURANCE

- A. Design system under direct supervision of a Professional Engineer experienced in design of this Work and licensed in the State in which the Project is located.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION

3.01 GENERAL SYSTEM DESIGN AND OPERATION STANDARDS

- A. The BAS shall control the mechanical systems within the site based upon the following design parameters:
 1. The building shall be heated and cooled via packaged rooftop air-handling units utilizing direct-expansion cooling & heating with modulating hot-gas reheat, propane gas backup heat and energy recovery sections. These units will control discharge air temperature and local humidity.

- B. Each unit shall be controlled by an individual DDC Controller and all required sensors, control valves, and appurtenances required to complete the sequence of operation. Units shall include occupied/unoccupied control, night-setback, morning warm-up/cool-down, and enthalpy-based economizer functions.

3.02 EXHAUST FANS

- A. Exhaust Fans Serving Toilet/Shower Rooms
 - 1. Exhaust fans serving toilet/shower rooms shall operate continuously during occupied hours.
- B. Provide a current sensor for each fan to show operational status.
- C. The following items shall be displayed at the Operator's Terminal:
 - 1. Commanded status of fan.
 - 2. Operational status of fan via current sensor.

3.03 SINGLE ZONE PACKAGED ROOFTOP UNITS WITH PROPANE GAS HEAT AND CENTRAL ENERGY RECOVERY

- A. Each unit shall be controlled by an individual DDC Controller. The DDC Controller shall be wired to a space temperature sensor, space-level CO2 sensor, discharge air temperature sensor, return air temperature sensor, space differential pressure sensor, damper motors, and the contacts to the factory-mounted unit control system controlling the compressor(s), hot-gas bypass, hot-gas reheat, and gas train combustion equipment.
- B. Cooling Mode:
 - 1. During the programmed occupied mode, the supply fan shall run continuously with the outside air damper open to the minimum position (10% outdoor air unless otherwise shown on Schedule).
 - a. The fan modulates to maintain space temperature while maintaining the discharge air setpoint (normally 55.0 deg. F - 60.0 deg. F). As the cooling load decreases, the fans will modulate down to minimum speed. As the space temperature continues to fall below the cooling setpoint by 1.0 deg. F (adj.) and remains at minimum speed for a period of time (default=10 minutes adj.) the fan will remain at minimum speed and enter into a discharge air reset mode. As the space temperature continues to drop toward the space occupied heating setpoint, the discharge air setpoint is reset between the "normal" discharge air cooling setpoint and the discharge air heating setpoint.
 - b. The fan will remain at minimum speed until the space temperature exceeds the cooling setpoint +1.0 deg. F for 10 minutes (adj.). At that point it will revert to its fan modulating mode with its discharge setpoint equal to its Discharge Air Cooling setpoint.
 - c. When in the occupied mode, the outdoor-air damper shall modulate to maintain the current outdoor airflow at setpoint. The BAS shall calculate and reset this outdoor airflow setpoint based on the current ventilation requirements based on field mounted CO2 sensor. The amount of outside air will be increased above the minimum setting on a rise in return air CO2 above the setpoint of 750 PPM (adjustable). On a return to setpoint the reverse occurs. Upon a rise in CO2 level above 1500 PPM, a high CO2 level will be displayed at the BAS workstation.
 - d. Setpoints are adjustable at the BAS workstation. As the outdoor air damper and supply air fan adjusts, the return exhaust fan shall automatically adjust its speed to maintain a constant static pressure within the space (0.3" WC, adjustable).
 - 2. The DX cooling shall stage and modulate to maintain the discharge air temperature setpoint in cooling mode. If economizing is enabled the outside air damper shall also modulate to maintain the discharge air temperature setpoint.

- a. As noted in paragraph B-1-a above, if cooling or heating is required and the fan is at minimum airflow then the DAT setpoint shall be reset up or down to accommodate space requirements.
 3. When dehumidification is required as sensed by the factory-provided humidistat (setpoint, 60% RH, adjustable), the hot-gas reheat system will be engaged and follow the factory-programmed sequence.
- C. Heating Mode:
 1. During the programmed occupied mode, the supply fan shall run continuously with the outside air damper open to the minimum position (as shown on Schedule).
 - a. The supply fan shall modulate airflow to maintain space temperature. The supply fan shall not modulate below the minimum OA ventilation rate required in the space. If cooling or heating is required and the fan is at minimum airflow then the DAT setpoint shall be reset up or down to accommodate space requirements. When the space temperature decreases to 1.0 deg. F below the heating setpoint, the fan will ramp up to 100% and the heat will be enabled. When the space temperature exceeds the heating setpoint +1.0 deg. F the heat will be disabled and the fan will ramp down to its minimum speed. Reset of the discharge air setpoint will occur every 5-10 minutes (adj.)
 - b. When the space temperature rises above the occupied cooling setpoint the mode shall transition to cooling. When the space temperature falls below the occupied heating setpoint the mode shall transition to heating. When the space temperature is above the occupied cooling setpoint or below the occupied heating setpoint the mode shall remain in its last state. If the space temperature sensor fails the mode shall remain in its last state and an alarm shall be annunciated at the BAS. If the local and communicated setpoints fail the controller shall disable the supply fan and an alarm shall be annunciated at the BAS.
 - c. When in the occupied mode, the outdoor-air damper shall modulate to maintain the current outdoor airflow at setpoint. The BAS shall calculate and reset this outdoor airflow setpoint based on the current ventilation requirements based on field mounted CO2 sensor. The amount of outside air will be increased above the minimum setting on a rise in return air CO2 above the setpoint of 750 PPM (adjustable). On a return to setpoint the reverse occurs. Upon a rise in CO2 level above 1500 PPM, a high CO2 level will be displayed at the BAS workstation.
 - d. Setpoints are adjustable at the BAS workstation. As the outdoor air damper and supply air fan adjusts, the return exhaust fan shall automatically adjust it's speed to maintain a constant static pressure within the space (0.3" WC, adjustable).
 2. The heat pump heating section shall energize and modulate compressor 1 to maintain the discharge air setpoint as defined on the unit schedule. Temperatures shall be user-adjustable. After 3 minutes, if the discharge temperature is still below the setpoint, the second compressor shall energize and modulate to maintain the discharge air setpoint. During operation in heating mode, the main unit controller will enable hot-gas reheat at 100%.
 3. The gas-fired auxiliary heating mode shall be enabled if the compressor heat is not able to maintain setpoint for more than 10 minutes or if the outdoor air temperature is less than 0 deg. F. Auxiliary heating mode shall disable the compressors from running and modulate the heating output to maintain the discharge air heating setpoint. Auxiliary heating mode shall be disabled when the outdoor air temperature rises 5 deg. F above the temperature that engaged the auxiliary heating mode.
- D. Energy Recovery Wheel Operation
 1. FOR UNITS EQUIPPED WITH AN ENERGY RECOVERY WHEEL: The AHU shall be in cooling recovery mode when the outdoor air temperature is greater than the space temperature and higher than the energy wheel enable setpoint (system economizer

- setpoint temperature). When the wheel is enabled, both outdoor & exhaust air bypass dampers shall be closed, outdoor air damper shall be at minimum, return air damper shall be open, and cooling shall be enabled. In cooling the recovery wheel shall be disabled when the outdoor air temperature is less than the space temperature and both outdoor & exhaust air bypass dampers shall be open.
2. The AHU shall be in heating recovery mode when the outdoor air temperature is less than the space temperature and less than the energy wheel enable setpoint and the supply air temperature is less than the discharge air setpoint. When heat recovery is enabled the wheel shall be enabled as the first stage of heat, the outdoor air damper shall be at minimum, the outdoor & bypass recovery bypass dampers shall be open, and the unit heat shall be disabled. On a continued call for heat the second stage is enabled, the outdoor recovery bypass damper shall close, and the exhaust recovery bypass damper shall modulate to maintain the space temperature setpoint. If additional heat is required the third stage is enabled, the return air damper shall be open, both recovery bypass dampers shall be closed, and the unit heat shall be enabled.
 3. If the outdoor air temperature drops below the outdoor air frost protection setpoint (adj.), the outdoor air bypass damper shall modulate to maintain the exhaust-side leaving temperature at setpoint. If the outdoor air bypass damper reaches 100% open for 5 minutes (adj.), the wheel shall be turned off to prevent frosting and an alarm shall be annunciated.
- E. Emergency / Standby Generator Mode
1. When the transfer switch is engaged to provide emergency power to the building, the cooling system shall be disabled in the packaged RTU systems. When the transfer switch returns to normal (grid) power, the cooling system shall be released for operation.
- F. Unoccupied Mode:
1. During the programmed un-occupied mode, the supply fan, compressor, gas train, and dampers for shall be cycled / modulated to maintain the un-occupied setpoints (55 degrees in Heating mode, 80 degrees in Cooling mode, both adjustable). Unless required for economizer cycle, the outside air damper shall remain closed.
- G. All setpoints and shall be adjustable at the BAS workstation.
- H. Provide a current sensor on one phase of power feeding each supply fan, exhaust fan, heat wheel, and compressor for status indication at the Operator's Terminal.
- I. If the discharge temperature fails to rise to a programmed minimum temperature during a call for heating; a low temperature alarm shall be activated at the Operator's Terminal. If the discharge temperature fails to fall to a programmed minimum temperature on a call for mechanical cooling, a high temperature alarm shall be activated at the Operator's Terminal.
- J. The following items shall be displayed at the Operator's Terminal:
1. Space temperature.
 2. Space temperature setpoint.
 3. Space humidity.
 4. Space humidity setpoint.
 5. Low Space temperature alarm.
 6. High Space temperature alarm.
 7. Discharge air temperature.
 8. Discharge air temperature setpoint.
 9. Return air temperature.
 10. Outside air temperature, humidity and enthalpy.
 11. Economizer enthalpy setpoint.
 12. Space CO2 level.
 13. Space CO2 level setpoint.

14. Space high CO2 level alarm: "1500 PPM", adjustable.
15. Supply fan operational status and speed (percentage)
16. Commanded status of supply fan.
17. Exhaust fan operational status and speed (percentage)
18. Commanded status of exhaust fan.
19. Heat Wheel operational status via current sensor.
20. Commanded status of heat wheel.
21. Commanded status of compressor(s).
22. Commanded status of gas-train.
23. Commanded position of dampers.
24. Status of Generator Transfer Switch.
25. Diagram showing the layout of the unit with major components and dynamic temperatures shown where temperature sensors exist in the system.

END OF SECTION

SECTION 23 11 26

FACILITY LIQUEFIED-PETROLEUM GAS PIPING AND TANKS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Pipe, pipe fittings, valves, and connections for propane gas piping systems.

1.02 RELATED REQUIREMENTS

- A. Section 23 05 16 - Expansion Fittings and Loops for HVAC Piping.
- B. Section 23 05 53 - Identification for HVAC Piping and Equipment.
- C. Section 33 52 16 - Gas Hydrocarbon Piping.

1.03 REFERENCE STANDARDS

- A. ANSI Z21.18/CSA 6.3 - Gas Appliance Pressure Regulators.
- B. ANSI Z21.80/CSA 6.22 - Line Pressure Regulators.
- C. ANSI Z223.1 - National Fuel Gas Code.
- D. ASME BPVC-IX - Boiler and Pressure Vessel Code, Section IX - Welding, Brazing, and Fusing Qualifications.
- E. ASME B16.3 - Malleable Iron Threaded Fittings: Classes 150 and 300.
- F. ASME B16.26 - Cast Copper Alloy Fittings for Flared Copper Tubes.
- G. ASME B31.1 - Power Piping.
- H. ASME B31.9 - Building Services Piping.
- I. ASTM A47/A47M - Standard Specification for Ferritic Malleable Iron Castings.
- J. ASTM A53/A53M - Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless.
- K. ASTM A123/A123M - Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.
- L. ASTM A234/A234M - Standard Specification for Piping Fittings of Wrought Carbon Steel and Alloy Steel for Moderate and High Temperature Service.
- M. ASTM B88 - Standard Specification for Seamless Copper Water Tube.
- N. ASTM B88M - Standard Specification for Seamless Copper Water Tube (Metric).
- O. ASTM B813 - Standard Specification for Liquid and Paste Fluxes for Soldering of Copper and Copper Alloy Tube.
- P. ASTM B828 - Standard Practice for Making Capillary Joints by Soldering of Copper and Copper Alloy Tube and Fittings.
- Q. ASTM D2513 - Standard Specification for Polyethylene (PE) Gas Pressure Pipe, Tubing, and Fittings.
- R. ASTM D2683 - Standard Specification for Socket-Type Polyethylene Fittings for Outside Diameter-Controlled Polyethylene Pipe and Tubing.
- S. ASTM F708 - Standard Practice for Design and Installation of Rigid Pipe Hangers.
- T. AWS D1.1/D1.1M - Structural Welding Code - Steel.
- U. AWWA C105/A21.5 - Polyethylene Encasement for Ductile-Iron Pipe Systems.
- V. AWWA C606 - Grooved and Shouldered Joints.
- W. ICC-ES AC01 - Acceptance Criteria for Expansion Anchors in Masonry Elements.

- X. ICC-ES AC106 - Acceptance Criteria for Predrilled Fasteners (Screw Anchors) in Masonry Elements.
- Y. ICC-ES AC193 - Acceptance Criteria for Mechanical Anchors in Concrete Elements.
- Z. ICC-ES AC308 - Acceptance Criteria for Post-Installed Adhesive Anchors in Concrete Elements.
- AA. MSS SP-58 - Pipe Hangers and Supports - Materials, Design, Manufacture, Selection, Application, and Installation.
- AB. MSS SP-78 - Cast Iron Plug Valves, Flanged and Threaded Ends.
- AC. MSS SP-110 - Ball Valves Threaded, Socket-Welding, Solder Joint, Grooved and Flared Ends.
- AD. NFPA 58 - Liquefied Petroleum Gas Code.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide data on pipe materials, pipe fittings, valves, and accessories. Provide manufacturers catalog information. Indicate valve data and ratings.
- C. Product Data: Provide data on tank, fill valve, relief valve, outlet valve, and % level gauge.
- D. Welder Certificate: Include welders certification of compliance with ASME BPVC-IX.
- E. Shop Drawings: For non-penetrating rooftop supports, submit detailed layout developed for this project, with design calculations for loadings and spacings.
- F. Project Record Documents: Record actual locations of valves.
- G. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
 - 1. See Section 01 60 00 - Product Requirements, for additional provisions.
 - 2. Valve Repacking Kits: One for each type and size of valve.

1.05 QUALITY ASSURANCE

- A. Perform work in accordance with applicable codes.
- B. Valves: Manufacturer's name and pressure rating marked on valve body.
- C. Welding Materials and Procedures: Conform to ASME BPVC-IX and applicable state labor regulations.
- D. Welder Qualifications: Certified in accordance with ASME BPVC-IX.
- E. Identify pipe with marking including size, ASTM material classification, and ASTM specification.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Accept valves on site in shipping containers with labeling in place. Inspect for damage.
- B. Provide temporary protective coating on cast iron and steel valves.
- C. Provide temporary end caps and closures on piping and fittings. Maintain in place until installation.
- D. Protect piping systems from entry of foreign materials by temporary covers, completing sections of the work, and isolating parts of completed system.

1.07 FIELD CONDITIONS

- A. Do not install underground piping when bedding is wet or frozen.

PART 2 PRODUCTS

2.01 PROPANE GAS TANK, ABOVE-GROUND

- A. The tank shall be above-grade, UL-listed, ASME pressure vessel.
 - 1. Single-wall, mild carbon steel construction.

2. Exterior coating shall be 10 mils polyurethane.
3. Provide with multivalve assembly by Sherwood Valve or approved equal having (at minimum) relief valve, fill valve, outlet valve, % level gauge, and overfill protection device.
4. Initial fill is to be by owner.

2.02 PROPANE GAS PIPING, BURIED BEYOND 5 FEET OF BUILDING

- A. Polyethylene Pipe: ASTM D2513, SDR 11.
 1. Fittings: ASTM D2683 or ASTM D2513 socket type.
 2. Joints: Fusion welded.

2.03 PROPANE GAS PIPING, BURIED WITHIN 5 FEET OF BUILDING

- A. Steel Pipe: ASTM A53/A53M Schedule 40 black.
 1. Fittings: ASTM A234/A234M, wrought steel welding type, with AWWA C105/A21.5 polyethylene jacket or double layer, half-lapped 10 mil polyethylene tape.
 2. Joints: ASME B31.1, welded.

2.04 PROPANE GAS PIPING, ABOVE GRADE

- A. Steel Pipe: ASTM A53/A53M Schedule 40 black.
 1. Fittings: ASME B16.3, malleable iron, or ASTM A234/A234M, wrought steel welding type.
 2. Joints: NFPA 58, threaded or welded to ASME B31.1.

2.05 FLANGES, UNIONS, AND COUPLINGS

- A. Unions for Pipe Sizes 3 Inches and Under:
 1. Ferrous pipe: Class 150 malleable iron threaded unions.
- B. Flanges for Pipe Size Over 1 Inch:
 1. Ferrous Pipe: Class 150 malleable iron threaded or forged steel slip-on flanges; preformed neoprene gaskets.

2.06 PIPE HANGERS AND SUPPORTS

- A. Provide hangers and supports that comply with MSS SP-58.
 1. If type of hanger or support for a particular situation is not indicated, select appropriate type using MSS SP-58 recommendations.
 2. Overhead Supports: Individual steel rod hangers attached to structure or to trapeze hangers.
 3. Trapeze Hangers: Welded steel channel frames attached to structure.
 4. Vertical Pipe Support: Steel riser clamp.
- B. Hanger Fasteners: Attach hangers to structure using appropriate fasteners, as follows:
 1. Concrete Wedge Expansion Anchors: Complying with ICC-ES AC193.
 2. Masonry Wedge Expansion Anchors: Complying with ICC-ES AC01.
 3. Concrete Screw Type Anchors: Complying with ICC-ES AC193.
 4. Masonry Screw Type Anchors: Complying with ICC-ES AC106.
 5. Concrete Adhesive Type Anchors: Complying with ICC-ES AC308.
 6. Other Types: As required.

2.07 BALL VALVES

- A. Manufacturers:
 1. Conbraco Industries, Inc: www.apollovalves.com.
 2. Grinnell Products, a Tyco Business: www.grinnell.com.
 3. Milwaukee Valve Company: www.milwaukeevalve.com.
 4. Nibco, Inc: www.nibco.com.
 5. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Construction, 4 Inches and Smaller: MSS SP-110, Class 150, 400 psi CWP, bronze or ductile iron body, 304 stainless steel or chrome plated brass ball, regular port, Teflon seats and stuffing

box ring, blow-out proof stem, lever handle with balancing stops, solder, threaded, or grooved ends with union.

2.08 STRAINERS

- A. Manufacturers:
 - 1. Armstrong International, Inc: www.armstronginternational.com.
 - 2. Green Country Filter Manufacturing: www.greencountryfilter.com.
 - 3. WEAMCO: www.weamco.com.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Size 2 inch and Under:
 - 1. Threaded brass body for 175 psi CWP, Y pattern with 1/32 inch stainless steel perforated screen.
 - 2. Class 150, threaded bronze body 300 psi CWP, Y pattern with 1/32 inch stainless steel perforated screen.

2.09 LINE PRESSURE REGULATORS AND APPLIANCE REGULATORS

- A. Compliance Requirements:
 - 1. Appliance Regulator: ANSI Z21.18/CSA 6.3.
 - 2. Line Pressure Regulator: ANSI Z21.80/CSA 6.22.
- B. Materials in Contact With Gas:
 - 1. Housing: Aluminum, steel (free of non-ferrous metals).
 - 2. Seals and Diaphragms: NBR-based rubber.
- C. Maximum Inlet Operating Pressure: 10 psi.
 - 1. Appliance Regulator: 10 psi.
 - 2. Line Pressure Regulator: 10 psi.
- D. Maximum Body Pressure: 10 psi.
- E. Output Pressure Range: 1 inch wc to 80 inch wc.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that excavations are to required grade, dry, and not over-excavated.

3.02 PREPARATION

- A. Ream pipe and tube ends. Remove burrs. Bevel plain end ferrous pipe.
- B. Remove scale and dirt, on inside and outside, before assembly.
- C. Prepare piping connections to equipment with flanges or unions.

3.03 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Provide non-conducting dielectric connections wherever jointing dissimilar metals.
- C. Route piping in orderly manner and maintain gradient. Route parallel and perpendicular to walls.
- D. Install piping to maintain headroom, conserve space, and not interfere with use of space.
- E. Group piping whenever practical at common elevations.
- F. Install piping to allow for expansion and contraction without stressing pipe, joints, or connected equipment. Refer to Section 22 05 16.
- G. Provide clearance in hangers and from structure and other equipment for installation of insulation and access to valves and fittings.
- H. Provide access where valves and fittings are not exposed.

- I. Establish elevations of buried piping outside the building to ensure not less than _____ ft of cover.
- J. Where pipe support members are welded to structural building framing, scrape, brush clean, and apply one coat of zinc rich primer to welding.
- K. Provide support for utility meters in accordance with requirements of utility companies.
- L. Prepare exposed, unfinished pipe, fittings, supports, and accessories ready for finish painting.
- M. Install valves with stems upright or horizontal, not inverted.
- N. Pipe vents from gas pressure reducing valves to outdoors and terminate in weather proof hood.
- O. Sleeve pipes passing through partitions, walls and floors.
- P. Inserts:
 - 1. Provide inserts for placement in concrete formwork.
 - 2. Provide inserts for suspending hangers from reinforced concrete slabs and sides of reinforced concrete beams.
 - 3. Provide hooked rod to concrete reinforcement section for inserts carrying pipe over 4 inches.
 - 4. Where concrete slabs form finished ceiling, locate inserts flush with slab surface.
 - 5. Where inserts are omitted, drill through concrete slab from below and provide through-bolt with recessed square steel plate and nut above slab.
- Q. Pipe Hangers and Supports:
 - 1. Install in accordance with ASME B31.9.
 - 2. Support horizontal piping as scheduled.
 - 3. Install hangers to provide minimum 1/2 inch space between finished covering and adjacent work.
 - 4. Place hangers within 12 inches of each horizontal elbow.
 - 5. Use hangers with 1-1/2 inch minimum vertical adjustment. Design hangers for pipe movement without disengagement of supported pipe.
 - 6. Support vertical piping at every other floor. Support riser piping independently of connected horizontal piping.
 - 7. Where several pipes can be installed in parallel and at same elevation, provide multiple or trapeze hangers.
 - 8. Prime coat exposed steel hangers and supports. Hangers and supports located in crawl spaces, pipe shafts, and suspended ceiling spaces are not considered exposed.

3.04 APPLICATION

- A. Install unions downstream of valves and at equipment or apparatus connections.
- B. Install brass male adapters each side of valves in copper piped system. Solder adapters to pipe.

3.05 SERVICE CONNECTIONS

- A. Provide new gas service complete with gas meter and regulators in accordance with Section 33 52 16. Gas service distribution piping to have initial minimum pressure of 7 inch wg. Provide regulators on each line serving gravity type appliances, sized in accordance with equipment.

3.06 SCHEDULES

- A. Pipe Hanger Spacing:
 - 1. Metal Piping:
 - a. Pipe Size: 1/2 inches to 1-1/4 inches:
 - 1) Maximum Hanger Spacing: 6.5 ft.
 - 2) Hanger Rod Diameter: 3/8 inches.
 - b. Pipe size: 1-1/2 inches to 2 inches:

- 1) Maximum Hanger Spacing: 10 ft.
- 2) Hanger Rod Diameter: 3/8 inch.
- c. Pipe size: 2-1/2 inches to 3 inches:
 - 1) Maximum Hanger Spacing: 10 ft.
 - 2) Hanger Rod Diameter: 1/2 inch.
- d. Pipe size: 4 inches to 6 inches:
 - 1) Maximum Hanger Spacing: 10 ft.
 - 2) Hanger Rod Diameter: 5/8 inch.
- e. Pipe size: 8 inches to 12 inches:
 - 1) Maximum Hanger Spacing: 14 ft.
 - 2) Hanger Rod Diameter: 7/8 inch.
- f. Pipe size: 14 inches and Over:
 - 1) Maximum Hanger Spacing: 20 ft.
 - 2) Hanger rod diameter: 1 inch.

END OF SECTION

SECTION 23 31 00
HVAC DUCTS AND CASINGS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Metal ductwork.
- B. Nonmetal ductwork.
- C. Casing and plenums.

1.02 RELATED REQUIREMENTS

- A. Section 03 30 00 - Cast-in-Place Concrete.
- B. Section 09 90 00 - Paints and Coatings: Weld priming, weather resistant, paint or coating.
- C. Section 11 40 00 - Foodservice Equipment: Supply of kitchen range hoods for placement by this Section.
- D. Section 23 07 13 - Duct Insulation: External insulation and duct liner.
- E. Section 23 33 00 - Air Duct Accessories.
- F. Section 23 36 00 - Air Terminal Units.
- G. Section 23 37 00 - Air Outlets and Inlets.
- H. Section 23 05 93 - Testing, Adjusting, and Balancing for HVAC.

1.03 REFERENCE STANDARDS

- A. ASTM A36/A36M - Standard Specification for Carbon Structural Steel.
- B. ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.
- C. ASTM A666 - Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar.
- D. ASTM A1008/A1008M - Standard Specification for Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, Solution Hardened, and Bake Hardenable.
- E. ASTM A1011/A1011M - Standard Specification for Steel, Sheet and Strip, Hot-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, and Ultra-High Strength.
- F. ASTM B209 - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate.
- G. ASTM B209M - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate [Metric].
- H. ASTM C14 - Standard Specification for Nonreinforced Concrete Sewer, Storm Drain, and Culvert Pipe.
- I. ASTM C14M - Standard Specification for Nonreinforced Concrete Sewer, Storm Drain, and Culvert Pipe (Metric).
- J. ASTM C443 - Standard Specification for Joints for Concrete Pipe and Manholes, Using Rubber Gaskets.
- K. ASTM C443M - Standard Specification for Joints for Concrete Pipe and Manholes, Using Rubber Gaskets (Metric).
- L. NFPA 90A - Standard for the Installation of Air-Conditioning and Ventilating Systems.
- M. NFPA 90B - Standard for the Installation of Warm Air Heating and Air-Conditioning Systems.

- N. NFPA 96 - Standard for Ventilation Control and Fire Protection of Commercial Cooking Operations.
- O. SMACNA (LEAK) - HVAC Air Duct Leakage Test Manual; Sheet Metal and Air Conditioning Contractors' National Association.
- P. SMACNA (DCS) - HVAC Duct Construction Standards Metal and Flexible.
- Q. SMACNA (FGD) - Fibrous Glass Duct Construction Standards.
- R. UL 181 - Standard for Factory-Made Air Ducts and Air Connectors.
- S. IECC 2012 - International Energy Conservation Code - Duct construction standards, leakage testing

1.04 PERFORMANCE REQUIREMENTS

- A. No variation of duct configuration or sizes permitted except by written permission. Size round ducts installed in place of rectangular ducts in accordance with ASHRAE table of equivalent rectangular and round ducts.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide data for duct materials and duct connections.
- C. Shop Drawings: Indicate duct fittings, particulars such as gages, sizes, welds, and configuration prior to start of work for all systems.
- D. MANDATORY Test Reports: Pressure test all ductwork. Indicate pressure tests performed. Include date, section tested, test pressure, and leakage rate, following SMACNA (LEAK) - HVAC Air Duct Leakage Test Manual.
 - 1. Utilize standard equation $CL = FP^{0.65}$ where F = Measured leakage rate in CFM per 100 square feet of duct surface, and P = Static Pressure of the test. Leakage rate shall not exceed 4.0 in that equation.
- E. Manufacturer's Certificate: Certify that installation of glass fiber ductwork meet or exceed recommended fabrication and installation requirements.
- F. Project Record Documents: Record actual locations of ducts and duct fittings. Record changes in fitting location and type. Show additional fittings used.

1.06 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the type of products specified in this section, with minimum three years of documented experience.
- B. Installer Qualifications: Company specializing in performing the type of work specified in this section, with minimum five years of documented experience.

1.07 REGULATORY REQUIREMENTS

- A. Construct ductwork to NFPA 90A, NFPA 90B, and NFPA 96 standards.

1.08 FIELD CONDITIONS

- A. Do not install duct sealants when temperatures are less than those recommended by sealant manufacturers.
- B. Maintain temperatures within acceptable range during and after installation of duct sealants.

PART 2 PRODUCTS

2.01 DUCT ASSEMBLIES

2.02 MATERIALS

- A. Galvanized Steel for Ducts: Hot-dipped galvanized steel sheet, ASTM A653/A653M FS Type B, with G90/Z275 coating.
- B. Aluminum for Ducts: ASTM B209 (ASTM B209M); aluminum sheet, alloy 3003-H14. Aluminum Connectors and Bar Stock: Alloy 6061-T651 or of equivalent strength.
- C. Stainless Steel for Ducts: ASTM A 240/A 240M, Type 304.
- D. Hanger Rod: ASTM A36/A36M; steel, galvanized; threaded both ends, threaded one end, or continuously threaded.
- E. Flexible Ducts:
 - 1. Two ply vinyl film supported by helically wound spring steel wire.
 - a. Pressure Rating: 10 inches WG positive and 1.0 inches WG negative.
 - b. Maximum Velocity: 4000 fpm.
 - c. Temperature Range: -10 degrees F to 160 degrees F.
- F. Insulated Flexible Ducts:
 - 1. Two ply vinyl film supported by helically wound spring steel wire; fiberglass insulation; polyethylene vapor barrier film.
 - a. Pressure Rating: 10 inches WG positive and 1.0 inches WG negative.
 - b. Maximum Velocity: 4000 fpm.
 - c. Temperature Range: -10 degrees F to 160 degrees F.
- G. Stainless Steel Ducts: ASTM A 666, Type 304.
- H. All Ducts: Galvanized steel, unless otherwise indicated.
- I. Low Pressure Supply (Heating Systems): 1 inch w.g. pressure class, galvanized steel.
- J. Low Pressure Supply (System with Cooling Coils): 1 inch w.g. pressure class, galvanized steel.
- K. Return and Relief: 1 inch w.g. pressure class, galvanized steel.
- L. General Exhaust: 1 inch w.g. pressure class, galvanized steel.
- M. Joint Sealers and Sealants: Non-hardening, water resistant, mildew and mold resistant.
 - 1. Type: Heavy mastic or liquid used alone or with tape, suitable for joint configuration and compatible with substrates, and recommended by manufacturer for pressure class of ducts.
 - 2. VOC Content: Not more than 250 g/L, excluding water.

2.03 DUCTWORK FABRICATION

- A. Fabricate and support in accordance with SMACNA HVAC Duct Construction Standards and as indicated.
- B. Provide duct material, gages, reinforcing, and sealing for operating pressures indicated.
- C. Construct T's, bends, and elbows with radius of not less than 1-1/2 times width of duct on centerline. Where not possible and where rectangular elbows must be used, provide turning vanes. .
- D. Increase duct sizes gradually, not exceeding 15 degrees divergence wherever possible; maximum 30 degrees divergence upstream of equipment and 45 degrees convergence downstream.
- E. Fabricate continuously welded round and oval duct fittings in accordance with SMACNA HVAC Duct Construction Standards.

- F. Fabricate continuously welded round and oval duct fittings two gages heavier than duct gages indicated in SMACNA Standard. Joints shall be minimum 4 inch cemented slip joint, brazed or electric welded. Prime coat welded joints.
- G. Provide standard 45 degree lateral wye takeoffs unless otherwise indicated where 90 degree conical tee connections may be used.
- H. Where ducts are connected to exterior wall louvers and duct outlet is smaller than louver frame, provide blank-out panels sealing louver area around duct. Use same material as duct, painted black on exterior side; seal to louver frame and duct.

2.04 MANUFACTURED DUCTWORK AND FITTINGS

- A. Manufacture in accordance with SMACNA HVAC Duct Construction Standards - Metal and Flexible, and as indicated. Provide duct material, gages, reinforcing, and sealing for operating pressures indicated.
- B. FABRIC AIR DISPERSION SYSTEM
 - 1. Round fabric air dispersion system shall be constructed of FabricAir® Combi 70 fabric. The fabric is a woven fire retardant and permeable fabric complying with the following characteristics:
 - a. Duct Shape: Round
 - b. Fabric: 100% Flame Retardant Polyester
 - c. Weight: 8.50 oz./yd² per ASTM D3776
 - d. Shrinkage: Max. 0.5% per EN ISO 5077
 - e. Color: STANDARD
 - f. Temperature Range: -40°F and +284°F
 - g. Base Permeability @ 0.5" WG: 2 CFM/SQFT per ASTM D737, Shall be verified by the Frazier Permeability Test
 - h. Fire Retardancy: Shall meet the requirements of NFPA 90-A, ICC AC167 and UL 2518
 - i. Manufacturer shall provide a 10 year non-prorated warranty. Prorated warranties will not be accepted.
 - 2. SYSTEM FABRICATION REQUIREMENTS
 - a. The system is made with sewn in, but still removable, aluminum hoops. The rods support the shape of the fabric system by 180° (8"-48"), 120° (49"-60"), 90° (61"-68") and 60° (69"-80"). Hoops must be pre-installed from factory, no installation at sight. Diameter of hoops and distance between as specified by manufacturer.
 - b. Elbows of 70° or more to have 2 hoops sewn in order to maintain shape.
 - c. Air dispersion shall be accomplished by dispersion through permeable fabric. Due to exact requirements of draft and NC requirements alternative flow models are not acceptable.
 - d. The system shall be made of permeable fabric. Base permeability of fabric shall be reached based on a combination of weave construction and a thermo fixation process in order to prevent permeability degradation after wash. Fabric permeability based on a calendering process is not acceptable.
 - e. Fabric system shall include connectors to attach to suspension system listed below.
 - f. Provide system in sections optimized for maintenance, connected by zippers. Zippers shall provide closure completely around the circumference to prevent leakage. Required number of zippers shall be specified by the manufacturer.
 - g. Each section to have a unique tag including information about manufacturers order number, position, diameter of section, length of section, maintenance instruction, code compliance and contact details for spare parts.
 - 3. DESIGN PARAMETERS
 - a. Use fabric air diffusers only for positive pressure air distribution.

- b. Do not use fabric air diffusers in concealed locations.
- c. Fabric diffusers shall be designed to a maximum of 3" water gauge, with 0.5" being the standard.
- d. Design temperatures shall be between -40°F and +284°F
- e. Manufacturer shall approve all technical design parameters.
- 4. **HANGERS AND SUPPORTS**
 - a. Type 8: One row H-rail/cable system located 2" above 12 o'clock of FabricAir® system. Hardware to include H-rail joint, eye bolt, end cap H-rail, cable, tie down strap and H-rail as required. FabricAir® system shall be attached to hardware using one single row of plastic sliders located 12 o'clock spaced 20 inches.
- 5. **Hardware**
 - a. Anodized Aluminum H-Rails - With PVC coated Galvanized Steel suspension cable. Suspension cable clamps, H-rail suspension eyebolts, and all other factory supplied metal components shall be Galvanized Steel.
 - b. PVC Coated Galvanized Steel Tensioning and Suspension Cable - Cable clamps, cable tensioners, and all other factory supplied metal components shall be Galvanized Steel.
- C. **Double Wall Insulated Round Ducts:** Round spiral lockseam duct with paintable galvanized steel outer wall, perforated galvanized steel inner wall; fitting with solid inner wall. Provide paint in color selected by architect.
 - 1. Manufacture in accordance with SMACNA HVAC Duct Construction Standards.
 - 2. Insulation:
 - a. Thickness: 2 inch.
 - b. Material: Fiberglass, with mylar coating between insulation and perforated liner.
- D. **Double Wall Insulated Rectangular Ducts:** Rectangular spiral lockseam duct with galvanized steel outer wall, perforated galvanized steel inner wall; fitting with solid inner wall.
 - 1. Manufacture in accordance with SMACNA (DCS).
 - 2. Insulation:
 - a. Thickness: 2 inch.
 - b. Material: Fiberglass, with mylar coating between insulation and perforated liner
- E. **Transverse Duct Connection System:** SMACNA "J" rated rigidly class connection, interlocking angle and duct edge connection system with sealant, gasket, cleats, and corner clips.
 - 1. Manufacturers:

2.05 CASINGS

- A. Fabricate casings in accordance with SMACNA HVAC Duct Construction Standards and construct for operating pressures indicated.
- B. Mount floor mounted casings on 4 inch high concrete curbs. At floor, rivet panels on 8 inch centers to angles. Where floors are acoustically insulated, provide liner of 18 gage galvanized expanded metal mesh supported at 12 inch centers, turned up 12 inches at sides with sheet metal shields.
- C. Mount floor mounted casings on 4 inch high concrete curbs. At floor, rivet panels on 8 inch centers to angles. Where floors are acoustically insulated, provide liner of 18 gage galvanized expanded metal mesh supported at 12 inch centers, turned up 12 inches at sides with sheet metal shields.
- D. Reinforce door frames with steel angles tied to horizontal and vertical plenum supporting angles. Install hinged access doors where indicated or required for access to equipment for cleaning and inspection.
 - 1. Provide clear wire glass observation ports, minimum 6 X 6 inch size.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install, support, and seal ducts in accordance with SMACNA HVAC Duct Construction Standards.
- B. Install in accordance with manufacturer's instructions.
- C. Duct sizes indicated are inside clear dimensions. For lined ducts, maintain sizes inside lining.
- D. Install and seal metal and flexible ducts in accordance with SMACNA HVAC Duct Construction Standards - Metal and Flexible.
- E. Provide openings in ductwork where required to accommodate thermometers and controllers. Provide pilot tube openings where required for testing of systems, complete with metal can with spring device or screw to ensure against air leakage. Where openings are provided in insulated ductwork, install insulation material inside a metal ring.
- F. Locate ducts with sufficient space around equipment to allow normal operating and maintenance activities.
- G. Use crimp joints with or without bead for joining round duct sizes 8 inch and smaller with crimp in direction of air flow.
- H. Use double nuts and lock washers on threaded rod supports.
- I. Tape joints of PVC coated metal ductwork with PVC tape.
- J. Connect terminal units to supply ducts with one foot maximum length of flexible duct. Do not use flexible duct to change direction.
- K. Connect diffusers or light troffer boots to low pressure ducts with 5 feet maximum length of flexible duct held in place with strap or clamp.
- L. Connect flexible ducts to metal ducts with adhesive plus sheet metal screws.
- M. Set plenum doors 6 to 12 inches above floor. Arrange door swings so that fan static pressure holds door in closed position.
- N. Use stainless steel for ductwork exposed to view and stainless steel or carbon steel for ducts where concealed.
- O. During construction provide temporary closures of metal or taped polyethylene on open ductwork to prevent construction dust from entering ductwork system.
- P. At exterior wall louvers, seal duct to louver frame and install blank-out panels as required.

3.02 CLEANING AND TESTING

- A. Clean duct system and force air at high velocity through duct to remove accumulated dust. To obtain sufficient air, clean half the system at a time. Protect equipment that could be harmed by excessive dirt with temporary filters, or bypass during cleaning.
- B. Conduct required duct-leakage testing as defined within this specification and otherwise noted in the contract documents.

3.03 FABRIC DUCT INSTALLATION

- A. Installation of Fabric Air Dispersion System
 - 1. Examine area and conditions under which the fabric duct systems are to be installed. Do not continue any installation until unsatisfactory conditions have been corrected.
 - 2. Install chosen suspension system in accordance with the requirements of the manufacturer. Installation instructions shall be provided by the manufacturer with product.
 - 3. Coordinate layout with suspended ceiling, lighting layouts, and all other trades that may interfere with the installation of fabric duct systems.

B. Cleaning of Fabric Air Dispersion System

1. Clean air handling unit and other ductwork prior to the fabric duct system as it is installed. Ensure that all construction debris, including dust, is removed from the air handling unit and other ductwork before connecting the fabric duct system.
2. If the fabric system becomes soiled during the installation, it should be removed and cleaned following the manufacturers cleaning instructions.

3.04 SCHEDULES

A. Ductwork Material:

1. Low Pressure Supply (Heating Systems): Steel, Aluminum.
2. Low Pressure Supply (System with Cooling Coils): Steel, Aluminum.
3. Medium and High Pressure Supply: Steel.
4. Return and Relief: Steel, Aluminum.
5. General Exhaust: Steel, Aluminum.
6. Outside Air Intake: Steel.
7. Exposed round ductwork: Double-walled spiral.

B. Ductwork Pressure Class:

1. Supply (Heating Systems): 1 inch
2. Supply (System with Cooling Coils): 2 inch.
3. Return and Relief: 1 inch.
4. General Exhaust: 1 inch.
5. Outside Air Intake: 1 inch.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 23 33 00
AIR DUCT ACCESSORIES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Air turning devices/extractors.
- B. Backdraft dampers - metal.
- C. Backdraft dampers.
- D. Combination fire and smoke dampers.
- E. Duct access doors.
- F. Duct test holes.
- G. Fire dampers.
- H. Flexible duct connections.
- I. Smoke dampers.
- J. Volume control dampers.

1.02 RELATED REQUIREMENTS

- A. Section 22 05 48 - Vibration and Seismic Controls for Plumbing Piping and Equipment.
- B. Section 23 31 00 - HVAC Ducts and Casings.
- C. Section 23 36 00 - Air Terminal Units: Pressure regulating damper assemblies.
- D. Section 26 27 17 - Equipment Wiring: Electrical characteristics and wiring connections.

1.03 REFERENCE STANDARDS

- A. NFPA 90A - Standard for the Installation of Air-Conditioning and Ventilating Systems.
- B. NFPA 92 - Standard for Smoke Control Systems.
- C. NFPA 92A - Standard for Smoke-Control Systems Utilizing Barriers and Pressure Differences.
- D. SMACNA (DCS) - HVAC Duct Construction Standards Metal and Flexible.
- E. UL 33 - Safety Heat Responsive Links for Fire-Protection Service.
- F. UL 555 - Standard for Fire Dampers.
- G. UL 555S - Standard for Smoke Dampers.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide for shop fabricated assemblies including volume control dampers, duct access doors, duct test holes, and hardware used. Include electrical characteristics and connection requirements.
- C. Shop Drawings: Indicate for shop fabricated assemblies including volume control dampers, duct access doors, and duct test holes.
- D. Manufacturer's Installation Instructions: Provide instructions for fire dampers and combination fire and smoke dampers.

1.05 PROJECT RECORD DOCUMENTS

- A. Record actual locations of access doors and test holes.

1.06 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the type of products specified in this section, with minimum five years of documented experience.

- B. Products Requiring Electrical Connection: Listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Protect dampers from damage to operating linkages and blades.

1.08 EXTRA MATERIALS

- A. See Section 01 60 00 - Product Requirements, for additional provisions.
- B. Provide two of each size and type of fusible link.

PART 2 PRODUCTS

2.01 AIR TURNING DEVICES/EXTRACTORS

- A. Manufacturers:
 - 1. Krueger: www.krueger-hvac.com/#sle.
 - 2. Ruskin Company: www.ruskin.com/#sle.
 - 3. Titus: www.titus-hvac.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Multi-blade device with blades aligned in short dimension; steel construction; with individually adjustable blades, mounting straps.

2.02 BACKDRAFT DAMPERS - METAL

2.03 BACKDRAFT DAMPERS

- A. Manufacturers:
 - 1. Louvers & Dampers, Inc: www.louvers-dampers.com/#sle.
 - 2. Nailor Industries Inc: www.nailor.com/#sle.
 - 3. Ruskin Company: www.ruskin.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Gravity Backdraft Dampers, Size 18 x 18 inches or Smaller, Furnished with Air Moving Equipment: Air moving equipment manufacturer's standard construction.

2.04 BACKDRAFT DAMPERS - FABRIC

- A. Fabric Backdraft Dampers: Factory-fabricated, 18 gage, galvanized steel frame.
 - 1. Blades: Neoprene coated fabric material.
 - 2. Birdscreen: 1/2 inch nominal mesh of galvanized steel or aluminum.
 - 3. Maximum Velocity: 1000 fpm (5 m/sec) face velocity.
- B. Multi-Blade, Parallel Action Gravity Balanced Backdraft Dampers: galvanized steel or extruded aluminum, with center pivoted blades of maximum 6 inch width, with felt or flexible vinyl sealed edges, linked together in rattle-free manner with 90 degree stop, steel ball bearings, and plated steel pivot pin; adjustment device to permit setting for varying differential static pressure.

2.05 COMBINATION FIRE AND SMOKE DAMPERS

- A. Manufacturers:
 - 1. Louvers & Dampers, Inc: www.louvers-dampers.com/#sle.
 - 2. Nailor Industries Inc: www.nailor.com/#sle.
 - 3. Ruskin Company: www.ruskin.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Fabricate in accordance with NFPA 90A, UL 555, UL 555S, and as indicated.
- C. Provide factory sleeve and collar for each damper.
- D. Multiple Blade Dampers: Fabricate with 16 gage galvanized steel frame and blades, oil-impregnated bronze or stainless steel sleeve bearings and plated steel axles, stainless steel

jamb seals, 1/8 x 1/2 inch plated steel concealed linkage, stainless steel closure spring, blade stops, and lock, and 1/2 inch actuator shaft.

- E. Operators: UL listed and labelled spring return electric type suitable for 120 volts, single phase, 60 Hz. Provide end switches to indicate damper position. Locate damper operator on interior of duct and link to damper operating shaft.
- F. Normally Closed Smoke Responsive Fire Dampers: Curtain type, opening by gravity upon actuation of electro thermal link, flexible stainless steel blade edge seals to provide constant sealing pressure.
- G. Normally Open Smoke Responsive Fire Dampers: Curtain type, closing upon actuation of electro thermal link, flexible stainless steel blade edge seals to provide constant sealing pressure, stainless steel springs with locking devices to ensure positive closure for units mounted horizontally.
- H. Electro Thermal Link: Fusible link melting at 165 degrees F; 120 volts, single phase, 60 Hz; UL listed and labeled.

2.06 DUCT ACCESS DOORS

- A. Manufacturers:
 - 1. Nailor Industries Inc: www.nailor.com/#sle.
 - 2. Ruskin Company: www.ruskin.com/#sle.
 - 3. SEMCO Incorporated: www.semcoinc.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Fabricate in accordance with SMACNA HVAC Duct Construction Standards and as indicated.
- C. Fabrication: Rigid and close-fitting of galvanized steel with sealing gaskets and quick fastening locking devices. For insulated ducts, install minimum 1 inch thick insulation with sheet metal cover.
 - 1. Less Than 12 inches Square: Secure with sash locks.
 - 2. Up to 18 inches Square: Provide two hinges and two sash locks.
 - 3. Up to 24 x 48 inches: Three hinges and two compression latches with outside and inside handles.
 - 4. Larger Sizes: Provide an additional hinge.
- D. Access doors with sheet metal screw fasteners are not acceptable.

2.07 DUCT TEST HOLES

- A. Temporary Test Holes: Cut or drill in ducts as required. Cap with neat patches, neoprene plugs, threaded plugs, or threaded or twist-on metal caps.
- B. Permanent Test Holes: Factory fabricated, air tight flanged fittings with screw cap. Provide extended neck fittings to clear insulation.

2.08 FIRE DAMPERS

- A. Manufacturers:
 - 1. Louvers & Dampers, Inc: www.louvers-dampers.com/#sle.
 - 2. Nailor Industries Inc: www.nailor.com/#sle.
 - 3. Ruskin Company: www.ruskin.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Fabricate in accordance with NFPA 90A and UL 555, and as indicated.
- C. Ceiling Dampers: Galvanized steel, 22 gage frame and 16 gage flap, two layers 0.125 inch ceramic fiber on top side and one layer on bottom side for round flaps, with locking clip.
- D. Horizontal Dampers: Galvanized steel, 22 gage frame, stainless steel closure spring, and lightweight, heat retardant non-asbestos fabric blanket.

- E. Curtain Type Dampers: Galvanized steel with interlocking blades. Provide stainless steel closure springs and latches for horizontal installations or closure under air flow conditions. Configure with blades out of air stream except for 1.0 inch pressure class ducts up to 12 inches in height.
- F. Multiple Blade Dampers: 16 gage galvanized steel frame and blades, oil-impregnated bronze or stainless steel sleeve bearings and plated steel axles, 1/8 x 1/2 inch plated steel concealed linkage, stainless steel closure spring, blade stops, and lock.
- G. Fusible Links: UL 33, separate at 160 degrees F with adjustable link straps for combination fire/balancing dampers.

2.09 FLEXIBLE DUCT CONNECTIONS

- A. Fabricate in accordance with SMACNA HVAC Duct Construction Standards and as indicated.
- B. Flexible Duct Connections: Fabric crimped into metal edging strip.
 - 1. Fabric: UL listed fire-retardant neoprene coated woven glass fiber fabric to NFPA 90A, minimum density 30 oz per sq yd.
 - a. Net Fabric Width: Approximately 6 inches wide.
 - 2. Metal: 3 inches wide, 24 gage thick galvanized steel.
- C. Lead Vinyl Sheet: Minimum 0.55 inch thick, 0.87 lbs per sq ft, 10 dB attenuation in 10 to 10,000 Hz range.

2.10 SMOKE DAMPERS

- A. Manufacturers:
 - 1. Louvers & Dampers, Inc: www.louvers-dampers.com/#sle.
 - 2. Nailor Industries Inc: www.nailor.com/#sle.
 - 3. Ruskin Company: www.ruskin.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Fabricate in accordance with NFPA 90A and UL 555S, and as indicated.
- C. Dampers: UL Class 1 multiple blade type fire damper, normally closed automatically operated by electric actuator.
- D. Electro Thermal Link: Fusible link melting at 165 degrees F; 120 volts, single phase, 60 Hz; UL listed and labeled.

2.11 VOLUME CONTROL DAMPERS

- A. Manufacturers:
 - 1. Louvers & Dampers, Inc: www.louvers-dampers.com/#sle.
 - 2. Nailor Industries Inc: www.nailor.com/#sle.
 - 3. Ruskin Company: www.ruskin.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Fabricate in accordance with SMACNA HVAC Duct Construction Standards and as indicated.
- C. Splitter Dampers:
 - 1. Material: Same gage as duct to 24 inches size in either direction, and two gages heavier for sizes over 24 inches.
 - 2. Blade: Fabricate of double thickness sheet metal to streamline shape, secured with continuous hinge or rod.
 - 3. Operator: Minimum 1/4 inch diameter rod in self aligning, universal joint action, flanged bushing with set screw .
- D. Single Blade Dampers: Fabricate for duct sizes up to 6 x 30 inch.

- E. Multi-Blade Damper: Fabricate of opposed blade pattern with maximum blade sizes 8 x 72 inch. Assemble center and edge crimped blades in prime coated or galvanized channel frame with suitable hardware.
- F. End Bearings: Except in round ducts 12 inches and smaller, provide end bearings. On multiple blade dampers, provide oil-impregnated nylon or sintered bronze bearings.
- G. Quadrants:
 - 1. Provide locking, indicating quadrant regulators on single and multi-blade dampers.
 - 2. On insulated ducts mount quadrant regulators on stand-off mounting brackets, bases, or adapters.

PART 3 EXECUTION

3.01 PREPARATION

- A. Verify that electric power is available and of the correct characteristics.

3.02 INSTALLATION

- A. Install accessories in accordance with manufacturer's instructions, NFPA 90A, and follow SMACNA HVAC Duct Construction Standards. Refer to Section 23 31 00 for duct construction and pressure class.
- B. Provide backdraft dampers on exhaust fans or exhaust ducts nearest to outside and where indicated.
- C. Provide duct access doors for inspection and cleaning before and after filters, coils, fans, automatic dampers, at fire dampers, combination fire and smoke dampers, and elsewhere as indicated. Provide for cleaning kitchen exhaust ducts in accordance with NFPA 96. Provide minimum 8 x 8 inch size for hand access, 18 x 18 inch size for shoulder access, and as indicated. Provide 4 x 4 inch for balancing dampers only. Review locations prior to fabrication.
- D. Provide duct test holes where indicated and required for testing and balancing purposes.
- E. Provide fire dampers, combination fire and smoke dampers, and smoke dampers at locations indicated, where ducts and outlets pass through fire rated components, and where required by authorities having jurisdiction. Install with required perimeter mounting angles, sleeves, breakaway duct connections, corrosion resistant springs, bearings, bushings and hinges.
- F. Install smoke dampers and combination smoke and fire dampers in accordance with NFPA 92.
 - 1. Smoke dampers shall be integrated into the "smoke purge control system". Dampers in the return ductwork shall be overridden to the open position when the smoke purge is activated.
- G. Demonstrate re-setting of fire dampers to Owner's representative.
- H. At fans and motorized equipment associated with ducts, provide flexible duct connections immediately adjacent to the equipment.
- I. At equipment supported by vibration isolators, provide flexible duct connections immediately adjacent to the equipment; see Section 22 05 48.
- J. For fans developing static pressures of 5.0 inches and over, cover flexible connections with leaded vinyl sheet, held in place with metal straps.
- K. Provide balancing dampers at points on supply, return, and exhaust systems where branches are taken from larger ducts as required for air balancing. Install minimum 2 duct widths from duct take-off.
- L. Use splitter dampers only where indicated.
- M. Provide balancing dampers on high velocity systems where indicated. Refer to Section 23 36 00 - Air Terminal Units.

- N. Provide balancing dampers on duct take-off to diffusers, grilles, and registers, regardless of whether dampers are specified as part of the diffuser, grille, or register assembly.

END OF SECTION

NOT FOR BIDDING

SECTION 23 34 23
HVAC POWER VENTILATORS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Ceiling exhaust fans.

1.02 RELATED REQUIREMENTS

- A. Section 23 05 13 - Common Motor Requirements for HVAC Equipment.
- B. Section 23 05 48 - Vibration and Seismic Controls for HVAC Piping Equipment.
- C. Section 23 33 00 - Air Duct Accessories: Backdraft dampers.
- D. Section 26 27 17 - Equipment Wiring: Electrical characteristics and wiring connections.

1.03 REFERENCE STANDARDS

- A. AMCA 99 - Standards Handbook.
- B. AMCA 204 - Balance Quality and Vibration Levels for Fans.
- C. AMCA 210 - Laboratory Methods of Testing Fans for Certified Aerodynamic Performance Rating.
- D. AMCA (DIR) - [Directory of] Products Licensed Under AMCA International Certified Ratings Program; Air Movement and Control Association International, Inc..
- E. AMCA 300 - Reverberant Room Method for Sound Testing of Fans.
- F. AMCA 301 - Methods for Calculating Fan Sound Ratings from Laboratory Test Data.
- G. NEMA MG 1 - Motors and Generators.
- H. NFPA 96 - Standard for Ventilation Control and Fire Protection of Commercial Cooking Operations.
- I. UL 705 - Power Ventilators.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide data on fans and accessories including fan curves with specified operating point clearly plotted, power, RPM, sound power levels at rated capacity, and electrical characteristics and connection requirements.
- C. Manufacturer's Instructions: Indicate installation instructions.
- D. Maintenance Data: Include instructions for lubrication, motor and drive replacement, spare parts list, and wiring diagrams.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the type of products specified in this section, with minimum 5 years of documented experience.
- B. Kitchen Range Hood Exhaust Fans: Comply with requirements of NFPA 96.
- C. Products Requiring Electrical Connection: Listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.

1.06 FIELD CONDITIONS

- A. Permanent ventilators may be used for ventilation during construction only after ductwork is clean, filters are in place, bearings have been lubricated, and fan has been test run under observation.

1.07 EXTRA MATERIALS

- A. See Section 01 60 00 - Product Requirements, for additional provisions.
- B. Supply two sets of belts for each fan.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Greenheck: www.greenheck.com/#sle.
- B. Loren Cook Company: www.lorencook.com/#sle.
- C. PennBarry: www.pennbarry.com/#sle.
- D. American Coolair/ILG: www.coolair.com
- E. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 POWER VENTILATORS - GENERAL

- A. Static and Dynamically Balanced: AMCA 204 - Balance Quality and Vibration Levels for Fans.
- B. Performance Ratings: Determined in accordance with AMCA 210 and bearing the AMCA Certified Rating Seal.
- C. Sound Ratings: AMCA 301, tested to AMCA 300, and bearing AMCA Certified Sound Rating Seal.
- D. Fabrication: Conform to AMCA 99.
- E. Electrical Components: Listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.

2.03 CABINET AND CEILING EXHAUST FANS

- A. Performance: As Indicated on drawings.
 - 1. Motor: Refer to Section 23 05 13.
- B. Centrifugal Fan Unit: V-belt or direct driven with galvanized steel housing lined with acoustic insulation, resilient mounted motor, gravity backdraft damper in discharge.
- C. Disconnect Switch: Cord and plug in housing for thermal overload protected motor .
- D. Grille: Molded white plastic or Aluminum with baked white enamel finish.
- E. Sheaves: Cast iron or steel, dynamically balanced, bored to fit shafts and keyed; variable and adjustable pitch motor sheaves selected so required rpm is obtained with sheaves set at mid-position; fan shaft with self-aligning pre-lubricated ball bearings.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Secure roof or wall exhausters with aluminum lag screws to roof curb or structure.
- C. Extend ducts to roof or wall exhausters into roof curb or structure. Counterflash duct to roof or wall opening.
- D. Hung Cabinet Fans:
 - 1. Install fans with resilient mountings and flexible electrical leads. Refer to Section 23 05 48.
 - 2. Install flexible connections specified in Section 23 33 00 between fan and ductwork. Ensure metal bands of connectors are parallel with minimum one inch flex between ductwork and fan while running.
- E. Provide sheaves required for final air balance.
- F. Install backdraft dampers on inlet to roof and wall exhausters.

- G. Provide backdraft dampers on outlet from cabinet and ceiling exhausters fans and as indicated.

END OF SECTION

NOT FOR BIDDING

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 23 34 39
HIGH-VOLUME, LOW-SPEED PROPELLER FANS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. High-volume, low-speed propeller fans.

1.02 RELATED REQUIREMENTS

- A. Section 23 05 13 - Motor Requirements for HVAC and Plumbing Equip.
- B. Section 23 05 48 - Vibration and Seismic Con. for Equipment.
- C. Section 26 27 17 - Equipment Wiring: Electrical characteristics and wiring connection.

1.03 REFERENCE STANDARDS

- A. UL 507 - Electric Fans.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements for submittal procedures.
- B. Product Data: Provide data on fans and accessories including fan curves with specified operating point clearly plotted, power, RPM, sound power levels at rated capacity, and electrical characteristics and connection requirements.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the type of products specified in this section, with minimum three years of documented experience.

1.06 FIELD CONDITIONS

- A. Fans may not be used for ventilation during construction.

1.07 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.

PART 2 PRODUCTS

2.01 GENERAL REQUIREMENTS

- A. UL Compliance: UL listed and labeled, designed, manufactured, and tested in accordance with UL 507.
- B. Electrical Components: Listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.

2.02 HIGH-VOLUME, LOW-SPEED PROPELLER FANS

- A. Manufacturers:
 - 1. Hunter Fan International; Titan: www.hunterfan.com/#sle.
 - 2. Delta T LLC, dba Big Ass Fans: www.bigassfans.com.
 - 3. Captive Aire: www.captiveaire.com.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Shafts and Bearings:
 - 1. Fan Shaft:
 - a. Ground and polished steel with anti-corrosive coating.
 - b. First critical speed at least 25 percent over maximum cataloged operating speed.
 - 2. Bearings:
 - a. Permanently sealed or pillow block type.
 - b. Minimum L10 life in excess of 100,000 hours (equivalent to L50 average life of 500,000 hours), at maximum cataloged operating speed.

- c. 100 percent factory tested.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Secure fan with stainless steel lag screws to structure.

END OF SECTION

NOT FOR BIDDING

SECTION 23 37 00
AIR OUTLETS AND INLETS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Diffusers.
 - 1. Perforated ceiling diffusers.
- B. Rectangular ceiling diffusers.
- C. Registers/grilles.
 - 1. Ceiling-mounted, exhaust and return register/grilles.
 - 2. Ceiling-mounted, supply register/grilles.
 - 3. Wall-mounted, supply register/grilles.
 - 4. Wall-mounted, exhaust and return register/grilles.
 - 5. Wall-mounted, grid core exhaust and return register/grilles.
- D. Louvers.
- E. Goosenecks.

1.02 RELATED REQUIREMENTS

- A. Section 09 90 00 - Paints and Coatings: Painting of ducts visible behind outlets and inlets.

1.03 REFERENCE STANDARDS

- A. AMCA 500-L - Laboratory Methods of Testing Louvers for Rating.
- B. ARI 890 - Standard for Air Diffusers and Air Diffuser Assemblies; Air-Conditioning and Refrigeration Institute.
- C. ASHRAE Std 70 - Method of Testing the Performance of Air Outlets and Inlets.
- D. SMACNA (DCS) - HVAC Duct Construction Standards Metal and Flexible.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements for submittal procedures.
- B. Product Data: Provide data for equipment required for this project. Review outlets and inlets as to size, finish, and type of mounting prior to submission. Submit schedule of outlets and inlets showing type, size, location, application, and noise level.
- C. Samples: Submit one of each required air outlet and inlet type.
- D. Project Record Documents: Record actual locations of air outlets and inlets.

1.05 QUALITY ASSURANCE

- A. Test and rate air outlet and inlet performance in accordance with ASHRAE Std 70.
- B. Test and rate louver performance in accordance with AMCA 500-L.

1.06 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the type of products specified in this section, with minimum five years of documented experience.

1.07 MOCK-UP

- A. Provide mock-up of typical exterior or exterior ceiling module with supply and return air outlets.
- B. Locate where directed.
- C. Mock-up may remain as part of the Work.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Carnes Company HVAC: www.carnes.com.
- B. Krueger: www.krueger-hvac.com/#sle.
- C. Price Industries: www.price-hvac.com/#sle.
- D. Titus: www.titus-hvac.com/#sle.
- E. Tuttle and Bailey: www.tuttleandbailey.com.
- F. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 RECTANGULAR CEILING DIFFUSERS

- A. Type: Square, stamped, multi-core diffuser to discharge air in 360 degree, one way, two way, three way or four way pattern as shown on drawings and with sectorizing baffles where indicated.
- B. Frame: Surface mount or inverted T-bar as indicated on drawings. In plaster ceilings, provide plaster frame and ceiling frame.
- C. Fabrication: Aluminum with baked enamel off-white finish.
- D. Accessories: Radial opposed blade damper and multi-louvered equalizing grid with damper adjustable from diffuser face.

2.03 PERFORATED FACE CEILING DIFFUSERS

- A. Type: Perforated face with fully adjustable pattern and removable face.
- B. Frame: Surface mount or Inverted T-bar as indicated on drawings. In plaster ceilings, provide plaster frame and ceiling frame.
- C. Fabrication: Steel with steel or aluminum frame and baked enamel off-white finish.
- D. Accessories: Radial opposed blade damper and multi-louvered equalizing grid with damper adjustable from diffuser face.

2.04 CEILING SUPPLY REGISTERS/GRILLES

- A. Type: Streamlined and individually adjustable curved blades to discharge air along face of grille, two-way deflection.
- B. Frame: 1 inch margin with countersunk screw mounting and gasket.
- C. Fabrication: Aluminum extrusions with factory off-white enamel or prime coat finish as indicated on drawings or selected by architect.
- D. Damper: Integral, gang-operated, opposed blade type with removable key operator, operable from face.

2.05 CEILING EXHAUST AND RETURN REGISTERS/GRILLES

- A. Type: Streamlined blades, 3/4 inch minimum depth, 3/4 inch maximum spacing, with blades set at 45 degrees, horizontal face.
- B. Frame: 1 inch margin with countersunk screw mounting.
- C. Fabrication: Aluminum extrusions, with factory off-white enamel, baked enamel, or prime coated finish as indicated on drawings or selected by architect.
- D. Damper: Integral, gang-operated, opposed blade type with removable key operator, operable from face where not individually connected to exhaust fans.
- E. Gymnasiums: Provide front pivoted or welded in place blades, securely fastened to be immobile.

2.06 CEILING GRID CORE EXHAUST AND RETURN REGISTERS/GRILLES

- A. Type: Fixed grilles of 1/2 x 1/2 x 1/2 inch louvers.
- B. Fabrication: Acrylic plastic with off-white finish.
- C. Frame: Channel lay-in frame for suspended grid ceilings.
- D. Damper: Integral, gang-operated, opposed blade type with removable key operator, operable from face.

2.07 WALL SUPPLY REGISTERS/GRILLES

- A. Type: Streamlined and individually adjustable blades, 3/4 inch minimum depth, 3/4 inch maximum spacing with spring or other device to set blades, horizontal face, double deflection.
- B. Frame: 1 inch margin with countersunk screw mounting and gasket.
- C. Fabrication: Aluminum extrusions, with factory off-white enamel, baked enamel, prime coat or clear lacquer finish as indicated on drawings or selected by architect.
- D. Damper: Integral, gang-operated opposed blade type with removable key operator, operable from face.
- E. Gymnasiums: Provide front pivoted or welded in place blades, securely fastened to be immobile.

2.08 WALL EXHAUST AND RETURN REGISTERS/GRILLES

- A. Type: Streamlined blades, 3/4 inch minimum depth, 3/4 inch maximum spacing, with spring or other device to set blades, horizontal face.
- B. Frame: 1 inch margin with countersunk screw mounting.
- C. Fabrication: Aluminum extrusions, with factory off-white enamel, baked enamel, prime coated or clear lacquer finish as indicated on drawings or selected by architect.
- D. Damper: Integral, gang-operated, opposed blade type with removable key operator, operable from face.
- E. Gymnasiums: Provide front pivoted or welded in place blades, securely fastened to be immobile.

2.09 WALL GRID CORE EXHAUST AND RETURN REGISTERS/GRILLES

- A. Type: Fixed grilles of 1/2 x 1/2 x 1/2 inch louvers.
- B. Fabrication: Aluminum with factory clear lacquer, off-white enamel or baked enamel finish as indicated on drawings or selected by architect.
- C. Frame: 1 inch margin with countersunk screw mounting.
- D. Damper: Integral, gang-operated, opposed blade type with removable key operator, operable from face.

2.10 LOUVERS

- A. Type: 4 inch or 6 inch deep as indicated on drawings with blades on 45 degree slope, heavy channel frame, 1/2 inch square mesh screen over exhaust and 1/2 inch square mesh screen over intake.
- B. Fabrication: 12 gage thick extruded aluminum, welded assembly, with factory prime coat, baked enamel, anodized or fluoropolymer spray finish as indicated on drawings or selected by architect.
- C. Mounting: Furnish with exterior angle flange, screw holes in jambs or masonry strap anchors for installation.

2.11 GOOSENECKS

- A. Fabricate in accordance with SMACNA HVAC Duct Construction Standards of minimum 18 gage galvanized steel.
- B. Mount on minimum 12 inch high curb base where size exceeds 9 x 9 inch.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Check location of outlets and inlets and make necessary adjustments in position to conform with architectural features, symmetry, and lighting arrangement.
- C. Install diffusers to ductwork with air tight connection.
- D. Provide balancing dampers on duct take-off to diffusers, and grilles and registers, despite whether dampers are specified as part of the diffuser, or grille and register assembly.
- E. Paint ductwork visible behind air outlets and inlets matte black. Refer to Section 09 90 00.

3.02 AIR OUTLET AND INLET SCHEDULE

- A. See Drawings

END OF SECTION

SECTION 23 74 13

PACKAGED OUTDOOR CENTRAL-STATION AIR-HANDLING UNITS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Packaged roof top unit.
- B. Unit controls.
- C. Remote panel.
- D. Mounting curb and base.
- E. Maintenance service.

1.02 RELATED REQUIREMENTS

- A. Section 07 62 00 - Sheet Metal Flashing and Trim.
- B. Section 23 05 13 - Common motor requirements for HVAC Equipment.
- C. Section 23 05 48 - Vibration and Seismic Con. for Equipment.
- D. Section 23 40 00 - HVAC Air Cleaning Devices.
- E. Section 23 09 13 - Instrumentation and Control Devices for HVAC: Control components, time clocks.
- F. Section 23 09 13 - Instrumentation and Control Devices for HVAC: Installation of thermostats and other controls components.
- G. Section 26 27 17 - Equipment Wiring: Installation and wiring of thermostats and other controls components; wiring from unit terminal strip to remote panel.
- H. Section 26 27 17 - Equipment Wiring: Electrical characteristics and wiring connections.

1.03 REFERENCE STANDARDS

- A. AHRI 210/240 - Standard for Performance Rating of Unitary Air-Conditioning and Air-Source Heat Pump Equipment.
- B. AHRI 270 - Sound Performance Rating of Outdoor Unitary Equipment.
- C. NFPA 90A - Standard for the Installation of Air-Conditioning and Ventilating Systems.

1.04 SUBMITTALS

- A. See Section 01 33 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide capacity and dimensions of manufactured products and assemblies required for this project. Indicate electrical service with electrical characteristics and connection requirements, and duct connections.
- C. Shop Drawings: Indicate capacity and dimensions of manufactured products and assemblies required for this project. Indicate electrical service with electrical characteristics and connection requirements, and duct connections.
- D. Manufacturer's Instructions: Indicate assembly, support details, connection requirements, and include start-up instructions.
- E. Operation and Maintenance Data: Include manufacturer's descriptive literature, operating instructions, installation instructions, maintenance and repair data, and parts listing.
- F. Warranty: Submit manufacturer's warranty and ensure forms have been filled out in Owner's name and registered with manufacturer.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the type of products specified in this section, with minimum five years of documented experience.
- B. Products Requiring Electrical Connection: Listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Protect units from physical damage by storing off site until roof mounting curbs are in place, ready for immediate installation of units.

1.07 WARRANTY

- A. Provide a five year warranty to include coverage for refrigeration compressors and heat exchangers.

1.08 MAINTENANCE SERVICE

- A. Furnish service and maintenance of packaged roof top units for one year from Date of Substantial Completion.
- B. Provide maintenance service with a two month interval as maximum time period between calls. Provide 24-hour emergency service on breakdowns and malfunctions.
- C. Include maintenance items as outlined in manufacturer's operating and maintenance data, including minimum of six filter replacements, minimum of one fan belt replacement, and controls check-out, adjustments, and recalibration.
- D. Submit copy of service call work order or report, and include description of work performed.

1.09 EXTRA MATERIALS

- A. Provide two sets of filters.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Modine Corporation
- B. Trane Horizon
- C. Innovent Corporation
- D. McQuay

2.02 AIR CONDITIONING UNITS

- A. General: Roof or ground mounted packaged units having gas burner rated for natural gas and LP/propane as scheduled and electric refrigeration.
- B. Description: Self-contained, packaged, factory assembled and prewired, consisting of cabinet and frame, supply fan, return fan, heat exchanger and burner, , energy recovery wheel, factory-mounted controls, air filters, hot water heating coil, refrigerant cooling coil and variable-speed compressors and hot-gas reheat circuits, condenser coil and condenser fan as scheduled.
- C. Disconnect Switch: Factory mount disconnect switch on equipment under provisions of Section 26 27 17.

2.03 FABRICATION

- A. Cabinet: Galvanized steel with baked enamel finish, including access doors with piano hinges and locking handle. Structural members shall be minimum 18 gage, with access doors or panels of minimum 20 gage.
- B. Insulation: two inch thick minimum glass fiber or injected foam, double-walled unit construction.

PACKAGED OUTDOOR CENTRAL-STATION AIR-HANDLING UNITS

- C. Supply and Return and Exhaust Fan as scheduled: Backward inclined or airfoil type, resiliently mounted with rubber isolated hinge mounted high efficiency direct drive motor. Isolate complete fan assembly. Provide factory-mounted variable-frequency drives for all fan motors.
- D. Air Filters: Minimum efficiency reporting value (MERV) of at least 13.
- E. Vibration Isolation Curb: Unless otherwise noted on schedule, 18" nominal height, Kinetics Noise Control model ESR or approved equal.

2.04 BURNER

- A. Gas Burner: Forced draft type burner with adjustable combustion air supply, pressure regulator, gas valves, manual shut-off, intermittent spark or glow coil ignition, flame sensing device, and automatic 100 percent shut-off pilot. Provide turndown ratio as indicated in the schedule. Provide condensing burners as indicated in schedule.
- B. Gas Burner Safety Controls: Energize ignition, limit time for establishment of flame, prevent opening of gas valve until pilot flame is proven, stop gas flow on ignition failure, energize blower motor, and after air flow proven and slight delay, allow gas valve to open.
- C. High Limit Control: Temperature sensor with fixed stop at maximum permissible setting, de-energize burner on excessive bonnet temperature and energize burner when temperature drops to lower safe value.
- D. Supply Fan Control: Temperature sensor sensing bonnet temperatures and independent of burner controls, with provisions for continuous fan operation.
- E. Where condensing burners are supplied, provide internally-mounted acid neutralization tank and all associated condensate removal piping.

2.05 EVAPORATOR OR INDOOR COILS

- A. Provide copper tube aluminum fin coil assembly with galvanized drain pan and connection for cooling coils.
- B. Provide thermostatic expansion valves for units of 6 tons capacity and less, and thermostatic expansion valves and alternate row circuiting for units 7.5 tons cooling capacity and larger.

2.06 COMPRESSOR

- A. Provide hermetic compressors, 3600 rpm maximum, resiliently mounted with positive lubrication, crankcase heater, high and low pressure safety controls, motor overload protection, suction and discharge service valves and gage ports, and filter drier.
- B. Five minute timed off circuit to delay compressor start.
- C. Outdoor thermostat to energize compressor above 35 degrees F ambient.
- D. Provide step capacity control by variable-speed scroll technology and/or adjusting variable-speed compressors.
- E. Provide hot-gas reheat coil for humidity control.

2.07 CONDENSER OR OUTDOOR COIL

- A. Provide copper tube aluminum or copper fin coil assembly with subcooling rows and coil guard.
- B. Provide direct drive propeller fans, resiliently mounted with fan guard, motor overload protection, wired to operate with compressor. Provide high efficiency fan motors.
- C. Provide refrigerant pressure switches to cycle condenser fans.

2.08 MIXED AIR CASING

- A. Dampers: Provide outside, return, and relief dampers with damper operator and control package to automatically vary outside air quantity. Outside air damper to fall to closed position.

- B. Gaskets: Provide tight fitting dampers with edge gaskets.
- C. Damper Operator, Units 7.5 Ton Cooling Capacity and Larger: 24 volt with gear train sealed in oil with spring return on.
- D. Outdoor airflow monitoring station: Provided at intake of the unit.
- E. Mixed Air Controls: Maintain selected supply air temperature and return dampers to minimum position on call for heating and above 70 degrees (F) ambient, or when ambient air enthalpy exceeds return air enthalpy.

2.09 OPERATING CONTROLS

- A. Provide factory controller and all necessary sensors and components for operation of refrigerant system, fan VFDs based on static-pressure feedback, energy recovery wheel, humidity control function, and economizer function. The humidity control (dehumidification sequence) shall be capable of being enabled when the unit is in both heating and cooling modes. The humidistat setpoint shall govern control of this sequence.
- B. Provide BACnet interface on unit for connection of operating controls for BAS control. Control shall allow for modulating heating via the gas-fired burner and modulating stages cooling, fan, and damper control. See section 23 09 93 for required data to be relayed to the BAS for monitoring and control.
- C. Provide remote mounted fan control switch for smoke-purge for each unit (on-auto) to activate only the exhaust fan at each unit, keep the outdoor air damper closed, and de-energize the energy wheel.
- D. See Specification Section 230993 - Sequence Of Operations, paragraphs 3.08 and 3.11 for required operating capabilities of the units.

2.10 HEAT RECOVERY

- A. The heat recovery module shall be provided as shown on the drawing and shall have a factory mounted and tested energy recovery wheel. The energy recovery wheel shall be mounted in a rigid frame containing the wheel drive motor, drive belt, wheel seats and bearings.
- B. The energy recovery cassette shall be rated in accordance with ARI Standard 1060 and shall bear the ARI certification symbol.
- C. The energy recovery cassette shall contain a total energy heat wheel constructed of a light weight polymer material with permanently bonded desiccant coating. The energy recovery wheel media shall be capable of removal from the cassette and be cleanable using hot water or light detergent without degrading the latent efficiency.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that roof is ready to receive work and opening dimensions are as indicated on shop drawings or illustrated by the manufacturer.
- B. Verify that proper power supply is available.

3.02 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Install in accordance with NFPA 90A.
- C. Mount units on factory built roof mounting curb providing watertight enclosure to protect ductwork and utility services. Install roof mounting curb level.
- D. Locate remote panels where identified in field coordination meeting.
- E. Tie unit into BAS as specified.
- F. Pipe condensate to nearest roof drain.

PACKAGED OUTDOOR CENTRAL-STATION AIR-HANDLING UNITS

1. Where condensate is provided for a condensing burner applicaiton, provide heat tracing powered from the same power source as the convenience outlet associated with the RTU.

3.03 SYSTEM STARTUP

- A. Prepare and start equipment. Adjust for proper operation.

3.04 CLOSEOUT ACTIVITIES

- A. Demonstrate operation to Owner's maintenance personnel.

3.05 MAINTENANCE

- A. Provide service and maintenance of packaged roof top units for one year year from Date of Substantial Completion.
- B. Provide routine maintenance service with a three month interval as maximum time period between calls.
- C. Include maintenance items as outlined in manufacturer's operating and maintenance data, including minimum of six filter replacements, minimum of one fan belt replacement, and controls check-out, adjustments, and recalibration.
- D. After each service call, submit copy of service call work order or report that includes description of work performed.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 23 81 27
SMALL SPLIT-SYSTEM HEATING AND COOLING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Air cooled condensing units.
- B. Indoor ductless fan & coil units.
- C. Controls.

1.02 RELATED REQUIREMENTS

- A. Section 03 30 00 - Cast-in-Place Concrete: Mounting pad for outdoor unit.
- B. Section 22 10 05 - Plumbing Piping: Indoor coil condensate drain.
- C. Section 23 09 13 - Instrumentation and Control Devices for HVAC: Thermostats, humidistats, time clocks.
- D. Section 23 09 23 - Direct Digital Controls Systems for HVAC.
- E. Section 23 09 93 - Sequence of Operations for HVAC.
- F. Section 26 27 17 - Equipment Wiring: Electrical characteristics and wiring connections and installation and wiring of thermostats and other controls components.

1.03 REFERENCE STANDARDS

- A. AHRI 270 - Sound Performance Rating of Outdoor Unitary Equipment.
- B. AHRI 520 - Performance Rating of Positive Displacement Condensing Units.
- C. AHRI 610 (I-P) - Performance Rating Of Central System Humidifiers for Residential Applications.
- D. ASHRAE Std 15 - Safety Standard for Refrigeration Systems.
- E. ASHRAE Std 23.1 - Methods of Testing for Rating Positive Displacement Refrigerant Compressors and Condensing Units.
- F. ASHRAE Std 52.1 - Gravimetric and Dust-Spot Procedures for Testing Air-Cleaning Devices Used in General Ventilation for Removing Particulate Matter; American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc.
- G. ASHRAE Std 90.1 I-P - Energy Standard for Buildings Except Low-Rise Residential Buildings.
- H. ASHRAE Std 90.2 - Energy-Efficient Design of New Low-Rise Residential Buildings.
- I. ASHRAE Std 103 - Methods of Testing for Annual Fuel Utilization Efficiency of Residential Central Furnaces and Boilers.
- J. NEMA MG 1 - Motors and Generators.
- K. NFPA 31 - Standard for the Installation of Oil Burning Equipment.
- L. NFPA 90A - Standard for the Installation of Air-Conditioning and Ventilating Systems.
- M. NFPA 90B - Standard for the Installation of Warm Air Heating and Air-Conditioning Systems.
- N. NFPA 211 - Guide for Smoke and Heat Venting.
- O. UL 207 - Standard for Refrigerant-Containing Components and Accessories, Nonelectrical.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide rated capacities, weights, accessories, electrical nameplate data, and wiring diagrams.

- C. Shop Drawings: Indicate assembly, required clearances, and location and size of field connections.
- D. Design Data: Indicate refrigerant pipe sizing.
- E. Manufacturer's Instructions: Indicate rigging, assembly, and installation instructions.
- F. Project Record Documents: Record actual locations of components and connections.
- G. Operation and Maintenance Data: Include manufacturer's descriptive literature, operating instructions, installation instructions, maintenance and repair data, and parts listing.
- H. Warranty: Submit manufacturers warranty and ensure forms have been filled out in Owner's name and registered with manufacturer.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the type of products specified in this section, with minimum 10 years of documented experience.
- B. Installer Qualifications: Company specializing in performing the work of this section with minimum 5 years of documented experience and approved by manufacturer.

1.06 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.
- B. Provide five year manufacturers warranty for heat exchangers, condensing units, and compressors.
- C. Provide five year manufacturers warranty for electronic air cleaners.

1.07 EXTRA MATERIALS

- A. See Section 01 60 00 - Project Requirements, for additional provisions.
- B. Provide two filters for each indoor unit.
- C. Provide two pilot thermocouples.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Sanyo:
- B. Mitsubishi:
- C. LG:
- D. Daikin.
- E. Samsung
- F. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 SYSTEM DESIGN

- A. Split-System Heating and Cooling Units: Self-contained, packaged, matched factory-engineered and assembled, pre-wired indoor and outdoor units; UL listed.
 - 1. Heating and Cooling: Air-source electric heat pump located in outdoor unit with evaporator coil.
 - 2. Heating: Natural gas fired; As scheduled.
 - 3. Cooling: Outdoor electric condensing unit with evaporator coil in central ducted indoor unit or coils in multiple .
 - 4. Provide refrigerant lines internal to units and between indoor and outdoor units, factory cleaned, dried, pressurized and sealed, with insulated suction line.
- B. Performance Requirements: See Drawings for additional requirements.

1. Efficiency: Energy Efficiency Rating (EER)/Coefficient of Performance (COP) not less than requirements of ASHRAE Std 90.1; seasonal efficiency to ASHRAE Std 103.

2.03 INDOOR UNITS FOR DUCTED SYSTEMS

- A. Indoor Units: Self-contained, packaged, factory assembled, pre-wired unit consisting of cabinet, supply fan, heating and cooling element(s), controls, and accessories; wired for single power connection with control transformer.
 1. Air Flow Configuration: Counterflow, with additional steel base; counterflow or horizontal as scheduled.
 2. Cabinet: Steel with baked enamel finish, easily removed and secured access doors with safety interlock switches, glass fiber insulation with reflective liner.
- B. Supply Fan: Centrifugal type rubber mounted with direct or belt drive with adjustable variable pitch motor pulley.
 1. Motor: NEMA MG 1; 1750 rpm single speed or multiple speed as scheduled permanently lubricated, hinge mounted.
 2. Motor Electrical Characteristics:
- C. Air Filters: 1 inch thick glass fiber, disposable type arranged for easy replacement.
- D. Evaporator Coils: Copper tube aluminum fin assembly, galvanized or polymer drain pan sloped in all directions to drain, drain connection, refrigerant piping connections, restricted distributor or thermostatic expansion valve.
 1. Construction and Ratings: In accordance with AHRI 210/240 and UL 207.
 2. Manufacturers: System manufacturer.

2.04 INDOOR UNITS FOR DUCTLESS SYSTEMS

- A. Indoor Units: Self-contained, packaged, factory assembled, pre-wired unit consisting of cabinet, supply fan, evaporator coil, and controls; wired for single power connection with control transformer.
- B. Evaporator Coils: Copper tube aluminum fin assembly, galvanized or polymer drain pan sloped in all directions to drain, drain connection, refrigerant piping connections, restricted distributor or thermostatic expansion valve.
 1. Construction and Ratings: In accordance with AHRI 210/240 and UL 207.
 2. Manufacturers: System manufacturer.

2.05 OUTDOOR UNITS

- A. Outdoor Units: Self-contained, packaged, pre-wired unit consisting of cabinet, with compressor and condenser.
 1. Cabinet: Steel with baked enamel finish, easily removed and secured access doors with safety interlock switches, glass fiber insulation with reflective liner.
 2. Construction and Ratings: In accordance with AHRI 210/240 with testing in accordance with ASHRAE Std 23.1 and UL 207.
- B. Compressor: As scheduled ARI 520; hermetic, single or two speed 1800 and 3600 rpm, resiliently mounted integral with condenser, with positive lubrication, crankcase heater, high pressure control, motor overload protection, service valves and drier. Provide time delay control to prevent short cycling and rapid speed changes.
- C. Air Cooled Condenser: ARI 520; Aluminum fin and copper tube coil, with direct drive axial propeller fan resiliently mounted, galvanized fan guard.
- D. Accessories: Filter drier, high pressure switch (manual reset), low pressure switch (automatic reset), service valves and gage ports, thermometer well (in liquid line).
 1. Provide thermostatic expansion valves.
 2. Provide heat pump reversing valves.
- E. Operating Controls:

1. Control by room thermostat to maintain room temperature setting.
2. Low Ambient Kit: Provide refrigerant pressure switch to cycle condenser fan on when condenser refrigerant pressure is above 285 psig and off when pressure drops below 140 psig for operation to 0 degrees F.

F. Mounting Pad: Minimum square; minimum of two located under cabinet feet.

2.06 ACCESSORY EQUIPMENT

- A. Room Humidistat: Electric, adjustable, to energize humidifier when fan operating, to maintain setting.
- B. Room Thermostat: Wall-mounted, electric solid state microcomputer based room thermostat with remote sensor to maintain temperature setting; low-voltage; with following features:
 1. System selector switch (heat-off-cool) and fan control switch (auto-on).
 2. Automatic switching from heating to cooling.
 3. Preferential rate control to minimize overshoot and deviation from setpoint.
 4. Set-up for four separate temperatures per day.
 5. Instant override of setpoint for continuous or timed period from one hour to 31 days.
 6. Short cycle protection.
 7. Programming based on every day of the week.
 8. Selection features including degree F or degree C display, 12 or 24 hour clock, keyboard disable, remote sensor, fan on-auto.
 9. Battery replacement without program loss.
 10. Thermostat display:
 - a. Time of day.
 - b. Actual room temperature.
 - c. Programmed temperature.
 - d. Programmed time.
 - e. Duration of timed override.
 - f. Day of week.
 - g. System mode indication: heating, cooling, fan auto, off, and on, auto or on, off.
 11. Manufacturers:
 - a. Matching unit manufacturer or provided by Building Automation System vendor..

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that substrates are ready for installation of units and openings are as indicated on shop drawings.
- B. Verify that proper power supply is available and in correct location.
- C. Verify that proper fuel supply is available for connection.
- D. Verify that water supply is available for humidifier.

3.02 INSTALLATION

- A. Install in accordance with manufacturer's instructions and requirements of local authorities having jurisdiction.
- B. Install in accordance with NFPA 90A and NFPA 90B.
- C. Provide vent connections in accordance with NFPA 211.
- D. Install refrigeration systems in accordance with ASHRAE Std 15.
- E. Mount counterflow furnaces installed on combustible floors on additive base.

END OF SECTION

SECTION 26 05 13
MEDIUM-VOLTAGE CABLES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Medium voltage cable.
- B. Cable terminations.

1.02 RELATED REQUIREMENTS

- A. Section 33 71 19 - Electrical Underground Ducts and Manholes: Cable racks in manholes.
- B. Section 26 05 53 - Identification for Electrical Systems.

1.03 REFERENCE STANDARDS

- A. IEEE C2 - National Electrical Safety Code; Institute of Electrical and Electronic Engineers.
- B. IEEE 48 - IEEE Standard Test Procedures and Requirements for Alternating-Current Cable Terminations 2.5 kV through 765 kV; Institute of Electrical and Electronic Engineers.
- C. NEMA WC 70 - Non-Shielded Power Cable 2000 V or Less for the Distribution of Electrical Energy; National Electrical Manufacturers Association.
- D. NFPA 70 - National Electrical Code; National Fire Protection Association.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide for cable, terminations, and accessories.
- C. Manufacturer's Instructions: Indicate application conditions and limitations of use stipulated by product testing agency specified under Regulatory Requirements. Include instructions for storage, handling, protection, examination, preparation, and installation of product.
- D. Project Record Documents: Record actual sizes and locations of cables.
- E. Certificate of Compliance: Indicate approval of installation by authority having jurisdiction.
- F. Maintenance Data: Include instructions for testing and cleaning cable and accessories.

1.05 QUALITY ASSURANCE

- A. Comply with NFPA 70.
- B. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience and with service facilities within 100 miles of Project.
- C. Installer Qualifications: Authorized installer of specified manufacturer with service facilities within 100 miles of Project.
- D. Products: Listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Cerro Wire Inc: www.cerrowire.com.
- B. The Okonite Company: www.iewc.com.
- C. Southwire Company: www.southwire.com.
- D. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 CABLE

- A. Medium Voltage Cable: NEMA WC 70 ethylene propylene insulated cable.
 - 1. Voltage: 15 kV, grounded,
 - 2. Conductor: Copper, compact round, stranded, with foil conductor shield.
 - 3. Construction: Single conductor with metal wire insulation shielding.
 - 4. Insulation Jacket: Meets or exceeds electrical and physical requirements of ICEAS 93-639/NEMA WC74 & S-97-682 and UL 1072 for polyvinyl chloride jackets. UL listed as Type MV-105 and sunlight resistant in accordance with UL 1072.
 - 5. Product: 15 KV Shielded power cable with EPR insulation, Type MV90/ MV 105 suitable for use in conduit and underground duct bank as manufactured by Okoguard- Okoseal or equal.
 - 6. Substitutions: See Section 01 60 00 - Product Requirements.

2.03 ACCESSORIES

- A. Modular Cable Terminations: IEEE 48, Class 1, molded-rubber cable termination in kit form with stress cone, ground clamp, non-tracking rubber skirts, load break connector, rubber cap, and aerial lug.
 - 1. Product: Cooper Industries
 - 2. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Tape Terminations: IEEE 48; Class 1, tape termination kit with semi- conductive tape, stress control tape, splicing tape, vinyl plastic tape, stress cone, mechanical ground straps, and cable preparation kit.
 - 1. Product: Cooper Industries
 - 2. Substitutions: See Section 01 60 00 - Product Requirements.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that conduit, duct, trench, or manholes are ready to receive cable.
- B. Verify routing and termination locations of cable bank prior to rough-in.
- C. Cable routing is shown in approximate locations unless dimensioned. Route as required to complete wiring system.

3.02 PREPARATION

- A. Use swab to clean conduits before pulling cables.

3.03 INSTALLATION

- A. Avoid abrasion and other damage to cables during installation.
- B. Use suitable lubricants and pulling equipment.
- C. Sustain cable pulling tensions and bending radii below recommended limits.
- D. Ground cable shield at each termination and splice.

3.04 FIELD QUALITY CONTROL

- A. Perform field inspection in accordance with Section 01 40 00.
- B. Inspect exposed cable sections for physical damage.
- C. Inspect cable for proper connections as indicated.
- D. Inspect shield grounding, cable supports, and terminations for proper installation.

3.05 PROTECTION

- A. Protect installed cables from entrance of moisture.

END OF SECTION

SECTION 26 05 19

LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Single conductor building wire.
- B. Underground feeder and branch-circuit cable.
- C. Service entrance cable.
- D. Armored cable.
- E. Metal-clad cable.
- F. Wiring connectors.
- G. Electrical tape.
- H. Heat shrink tubing.
- I. Oxide inhibiting compound.
- J. Wire pulling lubricant.
- K. Cable ties.

1.02 RELATED REQUIREMENTS

- A. Section 07 84 00 - Firestopping.
- B. Section 26 05 01 - Minor Electrical Demolition: Disconnection, removal, and/or extension of existing electrical conductors and cables.
- C. Section 26 05 26 - Grounding and Bonding for Electrical Systems: Additional requirements for grounding conductors and grounding connectors.
- D. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.
- E. Section 28 31 00 - Fire Detection and Alarm: Fire alarm system conductors and cables.
- F. Section 31 23 16 - Excavation.
- G. Section 31 23 16.13 - Trenching: Excavating, bedding, and backfilling.
- H. Section 31 23 23 - Fill: Bedding and backfilling.

1.03 REFERENCE STANDARDS

- A. ASTM B3 - Standard Specification for Soft or Annealed Copper Wire.
- B. ASTM B8 - Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft.
- C. ASTM B33 - Standard Specification for Tin-Coated Soft or Annealed Copper Wire for Electrical Purposes.
- D. ASTM B787/B787M - Standard Specification for 19 Wire Combination Unilay-Stranded Copper Conductors for Subsequent Insulation.
- E. ASTM D3005 - Standard Specification for Low-Temperature Resistant Vinyl Chloride Plastic Pressure-Sensitive Electrical Insulating Tape.
- F. ASTM D4388 - Standard Specification for Nonmetallic Semi-Conducting and Electrically Insulating Rubber Tapes.
- G. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- H. NECA 120 - Standard for Installing Armored Cable (AC) and Metal-Clad Cable (MC).

- I. NECA 121 - Standard for Installing Nonmetallic-Sheathed Cable (Type NM-B) and Underground Feeder and Branch-Circuit Cable (Type UF).
- J. NEMA WC 70 - Nonshielded Power Cable 2000 V or Less for the Distribution of Electrical Energy.
- K. NETA ATS - Acceptance Testing Specifications for Electrical Power Equipment and Systems.
- L. NFPA 70 - National Electrical Code.
- M. UL 4 - Armored Cable.
- N. UL 44 - Thermoset-Insulated Wires and Cables.
- O. UL 83 - Thermoplastic-Insulated Wires and Cables.
- P. UL 486A-486B - Wire Connectors.
- Q. UL 486C - Splicing Wire Connectors.
- R. UL 486D - Sealed Wire Connector Systems.
- S. UL 493 - Thermoplastic-Insulated Underground Feeder and Branch-Circuit Cables.
- T. UL 510 - Polyvinyl Chloride, Polyethylene, and Rubber Insulating Tape.
- U. UL 1569 - Metal-Clad Cables.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate sizes of raceways, boxes, and equipment enclosures installed under other sections with the actual conductors to be installed, including adjustments for conductor sizes increased for voltage drop.
 - 2. Coordinate with electrical equipment installed under other sections to provide terminations suitable for use with the conductors to be installed.
 - 3. Notify Architect of any conflicts with or deviations from the contract documents. Obtain direction before proceeding with work.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for conductors and cables, including detailed information on materials, construction, ratings, listings, and available sizes, configurations, and stranding.
- C. Sustainable Design Documentation: Submit manufacturer's product data on conductor and cable showing compliance with specified lead content requirements.
- D. Design Data: Indicate voltage drop and ampacity calculations for aluminum conductors substituted for copper conductors. Include proposed modifications to raceways, boxes, wiring gutters, enclosures, etc. to accommodate substituted conductors.
- E. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.
- F. Project Record Documents: Record actual installed circuiting arrangements. Record actual routing for underground circuits.

1.06 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.

LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES

- C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
- D. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Receive, inspect, handle, and store conductors and cables in accordance with manufacturer's instructions.

1.08 FIELD CONDITIONS

- A. Do not install or otherwise handle thermoplastic-insulated conductors at temperatures lower than 14 degrees F, unless otherwise permitted by manufacturer's instructions. When installation below this temperature is unavoidable, notify Architect and obtain direction before proceeding with work.

PART 2 PRODUCTS

2.01 CONDUCTOR AND CABLE APPLICATIONS

- A. Do not use conductors and cables for applications other than as permitted by NFPA 70 and product listing.
- B. Provide single conductor building wire installed in suitable raceway unless otherwise indicated, permitted, or required.

2.02 CONDUCTOR AND CABLE GENERAL REQUIREMENTS

- A. Provide products that comply with requirements of NFPA 70.
- B. Provide products listed, classified, and labeled as suitable for the purpose intended.
- C. Unless specifically indicated to be excluded, provide all required conduit, boxes, wiring, connectors, etc. as required for a complete operating system.
- D. Comply with NEMA WC 70.
- E. Thermoplastic-Insulated Conductors and Cables: Listed and labeled as complying with UL 83.
- F. Thermoset-Insulated Conductors and Cables: Listed and labeled as complying with UL 44.
- G. Conductors for Grounding and Bonding: Also comply with Section 26 05 26.
- H. Conductors and Cables Installed Exposed in Spaces Used for Environmental Air (only where specifically permitted): Plenum rated, listed and labeled as suitable for use in return air plenums.
- I. Conductor Material:
 - 1. Provide copper conductors only. Aluminum conductors are not acceptable for this project. Conductor sizes indicated are based on copper.
 - 2. Copper Conductors: Soft drawn annealed, 98 percent conductivity, uncoated copper conductors complying with ASTM B3, ASTM B8, or ASTM B787/B 787M unless otherwise indicated.
 - 3. Tinned Copper Conductors: Comply with ASTM B33.
- J. Minimum Conductor Size:
 - 1. Branch Circuits: 12 AWG.
 - a. Exceptions:
 - 1) 20 A, 120 V circuits longer than 75 feet: 10 AWG, for voltage drop.
 - 2) 20 A, 120 V circuits longer than 150 feet: 8 AWG, for voltage drop.
 - 3) 20 A, 277 V circuits longer than 150 feet: 10 AWG, for voltage drop.
 - 2. Control Circuits: 14 AWG.

- K. Where conductor size is not indicated, size to comply with NFPA 70 but not less than applicable minimum size requirements specified.
- L. Conductor Color Coding:
 - 1. Color code conductors as indicated unless otherwise required by the authority having jurisdiction. Maintain consistent color coding throughout project.
 - 2. Color Coding Method: Integrally colored insulation.
 - a. Conductors size 4 AWG and larger may have black insulation color coded using vinyl color coding electrical tape.
 - 3. Color Code:
 - a. 208Y/120 V, 3 Phase, 4 Wire System:
 - 1) Phase A: Black.
 - 2) Phase B: Red.
 - 3) Phase C: Blue.
 - 4) Neutral/Grounded: White.
 - b. Equipment Ground, All Systems: Green.
 - c. Isolated Ground, All Systems: Green with yellow stripe.
 - d. Travelers for 3-Way and 4-Way Switching: Pink.
 - e. For control circuits, comply with manufacturer's recommended color code.

2.03 SINGLE CONDUCTOR BUILDING WIRE

- A. Manufacturers:
 - 1. Copper Building Wire:
 - a. Cerro Wire LLC: www.cerrowire.com/#sle.
 - b. Southwire Company: www.southwire.com/#sle.
 - c. Houston Wire & Cable co.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: Single conductor insulated wire.
- C. Conductor Stranding:
 - 1. Feeders and Branch Circuits:
 - a. Size 10 AWG and Smaller: Solid.
 - b. Size 8 AWG and Larger: Stranded.
 - 2. Control Circuits: Stranded.
- D. Insulation Voltage Rating: 600 V.
- E. Insulation:
 - 1. Copper Building Wire: Type THHN/THWN or THHN/THWN-2, except as indicated below.
 - a. Size 4 AWG and Larger: Type XHHW-2.
 - b. Fixture Wiring Within Luminaires: Type TFFN/TFN for luminaires with labeled maximum temperature of 90 degrees C; Approved suitable type for luminaires with labeled maximum temperature greater than 90 degrees C.

2.04 UNDERGROUND FEEDER AND BRANCH-CIRCUIT CABLE

- A. Manufacturers:
 - 1. Cerro Wire LLC: www.cerrowire.com/#sle.
 - 2. Southwire Company: www.southwire.com/#sle.
 - 3. Houston Wire & Cable co..
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: NFPA 70, Type UF multiple-conductor cable listed and labeled as complying with UL 493, Type UF-B.
- C. Provide equipment grounding conductor unless otherwise indicated.

- D. Conductor Stranding:
 - 1. Size 10 AWG and Smaller: Solid.
 - 2. Size 8 AWG and Larger: Stranded.
- E. Insulation Voltage Rating: 600 V.

2.05 ARMORED CABLE

- A. Manufacturers:
 - 1. AFC Cable Systems Inc: www.afcweb.com/#sle.
 - 2. Encore Wire Corporation: www.encorewire.com/#sle.
 - 3. Southwire Company: www.southwire.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: NFPA 70, Type AC cable listed and labeled as complying with UL 4, and listed for use in classified firestop systems to be used.
- C. Conductor Stranding:
 - 1. Size 10 AWG and Smaller: Solid.
 - 2. Size 8 AWG and Larger: Stranded.
- D. Insulation Voltage Rating: 600 V.
- E. Insulation: Type THHN.
- F. Grounding: Combination of interlocking armor and integral bonding wire.
 - 1. Provide additional full-size integral insulated equipment grounding conductor for redundant grounding, suitable for general purpose, non-essential electrical systems in non-hazardous patient care areas of health care facilities.
- G. Armor: Steel, interlocked tape.

2.06 METAL-CLAD CABLE

- A. Manufacturers:
 - 1. AFC Cable Systems Inc: www.afcweb.com/#sle.
 - 2. Encore Wire Corporation: www.encorewire.com/#sle.
 - 3. Southwire Company: www.southwire.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: NFPA 70, Type MC cable listed and labeled as complying with UL 1569, and listed for use in classified firestop systems to be used.
- C. Conductor Stranding:
 - 1. Size 10 AWG and Smaller: Solid.
 - 2. Size 8 AWG and Larger: Stranded.
- D. Insulation Voltage Rating: 600 V.
- E. Insulation: Type THHN, THHN/THWN, or THHN/THWN-2.
- F. Provide dedicated neutral conductor for each phase conductor where indicated or required.
- G. Grounding: Full-size integral equipment grounding conductor.
 - 1. Provide additional isolated/insulated grounding conductor where indicated or required.
- H. Armor: Steel, interlocked tape.
- I. Provide PVC jacket applied over cable armor where indicated or required for environment of installed location.

2.07 WIRING CONNECTORS

- A. Description: Wiring connectors appropriate for the application, suitable for use with the conductors to be connected, and listed as complying with UL 486A-486B or UL 486C as applicable.

- B. Connectors for Grounding and Bonding: Comply with Section 26 05 26.
- C. Wiring Connectors for Splices and Taps:
 - 1. Copper Conductors Sizes 10 and under: Use twist-on insulated spring connectors.
 - 2. Copper Conductors Sizes 8 and larger: Use mechanical connectors.
- D. Wiring Connectors for Terminations:
 - 1. Provide terminal lugs for connecting conductors to equipment furnished with terminations designed for terminal lugs.
 - 2. Provide compression adapters for connecting conductors to equipment furnished with mechanical lugs when only compression connectors are specified.
 - 3. Where over-sized conductors are larger than the equipment terminations can accommodate, provide connectors suitable for reducing to appropriate size, but not less than required for the rating of the overcurrent protective device.
 - 4. Conductors for Control Circuits: Use crimped terminals for all connections.
- E. Do not use insulation-piercing or insulation-displacement connectors designed for use with conductors without stripping insulation.
- F. Do not use push-in wire connectors as a substitute for twist-on insulated spring connectors.
- G. Twist-on Insulated Spring Connectors: Rated 600 V, 221 degrees F for standard applications and 302 degrees F for high temperature applications; pre-filled with sealant and listed as complying with UL 486D for damp and wet locations.
 - 1. Manufacturers:
 - a. 3M: www.3m.com/#sle.
 - b. Ideal Industries, Inc: www.idealindustries.com/#sle.
 - c. NSI Industries LLC: www.nsiindustries.com/#sle.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
- H. Mechanical Connectors: Provide bolted type or set-screw type.
 - 1. Manufacturers:
 - a. Burndy: www.burndy.com.
 - b. IlSCO: www.ilsco.com/#sle.
 - c. Thomas & Betts Corporation: www.tnb.com/#sle.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
- I. Crimped Terminals: Nylon-insulated, with insulation grip and terminal configuration suitable for connection to be made.
 - 1. Manufacturers:
 - a. Burndy: www.burndy.com.
 - b. IlSCO: www.ilsco.com/#sle.
 - c. Thomas & Betts Corporation: www.tnb.com/#sle.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.

2.08 WIRING ACCESSORIES

- A. Electrical Tape:
 - 1. Manufacturers:
 - a. 3M: www.3m.com/#sle.
 - b. Plymouth Rubber Europa: www.plymouthrubber.com/#sle.
 - c. Substitutions: See Section 01 60 00 - Product Requirements.
 - 2. Vinyl Color Coding Electrical Tape: Integrally colored to match color code indicated; listed as complying with UL 510; minimum thickness of 7 mil; resistant to abrasion, corrosion, and sunlight; suitable for continuous temperature environment up to 221 degrees F.
 - a. Product: 3 M.
 - b. Substitutions: See Section 01 60 00 - Product Requirements.

3. Vinyl Insulating Electrical Tape: Complying with ASTM D3005 and listed as complying with UL 510; minimum thickness of 7 mil; resistant to abrasion, corrosion, and sunlight; conformable for application down to 0 degrees F and suitable for continuous temperature environment up to 221 degrees F.
 - a. Product: 3 M.
 - b. Substitutions: See Section 01 60 00 - Product Requirements.
4. Rubber Splicing Electrical Tape: Ethylene Propylene Rubber (EPR) tape, complying with ASTM D4388; minimum thickness of 30 mil; suitable for continuous temperature environment up to 194 degrees F and short-term 266 degrees F overload service.
5. Electrical Filler Tape: Rubber-based insulating moldable putty, minimum thickness of 125 mil; suitable for continuous temperature environment up to 176 degrees F.
6. Varnished Cambric Electrical Tape: Cotton cambric fabric tape, with or without adhesive, oil-primed and coated with high-grade insulating varnish; minimum thickness of 7 mil; suitable for continuous temperature environment up to 221 degrees F.
7. Moisture Sealing Electrical Tape: Insulating mastic compound laminated to flexible, all-weather vinyl backing; minimum thickness of 90 mil.
- B. Heat Shrink Tubing: Heavy-wall, split-resistant, with factory-applied adhesive; rated 600 V; suitable for direct burial applications; listed as complying with UL 486D.
 1. Manufacturers:
 - a. 3M: www.3m.com/#sle.
 - b. Burndy: www.burndy.com.
 - c. Thomas & Betts Corporation: www.tnb.com/#sle.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
- C. Oxide Inhibiting Compound: Listed; suitable for use with the conductors or cables to be installed.
 1. Manufacturers:
 - a. Burndy: www.burndy.com.
 - b. Ideal Industries, Inc: www.idealindustries.com/#sle.
 - c. IlSCO: www.ilsco.com/#sle.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
- D. Wire Pulling Lubricant: Listed; suitable for use with the conductors or cables to be installed and suitable for use at the installation temperature.
 1. Manufacturers:
 - a. 3M: www.3m.com/#sle.
 - b. American Polywater Corporation: www.polywater.com/#sle.
 - c. Ideal Industries, Inc: www.idealindustries.com/#sle.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
- E. Cable Ties: Material and tensile strength rating suitable for application.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that interior of building has been protected from weather.
- B. Verify that work likely to damage wire and cable has been completed.
- C. Verify that raceways, boxes, and equipment enclosures are installed and are properly sized to accommodate conductors and cables in accordance with NFPA 70.
- D. Verify that field measurements are as shown on the drawings.
- E. Verify that conditions are satisfactory for installation prior to starting work.

3.02 PREPARATION

- A. Clean raceways thoroughly to remove foreign materials before installing conductors and cables.

3.03 INSTALLATION

- A. Circuiting Requirements:
 - 1. Unless dimensioned, circuit routing indicated is diagrammatic.
 - 2. When circuit destination is indicated and routing is not shown, determine exact routing required.
 - 3. Arrange circuiting to minimize splices.
 - 4. Include circuit lengths required to install connected devices within 10 ft of location shown.
 - 5. Maintain separation of Class 1, Class 2, and Class 3 remote-control, signaling, and power-limited circuits in accordance with NFPA 70.
 - 6. Maintain separation of wiring for emergency systems in accordance with NFPA 70.
 - 7. Circuiting Adjustments: Unless otherwise indicated, when branch circuits are shown as separate, combining them together in a single raceway is not permitted.
- B. Install products in accordance with manufacturer's instructions.
- C. Install conductors and cable in a neat and workmanlike manner in accordance with NECA 1.
- D. Install underground feeder and branch-circuit cable (Type UF-B) in accordance with NECA 121.
- E. Install armored cable (Type AC) in accordance with NECA 120.
- F. Install metal-clad cable (Type MC) in accordance with NECA 120.
- G. Installation in Raceway:
 - 1. Tape ends of conductors and cables to prevent infiltration of moisture and other contaminants.
 - 2. Pull all conductors and cables together into raceway at same time.
 - 3. Do not damage conductors and cables or exceed manufacturer's recommended maximum pulling tension and sidewall pressure.
 - 4. Use suitable wire pulling lubricant where necessary, except when lubricant is not recommended by the manufacturer.
- H. Paralleled Conductors: Install conductors of the same length and terminate in the same manner.
- I. Secure and support conductors and cables in accordance with NFPA 70 using suitable supports and methods approved by the authority having jurisdiction. Provide independent support from building structure. Do not provide support from raceways, piping, ductwork, or other systems.
- J. Terminate cables using suitable fittings.
 - 1. Armored Cable (Type AC):
 - a. Use listed fittings and anti-short, insulating bushings.
 - b. Cut cable armor only using specialized tools to prevent damaging conductors or insulation. Do not use hacksaw or wire cutters to cut armor.
 - 2. Metal-Clad Cable (Type MC):
 - a. Use listed fittings.
 - b. Cut cable armor only using specialized tools to prevent damaging conductors or insulation. Do not use hacksaw or wire cutters to cut armor.
- K. Install conductors with a minimum of 12 inches of slack at each outlet.
- L. Where conductors are installed in enclosures for future termination by others, provide a minimum of 5 feet of slack.
- M. Neatly train and bundle conductors inside boxes, wireways, panelboards and other equipment enclosures.
- N. Group or otherwise identify neutral/grounded conductors with associated ungrounded conductors inside enclosures in accordance with NFPA 70.
- O. Make wiring connections using specified wiring connectors.

LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES

1. Make splices and taps only in accessible boxes. Do not pull splices into raceways or make splices in conduit bodies or wiring gutters.
 2. Remove appropriate amount of conductor insulation for making connections without cutting, nicking or damaging conductors.
 3. Do not remove conductor strands to facilitate insertion into connector.
 4. Clean contact surfaces on conductors and connectors to suitable remove corrosion, oxides, and other contaminates. Do not use wire brush on plated connector surfaces.
 5. Mechanical Connectors: Secure connections according to manufacturer's recommended torque settings.
 6. Compression Connectors: Secure connections using manufacturer's recommended tools and dies.
- P. Insulate splices and taps that are made with uninsulated connectors using methods suitable for the application, with insulation and mechanical strength at least equivalent to unspliced conductors.
1. Dry Locations: Use insulating covers specifically designed for the connectors, electrical tape, or heat shrink tubing.
 - a. For taped connections, first apply adequate amount of rubber splicing electrical tape or electrical filler tape, followed by outer covering of vinyl insulating electrical tape.
 - b. For taped connections likely to require re-entering, including motor leads, first apply varnished cambric electrical tape, followed by adequate amount of rubber splicing electrical tape, followed by outer covering of vinyl insulating electrical tape.
 2. Damp Locations: Use insulating covers specifically designed for the connectors, electrical tape, or heat shrink tubing.
 - a. For connections with insulating covers, apply outer covering of moisture sealing electrical tape.
 - b. For taped connections, follow same procedure as for dry locations but apply outer covering of moisture sealing electrical tape.
 3. Wet Locations: Use heat shrink tubing.
- Q. Insulate ends of spare conductors using vinyl insulating electrical tape.
- R. Field-Applied Color Coding: Where vinyl color coding electrical tape is used in lieu of integrally colored insulation as permitted in Part 2 under "Color Coding", apply half overlapping turns of tape at each termination and at each location conductors are accessible.
- S. Identify conductors and cables in accordance with Section 26 05 53.
- T. Install firestopping to preserve fire resistance rating of partitions and other elements, using materials and methods specified in Section 07 84 00.
- U. Unless specifically indicated to be excluded, provide final connections to all equipment and devices, including those furnished by others, as required for a complete operating system.

3.04 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Inspect and test in accordance with NETA ATS, except Section 4.
- C. Perform inspections and tests listed in NETA ATS, Section 7.3.2. The insulation resistance test is required for all conductors. The resistance test for parallel conductors listed as optional is not required.
- D. Correct deficiencies and replace damaged or defective conductors and cables.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 26 05 26
GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Grounding and bonding requirements.
- B. Conductors for grounding and bonding.
- C. Connectors for grounding and bonding.
- D. Ground bars.
- E. Ground rod electrodes.
- F. Ground enhancement material.
- G. Ground access wells.
- H. Grounding and bonding components.
- I. Provide all components necessary to complete the grounding system(s) consisting of:
 - 1. Existing metal underground water pipe.
 - 2. Metal frame of the building.
 - 3. Existing metal underground gas piping system.
 - 4. Metal underground gas piping system.

1.02 RELATED REQUIREMENTS

- A. Section 26 05 19 - Low-Voltage Electrical Power Conductors and Cables: Additional requirements for conductors for grounding and bonding, including conductor color coding.
- B. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.
- C. Section 26 56 00 - Exterior Lighting: Additional grounding and bonding requirements for pole-mounted luminaires.

1.03 REFERENCE STANDARDS

- A. IEEE 81 - IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Grounding System.
- B. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- C. NEMA GR 1 - Grounding Rod Electrodes and Grounding Rod Electrode Couplings.
- D. NETA ATS - Acceptance Testing Specifications for Electrical Power Equipment and Systems.
- E. NETA STD ATS - Acceptance Testing Specifications for Electrical Power Distribution Equipment and Systems; International Electrical Testing Association.
- F. NFPA 70 - National Electrical Code.
- G. UL 467 - Grounding and Bonding Equipment.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Verify exact locations of underground metal water service pipe entrances to building.
 - 2. Coordinate the work with other trades to provide steel reinforcement complying with specified requirements for concrete-encased electrode.
 - 3. Notify Architect of any conflicts with or deviations from the contract documents. Obtain direction before proceeding with work.
- B. Sequencing:
 - 1. Do not install ground rod electrodes until final backfill and compaction is complete.

1.05 PERFORMANCE REQUIREMENTS

- A. Grounding System Resistance: 25 ohms.

1.06 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements for submittals procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for grounding and bonding system components.
- C. Shop Drawings:
- D. Product Data: Provide for grounding electrodes and connections.
- E. Test Reports: Indicate overall resistance to ground and resistance of each electrode.
- F. Manufacturer's Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.
- G. Project Record Documents: Record actual locations of grounding electrode system components and connections.
- H. Project Record Documents: Record actual locations of components and grounding electrodes.

1.07 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
- D. Installer Qualifications for Signal Reference Grids: Company with minimum five years documented experience with high frequency grounding systems.
- E. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

1.08 DELIVERY, STORAGE, AND HANDLING

- A. Receive, inspect, handle, and store products in accordance with manufacturer's instructions.

PART 2 PRODUCTS

2.01 GROUNDING AND BONDING REQUIREMENTS

- A. Do not use products for applications other than as permitted by NFPA 70 and product listing.
- B. Unless specifically indicated to be excluded, provide all required components, conductors, connectors, conduit, boxes, fittings, supports, accessories, etc. as necessary for a complete grounding and bonding system.
- C. Where conductor size is not indicated, size to comply with NFPA 70 but not less than applicable minimum size requirements specified.
- D. Grounding System Resistance:
 - 1. Achieve specified grounding system resistance under normally dry conditions unless otherwise approved by Architect. Precipitation within the previous 48 hours does not constitute normally dry conditions.
 - 2. Grounding Electrode System: Not greater than 5 ohms to ground, when tested according to IEEE 81 using "fall-of-potential" method.

3. Between Grounding Electrode System and Major Electrical Equipment Frames, System Neutral, and Derived Neutral Points: Not greater than 0.5 ohms, when tested using "point-to-point" methods.
- E. Grounding Electrode System:
 1. Provide connection to required and supplemental grounding electrodes indicated to form grounding electrode system.
 - a. Provide continuous grounding electrode conductors without splice or joint.
 - b. Install grounding electrode conductors in raceway where exposed to physical damage. Bond grounding electrode conductor to metallic raceways at each end with bonding jumper.
 2. Metal Underground Water Pipe(s):
 - a. Provide connection to underground metal domestic and fire protection (where present) water service pipe(s) that are in direct contact with earth for at least 10 feet at an accessible location not more than 5 feet from the point of entrance to the building.
 - b. Provide bonding jumper(s) around insulating joints/pipes as required to make pipe electrically continuous.
 - c. Provide bonding jumper around water meter of sufficient length to permit removal of meter without disconnecting jumper.
 3. Metal Building or Structure Frame:
 - a. Provide connection to metal building or structure frame effectively grounded in accordance with NFPA 70 at nearest accessible location.
 4. Ground Ring:
 - a. Provide a ground ring encircling the building or structure consisting of bare copper conductor not less than 2 AWG in direct contact with earth, installed at a depth of not less than 30 inches.
 - b. Where location is not indicated, locate ground ring conductor at least 24 inches outside building perimeter foundation.
 - c. Provide ground enhancement material around conductor where indicated.
 - d. Provide connection from ground ring conductor to:
 - 1) Perimeter columns of metal building frame.
 - 2) Ground rod electrodes located as indicated.
 5. Provide additional ground electrode(s) as required to achieve specified grounding electrode system resistance.
- F. Service-Supplied System Grounding:
 1. For each service disconnect, provide grounding electrode conductor to connect neutral (grounded) service conductor to grounding electrode system. Unless otherwise indicated, make connection at neutral (grounded) bus in service disconnect enclosure.
 2. For each service disconnect, provide main bonding jumper to connect neutral (grounded) bus to equipment ground bus where not factory-installed. Do not make any other connections between neutral (grounded) conductors and ground on load side of service disconnect.
- G. Bonding and Equipment Grounding:
 1. Provide bonding for equipment grounding conductors, equipment ground busses, metallic equipment enclosures, metallic raceways and boxes, device grounding terminals, and other normally non-current-carrying conductive materials enclosing electrical conductors/equipment or likely to become energized as indicated and in accordance with NFPA 70.
 2. Provide insulated equipment grounding conductor in each feeder and branch circuit raceway. Do not use raceways as sole equipment grounding conductor.

3. Where circuit conductor sizes are increased for voltage drop, increase size of equipment grounding conductor proportionally in accordance with NFPA 70.
 4. Unless otherwise indicated, connect wiring device grounding terminal to branch circuit equipment grounding conductor and to outlet box with bonding jumper.
 5. Terminate branch circuit equipment grounding conductors on solidly bonded equipment ground bus only. Do not terminate on neutral (grounded) or isolated/insulated ground bus.
 6. Provide bonding jumper across expansion or expansion/deflection fittings provided to accommodate conduit movement.
 7. Provide bonding for interior metal piping systems in accordance with NFPA 70. This includes, but is not limited to:
 - a. Metal water piping where not already effectively bonded to metal underground water pipe used as grounding electrode.
 - b. Metal gas piping.
 8. Provide bonding for interior metal air ducts.
 9. Provide bonding for metal building frame where not used as a grounding electrode.
- H. Isolated Ground System:
1. Where isolated ground receptacles or other isolated ground connections are indicated, provide separate isolated/insulated equipment grounding conductors.
 2. Connect isolated/insulated equipment grounding conductors only to separate isolated/insulated equipment ground busses.
 3. Connect the isolated/insulated equipment grounding conductors to the solidly bonded equipment ground bus only at the service disconnect or separately derived system disconnect. Do not make any other connections between isolated ground system and normal equipment ground system on the load side of this connection.

2.02 GROUNDING AND BONDING COMPONENTS

- A. General Requirements:
1. Provide products listed, classified, and labeled by Underwriter's Laboratories Inc. (UL) or testing firm acceptable to authority having jurisdiction as suitable for the purpose indicated.
 2. Provide products listed and labeled as complying with UL 467 where applicable.
- B. Conductors for Grounding and Bonding, in addition to requirements of Section 26 05 19:
1. Use insulated copper conductors unless otherwise indicated.
 - a. Exceptions:
 - 1) Use bare copper conductors where installed underground in direct contact with earth.
 - 2) Use bare copper conductors where directly encased in concrete (not in raceway).
- C. Connectors for Grounding and Bonding:
1. Description: Connectors appropriate for the application and suitable for the conductors and items to be connected; listed and labeled as complying with UL 467.
 2. Unless otherwise indicated, use exothermic welded connections for underground, concealed and other inaccessible connections.
 - a. Exceptions:
 - 1) Use mechanical connectors for connections to electrodes at ground access wells.
 3. Unless otherwise indicated, use exothermic welded connections for accessible connections.
 - a. Exceptions:
 - 1) Use exothermic welded connections for connections to metal building frame.
 4. Manufacturers - Mechanical and Compression Connectors:
 - a. Advanced Lightning Technology (ALT): www.altfab.com/#sle.

- b. Burndy: www.burndy.com.
 - c. Thomas & Betts Corporation: www.tnb.com/#sle.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
 - 5. Manufacturers - Exothermic Welded Connections:
 - a. Burndy: www.burndy.com.
 - b. Cadweld, a brand of Erico International Corporation: www.erico.com/#sle.
 - c. ThermOweld, a brand of Continental Industries, Inc: www.thermoweld.com/#sle.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
- D. Ground Bars:
 - 1. Description: Copper rectangular ground bars with mounting brackets and insulators.
 - 2. Size: As indicated.
 - 3. Holes for Connections: As indicated or as required for connections to be made.
 - 4. Manufacturers:
 - a. Advanced Lightning Technology (ALT): www.altfab.com/#sle.
 - b. Erico International Corporation: www.erico.com/#sle.
 - c. Harger Lightning & Grounding: www.harger.com/#sle.
 - d. ThermOweld, a brand of Continental Industries, Inc: www.thermoweld.com/#sle.
 - e. Substitutions: See Section 01 60 00 - Product Requirements.
- E. Ground Rod Electrodes:
 - 1. Comply with NEMA GR 1.
 - 2. Material: Copper-bonded (copper-clad) steel.
 - 3. Size: 3/4 inch diameter by 10 feet length, unless otherwise indicated.
 - 4. Manufacturers:
 - a. Advanced Lightning Technology (ALT): www.altfab.com/#sle.
 - b. Erico International Corporation: www.erico.com/#sle.
 - c. Galvan Industries, Inc: www.galvanelectrical.com/#sle.
 - d. Harger Lightning & Grounding: www.harger.com/#sle.
 - e. Substitutions: See Section 01 60 00 - Product Requirements.
- F. Ground Enhancement Material:
 - 1. Description: Factory-mixed conductive material designed for permanent and maintenance-free improvement of grounding effectiveness by lowering resistivity.
 - 2. Resistivity: Not more than 20 ohm-cm in final installed form.
 - 3. Manufacturers:
 - a. Erico International Corporation: www.erico.com/#sle.
 - b. Harger Lightning & Grounding: www.harger.com/#sle.
 - c. ThermOweld, a brand of Continental Industries, Inc: www.thermoweld.com.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
- G. Ground Access Wells:
 - 1. Description: Open bottom round or rectangular well with access cover for testing and inspection; suitable for the expected load at the installed location.
 - 2. Size: As required to provide adequate access for testing and inspection, but not less than minimum size requirements specified.
 - a. Round Wells: Not less than 8 inches in diameter.
 - 3. Depth: As required to extend below frost line to prevent frost upheaval, but not less than 10 inches.
 - 4. Cover: Factory-identified by permanent means with word "GROUND".
 - 5. Manufacturers:
 - a. Advanced Lightning Technology (ALT): www.altfab.com/#sle.
 - b. Erico International Corporation: www.erico.com/#sle.
 - c. Harger Lightning & Grounding: www.harger.com/#sle.

- d. ThermOweld, a brand of Continental Industries, Inc: www.thermoweld.com.
- e. Substitutions: See Section 01 60 00 - Product Requirements.

2.03 MANUFACTURERS

- A. Cooper Power Systems: www.cooperpower.com.
- B. Framatome Connectors International: www.fciconnect.com.
- C. Lightning Master Corporation: www.lightningmaster.com.
- D. Substitutions: See Section 01 60 00 - Product Requirements.

2.04 CONNECTORS AND ACCESSORIES

- A. Mechanical Connectors: Bronze.
 - 1. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Wire: Stranded copper.
- C. Grounding Electrode Conductor: Size to meet NFPA 70 requirements.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that work likely to damage grounding and bonding system components has been completed.
- B. Verify that field measurements are as shown on the drawings.
- C. Verify that conditions are satisfactory for installation prior to starting work.
- D. Verify existing conditions prior to beginning work.
- E. Verify that final backfill and compaction has been completed before driving rod electrodes.

3.02 INSTALLATION

- A. Install products in accordance with manufacturer's instructions.
- B. Install grounding and bonding system components in a neat and workmanlike manner in accordance with NECA 1.
- C. Ground Rod Electrodes: Unless otherwise indicated, install ground rod electrodes vertically. Where encountered rock prohibits vertical installation, install at 45 degree angle or bury horizontally in trench at least 30 inches (750 mm) deep in accordance with NFPA 70 or provide ground plates.
 - 1. Outdoor Installations: Unless otherwise indicated, install with top of rod 6 inches below finished grade.
- D. Make grounding and bonding connections using specified connectors.
 - 1. Remove appropriate amount of conductor insulation for making connections without cutting, nicking or damaging conductors. Do not remove conductor strands to facilitate insertion into connector.
 - 2. Remove nonconductive paint, enamel, or similar coating at threads, contact points, and contact surfaces.
 - 3. Exothermic Welds: Make connections using molds and weld material suitable for the items to be connected in accordance with manufacturer's recommendations.
 - 4. Mechanical Connectors: Secure connections according to manufacturer's recommended torque settings.
 - 5. Compression Connectors: Secure connections using manufacturer's recommended tools and dies.
- E. Identify grounding and bonding system components in accordance with Section 26 05 53.
- F. Provide bonding to meet requirements described in Quality Assurance.

- G. Equipment Grounding Conductor: Provide separate, insulated conductor within each feeder and branch circuit raceway. Terminate each end on suitable lug, bus, or bushing. Each of branch circuits and feeder circuits shall have dedicated equipment grounding conductor, sharing this conductor with other grounding conductors is not permitted.

3.03 FIELD QUALITY CONTROL

- A. Perform inspection in accordance with Section 01 40 00.
- B. Inspect and test in accordance with NETA STD ATS except Section 4.
- C. Perform inspections and tests listed in NETA STD ATS, Section 7.13.
- D. Perform ground electrode resistance tests under normally dry conditions. Precipitation within the previous 48 hours does not constitute normally dry conditions.
- E. Investigate and correct deficiencies where measured ground resistances do not comply with specified requirements.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 26 05 29

HANGERS AND SUPPORTS FOR ELECTRICAL SYSTEMS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Support and attachment components for equipment, conduit, cable, boxes, and other electrical work.

1.02 RELATED REQUIREMENTS

- A. Section 03 30 00 - Cast-in-Place Concrete: Concrete equipment pads.
- B. Section 05 50 00 - Metal Fabrications: Materials and requirements for fabricated metal supports.
- C. Section 26 05 34 - Conduit: Additional support and attachment requirements for conduits.
- D. Section 26 05 37 - Boxes: Additional support and attachment requirements for boxes.
- E. Section 26 51 00 - Interior Lighting: Additional support and attachment requirements for interior luminaires.
- F. Section 26 56 00 - Exterior Lighting: Additional support and attachment requirements for exterior luminaires.

1.03 REFERENCE STANDARDS

- A. ASTM A123/A123M - Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.
- B. ASTM A153/A153M - Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware.
- C. ASTM B633 - Standard Specification for Electrodeposited Coatings of Zinc on Iron and Steel.
- D. MFMA-4 - Metal Framing Standards Publication.
- E. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- F. NFPA 70 - National Electrical Code.
- G. UL 5B - Strut-Type Channel Raceways and Fittings.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate sizes and arrangement of supports and bases with the actual equipment and components to be installed.
 - 2. Coordinate the work with other trades to provide additional framing and materials required for installation.
 - 3. Coordinate compatibility of support and attachment components with mounting surfaces at the installed locations.
 - 4. Coordinate the arrangement of supports with ductwork, piping, equipment and other potential conflicts installed under other sections or by others.
 - 5. Notify Architect of any conflicts with or deviations from the contract documents. Obtain direction before proceeding with work.
- B. Sequencing:
 - 1. Do not install products on or provide attachment to concrete surfaces until concrete has fully cured in accordance with Section 03 30 00.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for metal channel (strut) framing systems, non-penetrating rooftop supports, and post-installed concrete and masonry anchors.
- C. Shop Drawings: Include details for fabricated hangers and supports where materials or methods other than those indicated are proposed for substitution.
- D. Installer's Qualifications: Include evidence of compliance with specified requirements.
- E. Product Data: Provide manufacturer's catalog data for fastening systems.
- F. Manufacturer's Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.

1.06 QUALITY ASSURANCE

- A. Comply with NFPA 70.
- B. Comply with applicable building code.
- C. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- D. Installer Qualifications for Powder-Actuated Fasteners (when specified): Certified by fastener system manufacturer with current operator's license.
- E. Installer Qualifications for Field-Welding: As specified in Section 05 50 00.
- F. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Receive, inspect, handle, and store products in accordance with manufacturer's instructions.

PART 2 PRODUCTS

2.01 SUPPORT AND ATTACHMENT COMPONENTS

- A. General Requirements:
 - 1. Provide all required hangers, supports, anchors, fasteners, fittings, accessories, and hardware as necessary for the complete installation of electrical work.
 - 2. Provide products listed, classified, and labeled by Underwriter's Laboratories Inc. (UL) or testing firm acceptable to authority having jurisdiction as suitable for the purpose indicated, where applicable.
 - 3. Where support and attachment component types and sizes are not indicated, select in accordance with manufacturer's application criteria as required for the load to be supported with a minimum safety factor of 1.5. Include consideration for vibration, equipment operation, and shock loads where applicable.
 - 4. Do not use products for applications other than as permitted by NFPA 70 and product listing.
 - 5. Steel Components: Use corrosion resistant materials suitable for the environment where installed.
 - a. Indoor Dry Locations: Use zinc-plated steel or approved equivalent unless otherwise indicated.
 - b. Outdoor and Damp or Wet Indoor Locations: Use galvanized steel, stainless steel, or approved equivalent unless otherwise indicated.
 - c. Zinc-Plated Steel: Electroplated in accordance with ASTM B633.
 - d. Galvanized Steel: Hot-dip galvanized after fabrication in accordance with ASTM A123/A123M or ASTM A153/A153M.

- B. Materials for Metal Fabricated Supports: Comply with Section 05 50 00.
- C. Conduit and Cable Supports: Straps, clamps, etc. suitable for the conduit or cable to be supported.
 - 1. Conduit Straps: One-hole or two-hole type; steel or malleable iron.
 - 2. Conduit Clamps: Bolted type unless otherwise indicated.
 - 3. Manufacturers:
 - a. Cooper Crouse-Hinds, a division of Eaton Corporation: www.cooperindustries.com/#sle.
 - b. Erico International Corporation: www.erico.com/#sle.
 - c. O-Z/Gedney, a brand of Emerson Industrial Automation: www.emersonindustrial.com/#sle.
 - d. Thomas & Betts Corporation: www.tnb.com/#sle.
 - e. Substitutions: See Section 01 60 00 - Product Requirements.
- D. Outlet Box Supports: Hangers, brackets, etc. suitable for the boxes to be supported.
 - 1. Manufacturers:
 - a. Cooper Crouse-Hinds, a division of Eaton Corporation: www.cooperindustries.com/#sle.
 - b. Erico International Corporation: www.erico.com/#sle.
 - c. O-Z/Gedney, a brand of Emerson Industrial Automation: www.emersonindustrial.com/#sle.
 - d. Thomas & Betts Corporation: www.tnb.com/#sle.
 - e. Substitutions: See Section 01 60 00 - Product Requirements.
- E. Metal Channel (Strut) Framing Systems: Factory-fabricated continuous-slot metal channel (strut) and associated fittings, accessories, and hardware required for field-assembly of supports.
 - 1. Comply with MFMA-4.
 - 2. Channel (Strut) Used as Raceway (only where specifically indicated): Listed and labeled as complying with UL 5B.
 - 3. Channel Material:
 - a. Indoor Dry Locations: Use painted steel, zinc-plated steel, or galvanized steel.
 - b. Outdoor and Damp or Wet Indoor Locations: Use galvanized steel.
 - 4. Minimum Channel Thickness: Steel sheet, 12 gage, 0.1046 inch.
 - 5. Minimum Channel Dimensions: 1-5/8 inch width by 13/16 inch height.
 - 6. Manufacturers:
 - a. Cooper B-Line, a division of Eaton Corporation: www.cooperindustries.com/#sle.
 - b. Thomas & Betts Corporation: www.tnb.com/#sle.
 - c. Unistrut, a brand of Atkore International Inc: www.unistrut.com/#sle.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
 - e. Source Limitations: Furnish channels (struts) and associated fittings, accessories, and hardware produced by a single manufacturer.
- F. Hanger Rods: Threaded zinc-plated steel unless otherwise indicated.
 - 1. Minimum Size, Unless Otherwise Indicated or Required:
 - a. Equipment Supports: 1/2 inch diameter.
 - b. Single Conduit up to 1 inch (27mm) trade size: 1/4 inch diameter.
 - c. Single Conduit larger than 1 inch (27mm) trade size: 3/8 inch diameter.
 - d. Trapeze Support for Multiple Conduits: 3/8 inch diameter.
 - e. Outlet Boxes: 1/4 inch diameter.
 - f. Luminaires: 1/4 inch diameter.
- G. Anchors and Fasteners:

1. Unless otherwise indicated and where not otherwise restricted, use the anchor and fastener types indicated for the specified applications.
2. Concrete: Use preset concrete inserts, expansion anchors, or screw anchors.
3. Solid or Grout-Filled Masonry: Use expansion anchors or screw anchors.
4. Hollow Masonry: Use toggle bolts.
5. Hollow Stud Walls: Use toggle bolts.
6. Steel: Use beam clamps, machine bolts, or welded threaded studs.
7. Sheet Metal: Use sheet metal screws.
8. Powder-actuated fasteners are not permitted.
9. Hammer-driven anchors and fasteners are not permitted.
10. Preset Concrete Inserts: Continuous metal channel (strut) and spot inserts specifically designed to be cast in concrete ceilings, walls, and floors.
 - a. Comply with MFMA-4.
 - b. Channel Material: Use galvanized steel.
 - c. Manufacturer: Same as manufacturer of metal channel (strut) framing system.

2.02 MANUFACTURERS

- A. Thomas & Betts Corporation: www.tnb.com.
- B. Threaded Rod Company: www.threadedrod.com.
- C. Substitutions: See Section 01 60 00 - Product Requirements.

2.03 MATERIALS

- A. Hangers, Supports, Anchors, and Fasteners - General: Corrosion-resistant materials of size and type adequate to carry the loads of equipment and conduit, including weight of wire in conduit.
- B. Supports: Fabricated of structural steel or formed steel members; galvanized.
- C. Anchors and Fasteners:
 1. Do not use powder-actuated anchors.
 2. Obtain permission from Architect before using powder-actuated anchors.
 3. Concrete Structural Elements: Use precast inserts.
 4. Steel Structural Elements: Use beam clamps.
 5. Concrete Surfaces: Use self-drilling anchors or expansion anchors.
 6. Hollow Masonry, Plaster, and Gypsum Board Partitions: Use hollow wall fasteners.
 7. Solid Masonry Walls: Use expansion anchors.
 8. Sheet Metal: Use sheet metal screws.
 9. Wood Elements: Use wood screws.
- D. Formed Steel Channel:
 1. Product: manufactured by [B-Line.
 2. Substitutions: See Section 01 60 00 - Product Requirements.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field measurements are as shown on the drawings.
- B. Verify that mounting surfaces are ready to receive support and attachment components.
- C. Verify that conditions are satisfactory for installation prior to starting work.

3.02 INSTALLATION

- A. Install products in accordance with manufacturer's instructions.
- B. Install support and attachment components in a neat and workmanlike manner in accordance with NECA 1.

- C. Provide independent support from building structure. Do not provide support from piping, ductwork, or other systems.
- D. Unless specifically indicated or approved by Architect, do not provide support from suspended ceiling support system or ceiling grid.
- E. Unless specifically indicated or approved by Architect, do not provide support from roof deck.
- F. Do not penetrate or otherwise notch or cut structural members without approval of Structural Engineer.
- G. Equipment Support and Attachment:
 - 1. Use metal fabricated supports or supports assembled from metal channel (strut) to support equipment as required.
 - 2. Use metal channel (strut) secured to studs to support equipment surface-mounted on hollow stud walls when wall strength is not sufficient to resist pull-out.
 - 3. Use metal channel (strut) to support surface-mounted equipment in wet or damp locations to provide space between equipment and mounting surface.
 - 4. Securely fasten floor-mounted equipment. Do not install equipment such that it relies on its own weight for support.
- H. Conduit Support and Attachment: Also comply with Section 26 05 34.
- I. Box Support and Attachment: Also comply with Section 26 05 37.
- J. Interior Luminaire Support and Attachment: Also comply with Section 26 51 00.
- K. Exterior Luminaire Support and Attachment: Also comply with Section 26 56 00.
- L. Preset Concrete Inserts: Use manufacturer provided closure strips to inhibit concrete seepage during concrete pour.
- M. Secure fasteners according to manufacturer's recommended torque settings.
- N. Remove temporary supports.
- O. Identify independent electrical component support wires above accessible ceilings (only where specifically indicated or permitted) with color distinguishable from ceiling support wires in accordance with NFPA 70.

3.03 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Inspect support and attachment components for damage and defects.
- C. Repair cuts and abrasions in galvanized finishes using zinc-rich paint recommended by manufacturer. Replace components that exhibit signs of corrosion.
- D. Correct deficiencies and replace damaged or defective support and attachment components.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 26 05 34
CONDUIT

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Galvanized steel rigid metal conduit (RMC).
- B. Flexible metal conduit (FMC).
- C. Liquidtight flexible metal conduit (LFMC).
- D. Electrical metallic tubing (EMT).
- E. Rigid polyvinyl chloride (PVC) conduit.
- F. Conduit fittings.
- G. Accessories.
- H. Conduit, fittings and conduit bodies.

1.02 RELATED REQUIREMENTS

- A. Section 03 30 00 - Cast-in-Place Concrete: Concrete encasement of conduits.
- B. Section 07 84 00 - Firestopping.
- C. Section 26 05 19 - Low-Voltage Electrical Power Conductors and Cables: Metal clad cable (Type MC), armored cable (Type AC), and manufactured wiring systems, including uses permitted.
- D. Section 26 05 26 - Grounding and Bonding for Electrical Systems.
- E. Section 26 05 29 - Hangers and Supports for Electrical Systems.
- F. Section 26 05 53 - Identification for Electrical Systems.
- G. Section 26 05 37 - Boxes.
- H. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.
- I. Section 31 23 16 - Excavation.
- J. Section 31 23 16.13 - Trenching: Excavating, bedding, and backfilling.

1.03 REFERENCE STANDARDS

- A. ANSI C80.1 - American National Standard for Electrical Rigid Steel Conduit (ERSC).
- B. ANSI C80.3 - American National Standard for Steel Electrical Metallic Tubing (EMT).
- C. ANSI C80.5 - American National Standard for Electrical Rigid Aluminum Conduit (ERAC).
- D. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- E. NECA 101 - Standard for Installing Steel Conduits (Rigid, IMC, EMT).
- F. NECA 111 - Standard for Installing Nonmetallic Raceways (RNC, ENT, LFNC).
- G. NEMA FB 1 - Fittings, Cast Metal Boxes, and Conduit Bodies for Conduit, Electrical Metallic Tubing, and Cable.
- H. NFPA 70 - National Electrical Code.
- I. UL 1 - Flexible Metal Conduit.
- J. UL 6 - Electrical Rigid Metal Conduit-Steel.
- K. UL 360 - Liquid-Tight Flexible Steel Conduit.
- L. UL 514B - Conduit, Tubing, and Cable Fittings.

- M. UL 651 - Schedule 40, 80, Type EB and A Rigid PVC Conduit and Fittings.
- N. UL 797 - Electrical Metallic Tubing-Steel.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate minimum sizes of conduits with the actual conductors to be installed, including adjustments for conductor sizes increased for voltage drop.
 - 2. Coordinate the arrangement of conduits with structural members, ductwork, piping, equipment and other potential conflicts installed under other sections or by others.
 - 3. Verify exact conduit termination locations required for boxes, enclosures, and equipment installed under other sections or by others.
 - 4. Coordinate the work with other trades to provide roof penetrations that preserve the integrity of the roofing system and do not void the roof warranty.
 - 5. Notify Architect of any conflicts with or deviations from the contract documents. Obtain direction before proceeding with work.
- B. Sequencing:
 - 1. Do not begin installation of conductors and cables until installation of conduit is complete between outlet, junction and splicing points.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements for submittals procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for conduits and fittings.
- C. Shop Drawings:
 - 1. Indicate proposed arrangement for conduits to be installed within structural concrete slabs, where permitted.
 - 2. Include proposed locations of roof penetrations and proposed methods for sealing.
- D. Project Record Documents: Record actual routing for conduits installed underground, conduits embedded within concrete slabs, and conduits 2 inch (53 mm) trade size and larger.
- E. Product Data: Provide for metallic conduit and flexible metal conduit.
- F. Samples of Materials Actually Delivered to Site:
 - 1. Two pieces each of conduit, 2 feet long.
- G. Project Record Documents: Accurately record actual routing of conduits larger than 2 inches.

1.06 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.
- D. Products: Listed and classified by Underwriters Laboratories Inc. as suitable for purpose specified and shown.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Receive, inspect, handle, and store conduit and fittings in accordance with manufacturer's instructions.
- B. Accept conduit on site. Inspect for damage.

- C. Protect conduit from corrosion and entrance of debris by storing above grade. Provide appropriate covering.
- D. Protect PVC conduit from sunlight.

PART 2 PRODUCTS

2.01 CONDUIT APPLICATIONS

- A. Do not use conduit and associated fittings for applications other than as permitted by NFPA 70 and product listing.
- B. Unless otherwise indicated and where not otherwise restricted, use the conduit types indicated for the specified applications. Where more than one listed application applies, comply with the most restrictive requirements. Where conduit type for a particular application is not specified, use galvanized steel rigid metal conduit.
- C. Underground:
 - 1. Under Slab on Grade: Use rigid PVC conduit.
 - 2. Exterior, Direct-Buried: Use rigid PVC conduit.
 - 3. Exterior, Embedded Within Concrete: Use rigid PVC conduit.
 - 4. Where rigid polyvinyl (PVC) conduit is provided, transition to galvanized steel rigid metal conduit where emerging from underground.
 - 5. Where rigid polyvinyl (PVC) conduit larger than 2 inch (53 mm) trade size is provided, use galvanized steel rigid metal conduit elbows for bends.
- D. Embedded Within Concrete:
- E. Concealed Within Masonry Walls: Use galvanized steel rigid metal conduit.
- F. Concealed Within Hollow Stud Walls: Use electrical metallic tubing (EMT).
- G. Concealed Above Accessible Ceilings: Use electrical metallic tubing (EMT).
- H. Interior, Damp or Wet Locations: Use galvanized steel rigid metal conduit.
- I. Exposed, Interior, Not Subject to Physical Damage: Use galvanized steel rigid metal conduit.
- J. Exposed, Interior, Subject to Physical Damage: Use galvanized steel rigid metal conduit.
 - 1. Locations subject to physical damage include, but are not limited to:
 - a. Where exposed below 8 feet, except within electrical and communication rooms or closets.
- K. Exposed, Exterior: Use galvanized steel rigid metal conduit.
- L. Concealed, Exterior, Not Embedded in Concrete or in Contact With Earth: Use galvanized steel rigid metal conduit.
- M. Connections to Luminaires Above Accessible Ceilings: Use flexible metal conduit.
 - 1. Maximum Length: 6 feet.
- N. Connections to Vibrating Equipment:
 - 1. Dry Locations: Use flexible metal conduit.
 - 2. Damp, Wet, or Corrosive Locations: Use liquidtight flexible metal conduit.
 - 3. Maximum Length: 6 feet unless otherwise indicated.
 - 4. Vibrating equipment includes, but is not limited to:
 - a. Transformers.
 - b. Motors.
 - c. HVAC equipment.
- O. Fished in Existing Walls, Where Necessary: Use flexible metal conduit.

2.02 CONDUIT REQUIREMENTS

- A. Provide all conduit, fittings, supports, and accessories required for a complete raceway system.

- B. Provide products listed, classified, and labeled by Underwriter's Laboratories Inc. (UL) or testing firm acceptable to authority having jurisdiction as suitable for the purpose indicated.
- C. Minimum Conduit Size, Unless Otherwise Indicated:
 - 1. Branch Circuits: 3/4 inch (21 mm) trade size.
 - 2. Branch Circuit Homeruns: 3/4 inch (21 mm) trade size.
 - 3. Control Circuits: 1/2 inch (16 mm) trade size.
 - 4. Flexible Connections to Luminaires: 1/2 inch (16 mm) trade size.
 - 5. Underground, Interior: 3/4 inch (21 mm) trade size.
 - 6. Underground, Exterior: 1 inch (27 mm) trade size.
- D. Where conduit size is not indicated, size to comply with NFPA 70 but not less than applicable minimum size requirements specified.

2.03 GALVANIZED STEEL RIGID METAL CONDUIT (RMC)

- A. Manufacturers:
 - 1. Allied Tube & Conduit: www.alliedeg.com/#sle.
 - 2. Republic Conduit: www.republic-conduit.com/#sle.
 - 3. Wheatland Tube Company: www.wheatland.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: NFPA 70, Type RMC galvanized steel rigid metal conduit complying with ANSI C80.1 and listed and labeled as complying with UL 6.
- C. Fittings:
 - 1. Manufacturers:
 - a. Bridgeport Fittings Inc: www.bptfittings.com/#sle.
 - b. O-Z/Gedney, a brand of Emerson Industrial Automation: www.emersonindustrial.com/#sle.
 - c. Thomas & Betts Corporation: www.tnb.com/#sle.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
 - 2. Non-Hazardous Locations: Use fittings complying with NEMA FB 1 and listed and labeled as complying with UL 514B.
 - 3. Material: Use steel or malleable iron.
 - 4. Connectors and Couplings: Use threaded type fittings only. Threadless set screw and compression (gland) type fittings are not permitted.

2.04 METAL CONDUIT

- A. Manufacturers:
 - 1. Allied Tube & Conduit: www.alliedtube.com.
 - 2. Beck Manufacturing, Inc: www.beckmfg.com.
 - 3. Wheatland Tube Company: www.wheatland.com.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Rigid Steel Conduit: ANSI C80.1.
- C. Fittings and Conduit Bodies: NEMA FB 1; material to match conduit.

2.05 FLEXIBLE METAL CONDUIT (FMC)

- A. Manufacturers:
 - 1. AFC Cable Systems, Inc: www.afcweb.com/#sle.
 - 2. Electri-Flex Company: www.electriflex.com/#sle.
 - 3. International Metal Hose: www.metalhose.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: NFPA 70, Type FMC standard wall steel flexible metal conduit listed and labeled as complying with UL 1, and listed for use in classified firestop systems to be used.

- C. Fittings:
 - 1. Manufacturers:
 - a. Bridgeport Fittings Inc: www.bptfittings.com/#sle.
 - b. O-Z/Gedney, a brand of Emerson Industrial Automation: www.emersonindustrial.com/#sle.
 - c. Thomas & Betts Corporation: www.tnb.com/#sle.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
 - 2. Description: Fittings complying with NEMA FB 1 and listed and labeled as complying with UL 514B.
 - 3. Material: Use steel or malleable iron.
- D. Description: Interlocked steel construction.
- E. Fittings: NEMA FB 1.

2.06 LIQUIDTIGHT FLEXIBLE METAL CONDUIT (LFMC)

- A. Manufacturers:
 - 1. AFC Cable Systems, Inc: www.afcweb.com/#sle.
 - 2. Electri-Flex Company: www.electriflex.com/#sle.
 - 3. International Metal Hose: www.metalhose.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: NFPA 70, Type LFMC polyvinyl chloride (PVC) jacketed steel flexible metal conduit listed and labeled as complying with UL 360.
- C. Fittings:
 - 1. Manufacturers:
 - a. Bridgeport Fittings Inc: www.bptfittings.com/#sle.
 - b. O-Z/Gedney, a brand of Emerson Industrial Automation: www.emersonindustrial.com/#sle.
 - c. Thomas & Betts Corporation: www.tnb.com/#sle.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
 - 2. Description: Fittings complying with NEMA FB 1 and listed and labeled as complying with UL 514B.
 - 3. Material: Use steel or malleable iron.

2.07 ELECTRICAL METALLIC TUBING (EMT)

- A. Manufacturers:
 - 1. Allied Tube & Conduit: www.alliedeg.com/#sle.
 - 2. Republic Conduit: www.republic-conduit.com/#sle.
 - 3. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: NFPA 70, Type EMT steel electrical metallic tubing complying with ANSI C80.3 and listed and labeled as complying with UL 797.
- C. Fittings:
 - 1. Manufacturers:
 - a. Bridgeport Fittings Inc: www.bptfittings.com/#sle.
 - b. O-Z/Gedney, a brand of Emerson Industrial Automation: www.emersonindustrial.com/#sle.
 - c. Thomas & Betts Corporation: www.tnb.com/#sle.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
 - 2. Description: Fittings complying with NEMA FB 1 and listed and labeled as complying with UL 514B.
 - 3. Material: Use steel or malleable iron.
 - 4. Connectors and Couplings: Use compression (gland) or set-screw type.

- a. Do not use indenter type connectors and couplings.
- 5. Damp or Wet Locations (where permitted): Use fittings listed for use in wet locations.
- 6. Embedded Within Concrete (where permitted): Use fittings listed as concrete-tight. Fittings that require taping to be concrete-tight are acceptable.

2.08 RIGID POLYVINYL CHLORIDE (PVC) CONDUIT

- A. Manufacturers:
 - 1. Cantex Inc: www.cantexinc.com/#sle.
 - 2. Carlon, a brand of Thomas & Betts Corporation: www.carlon.com/#sle.
 - 3. JM Eagle: www.jmeagle.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: NFPA 70, Type PVC rigid polyvinyl chloride conduit complying with NEMA TC 2 and listed and labeled as complying with UL 651; Schedule 40 unless otherwise indicated, Schedule 80 where subject to physical damage; rated for use with conductors rated 90 degrees C.
- C. Fittings:
 - 1. Manufacturer: Same as manufacturer of conduit to be connected.
 - 2. Description: Fittings complying with NEMA TC 3 and listed and labeled as complying with UL 651; material to match conduit.

2.09 ACCESSORIES

- A. Conduit Joint Compound: Corrosion-resistant, electrically conductive; suitable for use with the conduit to be installed.
- B. Solvent Cement for PVC Conduit and Fittings: As recommended by manufacturer of conduit and fittings to be installed.
- C. Pull Strings: Use nylon cord with average breaking strength of not less than 200 pound-force.
- D. Sealing Compound for Sealing Fittings: Listed for use with the particular fittings to be installed.
- E. Modular Seals for Conduit Penetrations: Rated for minimum of 40 psig; Suitable for the conduits to be installed.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field measurements are as shown on drawings.
- B. Verify that mounting surfaces are ready to receive conduits.
- C. Verify that conditions are satisfactory for installation prior to starting work.
- D. Verify routing and termination locations of conduit prior to rough-in.
- E. Conduit routing is shown on drawings in approximate locations unless dimensioned. Route as required to complete wiring system.

3.02 INSTALLATION

- A. Install products in accordance with manufacturer's instructions.
- B. Install conduit in a neat and workmanlike manner in accordance with NECA 1.
- C. Install galvanized steel rigid metal conduit (RMC) in accordance with NECA 101.
- D. Install rigid polyvinyl chloride (PVC) conduit in accordance with NECA 111.
- E. Conduit Routing:
 - 1. Unless dimensioned, conduit routing indicated is diagrammatic.
 - 2. When conduit destination is indicated and routing is not shown, determine exact routing required.

3. Conceal all conduits unless specifically indicated to be exposed.
 4. Conduits in the following areas may be exposed, unless otherwise indicated:
 - a. Electrical rooms.
 - b. Mechanical equipment rooms.
 - c. Within joists in areas with no ceiling.
 5. Arrange conduit to maintain adequate headroom, clearances, and access.
 6. Arrange conduit to provide no more than the equivalent of four 90 degree bends between pull points.
 7. Arrange conduit to provide no more than 150 feet between pull points.
 8. Arrange conduit to prevent moisture traps. Provide drain fittings at low points and at sealing fittings where moisture may collect.
 9. Maintain minimum clearance of 6 inches between conduits and piping for other systems.
 10. Maintain minimum clearance of 12 inches between conduits and hot surfaces. This includes, but is not limited to:
 - a. Heaters.
 - b. Hot water piping.
 - c. Flues.
 11. Group parallel conduits in the same area together on a common rack.
- F. Conduit Support:
1. Secure and support conduits in accordance with NFPA 70 and Section 26 05 29 using suitable supports and methods approved by the authority having jurisdiction.
 2. Provide independent support from building structure. Do not provide support from piping, ductwork, or other systems.
 3. Installation Above Suspended Ceilings: Do not provide support from ceiling support system. Do not provide support from ceiling grid or allow conduits to lay on ceiling tiles.
 4. Use conduit strap to support single surface-mounted conduit.
 - a. Use clamp back spacer with conduit strap for damp and wet locations to provide space between conduit and mounting surface.
 5. Use metal channel (strut) with accessory conduit clamps to support multiple parallel surface-mounted conduits.
 6. Use conduit clamp to support single conduit from beam clamp or threaded rod.
 7. Use trapeze hangers assembled from threaded rods and metal channel (strut) with accessory conduit clamps to support multiple parallel suspended conduits.
 8. Use of spring steel conduit clips for support of conduits is not permitted.
 9. Use of wire for support of conduits is not permitted.
 - a. For securing conduits to studs in hollow stud walls.
 - b. For suspending conduits supported by spring steel conduit clips (only where specifically indicated or permitted).
- G. Connections and Terminations:
1. Use approved zinc-rich paint or conduit joint compound on field-cut threads of galvanized steel conduits prior to making connections.
 2. Where two threaded conduits must be joined and neither can be rotated, use three-piece couplings or split couplings. Do not use running threads.
 3. Use suitable adapters where required to transition from one type of conduit to another.
 4. Provide drip loops for liquidtight flexible conduit connections to prevent drainage of liquid into connectors.
 5. Terminate threaded conduits in boxes and enclosures using threaded hubs or double lock nuts for dry locations and raintight hubs for wet locations.
 6. Provide insulating bushings or insulated throats at all conduit terminations to protect conductors.

7. Secure joints and connections to provide maximum mechanical strength and electrical continuity.
- H. Penetrations:
 1. Do not penetrate or otherwise notch or cut structural members, including footings and grade beams, without approval of Structural Engineer.
 2. Make penetrations perpendicular to surfaces unless otherwise indicated.
 3. Provide sleeves for penetrations as indicated or as required to facilitate installation. Set sleeves flush with exposed surfaces unless otherwise indicated or required.
 4. Conceal bends for conduit risers emerging above ground.
 5. Seal interior of conduits entering the building from underground at first accessible point to prevent entry of moisture and gases.
 6. Where conduits penetrate waterproof membrane, seal as required to maintain integrity of membrane.
 7. Make penetrations for roof-mounted equipment within associated equipment openings and curbs where possible to minimize roofing system penetrations. Where penetrations are necessary, seal as indicated or as required to preserve integrity of roofing system and maintain roof warranty. Include proposed locations of penetrations and methods for sealing with submittals.
 8. Install firestopping to preserve fire resistance rating of partitions and other elements, using materials and methods specified in Section 07 84 00.
- I. Underground Installation:
 1. Provide trenching and backfilling in accordance with Section 31 23 16.13.
 2. Minimum Cover, Unless Otherwise Indicated or Required:
 - a. Underground, Exterior: 24 inches.
 - b. Under Slab on Grade: 12 inches to bottom of slab.
 3. Provide underground warning tape in accordance with Section 26 05 53 along entire conduit length.
- J. Concrete Encasement: Where conduits not otherwise embedded within concrete are indicated to be concrete-encased, provide concrete in accordance with Section 03 30 00 with minimum concrete cover of 3 inches on all sides unless otherwise indicated.
- K. Hazardous (Classified) Locations: Where conduits cross boundaries of hazardous (classified) locations, provide sealing fittings located as indicated or in accordance with NFPA 70.
- L. Conduit Movement Provisions: Where conduits are subject to movement, provide expansion and expansion/deflection fittings to prevent damage to enclosed conductors or connected equipment. This includes, but is not limited to:
 1. Where conduits cross structural joints intended for expansion, contraction, or deflection.
 2. Where conduits are subject to earth movement by settlement or frost.
- M. Condensation Prevention: Where conduits cross barriers between areas of potential substantial temperature differential, provide sealing fitting or approved sealing compound at an accessible point near the penetration to prevent condensation. This includes, but is not limited to:
 1. Where conduits pass from outdoors into conditioned interior spaces.
 2. Where conduits pass from unconditioned interior spaces into conditioned interior spaces.
- N. Provide pull string in all empty conduits and in conduits where conductors and cables are to be installed by others. Leave minimum slack of 12 inches at each end.
- O. Provide grounding and bonding in accordance with Section 26 05 26.
- P. Identify conduits in accordance with Section 26 05 53.

3.03 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.

- B. Repair cuts and abrasions in galvanized finishes using zinc-rich paint recommended by manufacturer. Replace components that exhibit signs of corrosion.
- C. Correct deficiencies and replace damaged or defective conduits.

3.04 CLEANING

- A. Clean interior of conduits to remove moisture and foreign matter.

3.05 PROTECTION

- A. Immediately after installation of conduit, use suitable manufactured plugs to provide protection from entry of moisture and foreign material and do not remove until ready for installation of conductors.

3.06 INTERFACE WITH OTHER PRODUCTS

- A. Install conduit to preserve fire resistance rating of partitions and other elements, using materials and methods specified in Section 07 84 00.
- B. Route conduit through roof openings for piping and ductwork wherever possible. Where separate roofing penetration is required, coordinate location and installation method with roofing installation specified in Section roofing section.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 26 05 37
BOXES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Outlet and device boxes up to 100 cubic inches, including those used as junction and pull boxes.
- B. Cabinets and enclosures, including junction and pull boxes larger than 100 cubic inches.
- C. Underground boxes/enclosures.
- D. Wall and ceiling outlet boxes.
- E. Floor boxes.
- F. Pull and junction boxes.

1.02 RELATED REQUIREMENTS

- A. Section 07 84 00 - Firestopping.
- B. Section 26 05 26 - Grounding and Bonding for Electrical Systems.
- C. Section 26 05 29 - Hangers and Supports for Electrical Systems.
- D. Section 26 27 26 - Wiring Devices:
 - 1. Wall plates.
- E. Section 26 27 16 - Electrical Cabinets and Enclosures.
- F. Section 26 27 26 - Wiring Devices: Wall plates in finished areas, floor box service fittings, fire-rated poke-through fittings, and access floor boxes.

1.03 REFERENCE STANDARDS

- A. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- B. NECA 130 - Standard for Installing and Maintaining Wiring Devices.
- C. NEMA FB 1 - Fittings, Cast Metal Boxes, and Conduit Bodies for Conduit, Electrical Metallic Tubing, and Cable.
- D. NEMA OS 1 - Sheet-Steel Outlet Boxes, Device Boxes, Covers, and Box Supports.
- E. NEMA OS 2 - Nonmetallic Outlet Boxes, Device Boxes, Covers and Box Supports.
- F. NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum).
- G. NFPA 70 - National Electrical Code.
- H. SCTE 77 - Specification for Underground Enclosure Integrity.
- I. UL 50 - Enclosures for Electrical Equipment, Non-Environmental Considerations.
- J. UL 50E - Enclosures for Electrical Equipment, Environmental Considerations.
- K. UL 508A - Industrial Control Panels.
- L. UL 514A - Metallic Outlet Boxes.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate the work with other trades to avoid placement of ductwork, piping, equipment, or other potential obstructions within the dedicated equipment spaces and working clearances for electrical equipment required by NFPA 70.
 - 2. Coordinate arrangement of electrical equipment with the dimensions and clearance requirements of the actual equipment to be installed.

3. Coordinate minimum sizes of boxes with the actual installed arrangement of conductors, clamps, support fittings, and devices, calculated according to NFPA 70.
4. Coordinate minimum sizes of pull boxes with the actual installed arrangement of connected conduits, calculated according to NFPA 70.
5. Coordinate the placement of boxes with millwork, furniture, devices, equipment, etc. installed under other sections or by others.
6. Coordinate the work with other trades to preserve insulation integrity.
7. Coordinate the work with other trades to provide walls suitable for installation of flush-mounted boxes where indicated.
8. Notify Architect of any conflicts with or deviations from the contract documents. Obtain direction before proceeding with work.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Project Record Documents: Record actual locations and mounting heights of outlet, pull, and junction boxes on project record documents.

1.06 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.

PART 2 PRODUCTS

2.01 BOXES

- A. General Requirements:
 1. Do not use boxes and associated accessories for applications other than as permitted by NFPA 70 and product listing.
 2. Provide all boxes, fittings, supports, and accessories required for a complete raceway system and to accommodate devices and equipment to be installed.
 3. Provide products listed, classified, and labeled by Underwriter's Laboratories Inc. (UL) or testing firm acceptable to authority having jurisdiction as suitable for the purpose indicated.
 4. Where box size is not indicated, size to comply with NFPA 70 but not less than applicable minimum size requirements specified.
 5. Provide grounding terminals within boxes where equipment grounding conductors terminate.
- B. Outlet and Device Boxes Up to 100 cubic inches, Including Those Used as Junction and Pull Boxes:
 1. Use sheet-steel boxes for dry locations unless otherwise indicated or required.
 2. Use cast iron boxes or cast aluminum boxes for damp or wet locations unless otherwise indicated or required; furnish with compatible weatherproof gasketed covers.
 3. Use suitable concrete type boxes where flush-mounted in concrete.
 4. Use suitable masonry type boxes where flush-mounted in masonry walls.
 5. Use raised covers suitable for the type of wall construction and device configuration where required.
 6. Use shallow boxes where required by the type of wall construction.
 7. Do not use "through-wall" boxes designed for access from both sides of wall.
 8. Sheet-Steel Boxes: Comply with NEMA OS 1, and list and label as complying with UL 514A.
 9. Cast Metal Boxes: Comply with NEMA FB 1, and list and label as complying with UL 514A; furnish with threaded hubs.
 10. Boxes for Supporting Luminaires and Ceiling Fans: Listed as suitable for the type and weight of load to be supported; furnished with fixture stud to accommodate mounting of luminaire where required.

11. Boxes for Ganged Devices: Use multigang boxes of single-piece construction. Do not use field-connected gangable boxes.
12. Wall Plates: Comply with Section 26 27 26.
- C. Cabinets and Enclosures, Including Junction and Pull Boxes Larger Than 100 cubic inches:
 1. Comply with NEMA 250, and list and label as complying with UL 50 and UL 50E, or UL 508A.
 2. NEMA 250 Environment Type, Unless Otherwise Indicated:
 3. Junction and Pull Boxes Larger Than 100 cubic inches:
 - a. Provide screw-cover or hinged-cover enclosures unless otherwise indicated.
- D. Underground Boxes/Enclosures:
 1. Description: In-ground, open bottom boxes furnished with flush, non-skid covers with legend indicating type of service and stainless steel tamper resistant cover bolts.
 2. Size: As indicated on drawings.
 3. Depth: As required to extend below frost line to prevent frost upheaval, but not less than 12 inches.
 4. Applications:
 - a. Do not use polymer concrete enclosures in areas subject to deliberate vehicular traffic.
 5. Polymer Concrete Underground Boxes/Enclosures: Comply with SCTE 77.
 - a. Manufacturers:
 - 1) Hubbell Incorporated; Quazite Products: www.hubbellpowersystems.com/#sle.
 - 2) Substitutions: See Section 01 60 00 - Product Requirements.

2.02 MANUFACTURERS

- A. Appleton Electric: www.appletonelec.com.
- B. Steel City
- C. Substitutions: Reco, Inc. See Section 01 60 00 - Product Requirements.

2.03 OUTLET BOXES

- A. Sheet Metal Outlet Boxes: NEMA OS 1, galvanized steel.
 1. Luminaire and Equipment Supporting Boxes: Rated for weight of equipment supported; include 1/2 inch male fixture studs where required.
 2. Concrete Ceiling Boxes: Concrete type.
- B. Nonmetallic Outlet Boxes: NEMA OS 2.
- C. Cast Boxes: NEMA FB 1, Type FD, aluminum. Provide gasketed cover by box manufacturer. Provide threaded hubs.
- D. Wall Plates for Finished Areas: As specified in Section 26 27 26.

2.04 FLOOR BOXES

- A. Floor Boxes: NEMA OS 1, fully adjustable, _4 inches deep.
- B. Material: Cast metal.
- C. Shape: Rectangular.
- D. Service Fittings: As specified in Section 26 27 26.

2.05 PULL AND JUNCTION BOXES

- A. Sheet Metal Boxes: NEMA OS 1, galvanized steel.
- B. Hinged Enclosures: As specified in Section 26 27 16.
- C. Surface Mounted Cast Metal Box: NEMA 250, Type 4; flat-flanged, surface mounted junction box:

1. Material: Galvanized cast iron; Cast Aluminum.
2. Cover: Furnish with ground flange, neoprene gasket, and stainless steel cover screws.
- D. In-Ground Cast Metal Box: NEMA 250, Type 6, outside flanged, recessed cover box for flush mounting:
 1. Material: Galvanized cast iron; Cast Aluminum.
 2. Cover: Nonskid cover with neoprene gasket and stainless steel cover screws.
 3. Cover Legend: "ELECTRIC".

PART 3 EXECUTION

3.01 EXAMINATION

3.02

- A. Verify that field measurements are as shown on drawings.
- B. Verify that mounting surfaces are ready to receive boxes.
- C. Verify that conditions are satisfactory for installation prior to starting work.
- D. Verify locations of floor boxes and outlets in offices and work areas prior to rough-in.

3.03 INSTALLATION

- A. Install products in accordance with manufacturer's instructions.
- B. Perform work in a neat and workmanlike manner in accordance with NECA 1 and, where applicable, NECA 130, including mounting heights specified in those standards where mounting heights are not indicated.
- C. Arrange equipment to provide minimum clearances in accordance with manufacturer's instructions and NFPA 70.
- D. Box Supports:
 1. Secure and support boxes in accordance with NFPA 70 and Section 26 05 29 using suitable supports and methods approved by the authority having jurisdiction.
 2. Provide independent support from building structure except for cast metal boxes (other than boxes used for fixture support) supported by threaded conduit connections in accordance with NFPA 70. Do not provide support from piping, ductwork, or other systems.
- E. Install boxes plumb and level.
- F. Flush-Mounted Boxes:
 1. Install boxes in noncombustible materials such as concrete, tile, gypsum, plaster, etc. so that front edge of box or associated raised cover is not set back from finished surface more than 1/4 inch or does not project beyond finished surface.
 2. Install boxes in combustible materials such as wood so that front edge of box or associated raised cover is flush with finished surface.
 3. Repair rough openings around boxes in noncombustible materials such as concrete, tile, gypsum, plaster, etc. so that there are no gaps or open spaces greater than 1/8 inch at the edge of the box.
- G. Install boxes as required to preserve insulation integrity.
- H. Underground Boxes/Enclosures:
 1. Install enclosure on gravel base, minimum 6 inches deep.
 2. Install additional bracing inside enclosures in accordance with manufacturer's instructions to minimize box sidewall deflections during backfilling. Backfill with cover bolted in place.
- I. Install permanent barrier between ganged wiring devices when voltage between adjacent devices exceeds 300 V.

- J. Install firestopping to preserve fire resistance rating of partitions and other elements, using materials and methods specified in Section 07 84 00.
- K. Close unused box openings.
- L. Install blank wall plates on junction boxes and on outlet boxes with no devices or equipment installed or designated for future use.
- M. Provide grounding and bonding in accordance with Section 26 05 26.
- N. Install boxes securely, in a neat and workmanlike manner, as specified in NECA 1.
- O. Install in locations as shown on Drawings, and as required for splices, taps, wire pulling, equipment connections, and as required by NFPA 70.
- P. Coordinate installation of outlet boxes for equipment connected under Section 26 27 17.
- Q. Set wall mounted boxes at elevations to accommodate mounting heights indicated.
- R. Electrical boxes are shown on Drawings in approximate locations unless dimensioned.
 - 1. Adjust box locations up to 10 feet if required to accommodate intended purpose.
- S. Orient boxes to accommodate wiring devices oriented as specified in Section 26 27 26.
- T. Maintain headroom and present neat mechanical appearance.
- U. Install pull boxes and junction boxes above accessible ceilings and in unfinished areas only.
- V. Inaccessible Ceiling Areas: Install outlet and junction boxes no more than 6 inches from ceiling access panel or from removable recessed luminaire.
- W. Install boxes to preserve fire resistance rating of partitions and other elements, using materials and methods specified in Section 07 84 00.
- X. Coordinate mounting heights and locations of outlets mounted above counters, benches, and backsplashes.
- Y. Locate outlet boxes to allow luminaires positioned as shown on reflected ceiling plan.
- Z. Align adjacent wall mounted outlet boxes for switches, thermostats, and similar devices.
- AA. Use flush mounting outlet box in finished areas.
- AB. Locate flush mounting box in masonry wall to require cutting of masonry unit corner only. Coordinate masonry cutting to achieve neat opening.
- AC. Do not install flush mounting box back-to-back in walls; provide minimum 6 inches separation. Provide minimum 24 inches separation in acoustic rated walls.
- AD. Secure flush mounting box to interior wall and partition studs. Accurately position to allow for surface finish thickness.
- AE. Use stamped steel bridges to fasten flush mounting outlet box between studs.
- AF. Install flush mounting box without damaging wall insulation or reducing its effectiveness.
- AG. Use adjustable steel channel fasteners for hung ceiling outlet box.
- AH. Do not fasten boxes to ceiling support wires.
- AI. Support boxes independently of conduit, except cast box that is connected to two rigid metal conduits both supported within 12 inches of box.
- AJ. Use gang box where more than one device is mounted together. Do not use sectional box.
- AK. Use gang box with plaster ring for single device outlets.
- AL. Use cast outlet box in exterior locations exposed to the weather and wet locations.
- AM. Use cast floor boxes for installations in slab on grade; formed steel boxes are acceptable for other installations.

AN. Set floor boxes level.

AO. Large Pull Boxes: Use hinged enclosure in interior dry locations, surface-mounted cast metal box in other locations.

3.04 ADJUSTING

- A. Adjust floor boxes flush with finish flooring material.
- B. Adjust flush-mounting outlets to make front flush with finished wall material.
- C. Install knockout closures in unused box openings.

3.05 CLEANING

- A. Clean interior of boxes to remove dirt, debris, plaster and other foreign material.

3.06 PROTECTION

- A. Immediately after installation, protect boxes from entry of moisture and foreign material until ready for installation of conductors.

END OF SECTION

SECTION 26 05 53
IDENTIFICATION FOR ELECTRICAL SYSTEMS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Electrical identification requirements.
- B. Identification nameplates and labels.
- C. Wire and cable markers.
- D. Voltage markers.
- E. Underground warning tape.
- F. Warning signs and labels.
- G. Field-painted identification of conduit.

1.02 RELATED REQUIREMENTS

- A. Section 09 90 00 - Paints and Coatings.

1.03 REFERENCE STANDARDS

- A. ANSI Z535.2 - American National Standard for Environmental and Facility Safety Signs.
- B. ANSI Z535.4 - American National Standard for Product Safety Signs and Labels.
- C. NFPA 70 - National Electrical Code.
- D. UL 969 - Marking and Labeling Systems.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements for submittals procedures.
- B. Product Data: Provide catalog data for nameplates, labels, and markers.
- C. Manufacturer's Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation and installation of product.

1.05 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.

1.06 EXTRA MATERIALS

- A. See Section 01 60 00 - Product Requirements for additional requirements.

PART 2 PRODUCTS

2.01 IDENTIFICATION REQUIREMENTS

- A. Identification for Equipment:
 - 1. Use identification nameplate to identify each piece of electrical distribution and control equipment and associated sections, compartments, and components.
 - a. Panelboards:
 - 1) Identify voltage and phase.
 - 2) Identify power source and circuit number. Include location when not within sight of equipment.
 - 3) Use typewritten circuit directory to identify load(s) served for panelboards with a door. Identify spares and spaces using pencil.
 - 4) For power panelboards without a door, use identification nameplate to identify load(s) served for each branch device. Do not identify spares and spaces.
 - b. Transformers:
 - 1) Identify kVA rating.

- 2) Identify voltage and phase for primary and secondary.
- 3) Identify power source and circuit number. Include location when not within sight of equipment.
- 4) Identify load(s) served. Include location when not within sight of equipment.
- c. Electricity Meters:
 - 1) Identify load(s) metered.
- B. Identification for Conductors and Cables:
 1. Color Coding for Power Conductors 600 V and Less: Comply with Section 26 05 19.
 2. Use identification nameplate or identification label to identify color code for ungrounded and grounded power conductors inside door or enclosure at each piece of feeder or branch-circuit distribution equipment when premises has feeders or branch circuits served by more than one nominal voltage system.
- C. Identification for Devices:
 1. Use identification label or engraved wallplate to identify serving branch circuit for all receptacles.
 2. Use identification label or engraved wallplate to identify load controlled for wall-mounted control devices controlling loads that are not visible from the control location and for multiple wall-mounted control devices installed at one location.

2.02 MANUFACTURERS

- A. Brady Corporation: www.bradycorp.com.
- B. Seton Identification Products: www.seton.com/aec.
- C. HellermannTyton: www.hellermanntyton.com.
- D. Substitutions: See Section 01 60 00 - Product Requirements.

2.03 IDENTIFICATION NAMEPLATES AND LABELS

- A. Identification Nameplates:
 1. Materials:
 - a. Indoor Clean, Dry Locations: Use plastic nameplates.
 - b. Outdoor Locations: Use plastic, stainless steel, or aluminum nameplates suitable for exterior use.
 2. Plastic Nameplates: Two-layer or three-layer laminated acrylic or electrically non-conductive phenolic with beveled edges; minimum thickness of 1/16 inch; engraved text.
 3. Stainless Steel Nameplates: Minimum thickness of 1/32 inch; engraved or laser-etched text.
 4. Aluminum Nameplates: Anodized; minimum thickness of 1/32 inch; engraved or laser-etched text.
 5. Mounting Holes for Mechanical Fasteners: Two, centered on sides for sizes up to 1 inch high; Four, located at corners for larger sizes.
- B. Identification Labels:
 1. Materials: Use self-adhesive laminated plastic labels; UV, chemical, water, heat, and abrasion resistant.
 - a. Use only for indoor locations.
 2. Text: Use factory pre-printed or machine-printed text. Do not use handwritten text unless otherwise indicated.
- C. Nameplates: Engraved three-layer laminated plastic, black letters on white background.
- D. Locations:
 1. Each electrical distribution and control equipment enclosure.
 2. Communication cabinets.

3. Disconnect switches, and starters.
- E. Letter Size:
 1. Use 1/8 inch letters for identifying individual equipment and loads.
 2. Use 1/4 inch letters for identifying grouped equipment and loads.

2.04 WIRE AND CABLE MARKERS

- A. Manufacturers:
 1. Panduit Corp.
 2. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Markers for Conductors and Cables: Use wrap-around self-adhesive vinyl cloth, wrap-around self-adhesive vinyl self-laminating, heat-shrink sleeve, plastic sleeve, plastic clip-on, or vinyl split sleeve type markers suitable for the conductor or cable to be identified.
- C. Markers for Conductor and Cable Bundles: Use plastic marker tags secured by nylon cable ties.
- D. Legend: Power source and circuit number or other designation indicated.
- E. Text: Use factory pre-printed or machine-printed text, all capitalized unless otherwise indicated.
- F. Minimum Text Height: 1/8 inch.
- G. Color: Black text on white background unless otherwise indicated.
- H. Description: split sleeve type wire markers.
- I. Locations: Each conductor at panelboard gutters, pull boxes, outlet boxes, and junction boxes each load connection.
- J. Legend:
 1. Power and Lighting Circuits: Branch circuit or feeder number indicated on drawings.
 2. Control Circuits: Control wire number indicated on shop drawings.

2.05 VOLTAGE MARKERS

- A. Manufacturers: Panduit Corp.
 1. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Minimum Size:
 1. Markers for Equipment: 1 1/8 by 4 1/2 inches.
 2. Markers for Conduits: As recommended by manufacturer for conduit size to be identified.
 3. Markers for Pull Boxes: 1 1/8 by 4 1/2 inches.
 4. Markers for Junction Boxes: 1/2 by 2 1/4 inches.
- C. Legend:
 1. Markers for Voltage Identification: Highest voltage present.
 2. Markers for System Identification:
 - a. Emergency Power System: Text "EMERGENCY".
 - b. Other Systems: Type of service.
- D. Color: Black text on orange background unless otherwise indicated.
- E. Location: Furnish markers for each conduit longer than 6 feet.
- F. Spacing: 20 feet on center.
- G. Color:
 1. 208 Volt System: Yellow.
 2. Fire Alarm System: Red.
- H. Legend:
 1. 208 Volt System: yellow.
 2. Fire Alarm System: red.

2.06 UNDERGROUND WARNING TAPE

- A. Materials: Use non-detectable type polyethylene tape suitable for direct burial, unless otherwise indicated.
- B. Non-detectable Type Tape: 6 inches wide, with minimum thickness of 4 mil.
- C. Legend: Type of service, continuously repeated over full length of tape.

2.07 WARNING SIGNS AND LABELS

- A. Comply with ANSI Z535.2 or ANSI Z535.4 as applicable.
- B. Warning Signs:
 - 1. Materials:
 - 2. Minimum Size: 7 by 10 inches unless otherwise indicated.
- C. Warning Labels:
 - 1. Materials: Use factory pre-printed or machine-printed self-adhesive polyester or self-adhesive vinyl labels; UV, chemical, water, heat, and abrasion resistant; produced using materials recognized to UL 969.
 - 2. Machine-Printed Labels: Use thermal transfer process printing machines and accessories recommended by label manufacturer.
 - 3. Minimum Size: 2 by 4 inches unless otherwise indicated.

PART 3 EXECUTION

3.01 PREPARATION

- A. Clean surfaces to receive adhesive products according to manufacturer's instructions.
- B. Degrease and clean surfaces to receive nameplates and labels.

3.02 INSTALLATION

- A. Install products in accordance with manufacturer's instructions.
- B. Install identification products to be plainly visible for examination, adjustment, servicing, and maintenance. Unless otherwise indicated, locate products as follows:
 - 1. Surface-Mounted Equipment: Enclosure front.
 - 2. Flush-Mounted Equipment: Inside of equipment door.
 - 3. Free-Standing Equipment: Enclosure front; also enclosure rear for equipment with rear access.
 - 4. Elevated Equipment: Legible from the floor or working platform.
 - 5. Branch Devices: Adjacent to device.
 - 6. Interior Components: Legible from the point of access.
 - 7. Conductors and Cables: Legible from the point of access.
 - 8. Devices: Outside face of cover.
- C. Install identification products centered, level, and parallel with lines of item being identified.
- D. Secure nameplates to exterior surfaces of enclosures using stainless steel screws and to interior surfaces using self-adhesive backing or epoxy cement.
- E. Install self-adhesive labels and markers to achieve maximum adhesion, with no bubbles or wrinkles and edges properly sealed.
- F. Install underground warning tape above buried lines with one tape per trench at 3 inches below finished grade.
- G. Mark all handwritten text, where permitted, to be neat and legible.

3.03 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.

- B. Replace self-adhesive labels and markers that exhibit bubbles, wrinkles, curling or other signs of improper adhesion.

END OF SECTION

NOT FOR BIDDING

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 26 05 73

OVERCURRENT PROTECTIVE DEVICE COORDINATION STUDY

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Short circuit study.
- B. Coordination study and analysis.

1.02 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Study reports, stamped or sealed and signed by study preparer.
- C. Study Report: Submit protective device studies as specified, prior to submission of product data submittals or ordering or fabrication of protective devices.
 - 1. Include stamp or seal and signature of preparing engineer.

1.03 PROTECTIVE DEVICE STUDY

- A. Analyze the specific electrical and utilization equipment (according to NEC definition), the actual protective devices to be used, and the actual feeder lengths to be installed.
 - 1. Study Methodology: Comply with requirements and recommendations of NFPA 70, IEEE 399, and IEEE 242.
 - 2. Report: State the methodology and rationale employed in making each type of calculation; identify computer software package(s) used.
- B. One-Line Diagrams: Prepare schematic drawing of electrical distribution system, with all electrical equipment and wiring to be protected by the protective devices; identify nodes on the diagrams for reference on report that includes:
 - 1. Calculated fault impedance, X/R ratios, utility contribution, and short circuit values (asymmetric and symmetric) at the main switchboard bus and all downstream devices containing protective devices.
 - 2. Breaker and fuse ratings.
 - 3. Transformer kVA and voltage ratings, percent impedance, X/R ratios, and wiring connections.
 - 4. Identification of each bus, with voltage.
 - 5. Conduit materials, feeder sizes, actual lengths, and X/R ratios.
- C. Short Circuit Study: Calculate the fault impedance to determine available 3-phase short circuit and ground fault currents at each bus and piece of equipment during normal conditions, alternate operations, emergency power conditions, and other operations that could result in maximum fault conditions.
 - 1. Show fault currents available at key points in the system down to a fault current of 7,000 A.
 - 2. Include motor contributions in determining the momentary and interrupting ratings of the protective devices.
 - 3. Report: Include all pertinent data used in calculations and for each device include:
 - a. Device identification.
 - b. Protective device.
 - c. Device rating.
 - d. Calculated short circuit current, asymmetrical and symmetrical, and ground fault current.
- D. Coordination Study: Perform an organized time-current analysis of each protective device in series from the individual device back to the primary source, under normal conditions, alternate operations, and emergency power conditions.

1. Graphically illustrate that adequate time separation exists between series devices, including upstream primary device.
2. Plot the specific time-current characteristics of each protective device on log-log paper.
3. Organize plots so that all upstream devices are clearly depicted on one sheet.
4. Also show the following on curve plot sheets:
 - a. Device identification.
 - b. Voltage and current transformer ratios for curves.
 - c. 3-phase and 1-phase ANSI damage curves for each transformer.
 - d. No-damage, melting, and clearing curves for fuses.
 - e. Cable damage curves.
 - f. Transformer inrush points.
 - g. Maximum short circuit cutoff point.
 - h. Simple one-line diagram for the portion of the system that each curve plot illustrates.
 - i. Software report for each curve plot, labeled for identification.
- E. Analysis: Determine ratings and settings of protective devices to minimize damage caused by a fault and so that the protective device closest to the fault will open first.
 1. Required Ratings and Settings: Derive required ratings and settings of protective devices in consideration of upstream protective device settings and optimize system to ensure selective coordination.
 2. Identify any equipment that is underrated as specified.
 3. Identify specified protective devices that will not achieve required protection or coordination and cannot be field adjusted to do so, and for which adequate devices would involve a change to the contract sum.
 4. In all cases where adequate protection or coordination cannot be achieved at no extra cost to Owner, provide a discussion of alternatives and logical compromises for best achievable coordination.
- F. Protective Device Rating and Setting Chart: Summarize in tabular format the required characteristics for each protective device based on the analysis; include:
 1. Device identification.
 2. Relay CT ratios, tap, time dial, and instantaneous pickup.
 3. Circuit breaker sensor rating, long-time, short-time, and instantaneous settings, and time bands.
 4. Fuse rating and type.
 5. Ground fault pickup and time delay.
 6. Input level and expected response time at two test points that are compatible with commonly available test equipment and the ratings of the protective device.
 7. Highlight all devices that as furnished by Contractor will not achieve required protection.

1.04 QUALITY ASSURANCE

- A. Computer Software for Study Preparation: Use the latest edition of commercially available software utilizing specified methodologies.
- B. Contractor Responsibility: Provide all project-related data needed by study preparer, including equipment, wire sizes, insulation types, conduit types, and actual circuit lengths.
- C. Owner's Responsibility: Provide data on relevant Owner power distribution equipment.

END OF SECTION

SECTION 26 09 19
ENCLOSED CONTACTORS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. General purpose contactors.

1.02 RELATED REQUIREMENTS

- A. Section 26 05 29 - Hangers and Supports for Electrical Systems.
- B. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.
- C. Section 26 28 13 - Fuses.

1.03 REFERENCE STANDARDS

- A. NEMA ICS 2 - Industrial Control and Systems Controllers, Contactors and Overload Relays Rated 600 Volts.
- B. NEMA ICS 5 - Industrial Control and Systems: Control Circuit and Pilot Devices.
- C. NEMA ICS 6 - Industrial Control and Systems: Enclosures.
- D. NEMA KS 1 - Heavy Duty Enclosed and Dead-Front Switches (600 Volts Maximum).
- E. NETA ATS - Acceptance Testing Specifications for Electrical Power Equipment and Systems.
- F. NFPA 70 - National Electrical Code.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide dimensions, size, voltage ratings and current ratings.
- C. Manufacturer's Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.
- D. Maintenance Data: Include instructions for replacing and maintaining coil and contacts.

1.05 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience and with service facilities within 100 miles of Project.
- C. Products: Listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Allen-Bradley/Rockwell Automation: www.ab.com/#sle.
- B. Eaton Corporation; Cutler-Hammer Products: www.eaton.com/#sle.
- C. Schneider Electric; Square D Products: www.schneider-electric.us/#sle.
- D. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 GENERAL PURPOSE CONTACTORS

- A. Description: NEMA ICS 2, AC general purpose magnetic contactor.
- B. Coil operating voltage: 120 volts, 60 Hertz.

- C. Poles: As required to match circuit configuration and control function.
- D. Enclosure: NEMA ICS 6, Type 1.
- E. Accessories:
 - 1. Selector Switch: ON/OFF/AUTOMATIC.
 - 2. Indicating Light: RED.
 - 3. Auxiliary Contacts: One, normally open.

2.03 ACCESSORIES

- A. Auxiliary Contacts: NEMA ICS 2, 2 normally open contacts in addition to seal-in contact.
- B. Cover Mounted Pilot Devices: NEMA ICS 5, oiltight type.
- C. Pilot Device Contacts: NEMA ICS 5, Form Z, rated A150.
- D. Pushbuttons: Lockable type.
- E. Indicating Lights: , LED type.
- F. Selector Switches: Rotary type.
- G. Relays: NEMA ICS 2, .
- H. Control Power Transformers: 120 volt secondary, 50 VA minimum, in each enclosed contactor. Provide fused primary and secondary, and bond unfused leg of secondary to enclosure.

2.04 DISCONNECTS

- A. Combination Contactors: Combine contactor with disconnect in common enclosure.
- B. Disconnects: Thermal magnetic circuit breaker with integral thermal and instantaneous magnetic trip in each pole; UL listed.
- C. Disconnects: Fusible switch assembly; NEMA KS 1, enclosed knife switch with externally operable handle. Fuse clips: Designed to accommodate Class R fuses.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install enclosed contactors where indicated, in accordance with manufacturer's instructions.
- B. Install enclosed contactors plumb. Provide supports in accordance with Section 26 05 29.
- C. Height: 5 ft to operating handle.
- D. Provide fuses for fusible switches; refer to Section 26 28 13 for product requirements.
- E. Provide engraved plastic nameplates; refer to Section 26 05 53 for product requirements and location.

3.02 FIELD QUALITY CONTROL

- A. Perform field inspection and testing in accordance with Section 01 40 00.
- B. Inspect and test in accordance with NETA STD ATS, except Section 4.
- C. Perform applicable inspections and tests listed in NETA STD ATS, Section 7.16.1.

END OF SECTION

SECTION 26 09 23
LIGHTING CONTROL DEVICES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Occupancy sensors.
- B. Time switches.
- C. Outdoor photo controls.
- D. Daylighting controls.

1.02 RELATED REQUIREMENTS

- A. Section 26 05 26 - Grounding and Bonding for Electrical Systems.
- B. Section 26 05 29 - Hangers and Supports for Electrical Systems.
- C. Section 26 05 37 - Boxes.
- D. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.
- E. Section 26 09 19 - Enclosed Contactors: Lighting contactors.
- F. Section 26 09 43 - Network Lighting Controls - Lutron.
- G. Section 26 27 26 - Wiring Devices: Devices for manual control of lighting, including wall switches, wall dimmers, fan speed controllers, and wall plates.
- H. Section 26 51 00 - Interior Lighting.
- I. Section 26 56 00 - Exterior Lighting.
- J. Section 01 91 00 - Commissioning
- K. Section 01 91 10 - Functional Testing Procedures
- L. Section 23 08 10 - Control Systems Commissioning

1.03 REFERENCE STANDARDS

- A. ANSI C136.10 - American National Standard for Roadway and Area Lighting Equipment - Locking-Type Photocontrol Devices and Mating Receptacles - Physical and Electrical Interchangeability and Testing.
- B. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- C. NECA 130 - Standard for Installing and Maintaining Wiring Devices.
- D. NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum).
- E. NFPA 70 - National Electrical Code.
- F. UL 773A - Nonindustrial Photoelectric Switches for Lighting Control.
- G. UL 916 - Energy Management Equipment.
- H. UL 917 - Clock-Operated Switches.
- I. UL 1472 - Solid-State Dimming Controls.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate the placement of lighting control devices with millwork, furniture, equipment, etc. installed under other sections or by others.
 - 2. Coordinate the placement of wall switch occupancy sensors with actual installed door swings.

3. Coordinate the placement of occupancy sensors with millwork, furniture, equipment or other potential obstructions to motion detection coverage installed under other sections or by others.
 4. Coordinate the placement of photo sensors for daylighting controls with windows, skylights, and luminaires to achieve optimum operation. Coordinate placement with ductwork, piping, equipment, or other potential obstructions to light level measurement installed under other sections or by others.
 5. Notify Architect of any conflicts or deviations from the contract documents to obtain direction prior to proceeding with work.
- B. Sequencing:
1. Do not install lighting control devices until final surface finishes and painting are complete.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Include ratings, configurations, standard wiring diagrams, dimensions, colors, service condition requirements, and installed features.
- C. Shop Drawings:
 1. Occupancy Sensors: Provide lighting plan indicating location, model number, and orientation of each occupancy sensor and associated system component.
 2. Daylighting Controls: Provide lighting plan indicating location, model number, and orientation of each photo sensor and associated system component.
- D. Field Quality Control Reports.
- E. Manufacturer's Installation Instructions: Include application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.
- F. Operation and Maintenance Data: Include detailed information on device programming and setup.
- G. Project Record Documents: Record actual installed locations and settings for lighting control devices.

1.06 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
- D. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

1.07 DELIVERY, STORAGE, AND PROTECTION

- A. Store products in a clean, dry space in original manufacturer's packaging in accordance with manufacturer's written instructions until ready for installation.

1.08 FIELD CONDITIONS

- A. Maintain field conditions within manufacturer's required service conditions during and after installation.

1.09 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.

- B. Provide five year manufacturer warranty for all occupancy sensors.
- C. Provide two year manufacturer warranty for all daylighting controls.

PART 2 PRODUCTS

2.01 ALL LIGHTING CONTROL DEVICES

- A. Provide products listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.
- B. Unless specifically indicated to be excluded, provide all required conduit, wiring, connectors, hardware, components, accessories, etc. as required for a complete operating system.
- C. Products for Switching of Electronic Fluorescent Ballasts: Tested and rated to be suitable for peak inrush currents specified in NEMA 410.

2.02 OCCUPANCY SENSORS

- A. Manufacturers:
 - 1. Hubbell Building Automation, Inc: www.hubbellautomation.com
 - 2. Lutron Electronics Company, Inc: www.lutron.com/#sle.
 - 3. Sensor Switch Inc: www.sensorswitch.com/#sle.
 - 4. WattStopper: www.wattstopper.com/#sle.
 - 5. Substitutions: See Section 01 60 00 - Product Requirements.
 - 6. Source Limitations: Furnish products produced by a single manufacturer and obtained from a single supplier.
- B. All Occupancy Sensors:
 - 1. Description: Factory-assembled commercial specification grade devices for indoor use capable of sensing both major motion, such as walking, and minor motion, such as small desktop level movements, according to published coverage areas, for automatic control of load indicated.
 - 2. Sensor Technology:
 - a. Passive Infrared/Ultrasonic Dual Technology Occupancy Sensors: Designed to detect occupancy using a combination of both passive infrared and ultrasonic technologies.
 - 3. Provide LED to visually indicate motion detection with separate color LEDs for each sensor type in dual technology units.
 - 4. Operation: Unless otherwise indicated, occupancy sensor to turn load on when occupant presence is detected and to turn load off when no occupant presence is detected during an adjustable turn-off delay time interval.
 - 5. Dual Technology Occupancy Sensors: Field configurable turn-on and hold-on activation with settings for activation by either or both sensing technologies.
 - 6. Turn-Off Delay: Field adjustable, with time delay settings up to 30 minutes.
 - 7. Sensitivity: Field adjustable.
 - 8. Adaptive Technology: Field selectable; capable of self-adjusting sensitivity and time delay according to conditions.
 - 9. Compatibility (Non-Dimming Sensors): Suitable for controlling incandescent lighting, low-voltage lighting with electronic and magnetic transformers, fluorescent lighting with electronic and magnetic ballasts, and fractional motor loads, with no minimum load requirements.
 - 10. Load Rating for Line Voltage Occupancy Sensors: As required to control the load indicated on drawings.
- C. Wall Switch Occupancy Sensors:
 - 1. All Wall Switch Occupancy Sensors:

- a. Description: Occupancy sensors designed for installation in standard wall box at standard wall switch mounting height with a field of view of 180 degrees, integrated manual control capability, and no leakage current to load in off mode.
 - b. Operation: Field selectable to operate either as occupancy sensor (automatic on/off) or as vacancy sensor (manual-on/automatic off).
 - c. Manual-Off Override Control: When used to turn off load while in automatic-on mode, unit to revert back to automatic mode after no occupant presence is detected during the delayed-off time interval.
- 2. Passive Infrared/Ultrasonic Dual Technology Wall Switch Occupancy Sensors: Capable of detecting motion within an area of 900 square feet.
 - a. Products:
 - 1) Hubbell Building Automation.
 - 2) Watt Stopper.
 - 3) Sensor switch.
 - 4) Substitutions: See Section 01 60 00 - Product Requirements.
- D. Wall Dimmer Occupancy Sensors:
 - 1. General Requirements:
 - a. Description: Occupancy sensors designed for installation in standard wall box at standard wall switch mounting height with a field of view of 180 degrees, integrated dimming control capability, and no leakage current to load in off mode.
 - b. Manual-Off Override Control Capability: When used to turn off load while in automatic-on mode, unit to revert back to automatic mode after no occupant presence is detected during the delayed-off time interval.
 - c. Dimmer: Solid-state with continuous full-range even control following square law dimming curve, integral radio frequency interference filtering, power failure preset memory, air gap switch accessible without removing wall plate, and listed as complying with UL 1472; type and rating suitable for load controlled.
 - d. Provide field adjustable dimming preset for occupied state.
- E. Ceiling Mounted Occupancy Sensors:
 - 1. All Ceiling Mounted Occupancy Sensors:
 - a. Description: Low profile occupancy sensors designed for ceiling installation.
 - b. Unless otherwise indicated or required to control the load indicated on drawings, provide low voltage units, for use with separate compatible accessory power packs.
 - c. Provide field selectable setting for disabling LED motion detector visual indicator.
 - d. Occupancy sensor to be field selectable as either manual-on/automatic-off or automatic on/off.
 - e. Finish: White unless otherwise indicated.
 - 2. Passive Infrared/Ultrasonic Dual Technology Ceiling Mounted Occupancy Sensors:
 - a. Standard Range Sensors: Capable of detecting motion within an area of 2000 sqft at a mounting height of 9 feet, with a field of view of 360 degrees.
 - 1) Products:
 - (a) Hubbell Building Automation.
 - (b) Sensor Switch.
 - (c) Watt Stopper.
 - (d) Substitutions: See Section 01 60 00 - Product Requirements.
- F. Power Packs for Low Voltage Occupancy Sensors:
 - 1. Description: Plenum rated, self-contained low voltage class 2 transformer and relay compatible with specified low voltage occupancy sensors for switching of line voltage loads.
 - 2. Provide quantity and configuration of power and slave packs with all associated wiring and accessories as required to control the load indicated on drawings.

3. Input Supply Voltage: Dual rated for 120/277 V ac.
4. Load Rating:
 - a. Incandescent Load: Not less than 15 A.
 - b. Fluorescent Load: Not less than 20 A.
 - c. Motor Load: Not less than 1 HP.

2.03 TIME SWITCHES

- A. Manufacturers:
 1. Intermatic, Inc: www.intermatic.com/#sle.
 2. Paragon, a brand of Invensys Controls: www.invensyscontrols.com.
 3. Tork, a division of NSI Industries LLC: www.tork.com/#sle.
 4. Substitutions: See Section 01 60 00 - Product Requirements.
 5. Source Limitations: Furnish products produced by a single manufacturer and obtained from a single supplier.
- B. Digital Electronic Time Switches:
 1. Description: Factory-assembled solid state programmable controller with LCD display, listed and labeled as complying with UL 916 or UL 917.
 2. Program Capability:
 - a. Astronomic Time Switches: Single channel, capable of different schedule for each day of the week with additional holiday schedule available to override normal schedule for selected days and field-configurable astronomic feature to automatically adjust for seasonal changes in sunrise and sunset times.
 3. Schedule Capacity: Not less than 16 programmable on/off operations.
 4. Provide automatic daylight savings time and leap year compensation.
 5. Provide power outage backup to retain programming and maintain clock.
 6. Manual override: Capable of overriding current schedule both permanently and temporarily until next scheduled event.
 7. Provide remote photocell input with light level adjustment.
 8. Input Supply Voltage: As indicated on the drawings.
 9. Output Switch Contact Ratings:
 - a. Resistive Load: Not less than 30 A at 120-277 V ac.
 - b. Tungsten Load: Not less than 5 A at 120 V ac.
 - c. Inductive Load: Not less than 30 A at 120-277 V ac.
 - d. Ballast Load: Not less than 20 A at 120 V ac or 6 A at 277 V ac.
 - e. Motor Load: Not less than 1 HP at 120 V ac or 2 HP at 240 V ac.
 10. Provide lockable enclosure; environmental type per NEMA 250 as specified for the following installation locations:
 - a. Indoor clean, dry locations: Type 1.
- C. Electromechanical Time Switches:
 1. Description: Factory-assembled controller with motor-operated timing dial mechanism and adjustable trippers for setting on/off operations, listed and labeled as complying with UL 917.
 2. Program Capability:
 - a. 24-Hour Time Switches: With same schedule for each day of the week and skip-a-day feature to omit selected days.
 3. Schedule Capacity:
 - a. 24-Hour Time Switches: Accommodating not less than 12 pairs of selected on/off operations per day.
 4. Manual override: Capable of overriding current schedule both permanently and temporarily until next scheduled event.
 5. Input Supply Voltage: As indicated on the drawings.

6. Output Switch Configuration: As required to control the load indicated on drawings.
7. Output Switch Configuration: SPST dry unpowered maintained contacts.
8. Output Switch Contact Ratings: As required to control the load indicated on drawings.
9. Output Switch Contact Ratings:
 - a. Resistive Load: Not less than 40 A at 120-277 V ac.
 - b. Tungsten Load: Not less than 40 A at 120 V ac.
 - c. Inductive Load: Not less than 20 A at 120-277 V ac.
 - d. Motor Load: Not less than 1 HP at 120 V ac or 2 HP at 240 V ac.
10. Provide lockable enclosure; environmental type per NEMA 250 as specified for the following installation locations:

2.04 OUTDOOR PHOTO CONTROLS

- A. Manufacturers:
 1. Intermatic, Inc: www.intermatic.com/#sle.
 2. Paragon, a brand of Invensys Controls: www.invensyscontrols.com.
 3. Tork, a division of NSI Industries LLC: www.tork.com/#sle.
 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Stem-Mounted Outdoor Photo Controls:
 1. Description: Direct-wired photo control unit with threaded conduit mounting stem and field-adjustable swivel base, listed and labeled as complying with UL 773A.
 2. Housing: Weatherproof, impact resistant polycarbonate.
 3. Photo Sensor: Cadmium sulfide.
 4. Provide external sliding shield for field adjustment of light level activation.
 5. Light Level Activation: 1 to 5 footcandles turn-on and 3 to 1 turn-off to turn-on ratio with delayed turn-off.
 6. Voltage: As required to control the load indicated on the drawings.
 7. Failure Mode: Fails to the on position.
 8. Load Rating: As required to control the load indicated on the drawings.
 9. Provide accessory wall-mounting bracket where indicated or as required to complete installation.

2.05 DAYLIGHTING CONTROLS

- A. Manufacturers:
 1. Hubbell Building Automation, Inc: www.hubbellautomation.com/#sle.
 2. Sensor Switch Inc: www.sensorswitch.com/#sle.
 3. WattStopper: www.wattstopper.com/#sle.
 4. Substitutions: See Section 01 60 00 - Product Requirements.
 5. Source Limitations: Furnish products produced by a single manufacturer and obtained from a single supplier.
- B. System Description: Control system consisting of photo sensors and compatible control modules and power packs, contactors, or relays as required for automatic control of load indicated according to available natural light; capable of integrating with occupancy sensors and manual override controls.
- C. Daylighting Control Photo Sensors: Low voltage class 2 photo sensor units with output signal proportional to the measured light level and provision for zero or offset based signal.
 1. Sensor Type: Filtered silicon photo diode.
 2. Sensor Range:
 - a. Indoor Photo Sensors: 5 to 100 footcandles.
 3. Finish: White unless otherwise indicated.
 4. Where wired sensors are indicated, wireless sensors are acceptable provided that all components and wiring modifications necessary for proper operation are included.

5. Wireless Daylighting Control Photo Sensors:
 - a. RF Range: 30 feet through typical construction materials.
 - b. Electromagnetic Interference/Radio Frequency Interference (EMI/RFI) Limits: Comply with FCC requirements of CFR, Title 47, Part 15, for Class B application.
 - c. Power: Battery-operated with minimum ten-year battery life.
- D. Dimming Photo Sensors: Photo sensor units with integral controller compatible with specified dimming ballasts, for direct continuous dimming of up to 50 ballasts.
- E. Daylighting Control Switching Modules for Low Voltage Sensors: Low voltage class 2 control unit compatible with specified photo sensors, for switching of compatible power packs, contactors, or relays in response to changes in measured light levels according to selected settings.
 1. Operation: Unless otherwise indicated, load to be turned on when light level is below selected low set point and load to be turned off when light level is above selected high set point, with a no switching dead band between set points to prevent unwanted cycling.
 2. Input Delay: To prevent unwanted cycling due to intermittent light level fluctuations.
 3. Control Capability:
 - a. Multi-Zone Switching Modules: Capable of controlling up to three separately programmable channels.
- F. Daylighting Control Dimming Modules for Low Voltage Sensors: Low voltage class 2 control unit compatible with specified photo sensors and with specified dimming ballasts, for both continuous dimming of compatible dimming ballasts and switching of compatible power packs, contactors, or relays in response to changes in measured light levels according to selected settings.
 1. Operation: Unless otherwise indicated, specified load to be continuously brightened as not enough daylight becomes available and continuously dimmed as enough daylight becomes available.
 2. Load to be turned off when available daylight is sufficient to fully dim the load, after the selected time delay.
 3. Control Capability: Capable of controlling up to three separately programmable channels, with up to 50 ballasts per channel.
 4. Dimming and Fade Rates: Adjustable from 5 to 60 seconds.
 5. Cut-Off Delay: Selectable and adjustable from 0 to 20 minutes.
- G. Power Packs for Low Voltage Daylighting Control Modules:
 1. Description: Plenum rated, self-contained low voltage class 2 transformer and relay compatible with specified low voltage daylighting control modules for switching of line voltage loads. Provide quantity and configuration of power and slave packs with all associated wiring and accessories as required to control the load indicated on drawings.
 2. Input Supply Voltage: Dual rated for 120/277 V ac.
 3. Load Ratings: As required to control the load indicated on drawings.
- H. Accessories:
 1. Where indicated, provide compatible accessory wall switches for manual override control.
 2. Where indicated, provide compatible accessory wireless controls for manual override control.
 - a. Products:
 - 1) Hubbell Building Automation.
 - 2) Sensor Switch.
 - 3) Substitutions: See Section 01 60 00 - Product Requirements.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field measurements are as shown on the drawings.
- B. Verify that outlet boxes are installed in proper locations and at proper mounting heights and are properly sized to accommodate devices and conductors in accordance with NFPA 70.
- C. Verify that openings for outlet boxes are neatly cut and will be completely covered by devices or wall plates.
- D. Verify that final surface finishes are complete, including painting.
- E. Verify that branch circuit wiring installation is completed, tested, and ready for connection to lighting control devices.
- F. Verify that the service voltage and ratings of lighting control devices are appropriate for the service voltage and load requirements at the location to be installed.
- G. Verify that conditions are satisfactory for installation prior to starting work.

3.02 PREPARATION

- A. Provide extension rings to bring outlet boxes flush with finished surface.
- B. Clean dirt, debris, plaster, and other foreign materials from outlet boxes.

3.03 INSTALLATION

- A. Perform work in a neat and workmanlike manner in accordance with NECA 1 and, where applicable, NECA 130, including mounting heights specified in those standards unless otherwise indicated.
- B. Coordinate locations of outlet boxes provided under Section 26 05 37 as required for installation of lighting control devices provided under this section.
 - 1. Mounting Heights: Unless otherwise indicated, as follows:
 - a. Wall Switch Occupancy Sensors: 48 inches above finished floor.
 - b. In-Wall Time Switches: 48 inches above finished floor.
 - c. In-Wall Interval Timers: 48 inches above finished floor.
 - 2. Orient outlet boxes for vertical installation of lighting control devices unless otherwise indicated.
 - 3. Locate wall switch occupancy sensors on strike side of door with edge of wall plate 3 inches from edge of door frame. Where locations are indicated otherwise, notify Architect to obtain direction prior to proceeding with work.
- C. Install lighting control devices in accordance with manufacturer's instructions.
- D. Unless otherwise indicated, connect lighting control device grounding terminal or conductor to branch circuit equipment grounding conductor and to outlet box with bonding jumper.
- E. Install lighting control devices plumb and level, and held securely in place.
- F. Where required and not furnished with lighting control device, provide wall plate in accordance with Section 26 27 26.
- G. Provide required supports in accordance with Section 26 05 29.
- H. Where applicable, install lighting control devices and associated wall plates to fit completely flush to mounting surface with no gaps and rough opening completely covered without strain on wall plate. Repair or reinstall improperly installed outlet boxes or improperly sized rough openings. Do not use oversized wall plates in lieu of meeting this requirement.
- I. Identify lighting control devices in accordance with Section 26 05 53.
- J. Occupancy Sensor Locations:

1. Location Adjustments: Do not make adjustments to locations without obtaining approval from the Architect.
 2. Locate ultrasonic and dual technology passive infrared/ultrasonic occupancy sensors a minimum of 4 feet from air supply ducts or other sources of heavy air flow and as per manufacturer's recommendations, in order to minimize false triggers.
- K. Outdoor Photo Control Locations:
1. Where possible, locate outdoor photo controls with photo sensor facing north. If north facing photo sensor is not possible, install with photo sensor facing east, west, or down.
 2. Locate outdoor photo controls so that photo sensors do not face artificial light sources, including light sources controlled by the photo control itself.
- L. Install outdoor photo controls so that connections are weatherproof. Do not install photo controls with conduit stem facing up in order to prevent infiltration of water into the photo control.
- M. Daylighting Control Photo Sensor Locations:
1. Location Adjustments: Do not make adjustments to locations without obtaining approval from the Architect.
 2. Unless otherwise indicated, locate photo sensors for closed loop systems to accurately measure the light level controlled at the designated task location, while minimizing the measured amount of direct light from natural or artificial sources such as windows or pendant luminaires.
 3. Unless otherwise indicated, locate photo sensors for open loop systems to accurately measure the level of daylight coming into the space, while minimizing the measured amount of lighting from artificial sources.
- N. Lamp Burn-In: Operate lamps at full output for minimum of 100 hours or prescribed period per manufacturer's recommendations prior to use with any dimming controls. Replace lamps that fail prematurely due to improper lamp burn-in.
- O. Unless otherwise indicated, install power packs for lighting control devices above accessible ceiling or above access panel in inaccessible ceiling near the sensor location.

3.04 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Inspect each lighting control device for damage and defects.
- C. Test occupancy sensors to verify proper operation, including time delays and ambient light thresholds where applicable. Verify optimal coverage for entire room or area. Record test results in written report to be included with submittals.
- D. Test time switches to verify proper operation.
- E. Test outdoor photo controls to verify proper operation, including time delays where applicable.
- F. Test daylighting controls to verify proper operation, including light level measurements and time delays where applicable. Record test results in written report to be included with submittals.
- G. Correct wiring deficiencies and replace damaged or defective lighting control devices.

3.05 ADJUSTING

- A. Adjust devices and wall plates to be flush and level.
- B. Adjust occupancy sensor settings to minimize undesired activations while optimizing energy savings, and to achieve desired function as indicated or as directed by Architect.
- C. Where indicated or as directed by Architect, install factory masking material or adjust integral blinders on passive infrared (PIR) and dual technology occupancy sensor lenses to block undesired motion detection.

- D. Adjust time switch settings to achieve desired operation schedule as indicated or as directed by Architect. Record settings in written report to be included with submittals.
- E. Adjust external sliding shields on outdoor photo controls under optimum lighting conditions to achieve desired turn-on and turn-off activation as indicated or as directed by Architect.
- F. Adjust daylighting controls under optimum lighting conditions after all room finishes, furniture, and window treatments have been installed to achieve desired operation as indicated or as directed by Architect. Record settings in written report to be included with submittals. Readjust controls calibrated prior to installation of final room finishes, furniture, and window treatments that do not function properly as determined by Architect.

3.06 CLEANING

- A. Clean exposed surfaces to remove dirt, paint, or other foreign material and restore to match original factory finish.

3.07 COMMISSIONING

- A. See Section 01 91 13 for commissioning requirements.

3.08 CLOSEOUT ACTIVITIES

- A. See Section 01 78 00 - Closeout Submittals, for closeout submittals.
- B. See Section 01 79 00 - Demonstration and Training, for additional requirements.
- C. Demonstration: Demonstrate proper operation of lighting control devices to Architect, and correct deficiencies or make adjustments as directed.

END OF SECTION

SECTION 26 12 00
MEDIUM-VOLTAGE TRANSFORMERS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Liquid-filled pad-mounted distribution transformers.

1.02 RELATED REQUIREMENTS

- A. Section 03 30 00 - Cast-in-Place Concrete: Pads for transformer support.

1.03 REFERENCE STANDARDS

- A. IEEE C57.12.28 - IEEE Standard for Pad-Mounted Equipment -- Enclosure Integrity.
- B. IEEE C57.12.00 - IEEE Standard General Requirements for Liquid-Immersed Distribution, Power, and Regulating Transformers; Institute of Electrical and Electronic Engineers.
- C. IEEE C57.12.01 - IEEE Standard General Requirements for Dry-Type Distribution and Power Transformers Including Those With Solid Cast and/or Resin-Encapsulated Windings; Institute of Electrical and Electronic Engineers
- D. IEEE C57.12.90 - IEEE Standard Test Code for Liquid-Immersed Distribution, Power, and Regulating Transformers; Institute of Electrical and Electronic Engineers.
- E. IEEE C57.13 - IEEE Standard Requirements for Instrument Transformers; Institute of Electrical and Electronic Engineers.
- F. IEEE C57.111 - IEEE Guide for Acceptance of Silicone Insulating Fluid and Its Maintenance in Transformers; Institute of Electrical and Electronic Engineers.
- G. IEEE 386 - IEEE Standard for Separable Insulated Connector Systems for Power Distribution Systems Above 600 V; Institute of Electrical and Electronic Engineers.
- H. NEMA 260 - Safety Labels for Padmounted Switchgear and Transformers Sited in Public Areas; National Electrical Manufacturers Association.
- I. NETA STD ATS - Acceptance Testing Specifications for Electrical Power Distribution Equipment and Systems; International Electrical Testing Association.
- J. NFPA 70 - National Electrical Code; National Fire Protection Association.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Shop Drawings: Indicate electrical characteristics and connection requirements, outline dimensions, connection and support points, weight, specified ratings and materials.
- C. Product Data: Provide electrical characteristics and connection requirements, standard model design tests, and options.
- D. Test Reports: Indicate procedures and results for specified factory and field testing and inspection.
- E. Manufacturer's Installation Instructions.
- F. Manufacturer's Certificate: Certify that products meet or exceed specified requirements.
- G. Manufacturer's Field Reports: Indicate activities on site, final adjustments and overcurrent protective device coordination curves, adverse findings, and recommendations.

1.05 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.

- B. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience and with service facilities within 100 miles of Project.
- C. Testing Agency Qualifications: Company member of International Electrical Testing Association and specializing in testing products specified in this section with minimum three years documented experience.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Protect transformers from moisture by using appropriate heaters as instructed by the manufacturer.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Cooper Power Systems, a division of Cooper Industries: www.cooperindustries.com.
- B. Eaton Corporation; Cutler-Hammer Products: www.eaton.com.
- C. Schneider Electric; Square D Products: www.schneider-electric.us.
- D. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 LIQUID-FILLED TRANSFORMERS

- A. Liquid-Filled Transformers: IEEE C57.12.00, three phase, pad-mounted, self-cooled transformer unit.
- B. Cooling and Temperature Rise; IEEE C57.12.00; Class OA. 55 degrees C, self-cooled.
- C. Insulating Liquid: Oil.

2.03 SERVICE CONDITIONS

- A. Meet requirements for usual service conditions described in IEEE C57.12.01 and for the specified unusual service conditions.
- B. Maximum Ambient Temperature: 120 degrees F.
- C. Transformer Loading Requirements: Continuous.

2.04 RATINGS

- A. Capacity: As indicated on drawings.
- B. Primary Voltage: 12.47 kV delta connected.
- C. Taps: Standard primary taps.
- D. Secondary Voltage: 208/120V, wye connected.
- E. Impedance: 5 percent maximum.
- F. Basic Impulse Level: 30 kV.

2.05 ACCESSORIES

- A. Accessories: IEEE C57.12.00 standard accessories.
- B. Tap Changer: Externally-operated type, pad lockable .
- C. Primary Terminations: Bushing wells to IEEE 386; provide three for radial feed. Include bushings for insulated loadbreak connectors.
- D. Primary Switching: Internal liquid-immersed gang-operated load break switch. Provide two, for primary selective switching.
- E. Primary Overcurrent Protection: Internally-mounted, liquid-immersed, expulsion fuses.
- F. Secondary Terminations: Spade lugs.

- G. Primary lightning arrestors and secondary current transformers to IEEE C57.13.
- H. Name plate in low voltage compartment
- I. 1 " Upper filter press and filing plug
- J. 1" Drain valve with sampling device
- K. Dial type thermometer
- L. Magnetic liquid-level guage
- M. Pressure vaccum gauge
- N. Pressure relief valve
- O. Penta head bolts for compartment doors

2.06 FABRICATION

- A. Conform to the requirements of IEEE C57.12.28. The transformer shall be of sealed-tank construction of sufficient strength to withstand a pressure of 7 psi without permanent distortion. The cover shall be welded and the hand hole fastenings tamper-proof. The transformer shall remian effectively sealed for a top oil temperature of -5 deg centigrade to 105 deg centigrade.

2.07 FACTORY FINISHING

- A. Clean surfaces before applying paint.
- B. Apply corrosion-resisting primer to all surfaces.
- C. Apply finish coat of baked enamel paint to 2 mils thick.
- D. Finish Color: Match the finish color of the existing medium voltage transformers on the site.

2.08 SOURCE QUALITY CONTROL

- A. Provide factory tests to IEEE C57.12.90 and IEEE C57.12.00. Include the routine tests as defined in the standards and the following other tests:
 - 1. Impedance voltage and load loss.
 - 2. Dielectric tests.
 - 3. Audible sound level.
 - 4. Short circuit capability.
 - 5. Telephone influence factor (TIF).
 - 6. Zero-phase-sequence impedance voltage.
 - 7. Temperature rise.
- B. Test insulating liquid samples in accordance with IEEE C57.111.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that support pads provided under Section 03 30 00 are ready to receive products.
- B. Verify that field measurements are as indicated on shop drawings.

3.02 INSTALLATION

- A. Install plumb and level.
- B. Install safety labels to NEMA 260.

3.03 FIELD QUALITY CONTROL

- A. Inspect and test in accordance with NETA STD ATS, except Section 4.
- B. Perform inspections and tests listed in NETA STD ATS, Section 7.2. In addition to the basic requirements of Section 7.2, include the following:
 - 1. Liquid-Filled Transformers:

- a. If core ground strap is accessible, remove and measure core insulation resistance at 500 volts dc.
- b. If applicable, measure the percentage of oxygen in the gas blanket.
- c. Measure insulating liquid's specific gravity, water content, and dissipation factor or power factor.

3.04 ADJUSTING

- A. Adjust primary taps so that secondary voltage is above and within 2 percent of rated voltage.

END OF SECTION

NOT FOR BIDDING

SECTION 26 24 16
PANELBOARDS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Power distribution panelboards.
- B. Lighting and appliance panelboards.
- C. Overcurrent protective devices for panelboards.

1.02 RELATED REQUIREMENTS

- A. Section 03 30 00 - Cast-in-Place Concrete: Concrete equipment pads.
- B. Section 26 05 26 - Grounding and Bonding for Electrical Systems.
- C. Section 26 05 26 - Grounding and Bonding for Electrical Systems.
- D. Section 26 05 29 - Hangers and Supports for Electrical Systems.
- E. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.
- F. Section 26 05 73 - Overcurrent Protective Device Coordination Study: Additional criteria for the selection and adjustment of equipment and associated protective devices specified in this section.
- G. Section 26 22 00 - Low-Voltage Transformers: Small power centers with integral primary breaker, transformer, and panelboard.
- H. Section 26 28 13 - Fuses: Fuses for fusible switches and spare fuse cabinets.
- I. Section 26 43 00 - Surge Protective Devices.

1.03 REFERENCE STANDARDS

- A. FS W-C-375 - Circuit Breakers, Molded Case; Branch Circuit and Service; Federal Specification.
- B. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- C. NECA 407 - Standard for Installing and Maintaining Panelboards.
- D. NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum).
- E. NEMA ICS 2 - Industrial Control and Systems Controllers, Contactors and Overload Relays Rated 600 Volts.
- F. NEMA KS 1 - Heavy Duty Enclosed and Dead-Front Switches (600 Volts Maximum).
- G. NEMA PB 1 - Panelboards.
- H. NEMA PB 1.1 - General Instructions for Proper Installation, Operation and Maintenance of Panelboards Rated 600 Volts or Less.
- I. NETA ATS - Acceptance Testing Specifications for Electrical Power Equipment and Systems.
- J. NFPA 70 - National Electrical Code.
- K. UL 50 - Enclosures for Electrical Equipment, Non-Environmental Considerations.
- L. UL 50E - Enclosures for Electrical Equipment, Environmental Considerations.
- M. UL 67 - Panelboards.
- N. UL 98 - Enclosed and Dead-Front Switches.
- O. UL 489 - Molded-Case Circuit Breakers, Molded-Case Switches and Circuit Breaker Enclosures.

- P. UL 869A - Reference Standard for Service Equipment.
- Q. UL 943 - Ground-Fault Circuit-Interrupters.
- R. UL 1053 - Ground-Fault Sensing and Relaying Equipment.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate the work with other trades to avoid placement of ductwork, piping, equipment, or other potential obstructions within the dedicated equipment spaces and working clearances for electrical equipment required by NFPA 70.
 - 2. Coordinate arrangement of electrical equipment with the dimensions and clearance requirements of the actual equipment to be installed.
 - 3. Coordinate the work with other trades to provide walls suitable for installation of flush-mounted panelboards where indicated.
 - 4. Verify with manufacturer that conductor terminations are suitable for use with the conductors to be installed.
 - 5. Notify Architect of any conflicts with or deviations from the contract documents. Obtain direction before proceeding with work.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for panelboards, enclosures, overcurrent protective devices, and other installed components and accessories.
 - 1. Include characteristic trip curves for each type and rating of overcurrent protective device upon request.
- C. Shop Drawings: Indicate outline and support point dimensions, voltage, main bus ampacity, overcurrent protective device arrangement and sizes, short circuit current ratings, conduit entry locations, conductor terminal information, and installed features and accessories.
 - 1. Include wiring diagrams showing all factory and field connections.
 - 2. Clearly indicate whether proposed short circuit current ratings are fully rated or, where acceptable, series rated systems.
- D. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.
- E. Project Record Documents: Record actual installed locations of panelboards and actual installed circuiting arrangements.
- F. Maintenance Data: Include information on replacement parts and recommended maintenance procedures and intervals.
- G. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
 - 1. See Section 01 60 00 - Product Requirements, for additional provisions.
 - 2. Panelboard Keys: Two of each different key.

1.06 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.

- D. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Receive, inspect, handle, and store panelboards in accordance with manufacturer's instructions and NECA 407.
- B. Store in a clean, dry space. Maintain factory wrapping or provide an additional heavy canvas or heavy plastic cover to protect units from dirt, water, construction debris, and traffic.
- C. Handle carefully in accordance with manufacturer's written instructions to avoid damage to panelboard internal components, enclosure, and finish.

1.08 FIELD CONDITIONS

- A. Maintain ambient temperature within the following limits during and after installation of panelboards:
 - 1. Panelboards Containing Circuit Breakers: Between 23 degrees F and 104 degrees F.

1.09 MAINTENANCE MATERIALS

- A. See Section 01 60 00 - Product Requirements, for additional provisions.
- B. Furnish two of each panelboard key.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Eaton Corporation; Cutler-Hammer Products: www.eaton.com/#sle.
- B. General Electric Company: www.geindustrial.com/#sle.
- C. Schneider Electric; Square D Products: www.schneider-electric.us/#sle.
- D. Substitutions: See Section 01 60 00 - Product Requirements.
- E. Source Limitations: Furnish panelboards and associated components produced by the same manufacturer as the other electrical distribution equipment used for this project and obtained from a single supplier.

2.02 ALL PANELBOARDS

- A. Provide products listed and labeled by Underwriters Laboratories Inc. as suitable for the purpose indicated.
- B. Unless otherwise indicated, provide products suitable for continuous operation under the following service conditions:
 - 1. Altitude: Less than 6,600 feet.
 - 2. Ambient Temperature:
 - a. Panelboards Containing Circuit Breakers: Between 23 degrees F and 104 degrees F.
- C. Short Circuit Current Rating:
 - 1. Provide panelboards with listed short circuit current rating not less than the available fault current at the installed location as indicated on the drawings.
 - 2. Listed series ratings are acceptable, except where not permitted by motor contribution according to NFPA 70.
 - 3. Label equipment utilizing series ratings as required by NFPA 70.
- D. Panelboards Used for Service Entrance: Listed and labeled as suitable for use as service equipment according to UL 869A.
- E. Mains: Configure for top or bottom incoming feed as indicated or as required for the installation.
- F. Branch Overcurrent Protective Devices: Replaceable without disturbing adjacent devices.

- G. Bussing: Sized in accordance with UL 67 temperature rise requirements.
 - 1. Provide fully rated neutral bus unless otherwise indicated, with a suitable lug for each feeder or branch circuit requiring a neutral connection.
 - 2. Provide solidly bonded equipment ground bus in each panelboard, with a suitable lug for each feeder and branch circuit equipment grounding conductor.
 - 3. Provide separate isolated/insulated ground bus where indicated or where isolated grounding conductors are provided.
- H. Conductor Terminations: Suitable for use with the conductors to be installed.
- I. Enclosures: Comply with NEMA 250, and list and label as complying with UL 50 and UL 50E.
 - 1. Environment Type per NEMA 250: Unless otherwise indicated, as specified for the following installation locations:
 - a. Indoor Clean, Dry Locations: Type 1.
 - 2. Boxes: Galvanized steel unless otherwise indicated.
 - a. Provide wiring gutters sized to accommodate the conductors to be installed.
 - 3. Fronts:
 - a. Fronts for Surface-Mounted Enclosures: Same dimensions as boxes.
 - b. Fronts for Flush-Mounted Enclosures: Overlap boxes on all sides to conceal rough opening.
 - c. Finish for Painted Steel Fronts: Manufacturer's standard grey unless otherwise indicated.
 - 4. Lockable Doors: All locks keyed alike unless otherwise indicated.
 - 5. Metal frame for type written directory
 - 6.
- J. Future Provisions: Prepare all unused spaces for future installation of devices including bussing, connectors, mounting hardware and all other required provisions.
- K. Panelboard Contactors: Where panelboard contactors are indicated, provide electrically operated, mechanically held magnetic contactor complying with NEMA ICS 2.
 - 1. Ampere Rating: Not less than ampere rating of panelboard bus.
 - 2. Short Circuit Current Rating: Not less than the panelboard short circuit current rating.
 - 3. Coil Voltage: As required for connection to control system indicated.
- L. Ground Fault Protection: Where ground-fault protection is indicated, provide system listed and labeled as complying with UL 1053.
 - 1. Where electronic circuit breakers equipped with integral ground fault protection are used, provide separate neutral current sensor where applicable.
- M. Selectivity: Where the requirement for selectivity is indicated, furnish products as required to achieve selective coordination.

2.03 POWER DISTRIBUTION PANELBOARDS

- A. Description: Panelboards complying with NEMA PB 1, power and feeder distribution type, circuit breaker type, and listed and labeled as complying with UL 67; ratings, configurations and features as indicated on the drawings.
- B. Products:
 - 1. SQ D .
 - 2. General Electric.
 - 3. Eaton Cutler Hammer.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- C. Conductor Terminations:
 - 1. Main and Neutral Lug Material: Copper, suitable for terminating copper conductors only.
 - 2. Main and Neutral Lug Type: Mechanical.

- D. Bussing:
 - 1. Phase and Neutral Bus Material: Copper.
 - 2. Ground Bus Material: Copper.
- E. Circuit Breakers:
 - 1. Provide bolt-on type or plug-in type secured with locking mechanical restraints.
 - 2. Provide thermal magnetic circuit breakers unless otherwise indicated.
 - 3. Provide electronic trip circuit breakers where indicated.
- F. Enclosures:
 - 1. Provide surface-mounted enclosures unless otherwise indicated.
 - 2. Fronts: Provide lockable door-in-door trim with hinged cover for access to load terminals and wiring gutters, and separate lockable continuous hinged door with concealed hinges for access to overcurrent protective device handles without exposing live parts.
 - 3. Provide metal circuit directory holder mounted on inside of door.
- G. Manufacturers:
 - 1. SQ.D or Equal.
 - 2. Substitutions: See Section 01 60 00 - Product Requirements.
- H. Description: NEMA PB 1, circuit breaker type.
- I. Service Conditions:
 - 1. Altitude: 1000 feet.
 - 2. Temperature: 55 degrees F.
- J. Panelboard Bus: Copper, ratings as indicated. Provide copper neutral and copper ground bus in each panelboard.
- K. Minimum integrated short circuit rating: As indicated.
 - 1. 240 Volt Panelboards: 14,000 amperes rms symmetrical (minimum).
- L. Molded Case Circuit Breakers: With integral thermal and instantaneous magnetic trip in each pole; UL listed. For air conditioning equipment branch circuits provide circuit breakers UL listed as Type HACR.
- M. Molded Case Circuit Breakers with Current Limiters: With replaceable current limiting elements, in addition to integral thermal and instantaneous magnetic trip in each pole; UL listed.
- N. Circuit Breaker Accessories: Trip units and auxiliary switches as indicated.
- O. Enclosure: NEMA PB 1, Type 1, 5 3/4" deep, 20" wide, cabinet box with continued hinge and lock.
- P. Cabinet Front: Surface type, hinged door with flush lock, metal directory frame, finished in manufacturer's standard gray enamel.

2.04 LIGHTING AND APPLIANCE PANELBOARDS

- A. Description: Panelboards complying with NEMA PB 1, lighting and appliance branch circuit type, circuit breaker type, and listed and labeled as complying with UL 67; ratings, configurations and features as indicated on the drawings.
- B. Products:
 - 1. SQD.
 - 2. General Electric.
 - 3. Eaton Cutler Hammer.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- C. Conductor Terminations:
 - 1. Main and Neutral Lug Material: Copper, suitable for terminating copper conductors only.
 - 2. Main and Neutral Lug Type: Mechanical.

- D. Bussing:
 - 1. Phase Bus Connections: Arranged for sequential phasing of overcurrent protective devices.
 - 2. Phase and Neutral Bus Material: Copper.
 - 3. Ground Bus Material: Copper.
- E. Circuit Breakers: Thermal magnetic bolt-on type unless otherwise indicated.
- F. Enclosures:
 - 1. Provide surface-mounted or flush-mounted enclosures as indicated.
 - 2. Fronts: Provide lockable door-in-door trim with hinged cover for access to load terminals and wiring gutters, and separate lockable continuous hinged door with concealed hinges for access to overcurrent protective device handles without exposing live parts.
 - 3. Provide metal circuit directory holder mounted on inside of door.
- G. Manufacturers:
 - 1. SQ.D or Equal.
 - 2. Substitutions: See Section 01 60 00 - Product Requirements.
- H. Description: NEMA PB1, circuit breaker type, lighting and appliance branch circuit panelboard.
- I. Panelboard Bus: Copper, ratings as indicated. Provide copper neutral and copper ground bus in each panelboard; provide insulated ground bus where scheduled.
- J. Minimum Integrated Short Circuit Rating: As indicated.
 - 1. 240 Volt Panelboards: 14,000 amperes rms symmetrical (minimum).
- K. Molded Case Circuit Breakers: Thermal magnetic trip circuit breakers, bolt-on type, with common trip handle for all poles; UL listed.
 - 1. Type SWD for lighting circuits.
 - 2. Type HACR for air conditioning equipment circuits.
 - 3. Class A ground fault interrupter circuit breakers where scheduled.
 - 4. Do not use tandem circuit breakers, or miniature circuit breakers.
- L. Enclosure: NEMA PB 1, Type 1.
- M. Cabinet Box: 6 inches deep, 20 inches wide for 240 volt and less panelboards.
- N. Cabinet Front: Flush or Surface cabinet front with concealed trim clamps, concealed hinge, metal directory frame, and flush lock all keyed alike. Finish in manufacturer's standard gray enamel.

2.05 OVERCURRENT PROTECTIVE DEVICES

- A. Molded Case Circuit Breakers:
 - 1. Description: Quick-make, quick-break, over center toggle, trip-free, trip-indicating circuit breakers listed and labeled as complying with UL 489, and complying with FS W-C-375 where applicable; ratings, configurations, and features as indicated on the drawings.
 - 2. Interrupting Capacity:
 - a. Provide circuit breakers with interrupting capacity as required to provide the short circuit current rating indicated, but not less than:
 - 1) 14000 rms symmetrical amperes at 240 VAC or 208 VAC.
 - b. Fully Rated Systems: Provide circuit breakers with interrupting capacity not less than the short circuit current rating indicated.
 - c. Series Rated Systems: Provide circuit breakers listed in combination with upstream devices to provide interrupting rating not less than the short circuit current rating indicated.
 - 3. Conductor Terminations:
 - a. Provide mechanical lugs unless otherwise indicated.
 - b. Lug Material: Copper, suitable for terminating copper conductors only.

4. Thermal Magnetic Circuit Breakers: For each pole, furnish thermal inverse time tripping element for overload protection and magnetic instantaneous tripping element for short circuit protection.
 - a. Provide field-adjustable magnetic instantaneous trip setting for circuit breaker frame sizes 225 amperes and larger.
 - b. Provide interchangeable trip units where indicated.
5. Electronic Trip Circuit Breakers: Furnish solid state, microprocessor-based, true rms sensing trip units.
 - a. Provide the following field-adjustable trip response settings:
 - 1) Long time pickup, adjustable by replacing interchangeable trip unit or by setting dial.
 - 2) Long time delay.
 - 3) Short time pickup and delay.
 - 4) Instantaneous pickup.
 - 5) Ground fault pickup and delay where ground fault protection is indicated.
6. Multi-Pole Circuit Breakers: Furnish with common trip for all poles.
7. Provide the following circuit breaker types where indicated:
 - a. Ground Fault Circuit Interrupter (GFCI) Circuit Breakers: Listed as complying with UL 943, class A for protection of personnel.
8. Provide listed switching duty rated circuit breakers with SWD marking for all branch circuits serving fluorescent lighting.
9. Provide listed high intensity discharge lighting rated circuit breakers with HID marking for all branch circuits serving HID lighting.
10. Do not use tandem circuit breakers.
11. Do not use handle ties in lieu of multi-pole circuit breakers.

2.06 SOURCE QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Factory test panelboards according to NEMA PB 1.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field measurements are as shown on the drawings.
- B. Verify that the ratings and configurations of the panelboards and associated components are consistent with the indicated requirements.
- C. Verify that mounting surfaces are ready to receive panelboards.
- D. Verify that conditions are satisfactory for installation prior to starting work.

3.02 INSTALLATION

- A. Install products in accordance with manufacturer's instructions.
- B. Install panelboards securely, in a neat and workmanlike manner in accordance with NECA 1 (general workmanship), NECA 407 (panelboards), and NEMA PB 1.1.
- C. Arrange equipment to provide minimum clearances in accordance with manufacturer's instructions and NFPA 70.
- D. Provide required supports in accordance with Section 26 05 29.
- E. Install panelboards plumb.
- F. Install flush-mounted panelboards so that trims fit completely flush to wall with no gaps and rough opening completely covered.

- G. Mount panelboards such that the highest position of any operating handle for circuit breakers or switches does not exceed 79 inches above the floor or working platform.
- H. Mount floor-mounted power distribution panelboards on properly sized 4 inch high concrete pad constructed in accordance with Section 03 30 00.
- I. Provide minimum of six spare 1 inch trade size conduits out of each flush-mounted panelboard stubbed into accessible space above ceiling and below floor.
- J. Provide grounding and bonding in accordance with Section 26 05 26.
 - 1. Terminate branch circuit equipment grounding conductors on solidly bonded equipment ground bus only. Do not terminate on isolated/insulated ground bus.
 - 2. Terminate branch circuit isolated grounding conductors on isolated/insulated ground bus only. Do not terminate on solidly bonded equipment ground bus.
- K. Install all field-installed branch devices, components, and accessories.
- L. Set field-adjustable circuit breaker tripping function settings as determined by overcurrent protective device coordination study performed according to Section 26 05 73.
- M. Set field-adjustable ground fault protection pickup and time delay settings as indicated.
- N. Install panelboards in accordance with NEMA PB 1.1 and NECA 1.
- O. Install panelboards plumb. Install recessed panelboards flush with wall finishes, where installed surface mounted secure or anchor panelboard to brick or cinder block wall.
- P. Height: 6 feet to top of panelboard; install panelboards taller than 6 feet with bottom no more than 4 inches above floor.
- Q. Provide filler plates to cover unused spaces in panelboards.
- R. Provide circuit breaker lock-on devices to prevent unauthorized personnel from de-energizing essential loads where indicated. Also provide for the following:
 - 1. Emergency and night lighting circuits.
 - 2. Fire detection and alarm circuits.
 - 3. Communications equipment circuits.
 - 4. Intrusion detection and access control system circuits.
 - 5. Video surveillance system circuits.
- S. Identify panelboards in accordance with Section 26 05 53.
- T. Provide computer-generated circuit directory for each lighting and appliance panelboard and each power distribution panelboard provided with a door, clearly and specifically indicating the loads served. Identify spares and spaces.
- U. Provide identification nameplate for each panelboard in accordance with Section 26 05 53.
- V. Provide arc flash warning labels in accordance with NFPA 70.
- W. Provide spare conduits out of each recessed panelboard to an accessible location above ceiling. Identify each as SPARE.
 - 1. Minimum spare conduits: 5 empty 1 inch.
- X. Ground and bond panelboard enclosure according to Section 26 05 26.

3.03 FIELD QUALITY CONTROL

- A. Perform inspection, testing, and adjusting in accordance with Section 01 40 00.
- B. Perform field inspection and testing in accordance with Section 01 40 00.
- C. Inspect and test in accordance with NETA STD ATS, except Section 4.
- D. Ground Fault Protection Systems: Test in accordance with manufacturer's instructions as required by NFPA 70.

- E. Test GFCI circuit breakers to verify proper operation.
- F. Test shunt trips to verify proper operation.
- G. Procure services of a qualified manufacturer's representative to observe installation and assist in inspection, testing, and adjusting. Include manufacturer's reports with field quality control submittals.
- H. Correct deficiencies and replace damaged or defective panelboards or associated components.
- I. Perform inspections and tests listed in NETA STD ATS, Section 7.5 for switches, Section 7.6 for circuit breakers.

3.04 ADJUSTING

- A. Adjust tightness of mechanical and electrical connections to manufacturer's recommended torque settings.
- B. Adjust alignment of panelboard fronts.
- C. Load Balancing: For each panelboard, rearrange circuits such that the difference between each measured steady state phase load does not exceed 20 percent and adjust circuit directories accordingly. Maintain proper phasing for multi-wire branch circuits.

3.05 CLEANING

- A. Clean dirt and debris from panelboard enclosures and components according to manufacturer's instructions.
- B. Repair scratched or marred exterior surfaces to match original factory finish.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 26 27 01
ELECTRICAL SERVICE ENTRANCE

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Service racks.
- B. Metering transformer cabinets.
- C. Meter bases.

1.02 RELATED REQUIREMENTS

- A. Section 26 09 14 - Electrical Power Monitoring: Electric meters.

1.03 REFERENCE STANDARDS

- A. NECA 1 - Standard for Good Workmanship in Electrical Construction; National Electrical Contractors Association.
- B. NFPA 70 - National Electrical Code; National Fire Protection Association.

1.04 SYSTEM DESCRIPTION

- A. System Characteristics: 208Y/120 volts, three phase, four-wire, 60 Hertz.

1.05 ADMINISTRATIVE REQUIREMENTS

- A. Preinstallation Meeting: Convene one week prior to commencing work of this section. Review service entrance requirements and details with Utility Company representative.

1.06 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide ratings and dimensions of transformer cabinets and meter bases.
- C. Submit utility company-prepared drawings.

1.07 QUALITY ASSURANCE

- A. Utility Company: Delmarva Power
- B. Perform work in accordance with utility company written requirements and NFPA 70.
 - 1. Maintain one copy of each document on site.
- C. Products: Listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.

1.08 PRE-INSTALLATION MEETING

- A. Convene one week prior to commencing work of this section. Review service entrance requirements and details with Utility Company representative.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. GE Industrial: www.geindustrial.com.
- B. Milbank Manufacturing: www.milbankmfg.com.
- C. Square D: www.squared.com.
- D. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 COMPONENTS

- A. Metering Transformer Cabinets: Sheet metal cabinet with hinged door, conforming to utility company requirements, with provisions for locking and sealing.
 - 1. Size: As required by utility.

- B. Utility Transformer Pad: Prefabricated fiberglass reinforced plastic transformer pad with cable pit.

PART 3 EXECUTION

3.01 PREPARATION

- A. Arrange with utility company to obtain permanent electric service to the Project.
- B. Verify that field measurements are as indicated on utility company drawings.

3.02 INSTALLATION

- A. Install service rack, transformer pad, and metering transformer cabinets as required.
- B. Install securely, in a neat and workmanlike manner, as specified in NECA 1.

END OF SECTION

SECTION 26 27 17
EQUIPMENT WIRING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Electrical connections to equipment.

1.02 RELATED REQUIREMENTS

- A. Section 26 05 34 - Conduit.
- B. Section 26 05 19 - Low-Voltage Electrical Power Conductors and Cables (600 V and Less).
- C. Section 26 05 37 - Boxes.
- D. Section 26 27 26 - Wiring Devices.

1.03 REFERENCE STANDARDS

- A. NEMA WD 1 - General Color Requirements for Wiring Devices.
- B. NEMA WD 6 - Wiring Devices - Dimensional Specifications.
- C. NFPA 70 - National Electrical Code.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide wiring device manufacturer's catalog information showing dimensions, configurations, and construction.
- C. Manufacturer's Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.

1.05 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Products: Listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.

1.06 COORDINATION

- A. Obtain and review shop drawings, product data, manufacturer's wiring diagrams, and manufacturer's instructions for equipment furnished under other sections.
- B. Determine connection locations and requirements.
- C. Sequence rough-in of electrical connections to coordinate with installation of equipment.
- D. Sequence electrical connections to coordinate with start-up of equipment.

PART 2 PRODUCTS

2.01 MATERIALS

- A. Cords and Caps: NEMA WD 6; match receptacle configuration at outlet provided for equipment.
 - 1. Colors: Conform to NEMA WD 1.
 - 2. Cord Construction: NFPA 70, Type SO, multiconductor flexible cord with identified equipment grounding conductor, suitable for use in damp locations.
 - 3. Size: Suitable for connected load of equipment, length of cord, and rating of branch circuit overcurrent protection.
 - 4. Product:
 - 5. Substitutions: See Section 01 60 00 - Product Requirements.

- B. Disconnect Switches: As specified in Section and in individual equipment sections.
- C. Wiring Devices: As specified in Section 26 27 26.
- D. Flexible Conduit: As specified in Section 26 05 34.
- E. Wire and Cable: As specified in Section 26 05 19.
- F. Boxes: As specified in Section 26 05 37.

2.02 EQUIPMENT CONNECTIONS

- A. As required by equipment manufacturer:

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that equipment is ready for electrical connection, wiring, and energization.

3.02 ELECTRICAL CONNECTIONS

- A. Make electrical connections in accordance with equipment manufacturer's instructions.
- B. Make conduit connections to equipment using flexible conduit. Use liquidtight flexible conduit with watertight connectors in damp or wet locations.
- C. Connect heat producing equipment using wire and cable with insulation suitable for temperatures encountered.
- D. Provide receptacle outlet to accommodate connection with attachment plug.
- E. Provide cord and cap where field-supplied attachment plug is required.
- F. Install suitable strain-relief clamps and fittings for cord connections at outlet boxes and equipment connection boxes.
- G. Install disconnect switches, controllers, control stations, and control devices to complete equipment wiring requirements.
- H. Install terminal block jumpers to complete equipment wiring requirements.
- I. Install interconnecting conduit and wiring between devices and equipment to complete equipment wiring requirements.
- J. Coolers and Freezers: Cut and seal conduit openings in freezer and cooler walls, floor, and ceilings.

END OF SECTION

SECTION 26 27 26
WIRING DEVICES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Wall switches.
- B. Wall dimmers.
- C. Receptacles.
- D. Wall plates.
- E. Floor box service fittings.

1.02 RELATED REQUIREMENTS

- A. Section 26 05 19 - Low-Voltage Electrical Power Conductors and Cables: Manufactured wiring systems for use with access floor boxes with compatible pre-wired connectors.
- B. Section 26 05 26 - Grounding and Bonding for Electrical Systems.
- C. Section 26 05 35 - Surface Raceways: Surface raceway systems, including multioutlet assemblies.
- D. Section 26 05 37 - Boxes.
- E. Section 26 05 37 - Boxes.
- F. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.
- G. Section 26 09 23 - Lighting Control Devices: Devices for automatic control of lighting, including occupancy sensors, in-wall time switches, and in-wall interval timers.
- H. Section 26 27 17 - Equipment Wiring: Cords and plugs for equipment.
- I. Section 26 29 13 - Enclosed Controllers: Manual motor starters and horsepower rated motor-starting switches without overload protection.
- J. Section 27 10 05 - Structured Cabling for Voice and Data - Inside-Plant: Voice and data jacks.

1.03 REFERENCE STANDARDS

- A. FS W-C-596 - Connector, Electrical, Power, General Specification for; Federal Specification.
- B. FS W-S-896 - Switches, Toggle (Toggle and Lock), Flush-mounted (General Specification); Federal Specification.
- C. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- D. NECA 130 - Standard for Installing and Maintaining Wiring Devices.
- E. NEMA WD 1 - General Color Requirements for Wiring Devices.
- F. NEMA WD 6 - Wiring Devices - Dimensional Specifications.
- G. NFPA 70 - National Electrical Code.
- H. UL 20 - General-Use Snap Switches.
- I. UL 498 - Attachment Plugs and Receptacles.
- J. UL 514D - Cover Plates for Flush-Mounted Wiring Devices.
- K. UL 943 - Ground-Fault Circuit-Interrupters.
- L. UL 1472 - Solid-State Dimming Controls.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:

1. Coordinate the placement of outlet boxes with millwork, furniture, equipment, etc. installed under other sections or by others.
 2. Coordinate wiring device ratings and configurations with the electrical requirements of actual equipment to be installed.
 3. Coordinate the placement of outlet boxes for wall switches with actual installed door swings.
 4. Coordinate the installation and preparation of uneven surfaces, such as split face block, to provide suitable surface for installation of wiring devices.
 5. Coordinate the core drilling of holes for poke-through assemblies with the work covered under other sections.
 6. Notify Architect of any conflicts or deviations from the contract documents to obtain direction prior to proceeding with work.
- B. Sequencing:
1. Do not install wiring devices until final surface finishes and painting are complete.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide manufacturer's catalog information showing dimensions, colors, and configurations.
- C. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.
- D. Operation and Maintenance Data:
 1. Wall Dimmers: Include information on operation and setting of presets.
 2. GFCI Receptacles: Include information on status indicators.
- E. Project Record Documents: Record actual installed locations of wiring devices.
- F. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
 1. See Section 01 60 00 - Product Requirements, for additional provisions.
 2. Extra Wall Plates: One of each style, size, and finish.
 3. Extra Flush Floor Service Fittings: Two of each type.

1.06 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
- D. Products: Listed, classified, and labeled as suitable for the purpose intended.
- E. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

1.07 DELIVERY, STORAGE, AND PROTECTION

- A. Store in a clean, dry space in original manufacturer's packaging until ready for installation.

1.08 EXTRA MATERIALS

- A. See Section 01 60 00 - Product Requirements, for additional provisions.
- B. Furnish two of each style, size, and finish wall plate.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Hubbell Incorporated; : www.hubbell-wiring.com.
- B. Leviton Manufacturing Company, Inc; : www.leviton.com.
- C. Lutron Electronics Company, Inc: www.lutron.com.
- D. Pass & Seymour, a brand of Legrand North America, Inc; : www.legrand.us
- E. Cooper Wiring Devices: www.cooperwiringdevices.com.
- F. Leviton Manufacturing, Inc: www.leviton.com.
- G. Substitutions: See Section 01 60 00 - Product Requirements.
- H. Source Limitations: Where possible, for each type of wiring device furnish products produced by a single manufacturer and obtained from a single supplier.

2.02 APPLICATIONS

- A. Provide wiring devices suitable for intended use and with ratings adequate for load served.
- B. For single receptacles installed on an individual branch circuit, provide receptacle with ampere rating not less than that of the branch circuit.
- C. Provide weather resistant GFI receptacles with specified weatherproof covers for all receptacles installed outdoors or in damp or wet locations.
- D. Provide GFI protection for all receptacles installed within 6 feet of sinks.
- E. Provide GFCI protection for receptacles serving electric drinking fountains.
- F. Unless noted otherwise, do not use combination switch/receptacle devices.
- G. For flush floor service fittings, use carpet flanges for installations in carpeted floors.

2.03 WIRING DEVICE FINISHES

- A. Provide wiring device finishes as described below unless otherwise indicated.
- B. Wiring Devices, Unless Otherwise Indicated: Black with stainless steel nylon wall plate.

2.04 ALL WIRING DEVICES

- A. Provide products listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.

2.05 WALL SWITCHES

- A. Manufacturers:
 - 1. Hubbell Incorporated; : www.hubbell-wiring.com.
 - 2. Leviton Manufacturing Company, Inc; : www.leviton.com/#sle.
 - 3. Pass & Seymour, a brand of Legrand North America, Inc; : www.legrand.us/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. All Wall Switches: AC only, quiet operating, general-use switches with silver alloy contacts, complying with NEMA WD 1 and NEMA WD 6, and listed as complying with UL 20 and where applicable, FS W-S-896; types as indicated on the drawings.
 - 1. Wiring Provisions: Terminal screws for side wiring and screw actuated binding clamp for back wiring with separate ground terminal screw.
- C. Wall Switches: Heavy Duty, AC only general-use switch, complying with NEMA WD 6 and WD
 - 1. Body and Handle: Black plastic with toggle handle.
 - 2. Ratings:
 - a. Voltage: 120 volts, AC.
 - b. Current: 20 amperes.

- 3. Ratings: Match branch circuit and load characteristics.
- D. Switch Types: Single pole, double pole, 3-way, and 4-way.

2.06 WALL DIMMERS

- A. Manufacturers:
 - 1. Leviton Manufacturing Company, Inc; _____: www.leviton.com/#sle.
 - 2. Lutron Electronics Company, Inc; Maestro Series: www.lutron.com.
 - 3. Pass & Seymour, a brand of Legrand North America, Inc; _____: www.legrand.us/#sle.
 - 4. Hubbell Control Solutions; <https://www.hubbell.com/hubbellcontrolsolutions/en..>
 - 5. Substitutions: See Section 01 60 00 - Product Requirements.
- B. All Wall Dimmers: Solid-state with continuous full-range even control following square law dimming curve, integral radio frequency interference filtering, power failure preset memory, air gap switch accessible without removing wall plate, complying with NEMA WD 1 and NEMA WD 6, and listed as complying with UL 1472; types and ratings suitable for load controlled as indicated on the drawings.

2.07 RECEPTACLES

- A. Manufacturers:
 - 1. Hubbell Incorporated; : www.hubbell-wiring.com.
 - 2. Leviton Manufacturing Company, Inc; : www.leviton.com/#sle.
 - 3. Pass & Seymour, a brand of Legrand North America, Inc; : www.legrand.us/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. All Receptacles: Self-grounding, complying with NEMA WD 1 and NEMA WD 6, and listed as complying with UL 498, and where applicable, FS W-C-596; types as indicated on the drawings.
 - 1. Wiring Provisions: Terminal screws for side wiring or screw actuated binding clamp for back wiring with separate ground terminal screw.
 - 2. NEMA configurations specified are according to NEMA WD 6.
- C. Convenience Receptacles:
 - 1. Standard Convenience Receptacles: Industrial specification grade, 20A, 125V, NEMA 5-20R; single or duplex as indicated on the drawings.
 - a. Products:
 - 1) Hubbell Wiring Devices.
 - 2) Leviton.
 - 3) Pass & Saymore.
 - 4) Substitutions: See Section 01 60 00 - Product Requirements.
- D. GFI Receptacles:
 - 1. All GFI Receptacles: Provide with feed-through protection, light to indicate ground fault tripped condition and loss of protection, and list as complying with UL 943, class A.
 - 2. Standard GFCI Receptacles: Industrial specification grade, duplex, 20A, 125V, NEMA 5-20R, rectangular decorator style.
- E. Receptacles: Heavy duty, complying with NEMA WD 6 and WD 1.
 - 1. Device Body: Black plastic.
 - 2. Configuration: NEMA WD 6, type as specified and indicated.
- F. Convenience Receptacles: Type 5 - 20.
- G. Single Convenience Receptacles.
- H. Duplex Convenience Receptacles.
- I. GFCI Receptacles: Convenience receptacle with integral ground fault circuit interrupter to meet regulatory requirements.

2.08 WALL PLATES

- A. Manufacturers:
 - 1. Hubbell Incorporated; : www.hubbell-wiring.com/#sle.
 - 2. Leviton Manufacturing Company, Inc; : www.leviton.com/#sle.
 - 3. Pass & Seymour, a brand of Legrand North America, Inc; : www.legrand.us/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. All Wall Plates: Comply with UL 514D.
 - 1. Configuration: One piece cover as required for quantity and types of corresponding wiring devices.
 - 2. Size: Standard; .
 - 3. Screws: Metal with slotted heads finished to match wall plate finish.
- C. Stainless Steel Wall Plates: Brushed satin finish, Type 302 stainless steel.
- D. Weatherproof Covers for Damp Locations: Gasketed, cast aluminum, with self-closing hinged cover and corrosion-resistant screws; listed as suitable for use in wet locations with cover closed.
- E. Weatherproof Covers for Wet Locations: Gasketed, cast aluminum, with hinged lockable cover and corrosion-resistant screws; listed as suitable for use in wet locations while in use with attachment plugs connected and identified as extra-duty type.
- F. Decorative Cover Plates: stainless steel.
- G. Jumbo Cover Plates: stainless steel.
- H. Weatherproof Cover Plates: Gasketed cast metal with hinged cover.

2.09 POKE-THROUGH ASSEMBLIES

- A. Description: Assembly comprising floor service fitting, poke-through component, fire stops and smoke barriers, and junction box for conduit termination; fire rating listed to match fire rating of floor and suitable for floor thickness where installed.
- B. Flush Floor Service Fittings:
 - 1. Dual Service Flush Combination Outlets:
 - a. Cover: Hinged door(s).
 - b. Configuration:
 - 1) Power: One standard convenience duplex receptacle(s).
 - 2) Communications: Two data drops..
 - 3) Voice and Data Jacks: As specified in Section 27 10 05.
 - 2. Accessories:
 - a. Closure Plugs: Size and fire rating as required to seal unused core hole and maintain fire rating of floor.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field measurements are as shown on the drawings.
- B. Verify that outlet boxes are installed in proper locations and at proper mounting heights and are properly sized to accommodate devices and conductors in accordance with NFPA 70.
- C. Verify that wall openings are neatly cut and will be completely covered by wall plates.
- D. Verify that final surface finishes are complete, including painting.
- E. Verify that floor boxes are adjusted properly.
- F. Verify that branch circuit wiring installation is completed, tested, and ready for connection to wiring devices.

- G. Verify that openings in access floor are in proper locations.
- H. Verify that conditions are satisfactory for installation prior to starting work.

3.02 PREPARATION

- A. Provide extension rings to bring outlet boxes flush with finished surface.
- B. Clean dirt, debris, plaster, and other foreign materials from outlet boxes.

3.03 INSTALLATION

- A. Perform work in a neat and workmanlike manner in accordance with NECA 1 and, where applicable, NECA 130, including mounting heights specified in those standards unless otherwise indicated.
- B. Perform work in a neat and workmanlike manner in accordance with NECA 1, including mounting heights specified in that standard unless otherwise indicated.
- C. Coordinate locations of outlet boxes provided under Section 26 05 37 as required for installation of wiring devices provided under this section.
 - 1. Orient outlet boxes for vertical installation of wiring devices unless otherwise indicated.
 - 2. Where multiple wall switches or wall dimmers are installed at the same location and at the same mounting height, gang devices together under a common wall plate.
 - 3. Locate wall switches on strike side of door with edge of wall plate 3 inches from edge of door frame. Where locations are indicated otherwise, notify Architect to obtain direction prior to proceeding with work.
 - 4. Locate receptacles for electric drinking fountains concealed behind drinking fountain according to manufacturer's instructions.
- D. Install wiring devices in accordance with manufacturer's instructions.
- E. Install permanent barrier between ganged wiring devices when voltage between adjacent devices exceeds 300 V.
- F. Where required, connect wiring devices using pigtails not less than 6 inches long. Do not connect more than one conductor to wiring device terminals.
- G. Connect wiring devices by wrapping conductor clockwise 3/4 turn around screw terminal and tightening to proper torque specified by the manufacturer. Where present, do not use push-in pressure terminals that do not rely on screw-actuated binding.
- H. Unless otherwise indicated, connect wiring device grounding terminal to branch circuit equipment grounding conductor and to outlet box with bonding jumper.
- I. For isolated ground receptacles, connect wiring device grounding terminal only to identified branch circuit isolated equipment grounding conductor. Do not connect grounding terminal to outlet box or normal branch circuit equipment grounding conductor.
- J. Unless otherwise indicated, GFCI receptacles may be connected to provide feed-through protection to downstream devices. Label such devices to indicate they are protected by upstream GFCI protection.
- K. Install securely, in a neat and workmanlike manner, as specified in NECA 1.
- L. Install wiring devices plumb and level with mounting yoke held rigidly in place.
- M. Install wall switches with OFF position down.
- N. Do not share neutral conductor on branch circuits utilizing wall dimmers.
- O. Install vertically mounted receptacles with grounding pole on top and horizontally mounted receptacles with grounding pole on left.
- P. Install wall plates to fit completely flush to wall with no gaps and rough opening completely covered without strain on wall plate. Repair or reinstall improperly installed outlet boxes or

improperly sized rough openings. Do not use oversized wall plates in lieu of meeting this requirement.

- Q. Install blank wall plates on junction boxes and on outlet boxes with no wiring devices installed or designated for future use.
- R. Install poke-through closure plugs in each unused core holes to maintain fire rating of floor.
- S. Install receptacles with grounding pole on top.
- T. Connect wiring device grounding terminal to outlet box with bonding jumper.
- U. Install decorative plates on switch, receptacle, and blank outlets in finished areas.
- V. Connect wiring devices by wrapping conductor around screw terminal.
- W. Use jumbo size plates for outlets installed in masonry walls.
- X. Install galvanized steel plates on outlet boxes and junction boxes in unfinished areas, above accessible ceilings, and on surface mounted outlets.

3.04 INTERFACE WITH OTHER PRODUCTS

- A. Coordinate locations of outlet boxes provided under Section 26 05 37 to obtain mounting heights. Coordinate with heights shown on drawings.
- B. Install convenience receptacle 6 inches above backsplash of counter.
- C. Coordinate installation of access floor boxes with access floor system provided under Section 09 69 00.
- D. Coordinate the installation of wiring devices with underfloor duct service fittings provided under Section 26 05 40.

3.05 FIELD QUALITY CONTROL

- A. Perform field inspection, testing, adjusting, and balancing in accordance with Section 01 40 00.
- B. Inspect each wiring device for damage and defects.
- C. Operate each wall switch, wall dimmer, and fan speed controller with circuit energized to verify proper operation.
- D. Operate each wall switch with circuit energized and verify proper operation.
- E. Verify that each receptacle device is energized.
- F. Test each receptacle to verify operation and proper polarity.
- G. Test each GFCI receptacle for proper tripping operation according to manufacturer's instructions.
- H. Correct wiring deficiencies and replace damaged or defective wiring devices.
- I. Verify that each telephone jack is properly connected and circuit is operational.

3.06 ADJUSTING

- A. Adjust devices and wall plates to be flush and level.

3.07 CLEANING

- A. Clean exposed surfaces to remove dirt, paint, or other foreign material and restore to match original factory finish.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 26 28 13
FUSES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Fuses.

1.02 RELATED REQUIREMENTS

- A. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.
- B. Section 26 05 73 - Overcurrent Protective Device Coordination Study: Additional criteria for the selection of protective devices specified in this section.
- C. Section 26 24 16 - Panelboards: Fusible switches.
- D. Section 26 28 18 - Enclosed Switches: Fusible switches.
- E. Section 26 29 13 - Enclosed Controllers: Fusible switches.

1.03 REFERENCE STANDARDS

- A. NEMA FU 1 - Low Voltage Cartridge Fuses.
- B. NFPA 70 - National Electrical Code.
- C. UL 248-1 - Low-Voltage Fuses - Part 1: General Requirements.
- D. UL 248-4 - Low-Voltage Fuses - Part 4: Class CC Fuses.
- E. UL 248-12 - Low-Voltage Fuses - Part 12: Class R Fuses.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate fuse clips furnished in equipment provided under other sections for compatibility with indicated fuses.
 - a. Fusible Switches for Enclosed Motor Controllers: See Section 26 29 13.
 - 2. Coordinate fuse requirements according to manufacturer's recommendations and nameplate data for actual equipment to be installed.
 - 3. Notify Architect of any conflicts with or deviations from the contract documents. Obtain direction before proceeding with work.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide manufacturer's standard data sheets including voltage and current ratings, interrupting ratings, time-current curves, and current limitation curves.
- C. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
 - 1. See Section 01 60 00 - Product Requirements, for additional provisions.
 - 2. Extra Fuses: One set(s) of three for each type and size installed.
 - 3. Fuse Pullers: One set(s) compatible with each type and size installed.

1.06 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
- C. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

- D. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience and with service facilities within 100 miles of Project.
- E. Products: Listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.

1.07 MAINTENANCE MATERIALS

- A. See Section 01 60 00 - Product Requirements, for additional provisions.
- B. Furnish two fuse pullers.
- C. Furnish three of each size and type fuse installed.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Cooper Bussmann, a division of Cooper Industries: www.cooperindustries.com/#sle.
- B. Mersen (formerly Ferraz Shawmut): ferrazshawmut.mersen.com.
- C. Littelfuse, Inc: www.littelfuse.com/#sle.
- D. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 APPLICATIONS

- A. Service Entrance:
 - 1. Fusible Switches up to 600 Amperes: Class RK1, time-delay.
- B. General Purpose Branch Circuits: Class RK1, time-delay.
- C. Primary Protection for Control Transformers: Class CC, time-delay.

2.03 FUSES

- A. Provide products listed and classified by Underwriters Laboratories Inc. as suitable for the purpose indicated.
- B. Unless specifically indicated to be excluded, provide fuses for all fusible equipment as required for a complete operating system.
- C. Provide fuses of the same type, rating, and manufacturer within the same switch.
- D. Comply with UL 248-1.
- E. Unless otherwise indicated, provide cartridge type fuses complying with NEMA FU 1, Class and ratings as indicated.
- F. Voltage Rating: Suitable for circuit voltage.
- G. Class R Fuses: Comply with UL 248-12.
- H. Class CC Fuses: Comply with UL 248-4.
- I. Power Load Feeder Switches: Class RK1 (time delay).
- J. Motor Load Feeder Switches: Class RK1 (time delay).
- K. Other Feeder Switches: Class RK1 (time delay).
- L. General Purpose Branch Circuits: Class RK1 (time delay).
- M. Motor Branch Circuits: Class L time delay.
- N. Lighting Branch Circuits: Class G.

2.04 CLASS RK1 (TIME DELAY) FUSES

- A. Manufacturers:
 - 1. Bussman Corp.

- 2. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Construction: Current limiting, dual-element fuse, 10 seconds minimum at 500% rated amps, with copper fuse element.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that fuse ratings are consistent with circuit voltage and manufacturer's recommendations and nameplate data for equipment.
- B. Verify that conditions are satisfactory for installation prior to starting work.

3.02 INSTALLATION

- A. Do not install fuses until circuits are ready to be energized.
- B. Install fuses with label oriented such that manufacturer, type, and size are easily read.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 26 28 17
ENCLOSED CIRCUIT BREAKERS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Enclosed circuit breakers.

1.02 RELATED REQUIREMENTS

- A. Section 26 05 26 - Grounding and Bonding for Electrical Systems.
- B. Section 26 05 29 - Hangers and Supports for Electrical Systems.
- C. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.
- D. Section 26 05 73 - Overcurrent Protective Device Coordination Study: Additional criteria for the selection and adjustment of equipment and associated protective devices specified in this section.

1.03 REFERENCE STANDARDS

- A. FS W-C-375 - Circuit Breakers, Molded Case; Branch Circuit and Service; Federal Specification.
- B. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- C. NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum).
- D. NETA ATS - Acceptance Testing Specifications for Electrical Power Equipment and Systems.
- E. NFPA 70 - National Electrical Code.
- F. UL 50 - Enclosures for Electrical Equipment, Non-Environmental Considerations.
- G. UL 50E - Enclosures for Electrical Equipment, Environmental Considerations.
- H. UL 489 - Molded-Case Circuit Breakers, Molded-Case Switches and Circuit Breaker Enclosures.
- I. UL 869A - Reference Standard for Service Equipment.
- J. UL 943 - Ground-Fault Circuit-Interrupters.
- K. UL 1053 - Ground-Fault Sensing and Relaying Equipment.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate work with other trades. Avoid placement of ductwork, piping, equipment, or other potential obstructions within dedicated equipment spaces and within working clearances for electrical equipment required by NFPA 70.
 - 2. Coordinate arrangement of electrical equipment with the dimensions and clearance requirements of the actual equipment to be installed.
 - 3. Verify with manufacturer that conductor terminations are suitable for use with the conductors to be installed.
 - 4. Notify Architect of any conflicts with or deviations from the contract documents. Obtain direction before proceeding with work.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for circuit breakers, enclosures, and other installed components and accessories.

- C. Shop Drawings: Indicate outline and support point dimensions, voltage and current ratings, short circuit current ratings, conduit entry locations, conductor terminal information, and installed features and accessories.
 - 1. Clearly indicate whether proposed short circuit current ratings are fully rated or, where acceptable, series rated systems.
 - 2. Include documentation of listed series ratings.
- D. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, installation, and starting of product.

1.06 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Maintain one copy of each document on site.
- D. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
- E. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Store in a clean, dry space. Maintain factory wrapping or provide an additional heavy canvas or heavy plastic cover to protect units from dirt, water, construction debris, and traffic.
- B. Handle carefully in accordance with manufacturer's written instructions to avoid damage to enclosed circuit breaker internal components, enclosure, and finish.

1.08 FIELD CONDITIONS

- A. Maintain ambient temperature between 23 degrees F and 104 degrees F during and after installation of enclosed circuit breakers.

1.09 EXTRA MATERIALS

- A. See Section 01 60 00 - Product Requirements, for additional provisions.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Eaton Corporation; Cutler-Hammer Products: www.eaton.com/#sle.
- B. General Electric Company: www.geindustrial.com/#sle.
- C. Schneider Electric; Square D Products: www.schneider-electric.us/#sle.
- D. Substitutions: See Section 01 60 00 - Product Requirements.
- E. Source Limitations: Furnish enclosed circuit breakers and associated components produced by the same manufacturer as the other electrical distribution equipment used for this project and obtained from a single supplier.

2.02 ENCLOSED CIRCUIT BREAKERS

- A. Description: Units consisting of molded case circuit breakers individually mounted in enclosures.
- B. Provide products listed and labeled by Underwriters Laboratories Inc. as suitable for the purpose indicated.

- C. Unless otherwise indicated, provide products suitable for continuous operation under the following service conditions:
 - 1. Altitude: Less than 6,600 feet.
 - 2. Ambient Temperature: Between 23 degrees F and 104 degrees F.
- D. Short Circuit Current Rating:
 - 1. Provide enclosed circuit breakers with listed short circuit current rating not less than the available fault current at the installed location indicated on the drawings.
 - 2. Listed series ratings are acceptable, except where not permitted by motor contribution according to NFPA 70.
 - 3. Label equipment utilizing series ratings as required by NFPA 70.
- E. Enclosed Circuit Breakers Used for Service Entrance: Listed and labeled as suitable for use as service equipment according to UL 869A.
- F. Conductor Terminations: Suitable for use with the conductors to be installed.
- G. Provide thermal magnetic circuit breakers unless otherwise indicated.
- H. Provide electronic trip circuit breakers where indicated.
- I. Provide insulated, groundable fully rated solid neutral assembly where a neutral connection is required, with a suitable lug for terminating each neutral conductor.
- J. Provide solidly bonded equipment ground bus in each enclosed circuit breaker, with a suitable lug for terminating each equipment grounding conductor.
- K. Enclosures: Comply with NEMA 250, and list and label as complying with UL 50 and UL 50E.
 - 1. Environment Type per NEMA 250: Unless otherwise indicated, as specified for the following installation locations:
 - a. Indoor Clean, Dry Locations: Type 1.
 - b. Outdoor Locations: Type 3R.
 - 2. Finish for Painted Steel Enclosures: Manufacturer's standard, factory applied grey unless otherwise indicated.
 - 3. Provide surface-mounted enclosures unless otherwise indicated.
- L. Provide externally operable handle with means for locking in the OFF position.
- M. Ground Fault Protection: Where ground-fault protection is indicated, provide system listed and labeled as complying with UL 1053.
 - 1. Where electronic circuit breakers equipped with integral ground fault protection are used, provide separate neutral current sensor where applicable.
 - 2. Where accessory ground fault sensing and relaying equipment is used, equip companion circuit breakers with ground-fault shunt trips.
 - a. Use zero sequence ground fault detection method unless otherwise indicated.
 - b. Provide test panel and field-adjustable ground fault pick-up and delay settings.

2.03 MOLDED CASE CIRCUIT BREAKERS

- A. Description: Quick-make, quick-break, over center toggle, trip-free, trip-indicating circuit breakers listed and labeled as complying with UL 489, and complying with FS W-C-375 where applicable; ratings, configurations, and features as indicated on the drawings.
- B. Interrupting Capacity:
 - 1. Provide circuit breakers with interrupting capacity as required to provide the short circuit current rating indicated, but not less than:
 - a. 14000 min. rms symmetrical amperes at 240 VAC or 208 VAC.
 - 2. Fully Rated Systems: Provide circuit breakers with interrupting capacity not less than the short circuit current rating indicated.

3. Series Rated Systems: Provide circuit breakers listed in combination with upstream devices to provide interrupting rating not less than the short circuit current rating indicated.
- C. Conductor Terminations:
 1. Provide mechanical lugs unless otherwise indicated.
 2. Lug Material: Copper, suitable for terminating copper conductors only.
- D. Thermal Magnetic Circuit Breakers: For each pole, furnish thermal inverse time tripping element for overload protection and magnetic instantaneous tripping element for short circuit protection.
 1. Provide field-adjustable magnetic instantaneous trip setting for circuit breaker frame sizes 225 amperes and larger.
 2. Provide interchangeable trip units for circuit breaker frame sizes 225 amperes and larger.
- E. Electronic Trip Circuit Breakers: Furnish solid state, microprocessor-based, true rms sensing trip units.
 1. Provide the following field-adjustable trip response settings:
 - a. Long time pickup, adjustable by replacing interchangeable trip unit or by setting dial.
 - b. Long time delay.
 - c. Short time pickup and delay.
 - d. Instantaneous pickup.
 - e. Ground fault pickup and delay where ground fault protection is indicated.
- F. Multi-Pole Circuit Breakers: Furnish with common trip for all poles.
- G. Provide the following circuit breaker types where indicated:
 1. Ground Fault Circuit Interrupter (GFCI) Circuit Breakers: Listed as complying with UL 943, class A for protection of personnel.
- H. Provide the following features and accessories where indicated or where required to complete installation:
 1. Shunt Trip: Provide coil voltage as required for connection to indicated trip actuator.
- I. Molded Case Circuit Breakers: UL listed for the following service conditions:
 1. Temperature: 95 degrees F.
 2. Altitude: 1000 feet.

2.04 TRIP UNITS

- A. Field-Adjustable Trip Circuit Breakers: Provide circuit breakers with frame sizes 200 amperes and larger with mechanism for adjusting long time continuous current, short time pickup current setting for automatic operation.
- B. Field-Changeable Ampere Rating Circuit Breaker: Provide circuit breakers with frame sizes 250 amperes and larger with changeable trip units.
- C. Current Limiting Circuit Breaker: Provide circuit breaker as indicated with automatically-resetting current limiting elements in each pole. Let-through Current and Energy: Less than permitted for same size Class RK-5 fuse.
- D. Solid-State Circuit Breaker: Provide circuit breaker as scheduled with electronic sensing, timing and tripping circuits for adjustable current settings; ground fault trip with zero sequence type ground fault sensor; instantaneous trip.

2.05 CURRENT LIMITERS

- A. Current Limiters: Designed for application with molded case circuit breaker.
- B. Coordinate limiter size with trip rating of circuit breaker to prevent nuisance tripping and to achieve interrupting current rating specified for circuit breaker.
- C. Provide interlocks to trip circuit breaker and to prevent closing circuit breaker when limiter compartment cover is removed or when one or more limiter is not in place or has operated.

2.06 ACCESSORIES

- A. Enclosures:
 - 1. Fabricate enclosures from steel.
 - 2. Finish: Manufacturer's standard enamel finish, gray color.
- B. Provide accessories as scheduled.
- C. Handle Lock: Include provisions for padlocking.
- D. Provide mechanical trip device.
- E. Provide grounding lug in each enclosure.
- F. Provide products suitable for use as service entrance equipment where so applied.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field measurements are as shown on the drawings.
- B. Verify that the ratings of the enclosed circuit breakers are consistent with the indicated requirements.
- C. Verify that mounting surfaces are ready to receive enclosed circuit breakers.
- D. Verify that conditions are satisfactory for installation prior to starting work.

3.02 INSTALLATION

- A. Install enclosed circuit breakers where indicated, in accordance with manufacturer's instructions.
- B. Install enclosed circuit breakers securely, in a neat and workmanlike manner in accordance with NECA 1.
- C. Arrange equipment to provide minimum clearances in accordance with manufacturer's instructions and NFPA 70.
- D. Provide required supports in accordance with Section 26 05 29.
- E. Install enclosed circuit breakers plumb.
- F. Except where indicated to be mounted adjacent to the equipment they supply, mount enclosed circuit breakers such that the highest position of the operating handle does not exceed 79 inches above the floor or working platform.
- G. Provide grounding and bonding in accordance with Section 26 05 26.
- H. Set field-adjustable ground fault protection pickup and time delay settings as indicated.
- I. Identify enclosed circuit breakers in accordance with Section 26 05 53.
- J. Height: 5 feet to operating handle.
- K. Provide identification nameplates for each enclosed circuit breaker in accordance with Section 26 05 53.
- L. Provide arc flash warning labels in accordance with NFPA 70.

3.03 FIELD QUALITY CONTROL

- A. Perform inspection, testing, and adjusting in accordance with Section 01 40 00.
- B. Inspect and test in accordance with manufacturer's instructions and NETA STD ATS, except Section 4.
- C. Perform inspections and tests listed in NETA STD ATS, Section 7.6.1.1 for circuit breakers used for service entrance and for circuit breakers larger than 400 amperes. Tests listed as optional are not required.

- D. Ground Fault Protection Systems: Test in accordance with manufacturer's instructions as required by NFPA 70.
- E. Test GFCI circuit breakers to verify proper operation.
- F. Test shunt trips to verify proper operation.
- G. Correct deficiencies and replace damaged or defective enclosed circuit breakers.
- H. Perform field inspection and testing in accordance with Section 01 40 00.
- I. Inspect and test each circuit breaker.
- J. Inspect each circuit breaker visually.
- K. Perform several mechanical ON-OFF operations on each circuit breaker.
- L. Verify circuit continuity on each pole in closed position.
- M. Determine that circuit breaker will trip on overcurrent condition, with tripping time to NEMA AB 1 requirements.
- N. Include description of testing and results in test report.

3.04 ADJUSTING

- A. Adjust tightness of mechanical and electrical connections to manufacturer's recommended torque settings.

3.05 CLEANING

- A. Clean dirt and debris from circuit breaker enclosures and components according to manufacturer's instructions.
- B. Repair scratched or marred exterior surfaces to match original factory finish.

END OF SECTION

SECTION 26 28 18
ENCLOSED SWITCHES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Enclosed safety switches.
- B. Fusible switches.
- C. Nonfusible switches.

1.02 RELATED REQUIREMENTS

- A. Section 26 05 26 - Grounding and Bonding for Electrical Systems.
- B. Section 26 05 29 - Hangers and Supports for Electrical Systems.
- C. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.
- D. Section 26 05 73 - Overcurrent Protective Device Coordination Study: Additional criteria for the selection of equipment and associated protective devices specified in this section.
- E. Section 26 28 13 - Fuses.
- F. Section 26 29 13 - Enclosed Controllers: Manual motor controllers.
- G. Section 26 36 00 - Transfer Switches: Automatic and non-automatic switches listed for use as transfer switch equipment.

1.03 REFERENCE STANDARDS

- A. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- B. NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum).
- C. NEMA FU 1 - Low Voltage Cartridge Fuses; National Electrical Manufacturers Association.
- D. NEMA KS 1 - Heavy Duty Enclosed and Dead-Front Switches (600 Volts Maximum).
- E. NETA ATS - Acceptance Testing Specifications for Electrical Power Equipment and Systems.
- F. NFPA 70 - National Electrical Code.
- G. UL 50 - Enclosures for Electrical Equipment, Non-Environmental Considerations.
- H. UL 50E - Enclosures for Electrical Equipment, Environmental Considerations.
- I. UL 98 - Enclosed and Dead-Front Switches.
- J. UL 869A - Reference Standard for Service Equipment.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate the work with other trades. Avoid placement of ductwork, piping, equipment, or other potential obstructions within the dedicated equipment spaces and within working clearances for electrical equipment required by NFPA 70.
 - 2. Coordinate arrangement of electrical equipment with the dimensions and clearance requirements of the actual equipment to be installed.
 - 3. Verify with manufacturer that conductor terminations are suitable for use with the conductors to be installed.
 - 4. Notify Architect of any conflicts with or deviations from Contract Documents. Obtain direction before proceeding with work.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for enclosed switches and other installed components and accessories.
- C. Project Record Documents: Record actual locations of enclosed switches.
- D. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
 - 1. See Section 01 60 00 - Product Requirements, for additional provisions.
 - 2. See Section 26 28 13 for requirements for spare fuses and spare fuse cabinets.

1.06 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
- D. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Store in a clean, dry space. Maintain factory wrapping or provide an additional heavy canvas or heavy plastic cover to protect units from dirt, water, construction debris, and traffic.
- B. Handle carefully in accordance with manufacturer's written instructions to avoid damage to enclosed switch internal components, enclosure, and finish.

1.08 FIELD CONDITIONS

- A. Maintain ambient temperature between -22 degrees F and 104 degrees F during and after installation of enclosed switches.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Eaton Corporation; Cutler-Hammer Products: www.eaton.com/#sle.
- B. General Electric Company: www.geindustrial.com/#sle.
- C. Schneider Electric; Square D Products: www.schneider-electric.us/#sle.
- D. Substitutions: See Section 01 60 00 - Product Requirements.
- E. Source Limitations: Furnish enclosed switches and associated components produced by the same manufacturer as the other electrical distribution equipment used for this project and obtained from a single supplier.

2.02 ENCLOSED SAFETY SWITCHES

- A. Description: Quick-make, quick-break enclosed safety switches listed and labeled as complying with UL 98; heavy duty; ratings, configurations, and features as indicated on the drawings.
- B. Provide products listed, classified, and labeled as suitable for the purpose intended.
- C. Unless otherwise indicated, provide products suitable for continuous operation under the following service conditions:
 - 1. Altitude: Less than 6,600 feet.
 - 2. Ambient Temperature: Between -22 degrees F and 104 degrees F.
- D. Horsepower Rating: Suitable for connected load.
- E. Voltage Rating: Suitable for circuit voltage.
- F. Short Circuit Current Rating:

1. Provide enclosed safety switches, when protected by the fuses or supply side overcurrent protective devices to be installed, with listed short circuit current rating not less than the available fault current at the installed location as determined by short circuit study performed in accordance with Section 26 05 73.
- G. Enclosed Safety Switches Used for Service Entrance: Listed and labeled as suitable for use as service equipment according to UL 869A.
- H. Provide with switch blade contact position that is visible when the cover is open.
- I. Fuse Clips for Fusible Switches: As required to accept fuses indicated.
- J. Conductor Terminations: Suitable for use with the conductors to be installed.
- K. Provide insulated, groundable fully rated solid neutral assembly where a neutral connection is required, with a suitable lug for terminating each neutral conductor.
- L. Provide solidly bonded equipment ground bus in each enclosed safety switch, with a suitable lug for terminating each equipment grounding conductor.
- M. Enclosures: Comply with NEMA 250, and list and label as complying with UL 50 and UL 50E.
 1. Environment Type per NEMA 250: Unless otherwise indicated, as specified for the following installation locations:
 - a. Indoor Clean, Dry Locations: Type 1.
 - b. Outdoor Locations: Type 4X, stainless steel.
- N. Provide safety interlock to prevent opening the cover with the switch in the ON position with capability of overriding interlock for testing purposes.
- O. Heavy Duty Switches:
 1. Products:
 - a. Schneider Electric.
 - b. General Electric Co.
 - c. Cutler Hammer.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
 2. Comply with NEMA KS 1.
 3. Conductor Terminations:
 - a. Provide mechanical lugs unless otherwise indicated.
 - b. Provide compression lugs where indicated.
 - c. Lug Material: Copper, suitable for terminating copper conductors only.
 4. Provide externally operable handle with means for locking in the OFF position, capable of accepting three padlocks.

2.03 COMPONENTS

- A. Fusible Switch Assemblies: NEMA KS 1, Type HD enclosed load interrupter knife switch.
 1. Externally operable handle interlocked to prevent opening front cover with switch in ON position.
 2. Handle lockable in OFF position.
 3. Fuse clips: Designed to accommodate NEMA FU1, Class R fuses.
- B. Nonfusible Switch Assemblies: NEMA KS 1, Type HD enclosed load interrupter knife switch.
 1. Externally operable handle interlocked to prevent opening front cover with switch in ON position.
 2. Handle lockable in OFF position.
- C. Enclosures: NEMA KS 1.
 1. Interior Dry Locations: Type 1.
 2. Exterior Locations: Type 4X.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field measurements are as shown on the drawings.
- B. Verify that the ratings of the enclosed switches are consistent with the indicated requirements.
- C. Verify that mounting surfaces are ready to receive enclosed safety switches.
- D. Verify that conditions are satisfactory for installation prior to starting work.

3.02 INSTALLATION

- A. Install enclosed switches in accordance with manufacturer's instructions.
- B. Install enclosed switches securely, in a neat and workmanlike manner in accordance with NECA 1.
- C. Arrange equipment to provide minimum clearances in accordance with manufacturer's instructions and NFPA 70.
- D. Provide required supports in accordance with Section 26 05 29.
- E. Install enclosed switches plumb.
- F. Except where indicated to be mounted adjacent to the equipment they supply, mount enclosed switches such that the highest position of the operating handle does not exceed 79 inches above the floor or working platform.
- G. Provide grounding and bonding in accordance with Section 26 05 26.
- H. Provide fuses complying with Section 26 28 13 for fusible switches as indicated or as required by equipment manufacturer's recommendations.
- I. Identify enclosed switches in accordance with Section 26 05 53.
- J. Provide identification nameplate for each enclosed switch in accordance with Section 26 05 53.
- K. Provide arc flash warning labels in accordance with NFPA 70.
- L. Install fuses in fusible disconnect switches.
- M. Apply adhesive tag on inside door of each fused switch indicating NEMA fuse class and size installed.

3.03 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Perform field inspection, testing, and adjusting in accordance with Section 01 40 00.
- C. Inspect and test in accordance with NETA STD ATS, except Section 4.
- D. Perform inspections and tests listed in NETA STD ATS, Section 7.5.1.1.
- E. Correct deficiencies and replace damaged or defective enclosed safety switches or associated components.

3.04 ADJUSTING

- A. Adjust tightness of mechanical and electrical connections to manufacturer's recommended torque settings.

3.05 CLEANING

- A. Clean dirt and debris from switch enclosures and components according to manufacturer's instructions.
- B. Repair scratched or marred exterior surfaces to match original factory finish.

END OF SECTION

SECTION 26 29 13
ENCLOSED CONTROLLERS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Enclosed NEMA controllers for low-voltage (600 V and less) applications:
 - 1. Magnetic motor starters.
 - 2. Manual motor starters.
- B. Magnetic motor controllers.
- C. Combination magnetic motor controllers and disconnects.

1.02 RELATED REQUIREMENTS

- A. Section 26 05 26 - Grounding and Bonding for Electrical Systems.
- B. Section 26 05 29 - Hangers and Supports for Electrical Systems.
- C. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.
- D. Section 26 05 73 - Overcurrent Protective Device Coordination Study: Additional criteria for the selection and adjustment of equipment and associated protective devices specified in this section.
- E. Section 26 28 13 - Fuses.

1.03 REFERENCE STANDARDS

- A. IEEE C57.13 - IEEE Standard Requirements for Instrument Transformers.
- B. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- C. NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum).
- D. NEMA ICS 2 - Industrial Control and Systems Controllers, Contactors and Overload Relays Rated 600 Volts.
- E. NEMA ICS 5 - Industrial Control and Systems: Control Circuit and Pilot Devices.
- F. NEMA ICS 6 - Industrial Control and Systems: Enclosures.
- G. NEMA KS 1 - Heavy Duty Enclosed and Dead-Front Switches (600 Volts Maximum).
- H. NETA ATS - Acceptance Testing Specifications for Electrical Power Equipment and Systems.
- I. NFPA 70 - National Electrical Code.
- J. UL 98 - Enclosed and Dead-Front Switches.
- K. UL 60947-1 - Low-Voltage Switchgear and Controlgear - Part 1: General Rules.
- L. UL 60947-4-1 - Low-Voltage Switchgear and Controlgear - Part 4-1: Contractors and Motor-starters - Electromechanical Contractors and Motor-starters.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate the work with other trades to avoid placement of ductwork, piping, equipment, or other potential obstructions within the dedicated equipment spaces and working clearances required by NFPA 70.
 - 2. Coordinate the work to provide motor controllers and associated overload relays suitable for use with the actual motors to be installed.
 - 3. Coordinate the work to provide controllers and associated wiring suitable for interface with control devices to be installed.

4. Coordinate arrangement of electrical equipment with the dimensions and clearance requirements of the actual equipment to be installed.
5. Verify with manufacturer that conductor terminations are suitable for use with the conductors to be installed.
6. Notify Architect of any conflicts with or deviations from Contract Documents. Obtain direction before proceeding with work.

1.05 SUBMITTALS

- A. See Section 01 33 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for motor controllers, enclosures, overcurrent protective devices, and other installed components and accessories.
 1. Include characteristic trip curves for each type and rating of overcurrent protective device upon request.
- C. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
 1. See Section 01 60 00 - Product Requirements, for additional provisions.
- D. Product Data: Provide catalog sheets showing voltage, controller size, ratings and size of switching and overcurrent protective devices, short circuit ratings, dimensions, and enclosure details.
- E. Test Reports: Indicate field test and inspection procedures and test results.
- F. Manufacturer's Instructions: Indicate application conditions and limitations of use stipulated by testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.
- G. Maintenance Data: Replacement parts list for controllers.

1.06 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience and with service facilities within 100 miles of Project.
- C. Products: Listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Store in a clean, dry space. Maintain factory wrapping or provide an additional heavy canvas or heavy plastic cover to protect units from dirt, water, construction debris, and traffic.
- B. Handle carefully in accordance with manufacturer's written instructions to avoid damage to internal components, enclosure, and finish.

1.08 FIELD CONDITIONS

- A. Maintain field conditions within required service conditions during and after installation.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Eaton Corporation; Cutler-Hammer Product: www.eaton.com/#sle.
- B. General Electric Company: www.geindustrial.com/#sle.
- C. Schneider Electric; Square D Products: www.schneider-electric.us/#sle.
- D. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 ENCLOSED CONTROLLERS

- A. Provide enclosed controller assemblies consisting of all required components, control power transformers, instrumentation and control wiring, accessories, etc. as necessary for a complete operating system.
- B. Provide products listed, classified, and labeled as suitable for the purpose intended.
- C. Description: Enclosed controllers complying with NEMA ICS 2, and listed and labeled as complying with UL 60947-1 and UL 60947-4-1; ratings, configurations and features as indicated on the drawings.
- D. Service Conditions:
 - 1. Provide controllers and associated components suitable for operation under the following service conditions without derating:
 - a. Altitude:
 - 1) Class 1 Km Equipment (devices utilizing power semiconductors, e.g. variable frequency controllers): Less than 3,300 feet.
 - 2) Class 2 Km Equipment (electromagnetic and manual devices): Less than 6,600 feet.
 - b. Ambient Temperature: Between 32 degrees F and 104 degrees F.
 - 2. Provide controllers and associated components suitable for operation at indicated ratings under the service conditions at the installed location.
- E. Short Circuit Current Rating:
 - 1. Provide controllers with listed short circuit current rating not less than the available fault current at the installed location as determined by short circuit study performed in accordance with Section 26 05 73.
- F. Conductor Terminations: Suitable for use with the conductors to be installed.
- G. Enclosures:
 - 1. Comply with NEMA ICS 6.
 - 2. Environment Type per NEMA 250: Unless otherwise indicated, as specified for the following installation locations:
 - a. Indoor Clean, Dry Locations: Type 1 or Type 12.
 - b. Outdoor Locations: Type 4X.
 - 3. Finish: Manufacturer's standard unless otherwise indicated.
- H. Instrument Transformers:
 - 1. Comply with IEEE C57.13.
 - 2. Select suitable ratio, burden, and accuracy as required for connected devices.
 - 3. Current Transformers: Connect secondaries to shorting terminal blocks.
 - 4. Potential Transformers: Include primary and secondary fuses with disconnecting means.
- I. Magnetic Motor Starters: Combination type unless otherwise indicated.
 - 1. Combination Magnetic Motor Starters: NEMA ICS 2, Class A combination motor controllers with magnetic contactor(s), externally operable disconnect and overload relay(s).
 - 2. Configuration: Full-voltage non-reversing unless otherwise indicated.
 - 3. Disconnects: Disconnect switch type.
 - a. Disconnect Switches: Fusible type unless otherwise indicated.
 - b. Provide externally operable handle with means for locking in the OFF position. Provide safety interlock to prevent opening the cover with the disconnect in the ON position with capability of overriding interlock for testing purposes.
 - c. Provide auxiliary interlock for disconnection of external control power sources where applicable.
 - 4. Overload Relays: Bimetallic thermal type unless otherwise indicated.

- J. Manual Motor Starters:
1. Description: NEMA ICS 2, Class A manually-operated motor controllers with overload relay(s).
 2. Configuration: Non-reversing unless otherwise indicated.
 3. Fractional-Horsepower Manual Motor Starters:
 - a. Furnish with toggle operator.
 - b. Overload Relays: Bimetallic or melting alloy thermal type.
 - c. Furnish Red ON indicating light.

2.03 OVERCURRENT PROTECTIVE DEVICES

- A. Overload Relays:
1. Provide overload relays and, where applicable, associated current elements/heaters, selected according to actual installed motor nameplate data, in accordance with manufacturer's recommendations and NFPA 70; include consideration for motor service factor and ambient temperature correction, where applicable.
 2. Inverse-Time Trip Class Rating: Class 20 unless otherwise indicated or required.
 3. Trip-free operation.
 4. Visible trip indication.
 5. Resettable.
 - a. Employ manual reset unless otherwise indicated.
 - b. Do not employ automatic reset with two-wire control.
 6. Bimetallic Thermal Overload Relays:
 - a. Interchangeable current elements/heaters.
 - b. Adjustable trip; plus/minus 10 percent of nominal, minimum.
 - c. Trip test function.
 7. Melting Alloy Thermal Overload Relays:
 - a. Interchangeable current elements/heaters.
- B. Fusible Disconnect Switches:
1. Description: Quick-make, quick-break, dead-front fusible switch units complying with NEMA KS 1, and listed and labeled as complying with UL 98; ratings, configurations, and features as indicated on the drawings.
 2. Fuse Clips: As required to accept indicated fuses.
 3. Provide externally operable handle with means for locking in the OFF position. Provide means for locking switch cover in the closed position. Provide safety interlock to prevent opening the cover with the switch in the ON position with capability of overriding interlock for testing purposes.

2.04 CONTROL ACCESSORIES

- A. Pilot Devices:
1. Comply with NEMA ICS 5; heavy-duty type.
 2. Pushbuttons: Unless otherwise indicated, provide momentary, non-illuminated type with flush button operator; normally open or normally closed as indicated or as required.
 3. Selector Switches: Unless otherwise indicated, provide maintained, non-illuminated type with knob operator; number of switch positions as indicated or as required.
 4. Indicating Lights: Push-to-test type unless otherwise indicated.
 5. Provide LED lamp source for indicating lights and illuminated devices.
- B. Control and Timing Relays:
1. Comply with NEMA ICS 5.
 2. Provide number and type of relays indicated or required to perform necessary functions.
- C. Control Power Transformers:

1. Size to accommodate burden of contactor coil(s) and all connected auxiliary devices, plus _____ VA spare capacity.
2. Include primary and secondary fuses.

2.05 AUTOMATIC CONTROLLERS

- A. Magnetic Motor Controllers: NEMA ICS 2, AC general-purpose Class A magnetic controller for induction motors rated in horsepower.
- B. Coil Operating Voltage: 120 volts, 60 Hertz.
- C. Overload Relays: NEMA ICS 2; bimetal.
- D. Enclosures: NEMA ICS 6, Type 1.

2.06 ACCESSORIES

- A. Auxiliary Contacts: NEMA ICS 2, 2 normally open contacts in addition to seal-in contact.
- B. Cover Mounted Pilot Devices: NEMA ICS 5, standard duty oiltight type.
- C. Pilot Device Contacts: NEMA ICS 5, Form Z, rated A150.
- D. Indicating Lights: Transformer, LED type.
- E. Selector Switches: Rotary type.
- F. Relays: NEMA ICS 2.
- G. Control Power Transformers: 120 volt secondary, 50 VA minimum, in each motor starter. Provide fused primary, secondary, and bond unfused leg of secondary to enclosure.

2.07 DISCONNECTS

- A. Combination Controllers: Combine motor controllers with disconnects in common enclosure. Obtain IEC Class 2 coordinated component protection.
- B. Fusible Switch Assemblies: NEMA KS 1, enclosed knife switch with externally operable handle. Fuse clips: Designed to accommodate Class R fuses.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field measurements are as indicated.
- B. Verify that ratings of enclosed controllers are consistent with the indicated requirements.
- C. Verify that mounting surfaces are ready to receive enclosed controllers.
- D. Verify that conditions are satisfactory for installation prior to starting work.

3.02 INSTALLATION

- A. Install enclosed controllers where indicated, in accordance with manufacturer's instructions.
- B. Install securely, in a neat and workmanlike manner, as specified in NECA 1.
- C. Arrange equipment to provide minimum clearances in accordance with manufacturer's instructions and NFPA 70.
- D. Provide supports in accordance with Section 26 05 29.
- E. Install enclosed controllers plumb and level.
- F. Provide grounding and bonding in accordance with Section 26 05 26.
- G. Install all field-installed devices, components, and accessories.
- H. Height: 5 ft to operating handle.
- I. Provide fuses for fusible switches; refer to Section 26 28 13 for product requirements.

- J. Select and install overload heater elements in motor controllers to match installed motor characteristics.
- K. Identify enclosed controllers in accordance with Section 26 05 53.

3.03 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Perform field inspection and testing in accordance with Section 01 45 00.
- C. Inspect and test in accordance with NETA STD ATS, except Section 4.
- D. Motor Starters: Perform inspections and tests listed in NETA ATS, Section 7.16.1.1. Tests listed as optional are not required.
- E. Fusible Switches: Perform inspections and tests listed in NETA ATS, Section 7.5.1.1.
- F. Perform inspections and tests listed in NETA STD ATS, Section 7.16.1.

3.04 ADJUSTING

- A. Adjust tightness of mechanical and electrical connections to manufacturer's recommended torque settings.

3.05 CLEANING

- A. Clean dirt and debris from controller enclosures and components according to manufacturer's instructions.
- B. Repair scratched or marred exterior surfaces to match original factory finish.

3.06 PROTECTION

- A. Protect installed enclosed controllers from subsequent construction operations.

END OF SECTION

SECTION 26 29 23
VARIABLE-FREQUENCY MOTOR CONTROLLERS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Variable frequency controllers.

1.02 RELATED REQUIREMENTS

- A. Section 03 30 00 - Cast-in-Place Concrete: Housekeeping pads.
- B. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.
- C. Section 26 28 13 - Fuses.

1.03 REFERENCE STANDARDS

- A. NEMA ICS 7.1 - Safety Standards for Construction and Guide for Selection, Installation, and Operation of Adjustable Speed Drive Systems.
- B. NEMA ICS 61800-2 - Adjustable Speed Electrical Power Drive Systems, Part 2: General Requirements-Rating Specifications for Low Voltage Adjustable Frequency AC Power Drive Systems.
- C. NEMA ICS 7 - Industrial Control and Systems: Adjustable-Speed Drives.
- D. NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum).
- E. NETA ATS - Acceptance Testing Specifications for Electrical Power Equipment and Systems.
- F. NFPA 70 - National Electrical Code.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide catalog sheets showing voltage, controller size, ratings and size of switching and overcurrent protective devices, short circuit ratings, dimensions, and enclosure details.
- C. Shop Drawings: Indicate front and side views of enclosures with overall dimensions and weights shown; conduit entrance locations and requirements; and nameplate legends.
- D. Test Reports: Indicate field test and inspection procedures and test results.
- E. Manufacturer's Instructions: Indicate application conditions and limitations of use stipulated by testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.
- F. Manufacturer's Field Reports: Indicate start-up inspection findings.
- G. Operation Data: NEMA ICS 7.1. Include instructions for starting and operating controllers, and describe operating limits that may result in hazardous or unsafe conditions.
- H. Maintenance Data: NEMA ICS 7.1. Include routine preventive maintenance schedule.

1.05 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience and with service facilities within 100 miles of Project.
- C. Products: Listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.

- D. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Store in a clean, dry space. Maintain factory wrapping or provide an additional heavy canvas or heavy plastic cover to protect units from dirt, water, construction debris, and traffic.
- B. Handle in accordance with manufacturer's written instructions. Lift only with lugs provided for the purpose. Handle carefully to avoid damage to components, enclosure, and finish.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. ABB: www.ABB.com.
- B. Schneider Electric; Square D Products: www.schneider-electric.us.
- C. Danfoss: www.danfoss.us.
- D. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 DESCRIPTION

- A. Variable Frequency Controllers: Enclosed controllers suitable for operating the indicated loads, in conformance with requirements of NEMA ICS 7. Select unspecified features and options in accordance with NEMA ICS 3.1.
 - 1. Employ pulse-width-modulated inverter system.
 - 2. Design for ability to operate controller with motor disconnected from output.
 - 3. Design to attempt five automatic restarts following fault condition before locking out and requiring manual restart.
- B. Enclosures: NEMA 250, Type 1, suitable for equipment application in places regularly open to the public.
- C. Finish: Manufacturer's standard enamel.

2.03 OPERATING REQUIREMENTS

- A. Rated Input Voltage: 480 volts, three phase, 60 Hertz.
- B. Motor Nameplate Voltage: 460 volts, three phase, 60 Hertz.
- C. Displacement Power Factor: Between 1.0 and 0.95, lagging, over entire range of operating speed and load.
- D. Operating Ambient: 0 degrees C to 40 degrees C.
- E. Minimum Efficiency at Full Load: 85 percent.
- F. Time to Stop: 5 seconds.
- G. Volts Per Hertz Adjustment: Plus or minus 0 percent.
- H. Current Limit Adjustment: 60 to 110 percent of rated.
- I. Acceleration Rate Adjustment: 0.5 to 30 seconds.
- J. Deceleration Rate Adjustment: 1 to 30 seconds.
- K. Input Signal: 4 to 20 mA DC.

2.04 COMPONENTS

- A. Display: Provide integral digital display to indicate output voltage, output frequency, and output current.
- B. Status Indicators: Separate indicators for overcurrent, overvoltage, ground fault, overtemperature, and input power ON.

- C. Furnish HAND-OFF-AUTOMATIC selector switch and manual speed control.
- D. Include undervoltage release.
- E. Control Power Source: Integral control transformer.
- F. Door Interlocks: Furnish mechanical means to prevent opening of equipment with power connected, or to disconnect power if door is opened; include means for defeating interlock by qualified persons.
- G. Safety Interlocks: Furnish terminals for remote contact to inhibit starting under both manual and automatic mode.
- H. Control Interlocks: Furnish terminals for remote contact to allow starting in automatic mode.
- I. Manual Bypass: Furnish contactor, motor running overload protection, and short circuit protection for full voltage, non-reversing operation of the motor. Include isolation switch to allow maintenance of inverter during bypass operation.
- J. Emergency Stop: Use dynamic brakes for emergency stop function.
- K. Disconnecting Means: Include integral fused disconnect switch on the line side of each controller.
- L. Wiring Terminations: Match conductor materials and sizes indicated.
- M. Line Reactor: Furnish line reactor (s) for harmonics mitigation.

2.05 SOURCE QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements for additional requirements.
- B. Factory test controllers in accordance with NEMA ICS 61800-2.
- C. Shop inspect and perform standard productions tests for each controller.
- D. Make completed controller available for inspection at manufacturer's factory prior to packaging for shipment. Notify Owner at least 7 days before inspection is allowed.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that surface is suitable for controller installation.
- B. Do not install controller until building environment can be maintained within the service conditions required by the manufacturer.
- C. Verify that field measurements are as indicated on shop drawings.

3.02 INSTALLATION

- A. Install in accordance with NEMA ICS 7.1 and manufacturer's instructions.
- B. Tighten accessible connections and mechanical fasteners after placing controller.
- C. Provide fuses in fusible switches; refer to Section 26 28 13 for product requirements.
- D. Select and install overload heater elements in motor controllers to match installed motor characteristics.
- E. Identify variable frequency controllers in accordance with Section 26 05 53.

3.03 FIELD QUALITY CONTROL

- A. Provide the service of the manufacturer's field representative to prepare and start controllers.
- B. Perform field inspection and testing in accordance with Section 01 40 00.
- C. Inspect and test in accordance with NETA STD ATS, except Section 4.
- D. Perform inspections and tests listed in NETA STD ATS, Section 7.17.

- E. Correct deficiencies and replace damaged or defective controllers or associated components.

3.04 ADJUSTING

- A. Make final adjustments to installed controller to assure proper operation of load system. Obtain performance requirements from installer of driven loads.

3.05 CLOSEOUT ACTIVITIES

- A. Demonstrate operation of controllers in automatic and manual modes.

3.06 MAINTENANCE

- A. See Section 01 70 00 - Execution Requirements, for additional requirements relating to maintenance service.
- B. Provide a separate maintenance contract for specified maintenance service.
- C. Provide service and maintenance of controllers for one year from Date of Substantial Completion.

END OF SECTION

SECTION 26 43 00
SURGE PROTECTIVE DEVICES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Surge protective devices for service entrance locations.
- B. Surge protective devices for distribution locations.

1.02 RELATED REQUIREMENTS

- A. Section 26 05 26 - Grounding and Bonding.
- B. Section 26 24 16 - Panelboards.
- C. Section 27 10 05 - Structured Cabling for Voice and Data: Protectors for communications service entrance.

1.03 ABBREVIATIONS AND ACRONYMS

- A. EMI/RFI: Electromagnetic Interference/Radio Frequency Interference.
- B. SPD: Surge Protective Device.

1.04 REFERENCE STANDARDS

- A. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- B. NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum).
- C. NETA ATS - Acceptance Testing Specifications for Electrical Power Equipment and Systems.
- D. NFPA 70 - National Electrical Code.
- E. UL 1449 - Standard for Surge Protective Devices.

1.05 ADMINISTRATIVE REQUIREMENTS

- A. Coordination: Coordinate size and location of overcurrent device compatible with the actual surge protective device and location to be installed. Notify Architect of any conflicts or deviations from the contract documents to obtain direction prior to ordering equipment.

1.06 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Include detailed component information, voltage, surge current ratings, repetitive surge current capacity, voltage protection rating (VPR) for all protection modes, maximum continuous operating voltage (MCOV), nominal discharge current (I-n), short circuit current rating (SCCR), connection means including any required external overcurrent protection, enclosure ratings, outline and support point dimensions, weight, service condition requirements, and installed features.
 - 1. SPDs with EMI/RFI filter: Include noise attenuation performance.
- C. Shop Drawings: Include wiring diagrams showing all factory and field connections with wire and circuit breaker/fuse sizes.
- D. Certificates: Manufacturer's documentation of listing for compliance with the following standards:
 - 1. UL 1449.
 - 2. UL 1283 (for Type 2 SPDs).
- E. Manufacturer's Installation Instructions: Include application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.

- F. Operation and Maintenance Data: Include information on status indicators and recommended maintenance procedures and intervals.
- G. Warranty: Submit sample of manufacturer's warranty and documentation of final executed warranty completed in Owner's name and registered with manufacturer.
- H. Project Record Documents: Record actual connections and locations of surge protective devices.

1.07 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.

1.08 DELIVERY, STORAGE, AND PROTECTION

- A. Store in a clean, dry space in accordance with manufacturer's written instructions.

1.09 FIELD CONDITIONS

- A. Maintain field conditions within manufacturer's required service conditions during and after installation.

1.10 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.
- B. Manufacturer's Warranty: Provide minimum five year warranty covering repair or replacement of surge protective devices showing evidence of failure due to defective materials or workmanship.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Basis of Design: Schneider Electric; Square D Brand Surgelocic Products as indicated under product article(s) below; www.surgelocic.com.
- B. Surge Protective Devices (SPD) as manufactured by Siemens Industry, Inc. are a permitted substitution with the inclusion of a Surge Counter and an External Operable Disconnect.
- C. Surge Protective Devices (SPD) as manufactured by Advanced Protection Technologies, Inc. are a permitted substitution with inclusion of an externally operable switch / breaker.
- D. Factory-installed, Internally Mounted Surge Protective Devices:
 - 1. Same as manufacturer of equipment containing surge protective device, to provide a complete listed assembly including SPD.
- E. Source Limitations: Furnish surge protective devices produced by a single manufacturer and obtained from a single supplier.

2.02 ALL SURGE PROTECTIVE DEVICES

- A. Description: Factory-assembled surge protective devices (SPDs) for 60 Hz service, listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated; system voltage as indicated on the drawings.
- B. Protected Modes:
 - 1. Wye Systems: L-N, L-G, N-G, L-L.
- C. UL 1449 Voltage Protection Ratings (VPRs):
 - 1. Equivalent to basis of design.

2. 480Y/277V System Voltage: Not more than 1,500 V for L-N, L-G, and N-G modes and 2,000 V for L-L mode.
- D. UL 1449 Maximum Continuous Operating Voltage (MCOV): Not less than 115% of nominal system voltage.
- E. Enclosure Environment Type per NEMA 250: Unless otherwise indicated, as specified for the following installation locations:
 1. Indoor clean, dry locations: Type 1.
- F. Mounting for Field-installed, Externally Mounted SPDs: Unless otherwise indicated, as specified for the following locations:
 1. Provide surface-mounted SPD where mounted in non-public areas or adjacent to surface-mounted equipment.
- G. Equipment Containing Factory-installed, Internally Mounted SPDs: Listed and labeled as a complete assembly including SPD.
 1. Panelboards: See Section 26 24 16.

2.03 SURGE PROTECTIVE DEVICES FOR SERVICE ENTRANCE LOCATIONS

- A. Unless otherwise indicated, provide field-installed, externally mounted or factory-installed, internally mounted SPDs.
- B. List and label as complying with UL 1449, Type 1 when connected on line side of service disconnect overcurrent device and Type 1 or 2 when connected on load side of service disconnect overcurrent device.
- C. Provide SPDs utilizing field-replaceable modular or non-modular protection circuits.
- D. Surge Current Rating: Not less than 120 kA per mode/240 kA per phase.
- E. Repetitive Surge Current Capacity: Not less than 5,000 impulses.
- F. UL 1449 Nominal Discharge Current (I-n): 20 kA.
- G. UL 1449 Short Circuit Current Rating (SCCR): Not less than the available fault current at the installed location as indicated on the drawings.
- H. Diagnostics:
 1. Protection Status Monitoring: Provide indicator lights to report the protection for each phase.
 2. Alarm Notification: Provide indicator light and audible alarm to report alarm condition. Provide button to manually silence audible alarm.
- I. Basis of Design: Schneider Electric; Square D Brand SurgeLogic Products; www.surgeologic.com.
 1. Field-installed, Externally Mounted Surge Protective Devices:
 - a. EMA Series: Replaceable modules; 200 kA SCCR; individually fused MOVs, thermal fusing; dry contacts; EMI/RFI filtering; surge counter; duty cycle tested for 20,000 impulses; 10 year warranty.
 2. Factory-installed, Internally Mounted Surge Protective Devices:
 - a. IMA Series: Replaceable modules; 200 kA SCCR; individually fused MOVs, thermal fusing; dry contacts; EMI/RFI filtering; surge counter; duty cycle tested for 20,000 impulses; 10 year warranty.

2.04 SURGE PROTECTIVE DEVICES FOR DISTRIBUTION LOCATIONS

- A. Unless otherwise indicated, provide field-installed, externally mounted or factory-installed, internally mounted SPDs.
- B. List and label as complying with UL 1449, Type 1 or Type 2.
- C. Provide SPDs utilizing field-replaceable modular or non-modular protection circuits.

- D. Surge Current Rating: Not less than 80 kA per phase/160 kA per phase.
- E. UL 1449 Nominal Discharge Current (I-n): 20 kA.
- F. UL 1449 Short Circuit Current Rating (SCCR): Not less than the available fault current at the installed location as indicated on the drawings.
- G. Diagnostics:
 - 1. Protection Status Monitoring: Provide indicator lights to report the protection status for each phase.
 - 2. Alarm Notification: Provide indicator light and audible alarm to report alarm condition. Provide button to manually silence audible alarm.
- H. Provide surge rated integral disconnect switch for SPDs not connected to a dedicated circuit breaker or fused switch or not direct bus connected.
- I. Basis of Design: Schneider Electric; Square D Brand SurgeLogic Products; www.surgeologic.com.
 - 1. Field-installed, Externally Mounted Surge Protective Devices:
 - a. EMA Series: Replaceable modules; 200 kA SCCR; individually fused MOVs, thermal fusing; dry contacts; EMI/RFI filtering; surge counter; duty cycle tested for 20,000 impulses; 10 year warranty.
 - 1) Furnished with integral switch option where indicated.
 - 2. Factory-installed, Internally Mounted Surge Protective Devices:
 - a. IMA Series: Replaceable modules; 200 kA SCCR; individually fused MOVs, thermal fusing; dry contacts; EMI/RFI filtering; surge counter; duty cycle tested for 20,000 impulses; 10 year warranty.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field measurements are as shown on the drawings.
- B. Verify that the service voltage and configuration marked on the SPD are consistent with the service voltage and configuration at the location to be installed.
- C. Verify that electrical equipment is ready to accept connection of the SPD and that installed overcurrent device is consistent with requirements of drawings and manufacturer's instructions.
- D. Verify system grounding and bonding is in accordance with Section 26 05 26, including bonding of neutral and ground for service entrance and separately derived systems where applicable. Do not energize SPD until deficiencies have been corrected.
- E. Verify that conditions are satisfactory for installation prior to starting work.

3.02 INSTALLATION

- A. Perform work in a neat and workmanlike manner in accordance with NECA 1.
- B. Install SPD in accordance with manufacturer's instructions.
- C. Arrange equipment to provide minimum clearances in accordance with manufacturer's instructions and NFPA 70.
- D. Provide conductors with minimum ampacity as indicated on the drawings, as required by NFPA 70, and not less than manufacturer's recommended minimum conductor size.
- E. Install conductors between SPD and equipment terminations as short and straight as possible, not exceeding manufacturer's recommended maximum conductor length. Breaker locations may be reasonably be rearranged in order to provide leads as short and straight as possible. Twist conductors together to reduce inductance.

- F. Do not energize SPD until bonding of neutral and ground for service entrance and separately derived systems is complete in accordance with Section 26 05 26 where applicable. Replace SPDs damaged by improper or missing neutral-ground bond.

3.03 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Perform inspection, testing, and adjusting in accordance with Section 01 40 00.
- C. Inspect and test in accordance with NETA STD ATS, except Section 4.
- D. Perform inspections and tests listed in NETA STD ATS Section 7.19.1.
- E. Procure services of a qualified manufacturer's representative to observe installation and assist in inspection, testing, and adjusting. Include manufacturer's reports with field quality control submittals.

3.04 CLEANING

- A. Repair scratched or marred exterior surfaces to match original factory finish.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 26 51 00
INTERIOR LIGHTING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Interior luminaires.
- B. Emergency lighting units.
- C. Exit signs.
- D. Drivers.
- E. Lamps.
- F. Luminaire accessories.

1.02 RELATED REQUIREMENTS

- A. Section 26 05 29 - Hangers and Supports for Electrical Systems.
- B. Section 26 05 37 - Boxes.
- C. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.
- D. Section 26 09 23 - Lighting Control Devices.
 - 1. Includes automatic controls for lighting including occupancy sensors, outdoor photo controls, and daylighting controls.
- E. Section 26 27 26 - Wiring Devices: Manual wall switches and wall dimmers.
- F. Section 26 56 00 - Exterior Lighting.

1.03 REFERENCE STANDARDS

- A. ANSI C78.379 - American National Standard for Electric Lamps -- Reflector Lamps -- Classification of Beam Patterns.
- B. ANSI C82.1 - American National Standard for Lamp Ballast - Line Frequency Fluorescent Lamp Ballast.
- C. ANSI C82.4 - American National Standard for Ballasts for High-Intensity-Discharge and Low-Pressure Sodium Lamps (Multiple-Supply Type).
- D. IES LM-79 - Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products; Illuminating Engineering Society.
- E. IES LM-80 - Approved Method: Measuring Luminous Flux and Color Maintenance of LED Packages, Arrays, and Modules; Illuminating Engineering Society.
- F. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- G. NECA/IESNA 500 - Standard for Installing Indoor Commercial Lighting Systems.
- H. NECA/IESNA 502 - Standard for Installing Industrial Lighting Systems.
- I. NEMA WD 6 - Wiring Devices - Dimensional Requirements; National Electrical Manufacturers Association.
- J. NFPA 70 - National Electrical Code.
- K. NFPA 101 - Life Safety Code.
- L. UL 924 - Emergency Lighting and Power Equipment.
- M. UL 935 - Fluorescent-Lamp Ballasts.
- N. UL 1598 - Luminaires.
- O. UL 8750 - Light Emitting Diode (LED) Equipment for Use in Lighting Products.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate the installation of luminaires with mounting surfaces installed under other sections or by others. Coordinate the work with placement of supports, anchors, etc. required for mounting. Coordinate compatibility of luminaires and associated trims with mounting surfaces at installed locations.
 - 2. Coordinate the placement of luminaires with structural members, ductwork, piping, equipment, diffusers, fire suppression system components, and other potential conflicts installed under other sections or by others.
 - 3. Coordinate the placement of exit signs with furniture, equipment, signage or other potential obstructions to visibility installed under other sections or by others.
 - 4. Notify Architect of any conflicts or deviations from the contract documents to obtain direction prior to proceeding with work.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Shop Drawings:
 - 1. Indicate dimensions and components for each luminaire that is not a standard product of the manufacturer.
 - 2. Provide photometric calculations where luminaires are proposed for substitution upon request.
- C. Shop Drawings: Indicate dimensions and components for each luminaire that is not a standard product of the manufacturer.
- D. Product Data: Provide manufacturer's standard catalog pages and data sheets including detailed information on luminaire construction, dimensions, ratings, finishes, mounting requirements, listings, service conditions, photometric performance, installed accessories, and ceiling compatibility; include model number nomenclature clearly marked with all proposed features.
 - 1. LED Luminaires:
 - a. Include estimated useful life, calculated based on IES LM-80 test data.
 - b. Include IES LM-79 test report upon request.
 - 2. Lamps: Include rated life, color temperature, color rendering index (CRI), and initial and mean lumen output.
- E. Sustainable Design Documentation: Submit manufacturer's product data on lamp mercury content and rated lamp life, showing compliance with specified requirements.
- F. Field Quality Control Reports.
- G. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.
- H. Operation and Maintenance Data: Instructions for each product including information on replacement parts.
- I. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
 - 1. See Section 01 60 00 - Product Requirements, for additional provisions.
- J. Project Record Documents: Record actual connections and locations of luminaires and any associated remote components.

1.06 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.

- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Conform to requirements of NFPA 70 and NFPA 101.
- D. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.

1.07 DELIVERY, STORAGE, AND PROTECTION

- A. Receive, handle, and store products according to NECA/IESNA 500 (commercial lighting), NECA/IESNA 502 (industrial lighting), and manufacturer's written instructions.
- B. Keep products in original manufacturer's packaging and protect from damage until ready for installation.

1.08 FIELD CONDITIONS

- A. Maintain field conditions within manufacturer's required service conditions during and after installation.

1.09 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.
- B. Provide ten year manufacturer warranty for LED luminaires, including drivers.

1.10 EXTRA MATERIALS

- A. See Section 01 60 00 - Product Requirements, for additional provisions.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Acuity Brands, Inc; : www.acuitybrands.com.
- B. Hubbell Lighting, Inc; : www.hubbelllighting.com.
- C. Lightolier: www.lightolier.com.
- D. Lithonia Lighting: www.lithonia.com.
- E. Columbia Lighting.
- F. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 LUMINAIRES

- A. Manufacturers:
 - 1. Acuity Brands, Inc; : www.acuitybrands.com/#sle.
 - 2. Cooper Lighting, a division of Cooper Industries; : www.cooperindustries.com/#sle.
 - 3. Hubbell Lighting, Inc; : www.hubbelllighting.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Provide products that comply with requirements of NFPA 70.
- C. Provide products that are listed and labeled as complying with UL 1598, where applicable.
- D. Provide products listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.
- E. Unless otherwise indicated, provide complete luminaires including lamp(s) and all sockets, ballasts, reflectors, lenses, housings and other components required to position, energize and protect the lamp and distribute the light.
- F. Unless specifically indicated to be excluded, provide all required conduit, boxes, wiring, connectors, hardware, supports, trims, accessories, etc. as necessary for a complete operating system.

- G. Provide products suitable to withstand normal handling, installation, and service without any damage, distortion, corrosion, fading, discoloring, etc.
- H. LED Luminaires:
 - 1. Components: UL 8750 recognized or listed as applicable.
 - 2. Tested in accordance with IES LM-79 and IES LM-80.
 - 3. LED Estimated Useful Life: Minimum of 200,000 hours at 70 percent lumen maintenance, calculated based on IES LM-80 test data.
- I. LED Luminaires: Listed and labeled as complying with UL 8750.
- J. Track Lighting Systems: Provide track compatible with specified track heads, with all connectors, power feed fittings, dead ends, hangers and canopies as necessary to complete installation.
- K. Luminaires Mounted in Continuous Rows: Provide quantity of units required for length indicated, with all accessories required for joining and aligning.

2.03 LUMINAIRES

- A. Furnish products as indicated in Schedule included on the Drawings.
- B. Substitutions: See Section 01 60 00 - Product Requirements.
 - 1. Input Voltage: 120 volts.

2.04 EXIT SIGNS

- A. Manufacturers:
 - 1. Acuity Brands, Inc; : www.acuitybrands.com/#sle.
 - 2. Cooper Lighting, a division of Cooper Industries; : www.cooperindustries.com/#sle.
 - 3. Hubbell Lighting, Inc; : www.hubbelllighting.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. All Exit Signs: Internally illuminated with LEDs unless otherwise indicated; complying with NFPA 101 and all applicable state and local codes, and listed and labeled as complying with UL 924.
 - 1. Number of Faces: Single or double as indicated or as required for the installed location.
 - 2. Directional Arrows: As indicated or as required for the installed location.
- C. Accessories:
 - 1. Provide compatible accessory high impact polycarbonate vandal shields where indicated.
 - 2. Provide compatible accessory wire guards where indicated.
- D. Manufacturers: As indicated on lighting fixture schedule.
 - 1. Substitutions: See Section 01 60 00 - Product Requirements.
- E. Exit Signs: Exit sign fixture .
 - 1. Housing: Plastic.
 - 2. Face: Translucent glass face with red letters on white background.
 - 3. Face: Aluminum stencil face with red letters.
 - 4. Directional Arrows: Universal type for field adjustment.
 - 5. Mounting: Universal, for field selection.
 - 6. Lamps: Manufacturer's standard.
 - 7. Input Voltage: 120 volts.

2.05 DRIVERS

- A. Dimmable LED Drivers:
 - 1. Dimming Range: Continuous dimming from 100 percent to five percent relative light output unless dimming capability to lower level is indicated, without flicker.
 - 2. Control Compatibility: Fully compatible with the dimming controls to be installed.
 - a. Wall Dimmers: See Section 26 27 26.

- b. Daylighting Controls: See Section 26 09 23.

2.06 ACCESSORIES

- A. Stems for Suspended Luminaires: Steel tubing, minimum 1/2" size, factory finished to match luminaire or field-painted as directed.
- B. Threaded Rods for Suspended Luminaires: Zinc-plated steel, minimum 1/4" size, field-painted as directed.
- C. Provide accessory plaster frames for luminaires recessed in plaster ceilings.
- D. Product: As indicated in lighting fixture schedule.
 - 1. Substitutions: See Section 01 60 00 - Product Requirements.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field measurements are as shown on the drawings.
- B. Verify that outlet boxes are installed in proper locations and at proper mounting heights and are properly sized to accommodate conductors in accordance with NFPA 70.
- C. Verify that suitable support frames are installed where required.
- D. Verify that branch circuit wiring installation is completed, tested, and ready for connection to luminaires.
- E. Verify that conditions are satisfactory for installation prior to starting work.

3.02 PREPARATION

- A. Provide extension rings to bring outlet boxes flush with finished surface.
- B. Clean dirt, debris, plaster, and other foreign materials from outlet boxes.

3.03 INSTALLATION

- A. Coordinate locations of outlet boxes provided under Section 26 05 37 as required for installation of luminaires provided under this section.
- B. Install products according to manufacturer's instructions.
- C. Install luminaires securely, in a neat and workmanlike manner, as specified in NECA 1 (general workmanship), NECA 500 (commercial lighting), and NECA 502 (industrial lighting).
- D. Install luminaires plumb and square and aligned with building lines and with adjacent luminaires.
- E. Suspended Ceiling Mounted Luminaires:
 - 1. Do not use ceiling tiles to bear weight of luminaires.
 - 2. Do not use ceiling support system to bear weight of luminaires unless ceiling support system is certified as suitable to do so.
 - 3. Secure pendant-mounted luminaires to building structure.
 - 4. Secure lay-in luminaires to ceiling support channels using listed safety clips at four corners.
 - 5. In addition to ceiling support wires, provide two galvanized steel safety wire(s), minimum 12 gage, connected from opposing corners of each recessed luminaire to building structure.
 - 6. See appropriate Division 9 section where suspended grid ceiling is specified for additional requirements.
- F. Recessed Luminaires:
 - 1. Install trims tight to mounting surface with no visible light leakage.
 - 2. Non-IC Rated Luminaires: Maintain required separation from insulation and combustible materials according to listing.

3. Luminaires Recessed in Fire-Rated Ceilings: Install using accessories and firestopping materials to meet regulatory requirements for fire rating.
- G. Suspended Luminaires:
 1. Install using the suspension method indicated, with support lengths and accessories as required for specified mounting height.
 2. Install canopies tight to mounting surface.
- H. Wall-Mounted Luminaires: Unless otherwise indicated, specified mounting heights are to center of luminaire.
- I. Install fixtures securely, in a neat and workmanlike manner, as specified in NECA 500 (commercial lighting).
- J. Install suspended luminaires and exit signs using pendants supported from swivel hangers. Provide pendant length required to suspend luminaire at indicated height.
- K. Support luminaires independent of ceiling framing.
- L. Locate recessed ceiling luminaires as indicated on reflected ceiling plan.
- M. Install surface mounted luminaires and exit signs plumb and adjust to align with building lines and with each other. Secure to prevent movement.
- N. Exposed Grid Ceilings: Support surface mounted luminaires in grid ceiling directly from building structure.
- O. Exposed Grid Ceilings: Provide auxiliary members spanning ceiling grid members to support surface mounted luminaires.
- P. Exposed Grid Ceilings: Fasten surface mounted luminaires to ceiling grid members using bolts, screws, rivets, or suitable clips.
- Q. Install recessed luminaires to permit removal from below.
- R. Install recessed luminaires using accessories and firestopping materials to meet regulatory requirements for fire rating.
- S. Install clips to secure recessed grid-supported luminaires in place.
- T. Install wall mounted luminaires and exit signs at height as scheduled.
- U. Install accessories furnished with each luminaire.
- V. Make wiring connections to branch circuit using building wire with insulation suitable for temperature conditions within luminaire.
- W. Bond products and metal accessories to branch circuit equipment grounding conductor.
- X. Emergency Lighting Units:
 1. Unless otherwise indicated, connect unit to unswitched power from same circuit feeding normal lighting in same room or area. Bypass local switches, contactors, or other lighting controls.
- Y. Exit Signs:
 1. Unless otherwise indicated, connect unit to unswitched power from same circuit feeding normal lighting in same room or area. Bypass local switches, contactors, or other lighting controls.

3.04 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Inspect each product for damage and defects.
- C. Perform field inspection, testing, and adjusting in accordance with Section 01 40 00.
- D. Operate each luminaire after installation and connection to verify proper operation.

- E. Correct wiring deficiencies and repair or replace damaged or defective products. Repair or replace excessively noisy ballasts as determined by Architect.

3.05 ADJUSTING

- A. Aim and position adjustable luminaires to achieve desired illumination as indicated or as directed by Architect. Secure locking fittings in place.
- B. Aim and position adjustable emergency lighting unit lamps to achieve optimum illumination of egress path as required or as directed by Architect or authority having jurisdiction.
- C. Exit Signs with Field-Selectable Directional Arrows: Set as indicated or as required to properly designate egress path as directed by Architect or authority having jurisdiction.
- D. Aim and adjust luminaires as indicated.
- E. Position exit sign directional arrows as indicated.

3.06 CLEANING

- A. Clean surfaces according to NECA 500 (commercial lighting), NECA 502 (industrial lighting), and manufacturer's instructions to remove dirt, fingerprints, paint, or other foreign material and restore finishes to match original factory finish.
- B. Clean electrical parts to remove conductive and deleterious materials.
- C. Remove dirt and debris from enclosures.
- D. Clean photometric control surfaces as recommended by manufacturer.
- E. Clean finishes and touch up damage.

3.07 CLOSEOUT ACTIVITIES

- A. See Section 01 78 00 - Closeout Submittals, for closeout submittals.
- B. See Section 01 79 00 - Demonstration and Training, for additional requirements.
- C. Demonstration: Demonstrate proper operation of luminaires to Architect, and correct deficiencies or make adjustments as directed.

3.08 PROTECTION

- A. Protect installed luminaires from subsequent construction operations.

3.09 SCHEDULE - SEE DRAWINGS

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 26 56 00
EXTERIOR LIGHTING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Exterior luminaires.
- B. Drivers.
- C. Luminaire accessories.

1.02 RELATED REQUIREMENTS

- A. Section 26 05 26 - Grounding and Bonding for Electrical Systems.
- B. Section 26 05 29 - Hangers and Supports for Electrical Systems.
- C. Section 26 05 37 - Boxes.
- D. Section 26 09 23 - Lighting Control Devices.
 - 1. Includes automatic controls for lighting including outdoor motion sensors, time switches, and outdoor photo controls.
- E. Section 26 27 26 - Wiring Devices: Receptacles for installation in poles.
- F. Section 26 28 13 - Fuses.
- G. Section 26 51 00 - Interior Lighting.

1.03 REFERENCE STANDARDS

- A. IESNA LM-63 - ANSI Approved Standard File Format for Electronic Transfer of Photometric Data and Related Information.
- B. IES LM-79 - Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products.
- C. IES LM-80 - Approved Method: Measuring Luminous Flux and Color Maintenance of LED Packages, Arrays, and Modules; Illuminating Engineering Society.
- D. IESNA LM-64 - Photometric Measurements of Parking Areas.
- E. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- F. NECA/IESNA 501 - Standard for Installing Exterior Lighting Systems.
- G. NFPA 70 - National Electrical Code.
- H. UL 1598 - Luminaires.
- I. UL 8750 - Light Emitting Diode (LED) Equipment for Use in Lighting Products.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Notify Architect of any conflicts or deviations from the contract documents to obtain direction prior to proceeding with work.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Shop Drawings:
 - 1. Indicate dimensions and components for each luminaire that is not a standard product of the manufacturer.
 - 2. Provide photometric calculations where luminaires are proposed for substitution .
- C. Product Data: Provide manufacturer's standard catalog pages and data sheets including detailed information on luminaire construction, dimensions, ratings, finishes, mounting

requirements, listings, service conditions, photometric performance, weight, effective projected area (EPA), and installed accessories; include model number nomenclature clearly marked with all proposed features.

1. LED Luminaires:
 - a. Include estimated useful life, calculated based on IES LM-80 test data.
 - b. Include IES LM-79 test report upon request.
2. Provide electronic files of photometric data certified by a National Voluntary Laboratory Accreditation Program (NVLAP) lab or independent testing agency in IESNA LM-63 standard format upon request.
3. Lamps: Include rated life and initial and mean lumen output.
- D. Sustainable Design Documentation: Submit manufacturer's product data on lamp mercury content and rated lamp life, showing compliance with specified requirements.
- E. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, installation, and starting of product.
- F. Operation and Maintenance Data: Instructions for each product including information on replacement parts.
- G. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
 1. See Section 01 60 00 - Product Requirements, for additional provisions.
- H. Project Record Documents: Record actual connections and locations of pole foundations, luminaires, and any pull or junction boxes.

1.06 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
- D. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Receive, handle, and store products according to NECA/IESNA 501 and manufacturer's written instructions.
- B. Keep products in original manufacturer's packaging and protect from damage until ready for installation.

1.08 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.
- B. Provide five year manufacturer warranty for all LED luminaires, including drivers.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Acuity Brands, Inc; : www.acuitybrands.com.
- B. Hubbell Lighting, Inc; : www.hubbelllighting.com.
- C. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 LUMINAIRE TYPES

- A. Furnish products as indicated in luminaire schedule included on the Drawings.

- B. Substitutions: See Section 01 60 00 - Product Requirements.

2.03 LUMINAIRES

- A. Manufacturers:
1. Acuity Brands, Inc; : www.acuitybrands.com/#sle.
 2. Hubbell Lighting, Inc; : www.hubbelllighting.com/#sle.
 3. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Provide products that comply with requirements of NFPA 70.
- C. Provide products that are listed and labeled as complying with UL 1598, where applicable.
- D. Provide products listed and classified by Underwriters Laboratories Inc. as suitable for the purpose specified and indicated.
- E. Unless otherwise indicated, provide complete luminaires including lamp(s) and all sockets, ballasts, reflectors, lenses, housings and other components required to position, energize and protect the lamp and distribute the light.
- F. Unless specifically indicated to be excluded, provide all required conduit, boxes, wiring, connectors, hardware, poles, foundations, supports, trims, accessories, etc. as necessary for a complete operating system.
- G. Provide products suitable to withstand normal handling, installation, and service without any damage, distortion, corrosion, fading, discoloring, etc.
- H. Provide luminaires listed and labeled as suitable for wet locations unless otherwise indicated.
- I. LED Luminaires:
1. Components: UL 8750 recognized or listed as applicable.
 2. Tested in accordance with IES LM-79 and IES LM-80.
 3. LED Estimated Useful Life: Minimum of 50,000 hours at 70 percent lumen maintenance, calculated based on IES LM-80 test data.
- J. LED Luminaires: Listed and labeled as complying with UL 8750.
- K. Exposed Hardware: Stainless steel.

2.04 DRIVERS

- A. Manufacturers:
1. General Electric Company/GE Lighting; : www.gelighting.com/#sle.
 2. Osram Sylvania; : www.sylvania.com/#sle.
 3. Philips Lighting Electronics/Advance; : www.advance.philips.com.
 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Dimmable LED Drivers:
1. Dimming Range: Continuous dimming from 100 percent to five percent relative light output unless dimming capability to lower level is indicated, without flicker.
 2. Control Compatibility: Fully compatible with the dimming controls to be installed.

2.05 ACCESSORIES

- A. Stems for Suspended Luminaires: Steel tubing, minimum 1/2" size, factory finished to match luminaire or field-painted as directed.
- B. Provide accessory plaster frames for luminaires recessed in plaster ceilings.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field measurements are as shown on the drawings.

- B. Verify that outlet boxes are installed in proper locations and at proper mounting heights and are properly sized to accommodate conductors in accordance with NFPA 70.
- C. Verify that suitable support frames are installed where required.
- D. Verify that branch circuit wiring installation is completed, tested, and ready for connection to luminaires.
- E. Verify that conditions are satisfactory for installation prior to starting work.

3.02 PREPARATION

- A. Provide extension rings to bring outlet boxes flush with finished surface.
- B. Clean dirt, debris, plaster, and other foreign materials from outlet boxes.

3.03 INSTALLATION

- A. Coordinate locations of outlet boxes provided under Section 26 05 37 as required for installation of luminaires provided under this section.
- B. Perform work in accordance with NECA 1 (general workmanship).
- C. Install products according to manufacturer's instructions.
- D. Install luminaires securely, in a neat and workmanlike manner, as specified in NECA 1 (general workmanship) and NECA/IESNA 501 (exterior lighting).
- E. Provide required support and attachment in accordance with Section 26 05 29.
- F. Install luminaires plumb and square and aligned with building lines and with adjacent luminaires.
- G. Wall-Mounted Luminaires: Unless otherwise indicated, specified mounting heights are to center of luminaire.
- H. Install accessories furnished with each luminaire.
- I. Bond products and metal accessories to branch circuit equipment grounding conductor.

3.04 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Inspect each product for damage and defects.
- C. Operate each luminaire after installation and connection to verify proper operation.
- D. Correct wiring deficiencies and repair or replace damaged or defective products. Repair or replace excessively noisy drivers as determined by Architect.

3.05 ADJUSTING

- A. Aim and position adjustable luminaires to achieve desired illumination as indicated or as directed by Architect. Secure locking fittings in place.

3.06 CLEANING

- A. Clean surfaces according to NECA/IESNA 501 and manufacturer's instructions to remove dirt, fingerprints, paint, or other foreign material and restore finishes to match original factory finish.

3.07 CLOSEOUT ACTIVITIES

- A. See Section 01 78 00 - Closeout Submittals, for closeout submittals.
- B. See Section 01 79 00 - Demonstration and Training, for additional requirements.
- C. Demonstration: Demonstrate proper operation of luminaires to Architect, and correct deficiencies or make adjustments as directed.

3.08 PROTECTION

- A. Protect installed luminaires from subsequent construction operations.

END OF SECTION

NOT FOR BIDDING

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 27 10 05

STRUCTURED CABLING FOR VOICE AND DATA - INSIDE-PLANT

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Communications system design requirements.
- B. Communications pathways.
- C. Copper cable and terminations.
- D. Fiber optic cable and interconnecting devices.
- E. Communications equipment room fittings.
- F. Communications outlets.
- G. Communications grounding and bonding.
- H. Communications identification.

1.02 RELATED REQUIREMENTS

- A. Section 07 84 00 - Firestopping.
- B. Section 26 05 34 - Conduit.
- C. Section 26 05 37 - Boxes.

1.03 REFERENCE STANDARDS

- A. ASTM D709 - (2017) Standard Specification for Laminating Thermosetting Materials
- B. EIA/ECA-310 - Cabinets, Racks, Panels, and Associated Equipment; Electronic Industries Alliance/Electrical Components Association.
- C. IEEE 100 - (2000; Archived) The Authoritative Dictionary of IEEE Standards Terms
- D. ICEA S-83-596 - Indoor Optical Fiber Cables; Insulated Cable Engineers Association.
- E. ICEA S-90-661 - Category 3, 5, & 5e Individually Unshielded Twisted Pair Indoor Cables (With or Without An Overall Shield) For Use in General Purpose and LAN Communications Wiring Systems Technical Requirements.
- F. NECA/BICSI 568 - Standard for Installing Building Telecommunications Cabling; National Electrical Contractors Association.
- G. ANSI/NEMA WC 66 - (2019) Performance Standard for Category 6 and Category 7 100 Ohm Shielded and Unshielded Twisted Pairs
- H. NFPA 70 - National Electrical Code.
- I. TIA-455-21 - FOTP-21 - Mating Durability of Fiber Optic Interconnecting Devices.
- J. TIA-526-7 - (2015a) OFSTP-7 Measurement of Optical Power Loss of Installed Single-Mode Fiber Cable Plant
- K. TIA-526-14 - (2015c) Optical Power Loss Measurements of Installed Multimode Biber Cable Plant
- L. TIA-526-7 - Measurement of Optical Power Loss of Installed Single-Mode Fiber Cable Plant.
- M. TIA-526-14 - Optical Power Loss Measurement of Installed Multimode Fiber Cable Plant.
- N. TIA-568-C.0 - (2009; Add 1 2010; Add 2 2012) Generic Telecommunications Cabling for Customer Premises
- O. TIA-568-C.2 - Balanced Twisted-Pair Telecommunications Cabling and Components Standards.
- P. TIA-569-C - Commercial Building Standard for Telecommunications Pathways and Spaces.

- Q. TIA-606 - Administration Standard for Telecommunications Infrastructure.
- R. TIA-606-B - Administration Standard for the Telecommunications Infrastructure.
- S. TIA-607-B - Generic Telecommunications Bonding and Grounding (Earthing) for Customer Premises.
- T. UL 444 - Communications Cables.
- U. UL 514C - Nonmetallic Outlet Boxes, Flush-Device Boxes, and Covers.
- V. UL 1863 - Communications-Circuit Accessories.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate requirements for service entrance and entrance facilities with Communications Service Provider.
 - 2. Coordinate the work with other trades to avoid placement of other utilities or obstructions within the spaces dedicated for communications equipment.
 - 3. Coordinate arrangement of communications equipment with the dimensions and clearance requirements of the actual equipment to be installed.
 - 4. Notify Architect of any conflicts with or deviations from the contract documents. Obtain direction before proceeding with work.

1.05 DEFINITIONS

- A. Campus Distributor (CD) - A distributor from which the campus backbone cabling emanates. (International expression for main cross-connect (MC).)
- B. Building Distributor (BD) - A distributor in which the building backbone cables terminate and at which connections to the campus backbone cables may be made. (International expression for intermediate cross-connect (IC).)
- C. Floor Distributor (FD) - A distributor used to connect horizontal cable and cabling subsystems or equipment. (International expression for horizontal cross-connect (HC).)
- D. Telecommunications Room (TR) - An enclosed space for housing telecommunications equipment, cable, terminations, and cross-connects. The room is the recognized cross-connect between the backbone cable and the horizontal cabling.
- E. Entrance Facility (EF) (Telecommunications) - An entrance to the building for both private and public network service cables (including wireless) including the entrance point at the building wall and continuing to the equipment room.
- F. Equipment Room (ER) (Telecommunications) - An environmentally controlled centralized space for telecommunications equipment that serves the occupants of a building. Equipment housed therein is considered distinct from a telecommunications room because of the nature of its complexity.
- G. Open Cable - Cabling that is not run in a raceway as defined by NFPA 70. This refers to cabling that is "open" to the space in which the cable has been installed and is therefore exposed to the environmental conditions associated with that space.
- H. Open Office - A floor space division provided by furniture, moveable partitions, or other means instead of by building walls.
- I. Pathway - A physical infrastructure utilized for the placement and routing of telecommunications cable.

1.06 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Condensed Submittal List - Provide the following submittals as listed and further defined below

1. Shop Drawings
 - a. Telecommunications drawings
 - b. Telecommunication space drawings
 2. Product Data
 - a. Telecommunications cabling
 - b. Patch panels
 - c. Telecommunications outlet/connector assemblies
 - d. Equipment support frame
 - e. Connector blocks
 - f. Spare parts
 3. Test Reports
 - a. Telecommunications cabling testing
 4. Certificates
 - a. Telecommunications Contractor Qualifications
 - b. Key Personnel Qualifications
 - c. Manufacturer Qualifications
 - d. Test Plan
 5. Manufacturer's Field Reports
 - a. Factory reel tests
 6. Operations and Maintenance Data
 - a. Telecommunications cabling and pathway system
 7. Closeout Submittals
 - a. Recording Documentation
- C. Product Data: Provide manufacturer's standard catalog pages and data sheets for each product. Include manufacturer's name, trade name, place of manufacture, and catalog model or number. Include performance and characteristic curves. Submittals shall also include applicable federal, military, industry, and technical society publication references. Should manufacturer's data require supplemental information for clarification, the supplemental information shall be submitted as specified in paragraph REGULATORY REQUIREMENTS and as required in Section 01 30 00 SUBMITTAL PROCEDURES.
- D. Sustainable Design Documentation: Submit manufacturer's product data on cable and cable insulation showing compliance with specified lead content requirements.
- E. Shop Drawings: Show compliance with requirements on isometric schematic diagram of network layout, showing cable routings, telecommunication closets, rack and enclosure layouts and locations, service entrance, and grounding, prepared and approved by BICSI Registered Communications Distribution Designer (RCDD). Shop drawings shall be submitted with the RCDD stamp on the drawings submitted for approval by the Contractor.
1. In exception to Section 01 30 00 SUBMITTAL PROCEDURES, submitted plan drawings shall be a minimum of 279 by 432 mm 11 by 17 inches in size using a minimum scale of one mm per 100 mm 1/8 inch per foot[, except as specified otherwise]. Include wiring diagrams and installation details of equipment indicating proposed location, layout and arrangement, control panels, accessories, piping, ductwork, and other items that must be shown to ensure a coordinated installation. Wiring diagrams shall identify circuit terminals and indicate the internal wiring for each item of equipment and the interconnection between each item of equipment. Drawings shall indicate adequate clearance for operation, maintenance, and replacement of operating equipment devices. Submittals shall include the nameplate data, size, and capacity. Submittals shall also include applicable federal, military, industry, and technical society publication references.
- F. Telecommunication Drawings as follows shall be RCDD approved and stamped
1. Provide registered communications distribution designer (RCDD) approved, drawings in accordance with TIA-606. The identifier for each termination and cable shall appear on the

drawings. Drawings shall depict final telecommunications installed wiring system infrastructure in accordance with TIA-606. The drawings should provide details required to prove that the distribution system shall properly support connectivity from the EF telecommunications and ER telecommunications, CD's[, BD's], and FD's to the telecommunications work area outlets.[Provide a plastic laminated schematic of the as-installed telecommunications cable system showing cabling, CD's, BD's, FD's, and the EF and ER for telecommunications keyed to floor plans by room number. Mount the laminated schematic in the EF telecommunications space as directed by the Contracting Officer. The following drawings shall be provided as a minimum:

- a. T1 - Layout of complete building per floor - Building Area/Serving Zone Boundaries, Backbone Systems, and Horizontal Pathways. Layout of complete building per floor. The drawing indicates location of building areas, serving zones, vertical backbone diagrams, telecommunications rooms, access points, pathways, grounding system, and other systems that need to be viewed from the complete building perspective.
 - b. T2 - Serving Zones/Building Area Drawings - Drop Locations and Cable Identification (ID'S). Shows a building area or serving zone. These drawings show drop locations, telecommunications rooms, access points and detail call outs for common equipment rooms and other congested areas.
 - c. T4 - Typical Detail Drawings - Faceplate Labeling, Firestopping, Americans with Disabilities Act (ADA), Safety, Department of Transportation (DOT). Detailed drawings of symbols and typicals such as faceplate labeling, faceplate types, faceplate population installation procedures, detail racking, and raceways.
2. Telecommunications Space Drawings
- a. Provide T3 drawings in accordance with TIA-606 that include telecommunications rooms plan views, pathway layout (cable tray, racks, ladder-racks, etc.), mechanical/electrical layout, and [cabinet][, rack][, backboard][and] wall elevations. Drawings shall show layout of applicable equipment including incoming cable stub or connector blocks, building protector assembly, outgoing cable connector blocks, patch panels and equipment spaces and cabinet/racks. Drawings shall include a complete list of equipment and material, equipment rack details, proposed layout and anchorage of equipment and appurtenances, and equipment relationship to other parts of the work including clearance for maintenance and operation. Drawings may also be an enlargement of a congested area of T1 or T2 drawings.
- G. Evidence of qualifications for installer.
- H. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, installation, and operation of product.
- I. Test Plan: Complete and detailed plan, with list of test equipment, procedures for inspection and testing, and intended test date; submit at least 60 days prior to intended test date.
- J. Field Test Reports.
- K. Project Record Documents: Prepared and approved by BICSI Registered Communications Distribution Designer (RCDD).
1. Record actual locations of outlet boxes and distribution frames.
 2. Show as-installed color coding, pair assignment, polarization, and cross-connect layout.
 3. Identify distribution frames and equipment rooms by room number on contract drawings.
 4. Provide T5 drawings including documentation on cables and termination hardware in accordance with TIA-606. T5 drawings shall include schedules to show information for cut-overs and cable plant management, patch panel layouts and cover plate assignments, cross-connect information and connecting terminal layout as a minimum. T5 drawings shall be provided[in hard copy format][on electronic media using Windows based computer cable management software.][A licensed copy of the cable management

software including documentation, shall be provided.] Provide the following T5 drawing documentation as a minimum:

- a. Cables - A record of installed cable shall be provided in accordance with TIA-606. The cable records shall [include only the required data fields][include the required data fields for each cable and complete end-to-end circuit report for each complete circuit from the assigned outlet to the entry facility]in accordance with TIA-606. Include manufacture date of cable with submittal.
- b. Termination Hardware - A record of installed patch panels, cross-connect points, distribution frames, terminating block arrangements and type, and outlets shall be provided in accordance with TIA-606. Documentation shall include the required data fields as a minimum in accordance with TIA-606.
- L. Operation and Maintenance Data: List of all components with part numbers, sources of supply, and operation and maintenance instructions; include copy of project record documents. Commercial off the shelf manuals shall be furnished for operation, installation, configuration, and maintenance of products provided as a part of the telecommunications cabling and pathway system, Data Package 5. Submit operations and maintenance data on all equipment specified herein and shown on the drawings not later than 2 months prior to the date of beneficial occupancy. In addition to requirements of Data Package 5, include the requirements of paragraphs INFORMATION TECHNOLOGY DRAWINGS, TELECOMMUNICATIONS DRAWINGS, TELECOMMUNICATIONS SPACE DRAWINGS, and RECORD DOCUMENTATION. Ensure that these drawings and documents depict the as-built configuration.

1.07 QUALITY ASSURANCE

- A. Manufacturer Qualifications: At least 3 years experience in manufacturing, assembly, and factory testing of components which comply with TIA-568-C, TIA-568-C.2, and TIA-568-C.3.
- B. Installer Qualifications: A company having at least 3 years experience in the installation and testing of the type of system specified, and:
 1. Telecommunications Contractor - The telecommunications contractor shall be a firm which is regularly and professionally engaged in the business of the applications, installation, and testing of the specified telecommunications systems and equipment. The telecommunications contractor shall demonstrate experience in providing successful telecommunications systems within the past 3 years of similar scope and size. Submit documentation for a minimum of three and a maximum of five successful telecommunication system installations for the telecommunications contractor.
 2. Key Personnel
 - a. Provide key personnel who are regularly and professionally engaged in the business of the application, installation and testing of the specified telecommunications systems and equipment. There may be one key person or more key persons proposed for this solicitation depending upon how many of the key roles each has successfully provided. Each of the key personnel shall demonstrate experience in providing successful telecommunications systems within the past 3 years.
 - b. Supervisors and installers assigned to the installation of this system or any of its components shall be Building Industry Consulting Services International (BICSI) Registered Cabling Installers, Technician Level. Submit documentation of current BICSI certification for each of the key personnel.
 - c. In lieu of BICSI certification, supervisors and installers assigned to the installation of this system or any of its components shall have a minimum of 3 years experience in the installation of the specified copper and fiber optic cable and components. They shall have factory or factory approved certification from each equipment manufacturer indicating that they are qualified to install and test the provided products. Submit documentation for a minimum of three and a maximum of five successful

telecommunication system installations for each of the key personnel. Documentation for each key person shall include at least two successful system installations provided that are equivalent in system size and in construction complexity to the telecommunications system proposed for this solicitation. Include specific experience in installing and testing telecommunications systems and provide the names and locations of at least two project installations successfully completed using optical fiber and copper telecommunications cabling systems. All of the existing telecommunications system installations offered by the key persons as successful experience shall have been in successful full-time service for at least 18 months prior to the issuance date for this solicitation. Provide the name and role of the key person, the title, location, and completed installation date of the referenced project, the referenced project owner point of contact information including name, organization, title, and telephone number, and generally, the referenced project description including system size and construction complexity.

- d. Indicate that all key persons are currently employed by the telecommunications contractor, or have a commitment to the telecommunications contractor to work on this project. All key persons shall be employed by the telecommunications contractor at the date of issuance of this solicitation, or if not, have a commitment to the telecommunications contractor to work on this project by the date that the bid was due to the Contracting Officer.
 - e. Note that only the key personnel approved by the Contracting Officer in the successful proposal shall do work on this solicitation's telecommunications system. Key personnel shall function in the same roles in this contract, as they functioned in the offered successful experience. Any substitutions for the telecommunications contractor's key personnel requires approval from The Contracting Officer.
- C. Products: Listed, classified, and labeled as suitable for the purpose intended.
- D. Components shall be UL or third party certified. Where equipment or materials are specified to conform to industry and technical society reference standards of the organizations, submit proof of such compliance. The label or listing by the specified organization will be acceptable evidence of compliance. In lieu of the label or listing, submit a certificate from an independent testing organization, competent to perform testing, and approved by the Contracting Officer. The certificate shall state that the item has been tested in accordance with the specified organization's test methods and that the item complies with the specified organization's reference standard. Provide a complete system of telecommunications cabling and pathway components using star topology. Provide support structures and pathways, complete with outlets, cables, connecting hardware and telecommunications cabinets/racks. Cabling and interconnecting hardware and components for telecommunications systems shall be UL listed or third party independent testing laboratory certified, and shall comply with NFPA 70 and conform to the requirements specified herein.

1.08 DELIVERY, STORAGE, AND HANDLING

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Keep stored products clean and dry.

1.09 SPARE PARTS

- A. provide a complete list of parts and supplies, with current unit prices and source of supply, and a list of spare parts recommended for stocking.

1.10 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.
- B. Correct defective Work within a 2 year period after Date of Substantial Completion.

PART 2 PRODUCTS

2.01 SYSTEM DESIGN

- A. Provide a complete permanent system of cabling and pathways for voice and data communications, including cables, conduits and wireways, pull wires, support structures, enclosures and cabinets, and outlets.
 - 1. Provide fixed cables and pathways that comply with NFPA 70 and TIA-607 and are UL listed or third party independent testing laboratory certified.
 - 2. Provide connection devices that are rated for operation under conditions of 32 to 140 degrees F at relative humidity of 0 to 95 percent, noncondensing.
 - 3. In this project, the term plenum is defined as return air spaces above ceilings, inside ducts, under raised floors, and other air-handling spaces.
- B. Main Distribution Frame (MDF): Centrally located support structure for terminating horizontal cables that extend to telecommunications outlets, functioning as point of presence to external service provider.
 - 1. Locate main distribution frame as indicated on the drawings.
- C. Cabling to Outlets: Specified horizontal cabling, wired in star topology to distribution frame located at center hub of star; also referred to as "links".

2.02 PATHWAYS

- A. Conduit: As specified in Section 26 05 34; provide pull cords in all conduit.
- B. Provide telecommunications pathways in accordance with TIA-569
- C. Firestop Sleeves: Listed; provide as required to preserve fire resistance rating of building elements.

2.03 CABLING GENERAL

- A. Cabling shall be UL listed for the application and shall comply with TIA-568-C.0, TIA-568-C.1, TIA-568-C.2, TIA-568-C.3 and NFPA 70. Provide a labeling system for cabling as required by TIA-606 and UL 969. Ship cable on reels or in boxes bearing manufacture date for for unshielded twisted pair (UTP) in accordance with ICEA S-90-661 and optical fiber cables in accordance with ICEA S-83-596 for all cable used on this project. Cabling manufactured more than 12 months prior to date of installation shall not be used. All horizontal cabling shall be plenum rated.

2.04 COPPER CABLE AND TERMINATIONS

- A. Copper Horizontal Cable:
 - 1. Description: 100 ohm, balanced twisted pair cable complying with TIA-568 and listed and labeled as complying with UL 444, TIA-568-C.2, ANSI/NEMA WC 66, and ICEA S-90-661.
 - 2. Cable Type - Data: TIA-568 Category 6 UTP (unshielded twisted pair); 23 AWG.
 - 3. Cable Capacity: 4-pair.
 - 4. Cable Applications: Use listed NFPA 70 Type CMP plenum cable.
 - 5. Cable Jacket Color -Data Cable: White.
 - 6. Product(s):
 - a. Hubbell: NEXTSPEED Category 6 UTP Cable: M/N C6RPW or approved equal www.hubbell.com/hubbellpremisewiring/en
- B. Copper Cable Terminations: Insulation displacement connection (IDC) type using appropriate tool; use screw connections only where specifically indicated.
- C. Jacks and Connectors: Modular RJ-45, non-keyed, terminated with 110-style insulation displacement connectors (IDC); high impact thermoplastic housing; suitable for and complying with same standard as specified horizontal cable; UL 1863 listed.
 - 1. Performance: 500 mating cycles.

2. Voice and Data Jacks: 8-position modular jack, color-coded for both T568A and T568B wiring configurations.
3. Color: White
4. Product(s):
 - a. Hubbell: NEXTSPEED Ascent Category 6 Jacks: M/N HXJ6W or approved equal www.hubbell.com/hubbellpremisewiring/en
- D. Copper Patch Cords:
 1. Description: Factory-fabricated 4-pair cable assemblies with 8-position modular connectors terminated at each end.
 2. Patch Cords for Patch Panels:
 - a. Quantity: One for each pair of patch panel ports.
 - b. Length: One foot.
 3. Patch Cords for Areas other than Patch Panels:
 - a. Quantity: One for each outlet port.
 - b. Length: As indicated on drawings.
 4. Product(s):
 - a. Hubbell Premise Wiring; www.hubbell.com/hubbellpremisewiring/en
 - 1) Hubbell NEXTSPEED High Flex Standard Category 6 Patch Cord Model HC6W01 or approved equal for Patch Panels.
 - b. Hubbell Premise Wiring; www.hubbell.com/hubbellpremisewiring/en
 - 1) Hubbell NEXTSPEED High Flex Standard Category 6 Patch Cord Model HC6WXX or approved equal for Areas other than Patch Panels. XX relates to the length of the cable. Provide applicable length as indicated on drawings.

2.05 FIBER OPTIC CABLE AND INTERCONNECTING DEVICES

- A. Manufacturers:
 1. Hubbell Premise Wiring; www.hubbell.com/hubbellpremisewiring/en
 2. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Fiber Optic Interconnecting Devices:
 1. Connector Type: Type LC.
 2. Connector Performance: 500 mating cycles, when tested in accordance with TIA-455-21.
 3. Maximum Attenuation/Insertion Loss: 0.3 dB.
 4. Product(s):
 - a. Hubbell Premise Wiring: M/N FCLCF900SM6PK or approved equal www.hubbell.com/hubbellpremisewiring/en

2.06 COMMUNICATIONS EQUIPMENT ROOM FITTINGS

- A. Copper Cross-Connection Equipment:
 1. Manufacturers:
 - a. Hubbell Premise Wiring: www.hubbell.com/hubbellpremisewiring/en
 - b. Substitutions: See Section 01 60 00 - Product Requirements.
 2. Patch Panels for Copper Cabling: Sized to fit EIA/ECA-310 standard 19 inch wide equipment racks; 0.09 inch thick aluminum; cabling terminated on Type 110 insulation displacement connectors; printed circuit board interface.
 - a. Jacks: Non-keyed RJ-45, suitable for and complying with same standard as cable to be terminated; maximum 48 ports per standard width panel.
 - b. Capacity: Provide ports sufficient for cables to be terminated plus 25 percent spare.
 - c. Labels: Factory installed laminated plastic nameplates above each port, numbered consecutively; comply with TIA-606.
 - d. Labels: Factory installed laminated plastic nameplates above each port, numbered consecutively; comply with TIA-606.
 - e. Provide incoming cable strain relief and routing guides on back of panel.

3. Product(s):
 - a. Hubbell Premise Wiring; www.hubbell.com/hubbellpremisewiring/en
 - 1) Patch Panel:
 - (a) Hubbell Model HP648: 48 port black anodized aluminum or approved equal
- B. Fiber Optic Cross-Connection Equipment:
 1. Manufacturers:
 - a. Hubbell Premise Wiring; www.hubbell.com/hubbellpremisewiring/en
 2. Patch Panels for Fiber Optic Cabling: Sized to fit EIA/ECA-310 standard 19 inch wide equipment racks; 0.09 inch thick aluminum.
 - a. Adapters: As specified above under FIBER OPTIC CABLE AND INTERCONNECTING DEVICES; maximum of 24 duplex adaptors per standard panel width.
 - b. Labels: Factory installed laminated plastic nameplates above each port, numbered consecutively; comply with TIA-606.
 - c. Labels: Factory installed laminated plastic nameplates above each port, numbered consecutively; comply with TIA-606.
 - d. Provide incoming cable strain relief and routing guides on back of panel.
 - e. Provide rear cable management tray at least 8 inches deep with removable cover.
 - f. Provide dust covers for unused adapters.
- C. Backboards: Interior grade plywood without voids, 3/4 inch thick; UL-labeled fire-retardant.
 1. Provide void-free, interior grade A-C plywood 19 mm 3/4 inch thick 4 by 8 feet. Backboards shall be fire rated by manufacturing process. Fire stamp shall be clearly visible. Paint applied over fire retardant backboard shall be UL 723 fire retardant paint. Provide label including paint manufacturer, date painted, UL listing and name of Installer. When painted, paint label and fire stamp shall be clearly visible. Backboards shall be provided on a minimum of two adjacent walls in the telecommunication spaces.
 2. Do not paint over UL and Fire stamp labels of plywood .
- D. Equipment Racks and Cabinets: EIA/ECA-310 standard 19 inch wide component racks.
 1. Manufacturers:
 - a. APC; www.apc.com/us/en.
 - b. Substitutions: See Section 01 60 00 - Product Requirements.
 2. Floor Mounted Racks: Aluminum or steel construction with corrosion resistant finish; vertical and horizontal cable management channels, top and bottom cable troughs, and grounding lug. APC Model AR3100
 - a. Load Rating: minimum 2249.99 pounds.
 - b. Fully enclosed cabinet type
 - c. Lockable
 - d. Front and rear doors with locks
 - e. Adjustable leveling feet with low-profile castors
 - f. Split rear doors

2.07 COMMUNICATIONS OUTLETS

- A. Manufacturers:
 1. Hubbell Premise Wiring; www.hubbell.com/hubbellpremisewiring/en
- B. Outlet Boxes: Comply with Section 26 05 37.
 1. Provide depth as required to accommodate cable manufacturer's recommended minimum conductor bend radius.
- C. Wall Plates:
 1. Comply with system design standards and UL 514C.
 2. Accepts modular jacks/inserts.

3. Capacity:
 - a. Data or Combination Voice/Data Outlets: Refer to drawings for number of ports.
4. Product(s):
 - a. Hubbell Premise Wiring; www.hubbell.com/hubbellpremisewiring/en

2.08 GROUNDING AND BONDING COMPONENTS

- A. Comply with TIA-607.

2.09 IDENTIFICATION PRODUCTS

- A. Comply with TIA-606.
- B. Comply with TIA-606.

2.10 SOURCE QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Factory test cables according to TIA-568.

PART 3 EXECUTION

3.01 INSTALLATION - GENERAL

- A. Comply with latest editions and addenda of TIA-568 (cabling), TIA-569 (pathways), TIA-607 (grounding and bonding), NECA/BICSI 568, NFPA 70, and SYSTEM DESIGN as specified in PART 2.
- B. Comply with Communication Service Provider requirements.
- C. Grounding and Bonding: Perform in accordance with TIA-607 and NFPA 70.
- D. Install firestopping to preserve fire resistance rating of partitions and other elements, using materials and methods specified in Section 07 84 00.

3.02 INSTALLATION OF PATHWAYS

- A. Install pathways with the following minimum clearances:
 1. 48 inches from motors, generators, frequency converters, transformers, x-ray equipment, and uninterruptible power systems.
 2. 12 inches from power conduits and cables and panelboards.
 3. 5 inches from fluorescent and high frequency lighting fixtures.
 4. 6 inches from flues, hot water pipes, and steam pipes.
- B. Conduit, in Addition to Requirements of Section 26 05 34:
 1. Arrange conduit to provide no more than the equivalent of two 90 degree bend(s) between pull points.
 2. Conduit Bends: Inside radius not less than 10 times conduit internal diameter.
 3. Arrange conduit to provide no more than 100 feet between pull points.
- C. Outlet Boxes:
 1. Coordinate locations of outlet boxes provided under Section 26 05 37 as required for installation of telecommunications outlets provided under this section.

3.03 INSTALLATION OF EQUIPMENT AND CABLING

- A. Cabling:
 1. Do not bend cable at radius less than manufacturer's recommended bend radius; for unshielded twisted pair use bend radius of not less than 4 times cable diameter.
 2. Do not over-cinch or crush cables.
 3. Do not exceed manufacturer's recommended cable pull tension.
 4. When installing in conduit, use only lubricants approved by cable manufacturer and do not chafe or damage outer jacket.

- B. Service Loops (Slack or Excess Length): Provide the following minimum extra length of cable, looped neatly:
 - 1. At Distribution Frames: 120 inches.
 - 2. At Outlets - Copper: 12 inches.
 - 3. At Outlets - Optical Fiber: 39 inches.
- C. Copper Cabling:
 - 1. Category 5e and Above: Maintain cable geometry; do not untwist more than 1/2 inch from point of termination.
 - 2. For 4-pair cables in conduit, do not exceed 25 pounds pull tension.
 - 3. Use T568B wiring configuration.
- D. Fiber Optic Cabling:
 - 1. Prepare for pulling by cutting outer jacket for 10 inches from end, leaving strength members exposed. Twist strength members together and attach to pulling eye.
 - 2. Support vertical cable at intervals as recommended by manufacturer.
- E. Floor-Mounted Racks and Enclosures: Permanently anchor to floor in accordance with manufacturer's recommendations.
- F. Identification:
 - 1. Use wire and cable markers to identify cables at each end.
 - 2. Use manufacturer-furnished label inserts, identification labels, or engraved wallplate to identify each jack at communications outlets with unique identifier.
 - 3. Use identification nameplate to identify cross-connection equipment, equipment racks, and cabinets.

3.04 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Comply with inspection and testing requirements of specified installation standards.
- C. Visual Inspection:
 - 1. Inspect cable jackets for certification markings.
 - 2. Inspect cable terminations for color coded labels of proper type.
 - 3. Inspect outlet plates and patch panels for complete labels.
- D. Testing - Copper Cabling and Associated Equipment:
 - 1. Test backbone cables after termination but before cross-connection.
 - 2. Test backbone cables for DC loop resistance, shorts, opens, intermittent faults, and polarity between connectors and between conductors and shield, if cable has overall shield.
 - 3. Category 5e and Above Backbone: Perform near end cross talk (NEXT) and attenuation tests.
 - 4. Category 5e and Above Links: Perform tests for wire map, length, attenuation, NEXT, and propagation delay.
- E. Testing - Fiber Optic Cabling:
 - 1. Backbone: Perform optical fiber end-to-end attenuation test using an optical time domain reflectometer (OTDR) and manufacturer's recommended test procedures; perform verification acceptance tests and factory reel tests.
 - 2. Multimode Backbone: Perform tests in accordance with TIA-526-14 Method B.
 - 3. Single Mode Backbone: Perform tests in accordance with TIA-526-7 Method B.
 - 4. Links: Perform optical fiber end-to-end attenuation tests and field reel tests.
- F. Final Testing: After all work is complete, including installation of telecommunications outlets, and telephone dial tone service is active, test each voice jack for dial tone.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 28 13 00
ACCESS CONTROL

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Access control system requirements.
- B. Access control units and software.
- C. Access control point peripherals, including readers.
- D. Accessories.

1.02 RELATED REQUIREMENTS

- A. Section 07 84 00 - Firestopping.
- B. Section 26 05 26 - Grounding and Bonding for Electrical Systems.
- C. Section 26 05 34 - Conduit.
- D. Section 26 05 53 - Identification for Electrical Systems: Identification products and requirements.
- E. Section 28 23 10 Video Door Release System: For interface with access control system.

1.03 REFERENCE STANDARDS

- A. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- B. NFPA 70 - National Electrical Code.
- C. NFPA 101 - Life Safety Code.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate the work with other installers to provide suitable door hardware as required for both access control functionality and code compliance.
 - 2. Coordinate the placement of readers with millwork, furniture, equipment, etc. installed under other sections or by others.
 - 3. Coordinate the work with other installers to provide power for equipment at required locations.
 - 4. Notify Architect of any conflicts with or deviations from the contract documents. Obtain direction before proceeding with work.

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Shop Drawings: Include plan views indicating locations of system components and proposed size, type, and routing of conduits and/or cables. Include elevations and details of proposed equipment arrangements. Include system interconnection schematic diagrams. Include requirements for interface with other systems.
- C. Product Data: Provide manufacturer's standard catalog pages and data sheets for each system component. Include ratings, configurations, standard wiring diagrams, dimensions, finishes, service condition requirements, and installed features.
- D. Design Data: Standby battery/UPS calculations.
- E. Certify that proposed system design and components meet or exceed specified requirements.
- F. Evidence of qualifications for manufacturer.
- G. Evidence of qualifications for installer.
- H. Evidence of qualifications for maintenance contractor (if different entity from installer).

- I. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, installation, and operation of product.
- J. Manufacturer's detailed field testing procedures.
- K. Field quality control test reports.
- L. Maintenance contracts.
- M. Project Record Documents: Record actual locations of system components and installed wiring arrangements and routing.
- N. Operation and Maintenance Data: Include detailed information on system operation, equipment programming and setup, replacement parts, and recommended maintenance procedures and intervals.
 - 1. Include contact information for entity that will be providing contract maintenance and trouble call-back service.
- O. Warranty: Submit sample of manufacturer's warranty and documentation of final executed warranty completed in Owner's name and registered with manufacturer.
- P. Software: One copy of software not resident in read-only memory.
- Q. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
 - 1. See Section 01 60 00 - Product Requirements, for additional provisions.

1.06 QUALITY ASSURANCE

- A. Comply with the following:
 - 1. NFPA 70
 - 2. NFPA 101 (Life Safety Code).
 - 3. The requirements of the local authorities having jurisdiction.
 - 4. Applicable TIA/EIA standards.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
- D. Installer Qualifications: Company specializing in performing the work of this section with minimum three years documented experience with access control systems of similar size, type, and complexity and providing contract maintenance service as a regular part of their business; authorized manufacturer's representative.
 - 1. Contract maintenance office located within 100 miles of project site.
- E. Maintenance Contractor Qualifications: Same entity as installer.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Receive, inspect, handle, and store products in accordance with manufacturer's instructions.
- B. Store products in manufacturer's unopened packaging, keep dry and protect from damage until ready for installation.

1.08 FIELD CONDITIONS

- A. Maintain field conditions within manufacturer's required service conditions during and after installation.

1.09 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.
- B. Provide minimum two year manufacturer warranty covering repair or replacement due to defective materials or workmanship. Warranty shall include parts and labor.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Access Control System - Basis of Design: Galaxy Access Control, as indicated under product articles below; www.galaxysys.com.
- B. Products other than basis of design are subject to compliance with specified requirements and prior approval of Engineer. By using products other than basis of design, Contractor accepts responsibility for costs associated with any necessary modifications to related work, including any design fees.
- C. Source Limitations: Where possible, furnish system components and accessories produced by a single manufacturer and obtained from a single supplier.

2.02 ACCESS CONTROL SYSTEM REQUIREMENTS

- A. Provide new access control system consisting of all required equipment, conduit, boxes, wiring, connectors, hardware, supports, accessories, software, system programming, etc. as necessary for a complete operating system that provides the functional intent indicated.
- B. System Battery Backup: Provide batteries/uninterruptible power supplies (UPS) as required for 240 minutes full operation. Provide the battery backup for all door strike or controller power supplies. Provide power from the controllers and/or remote power supplies for the door strikes. Both the controllers and/or the power supplies are to have battery back-up for the door strikes as mentioned above.
- C. Computers Required:
 - 1. No new computers are required. All access control equipment shall be programmed to communicate with Owner's access control workstation (head-end) located at their headquarters in New Castle, Delaware.

2.03 ACCESS CONTROL UNITS AND SOFTWARE

- A. Provide access control units and associated software compatible with readers to be connected.
- B. Provide Galaxy Part Number 635PACK4PS - 635 4 Reader UL Controller-Includes Medium Controller Box, CPU, 2 DRMs & 2 power supplies: Qty (1)
 - 1. Galaxy 635 CPU P/N 20-0635-30
 - 2. 18ga powder coated cabinet w/K/Os
 - 3. Power supplies Qty (2)
 - 4. Batteries
 - 5. Transformers (if applicable)
 - 6. Tamper switch
 - 7. 6 Slots
 - 8. Factory installed wiring harness
 - 9. Cabinet Locks w/Keys
 - 10. Removable door
- C. Provide Altronix Part Number 90-0714-19 - AL600ULLACM with ACM8 power controller: Qty (1)

2.04 ACCESS CONTROL POINT PERIPHERALS

- A. Provide devices compatible with control units.
- B. Provide devices suitable for operation under the service conditions at the installed location.
- C. Readers and Keypads:
 - 1. General Requirements:
 - a. Provide readers compatible with credentials to be used.
 - b. Color: To be selected by Architect from manufacturer's available standard colors.

2. Contactless Smart Card Reader HID Part Number 923PPR - PKI-based FIPS-201 Reader:
Qty (4)
- D. Provide readers compatible with credentials to be used.
- E. Reader Color: To be selected by Architect from manufacturer's available standard colors.

2.05 ACCESSORIES

- A. Provide components as indicated or as required for connection of access control system to devices and other systems indicated.
- B. Provide Galaxy Door Reader Module (635 DRM) Part Number 90-0600-70/8EUP - SG Enterprise 8 Reader Upgrade: Qty: (1) pack of 8
- C. Provide cables as indicated or as required for connections between system components. Cable for new controllers and locks to be composite cable, and it shall be plenum rated. Cables shall be CAT6 Hubbell M/N C6RPxx or approved equal for access control device interconnections.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field measurements are as shown on the drawings.
- B. Verify that ratings and configurations of system components are consistent with the indicated requirements.
- C. Verify that mounting surfaces are ready to receive system components.
- D. Verify that branch circuit wiring installation is completed, tested, and ready for connection to system.
- E. Verify that conditions are satisfactory for installation prior to starting work.

3.02 INSTALLATION

- A. Install access control system in accordance with NECA 1 (general workmanship).
- B. Install products in accordance with manufacturer's instructions.
- C. Wiring Method: Unless otherwise indicated, use cables (not in conduit). However, any exposed cabling shall be in EMT conduit.
 1. Use suitable listed cables in wet locations, including underground raceways.
 2. Use suitable listed cables for vertical riser applications.
 3. Use listed plenum rated cables
 4. Conduit: Comply with Section 26 05 34.
 5. Conceal all cables unless specifically indicated to be exposed.
 6. Use power transfer hinges complying with Section 08 71 00 for concealed connections to door hardware.
 7. Route exposed cables parallel or perpendicular to building structural members and surfaces.
 8. Do not exceed manufacturer's recommended maximum cable length between components.
- D. Provide grounding and bonding in accordance with Section 26 05 26.
- E. Install firestopping to preserve fire resistance rating of partitions and other elements, using materials and methods specified in Section 07 84 00.
- F. Identify system wiring and components in accordance with Section 26 05 53.
- G. All permits, drawings and fees for the access control systems are the responsibility of the Access Control contractor.

3.03 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.

- B. Provide services of a manufacturer's authorized representative to observe installation and assist in inspection and testing. Include manufacturer's detailed testing procedures and field reports with submittals.
- C. Prepare and start system in accordance with manufacturer's instructions.
- D. Program system parameters according to requirements of Owner.
- E. Test for proper interface with other systems.
- F. Correct defective work, adjust for proper operation, and retest until entire system complies with contract documents.
- G. Submit detailed reports indicating inspection and testing results and corrective actions taken.

3.04 CLEANING

- A. Clean exposed surfaces to remove dirt, paint, or other foreign material and restore to match original factory finish.

3.05 CLOSEOUT ACTIVITIES

- A. See Section 01 78 00 - Closeout Submittals, for closeout submittals.
- B. See Section 01 79 00 - Demonstration and Training, for additional requirements.
- C. Demonstration: Demonstrate proper operation of system to Owner, and correct deficiencies or make adjustments as directed.
- D. Training: Train Owner's personnel on operation, adjustment, and maintenance of system.
 - 1. Use operation and maintenance manual as training reference, supplemented with additional training materials as required.
 - 2. Provide minimum of four hours of training.
 - 3. Instructor: Manufacturer's authorized representative.
 - 4. Location: At project site.

3.06 PROTECTION

- A. Protect installed system components from subsequent construction operations.

3.07 MAINTENANCE

- A. See Section 01 70 00 - Execution Requirements, for additional requirements relating to maintenance service.
- B. Provide to Owner, a proposal as an alternate to the base bid, a separate maintenance contract for the service and maintenance of access control system for two years from date of Substantial Completion; Include a complete description of preventive maintenance, systematic examination, adjustment, cleaning, inspection, and testing, with a detailed schedule.
- C. Conduct site visit at least once every three months to perform inspection, testing, and preventive maintenance. Submit report to Owner indicating maintenance performed along with evaluations and recommendations.
- D. Provide trouble call-back service upon notification by Owner:
 - 1. Include allowance for call-back service during normal working hours at no extra cost to Owner.
 - 2. Owner will pay for call-back service outside of normal working hours on an hourly basis, based on actual time spent at site and not including travel time; include hourly rate and definition of normal working hours in maintenance contract.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 28 31 00
FIRE DETECTION AND ALARM

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Fire alarm system design and installation, including all components, wiring, and conduit.
- B. Transmitters for communication with supervising station.
- C. Circuits from protected premises to supervising station, including conduit.
- D. Replacement and removal of existing fire alarm system components, wiring, and conduit indicated.
- E. Maintenance of fire alarm system under contract for specified warranty period.

1.02 RELATED REQUIREMENTS

- A. Section 08 71 00 - Door Hardware: Electrically operated locks and door holder devices to be monitored and released by fire alarm system.
- B. Section 23 33 00 - Air Duct Accessories: Smoke dampers monitored and controlled by fire alarm system.

1.03 REFERENCE STANDARDS

- A. 36 CFR 1191 - Americans with Disabilities Act (ADA) Accessibility Guidelines for Buildings and Facilities; Architectural Barriers Act (ABA) Accessibility Guidelines.
- B. IEEE C62.41.2 - Recommended Practice on Characterization of Surges in Low-Voltage (1000 V and less) AC Power Circuits.
- C. NFPA 70 - National Electrical Code.
- D. NFPA 72 - National Fire Alarm and Signaling Code.
- E. NFPA 101 - Life Safety Code.
- F. UL 268 - Standard for Smoke Detectors for Fire Alarm Systems.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Drawings must be prepared using AutoCAD Release 11_.
 - 1. Owner will provide floor plan drawings for Contractor's use; verify all dimensions on Owner-provided drawings.
- C. Evidence of designer qualifications.
- D. Design Documents: Submit all information required for plan review and permitting by authorities having jurisdiction, including but not limited to floor plans, riser diagrams, and description of operation:
 - 1. Copy (if any) of list of data required by authority having jurisdiction.
 - 2. NFPA 72 "Record of Completion", filled out to the extent known at the time.
 - 3. Clear and concise description of operation, with input/output matrix similar to that shown in NFPA 72 Appendix A-7-5-2.2(9), and complete listing of software required.
 - 4. System zone boundaries and interfaces to fire safety systems.
 - 5. Location of all components, circuits, and raceways; mark components with identifiers used in control unit programming.
 - 6. Circuit layouts; number, size, and type of raceways and conductors; conduit fill calculations; spare capacity calculations; notification appliance circuit voltage drop calculations.
 - 7. List of all devices on each signaling line circuit, with spare capacity indicated.

8. Manufacturer's detailed data sheet for each component, including wiring diagrams, installation instructions, and circuit length limitations.
9. Description of power supplies; if secondary power is by battery include calculations demonstrating adequate battery power.
10. Certification by either the manufacturer of the control unit or by the manufacturer of each other component that the components are compatible with the control unit.
11. Certification by the manufacturer of the control unit that the system design complies with the contract documents.
12. Certification by Contractor that the system design complies with the contract documents.
- E. Evidence of installer qualifications.
- F. Evidence of instructor qualifications; training lesson plan outline.
- G. Evidence of maintenance contractor qualifications, if different from installer.
- H. Inspection and Test Reports:
 1. Submit inspection and test plan prior to closeout demonstration.
 2. Submit documentation of satisfactory inspections and tests.
 3. Submit NFPA 72 "Inspection and Test Form," filled out.
- I. Operating and Maintenance Data: See Section 01 78 00 for additional requirements; revise and resubmit until acceptable; have one set available during closeout demonstration:
 1. Complete set of specified design documents, as approved by authority having jurisdiction.
 2. Additional printed set of project record documents and closeout documents, bound or filed in same manuals.
 3. Contact information for firm that will be providing contract maintenance and trouble call-back service.
 4. List of recommended spare parts, tools, and instruments for testing.
 5. Replacement parts list with current prices, and source of supply.
 6. Detailed troubleshooting guide and large scale input/output matrix.
 7. Preventive maintenance, inspection, and testing schedule complying with NFPA 72; provide printed copy and computer format acceptable to Owner.
 8. Detailed but easy to read explanation of procedures to be taken by non-technical administrative personnel in the event of system trouble, when routine testing is being conducted, for fire drills, and when entering into contracts for remodeling.
- J. Project Record Documents: See Section 01 78 00 for additional requirements; have one set available during closeout demonstration:
 1. Complete set of floor plans showing actual installed locations of components, conduit, and zones.
 2. "As installed" wiring and schematic diagrams, with final terminal identifications.
 3. "As programmed" operating sequences, including control events by device, updated input/output chart, and voice messages by event.
- K. Closeout Documents:
 1. Certification by manufacturer that the system has been installed in compliance with his installation requirements, is complete, and is in satisfactory operating condition.
 2. NFPA 72 "Record of Completion", filled out completely and signed by installer and authorized representative of authority having jurisdiction.
 3. Certificate of Occupancy.
 4. Maintenance contract.
- L. Maintenance Materials, Tools, and Software: Furnish the following for Owner's use in maintenance of project.
 1. Furnish spare parts of same manufacturer and model as those installed; deliver in original packaging, labeled in same manner as in operating and maintenance data .

2. In addition to the items in quantities indicated in PART 2, furnish the following:
 - a. All tools, software, and documentation necessary to modify the fire alarm system using Owner's personnel; minimum modification capability to include addition and deletion of devices, circuits, and zones, and changes to system description, operation, and evacuation and instructional messages.
 - b. One copy, on CD-ROM, of all software not resident in read-only-memory.

1.05 QUALITY ASSURANCE

- A. Designer Qualifications: NICET Level III or IV (3 or 4) certified fire alarm technician or registered fire protection engineer, employed by fire alarm control panel manufacturer, Contractor, or installer, with experience designing fire alarm systems in the jurisdictional area of the authorities having jurisdiction.
- B. Installer Qualifications: Firm with minimum 3 years documented experience installing fire alarm systems of the specified type and providing contract maintenance service as a regular part of their business.
 1. Authorized representative of control unit manufacturer; submit manufacturer's certification that installer is authorized; include name and title of manufacturer's representative making certification.
 2. Installer Personnel: At least 2 years of experience installing fire alarm systems.
 3. Supervisor: NICET level III or IV (3 or 4) certified fire alarm technician; furnish name and address.
- C. Maintenance Contractor Qualifications: Same entity as installer or different entity with specified qualifications.
- D. Instructor Qualifications: Experienced in technical instruction, understanding fire alarm theory, and able to provide the required training; trained by fire alarm control unit manufacturer.
- E. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

1.06 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.
- B. Provide control panel manufacturer's warranty that system components other than wire and conduit are free from defects and will remain so for 1 year after date of Substantial Completion.
- C. Provide installer's warranty that the installation is free from defects and will remain so for 1 year after date of Substantial Completion.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Fire Alarm Control Units - Basis of Design: Simplex Remote Command Center .
- B. Fire Alarm Control Units - Other Acceptable Manufacturers: Provided their products meet or exceed the performance of the basis of design product, products of the following are acceptable:
 1. Honeywell Security & Fire Solutions/Fire-Lite: www.firelite.com/#sle.
 2. Honeywell Security & Fire Solutions/Silent Knight; _____: www.silentknight.com/#sle.
 3. Provide all control units made by the same manufacturer.
- C. Initiating Devices, and Notification Appliances:
 1. Honeywell Security & Fire Solutions/Fire-Lite: www.firelite.com/#sle.
 2. Honeywell Security & Fire Solutions/Silent Knight; _____: www.silentknight.com/#sle.
 3. Same manufacturer as control units.
 4. Provide all initiating devices and notification appliances made by the same manufacturer.

- D. Substitutions: See Section 01 60 00 - Product Requirements.
 - 1. For other acceptable manufacturers of control units specified, submit product data showing equivalent features and compliance with contract documents.
 - 2. For substitution of products by manufacturers not listed, submit product data showing features and certification by Contractor that the design will comply with contract documents.

2.02 FIRE ALARM SYSTEM

- A. Fire Alarm System: Provide a new automatic fire detection and alarm system:
 - 1. Provide all components necessary, regardless of whether shown in the contract documents or not.
 - 2. Protected Premises: Entire building shown on drawings.
 - 3. Comply with the following; where requirements conflict, order of precedence of requirements is as listed:
 - a. ADA Standards for Accessible Design.
 - b. The requirements of the State Fire Marshal.
 - c. The requirements of the local authority having jurisdiction, which is State Of Delaware Fire Marshall's office.
 - d. Applicable local codes.
 - e. The contract documents (drawings and specifications).
 - f. NFPA 72; where the word "should" is used consider that provision mandatory; where conflicts between requirements require deviation from NFPA 72, identify deviations clearly on design documents.
 - 4. Evacuation Alarm: Multiple smoke zones; allow for evacuation notification of any individual zone or combination of zones, in addition to general evacuation of entire premises.
 - 5. Voice Notification: Provide emergency voice/alarm communications with multichannel capability; digital.
 - 6. General Evacuation Zones: Each smoke zone is considered a general evacuation zone unless otherwise indicated, with alarm notification in all zones.
 - 7. Program notification zones and voice messages as directed by Owner.
 - 8. Hearing Impaired Occupants: Provide visible notification devices in all public areas and in dwelling units.
 - 9. Master Control Unit (Panel): New, located at front entrance vestibule.
- B. Supervising Stations and Fire Department Connections:
 - 1. Public Fire Department Notification: By on-premises supervising station.
 - 2. Means of Transmission to Remote Supervising Station: Digital alarm communicator transmitter (DACT), 2 telephone lines.
- C. Circuits:
 - 1. Initiating Device Circuits (IDC): Class A, Style D.
 - 2. Signaling Line Circuits (SLC) Within Single Building: Class A, Style 7.
 - 3. Notification Appliance Circuits (NAC): Class A, Style Z.
- D. Spare Capacity:
 - 1. Initiating Device Circuits: Minimum 25 percent spare capacity.
 - 2. Notification Appliance Circuits: Minimum 25 percent spare capacity.
 - 3. Speaker Amplifiers: Minimum 25 percent spare capacity.
 - 4. Master Control Unit: Capable of handling all circuits utilized to capacity without requiring additional components other than plug-in control modules.
- E. Power Sources:
 - 1. Primary: Dedicated branch circuits of the facility power distribution system.
 - 2. Secondary: Storage batteries.

3. Capacity: Sufficient to operate entire system for period specified by NFPA 72.
4. Each Computer System: Provide uninterruptible power supply (UPS).

2.03 FIRE SAFETY SYSTEMS INTERFACES

- A. Alarm: Provide alarm initiation in accordance with NFPA 72 for the following:
 1. Duct smoke detectors.
- B. HVAC:
 1. Duct Smoke Detectors: Close dampers indicated; shut down air handlers indicated.

2.04 COMPONENTS

- A. General:
 1. Provide flush mounted units where installed in finish areas; in unfinished areas, surface mounted unit are acceptable.
 2. Provide legible, permanent labels for each control device, using identification used in operation and maintenance data.
- B. Fire Alarm Control Units, Initiating Devices, and Notification Appliances: Analog, addressable type; listed by Underwriters Laboratories as suitable for the purpose intended.
- C. Master Control Unit: As specified for Basis of Design above, or equivalent.
- D. Remote Annunciators: Fire Lite.
- E. Initiating Devices:
 1. Addressable Systems:
 - a. Addressable Devices: Individually identifiable by addressable fire alarm control unit.
 - b. Provide suitable addressable interface modules as indicated or as required for connection to conventional (non-addressable) devices and other components that provide a dry closure output.
 2. Manual Pull Stations: Simplex.
 - a. Provide 1 extra.
 3. Key Operated Pull Stations: Simplex.
 4. Smoke Detectors: Simplex.
 - a. Provide 1 extra.
 5. Duct Smoke Detectors: Simplex.
 6. Heat Detectors: Simplex.
 - a. Provide 1 extra.
 7. Addressable Interface Devices: Simplex.
 - a. Provide 1 extra.
- F. Notification Appliances:
 1. Bells: Simplex.
 2. Speakers: Simplex.
 - a. Provide 1 extra.
 3. Strobes: Simplex.
 - a. Provide 1 extra.
- G. Circuit Conductors: Copper or optical fiber; provide 200 feet extra; color code and label.
- H. Surge Protection: In accordance with IEEE C62.41.2 category B combination waveform and NFPA 70; except for optical fiber conductors.
- I. Locks and Keys: Deliver keys to Owner.
- J. Instruction Charts: Printed instruction chart for operators, showing steps to be taken when a signal is received (normal, alarm, supervisory, and trouble); easily readable from normal operator's station.
 1. Frame: Stainless steel or aluminum with polycarbonate or glass cover.

2. Provide one for each control unit where operations are to be performed.
3. Obtain approval of Owner prior to mounting; mount in location acceptable to Owner.
4. Provide extra copy with operation and maintenance data submittal.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install in accordance with applicable codes, NFPA 72, NFPA 70, and the contract documents.
- B. Conceal all wiring, conduit, boxes, and supports where installed in finished areas.
- C. Obtain Owner's approval of locations of devices, before installation.
- D. Install instruction cards and labels.

3.02 INSPECTION AND TESTING FOR COMPLETION

- A. Notify Owner 7 days prior to beginning completion inspections and tests.
- B. Notify authorities having jurisdiction and comply with their requirements for scheduling inspections and tests and for observation by their personnel.
- C. Provide the services of the installer's supervisor or person with equivalent qualifications to supervise inspection and testing, correction, and adjustments.
- D. Prepare for testing by ensuring that all work is complete and correct; perform preliminary tests as required.
- E. Provide all tools, software, and supplies required to accomplish inspection and testing.
- F. Perform inspection and testing in accordance with NFPA 72 and requirements of local authorities; document each inspection and test.
- G. Correct defective work, adjust for proper operation, and retest until entire system complies with contract documents.

3.03 OWNER PERSONNEL INSTRUCTION

- A. Provide the following instruction to designated Owner personnel:
 1. Hands-On Instruction: On-site, using operational system.
 2. Classroom Instruction: Owner furnished classroom, on-site or at other local facility.
- B. Administrative: One-hour session(s) covering issues necessary for non-technical administrative staff; classroom:
 1. Initial Training: 1 session pre-closeout.
- C. Basic Operation: One-hour sessions for attendant personnel, security officers, and engineering staff; combination of classroom and hands-on:
 1. Initial Training: 1 session pre-closeout.
- D. Furnish the services of instructors and teaching aids; have copies of operation and maintenance data available during instruction.

3.04 CLOSEOUT

- A. Closeout Demonstration: Demonstrate proper operation of all functions to Owner.
 1. Be prepared to conduct any of the required tests.
 2. Have at least one copy of operation and maintenance data, preliminary copy of project record drawings, input/output matrix, and operator instruction chart(s) available during demonstration.
 3. Have authorized technical representative of control unit manufacturer present during demonstration.
 4. Demonstration may be combined with inspection and testing required by authority having jurisdiction; notify authority having jurisdiction in time to schedule demonstration.
 5. Repeat demonstration until successful.

- B. Occupancy of the project will not occur prior to Substantial Completion.
- C. Substantial Completion of the project cannot be achieved until inspection and testing is successful and:
 - 1. Approved operating and maintenance data has been delivered.
 - 2. Spare parts, extra materials, and tools have been delivered.
 - 3. All aspects of operation have been demonstrated to Owner.
 - 4. Final acceptance of the fire alarm system has been given by authorities having jurisdiction.
 - 5. Occupancy permit has been granted.
 - 6. Specified pre-closeout instruction is complete.

3.05 MAINTENANCE

- A. See Section 01 70 00 - Execution Requirements, for additional requirements relating to maintenance service.
- B. Provide to Owner, at no extra cost, a written maintenance contract for entire manufacturer's warranty period, to include the work described below.
- C. Perform routine inspection, testing, and preventive maintenance required by NFPA 72, including:
 - 1. Maintenance of fire safety interface and supervisory devices connected to fire alarm system.
 - 2. Repairs required, unless due to improper use, accidents, or negligence beyond the control of the maintenance contractor.
 - 3. Record keeping required by NFPA 72 and authorities having jurisdiction.
- D. Provide trouble call-back service upon notification by Owner:
 - 1. Provide on-site response within 2 hours of notification.
 - 2. Include allowance for call-back service during normal working hours at no extra cost to Owner.
 - 3. Owner will pay for call-back service outside of normal working hours on an hourly basis, based on actual time spent at site and not including travel time; include hourly rate and definition of normal working hours in maintenance contract.
- E. Provide a complete description of preventive maintenance, systematic examination, adjustment, cleaning, inspection, and testing, with a detailed schedule.
- F. Maintain a log at each fire alarm control unit, listing the date and time of each inspection and call-back visit, the condition of the system, nature of the trouble, correction performed, and parts replaced. Submit duplicate of each log entry to Owner's representative upon completion of site visit.
- G. Comply with Owner's requirements for access to facility and security.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 31 22 00

GRADING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Removal of topsoil.
- B. Rough grading the site for site structures.
- C. Finish grading.

1.02 RELATED REQUIREMENTS

- A. Section 31 23 16 - Excavation.
- B. Section 31 23 16.13 - Trenching: Trenching and backfilling for utilities.
- C. Section 31 23 23 - Fill: Filling and compaction.
- D. Section 32 92 19 - Seeding: Finish ground cover.

1.03 SUBMITTALS

- A. Certificate of analysis of topsoil samples indicating compliance with sieve analysis, acidity, and organic matter requirements.
- B. Project Record Documents: Accurately record actual locations of utilities remaining by horizontal dimensions, elevations or inverts, and slope gradients.

PART 2 PRODUCTS

2.01 MATERIALS

- A. Topsoil: DeDOT Specification 911.05.5 Soil Mix.
 - 1. Graded.
 - 2. Topsoil shall be a loam, landy loam, clay loam, silt loam, sandy clay loam, loamy sand.
 - 3. Topsoil shall be free of subsoil, rocks larger than 1/2 inch, heavy clay, hard clods, weeds, roots, sticks, toxic substances, foreign matter, or any other extraneous material.
 - 4. Topsoil shall have a pH range from 5.5 to 6.8 and contain not less than 2 percent nor more than 10 percent organic matter.
 - 5. Topsoil shall exhibit the following grading analysis:
 - a. Sieve Size minimum percent Passing
 - 2 inch 100 percent
 - No. 4 90 percent
 - No. 10 80 percent

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that survey bench mark and intended elevations for the Work are as indicated.
- B. Verify the absence of standing or ponding water.

3.02 PREPARATION

- A. Identify required lines, levels, contours, and datum.
- B. Stake and flag locations of known utilities.
- C. Locate, identify, and protect from damage above- and below-grade utilities to remain.
- D. Provide temporary means and methods to remove all standing or ponding water from areas prior to grading.
- E. Protect site features to remain, including but not limited to existing structures, fences, sidewalks, paving, and curbs, from damage by grading equipment and vehicular traffic.

3.03 ROUGH GRADING

- A. Remove topsoil from areas to be further excavated, re-landscaped, or re-graded, without mixing with foreign materials.
- B. Do not remove topsoil when wet.
- C. Remove subsoil from areas to be further excavated, re-landscaped, or re-graded.
- D. Do not remove wet subsoil, unless it is subsequently processed to obtain optimum moisture content.
- E. When excavating through roots, perform work by hand and cut roots with sharp axe.
- F. See Section 31 23 23 - Fill, for filling procedures.
- G. Benching Slopes: Horizontally bench existing slopes greater than 1:4 to key fill material to slope for firm bearing.
- H. Stability: Replace damaged or displaced subsoil to same requirements as for specified fill.
- I. Remove and replace soils deemed unsuitable by classification and which are excessively moist due to lack surface water control.

3.04 SOIL REMOVAL

- A. Stockpile topsoil to be re-used on site; remove remainder from site.
- B. Stockpiles: Use areas designated on site; pile depth not to exceed 8 feet; protect from erosion.

3.05 FINISH GRADING

- A. Before Finish Grading:
 - 1. Verify building and trench backfilling have been inspected.
 - 2. Verify subgrade has been contoured and compacted.
- B. Remove debris, roots, branches, stones, in excess of 1/2 inch in size. Remove soil contaminated with petroleum products.
- C. Where topsoil is to be placed, scarify surface to depth of 3 inches.
- D. In areas where vehicles or equipment have compacted soil, scarify surface to depth of 6 inches.
- E. Place topsoil in areas where seeding, sodding, and planting are indicated.
- F. Place topsoil where required to level finish grade.
- G. Place topsoil to the following compacted thicknesses:
 - 1. Areas to be Seeded with Grass: 6 inches.
 - 2. Areas to be Sodded: 4 inches.
 - 3. Shrub Beds: 18 inches.
 - 4. Flower Beds: 12 inches.
- H. Place topsoil during dry weather.
- I. Remove roots, weeds, rocks, and foreign material while spreading.
- J. Near plants spread topsoil manually to prevent damage.
- K. Fine grade topsoil to eliminate uneven areas and low spots. Maintain profiles and contour of subgrade.
- L. Lightly compact placed topsoil.
- M. Maintain stability of topsoil during inclement weather. Replace topsoil in areas where surface water has eroded thickness below specifications.

3.06 TOLERANCES

- A. Top Surface of Subgrade: Plus or minus 0.10 foot (1-3/16 inches) from required elevation.

- B. Top Surface of Finish Grade: Plus or minus 0.04 foot (1/2 inch).

3.07 REPAIR AND RESTORATION

- A. Existing Facilities, Utilities, and Site Features to Remain: If damaged due to this work, repair or replace to original condition.

3.08 FIELD QUALITY CONTROL

- A. See Section 31 23 23 - Fill, for compaction density testing.

3.09 CLEANING

- A. Remove unused stockpiled topsoil. Grade stockpile area to prevent standing water.
- B. Leave site clean and raked, ready to receive landscaping.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 31 23 16
EXCAVATION

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Excavating for footings, slabs-on-grade, paving, site structures, and utilities within the building.
- B. Temporary excavation support and protection systems.

1.02 RELATED REQUIREMENTS

- A. Section 01 70 00 - Execution and Closeout Requirements: General requirements for dewatering of excavations and water control.
- B. Section 31 22 00 - Grading: Soil removal from surface of site.
- C. Section 31 22 00 - Grading: Grading.
- D. Section 31 23 16.13 - Trenching: Excavating for utility trenches outside the building to utility main connections.
- E. Section 31 23 19 - Dewatering: Dewatering requirements.
- F. Section 31 23 23 - Fill: Fill materials, filling, and compacting.
- G. Section 31 2316.13 - Trenching: Excavating for utility trenches to utility main connections.

1.03 REFERENCE STANDARDS

- A. 29 CFR 1926 - U.S. Occupational Safety and Health Standards.

1.04 PROJECT CONDITIONS

- A. Verify that survey bench mark and intended elevations for the Work are as indicated.
- B. Protect plants, lawns, and other features to remain.
- C. Protect permanent structures and underground utilities from excavating equipment and vehicular traffic.

PART 2 PRODUCTS

2.01 MATERIALS

- A. Bedding and Fill to Correct Over-Excavation:
 - 1. See Section 31 23 23 for bedding and corrective fill materials at general excavations.
 - 2. See Section 31 23 16.13 for bedding and corrective fill materials at utility trenches.
- B. Underground Warning Tapes:
 - 1. See Section for 31 23 16.13 underground warning tapes at underground fire suppression lines.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that survey bench mark and intended elevations for the work are as indicated.
- B. Survey existing adjacent structures and improvements and establish exact elevations at fixed points to act as benchmarks.

3.02 PREPARATION

- A. Identify required lines, levels, contours, and datum locations.
- B. See Section 31 22 00 for additional requirements.
- C. Locate, identify, and protect utilities that remain and protect from damage.

- D. Grade top perimeter of excavation to prevent surface water from draining into excavation. Provide temporary means and methods, as required, to maintain surface water diversion until no longer needed, or as directed by the Architect.

3.03 TEMPORARY EXCAVATION SUPPORT AND PROTECTION

- A. Excavation Safety: Comply with OSHA92s Excavation Standard, 29 CFR 1926, Subpart P.

3.04 EXCAVATING

- A. Underpin adjacent structures that could be damaged by excavating work.
- B. Excavate to accommodate new structures and construction operations.
- C. Notify Architect of unexpected subsurface conditions and discontinue affected Work in area until notified to resume work.
- D. Slope banks of excavations deeper than 4 feet to angle of repose or less until shored.
- E. Do not interfere with 45 degree bearing splay of foundations.
- F. Cut utility trenches wide enough to allow inspection of installed utilities.
- G. Hand trim excavations. Remove loose matter.
- H. Remove lumped subsoil, boulders, and rock up to 1/3 cu yd measured by volume.
- I. Correct areas that are over-excavated and load-bearing surfaces that are disturbed; see Section 31 23 23.
- J. Grade top perimeter of excavation to prevent surface water from draining into excavation.
- K. Determine the prevailing groundwater level prior to excavation. If the proposed excavation extends less than 1 foot into the prevailing groundwater, control groundwater intrusion with perimeter drains routed to sump pumps, or as directed by the Architect. If the proposed excavation extends more than 1 foot into the excavation, control groundwater intrusion with a comprehensive dewatering procedures, or as directed by the Geotechnical Engineer.
- L. Remove excavated material that is unsuitable for re-use from site.
- M. Stockpile excavated material to be re-used in area designated on site in accordance with Section 31 22 00.
- N. Remove excess excavated material from site.

3.05 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for general requirements for field inspection and testing.
- B. Provide for visual inspection of load-bearing excavated surfaces before placement of foundations.

3.06 PROTECTION

- A. Divert surface flow from rains or water discharges from the excavation.
- B. Prevent displacement of banks and keep loose soil from falling into excavation; maintain soil stability.
- C. Protect open excavations from rainfall, runoff, freezing groundwater, or excessive drying so as to maintain foundation subgrade in satisfactory, undisturbed condition.
- D. Protect bottom of excavations and soil adjacent to and beneath foundation from freezing.
- E. Keep excavations free of standing water and completely free of water during concrete placement.

END OF SECTION

SECTION 31 23 16.13

TRENCHING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Backfilling and compacting for utilities outside the building to utility main connections.

1.02 RELATED REQUIREMENTS

- A. Section 31 22 00 - Grading: Site grading.
- B. Section 31 23 16 - Excavation: Building and foundation excavating.
- C. Section 31 23 23 - Fill: Backfilling at building and foundations.

1.03 DEFINITIONS

- A. Finish Grade Elevations: Indicated on drawings.
- B. Subgrade Elevations: 4 inches below finish grade elevations indicated on drawings, unless otherwise indicated.

1.04 REFERENCE STANDARDS

- A. ASTM D2487 - Standard Practice for Classification of Soils for Engineering Purposes (Unified Soil Classification System).

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. When necessary, store materials on site in advance of need.
- B. When fill materials need to be stored on site, locate stockpiles where indicated.
 - 1. Separate differing materials with dividers or stockpile separately to prevent intermixing.
 - 2. Prevent contamination.
 - 3. Protect stockpiles from erosion and deterioration of materials.

PART 2 PRODUCTS

2.01 FILL MATERIALS

- A. General Fill: Subsoil excavated on-site.
 - 1. Graded.
 - 2. Free of lumps larger than 3 inches, rocks larger than 2 inches, and debris.
 - 3. Conforming to ASTM D2487 Group Symbol CL.
- B. Granular Fill: Coarse aggregate, conforming to State of Delaware Highway Department standard.
- C. Sand: Natural river or bank sand; washed; free of silt, clay, loam, friable or soluble materials, and organic matter.
- D. Topsoil: See Section 31 22 00.

2.02 ACCESSORIES

- A. Geotextile Fabric: Non-biodegradable, woven fabric for sub-surface drainage. Class 2 (AASHTO M288-06 (2011))
- B. Detectable Underground Plastic Pipe Markers: Bright colored continuously printed plastic ribbon tape, minimum 6 inches wide by 4 mil thick, manufactured for direct burial service.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that survey bench marks and intended elevations for the work are as indicated.

3.02 PREPARATION

- A. Identify required lines, levels, contours, and datum locations.
- B. See Section 31 22 00 for additional requirements.
- C. Grade top perimeter of trenching area to prevent surface water from draining into trench. Provide temporary means and methods, as required, to maintain surface water diversion until no longer needed, or as directed by the Architect.

3.03 TRENCHING

- A. Notify Architect of unexpected subsurface conditions and discontinue affected Work in area until notified to resume work.
- B. Slope banks of excavations deeper than 4 feet to angle of repose or less until shored.
- C. Do not interfere with 45 degree bearing splay of foundations.
- D. Cut trenches wide enough to allow inspection of installed utilities.
- E. Hand trim excavations. Remove loose matter.
- F. Remove excavated material that is unsuitable for re-use from site.
- G. Remove excess excavated material from site.
- H. Provide temporary means and methods, as required, to remove all water from trenching until directed by the Architect. Remove and replace soils deemed unsuitable by classification and which are excessively moist due to lack of dewatering or surface water control.
- I. Determine the prevailing groundwater level prior to trenching. If the proposed trench extends less than 1 foot into the prevailing groundwater, control groundwater intrusion with perimeter drains routed to sump pumps, or as directed by the Architect.

3.04 PREPARATION FOR UTILITY PLACEMENT

- A. Cut out soft areas of subgrade not capable of compaction in place. Backfill with general fill.
- B. Compact subgrade to density equal to or greater than requirements for subsequent fill material.
- C. Until ready to backfill, maintain excavations and prevent loose soil from falling into excavation.

3.05 BACKFILLING

- A. Backfill to contours and elevations indicated using unfrozen materials.
- B. Employ a placement method that does not disturb or damage other work.
- C. Systematically fill to allow maximum time for natural settlement. Do not fill over porous, wet, frozen or spongy subgrade surfaces.
- D. Maintain optimum moisture content of fill materials to attain required compaction density.
- E. Slope grade away from building minimum 2 inches in 10 feet, unless noted otherwise. Make gradual grade changes. Blend slope into level areas.
- F. Correct areas that are over-excavated.
 - 1. Other areas: Use general fill, flush to required elevation, compacted to minimum 97 percent of maximum dry density.
- G. Compaction Density Unless Otherwise Specified or Indicated:
- H. Reshape and re-compact fills subjected to vehicular traffic.

3.06 BEDDING AND FILL AT SPECIFIC LOCATIONS

- A. Utility Piping:
 - 1. Bedding: Use granular fill.
 - 2. Cover with general fill.
 - 3. Fill up to subgrade with general fill. Fill with topsoil at top 6 inches..
 - 4. Compact in maximum 8 inch lifts to 95 percent of maximum dry density.

3.07 DETECTABLE PIPE MARKERS

- A. Install detectable underground plastic pipe marker tape above HDPE, PVC and concrete pipe at a depth of 14" to 24" below surface.

3.08 TOLERANCES

- A. Top Surface of General Backfilling: Plus or minus 1 inch from required elevations.
- B. Top Surface of Backfilling Under Paved Areas: Plus or minus 1 inch from required elevations.

3.09 CLEANING

- A. Leave unused materials in a neat, compact stockpile.
- B. Remove unused stockpiled materials, leave area in a clean and neat condition. Grade stockpile area to prevent standing surface water.
- C. Leave borrow areas in a clean and neat condition. Grade to prevent standing surface water.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 31 23 19

DEWATERING

PART 1 GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.
- B. DNREC Standards and Specifications for Soil Erosion and Sediment Control.

1.02 SUMMARY

- A. Section includes construction dewatering.

1.03 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.
 - 1. Verify availability of Installer's personnel, equipment, and facilities needed to make progress and avoid delays.
 - 2. Review condition of site to be dewatered including coordination with temporary erosion-control measures and temporary controls and protections.
 - 3. Review proposed site clearing and excavations.
 - 4. Review existing utilities and subsurface conditions.
 - 5. Review observation and monitoring of dewatering system.

1.04 ACTION SUBMITTALS

- A. Shop Drawings: For dewatering system, prepared by or under the supervision of a qualified professional engineer.
 - 1. Include plans, elevations, sections, and details.
 - 2. Show arrangement, locations, and details of wells and well points; locations of risers, headers, filters, pumps, power units, and discharge lines; and means of discharge, control of sediment, and disposal of water.
 - 3. Include layouts of piezometers and flow-measuring devices for monitoring performance of dewatering system.
 - 4. Include written plan for dewatering operations including sequence of well and well-point placement coordinated with excavation shoring and bracings and control procedures to be adopted if dewatering problems arise.

1.05 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer and professional engineer.
- B. Field quality-control reports.
- C. Existing Conditions: Using photographs or video recordings, show existing conditions of adjacent construction and site improvements that might be misconstrued as damage caused by dewatering operations. Submit before Work begins.
- D. Record Drawings: Identify locations and depths of capped wells and well points and other abandoned-in-place dewatering equipment.

1.06 QUALITY ASSURANCE

- A. Installer Qualifications: An experienced installer that has specialized in design of dewatering systems and dewatering work.

1.07 FIELD CONDITIONS

- A. Project-Site Information: A geotechnical report has been prepared for this Project and is available for information only. The opinions expressed in this report are those of a geotechnical engineer and represent interpretations of subsoil conditions, tests, and results of analyses

conducted by a geotechnical engineer. Owner is not responsible for interpretations or conclusions drawn from this data.

1. Make additional test borings and conduct other exploratory operations necessary for dewatering according to the performance requirements.
- B. Survey Work: Engage a qualified land surveyor or professional engineer to survey adjacent existing buildings, structures, and site improvements; establish exact elevations at fixed points to act as benchmarks. Clearly identify benchmarks and record existing elevations.

PART 2 PRODUCTS

2.01 PERFORMANCE REQUIREMENTS

- A. Dewatering Performance: Design, furnish, install, test, operate, monitor, and maintain dewatering system of sufficient scope, size, and capacity to control hydrostatic pressures and to lower, control, remove, and dispose of ground water and permit excavation and construction to proceed on dry, stable subgrades.
 1. Design dewatering system, including comprehensive engineering analysis by a qualified professional engineer.
 2. Continuously monitor and maintain dewatering operations to ensure erosion control, stability of excavations and constructed slopes, prevention of flooding in excavation, and prevention of damage to subgrades and permanent structures.
 3. Prevent surface water from entering excavations by grading, dikes, or other means.
 4. Accomplish dewatering without damaging existing buildings, structures, and site improvements adjacent to excavation.
 5. Remove dewatering system when no longer required for construction.
- B. Regulatory Requirements: Comply with governing EPA notification regulations before beginning dewatering. Comply with water- and debris-disposal regulations of authorities having jurisdiction.

PART 3 EXECUTION

3.01 PREPARATION

- A. Protect structures, utilities, sidewalks, pavements, and other facilities from damage caused by settlement, lateral movement, undermining, washout, and other hazards created by dewatering operations.
 1. Prevent surface water and subsurface or ground water from entering excavations, from ponding on prepared subgrades, and from flooding site or surrounding area.
 2. Protect subgrades and foundation soils from softening and damage by rain or water accumulation.
- B. Install dewatering system to ensure minimum interference with roads, streets, walks, and other adjacent occupied and used facilities.
 1. Do not close or obstruct streets, walks, or other adjacent occupied or used facilities without permission from Owner and authorities having jurisdiction. Provide alternate routes around closed or obstructed traffic ways if required by authorities having jurisdiction.
- C. Provide temporary grading to facilitate dewatering and control of surface water.
- D. Protect and maintain temporary erosion and sedimentation controls.

3.02 INSTALLATION

- A. Install dewatering system utilizing wells, well points, or similar methods complete with pump equipment, standby power and pumps, filter material gradation, valves, appurtenances, water disposal, and surface-water controls.
 1. Space well points or wells at intervals required to provide sufficient dewatering.
 2. Use filters or other means to prevent pumping of fine sands or silts from the subsurface.
- B. Place dewatering system into operation to lower water to specified levels before excavating below ground-water level.

- C. Provide sumps, sedimentation tanks, and other flow-control devices as required by authorities having jurisdiction.
- D. Provide standby equipment on-site, installed and available for immediate operation, to maintain dewatering on continuous basis if any part of system becomes inadequate or fails.

3.03 OPERATION

- A. Operate system continuously until drains, sewers, and structures have been constructed and fill materials have been placed or until dewatering is no longer required.
- B. Operate system to lower and control ground water to permit excavation, construction of structures, and placement of fill materials on dry subgrades. Drain water-bearing strata above and below bottom of foundations, drains, sewers, and other excavations.
 - 1. Do not permit open-sump pumping that leads to loss of fines, soil piping, subgrade softening, and slope instability.
 - 2. Reduce hydrostatic head in water-bearing strata below subgrade elevations of foundations, drains, sewers, and other excavations.
 - 3. Maintain piezometric water level a minimum of [24 inches (600 mm)] [60 inches (1500 mm)] <Insert dimension> below bottom of excavation.
- C. Dispose of water removed by dewatering in a manner that avoids endangering public health, property, and portions of work under construction or completed. Dispose of water and sediment in a manner that avoids inconvenience to others.
- D. Remove dewatering system from Project site on completion of dewatering. Plug or fill well holes with sand or cut off and cap wells a minimum of 36 inches (900 mm) below overlying construction.

3.04 FIELD QUALITY CONTROL

- A. Observation Wells: Provide observation wells or piezometers, take measurements, and maintain at least the minimum number indicated; additional observation wells may be required by authorities having jurisdiction.
 - 1. Observe and record daily elevation of ground water and piezometric water levels in observation wells.
 - 2. Repair or replace, within 24 hours, observation wells that become inactive, damaged, or destroyed. In areas where observation wells are not functioning properly, suspend construction activities until reliable observations can be made. Add or remove water from observation-well risers to demonstrate that observation wells are functioning properly.
 - 3. Fill observation wells, remove piezometers, and fill holes when dewatering is completed.
- B. Survey-Work Benchmarks: Resurvey benchmarks [regularly] [monthly] <Insert time period> during dewatering and maintain an accurate log of surveyed elevations for comparison with original elevations. Promptly notify Architect if changes in elevations occur or if cracks, sags, or other damage is evident in adjacent construction.
- C. Provide continual observation to ensure that subsurface soils are not being removed by the dewatering operation.
- D. Prepare reports of observations.

3.05 PROTECTION

- A. Protect and maintain dewatering system during dewatering operations.
- B. Promptly repair damages to adjacent facilities caused by dewatering.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING

SECTION 31 23 23

FILL

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Filling, backfilling, and compacting for building volume below grade.
- B. Backfilling and compacting for utilities outside the building to utility main connections.

1.02 RELATED REQUIREMENTS

- A. Section 31 22 00 - Grading: Site grading.
- B. Section 31 23 16 - Excavation: Removal and handling of soil to be re-used.
- C. Section 31 23 16.13 - Trenching: Excavating for utility trenches outside the building to utility main connections.

1.03 DEFINITIONS

- A. Finish Grade Elevations: Indicated on drawings.
- B. Subgrade Elevations: 4 inches below finish grade elevations indicated on drawings, unless otherwise indicated.

1.04 REFERENCE STANDARDS

- A. AASHTO T 180 - Standard Specification for Moisture-Density Relations of Soils Using a 4.54 kg (10-lb) Rammer and a 457 mm (18 in.) Drop.
- B. ASTM D698 - Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Standard Effort (12,400 ft-lbf/ft³ (600 kN-m/m³)).
- C. ASTM D1556 - Standard Test Method for Density and Unit Weight of Soil in Place by the Sand-Cone Method.
- D. ASTM D1557 - Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/ft³ (2,700 kN m/m³)).
- E. ASTM D2167 - Standard Test Method for Density and Unit Weight of Soil in Place by the Rubber Balloon Method.
- F. ASTM D 2922 - Standard Test Methods for Density of Soil and Soil-Aggregate in Place by Nuclear Methods (Shallow Depth).
- G. ASTM D3017 - Standard Test Method for Water Content of Soil and Rock in Place by Nuclear Methods (Shallow Depth).

1.05 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Compaction Density Test Reports.

1.06 QUALITY ASSURANCE

- A. Testing Agency Qualifications: Independent firm specializing in performing testing and inspections of the type specified in this section.
- B. Contractor to delivery samples to Owner's Testing Agency at least 5 days before the start of earthwork activities.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. When necessary, store materials on site in advance of need.

PART 2 PRODUCTS

2.01 FILL MATERIALS

- A. General Fill: Subsoil excavated on-site.
 - 1. Graded.
 - 2. Free of lumps larger than 3 inches, rocks larger than 2 inches, and debris.
- B. Granular Fill: Coarse aggregate, conforming to State of Delaware Highway Department standard.
- C. Sand: Conforming to State of Delaware Department of Transportation standard.
- D. Topsoil: See Section 31 22 00 Grading

2.02 SOURCE QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for general requirements for testing and analysis of soil material.
- B. If tests indicate materials do not meet specified requirements, change material and retest.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Identify required lines, levels, contours, and datum locations.
- B. See Section 31 22 00 Grading for additional requirements.
- C. Verify areas to be filled are not compromised with surface or ground water.

3.02 PREPARATION

- A. Scarify subgrade surface to a depth of 6 inches to identify soft spots.
- B. Cut out soft areas of subgrade not capable of compaction in place. Backfill with general fill.
- C. Compact subgrade to density equal to or greater than requirements for subsequent fill material.
- D. Until ready to fill, maintain excavations and prevent loose soil from falling into excavation.

3.03 FILLING

- A. Fill to contours and elevations indicated using unfrozen materials.
- B. Employ a placement method that does not disturb or damage other work.
- C. Systematically fill to allow maximum time for natural settlement. Do not fill over porous, wet, frozen or spongy subgrade surfaces.
- D. Maintain optimum moisture content of fill materials to attain required compaction density.
- E. Slope grade away from building minimum 2 inches in 10 ft, unless noted otherwise. Make gradual grade changes. Blend slope into level areas.
- F. Correct areas that are over-excavated.
 - 1. Other areas: Use general fill, flush to required elevation, compacted to minimum 97 percent of maximum dry density.
- G. Compaction Density Unless Otherwise Specified or Indicated:
- H. Reshape and re-compact fills subjected to vehicular traffic.
- I. Maintain temporary means and methods, as required, to remove all water while fill is being placed as required, or until directed by the Architect. Remove and replace soils deemed unsuitable by classification and which are excessively moist due to lack of dewatering or surface water control.

3.04 FILL AT SPECIFIC LOCATIONS

- A. Under Interior Slabs-On-Grade:

1. Use granular fill.
 2. Depth: 4 inches deep.
 3. Compact to 95 percent of maximum dry density.
- B. At Foundation Walls and Footings:
1. Use general fill.
 2. Fill up to subgrade elevation.
 3. Compact each lift to 95 percent of maximum dry density.
 4. Do not backfill against unsupported foundation walls.
 5. Backfill simultaneously on each side of unsupported foundation walls until supports are in place.
 6. See Section 31 22 00 for topsoil placement.
- C. Over Buried Utility Piping, Conduits, and Duct Bank in Trenches :
1. Cover with general fill.
 2. Fill up to subgrade elevation.
 3. Compact in maximum 8 inch lifts to 95 percent of maximum dry density.
 4. See Section 31 22 00 for topsoil placement.
- D. At Lawn Areas:
1. Use general fill.
 2. Fill up to 6 inches below finish grade elevations.
 3. Fill up to subgrade elevations.
 4. Compact to 95 percent of maximum dry density.
 5. See Section 31 22 00 for topsoil placement.
- E. At Planting Areas Other Than Lawns :
1. Use general fill.
 2. Fill up to depth indicated in Section 31 22 00.
 3. Compact to 95 percent of maximum dry density.
 4. See Section 31 22 00 for topsoil placement.

3.05 TOLERANCES

- A. Top Surface of Subgrade: Plus or minus 0.10 foot (1-3/16 inches) from required elevation.
- B. Top Surface of Finish Grade: Plus or minus 0.04 foot (1/2 inch).

3.06 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for general requirements for field inspection and testing.
- B. Perform compaction density testing on compacted fill in accordance with ASTM D1556, ASTM D2167, ASTM D2922, or ASTM D3017.
- C. Evaluate results in relation to compaction curve determined by testing uncompacted material in accordance with ASTM D698 ("standard Proctor"), ASTM D1557 ("modified Proctor"), or AASHTO T 180.
- D. If tests indicate work does not meet specified requirements, remove work, replace and retest.
- E. Proof roll compacted fill at surfaces that will be under slabs-on-grade and paving.

3.07 CLEANING

- A. See Section 01 74 19 - Construction Waste Management and Disposal, for additional requirements.
- B. Remove unused stockpiled materials, leave area in a clean and neat condition. Grade stockpile area to prevent standing surface water.

- C. Leave borrow areas in a clean and neat condition. Grade to prevent standing surface water.

END OF SECTION

NOT FOR BIDDING

SECTION 31 31 16
TERMITE CONTROL

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Chemical soil treatment.

1.02 REFERENCE STANDARDS

- A. Title 7, United States Code, 136 through 136y - Federal Insecticide, Fungicide and Rodenticide Act.

1.03 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Indicate toxicants to be used, composition by percentage, dilution schedule, intended application rate.
- C. Product Data: Submit manufacturers' data on manufactured products showing compliance with specified requirements.
- D. Warranty: Submit warranty and ensure that forms have been completed in Owner's name.

1.04 QUALITY ASSURANCE

- A. Installer Qualifications: Company specializing in performing this type of work and:
 - 1. Having minimum of three (3) years documented experience.
 - 2. Approved by manufacturer of treatment materials.
 - 3. Licensed in the State in which the Project is located.

1.05 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.
- B. Provide five year installer's warranty against damage to building caused by termites.

PART 2 PRODUCTS

2.01 CHEMICAL SOIL TREATMENT

- A. Toxicant Chemical: EPA (Title 7, United States Code, 136 through 136y) approved; synthetically color dyed to permit visual identification of treated soil.
- B. Diluent: Recommended by toxicant manufacturer.
- C. Manufacturers:
 - 1. Bayer Environmental Science Corp: www.backedbybayer.com/pest-management/#sle.
 - 2. FMC Professional Solutions: www.fmcprosolutions.com/#sle.
 - 3. Syngenta Professional Products: www.syngentaprofessionalproducts.com/#sle.
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that soil surfaces are unfrozen, sufficiently dry to absorb toxicant, and ready to receive treatment.
- B. Verify final grading is complete.

3.02 APPLICATION - CHEMICAL TREATMENT

- A. Comply with requirements of U.S. EPA and applicable state and local codes.
- B. Spray apply toxicant in accordance with manufacturer's instructions.
- C. Apply toxicant at following locations:

1. Under Slabs-on-Grade.
 2. At Both Sides of Foundation Surface.
- D. Under slabs, apply toxicant immediately prior to installation of vapor barrier.
- E. At foundation walls, apply toxicant immediately prior to finish grading work outside foundations.
- F. Apply extra treatment to structure penetration surfaces such as pipe or ducts, and soil penetrations such as grounding rods or posts.
- G. Re-treat disturbed treated soil with same toxicant as original treatment.
- H. If inspection or testing identifies the presence of termites, re-treat soil and re-test.

3.03 PROTECTION

- A. Do not permit soil grading over treated work.

END OF SECTION

SECTION 33 71 19

ELECTRICAL UNDERGROUND DUCTS, DUCTBANKS, AND MANHOLES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Conduit and duct:
 - 1. Rigid polyvinyl chloride (PVC) conduit.
- B. Precast polymer-concrete in-grade utility boxes.
- C. Accessories:
 - 1. Underground warning tape.
 - 2. Accessories for utility boxes and handholes.

1.02 RELATED REQUIREMENTS

- A. Section 31 23 16 - Excavation.
- B. Section 31 23 16.13 - Trenching: Excavating, bedding, and backfilling.
- C. Section 31 23 23 - Fill: Bedding and backfilling.

1.03 REFERENCE STANDARDS

- A. ASTM C857 - Standard Practice for Minimum Structural Design Loading for Underground Precast Concrete Utility Structures.
- B. ASTM C858 - Standard Specification for Underground Precast Concrete Utility Structures.
- C. ASTM C891 - Standard Practice for Installation of Underground Precast Concrete Utility Structures.
- D. ASTM F512 - Standard Specification for Smooth-Wall Poly(Vinyl Chloride) (PVC) Conduit and Fittings for Underground Installation.
- E. IEEE C2 - National Electrical Safety Code.
- F. NEMA TC 2 - Electrical Polyvinyl Chloride (PVC) Conduit.
- G. NEMA TC 3 - Polyvinyl Chloride (PVC) Fittings for Use with Rigid PVC Conduit and Tubing.
- H. NEMA TC 6&8 - Polyvinyl Chloride (PVC) Plastic Utilities for Underground Installations.
- I. NFPA 70 - National Electrical Code.
- J. UL 651 - Schedule 40, 80, Type EB and A Rigid PVC Conduit and Fittings.

1.04 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide for metallic conduit, nonmetallic conduit, and manhole accessories.
- C. Shop Drawings: Indicate dimensions, reinforcement, size and locations of openings, and accessory locations for in-grade utility boxes.
- D. Project Record Documents: Record actual routing and elevations of underground conduit and duct, and locations and sizes of in-grade utility boxes.

1.05 FIELD CONDITIONS

- A. Interruption of Existing Electrical Service; Do not interrupt electrical service to facilities occupied by Owner or others unless permitted under the following conditions, and then only after arranging to provide temporary electrical service according to requirements indicated:
 - 1. Notify Owner no fewer than two days in advance of proposed interruption of electrical service.
 - 2. Do not proceed with interruption of electrical service without Owners written permission.

- B. Ground Water: Assume ground-water level is 18 inches (900MM) below ground surface unless a higher water table is noted on Drawings.

PART 2 PRODUCTS

2.01 CONDUIT AND DUCT

- A. Rigid Polyvinyl Chloride (PVC) Conduit: NFPA 70, Type PVC; comply with NEMA TC 2 and list and label as complying with UL 651; Schedule 40 unless otherwise indicated; rated for use with conductors rated 90 degrees C.
1. Manufacturers:
 - a. Cantex Inc: www.cantexinc.com.
 - b. Carlon, a brand of Thomas & Betts Corporation: www.carlon.com.
 - c. JM Eagle: www.jmeagle.com.
 2. Fittings: Comply with NEMA TC 3 and list and label as complying with UL 651.
 - a. Manufacturer: Same as manufacturer of conduit to be connected.

2.02 POLYMER CONCRETE REINFORCED UTILITY BOXES

- A. Manufacturers:
 1. Quazite.
 2. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: Precast utility boxes designed in accordance with ASTM C858, comprising modular, interlocking sections complete with accessories, and cover.
- C. Loading: ASTM C857, Class A-16.
- D. Shape and size: As indicated on drawings.

2.03 ACCESSORIES

- A. Duct Bank Spacers: Nonmetallic; designed for maintaining conduit/duct spacing for concrete encasement in open trench installation; suitable for the conduit/duct arrangement to be installed.
1. Products:
 - a. Advance Products & Systems, LLC; Duct Bank Spacers: www.apsonline.com/#sle.
 - b. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Underground Warning Tape: Non-Biodegradable Polyethylene tape suitable for direct burial.
1. Manufacturers:
 - a. Brady Corporation: www.bradyid.com.
 - b. Brimar Industries, Inc: www.brimar.com.
 - c. Seton Identification Products: www.seton.com.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
 2. Foil-backed Detectable Type Tape: 4 inches wide, with minimum thickness of 5 mil, unless otherwise required for proper detection.
 3. Legend: Type of service, continuously repeated over full length of tape.
 4. Color:
 - a. Tape for Buried Power Lines: Black text on red background.
 - b. Tape for Buried Communication, Alarm, and Signal Lines: Black text on orange background.
 5. Duct Separators: Factory-fabricated rigid PVC interlocking spacers, sized for type and size of ducts with which used, and selected to provide minimum duct spacing indicated while supporting ducts during concreting or backfilling.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify routing and termination locations of duct bank prior to excavation for rough-in.

ELECTRICAL UNDERGROUND DUCTS, DUCTBANKS, AND MANHOLES

StudioJAED Architects & Engineers

33 71 19 - 2

Project No. 20048

- B. Verify locations of manholes prior to excavating for installation.
- C. Duct bank routing is shown in approximate locations unless dimensions are indicated. Route as required to complete duct system.
- D. Manhole locations are shown in approximate locations unless dimensions are indicated. Locate as required to complete ductbank system.

3.02 DUCT BANK INSTALLATION

- A. Install duct with minimum slope of 4 inches per 100 feet (0.33 percent). Slope duct away from building entrances.
- B. Cut duct square using saw or pipe cutter; de-burr cut ends.
- C. Insert duct to shoulder of fittings; fasten securely.
- D. Join nonmetallic duct using adhesive as recommended by manufacturer.
- E. Wipe nonmetallic duct dry and clean before joining. Apply full even coat of adhesive to entire area inserted in fitting. Allow joint to cure for 20 minutes, minimum.
- F. Install no more than equivalent of three 90-degree bends between pull points.
- G. Provide suitable fittings to accommodate expansion and deflection where required.
- H. Stagger duct joints vertically in concrete encasement 6 inches minimum.
- I. Use suitable separators and chairs installed not greater than 4 feet on centers.
- J. Band ducts together before backfilling.
- K. Securely anchor duct to prevent movement during concrete placement.
- L. Provide suitable pull string in each empty duct except sleeves and nipples.
- M. Swab duct. Use suitable caps to protect installed duct against entrance of dirt and moisture.

3.03 EARTHWORK

- A. Excavation and Backfill: Comply with Section 31 20 00 "Earth Moving", but do not use heavy duty, hydraulic operated, compaction equipment.
- B. Restore surface features at areas disturbed by excavation, and re-establish original grades unless otherwise indicated. Replace removed sod immediately after backfilling completed.
- C. Restore areas disturbed by trenching, storing of dirt, cable laying, and other work. Restore vegetation and include necessary topsoiling, fertilizing, liming, seeding, sodding, sprigging, and mulching. Comply with Section 32 92 00 "Turf and Grasses" and Section 32 93 00 "Plants".
- D. Cut and patch existing pavement in the path of underground ducts and utility structures according to the "Cutting and Patching" Article in Section 01 73 00 "Execution".

3.04 DUCT INSTALLATION

- A. Install ducts according to NEMA TCB 2.
- B. Slope: Pitch ducts a minimum slope of 1:300 down toward manholes and handholes and away from buildings and equipment. Slope ducts from a high point in runs between two manholes to drain in both directions.
- C. Curves and Bends: Use 5-degree angle couplings for small changes in direction. Use manufactured long sweep GRC bends with a minimum radius of 48 inches (1220 mm) [12.5 feet (4 m)] [25 feet (7.5 m)], both horizontally and vertically, at other locations, unless otherwise indicated.
- D. Joints: Use solvent-cemented joints in ducts and fittings and make watertight according to manufacturer's written instructions. Stagger couplings so those of adjacent ducts do not lie in same plane.

- E. Installation Adjacent to High-Temperature Steam Lines: Where duct banks are installed parallel to underground steam lines, perform calculations showing the duct bank will not be subject to environmental temperatures above 40 deg. C. Where environmental temperatures are calculated to rise above 40 deg C, and anywhere the duct bank crosses above an underground steam line, install insulation blankets listed for direct burial to isolate the duct bank from the steam line.
- F. Duct Entrances to Manholes and Polymer Concrete Handholes: Use end bells, spaced approximately 10 inches (250 mm) O.C. for 5-inch (125-mm) ducts, and vary proportionately for other duct sizes.
 - 1. Begin change from regular spacing to end-bell spacing 10 feet (3 m) from the end bell without reducing duct line slope and without forming a trap in the line.
 - 2. Direct-Buried Duct Banks: Install an expansion and deflection fitting in each conduit in the area of disturbed earth adjacent to manhole or handhole. Install an expansion fitting near the center of all straight line direct-buried duct banks with calculated expansion of more than 3/4 inch (19mm)
 - 3. Grout end bells into structure walls from both sides to provide watertight entrances.
- G. Building Wall Penetrations: Make a transition from underground duct to rigid steel conduit at least 10 feet (3 m) outside the building wall without reducing duct line slope away from the building, and without forming a trap in the line. Use fittings manufactured for duct-to-conduit transition. Install conduit penetrations of building walls using galvanized steel sleeves. At floor and exterior wall conduit penetrations, completely seal the gap around conduit to render it watertight using "Link-Seal ®" products modular seal assemblies.
- H. Sealing: Provide temporary closure at terminations of ducts that have cables pulled. Seal spare ducts at terminations. Use sealing compound and plugs to withstand at least 15-psig (1.03-MPa) hydrostatic pressure.
- I. Pulling Cord: Install 1 00-lbf- (445-N-) test nylon cord in empty ducts.
- J. Concrete-Encased Ducts: Support ducts on duct separators.
 - 1. Excavate trench bottom to provide firm and uniform support for duct bank. Prepare trench bottoms as specified in Section 312000 "Earth Moving" for pipes less than 6 inches (150 mm) in nominal diameter.
 - 2. Width: Excavate trench 12 inches (300 mm) wider than duct bank on each side.
 - 3. Width: Excavate trench 3 inches (75 mm) wider than duct bank on each side.
 - 4. Depth: Install top of duct bank at least 24 inches (600 mm) below finished grade in areas not subject to deliberate traffic, and at least 30 inches (750 mm) below finished grade in deliberate traffic paths for vehicles unless otherwise indicated.
 - 5. Support ducts on duct separators coordinated with duct size, duct spacing, and outdoor temperature.
 - 6. Separator Installation: Space separators close enough to prevent sagging and deforming of ducts, with not less than [four] [five] spacers per 20 feet (6 in) of duct. Secure separators to earth and to ducts to prevent floating during concreting. Stagger separators approximately 6 inches (150 mm) between tiers. Tie entire assembly together using fabric straps; do not use tie wires or reinforcing steel that may form conductive or magnetic loops around ducts or duct groups.
 - 7. Minimum Space between Ducts: 3 inches (75 mm) between ducts and exterior envelope wall, 2 inches (50 mm) between ducts for like services, and 4 inches (100 mm) between power and signal ducts.
 - 8. Elbows: Use manufactured duct elbows for stub-ups at poles and equipment, at building entrances through floor, and at changes of direction in duct run unless otherwise indicated. Extend concrete encasement throughout length of elbow.
 - 9. Elbows: Use manufactured rigid steel conduit elbows for stub-ups at poles and equipment, at building entrances through floor, and at changes of direction in duct run.

ELECTRICAL UNDERGROUND DUCTS, DUCTBANKS, AND MANHOLES

StudioJAED Architects & Engineers

- a. Couple steel conduits to ducts with adapters designed for this purpose, and encase coupling with 3 inches (75 mm) of concrete.
 - b. Stub-Ups to Equipment: For equipment mounted on outdoor concrete bases, extend steel conduit horizontally a minimum of 60 inches (1500 mm) from edge of base. Install insulated grounding bushings on terminations at equipment.
 10. Reinforcement: Reinforce concrete-encased duct banks where they cross disturbed earth and where indicated. Arrange reinforcing rods and ties without forming conductive or magnetic loops around ducts or duct groups.
 11. Forms: Use walls of trench to form side walls of duct bank where soil is self-supporting and concrete envelope can be poured without soil inclusions; otherwise, use forms.
 12. Concrete Cover: Install a minimum of 3 inches (75 mm) of concrete cover at top and bottom, and a minimum of 2 inches (50 mm) on each side of duct bank.
 13. Concreting Sequence: Pour each run of envelope between manholes or other terminations in one continuous operation.
 - a. Start at one end and finish at the other, allowing for expansion and contraction of ducts as their temperature changes during and after the pour. Use expansion fittings installed according to manufacturer's written recommendations, or use other specific measures to prevent expansion-contraction damage.
 - b. If more than one pour is necessary, terminate each pour in a vertical plane and install 3/4-inch (15-mm) reinforcing-rod dowels extending a minimum of 18 inches (450 mm) into concrete on both sides of joint near corners of envelope.
 14. Pouring Concrete: Comply with requirements in "Concrete Placement" Article in Section 033000 "Cast-in-Place Concrete." Place concrete carefully during pours to prevent voids under and between conduits and at exterior surface of envelope. Do not allow a heavy mass of concrete to fall directly onto ducts. Allow concrete to flow to center of bank and rise up in middle, uniformly filling all open spaces. Do not use power-driven agitating equipment unless specifically designed for duct-bank application.
- K. Direct-Buried Duct Banks:
1. Excavate trench bottom to provide firm and uniform support for duct bank. Comply with requirements in Section 312000 "Earth Moving" for preparation of trench bottoms for pipes less than 6 inches (150 mm) in nominal diameter.
 2. Support ducts on duct separators coordinated with duct size, duct spacing, and outdoor temperature.
 3. Space separators close enough to prevent sagging and deforming of ducts, with not less than [four] [five] spacers per 20 feet (6 in) of duct. Secure separators to earth and to ducts to prevent displacement during backfill and yet permit linear duct movement due to expansion and contraction as temperature changes. Stagger spacers approximately 6 inches (150 mm) between tiers.
 4. Depth: Install top of duct bank at least 36 inches (900 mm) below finished grade unless otherwise indicated.
 5. Set elevation of bottom of duct bank below frost line.
 6. Install ducts with a minimum of 3 inches (75 mm) between ducts for like services and 6 inches (150 mm) between power and signal ducts.
 7. Elbows: Install manufactured duct elbows for stub-ups at poles and equipment, at building entrances through floor, and at changes of direction in duct run unless otherwise indicated. Encase elbows for stub-up ducts throughout length of elbow.
 8. Install manufactured rigid steel conduit elbows for stub-ups at poles and equipment, at building entrances through floor, and at changes of direction in duct run.
 - a. Couple steel conduits to ducts with adapters designed for this purpose, and encase coupling with 3 inches (75 mm) of concrete.

- b. For equipment mounted on outdoor concrete bases, extend steel conduit horizontally a minimum of 60 inches (1500 min) from edge of equipment pad or foundation. Install insulated grounding bushings on terminations at equipment.
- 9. After installing first tier of ducts, backfill and compact. Start at tie-in point and work toward end of duct run, leaving ducts at end of run free to move with expansion and contraction as temperature changes during this process. Repeat procedure after placing each tier. After placing last tier, hand place backfill to 4 inches (1 00 rum) over ducts and hand tamp. Firmly tamp backfill around ducts to provide maximum supporting strength. Use hand tamper only. After placing controlled backfill over final tier, make final duct connections at end of run and complete backfilling with normal compaction. Comply with requirements in Section 312000 "Earth Moving" for installation of backfill materials.
 - a. Place minimum 3 inches (75 mm) of sand as a bed for duct bank. Place sand to a minimum of 6 inches (150 torn) above top level of duct bank.
 - b. Place minimum 6 inches (1 50 miv) of engineered fill above concrete encasement of duct bank.
- L. Warning Planks: Bury warning planks approximately 12 inches (300 mm) above direct-buried ducts and duct banks, placing them 24 inches (600 mm) o.c. Align planks along the width and along the centerline of duct bank. Provide an additional plank for each 12-inch (300-mm) increment of duct-bank width over a nominal 18 inches (450 rum). Space additional planks 12 inches (300 mm) apart, horizontally.
- M. Warning Tape: Bury warning tape approximately 12 inches (300 mm) above all concrete-encased ducts and duct banks. Align tape parallel to and within 3 inches (75 miv) of centerline of duct bank. Provide an additional warning tape for each 12-inch (300-inn) increment of duct-bank width over a nominal 1 8 inches (450 mm). Space additional tapes 12 inches (300 mm) apart, horizontally.

3.05 INSTALLATION OF HANDHOLES AND BOXES OTHER THAN PRECAST CONCRETE

- A. Install handholes and boxes level and plumb and with orientation and depth coordinated with connecting ducts, to minimize bends and deflections required for proper entrances. Use box extension if required to match depths of ducts, and seal joint between box and extension as recommended by manufacturer.
- B. Unless otherwise indicated, support units on a level bed of crushed stone or gravel, graded from 1/2-inch (12.5-mm) sieve to No. 4 (4.75-rum) sieve and compacted to same density as adjacent undisturbed earth.
- C. Elevation: In paved areas and trafficways, set cover flush with finished grade. Set covers of other handholes 1 inch (25 mm) above finished grade.
- D. Install handholes and boxes with bottom below frost line, <Insert depth of frost line below grade at Project sited below grade.
- E. Install removable hardware, including pulling eyes, cable stanchions, cable arms, and insulators, as required for installation and support of cables and conductors and as indicated. Select arm lengths to be long enough to provide spare space for future cables, but short enough to preserve adequate woTking clearances in enclosuTe.
- F. Field cut openings for ducts and conduits according to enclosure manufacturer's written instructions. Cut wall of enclosure with a tool designed for material to be cut. Size holes for terminating fittings to be used, and seal around penetrations after fittings are installed.
- G. For enclosures installed in [asphalt paving] [and] <Insert material> and subject to occasional, nondeliberate, heavy-vehicle loading, form and pour a concrete ring encircling, and in contact with, enclosure and with top surface screeded to top of box cover frame. Bottom of ring shall rest on compacted earth.

1. Concrete: 3000 psi (20 kPa), 28-day strength, complying with Section 033000 "Cast-in-Place Concrete," with a troweled finish.
2. Dimensions: [10 inches wide by 12 inches deep (250 mm wide by 300 mm deep).

3.06 GROUNDING

- A. Ground underground ducts and utility structures according to Section 260526 "Grounding and Bonding for Electrical Systems."

3.07 FIELD QUALITY CONTROL

- A. Perform the following tests and inspections and prepare test reports:
 1. Demonstrate capability and compliance with requirements on completion of installation of underground ducts and utility structures.
 2. Pull solid aluminum or wood test mandrel through duct to prove joint integrity and adequate bend radii, and test for out-of-round duct. Provide a minimum 6-incli- (1 50- min-) long mandrel equal to 80 percent fill of duct. If obstructions are indicated, remove obstructions and retest.
 3. Test manhole[and handhole] grounding to ensure electrical continuity of grounding and bonding connections. Measure and report ground resistance as specified in Section 260526 "Grounding and Bonding for Electrical Systems."
- B. Correct deficiencies and retest as specified above to demonstrate compliance.

3.08 CLEANING

- A. Pull leather-washer-type duct cleaner, with graduated washer sizes, through full length of ducts. Follow with rubber duct swab for final cleaning and to assist in spreading lubricant throughout ducts.
- B. Clean internal surfaces of manholes, including sump. Remove foreign material.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

NOT FOR BIDDING