



Delaware Technical & Community College

21179 College Dr.
Georgetown, DE 19947

Owens Campus Student
Services Center Renovations

BSA+A PROJECT #23.004

PROJECT MANUAL

Contract #: DTCC-C9004020001

GSS Submission

October 18, 2024



PROJECT MANUAL

DELAWARE TECHNICAL & COMMUNITY COLLEGE

Owens Campus Student Services Center Renovations

ARCHITECT

BSA+A / Buck Simpers Architect + Associates, Inc.
965 Justison St.
Wilmington, DE 19801
302.658.9300
fax 302.658.1125

MECHANICAL/ELECTRICAL/PLUMBING ENGINEER

Gipe Associates, Inc
8719 Brooks Dr.
Suites 2-5
Easton, MD 21601
410.822.8288

October 18, 2024

SECTION 00 01 07 – SEALS PAGE

1.1 DESIGN PROFESSIONALS OF RECORD


Architect

Dave Dalby
Buck Simpers Architects + Associates
954 Justison St.
Wilmington, DE 19801
(302) 638-9300
DE License No. S5-0001095



MEP-FP Engineer

Dave Hoffman
Gipe Associates, Inc.
8719 Brooks Drive, Suites 2-5
Easton, MD 21601
(410) 822-8688
DE License No. 9773

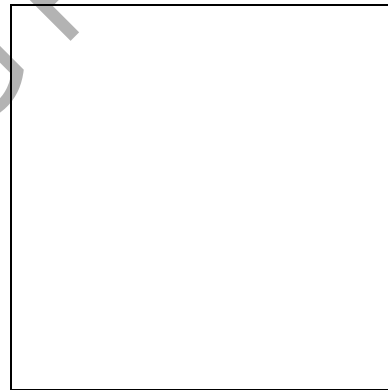

END OF SECTION 00 01 07

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 00 01 10 - TABLE OF CONTENTS

- A. Specifications for this project are arranged in accordance with the Construction Specification Institute numbering system and format. Section numbering is discontinuous and all numbers not appearing in the Table of Contents are not used for this Project.
- B. DOCUMENTS BOUND HEREWITH:

00 00 01	Project Title Page
00 01 07	Seals Page
00 01 10	Table of Contents
00 01 15	List of Drawing Sheets

DIVISION 0 – PROCUREMENT AND CONTRACTING REQUIREMENTS

00 11 16	Invitation to Bid
00 21 13	Instructions to Bidders
00 41 13	Bid Form
00 43 13	Bid Bond
00 52 13	Standard form of Agreement Between Owner & Contractor (Sample AIA A101-2017) (Samples AIA A101-2017 – Exhibit A)
00 54 13	Supplement to Agreement between Owner & Contractor A101-2017
00 54 14	Supplement to A101-2017 – Exhibit A – Insurance & Bonds
00 61 13.13	Performance Bond
00 61 13.16	Payment Bond
00 72 13	General Conditions to the Contract (Sample AIA A201-2017)
00 73 13	Supplementary General Conditions
00 73 43	Wage Rate Requirements
00 73 43.2	Wage Rates
00 73 44	Electronic Release Form
00 81 13	General Requirements
00 81 14	Drug Testing Forms
00 81 15	Affidavit of Craft Training

DIVISION 1 – GENERAL REQUIREMENTS

01 10 00	Summary
01 21 00	Allowances
01 21 16	Allowance Authorization
01 22 00	Unit Prices
01 23 00	Alternates
01 25 00	Substitution Procedures
01 25 01	Substitution Request Form
01 26 00	Contract Modification
01 29 00	Payment Procedures
01 29 01	Application for Payment
01 29 02	Continuation Sheet

01 31 00	Project Management and Coordination
01 32 00	Construction Progress Documentation
01 33 00	Submittal Procedures
01 35 23	Safety Program
01 40 00	Quality Requirements
01 42 00	References
01 50 00	Temporary Facilities and Controls
01 60 00	Product Requirements
01 62 00	Material & Equipment
01 73 00	Execution
01 74 19	Construction Waste Management
01 77 00	Closeout Procedures
01 78 39	Project Record Documentation
01 79 00	Demo and Training

TECHNICAL SPECIFICATIONS

DIVISION 2 – EXISTING CONDITIONS

02 41 19	Selective Demolition

DIVISION 6 – WOOD, PLASTICS AND COMPOSITES

06 06 60	Plastic Fabrications
06 10 53	Miscellaneous Rough Carpentry
06 41 16	Plastic Laminate Faced Architectural Cabinets

DIVISION 07 – THERMAL AND MOISTURE PROTECTION

078413	Fire Protection, HVAC & Plumbing Penetration Firestopping

DIVISION 9 - FINISHES

09 22 16	Non-Structural Metal Framing
09 29 00	Gypsum Board
09 51 13	Acoustical Panel Ceilings
09 54 36	Suspended Decorative Grids
09 65 13	Resilient Base & Accessories
09 65 19	Resilient Flooring
09 68 13	Tile Carpeting
09 91 00	Interior Painting

DIVISION 10 - SPECIALTIES

10 14 19 Dimensional Letter Signage

DIVISION 21 – FIRE PROTECTION

21 05 00 Common Work Results for Fire Protection
21 05 05 Fire Protection Piping, Fitting and Valves
21 10 03 Water Based Fire Suppression System – Sprinklers

DIVISION 23 - HVAC

23 05 00 Common Work Results for HVAC
23 05 93 Testing, Adjusting & Balancing for HVAC and Plumbing
23 07 01 HVAC Insulation
23 30 00 HVAC Air Distribution

DIVISION 26 – ELECTRICAL

26 05 01 Common Work Results for Electrical
26 05 02 Electrical Demolition for Remodeling
26 05 19 Low-Voltage Electrical Power Conductors and Cables
26 05 26 Grounding and Bonding for Electrical Systems
26 05 28 Electrical Firestopping
26 05 29 Hangers and Supports for Electrical Systems
26 05 33 Raceways and Boxes for Electrical Systems
26 05 53 Identification for Electrical Systems
26 08 00 Commissioning of Electrical Systems
26 09 23 Lighting Control Devices
26 27 26 Wiring Devices
26 51 00 Interior Lighting

DIVISION 27 – COMMUNICATION

27 15 13 Data, Voice and Video Systems

DIVISION 28 – ELECTRONIC SAFETY & SECURITY

28 31 11 Fire Alarm System

END TABLE OF CONTENTS

00 01 15 DRAWING SHEET LIST

GENERAL

001 COVER SHEET
002 LIFE SAFETY PLAN

ARCHITECTURE

A001 ACCESSIBILITY DETAILS
A100 OVERALL FIRST FLOOR PLAN – ALTERNATES
A101 DEMOLITION PLAN – AREA A
A102 DEMOLITION PLAN – AREA B
A110 OVERALL NEW CONSTRUCTION PLAN & PARTITION TYPES
A111 NEW CONSTRUCTION PLAN – AREA A
A112 NEW CONSTRUCTION PLAN – AREA B
A121 NEW REFLECTED CEILING PLAN – AREA A
A122 NEW REFLECTED CEILING PLAN – AREA B
A141 FINISH PLAN – AREA A
A142 FINISH PLAN – AREA B
A151 FURNITURE PLAN – AREA A
A431 INTERIOR ELEVATIONS
A432 INTERIOR ELEVATIONS
A441 CASEWORK ELEVATIONS
A451 CASEWORK SECTIONS & DETAILS
A511 CEILING DETAILS
A902 INTERIOR 3D VIEWS

FIRE PROTECTION

FP-1 FIRE PROTECTION PLAN, NOTES AND DETAILS
(EXISTING BUILDING DRAWING INCLUDED FOR REFERENCE ONLY)

MECHANICAL

M001 LEGEND AND ABBREVIATIONS – HVAC
MD101 PARTIAL DEMOLITION PLAN AREA A – HVAC
MD102 PARTIAL DEMOLITION PLAN AREA B - HVAC
M101 PARTIAL PLAN AREA A – HVAC
M102 PARTIAL PLAN AREA B – HVAC
M301 DETAILS – HVAC
M401 SCHEDULES – HVAC

ELECTRICAL

E001 ELECTRICAL LEGEND, SCHEDULES & ABBREVIATIONS
E002 LIGHTING FIXTURE SCHEDULE
ED101 PARTIAL DEMOLITION PLAN – AREA A
E101 PARTIAL PLAN – AREA A LIGHTING
E201 PARTIAL PLAN – AREA A POWER & SPECIAL SYSTEMS
E501 SCHEMATIC RISER DIAGRAMS
E601 DETAILS

END DRAWING SHEET LIST

**SECTION 00 11 16
INVITATION TO BID**

Sealed bids for Delaware Technical and Community College (DTCC) – Owens Campus Student Services Center (SSC) Renovation, Contract No. C9004020001, will be received by DTCC at the Meeting Room A, Student Services Center, Delaware Tech Owens Campus, 21179 College Avenue, Georgetown, DE 19947 until **1 PM local time on Tuesday, December 3, 2024**, at which time they will be publicly opened and read aloud in Meeting Room A. Bidder bears the risk of late delivery. Any bids received after the stated time will be returned unopened.

Project involves Renovation of College Student Services Center in Georgetown, DE. Project scope includes (but is not limited to) new finishes, ceilings, new partitions, millwork, mechanical/electrical work, and limited reconfiguration of space.

A **NON-MANDATORY** Pre-Bid Meeting will be held on Tuesday November 12, 2024, at 1 PM at the Meeting Room A, Student Services Center, Delaware Tech Owens Campus, 21179 College Avenue, Georgetown, DE 19947, for the purpose of establishing the listing of subcontractors and to answer questions. **ATTENDANCE OF THIS MEETING IS ENCOURAGED BUT NOT A PREREQUISITE FOR BIDDING ON THIS CONTRACT.**

Please contact BSA+A, Laura Branam, lbranam@simpers.com, with any questions related to this bid. All questions should be submitted by e-mail only to Laura Branam, copying Kelly Lucas, klucas@simpers.com with the following reference: **DTCC Owens Student Services Center Renovation – Contract #: C9004020001.**

Sealed bids shall be addressed to DTCC, Mr. Mark DeVore P.E., Collegewide Director of Facilities. The outer envelope should clearly indicate: **"DTCC Owens Student Services Center Renovation - CONTRACT NO. C9004020001- SEALED BID - DO NOT OPEN."**

Construction documents will be available for purchase at the following location:

RCI Printing & Graphics
298 Churchman's Rd, Newcastle, DE 19720
(302) 328-5019

(1) FULL SET OF CONSTRUCTION DOCUMENTS WILL BE PROVIDED AT NO COST TO INTERESTED BIDDERS. SUBSEQUENT SETS WILL BE AT THE RESPONSIBILITY OF THE BIDDER.

Bidders will not be subject to discrimination on the basis of race, creed, color, sex, sexual orientation, gender identity or national origin in consideration of this award, and Minority Business Enterprises, Disadvantaged Business Enterprises, Women-Owned Business Enterprises and Veteran-Owned Business Enterprises will be afforded full opportunity to submit bids on this contract. Each bid must be accompanied by a bid security equivalent to ten percent of the bid amount and all additive alternates. The successful bidder must post a performance bond and payment bond in a sum equal to 100 percent of the contract price upon execution of the contract. The Owner reserves the right to reject any or all bids and to waive any informalities therein. The Owner may extend the time and place for the opening of the bids from that described in the advertisement, with not less than two calendar days notice by certified delivery, facsimile machine or other electronic means to those bidders receiving plans.

END OF SECTION 00 11 16

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 00 21 13

INSTRUCTIONS TO BIDDERS

TABLE OF ARTICLES

1. GENERAL
2. BIDDER'S REPRESENTATION
3. BIDDING DOCUMENTS
4. BIDDING PROCEDURES
5. CONSIDERATION OF BIDS
6. POST-BID INFORMATION
7. PERFORMANCE BOND AND PAYMENT BOND
8. FORM OF AGREEMENT BETWEEN OWNER AND CONTRACTOR

ARTICLE 1: GENERAL

1.1 DEFINITIONS

1.1.1 Whenever the following terms are used, their intent and meaning shall be interpreted as follows:

1.2 STATE: The State of Delaware.

1.3 AGENCY: Delaware Technical and Community College.

1.4 DESIGNATED OFFICIAL: The agent authorized to act for the Agency.

1.5 BIDDING DOCUMENTS: Bidding Documents include the Bidding Requirements and the proposed Contract Documents. The Bidding Requirements consist of the Advertisement for Bid, Invitation to Bid, Instructions to Bidders, Supplementary Instructions to Bidders (if any), General Conditions, Supplementary General Conditions, General Requirements, Special Provisions (if any), the Bid Form (including the Non-collusion Statement), and other sample bidding and contract forms. The proposed Contract Documents consist of the form of Agreement between the Owner and Contractor, Owner's Amendment, as well as the Drawings, Specifications (Project Manual) and all Addenda issued prior to execution of the Contract.

1.6 CONTRACT DOCUMENTS: The Contract Documents consist of the, Instructions to Bidders, Supplementary Instructions to Bidders (if any), General Conditions, Supplementary General Conditions, General Requirements, Special Provisions (if any), the form of agreement between the Owner and the Contractor, Owner's Amendment, Drawings (if any), Specifications (Project Manual), and all addenda.

1.7 AGREEMENT: The form of the Agreement shall be AIA Document A101, Standard Form of Agreement between Owner and Contractor where the basis of payment is a STIPULATED SUM, as modified by the Owner's Amendment to the A101. In the case of conflict between the instructions contained therein and the General Requirements herein, these General Requirements shall prevail.

1.8 GENERAL REQUIREMENTS (or CONDITIONS): General Requirements (or conditions) are instructions pertaining to the Bidding Documents and to contracts in general. They contain, in summary, requirements of laws of the State; policies of the Agency and instructions to bidders.

1.9 SPECIAL PROVISIONS: Special Provisions are specific conditions or requirements peculiar to the bidding documents and to the contract under consideration and are supplemental to the General Requirements. Should the Special Provisions conflict with the General Requirements, the Special Provisions shall prevail.

1.10 ADDENDA: Written or graphic instruments issued by the Owner/Architect prior to the execution of the contract which modify or interpret the Bidding Documents by additions, deletions, clarifications or corrections.

1.11 BIDDER OR VENDOR: A person or entity who formally submits a Bid for the material or Work contemplated, acting directly or through a duly authorized representative who meets the requirements set forth in the Bidding Documents.

1.12 SUB-BIDDER: A person or entity who submits a Bid to a Bidder for materials or labor, or both for a portion of the Work.

- 1.13 BID: A complete and properly executed proposal to do the Work for the sums stipulated therein, submitted in accordance with the Bidding Documents.
- 1.14 BASE BID: The sum stated in the Bid for which the Bidder offers to perform the Work described in the Bidding Documents as the base, to which Work may be added or from which Work may be deleted for sums stated in Alternate Bids (if any are required to be stated in the bid).
- 1.15 ALTERNATE BID (or ALTERNATE): An amount stated in the Bid, where applicable, to be added to or deducted from the amount of the Base Bid if the corresponding change in the Work, as described in the Bidding Documents is accepted.
- 1.16 UNIT PRICE: An amount stated in the Bid, where applicable, as a price per unit of measurement for materials, equipment or services or a portion of the Work as described in the Bidding Documents.
- 1.17 SURETY: The corporate body which is bound with and for the Contract, or which is liable, and which engages to be responsible for the Contractor's payments of all debts pertaining to and for his acceptable performance of the Work for which he has contracted.
- 1.18 BIDDER'S DEPOSIT: The security designated in the Bid to be furnished by the Bidder as a guaranty of good faith to enter into a contract with the Agency if the Work to be performed or the material or equipment to be furnished is awarded to him.
- 1.19 CONTRACT: The written agreement covering the furnishing and delivery of material or work to be performed.
- 1.20 CONTRACTOR: Any individual, firm or corporation with whom a contract is made by the Agency.
- 1.21 SUBCONTRACTOR: An individual, partnership or corporation which has a direct contract with a contractor to furnish labor and materials at the job site, or to perform construction labor and furnish material in connection with such labor at the job site.
- 1.22 CONTRACT BOND: The approved form of security furnished by the contractor and his surety as a guaranty of good faith on the part of the contractor to execute the work in accordance with the terms of the contract.

ARTICLE 2: BIDDER'S REPRESENTATION

2.1 PRE-BID MEETING

- 2.1.1 A pre-bid meeting for this project will be held at the time and place designated. Attendance at this meeting is a pre-requisite for submitting a Bid, unless this requirement is specifically waived elsewhere in the Bid Documents.

2.2 By submitting a Bid, the Bidder represents that:

- 2.2.1 The Bidder has read and understands the Bidding Documents and that the Bid is made in accordance therewith.
- 2.2.2 The Bidder has visited the site, become familiar with existing conditions under which the Work is to be performed, and has correlated the Bidder's his personal observations with the requirements of the proposed Contract Documents.

2.2.3 The Bid is based upon the materials, equipment, and systems required by the Bidding Documents without exception.

2.3 JOINT VENTURE REQUIREMENTS

2.3.1 For Public Works Contracts, each Joint Venturer shall be qualified and capable to complete the Work with their own forces.

2.3.2 Included with the Bid submission, and as a requirement to bid, a copy of the executed Joint Venture Agreement shall be submitted and signed by all Joint Venturers involved.

2.3.3 All required Bid Bonds, Performance Bonds, Material and Labor Payment Bonds must be executed by both Joint Venturers and be placed in both of their names.

2.3.4 All required insurance certificates shall name both Joint Venturers.

2.3.5 Both Joint Venturers shall sign the Bid Form.

2.3.6 Both Joint Venturers shall include their Federal E.I. Number with the Bid.

2.3.7 In the event of a mandatory Pre-bid Meeting, each Joint Venturer shall have a representative in attendance.

2.3.8 Due to exceptional circumstances and for good cause shown, one or more of these provisions may be waived at the discretion of the State.

2.4 ASSIGNMENT OF ANTITRUST CLAIMS

2.4.1 As consideration for the award and execution by the Owner of this contract, the Contractor hereby grants, conveys, sells, assigns and transfers to the State of Delaware all of its right, title and interests in and to all known or unknown causes of action it presently has or may now or hereafter acquire under the antitrust laws of the United States and the State of Delaware, relating to the particular goods or services purchased or acquired by the Owner pursuant to this contract.

ARTICLE 3: BIDDING DOCUMENTS

3.1 COPIES OF BID DOCUMENTS

3.1.1 Bidders may obtain complete sets of the Bidding Documents from the Architectural/Engineering firm designated in the Advertisement or Invitation to Bid in the number and for the deposit sum, if any, stated therein.

3.1.2 Bidders shall use complete sets of Bidding Documents for preparation of Bids. The issuing Agency nor the Architect assumes no responsibility for errors or misinterpretations resulting from the use of incomplete sets of Bidding Documents.

3.1.3 Any errors, inconsistencies or omissions discovered shall be reported to the Architect immediately.

3.1.4 The Agency and Architect may make copies of the Bidding Documents available on the above terms for the purpose of obtaining Bids on the Work. No license or grant of use is conferred by issuance of copies of the Bidding Documents.

3.2 INTERPRETATION OR CORRECTION OF BIDDING DOCUMENTS

- 3.2.1 The Bidder shall carefully study and compare the Bidding Documents with each other, and with other work being bid concurrently or presently under construction to the extent that it relates to the Work for which the Bid is submitted, shall examine the site and local conditions, and shall report any errors, inconsistencies, or ambiguities discovered to the Architect.
- 3.2.2 Bidders or Sub-bidders requiring clarification or interpretation of the Bidding Documents shall make a written request to the Architect at least seven days prior to the date for receipt of Bids. Interpretations, corrections and changes to the Bidding Documents will be made by written Addendum. Interpretations, corrections, or changes to the Bidding Documents made in any other manner shall not be binding.
- 3.2.3 The apparent silence of the specifications as to any detail, or the apparent omission from it of detailed description concerning any point, shall be regarded as meaning that only the best commercial practice is to prevail and only material and workmanship of the first quality are to be used. Proof of specification compliance will be the responsibility of the Bidder.
- 3.2.4 Unless otherwise provided in the Contract Documents, the Contractor shall provide and pay for all permits, labor, materials, equipment, tools, construction equipment and machinery, water, heat, utilities, transportation, and other facilities and services necessary for the proper execution and completion of the Work.
- 3.2.5 The Owner will bear the costs for all impact and user fees associated with the project.
- 3.3 SUBSTITUTIONS
- 3.3.1 The materials, products and equipment described in the Bidding Documents establish a standard of quality, required function, dimension, and appearance to be met by any proposed substitution. The specification of a particular manufacturer or model number is not intended to be proprietary in any way. Substitutions of products for those named will be considered, providing that the Vendor certifies that the function, quality, and performance characteristics of the material offered is equal or superior to that specified. It shall be the Bidder's responsibility to assure that the proposed substitution will not affect the intent of the design, and to make any installation modifications required to accommodate the substitution.
- 3.3.2 Requests for substitutions shall be made in writing to the Architect at least ten days prior to the date of the Bid Opening. Such requests shall include a complete description of the proposed substitution, drawings, performance and test data, explanation of required installation modifications due the substitution, and any other information necessary for an evaluation. The burden of proof of the merit of the proposed substitution is upon the proposer. The Architect's decision of approval or disapproval shall be final. The Architect is to notify Owner prior to any approvals.
- 3.3.3 If the Architect approves a substitution prior to the receipt of Bids, such approval shall be set forth in an Addendum. Approvals made in any other manner shall not be binding.
- 3.3.4 The Architect shall have no obligation to consider any substitutions after the Contract award.
- 3.4 ADDENDA
- 3.4.1 Addenda will be mailed or delivered to all who are known by the Architect to have received a complete set of the Bidding Documents.
- 3.4.2 Copies of Addenda will be made available for inspection wherever Bidding Documents are on file for that purpose.

3.4.3 No Addenda will be issued later than 2 calendar days prior to the date for receipt of Bids except an Addendum withdrawing the request for Bids or one which extends the time or changes the location for the opening of bids.

3.4.4 Each bidder shall ascertain prior to submitting his Bid that they have received all Addenda issued, and shall acknowledge their receipt in their Bid in the appropriate space. Not acknowledging an issued Addenda could be grounds for determining a bid to be non-responsive.

ARTICLE 4: BIDDING PROCEDURES

4.1 PREPARATION OF BIDS

4.1.1 Submit the bids on the Bid Forms included with the Bidding Documents.

4.1.2 Submit the original Bid Form for each bid. Bid Forms may be removed from the project manual for this purpose.

4.1.3 Execute all blanks on the Bid Form in a non-erasable medium (typewriter or manually in ink).

4.1.4 Where so indicated by the makeup on the Bid Form, express sums in both words and figures, in case of discrepancy between the two, the written amount shall govern.

4.1.5 Interlineations, alterations or erasures must be initialed by the signer of the Bid.

4.1.6 BID ALL REQUESTED ALTERNATES AND UNIT PRICES, IF ANY. If there is no change in the Base Bid for an Alternate, enter "No Change". The Contractor is responsible for verifying that they have received all addenda issued during the bidding period. Work required by Addenda shall automatically become part of the Contract.

4.1.7 Make no additional stipulations on the Bid Form and do not qualify the Bid in any other manner.

4.1.8 Each copy of the Bid shall include the legal name of the Bidder and a statement whether the Bidder is a sole proprietor, a partnership, a corporation, or any legal entity, and each copy shall be signed by the person or persons legally authorized to bind the Bidder to a contract. A Bid by a corporation shall further give the state of incorporation and have the corporate seal affixed. A Bid submitted by an agent shall have a current Power of Attorney attached, certifying agent's authority to bind the Bidder.

4.1.9 Bidder shall complete the Non-Collusion Statement form included with the Bid Forms and include it with their Bid.

4.1.10 In the construction of all Public Works projects for the State of Delaware or any agency thereof, preference in employment of laborers, workers or mechanics shall be given to bona fide legal citizens of the State who have established citizenship by residence of at least 90 days in the State.

4.1.11 Each bidder shall include a signed Affidavit for the Bidder certifying compliance with OMB Regulation 4104 - "Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on "Large Public Works Projects." "Large Public Works" is based upon the current threshold required for bidding Public Works as set by the Purchasing and Contracting Advisory Council.

4.2 BID SECURITY

- 4.2.1 All bids shall be accompanied by a deposit of either a good and sufficient bond to the agency for the benefit of the agency, with corporate surety authorized to do business in this State, the form of the bond and the surety to be approved by the agency, or a security of the bidder assigned to the agency, for a sum equal to at least 10% of the bid plus all add alternates, or in lieu of the bid bond a security deposit in the form of a certified check, bank treasurer's check, cashier's check, money order, or other prior approved secured deposit assigned to the State. The bid bond need not be for a specific sum, but may be stated to be for a sum equal to 10% of the bid plus all add alternates to which it relates and not to exceed a certain stated sum, if said sum is equal to at least 10% of the bid. The Bid Bond form used shall be the standard OMB form (attached).
- 4.2.2 The Agency has the right to retain the bid security of Bidders to whom an award is being considered until either a formal contract has been executed and bonds have been furnished or the specified time has elapsed so the Bids may be withdrawn or all Bids have been rejected.
- 4.2.3 In the event of any successful Bidder refusing or neglecting to execute a formal contract and bond within 20 days of the awarding of the contract, the bid bond or security deposited by the successful bidder shall be forfeited.
- 4.3 SUBCONTRACTOR LIST
- 4.3.1 In accordance with Title 29, Chapter 69, Section 6962(d)(10)b of the Delaware Code, each Bidder shall submit with their Bid a completed List of Sub-Contractors included with the Bid Form. NAME ONLY ONE SUBCONTRACTOR FOR EACH TRADE. The bidder must list **in each category** the full name and address (City & State) of the sub-contractor that the Bidder will be using to perform the work and provide material for that subcontractor category. Should the Bidder's listed subcontractor intend to provide any of their subcontractor category of work through a third-tier contractor, the Bidder shall list that third-tier contractor's full name and address (City & State). **If the Bidder intends to perform any category of work itself, it must list its full name and address.** For clarification, if the Bidder intends to perform the work themselves, the Bidder **may not** insert "not applicable", "N/A", "self" or anything other than its own full name and address (City & State). To do so shall cause the bid to be rejected. In addition, the failure to produce a completed subcontractor list with the bid submittal shall cause the bid to be rejected. If you have more than three (3) third-tier contractors to report in any subcontractor category, print out additional page(s) containing the appropriate category, complete the rest of your list of third-tier contractors for that category, notate the addition in parentheses as (CONTINUATION) next to the subcontractor category and an asterisk (*) next to any additional third-tier contractors, and submit it with your bid.
- 4.3.2 It is the responsibility of the Contractor to ensure that their Subcontractors are in compliance with the provisions of this law. Also, if a Contractor elects to list themselves as a Subcontractor for any category, they must specifically name themselves on the Bid Form and be able to document their capability to act as Subcontractor in that category in accordance with this law.
- 4.4 AFFIDAVIT OF CONTRACTOR QUALIFICATIONS
- 4.4.1 In accordance with Title 29, Chapter 69, Section 6962(d)(10)b.3 of the Delaware Code, each Bidder shall submit with their Bid the Affidavit of Contractor Qualifications certifying that the Bidder will abide by the contractor's qualifications outlined in the construction bid specifications for the duration of the contract term. After a contract has been awarded the successful bidder shall not substitute another subcontractor whose name was submitted on the Subcontractor Form except for the reasons in the statute and not without written consent from the awarding agency. Failure to utilize the subcontractors on the list will

subject the successful bidder to penalties as outlined in the General Requirements Section 5.2 of the contract.

4.5 AFFIDAVIT OF CRAFT TRAINING COMPLIANCE

4.5.1 In accordance with Title 29, Chapter 69, Section 6962(c)(13) of the Delaware Code, contractors and subcontractors must provide craft training for journeyman and apprentice levels if **all** of the following apply:

- A. A project meets the prevailing wage requirement under Title 29, Chapter 69, Section 6960 of the Delaware Code.
- B. The contractor employs 10 or more total employees.
- C. The project is not a federal highway project

Failure to provide required craft training on the project may subject the successful contractor and/or subcontractor(s) to penalties as outlined in Title 29, Chapter 69, Section 6962(c)(13) of the Delaware Code.

Bidders shall submit the Affidavit of Craft Training Compliance prior to contract execution.

4.6 EQUALITY OF EMPLOYMENT OPPORTUNITY ON PUBLIC WORKS

4.6.1 During the performance of this contract, the contractor agrees as follows:

- A. The Contractor will not discriminate against any employee or applicant for employment because of race, creed, sex, color, sexual orientation, gender identity or national origin. The Contractor will take affirmative action to ensure the applicants are employed, and that employees are treated during employment, without regard to their race, creed, sex, color, sexual orientation, gender identity or national origin. Such action shall include, but not be limited to, the following: Employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship. The Contractor agrees to post in conspicuous places available to employees and applicants for employment notices to be provided by the contracting agency setting forth this nondiscrimination clause.
- B. The Contractor will, in all solicitations or advertisements for employees placed by or on behalf of the Contractor, state that all qualified applicants will receive consideration for employment without regard to race, creed, sex, color, sexual orientation, gender identity or national origin."

4.7 PREVAILING WAGE REQUIREMENT

4.7.1 Wage Provisions: For renovation and new construction projects whose costs exceed the thresholds contained in Delaware Code, Title 29, Section 6960, the minimum wage rates for various classes of laborers and mechanics shall be as determined by the Department of Labor, Division of Industrial Affairs of the State of Delaware.

4.7.2 The employer shall pay all mechanics and labors employed directly upon the site of work, unconditionally and not less often than once a week and without subsequent deduction or rebate on any account, the full amounts accrued at time of payment, computed at wage rates not less than those stated in the specifications, regardless of any contractual relationship which may be alleged to exist between the employer and such laborers and mechanics.

4.7.3 The scale of the wages to be paid shall be posted by the employer in a prominent and easily accessible place at the site of the work.

4.7.4 Every contract based upon these specifications shall contain a stipulation that sworn payroll information, as required by the Department of Labor, be furnished weekly. The Department of Labor shall keep and maintain the sworn payroll information for a period of 6 months from the last day of the work week covered by the payroll.

4.8 SUBMISSION OF BIDS

4.8.1 Enclose the Bid, the Bid Security, and any other documents required to be submitted with the Bid in a sealed opaque envelope. Address the envelope to the party receiving the Bids. Identify with the project name, project number, and the Bidder's name and address. If the Bid is sent by mail, enclose the sealed envelope in a separate mailing envelope with the notation "BID ENCLOSED" on the face thereof. The State is not responsible for the opening of bids prior to bid opening date and time that are not properly marked.

4.8.2 Deposit Bids at the designated location prior to the time and date for receipt of bids indicated in the Advertisement for Bids. Bids received after the time and date for receipt of bids will be marked "LATE BID" and returned.

4.8.3 Bidder assumes full responsibility for timely delivery at location designated for receipt of bids.

4.8.4 Oral, telephonic or telegraphic bids are invalid and will not receive consideration.

4.8.5 Withdrawn Bids may be resubmitted up to the date and time designated for the receipt of Bids, provided that they are then fully in compliance with these Instructions to Bidders.

4.9 MODIFICATION OR WITHDRAW OF BIDS

4.9.1 Prior to the closing date for receipt of Bids, a Bidder may withdraw a Bid by personal request and by showing proper identification to the Architect. A request for withdraw by letter or fax, if the Architect is notified in writing prior to receipt of fax, is acceptable. A fax directing a modification in the bid price will render the Bid informal, causing it to be ineligible for consideration of award. Telephone directives for modification of the bid price shall not be permitted and will have no bearing on the submitted proposal in any manner.

4.9.2 Bidders submitting Bids that are late shall be notified as soon as practicable and the bid shall be returned.

4.9.3 A Bid may not be modified, withdrawn or canceled by the Bidder during a thirty (30) day period following the time and date designated for the receipt and opening of Bids, and Bidder so agrees in submitting their Bid. Bids shall be binding for 30 days after the date of the Bid opening.

ARTICLE 5: CONSIDERATION OF BIDS

5.1 OPENING/REJECTION OF BIDS

5.1.1 Unless otherwise stated, Bids received on time will be publicly opened and will be read aloud. An abstract of the Bids will be made available to Bidders.

5.1.2 The Agency shall have the right to reject any and all Bids. A Bid not accompanied by a required Bid Security or by other data required by the Bidding Documents, or a Bid which is in any way incomplete or irregular is subject to rejection.

5.1.3 If the Bids are rejected, it will be done within thirty (30) calendar day of the Bid opening.

5.2 COMPARISON OF BIDS

5.2.1 After the Bids have been opened and read, the bid prices will be compared and the result of such comparisons will be made available to the public. Comparisons of the Bids may be based on the Base Bid plus desired Alternates. The Agency shall have the right to accept Alternates in any order or combination.

5.2.2 The Agency reserves the right to waive technicalities, to reject any or all Bids, or any portion thereof, to advertise for new Bids, to proceed to do the Work otherwise, or to abandon the Work, if in the judgment of the Agency or its agent(s), it is in the best interest of the State.

5.2.3 An increase or decrease in the quantity for any item is not sufficient grounds for an increase or decrease in the Unit Price.

5.2.4 The prices quoted are to be those for which the material will be furnished F.O.B. Job Site and include all charges that may be imposed during the period of the Contract.

5.2.5 No qualifying letter or statements in or attached to the Bid, or separate discounts will be considered in determining the low Bid except as may be otherwise herein noted. Cash or separate discounts should be computed and incorporated into Unit Bid Price(s).

5.3 DISQUALIFICATION OF BIDDERS

5.3.1 An agency shall determine that each Bidder on any Public Works Contract is responsible before awarding the Contract. Factors to be considered in determining the responsibility of a Bidder include:

- A. The Bidder's financial, physical, personnel or other resources including Subcontracts;
- B. The Bidder's record of performance on past public or private construction projects, including, but not limited to, defaults and/or final adjudication or admission of violations of the Prevailing Wage Laws in Delaware or any other state;
- C. The Bidder's written safety plan;
- D. Whether the Bidder is qualified legally to contract with the State;
- E. Whether the Bidder supplied all necessary information concerning its responsibility; and,
- F. Any other specific criteria for a particular procurement, which an agency may establish; provided however, that, the criteria be set forth in the Invitation to Bid and is otherwise in conformity with State and/or Federal law.

5.3.2 If an agency determines that a Bidder is nonresponsive and/or nonresponsible, the determination shall be in writing and set forth the basis for the determination. A copy of the determination shall be sent to the affected Bidder within five (5) working days of said determination.

5.3.3 In addition, any one or more of the following causes may be considered as sufficient for the disqualification of a Bidder and the rejection of their Bid or Bids.

- 5.3.3.1 More than one Bid for the same Contract from an individual, firm or corporation under the same or different names.
- 5.3.3.2 Evidence of collusion among Bidders.
- 5.3.3.3 Unsatisfactory performance record as evidenced by past experience.
- 5.3.3.4 If the Unit Prices are obviously unbalanced either in excess or below reasonable cost analysis values.
- 5.3.3.5 If there are any unauthorized additions, interlineation, conditional or alternate bids or irregularities of any kind which may tend to make the Bid incomplete, indefinite or ambiguous as to its meaning.
- 5.3.3.6 If the Bid is not accompanied by the required Bid Security and other data required by the Bidding Documents.
- 5.3.3.7 If any exceptions or qualifications of the Bid are noted on the Bid Form.
- 5.4 ACCEPTANCE OF BID AND AWARD OF CONTRACT
- 5.4.1 A formal Contract shall be executed with the successful Bidder within twenty (20) calendar days after the award of the Contract.
- 5.4.2 Per Section 6962(d)(13)a., Title 29, Delaware Code, "The contracting agency shall award any public works contract within thirty (30) days of the bid opening to the lowest responsive and responsible Bidder, unless the Agency elects to award on the basis of best value, in which case the election to award on the basis of best value shall be stated in the Invitation To Bid.
- 5.4.3 Each Bid on any Public Works Contract must be deemed responsive by the Agency to be considered for award. A responsive Bid shall conform in all material respects to the requirements and criteria set forth in the Contract Documents and specifications.
- 5.4.4 The Agency shall have the right to accept Alternates in any order or combination, and to determine the low Bidder on the basis of the sum of the Base Bid, plus accepted Alternates.
- 5.4.5 The successful Bidder shall execute a formal contract, submit the required Insurance Certificate, and furnish good and sufficient bonds, unless specifically waived in the General Requirements, in accordance with the General Requirement, within twenty (20) days of official notice of contract award. The successful Bidder shall provide, at least two business days prior to contract execution, copies of the Employee Drug Testing Program for the Bidder and all listed Subcontractors. Bonds shall be for the benefit of the Agency with surety in the amount of 100% of the total contract award. Said Bonds shall be conditioned upon the faithful performance of the contract. Bonds shall remain in affect for period of two (2) years after the date of the Certificate of Final Payment.
- 5.4.6 If the successful Bidder fails to execute the required Contract, Bond and all required information, as aforesaid, within twenty (20) calendar days after the date of official Notice of the Award of the Contract, their Bid guaranty shall immediately be taken and become the property of the State for the benefit of the Agency as liquidated damages, and not as a forfeiture or as a penalty. Award will then be made to the next lowest qualified Bidder of the Work or readvertised, as the Agency may decide.

- 5.4.7 Each bidder shall supply with its bid its taxpayer identification number (i.e., federal employer identification number or social security number) and should the vendor be awarded a contract, such vendor shall provide to the agency the taxpayer identification license numbers of such subcontractors. Such numbers shall be provided on the later of the date on which such subcontractor is required to be identified or the time the contract is executed. The successful Bidder shall provide to the agency to which it is contracting, within 30 days of entering into such public works contract, copies of all Delaware Business licenses of subcontractors and/or independent contractors that will perform work for such public works contract. However, if a subcontractor or independent contractor is hired or contracted more than 20 days after the Bidder entered the public works contract the Delaware Business license of such subcontractor or independent contractor shall be provided to the agency within 10 days of being contracted or hired.
- 5.4.8 The Bid Security shall be returned to the successful Bidder upon the execution of the formal contract. The Bid Securities of unsuccessful bidders shall be returned within thirty (30) calendar days after the opening of the Bids.

ARTICLE 6: POST-BID INFORMATION

- 6.1 CONTRACTOR'S QUALIFICATION STATEMENT
- 6.1.1 Bidders to whom an award of a Contract is under consideration shall, if requested by the Agency, submit a properly executed AIA Document A305, Contractor's Qualification Statement, unless such a statement has been previously required and submitted.
- 6.2 Bidders to whom an award of a Contract has been made must produce their Delaware Business License before the Contract can be executed.

ARTICLE 7: PERFORMANCE BOND AND PAYMENT BOND

- 7.1 BOND REQUIREMENTS
- 7.1.1 The cost of furnishing the required Bonds, that are stipulated in the Bidding Documents, shall be included in the Bid.
- 7.1.2 If the Bidder is required by the Agency to secure a bond from other than the Bidder's usual sources, changes in cost will be adjusted as provide in the Contract Documents.
- 7.1.3 The Performance and Payment Bond forms used shall be the standard OMB forms (attached).
- 7.2 TIME OF DELIVERY AND FORM OF BONDS
- 7.2.1 The bonds shall be dated on or after the date of the Contract.
- 7.2.2 The Bidder shall require the attorney-in-fact who executes the required bonds on behalf of the surety to affix a certified and current copy of the power of attorney.

ARTICLE 8: FORM OF AGREEMENT BETWEEN OWNER AND CONTRACTOR

- 8.1 Unless otherwise required in the Bidding Documents, the Agreement for the Work will be written on AIA Document A101, Standard Form of Agreement Between Owner and Contractor Where the Basis of Payment is a Stipulated Sum, as modified by the Owner's Amendment to the A101.

END OF SECTION

Delaware Technical Community College
Owens Campus Student Services Center Renovation
Contract #: C9004020001

To: Delaware Technical Community College – Owens Campus
21179 College Dr.
Georgetown, DE 19947

(Other License Nos.): _____

\$ _____
(\$ _____)

Add/Deduct: _____
(\$ _____)

Delaware Technical Community College
Owens Campus Student Services Center Renovation
Contract #: C9004020001

BID FORM

I/We acknowledge Addendums numbered _____ and the price(s) submitted include any cost/schedule impact they may have.

This bid shall remain valid and cannot be withdrawn for thirty (30) days from the date of opening of bids, and the undersigned shall abide by the Bid Security forfeiture provisions. Bid Security is attached to this Bid.

The Owner shall have the right to reject any or all bids, and to waive any informality or irregularity in any bid received.

This bid is based upon work being accomplished by the Sub-Contractors named on the list attached to this bid.

Should I/We be awarded this contract, I/We pledge to achieve substantial completion of all the work within _____ calendar days of the Notice to Proceed.

The undersigned represents and warrants that he has complied and shall comply with all requirements of local, state, and national laws; that no legal requirement has been or shall be violated in making or accepting this bid, in awarding the contract to him or in the prosecution of the work required; that the bid is legal and firm; that he has not, directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken action in restraint of free competitive bidding.

Upon receipt of written notice of the acceptance of this Bid, the Bidder shall, within twenty (20) calendar days, execute the agreement in the required form and deliver the Contract Bonds, and Insurance Certificates, required by the Contract Documents.

I am / We are an Individual / a Partnership / a Corporation

By _____ Trading as _____
(Individual's / General Partner's / Corporate Name)

(State of Corporation)

Business Address: _____

Witness: _____ **By:** _____
(SEAL) (Authorized Signature)

(Title)
Date: _____

ATTACHMENTS

Sub-Contractor List
Non-Collusion Statement
Affidavit of Employee Drug Testing Program
Affidavit of Contractor Qualifications
Bid Security
(Others as Required by Project Manuals)

Delaware Technical Community College
Owens Campus Student Services Center Renovation
Contract #: C9004020001

BID FORM

SUBCONTRACTOR LIST

In accordance with Title 29, Chapter 69, Section 6962(d)(10)b of the Delaware Code, the following subcontractor listing must accompany any bid submittal. The bidder must list **in each category** the full name and address (City & State) of the sub-contractor that the bidder will be using to perform the work and provide material for that subcontractor category. Should the bidder's listed subcontractor intend to provide any of their subcontractor category of work through a third-tier contractor, the bidder shall list that third-tier contractor's full name and address (City & State). **If the bidder intends to perform any category of work itself, it must list its full name and address.** For clarification, if the bidder intends to perform the work themselves, the bidder **may not** insert "not applicable", "N/A", "self" or anything other than its own full name and address (City & State). To do so shall cause the bid to be rejected. In addition, the failure to produce a completed subcontractor list with the bid submittal shall cause the bid to be rejected. If you have more than three (3) third-tier contractors to report in any subcontractor category, print out additional page(s) containing the appropriate category, complete the rest of your list of third-tier contractors for that category, notate the addition in parentheses as (CONTINUATION) next to the subcontractor category and an asterisk (*) next to any additional third-tier contractors, and submit it with your bid.

<u>Subcontractor Category</u>	<u>Subcontractor</u>	<u>Address (City & State)</u>	<u>Subcontractors tax-payer ID # or Delaware Business license #</u>
1. Electrical			
A.			
B.			
C.			
2. Mechanical			
A.			
B.			
C.			

Delaware Technical Community College
Owens Campus Student Services Center Renovation
Contract #: C9004020001

BID FORM (Continued)

3.	Ceilings			
	A.			
	B.			
	C.			
4.	Flooring			
	A.			
	B.			
	C.			

NOT FOR BIDDING PURPOSES

Delaware Technical Community College
Owens Campus Student Services Center Renovation
Contract #: C9004020001

BID FORM

NON-COLLUSION STATEMENT

This is to certify that the undersigned bidder has neither directly nor indirectly, entered into any agreement, participated in any collusion or otherwise taken any action in restraint of free competitive bidding in connection with this proposal submitted this date (*to the Office of Management and Budget, Division of Facilities Management*).

All the terms and conditions of (*Project or Contract Number*) have been thoroughly examined and are understood.

NAME OF BIDDER:

AUTHORIZED REPRESENTATIVE
(TYPED):

AUTHORIZED REPRESENTATIVE
(SIGNATURE):

TITLE:

ADDRESS OF BIDDER:

E-MAIL:

PHONE NUMBER:

Sworn to and Subscribed before me this _____ day of _____ 20____.

My Commission expires _____. NOTARY PUBLIC _____.

THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.

Delaware Technical Community College
Owens Campus Student Services Center Renovation
Contract #: C9004020001

**AFFIDAVIT
OF
EMPLOYEE DRUG TESTING PROGRAM**

4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects requires that Contractors and Subcontractors implement a program of mandatory drug testing for Employees who work on Large Public Works Contracts funded all or in part with public funds.

We hereby certify that we have in place or will implement during the entire term of the contract a Mandatory Drug Testing Program for our employees on the jobsite, including subcontractors, that complies with this regulation:

Contractor/Subcontractor Name: _____

Contractor/Subcontractor Address: _____

Authorized Representative (typed or printed): _____

Authorized Representative (signature): _____

Title: _____

Sworn to and Subscribed before me this _____ day of _____ 20____.

My Commission expires _____. NOTARY PUBLIC _____

THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.

Delaware Technical Community College
Owens Campus Student Services Center Renovation
Contract #: C9004020001

**AFFIDAVIT
OF
CONTRACTOR QUALIFICATIONS**

We hereby certify that we will abide by the contractor's qualifications outlined in the construction bid specifications for the duration of the contract term.

In accordance with Title 29, Chapter 69, Section 6962(d)(10)b.3 of the Delaware Code, after a contract has been awarded the successful bidder shall not substitute another subcontractor whose name was submitted on the Subcontractor Form except for the reasons in the statute and not without written consent from the awarding agency. Failure to utilize the subcontractors on the list will subject the successful bidder to penalties as outlined in the General Requirements Section 5.2 of the contract.

Contractor Name:

Contractor Address:

Authorized Representative (typed or printed):

Authorized Representative (signature):

Title:

Sworn to and Subscribed before me this _____ day of _____ 20____.

My Commission expires _____. NOTARY PUBLIC _____.

THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.

THIS PAGE INTENTIONALLY LEFT BLANK

Delaware Technical Community College
Owens Campus Student Services Center Renovation
Contract #: C9004020001

BID BOND

TO ACCOMPANY PROPOSAL
(Not necessary if security is used)

KNOW ALL MEN BY THESE PRESENTS That: _____
_____ of _____ in the County of _____
_____ and State of _____ as **Principal**, and _____
_____ of _____ in the County of _____
and State of _____ as **Surety**, legally authorized to do business in the State of Delaware
("State"), are held and firmly unto the **State** in the sum of _____
_____ Dollars (\$ _____), or _____ percent not to exceed _____
_____ Dollars (\$ _____)
of amount of bid on Contract No. _____, to be paid to the **State** for the use and
benefit of _____ (*insert State agency name*) for which payment
well and truly to be made, we do bind ourselves, our and each of our heirs, executors, administrators, and
successors, jointly and severally for and in the whole firmly by these presents.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH That if the above bonded **Principal**
who has submitted to the _____ (*insert State agency name*) a
certain proposal to enter into this contract for the furnishing of certain material and/or services within the
State, shall be awarded this Contract, and if said **Principal** shall well and truly enter into and execute this
Contract as may be required by the terms of this Contract and approved by the _____
_____ (*insert State agency name*) this Contract to be entered into within twenty days after
the date of official notice of the award thereof in accordance with the terms of said proposal, then this
obligation shall be void or else to be and remain in full force and virtue.

Sealed with _____ seal and dated this _____ day of _____ in the year of our Lord two
thousand and _____ (20____).

SEALED, AND DELIVERED IN THE
Presence of

Corporate
Seal

By:

Name of Bidder (Organization)

Authorized Signature

Attest _____

Title

Name of Surety

Witness: _____

By:

Title

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 00 52 13

STANDARD FORM OF AGREEMENT BETWEEN OWNER AND CONTRACTOR
A101-2017

The contract to be utilized on this project shall be the "Standard Form of Agreement Between Owner and Contractor" AIA Document A101-2017, including AIA Document A101 – 2017 Exhibit A, the Owner's Amendment to the A101-2017, as well as Supplements to A101-2017 and Exhibit A and the State of Delaware's General Requirements.

THIS PAGE INTENTIONALLY LEFT BLANK

DRAFT AIA® Document A101® – 2017

Standard Form of Agreement Between Owner and Contractor *where the basis of payment is a Stipulated Sum*

AGREEMENT made as of the « 3rd » day of « December » in the year « 2024 »
(In words, indicate day, month and year.)

BETWEEN the Owner:
(Name, legal status, address and other information)

« Delaware Technical and Community College, » « »
« PO Box 897, Dover, DE 19903 »
« Telephone Number: (302) 454-3922 »
« »

and the Contractor:
(Name, legal status, address and other information)

« ... » « »
« ... »
« ... »
« ... »

for the following Project:
(Name, location and detailed description)

« DTCC Owens – Student Services Center Renovation »
« 21179 College Dr. Georgetown, DE 19947 »
« Contract #: C9004020001 »

The Architect:
(Name, legal status, address and other information)

« BSA+A, Inc. » « »
« 954 Justison St. Wilmington DE, 19801 »
« Telephone Number: (302) 658-9300 »
« Fax Number: (302) 658-1125 »

The Owner and Contractor agree as follows.

ADDITIONS AND DELETIONS:

The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

The parties should complete A101®-2017, Exhibit A, Insurance and Bonds, contemporaneously with this Agreement. AIA Document A201®-2017, General Conditions of the Contract for Construction, is adopted in this document by reference. Do not use with other general conditions unless this document is modified.

ELECTRONIC COPYING of any portion of this AIA® Document to another electronic file is prohibited and constitutes a violation of copyright laws as set forth in the footer of this document.

TABLE OF ARTICLES

- 1 THE CONTRACT DOCUMENTS
- 2 THE WORK OF THIS CONTRACT
- 3 DATE OF COMMENCEMENT AND SUBSTANTIAL COMPLETION
- 4 CONTRACT SUM
- 5 PAYMENTS
- 6 DISPUTE RESOLUTION
- 7 TERMINATION OR SUSPENSION
- 8 MISCELLANEOUS PROVISIONS
- 9 ENUMERATION OF CONTRACT DOCUMENTS

EXHIBIT A INSURANCE AND BONDS

ARTICLE 1 THE CONTRACT DOCUMENTS

The Contract Documents consist of this Agreement, Conditions of the Contract (General, Supplementary, and other Conditions), Drawings, Specifications, Addenda issued prior to execution of this Agreement, other documents listed in this Agreement, and Modifications issued after execution of this Agreement, all of which form the Contract, and are as fully a part of the Contract as if attached to this Agreement or repeated herein. The Contract represents the entire and integrated agreement between the parties hereto and supersedes prior negotiations, representations, or agreements, either written or oral. An enumeration of the Contract Documents, other than a Modification, appears in Article 9.

ARTICLE 2 THE WORK OF THIS CONTRACT

The Contractor shall fully execute the Work described in the Contract Documents, except as specifically indicated in the Contract Documents to be the responsibility of others.

ARTICLE 3 DATE OF COMMENCEMENT AND SUBSTANTIAL COMPLETION

§ 3.1 The date of commencement of the Work shall be:

(Check one of the following boxes.)

☐ The date of this Agreement.

☒ A date set forth in a notice to proceed issued by the Owner.

☐ Established as follows:

(Insert a date or a means to determine the date of commencement of the Work.)

« »

If a date of commencement of the Work is not selected, then the date of commencement shall be the date of this Agreement.

§ 3.2 The Contract Time shall be measured from the date of commencement of the Work.

§ 3.3 Substantial Completion

§ 3.3.1 Subject to adjustments of the Contract Time as provided in the Contract Documents, the Contractor shall achieve Substantial Completion of the entire Work:

(Check one of the following boxes and complete the necessary information.)

[« X »] Not later than « X » (« X ») calendar days from the date of commencement of the Work.

[« »] By the following date: « »

§ 3.3.2 Subject to adjustments of the Contract Time as provided in the Contract Documents, if portions of the Work are to be completed prior to Substantial Completion of the entire Work, the Contractor shall achieve Substantial Completion of such portions by the following dates:

Portion of Work	Substantial Completion Date
None.	N/A

§ 3.3.3 If the Contractor fails to achieve Substantial Completion as provided in this Section 3.3, liquidated damages, if any, shall be assessed as set forth in Section 4.5.

ARTICLE 4 CONTRACT SUM

§ 4.1 The Owner shall pay the Contractor the Contract Sum in current funds for the Contractor's performance of the Contract. The Contract Sum shall be « X » (\$ « X »), subject to additions and deductions as provided in the Contract Documents.

§ 4.2 Alternates

§ 4.2.1 Alternates, if any, included in the Contract Sum:

Item	Price
• Alternate No.1: Lobby 100 Flooring, Base, Ceiling and Light Fixtures.	\$X
• Alternate No. 2: Back Offices Flooring, Base and Paint.	\$X
• Alternate No. 3: Corridor 153, part of Registrar 129 and Office 128 Ceiling grid, Tile and Light Fixtures.	\$X
• Alternate No. 4: Fire Lounge 986 paint and wall panels	\$X

§ 4.2.2 Subject to the conditions noted below, the following alternates may be accepted by the Owner following execution of this Agreement. Upon acceptance, the Owner shall issue a Modification to this Agreement. (Insert below each alternate and the conditions that must be met for the Owner to accept the alternate.)

Item	Price	Conditions for Acceptance
• N/A		

§ 4.3 Allowances, if any, included in the Contract Sum:
(Identify each allowance.)

Item	Price
• N/A	\$X

§ 4.4 Unit prices, if any:

(Identify the item and state the unit price and quantity limitations, if any, to which the unit price will be applicable.)

Item	Units and Limitations	Price per Unit (\$0.00)
• N/A	X	See attached Bid Form.

§ 4.5 Liquidated damages, if any:

(Insert terms and conditions for liquidated damages, if any.)

« None. »

§ 4.6 Other:

(Insert provisions for bonus or other incentives, if any, that might result in a change to the Contract Sum.)

« N/A »

ARTICLE 5 PAYMENTS

§ 5.1 Progress Payments

§ 5.1.1 Based upon Applications for Payment submitted to the Architect by the Contractor and Certificates for Payment issued by the Architect, the Owner shall make progress payments on account of the Contract Sum to the Contractor as provided below and elsewhere in the Contract Documents.

§ 5.1.2 The period covered by each Application for Payment shall be one calendar month ending on the last day of the month, or as follows:

« »

§ 5.1.3 Provided that an Application for Payment is received by the Architect not later than the « 25th » day of a month, the Owner shall make payment of the amount certified to the Contractor not later than the « 30th » day of the « following » month. If an Application for Payment is received by the Architect after the application date fixed above, payment of the amount certified shall be made by the Owner not later than « Thirty » (« 30 ») days after the Architect receives the Application for Payment.

(Federal, state or local laws may require payment within a certain period of time.)

§ 5.1.4 Each Application for Payment shall be based on the most recent schedule of values submitted by the Contractor in accordance with the Contract Documents. The schedule of values shall allocate the entire Contract Sum among the various portions of the Work. The schedule of values shall be prepared in such form, and supported by such data to substantiate its accuracy, as the Architect may require. This schedule of values shall be used as a basis for reviewing the Contractor's Applications for Payment.

§ 5.1.5 Applications for Payment shall show the percentage of completion of each portion of the Work as of the end of the period covered by the Application for Payment.

§ 5.1.6 In accordance with AIA Document A201™–2017, General Conditions of the Contract for Construction, and subject to other provisions of the Contract Documents, the amount of each progress payment shall be computed as follows:

§ 5.1.6.1 The amount of each progress payment shall first include:

- .1 That portion of the Contract Sum properly allocable to completed Work;
- .2 That portion of the Contract Sum properly allocable to materials and equipment delivered and suitably stored at the site for subsequent incorporation in the completed construction, or, if approved in advance by the Owner, suitably stored off the site at a location agreed upon in writing; and
- .3 That portion of Construction Change Directives that the Architect determines, in the Architect's professional judgment, to be reasonably justified.

§ 5.1.6.2 The amount of each progress payment shall then be reduced by:

- .1 The aggregate of any amounts previously paid by the Owner;
- .2 The amount, if any, for Work that remains uncorrected and for which the Architect has previously withheld a Certificate for Payment as provided in Article 9 of AIA Document A201–2017;
- .3 Any amount for which the Contractor does not intend to pay a Subcontractor or material supplier, unless the Work has been performed by others the Contractor intends to pay;
- .4 For Work performed or defects discovered since the last payment application, any amount for which the Architect may withhold payment, or nullify a Certificate of Payment in whole or in part, as provided in Article 9 of AIA Document A201–2017; and
- .5 Retainage withheld pursuant to Section 5.1.7.

§ 5.1.7 Retainage

§ 5.1.7.1 For each progress payment made prior to Substantial Completion of the Work, the Owner may withhold the following amount, as retainage, from the payment otherwise due:

(Insert a percentage or amount to be withheld as retainage from each Application for Payment. The amount of retainage may be limited by governing law.)

« 5.0% »

§ 5.1.7.1.1 The following items are not subject to retainage:

(Insert any items not subject to the withholding of retainage, such as general conditions, insurance, etc.)

« »

§ 5.1.7.2 Reduction or limitation of retainage, if any, shall be as follows:

(If the retainage established in Section 5.1.7.1 is to be modified prior to Substantial Completion of the entire Work, including modifications for Substantial Completion of portions of the Work as provided in Section 3.3.2, insert provisions for such modifications.)

« »

§ 5.1.7.3 Except as set forth in this Section 5.1.7.3, upon Substantial Completion of the Work, the Contractor may submit an Application for Payment that includes the retainage withheld from prior Applications for Payment pursuant to this Section 5.1.7. The Application for Payment submitted at Substantial Completion shall not include retainage as follows:

(Insert any other conditions for release of retainage upon Substantial Completion.)

« »

§ 5.1.8 If final completion of the Work is materially delayed through no fault of the Contractor, the Owner shall pay the Contractor any additional amounts in accordance with Article 9 of AIA Document A201–2017.

§ 5.1.9 Except with the Owner's prior approval, the Contractor shall not make advance payments to suppliers for materials or equipment which have not been delivered and stored at the site.

§ 5.2 Final Payment

§ 5.2.1 Final payment, constituting the entire unpaid balance of the Contract Sum, shall be made by the Owner to the Contractor when

- .1 the Contractor has fully performed the Contract except for the Contractor's responsibility to correct Work as provided in Article 12 of AIA Document A201–2017, and to satisfy other requirements, if any, which extend beyond final payment; and
- .2 a final Certificate for Payment has been issued by the Architect.

§ 5.2.2 The Owner's final payment to the Contractor shall be made no later than 30 days after the issuance of the Architect's final Certificate for Payment, or as follows:

« »

§ 5.3 Interest

Payments due and unpaid under the Contract shall bear interest from the date payment is due at the rate stated below, or in the absence thereof, at the legal rate prevailing from time to time at the place where the Project is located.

(Insert rate of interest agreed upon, if any.)

« 1 » % « Per Month »

ARTICLE 6 DISPUTE RESOLUTION

§ 6.1 Initial Decision Maker

The Architect will serve as the Initial Decision Maker pursuant to Article 15 of AIA Document A201–2017, unless the parties appoint below another individual, not a party to this Agreement, to serve as the Initial Decision Maker. *(If the parties mutually agree, insert the name, address and other contact information of the Initial Decision Maker, if other than the Architect.)*

« »
« »

x§ 6.2 Binding Dispute Resolution

For any Claim subject to, but not resolved by, mediation pursuant to Article 15 of AIA Document A201–2017, the method of binding dispute resolution shall be as follows:
(Check the appropriate box.)

[☐] Arbitration pursuant to Section 15.4 of AIA Document A201–2017

[☐] Litigation in a court of competent jurisdiction

[☒] Other *(Specify)*

« All remedies in law and equity. »

If the Owner and Contractor do not select a method of binding dispute resolution, or do not subsequently agree in writing to a binding dispute resolution method other than litigation, Claims will be resolved by litigation in a court of competent jurisdiction.

ARTICLE 7 TERMINATION OR SUSPENSION

§ 7.1 The Contract may be terminated by the Owner or the Contractor as provided in Article 14 of AIA Document A201–2017.

§ 7.1.1 If the Contract is terminated for the Owner's convenience in accordance with Article 14 of AIA Document A201–2017, then the Owner shall pay the Contractor a termination fee as follows:

(Insert the amount of, or method for determining, the fee, if any, payable to the Contractor following a termination for the Owner's convenience.)

« None. »

§ 7.2 The Work may be suspended by the Owner as provided in Article 14 of AIA Document A201–2017.

ARTICLE 8 MISCELLANEOUS PROVISIONS

§ 8.1 Where reference is made in this Agreement to a provision of AIA Document A201–2017 or another Contract Document, the reference refers to that provision as amended or supplemented by other provisions of the Contract Documents.

§ 8.2 The Owner's representative:

(Name, address, email address, and other information)

« Mark DeVore, Collegewide Director of Facilities »

« Delaware Technical and Community College, »

« PO Box 897, Dover, DE 19903 »

« Telephone Number: (302) 857-1654 »

§ 8.3 The Contractor's representative:

(Name, address, email address, and other information)

«

§ 8.4 Neither the Owner's nor the Contractor's representative shall be changed without ten days' prior notice to the other party.

§ 8.5 Insurance and Bonds

§ 8.5.1 The Owner and the Contractor shall purchase and maintain insurance as set forth in AIA Document A101™-2017, Standard Form of Agreement Between Owner and Contractor where the basis of payment is a Stipulated Sum, Exhibit A, Insurance and Bonds, and elsewhere in the Contract Documents.

§ 8.5.2 The Contractor shall provide bonds as set forth in AIA Document A101™-2017 Exhibit A, and elsewhere in the Contract Documents.

§ 8.6 Notice in electronic format, pursuant to Article 1 of AIA Document A201-2017, may be given in accordance with AIA Document E203™-2013, Building Information Modeling and Digital Data Exhibit, if completed, or as otherwise set forth below:

(If other than in accordance with AIA Document E203-2013, insert requirements for delivering notice in electronic format such as name, title, and email address of the recipient and whether and how the system will be required to generate a read receipt for the transmission.)

« N/A »

§ 8.7 Other provisions:

« »

ARTICLE 9 ENUMERATION OF CONTRACT DOCUMENTS

§ 9.1 This Agreement is comprised of the following documents:

- .1 AIA Document A101™-2017, Standard Form of Agreement Between Owner and Contractor
- .2 AIA Document A101™-2017, Exhibit A, Insurance and Bonds
- .3 AIA Document A201™-2017, General Conditions of the Contract for Construction

« »

- .5 Drawings

Number	Title	Date
Reference Section 000115 Drawing Sheets	Issue for Bid	11/04/24

- .6 Specifications

Section	Title	Date	Pages
Reference Section 000110 Table of Contents	Issue for Bid	11/04/24	In its Entirety

- .7 Addenda, if any:

Number	Date	Pages
Addendum #1	X	In its Entirety

Portions of Addenda relating to bidding or proposal requirements are not part of the Contract Documents unless the bidding or proposal requirements are also enumerated in this Article 9.

- .8 Other Exhibits:

[« X »] Supplementary and other Conditions of the Contract:

Document	Title	Date	Pages
Section 005413	Supplement to Agreement	11/04/24	In its Entirety
Section 005414	Supplement - Exhibit A	11/04/24	In its Entirety

.9 Other documents, if any, listed below:

(List here any additional documents that are intended to form part of the Contract Documents. AIA Document A201™-2017 provides that the advertisement or invitation to bid, Instructions to Bidders, sample forms, the Contractor's bid or proposal, portions of Addenda relating to bidding or proposal requirements, and other information furnished by the Owner in anticipation of receiving bids or proposals, are not part of the Contract Documents unless enumerated in this Agreement. Any such documents should be listed here only if intended to be part of the Contract Documents.)

« Section 005214 – Amendment to the Contract (/ /) »

This Agreement entered into as of the day and year first written above.

OWNER (Signature)

« Dr. Mark T. Brainard, »« President »

(Printed name and title)

CONTRACTOR (Signature)

«»«»

(Printed name and title)

Amendment to Contract for Construction
Between
Delaware Technical and Community College
And

The parties hereby agree and reaffirm that the AIA Document A101 – 2017 “Standard Form of Agreement between Owner and Contractor” between Delaware Technical and Community College (“Owner”) and _____, a _____ corporation (“Contractor”), dated _____, 202_, shall govern this transaction as supplemented by A201-2017 General Conditions for Construction and amended herein (“Contract Documents”). At times Owner and Contractor shall be collectively referred to the “Parties”.

The parties expressly agree to enter into this amendment (“Amendment”) which shall govern in the event of a conflict between the terms of the Contract Documents or any document referenced or incorporated therein, and that any contrary provision of any such document shall be superseded hereby. The parties agree to this Amendment as follows:

1. Contractor represents and warrants that it has not employed or retained any company or person, other than a bona fide employee working primarily for the firm offering professional services, to solicit or secure this agreement, and that he has not been paid or agreed to pay any person, company, corporation, individual, or firm, other than a bona fide employee working primarily for the firm offering professional services, any fee, commission, percentage, gift, or any other consideration, contingent upon or resulting from the award or making of this agreement.
2. All provisions of the Bid Package and Project manual are incorporated herein by reference as though fully set forth. In the event of a conflict between any provision of the Bid Package or Project Manual and the bid or proposal submitted by Contractor, the Bid Package and Project Manual shall control.
3. §3.3 is amended to require substantial completion of all construction not later than _____ days from the commencement of construction. Time is of the essence. If the Contractor fails to complete the work within the time specified, the Contractor shall pay liquidated damages to the Owner in the amount of \$ _____ for each calendar day of delay until the work is completed or accepted. If the Owner terminates the Contractor’s right to proceed, liquidated damages will continue to accrue until the work is completed. These liquidated damages are in addition to all sums and remedies available to Owner upon termination for cause.
4. In the event the attached contract or aggregate of contracts is in excess of \$500,000 for new construction (including painting and decorating) or \$45,000 for alteration, repair,

renovation, rehabilitation, demolition or reconstruction (including painting and decorating of buildings or works) and requires or involves the employment of mechanics and/or laborers, then the minimum wages to be paid to the various classes of laborers and mechanics shall be based upon the wages that will be determined by the Delaware Department of Labor, Division of Industrial Affairs, to be prevailing in the county in which the work is to be performed.

5. Contractor shall pay all mechanics and laborers employed directly upon the site of the work, unconditionally and not less often than once a week and without subsequent deduction or rebate on any account, the full amounts accrued at time of payment, computed at wage rates not less than the prevailing wages, regardless of any contractual relationship which may be alleged to exist between the employer and such laborers and mechanics, and shall provide sworn payroll information, as required by the Department of Labor, on a weekly basis.
6. All changes to the scope of construction shall be authorized in writing by Owner in advance. Owner shall not be liable for payment of any change order that has not received prior written authorization. The cost of any change order shall be set forth therein. If no such provision is set forth in the change order, then the cost to the Owner shall be the Contractor's costs for wages, labor costs other than wages, wage taxes, materiel, equipment rentals, insurance and subcontracts attributable to the additional activity plus a reasonable sum for overhead and profit not to exceed 15%.
7. Preference in employment of laborers, workers or mechanics shall be given to bona fide legal citizens of the State who have established citizenship by residence of at least 90 days in the State. Contractor shall pay a penalty to the Secretary of Finance equal to the amount of compensation paid to any person in violation of this section.
8. Contractor shall not substitute another subcontractor for any subcontractor whose name was set forth in the statement which accompanied the bid without the written consent of Owner. Contractor shall pay a penalty equal to 150% of the amount of the proposal or subcontract submitted by the subcontractor identified in the accompanying statement for violating this paragraph.
9. Payments are due 30 days after receipt of a valid Application for Payment. Payments due and unpaid after 30 days shall bear simple interest at the rate of 1 percent per month not greater than 12% annual percentage rate.
10. Final payment shall not be due until all non-conforming work has been corrected and all other provisions of the agreement have been met, including, but not limited to, all reporting requirements. Furthermore, a written release of mechanics' liens signed by all persons who would otherwise be entitled to avail themselves of the provisions of Chapter 27 of Title 25 of the Delaware Code, containing a notarized, verified certification signed by the Contractor that all of the persons signing the release constitute all of the persons who have furnished materials and performed labor in and for the construction, erection, building, improvement, alteration and repair to the date of the release and who would be

entitled otherwise to file mechanics' liens claims shall be provided simultaneously with the receipt of final payment.

11. Owner may terminate this agreement or suspend work hereunder for any reason authorized by applicable Delaware law.
12. §6.2 is hereby deleted. The parties reserve all remedies available at law or equity for any dispute not resolved in accordance with §6.1.
13. §7.1.1 is hereby deleted and there shall be no Termination Fee paid to Contractor. Any reference to a Termination Fee in §14.4.3 of the A201-2017 is also deleted.
14. Any and all references to attorney's fees in §10.3.3 of the A201-2017 is deleted.
15. Exhibit A Insurance and Bonds is hereby deleted except as noted in the Supplement to Agreement Between Owner and Contractor A101-2017. Contractor shall obtain all insurance required by Owner and provide proof thereof prior to execution.
16. Simultaneous with the execution of this contract, Contractor shall also execute a good and sufficient bond for the benefit of Owner, with corporate surety authorized to do business in this State, in a sum equal to 100% of the contract price and the bond form used shall be the standard form issued by the Office of Management and Budget. Owner shall have the right to terminate the contract upon receipt of notice from Contractor's surety that bond claims have been made or are anticipated to be made against Contractor on this or any other project of Contractor. If Owner elects to terminate the contract pursuant to this paragraph, it shall be deemed a termination for cause. Owner may, when it considers that its interests so require, cause judgment to be confessed upon the bond. All sums received through confession of judgment shall be paid for the credit of the Owner to the Secretary of Finance. No firm or surety, in any action brought under 29 Del C §6962, or any successor law, or on the bond required by such statute, shall assert as a defense to such action the claim that the bond given contained a limitation or restriction not provided for by Chapter 69, Title 29 of the Delaware Code, the provisions of which are incorporated herein by reference as though fully set forth.
17. Owner or any of its duly authorized representatives shall have access to any documents, books, papers, and records of Contractor (which are directly pertinent to a specific grant program) for the purpose of making an audit, examination, excerpts, and transcriptions. Contractor shall maintain all required records for at least three years after Owner makes final payment and all pending matters are closed.
18. Contractor shall submit a report to Owner not less frequently than monthly covering the general progress of the job and describing any problems or factors contributing to delay.
19. During the performance of this contract, the contractor agrees as follows:

The contractor will not discriminate against any employee or applicant for employment because of race, creed, color, sex, sexual orientation gender identity, pregnancy, or national origin. The contractor will take positive steps to ensure that applicants are employed and that employees are treated during employment without regard to their race, creed, color, sex, sexual orientation, gender identity, pregnancy, or national origin. Such action shall include, but not be limited to, the following: employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship. The contractor agrees to post in conspicuous places available to employees and applicants for employment notices to be provided by the contracting agency setting forth this nondiscrimination clause.

The contractor will, in all solicitations or advertisements for employees placed by or on behalf of the contractor, state that all qualified applicants receive consideration for employment without regard to race, creed, color, sex, sexual orientation or national origin.

20. The parties agree that this agreement shall be governed by and construed pursuant to the laws of the State of Delaware, and that the Delaware courts shall have sole and exclusive jurisdiction of any dispute arising under this Agreement.

IN WITNESS WHEREOF, the parties, through their acknowledged and duly authorized agents set forth below, have set their hand and seal on this indenture on this _____ day of _____, 202_____.

Delaware Technical and Community College

_____(Seal)
Mark T. Brainard, President

(Contractor)

_____(Seal)
By:

SECTION 00 54 13

SUPPLEMENT TO AGREEMENT BETWEEN OWNER AND CONTRACTOR A101-2017

The following supplements modify the “Standard Form of Agreement Between Owner and Contractor,” AIA Document A101-2017. Where a portion of the Standard Form of Agreement is modified or deleted by the following, the unaltered portions of the Standard Form of Agreement shall remain in effect.

ARTICLE 3: DATE OF COMMENCEMENT AND SUBSTANTIAL COMPLETION

3.1 Delete paragraph 3.1 in its entirety and replace with the following:

“The date of Commencement of the Work shall be a date set forth in a notice to proceed issued by the Owner.”

ARTICLE 5: PAYMENTS

5.1 PROGRESS PAYMENTS

5.1.3 Delete paragraph 5.1.3 in its entirety and replace with the following:

“Provided that a valid Application for Payment is received by the Architect that meets all requirements of the Contract, payment shall be made by the Owner not later than 30 days after the Owner receives the valid Application for Payment.”

5.3 Insert the interest rate of “1% per month not to exceed 12% per annum.”

ARTICLE 6: DISPUTE RESOLUTION

6.2 BINDING DISPUTE RESOLUTION

Check the box “Other” – and add the following sentence:

"Any remedies available in law or in equity."

ARTICLE 7: TERMINATION or SUSPENSION

7.1.1.1 Delete paragraph 7.1.1.1 in its entirety.

ARTICLE 8: MISCELLANEOUS PROVISIONS

8.4 Delete paragraph 8.4 in its entirety and replace with the following:

“The Contractor’s representative shall not be changed without ten days written notice to the Owner.”

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 00 54 14

SUPPLEMENT TO A101-2017 – EXHIBIT A - INSURANCE & BONDS

The following supplements modify the “Standard Form of Agreement Between Owner and Contractor,” AIA Document A101-2017 Exhibit A Insurance and Bonds. Where a portion of the Standard Form of Agreement is modified or deleted by the following, the unaltered portions of the Standard Form of Agreement shall remain in effect.

ARTICLE A.2 OWNER’S INSURANCE

A.2.1 General

Delete paragraph A.2.1 in its entirety.

A.2.2 Liability Insurance

Delete paragraph A.2.2 in its entirety, except in the case of school projects this paragraph shall remain.

A.2.3 Required Property Insurance

Delete paragraph A.2.3 in its entirety.

A.2.4 Optional Extended Property Insurance

Delete paragraph A.2.4 in its entirety.

A.2.5 Other Optional Insurance

Delete paragraph A.2.5 in its entirety.

ARTICLE A.3 CONTRACTORS INSURANCE AND BONDS

A.3.1.1 Strike the last sentence of the paragraph.

A.3.1.3 Additional Insured Obligations

In the first sentence after “coverage to include (1)” delete “(1) the Owner,”.

Strike the remainder of the first sentence beginning at the semicolon “; and (2) the Owner” through the end of the sentence.

Delete the second sentence in its entirety.

A.3.2.2.1 Insert “\$1,000,000.00” in the blank for each occurrence.

Insert “\$3,000,000.00” in the blank for general aggregate.

Insert “\$3,000,000.00” in the blank for aggregate for products-completed operations hazard.

A.3.2.3 Insert "\$1,000,000.00" in the blank for per accident.

A.3.2.6 Insert "\$500,000.00" in the blank for each accident.
Insert "\$500,000.00" in the blank for each employee.
Insert "\$500,000.00" in the blank for policy limit.

A.3.2.8 Insert "\$1,000,000.00" in the blank for per claim.
Insert "\$3,000,000.00" in the blank for in the aggregate.

A.3.2.9 Insert "\$1,000,000.00" in the blank for per claim.
Insert "\$3,000,000.00" in the blank for in the aggregate.

A.3.2.10 Insert "\$2,000,000.00" in the blank for per claim.
Insert "\$4,000,000.00" in the blank for in the aggregate.

A.3.2.11 Strike in its entirety.

A.3.2.12 Strike in its entirety.

A.3.3.2.1 Delete paragraph 3.3.2.1 in its entirety

A.3.3.2.2 Strike in its entirety.

A.3.3.2.3 Insert "\$1,000,000.00" in the blanks for per claim.
Insert "\$3,000,000.00" in the blanks for in the aggregate.

A.3.4 Insert the actual contract price in both the Payment Bond and the Performance Bond Penal Sum blanks. It must be 100% of the contract price.

Strike the last sentence in this section and replace with "Payment and Performance Bonds shall be in the standard form issued by the Delaware Office of Management and Budget."

END OF SECTION

Delaware Technical Community College
Owens Campus Student Services Center Renovation
Contract #: C9004020001

PERFORMANCE BOND

Bond Number: _____

KNOW ALL PERSONS BY THESE PRESENTS, that we, _____, as principal (“**Principal**”), and _____, a _____ corporation, legally authorized to do business in the State of Delaware, as surety (“**Surety**”), are held and firmly bound unto Delaware Technical and Community College (“**Owner**”), in the amount of _____ (\$_____), to be paid to **Owner**, for which payment well and truly to be made, we do bind ourselves, our and each and every of our heirs, executors, administrations, successors and assigns, jointly and severally, for and in the whole, firmly by these presents.

Sealed with our seals and dated this _____ day of _____, 20__.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH, that if **Principal**, who has been awarded by **Owner** that certain contract known as Contract No. _____ dated the _____ day of _____, 20__ (the “Contract”), which Contract is incorporated herein by reference, shall well and truly provide and furnish all materials, appliances and tools and perform all the work required under and pursuant to the terms and conditions of the Contract and the Contract Documents (as defined in the Contract) or any changes or modifications thereto made as therein provided, shall make good and reimburse **Owner** sufficient funds to pay the costs of completing the Contract that **Owner** may sustain by reason of any failure or default on the part of **Principal**, and shall also indemnify and save harmless **Owner** from all costs, damages and expenses arising out of or by reason of the performance of the Contract and for as long as provided by the Contract; then this obligation shall be void, otherwise to be and remain in full force and effect.

Surety, for value received, hereby stipulates and agrees, if requested to do so by **Owner**, to fully perform and complete the work to be performed under the Contract pursuant to the terms, conditions and covenants thereof, if for any cause **Principal** fails or neglects to so fully perform and complete such work.

Surety, for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of **Surety** and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition or change in or to the Contract or the work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any work to be performed or any monies due or to become due thereunder; and **Surety** hereby waives notice of any and all such extensions, modifications, omissions, additions, changes, payments, waivers, assignments, subcontracts and transfers and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to assignees, subcontractors, and other transferees shall have the same effect as to **Surety** as though done or omitted to be done by or in relation to **Principal**.

Surety hereby stipulates and agrees that no modifications, omissions or additions in or to the terms of the Contract shall in any way whatsoever affect the obligation of **Surety** and its bond.

Any proceeding, legal or equitable, under this Bond may be brought in any court of competent jurisdiction in the State of Delaware. Notices to **Surety** or Contractor may be mailed or delivered to them at their respective addresses shown below.

IN WITNESS WHEREOF, **Principal** and **Surety** have hereunto set their hand and seals, and such of them as are corporations have caused their corporate seal to be hereto affixed and these presents to be signed by their duly authorized officers, the day and year first above written.

PRINCIPAL

Name: _____

Witness or Attest: Address: _____

Name: By: _____ (SEAL)
Name:
Title:
(Corporate Seal)

SURETY

Name: _____

Witness or Attest: Address: _____

Name: By: _____ (SEAL)
Name:
Title:
(Corporate Seal)

Delaware Technical Community College
Owens Campus Student Services Center Renovation
Contract #: C9004020001

PAYMENT BOND

Bond Number: _____

KNOW ALL PERSONS BY THESE PRESENTS, that we, _____, as principal (“**Principal**”), and _____, a _____ corporation, legally authorized to do business in the State of Delaware, as surety (“**Surety**”), are held and firmly bound unto Delaware Technical and Community College (“**Owner**”), in the amount of _____ (\$_____), to be paid to **Owner**, for which payment well and truly to be made, we do bind ourselves, our and each and every of our heirs, executors, administrations, successors and assigns, jointly and severally, for and in the whole firmly by these presents.

Sealed with our seals and dated this _____ day of _____, 20__.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH, that if **Principal**, who has been awarded by **Owner** that certain contract known as Contract No. _____ dated the _____ day of _____, 20__ (the “Contract”), which Contract is incorporated herein by reference, shall well and truly pay all and every person furnishing materials or performing labor or service in and about the performance of the work under the Contract, all and every sums of money due him, her, them or any of them, for all such materials, labor and service for which **Principal** is liable, shall make good and reimburse **Owner** sufficient funds to pay such costs in the completion of the Contract as **Owner** may sustain by reason of any failure or default on the part of **Principal**, and shall also indemnify and save harmless **Owner** from all costs, damages and expenses arising out of or by reason of the performance of the Contract and for as long as provided by the Contract; then this obligation shall be void, otherwise to be and remain in full force and effect.

Surety, for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of **Surety** and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition or change in or to the Contract or the work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any work to be performed or any monies due or to become due thereunder; and **Surety** hereby waives notice of any and all such extensions, modifications, omissions, additions, changes, payments, waivers, assignments, subcontracts and transfers and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to assignees, subcontractors, and other transferees shall have the same effect as to **Surety** as though done or omitted to be done by or in relation to **Principal**.

Surety hereby stipulates and agrees that no modifications, omission or additions in or to the terms of the Contract shall in any way whatsoever affect the obligation of **Surety** and its bond.

Any proceeding, legal or equitable, under this Bond may be brought in any court of competent jurisdiction in the State of Delaware. Notices to **Surety** or Contractor may be mailed or delivered to them at their respective addresses shown below.

IN WITNESS WHEREOF, **Principal** and **Surety** have hereunto set their hand and seals, and such of them as are corporations have caused their corporate seal to be hereto affixed and these presents to be signed by their duly authorized officers, the day and year first above written.

PRINCIPAL

Name: _____

Witness or Attest: Address: _____

Name:

(Corporate Seal)

By: _____(SEAL)
Name:
Title:

SURETY

Name: _____

Witness or Attest: Address: _____

Name:

(Corporate Seal)

By: _____(SEAL)
Name:
Title:

SECTION 00 72 13

GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION
A201 - 2017

The General Conditions of this Contract are as stated in the American Institute of Architects Document AIA A201 (2017 Edition) entitled General Conditions of the Contract for Construction as revised by the Supplementary General Conditions and is part of this project manual as if herein written in full.

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 00 73 13

SUPPLEMENTARY GENERAL CONDITIONS A201-2017

The following supplements modify the "General Conditions of the Contract for Construction," AIA Document A201-2017. Where a portion of the General Conditions is modified or deleted by the Supplementary Conditions, the unaltered portions of the General Conditions shall remain in effect.

TABLE OF ARTICLES

1. GENERAL PROVISIONS
2. OWNER
3. CONTRACTOR
4. ADMINISTRATION OF THE CONTRACT
5. SUBCONTRACTORS
6. CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS
7. CHANGES IN THE WORK
8. TIME
9. PAYMENTS AND COMPLETION
10. PROTECTION OF PERSONS AND PROPERTY
11. INSURANCE AND BONDS
12. UNCOVERING AND CORRECTION OF WORK
13. MISCELLANEOUS PROVISIONS
14. TERMINATION OR SUSPENSION OF THE CONTRACT
15. CLAIMS AND DISPUTES

ARTICLE 1: GENERAL PROVISIONS

1.1 BASIC DEFINITIONS

1.1.1 THE CONTRACT DOCUMENTS

Strike the last sentence of Section 1.1.1 in its entirety and replace with the following:

“The Contract Documents also include Advertisement for Bid, Instructions to Bidder, sample forms, the Bid Form, the Contractor’s completed Bid and the Award Letter.”

Add the following Section:

“1.1.1.1 In the event of conflict or discrepancies among the Contract Documents, the Documents prepared by the State of Delaware, Delaware Technical and Community College shall take precedence over all other documents.”

1.1.8 INITIAL DECISION MAKER

Strike the last sentence of Section 1.1.8 in its entirety and add the following to the end of the remaining sentence:

“ and certify termination of the Agreement under Section 14.2.2.”

1.2 CORRELATION AND INTENT OF THE CONTRACT DOCUMENTS

1.2.1.1 Insert “if possible” at the end of the second sentence.

Add the following Sections:

“1.2.4 In the case of an inconsistency between the Drawings and the Specifications, or within either document not clarified by addendum, the better quality or greater quantity of work shall be provided in accordance with the Architect’s interpretation.”

“1.2.5 The word “PROVIDE” as used in the Contract Documents shall mean “FURNISH AND INSTALL” and shall include, without limitation, all labor, materials, equipment, transportation, services and other items required to complete the Work.”

“1.2.6 The word “PRODUCT” as used in the Contract Documents means all materials, systems and equipment.”

1.5 OWNERSHIP AND USE OF DRAWINGS, SPECIFICATIONS AND OTHER INSTRUMENTS OF SERVICE

Strike Section 1.5.1 in its entirety and replace with the following:

“All pre-design studies, drawings, specifications and other documents, including those in electronic form, prepared by the Architect under this Agreement are, and shall remain, the property of the Owner whether the Project for which they are made is executed or not. Such documents may be used by the Owner to construct one or more like Projects without the

approval of, or additional compensation to, the Architect. The Contractor, Subcontractors, Sub-subcontractors, and Material or Equipment Suppliers are authorized to use and reproduce applicable portions of the Drawings, Specifications and other documents prepared by the Architect and the Architect's consultants appropriate to and for use in the execution of their Work under the Contract Documents. They are not to be used by the Contractor or any Subcontractor, Sub-subcontractor or Material and Equipment Supplier on other Projects or for additions to this Project outside the scope of the Work without the specific written consent of the Owner, Architect and Architect's consultants.

written consent of the Owner, Architect and Architect's consultants.

ritten consent of the Owner, Architect and Architect's consultants.

The Architect shall not be liable for injury or damage resulting from the re-use of drawings and specifications if the Architect is not involved in the re-use Project. Prior to re-use of construction documents for a Project in which the Architect is not also involved, the Owner will remove from such documents all identification of the original Architect, including name, address and professional seal or stamp."

Strike Section 1.5.2 in its entirety.

1.7 DIGITAL DATA USE AND TRANSMISSION

Strike Section 1.7 in its entirety and replace with the following:

"The parties shall agree upon protocols governing transmission and use of Instruments of Service or any other information or documentation in digital form."

1.8 BUILDING INFORMATION MODELS USE AND RELIANCE

Strike Section 1.8 in its entirety.

ARTICLE 2: OWNER

2.2 EVIDENCE OF THE OWNERS FINANCIAL ARRANGEMENTS

Strike Section 2.2 in its entirety.

2.3 INFORMATION AND SERVICES REQUIRED OF THE OWNER

2.3.3 Strike 2.3.3 in its entirety.

2.3.4 Add the following sentence at the end of the paragraph:

"The Contractor, at their expense shall bear the costs to accurately identify the location of all underground utilities in the area of their excavation and shall bear all cost for any repairs required, out of failure to accurately identify said utilities."

Strike Section 2.3.6 in its entirety and replace with the following:

“2.3.6The Contractor shall be furnished free of charge (1) electronic set of the Drawings and Project Manuals. Additional sets will be furnished at the cost of reproduction, postage and handling.”

2.5 OWNER’S RIGHT TO CARRY OUT THE WORK

Add “, except as outlined in Section 3.15” after the reference to “Article 15” at the end of the last sentence of the Section.

ARTICLE 3: CONTRACTOR

3.2 REVIEW OF CONTRACT DOCUMENTS AND FIELD CONDITIONS BY CONTRACTOR

3.2.2 Add “and Owner” after “report to the Architect” in the second sentence.

3.2.4 Strike “subject to Section 15.1.7” in the second sentence.

3.2.4 Strike the third sentence.

3.3 SUPERVISION AND CONSTRUCTION PROCEDURES

Add the following Sections:

“3.3.2.1 The Contractor shall immediately remove from the Work, whenever requested to do so by the Owner, any person who is considered by the Owner or Architect to be incompetent or disposed to be so disorderly, or who for any reason is not satisfactory to the Owner, and that person shall not again be employed on the Work without the consent of the Owner or the Architect.”

“3.3.4The Contractor must provide suitable storage facilities at the Site for the proper protection and safe storage of their materials, or as otherwise identified by the specifications. Consult the Owner and the Architect before storing any materials.”

“3.3.5When any room is used as a shop, storeroom, office, etc., by the Contractor or Subcontractor(s) during the construction of the Work, the Contractor making use of these areas will be held responsible for any repairs, patching or cleaning arising from such use.”

3.4 LABOR AND MATERIALS

Add the Following Sections:

“3.4.4Before starting the Work, each Contractor shall carefully examine all preparatory Work that has been executed to receive their Work. Check carefully, by whatever means are required, to insure that its Work and adjacent, related Work, will finish to proper contours, planes and levels. Promptly notify the Architect & Owner of any defects or imperfections in preparatory Work which will in any way affect satisfactory completion of its Work. Absence of such

notification will be construed as an acceptance of preparatory Work and later claims of defects will not be recognized.”

“3.4.5 Under no circumstances shall the Contractor’s Work proceed prior to preparatory Work having been completely cured, dried and/or otherwise made satisfactory to receive this Work. Responsibility for timely installation of all materials rests solely with the Contractor responsible for that Work, who shall maintain coordination at all times.”

3.5 WARRANTY

Add the following Sections:

“3.5.3 The Contractor will guarantee all materials and workmanship against original defects, except injury from proper and usual wear when used for the purpose intended, for two years after Acceptance by the Owner, and will maintain all items in perfect condition during the period of warranty.”

“3.5.4 Defects appearing during the period of warranty will be made good by the Contractor at his expense upon demand of the Owner, it being required that all work will be in perfect condition when the period of warranty will have elapsed.”

“3.5.5 Upon notification by the Owner of a defect covered by the Contractor’s warranty, the Contractor shall respond within 4 hours of the notification.”

“3.5.6 In addition to the General Warranty there are other warranties required for certain items for different periods of time than the two years as above, and are particularly so stated in that part of the specifications referring to same. The said warranties will commence at the same time as the General Warranty.”

“3.5.7 If the Contractor fails to remedy any failure, defect or damage within a reasonable time after receipt of notice, the Owner will have the right to replace, repair, or otherwise remedy the failure, defect or damage at the Contractor’s expense.”

3.8 ALLOWANCES

Add the following Section:

“3.8.1.1 For costs to be covered under a project allowance, (included in the schedule of values) the Contractor shall submit a summary of those costs anticipated and an Allowance Access Authorization Form to the Architect and Owner, reflecting the projected costs. The Allowance Access Authorization Form must be signed by the Owner prior to initiating any work associated with the allowance.”

3.10 CONTRACTOR’S CONSTRUCTION AND SUBMITTAL SCHEDULES

3.10.1 Add “estimated” after “and the” and before “date of” in the second sentence.

3.10.2 Strike “and thereafter as necessary to maintain a current submittal schedule” in the first sentence.

3.11 DOCUMENTS AND SAMPLES AT THE SITE

Add the following Sections:

“3.11.1 During the course of the Work, the Contractor shall maintain a record set of drawings on which the Contractor shall mark the actual physical location of all piping, valves, equipment, conduit, outlets, access panels, controls, actuators, including all appurtenances that will be concealed once construction is complete, etc., including all invert elevations.”

“3.11.2 At the completion of the project, the Contractor shall obtain a set of the conformed contract drawings from the Architect, and neatly transfer all information outlined in 3.11.1 to provide a complete record of the as-built conditions.”

“3.11.3 Upon completion of the work noted in 3.11.2 the contractor shall schedule a meeting with the Architect/Engineer and Owner to review the final record drawings and closeout documents prior to submission. After this meeting the Contractor shall make adjustments per the review, and submit one (1) original markup and (2) copies of the red line drawings (as-built conditions, to the Owner and one (1) print to the Architect. In addition, attach one complete set of the as-built documents to each of the Operating and Maintenance Instructions/Manuals. The Contractor will include (2) USB drives, each containing all “red line drawings (as-built) and Closeout Documents properly tabbed in accordance with closeout requirements as defined elsewhere in the contract documents.”

3.12 SHOP DRAWINGS, PRODUCT DATA AND SAMPLES

3.12.10.2 Strike “If the Contract Documents require” from the beginning of the sentence.

3.12.10.2 Strike “to” between “professional” and certify” and replace with “shall”.

3.17 Insert “indemnify and” between “shall” and “hold” in the second sentence.

ARTICLE 4: ADMINISTRATION OF THE CONTRACT

4.2 ADMINISTRATION OF THE CONTRACT

4.2.7 Strike the first sentence and replace with the following:

“The Architect will review and approve or take other appropriate action upon the Contractor’s submittals such as Shop Drawings, Product Data and Samples for the purpose of checking for conformance with the Contract Documents.”

4.2.7 Strike the second sentence and replace with the following:

“The Architect’s action will be taken with such reasonable promptness as to cause no delay in the Work in the activities of the Owner, Contractor or separate Contractors, while allowing sufficient time in the Owner’s professional judgment to permit adequate review.”

Add the following Section:

“4.2.10.1 There will be no full-time Project Representative provided by the Owner or Architect on this project.”

“4.2.13 Add “and in compliance with all local requirements.” to the end of the sentence.”

ARTICLE 5: SUBCONTRACTORS

5.2 AWARD OF SUBCONTRACTS AND OTHER CONTRACTS FOR PORTIONS OF THE WORK

5.2.3 Strike Section 5.2.3 in its entirety and replace with the following:

“If the Owner or Architect has reasonable objection to a person or entity proposed by the Contractor, the Contractor shall propose another to whom the Owner or Architect has no reasonable objection, subject to the statutory requirements of 29 Delaware Code § 6962(d)(10)b.3 and 4.”

5.2.4 Strike Section 5.2.4 in its entirety and replace with the following:

”The Contractor may not substitute any Subcontractor listed in its Bid unless the Contractor complies with the requirements of 29 Delaware Code § 6962(d)(10)b.3 and 4. Failure to comply with this requirement shall subject the Contractor to a penalty as outlined in Section 5.2 of the Owner’s General Requirements.”

Add the following Section:

“5.2.5 The Contractor shall comply and shall ensure all Subcontractors comply with all requirements for drug testing as set forth in TITLE 19 LABOR DELAWARE ADMINISTRATIVE CODE 4000 Office of Management and Budget 4100 Division of Facilities Management 4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects.”

ARTICLE 6: CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS

6.1 OWNER’S RIGHT TO PERFORM CONSTRUCTION AND TO AWARD SEPARATE CONTRACTS

6.1.1 Strike “and waiver of subrogation” from the end of the second sentence.

6.1.4 Strike Section 6.1.4 in its entirety.

6.2 MUTUAL RESPONSIBILITY

6.2.3 Strike “shall” and replace with “may” in the second sentence.

ARTICLE 7: CHANGES IN THE WORK

(SEE ARTICLE 7: CHANGES IN WORK IN THE STATE OF DELAWARE DIVISION OF FACILITIES MANAGEMENT GENERAL REQUIREMENTS)

- 7.3.4.1 Strike “and other employee costs approved by the Architect” after “worker’s compensation insurance,”
- 7.3.4.4 Add “work attributable to the” before “change” at the end of the sentence.
- 7.4 MINOR CHANGES IN WORK
Add “unless such changes are approved” at the end of the third sentence.

ARTICLE 8: TIME

8.2 PROGRESS AND COMPLETION

8.2.1 Add the following Section:

“8.2.1.1 Refer to Project Specifications Section SUMMARY OF WORK for Contract time requirements.”

8.2.2 After “by the Contractor” strike “and” and insert “to”.

8.2.4 Add the following Section:

“8.2.4 If the Work falls behind the Progress Schedule as submitted by the Contractor, the Contractor shall employ additional labor and/or equipment necessary to bring the Work into compliance with the Progress Schedule at no additional cost to the Owner.”

8.3 DELAYS AND EXTENSION OF TIME

8.3.1 Strike “binding dispute resolution” and insert “any and all remedies at law or in equity”.

Add the following Section:

“8.3.2.1 The Contractor shall update the status of the suspension, delay, or interruption of the Work with each Application for Payment. (The Contractor shall report the termination of such cause immediately upon the termination thereof.) Failure to comply with this procedure shall constitute a waiver for any claim for adjustment of time or price based upon said cause.”

Strike Section 8.3.3 in its entirety and replace with the following:

8.3.3 “Except in the case of a suspension of the Work directed by the Owner, an extension of time under the provisions of Section 8.3.1 shall be the Contractor’s sole remedy in the progress of the Work and there shall be no payment or compensation to the Contractor for any expense or damage resulting from the delay.”

Add the following Section:

“8.3.4 By permitting the Contractor to work after the expired time for completion of the project, the Owner does not waive their rights under the Contract.”

ARTICLE 9: PAYMENTS AND COMPLETION

9.2 SCHEDULE OF VALUES

Add the following Sections:

“9.2.1 The Schedule of Values shall be submitted using AIA Document G703, Continuation Sheet to G702.”

“9.2.2 The Schedule of Values is to include a line item for Project Closeout Document Submittal. The value of this item is to be no less than 1.5% of the initial contract amount.”

9.3 APPLICATIONS FOR PAYMENT

9.3.1 Strike Section 9.3.1 in its entirety and replace with the following:

“At least ten days before the date established for each progress payment, the Contractor shall submit to the Architect an itemized Application for Payment prepared in accordance with the schedule of values for completed portions of the Work. The application shall be notarized, and supported by all data substantiating the Contractor’s right to payment that the Owner or Architect require, such as copies of requisitions, and releases and waivers of liens from Subcontractors and suppliers, and shall reflect retainage.”

Add the following Sections:

“9.3.1.3 Application for Payment shall be submitted on AIA Document G702 “Application and Certificate for Payment”, supported by AIA Document G703 “Continuation Sheet”. Said Applications shall be fully executed and notarized.”

“9.3.4 Until Closeout Documents have been received and outstanding items completed the Owner will pay 95% (ninety-five percent) of the amount due the Contractor on account of progress payments.”

“9.3.5 The Contractor shall provide a current and updated Progress Schedule to the Architect with each Application for Payment. Failure to provide Schedule will be just cause for rejection of Application for Payment.”

9.5 DECISIONS TO WITHHOLD CERTIFICATION

Add the following Subsections to 9.5.1:

- .8 failure to provide a current Progress Schedule;
- .9 a lien or attachment is filed;
- .10 failure to comply with mandatory requirements for maintaining Record Documents.

9.6 PROGRESS PAYMENTS

9.6.1 Strike Section 9.6.1 in its entirety and replace with the following:

“9.6.1 After the Architect has approved and issued a Certificate for Payment, payment shall be made by the Owner within 30 days after Owner’s receipt of the Certificate for Payment.”

9.6.8 Strike “Provided the Owner has fulfilled its payment obligations under the Contract Documents,” in the first sentence.

9.7 FAILURE OF PAYMENT

Strike Section 9.7 in its entirety and replace with the following:

“If the Architect does not issue a Certificate for Payment, through no fault of the Contractor, within fourteen days after receipt of the Contractor’s Application for Payment, or if the Owner does not pay the Contractor within thirty days after the date established in the Contract Documents, the amount certified by the Architect, then the Contractor may, upon thirty additional days’ notice to the Owner and Architect, stop the Work until payment of the amount owing has been received. The Contract Time shall be extended appropriately and the Contract Sum shall be increased by the amount of the Contractor’s reasonable costs of shutdown, delay and start-up, plus interest as provided for in the Contract Documents.”

l be extended appropriately and the Contract Sum shall be increased by the amount of the Contractor’s reasonable costs of shutdown, delay and start-up, plus interest as provided for in the Contract Documents.”

be extended appropriately and the Contract Sum shall be increased by the amount of the Contractor’s reasonable costs of shutdown, delay and start-up, plus interest as provided for in the Contract Documents.”

9.8 SUBSTANTIAL COMPLETION

9.8.3 At the end of Section 9.8.3, add the following sentence:

“If the Architect is required to make more than 2 inspections of the same portion of work, the Contractor shall be responsible for all costs associated with subsequent inspections including but not limited to any Architect’s fees.”

9.8.5 Strike “shall” and insert “may” in the second sentence.

9.8.5 Insert “1/2 of the” after “make payment of” in the second sentence.

9.9 PARTIAL OCCUPANCY OR USE

9.9.1 Strike the first sentence and replace with the following (the remainder of the Section remains as written):

“The Owner may occupy or use any completed or partially completed portion of the Work at any stage when such portion is designated by separate agreement with the Contractor, provided such occupancy or use authorized by public authorities having jurisdiction over the Project.”

9.10.2 Strike “to remain in force after final payment is currently in effect” after “required by the Contract Documents” and replace with “shall remain in force until final payment is completed” in the first sentence.

9.10.4.4 Strike “if permitted by the Contract Documents,”

ARTICLE 10: PROTECTION OF PERSONS AND PROPERTY

10.1 SAFETY PRECAUTIONS AND PROGRAMS

Add the following Sections:

10.1.1 Each Contractor shall develop a safety program in accordance with the Occupational Safety and Health Act of 1970. A copy of said plan shall be furnished to the Owner and Architect prior to the commencement of that Contractor's Work.

10.1.2 Each Contractor shall appoint a Safety Representative. Safety Representatives shall be someone who is on site on a full time basis. If deemed necessary by the Owner or Architect, Contractor Safety meetings will be scheduled. The attendance of all Safety Representatives will be required. Minutes will be recorded of said meetings by the Contractor and will be distributed to all parties as well as posted in all job offices/trailers etc.

10.2 SAFETY OF PERSONS AND PROPERTY

Add the following Section:

10.2.4.1 As required in the Hazardous Chemical Act of June 1984, all vendors supplying any material that may be defined as hazardous must provide Material Safety Data Sheets for those products. Any chemical product should be considered hazardous if it has a caution warning on the label relating to a potential physical or health hazard, if it is known to be present in the work place, and if employees may be exposed under normal conditions or in foreseeable emergency situations. Material Safety Data Sheets shall be provided directly to the Owner, along with the shipping slips that include those products.

10.2.5 Strike the second sentence in its entirety.

10.3 HAZARDOUS MATERIALS AND SUBSTANCES

10.3.3 Strike Section 10.3.3 in its entirety.

10.3.4 Insert "hazardous" in the last sentence after "handling of such".

10.3.6 Strike Section 10.3.6 in its entirety.

ARTICLE 11: INSURANCE AND BONDS

11.1 CONTRACTOR'S INSURANCE AND BONDS

11.1.1 Strike "Owner" from the third sentence.

11.2 OWNER'S LIABILITY INSURANCE

Strike 11.2 in its entirety, except that in the case of school projects in which case Section 11.2 shall remain.

11.3 WAIVERS OF SUBROGATION

Delete Section 11.3 in its entirety

11.4 LOSS OF USE, BUSINESS INTERRUPTION, AND DELAY IN COMPLETION
INSURANCE

Delete Section 11.4 in its entirety

ARTICLE 12: UNCOVERING AND CORRECTION OF WORK

12.2.2 AFTER SUBSTANTIAL COMPLETION

Add the following Section:

“12.2.2.1.1 At any time during the progress of the Work, or in any case where the nature of the defects will be such that it is not expedient to have corrected, the Owner, at its option, will have the right to deduct such sum, or sums, of money from the amount of the Contract as it considers justified to adjust the difference in value between the non-conforming work and that required under contract including any damage to the structure.”

12.2.2.1 Strike all references to “one year” or “one-year” and replace with “two years”.

12.2.2.2 Strike “one-year” and replace with “two years”.

12.2.2.3 Strike “one-year” and replace with “two years”.

12.2.5 Strike “one-year” and replaced with “two years”.

ARTICLE 13: MISCELLANEOUS PROVISIONS

13.1 GOVERNING LAW

Strike the last sentence.

13.4 TESTS AND INSPECTIONS

13.4.1 Strike the last sentence and replace with the following:

“The Owner shall pay for tests, inspections, or approvals where building codes or applicable laws or regulations prohibit the Owner from delegating their cost to the Contractor.”

13.5 INTEREST

Strike “the date payment is due at such rate as the parties may agree upon in writing or, in the absence thereof, at the legal rate prevailing from time to time at the place where the Project is located” and replace with “30 days of presentment of the authorized Certificate of Payment at the annual rate of 12% or 1% per month.”

Insert the following Section:

“13.6 CONFLICTS WITH FEDERAL STATUTES OR REGULATIONS

13.6.1 If any provision, specifications or requirement of the Contract Documents conflict or is inconsistent with any statute, law or regulation of the government of the United State of America, the Contractor shall notify the Architect and Owner immediately upon discovery.”

ARTICLE 14: TERMINATION OR SUSPENSION OF THE CONTRACT

14.1 TERMINATION BY THE CONTRACTOR

14.1.1.4 Insert “, upon the Contractors’ request,” after “furnish to the Contractor”.

14.1.3 Strike “and profit on Work not executed, and” after “as well as reasonable overhead” and replace with “, profit, and reasonable”

14.3 SUSPENSION BY OWNER FOR CONVENIENCE

14.3.2 Strike “Adjustment of the Contract Sum shall include profit”.

14.4 TERMINATION BY THE OWNER FOR CONVENIENCE

14.4.3 Strike Section 14.4.3 in its entirety and replace with the following:

“In case of such termination for the Owner’s convenience, the Contractor shall be entitled to receive payment for Work executed, and reasonable costs incurred by reason of such termination along with reasonable overhead.”

ARTICLE 15: CLAIMS AND DISPUTES

15.1 CLAIMS

15.1.2 TIME LIMITS ON CLAIMS

Strike the last sentence.

15.1.3 NOTICE OF CLAIM

Strike all references to “21” and replace with “45”.

15.1.5 CLAIMS FOR ADDITIONAL COSTS

Strike the first sentence and replace with the following:

“Contractor shall not proceed to execute any portion of the Work that is subject to the Claim without prior approval of the costs or method of payment for the costs associated with the Claim as determined by the Architect and approved by the Owner.”

15.1.7 WAIVER OF CLAIMS FOR CONSEQUENTIAL DAMAGES

Strike Section 15.1.7 in its entirety.

15.2 INITIAL DECISION

15.2.1 Strike “and binding dispute resolution” in the fourth sentence and replace with “or any and all remedies at law or in equity”.

15.2.5 Strike Section 15.2.5 in its entirety and replace with the following:

“The Architect will approve or reject Claims by written decision, which shall state the reasons therefore and shall notify the parties of any change in the Contract Sum or Contract Time or both. The approval or rejection of a Claim by the Architect shall be subject to mediation and any or all remedies at law or in equity.”

15.2.6 Strike Section 15.2.6 and its sub-Sections in their entirety.

15.3 MEDIATION

15.3.1 Strike “binding dispute resolution” and replace with “any or all remedies at law or in equity”.

15.3.2 Strike “, shall be administered by the American Arbitration Association in accordance with its Construction Industry Mediation Procedure in effect on the date of the Agreement,” in the first sentence.

15.3.2 Strike all references to “binding dispute resolution” and replace with “any or all remedies at law and in equity”.

15.3.3 Strike Section 15.3.3 in its entirety.

15.4 ARBITRATION

Strike Section 15.4 and its Subsections in their entirety.

END OF SECTION

DIVISION 00 73 43 – WAGE RATE REQUIREMENTS

1.01 GENERAL CONDITIONS

- A. Prevailing wages are applicable to this project per the requirements noted in Delaware's Prevailing Wage Law, 29 Del.C. §6960 and Regulations as noted.
- B. Prevailing Wage Rates, as directed by Delaware Law, must be adhered to where applicable. Davis-Bacon Act wages, in accordance with Subchapter IV of Chapter 31 of Title 40 USC, must be adhered to. Contractors must pay the higher of the two rates.
- C. A copy of the Prevailing Wages letter from the Delaware Department of Labor for the project is attached here to.

THIS PAGE INTENTIONALLY LEFT BLANK



State of Delaware
Department of labor
Office of Construction Industry Enforcement
655 S. Dupont Hwy
Suite 2h
Dover, DE 19901

Via Electronic and Regular Mail

June 17, 2024
Ms. Jessica Martin
Buck Simpers Architect + Associates, Inc.
954 Justison Street
Wilmington, DE 19801

Re: C9004020001 Delaware Technical Community College - Owens Campus Student Services Center, Sussex County, DE

Dear Ms. Martin:

I am responding to your request for a category determination for the C9004020001 Delaware Technical Community College - Owens Campus Student Services Center, which is a state funded construction project located in Sussex County, DE. The work consists of renovation of college student services center in Georgetown, DE, including new finishes, ceilings, partitions, acoustical treatment, millwork, mechanical/electrical work, and limited reconfiguration of space. You estimate the total cost of construction for this project to be \$737,772.23.

Based upon the information you provided the Department of Labor has determined that this project is a Building Construction project.

Delaware's Prevailing Wage Regulations provide that the rates applicable to a project are the rates in effect on the date of publication of the specifications for that project. I have enclosed a certified copy of the March 15, 2024, prevailing wage rates for Building Construction to be included in your bid specification. However, please be advised that, in the event that a contract for a project is not executed within one hundred and twenty (120) days from the earliest date the specifications were published, the rates in effect at the time of the execution of the contract shall be the applicable rates for the project.

This determination is directed solely to the parties identified herein. It is based on the unique facts relevant to this matter. It does not constitute precedent and should not be cited as such by future parties.

Pursuant to 19 Del. Chapter 36, all contractors must obtain their Contractor Registration certificate prior to performing construction services or maintenance work throughout Delaware. Contractors can submit an application by visiting the Delaware One Stop https://onestop.delaware.gov/Operate_Contractors.

Additionally, effective July 26, 2023, SSI for SB102 amends Delaware's Prevailing Law 29 Del.C.6960(b) now requires these applicable prevailing wage rates to be paid to all workers who perform custom fabrication work regardless of where the work is performed. For further information regarding custom fabrication see 29 Del.C.6902(8).

Lastly, please see the enclosed debarment list. Entities/individuals listed shall not be permitted to bid on, be awarded or work on Delaware State funded construction projects, in the timeframe specified, as provided for under 29 Del.C.6960 or other applicable State statutes.

If you have any questions or I can provide any additional assistance, please do not hesitate to contact me at .

Sincerely,



KEVIN THOMAS
KEVIN.THOMAS@DELAWARE.GOV

Enclosures

STATE OF DELAWARE
DEPARTMENT OF LABOR
DIVISION OF INDUSTRIAL AFFAIRS OFFICE
CONSTRUCTION INDUSTRY ENFORCEMENT
PHONE: (302) 318-2769


Mailing Address:
252 Chapman Road
Suite 210
Newark, DE 19702

Located at:
252 Chapman Road
Suite 210
Newark, DE 19702

PREVAILING WAGES FOR BUILDING CONSTRUCTION
EFFECTIVE MARCH 15, 2024 – AMENDED JUNE 14, 2024

CLASSIFICATION	NEW CASTLE	KENT	SUSSEX
ASBESTOS WORKERS	29.03	35.74	52.03
BOILERMAKERS	86.90	44.09	64.81
BRICKLAYERS	65.24	65.24	65.24
CARPENTERS	61.06	61.06	49.30
CEMENT FINISHERS	91.66	65.19	50.55
ELECTRICAL LINE WORKERS	57.72	49.50	37.74
ELECTRICIANS	81.62	81.62	81.62
ELEVATOR CONSTRUCTORS	113.66	81.88	103.45
GLAZIERS	83.30	83.30	71.92
INSULATORS	67.20	67.20	67.20
IRON WORKERS	75.32	75.32	75.32
LABORERS	55.65	55.65	55.65
MILLWRIGHTS	85.36	85.36	68.57
PAINTERS	57.60	57.60	57.60
PILEDRIERS	88.62	49.97	40.41
PLASTERERS	37.89	37.89	28.08
PLUMBERS/PIPEFITTERS/STEAMFITTERS	77.30	80.57	71.11
POWER EQUIPMENT OPERATORS	81.29	81.29	81.29
ROOFERS-COMPOSITION	29.45	29.41	31.82
ROOFERS-SHINGLE/SLATE/TILE	23.34	27.77	21.83
SHEET METAL WORKERS	84.53	84.53	84.53
SOFT FLOOR LAYERS	60.12	60.12	60.12
SPRINKLER FITTERS	70.52	70.52	70.52
TERRAZZO/MARBLE/TILE FNRS	70.79	70.79	79.54
TERRAZZO/MARBLE/TILE STRS	78.73	78.73	88.22
TRUCK DRIVERS	55.25	34.83	27.11

CERTIFIED: 06/17/2024

BY:  Fran Chudzick
ADMINISTRATOR, OFFICE OF LABOR LAW ENFORCEMENT

NOTE: THESE RATES ARE PROMULGATED AND ENFORCED PURSUANT TO THE PREVAILING WAGE REGULATIONS ADOPTED BY THE DEPARTMENT OF LABOR ON APRIL 3, 1997.

CLASSIFICATIONS OF WORKERS ARE DETERMINED BY THE DEPARTMENT OF LABOR. FOR ASSISTANCE IN CLASSIFYING WORKERS, OR FOR A COPY OF THE REGULATORY CLASSIFICATIONS, PHONE (302) 318-2769.

NON-REGISTERED APPRENTICES MUST BE PAID THE MECHANIC'S RATE.

PROJECT:



PREVAILING WAGE DEBARMENT LIST

The following contractors have been debarred for violations of the prevailing wage law 29Del.C. §6960 or other applicable State statutes.

Therefore, no public construction contract in this State shall be bid on, awarded to, or received by contractors and individuals on this list for a period of (3) three years from the date of the judgment or as deemed by a court of competent jurisdiction.

Contractor	Address	Date of Debarment
Mullen Brothers, Inc. and Daniel Mullen, individually	3375 Garnett Road, Boothwyn, PA 19060	Indefinite/ Civil Contempt
State Contractors Corporation, and Jose Oscar Rivera, individually	13004 Hathaway Drive Silver Spring, MD 20906	Indefinite/ 19 <u>Del.C.</u> 2374(f)
Green Granite and Jason Green, individually	604 Heatherbrooke Court Avondale, PA 19311	Indefinite/ Civil Contempt
Pro Image Landscaping, Inc. and Owner(s) individually	23 Commerce Street Wilmington, DE 19801 and/or 2 Cameo Road Claymont, DE 19703	Indefinite/19 <u>Del.C.</u> §108 & 10 <u>Del.C.</u> 542(c)
Liberty Mechanical, LLC and Owner(s), individually	2032 Duncan Road Wilmington, DE 19801	Indefinite/ 19 <u>Del.C.</u> 2374(f)
Integrated Mechanical and Fire Systems Inc. and Allison Sheldon, individually	4601 Governor Printz Boulevard Wilmington, DE 19809	Indefinite/19 <u>Del.C.</u> §108 & 10 <u>Del.C.</u> 542(c)
ACH 1, INC.	873 Salem Church Road Newark, DE 19702	Indefinite/19 <u>Del.C.</u> 6960

Updated: July 6, 2022



Planning

Architecture

Interior Design

Graphic Design

Project Management

00 73 44 - RELEASE FORM FOR ELECTRONIC FILES

OWNER: Delaware Technical Community College

PROJECT: Owens Campus – Student Services Center Renovations

LIST OF DRAWINGS: _____

USAGE FEE: \$0.00 DATE: _____

Definitions:

All electronic information and other instruments of service provided by BSA+A and its consultants, 954 Justison Street, Wilmington, DE 19801, which include everything transmitted on electronic storage media, from a website, or via the Internet, is known as the Data. The Recipient is the undersigned firm or individual requesting the Data.

Terms:

In accepting and utilizing the Data, the Recipient agrees with the following Terms:

1. The General Contractor/Construction Manager, and every subcontractor using the Data shall each return one signed copy of this Release Form to BSA+A.
2. DISTRIBUTION AND COORDINATION: The Recipient will not distribute the Data to any other firm or individual, except for the Recipient's consultants or subcontractors. If BSA+A issues an update or change in the Data during the course of the project, the General Contractor/Construction Manager is responsible for distribution and coordination. Transfer of electronic data does not include subsequent updates and revisions
2. USE: The Data will be used only for the specific project and owner listed above. None of the Data will be used for any other project or purpose, at this or any other site. Indicia/Title Block may be removed at the discretion of the design professional. The
3. OWNERSHIP: Copyright and ownership of the Data are not transferred to the Recipient, or to any other party. BSA+A and/or Owner retain all rights to the Data.
4. ACCURACY: Design data is never perfect. The information is not guaranteed to be accurate. The method of data transfer cannot be guaranteed to be error-free, durable, or compatible with the Recipient's hardware, software or output systems. Any defects discovered by the Recipient shall be reported to BSA+A. **Contractors and subcontractors are not relieved of their normal responsibilities to independently check, coordinate & verify information and dimensions, and to familiarize themselves thoroughly with the project. The electronic data received should not be relied upon for existing building conditions, which must be verified as required.**
5. Electronic data (**REVIT 2023 Model and AutoCAD 2023 Files**) shall be provided for use as background plans only. Contractor shall be responsible for verification of all dimensions and revisions. Contractor shall not have, copy or reproduce details, elevations, sections, schedules or other similar data.
6. Neither BSA+A nor its consultants are not to be held liable for any damages attributable to the use of the Data, or changes and additions made to the Data by you or your consultants or subcontractors. The Undersigned agrees, to the fullest extent permitted by law, to indemnify and hold BSA+A and its consultants harmless from any damage, liability or cost, including reasonable attorney's fees and costs of defense, arising from any changes made by anyone other than the Firm or from any reuse of the drawings and data without the prior written consent of BSA+A and its consultants.
7. This agreement shall be governed by the laws of Delaware.
8. The Undersigned agrees to make payment of _____ processing fee for each consultant's electronic files to BSA+A prior to release of any electronic media release.

Buck Simpers
Architect
+ Associates, Inc.

954 Justison Street
Wilmington, DE 19801

302.658.9300
fax 658.1125

www.simpers.com

GENERAL CONTRACTOR, CONSTRUCTION MANAGER, OR SUBCONTRACTOR:

Print Clearly:

Company: _____

Name: _____

Address: _____

Phone: _____ **Email:** _____

Signed _____ **Date:** _____

NOT FOR BIDDING PURPOSES

SECTION 00 81 13

GENERAL REQUIREMENTS

TABLE OF ARTICLES

1. GENERAL
2. OWNER
3. CONTRACTOR
4. ADMINISTRATION OF THE CONTRACT
5. SUBCONTRACTORS
6. CONSTRUCTION BY OWNER OR SEPARATE CONTRACTORS
7. CHANGES IN THE WORK
8. TIME
9. PAYMENTS AND COMPLETION
10. PROTECTION OF PERSONS AND PROPERTY
11. INSURANCE AND BONDS
12. UNCOVERING AND CORRECTION OF WORK
13. MISCELLANEOUS PROVISIONS
14. TERMINATION OR SUSPENSION OF THE CONTRACT

ARTICLE 1: GENERAL

1.1 CONTRACT DOCUMENTS

1.1.1 The intent of the Contract Documents is to include all items necessary for the proper execution and completion of the Work by the Contractor. The Contract Documents are complementary and what is required by one shall be as binding as if required by all. Performance by the Contractor shall be required to an extent consistent with the Contract Documents and reasonably inferable from them as being necessary to produce the intended results.

1.1.2 Work including material purchases shall not begin until the Contractor is in receipt of a bonafide State of Delaware Purchase Order. Any work performed or material purchases prior to the issuance of the Purchase Order is done at the Contractor's own risk and cost.

1.2 EQUALITY OF EMPLOYMENT OPPORTUNITY ON PUBLIC WORKS

1.2.1 For Public Works Projects financed in whole or in part by state appropriation the Contractor agrees that during the performance of this contract:

1. The Contractor will not discriminate against any employee or applicant for employment because of race, creed, sex, color, sexual orientation, gender identity or national origin. The Contractor will take positive steps to ensure that applicants are employed and that employees are treated during employment without regard to their race, creed, sex, color, sexual orientation, gender identity or national origin. Such action shall include, but not be limited to, the following: employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship. The Contractor agrees to post in conspicuous places available to employees and applicants for employment notices to be provided by the contracting agency setting forth this nondiscrimination clause.
2. The Contractor will, in all solicitations or advertisements for employees placed by or on behalf of the Contractor, state that all qualified applicants will receive consideration for employment without regard to race, creed, sex, color, sexual orientation, gender identity or national origin."

ARTICLE 2: OWNER

(NO ADDITIONAL GENERAL REQUIREMENTS – SEE SUPPLEMENTARY GENERAL CONDITIONS)

ARTICLE 3: CONTRACTOR

3.1 Schedule of Values: The successful Bidder shall within twenty (20) days after receiving notice to proceed with the work, furnish to the Owner a complete schedule of values on the various items comprising the work.

- 3.2 Subcontracts: Upon approval of Subcontractors, the Contractor shall award their Subcontracts as soon as possible after the signing of their own contract and see that all material, their own and those of their Subcontractors, are promptly ordered so that the work will not be delayed by failure of materials to arrive on time.
- 3.3 Before commencing any work or construction, the General Contractor is to consult with the Owner as to matters in connection with access to the site and the allocation of Ground Areas for the various features of hauling, storage, etc.
- 3.4 The Contractor shall supervise and direct the Work, using the Contractor's best skill and attention. The Contractor shall be solely responsible for and have control over construction means, methods, techniques, sequences and procedures and for coordinating all portions of the Work under the Contract, unless the Contract Documents give other specific instructions.
- 3.5 The Contractor shall enforce strict discipline and good order among the Contractor's employees and other persons carrying out the Contract. The Contractor shall not permit employment of unfit persons or persons not skilled in tasks assigned to them.
- 3.6 The Contractor warrants to the Owner that materials and equipment furnished will be new and of good quality, unless otherwise permitted, and that the work will be free from defects and in conformance with the Contract Documents. Work not conforming to these requirements, including substitutions not properly approved, may be considered defective. If required by the Owner, the Contractor shall furnish evidence as to the kind and quality of materials and equipment provided.
- 3.7 Unless otherwise provided, the Contractor shall pay all sales, consumer, use and other similar taxes, and shall secure and pay for required permits, fees, licenses, and inspections necessary for proper execution of the Work.
- 3.8 The Contractor shall comply with and give notices required by laws, ordinances, rules, regulations, and lawful orders of public authorities bearing on performance of the Work. The Contractor shall promptly notify the Owner if the Drawings and Specifications are observed to be at variance therewith.
- 3.9 The Contractor shall be responsible to the Owner for the acts and omissions of the Contractor's employees, Subcontractors and their agents and employees, and other persons performing portions of the Work under contract with the Contractor.
- 3.10 The Contractor shall keep the premises and surrounding area free from accumulation of waste materials or rubbish caused by operations under the Contract. At completion of the Work the Contractor shall remove from and about the Project all waste materials, rubbish, the Contractor's tools, construction equipment, machinery and surplus materials. The Contractor shall be responsible for returning all damaged areas to their original conditions.
- 3.11 STATE LICENSE AND TAX REQUIREMENTS
- 3.11.1 Each Contractor and Subcontractor shall be licensed to do business in the State of Delaware and shall pay all fees and taxes due under State laws. In conformance with Section 2503, Chapter 25, Title 30, Delaware Code, "the Contractor shall furnish the Delaware Department of Finance within ten (10) days after entering into any contract

with a contractor or subcontractor not a resident of this State, a statement of total value of such contract or contracts together with the names and addresses of the contracting parties.”

3.12 The Contractor shall comply with all requirements set forth in Section 6962, Chapter 69, Title 29 of the Delaware Code.

3.13 During the contract Work, the Contractor and each Subcontractor, shall implement an Employee Drug Testing Program in accordance with OMB Regulation 4104 - “Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on “Large Public Works Projects”. “Large Public Works” is based upon the current threshold required for bidding Public Works as set by the Purchasing and Contracting Advisory Council.

ARTICLE 4: ADMINISTRATION OF THE CONTRACT

4.1 CONTRACT SURETY

4.1.1 PERFORMANCE BOND AND LABOR AND MATERIAL PAYMENT BOND

4.1.2 All bonds will be required as follows unless specifically waived elsewhere in the Bidding Documents.

4.1.3 Contents of Performance Bonds – The bond shall be in the form approved by the Office of Management and Budget. The bond shall be conditioned upon the faithful compliance and performance by the successful bidder of each and every term and condition of the contract and the proposal, plans, specifications, and bid documents thereof. Each term and condition shall be met at the time and in the manner prescribed by the Contract, Bid documents and the specifications, including the payment in full to every person furnishing material or performing labor in the performance of the Contract, of all sums of money due the person for such labor and material. (The bond shall also contain the successful bidder’s guarantee to indemnify and save harmless the State and the agency from all costs, damages and expenses growing out of or by reason of the Contract in accordance with the Contract.)

4.1.4 Invoking a Performance Bond – The agency may, when it considers that the interest of the State so requires, cause judgement to be confessed upon the bond.

4.1.5 Within twenty (20) days after the date of notice of award of contract, the Bidder to whom the award is made shall furnish a Performance Bond and Labor and Material Payment Bond, each equal to the full amount of the Contract price to guarantee the faithful performance of all terms, covenants and conditions of the same. The bonds are to be issued by an acceptable Bonding Company licensed to do business in the State of Delaware and shall be issued in duplicate.

4.1.6 Performance and Payment Bonds shall be maintained in full force (warranty bond) for a period of two (2) years after the date of the Certificate for Final Payment. The Performance Bond shall guarantee the satisfactory completion of the Project and that the Contractor will make good any faults or defects in his work which may develop during the period of said guarantees as a result of improper or defective workmanship, material or apparatus, whether furnished by themselves or their Sub-Contractors. The Payment Bond shall guarantee that

the Contractor shall pay in full all persons, firms or corporations who furnish labor or material or both labor and material for, or on account of, the work included herein. The bonds shall be paid for by this Contractor. The Owner shall have the right to demand that the proof parties signing the bonds are duly authorized to do so.

4.2 FAILURE TO COMPLY WITH CONTRACT

4.2.1 If any firm entering into a contract with the State, or Agency that neglects or refuses to perform or fails to comply with the terms thereof, the Agency which signed the Contract may terminate the Contract and proceed to award a new contract in accordance with this Chapter 69, Title 29 of the Delaware Code or may require the Surety on the Performance Bond to complete the Contract in accordance with the terms of the Performance Bond. Nothing herein shall preclude the Agency from pursuing additional remedies as otherwise provided by law.

4.3 CONTRACT INSURANCE AND CONTRACT LIABILITY

4.3.1 In addition to the bond requirements stated in the Bid Documents, each successful Bidder shall purchase adequate insurance for the performance of the Contract and, by submission of a Bid, agrees to indemnify and save harmless and to defend all legal or equitable actions brought against the State, any Agency, officer and/or employee of the State, for and from all claims of liability which is or may be the result of the successful Bidder's actions during the performance of the Contract.

4.3.2 The purchase or nonpurchase of such insurance or the involvement of the successful Bidder in any legal or equitable defense of any action brought against the successful Bidder based upon work performed pursuant to the Contract will not waive any defense which the State, its agencies and their respective officers, employees and agents might otherwise have against such claims, specifically including the defense of sovereign immunity, where applicable, and by the terms of this section, the State and all agencies, officers and employees thereof shall not be financially responsible for the consequences of work performed, pursuant to said contract.

4.4 RIGHT TO AUDIT RECORDS

4.4.1 The Owner shall have the right to audit the books and records of a Contractor or any Subcontractor under any Contract or Subcontract to the extent that the books and records relate to the performance of the Contract or Subcontract.

4.4.2 Said books and records shall be maintained by the Contractor for a period of seven (7) years from the date of final payment under the Prime Contract and by the Subcontractor for a period of seven (7) years from the date of final payment under the Subcontract.

ARTICLE 5: SUBCONTRACTORS

5.1 SUBCONTRACTING REQUIREMENTS

5.1.1 All contracts for the construction, reconstruction, alteration or repair of any public building (not a road, street or highway) shall be subject to the following provisions:

1. A contract shall be awarded only to a Bidder whose Bid is accompanied by a statement containing, for each Subcontractor category, the name and address (city or town and State only – street number and P.O. Box addresses not required) of the subcontractor whose services the Bidder intends to use in performing the Work and providing the material for such Subcontractor category.
 2. A Bid will not be accepted nor will an award of any Contract be made to any Bidder which, as the Prime Contractor, has listed itself as the Subcontractor for any Subcontractor unless:
 - A. It has been established to the satisfaction of the awarding Agency that the Bidder has customarily performed the specialty work of such Subcontractor category by artisans regularly employed by the Bidder's firm;
 - B. That the Bidder is duly licensed by the State to engage in such specialty work, if the State requires licenses; and
 - C. That the Bidder is recognized in the industry as a bona fide Subcontractor or Contractor in such specialty work and Subcontractor category.
- 5.1.2 The decision of the awarding Agency as to whether a Bidder who list itself as the Subcontractor for a Subcontractor category shall be final and binding upon all Bidders, and no action of any nature shall lie against any awarding agency or its employees or officers because of its decision in this regard.
- 5.1.3 After such a Contract has been awarded, the successful Bidder shall not substitute another Subcontractor for any Subcontractor whose name was set forth in the statement which accompanied the Bid without the written consent of the awarding Agency.
- 5.1.4 No Agency shall consent to any substitution of Subcontractors unless the Agency is satisfied that the Subcontractor whose name is on the Bidders accompanying statement:
- A. Is unqualified to perform the work required;
 - B. Has failed to execute a timely reasonable Subcontract;
 - C. Has defaulted in the performance on the portion of the work covered by the Subcontract; or
 - D. Is no longer engaged in such business.
- 5.1.5 Should a Bidder be awarded a contract, such successful Bidder shall provide to the agency the taxpayer identification license numbers of such subcontractors. Such numbers shall be provided on the later of the date on which such subcontractor is required to be identified or the time the contract is executed. The successful Bidder shall provide to the agency to which it is contracting, within 30 days of entering into such public works contract, copies of all Delaware Business licenses of subcontractors and/or independent contractors that will perform work for such public works contract. However, if a subcontractor or independent contractor is hired or contracted more than 20 days after the Bidder entered the public works

contract the Delaware Business license of such subcontractor or independent contractor shall be provided to the agency within 10 days of being contracted or hired.

- 5.1.6 The Contractor may employ additional Subcontractors on the jobsite only after submitting a copy of the Subcontractor's Employee Drug Testing Program to the Owner for approval. A Contractor or Subcontractor shall not commence work until the Owner has concluded its review and determined that the submitted Employee Drug Testing Program complies with OMB Regulation 4104.

5.2 **PENALTY FOR SUBSTITUTION OF SUBCONTRACTORS**

- 5.2.1 Should the Contractor fail to utilize any or all of the Subcontractors in the Contractor's Bid statement in the performance of the Work on the public bidding, the Contractor shall be penalized in the amount of (project specific amount*). The Agency may determine to deduct payments of the penalty from the Contractor or have the amount paid directly to the Agency. Any penalty amount assessed against the Contractor may be remitted or refunded, in whole or in part, by the Agency awarding the Contract, only if it is established to the satisfaction of the Agency that the Subcontractor in question has defaulted or is no longer engaged in such business. No claim for the remission or refund of any penalty shall be granted unless an application is filed within one year after the liability of the successful Bidder accrues. All penalty amounts assessed and not refunded or remitted to the contractor shall be reverted to the State.

*one (1) percent of contract amount not to exceed \$10,000

5.3 **ASBESTOS ABATEMENT**

- 5.3.1 The selection of any Contractor to perform asbestos abatement for State-funded projects shall be approved by the Office of Management and Budget, Division of Facilities Management pursuant to Chapter 78 of Title 16.

5.4 **STANDARDS OF CONSTRUCTION FOR THE PROTECTION OF THE PHYSICALLY HANDICAPPED**

- 5.4.1 All Contracts shall conform with the standard established by the Delaware Architectural Accessibility Board unless otherwise exempted by the Board.

5.5 **CONTRACT PERFORMANCE**

- 5.5.1 Any firm entering into a Public Works Contract that neglects or refuses to perform or fails to comply with its terms, the Agency may terminate the Contract and proceed to award a new Contract or may require the Surety on the Performance Bond to complete the Contract in accordance with the terms of the Performance Bond.

ARTICLE 6: CONSTRUCTION BY OWNER OR SEPARATE CONTRACTORS

- 6.1 The Owner reserves the right to simultaneously perform other construction or operations related to the Project with the Owner's own forces, and to award separate contracts in connection with other portions of the Project or other Projects at the same site.

- 6.2 The Contractor shall afford the Owner and other Contractors reasonable opportunity for access and storage of materials and equipment, and for the performance of their activities, and shall connect and coordinate their activities with other forces as required by the Contract Documents.

ARTICLE 7: CHANGES IN THE WORK

- 7.1 The Owner, without invalidating the Contract, may order changes in the Work consisting of Additions, Deletions, Modifications or Substitutions, with the Contract Sum and Contract completion date being adjusted accordingly. Such changes in the Work shall be authorized by written Change Order signed by the Professional, as the duly authorized agent, the Contractor and the Owner.
- 7.2 The Contract Sum and Contract Completion Date shall be adjusted only by a fully executed Change Order.
- 7.3 The additional cost, or credit to the Owner resulting from a change in the Work shall be by mutual agreement of the Owner, Contractor and the Architect. In all cases, this cost or credit shall be based on the 'DPE' wages required and the "invoice price" of the materials/equipment needed.
- 7.3.1 "DPE" shall be defined to mean "direct personnel expense". Direct payroll expense includes prevailing wage rates plus a maximum multiplier of 1.35 times DPE. For example, if the prevailing wage rate is \$50/hour, the DPE would be \$67.50/hour (50 x 1.35).
- 7.3.2 "Invoice price" of materials/equipment shall be defined to mean the actual cost of materials and/or equipment that is paid by the Contractor, (or subcontractor), to a material distributor, direct factory vendor, store, material provider, or equipment leasing entity. Rates for equipment that is leased and/or owned by the Contractor or subcontractor(s) shall not exceed those listed in the latest version of the "Means Building Construction Cost Data" publication.
- 7.3.3 In addition to the above, the General Contractor is allowed a fifteen percent (15%) markup for overhead and profit for additional work performed by the General Contractor's own forces. For additional subcontractor work, the Subcontractor is allowed a fifteen (15) percent overhead and profit on change order work above and beyond the direct costs stated previously. To this amount, the General Contractor will be allowed a mark-up not exceeding seven and one half percent (7.5%) on the subcontractors work. These mark-ups shall include all costs including, but not limited to: overhead, profit, bonds, insurance, supervision, etc. No markup is permitted on the work of the subcontractors subcontractor. No additional costs shall be allowed for changes related to the Contractor's onsite superintendent/staff, or project manager, unless a change in the work changes the project duration and is identified by the CPM schedule. There will be no other costs associated with the change order.

ARTICLE 8: TIME

- 8.1 Time limits, if any, are as stated in the Project Manual. By executing the Agreement, the Contractor confirms that the stipulated limits are reasonable, and that the Work will be completed within the anticipated time frame.

- 8.2 If progress of the Work is delayed at any time by changes ordered by the Owner, by labor disputes, fire, unusual delay in deliveries, abnormal adverse weather conditions, unavoidable casualties or other causes beyond the Contractor's control, the Contract Time shall be extended for such reasonable time as the Owner may determine.
- 8.3 Any extension of time beyond the date fixed for completion of the construction and acceptance of any part of the Work called for by the Contract, or the occupancy of the building by the Owner, in whole or in part, previous to the completion shall not be deemed a waiver by the Owner of his right to annul or terminate the Contract for abandonment or delay in the matter provided for, nor relieve the Contractor of full responsibility
- 8.4 **SUSPENSION AND DEBARMENT**
- 8.4.1 Per Section 6962(d)(14), Title 29, Delaware Code, "Any Contractor who fails to perform a public works contract or complete a public works project within the time schedule established by the Agency in the Invitation To Bid, may be subject to Suspension or Debarment for one or more of the following reasons: a) failure to supply the adequate labor supply ratio for the project; b) inadequate financial resources; or, c) poor performance on the Project."
- 8.4.2 "Upon such failure for any of the above stated reasons, the Agency that contracted for the public works project may petition the Director of the Office of Management and Budget for Suspension or Debarment of the Contractor. The Agency shall send a copy of the petition to the Contractor within three (3) working days of filing with the Director. If the Director concludes that the petition has merit, the Director shall schedule and hold a hearing to determine whether to suspend the Contractor, debar the Contractor or deny the petition. The Agency shall have the burden of proving, by a preponderance of the evidence, that the Contractor failed to perform or complete the public works project within the time schedule established by the Agency and failed to do so for one or more of the following reasons: a) failure to supply the adequate labor supply ratio for the project; b) inadequate financial resources; or, c) poor performance on the project. Upon a finding in favor of the Agency, the Director may suspend a Contractor from Bidding on any project funded, in whole or in part, with public funds for up to 1 year for a first offense, up to 3 years for a second offense and permanently debar the Contractor for a third offense. The Director shall issue a written decision and shall send a copy to the Contractor and the Agency. Such decision may be appealed to the Superior Court within thirty (30) days for a review on the record."
- 8.5 **RETAINAGE**
- 8.5.1 Per Section 6962(d)(5) a.3, Title 29, Delaware Code: The Agency may at the beginning of each public works project establish a time schedule for the completion of the project. If the project is delayed beyond the completion date due to the Contractor's failure to meet their responsibilities, the Agency may forfeit, at its discretion, all or part of the Contractor's retainage.
- 8.5.2 This forfeiture of retainage also applies to the timely completion of the punchlist. A punchlist will only be prepared upon the mutual agreement of the Owner, Architect and Contractor. Once the punchlist is prepared, all three parties will by mutual agreement, establish a schedule for its completion. Should completion of the punchlist be delayed beyond the established date due to the Contractor's failure to meet their responsibilities,

the Agency may hold permanently, at its discretion, all or part of the Contractor's retainage.

ARTICLE 9: PAYMENTS AND COMPLETION

9.1 APPLICATION FOR PAYMENT

9.1.1 Applications for payment shall be made upon AIA Document G702. There will be a five percent (5%) retainage on all Contractor's monthly invoices until completion of the project. This retainage may become payable upon receipt of all required closeout documentation, provided all other requirements of the Contract Documents have been met.

9.1.2 A date will be fixed for the taking of the monthly account of work done. Upon receipt of Contractor's itemized application for payment, such application will be audited, modified, if found necessary, and approved for the amount. Statement shall be submitted to the Owner.

9.1.3 Section 6516, Title 29 of the Delaware Code annualized interest is not to exceed 12% per annum beginning thirty (30) days after the "presentment" (as opposed to the date) of the invoice.

9.2 PARTIAL PAYMENTS

9.2.1 Any public works Contract executed by any Agency may provide for partial payments at the option of the Owner with respect to materials placed along or upon the sites or stored at secured locations, which are suitable for use in the performance of the contract.

9.2.2 When approved by the agency, partial payment may include the values of tested and acceptable materials of a nonperishable or noncontaminative nature which have been produced or furnished for incorporation as a permanent part of the work yet to be completed, provided acceptable provisions have been made for storage.

9.2.2.1 Any allowance made for materials on hand will not exceed the delivered cost of the materials as verified by invoices furnished by the Contractor, nor will it exceed the contract bid price for the material complete in place.

9.2.3 If requested by the Agency, receipted bills from all Contractors, Subcontractors, and material, men, etc., for the previous payment must accompany each application for payment. Following such a request, no payment will be made until these receipted bills have been received by the Owner.

9.3 SUBSTANTIAL COMPLETION

9.3.1 When the building has been made suitable for occupancy, but still requires small items of miscellaneous work, the Owner will determine the date when the project has been substantially completed.

9.3.2 If, after the Work has been substantially completed, full completion thereof is materially delayed through no fault of the Contractor, and without terminating the Contract, the Owner may make payment of the balance due for the portion of the Work fully completed and accepted. Such payment shall be made under the terms and conditions governing final payment that it shall not constitute a waiver of claims.

- 9.3.3 On projects where commissioning is included, the commissioning work as defined in the specifications must be complete prior to the issuance of substantial completion.
- 9.4 FINAL PAYMENT
- 9.4.1 Final payment, including the five percent (5%) retainage if determined appropriate, shall be made within thirty (30) days after the Work is fully completed and the Contract fully performed and provided that the Contractor has submitted the following closeout documentation (in addition to any other documentation required elsewhere in the Contract Documents):
- 9.4.1.1 Evidence satisfactory to the Owner that all payrolls, material bills, and other indebtedness connected with the work have been paid,
- 9.4.1.2 An acceptable RELEASE OF LIENS,
- 9.4.1.3 Copies of all applicable warranties,
- 9.4.1.4 As-built drawings,
- 9.4.1.5 Operations and Maintenance Manuals,
- 9.4.1.6 Instruction Manuals,
- 9.4.1.7 Consent of Surety to final payment.
- 9.4.1.8 The Owner reserves the right to retain payments, or parts thereof, for its protection until the foregoing conditions have been complied with, defective work corrected and all unsatisfactory conditions remedied.

ARTICLE 10: PROTECTION OF PERSONS AND PROPERTY

- 10.1 The Contractor shall be responsible for initiating, maintaining, and supervising all safety precautions and programs in connection with the performance of the Contract. The Contractor shall take all reasonable precautions to prevent damage, injury or loss to: workers, persons nearby who may be affected, the Work, materials and equipment to be incorporated, and existing property at the site or adjacent thereto. The Contractor shall give notices and comply with applicable laws ordinances, rules regulations, and lawful orders of public authorities bearing on the safety of persons and property and their protection from injury, damage, or loss. The Contractor shall promptly remedy damage and loss to property at the site caused in whole or in part by the Contractor, a Subcontractor, or anyone directly or indirectly employed by any of them, or by anyone for whose acts they may be liable.
- 10.2 The Contractor shall notify the Owner in the event any existing hazardous material such as lead, PCBs, asbestos, etc. is encountered on the project. The Owner will arrange with a qualified specialist for the identification, testing, removal, handling and protection against exposure or environmental pollution, to comply with applicable regulation laws and ordinances. The Contractor and Architect will not be required to participate in or to perform this operation. Upon completion of this work, the Owner will notify the Contractor and Architect in writing the area has been cleared and approved by the authorities in order for the

work to proceed. The Contractor shall attach documentation from the authorities of said approval.

- 10.3 As required in the Hazardous Chemical Information Act of June 1984, all vendors supplying any materials that may be defined as hazardous, must provide Material Safety Data Sheets for those products. Any chemical product should be considered hazardous if it has a warning caution on the label relating to a potential physical or health hazard, if it is known to be present in the work place, and if employees may be exposed under normal conditions or in any foreseeable emergency situation. Material Safety Data Sheets must be provided directly to the Owner along with the shipping slips that include those products.
- 10.4 The Contractor shall certify to the Owner that materials incorporated into the Work are free of all asbestos. This certification may be in the form of Material Safety Data Sheet (MSDS) provided by the product manufacturer for the materials used in construction, as specified or as provided by the Contractor.

ARTICLE 11: INSURANCE AND BONDS

- 11.1 The Contractor shall carry all insurance required by law, such as Unemployment Insurance, etc. The Contractor shall carry such insurance coverage as they desire on their own property such as a field office, storage sheds or other structures erected upon the project site that belong to them and for their own use. The Subcontractors involved with this project shall carry whatever insurance protection they consider necessary to cover the loss of any of their personal property, etc.
- 11.2 Upon being awarded the Contract, the Contractor shall obtain a minimum of two (2) copies of all required insurance certificates called for herein, and submit one (1) copy of each certificate, to the Owner, within 20 days of contract award.
- 11.3 Bodily Injury Liability and Property Damage Liability Insurance shall, in addition to the coverage included herein, include coverage for injury to or destruction of any property arising out of the collapse of or structural injury to any building or structure due to demolition work and evidence of these coverages shall be filed with and approved by the Owner.
- 11.4 The Contractor's Property Damage Liability Insurance shall, in addition to the coverage noted herein, include coverage on all real and personal property in their care, custody and control damaged in any way by the Contractor or their Subcontractors during the entire construction period on this project.
- 11.5 Builders Risk (including Standard Extended Coverage Insurance) on the existing building during the entire construction period, may be provided by the Contractor under this contract. The Owner shall insure the existing building and all of its contents and all this new alteration work under this contract during entire construction period for the full insurable value of the entire work at the site. Note, however, that the Contractor and their Subcontractors shall be responsible for insuring building materials (installed and stored) and their tools and equipment whenever in use on the project, against fire damage, theft, vandalism, etc.
- 11.6 Certificates of the insurance company or companies stating the amount and type of coverage, terms of policies, etc., shall be furnished to the Owner, within 20 days of contract award.

11.7 The Contractor shall, at their own expense, (in addition to the above) carry the following forms of insurance:

11.7.1 Contractor's Contractual Liability Insurance

Minimum coverage to be:

Bodily Injury	\$1,000,000 \$3,000,000	for each occurrence aggregate
Property Damage	\$1,000,000 \$3,000,000	for each occurrence aggregate

11.7.2 Contractor's Protective Liability Insurance

Minimum coverage to be:

Bodily Injury	\$1,000,000 \$3,000,000	for each occurrence aggregate
Property Damage	\$1,000,000 \$3,000,000	for each occurrence aggregate

11.7.3 Automobile Liability Insurance

Minimum coverage to be:

Bodily Injury	\$1,000,000 \$1,000,000	for each person for each occurrence
Property Damage	\$500,000	per accident

11.7.4 Prime Contractor's and Subcontractors' policies shall include contingent and contractual liability coverage in the same minimum amounts as 11.7.1 above.

11.7.5 Workmen's Compensation (including Employer's Liability):

11.7.5.1 Minimum Limit on employer's liability to be as required by law.

11.7.5.2 Minimum Limit for all employees working at one site.

11.7.6 Certificates of Insurance must be filed with the Owner guaranteeing fifteen (15) days prior notice of cancellation, non-renewal, or any change in coverages and limits of liability shown as included on certificates.

11.7.7 Social Security Liability

11.7.7.1 With respect to all persons at any time employed by or on the payroll of the Contractor or performing any work for or on their behalf, or in connection with or arising out of the

Contractor's business, the Contractor shall accept full and exclusive liability for the payment of any and all contributions or taxes or unemployment insurance, or old age retirement benefits, pensions or annuities now or hereafter imposed by the Government of the United States and the State or political subdivision thereof, whether the same be measured by wages, salaries or other remuneration paid to such persons or otherwise.

11.7.7.2 Upon request, the Contractor shall furnish Owner such information on payrolls or employment records as may be necessary to enable it to fully comply with the law imposing the aforesaid contributions or taxes.

11.7.7.3 If the Owner is required by law to and does pay any and/or all of the aforesaid contributions or taxes, the Contractor shall forthwith reimburse the Owner for the entire amount so paid by the Owner.

ARTICLE 12: UNCOVERING AND CORRECTION OF WORK

12.1 The Contractor shall promptly correct Work rejected by the Owner or failing to conform to the requirements of the Contract Documents, whether observed before or after Substantial Completion and whether or not fabricated, installed or completed, and shall correct any Work found to be not in accordance with the requirements of the Contract Documents within a period of two years from the date of Substantial Completion, or by terms of an applicable special warranty required by the Contract Documents. The provisions of this Article apply to work done by Subcontractors as well as to Work done by direct employees of the Contractor.

12.2 At any time during the progress of the work, or in any case where the nature of the defects shall be such that it is not expedient to have them corrected, the Owner, at their option, shall have the right to deduct such sum, or sums, of money from the amount of the contract as they consider justified to adjust the difference in value between the defective work and that required under contract including any damage to the structure.

ARTICLE 13: MISCELLANEOUS PROVISIONS

13.1 CUTTING AND PATCHING

13.1.1 The Contractor shall be responsible for all cutting and patching. The Contractor shall coordinate the work of the various trades involved.

13.2 DIMENSIONS

13.2.1 All dimensions shown shall be verified by the Contractor by actual measurements at the project site. Any discrepancies between the drawings and specifications and the existing conditions shall be referred to the Owner for adjustment before any work affected thereby has been performed.

13.3 LABORATORY TESTS

13.3.1 Any specified laboratory tests of material and finished articles to be incorporated in the work shall be made by bureaus, laboratories or agencies approved by the Owner and reports of such tests shall be submitted to the Owner. The cost of the testing shall be paid for by the Contractor.

13.3.2 The Contractor shall furnish all sample materials required for these tests and shall deliver same without charge to the testing laboratory or other designated agency when and where directed by the Owner.

13.4 ARCHAEOLOGICAL EVIDENCE

13.4.1 Whenever, in the course of construction, any archaeological evidence is encountered on the surface or below the surface of the ground, the Contractor shall notify the authorities of the State Historic Preservation Office and suspend work in the immediate area for a reasonable time to permit those authorities, or persons designated by them, to examine the area and ensure the proper removal of the archaeological evidence for suitable preservation by the Division of Historical and Cultural Affairs.

13.5 GLASS REPLACEMENT AND CLEANING

13.5.1 The General Contractor shall replace without expense to the Owner all glass broken during the construction of the project. If job conditions warrant, at completion of the job the General Contractor shall have all glass cleaned and polished.

13.6 WARRANTY

13.6.1 For a period of two (2) years from the date of substantial completion, as evidenced by the date of final acceptance of the work, the contractor warrants that work performed under this contract conforms to the contract requirements and is free of any defect of equipment, material or workmanship performed by the contractor or any of his subcontractors or suppliers. However, manufacturer's warranties and guarantees, if for a period longer than two (2) years, shall take precedence over the above warranties. The contractor shall remedy, at his own expense, any such failure to conform or any such defect. The protection of this warranty shall be included in the Contractor's Performance Bond.

ARTICLE 14: TERMINATION OR SUSPENSION OF THE CONTRACT

14.1 If the Contractor defaults or persistently fails or neglects to carry out the Work in accordance with the Contract Documents or fails to perform a provision of the Contract, the Owner, after seven days written notice to the Contractor, may make good such deficiencies and may deduct the cost thereof from the payment then or thereafter due the Contractor. Alternatively, at the Owner's option, and the Owner may terminate the Contract and take possession of the site and of all materials, equipment, tools, and machinery thereon owned by the Contractor and may finish the Work by whatever method the Owner may deem expedient. If the costs of finishing the Work exceed any unpaid compensation due the Contractor, the Contractor shall pay the difference to the Owner.

14.2 "If the continuation of this Agreement is contingent upon the appropriation of adequate state, or federal funds, this Agreement may be terminated on the date beginning on the first fiscal year for which funds are not appropriated or at the exhaustion of the appropriation. The Owner may terminate this Agreement by providing written notice to the parties of such non-appropriation. All payment obligations of the Owner will cease upon the date of termination. Notwithstanding the foregoing, the Owner agrees that it

will use its best efforts to obtain approval of necessary funds to continue the Agreement by taking appropriate action to request adequate funds to continue the Agreement.”

END OF SECTION

NOT FOR BIDDING PURPOSES

SECTION 00 81 14 – DRUG TESTING

1. DRUG TESTING

1.1 Drug Testing must be in the following forms:

1. Employee Drug Testing Report Form
2. Report of Positive Results

NOT FOR BIDDING PURPOSES

THIS PAGE INTENTIONATELLELY LEFT BLANK

EMPLOYEE DRUG TESTING REPORT FORM

Period Ending: _____

4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects requires that Contractors and Subcontractors who work on Large Public Works Contracts funded all or in part with public funds maintain testing data that includes but is not limited to the data elements below.

Project Number: _____

Project Name: _____

Contractor/Subcontractor Name: _____

Contractor/Subcontractor Address: _____

Number of employees who worked on the jobsite during the report period: _____

Number of employees subject to random testing during the report period: _____

Number of Negative Results _____ Number of Positive Results _____

Action taken on employee(s) in response to a failed or positive random test:

Date: _____

This form is not required to be submitted to the Owner. Included as a reference to show information required to be maintained by the Contractor. The Owner shall have the right to periodically audit all Contractor and Subcontractor test results at the Contractor's or Subcontractor's offices (or by other means to make the data available for inspection by the Owner).

**EMPLOYEE DRUG TESTING
REPORT OF POSITIVE RESULTS**

4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects requires that Contractors and Subcontractors who work on Large Public Works Contracts funded all or in part with public funds to notify the Owner in writing of a positive random drug test.

Project Number: _____

Project Name: _____

Contractor/Subcontractor Name: _____

Contractor/Subcontractor Address: _____

Name of employee with positive test result: _____

Last 4 digits of employee SSN: _____

Date test results received: _____

Action taken on employee in response to a positive test result:

Authorized Representative of Contractor/Subcontractor: _____
(typed or printed)

Authorized Representative of Contractor/Subcontractor: _____
(signature)

Date: _____

This form shall be sent by mail to the Owner within 24 hours of receipt of test results.

Enclose this test results form in a sealed envelope with the notation "Drug Testing Form – DO NOT OPEN" on the face thereof and place in a separate mailing envelope.

Delaware Technical and Community College
Stanton Campus Child Development Center
Contract #: DTCC-C94523002

**AFFIDAVIT OF
CRAFT TRAINING COMPLIANCE**

We, the contractor, hereby certify that we and all applicable subcontractors will abide by the contractor and subcontractor craft training requirements outlined below for the duration of the contract. Craft training must be provided by a contractor and/or subcontractor for each craft on a project for which there are Delaware Department of Labor approved and registered training programs or, if the contractor and/or subcontractor meets the requirements under Title 29, Chapter 69, Section 6960A.(b)(1)c.1.-3., payment may be made in accordance with Title 29, Chapter 69, Section 6960A.(b)(1)d. A list of crafts for which there are approved and registered training programs is maintained by the Delaware Department of Labor and can be found at:

<https://laborfiles.delaware.gov/main/det/apprenticeship/DE%20Craft%20Training%20Occupation%20List%20Effective%20March%201%202022.pdf>. If you have questions regarding craft training programs, please submit all questions in writing to the Delaware Department of Labor at: apprenticeship@delaware.gov. ***This Affidavit of Craft Training Compliance must be submitted prior to contract execution.***

In accordance with Title 29, Chapter 69, Section 6960A.(a)(1), a contract relating to a public works project under § 6962 of Title 29 must include a craft training program for each craft in the project if at the time the contractor executes a public works contract, all of the following apply:

- a. A project meets the prevailing wage requirement under Section 6960 of Title 29.
- b. The contractor employs 10 or more total employees.
- c. The project is not a federal highway project, except for the project under Section 6962(c)(11) of Title 29.
- d. There is an apprenticeship program for a craft in the project on the list of crafts under Section 204(b)(2) of Title 19.

Pursuant to Title 29, Chapter 69, Section 6960A.(a)(2), ***a contractor must commit that all subcontractors provide craft training*** if paragraph (a)(1) of this section applies to the subcontractor. Failure to provide required craft training or payment on the project may subject the successful contractor and/or subcontractor(s) to penalties as outlined in Title 29, Chapter 69, Section 6960A.(d)(1)-(3).

Craft(s): _____

Contractor Name: _____

Contractor Address: _____

Contractor Program

Registration Number(s) _____

On this line also indicate whether DE, Other State (identify) or US Registration Number

Or

☐ A payment has been made in the amount established under Section 204(b)(2)b.2. of Title 19, for the craft into the Delaware Department of Labor's Apprenticeship and Training Fund.

Or

☐ Craft Training requirements are not applicable because:

Authorized Representative (typed or printed): _____

Authorized Representative (signature): _____

Title: _____

State of Delaware)

County of _____)

ss:

Before me, a notary public, in and for said county and state, personally appeared, _____, who acknowledged to me that she/he did execute the foregoing instrument on behalf of _____.

IN TESTIMONY WHEREOF, I have subscribed my name and affixed my official seal this ____ day of _____ 20__.

Notary Public

Commission Expires _____

THIS PAGE MUST BE SIGNED AND NOTARIZED TO BE CONSIDERED.

SECTION 01 10 00 - SUMMARY

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Project information.
2. Work covered by Contract Documents.
3. Access to site.
4. Coordination with occupants.
5. Work restrictions.
6. Specification and drawing conventions.
7. Miscellaneous provisions.

B. Related Requirements:

1. Section 015000 "Temporary Facilities and Controls" for limitations and procedures governing temporary use of Owner's facilities.

1.3 PROJECT INFORMATION

A. Project Identification: Interior Renovation of College Student Services Center

1. Project Location: 21179 College Dr. Georgetown, DE 19947

B. Owner: Delaware Technical and Community College

C. Architect: Buck Simperts Architect and Associates (BSA+A)

D. MEP Consulting Engineer: Gipe Associates, Inc.

E. Acoustics Consultant: Metropolitan Acoustics

1.4 WORK COVERED BY CONTRACT DOCUMENTS

A. The Work of Project is defined by the Contract Documents and consists of the following:

1. Interior Renovation of existing interior space.

B. Type of Contract:

1. Project will be constructed under a single prime contract.

1.5 CONSTRUCTION SCHEDULE

- A. The contractor is required to submit a detailed project schedule seven (7) days after receipt of Notice to Proceed and to begin its submittal process. The Project Schedule is an integral part of this contract. This schedule is to include a contingency of **10** days lost to delays during construction for any reason (weather, owner delay)
1. Unless otherwise specifically authorized, the Contractor shall absorb, without additional compensation, all costs of working beyond normal hours to maintain job progress in accordance with the current construction schedule.
 2. Construction is to begin on or about **01/06/2025**
Substantial Completion by:
 - **04/11/2025 Base Bid**
 - **05/30/2025 Including Alternates**

1.6 ACCESS TO SITE

- A. General: Contractor shall have limited use of Project site for construction operations as indicated on Drawings by the Contract limits and as indicated by requirements of this Section.
- B. Use of Site: Limit use of Project site to areas within the Contract limits indicated. Do not disturb portions of Project site beyond areas in which the Work is indicated.
1. Limits: Confine construction operations, storage, laydown, and construction staging areas to site areas identified on the drawings
 2. Keep driveways, loading areas, walkways and entrances serving premises clear and available to Owner, Owner's employees, and emergency vehicles at all times. Do not use these areas for parking or storage of materials.
- C. Condition of Existing Building: Maintain portions of existing building affected by construction operations in a weathertight condition throughout construction period. Repair damage caused by construction operations.

1.7 COORDINATION WITH OCCUPANTS

- A. You are to generally contain your work to the limit of disturbance identified on the drawings. Provide necessary protection and clear paths around the construction area for public accessibility and to meet the requirements of the Delaware State Fire Marshal for emergency access to exits. Contractor will be responsible to keep all areas of the project, including, but not limited to public roadways, parking areas, interior corridors, existing rooms soiled by construction traffic on a daily basis.
- B. Adjacent Owner Occupancy: The owner will occupy the attached building and the parking area during entire construction period. Contractor is to cooperate with concurrent users during

construction operations to minimize conflicts. Perform the Work so as not to interfere with adjacent user operations. Maintain existing exits unless otherwise indicated.

1. Maintain access to existing walkways, corridors, and other adjacent occupied or used facilities. Do not close or obstruct walkways, corridors, or other occupied or used facilities without written permission from Owner and authorities having jurisdiction.
2. Provide not less than 72 hours' notice to Owner of activities that will affect Owner's operations.

1.8 WORK BY OWNER

- A. General: Cooperate fully with Owner so work may be carried out smoothly, without interfering with or delaying work under this Contract or work by Owner. Coordinate the Work of this Contract with work performed by Owner.
- B. Preceding Work: Owner has performed limited demolition work. Any items left are to become the responsibility of the contractor to protect or remove and properly dispose of.
- C. Subsequent Work: Owner will perform the following additional work at site after Substantial Completion. Completion of that work will depend on successful completion of preparatory work under this Contract.
 1. Furniture purchase and Installation.
 - a. To be installed at completion of project
 2. Owner supplied simulation and training equipment
 - a. Coordinate and verify equipment installation and location with Mechanical, Electrical and installation (including required opening sizes)
 - b. Coordinate schedule of work with other work to limit possible damage to equipment
 - c. Contractor to protect equipment from damage after installation
 - d. Contractor to provide photographs of equipment prior to installation to verify an existing damage or imperfections.

1.9 WORK RESTRICTIONS

- A. Work Restrictions, General: Comply with restrictions on construction operations.
 1. Comply with limitations on use of public streets and with other requirements of authorities having jurisdiction.
- B. On-Site Work Hours: Work hours are defined as follows:
 1. Weekday Hours: 7:00am-4:00pm
 - a. Extended work hours with owner approval: 6:00am-8:00am
 2. Weekend Hours: As arranged with owner prior approval (min. 24 hour notice)
 3. Holiday Hours: As arranged with owner prior approval (min. 24 hour notice)
- C. Contractor is responsible for having a competent project superintendent/foreman on-site during all work performed under its contract. In the event the Contractor has non-English speaking employees or subcontractors on the project, they shall have a superintendent or foreman on site, at all times, who speaks English and can communicate with Contractor's employees. Should the Contractor fail to meet this requirement, at any time, The Owner may direct all Work to stop

until the proper supervision is on site. The Contractor will be responsible for maintaining the project work schedule and make up at its own expense, any delay to the Schedule resulting from the work stoppage.

- D. Nonsmoking site: Smoking, use of tobacco products and e-cigarettes is not permitted anywhere on the job site and school property. Violators of this policy are to be placed on notice for the first offense and removed from the job site with a second offense
- E. Firearms, ammunition, explosives, etc. are prohibited from anywhere on the property. Contractor employees, subcontractors or contract workers violating this policy are to be immediately removed from the site. Law enforcement official may be notified.
- F. Controlled Substances: Use or possession of controlled substances or illegal drugs is prohibited on the property. Contractor employees, subcontractors or contract workers violating this policy are to be immediately removed from the site. Law enforcement official may be notified.
 - 1. All public works contracts (paid) with public funds must include provisions requiring the contractor, its agents and employees to implement (a) mandatory drug testing program(s) for all employees or agents working on the job site in non-clerical positions. Provisions governing mandatory drug testing shall be incorporated into all public works contracts..." "The rules governing the administration of such tests by the contractor shall be promulgated by the Director of the Office of Management and Budget." [in accordance with 29Del.C.§6908(a)(b)]
- G. Interaction or Photography of employees, staff, students, or guests are prohibited. Violators are to be immediately removed from the construction site for the duration of the project
- H. Radios or other devices that could affect the adjacent users are prohibited

1.10 SPECIFICATION AND DRAWING CONVENTIONS

- A. Specification Content: The Specifications use certain conventions for the style of language and the intended meaning of certain terms, words, and phrases when used in particular situations. These conventions are as follows:
 - 1. Imperative mood and streamlined language are generally used in the Specifications. The words "shall," "shall be," or "shall comply with," depending on the context, are implied where a colon (:) is used within a sentence or phrase.
 - 2. Specification requirements are to be performed by Contractor unless specifically stated otherwise.
- B. Division 01 General Requirements: Requirements of Sections in Division 01 apply to the Work of all Sections in the Specifications.
- C. Drawing Coordination: Requirements for materials and products identified on Drawings are described in detail in the Specifications. One or more of the following are used on Drawings to identify materials and products:
 - 1. Terminology: Materials and products are identified by the typical generic terms used in the individual Specifications Sections.

2. Abbreviations: Materials and products are identified by abbreviations scheduled on Drawings.
3. Keynoting: Materials and products are identified by reference keynotes referencing Specification Section numbers found in this Project Manual.

1.11 MISCELLANEOUS PROVISIONS

- A. General: Except for items or materials to be salvaged, recycled, or otherwise reused, remove waste materials from Project site and legally dispose of them in a landfill or incinerator acceptable to authorities having jurisdiction.
 1. Provide properly sized containers and schedule pick up schedule to not allow waste materials to accumulate on-site
 2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
 3. Burying, or disposing of waste material on site is not permitted
- B. Hazardous Materials
 1. Owner is to be notified before disposing of any hazardous materials
 2. Hazardous materials are to be properly disposed of following Federal, State, and local requirements.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SUMMARY

THIS PAGE INTENTIONATELLY LEFT BLANK

SECTION 01 21 00 – ALLOWANCES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements governing allowances.
 - 1. Certain items are specified in the Contract Documents by allowances. Allowances have been established in lieu of additional requirements and to defer selection of actual materials and equipment to a later date when direction will be provided to Contractor. If necessary, additional requirements will be issued by Change Order.
- B. Types of allowances include the following:
 - 1. Contingency allowance.

1.3 COORDINATION

- A. Coordinate allowance items with other portions of the Work. Furnish templates as required to coordinate installation.

1.4 CONTINGENCY ALLOWANCES

- A. Use the contingency allowance only as directed by Architect for Owner's purposes and only by Change Orders that indicate amounts to be charged to the allowance. Submit costs for approval before proceeding with contingency allowance work
- B. Contractor's overhead, profit, and related costs for products and equipment ordered by Owner under the contingency allowance are included in the allowance to be included as a line item in the Contract Sum. These costs include delivery, installation, taxes, insurance, equipment rental, and similar costs.
- C. At Project closeout, unused amounts remaining in the contingency allowance are to be returned to the Owner with a credit Change Order to the Contractor.

1.5 ADJUSTMENT OF ALLOWANCES

- A. Submit claims for increased costs because of a change in scope or nature of the allowance described in the Contract Documents, whether for the purchase order amount or Contractor's handling, labor, installation, overhead, and profit.

1. Do not include Contractor's or subcontractor's indirect expense in the Change Order cost amount unless it is clearly shown that the nature or extent of work has changed from what could have been foreseen from information in the Contract Documents.
2. No change to Contractor's indirect expense is permitted for selection of higher- or lower-priced materials or systems of the same scope and nature as originally indicated.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine products covered by an allowance promptly on delivery for damage or defects. Return damaged or defective products to manufacturer for replacement.

3.2 PREPARATION

- A. Coordinate materials and their installation for each allowance with related materials and installations to ensure that each allowance item is completely integrated and interfaced with related work.

3.3 SCHEDULE OF ALLOWANCES

- A. Allowance No. 1: PROVIDE A CONTINGENCY ALLOWANCE OF \$20,000.00 FOR REPAIR OF UNFORSEEN CONDITIONS, OR OTHER ISSUES DISCOVERED DURING DEMOLITION AND RECONSTRUCTION.

ALLOWANCE AUTHORIZATION

Project: _____

Architect: _____

Project No. _____

Contractor: _____

AAA No.: _____

Initiation Date: _____

The Allowance is allocated as follows:

Total original Contract Allowance was:

\$ _____

Amount of Contract Allowance Access previously authorized:

\$ _____

Adjusted Contract Allowance prior to this authorization is:

\$ _____

The amount of available Allowance will Decrease by this Access Authorization:

\$ _____

The remaining Contract Allowance, after this Access Authorization will be:

\$ _____

Recommended by:

Architect

By (Signature): _____

Date: _____

Accepted by:

Contractor

By (Signature): _____

Date: _____

Approved by:

Owner

By (Signature): _____

Date: _____

THIS PAGE INTENTIONATELLELY LEFT BLANK

SECTION 012200 - UNIT PRICES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for unit prices.
- B. Related Requirements:
 - 1. Section 012600 "Contract Modification Procedures" for procedures for submitting and handling Change Orders.
 - 2. Section 014000 "Quality Requirements" for general testing and inspecting requirements.

1.3 DEFINITIONS

- A. Unit price is an amount incorporated in the Agreement, applicable during the duration of the Work as a price per unit of measurement for materials, equipment, or services, or a portion of the Work, added to or deducted from the Contract Sum by appropriate modification, if the scope of Work or estimated quantities of Work required by the Contract Documents are increased or decreased.

1.4 PROCEDURES

- A. Unit prices include all necessary material, plus cost for delivery, installation, insurance, applicable taxes, overhead, and profit.
- B. Measurement and Payment: See individual Specification Sections for work that requires establishment of unit prices. Methods of measurement and payment for unit prices are specified in those Sections.
- C. Owner reserves the right to reject Contractor's measurement of work-in-place that involves use of established unit prices and to have this work measured, at Owner's expense, by an independent surveyor acceptable to Contractor.
- D. List of Unit Prices: A schedule of unit prices is included in Part 3. Specification Sections referenced in the schedule contain requirements for materials described under each unit price.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 SCHEDULE OF UNIT PRICES

A. N/A

END OF SECTION 012200

NOT FOR BIDDING PURPOSES

SECTION 01 23 00 – ALTERNATES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for alternates.

1.3 DEFINITIONS

- A. Alternate: An amount proposed by bidders and stated on the Bid Form for certain work defined in the bidding requirements that may be added to or deducted from the base bid amount if Owner decides to accept a corresponding change either in the amount of construction to be completed or in the products, materials, equipment, systems, or installation methods described in the Contract Documents.
 - 1. Alternates described in this Section are part of the Work only if enumerated in the Agreement.
 - 2. The cost or credit for each alternate is the net addition to or deduction from the Contract Sum to incorporate alternate into the Work. No other adjustments are made to the Contract Sum.

1.4 PROCEDURES

- A. Coordination: Revise or adjust affected adjacent work as necessary to completely integrate work of the alternate into Project.
 - 1. Include as part of each alternate, miscellaneous devices, accessory objects, and similar items incidental to or required for a complete installation whether or not indicated as part of alternate.
- B. Notification: Immediately following award of the Contract, notify each party involved, in writing, of the status of each alternate. Indicate if alternates have been accepted, rejected, or deferred for later consideration. Include a complete description of negotiated revisions to alternates.
- C. Execute accepted alternates under the same conditions as other work of the Contract.
- D. Schedule: A schedule of alternates is included at the end of this Section. Specification Sections referenced in schedule contain requirements for materials necessary to achieve the work described under each alternate.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 SCHEDULE OF ALTERNATES

A. Alternate No. 1: Lobby 100, Vestibules 101 & 102 and Corridor 954 Painting, Flooring, Base, Ceiling and Light Fixtures

1. **Base Bid:** For areas noted on drawings: No work to be performed in this area.
2. **Alternate:** For areas noted on drawings: Remove existing flooring and base in its entirety. Patch and repair surrounding surfaces in preparation for new finishes as noted in finish plans. Remove existing ceiling and light fixtures. Prepare to provide new finishes, ceiling and lighting as noted in architectural plans and MEP drawings.

B. Alternate No. 2: Back Offices Painting, Flooring & Base

1. **Base Bid:** For areas noted on drawings: No Work to be performed in this area.
2. **Alternate:** For areas noted on drawings: Remove existing flooring and base in its entirety. Patch and repair surrounding surfaces in preparation to receive new finishes as noted in finish plans.

C. Alternate No. 3: Portion of Open Office 128, Registrar 129 and all Corridor 153 Ceiling and Light Fixtures

1. **Base Bid:** For areas noted on drawings: Provide painting, flooring and base as noted in finish plans.
2. **Alternate:** For areas noted on drawings: Remove existing ceiling grid, tile and light fixtures. Prepare to provide new ceiling grid, tile and lighting as noted in RCP and MEP drawings.

D. Alternate No. 4: Fire Lounge 986 Paint and Acoustical Wall Panels

1. **Base Bid:** For areas noted on drawings: No Work to be performed in this area.
2. **Alternate:** For areas noted on drawings: Remove existing wall panels in its entirety and discard. Patch and repair surrounding surfaces in preparation to receive new finishes as noted in finish plans. Existing flooring, base, ceiling and light fixtures to remain, protect during construction.

END OF SECTION 01 23 00

SECTION 01 25 00 - SUBSTITUTION PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for substitutions.
- B. Related Requirements:
 - 1. Division 01 Section "Product Requirements" for requirements for submitting comparable product submittals for products by listed manufacturers.
 - 2. Divisions 02 through 33 Sections for specific requirements and limitations for substitutions.

1.3 DEFINITIONS

- A. Substitutions: Changes in products, materials, equipment, and methods of construction from those required by the Contract Documents and proposed by Contractor.
 - 1. Substitutions for Cause: Changes proposed by Contractor that are required due to changed Project conditions, such as unavailability of product, regulatory changes, or unavailability of required warranty terms.
 - 2. Substitutions for Convenience: Changes proposed by Contractor or Owner that are not required in order to meet other Project requirements but may offer advantage to Contractor or Owner.

1.4 ACTION SUBMITTALS

- A. Substitution Requests: Submit three copies of each request for consideration. Identify product or fabrication or installation method to be replaced. Include Specification Section number and title and Drawing numbers and titles.
 - 1. Substitution Request Form: Use facsimile of form provided in Project Manual.
 - 2. Documentation: Show compliance with requirements for substitutions and the following, as applicable:
 - a. Statement indicating why specified product or fabrication or installation cannot be provided, if applicable.
 - b. Coordination information, including a list of changes or revisions needed to other parts of the Work and to construction performed by Owner and separate contractors, that will be necessary to accommodate proposed substitution.

- c. Detailed comparison of significant qualities of proposed substitution with those of the Work specified. Include annotated copy of applicable Specification Section. Significant qualities may include attributes such as performance, weight, size, durability, visual effect, sustainable design characteristics, warranties, and specific features and requirements indicated. Indicate deviations, if any, from the Work specified.
 - d. Product Data, including drawings and descriptions of products and fabrication and installation procedures.
 - e. Samples, where applicable or requested.
 - f. Certificates and qualification data, where applicable or requested.
 - g. List of similar installations for completed projects with project names and addresses and names and addresses of architects and owners.
 - h. Material test reports from a qualified testing agency indicating and interpreting test results for compliance with requirements indicated.
 - i. Research reports evidencing compliance with building code in effect for Project, from ICC-ES.
 - j. Detailed comparison of Contractor's construction schedule using proposed substitution with products specified for the Work, including effect on the overall Contract Time. If specified product or method of construction cannot be provided within the Contract Time, include letter from manufacturer, on manufacturer's letterhead, stating date of receipt of purchase order, lack of availability, or delays in delivery.
 - k. Cost information, including a proposal of change, if any, in the Contract Sum.
 - l. Contractor's certification that proposed substitution complies with requirements in the Contract Documents except as indicated in substitution request, is compatible with related materials, and is appropriate for applications indicated.
 - m. Contractor's waiver of rights to additional payment or time that may subsequently become necessary because of failure of proposed substitution to produce indicated results.
3. Architect's Action: If necessary, Architect will request additional information or documentation for evaluation within seven days of receipt of a request for substitution. Architect will notify Contractor of acceptance or rejection of proposed substitution within 15 days of receipt of request, or seven days of receipt of additional information or documentation, whichever is later.
- a. Forms of Acceptance: Change Order, Construction Change Directive, or Architect's Supplemental Instructions for minor changes in the Work.
 - b. Use product specified if Architect does not issue a decision on use of a proposed substitution within time allocated.

1.5 QUALITY ASSURANCE

- A. Compatibility of Substitutions: Investigate and document compatibility of proposed substitution with related products and materials. Engage a qualified testing agency to perform compatibility tests recommended by manufacturers.

1.6 PROCEDURES

- A. Coordination: Revise or adjust affected work as necessary to integrate work of the approved substitutions.

PART 2 - PRODUCTS

2.1 SUBSTITUTIONS

- A. Substitutions for Cause: Submit requests for substitution immediately on discovery of need for change, but not later than 15 days prior to time required for preparation and review of related submittals.
1. Conditions: Architect will consider Contractor's request for substitution when the following conditions are satisfied. If the following conditions are not satisfied, Architect will return requests without action, except to record noncompliance with these requirements:
 - a. Requested substitution is consistent with the Contract Documents and will produce indicated results.
 - b. Requested substitution provides sustainable design characteristics that specified product provided for achieving LEED prerequisites and credits.
 - c. Substitution request is fully documented and properly submitted.
 - d. Requested substitution will not adversely affect Contractor's construction schedule.
 - e. Requested substitution has received necessary approvals of authorities having jurisdiction.
 - f. Requested substitution is compatible with other portions of the Work.
 - g. Requested substitution has been coordinated with other portions of the Work.
 - h. Requested substitution provides specified warranty.
 - i. If requested substitution involves more than one contractor, requested substitution has been coordinated with other portions of the Work, is uniform and consistent, is compatible with other products, and is acceptable to all contractors involved.
- B. Substitutions for Convenience: Not allowed unless otherwise indicated.
- C. Substitutions for Convenience: Architect will consider requests for substitution if received within 60 days after the commencement of the Work. Requests received after that time may be considered or rejected at discretion of Architect.
1. Conditions: Architect will consider Contractor's request for substitution when the following conditions are satisfied. If the following conditions are not satisfied, Architect will return requests without action, except to record noncompliance with these requirements:
 - a. Requested substitution offers Owner a substantial advantage in cost, time, energy conservation, or other considerations, after deducting additional responsibilities Owner must assume. Owner's additional responsibilities may include compensation to Architect for redesign and evaluation services, increased cost of other construction by Owner, and similar considerations.

- b. Requested substitution does not require extensive revisions to the Contract Documents.
- c. Requested substitution is consistent with the Contract Documents and will produce indicated results.
- d. Requested substitution provides sustainable design characteristics that specified product provided for achieving LEED prerequisites and credits.
- e. Substitution request is fully documented and properly submitted.
- f. Requested substitution will not adversely affect Contractor's construction schedule.
- g. Requested substitution has received necessary approvals of authorities having jurisdiction.
- h. Requested substitution is compatible with other portions of the Work.
- i. Requested substitution has been coordinated with other portions of the Work.
- j. Requested substitution provides specified warranty.
- k. If requested substitution involves more than one contractor, requested substitution has been coordinated with other portions of the Work, is uniform and consistent, is compatible with other products, and is acceptable to all contractors involved.

PART 3 - EXECUTION (Not Used)

END OF SUBSTITUTION PROCEDURES

SUBSTITUTION REQUEST

Project: _____ Substitution Request Number: _____

 From: _____
 To: _____ Date: _____

 A/E Project Number: _____
 Re: _____ Contract For: _____

Specification Title: _____ Description: _____
 Section: _____ Page: _____ Article/Paragraph: _____

Proposed Substitution: _____
 Manufacturer: _____ Address: _____ Phone: _____
 Trade Name: _____ Model No.: _____
 Installer: _____ Address: _____ Phone: _____

History: ☐ New product ☐ 2-5 years old ☐ 5-10 yrs old ☐ More than 10 years old

Differences between proposed substitution and specified product: _____

☐ Point-by-point comparative data attached - REQUIRED BY A/E

Reason for not providing specified item: _____

Similar Installation:

Project: _____ Architect: _____
 Address: _____ Owner: _____
 Date Installed: _____

Proposed substitution affects other parts of Work: ☐ No ☐ Yes; explain _____

Savings to Owner for accepting substitution: _____ (\$ _____).

Proposed substitution changes Contract Time: ☐ No ☐ Yes [Add] [Deduct] _____ days.

Supporting Data Attached: ☐ Drawings ☐ Product Data ☐ Samples ☐ Tests ☐ Reports ☐ _____

SUBSTITUTION REQUEST

The Undersigned certifies:

- Proposed substitution has been fully investigated and determined to be equal or superior in all respects to specified product.
- Same warranty will be furnished for proposed substitution as for specified product.
- Same maintenance service and source of replacement parts, as applicable, is available.
- Proposed substitution will have no adverse effect on other trades and will not affect or delay progress schedule.
- Cost data as stated above is complete. Claims for additional costs related to accepted substitution which may subsequently become apparent are to be waived.
- Proposed substitution does not affect dimensions and functional clearances.
- Payment will be made for changes to building design, including A/E design, detailing, and construction costs caused by the substitution.
- Coordination, installation, and changes in the Work as necessary for accepted substitution will be complete in all respects.

Submitted by: _____

Signed by: _____

Firm: _____

Address: _____

Telephone: _____

Attachments: _____

A/E's REVIEW AND ACTION

- ☐ Substitution approved - Make submittals in accordance with Specification Section 01330.
☐ Substitution approved as noted - Make submittals in accordance with Specification Section 01330.
☐ Substitution rejected - Use specified materials.
☐ Substitution Request received too late - Use specified materials.

Signed by: _____ Date: _____

Additional Comments: ☐ Contractor ☐ Subcontractor ☐ Supplier ☐ Manufacturer ☐ A/E ☐ _____

SECTION 01 26 00 - CONTRACT MODIFICATION PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for handling and processing Contract modifications.
- B. Related Requirements:
 - 1. Division 01 Section "Substitution Procedures" for administrative procedures for handling requests for substitutions made after the Contract award.

1.3 MINOR CHANGES IN THE WORK

- A. Architect will issue supplemental instructions authorizing minor changes in the Work, not involving adjustment to the Contract Sum or the Contract Time, on AIA Document G710, "Architect's Supplemental Instructions."

1.4 PROPOSAL REQUESTS

- A. Owner-Initiated Proposal Requests: Architect will issue a detailed description of proposed changes in the Work that may require adjustment to the Contract Sum or the Contract Time. If necessary, the description will include supplemental or revised Drawings and Specifications.
 - 1. Work Change Proposal Requests issued by Architect are not instructions either to stop work in progress or to execute the proposed change.
 - 2. Within time specified in Proposal Request or 20 days, when not otherwise specified, after receipt of Proposal Request, submit a quotation estimating cost adjustments to the Contract Sum and the Contract Time necessary to execute the change.
 - a. Include a list of quantities of products required or eliminated and unit costs, with total amount of purchases and credits to be made. If requested, furnish survey data to substantiate quantities.
 - b. Indicate applicable taxes, delivery charges, equipment rental, and amounts of trade discounts.
 - c. Include costs of labor and supervision directly attributable to the change.
 - d. Include an updated Contractor's construction schedule that indicates the effect of the change, including, but not limited to, changes in activity duration, start and

finish times, and activity relationship. Use available total float before requesting an extension of the Contract Time.

- e. Quotation Form: Use CSI Form 13.6D, "Proposal Worksheet Summary," and Form 13.6C, "Proposal Worksheet Detail." or forms acceptable to owner and / or Architect.

- B. Contractor-Initiated Proposals: If latent or changed conditions require modifications to the Contract, Contractor may initiate a claim by submitting a request for a change to Architect.

1. Include a statement outlining reasons for the change and the effect of the change on the Work. Provide a complete description of the proposed change. Indicate the effect of the proposed change on the Contract Sum and the Contract Time.
2. Include a list of quantities of products required or eliminated and unit costs, with total amount of purchases and credits to be made. If requested, furnish survey data to substantiate quantities.
3. Indicate applicable taxes, delivery charges, equipment rental, and amounts of trade discounts.
4. Include costs of labor and supervision directly attributable to the change.
5. Include an updated Contractor's construction schedule that indicates the effect of the change, including, but not limited to, changes in activity duration, start and finish times, and activity relationship. Use available total float before requesting an extension of the Contract Time.
6. Comply with requirements in Division 01 Section "Substitution Procedures" if the proposed change requires substitution of one product or system for product or system specified.
7. Proposal Request Form: Use CSI Form 13.6A, "Change Order Request (Proposal)," with attachments CSI Form 13.6D, "Proposal Worksheet Summary," and Form 13.6C, "Proposal Worksheet Detail" or form acceptable to Owner and / or Architect.

1.5 ADMINISTRATIVE CHANGE ORDERS

- A. Allowance Adjustment: See Division 01 Section "Allowances" for administrative procedures for preparation of Change Order Proposal for adjusting the Contract Sum to reflect actual costs of allowances.
- B. Unit-Price Adjustment: See Division 01 Section "Unit Prices" for administrative procedures for preparation of Change Order Proposal for adjusting the Contract Sum to reflect measured scope of unit-price work.

1.6 CHANGE ORDER PROCEDURES

- A. On Owner's approval of a Work Changes Proposal Request, Contractor will issue a Change Order for signatures of Owner and Contractor on AIA Document G701.

1.7 CONSTRUCTION CHANGE DIRECTIVE

- A. Construction Change Directive: Architect may issue a Construction Change Directive on AIA Document G714. Construction Change Directive instructs Contractor to proceed with a change in the Work, for subsequent inclusion in a Change Order.
 - 1. Construction Change Directive contains a complete description of change in the Work. It also designates method to be followed to determine change in the Contract Sum or the Contract Time.
- B. Documentation: Maintain detailed records on a time and material basis of work required by the Construction Change Directive.
 - 1. After completion of change, submit an itemized account and supporting data necessary to substantiate cost and time adjustments to the Contract.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 01 29 00 - PAYMENT PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements necessary to prepare and process Applications for Payment.
- B. Related Requirements:
 - 1. Division 01 Section "Contract Modification Procedures" for administrative procedures for handling changes to the Contract.
 - 2. Division 01 Section "Construction Progress Documentation" for administrative requirements governing the preparation and submittal of the Contractor's construction schedule.

1.3 DEFINITIONS

- A. Schedule of Values: A statement furnished by Contractor allocating portions of the Contract Sum to various portions of the Work and used as the basis for reviewing Contractor's Applications for Payment.

1.4 SCHEDULE OF VALUES

- A. Coordination: Coordinate preparation of the schedule of values with preparation of Contractor's construction schedule.
 - 1. Coordinate line items in the schedule of values with other required administrative forms and schedules, including the following:
 - a. Application for Payment forms with continuation sheets.
 - b. Submittal schedule.
 - c. Items required to be indicated as separate activities in Contractor's construction schedule.
 - 2. Submit the schedule of values to Architect at earliest possible date, but no later than seven days before the date scheduled for submittal of initial Applications for Payment.
 - 3. Sub-schedules for Phased Work: Where the Work is separated into phases requiring separately phased payments, provide sub-schedules showing values coordinated with each phase of payment.

4. Sub-schedules for Separate Elements of Work: Where the Contractor's construction schedule defines separate elements of the Work, provide sub-schedules showing values coordinated with each element.
 5. Sub-schedules for Separate Design Contracts: Where the Owner has retained design professionals under separate contracts who will each provide certification of payment requests, provide sub-schedules showing values coordinated with the scope of each design services contract as described in Division 01 Section "Summary."
- B. Format and Content: Use Project Manual table of contents as a guide to establish line items for the schedule of values. Provide at least one line item for each Specification Section.
1. Identification: Include the following Project identification on the schedule of values:
 - a. Project name and location.
 - b. Name of Architect.
 - c. Architect's project number.
 - d. Contractor's name and address.
 - e. Date of submittal.
 2. Arrange schedule of values consistent with format of AIA Document G703.
 3. Arrange the schedule of values in tabular form with separate columns to indicate the following for each item listed:
 - a. Related Specification Section or Division.
 - b. Description of the Work.
 - c. Name of subcontractor.
 - d. Name of manufacturer or fabricator.
 - e. Name of supplier.
 - f. Change Orders (numbers) that affect value.
 - g. Dollar value of the following, as a percentage of the Contract Sum to nearest one-hundredth percent, adjusted to total 100 percent.
 - 1) Labor.
 - 2) Materials.
 - 3) Equipment.
 4. Provide a breakdown of the Contract Sum in enough detail to facilitate continued evaluation of Applications for Payment and progress reports. Coordinate with Project Manual table of contents. Provide multiple line items for principal subcontract amounts in excess of five percent of the Contract Sum.
 - a. Include separate line items under Contractor and principal subcontracts for LEED documentation and other Project closeout requirements in an amount totaling five percent of the Contract Sum and subcontract amount.
 5. Round amounts to nearest whole dollar; total shall equal the Contract Sum.
 6. Provide a separate line item in the schedule of values for each part of the Work where Applications for Payment may include materials or equipment purchased or fabricated and stored, but not yet installed.

- a. Differentiate between items stored on-site and items stored off-site. If required, include evidence of insurance.
7. Provide separate line items in the schedule of values for initial cost of materials, for each subsequent stage of completion, and for total installed value of that part of the Work.
8. Allowances: Provide a separate line item in the schedule of values for each allowance. Show line-item value of unit-cost allowances, as a product of the unit cost, multiplied by measured quantity. Use information indicated in the Contract Documents to determine quantities.
9. Purchase Contracts: Provide a separate line item in the schedule of values for each purchase contract. Show line-item value of purchase contract. Indicate owner payments or deposits, if any, and balance to be paid by Contractor.
10. Each item in the schedule of values and Applications for Payment shall be complete. Include total cost and proportionate share of general overhead and profit for each item.
 - a. Temporary facilities and other major cost items that are not direct cost of actual work-in-place may be shown either as separate line items in the schedule of values or distributed as general overhead expense, at Contractor's option.
11. Schedule Updating: Update and resubmit the schedule of values before the next Applications for Payment when Change Orders or Construction Change Directives result in a change in the Contract Sum.

1.5 APPLICATIONS FOR PAYMENT

- A. Each Application for Payment following the initial Application for Payment shall be consistent with previous applications and payments as certified by Architect and paid for by Owner.
 1. Initial Application for Payment, Application for Payment at time of Substantial Completion, and final Application for Payment involve additional requirements.
- B. Payment Application Times: The date for each progress payment is indicated in the Agreement between Owner and Contractor. The period of construction work covered by each Application for Payment is the period indicated in the Agreement.
- C. Payment Application Times: Submit Application for Payment to Architect by the 30th of the month. The period covered by each Application for Payment is one month, ending on the last day of the month.
 1. Submit draft copy of Application for Payment seven days prior to due date for review by Architect.
- D. Application for Payment Forms: Use AIA Document G702 and AIA Document G703 as form for Applications for Payment.
- E. Application for Payment Forms: Use forms provided by Owner for Applications for Payment. Sample copies are included in Project Manual.
- F. Application for Payment Forms: Use forms acceptable to Architect and Owner for Applications for Payment. Submit forms for approval with initial submittal of schedule of values.

- G. Application Preparation: Complete every entry on form. Notarize and execute by a person authorized to sign legal documents on behalf of Contractor. Architect will return incomplete applications without action.
1. Entries shall match data on the schedule of values and Contractor's construction schedule. Use updated schedules if revisions were made.
 2. Include amounts for work completed following previous Application for Payment, whether or not payment has been received. Include only amounts for work completed at time of Application for Payment.
 3. Include amounts of Change Orders and Construction Change Directives issued before last day of construction period covered by application.
 4. Indicate separate amounts for work being carried out under Owner-requested project acceleration.
- H. Stored Materials: Include in Application for Payment amounts applied for materials or equipment purchased or fabricated and stored, but not yet installed. Differentiate between items stored on-site and items stored off-site.
1. Provide certificate of insurance, evidence of transfer of title to Owner, and consent of surety to payment, for stored materials.
 2. Provide supporting documentation that verifies amount requested, such as paid invoices. Match amount requested with amounts indicated on documentation; do not include overhead and profit on stored materials.
 3. Provide summary documentation for stored materials indicating the following:
 - a. Value of materials previously stored and remaining stored as of date of previous Applications for Payment.
 - b. Value of previously stored materials put in place after date of previous Application for Payment and on or before date of current Application for Payment.
 - c. Value of materials stored since date of previous Application for Payment and remaining stored as of date of current Application for Payment.
- I. Transmittal: Submit three signed and notarized original copies of each Application for Payment to Architect by a method ensuring receipt within 24 hours. One copy shall include waivers of lien and similar attachments if required.
1. Transmit each copy with a transmittal form listing attachments and recording appropriate information about application.
- J. Waivers of Mechanic's Lien: With each Application for Payment, submit waivers of mechanic's lien from entities lawfully entitled to file a mechanic's lien arising out of the Contract and related to the Work covered by the payment.
1. Submit partial waivers on each item for amount requested in previous application, after deduction for retainage, on each item.
 2. When an application shows completion of an item, submit conditional final or full waivers.
 3. Owner reserves the right to designate which entities involved in the Work must submit waivers.
 4. Waiver Forms: Submit executed waivers of lien on forms acceptable to Owner.

- K. Waivers of Mechanic's Lien: With each Application for Payment, submit waivers of mechanic's liens from subcontractors, sub-subcontractors, and suppliers for construction period covered by the previous application.
1. Submit partial waivers on each item for amount requested in previous application, after deduction for retainage, on each item.
 2. When an application shows completion of an item, submit conditional final or full waivers.
 3. Owner reserves the right to designate which entities involved in the Work must submit waivers.
 4. Submit final Application for Payment with or preceded by conditional final waivers from every entity involved with performance of the Work covered by the application who is lawfully entitled to a lien.
 5. Waiver Forms: Submit executed waivers of lien on forms, acceptable to Owner.
- L. Initial Application for Payment: Administrative actions and submittals that must precede or coincide with submittal of first Application for Payment include the following:
1. List of subcontractors.
 2. Schedule of values.
 3. Contractor's construction schedule (preliminary if not final).
 4. Combined Contractor's construction schedule (preliminary if not final) incorporating Work of multiple contracts, with indication of acceptance of schedule by each Contractor.
 5. Products list (preliminary if not final).
 6. Schedule of unit prices.
 7. Submittal schedule (preliminary if not final).
 8. List of Contractor's staff assignments.
 9. List of Contractor's principal consultants.
 10. Copies of building permits.
 11. Copies of authorizations and licenses from authorities having jurisdiction for performance of the Work.
 12. Initial progress report.
 13. Report of preconstruction conference.
 14. Certificates of insurance and insurance policies.
 15. Performance and payment bonds.
 16. Data needed to acquire Owner's insurance.
- M. Application for Payment at Substantial Completion: After Architect issues the Certificate of Substantial Completion, submit an Application for Payment showing 100 percent completion for portion of the Work claimed as substantially complete.
1. Include documentation supporting claim that the Work is substantially complete and a statement showing an accounting of changes to the Contract Sum.
 2. This application shall reflect Certificate(s) of Substantial Completion issued previously for Owner occupancy of designated portions of the Work.
- N. Final Payment Application: After completing Project closeout requirements, submit final Application for Payment with releases and supporting documentation not previously submitted and accepted, including, but not limited, to the following:
1. Evidence of completion of Project closeout requirements.

2. Insurance certificates for products and completed operations where required and proof that taxes, fees, and similar obligations were paid.
3. Updated final statement, accounting for final changes to the Contract Sum.
4. AIA Document G706, "Contractor's Affidavit of Payment of Debts and Claims."
5. AIA Document G706A, "Contractor's Affidavit of Release of Liens."
6. Evidence that claims have been settled.
7. Final meter readings for utilities, a measured record of stored fuel, and similar data as of date of Substantial Completion or when Owner took possession of and assumed responsibility for corresponding elements of the Work.
8. Final liquidated damages settlement statement.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION



Application and Certificate for Payment

TO OWNER:	PROJECT: sample	APPLICATION NO: 001	Distribution to:
		PERIOD TO:	OWNER:
		CONTRACT FOR: General Construction	ARCHITECT:
FROM	VIA	CONTRACT DATE:	CONTRACTOR:
CONTRACTOR:	ARCHITECT:	PROJECT NOS: / /	FIELD:
			OTHER:

CONTRACTOR'S APPLICATION FOR PAYMENT

Application is made for payment, as shown below, in connection with the Contract. Continuation Sheet, AIA Document G703, is attached.

1. ORIGINAL CONTRACT SUM	\$	0.00
2. NET CHANGE BY CHANGE ORDERS	\$	0.00
3. CONTRACT SUM TO DATE (Line 1 ± 2)	\$	0.00
4. TOTAL COMPLETED & STORED TO DATE (Column G on G703)	\$	0.00
5. RETAINAGE:		
a. 0 % of Completed Work (Column D + E on G703)	\$	0.00
b. 0 % of Stored Material (Column F on G703)	\$	0.00
Total Retainage (Lines 5a + 5b or Total in Column I of G703)	\$	0.00
6. TOTAL EARNED LESS RETAINAGE	\$	0.00
(Line 4 Less Line 5 Total)		
7. LESS PREVIOUS CERTIFICATES FOR PAYMENT	\$	0.00
(Line 6 from prior Certificate)		
8. CURRENT PAYMENT DUE	\$	0.00
9. BALANCE TO FINISH, INCLUDING RETAINAGE		
(Line 3 less Line 6)	\$	0.00

CHANGE ORDER SUMMARY	ADDITIONS	DEDUCTIONS
Total changes approved in previous months by Owner	\$ 0.00	\$ 0.00
Total approved this Month	\$ 0.00	\$ 0.00
TOTALS	\$ 0.00	\$ 0.00
NET CHANGES by Change Order	\$	0.00

The undersigned Contractor certifies that to the best of the Contractor's knowledge, information and belief the Work covered by this Application for Payment has been completed in accordance with the Contract Documents, that all amounts have been paid by the Contractor for Work for which previous Certificates for Payment were issued and payments received from the Owner, and that current payment shown herein is now due.

CONTRACTOR:

By: _____ Date: _____
State of: _____
County of: _____
Subscribed and sworn to before
me this _____ day of _____
Notary Public:
My Commission expires: _____

ARCHITECT'S CERTIFICATE FOR PAYMENT

In accordance with the Contract Documents, based on on-site observations and the data comprising this application, the Architect certifies to the Owner that to the best of the Architect's knowledge, information and belief the Work has progressed as indicated, the quality of the Work is in accordance with the Contract Documents, and the Contractor is entitled to payment of the AMOUNT CERTIFIED.

AMOUNT CERTIFIED \$ 0.00
(Attach explanation if amount certified differs from the amount applied. Initial all figures on this Application and on the Continuation Sheet that are changed to conform with the amount certified.)

ARCHITECT:

By: _____ Date: _____

This Certificate is not negotiable. The AMOUNT CERTIFIED is payable only to the Contractor named herein. Issuance, payment and acceptance of payment are without prejudice to any rights of the Owner or Contractor under this Contract.



AIA Document G702, APPLICATION AND CERTIFICATION FOR PAYMENT, containing Contractor's signed certification is attached.
In tabulations below, amounts are in US dollars.
Use Column I on Contracts where variable retainage for line items may apply.

ARCHITECT'S PROJECT NO:

AIA Document G703™ – 1992. Copyright © 1963, 1965, 1966, 1967, 1970, 1978, 1983 and 1992 by The American Institute of Architects. All rights reserved. **WARNING: This AIA® Document is protected by U.S. Copyright Law and International Treaties. Unauthorized reproduction or distribution of this AIA® Document, or any portion of it, may result in severe civil and criminal penalties, and will be prosecuted to the maximum extent possible under the law.** This document was produced by AIA software at 11:02:30 on 12/16/2009 under Order No.3322946485_1 which expires on 06/12/2010, and is not for resale.

(1801800307)

SECTION 01 31 00 - PROJECT MANAGEMENT AND COORDINATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative provisions for coordinating construction operations on Project including, but not limited to, the following:
 - 1. General coordination procedures.
 - 2. Coordination drawings.
 - 3. Requests for Information (RFIs).
 - 4. Project Web site.
 - 5. Project meetings.
- B. Each contractor shall participate in coordination requirements. Certain areas of responsibility are assigned to a specific contractor.
- C. Related Requirements:
 - 1. Division 01 Section "Construction Progress Documentation" for preparing and submitting Contractor's construction schedule.
 - 2. Division 01 Section "Execution" for procedures for coordinating general installation and field-engineering services, including establishment of benchmarks and control points.
 - 3. Division 01 Section "Closeout Procedures" for coordinating closeout of the Contract.
 - 4. Division 01 Section "General Commissioning Requirements" for coordinating the Work with Owner's Commissioning Authority.

1.3 DEFINITIONS

- A. RFI: Request from Owner, Architect, or Contractor seeking information required by or clarifications of the Contract Documents.

1.4 SCHEDULE

1. Bidding and Negotiation (B&N)
 - a. Advertise for Bid / Posted to GSS: 11/04/2024
 - b. Bidding Period (3 Weeks) 11/12/2024 – 12/03/2024
 - c. Bids Due: 12/03/2024
 - d. Bids Awarded / Approved: 12/10/2024
2. Construction
 - a. Contractor Mobilization: 01/06/2025
 - b. Substantial Completion: 04/11/2025
 - i. Including Alternates: 05/30/2025
 - c. Punch Listing / Close Out: 04/25/2025
 - i. Including Alternates: 06/13/25
 - d. Final Building Occupation: 05/09/25
 - i. Including Alternates: 06/27/25

1.5 INFORMATIONAL SUBMITTALS

- A. Subcontract List: Prepare a written summary identifying individuals or firms proposed for each portion of the Work, including those who are to furnish products or equipment fabricated to a special design. Include the following information in tabular form:
 1. Name, address, and telephone number of entity performing subcontract or supplying products.
 2. Number and title of related Specification Section(s) covered by subcontract.
 3. Drawing number and detail references, as appropriate, covered by subcontract.
- B. Key Personnel Names: Within 15 days of starting construction operations, submit a list of key personnel assignments, including superintendent and other personnel in attendance at Project site. Identify individuals and their duties and responsibilities; list addresses and telephone numbers, including home, office, and cellular telephone numbers and e-mail addresses. Provide names, addresses, and telephone numbers of individuals assigned as alternates in the absence of individuals assigned to Project.
 1. Post copies of list in project meeting room, in temporary field office, and by each temporary telephone. Keep list current at all times.

1.6 GENERAL COORDINATION PROCEDURES

- A. Coordination: Coordinate construction operations included in different Sections of the Specifications to ensure efficient and orderly installation of each part of the Work. Coordinate construction operations, included in different Sections, that depend on each other for proper installation, connection, and operation.
 1. Schedule construction operations in sequence required to obtain the best results where installation of one part of the Work depends on installation of other components, before or after its own installation.
 2. Coordinate installation of different components to ensure maximum performance and accessibility for required maintenance, service, and repair.
 3. Make adequate provisions to accommodate items scheduled for later installation.

- B. Coordination: Each contractor shall coordinate its construction operations with those of other contractors and entities to ensure efficient and orderly installation of each part of the Work. Each contractor shall coordinate its operations with operations, included in different Sections, that depend on each other for proper installation, connection, and operation.
1. Schedule construction operations in sequence required to obtain the best results where installation of one part of the Work depends on installation of other components, before or after its own installation.
 2. Coordinate installation of different components with other contractors to ensure maximum performance and accessibility for required maintenance, service, and repair.
 3. Make adequate provisions to accommodate items scheduled for later installation.
- C. Prepare memoranda for distribution to each party involved, outlining special procedures required for coordination. Include such items as required notices, reports, and list of attendees at meetings.
1. Prepare similar memoranda for Owner and separate contractors if coordination of their Work is required.
- D. Administrative Procedures: Coordinate scheduling and timing of required administrative procedures with other construction activities and activities of other contractors to avoid conflicts and to ensure orderly progress of the Work. Such administrative activities include, but are not limited to, the following:
1. Preparation of Contractor's construction schedule.
 2. Preparation of the schedule of values.
 3. Installation and removal of temporary facilities and controls.
 4. Delivery and processing of submittals.
 5. Progress meetings.
 6. Preinstallation conferences.
 7. Project closeout activities.
 8. Startup and adjustment of systems.
- E. Conservation: Coordinate construction activities to ensure that operations are carried out with consideration given to conservation of energy, water, and materials. Coordinate use of temporary utilities to minimize waste.
1. Salvage materials and equipment involved in performance of, but not actually incorporated into, the Work. See other Sections for disposition of salvaged materials that are designated as Owner's property.

1.7 COORDINATION DRAWINGS

- A. Coordination Drawings, General: Prepare coordination drawings according to requirements in individual Sections, and additionally where installation is not completely shown on Shop Drawings, where limited space availability necessitates coordination, or if coordination is required to facilitate integration of products and materials fabricated or installed by more than one entity.
1. Content: Project-specific information, drawn accurately to a scale large enough to indicate and resolve conflicts. Do not base coordination drawings on standard printed data. Include the following information, as applicable:
 - a. Use applicable Drawings as a basis for preparation of coordination drawings. Prepare sections, elevations, and details as needed to describe relationship of various systems and components.

- b. Coordinate the addition of trade-specific information to the coordination drawings by multiple contractors in a sequence that best provides for coordination of the information and resolution of conflicts between installed components before submitting for review.
 - c. Indicate functional and spatial relationships of components of architectural, structural, civil, mechanical, and electrical systems.
 - d. Indicate space requirements for routine maintenance and for anticipated replacement of components during the life of the installation.
 - e. Show location and size of access doors required for access to concealed dampers, valves, and other controls.
 - f. Indicate required installation sequences.
 - g. Indicate dimensions shown on the Drawings. Specifically note dimensions that appear to be in conflict with submitted equipment and minimum clearance requirements. Provide alternate sketches to Architect indicating proposed resolution of such conflicts. Minor dimension changes and difficult installations will not be considered changes to the Contract.
- B. Coordination Drawing Organization: Organize coordination drawings as follows:
- 1. Floor Plans and Reflected Ceiling Plans: Show architectural and structural elements, and mechanical, plumbing, fire-protection, fire-alarm, and electrical Work. Show locations of visible ceiling-mounted devices relative to acoustical ceiling grid. Supplement plan drawings with section drawings where required to adequately represent the Work.
 - 2. Plenum Space: Indicate sub-framing for support of ceiling and wall systems, mechanical and electrical equipment, and related Work. Locate components within ceiling plenum to accommodate layout of light fixtures indicated on Drawings. Indicate areas of conflict between light fixtures and other components.
 - 3. Mechanical Rooms: Provide coordination drawings for mechanical rooms showing plans and elevations of mechanical, plumbing, fire-protection, fire-alarm, and electrical equipment.
 - 4. Structural Penetrations: Indicate penetrations and openings required for all disciplines.
 - 5. Slab Edge and Embedded Items: Indicate slab edge locations and sizes and locations of embedded items for metal fabrications, sleeves, anchor bolts, bearing plates, angles, door floor closers, slab depressions for floor finishes, curbs and housekeeping pads, and similar items.
 - 6. Mechanical and Plumbing Work: Show the following:
 - a. Sizes and bottom elevations of ductwork, piping, and conduit runs, including insulation, bracing, flanges, and support systems.
 - b. Dimensions of major components, such as dampers, valves, diffusers, access doors, cleanouts and electrical distribution equipment.
 - c. Fire-rated enclosures around ductwork.
 - 7. Electrical Work: Show the following:
 - a. Runs of vertical and horizontal conduit 1-1/4 inches (32 mm) in diameter and larger.
 - b. Light fixture, exit light, emergency battery pack, smoke detector, and other fire-alarm locations.
 - c. Panel board, switch board, switchgear, transformer, busway, generator, and motor control center locations.
 - d. Location of pull boxes and junction boxes, dimensioned from column center lines.
 - 8. Fire-Protection System: Show the following:
 - a. Locations of standpipes, mains piping, branch lines, pipe drops, and sprinkler heads.
 - 9. Review: Architect will review coordination drawings to confirm that the Work is being coordinated, but not for the details of the coordination, which are Contractor's responsibility. If

Architect determines that coordination drawings are not being prepared in sufficient scope or detail, or are otherwise deficient, Architect will so inform Contractor, who shall make changes as directed and resubmit.

10. Coordination Drawing Prints: Prepare coordination drawing prints according to requirements in Division 01 Section "Submittal Procedures."

C. Coordination Digital Data Files: Prepare coordination digital data files according to the following requirements:

1. File Preparation Format: Same digital data software program, version, and operating system as original Drawings.
2. File Preparation Format: DWG, Version AutoCAD (Release 2010), operating in Microsoft Windows operating system
3. File Submittal Format: Submit or post coordination drawing files using format same as file preparation format.
4. Architect will furnish Contractor one set of digital data files of Drawings for use in preparing coordination digital data files.
 - a. Architect makes no representations as to the accuracy or completeness of digital data files as they relate to Drawings.
 - b. Digital Data Software Program: Drawings are available in PDF and / or AutoCAD.
 - c. Contractor shall execute a data licensing agreement in the form of Agreement form acceptable to Owner and Architect.

1.8 REQUESTS FOR INFORMATION (RFIs)

A. General: Immediately on discovery of the need for additional information or interpretation of the Contract Documents, Contractor shall prepare and submit an RFI in the form specified.

1. Architect will return RFIs submitted to Architect by other entities controlled by Contractor with no response.
2. Coordinate and submit RFIs in a prompt manner so as to avoid delays in Contractor's work or work of subcontractors.

B. Content of the RFI: Include a detailed, legible description of item needing information or interpretation and the following:

1. Project name.
2. Project number.
3. Date.
4. Name of Contractor.
5. Name of Architect.
6. RFI number, numbered sequentially.
7. RFI subject.
8. Specification Section number and title and related paragraphs, as appropriate.
9. Drawing number and detail references, as appropriate.
10. Field dimensions and conditions, as appropriate.
11. Contractor's suggested resolution. If Contractor's suggested resolution impacts the Contract Time or the Contract Sum, Contractor shall state impact in the RFI.
12. Contractor's signature.

13. Attachments: Include sketches, descriptions, measurements, photos, Product Data, Shop Drawings, coordination drawings, and other information necessary to fully describe items needing interpretation.
 - a. Include dimensions, thicknesses, structural grid references, and details of affected materials, assemblies, and attachments on attached sketches.
- C. RFI Forms: AIA Document G716.
 1. Attachments shall be electronic files in Adobe Acrobat PDF format.
- D. Architect's Action: Architect will review each RFI, determine action required, and respond. Allow seven working days for Architect's response for each RFI. RFIs received by Architect after 1:00 p.m. will be considered as received the following working day.
 1. The following Contractor-generated RFIs will be returned without action:
 - a. Requests for approval of submittals.
 - b. Requests for approval of substitutions.
 - c. Requests for approval of Contractor's means and methods.
 - d. Requests for coordination information already indicated in the Contract Documents.
 - e. Requests for adjustments in the Contract Time or the Contract Sum.
 - f. Requests for interpretation of Architect's actions on submittals.
 - g. Incomplete RFIs or inaccurately prepared RFIs.
 2. Architect's action may include a request for additional information, in which case Architect's time for response will date from time of receipt of additional information.
 3. Architect's action on RFIs that may result in a change to the Contract Time or the Contract Sum may be eligible for Contractor to submit Change Proposal according to Division 01 Section "Contract Modification Procedures."
 - a. If Contractor believes the RFI response warrants change in the Contract Time or the Contract Sum, notify Architect in writing within 10 days of receipt of the RFI response.
- E. RFI Log: Prepare, maintain, and submit a tabular log of RFIs organized by the RFI number. Submit log bi-weekly. Software log with not less than the following:
 1. Project name.
 2. Name and address of Contractor.
 3. Name and address of Architect.
 4. RFI number including RFIs that were returned without action or withdrawn.
 5. RFI description.
 6. Date the RFI was submitted.
 7. Date Architect's response was received.
- F. On receipt of Architect's[action, update the RFI log and immediately distribute the RFI response to affected parties. Review response and notify Architect within seven days if Contractor disagrees with response.
 1. Identification of related Minor Change in the Work, Construction Change Directive, and Proposal Request, as appropriate.
 2. Identification of related Field Order, Work Change Directive, and Proposal Request, as appropriate.

1.9 PROJECT WEB SITE

- A. Use Owner's Project Web site for purposes of hosting and managing project communication and documentation until Final Completion. Project Web site shall include the following functions:
1. Project directory.
 2. Project correspondence.
 3. Meeting minutes.
 4. Contract modifications forms and logs.
 5. RFI forms and logs.
 6. Task and issue management.
 7. Photo documentation.
 8. Schedule and calendar management.
 9. Submittals forms and logs.
 10. Payment application forms.
 11. Drawing and specification document hosting, viewing, and updating.
 12. Online document collaboration.
 13. Reminder and tracking functions.
 14. Archiving functions.
- B. Provide up to seven Project Web site user licenses for use of the Owner,, Architect, and Architect's consultants. Provide two hours of software training at Architect's office for Project Web site users.
- C. On completion of Project, provide one complete archive copy(ies) of Project Web site files to Owner and to Architect in a digital storage format acceptable to Architect.
- D. Provide one of the following Project Web site software packages under their current published licensing agreements:
1. Procore
 2. Plan Grid
 3. Projectsight
 4. Or Equal.
- E. Contractor, subcontractors, and other parties granted access by Contractor to Project Web site shall execute a data licensing agreement in the form of AIA Document C106.

1.10 PROJECT MEETINGS

- A. General: Schedule and conduct meetings and conferences at Project site unless otherwise indicated.
1. Attendees: Inform participants and others involved, and individuals whose presence is required, of date and time of each meeting. Notify Owner and Architect of scheduled meeting dates and times.
 2. Agenda: Prepare the meeting agenda. Distribute the agenda to all invited attendees.
 3. Minutes: The entity responsible for conducting the meeting will record significant discussions and agreements achieved. Distribute the meeting minutes to everyone concerned, including Owner, and Architect, within three days of the meeting.
- B. Preconstruction Conference: Schedule and conduct a preconstruction conference before starting construction, at a time convenient to Owner and Architect, but no later than 15 days after execution of the Agreement.

1. Conduct the conference to review responsibilities and personnel assignments.
 2. Attendees: Authorized representatives of Owner, Architect, and their consultants; Contractor and its superintendent; major subcontractors; suppliers; and other concerned parties shall attend the conference. Participants at the conference shall be familiar with Project and authorized to conclude matters relating to the Work.
 3. Agenda: Discuss items of significance that could affect progress, including the following:
 - a. Tentative construction schedule.
 - b. Critical work sequencing and long-lead items.
 - c. Designation of key personnel and their duties.
 - d. Lines of communications.
 - e. Procedures for processing field decisions and Change Orders.
 - f. Procedures for RFIs.
 - g. Procedures for testing and inspecting.
 - h. Procedures for processing Applications for Payment.
 - i. Distribution of the Contract Documents.
 - j. Submittal procedures.
 - k. Preparation of record documents.
 - l. Use of the premises and existing buildings.
 - m. Work restrictions.
 - n. Working hours.
 - o. Owner's occupancy requirements.
 - p. Responsibility for temporary facilities and controls.
 - q. Procedures for moisture and mold control.
 - r. Procedures for disruptions and shutdowns.
 - s. Construction waste management and recycling.
 - t. Parking availability.
 - u. Office, work, and storage areas.
 - v. Equipment deliveries and priorities.
 - w. First aid.
 - x. Security.
 - y. Progress cleaning.
 4. Minutes: Entity responsible for conducting meeting will record and distribute meeting minutes.
- D. Preinstallation Conferences: Conduct a preinstallation conference at Project site before each construction activity that requires coordination with other construction.
1. Attendees: Installer and representatives of manufacturers and fabricators involved in or affected by the installation and its coordination or integration with other materials and installations that have preceded or will follow, shall attend the meeting. Advise Architect, of scheduled meeting dates.
 2. Agenda: Review progress of other construction activities and preparations for the particular activity under consideration, including requirements for the following:
 - a. Contract Documents.
 - b. Options.
 - c. Related RFIs.
 - d. Related Change Orders.
 - e. Purchases.
 - f. Deliveries.

- g. Submittals.
 - h. Review of mockups.
 - i. Possible conflicts.
 - j. Compatibility requirements.
 - k. Time schedules.
 - l. Weather limitations.
 - m. Manufacturer's written instructions.
 - n. Warranty requirements.
 - o. Compatibility of materials.
 - p. Acceptability of substrates.
 - q. Temporary facilities and controls.
 - r. Space and access limitations.
 - s. Regulations of authorities having jurisdiction.
 - t. Testing and inspecting requirements.
 - u. Installation procedures.
 - v. Coordination with other work.
 - w. Required performance results.
 - x. Protection of adjacent work.
 - y. Protection of construction and personnel.
- 3. Record significant conference discussions, agreements, and disagreements, including required corrective measures and actions.
- 4. Reporting: Distribute minutes of the meeting to each party present and to other parties requiring information.
- 5. Do not proceed with installation if the conference cannot be successfully concluded. Initiate whatever actions are necessary to resolve impediments to performance of the Work and reconvene the conference at earliest feasible date.
- E. Project Closeout Conference: Schedule and conduct a project closeout conference, at a time convenient to Owner and Architect, but no later than **9** days prior to the scheduled date of Substantial Completion.
 - 1. Conduct the conference to review requirements and responsibilities related to Project closeout.
 - 2. Attendees: Authorized representatives of Owner, Architect, and their consultants; Contractor and its superintendent; major subcontractors; suppliers; and other concerned parties shall attend the meeting. Participants at the meeting shall be familiar with Project and authorized to conclude matters relating to the Work.
 - 3. Agenda: Discuss items of significance that could affect or delay Project closeout, including the following:
 - a. Preparation of record documents.
 - b. Procedures required prior to inspection for Substantial Completion and for final inspection for acceptance.
 - c. Submittal of written warranties.
 - d. Requirements for preparing operations and maintenance data.
 - e. Requirements for delivery of material samples, attic stock, and spare parts.
 - f. Requirements for demonstration and training.
 - g. Preparation of Contractor's punch list.
 - h. Procedures for processing Applications for Payment at Substantial Completion and for final payment.
 - i. Submittal procedures.
 - j. Coordination of separate contracts.
 - k. Owner's partial occupancy requirements.
 - l. Installation of Owner's furniture, fixtures, and equipment.
 - m. Responsibility for removing temporary facilities and controls.

4. Minutes: Entity conducting meeting will record and distribute meeting minutes.
- F. Progress Meetings: Conduct progress meetings at biweekly intervals.
1. Coordinate dates of meetings with preparation of payment requests.
 2. Attendees: In addition to representatives of Owner, and Architect, each contractor, subcontractor, supplier, and other entity concerned with current progress or involved in planning, coordination, or performance of future activities shall be represented at these meetings. All participants at the meeting shall be familiar with Project and authorized to conclude matters relating to the Work.
 3. Agenda: Review and correct or approve minutes of previous progress meeting. Review other items of significance that could affect progress. Include topics for discussion as appropriate to status of Project.
 - a. Contractor's Construction Schedule: Review progress since the last meeting. Determine whether each activity is on time, ahead of schedule, or behind schedule, in relation to Contractor's construction schedule. Determine how construction behind schedule will be expedited; secure commitments from parties involved to do so. Discuss whether schedule revisions are required to ensure that current and subsequent activities will be completed within the Contract Time.
 - 1) Review schedule for next period.
 - b. Review present and future needs of each entity present, including the following:
 - 1) Interface requirements
 - 2) Sequence of operations.
 - 3) Status of submittals.
 - 4) Deliveries.
 - 5) Off-site fabrication.
 - 6) Access.
 - 7) Site utilization.
 - 8) Temporary facilities and controls.
 - 9) Progress cleaning.
 - 10) Quality and work standards.
 - 11) Status of correction of deficient items.
 - 12) Field observations.
 - 13) Status of RFIs.
 - 14) Status of proposal requests.
 - 15) Pending changes.
 - 16) Status of Change Orders.
 - 17) Pending claims and disputes.
 - 18) Documentation of information for payment requests.
 4. Minutes: Entity responsible for conducting the meeting will record and distribute the meeting minutes to each party present and to parties requiring information.
 - a. Schedule Updating: Revise Contractor's construction schedule after each progress meeting where revisions to the schedule have been made or recognized. Issue revised schedule concurrently with the report of each meeting.

- G. Coordination Meetings: Conduct Project coordination meetings at biweekly intervals. Project coordination meetings are in addition to specific meetings held for other purposes, such as progress meetings and preinstallation conferences.
1. Attendees: In addition to representatives of Owner, and Architect, each contractor, subcontractor, supplier, and other entity concerned with current progress or involved in planning, coordination, or performance of future activities shall be represented at these meetings. All participants at the meetings shall be familiar with Project and authorized to conclude matters relating to the Work.
 2. Agenda: Review and correct or approve minutes of the previous coordination meeting. Review other items of significance that could affect progress. Include topics for discussion as appropriate to status of Project.
 - a. Combined Contractor's Construction Schedule: Review progress since the last coordination meeting. Determine whether each contract is on time, ahead of schedule, or behind schedule, in relation to combined Contractor's construction schedule. Determine how construction behind schedule will be expedited; secure commitments from parties involved to do so. Discuss whether schedule revisions are required to ensure that current and subsequent activities will be completed within the Contract Time.
 - b. Schedule Updating: Revise combined Contractor's construction schedule after each coordination meeting where revisions to the schedule have been made or recognized. Issue revised schedule concurrently with report of each meeting.
 - c. Review present and future needs of each contractor present, including the following:
 - 1) Interface requirements.
 - 2) Sequence of operations.
 - 3) Resolution of BIM component conflicts.
 - 4) Status of submittals.
 - 5) Deliveries.
 - 6) Off-site fabrication.
 - 7) Access.
 - 8) Site utilization.
 - 9) Temporary facilities and controls.
 - 10) Work hours.
 - 11) Hazards and risks.
 - 12) Progress cleaning.
 - 13) Quality and work standards.
 - 14) Change Orders.
 3. Reporting: Record meeting results and distribute copies to everyone in attendance and to others affected by decisions or actions resulting from each meeting.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 01 32 00 - CONSTRUCTION PROGRESS DOCUMENTATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for documenting the progress of construction during performance of the Work, including the following:
 - 1. Startup construction schedule.
 - 2. Contractor's construction schedule.
 - 3. Construction schedule updating reports.
 - 4. Daily construction reports.
 - 5. Material location reports.
 - 6. Site condition reports.
 - 7. Special reports.
- B. Related Requirements:
 - 1. Division 01 Section "Multiple Contract Summary" for preparing a combined Contractor's construction schedule.
 - 2. Division 01 Section "Submittal Procedures" for submitting schedules and reports.
 - 3. Division 01 Section "Quality Requirements" for submitting a schedule of tests and inspections.

1.3 DEFINITIONS

- A. Activity: A discrete part of a project that can be identified for planning, scheduling, monitoring, and controlling the construction project. Activities included in a construction schedule consume time and resources.
 - 1. Critical Activity: An activity on the critical path that must start and finish on the planned early start and finish times.
 - 2. Predecessor Activity: An activity that precedes another activity in the network.
 - 3. Successor Activity: An activity that follows another activity in the network.
- B. Cost Loading: The allocation of the schedule of values for the completion of an activity as scheduled. The sum of costs for all activities must equal the total Contract Sum unless otherwise approved by Architect.

- C. CPM: Critical path method, which is a method of planning and scheduling a construction project where activities are arranged based on activity relationships. Network calculations determine when activities can be performed and the critical path of Project.
- D. Critical Path: The longest connected chain of interdependent activities through the network schedule that establishes the minimum overall Project duration and contains no float.
- E. Event: The starting or ending point of an activity.
- F. Float: The measure of leeway in starting and completing an activity.
 - 1. Float time belongs to Owner.
 - 2. Free float is the amount of time an activity can be delayed without adversely affecting the early start of the successor activity.
 - 3. Total float is the measure of leeway in starting or completing an activity without adversely affecting the planned Project completion date.
- G. Resource Loading: The allocation of manpower and equipment necessary for the completion of an activity as scheduled.

1.4 INFORMATIONAL SUBMITTALS

- A. Format for Submittals: Submit required submittals in the following format:
 - 1. Working electronic copy of schedule file, where indicated.
 - 2. PDF electronic file.
- B. Startup construction schedule.
 - 1. Approval of cost-loaded, startup construction schedule will not constitute approval of schedule of values for cost-loaded activities.
- C. Startup Network Diagram: Of size required to display entire network for entire construction period. Show logic ties for activities.
- D. Contractor's Construction Schedule: Initial schedule, of size required to display entire schedule for entire construction period.
- E. CPM Reports: Concurrent with CPM schedule, submit each of the following reports. Format for each activity in reports shall contain activity number, activity description, cost and resource loading, original duration, remaining duration, early start date, early finish date, late start date, late finish date, and total float in calendar days.
 - 1. Activity Report: List of all activities sorted by activity number and then early start date, or actual start date if known.
 - 2. Logic Report: List of preceding and succeeding activities for all activities, sorted in ascending order by activity number and then early start date, or actual start date if known.
 - 3. Total Float Report: List of all activities sorted in ascending order of total float.
 - 4. Earnings Report: Compilation of Contractor's total earnings from commencement of the Work until most recent Application for Payment.

- F. Construction Schedule Updating Reports: Submit with Applications for Payment.
- G. Daily Construction Reports: Submit at weekly intervals.
- H. Material Location Reports: Submit at weekly intervals.
- I. Site Condition Reports: Submit at time of discovery of differing conditions.
- J. Special Reports: Submit at time of unusual event.
- K. Qualification Data: For scheduling consultant.

1.5 QUALITY ASSURANCE

- A. Scheduling Consultant Qualifications: An experienced specialist in CPM scheduling and reporting, with capability of producing CPM reports and diagrams within 24 hours of Architect's request.
- B. Prescheduling Conference: Conduct conference at Project site to comply with requirements in Division 01 Section "Project Management and Coordination." Review methods and procedures related to the preliminary construction schedule and Contractor's construction schedule, including, but not limited to, the following:
 - 1. Review software limitations and content and format for reports.
 - 2. Verify availability of qualified personnel needed to develop and update schedule.
 - 3. Discuss constraints, including work stages.
 - 4. Review delivery dates for Owner-furnished products.
 - 5. Review schedule for work of Owner's separate contracts.
 - 6. Review submittal requirements and procedures.
 - 7. Review time required for review of submittals and resubmittals.
 - 8. Review requirements for tests and inspections by independent testing and inspecting agencies.
 - 9. Review time required for Project closeout and Owner startup procedures, including commissioning activities.
 - 10. Review and finalize list of construction activities to be included in schedule.
 - 11. Review procedures for updating schedule.

1.6 COORDINATION

- A. Coordinate preparation and processing of schedules and reports with performance of construction activities and with scheduling and reporting of separate contractors.
- B. Coordinate Contractor's construction schedule with the schedule of values, list of subcontracts, submittal schedule, progress reports, payment requests, and other required schedules and reports.
 - 1. Secure time commitments for performing critical elements of the Work from entities involved.

2. Coordinate each construction activity in the network with other activities and schedule them in proper sequence.

PART 2 - PRODUCTS

2.1 CONTRACTOR'S CONSTRUCTION SCHEDULE, GENERAL

- A. Time Frame: Extend schedule from date established for commencement of the Work to date of Substantial Completion.
 1. Contract completion date shall not be changed by submission of a schedule that shows an early completion date, unless specifically authorized by Change Order.
- B. Activities: Treat each story or separate area as a separate numbered activity for each main element of the Work. Comply with the following:
 1. Activity Duration: Define activities so no activity is longer than 20 days, unless specifically allowed by Architect.
 2. Procurement Activities: Include procurement process activities for the following long lead items and major items, requiring a cycle of more than 60 days, as separate activities in schedule. Procurement cycle activities include, but are not limited to, submittals, approvals, purchasing, fabrication, and delivery.
 - a. HVAC / Mechanical Equipment.
 3. Submittal Review Time: Include review and resubmittal times indicated in Division 01 Section "Submittal Procedures" in schedule. Coordinate submittal review times in Contractor's construction schedule with submittal schedule.
 4. Startup and Testing Time: Include no fewer than **15** days for startup and testing.
 5. Substantial Completion: Indicate completion in advance of date established for Substantial Completion, and allow time for Architect's administrative procedures necessary for certification of Substantial Completion.
 6. Punch List and Final Completion: Include not more than 30 days for completion of punch list items and final completion.
 7. Work Stages: Indicate important stages of construction for each major portion of the Work, including, but not limited to, the following:
 - a. Subcontract awards.
 - b. Submittals.
 - c. Purchases.
 - d. Mockups.
 - e. Fabrication.
 - f. Sample testing.
 - g. Deliveries.
 - h. Installation.
 - i. Tests and inspections.
 - j. Adjusting.
 - k. Curing.

- l. Building flush-out.
 - m. Startup and placement into final use and operation.
- 8. Construction Areas: Identify each major area of construction for each major portion of the Work. Indicate where each construction activity within a major area must be sequenced or integrated with other construction activities to provide for the following:
 - a. Structural completion.
 - b. Temporary enclosure and space conditioning.
 - c. Permanent space enclosure.
 - d. Completion of mechanical installation.
 - e. Completion of electrical installation.
 - f. Substantial Completion.
- C. Milestones: Include milestones indicated in the Contract Documents in schedule, including, but not limited to, the Notice to Proceed, Substantial Completion, and final completion.
- D. Cost Correlation: Superimpose a cost correlation timeline, indicating planned and actual costs. On the line, show planned and actual dollar volume of the Work performed as of planned and actual dates used for preparation of payment requests.
 - 1. See Division 01 Section "Payment Procedures" for cost reporting and payment procedures.
- E. Upcoming Work Summary: Prepare summary report indicating activities scheduled to occur or commence prior to submittal of next schedule update. Summarize the following issues:
 - 1. Unresolved issues.
 - 2. Unanswered Requests for Information.
 - 3. Rejected or unreturned submittals.
 - 4. Notations on returned submittals.
 - 5. Pending modifications affecting the Work and Contract Time.
- F. Recovery Schedule: When periodic update indicates the Work is 14 or more calendar days behind the current approved schedule, submit a separate recovery schedule indicating means by which Contractor intends to regain compliance with the schedule. Indicate changes to working hours, working days, crew sizes, and equipment required to achieve compliance, and date by which recovery will be accomplished.
- G. Computer Scheduling Software: Prepare schedules using current version of a program that has been developed specifically to manage construction schedules.

2.2 STARTUP CONSTRUCTION SCHEDULE

- A. Bar-Chart Schedule: Submit startup, horizontal, bar-chart-type construction schedule within seven days of date established for commencement of the Work.
- B. Preparation: Indicate each significant construction activity separately. Identify first workday of each week with a continuous vertical line. Outline significant construction activities for first 90

days of construction. Include skeleton diagram for the remainder of the Work and a cash requirement prediction based on indicated activities.

2.3 CONTRACTOR'S CONSTRUCTION SCHEDULE (GANTT CHART)

- A. Gantt-Chart Schedule: Submit a comprehensive, fully developed, horizontal, Gantt-chart-type, Contractor's construction schedule within 30 days of date established for commencement of the Work. Base schedule on the startup construction schedule and additional information received since the start of Project.
- B. Preparation: Indicate each significant construction activity separately. Identify first workday of each week with a continuous vertical line.
 - 1. For construction activities that require three months or longer to complete, indicate an estimated completion percentage in 10 percent increments within time bar.

2.4 REPORTS

- A. Daily Construction Reports: Prepare a daily construction report recording the following information concerning events at Project site:
 - 1. List of subcontractors at Project site.
 - 2. List of separate contractors at Project site.
 - 3. Approximate count of personnel at Project site.
 - 4. Equipment at Project site.
 - 5. Material deliveries.
 - 6. High and low temperatures and general weather conditions, including presence of rain or snow.
 - 7. Accidents.
 - 8. Meetings and significant decisions.
 - 9. Unusual events (see special reports).
 - 10. Stoppages, delays, shortages, and losses.
 - 11. Meter readings and similar recordings.
 - 12. Emergency procedures.
 - 13. Orders and requests of authorities having jurisdiction.
 - 14. Change Orders received and implemented.
 - 15. Construction Change Directives received and implemented.
 - 16. Services connected and disconnected.
 - 17. Equipment or system tests and startups.
 - 18. Partial completions and occupancies.
 - 19. Substantial Completions authorized.
 - 20. Material stored prior to previous report and remaining in storage.
 - 21. Material stored prior to previous report and since removed from storage and installed.
 - 22. Material stored following previous report and remaining in storage.
- B. Site Condition Reports: Immediately on discovery of a difference between site conditions and the Contract Documents, prepare and submit a detailed report. Submit with a Request for

Information. Include a detailed description of the differing conditions, together with recommendations for changing the Contract Documents.

2.5 SPECIAL REPORTS

- A. General: Submit special reports directly to Owner within one day(s) of an occurrence. Distribute copies of report to parties affected by the occurrence.
- B. Reporting Unusual Events: When an event of an unusual and significant nature occurs at Project site, whether or not related directly to the Work, prepare and submit a special report. List chain of events, persons participating, response by Contractor's personnel, evaluation of results or effects, and similar pertinent information. Advise Owner in advance when these events are known or predictable.

PART 3 - EXECUTION

3.1 CONTRACTOR'S CONSTRUCTION SCHEDULE

- A. Scheduling Consultant: Engage a consultant to provide planning, evaluation, and reporting using CPM scheduling.
 - 1. In-House Option: Owner may waive the requirement to retain a consultant if Contractor employs skilled personnel with experience in CPM scheduling and reporting techniques. Submit qualifications.
 - 2. Meetings: Scheduling consultant shall attend all meetings related to Project progress, alleged delays, and time impact.
- B. Contractor's Construction Schedule Updating: At monthly intervals, update schedule to reflect actual construction progress and activities. Issue schedule one week before each regularly scheduled progress meeting.
 - 1. Revise schedule immediately after each meeting or other activity where revisions have been recognized or made. Issue updated schedule concurrently with the report of each such meeting.
 - 2. Include a report with updated schedule that indicates every change, including, but not limited to, changes in logic, durations, actual starts and finishes, and activity durations.
 - 3. As the Work progresses, indicate final completion percentage for each activity.
- C. Distribution: Distribute copies of approved schedule to Architect, Owner, separate contractors, testing and inspecting agencies, and other parties identified by Contractor with a need-to-know schedule responsibility.
 - 1. Post copies in Project meeting rooms and temporary field offices.
 - 2. When revisions are made, distribute updated schedules to the same parties and post in the same locations. Delete parties from distribution when they have completed their assigned portion of the Work and are no longer involved in performance of construction activities.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 01 33 00 – SUBMITTAL PROCEDURES

1. GENERAL PROVISIONS

- 1.1 The general provisions of the Contract, including the Conditions of the Contract (General, Supplementary and other Conditions, if any) and Division 1 as appropriate, apply to the Work specified in this Section.

2. ITEMS TO BE SUBMITTED AT START OF WORK

- 2.1 Performance/Labor and Material Payment Bond(s): One (1) copy of each bond simultaneously with the signed Agreement. See General Conditions Article 11.4 and Supplementary Conditions.
- 2.2 Policies or Certificates of Insurance: Two (2) copies simultaneously with the signed Agreement. See General Conditions Article 11 and Supplementary Conditions.
- 2.3 Contractor's License: Submit a copy of all business licenses required by local and state agencies.
- 2.4 Contractor's Schedule of Values: Two (2) copies for approval within 21 days after the Agreement is signed. See General Conditions Article 9.2 and provisions in this Section.
- 2.5 Contractor's Progress Schedule: Two (2) copies for review and reference within 21 days after the Agreement is signed. See General Conditions Article 3.10 and provisions in this Section.
- 2.6 Submittal Schedule: In Excel electronic format within 21 days after the Agreement is signed. See provisions in this Section.
- 2.7 Products List: In Excel format for approval within 30 days after the Agreement is signed. See provisions in Section 016200 - MATERIAL AND EQUIPMENT.

3. NON-RESIDENT CONTRACTOR & SUBCONTRACTORS BONDS

- 3.1 Refer to requirements in Section 011100 - INSTRUCTIONS TO BIDDERS for filing of Surety Bonds with the Division of Revenue.
- 3.2 If such bonds are required on this project, it will be the responsibility of the Contractor to produce evidence to the Construction Manager that they have been filed, or if not required, to supply a notarized statement that they are not required. This must be done within seven (7) days after award of Contract and in any event before construction starts.

4. RELATED REQUIREMENTS

- 4.1 See Section 017700 - CONTRACT CLOSE OUT: for submittal requirements for Contract Close out.

5. SUBMITTALS

5.2 Prepare a Submittal's Schedule in Excel electronic format for Shop Drawings, Product Data and Samples. Show:

1. The dates for Contractor's submittals.
2. The dates submittals will be required for Owner-furnished products.
3. The date approved submittals will be required from the Architect.

5.3 Should the Architect or Construction Manager elect to omit any items from the list of items to be reviewed, it shall not relieve the Contractor from compliance with the Contract Documents with regard to that item. In such instance, the Contractor may still elect to have submittals prepared for his own use without review by the Architect or Construction Manager.

6. SHOP DRAWINGS

6.1 Conform to provisions in General Conditions applying to Shop Drawings.

6.2 Present in a clear and thorough manner.

1. Identify details by reference to sheet and details, schedule or room numbers shown on Contract Drawings.

7. PRODUCT DATA

7.1 Conform to provisions in General Conditions applying to Product Data.

7.2 Preparation:

1. Clearly mark each copy to specifically identify products or models pertinent to project.
2. Show performance characteristics and capacities.
2. Show dimensions and clearances required.
4. Show wiring or piping diagrams and controls.

7.3 Manufacturer's standard schematic drawings and diagrams:

1. Modify drawings and diagrams to delete information which is not applicable to the Work.
2. Supplement standard information to provide information specifically applicable to the Work.

8. SAMPLES

8.1 Conform to provisions in General Conditions applying to Samples.

8.2 Provide samples of sufficient size and quantity to clearly illustrate:

1. Functional characteristics of the project, with integrally related parts and attachment devices.
2. Full range of color, texture and pattern.

8.3 Samples must be clearly labelled with project number, submittal number, color, type, model number, and any other identifying items, in order to be properly reviewed and approved.

8.4 Field samples and mock-ups; See requirements, if any, in other specification Sections.

9. SUBMITTAL REQUIREMENTS

9.1 Number of submittals required.

1. Shop drawings and Product Data: shop drawings for temporary steel, steel and miscellaneous steel, MEP shop drawings shall also provide one (1) paper copy for approval and ultimate use by the Construction manager for field verification. Any additional copies required by the Contractor shall be made by him.
2. Samples: Submit four (4) each. Submit all data and pictures of samples through the Building Blok Management System. Physical samples to be noted on Building Blok submittal and supplied to Construction manager for processing. When approved it will be returned to the Construction Manager to be retained at the site for reference use.

9.2 Submittals shall contain:

1. The date of submission and the dates of any previous submissions.
2. The Project title and number.
3. Contract identification.
4. The names of the Contractor, Supplier and Manufacturer.
5. Identification of the product, with the specification section number.
6. Field dimensions, clearly identified as such.
7. Relation to adjacent or critical features of the Work or materials.
8. Applicable standards, such as ASTM or Federal Specification numbers.
9. Identification of deviations from Contract Documents.
10. Identification of revisions on resubmittals.
11. An 8 inch x 3 inch blank space for Contractor and Architect's stamps.
12. Contractor's stamp, initialed or signed, certifying review of submittal, verification of

products, field measurements and field construction criteria, and coordination of the information within the submittal with requirements of the Work and of Contract Documents. Submittals which have not been stamped with this stamp or its approved equivalent will be returned without being reviewed.

- 9.3 Shop Drawing coordination and interface with work of other Contracts and adjacent work is the responsibility of each individual Contractor.

10. RESUBMISSION REQUIREMENTS

- 10.1 Make any corrections or changes in the submittals required by the Architect and resubmit until approved.

10.2 Shop drawings and Product Data:

1. Revise initial drawings or data, and resubmit as specified for the initial submittal.
2. Indicate any changes which have been made other than those requested by the Architect.

- 10.3 Samples: Submit new samples as required for initial submittal.

11. FINAL DISTRIBUTION OF APPROVED SUBMITTALS

- 11.1 The Construction Manager will distribute copies of Shop Drawings and Product Data which carry the Architect's stamp through Building Blok to:

1. Contractor that made submittal.
2. Jobsite File.
3. Record Document File.
4. Other Contractors, as required for coordination.

- 11.2 The Construction Manager will distribute samples as required.

- 11.3 The Contractor will distribute copies of Shop Drawings and Product Data which carry the Architect's stamp to:

1. Subcontractors.
2. Suppliers.
3. Fabricators.

12. SCHEDULE OF VALUES

- 12.1 Use AIA Document G703, Continuation Sheet to G702.

13. PROGRESS SCHEDULE

- 13.1 Prepare schedules in the form of a horizontal bar chart.

1. Provide separate horizontal bar chart for each trade or operation.
 2. Horizontal time scale: Identify the first work day of each week.
 3. Scale and spacing: To allow space for notations and future revisions.
 4. Minimum sheet size 11 inches by 17 inches.
- 13.2 Format of listings: The chronological order of the start of each item of work.
- 13.3 Show the complete sequence of construction by activity.
- 13.4 Show the dates for the beginning, and completion of, each major element of construction such as:
1. Site clearing.
 2. Site utilities.
 3. Foundation work.
 4. Structural framing.
 5. Subcontractor work.
 6. Equipment installation.
- 13.5 Show projected percentage of completion for each item as of the first day of each month.
- 13.6 Update Progress Schedule monthly and submit with Application for Payment and Schedule of values.
- 13.7 Indicate progress of each activity to date of submission.
- 13.8 Show changes occurring since previous submission of schedule:
1. Major changes in scope.
 2. Activities modified since previous submission.
 3. Revised projections of progress and completion.
 4. Other identifiable changes.
- 13.9 Provide a narrative report as needed to define:
1. Problem areas, anticipated delays and the impact of the schedule.
 2. Corrective action recommended, and its effect.
 3. The effect of changes on schedules of other prime contractors.

- 13.10 Submit one reproducible transparency.
- 13.11 After review, distribute copies of the schedule to:
1. Jobsite File.
 2. Subcontractors.
 3. Architect.
 4. Owner.
- 13.12 Instruct recipients to report promptly to the Contractor, in writing, any problems anticipated by the projections shown in the schedules.
14. CLOSE OUT DOCUMENTS, GUARANTEES, WARRANTIES, OPERATION MANUALS:
Contractors shall include the cost to provide (2) copies of the following close-out documentations to Owner with-in 30 Calendar days of the completion of the contract work.
1. CLOSE OUT DOCUMENTS, GUARANTEES, WARRANTIES, OPERATION MANUALS
- (2) Each Contractor shall be prepared for the Owner's Design Professionals to make a final inspection of the construction (accompanied by Owner Representative) and certify the completion of construction in writing. The inspection will be scheduled at least 15 days prior to the scheduled completion date.
- (3) All Guarantees and Warranties shall be in writing and be delivered to Owner at the time of the final inspection. In conjunction with this delivery, Contractor shall prepare and deliver to Owner a listing (company, and name, address, day and night phone numbers) of contacts for service calls.
- (a) Note that no final invoice will be processed until all close-out documentation is received.
- (4) The following is a list of O&M items to delivered to Owner at the above stated time.
- (a) Note that this is to be a rider to the O&M information required by the specification and not to be an all inclusive list.
- (b) Contractor shall furnish Contract specific items. If an item is not applicable to a Contractor agreement then it may be disregarded
- (c) Contractor shall provide two (2) sets of the manufacturer's operation and service manuals of all equipment.
- (d) All warranties and guarantees shall be issued in the name of the Owner
- (e) Contractor shall provide all relevant documents on the following "CLOSE OUT DOCUMENT LIST".
- (i) Paving warranty (1 year).
 - (ii) Roofing and watertight warranty from manufacturer (20 years)
 - (iii) Contractor Blanket Warranty (1 year)
 - (iv) Roof installer warranty (3 years)
 - (v) HVAC units (1 year general / 5 year compressor)
 - (vi) Caulking and Sealants (5 years)
 - (vii) Store front Aluminum Warranty (3 years)
 - (viii) *Soil treatment of termites (5 year certificate)
 - (ix) Masonry waterproofing (5 year)

- (x) Foundation Inspection and Certification.
- (xi) Structural Steel Inspection and Certification.
- (xii) Fire Sprinkler Material and Test certificate (above and below grade)
- (xiii) Water line pressure test.
- (xiv) Gas Line pressure test
- (xv) Sanitary sewer flow test
- (xvi) Domestic Water Sterilization Certification
- (xvii) Electrical Panel Balance and Phase Test
- (xviii) HVAC Test and Balance report
- (xix) HVAC and Control Panel start-up report and certification that systems perform according to specifications.
- (xx) Fire protection systems Warranty (1 year) and Certification letter that states all corrections have been completed according to Fire Marshall.
- (xxi) As-Built drawings and Specifications two (2) complete and one (1) reproducible.
- (xxii) Final Contractor's List and Phone Numbers.
- (xxiii) Final Lien Releases from Contractor
- (xxiv) Punch list Completion Statement from Contractor that all items related to the associated contract have been completed
- (xxv) 11-Month Warranty Inspection and Punch list.
- (xxvi) Waste manifests for the transportation of environmental waste.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 01 35 23 - SAFETY PROGRAM

1. GENERAL

- 1.1 The Contractor shall be responsible for initiating, maintaining and supervising all safety activities and programs in connection with the Work.
- 1.2 Contractor shall be responsible for the safety of its personnel.
- 1.3 Hard hats and safety glasses must be worn by all personnel on the jobsite, except in contractor's administrative office/trailer. All equipment must comply with OSHA standards. All job site personnel shall wear long pants, shirts (no tank tops) and work boots.

2. SAFETY PROGRAM

- 2.1 Prior to commencing the Work, the Contractor shall submit to the (1) electronic copy and (1) bound copy of its safety program and one (1) copy of MSDS information in a 2" ringed notebook. One paper copy of the safety program and MSDS will be retained by the Construction Manager in the field office.
- 2.2 The safety program shall outline those hazards peculiar to the Contractor's Work, and the steps to be taken to eliminate or reduce the risk of injury or loss due to those hazards. **The program shall be site specific.** Contractor shall implement and enforce its safety program, which is in accordance with all OSHA, Federal, State and local laws.
- 2.3 Contractor shall designate a qualified Safety Supervisor to implement the safety program. Unless otherwise approved by the Owner, the Safety Supervisor shall be the Contractor's field Superintendent/Foremen.
- 2.4 Contractor shall hold weekly safety toolbox talks with all of its employees. The Contractor shall designate a responsible, capable person to conduct these meetings.

3. SUBSTANCE ABUSE POLICY STATEMENT

The Owner is committed to providing a safe work site environment for its employees and Contractors' employees. The Owner does not condone or permit employees and Contractors' employees to use or be under the influence of drugs or alcohol while they are on the work site. The Policy is as follows:

- 3.1 It is a violation Contractors' employees to use, possess, sell, trade, or otherwise engage in the use of illegal drugs and alcohol.
- 3.2 It is a violation for Contractors' employees to report to work while influenced by illegal drugs or alcohol.
- 3.3 It is a violation for Contractors' employees to use prescription drugs illegally (i.e. to use prescription drugs that have not been legally obtained) and to use prescription drugs in a manner other than the prescribed intentions.
- 3.4 Contractors' employees who are taking medication, which is prescribed by their physician, are expected to discuss potential side effects with their prescribing physician, as it relates to the work requirements.

Violations of this policy will require disciplinary action. If any Contractors' employees are observed or suspected of being influenced by drugs or alcohol, they will be instructed to stop work and may be required to leave the work site.

4. EXECUTION

- 4.1 Contractor shall comply with all applicable federal, state and local laws, regulations and orders relating to occupational safety and health, and related procedures, and shall, to the extent permitted by law, indemnify and hold Owner and Architect, and their respective directors, officers, or agents and employees, harmless from any and all liability, public or private, penalties, contractual or otherwise, losses, damages, costs, attorney's fees, expenses, causes of action, claims or judgments resulting from a claim filed by anyone in connection with the aforementioned acts, or any rule, regulation or order promulgated thereunder, arising out of the Contractor's Work, this Agreement or any subcontract executed in prosecution of the Work. Contractor further agrees in the event of a claim of violation of any such laws, regulations, orders or procedures arising out of or in any way connected with the performance of this agreement, Owner may immediately take whatever action is deemed necessary by Owner and/or Architect to remedy the claim or violation. Any and all costs or expenses paid or incurred by Owner and/or Architect in taking such action shall be borne by Contractor, and may be deducted from any payments due Contractor.
- 4.2 The Contractor agrees to (1) take all necessary steps to promote safety and health on the job site; (2) cooperate with Owner and/or Architect in preventing and eliminating safety and health hazards; (3) train, instruct and provide adequate supervision to ensure that its employees are aware of, and comply with, applicable Federal and State safety and health laws, standards, regulations and rules, safe healthful work practices and all applicable safety rules, regulations and work practices and procedures (4) not create any hazards or expose any of its employees, employees of the Owner and/or Architect or employees of Contractors to any hazards; and (5) where the Contractor is aware of the existence of a hazard not within its control, notify the Owner/ Architect of the hazard as well as warn exposed persons to avoid the hazard.
- 4.3 The Contractor's Superintendent or Safety Supervisor shall immediately, verbally report, and promptly thereafter confirm in writing to the Owner and Architect any unsafe conditions or practices that are observed, or violations of job safety which are not within the Contractor's control.
- 4.4 Contractors shall immediately, verbally report, and promptly thereafter confirm in writing, to the Owner and Architect any unsafe practices or conditions that are observed which are not under the Contractor's control.
- 4.5 The Contractor's Superintendent or Safety Supervisor shall insure that adequate first aid supplies are available, and that personnel are qualified to administer first aid/CPR, as required by State and/or Federal regulations.
- 4.6 Contractor shall promptly notify Owner and Architect of any personal injury requiring medical treatment of any of the Contractor's employees at the Project site; or of significant damage to property arising in connection with Contractor's performance, as promptly as possible after the occurrence of such injury or damage. Within forty-eight hours of such occurrence, Contractor shall furnish to Owner and Architect a complete written report of such injury or damage.
- 4.7 Contractor certifies that the forgoing terms shall be made applicable to all Contractors'

suppliers, materialmen or anyone furnishing labor and/or materials to the site.

4.8 The Contractor shall continue to educate his job Safety Supervisor or Superintendent of their responsibilities, which shall include:

1. Instructing workers and subcontractors under its supervision in safe work practices and work methods at the time they are given work assignments.
2. Ensuring that its workers and subcontractors have and use the proper protective equipment and suitable tools for the job.
3. Continuously checking to see that no unsafe practices or conditions are allowed to exist on any part of his job.
4. Acquainting its workers and subcontractors with all applicable safety requirements and seeing that they are enforced.
5. Setting a good example for his workers.
6. Making a complete investigation of accidents to determine facts necessary to take corrective action.
7. Holding weekly "tool box" safety meetings with his men to:
 - a. Discuss observed unsafe work practices or conditions including a review of current safety report.
 - b. Review the accident experience of his crew and discuss correction of accident causes.
 - c. Encourage safety suggestions from his men.
8. Seeing that prompt medical treatment is administered to an injured employee.
9. Correcting or reporting immediately to job superintendent any observed unsafe conditions, practices or violations of job security.
10. Making all reports required by these Contract Documents in a full and timely fashion.

5. **SAFETY MEETINGS**

5.1 The Contractor's Project Manager or Superintendent shall attend weekly or biweekly supervisory job meetings. The first topic of these meetings will be job site safety. The weekly safety reports will be reviewed and violations must be corrected immediately. Contractors will be encouraged to participate in the on-going jobsite safety.

6. **TOOL BOX SAFETY MEETINGS**

6.1 The Contractor shall schedule weekly "tool box" safety sessions to be held by his job safety supervisor or superintendent for all of his employees.

6.2 A member of the Contractor's management staff shall periodically attend "tool box" safety sessions to evaluate their effectiveness and offer any appropriate suggestions for improvement.

7. REPORTS

- 7.1 Contractors shall report all accidents or injuries on a timely basis in accordance with all applicable regulations.
- 7.2 Contractors shall promptly complete an accident investigation report of all accidents.
- 7.3 A record of all “tool box” safety sessions shall be made.

8. FALL PROTECTION PROCEDURES

- 8.1 Contractor is responsible, in accordance with federal, state, local laws and regulations including OSHA, to provide and enforce their own site specific fall protection program and equipment. The following fall protection procedures shall be enforced by all Contractors as a minimum standard.

All workers on walking/working surfaces with unprotected sides or edges six feet (6') or higher above the next lower level must be protected from falls by the use of guardrail systems, net systems, fall arrest systems or control access zone programs. It is intended that when fall protection is required, it is required 100% of the time. All contractors are reminded that relevant industry regulations require that contractors comply with the following standards.

- 1. Workers constructing or working near leading edges must be protected.
 - 2. Workers on the face of formwork or reinforcing steel must be protected at a height of 6 feet (6') or greater.
 - 3. Scaffolds shall be guarded at 6 feet (6') above next lower level.
 - 4. Brick layers performing overhand bricklaying and related work six feet (6') or higher above lower levels must be protected from falls.
 - 5. Roofers must comply with OSHA standards for roof work.
 - 6. The Contractor's controlled access zone plan shall be included in their site-specific safety program and shall be submitted prior to the start of work. Contractors are responsible for assuring programs are OSHA compliant.
 - 7. Guidelines for Residential Construction or any interpretations will not be accepted in lieu of 1926 Standards.
- 8.2 Contractor shall provide its own fall protection. Fall protection may be provided by guardrail systems, net systems, or personal fall arrest systems. All fall protection systems must comply with OSHA standards.
 - 8.3 Stepladders, exposed to shafts or edges of the building, greater than six feet (6') above the next lower level, must be tied off or otherwise secured. Employee must wear fall protection, i.e. harness/lanyard.
 - 8.4 The Safety Cable System shall not be altered or removed without a written request submitted to the Project Manager with a copy to the Field Manager. It shall be the responsibility of each

and every Contractor that is removing or altering the Safety Cable System to maintain the fall protection safety provided by the safety cable and not leave the area unprotected. Each and every Contractor shall be responsible to re-install the Safety Cable System immediately after work is completed. Each and every Contractor shall be responsible to re-install the Safety Cable System in accordance to OSHA standards.

8.5 Fall protection will be enforced for Structural Steel Erectors.

1. As for a Contractor engaged in structural steel erection, the Contractor is specifically advised that structural steel erectors shall comply with all protection requirements for all work at a height of six feet (6') or greater above the next lower level, 100 percent of the time, by any of the following means.
 - a. Standard guardrail system.
 - b. Personal Fall Arrest System (PFAS) – full body harness with shock absorbing lanyard. Maximum free fall distance permitted, with lanyard and lanyard attachment shall not exceed six feet (6'). Anchor point must be capable of supporting five thousand pounds. Perimeter guard cables or alignment cables may not be used for anchor points.
 - c. Access to work area shall be provided by ladders. There shall be sufficient number of ladders available to reduce the amount of “beam walking.” When it is absolutely necessary to traverse a beam, 100% fall protection must be utilized.
 - d. Steel erection Contractors must, at all times, be able to certify in writing that each of his employees has been properly trained in both OSHA fall protection standards and the Contractor's site specific project fall protection procedures.
 - e. Prior to the erection of the steel, the Contractor shall meet with the Project Manager and Safety Representatives to review and document site specific procedures.

END OF SAFETY PROGRAM

SECTION 01 40 00 - QUALITY REQUIREMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for quality assurance and quality control.
- B. Testing and inspecting services are required to verify compliance with requirements specified or indicated. These services do not relieve Contractor of responsibility for compliance with the Contract Document requirements.
 - 1. Specific quality-assurance and -control requirements for individual construction activities are specified in the Sections that specify those activities. Requirements in those Sections may also cover production of standard products.
 - 2. Specified tests, inspections, and related actions do not limit Contractor's other quality-assurance and -control procedures that facilitate compliance with the Contract Document requirements.
 - 3. Requirements for Contractor to provide quality-assurance and -control services required by Architect, Owner, or authorities having jurisdiction are not limited by provisions of this Section.
- C. Related Requirements:
 - 1. Divisions 02 through 33 Sections for specific test and inspection requirements.

1.3 DEFINITIONS

- A. Quality-Assurance Services: Activities, actions, and procedures performed before and during execution of the Work to guard against defects and deficiencies and substantiate that proposed construction will comply with requirements.
- B. Quality-Control Services: Tests, inspections, procedures, and related actions during and after execution of the Work to evaluate that actual products incorporated into the Work and completed construction comply with requirements. Services do not include contract enforcement activities performed by Architect.
- C. Mockups: Full-size physical assemblies that are constructed on-site. Mockups are constructed to verify selections made under Sample submittals; to demonstrate aesthetic effects and, where indicated, qualities of materials and execution; to review coordination, testing, or operation; to show interface between dissimilar materials; and to demonstrate compliance with specified

installation tolerances. Mockups are not Samples. Unless otherwise indicated, approved mockups establish the standard by which the Work will be judged.

1. Integrated Exterior Mockups: Mockups of the exterior envelope erected separately from the building but on Project site, consisting of multiple products, assemblies, and subassemblies.
- D. Preconstruction Testing: Tests and inspections performed specifically for Project before products and materials are incorporated into the Work, to verify performance or compliance with specified criteria.
- E. Product Testing: Tests and inspections that are performed by an NRTL, an NVLAP, or a testing agency qualified to conduct product testing and acceptable to authorities having jurisdiction, to establish product performance and compliance with specified requirements.
- F. Source Quality-Control Testing: Tests and inspections that are performed at the source, e.g., plant, mill, factory, or shop.
- G. Field Quality-Control Testing: Tests and inspections that are performed on-site for installation of the Work and for completed Work.
- H. Testing Agency: An entity engaged to perform specific tests, inspections, or both. Testing laboratory shall mean the same as testing agency.
- I. Installer/Applicator/Erector: Contractor or another entity engaged by Contractor as an employee, Subcontractor, or Sub-subcontractor, to perform a particular construction operation, including installation, erection, application, and similar operations.
 1. Use of trade-specific terminology in referring to a trade or entity does not require that certain construction activities be performed by accredited or unionized individuals, or that requirements specified apply exclusively to specific trade(s).
- J. Experienced: When used with an entity or individual, "experienced" means having successfully completed a minimum of five previous projects similar in nature, size, and extent to this Project; being familiar with special requirements indicated; and having complied with requirements of authorities having jurisdiction.

1.4 CONFLICTING REQUIREMENTS

- A. Referenced Standards: If compliance with two or more standards is specified and the standards establish different or conflicting requirements for minimum quantities or quality levels, comply with the most stringent requirement. Refer conflicting requirements that are different, but apparently equal, to Architect for a decision before proceeding.
- B. Minimum Quantity or Quality Levels: The quantity or quality level shown or specified shall be the minimum provided or performed. The actual installation may comply exactly with the minimum quantity or quality specified, or it may exceed the minimum within reasonable limits. To comply with these requirements, indicated numeric values are minimum or maximum, as appropriate, for the context of requirements. Refer uncertainties to Architect for a decision before proceeding.

1.5 INFORMATIONAL SUBMITTALS

- A. Contractor's Quality-Control Plan: For quality-assurance and quality-control activities and responsibilities.
- B. Qualification Data : For Contractor's quality-control personnel.
- C. Contractor's Statement of Responsibility: When required by authorities having jurisdiction, submit copy of written statement of responsibility sent to authorities having jurisdiction before starting work on the following systems:
 - 1. Seismic-force-resisting system, designated seismic system, or component listed in the designated seismic system quality-assurance plan prepared by Architect.
 - 2. Main wind-force-resisting system or a wind-resisting component listed in the wind-force-resisting system quality-assurance plan prepared by Architect.
- D. Testing Agency Qualifications: For testing agencies specified in "Quality Assurance" Article to demonstrate their capabilities and experience. Include proof of qualifications in the form of a recent report on the inspection of the testing agency by a recognized authority.
- E. Schedule of Tests and Inspections: Prepare in tabular form and include the following:
 - 1. Specification Section number and title.
 - 2. Entity responsible for performing tests and inspections.
 - 3. Description of test and inspection.
 - 4. Identification of applicable standards.
 - 5. Identification of test and inspection methods.
 - 6. Number of tests and inspections required.
 - 7. Time schedule or time span for tests and inspections.
 - 8. Requirements for obtaining samples.
 - 9. Unique characteristics of each quality-control service.

1.6 CONTRACTOR'S QUALITY-CONTROL PLAN

- A. Quality-Control Plan, General: Submit quality-control plan within 10 days of Notice to Proceed, and not less than five days prior to preconstruction conference. Submit in format acceptable to Architect. Identify personnel, procedures, controls, instructions, tests, records, and forms to be used to carry out Contractor's quality-assurance and quality-control responsibilities. Coordinate with Contractor's construction schedule.
- B. Quality-Control Personnel Qualifications: Engage qualified full-time personnel trained and experienced in managing and executing quality-assurance and quality-control procedures similar in nature and extent to those required for Project.
 - 1. Project quality-control manager may also serve as Project superintendent.
- C. Submittal Procedure: Describe procedures for ensuring compliance with requirements through review and management of submittal process. Indicate qualifications of personnel responsible for submittal review.

- D. **Testing and Inspection:** In quality-control plan, include a comprehensive schedule of Work requiring testing or inspection, including the following:
1. Contractor-performed tests and inspections including subcontractor-performed tests and inspections. Include required tests and inspections and Contractor-elected tests and inspections.
 2. Special inspections required by authorities having jurisdiction and indicated on the "Statement of Special Inspections."
 3. Owner-performed tests and inspections indicated in the Contract Documents, including tests and inspections indicated to be performed by the Commissioning Authority.
- E. **Continuous Inspection of Workmanship:** Describe process for continuous inspection during construction to identify and correct deficiencies in workmanship in addition to testing and inspection specified. Indicate types of corrective actions to be required to bring work into compliance with standards of workmanship established by Contract requirements and approved mockups.
- F. **Monitoring and Documentation:** Maintain testing and inspection reports including log of approved and rejected results. Include work Architect has indicated as nonconforming or defective. Indicate corrective actions taken to bring nonconforming work into compliance with requirements. Comply with requirements of authorities having jurisdiction.

1.7 REPORTS AND DOCUMENTS

- A. **Test and Inspection Reports:** Prepare and submit certified written reports specified in other Sections. Include the following:
1. Date of issue.
 2. Project title and number.
 3. Name, address, and telephone number of testing agency.
 4. Dates and locations of samples and tests or inspections.
 5. Names of individuals making tests and inspections.
 6. Description of the Work and test and inspection method.
 7. Identification of product and Specification Section.
 8. Complete test or inspection data.
 9. Test and inspection results and an interpretation of test results.
 10. Record of temperature and weather conditions at time of sample taking and testing and inspecting.
 11. Comments or professional opinion on whether tested or inspected Work complies with the Contract Document requirements.
 12. Name and signature of laboratory inspector.
 13. Recommendations on retesting and reinspecting.
- B. **Manufacturer's Technical Representative's Field Reports:** Prepare written information documenting manufacturer's technical representative's tests and inspections specified in other Sections. Include the following:
1. Name, address, and telephone number of technical representative making report.
 2. Statement on condition of substrates and their acceptability for installation of product.
 3. Statement that products at Project site comply with requirements.

4. Summary of installation procedures being followed, whether they comply with requirements and, if not, what corrective action was taken.
 5. Results of operational and other tests and a statement of whether observed performance complies with requirements.
 6. Statement whether conditions, products, and installation will affect warranty.
 7. Other required items indicated in individual Specification Sections.
- C. **Factory-Authorized Service Representative's Reports:** Prepare written information documenting manufacturer's factory-authorized service representative's tests and inspections specified in other Sections. Include the following:
1. Name, address, and telephone number of factory-authorized service representative making report.
 2. Statement that equipment complies with requirements.
 3. Results of operational and other tests and a statement of whether observed performance complies with requirements.
 4. Statement whether conditions, products, and installation will affect warranty.
 5. Other required items indicated in individual Specification Sections.
- D. **Permits, Licenses, and Certificates:** For Owner's records, submit copies of permits, licenses, certifications, inspection reports, releases, jurisdictional settlements, notices, receipts for fee payments, judgments, correspondence, records, and similar documents, established for compliance with standards and regulations bearing on performance of the Work.

1.8 QUALITY ASSURANCE

- A. **General:** Qualifications paragraphs in this article establish the minimum qualification levels required; individual Specification Sections specify additional requirements.
- B. **Manufacturer Qualifications:** A firm experienced in manufacturing products or systems similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units.
- C. **Fabricator Qualifications:** A firm experienced in producing products similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units.
- D. **Installer Qualifications:** A firm or individual experienced in installing, erecting, or assembling work similar in material, design, and extent to that indicated for this Project, whose work has resulted in construction with a record of successful in-service performance.
- E. **Professional Engineer Qualifications:** A professional engineer who is legally qualified to practice in jurisdiction where Project is located and who is experienced in providing engineering services of the kind indicated. Engineering services are defined as those performed for installations of the system, assembly, or product that are similar in material, design, and extent to those indicated for this Project.
- F. **Specialists:** Certain Specification Sections require that specific construction activities shall be performed by entities who are recognized experts in those operations. Specialists shall satisfy qualification requirements indicated and shall be engaged for the activities indicated.

1. Requirements of authorities having jurisdiction shall supersede requirements for specialists.
- G. **Testing Agency Qualifications:** An NRTL, an NVLAP, or an independent agency with the experience and capability to conduct testing and inspecting indicated, as documented according to ASTM E 329; and with additional qualifications specified in individual Sections; and, where required by authorities having jurisdiction, that is acceptable to authorities.
 1. NRTL: A nationally recognized testing laboratory according to 29 CFR 1910.7.
 2. NVLAP: A testing agency accredited according to NIST's National Voluntary Laboratory Accreditation Program.
- H. **Manufacturer's Technical Representative Qualifications:** An authorized representative of manufacturer who is trained and approved by manufacturer to observe and inspect installation of manufacturer's products that are similar in material, design, and extent to those indicated for this Project.
- I. **Factory-Authorized Service Representative Qualifications:** An authorized representative of manufacturer who is trained and approved by manufacturer to inspect installation of manufacturer's products that are similar in material, design, and extent to those indicated for this Project.
- J. **Preconstruction Testing:** Where testing agency is indicated to perform preconstruction testing for compliance with specified requirements for performance and test methods, comply with the following:
 1. Contractor responsibilities include the following:
 - a. Provide test specimens representative of proposed products and construction.
 - b. Submit specimens in a timely manner with sufficient time for testing and analyzing results to prevent delaying the Work.
 - c. Provide sizes and configurations of test assemblies, mockups, and laboratory mockups to adequately demonstrate capability of products to comply with performance requirements.
 - d. Build site-assembled test assemblies and mockups using installers who will perform same tasks for Project.
 - e. Build laboratory mockups at testing facility using personnel, products, and methods of construction indicated for the completed Work.
 - f. When testing is complete, remove test specimens, assemblies, and mockups; do not reuse products on Project.
 2. **Testing Agency Responsibilities:** Submit a certified written report of each test, inspection, and similar quality-assurance service to Architect and Commissioning Authority, with copy to Contractor. Interpret tests and inspections and state in each report whether tested and inspected work complies with or deviates from the Contract Documents.
- K. **Mockups:** Before installing portions of the Work requiring mockups, build mockups for each form of construction and finish required to comply with the following requirements, using materials indicated for the completed Work:

1. Build mockups in location and of size indicated or, if not indicated, as directed by Architect.
 2. Notify Architect seven days in advance of dates and times when mockups will be constructed.
 3. Employ supervisory personnel who will oversee mockup construction. Employ workers that will be employed during the construction at Project.
 4. Demonstrate the proposed range of aesthetic effects and workmanship.
 5. Obtain Architect's approval of mockups before starting work, fabrication, or construction.
 - a. Allow seven days for initial review and each re-review of each mockup.
 6. Maintain mockups during construction in an undisturbed condition as a standard for judging the completed Work.
 7. Demolish and remove mockups when directed unless otherwise indicated.
- L. Integrated Exterior Mockups: Construct integrated exterior mockup according to approved Shop Drawings. Coordinate installation of exterior envelope materials and products for which mockups are required in individual Specification Sections, along with supporting materials.
- M. Laboratory Mockups: Comply with requirements of preconstruction testing and those specified in individual Specification Sections in Divisions 02 through 33.

1.9 QUALITY CONTROL

- A. Owner Responsibilities: Where quality-control services are indicated as Owner's responsibility, Owner will engage a qualified testing agency to perform these services.
1. Owner will furnish Contractor with names, addresses, and telephone numbers of testing agencies engaged and a description of types of testing and inspecting they are engaged to perform.
 2. Payment for these services will be made from testing and inspecting allowances, as authorized by Change Orders.
 3. Costs for retesting and re-inspecting construction that replaces or is necessitated by work that failed to comply with the Contract Documents will be charged to Contractor.
- B. Contractor Responsibilities: Tests and inspections not explicitly assigned to Owner are Contractor's responsibility. Perform additional quality-control activities required to verify that the Work complies with requirements, whether specified or not.
1. Unless otherwise indicated, provide quality-control services specified and those required by authorities having jurisdiction. Perform quality-control services required of Contractor by authorities having jurisdiction, whether specified or not.
 2. Where services are indicated as Contractor's responsibility, engage a qualified testing agency to perform these quality-control services.
 - a. Contractor shall not employ same entity engaged by Owner, unless agreed to in writing by Owner.
 3. Notify testing agencies at least 24 hours in advance of time when Work that requires testing or inspecting will be performed.

4. Where quality-control services are indicated as Contractor's responsibility, submit a certified written report, in duplicate, of each quality-control service.
 5. Testing and inspecting requested by Contractor and not required by the Contract Documents are Contractor's responsibility.
 6. Submit additional copies of each written report directly to authorities having jurisdiction, when they so direct.
- C. **Manufacturer's Field Services:** Where indicated, engage a factory-authorized service representative to inspect field-assembled components and equipment installation, including service connections. Report results in writing as specified in Division 01 Section "Submittal Procedures."
- D. **Manufacturer's Technical Services:** Where indicated, engage a manufacturer's technical representative to observe and inspect the Work. Manufacturer's technical representative's services include participation in pre-installation conferences, examination of substrates and conditions, verification of materials, observation of Installer activities, inspection of completed portions of the Work, and submittal of written reports.
- E. **Retesting/Re-inspecting:** Regardless of whether original tests or inspections were Contractor's responsibility, provide quality-control services, including retesting and re-inspecting, for construction that replaced Work that failed to comply with the Contract Documents.
- F. **Testing Agency Responsibilities:** Cooperate with Architect and Contractor in performance of duties. Provide qualified personnel to perform required tests and inspections.
1. Notify Architect and Contractor promptly of irregularities or deficiencies observed in the Work during performance of its services.
 2. Determine the location from which test samples will be taken and in which in-situ tests are conducted.
 3. Conduct and interpret tests and inspections and state in each report whether tested and inspected work complies with or deviates from requirements.
 4. Submit a certified written report, in duplicate, of each test, inspection, and similar quality-control service through Contractor.
 5. Do not release, revoke, alter, or increase the Contract Document requirements or approve or accept any portion of the Work.
 6. Do not perform any duties of Contractor.
- G. **Associated Services:** Cooperate with agencies performing required tests, inspections, and similar quality-control services, and provide reasonable auxiliary services as requested. Notify agency sufficiently in advance of operations to permit assignment of personnel. Provide the following:
1. Access to the Work.
 2. Incidental labor and facilities necessary to facilitate tests and inspections.
 3. Adequate quantities of representative samples of materials that require testing and inspecting. Assist agency in obtaining samples.
 4. Facilities for storage and field curing of test samples.
 5. Delivery of samples to testing agencies.
 6. Preliminary design mix proposed for use for material mixes that require control by testing agency.

7. Security and protection for samples and for testing and inspecting equipment at Project site.
- H. Coordination: Coordinate sequence of activities to accommodate required quality-assurance and -control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspecting.
 1. Schedule times for tests, inspections, obtaining samples, and similar activities.
- I. Schedule of Tests and Inspections: Prepare a schedule of tests, inspections, and similar quality-control services required by the Contract Documents as a component of Contractor's quality-control plan. Coordinate and submit concurrently with Contractor's construction schedule. Update as the Work progresses.
 1. Distribution: Distribute schedule to Owner, Architect, testing agencies, and each party involved in performance of portions of the Work where tests and inspections are required.

1.10 SPECIAL TESTS AND INSPECTIONS

- A. Special Tests and Inspections: Engage a qualified testing agency to conduct special tests and inspections required by authorities having jurisdiction as the responsibility of Owner and as follows:
 1. Verifying that manufacturer maintains detailed fabrication and quality-control procedures and reviews the completeness and adequacy of those procedures to perform the Work.
 2. Notifying Architect, and Contractor promptly of irregularities and deficiencies observed in the Work during performance of its services.
 3. Submitting a certified written report of each test, inspection, and similar quality-control service to Architect with copy to Contractor and to authorities having jurisdiction.
 4. Submitting a final report of special tests and inspections at Substantial Completion, which includes a list of unresolved deficiencies.
 5. Interpreting tests and inspections and stating in each report whether tested and inspected work complies with or deviates from the Contract Documents.
 6. Retesting and re-inspecting corrected work.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 TEST AND INSPECTION LOG

- A. Test and Inspection Log: Prepare a record of tests and inspections. Include the following:
 1. Date test or inspection was conducted.
 2. Description of the Work tested or inspected.
 3. Date test or inspection results were transmitted to Architect.
 4. Identification of testing agency or special inspector conducting test or inspection.

- B. Maintain log at Project site. Post changes and revisions as they occur. Provide access to test and inspection log for Architect's reference during normal working hours.

3.2 REPAIR AND PROTECTION

- A. General: On completion of testing, inspecting, sample taking, and similar services, repair damaged construction and restore substrates and finishes.
 - 1. Provide materials and comply with installation requirements specified in other Specification Sections or matching existing substrates and finishes. Restore patched areas and extend restoration into adjoining areas with durable seams that are as invisible as possible. Comply with the Contract Document requirements for cutting and patching in Division 01 Section "Execution."
- B. Protect construction exposed by or for quality-control service activities.
- C. Repair and protection are Contractor's responsibility, regardless of the assignment of responsibility for quality-control services.

END OF QUALITY REQUIREMENTS

SECTION 01 42 00 - REFERENCES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 DEFINITIONS

- A. General: Basic Contract definitions are included in the Conditions of the Contract.
- B. "Approved": When used to convey Architect's action on Contractor's submittals, applications, and requests, "approved" is limited to Architect's duties and responsibilities as stated in the Conditions of the Contract.
- C. "Directed": A command or instruction by Architect. Other terms including "requested," "authorized," "selected," "required," and "permitted" have the same meaning as "directed."
- D. "Indicated": Requirements expressed by graphic representations or in written form on Drawings, in Specifications, and in other Contract Documents. Other terms including "shown," "noted," "scheduled," and "specified" have the same meaning as "indicated."
- E. "Regulations": Laws, ordinances, statutes, and lawful orders issued by authorities having jurisdiction, and rules, conventions, and agreements within the construction industry that control performance of the Work.
- F. "Furnish": Supply and deliver to Project site, ready for unloading, unpacking, assembly, installation, and similar operations.
- G. "Install": Operations at Project site including unloading, temporarily storing, unpacking, assembling, erecting, placing, anchoring, applying, working to dimension, finishing, curing, protecting, cleaning, and similar operations.
- H. "Provide": Furnish and install, complete and ready for the intended use.
- I. "Project Site": Space available for performing construction activities. The extent of Project site is shown on Drawings and may or may not be identical with the description of the land on which Project is to be built.

1.3 INDUSTRY STANDARDS

- A. Applicability of Standards: Unless the Contract Documents include more stringent requirements, applicable construction industry standards have the same force and effect as if bound or copied directly into the Contract Documents to the extent referenced. Such standards are made a part of the Contract Documents by reference.

- B. Publication Dates: Comply with standards in effect as of date of the Contract Documents unless otherwise indicated.
- C. Copies of Standards: Each entity engaged in construction on Project should be familiar with industry standards applicable to its construction activity. Copies of applicable standards are not bound with the Contract Documents.
 - 1. Where copies of standards are needed to perform a required construction activity, obtain copies directly from publication source.

1.4 ABBREVIATIONS AND ACRONYMS

- A. Industry Organizations: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities indicated in Thomson Gale's "Encyclopedia of Associations" or in Columbia Books' "National Trade & Professional Associations of the U.S."
- B. Industry Organizations: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities in the following list. Names, telephone numbers, and Web sites are subject to change and are believed to be accurate and up-to-date as of the date of the Contract Documents.

PRIVATE tbl1

AA	Aluminum Association, Inc. (The) www.aluminum.org	(703) 358-2960
AAADM	American Association of Automatic Door Manufacturers www.aaadm.com	(216) 241-7333
AABC	Associated Air Balance Council www.aabchq.com	(202) 737-0202
AAMA	American Architectural Manufacturers Association www.aamanet.org	(847) 303-5664
AASHTO	American Association of State Highway and Transportation Officials www.transportation.org	(202) 624-5800
AATCC	American Association of Textile Chemists and Colorists www.aatcc.org	(919) 549-8141
ABAA	Air Barrier Association of America www.airbarrier.org	(866) 956-5888
ABMA	American Bearing Manufacturers Association www.abma-dc.org	(202) 367-1155
ACI	American Concrete Institute www.concrete.org	(248) 848-3700

OWENS STUDENT SERVICES CENTER
DELAWARE TECHNICAL AND COMMUNITY COLLEGE

BSA+A PROJECT No. 23.004
OCTOBER 2024

ACPA	American Concrete Pipe Association www.concrete-pipe.org	(972) 506-7216
AEIC	Association of Edison Illuminating Companies, Inc. (The) www.aeic.org	(205) 257-2530
AF&PA	American Forest & Paper Association www.afandpa.org	(800) 878-8878 (202) 463-2700
AGA	American Gas Association www.aga.org	(202) 824-7000
AGC	Associated General Contractors of America (The) www.agc.org	(703) 548-3118
AHA	American Hardboard Association (Now part of CPA)	
AHAM	Association of Home Appliance Manufacturers www.aham.org	(202) 872-5955
AI	Asphalt Institute www.asphaltinstitute.org	(859) 288-4960
AIA	American Institute of Architects (The) www.aia.org	(800) 242-3837 (202) 626-7300
AISC	American Institute of Steel Construction www.aisc.org	(800) 644-2400 (312) 670-2400
ISI	American Iron and Steel Institute www.steel.org	(202) 452-7100
AITC	American Institute of Timber Construction www.aitc-glulam.org	(303) 792-9559
ALCA	Associated Landscape Contractors of America (Now PLANET - Professional Landcare Network)	
ALSC	American Lumber Standard Committee, Incorporated www.alsc.org	(301) 972-1700
AMCA	Air Movement and Control Association International, Inc. www.amca.org	(847) 394-0150
ANSI	American National Standards Institute www.ansi.org	(202) 293-8020
AOSA	Association of Official Seed Analysts, Inc. www.aosaseed.com	(405) 780-7372

REFERENCES

01 42 00 - 3

OWENS STUDENT SERVICES CENTER
DELAWARE TECHNICAL AND COMMUNITY COLLEGE

BSA+A PROJECT No. 23.004
OCTOBER 2024

APA	Architectural Precast Association www.archprecast.org	(239) 454-6989
APA	APA - The Engineered Wood Association www.apawood.org	(253) 565-6600
APA EWS	APA - The Engineered Wood Association; Engineered Wood Systems (See APA - The Engineered Wood Association)	
API	American Petroleum Institute www.api.org	(202) 682-8000
ARI	Air-Conditioning & Refrigeration Institute www.ari.org	(703) 524-8800
ARMA	Asphalt Roofing Manufacturers Association www.asphaltroofing.org	(202) 207-0917
ASCE	American Society of Civil Engineers www.asce.org	(800) 548-2723 (703) 295-6300
ASCE/SEI	American Society of Civil Engineers/Structural Engineering Institute (See ASCE)	
ASHRAE	American Society of Heating, Refrigerating and Air-Conditioning Engineers www.ashrae.org	(800) 527-4723 (404) 636-8400
ASME	ASME International (American Society of Mechanical Engineers International) www.asme.org	(800) 843-2763 (973) 882-1170
ASSE	American Society of Sanitary Engineering www.asse-plumbing.org	(440) 835-3040
ASTM	ASTM International (American Society for Testing and Materials International) www.astm.org	(610) 832-9500
AWCI	Association of the Wall and Ceiling Industry www.awci.org	(703) 534-8300
AWCMA	American Window Covering Manufacturers Association (Now WCMA)	
AWI	Architectural Woodwork Institute www.awinet.org	(571) 323-3636
AWPA	American Wood Protection Association	(205) 733-4077

REFERENCES

01 42 00 - 4

OWENS STUDENT SERVICES CENTER
DELAWARE TECHNICAL AND COMMUNITY COLLEGE

BSA+A PROJECT No. 23.004
OCTOBER 2024

	(Formerly: American Wood Preservers' Association) www.awpa.com	
AWS	American Welding Society www.aws.org	(800) 443-9353 (305) 443-9353
AWWA	American Water Works Association www.awwa.org	(800) 926-7337 (303) 794-7711
BHMA	Builders Hardware Manufacturers Association www.buildershardware.com	(212) 297-2122
BIA	Brick Industry Association (The) www.bia.org	(703) 620-0010
BICSI	BICSI, Inc. www.bicsi.org	(800) 242-7405 (813) 979-1991
BIFMA	BIFMA International (Business and Institutional Furniture Manufacturer's Association International) www.bifma.com	(616) 285-3963
BISSC	Baking Industry Sanitation Standards Committee www.bissc.org	(866) 342-4772
BWF	Badminton World Federation (Formerly: IBF - International Badminton Federation) www.internationalbadminton.org	6-03-9283 7155
CCC	Carpet Cushion Council www.carpetcushion.org	(610) 527-3880
CDA	Copper Development Association www.copper.org	(800) 232-3282 (212) 251-7200
CEA	Canadian Electricity Association www.canelect.ca	(613) 230-9263
CEA	Consumer Electronics Association www.ce.org	(866) 858-1555 (703) 907-7600
CFFA	Chemical Fabrics & Film Association, Inc. www.chemicalfabricsandfilm.com	(216) 241-7333
CGA	Compressed Gas Association www.cganet.com	(703) 788-2700
CIMA	Cellulose Insulation Manufacturers Association www.cellulose.org	(888) 881-2462 (937) 222-2462

REFERENCES

01 42 00 - 5

OWENS STUDENT SERVICES CENTER
DELAWARE TECHNICAL AND COMMUNITY COLLEGE

BSA+A PROJECT No. 23.004
OCTOBER 2024

CISCA	Ceilings & Interior Systems Construction Association www.cisca.org	(630) 584-1919
CISPI	Cast Iron Soil Pipe Institute www.cispi.org	(423) 892-0137
CLFMI	Chain Link Fence Manufacturers Institute www.chainlinkinfo.org	(301) 596-2583
CRRC	Cool Roof Rating Council www.coolroofs.org	(866) 465-2523 (510) 485-7175
CPA	Composite Panel Association www.pbmdf.com	(301) 670-0604
CPPA	Corrugated Polyethylene Pipe Association www.cppa-info.org	(800) 510-2772 (202) 462-9607
CRI	Carpet and Rug Institute (The) www.carpet-rug.com	(800) 882-8846 (706) 278-3176
CRSI	Concrete Reinforcing Steel Institute www.crsi.org	(847) 517-1200
CSA	Canadian Standards Association	(800) 463-6727 (416) 747-4000
CSA	CSA International (Formerly: IAS - International Approval Services) www.csa-international.org	(866) 797-4272 (416) 747-4000
CSI	Cast Stone Institute www.caststone.org	(717) 272-3744
CSI	Construction Specifications Institute (The) www.csinet.org	(800) 689-2900 (703) 684-0300
CSSB	Cedar Shake & Shingle Bureau www.cedarbureau.org	(604) 820-7700
CTI	Cooling Technology Institute (Formerly: Cooling Tower Institute) www.cti.org	(281) 583-4087
DHI	Door and Hardware Institute www.dhi.org	(703) 222-2010
EIA	Electronic Industries Alliance www.eia.org	(703) 907-7500
EIMA	EIFS Industry Members Association	(800) 294-3462

REFERENCES

01 42 00 - 6

OWENS STUDENT SERVICES CENTER
DELAWARE TECHNICAL AND COMMUNITY COLLEGE

BSA+A PROJECT No. 23.004
OCTOBER 2024

	www.eima.com	(770) 968-7945
EJCDC	Engineers Joint Contract Documents Committee www.ejdc.org	(703) 295-5000
EJMA	Expansion Joint Manufacturers Association, Inc. www.ejma.org	(914) 332-0040
ESD	ESD Association (Electrostatic Discharge Association) www.esda.org	(315) 339-6937
ETL SEMCO	Intertek ETL SEMCO (Formerly: ITS - Intertek Testing Service NA) www.intertek.com	(800) 967-5352
FIBA	Federation Internationale de Basketball (The International Basketball Federation) www.fiba.com	41 22 545 00 00
FIVB	Federation Internationale de Volleyball (The International Volleyball Federation) www.fivb.ch	41 21 345 35 35
FM Approvals	FM Approvals LLC www.fmglobal.com	(781) 762-4300
FM Global	FM Global (Formerly: FMG - FM Global) www.fmglobal.com	(401) 275-3000
FMRC	Factory Mutual Research (Now FM Global)	
FRSA	Florida Roofing, Sheet Metal & Air Conditioning Contractors Association, Inc. www.floridarroof.com	(407) 671-3772
FSA	Fluid Sealing Association www.fluidsealing.com	(610) 971-4850
FSC	Forest Stewardship Council www.fsc.org	49 228 367 66 0
GA	Gypsum Association www.gypsum.org	(202) 289-5440
GANA	Glass Association of North America www.glasswebsite.com	(785) 271-0208
GRI	(Part of GSI)	

REFERENCES

01 42 00 - 7

GS	Green Seal www.greenseal.org	(202) 872-6400
GSI	Geosynthetic Institute www.geosynthetic-institute.org	(610) 522-8440
HI	Hydraulic Institute www.pumps.org	(973) 267-9700
HI	Hydronics Institute www.gamanet.org	(908) 464-8200
HMMA	Hollow Metal Manufacturers Association (Part of NAAMM)	
HPVA	Hardwood Plywood & Veneer Association www.hpva.org	(703) 435-2900
HPW	H. P. White Laboratory, Inc. www.hpwhite.com	(410) 838-6550
IAS	International Approval Services (Now CSA International)	
IBF	International Badminton Federation (Now BWF)	
ICEA	Insulated Cable Engineers Association, Inc. www.icea.net	(770) 830-0369
ICRI	International Concrete Repair Institute, Inc. www.icri.org	(847) 827-0830
IEC	International Electrotechnical Commission www.iec.ch	41 22 919 02 11
IEEE	Institute of Electrical and Electronics Engineers, Inc. (The) www.ieee.org	(212) 419-7900
IESNA	Illuminating Engineering Society of North America www.iesna.org	(212) 248-5000
IENT	Institute of Environmental Sciences and Technology www.ient.org	(847) 255-1561
IGCC	Insulating Glass Certification Council www.igcc.org	(315) 646-2234
IGMA	Insulating Glass Manufacturers Alliance www.igmaonline.org	(613) 233-1510

ILI	Indiana Limestone Institute of America, Inc. www.ili.ai.com	(812) 275-4426
ISO	International Organization for Standardization www.iso.ch	41 22 749 01 11
	Available from ANSI www.ansi.org	(202) 293-8020
ISSFA	International Solid Surface Fabricators Association www.issfa.net	(877) 464-7732 (702) 567-8150
ITS	Intertek Testing Service NA (Now ETL SEMCO)	
ITU	International Telecommunication Union www.itu.int/home	41 22 730 51 11
KCMA	Kitchen Cabinet Manufacturers Association www.kcma.org	(703) 264-1690
LMA	Laminating Materials Association (Now part of CPA)	
LPI	Lightning Protection Institute www.lightning.org	(800) 488-6864
MBMA	Metal Building Manufacturers Association www.mbma.com	(216) 241-7333
MFMA	Maple Flooring Manufacturers Association, Inc. www.maplefloor.org	(888) 480-9138
MFMA	Metal Framing Manufacturers Association, Inc. www.metalframingmfg.org	(312) 644-6610
MH	Material Handling (Now MHIA)	
MHIA	Material Handling Industry of America www.mhia.org	(800) 345-1815 (704) 676-1190
MIA	Marble Institute of America www.marble-institute.com	(440) 250-9222
MPI	Master Painters Institute www.paintinfo.com	(888) 674-8937 (604) 298-7578
MSS	Manufacturers Standardization Society of The Valve and Fittings Industry Inc.	(703) 281-6613

OWENS STUDENT SERVICES CENTER
DELAWARE TECHNICAL AND COMMUNITY COLLEGE

BSA+A PROJECT No. 23.004
OCTOBER 2024

	www.mss-hq.com	
NAAMM	National Association of Architectural Metal Manufacturers www.naamm.org	(630) 942-6591
NACE	NACE International (National Association of Corrosion Engineers International) www.nace.org	(800) 797-6623 (281) 228-6200
NADCA	National Air Duct Cleaners Association www.nadca.com	(202) 737-2926
NAGWS	National Association for Girls and Women in Sport www.aahperd.org/nagws/	(800) 213-7193, ext. 453
NAIMA	North American Insulation Manufacturers Association www.naima.org	(703) 684-0084
NBGQA	National Building Granite Quarries Association, Inc. www.nbgqa.com	(800) 557-2848
NCAA	National Collegiate Athletic Association (The) www.ncaa.org	(317) 917-6222
NCMA	National Concrete Masonry Association www.ncma.org	(703) 713-1900
NCPI	National Clay Pipe Institute www.ncpi.org	(262) 248-9094
NCTA	National Cable & Telecommunications Association www.ncta.com	(202) 775-2300
NEBB	National Environmental Balancing Bureau www.nebb.org	(301) 977-3698
NECA	National Electrical Contractors Association www.necanet.org	(301) 657-3110
NeLMA	Northeastern Lumber Manufacturers' Association www.nelma.org	(207) 829-6901
NEMA	National Electrical Manufacturers Association www.nema.org	(703) 841-3200
NETA	InterNational Electrical Testing Association www.netaworld.org	(888) 300-6382 (269) 488-6382
NFHS	National Federation of State High School Associations www.nfhs.org	(317) 972-6900

REFERENCES

01 42 00 - 10

OWENS STUDENT SERVICES CENTER
DELAWARE TECHNICAL AND COMMUNITY COLLEGE

BSA+A PROJECT No. 23.004
OCTOBER 2024

NFPA	NFPA (National Fire Protection Association) www.nfpa.org	(800) 344-3555 (617) 770-3000
NFRC	National Fenestration Rating Council www.nfrc.org	(301) 589-1776
NGA	National Glass Association www.glass.org	(866) 342-5642 (703) 442-4890
NHLA	National Hardwood Lumber Association www.natlhardwood.org	(800) 933-0318 (901) 377-1818
NLGA	National Lumber Grades Authority www.nlga.org	(604) 524-2393
NOFMA	NOFMA: The Wood Flooring Manufacturers Association (Formerly: National Oak Flooring Manufacturers Association) www.nofma.com	(901) 526-5016
NOMMA	National Ornamental & Miscellaneous Metals Association www.nomma.org	(888) 516-8585
NRCA	National Roofing Contractors Association www.nrca.net	(800) 323-9545 (847) 299-9070
NRMCA	National Ready Mixed Concrete Association www.nrmca.org	(888) 846-7622 (301) 587-1400
NSF	NSF International (National Sanitation Foundation International) www.nsf.org	(800) 673-6275 (734) 769-8010
NSSGA	National Stone, Sand & Gravel Association www.nssga.org	(800) 342-1415 (703) 525-8788
NTMA	National Terrazzo & Mosaic Association, Inc. (The) www.ntma.com	(800) 323-9736 (540) 751-0930
NTRMA	National Tile Roofing Manufacturers Association (Now TRI)	
NWWDA	National Wood Window and Door Association (Now WDMA)	
OPL	Omega Point Laboratories, Inc. (Now ITS)	
PCI	Precast/Prestressed Concrete Institute www.pci.org	(312) 786-0300

REFERENCES

01 42 00 - 11

OWENS STUDENT SERVICES CENTER
DELAWARE TECHNICAL AND COMMUNITY COLLEGE

BSA+A PROJECT No. 23.004
OCTOBER 2024

PDCA	Painting & Decorating Contractors of America www.pdca.com	(800) 332-7322 (314) 514-7322
PDI	Plumbing & Drainage Institute www.pdionline.org	(800) 589-8956 (978) 557-0720
PGI	PVC Geomembrane Institute http://pgi-tp.ce.uiuc.edu	(217) 333-3929
PLANET	Professional Landcare Network (Formerly: ACLA - Associated Landscape Contractors of America) www.landcarenetwork.org	(800) 395-2522 (703) 736-9666
PTI	Post-Tensioning Institute www.post-tensioning.org	(602) 870-7540
RCSC	Research Council on Structural Connections www.boltcouncil.org	
RFCI	Resilient Floor Covering Institute www.rfci.com	(301) 340-8580
RIS	Redwood Inspection Service www.redwoodinspection.com	(888) 225-7339 (415) 382-0662
SAE	SAE International www.sae.org	(877) 606-7323 (724) 776-4841
SDI	Steel Deck Institute www.sdi.org	(847) 458-4647
SDI	Steel Door Institute www.steeldoor.org	(440) 899-0010
SEFA	Scientific Equipment and Furniture Association www.sefalabs.com	(877) 294-5424 (516) 294-5424
SEI/ASCE	Structural Engineering Institute/American Society of Civil Engineers (See ASCE)	
SGCC	Safety Glazing Certification Council www.sgcc.org	(315) 646-2234
SIA	Security Industry Association www.siaonline.org	(866) 817-8888 (703) 683-2075
SIGMA	Sealed Insulating Glass Manufacturers Association (Now IGMA)	

REFERENCES

01 42 00 - 12

SJI	Steel Joist Institute www.steeljoist.org	(843) 626-1995
SMA	Screen Manufacturers Association www.smacentral.org	(561) 533-0991
SMACNA	Sheet Metal and Air Conditioning Contractors' National Association www.smacna.org	(703) 803-2980
SMPTE	Society of Motion Picture and Television Engineers www.smpte.org	(914) 761-1100
SPFA	Spray Polyurethane Foam Alliance (Formerly: SPI/SPFD - The Society of the Plastics Industry, Inc.; Spray Polyurethane Foam Division) www.sprayfoam.org	(800) 523-6154
SPIB	Southern Pine Inspection Bureau (The) www.spib.org	(850) 434-2611
SPRI	Single Ply Roofing Industry www.spri.org	(781) 647-7026
SSINA	Specialty Steel Industry of North America www.ssina.com	(800) 982-0355 (202) 342-8630
SSPC	SSPC: The Society for Protective Coatings www.sspc.org	(877) 281-7772 (412) 281-2331
STI	Steel Tank Institute www.steeltank.com	(847) 438-8265
SWI	Steel Window Institute www.steelwindows.com	(216) 241-7333
SWRI	Sealant, Waterproofing, & Restoration Institute www.swrionline.org	(816) 472-7974
TCA	Tile Council of America, Inc. (Now TCNA)	
TCNA	Tile Council of North America, Inc. www.tileusa.com	(864) 646-8453
TIA/EIA	Telecommunications Industry Association/Electronic Industries Alliance www.tiaonline.org	(703) 907-7700
TMS	The Masonry Society	(303) 939-9700

	www.masonrysociety.org	
TPI	Truss Plate Institute, Inc. www.tpinst.org	(703) 683-1010
TPI	Turfgrass Producers International www.turfgrassod.org	(800) 405-8873 (847) 649-5555
TRI	Tile Roofing Institute www.tilerroofing.org	(312) 670-4177
UL	Underwriters Laboratories Inc. www.ul.com	(877) 854-3577 (847) 272-8800
UNI	Uni-Bell PVC Pipe Association www.uni-bell.org	(972) 243-3902
USAV	USA Volleyball www.usavolleyball.org	(888) 786-5539 (719) 228-6800
USGBC	U.S. Green Building Council www.usgbc.org	(800) 795-1747
USITT	United States Institute for Theatre Technology, Inc. www.usitt.org	(800) 938-7488 (315) 463-6463
WASTEC	Waste Equipment Technology Association www.wastec.org	(800) 424-2869 (202) 244-4700
WCLIB	West Coast Lumber Inspection Bureau www.wclib.org	(800) 283-1486 (503) 639-0651
WCMA	Window Covering Manufacturers Association www.wcmanet.org	(212) 297-2122
WCSC	Window Covering Safety Council (Formerly: WCMA - Window Covering Manufacturers Association) www.windowcoverings.org	(800) 506-4636 (212) 297-2109
WDMA	Window & Door Manufacturers Association (Formerly: NWWDA - National Wood Window and Door Association) www.wdma.com	(800) 223-2301 (847) 299-5200
WI	Woodwork Institute (Formerly: WIC - Woodwork Institute of California) www.wicnet.org	(916) 372-9943
WIC	Woodwork Institute of California (Now WI)	

WMMPA	Wood Moulding & Millwork Producers Association www.wmmpa.com	(800) 550-7889 (530) 661-9591
WSRCA	Western States Roofing Contractors Association www.wsrca.com	(800) 725-0333 (650) 570-5441
WWPA	Western Wood Products Association www.wwpa.org	(503) 224-3930

- C. Code Agencies: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities in the following list. Names, telephone numbers, and Web sites are subject to change and are believed to be accurate and up-to-date as of the date of the Contract Documents.

PRIVATE tbl2

IAPMO	International Association of Plumbing and Mechanical Officials www.iapmo.org	(909) 472-4100
ICC	International Code Council www.iccsafe.org	(888) 422-7233
ICC-ES	ICC Evaluation Service, Inc. www.icc-es.org	(800) 423-6587 (562) 699-0543
UBC	Uniform Building Code (See ICC)	

- D. Federal Government Agencies: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities in the following list. Names, telephone numbers, and Web sites are subject to change and are believed to be accurate and up-to-date as of the date of the Contract Documents.

PRIVATE tbl3

CE	Army Corps of Engineers www.usace.army.mil	(202) 761-0011
CPSC	Consumer Product Safety Commission www.cpsc.gov	(800) 638-2772 (301) 504-7923
DOC	Department of Commerce www.commerce.gov	(202) 482-2000
DOD	Department of Defense http://.dodssp.daps.dla.mil	(215) 697-6257
DOE	Department of Energy www.energy.gov	(202) 586-9220
EPA	Environmental Protection Agency www.epa.gov	(202) 272-0167
FAA	Federal Aviation Administration	(866) 835-5322

	www.faa.gov	
FCC	Federal Communications Commission www.fcc.gov	(888) 225-5322
FDA	Food and Drug Administration www.fda.gov	(888) 463-6332
GSA	General Services Administration www.gsa.gov	(800) 488-3111
HUD	Department of Housing and Urban Development www.hud.gov	(202) 708-1112
LBL	Lawrence Berkeley National Laboratory www.lbl.gov	(510) 486-4000
NCHRP	National Cooperative Highway Research Program (See TRB)	
NIST	National Institute of Standards and Technology www.nist.gov	(301) 975-6478
OSHA	Occupational Safety & Health Administration www.osha.gov	(800) 321-6742 (202) 693-1999
PBS	Public Buildings Service (See GSA)	
PHS	Office of Public Health and Science www.osophs.dhhs.gov/ophs	(202) 690-7694
RUS	Rural Utilities Service (See USDA)	(202) 720-9540
SD	State Department www.state.gov	(202) 647-4000
TRB	Transportation Research Board http://gulliver.trb.org	(202) 334-2934
USDA	Department of Agriculture www.usda.gov	(202) 720-2791
USPS	Postal Service www.usps.com	(202) 268-2000

- E. Standards and Regulations: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the standards and regulations in the following list. Names, telephone numbers, and Web sites are subject to change and are believed to be accurate and up-to-date as of the date of the Contract Documents.

OWENS STUDENT SERVICES CENTER
DELAWARE TECHNICAL AND COMMUNITY COLLEGE

BSA+A PROJECT No. 23.004
OCTOBER 2024

PRIVATE tbl4

ADAAG Americans with Disabilities Act (ADA) (800) 872-2253
Architectural Barriers Act (ABA) (202) 272-0080
Accessibility Guidelines for Buildings and Facilities
Available from U.S. Access Board
www.access-board.gov

CFR Code of Federal Regulations (866) 512-1800
Available from Government Printing Office (202) 512-1800
www.gpoaccess.gov/cfr/index.html

DOD Department of Defense Military Specifications and Standards (215) 697-2664
Available from Department of Defense Single Stock Point
http://dodssp.daps.dla.mil

DSCC Defense Supply Center Columbus
(See FS)

FED-STD Federal Standard
(See FS)

FS Federal Specification (215) 697-2664
Available from Department of Defense Single Stock Point
http://dodssp.daps.dla.mil

Available from Defense Standardization Program
www.dps.dla.mil

Available from General Services Administration (202) 619-8925
www.gsa.gov

Available from National Institute of Building Sciences (202) 289-7800
www.wbdg.org/ccb

FTMS Federal Test Method Standard
(See FS)

MIL (See MILSPEC)

MIL-STD (See MILSPEC)

MILSPEC Military Specification and Standards (215) 697-2664
Available from Department of Defense Single Stock Point
http://dodssp.daps.dla.mil

UFAS Uniform Federal Accessibility Standards (800) 872-2253
Available from Access Board (202) 272-0080
www.access-board.gov

F. State Government Agencies: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities in the following

Commented [MPC1]: Surprised there are no Delaware references in the GSS pack.

REFERENCES

01 42 00 - 17

OWENS STUDENT SERVICES CENTER
DELAWARE TECHNICAL AND COMMUNITY COLLEGE

BSA+A PROJECT No. 23.004
OCTOBER 2024

list. Names, telephone numbers, and Web sites are subject to change and are believed to be accurate and up-to-date as of the date of the Contract Documents.

PRIVATE tbl5

CBHF State of California, Department of Consumer Affairs Bureau of Home (800) 952-5210
Furnishings and Thermal Insulation
www.dca.ca.gov/bhfti (916) 574-2041

CCR California Code of Regulations (916) 323-6815
www.calregs.com

CPUC California Public Utilities Commission (415) 703-2782
www.cpuc.ca.gov

TFS Texas Forest Service (979) 458-6650
Forest Resource Development
http://txforestservation.tamu.edu

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION

REFERENCES

01 42 00 - 18

SECTION 01 50 00 - TEMPORARY FACILITIES AND CONTROLS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes requirements for temporary utilities, support facilities, and security and protection facilities.
- B. Related Requirements:
 - 1. Section 011000 "Summary" for work restrictions and limitations on utility interruptions.

1.3 USE CHARGES

- A. General: Installation and removal of and use charges for temporary facilities shall be included in the Contract Sum unless otherwise indicated.
- B. Water and Sewer Service from Existing System: Water from Owner's existing water system is available for use without metering and without payment of use charges. Provide connections and extensions of services as required for construction operations. Contractor is responsible for dislocating hoses and verifying water is turned off at water source locations. Where hose bibbs and valves are secured, contractor to verify they are secured at the end of the work day
- C. Electric Power Service from Existing System: Power will be available on site for contractor use. Contractor will be responsible for all power usage charges.
 - 1. The contractor is responsible for providing any additional power, or higher voltages not available from on site power. This can be provided by metered temporary power, or on-site generator.

1.4 INFORMATIONAL SUBMITTALS

- A. Site Plan: Show temporary facilities, utility hookups, staging areas, and parking areas for construction personnel.

1.5 QUALITY ASSURANCE

- A. Electric Service: Comply with NECA, NEMA, and UL standards and regulations for temporary electric service. Install service to comply with NFPA 70.

PART 2 - PRODUCTS

2.1 TEMPORARY FACILITIES

- A. Field Offices, General: Field office is not required. Contractor will be responsible for providing on site location for access to drawings and submittals
- B. Storage and Fabrication areas or structures: Provide secure storage areas or structures to accommodate materials and equipment for construction operations.
 - 1. Coordinate location of storage areas with owner.
 - a. Do not affect fire lane access
 - b. Do not affect general access to site
 - 2. Obtain approval and coordinate location of long term storage with owner
- C. Provide temporary toilets for use until permanent facilities are installed.
 - 1. Coordinate location with current tenant to not affect fire lane access, or general access to site, or access/egress from occupied space
 - 2. Contractor is responsible for securing and maintenance of temporary facilities.
 - a. Arrange for regular emptying and cleaning of facility
 - b. Ensure security of toilet at the end of the work day
- D. Provide temporary drinking water and wash facilities for use of construction personnel

2.2 EQUIPMENT

- A. Fire Extinguishers: Portable, UL rated; with class and extinguishing agent as required by locations and classes of fire exposures.
- B. Provide land line or reliable cellular service phone on site for communication with architect, owner and others associated with the project in a timely manner

PART 3 - EXECUTION

3.1 PARKING AND LAYDOWN SPACE

- A. Parking: Parking for contractors, subcontractors and suppliers shall only be in identified areas
- B. Staging, Storage, and construction lay down space shall be only in areas identified, or coordinated with tenant and client
- C. Waste Disposal Facilities: Comply with requirements specified in Section 017419 "Construction Waste Management and Disposal."
- D. Lifts and Hoists: Provide facilities necessary for hoisting materials and personnel.
 - 1. Truck cranes and similar devices used for hoisting materials are considered "tools and equipment" and not temporary facilities.

3.2 SECURITY AND PROTECTION FACILITIES INSTALLATION

- A. The contractor is responsible for the providing locks and security of the job site and equipment during the construction. The owner is to be provided with keys to the lock.
- B. Protection of Existing Facilities: Protect existing vegetation, equipment, structures, utilities, and other improvements at Project site and on adjacent properties, except those indicated to be removed or altered. Repair damage to existing facilities.
- C. Barricades, Warning Signs, covered walkways etc. to protect persons and property
 - 1. Contractor is responsible for repair of any vehicles or equipment owned and not owned by the school caused by work associated with this project including damage during deliveries

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 01 60 00 - PRODUCT REQUIREMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for selection of products for use in Project; product delivery, storage, and handling; manufacturers' standard warranties on products; special warranties; and comparable products.
- B. Related Requirements:
 - 1. Division 01 Section "Substitution Procedures" for requests for substitutions.
 - 2. Division 01 Section "References" for applicable industry standards for products specified.

1.3 DEFINITIONS

- A. Products: Items obtained for incorporating into the Work, whether purchased for Project or taken from previously purchased stock. The term "product" includes the terms "material," "equipment," "system," and terms of similar intent.
 - 1. Named Products: Items identified by manufacturer's product name, including make or model number or other designation shown or listed in manufacturer's published product literature that is current as of date of the Contract Documents.
 - 2. New Products: Items that have not previously been incorporated into another project or facility. Products salvaged or recycled from other projects are not considered new products.
 - 3. Comparable Product: Product that is demonstrated and approved through submittal process to have the indicated qualities related to type, function, dimension, in-service performance, physical properties, appearance, and other characteristics that equal or exceed those of specified product.
- B. Basis-of-Design Product Specification: A specification in which a specific manufacturer's product is named and accompanied by the words "basis-of-design product," including make or model number or other designation, to establish the significant qualities related to type, function, dimension, in-service performance, physical properties, appearance, and other characteristics for purposes of evaluating comparable products of additional manufacturers named in the specification.

1.4 ACTION SUBMITTALS

- A. Comparable Product Requests: Submit request for consideration of each comparable product. Identify product or fabrication or installation method to be replaced. Include Specification Section number and title and Drawing numbers and titles.
1. Include data to indicate compliance with the requirements specified in "Comparable Products" Article.
 2. Architect's Action: If necessary, Architect will request additional information or documentation for evaluation within one week of receipt of a comparable product request. Architect will notify Contractor of approval or rejection of proposed comparable product request within 15 days of receipt of request, or seven days of receipt of additional information or documentation, whichever is later.
 - a. Form of Approval: As specified in Division 01 Section "Submittal Procedures."
 - b. Use product specified if Architect does not issue a decision on use of a comparable product request within time allocated.
- B. Basis-of-Design Product Specification Submittal: Comply with requirements in Division 01 Section "Submittal Procedures." Show compliance with requirements.

1.5 QUALITY ASSURANCE

- A. Compatibility of Options: If Contractor is given option of selecting between two or more products for use on Project, select product compatible with products previously selected, even if previously selected products were also options.
1. Each contractor is responsible for providing products and construction methods compatible with products and construction methods of other contractors.
 2. If a dispute arises between contractors over concurrently selectable but incompatible products, Architect will determine which products shall be used.

1.6 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, and handle products using means and methods that will prevent damage, deterioration, and loss, including theft and vandalism. Comply with manufacturer's written instructions.
- B. Delivery and Handling:
1. Schedule delivery to minimize long-term storage at Project site and to prevent overcrowding of construction spaces.
 2. Coordinate delivery with installation time to ensure minimum holding time for items that are flammable, hazardous, easily damaged, or sensitive to deterioration, theft, and other losses.
 3. Deliver products to Project site in an undamaged condition in manufacturer's original sealed container or other packaging system, complete with labels and instructions for handling, storing, unpacking, protecting, and installing.

4. Inspect products on delivery to determine compliance with the Contract Documents and to determine that products are undamaged and properly protected.

C. Storage:

1. Store products to allow for inspection and measurement of quantity or counting of units.
2. Store materials in a manner that will not endanger Project structure.
3. Store products that are subject to damage by the elements, under cover in a weathertight enclosure above ground, with ventilation adequate to prevent condensation.
4. Protect foam plastic from exposure to sunlight, except to extent necessary for period of installation and concealment.
5. Comply with product manufacturer's written instructions for temperature, humidity, ventilation, and weather-protection requirements for storage.
6. Protect stored products from damage and liquids from freezing.
7. Provide a secure location and enclosure at Project site for storage of materials and equipment by Owner's construction forces. Coordinate location with Owner.

1.7 PRODUCT WARRANTIES

- A. Warranties specified in other Sections shall be in addition to, and run concurrent with, other warranties required by the Contract Documents. Manufacturer's disclaimers and limitations on product warranties do not relieve Contractor of obligations under requirements of the Contract Documents.

1. Manufacturer's Warranty: Written warranty furnished by individual manufacturer for a particular product and specifically endorsed by manufacturer to Owner.
2. Special Warranty: Written warranty required by the Contract Documents to provide specific rights for Owner.

- B. Special Warranties: Prepare a written document that contains appropriate terms and identification, ready for execution.

1. Manufacturer's Standard Form: Modified to include Project-specific information and properly executed.
2. Specified Form: When specified forms are included with the Specifications, prepare a written document using indicated form properly executed.
3. See Divisions 02 through 33 Sections for specific content requirements and particular requirements for submitting special warranties.

- C. Submittal Time: Comply with requirements in Division 01 Section "Closeout Procedures."

PART 2 - PRODUCTS

2.1 PRODUCT SELECTION PROCEDURES

- A. General Product Requirements: Provide products that comply with the Contract Documents, are undamaged and, unless otherwise indicated, are new at time of installation.

1. Provide products complete with accessories, trim, finish, fasteners, and other items needed for a complete installation and indicated use and effect.
2. Standard Products: If available, and unless custom products or nonstandard options are specified, provide standard products of types that have been produced and used successfully in similar situations on other projects.
3. Owner reserves the right to limit selection to products with warranties not in conflict with requirements of the Contract Documents.
4. Where products are accompanied by the term "as selected," Architect will make selection.
5. Descriptive, performance, and reference standard requirements in the Specifications establish salient characteristics of products.
6. Or Equal: For products specified by name and accompanied by the term "or equal," or "or approved equal," or "or approved," comply with requirements in "Comparable Products" Article to obtain approval for use of an unnamed product.

B. Product Selection Procedures:

1. Product: Where Specifications name a single manufacturer and product, provide the named product that complies with requirements. Comparable products or substitutions for Contractor's convenience will not be considered.
2. Manufacturer/Source: Where Specifications name a single manufacturer or source, provide a product by the named manufacturer or source that complies with requirements. Comparable products or substitutions for Contractor's convenience will not be considered.
3. Products:
 - a. Restricted List: Where Specifications include a list of names of both manufacturers and products, provide one of the products listed that complies with requirements. Comparable products or substitutions for Contractor's convenience will not be considered unless otherwise indicated.
 - b. Non-restricted List: Where Specifications include a list of names of both available manufacturers and products, provide one of the products listed, or an unnamed product, that complies with requirements. Comply with requirements in "Comparable Products" Article for consideration of an unnamed product.
4. Manufacturers:
 - a. Restricted List: Where Specifications include a list of manufacturers' names, provide a product by one of the manufacturers listed that complies with requirements. Comparable products or substitutions for Contractor's convenience will not be considered unless otherwise indicated.
 - b. Non-restricted List: Where Specifications include a list of available manufacturers, provide a product by one of the manufacturers listed, or a product by an unnamed manufacturer, that complies with requirements. Comply with requirements in "Comparable Products" Article for consideration of an unnamed manufacturer's product.
5. Basis-of-Design Product: Where Specifications name a product, or refer to a product indicated on Drawings, and include a list of manufacturers, provide the specified or indicated product or a comparable product by one of the other named manufacturers. Drawings and Specifications indicate sizes, profiles, dimensions, and other characteristics

that are based on the product named. Comply with requirements in "Comparable Products" Article for consideration of an unnamed product by one of the other named manufacturers.

- C. Visual Matching Specification: Where Specifications require "match Architect's sample", provide a product that complies with requirements and matches Architect's sample. Architect's decision will be final on whether a proposed product matches.
 - 1. If no product available within specified category matches and complies with other specified requirements, comply with requirements in Division 01 Section "Substitution Procedures" for proposal of product.
- D. Visual Selection Specification: Where Specifications include the phrase "as selected by Architect from manufacturer's full range" or similar phrase, select a product that complies with requirements. Architect will select color, gloss, pattern, density, or texture from manufacturer's product line that includes both standard and premium items.

2.2 COMPARABLE PRODUCTS

- A. Conditions for Consideration: Architect will consider Contractor's request for comparable product when the following conditions are satisfied. If the following conditions are not satisfied, Architect may return requests without action, except to record noncompliance with these requirements:
 - 1. Evidence that the proposed product does not require revisions to the Contract Documents that it is consistent with the Contract Documents and will produce the indicated results, and that it is compatible with other portions of the Work.
 - 2. Detailed comparison of significant qualities of proposed product with those named in the Specifications. Significant qualities include attributes such as performance, weight, size, durability, visual effect, and specific features and requirements indicated.
 - 3. Evidence that proposed product provides specified warranty.
 - 4. List of similar installations for completed projects with project names and addresses and names and addresses of architects and owners, if requested.
 - 5. Samples, if requested.

PART 3 - EXECUTION (Not Used)

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 01 62 00 - MATERIAL AND EQUIPMENT

1. GENERAL CONDITIONS

- 1.1 The general provisions of the Contract, including the Conditions of the Contract (General, Supplementary and other Conditions, if any) and Division 1 as appropriate apply to the Work specified in this Section.
- 1.2 Where work is to be executed under Separate Prime Contracts, the provisions of this Section apply to each Contract.

2. REQUIREMENTS INCLUDED

- 2.1 All materials and equipment incorporated into the Work shall:
 1. Be new;
 2. Conform to applicable specifications and standards; and
 3. Comply with size, make, type and quality specified, or as specifically approved in writing by the Architect / Engineer.
- 2.2 Manufactured and Fabricated Products shall conform to the following requirements:
 1. Designed, fabricated and assembled in accord with the best engineering and shop practices.
 2. Manufactured like parts of duplicate units to standard sizes and gauges, to be interchangeable.
 3. Two or more items of the same kind shall be identical, by the same manufacturer.
 4. Products shall be suitable for service conditions.
 5. Equipment capacities, sizes and dimensions shown or specified shall be adhered to unless variations are specifically approved in writing.
- 2.3 Contractor shall not use materials or equipment for any purpose other than that for which it is designated or is specified.
- 2.4 Materials removed from existing structures shall not be reused in the completed work unless specifically indicated or specified.
- 2.5 For materials and equipment specifically indicated or specified to be reused in the Work:
 1. Contractor shall use special care on removal, handling storage and reinstallation, to assure proper function in the completed Work.
 2. Arrange for transportation, storage and handling of products which require off-site storage, restoration or renovation. Pay all costs for such work.

3. MANUFACTURER'S INSTRUCTIONS

- 3.1 When Contract Documents require that installation of work shall comply with manufacturer's

printed instructions, Contractor shall obtain and distribute copies of such instructions to parties involved in the installation, including two copies to Construction Manager.

1. Maintain one set of complete instructions at the job site during installation and until completion.
- 3.2 Contractor shall handle, install, connect, clean, condition and adjust products in strict accord with such instructions and in conformity with specified requirements.
 1. Should job conditions or specified requirements conflict with manufacturer's instructions, Contractor shall consult with Construction Manager for further instructions.
 2. Contractor shall perform work in accord with manufacturer's instructions. Contractor shall not omit any preparatory step or installation procedure unless specifically modified or exempted by Contract Documents.

4. TRANSPORTATION AND HANDLING

- 4.1 Contractor shall arrange deliveries of Products in accord with construction schedules, coordinate to avoid conflict with work and conditions at the site.
 1. Deliver Products in undamaged condition, in manufacturer's original containers or packaging, with identifying labels intact and legible.
 2. Contractor shall immediately on delivery, inspect shipments to assure compliance with requirements of Contract Documents and approved submittals, and that Products are properly protected and undamaged.
- 4.2 Contractor shall provide equipment and personnel to handle Products by methods to prevent soiling or damage to Products or packaging.

5. STORAGE AND PROTECTION

- 5.1 Contractor shall store Products in accord with manufacturer's instructions, with seals and labels intact and legible.
 1. Contractor shall store Products subject to damage by the elements in weathertight enclosures.
 2. Contractor shall maintain temperature and humidity within the ranges required by manufacture's instructions.
- 5.2 Exterior Storage
 1. Contractor shall store fabricated Products above the ground, on blocking or skids, to prevent soiling or staining. Cover Products which are subject to deterioration with impervious sheet coverings; provide adequate ventilation to avoid condensation.
 2. Contractor shall store loose granular materials in a well-drained area on soiled surfaces to prevent mixing with foreign matter.
- 5.3 Contractor shall arrange storage in a manner to provide easy access for inspection. Contractor shall make periodic inspections of stored Products to assure that Products are maintained under specified conditions, and free from damage or deterioration.

5.4 Contractor shall store flammable materials so as to prevent contact with flames and fire. Conform with manufacturer's recommendations and local laws. Pay particular attention to storage of:

1. Roof insulation.
2. Roofing materials, including solvents.
3. Cleaning and other solvents.
4. Fuels.

5.5 Protection after Installation:

1. Contractor shall provide substantial coverings as necessary to protect installed Products from damage from traffic and subsequent construction operations. Remove when no longer needed.

6. SUBSTITUTIONS AND PRODUCT OPTIONS

6.1 Product List.

1. Within 30 days after Contract Date, Contractor shall submit to Construction Manager a complete list of major products proposed to be used, with the name of the manufacturer and the installing Contractor.

6.2 Contractor's Options.

1. For Products specified only by reference standard, Contractor shall select any Product meeting that standard.
2. For Products specified by naming several Products or manufacturers, Contractor shall select any one of the Products or manufacturers named which complies with the specifications.
3. For Products specified by naming one or more Products or manufacturers and "or equal", Bidders must, during the bidding period, submit a request for substitutions for any Product or manufacturer not specifically named. See provisions in Paragraph 1.6.3.
4. For Products specified by naming only one Product and manufacturer, there is no option; and Contractor shall provide the precise Product specified.

6.3 Substitutions.

1. Until a date no later than ten (10) days before the date Bids are due, Architect will consider written requests from bidders for substitution of Products. Architect will review requests and will notify Bidders in an Addendum if the requested substitution is acceptable.
2. Should the Bidder desire a substitution, it shall submit a separate request for each Product, supported with complete data, with drawings and samples as appropriate, including:
 1. Comparison of the qualities of the proposed substitution with that specified.

2. Changes required in other elements of the Work because of the substitution.
 3. Effect on the construction schedule.
 4. Cost data comparing the proposed substitution with the Product specified.
 5. Any required license fees or royalties.
 6. Availability of maintenance service, and source of replacement materials.
3. Architect, in its sole discretion, shall be the judge of the acceptability of the proposed substitution.
 4. A request for a substitution constitutes a representation that Bidder:
 1. Has investigated the proposed Product and determined that it is equal to or superior in all respects to that specified;
 2. Will provide the same warranties or bonds for the substitution as for the Product specified;
 3. Will coordinate the installation of an accepted substitution into the Work, and make such other changes as may be required to make the Work complete in all respects; and
 4. Waives all claims for additional costs, under his responsibility, which may subsequently become apparent.
- 6.4 Architect will review requests for substitutions with reasonable promptness, and notify Bidders, in writing, through the Construction Manager, of the decision to accept or reject the requested substitution. Any decision to accept a substitution must be confirmed in an Addendum issued during the bidding period in order to be valid. Oral approvals will not be binding.
- 6.5 MATERIAL LOADING LOGISTICS: Any and all costs associated with stocking the job with labor and material and other site logistical issues such as parking, off hours stocking shall be INCLUDED in the BASE BID for this project.

END OF SECTION

SECTION 01 73 00 - EXECUTION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes general administrative and procedural requirements governing execution of the Work including, but not limited to, the following:
 - 1. Construction layout.
 - 2. Field engineering and surveying.
 - 3. Installation of the Work.
 - 4. Coordination of Owner-installed products.
 - 5. Progress cleaning.
 - 6. Starting and adjusting.
 - 7. Protection of installed construction.
 - 8. Correction of the Work.
- B. Related Requirements:
 - 1. Division 01 Section "Summary" for limits on use of Project site.
 - 2. Division 01 Section "Submittal Procedures" for submitting surveys.

1.3 DEFINITIONS

- A. Cutting: Removal of in-place construction necessary to permit installation or performance of other work.
- B. Patching: Fitting and repair work required to restore construction to original conditions after installation of other work.

1.4 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For professional engineer.
- B. Certificates: Submit certificate signed by professional engineer certifying that location and elevation of improvements comply with requirements.
- C. Landfill Receipts: Submit copy of receipts issued by a landfill facility, licensed to accept hazardous materials, for hazardous waste disposal.

- D. Certified Surveys: Submit two copies signed by professional engineer.
- E. Final Property Survey: Submit 10 copies showing the Work performed and record survey data.

1.5 QUALITY ASSURANCE

- A. Land Surveyor Qualifications: A professional land surveyor who is legally qualified to practice in jurisdiction where Project is located and who is experienced in providing land-surveying services of the kind indicated.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. General: Comply with requirements specified in other Sections.
 - 1. For projects requiring compliance with sustainable design and construction practices and procedures, use products for patching that comply with requirements in Division 01 sustainable design requirements Section.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Existing Conditions: The existence and location of underground and other utilities and construction indicated as existing are not guaranteed. Before beginning site work, investigate and verify the existence and location of underground utilities, mechanical and electrical systems, and other construction affecting the Work.
 - 1. Before construction, verify the location and invert elevation at points of connection of sanitary sewer, storm sewer, and water-service piping; underground electrical services, and other utilities.
 - 2. Furnish location data for work related to Project that must be performed by public utilities serving Project site.

3.2 PREPARATION

- A. Existing Utility Information: Furnish information to Owner that is necessary to adjust, move, or relocate existing utility structures, utility poles, lines, services, or other utility appurtenances located in or affected by construction. Coordinate with authorities having jurisdiction.
- B. Field Measurements: Take field measurements as required to fit the Work properly. Recheck measurements before installing each product. Where portions of the Work are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication. Coordinate fabrication schedule with construction progress to avoid delaying the Work.

- C. Space Requirements: Verify space requirements and dimensions of items shown diagrammatically on Drawings.
- D. Review of Contract Documents and Field Conditions: Immediately on discovery of the need for clarification of the Contract Documents caused by differing field conditions outside the control of Contractor, submit a request for information to Architect according to requirements in Division 01 Section "Project Management and Coordination."

3.3 CONSTRUCTION LAYOUT

- A. Verification: Before proceeding to lay out the Work, verify layout information shown on Drawings, in relation to the property survey and existing benchmarks. If discrepancies are discovered, notify Architect promptly.
- B. Record Log: Maintain a log of layout control work. Record deviations from required lines and levels. Include beginning and ending dates and times of surveys, weather conditions, name and duty of each survey party member, and types of instruments and tapes used. Make the log available for reference by Architect.

3.4 INSTALLATION

- A. General: Locate the Work and components of the Work accurately, in correct alignment and elevation, as indicated.
 - 1. Make vertical work plumb and make horizontal work level.
 - 2. Where space is limited, install components to maximize space available for maintenance and ease of removal for replacement.
 - 3. Conceal pipes, ducts, and wiring in finished areas unless otherwise indicated.
 - 4. Maintain minimum headroom clearance of 96 inches (2440 mm) in occupied spaces and 90 inches (2300 mm) in unoccupied spaces.
- B. Comply with manufacturer's written instructions and recommendations for installing products in applications indicated.
- C. Install products at the time and under conditions that will ensure the best possible results. Maintain conditions required for product performance until Substantial Completion.
- D. Conduct construction operations so no part of the Work is subjected to damaging operations or loading in excess of that expected during normal conditions of occupancy.
- E. Sequence the Work and allow adequate clearances to accommodate movement of construction items on site and placement in permanent locations.
- F. Tools and Equipment: Do not use tools or equipment that produce harmful noise levels.
- G. Templates: Obtain and distribute to the parties involved templates for work specified to be factory prepared and field installed. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing products to comply with indicated requirements.

- H. Attachment: Provide blocking and attachment plates and anchors and fasteners of adequate size and number to securely anchor each component in place, accurately located and aligned with other portions of the Work. Where size and type of attachments are not indicated, verify size and type required for load conditions.
 - 1. Mounting Heights: Where mounting heights are not indicated, mount components at heights directed by Architect.
 - 2. Allow for building movement, including thermal expansion and contraction.
 - 3. Coordinate installation of anchorages. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.
- I. Joints: Make joints of uniform width. Where joint locations in exposed work are not indicated, arrange joints for the best visual effect. Fit exposed connections together to form hairline joints.
- J. Hazardous Materials: Use products, cleaners, and installation materials that are not considered hazardous.

3.5 OWNER-INSTALLED PRODUCTS

- A. Site Access: Provide access to Project site for Owner's construction personnel.
- B. Coordination: Coordinate construction and operations of the Work with work performed by Owner's construction personnel.
 - 1. Construction Schedule: Inform Owner of Contractor's preferred construction schedule for Owner's portion of the Work. Adjust construction schedule based on a mutually agreeable timetable. Notify Owner if changes to schedule are required due to differences in actual construction progress.
 - 2. Pre-installation Conferences: Include Owner's construction personnel at pre-installation conferences covering portions of the Work that are to receive Owner's work. Attend pre-installation conferences conducted by Owner's construction personnel if portions of the Work depend on Owner's construction.

3.6 PROGRESS CLEANING

- A. General: Clean Project site and work areas daily, including common areas. Enforce requirements strictly. Dispose of materials lawfully.
 - 1. Comply with requirements in NFPA 241 for removal of combustible waste materials and debris.
 - 2. Do not hold waste materials more than seven days during normal weather or three days if the temperature is expected to rise above 80 deg F (27 deg C).
 - 3. Containerize hazardous and unsanitary waste materials separately from other waste. Mark containers appropriately and dispose of legally, according to regulations.
 - a. Use containers intended for holding waste materials of type to be stored.

4. Coordinate progress cleaning for joint-use areas where Contractor and other contractors are working concurrently.
- B. Site: Maintain Project site free of waste materials and debris.
- C. Work Areas: Clean areas where work is in progress to the level of cleanliness necessary for proper execution of the Work.
 1. Remove liquid spills promptly.
 2. Where dust would impair proper execution of the Work, broom-clean or vacuum the entire work area, as appropriate.
- D. Installed Work: Keep installed work clean. Clean installed surfaces according to written instructions of manufacturer or fabricator of product installed, using only cleaning materials specifically recommended. If specific cleaning materials are not recommended, use cleaning materials that are not hazardous to health or property and that will not damage exposed surfaces.
- E. Concealed Spaces: Remove debris from concealed spaces before enclosing the space.
- F. Exposed Surfaces in Finished Areas: Clean exposed surfaces and protect as necessary to ensure freedom from damage and deterioration at time of Substantial Completion.
- G. Waste Disposal: Do not bury or burn waste materials on-site. Do not wash waste materials down sewers or into waterways. Comply with waste disposal requirements in Division 01 Section "Construction Waste Management and Disposal."
- H. During handling and installation, clean and protect construction in progress and adjoining materials already in place. Apply protective covering where required to ensure protection from damage or deterioration at Substantial Completion.
- I. Clean and provide maintenance on completed construction as frequently as necessary through the remainder of the construction period. Adjust and lubricate operable components to ensure operability without damaging effects.
- J. Limiting Exposures: Supervise construction operations to assure that no part of the construction, completed or in progress, is subject to harmful, dangerous, damaging, or otherwise deleterious exposure during the construction period.

3.7 STARTING AND ADJUSTING

- A. Coordinate startup and adjusting of equipment and operating components with requirements in Division 01 Section "General Commissioning Requirements."
- B. Start equipment and operating components to confirm proper operation. Remove malfunctioning units, replace with new units, and retest.
- C. Adjust equipment for proper operation. Adjust operating components for proper operation without binding.
- D. Test each piece of equipment to verify proper operation. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

- E. Manufacturer's Field Service: Comply with qualification requirements in Division 01 Section "Quality Requirements."

3.8 PROTECTION OF INSTALLED CONSTRUCTION

- A. Provide final protection and maintain conditions that ensure installed Work is without damage or deterioration at time of Substantial Completion.
- B. Comply with manufacturer's written instructions for temperature and relative humidity.

END OF SECTION

SECTION 01 74 19 – CONSTRUCTION WASTE MANAGEMENT

PART 1 GENERAL

1.1 GENERAL REQUIREMENTS

- A. Work of this Section, as shown or specified, shall be in accordance with the requirements of the Contract Documents.

1.2 SECTION INCLUDES

- A. Work of this section includes the following requirements:
 - 1. Waste management requirements.

1.3 WASTE MANAGEMENT REQUIREMENTS

- A. The contractor is responsible for daily job cleaning of the project area and interior and exterior areas immediately adjacent to the project area
- B. All items (construction products, equipment, etc.) identified for demolition are to become the property of the contractor to be removed from the job site and properly disposed of offsite.
- C. Items identified as salvage or reuse are to be carefully removed and properly stored, protected from damage. If necessary, photograph items to identify previous damage. Any damage occurring during removal, storage or reinstalling will be the responsibility of the contractor to correct or replace
- D. The contractor is responsible for supplying a dumpster and payment of dump fees. Contractor is responsible for the security of dumpster. Items placed in the dumpster by others will become the responsibility of the contractor for proper disposal. The dumpster is to be located in area as directed by owner
- E. The dumpster is not to be used for the disposal of hazardous waste. Hazardous wastes shall be separated, stored, and disposed of according to local regulations.

1.4 CLEAN-UP

- A. Contractor shall arrange for clean up and removal of debris resulting from work of this project including all work by subcontractors and suppliers. Debris shall be properly disposed of as identified in 1.3 above.
- B. Clean up shall be scheduled on a continual basis to ensure that project area, building areas (occupied and unoccupied) are maintained free from accumulation of waste materials and trash
- C. Removal of garbage, food, and other items that could attract pests and insects are to be removed on a daily basis

1. If, within 24 hours after written notification from the owner of discrepancies in housekeeping. The owner reserves the right to undertake the work and back charge the contractor
 - D. See Close out Procedures for Final cleaning requirements
- 1.5 QUALITY ASSURANCE
- A. Regulatory Requirements: Comply with hauling and disposal regulations of authorities having jurisdiction. Comply with all applicable local ordinances and regulations.

END OF SECTION

SECTION 01 77 00 - CLOSEOUT PROCEDURES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes administrative and procedural requirements for contract closeout, including, but not limited to, the following:
 - 1. Substantial Completion procedures.
 - 2. Final completion procedures.
 - 3. Warranties.
 - 4. Final cleaning.
 - 5. Repair of the Work.
- B. Related Requirements:
 - 1. Division 01 Section "Project Record Documents" for submitting record Drawings, record Specifications, and record Product Data.
 - 2. Divisions 02 through 33 Sections for specific closeout and special cleaning requirements for the Work in those Sections.

1.2 ACTION SUBMITTALS

- A. Product Data: For cleaning agents.
- B. Contractor's List of Incomplete Items: Initial submittal at Substantial Completion.
- C. Certified List of Incomplete Items: Final submittal at Final Completion.

1.3 CLOSEOUT SUBMITTALS

- A. Certificates of Release: From authorities having jurisdiction.
- B. Certificate of Insurance: For continuing coverage.
- C. Field Report: For pest control inspection.

1.4 MAINTENANCE MATERIAL SUBMITTALS

- A. Schedule of Maintenance Material Items: For maintenance material submittal items specified in other Sections.

1.5 SUBSTANTIAL COMPLETION PROCEDURES

- A. Contractor's List of Incomplete Items: Prepare and submit a list of items to be completed and corrected (Contractor's punch list), indicating the value of each item on the list and reasons why the Work is incomplete.
- B. Submittals Prior to Substantial Completion: Complete the following a minimum of 10 days prior to requesting inspection for determining date of Substantial Completion. List items below that are incomplete at time of request.
1. Certificates of Release: Obtain and submit releases from authorities having jurisdiction permitting Owner unrestricted use of the Work and access to services and utilities. Include occupancy permits, operating certificates, and similar releases.
 2. Submit closeout submittals specified in other Division 01 Sections, including project record documents, operation and maintenance manuals, final completion construction photographic documentation, damage or settlement surveys, property surveys, and similar final record information.
 3. Submit closeout submittals specified in individual Divisions 02 through 33 Sections, including specific warranties, workmanship bonds, maintenance service agreements, final certifications, and similar documents.
 4. Submit maintenance material submittals specified in individual Divisions 02 through 33 Sections, including tools, spare parts, extra materials, and similar items, and deliver to location designated by Owner. Label with manufacturer's name and model number where applicable.
 - a. Schedule of Maintenance Material Items: Prepare and submit schedule of maintenance material submittal items, including name and quantity of each item and name and number of related Specification Section. Obtain Owner's signature for receipt of submittals.
 5. Submit test/adjust/balance records.
 6. Submit sustainable design submittals required in Division 01 sustainable design requirements Section and in individual Division 02 through 33 Sections.
 7. Submit changeover information related to Owner's occupancy, use, operation, and maintenance.
- C. Procedures Prior to Substantial Completion: Complete the following a minimum of 10 days prior to requesting inspection for determining date of Substantial Completion. List items below that are incomplete at time of request.
1. Advise Owner of pending insurance changeover requirements.
 2. Make final changeover of permanent locks and deliver keys to Owner. Advise Owner's personnel of changeover in security provisions.
 3. Complete startup and testing of systems and equipment.
 4. Perform preventive maintenance on equipment used prior to Substantial Completion.
 5. Instruct Owner's personnel in operation, adjustment, and maintenance of products, equipment, and systems. Submit demonstration and training video recordings specified in Division 01 Section "Demonstration and Training."
 6. Advise Owner of changeover in heat and other utilities.
 7. Participate with Owner in conducting inspection and walkthrough with local emergency responders.

8. Terminate and remove temporary facilities from Project site, along with mockups, construction tools, and similar elements.
9. Complete final cleaning requirements, including touchup painting.
10. Touch up and otherwise repair and restore marred exposed finishes to eliminate visual defects.

D. Inspection: Submit a written request for inspection to determine Substantial Completion a minimum of 10 days prior to date the work will be completed and ready for final inspection and tests. On receipt of request, Architect will either proceed with inspection or notify Contractor of unfulfilled requirements. Architect will prepare the Certificate of Substantial Completion after inspection or will notify Contractor of items, either on Contractor's list or additional items identified by Architect, that must be completed or corrected before certificate will be issued.

1. Re-inspection: Request re-inspection when the Work identified in previous inspections as incomplete is completed or corrected.
2. Results of completed inspection will form the basis of requirements for final completion.

1.6 FINAL COMPLETION PROCEDURES

A. Preliminary Procedures: Before requesting final inspection for determining final completion, complete the following:

1. Submit a final Application for Payment according to Division 01 Section "Payment Procedures."
2. Certified List of Incomplete Items: Submit certified copy of Architect's Substantial Completion inspection list of items to be completed or corrected (punch list), endorsed and dated by Architect. Certified copy of the list shall state that each item has been completed or otherwise resolved for acceptance.
3. Certificate of Insurance: Submit evidence of final, continuing insurance coverage complying with insurance requirements.
4. Submit pest-control final inspection report and warranty.
5. Instruct Owner's personnel in operation, adjustment, and maintenance of products, equipment, and systems.

B. Inspection: Submit a written request for final inspection to determine acceptance. On receipt of request, Architect will either proceed with inspection or notify Contractor of unfulfilled requirements. Architect will prepare a final Certificate for Payment after inspection or will notify Contractor of construction that must be completed or corrected before certificate will be issued.

1. Re-inspection: Request re-inspection when the Work identified in previous inspections as incomplete is completed or corrected.

1.7 LIST OF INCOMPLETE ITEMS (PUNCH LIST)

A. Organization of List: Include name and identification of each space and area affected by construction operations for incomplete items and items needing correction including, if necessary, areas disturbed by Contractor that are outside the limits of construction. Use CSI Form 14.1A.

1. Organize list of spaces in sequential order, starting with exterior areas first and proceeding from lowest floor to highest floor.
2. Organize items applying to each space by major element, including categories for ceiling, individual walls, floors, equipment, and building systems.
3. Submit list of incomplete items in the following format:
 - a. PDF electronic file. Architect will return annotated copy.

1.8 SUBMITTAL OF PROJECT WARRANTIES

- A. Time of Submittal: Submit written warranties on request of Architect for designated portions of the Work where commencement of warranties other than date of Substantial Completion is indicated, or when delay in submittal of warranties might limit Owner's rights under warranty.
- B. Organize warranty documents into an orderly sequence based on the table of contents of the Project Manual.
 1. Bind warranties and bonds in heavy-duty, three-ring, vinyl-covered, loose-leaf binders, thickness as necessary to accommodate contents, and sized to receive 8-1/2-by-11-inch (215-by-280-mm) paper.
 2. Provide heavy paper dividers with plastic-covered tabs for each separate warranty. Mark tab to identify the product or installation. Provide a typed description of the product or installation, including the name of the product and the name, address, and telephone number of Installer.
 3. Identify each binder on the front and spine with the typed or printed title "WARRANTIES," Project name, and name of Contractor.
 4. Warranty Electronic File: Scan warranties and bonds and assemble complete warranty and bond submittal package into a single indexed electronic PDF file with links enabling navigation to each item. Provide bookmarked table of contents at beginning of document.
- C. Provide additional copies of each warranty to include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.
 1. Use cleaning products that comply with Green Seal's GS-37, or if GS-37 is not applicable, use products that comply with the California Code of Regulations maximum allowable VOC levels.

PART 3 - EXECUTION

3.1 FINAL CLEANING

- A. General: Perform final cleaning. Conduct cleaning and waste-removal operations to comply with local laws and ordinances and Federal and local environmental and antipollution regulations.
- B. Cleaning: Employ experienced workers or professional cleaners for final cleaning. Clean each surface or unit to condition expected in an average commercial building cleaning and maintenance program. Comply with manufacturer's written instructions.
 - 1. Complete the following cleaning operations before requesting inspection for certification of Substantial Completion for entire Project or for a designated portion of Project:
 - a. Clean Project site, yard, and grounds, in areas disturbed by construction activities, including landscape development areas, of rubbish, waste material, litter, and other foreign substances.
 - b. Sweep paved areas broom clean. Remove petrochemical spills, stains, and other foreign deposits.
 - c. Rake grounds that are neither planted nor paved to a smooth, even-textured surface.
 - d. Remove tools, construction equipment, machinery, and surplus material from Project site.
 - e. Remove snow and ice to provide safe access to building.
 - f. Clean exposed exterior and interior hard-surfaced finishes to a dirt-free condition, free of stains, films, and similar foreign substances. Avoid disturbing natural weathering of exterior surfaces. Restore reflective surfaces to their original condition.
 - g. Remove debris and surface dust from limited access spaces, including roofs, plenums, shafts, trenches, equipment vaults, manholes, attics, and similar spaces.
 - h. Sweep concrete floors broom clean in unoccupied spaces.
 - i. Vacuum carpet and similar soft surfaces, removing debris and excess nap; clean according to manufacturer's recommendations if visible soil or stains remain.
 - j. Clean transparent materials, including mirrors and glass in doors and windows. Remove glazing compounds and other noticeable, vision-obscuring materials. Replace chipped or broken glass and other damaged transparent materials. Polish mirrors and glass, taking care not to scratch surfaces.
 - k. Remove labels that are not permanent.
 - l. Wipe surfaces of mechanical and electrical equipment and similar equipment. Remove excess lubrication, paint and mortar droppings, and other foreign substances.
 - m. Clean plumbing fixtures to a sanitary condition, free of stains, including stains resulting from water exposure.
 - n. Replace disposable air filters and clean permanent air filters. Clean exposed surfaces of diffusers, registers, and grills.
 - o. Clean light fixtures, lamps, globes, and reflectors to function with full efficiency.
 - p. Leave Project clean and ready for occupancy.

- C. Pest Control: Comply with pest control requirements in Division 01 Section "Temporary Facilities and Controls." Prepare written report.

3.2 REPAIR OF THE WORK

- A. Complete repair and restoration operations before requesting inspection for determination of Substantial Completion.
- B. Repair or remove and replace defective construction. Repairing includes replacing defective parts, refinishing damaged surfaces, touching up with matching materials, and properly adjusting operating equipment. Where damaged or worn items cannot be repaired or restored, provide replacements. Remove and replace operating components that cannot be repaired. Restore damaged construction and permanent facilities used during construction to specified condition.
 - 1. Remove and replace chipped, scratched, and broken glass, reflective surfaces, and other damaged transparent materials.
 - 2. Touch up and otherwise repair and restore marred or exposed finishes and surfaces. Replace finishes and surfaces that already show evidence of repair or restoration.
 - a. Do not paint over "UL" and other required labels and identification, including mechanical and electrical nameplates. Remove paint applied to required labels and identification.
 - 3. Replace parts subject to operating conditions during construction that may impede operation or reduce longevity.
 - 4. Replace burned-out bulbs, bulbs noticeably dimmed by hours of use, and defective and noisy starters in fluorescent and mercury vapor fixtures to comply with requirements for new fixtures.

END OF SECTION

SECTION 01 78 39 - PROJECT RECORD DOCUMENTS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes administrative and procedural requirements for project record documents, including the following:
 - 1. Record Drawings.
 - 2. Record Specifications.
 - 3. Record Product Data.
- B. Related Requirements:
 - 1. Division 01 Section "Operation and Maintenance Data" for operation and maintenance manual requirements.
 - 2. Divisions 02 through 33 Sections for specific requirements for project record documents of the Work in those Sections.

1.2 CLOSEOUT SUBMITTALS

- A. Record Drawings: Comply with the following:
 - 1. Number of Copies: Submit one set(s) of marked-up record prints.
 - 2. Number of Copies: Submit copies of record Drawings as follows:
 - a. Final Submittal:
 - 1) Submit PDF electronic files of scanned record prints and three set(s) of prints.
 - 2) Print each drawing, whether or not changes and additional information were recorded.
- B. Record Specifications: Submit annotated PDF electronic files of Project's Specifications, including addenda and contract modifications.
- C. Record Product Data: Submit annotated PDF electronic files and directories of each submittal.

PART 2 - PRODUCTS

2.1 RECORD DRAWINGS

- A. Record Prints: Maintain one set of marked-up paper copies of the Contract Drawings and Shop Drawings, incorporating new and revised Drawings as modifications are issued.

1. Preparation: Mark record prints to show the actual installation where installation varies from that shown originally. Require individual or entity who obtained record data, whether individual or entity is Installer, subcontractor, or similar entity, to provide information for preparation of corresponding marked-up record prints.
 - a. Give particular attention to information on concealed elements that would be difficult to identify or measure and record later.
 - b. Record data as soon as possible after obtaining it.
 - c. Record and check the markup before enclosing concealed installations.
 2. Mark the Contract Drawings and Shop Drawings completely and accurately. Use personnel proficient at recording graphic information in production of marked-up record prints.
 3. Mark record sets with erasable, red-colored pencil. Use other colors to distinguish between changes for different categories of the Work at same location.
 4. Note Construction Change Directive numbers, alternate numbers, Change Order numbers, and similar identification, where applicable.
- B. Record Digital Data Files: Immediately before inspection for Certificate of Substantial Completion, review marked-up record prints with Architect. When authorized, prepare a full set of corrected digital data files of the Contract Drawings, as follows:
1. Format: Same digital data software program, version, and operating system as the original Contract Drawings.
 2. Incorporate changes and additional information previously marked on record prints. Delete, redraw, and add details and notations where applicable.
 3. Refer instances of uncertainty to Architect for resolution.
 4. Architect will furnish Contractor one set of digital data files of the Contract Drawings for use in recording information.
- C. Format: Identify and date each record Drawing; include the designation "PROJECT RECORD DRAWING" in a prominent location.
1. Record Prints: Organize record prints and newly prepared record Drawings into manageable sets. Bind each set with durable paper cover sheets. Include identification on cover sheets.
 2. Format: Annotated PDF electronic file **with comment function enabled**.
 3. Record Digital Data Files: Organize digital data information into separate electronic files that correspond to each sheet of the Contract Drawings. Name each file with the sheet identification. Include identification in each digital data file.
 4. Identification: As follows:
 - a. Project name.
 - b. Date.
 - c. Designation "PROJECT RECORD DRAWINGS."
 - d. Name of Architect.
 - e. Name of Contractor.

2.2 RECORD SPECIFICATIONS

- A. Preparation: Mark Specifications to indicate the actual product installation where installation varies from that indicated in Specifications, addenda, and contract modifications.
 - 1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
 - 2. Note related Change Orders and record Drawings where applicable.
- B. Format: Submit record Specifications as annotated PDF electronic file.

2.3 RECORD PRODUCT DATA

- A. Preparation: Mark Product Data to indicate the actual product installation where installation varies substantially from that indicated in Product Data submittal.
 - 1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
 - 2. Include significant changes in the product delivered to Project site and changes in manufacturer's written instructions for installation.
 - 3. Note related Change Orders, record Specifications, and record Drawings where applicable.
- B. Format: Submit record Product Data as annotated PDF electronic file

2.4 MISCELLANEOUS RECORD SUBMITTALS

- A. Assemble miscellaneous records required by other Specification Sections for miscellaneous record keeping and submittal in connection with actual performance of the Work. Bind or file miscellaneous records and identify each, ready for continued use and reference.
- B. Format: Submit miscellaneous record submittals as PDF electronic file.

PART 3 - EXECUTION

3.1 RECORDING AND MAINTENANCE

- A. Recording: Maintain one copy of each submittal during the construction period for project record document purposes. Post changes and revisions to project record documents as they occur; do not wait until end of Project.
- B. Maintenance of Record Documents and Samples: Store record documents and Samples in the field office apart from the Contract Documents used for construction. Do not use project record documents for construction purposes. Maintain record documents in good order and in a clean, dry, legible condition, protected from deterioration and loss. Provide access to project record documents for Architect's reference during normal working hours.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 01 79 00 - DEMONSTRATION AND TRAINING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for instructing Owner's personnel, including the following:
 - 1. Demonstration of operation of systems, subsystems, and equipment.
 - 2. Training in operation and maintenance of systems, subsystems, and equipment.
 - 3. Demonstration and training video recordings.
- B. Related Requirements:
 - 1. Divisions 02 through 33 Sections for specific requirements for demonstration and training for products in those Sections.

1.3 INFORMATIONAL SUBMITTALS

- A. Instruction Program: Submit outline of instructional program for demonstration and training, including a list of training modules and a schedule of proposed dates, times, length of instruction time, and instructors' names for each training module. Include learning objective and outline for each training module.
 - 1. Indicate proposed training modules using manufacturer-produced demonstration and training video recordings for systems, equipment, and products in lieu of video recording of live instructional module.
- B. Qualification Data: For instructor.
- C. Attendance Record: For each training module, submit list of participants and length of instruction time.
- D. Evaluations: For each participant and for each training module, submit results and documentation of performance-based test.

1.4 CLOSEOUT SUBMITTALS

- A. Demonstration and Training Video Recordings: Submit two copies within seven days of end of each training module.

1. Identification: On each copy, provide an applied label with the following information:
 - a. Name of Project.
 - b. Name and address of videographer.
 - c. Name of Architect.
 - d. Name of Construction Manager.
 - e. Name of Contractor.
 - f. Date of video recording.
2. Transcript: Prepared in PDF electronic format. Include a cover sheet with same label information as the corresponding video recording and a table of contents with links to corresponding training components. Include name of Project and date of video recording on each page.
3. At completion of training, submit complete training manual(s) for Owner's use prepared and bound in format matching operation and maintenance manuals.

1.5 QUALITY ASSURANCE

- A. Facilitator Qualifications: A firm or individual experienced in training or educating maintenance personnel in a training program similar in content and extent to that indicated for this Project, and whose work has resulted in training or education with a record of successful learning performance.
- B. Instructor Qualifications: A factory-authorized service representative, complying with requirements in Division 01 Section "Quality Requirements," experienced in operation and maintenance procedures and training.
- C. Videographer Qualifications: A professional videographer who is experienced photographing demonstration and training events similar to those required.
- D. Pre-instruction Conference: Conduct conference at Project site to comply with requirements in Division 01 Section "Project Management and Coordination." Review methods and procedures related to demonstration and training including, but not limited to, the following:
 1. Inspect and discuss locations and other facilities required for instruction.
 2. Review and finalize instruction schedule and verify availability of educational materials, instructors' personnel, audiovisual equipment, and facilities needed to avoid delays.
 3. Review required content of instruction.
 4. For instruction that must occur outside, review weather and forecasted weather conditions and procedures to follow if conditions are unfavorable.

1.6 COORDINATION

- A. Coordinate instruction schedule with Owner's operations. Adjust schedule as required to minimize disrupting Owner's operations and to ensure availability of Owner's personnel.
- B. Coordinate instructors, including providing notification of dates, times, length of instruction time, and course content.

- C. Coordinate content of training modules with content of approved emergency, operation, and maintenance manuals. Do not submit instruction program until operation and maintenance data has been reviewed and approved by Architect.

PART 2 - PRODUCTS

2.1 INSTRUCTION PROGRAM

- A. Program Structure: Develop an instruction program that includes individual training modules for each system and for equipment not part of a system, as required by individual Specification Sections.
- B. Training Modules: Develop a learning objective and teaching outline for each module. Include a description of specific skills and knowledge that participant is expected to master. For each module, include instruction for the following as applicable to the system, equipment, or component:
 - 1. Basis of System Design, Operational Requirements, and Criteria: Include the following:
 - a. System, subsystem, and equipment descriptions.
 - b. Performance and design criteria if Contractor is delegated design responsibility.
 - c. Operating standards.
 - d. Regulatory requirements.
 - e. Equipment function.
 - f. Operating characteristics.
 - g. Limiting conditions.
 - h. Performance curves.
 - 2. Documentation: Review the following items in detail:
 - a. Emergency manuals.
 - b. Operations manuals.
 - c. Maintenance manuals.
 - d. Project record documents.
 - e. Identification systems.
 - f. Warranties and bonds.
 - g. Maintenance service agreements and similar continuing commitments.
 - 3. Emergencies: Include the following, as applicable:
 - a. Instructions on meaning of warnings, trouble indications, and error messages.
 - b. Instructions on stopping.
 - c. Shutdown instructions for each type of emergency.
 - d. Operating instructions for conditions outside of normal operating limits.
 - e. Sequences for electric or electronic systems.
 - f. Special operating instructions and procedures.
 - 4. Operations: Include the following, as applicable:

- a. Startup procedures.
 - b. Equipment or system break-in procedures.
 - c. Routine and normal operating instructions.
 - d. Regulation and control procedures.
 - e. Control sequences.
 - f. Safety procedures.
 - g. Instructions on stopping.
 - h. Normal shutdown instructions.
 - i. Operating procedures for emergencies.
 - j. Operating procedures for system, subsystem, or equipment failure.
 - k. Seasonal and weekend operating instructions.
 - l. Required sequences for electric or electronic systems.
 - m. Special operating instructions and procedures.
5. Adjustments: Include the following:
 - a. Alignments.
 - b. Checking adjustments.
 - c. Noise and vibration adjustments.
 - d. Economy and efficiency adjustments.
6. Troubleshooting: Include the following:
 - a. Diagnostic instructions.
 - b. Test and inspection procedures.
7. Maintenance: Include the following:
 - a. Inspection procedures.
 - b. Types of cleaning agents to be used and methods of cleaning.
 - c. List of cleaning agents and methods of cleaning detrimental to product.
 - d. Procedures for routine cleaning
 - e. Procedures for preventive maintenance.
 - f. Procedures for routine maintenance.
 - g. Instruction on use of special tools.
8. Repairs: Include the following:
 - a. Diagnosis instructions.
 - b. Repair instructions.
 - c. Disassembly; component removal, repair, and replacement; and reassembly instructions.
 - d. Instructions for identifying parts and components.
 - e. Review of spare parts needed for operation and maintenance.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Assemble educational materials necessary for instruction, including documentation and training module. Assemble training modules into a training manual organized in coordination with requirements in Division 01 Section "Operations and Maintenance Data."
- B. Set up instructional equipment at instruction location.

3.2 INSTRUCTION

- A. Facilitator: Engage a qualified facilitator to prepare instruction program and training modules, to coordinate instructors, and to coordinate between Contractor and Owner for number of participants, instruction times, and location.
- B. Engage qualified instructors to instruct Owner's personnel to adjust, operate, and maintain systems, subsystems, and equipment not part of a system.
 - 1. Architect will furnish an instructor to describe basis of system design, operational requirements, criteria, and regulatory requirements.
 - 2. Owner will furnish an instructor to describe Owner's operational philosophy.
 - 3. Owner will furnish Contractor with names and positions of participants.
- C. Scheduling: Provide instruction at mutually agreed on times. For equipment that requires seasonal operation, provide similar instruction at start of each season.
 - 1. Schedule training with Owner with at least seven days' advance notice.
- D. Training Location and Reference Material: Conduct training on-site in the completed and fully operational facility using the actual equipment in-place. Conduct training using final operation and maintenance data submittals.
- E. Evaluation: At conclusion of each training module, assess and document each participant's mastery of module by use of a demonstration performance-based test.
- F. Cleanup: Collect used and leftover educational materials and give to Owner. Remove instructional equipment. Restore systems and equipment to condition existing before initial training use.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 02 41 19 - SELECTIVE DEMOLITION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Demolition and removal of selected portions of building or structure.
2. Demolition and removal of selected site elements.
3. Salvage of existing items to be reused or recycled.

B. Related Requirements:

1. Section 011000 "Summary" for restrictions on the use of the premises, Owner-occupancy requirements, and phasing requirements.
2. Section 017300 "Execution" for cutting and patching procedures.

1.3 DEFINITIONS

- A. Remove: Detach items from existing construction and legally dispose of them off-site unless indicated to be removed and salvaged or removed and reinstalled.
- B. Remove and Salvage: Carefully detach from existing construction, in a manner to prevent damage, and deliver to Owner.
- C. Remove and Reinstall: Detach items from existing construction, prepare for reuse, and reinstall where indicated.
- D. Existing to Remain: Existing items of construction that are not to be permanently removed and that are not otherwise indicated to be removed, removed and salvaged, or removed and reinstalled.

1.4 MATERIALS OWNERSHIP

- A. Unless otherwise indicated, demolition waste becomes property of Contractor.
- B. Historic items, relics, antiques, and similar objects including, but not limited to, cornerstones and their contents, commemorative plaques and tablets, and other items of interest or value to Owner that may be uncovered during demolition remain the property of Owner.

1. Carefully salvage in a manner to prevent damage and promptly return to Owner.

1.5 PREINSTALLATION MEETINGS

- A. Predemolition Conference: Conduct conference at Project site.

1. Inspect and discuss condition of construction to be selectively demolished.
2. Review structural load limitations of existing structure.
3. Review and finalize selective demolition schedule and verify availability of materials, demolition personnel, equipment, and facilities needed to make progress and avoid delays.
4. Review requirements of work performed by other trades that rely on substrates exposed by selective demolition operations.
5. Review areas where existing construction is to remain and requires protection.

1.6 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For refrigerant recovery technician.

- B. Proposed Protection Measures: Submit report, including drawings, that indicates the measures proposed for protecting individuals and property, for environmental protection, for dust control and , for noise control. Indicate proposed locations and construction of barriers.

- C. Schedule of Selective Demolition Activities: Indicate the following:

1. Detailed sequence of selective demolition and removal work, with starting and ending dates for each activity. Ensure Owner's on-site operations are uninterrupted.
2. Interruption of utility services. Indicate how long utility services will be interrupted.
3. Coordination for shutoff, capping, and continuation of utility services.
4. Use of elevator and stairs.
5. Coordination of Owner's continuing occupancy of portions of existing building and of Owner's partial occupancy of completed Work.

- D. Inventory: Submit a list of items to be removed and salvaged and deliver to Owner prior to start of demolition.

- E. Predemolition Photographs or Video: Submit before Work begins.

- F. Statement of Refrigerant Recovery: Signed by refrigerant recovery technician responsible for recovering refrigerant, stating that all refrigerant that was present was recovered and that recovery was performed according to EPA regulations. Include name and address of technician and date refrigerant was recovered.

- G. Warranties: Documentation indicated that existing warranties are still in effect after completion of selective demolition.

1.7 CLOSEOUT SUBMITTALS

- A. Inventory: Submit a list of items that have been removed and salvaged.
- B. Landfill Records: Indicate receipt and acceptance of hazardous wastes by a landfill facility licensed to accept hazardous wastes.

1.8 QUALITY ASSURANCE

- A. Refrigerant Recovery Technician Qualifications: Certified by an EPA-approved certification program.

1.9 FIELD CONDITIONS

- A. Owner will occupy portions of building immediately adjacent to selective demolition area. Conduct selective demolition so Owner's operations will not be disrupted.
- B. Conditions existing at time of inspection for bidding purpose will be maintained by Owner as far as practical.
 - 1. Before selective demolition, Owner will remove the following items:
 - a. Furniture and Equipment.
- C. Notify Architect of discrepancies between existing conditions and Drawings before proceeding with selective demolition.
- D. Hazardous Materials: It is not expected that hazardous materials will be encountered in the Work.
 - 1. Hazardous materials will be removed by Owner before start of the Work.
 - 2. If suspected hazardous materials are encountered, do not disturb; immediately notify Architect and Owner. Hazardous materials will be removed by Owner under a separate contract.
- E. Storage or sale of removed items or materials on-site is not permitted.
- F. Utility Service: Maintain existing utilities indicated to remain in service and protect them against damage during selective demolition operations.
 - 1. Maintain fire-protection facilities in service during selective demolition operations.

1.10 WARRANTY

- A. Existing Warranties: Remove, replace, patch, and repair materials and surfaces cut or damaged during selective demolition, by methods and with materials so as not to void existing warranties. Notify warrantor before proceeding. Existing warranties include the following:
 - 1. Roofing Systems.

- B. Notify warrantor on completion of selective demolition, and obtain documentation verifying that existing system has been inspected and warranty remains in effect. Submit documentation at Project closeout.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Regulatory Requirements: Comply with governing EPA notification regulations before beginning selective demolition. Comply with hauling and disposal regulations of authorities having jurisdiction.
- B. Standards: Comply with ANSI/ASSE A10.6 and NFPA 241.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verify that utilities have been disconnected and capped before starting selective demolition operations.
- B. Review record documents of existing construction provided by Owner. Owner does not guarantee that existing conditions are same as those indicated in record documents.
- C. Survey existing conditions and correlate with requirements indicated to determine extent of selective demolition required.
- D. When unanticipated mechanical, electrical, or structural elements that conflict with intended function or design are encountered, investigate and measure the nature and extent of conflict. Promptly submit a written report to Architect.
- E. Perform an engineering survey of condition of building to determine whether removing any element might result in structural deficiency or unplanned collapse of any portion of structure or adjacent structures during selective building demolition operations.
 - 1. Perform surveys as the Work progresses to detect hazards resulting from selective demolition activities.
- F. Survey of Existing Conditions: Record existing conditions by use of measured drawing.
 - 1. Comply with requirements specified in Section 013233 "Photographic Documentation."
 - 2. Inventory and record the condition of items to be removed and salvaged. Provide photographs of conditions that might be misconstrued as damage caused by salvage operations.
 - 3. Before selective demolition or removal of existing building elements that will be reproduced or duplicated in final Work, make permanent record of measurements, materials, and construction details required to make exact reproduction.

3.2 UTILITY SERVICES AND MECHANICAL/ELECTRICAL SYSTEMS

- A. Existing Services/Systems to Remain: Maintain services/systems indicated to remain and protect them against damage.
1. Comply with requirements for existing services/systems interruptions specified in Section 011000 "Summary."
- B. Existing Services/Systems to Be Removed, Relocated, or Abandoned: Locate, identify, disconnect, and seal or cap off indicated utility services and mechanical/electrical systems serving areas to be selectively demolished.
1. Owner will arrange to shut off indicated services/systems when requested by Contractor.
 2. If services/systems are required to be removed, relocated, or abandoned, provide temporary services/systems that bypass area of selective demolition and that maintain continuity of services/systems to other parts of building.
 3. Disconnect, demolish, and remove fire-suppression systems, plumbing, and HVAC systems, equipment, and components indicated to be removed.
 - a. Piping to Be Removed: Remove portion of piping indicated to be removed and cap or plug remaining piping with same or compatible piping material.
 - b. Piping to Be Abandoned in Place: Drain piping and cap or plug piping with same or compatible piping material.
 - c. Equipment to Be Removed: Disconnect and cap services and remove equipment.
 - d. Equipment to Be Removed and Reinstalled: Disconnect and cap services and remove, clean, and store equipment; when appropriate, reinstall, reconnect, and make equipment operational.
 - e. Equipment to Be Removed and Salvaged: Disconnect and cap services and remove equipment and deliver to Owner.
 - f. Ducts to Be Removed: Remove portion of ducts indicated to be removed and plug remaining ducts with same or compatible ductwork material.
 - g. Ducts to Be Abandoned in Place: Cap or plug ducts with same or compatible ductwork material.
- C. Refrigerant: Remove refrigerant from mechanical equipment to be selectively demolished according to 40 CFR 82 and regulations of authorities having jurisdiction.

3.3 PREPARATION

- A. Site Access and Temporary Controls: Conduct selective demolition and debris-removal operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.
1. Comply with requirements for access and protection specified in Section 015000 "Temporary Facilities and Controls."
- B. Temporary Facilities: Provide temporary barricades and other protection required to prevent injury to people and damage to adjacent buildings and facilities to remain.

1. Provide protection to ensure safe passage of people around selective demolition area and to and from occupied portions of building.
 2. Provide temporary weather protection, during interval between selective demolition of existing construction on exterior surfaces and new construction, to prevent water leakage and damage to structure and interior areas.
 3. Protect walls, ceilings, floors, and other existing finish work that are to remain or that are exposed during selective demolition operations.
 4. Cover and protect furniture, furnishings, and equipment that have not been removed.
 5. Comply with requirements for temporary enclosures, dust control, heating, and cooling specified in Section 015000 "Temporary Facilities and Controls."
- C. Temporary Shoring: Provide and maintain shoring, bracing, and structural supports as required to preserve stability and prevent movement, settlement, or collapse of construction and finishes to remain, and to prevent unexpected or uncontrolled movement or collapse of construction being demolished.
1. Strengthen or add new supports when required during progress of selective demolition.

3.4 SELECTIVE DEMOLITION, GENERAL

- A. General: Demolish and remove existing construction only to the extent required by new construction and as indicated. Use methods required to complete the Work within limitations of governing regulations and as follows:
1. Proceed with selective demolition systematically, from higher to lower level. Complete selective demolition operations above each floor or tier before disturbing supporting members on the next lower level.
 2. Neatly cut openings and holes plumb, square, and true to dimensions required. Use cutting methods least likely to damage construction to remain or adjoining construction. Use hand tools or small power tools designed for sawing or grinding, not hammering and chopping, to minimize disturbance of adjacent surfaces. Temporarily cover openings to remain.
 3. Cut or drill from the exposed or finished side into concealed surfaces to avoid marring existing finished surfaces.
 4. Do not use cutting torches until work area is cleared of flammable materials. At concealed spaces, such as duct and pipe interiors, verify condition and contents of hidden space before starting flame-cutting operations. Maintain fire watch and portable fire-suppression devices during flame-cutting operations.
 5. Maintain adequate ventilation when using cutting torches.
 6. Remove decayed, vermin-infested, or otherwise dangerous or unsuitable materials and promptly dispose of off-site.
 7. Remove structural framing members and lower to ground by method suitable to avoid free fall and to prevent ground impact or dust generation.
 8. Locate selective demolition equipment and remove debris and materials so as not to impose excessive loads on supporting walls, floors, or framing.
 9. Dispose of demolished items and materials promptly. Comply with requirements in Section 017419 "Construction Waste Management and Disposal."
- B. Removed and Reinstalled Items:

1. Clean and repair items to functional condition adequate for intended reuse.
 2. Pack or crate items after cleaning and repairing. Identify contents of containers.
 3. Protect items from damage during transport and storage.
 4. Reinstall items in locations indicated. Comply with installation requirements for new materials and equipment. Provide connections, supports, and miscellaneous materials necessary to make item functional for use indicated.
- C. Existing Items to Remain: Protect construction indicated to remain against damage and soiling during selective demolition. When permitted by Architect, items may be removed to a suitable, protected storage location during selective demolition and reinstalled in their original locations after selective demolition operations are complete.

3.5 SELECTIVE DEMOLITION PROCEDURES FOR SPECIFIC MATERIALS

- A. Concrete: Demolish in small sections. Using power-driven saw, cut concrete to a depth of at least 3/4 inch (19 mm) at junctures with construction to remain. Dislodge concrete from reinforcement at perimeter of areas being demolished, cut reinforcement, and then remove remainder of concrete. Neatly trim openings to dimensions indicated.
- B. Concrete: Demolish in sections. Cut concrete full depth at junctures with construction to remain and at regular intervals using power-driven saw, then remove concrete between saw cuts.
- C. Masonry: Demolish in small sections. Cut masonry at junctures with construction to remain, using power-driven saw, then remove masonry between saw cuts.
- D. Concrete Slabs-on-Grade: Saw-cut perimeter of area to be demolished, then break up and remove.
- E. Resilient Floor Coverings: Remove floor coverings and adhesive according to recommendations in RFCI's "Recommended Work Practices for the Removal of Resilient Floor Coverings."
- F. Roofing: Remove no more existing roofing than what can be covered in one day by new roofing and so that building interior remains watertight and weathertight. See Section 075323 – EPDM Membrane Roofing" for new roofing requirements.
 1. Remove existing roof membrane, flashings, copings, and roof accessories.
 2. Remove existing roofing system down to substrate.

3.6 DISPOSAL OF DEMOLISHED MATERIALS

- A. General: Except for items or materials indicated to be recycled, reused, salvaged, reinstalled, or otherwise indicated to remain Owner's property, remove demolished materials from Project site and legally dispose of them in an EPA-approved landfill.
 1. Do not allow demolished materials to accumulate on-site.
 2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.

3. Remove debris from elevated portions of building by chute, hoist, or other device that will convey debris to grade level in a controlled descent.
4. Comply with requirements specified in Section 017419 "Construction Waste Management and Disposal."

B. Burning: Do not burn demolished materials.

C. Disposal: Transport demolished materials and dispose of at designated spoil areas on Owner's property.

D. Disposal: Transport demolished materials off Owner's property and legally dispose of them.

3.7 CLEANING

- A. Clean adjacent structures and improvements of dust, dirt, and debris caused by selective demolition operations. Return adjacent areas to condition existing before selective demolition operations began.

END OF SECTION

SECTION 06 06 60 – PLASTIC

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the Plastic Fabrication as shown and specified in the described system:
 - 1. Wall Wood Cap and Apron
- B. Related Sections include the following:
 - 1. Section 06 10 53 Miscellaneous Carpentry
 - 2. Section 06 40 23 Interior Architectural Woodwork

1.3 SUBMITTALS

- A. General: Submit the following in accordance with conditions of contract and Division 1 specification section 01 33 00 "Submittal Procedures".
- B. Product Data: Submit manufacturer's product data; include product description, fabrication information, and compliance with specified performance requirements.
- C. Submit product test reports from a qualified independent 3rd party testing agency indicating each type and class of panel system complies with the project performance requirements, based on comprehensive testing of current products. Previously completed test reports will be acceptable if for current manufacturer and indicative of products used on this project.
 - 1. Test reports required are:
 - a. Rate of Burning (ASTM D 635)
 - b. Self-Ignition Temperature (ASTM D 1929)
 - c. Density of Smoke (ASTM D 2843)
 - d. Flame Spread and Smoke Developed testing (ASTM E 84)
 - e. Room Corner Burn Test (NFPA 286)
 - f. Extent of Burning (UL 94)
 - g. Impact strength (ASTM D 3763)
 - h. Safety glazing impact resistance (ANSI Z97.1-2004)
 - i. UPIIT Test for Combustion Product Toxicity
 - j. Passes NFPA 269/ASTM1678 for Combustion Product Toxicity
 - k. Dynamic environmental testing (ASTM standards D 5116 or D 6670)
 - l. UL Yellowcard

- D. Shop Drawings: Include plans, elevations, sections, panel dimensions, details, and attachments to other work.
- E. Samples for Initial Selection: Upon request, for each product indicated.
- D. Samples for Verification: Submit minimum (2) 4-inch by 4-inch sample for each type, texture, pattern and color of solid plastic fabrication.
- E. Mockups:
 - 1. Build mockups to verify selections made under sample Submittals and to demonstrate aesthetic effects.
 - 2. Build mockup of each type of Plastic Fabrication.
 - 3. Approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.
- G. Maintenance Data: Submit manufacturer's care and maintenance data, including care, repair and cleaning instructions. Include in Project closeout documents.

1.4 QUALITY ASSURANCE

- A. Manufacturers Qualifications
 - 1. Materials and systems shall be manufactured by a company continuously and regularly employed in the manufacture of specified materials for a period of at least five (5) consecutive years and which can show evidence of those materials being satisfactorily used on at least six (6) projects of similar size, scope and location. At least three (3) of the projects shall have been successful for use five (5) years or longer.
 - 2. Completely PVC – Free product

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Deliver Plastic Fabrications, systems and specified items in manufacturer's standard protective packaging.
- B. Do not deliver Plastic Fabrications, system, components and accessories to Project site until areas are ready for installation.
- C. Store materials in a flat orientation in a dry place that is not exposed to exterior elements.
- D. Handle materials to prevent damage to finished surfaces. Provide protective coverings to prevent damage or staining following installation for duration of project.
- E. Before installing Plastic Fabrications, permit them to reach room temperature.

1.6 PROJECT CONDITIONS

- A. Environmental Limitations: Do not install Solid Polymer Fabrications until spaces are enclosed and weatherproof, and ambient temperatures and humidity conditions are maintained at the levels indicated for Project when occupied for its intended use.

1.6 WARRANTY

- A. Manufacturer's Special Warranty on Plastic Fabrications: Manufacturer's standard form agreeing to repair or replace units that fail in material or workmanship within the specified warranty period.
- B. Warranty Period: 1 year after the date of substantial completion.
- C. The warranty shall not deprive the owner of other rights or remedies the Owner may have under other provisions of the Contract Documents, and is in addition to and runs concurrent with other warranties made by the Contractor under the requirements of the Contract Documents.

PART 2 - PRODUCTS

2.1 RESIN PANEL – RSP-1-2

- A. Manufacturers: Basis-of-Design Product: Subject to compliance with requirements, provide 3form, LLC Varia or a comparable product by one of the following:
 - 1. Sensitile Systems, LLC
 - 2. Polygood, a Division of The Good Plastic Company
 - 3. Lumicor, Inc.
- B. Varia Ecoresin Shet
 - 1. Engineered co-polyester resin produced in the USA
 - 2. Sheet Size: Maximum 4' x 10'
 - 3. Thickness: Minimum 1"
 - 4. Color/Pattern: As indicated in Finish Legend
- C. Interlayer Materials: Compatible with polyesters and bonding process to create a monolithic sheet of material when complete.
- D. Sheet minimum performance attributes:
 - 1. Rate of Burning (ASTM D 635). Material must attain CC1 Rating for a nominal thickness of 1.5 mm (0.060 in.) and greater.
 - 2. Self-Ignition Temperature (ASTM D 1929). Material must have a Self-ignition temperature greater than 650°F.
 - 3. Density of Smoke (ASTM D 2843). Material must have a smoke density less than 75%.
 - 4. Flame spread and Smoke developed testing (ASTM E 84). Material must be able to meet a level of Class A (Flame spread less than 25 and smoke less than 450) at thickness of 1/8", 3/16" and 1".
 - 5. Room Corner Burn Test (NFPA 286). Material must meet Class A criteria at 1/4" (walls only) and 3/8" (walls only/standoffs only) thickness as described by the 2012 International Building Code.
 - 6. Extent of Burning (UL 94). Must submit UL card.
 - 7. Impact strength. Minimum impact strength test as measured by ASTM D 3763 of 20 ft. lbs. (for durability, shipping, installation, and use).

8. Safety Glazing. Material must attain a Class A impact rating in accordance with ANSI Z97.1-2004 at 1/8" thickness.
9. UPIIT Test for Combustion Product Toxicity: Product must be recorded as "not more toxic than wood".
10. NFPA 269/ASTM 1678 test for toxicity: Product must have a best predicted LC50 value ≤ 80.8 g/m³ Product must have a best predicted corrected for post-flashover conditions LC50 value ≤ 19.0 g/m³
11. Dynamic environmental testing (ASTM standards D 5116 or D 6670). Panels must not have detectable VOC off-gassing agents and must be have Greenguard™ Indoor Air Quality Children and Schools certified.

2.2 FABRICATION

- A. General: Fabricate Plastic Fabrications to designs, sizes and thicknesses indicated and to comply with indicated standards. Sizes, profiles and other characteristics are indicated on the drawings.
- B. Comply with manufacturer's written recommendations for fabrication.
- C. Machining: Acceptable means of machining are listed below. Ensure that material is not chipped or warped by machining operations.
 1. Sawing: Select equipment and blades suitable for type of cut required.
 2. Drilling: Drills specifically designed for use with plastic products.
 3. Milling: Climb cut where possible.
 4. Routing
 5. Tapping
- D. Forming: Form products to shapes indicated using the appropriate method listed below. Comply with manufacturer's written instructions.
 1. Cold Bending
 2. Hot Bending
 3. Thermoforming: Acceptable only on uncoated material.
 4. Drape Forming
 5. Matched Mold Forming
 6. Mechanical Forming
- E. Laminating: Laminate to substrates indicated using adhesives and techniques recommended by manufacturer.

2.3 MISCELLANEOUS MATERIALS

- A. General: Provide products of material, size, and shape required for application indicated, and with a proven record of compatibility with surfaces contacted in installation.
- B. Cleaner: Type recommended by manufacturer.

- C. Fasteners: Use screws designed specifically for plastics. Self-threading screws are acceptable for permanent installations. Provide threaded metal inserts for applications requiring frequent disassembly such as light fixtures.
- D. Bonding Cements: May be achieved with solvents or adhesives, suitable for use with product and application.

2.4 INSTALLATION HARDWARE AND ACCESSORIES

- A. Seams hardware
 - 1. Basis of Design: Subject to compliance with requirements, provide 3form, Align Smooth Large with cover. Subject to compliance with basis of design specifications, and design intent, or approved equivalent.
 - a. Provide quantity as recommended by manufacturer.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions where installation of Plastic Fabrications will occur, with Installer present, for compliance with manufacturer's requirements. Verify that substrates and conditions are satisfactory for installation and comply with requirements specified.

3.2 INSTALLATION

- A. General: Comply with manufacturer's written instructions for the installation of Plastic Fabrications.
- B. Manufacturer's shop to fabricate items to the greatest degree possible.
- C. Utilize fasteners, adhesives and bonding agents recommended by manufacturer for type of installation indicated. Material that is chipped, warped, hazed or discolored as a result of installation or fabrication methods will be rejected.
- D. Install components plumb, level and rigid, scribed to adjacent finishes, in accordance with approved shop drawings and product data.
- E. Form field joints using manufacturer's recommended procedures. Locate seams in panels so that they are not directly in line with seams in substrates.

3.3 CLEANING AND PROTECTION

- A. Repair work or replace damaged work, which cannot be repaired to Architect's satisfaction.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 06 10 53 - MISCELLANEOUS CARPENTRY

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Window Stools
 - 2. Painted standing and running trim
 - 3. Interior frames and jambs (painted)
 - 4. Shelving and support brackets
 - 5. Interior wood blocking and nailers.
 - 6. Blocking for cants, and nailers
 - 7. Wood furring sleepers, and grounds.
 - 8.
- B. Blocking shall be provided, but not limited to, at the following locations
 - 1. Casework and shelving.
 - 2. Tackboards and marker boards
 - 3. Wall mounted door hardware
 - 4. Fire Extinguisher Cabinets
 - 5. Toilet accessories
 - 6. Wall mounted equipment
 - 7. As noted on drawings
- C. Related Sections include the following:
 - 1. Division 6 Section "Rough Carpentry"
 - 2. Division 6 Section "Interior Architectural Woodwork."

1.3 DEFINITIONS

- A. Dimension Lumber: Lumber of 2 inches nominal or greater but less than 5 inches nominal in least dimension.
- B. Lumber grading agencies, and the abbreviations used to reference them, include the following:
 - 1. NeLMA: Northeastern Lumber Manufacturers' Association.
 - 2. NHLA: National Hardwood Lumber Association.
 - 3. NLGA: National Lumber Grades Authority.
 - 4. SPIB: The Southern Pine Inspection Bureau.
 - 5. WCLIB: West Coast Lumber Inspection Bureau.
 - 6. WWPA: Western Wood Products Association.

1.4 QUALITY ASSURANCE

- A. Fabricator/Installer: A firm which has successfully produced work similar to the quality specified and in the quantity shown for a period of not less than 5 years.
- B. Reference Standards: Comply with the applicable provisions for grading and workmanship of the "Architectural Woodwork Quality Standards", Version 2.0 (2005), published by the Architectural Woodwork Institute (AWI) (herein referred to as Standards), except as otherwise specified.
- C. Structural Performance: Design, manufacture and install handrails to resist a 200 pound concentrated force applied in any direction at any point and a uniform force of 50 pounds per linear foot applied in any direction without distortion or failure.

1.5 SUBMITTALS

- A. Product Data: For each type of process and factory-fabricated product. Indicate component materials and dimensions and include construction and application details.
 - 1. Include data for wood-preservative treatment from chemical treatment manufacturer and certification by treating plant that treated materials comply with requirements. Indicate type of preservative used and net amount of preservative retained.
 - 2. Include data for fire-retardant treatment from chemical treatment manufacturer and certification by treating plant that treated materials comply with requirements. Include physical properties of treated materials based on testing by a qualified independent testing agency.
 - 3. For products receiving a waterborne treatment, include statement that moisture content of treated materials was reduced to levels specified before shipment to Project site.
 - 4. Include copies of warranties from chemical treatment manufacturers for each type of treatment.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Stack lumber flat with spacers between each bundle to provide air circulation. Provide for air circulation around stacks and under coverings.
- B. Deliver interior wood materials that are to be exposed to view only after building is enclosed and weatherproof, wet work other than painting is dry, and HVAC system is operating and maintaining temperature and humidity at occupancy levels.

PART 2 - PRODUCTS

2.1 WOOD PRODUCTS, GENERAL

- A. Lumber: DOC PS 20 and applicable rules of grading agencies indicated. If no grading agency is indicated, provide lumber that complies with the applicable rules of any rules-writing agency certified by the ALSC Board of Review. Provide lumber graded by an agency certified by the ALSC Board of Review to inspect and grade lumber under the rules indicated.

1. Factory mark each piece of lumber with grade stamp of grading agency.
2. Where nominal sizes are indicated, provide actual sizes required by DOC PS 20 for moisture content specified. Where actual sizes are indicated, they are minimum dressed sizes for dry lumber.
3. Provide dressed lumber, S4S, unless otherwise indicated.

2.2 WOOD-PRESERVATIVE-TREATED MATERIALS

- A. Preservative Treatment by Pressure Process: AWPA C2, except that lumber that is not in contact with the ground and is continuously protected from liquid water may be treated according to AWPA C31 with inorganic boron (SBX).
 1. Preservative Chemicals: Acceptable to authorities having jurisdiction and containing no arsenic or chromium.
- B. Kiln-dry lumber after treatment to a maximum moisture content of 19 percent. Do not use material that is warped or does not comply with requirements for untreated material.
- C. Mark lumber with treatment quality mark of an inspection agency approved by the ALSC Board of Review.
- D. Application: Treat items indicated on Drawings, and the following:
 1. Wood cants, nailers, curbs, equipment support bases, blocking, stripping, and similar members in connection with roofing, flashing, vapor barriers, and waterproofing.
 2. Wood sills, sleepers, blocking, and similar concealed members in contact with masonry or concrete.
 3. Wood floor plates that are installed over concrete slabs-on-grade.

2.3 FIRE-RETARDANT-TREATED MATERIALS

- A. General: Comply with performance requirements in AWPA C20 (lumber) and AWPA C27 (plywood).
 1. Use treatment that does not promote corrosion of metal fasteners.
 2. Use Exterior type for exterior locations and where indicated.
 3. Use Interior Type A, unless otherwise indicated.
- B. Identify fire-retardant-treated wood with appropriate classification marking of testing and inspecting agency acceptable to authorities having jurisdiction.
- C. Application: Treat items indicated on Drawings, and the following:
 1. Concealed blocking.
 2. Plywood backing panels.
 3. Plywood Sheathing complying with C31 and C27.

2.4 MISCELLANEOUS LUMBER

- A. General: Provide miscellaneous lumber indicated and lumber for support or attachment of other construction, including the following:
1. Blocking.
 2. Nailers.
 3. Rooftop equipment bases and support curbs.
 4. Cants.
 5. Furring.
 6. Grounds.
- B. For items of dimension lumber size, provide Construction or No. 2 grade lumber with 19 percent maximum moisture content of any species.
- C. For concealed boards, provide lumber with 19 percent maximum moisture content and any of the following species and grades:
1. Mixed southern pine, No. 2 grade; SPIB.
 2. Hem-fir or hem-fir (north), Construction or 2 Common grade; NLGA, WCLIB, or WWP.
 3. Spruce-pine-fir (south) or spruce-pine-fir, Construction or 2 Common grade; NeLMA, NLGA, WCLIB, or WWP.
- D. For blocking not used for attachment of other construction Utility, Stud, or No. 3 grade lumber of any species may be used provided that it is cut and selected to eliminate defects that will interfere with its attachment and purpose.
- E. For blocking and nailers used for attachment of other construction, select and cut lumber to eliminate knots and other defects that will interfere with attachment of other work.
- F. For furring strips for installing plywood or hardboard paneling, select boards with no knots capable of producing bent-over nails and damage to paneling.

2.5 INTERIOR STANDING AND RUNNING TRIM FOR OPAQUE FINISH

- A. Quality Standard: Comply with AWI Section 300.
- B. Grade: Custom.
1. Backout or groove backs of flat trim members and kerf backs of other wide, flat members, except for members with ends exposed in finished work.
 2. Assemble casings in plant except where limitations of access to place of installation require field assembly.
 3. Assemble moldings in plant to maximum extent possible. Miter corners in plant and prepare for field assembly with bolted fittings designed to pull connections together.
- C. Wood Species: Any closed-grain hardwood..

2.6 Window Stools for opaque finish: Painted hardwood unless noted otherwise.

- A.

2.7 PLYWOOD BACKING PANELS

- A. Telephone and Electrical Equipment Backing Panels: DOC PS 1, Exposure 1, C-D Plugged, fire-retardant treated.
 - 1. Provide ½" thick, 48"x96" panel in each telephone, data, and electrical room or closet.

2.8 FASTENERS

- A. General: Provide fasteners of size and type indicated that comply with requirements specified in this Article for material and manufacture.
 - 1. Where carpentry is exposed to weather, in ground contact, pressure-preservative treated, or in area of high relative humidity, provide fasteners of Type 304 stainless steel.
- B. Nails, Brads, and Staples: ASTM F 1667.
- C. Power-Driven Fasteners: NES NER-272.
- D. Wood Screws: ASME B18.6.1.
- E. Screws for Fastening to Cold-Formed Metal Framing: ASTM C 954, except with wafer heads and reamer wings, length as recommended by screw manufacturer for material being fastened.
- F. Lag Bolts: ASME B18.2.1.
- G. Bolts: Steel bolts complying with ASTM A 307, Grade A; with ASTM A 563 hex nuts and, where indicated, flat washers.
- H. Stainless-Steel Bolts and Nuts: Regular hexagon-head annealed stainless-steel bolts, nuts and, where indicated, flat washers; ASTM F 593 (ASTM F 738M) for bolts and ASTM F 594 (ASTM F 836M) for nuts, Alloy Group 1 (A1)
- I. Expansion Anchors: Anchor bolt and sleeve assembly of material indicated below with capability to sustain, without failure, a load equal to 6 times the load imposed when installed in unit masonry assemblies and equal to 4 times the load imposed when installed in concrete as determined by testing per ASTM E 488 conducted by a qualified independent testing and inspecting agency.
 - 1. Material: Carbon-steel components, zinc plated to comply with ASTM B 633, Class Fe/Zn 5.
 - 2. Material: Stainless steel with bolts and nuts complying with ASTM F 593 and ASTM F 594, Alloy Group 1 or 2.

2.9 MISCELLANEOUS MATERIALS

- A. Adhesives for Gluing Sleepers to Concrete or Masonry: Formulation complying with ASTM D 3498 that is approved for use indicated by adhesive manufacturer.
- B. Separator sheet: 15# Building felt or 15 mil "underslab" vapor barrier.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Set rough carpentry to required levels and lines, with members plumb, true to line, cut, and fitted. Fit carpentry to other construction; scribe and cope as needed for accurate fit. Locate nailers, blocking, grounds, and similar supports to comply with requirements for attaching other construction.
- B. Provide blocking and framing as indicated and as required to support facing materials, fixtures, specialty items, and trim.
 - 1. Provide metal clips for fastening gypsum board or lath at corners and intersections where framing or blocking does not provide a surface for fastening edges of panels. Space clips not more than 16 inches o.c.
- C. Sort and select lumber so that natural characteristics will not interfere with installation or with fastening other materials to lumber. Do not use materials with defects that interfere with function of member or pieces that are too small to use with minimum number of joints or optimum joint arrangement.
- D. Comply with AWPAC M4 for applying field treatment to cut surfaces of preservative-treated lumber.
 - 1. Use inorganic boron for items that are continuously protected from liquid water.
 - 2. Use copper naphthenate for items not continuously protected from liquid water.
- E. Securely attach carpentry work to substrate by anchoring and fastening as indicated, complying with the following:
 - 1. NES NER-272 for power-driven fasteners.
 - 2. Table 2304.9.1, "Fastening Schedule," in ICC's International Building Code.
- F. Use common wire nails, unless otherwise indicated. Select fasteners of size that will not fully penetrate members where opposite side will be exposed to view or will receive finish materials. Make tight connections between members. Install fasteners without splitting wood; do not countersink nail heads, unless otherwise indicated.

3.2 WOOD GROUND, SLEEPER, BLOCKING, AND NAILER INSTALLATION

- A. Install where indicated and where required for attaching other work. Form to shapes indicated and cut as required for true line and level of attached work. Coordinate locations with other work involved. Secure all pressure treated lumber with stainless steel or epoxy coated anchorage.
- B. Attach items to substrates to support applied loading. Recess bolts and nuts flush with surfaces, unless otherwise indicated.

- C. Provide separator sheet between all pressure treated wood blocking and metal deck, steel studs, copings, curbs, and other steel or aluminum components.

3.3 STOOLS

- A. Scribe window stools to fit. Cope and return bullnose at sides and ends. Back prime prior to installation
- B. Fasten to blocking with countersunk fasteners. Plug and finish flush prior to field painting.

3.4 PROTECTION

- A. Protect wood that has been treated with inorganic boron (SBX) from weather. If, despite protection, inorganic boron-treated wood becomes wet, apply EPA-registered borate treatment. Apply borate solution by spraying to comply with EPA-registered label.
- B. Protect rough carpentry from weather. If, despite protection, rough carpentry becomes wet, apply EPA-registered borate treatment. Apply borate solution by spraying to comply with EPA-registered label.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 06 41 16 - PLASTIC-LAMINATE-FACED ARCHITECTURAL CABINETS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Plastic-laminate-faced architectural cabinets. (PL)
2. Wood furring, blocking, shims, and hanging strips for installing plastic-laminate-faced architectural cabinets unless concealed within other construction before cabinet installation.
3. Solid Surface Countertops (SS)

B. Related Requirements:

1. Section 061000 "Rough Carpentry" for wood furring, blocking, shims, and hanging strips required for installing cabinets and concealed within other construction before cabinet installation.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product, including high-pressure decorative laminate and cabinet hardware and accessories.

- B. Shop Drawings: Show location of each item, dimensioned plans and elevations, large-scale details, attachment devices, and other components.

1. Show details full size.
2. Show locations and sizes of furring, blocking, and hanging strips, including concealed blocking and reinforcement specified in other Sections.
3. Show locations and sizes of cutouts and holes for electrical switches and outlets and other items installed in architectural plastic-laminate cabinets.

C. Samples:

1. Plastic laminates, 8 by 10 inches (200 by 250 mm), for each type, color, pattern, and surface finish.
2. Wood-grain plastic laminates, 12 by 24 inches (300 by 600 mm), for each type, pattern and surface finish.
3. Countertop material, 6 by 6 inches (150 by 150 mm).
4. Exposed cabinet hardware and accessories, one unit for each type and finish.

1.4 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For fabricator.
- B. Product Certificates: For each type of product.
 - 1. Composite wood and agrifiber products.
 - 2. High-pressure decorative laminate.
 - 3. Adhesives.
- C. Evaluation Reports: For fire-retardant-treated materials, from ICC-ES.

1.5 QUALITY ASSURANCE

- A. Fabricator Qualifications: Shop that employs skilled workers who custom-fabricate products similar to those required for this Project and whose products have a record of successful in-service performance. Shop is a licensee of WI's Certified Compliance Program.
- B. Source Limitations: Engage a qualified woodworking firm to assume undivided responsibility for production of interior architectural woodwork with sequence-matched wood veneers
Quality Standard: Unless otherwise indicated, comply with AWI's "Architectural Woodwork Quality Standards" for grades of interior architectural woodwork indicated for construction, finishes, installation, and other requirements.
- C. Quality Standard: Unless otherwise indicated, comply with WI's "Manual of Millwork" for grades of interior architectural woodwork indicated for construction, finishes, installation, and other requirements.
 - 1. Provide WI-certified compliance labels indicating that woodwork complies with requirements of grades specified.
 - 2. The Contract Documents contain selections chosen from options in the quality standard and additional requirements beyond those of the quality standard. Comply with such selections and requirements in addition to the quality standard.
- D. Testing Agency Qualifications: For testing agency providing classification marking for fire-retardant-treated material, an inspection agency acceptable to authorities having jurisdiction that periodically performs inspections to verify that the material bearing the classification marking is representative of the material tested.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Do not deliver cabinets until painting and similar operations that could damage woodwork have been completed in installation areas. If cabinets must be stored in other than installation areas, store only in areas where environmental conditions comply with requirements specified in "Field Conditions" Article.

1.7 FIELD CONDITIONS

- A. Environmental Limitations: Do not deliver or install cabinets until building is enclosed, wet work is complete, and HVAC system is operating and maintaining temperature between 60 and 90 deg F (16 and 32 deg C) and relative humidity between **25 and 55** percent during the remainder of the construction period.
- B. Field Measurements: Where cabinets are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication, and indicate measurements on Shop Drawings. Coordinate fabrication schedule with construction progress to avoid delaying the Work.
 - 1. Locate concealed framing, blocking, and reinforcements that support cabinets by field measurements before being enclosed, and indicate measurements on Shop Drawings.
- C. Established Dimensions: Where cabinets are indicated to fit to other construction, establish dimensions for areas where cabinets are to fit. Provide allowance for trimming at site, and coordinate construction to ensure that actual dimensions correspond to established dimensions.

1.8 COORDINATION

- A. Coordinate sizes and locations of framing, blocking, furring, reinforcements, and other related units of Work specified in other Sections to ensure that cabinets can be supported and installed as indicated.
- B. Hardware Coordination: Distribute copies of approved hardware schedule specified in Section 087111 "Door Hardware (Descriptive Specification)" to fabricator of architectural woodwork; coordinate Shop Drawings and fabrication with hardware requirements.

PART 2 - PRODUCTS

2.1 PLASTIC-LAMINATE CABINETS – PL-1

- A. Basis-of-Design Product: Wilsonart International; Div. of Premark International, Inc. Decorative Plastic Laminate. Subject to compliance with basis of design specifications and design (color, pattern, texture) shown on drawings, available manufacturers offering products that may be incorporated into the work include, but are not limited to, the following:
 - 1. Abet Laminati Inc
 - 2. Formica Corporation.
 - 3. Lamin-Art, Inc.d.Pionite; a Panolam Industries International, Inc. brand.
- B. Grade: Premium.
- C. AWI Type of Cabinet Construction: Flush overlay.
- D. WI Construction Style: Style A, Frameless.
- E. WI Construction Type: Type I, multiple self-supporting units rigidly joined together.

- F. WI Door and Drawer Front Style: Flush overlay.
- G. Reveal Dimension: As indicated.
- H. Laminate Cladding for Exposed Surfaces: High-pressure decorative laminate complying with the following requirements:
 - 1. Horizontal Surfaces Other Than Tops: Grade HGS.
 - 2. Postformed Surfaces: Grade HGP.
 - 3. Vertical Surfaces: Grade HGS.
 - 4. Edges: PVC edge banding, 0.12 inch (3 mm) thick, matching laminate in color, pattern, and finish.
- I. Materials for Semi exposed Surfaces:
 - 1. Surfaces Other Than Drawer Bodies: Thermoset decorative panels.
 - a. Edges of Plastic-Laminate Shelves: PVC edge banding, 0.12 inch (3 mm) thick, matching laminate in color, pattern, and finish.
 - b. For semi exposed backs of panels with exposed plastic-laminate surfaces, provide surface of high-pressure decorative laminate, Grade VGS.
 - 2. Drawer Sides and Backs: Thermoset decorative panels.
 - 3. Drawer Bottoms: Thermoset decorative panels.
- J. Concealed Backs of Panels with Exposed Plastic Laminate Surfaces: High-pressure decorative laminate, Grade BKL.
- K. Colors, Patterns, and Finishes: Provide materials and products that result in colors and textures of exposed laminate surfaces as indicated on Finishes Legend.
- L. Provide dust panels of 1/4-inch (6.4-mm) plywood or tempered hardboard above compartments and drawers, unless located directly under tops.

2.2 SOLID SURFACE – SS-1

- A. Composition Solid-Surface Material: Homogeneous-filled plastic resin complying with ICPA SS-1.
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide Wilsonart LLC, Solid Surface. Subject to compliance with basis of design specifications, and design intent, including color and texture noted on the finish schedule include, but are not limited to:
 - a. Affinity Surfaces; a brand of Domain Industries, Inc.
 - b. Avonite Surfaces.
 - c. E. I. du Pont de Nemours and Company.
 - d. Formica Corporation.
 - e. LG Chemical, Ltd.
 - f. Meganite Inc.

- g. Samsung Chemical USA, Inc.
 - h. Swan Corporation (The).
 - i. Transolid Div of Trumbull Industries.
 - 2. Thickness: 0.490 inch
 - 3. Panel Weight: 4.4 lb/sq. ft. .
 - 4. Surface-Burning Characteristics: Comply with ASTM E 84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - a. Flame-Spread Index: 25 or less.
 - b. Smoke-Developed Index: 450 or less.
 - 5. Colors and Patterns: As noted on finish schedule
- B. Fabricate tops in one piece, unless otherwise indicated. Comply with solid-surfacing-material manufacturer's written recommendations for adhesives, sealers, fabrication, and finishing.
 - 1. Fabricate tops with shop-applied edges of materials and configuration indicated.
 - 2. Fabricate tops with shop-applied backsplashes.
- C. Conformance Standards:
 - 1. UL 2818:
 - a. GREENGUARD-Emission levels in UL 2818, Section 7.1 are applicable for furniture products.
 - b. GREENGUARD Gold-Emission levels in UL 2818, Section 7.2 are applicable for building materials, finishes, and furnishings.
- D. Physical Characteristics:
 - 1. Thermal Expansion Coefficient: 1.5×10^{-5} in./in.°F; ASTM D 696.
 - 2. Hardness (Barcol Impressor): 62; ASTM D 2583.
 - 3. Impact Resistance: 78 in. drop with no fracture; NEMA LD-3, Method 3.8.
 - 4. Izod Impact: 0.24 (ft-lb.)/in.; ASTM D 256, Method A.
 - 5. Light Resistance -Xenon: No effect; NEMA LD-3, Method 3.3.
 - 6. Stain Resistance: Pass; ANSI Z 124.3, modified.
 - 7. Wear and Cleanability: Pass; ANSI Z 124.3.
 - 8. Fungi Resistance: Pass; ASTM G 21.
 - 9. Bacterial Resistance: Pass; ASTM G 22.
 - 10. Boiling Water Resistance: No effect; NEMA LD-3, Method 3.5.
 - 11. High Temperature Resistance: No effect; NEMA LD-3, Method 3.6.
 - 12. Weatherability: Delta E less than 5; ASTM G 155.
 - 13. Moisture Absorption: Less than 0.25 percent; ASTM D 570, long term.
 - 14. Specific Gravity: 1.78 gram/cm³; ASTM D 792.
 - 15. Approximate Weight: 2.2 lb./ft².
 - 16. Surface Burning Characteristics: Class II and Class B; ASTM E 84.
- E. Colors, Patterns, and Finishes: Provide materials and products that result in colors and textures of exposed laminate surfaces as indicated on Finishes Legend.

2.3 WOOD MATERIALS

- A. Wood Products: Provide materials that comply with requirements of referenced quality standard for each type of woodwork and quality grade specified unless otherwise indicated.
 - 1. Wood Moisture Content: 5 to 10 percent.
- B. Composite Wood and Agrifiber Products: Provide materials that comply with requirements of referenced quality standard for each type of woodwork and quality grade specified unless otherwise indicated.
 - 1. Medium-Density Fiberboard: ANSI A208.2, Grade 130, made with binder containing no urea formaldehyde.
 - 2. Particleboard: ANSI A208.1, Grade M-2, made with binder containing no urea formaldehyde.
 - 3. Particleboard: Straw-based particleboard complying with requirements in ANSI A208.1, Grade M-2, except for density.
 - a. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) Environ Biocomposites Manufacturing LLC; Biofiber Wheat.
 - 2) Sorm Incorporated; Primeboard Premium Wheat.
 - 4. Softwood Plywood: DOC PS 1, medium-density overlay.
 - 5. Veneer-Faced Panel Products (Hardwood Plywood): HPVA HP-1, made with adhesive containing no urea formaldehyde.

2.4 CABINET HARDWARE AND ACCESSORIES

- A. General: Provide cabinet hardware and accessory materials associated with architectural cabinets, except for items specified in Division 08 Section "Door Hardware (Scheduled by Describing Products)."
- B. Butt Hinges: 2-3/4-inch (70-mm), 5-knuckle steel hinges made from 0.095-inch (2.4-mm) thick metal, and as follows:
 - 1. Semi-concealed Hinges for Overlay Doors: BHMA A156.9, B01521.
- C. Back-Mounted Pulls: BHMA A156.9, B02011.
- D. Wire Pulls: Back mounted, solid metal, 4 inches (102 mm) long, 1-1/4 inches (32 mm) deep, and 5/16 inch (8 mm) in diameter.
- E. Adjustable Shelf Standards and Supports: BHMA A156.9, B04071; with shelf rests, B04081.
- F. Shelf Rests: BHMA A156.9, B04013; metal, two-pin type with shelf hold-down clip.
- G. Drawer Slides: BHMA A156.9, B05091.
 - 1. Standard Duty (Grade 1, Grade 2, and Grade 3): Side mounted and extending under bottom edge of drawer; full-extension type; zinc-plated steel with polymer rollers.

2. Box Drawer Slides: Grade 1; for drawers not more than 6 inches (150 mm) high and 24 inches (600 mm) wide.
 3. File Drawer Slides: Grade 1HD-100; for drawers more than 6 inches (150 mm) high or 24 inches (600 mm) wide.
 4. Pencil Drawer Slides: Grade 2 for drawers not more than 3 inches (75 mm) high and 24 inches (600 mm) wide.
 5. Keyboard Slides: Grade 1; for computer keyboard shelves.
- H. Door and Drawer Locks: BHMA A156.11, E07121.
- I. Grommets for Cable Passage through Countertops: **1-3/4 inches (45-mm)** OD, molded-plastic grommets and matching plastic caps with slot for wire passage. Color to be selected by architect from manufacturer's full range of colors.
1. Product: Subject to compliance with requirements, provide "SG series" by Doug Mockett & Company, Inc.
- J. Exposed Hardware Finishes: For exposed hardware, provide finish that complies with BHMA A156.18 for BHMA finish number indicated.
1. Satin Stainless Steel: BHMA 630.
- K. For concealed hardware, provide manufacturer's standard finish that complies with product class requirements in BHMA A156.9.
- L. Millwork Channel with Return Keys:
1. Basis of Design: Subject to compliance with requirements, provide Fry Reglet - Millwork Channel with Return Keys. Subject to compliance with basis of design specifications, and design intent, or approved equivalent.
 2. Characteristics:
 - a. Description: Provides a straight, uniform reveal horizontally or vertically between panels.
 - b. Material: Extruded Aluminum.
 - c. Dimensions: Coordinate with wall panel construction. Refer to sections.
 - d. Color: Architect to select from manufacturer's full range of colors.
- 2.5 MISCELLANEOUS MATERIALS
- A. Furring, Blocking, Shims, and Hanging Strips: Softwood or hardwood lumber kiln dried to less than 15 percent moisture content.
- B. Anchors: Select material, type, size, and finish required for each substrate for secure anchorage. Provide metal expansion sleeves or expansion bolts for post-installed anchors. Use nonferrous-metal or hot-dip galvanized anchors and inserts at inside face of exterior walls and at floors.
- C. Adhesives: Do not use adhesives that contain urea formaldehyde.
- D. Adhesive for Bonding Plastic Laminate: Unpigmented contact cement.
1. Adhesive for Bonding Edges: Hot-melt adhesive or adhesive specified above for faces.

2.6 FABRICATION

- A. Sand fire-retardant-treated wood lightly to remove raised grain on exposed surfaces before fabrication.
- B. Fabricate cabinets to dimensions, profiles, and details indicated.
- C. Complete fabrication, including assembly and hardware application, to maximum extent possible before shipment to Project site. Disassemble components only as necessary for shipment and installation. Where necessary for fitting at site, provide ample allowance for scribing, trimming, and fitting.
 - 1. Notify Architect seven days in advance of the dates and times woodwork fabrication will be complete.
 - 2. Trial fit assemblies at fabrication shop that cannot be shipped completely assembled. Install dowels, screws, bolted connectors, and other fastening devices that can be removed after trial fitting. Verify that various parts fit as intended and check measurements of assemblies against field measurements before disassembling for shipment.
- D. Shop-cut openings to maximum extent possible to receive hardware, appliances, electrical work, and similar items. Locate openings accurately and use templates or roughing-in diagrams to produce accurately sized and shaped openings. Sand edges of cutouts to remove splinters and burrs.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Before installation, condition cabinets to average prevailing humidity conditions in installation areas.
- B. Before installing cabinets, examine shop-fabricated work for completion and complete work as required.

3.2 INSTALLATION

- A. Grade: Install cabinets to comply with same grade as item to be installed.
- B. Assemble cabinets and complete fabrication at Project site to the extent that it was not completed in the shop.
- C. Install cabinets level, plumb, true, and straight. Shim as required with concealed shims. Install level and plumb to a tolerance of 1/8 inch in 96 inches (3 mm in 2400 mm).
- D. Scribe and cut cabinets to fit adjoining work, refinish cut surfaces, and repair damaged finish at cuts.

- E. Anchor cabinets to anchors or blocking built in or directly attached to substrates. Secure with countersunk, concealed fasteners and blind nailing. Use fine finishing nails or finishing screws for exposed fastening, countersunk, and filled flush with woodwork.
 - 1. Use filler matching finish of items being installed.
 - F. Cabinets: Install without distortion so doors and drawers fit openings properly and are accurately aligned. Adjust hardware to center doors and drawers in openings and to provide unencumbered operation. Complete installation of hardware and accessory items as indicated.
 - 1. Install cabinets with no more than 1/8 inch in 96-inch (3 mm in 2400-mm) sag, bow, or other variation from a straight line.
 - 2. Maintain veneer sequence matching of cabinets with transparent finish.
- 3.3 Fasten wall cabinets through back, near top and bottom, at ends and not more than 16 inches (400 mm) o.c. with No. 10 wafer-head screws sized for 1-inch (25-mm) penetration into wood framing, blocking, or hanging strips.
- 3.4 ADJUSTING AND CLEANING
- A. Repair damaged and defective cabinets, where possible, to eliminate functional and visual defects; where not possible to repair, replace woodwork. Adjust joinery for uniform appearance.
 - B. Clean, lubricate, and adjust hardware.
 - C. Clean cabinets on exposed and semi exposed surfaces.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

DIVISION 07 SECTION 07 84 13
FIRE PROTECTION, HVAC & PLUMBING PENETRATION FIRESTOPPING
TABLE OF CONTENTS

PART 1 - GENERAL	1
1.1. SUMMARY	1
1.2. REFERENCES	1
1.3. DEFINITIONS	1
1.4. SYSTEM DESCRIPTION	2
1.5. SUBMITTALS	2
1.6. QUALITY ASSURANCE	2
1.7. DELIVERY, STORAGE, AND HANDLING	3
1.8. PROJECT CONDITIONS	3
1.9. WARRANTY	3
PART 2 - PRODUCTS	4
2.1. THROUGH-PENETRATION FIRESTOPPING OF FIRE-RATED CONSTRUCTION	4
2.2. SMOKE-STOPPING AT SMOKE PARTITIONS	4
2.3. ACCESSORIES	4
PART 3 - EXECUTION	4
3.1. EXAMINATION	4
3.2. PREPARATION	5
3.3. INSTALLATION	5
3.4. FIELD QUALITY CONTROL	5
3.5. ADJUSTING AND CLEANING	5
3.6. SYSTEMS AND APPLICATION SCHEDULES*	6
END OF SECTION	7

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 07 84 13 - FIRE PROTECTION, HVAC & PLUMBING PENETRATION FIRESTOPPING

PART 1 - GENERAL

1.1. SUMMARY

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.
- B. Section includes:
 - 1. Through-penetration firestopping in fire rated construction.
 - 2. Through-penetration smoke-stopping in smoke partitions.

1.2. REFERENCES

- A. Underwriters Laboratories
 - 1. UL Fire Resistance Directory
 - a. Through-penetration firestop devices (XHCR)
 - b. Fire resistance rating (BXUV)
 - c. Through-penetration firestop systems (XHEZ)
 - d. Fill, void, or cavity material (XHHW)
- B. American Society for Testing and Materials Standards:
- C. ASTM E 814-88: Standard Test Method for Fire Tests of Through-Penetration Firestops.

1.3. DEFINITIONS

- A. Assembly: Particular arrangement of materials specific to given type of construction described or detailed in referenced documents.
- B. Barriers: Time-rated fire walls, smoke barrier walls, time-rated ceiling/floor assemblies and structural floors.
- C. Firestopping: Methods and materials applied in penetrations and unprotected openings to limit spread of heat, fire, gasses and smoke.
- D. Penetration: Opening or foreign material passing through or into barrier or structural floor such that full thickness of rated materials is not obtained.
- E. System: Specific products and applications, classified and numbered by Underwriters Laboratories, Inc. to close specific barrier penetrations.
- F. Sleeve: Metal fabrication or pipe section extended through thickness of barrier and used to permanently guard penetration. Sleeves are described as part of penetrating system in

other sections and may or may not be required.

1.4. SYSTEM DESCRIPTION

A. Design Requirements

1. Fire-rated construction: Maintain barrier and structural floor fire resistance ratings including resistance to cold smoke at all penetrations.
2. Smoke barrier construction: Maintain barrier and structural floor resistance to cold smoke at all penetrations.

1.5. SUBMITTALS

A. Submit in accordance with Division 01 Section Submittal Procedures, unless otherwise indicated.

B. Product data: Manufacturer's specifications and technical data including the following:

1. Detailed specification of construction and fabrication.
2. Manufacturer's installation instructions.

C. Shop drawings: Indicate dimensions, description of materials and finishes, general construction, specific modifications, component connections, anchorage methods, hardware, and installation procedures, plus the following specific requirements.

1. Details of each proposed assembly identifying intended products and applicable UL system number, or UL classified devices.
2. Manufacturer or manufacturer's representative shall provide qualified engineering judgment and drawings relating to non-standard applications as needed.

D. Quality control submittals:

1. Statement of qualifications.

E. Applicators' qualifications statement:

1. List past projects indicating required experience.

1.6. QUALITY ASSURANCE

A. Installer's qualifications: Fire experienced in installation or application of systems similar in complexity to those required for this project, plus the following:

1. Acceptable to or licensed by manufacturer, State or local authority where applicable.
2. At least 2 years experience with systems.
3. Successfully completed at least 5 comparable scale projects using this system.

B. Local and State regulatory requirements: Submit forms or acceptance for proposed

assemblies not conforming to specific UL Firestop System numbers, or UL classified devices.

- C. Materials shall have been tested to provide fire rating at least equal to that of the construction.

1.7. DELIVERY, STORAGE, AND HANDLING

- A. Packing and shipping:

- 1. Deliver products in original unopened packaging with legible manufacturer's identification.
 - 2. Coordinate delivery with scheduled installation date, allow minimum storage at site.

- B. Storage and protection: Store materials in a clean, dry, ventilated location. Protect from soiling, abuse, moisture and freezing when required. Follow manufacturer's instructions.

1.8. PROJECT CONDITIONS

- A. Existing condition:

- 1. Verify existing conditions and substrates before starting work. Correct unsatisfactory conditions before proceeding.
 - 2. Proceed with installation only after penetrations of the substrate and supporting brackets have been installed.

- B. Environmental requirements:

- 1. Furnish adequate ventilation if using solvent.
 - 2. Furnish forced air ventilation during installation if required by manufacturer.
 - 3. Keep flammable materials away from sparks or flame.
 - 4. Provide masking and drop cloths to prevent contamination of adjacent surfaces by firestopping materials.

1.9. WARRANTY

- A. Submit copies of written warranty agreeing to repair or replace joint sealers which fail in joint adhesion, extrusion resistance, migration resistance, or general durability or appear to deteriorate in any other manner not clearly specified by submitted manufacturer's data as an inherent quality of the material for the exposure indicated. The warranty period shall be two (2) years from date of substantial completion unless otherwise noted.

PART 2 - PRODUCTS

2.1. THROUGH-PENETRATION FIRESTOPPING OF FIRE-RATED CONSTRUCTION

- A. Systems of devices listed in the UL Fire Resistance Directory under categories XHCR and XHEZ may be used, providing that it conforms to the construction type, penetrant type, annular space requirements and fire rating involved in each separate instance, and that the system be symmetrical for wall applications. Systems or devices must be asbestos-free.
 - 1. Additional requirements: Withstand the passage of cold smoke either as an inherent property of the system, or by the use of a separate product included as a part of the UL system or device, and designed to perform this function.
 - 2. Acceptable manufacturers and products.
 - a. Those listed in the UL Fire Resistance directory for the UL System involved and as further defined in the System and Applications Schedule in Part 3.6 of this section.
 - 3. All firestopping products must be from a single manufacturer. All trades shall use products from the same manufacturer unless otherwise noted.

2.2. SMOKE-STOPPING AT SMOKE PARTITIONS

- A. Through-penetration smoke-stopping: Any system complying with the requirements for through-penetration firestopping in fire-rated construction, as specified in The Systems and Applications Schedule in Part 3.6 of this section, is acceptable, provided that the system includes the specified smoke seal or will provide a smoke seal. The length of time of the fire resistance may be disregarded.

2.3. ACCESSORIES

- A. Fill, void or cavity materials: As classified under category XHHW in the UL Fire Resistance Directory.
- B. Forming materials: As classified under category XHKU in the UL Fire Resistance Directory.

PART 3 - EXECUTION

3.1. EXAMINATION

- A. Verification of conditions: Examine areas and conditions under which work is to be performed and identify conditions detrimental to proper or timely completion.
 - 1. Verify barrier penetrations are properly sized and in suitable condition for

application of materials.

2. Do not proceed until unsatisfactory conditions have been corrected.

- B. Coordinate an inspection of all Mechanical Firestopping systems with the Fire Marshal prior to installation of ceilings, walls, etc.

3.2. PREPARATION

- A. Clean surfaces to be in contact with penetration seal materials of dirt, grease, oil, loose materials, rust, or other substances that may affect proper fitting, adhesion, or the required fire resistance.

3.3. INSTALLATION

- A. Install penetration seal materials in accordance with printed instructions of the UL Fire Resistance Directory and in accordance with manufacturer's instruction.
- B. Seal holes or voids made by penetrations to ensure an effective smoke barrier.
- C. Protect materials from damage on surfaces subject to traffic.
- D. When large openings are created in walls or floors to permit installation of pipes, ducts, or other items, close unused portions of opening with firestopping materials tested for the application. See UL Fire Resistance Directory or Section 3.6 of this document.
 1. Install smoke stopping as specified for firestopping.

3.4. FIELD QUALITY CONTROL

- A. Examine penetration sealed areas to ensure proper installation before concealing or enclosing areas.
- B. Keep areas of work accessible until inspection by applicable code authorities.
- C. Perform under this section patching and repairing of firestopping caused by cutting or penetration by other trades.

3.5. ADJUSTING AND CLEANING

- A. Clean up spills of liquid components.
- B. Neatly cut and trim materials as required.
- C. Remove equipment, materials and debris, leaving area in undamaged, clean condition.

3.6. SYSTEMS AND APPLICATION SCHEDULES*

PENETRATING ITEM	CONCRETE	GYP SUM	WOOD FLOOR/CEILING
Metal Pipe	CAJ1001 CP25S/L, CP25N/S CAJ1006 CS-195+, FS-195+ CAJ1007 FS-195+, 1-inch& 2-inch Wide CAJ1009 2000, 2000+, 2003 CAJ1010 2000, 2000+, 2003 CAJ1012 2000, 2000+, 2003 CAJ1013 2000, 2000+, 2003 CAJ1014 2000, 2000+, 2003 CAJ1015 2000, 2000+, 2003 CAJ1017 FD 150 CAJ1021 FD 150 CAJ1027 MPS-2+ CAJ1044 CP 25WB+ CAJ1052 CP 25S/L, CP 25N/S CAJ1058 2000, 2000+, 2003 CAJ1060 2000, 2000+, 2003 CAJ1063 2000, 2000+, 2003 CAJ1066 CP 25N/S, CP 25S/L, CP 25WB+ CAJ1091 CP 25N/S, CP 25S/L, CP 25WB+ CAJ1092 CP 25WB+ CAJ1112 FS-195+ CAJ1160 CP 25S/L, CP 25N/S CAJ1175 CP 25WB+ CAJ1176 CP 25WB+ CAJ1188 2000+ CBJ1020 CS-195+, FS-195+ CBJ1021 CS-195+, MPS-2+ CBJ1031 2001 CBJ1032 2001 FA1002 CP 25WB+ WJ1010 CP25WB+ WJ1023 2001	WL1001 CP 25 WL1002 FS-195+ WL1003 CP 25WB+, CP 25N/S WL1008 2000+ WL1009 2000+ WL1010 2000+ WL1016 CP 25WB+ WL1017 CP 25WB+, CP 25N/S WL1032 CP 25WB+, CP 25N/S WL1036 FD 150 WL1037 CS-195+, FS-195+ WL1067 CP 25N/S WL1073 CP 25WB+ WL1080 MPS2+ WL1082 2000+	FC1002 CP 25 FC1003 2000, 2000+, 20003 FC1006 CP 25WB+
Non-Metallic	CAJ2001 FS-195+, 1-inch& 2-inch WIDE, PPD'S CAJ2002 FS-195+ CAJ2003 CS-195+, FS-195+ CAJ2005 FS-195 CAJ2006 FS-195+ CAJ2013 FS-195+ CAJ2019 2000, 2000+, 2003 CAJ2027 FS-195+, CP 25N/S, CP 25S/L, CP 25WB+ CAJ2028 FS-195, MPS-2+ CAJ2029 FS-195+, PPD'S CAJ2030 CS-195+, FS-195+ CAJ2040 FS-195+, CP 25WB+ CAJ2044 FS-195+, CP 25N/S, CP 25S/L CP 25 WB+ CAJ2090 FS-195+ CAJ2177 FS-195+, PPD'S FA2001 FS-195+, PPD'S FS2002 CS-195+, FS-195+, MPS-2+, PPD'S FA2011 FS-195+ WJ2012 FS-195+ 1-inch WIDE	WL2002 FS-195+, PPD'S WL2003 FS-195+ WL2004 FS-195+ WL2005 FS-195+ 4' WIDE WL2006 FS-195+ WL2013 FS-195+ WL2031 CS-195+, FS-195+ WL2032 CS-195+, FS-195+ WL2033 FS-195+ WL2073 FS-195+ 1-inch WIDE	FC2002 FS-195+, PPD'S FC2007 FS-195+, PPD'S FC2008 FS-195+ FC2009 FS-195+, PPD'S FC2024 FS-195 FC2026 FS-195+ FC2028 FS-195, 1' & 2-inch WIDE, PPD'S

PENETRATING ITEM	CONCRETE	GYPSUM	WOOD FLOOR/CEILING
Insulated Metallic Pipe	CAJ5001 CP 25N/S, CP 25S/L, CP 25WB+ CAJ5002 FS-195+ CAJ5003 FS-195+ CAJ5005 MPS-2+ CAJ5009 2000+, 2003 CAJ5017 FS-195+, CP 25 CAJ5022 FS-195+ CAJ5024 FS-195+ CAJ5030 CS-195+, FS-195+ CAJ5041 2000, 2000+, 2003 CAJ5060 CP 25WB+ CAJ5074 2000+ CBJ5002 CP 25 CBJ5003 FS-195+ FA5001 FS-195+, CP 25WB+	WL5001 FS-195+ WL5002 FS-195+ WL5009 FS-195+ WL5010 FS-195+ WL5011 CP 25WB+ WL5032 2000+ WL5038 CP 25WB+ WL5039 CP 25WB+ WL5040 CP 25WB+ WL5045 CP 25WB+ WL5053 2000+	FC5002 FS-195+ FC5008 FS-195+
Miscellaneous Mechanical HVAC Ducts	CAJ7001 CP 25N/S CP 25S/L CAJ7003 CP 25WB+ CAJ7009 DUCT WRAP, BULK PUTTY		FC7001 CP 25S/L, CP 25N/S
Mixed Penetrating Items Combos	CAJ8001 CS-195+ FS-195 CAJ8003 2000, 2000+, 20003 CAJ8004 2000, 2000+, 20003 CAJ8006 2001 CAJ8013 FS-195+, CP 25 CBJ8004 CS-195, FS-195+ CBJ8005 CS-195+, MPS-2+ CBJ8008 2001 FA8001 FS-195+, CP 25WB+	WL8002 CS-195+, FS-195+	

*Underwriter's Laboratories, Inc., Fire Resistance Directory.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 09 22 16 - NON-STRUCTURAL METAL FRAMING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.
 - 1. Division 01 Section 017419 – Construction Waste Management.

1.2 SUMMARY

- A. Section Includes:
 - 1. Non-load-bearing steel framing systems for interior gypsum board assemblies.
 - 2. Suspension systems for interior gypsum ceilings, soffits, and grid systems.
- B. Related Requirements:
 - 1. Division 05 Section "Cold-Formed Metal Framing" for exterior and interior load-bearing and exterior non-load-bearing wall studs; floor joists; roof rafters and ceiling joists; and roof trusses.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.

1.4 INFORMATIONAL SUBMITTALS

- A. Evaluation Reports: For dimpled steel studs and runners, from ICC-ES.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Fire-Test-Response Characteristics: For fire-resistance-rated assemblies that incorporate non-load-bearing steel framing, provide materials and construction identical to those tested in assembly indicated, according to ASTM E 119 by an independent testing agency.
- B. STC-Rated Assemblies: For STC-rated assemblies, provide materials and construction identical to those tested in assembly indicated, according to ASTM E 90 and classified according to ASTM E 413 by an independent testing agency.

2.2 FRAMING SYSTEMS

- A. Recycled Content of Steel Products: Postconsumer recycled content plus one-half of preconsumer recycled content not less than 25 percent.
- B. Framing Members, General: Comply with ASTM C 754 for conditions indicated.
 - 1. Steel Sheet Components: Comply with ASTM C 645 requirements for metal unless otherwise indicated.
 - 2. Protective Coating: hot-dip galvanized unless otherwise indicated.
- C. Studs and Runners: ASTM C 645. Use either steel studs and runners or dimpled steel studs and runners.
 - 1. Steel Studs and Runners:
 - a. Minimum Base-Metal Thickness: 0.027 inch (0.68 mm)
 - b. Depth: As indicated on Drawings.
 - 2. Dimpled Steel Studs and Runners:
 - a. Minimum Base-Metal Thickness: 0.025 inch (0.64 mm).
 - b. Depth: As indicated on Drawings.
- D. Slip-Type Head Joints: Where indicated, provide one of the following:
 - 1. Single Long-Leg Runner System: ASTM C 645 top runner with 2-inch- (51-mm-) deep flanges in thickness not less than indicated for studs, installed with studs friction fit into top runner and with continuous bridging located within 12 inches (305 mm) of the top of studs to provide lateral bracing.
 - 2. Double-Runner System: ASTM C 645 top runners, inside runner with 2-inch- (51-mm-) deep flanges in thickness not less than indicated for studs and fastened to studs, and outer runner sized to friction fit inside runner.
 - 3. Deflection Track: Steel sheet top runner manufactured to prevent cracking of finishes applied to interior partition framing resulting from deflection of structure above; in thickness not less than indicated for studs and in width to accommodate depth of studs.
 - a. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) Dietrich Metal Framing; SLP-TRK Slotted Deflection Track.
 - 2) MBA Building Supplies; FlatSteel Deflection Track or Slotted Deflecto Track.
 - 3) Steel Network Inc. (The); VertiClip SLD or VertiTrack VTD Series.
 - 4) Superior Metal Trim; Superior Flex Track System (SFT).
 - 5) Telling Industries; Vertical Slip Track or Vertical Slip Track II..
- E. Firestop Tracks: Top runner manufactured to allow partition heads to expand and contract with movement of the structure while maintaining continuity of fire-resistance-rated assembly indicated; in thickness not less than indicated for studs and in width to accommodate depth of studs.

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Fire Trak Corp.; Fire Trak System attached to studs with Fire Trak Posi Klip.
 - b. Grace Construction Products; FlameSafe FlowTrak System.
 - c. Metal-Lite, Inc.; The System.
 - d. Steel Network Inc. (The); VertiClip SLD or VertiTrack VTD Series.
- F. Flat Strap and Backing Plate: Steel sheet for blocking and bracing in length and width indicated.
 1. Minimum Base-Metal Thickness: 0.027 inch (0.68 mm).
- G. Cold-Rolled Channel Bridging: Steel, 0.053-inch (1.34-mm) minimum base-metal thickness, with minimum 1/2-inch- (13-mm-) wide flanges.
 1. Depth: As indicated on Drawings.
 2. Clip Angle: Not less than 1-1/2 by 1-1/2 inches (38 by 38 mm), 0.068-inch- (1.72-mm-) thick, galvanized steel.
- H. Hat-Shaped, Rigid Furring Channels: ASTM C 645.
 1. Minimum Base-Metal Thickness: [0.033 inch (0.84 mm).
 2. Depth: As indicated on Drawings.
- I. Resilient Furring Channels: 1/2-inch- (13-mm-) deep, steel sheet members designed to reduce sound transmission.
 1. Configuration: Asymmetrical or hat shaped .
- J. Cold-Rolled Furring Channels: 0.053-inch (1.34-mm) uncoated-steel thickness, with minimum 1/2-inch- (13-mm-) wide flanges.
 1. Depth: As indicated on Drawings
 2. Furring Brackets: Adjustable, corrugated-edge type of steel sheet with minimum uncoated-steel thickness of 0.033 inch (0.8 mm).
 3. Tie Wire: ASTM A 641/A 641M, Class 1 zinc coating, soft temper, 0.062-inch- (1.59-mm-) diameter wire, or double strand of 0.048-inch- (1.21-mm-) diameter wire.
- K. Z-Shaped Furring: With slotted or nonslotted web, face flange of 1-1/4 inches (32 mm), wall attachment flange of 7/8 inch (22 mm), minimum uncoated-metal thickness of 0.018 inch (0.45 mm), and depth required to fit insulation thickness indicated.

2.3 SUSPENSION SYSTEMS

- A. Tie Wire: ASTM A 641/A 641M, Class 1 zinc coating, soft temper, 0.062-inch- (1.59-mm-) diameter wire, or double strand of 0.048-inch- (1.21-mm-) diameter wire.
- B. Hanger Attachments to Concrete:

1. Anchors: Fabricated from corrosion-resistant materials with holes or loops for attaching wire hangers and capable of sustaining, without failure, a load equal to 5 times that imposed by construction as determined by testing according to ASTM E 488 by an independent testing agency.
 - a. Type: Postinstalled, expansion anchor.
2. Powder-Actuated Fasteners: Suitable for application indicated, fabricated from corrosion-resistant materials with clips or other devices for attaching hangers of type indicated, and capable of sustaining, without failure, a load equal to 10 times that imposed by construction as determined by testing according to ASTM E 1190 by an independent testing agency.
- C. Wire Hangers: ASTM A 641/A 641M, Class 1 zinc coating, soft temper, 0.16 inch (4.12 mm) in diameter.
- D. Flat Hangers: Steel sheet, in size indicated on Drawings.
- E. Carrying Channels: Cold-rolled, commercial-steel sheet with a base-metal thickness of 0.053 inch (1.34 mm) and minimum 1/2-inch- (13-mm-) wide flanges.
 1. Depth: As indicated on Drawings.
- F. Furring Channels (Furring Members):
 1. Cold-Rolled Channels: 0.053-inch (1.34-mm) uncoated-steel thickness, with minimum 1/2-inch- (13-mm-) wide flanges, 3/4 inch (19 mm) deep.
 2. Steel Studs and Runners: ASTM C 645.
 - a. Minimum Base-Metal Thickness: 0.027 inch (0.68 mm).
 - b. Depth: As indicated on Drawings.
 3. Dimpled Steel Studs and Runners: ASTM C 645.
 - a. Minimum Base-Metal Thickness: 0.025 inch (0.64 mm).
 - b. Depth: As indicated on Drawings.
 4. Hat-Shaped, Rigid Furring Channels: ASTM C 645, 7/8 inch (22 mm) deep.
 - a. Minimum Base-Metal Thickness: 0.033 inch (0.84 mm)
 5. Resilient Furring Channels: 1/2-inch- (13-mm-) deep members designed to reduce sound transmission.
 - a. Configuration: Asymmetrical or hat shaped.
- G. Grid Suspension System for Gypsum Board Ceilings: ASTM C 645, direct-hung system composed of main beams and cross-furring members that interlock.
 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:

- a. Armstrong World Industries, Inc.; Drywall Grid Systems.
- b. Chicago Metallic Corporation; Drywall Grid System.
- c. USG Corporation; Drywall Suspension System.

2.4 AUXILIARY MATERIALS

- A. General: Provide auxiliary materials that comply with referenced installation standards.
 1. Fasteners for Metal Framing: Of type, material, size, corrosion resistance, holding power, and other properties required to fasten steel members to substrates.
- B. Isolation Strip at Exterior Walls: Provide one of the following:
 1. Asphalt-Saturated Organic Felt: ASTM D 226, Type I (No. 15 asphalt felt), nonperforated.
 2. Foam Gasket: Adhesive-backed, closed-cell vinyl foam strips that allow fastener penetration without foam displacement, 1/8 inch (3.2 mm) thick, in width to suit steel stud size.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas and substrates, with Installer present, and including welded hollow-metal frames, cast-in anchors, and structural framing, for compliance with requirements and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Suspended Assemblies: Coordinate installation of suspension systems with installation of overhead structure to ensure that inserts and other provisions for anchorages to building structure have been installed to receive hangers at spacing required to support the Work and that hangers will develop their full strength.
 1. Furnish concrete inserts and other devices indicated to other trades for installation in advance of time needed for coordination and construction.
- B. Installation Standard: ASTM C 754.
 1. Gypsum Plaster Assemblies: Also comply with requirements in ASTM C 841 that apply to framing installation.
 2. Portland Cement Plaster Assemblies: Also comply with requirements in ASTM C 1063 that apply to framing installation.
 3. Gypsum Veneer Plaster Assemblies: Also comply with requirements in ASTM C 844 that apply to framing installation.

4. Gypsum Board Assemblies: Also comply with requirements in ASTM C 840 that apply to framing installation.
- C. Install supplementary framing, and blocking to support fixtures, equipment services, heavy trim, grab bars, toilet accessories, furnishings, or similar construction.
- D. Install bracing at terminations in assemblies.
- E. Do not bridge building control and expansion joints with non-load-bearing steel framing members. Frame both sides of joints independently.

3.3 INSTALLING FRAMED ASSEMBLIES

- A. Install framing system components according to spacings indicated, but not greater than spacings required by referenced installation standards for assembly types.
 1. Single-Layer Application: 16 inches (406 mm) o.c. unless otherwise indicated.
 2. Multilayer Application: 16 inches (406 mm) o.c. unless otherwise indicated.
 3. Tile Backing Panels: 16 inches (406 mm) o.c. unless otherwise indicated.
- B. Where studs are installed directly against exterior masonry walls or dissimilar metals at exterior walls, install isolation strip between studs and exterior wall.
- C. Install studs so flanges within framing system point in same direction.
- D. Install tracks (runners) at floors and overhead supports. Extend framing full height to structural supports or substrates above suspended ceilings except where partitions are indicated to terminate at suspended ceilings. Continue framing around ducts penetrating partitions above ceiling.
 1. Slip-Type Head Joints: Where framing extends to overhead structural supports, install to produce joints at tops of framing systems that prevent axial loading of finished assemblies.
 2. Door Openings: Screw vertical studs at jambs to jamb anchor clips on door frames; install runner track section (for cripple studs) at head and secure to jamb studs.
 - a. Install two studs at each jamb unless otherwise indicated.
 - b. Install cripple studs at head adjacent to each jamb stud, with a minimum **1/2-inch (13-mm)** clearance from jamb stud to allow for installation of control joint in finished assembly.
 - c. Extend jamb studs through suspended ceilings and attach to underside of overhead structure.
 3. Other Framed Openings: Frame openings other than door openings the same as required for door openings unless otherwise indicated. Install framing below sills of openings to match framing required above door heads.
 4. Fire-Resistance-Rated Partitions: Install framing to comply with fire-resistance-rated assembly indicated and support closures and to make partitions continuous from floor to underside of solid structure.

- a. Firestop Track: Where indicated, install to maintain continuity of fire-resistance-rated assembly indicated.
- 5. Sound-Rated Partitions: Install framing to comply with sound-rated assembly indicated.
- 6. Curved Partitions:
 - a. Bend track to uniform curve and locate straight lengths so they are tangent to arcs.
 - b. Begin and end each arc with a stud, and space intermediate studs equally along arcs. On straight lengths of no fewer than two studs at ends of arcs, place studs 6 inches (150 mm) o.c.
- E. Direct Furring:
 - 1. Screw to wood framing.
 - 2. Attach to concrete or masonry with stub nails, screws designed for masonry attachment, or powder-driven fasteners spaced 24 inches (610 mm) o.c.
- F. Z-Furring Members:
 - 1. Erect insulation, specified in Division 07 Section "Thermal Insulation," vertically and hold in place with Z-furring members spaced 24 inches (610 mm) o.c.
 - 2. Except at exterior corners, securely attach narrow flanges of furring members to wall with concrete stub nails, screws designed for masonry attachment, or powder-driven fasteners spaced 24 inches (610 mm) o.c.
 - 3. At exterior corners, attach wide flange of furring members to wall with short flange extending beyond corner; on adjacent wall surface, screw-attach short flange of furring channel to web of attached channel. At interior corners, space second member no more than 12 inches (305 mm) from corner and cut insulation to fit.
- G. Installation Tolerance: Install each framing member so fastening surfaces vary not more than 1/8 inch (3 mm) from the plane formed by faces of adjacent framing.

3.4 INSTALLING SUSPENSION SYSTEMS

- A. Install suspension system components according to spacings indicated, but not greater than spacings required by referenced installation standards for assembly types.
 - 1. Hangers: 48 inches (1219 mm) o.c.
 - 2. Carrying Channels (Main Runners): 48 inches (1219 mm) o.c.
 - 3. Furring Channels (Furring Members): 16 inches (406 mm) o.c.
- B. Isolate suspension systems from building structure where they abut or are penetrated by building structure to prevent transfer of loading imposed by structural movement.
- C. Suspend hangers from building structure as follows:
 - 1. Install hangers plumb and free from contact with insulation or other objects within ceiling plenum that are not part of supporting structural or suspension system.

- a. Splay hangers only where required to miss obstructions and offset resulting horizontal forces by bracing, countersplaying, or other equally effective means.
 2. Where width of ducts and other construction within ceiling plenum produces hanger spacings that interfere with locations of hangers required to support standard suspension system members, install supplemental suspension members and hangers in the form of trapezes or equivalent devices.
 - a. Size supplemental suspension members and hangers to support ceiling loads within performance limits established by referenced installation standards
 3. Wire Hangers: Secure by looping and wire tying, either directly to structures or to inserts, eye screws, or other devices and fasteners that are secure and appropriate for substrate, and in a manner that will not cause hangers to deteriorate or otherwise fail.
 4. Flat Hangers: Secure to structure, including intermediate framing members, by attaching to inserts, eye screws, or other devices and fasteners that are secure and appropriate for structure and hanger, and in a manner that will not cause hangers to deteriorate or otherwise fail.
 5. Do not attach hangers to steel roof deck.
 6. Do not attach hangers to permanent metal forms. Furnish cast-in-place hanger inserts that extend through forms.
 7. Do not attach hangers to rolled-in hanger tabs of composite steel floor deck.
 8. Do not connect or suspend steel framing from ducts, pipes, or conduit.
- D. Fire-Resistance-Rated Assemblies: Wire tie furring channels to supports.
- E. Seismic Bracing: Sway-brace suspension systems with hangers used for support.
- F. Grid Suspension Systems: Attach perimeter wall track or angle where grid suspension systems meet vertical surfaces. Mechanically join main beam and cross-furring members to each other and butt-cut to fit into wall track.
- G. Installation Tolerances: Install suspension systems that are level to within 1/8 inch in 12 feet (3 mm in 3.6 m) measured lengthwise on each member that will receive finishes and transversely between parallel members that will receive finishes.

END OF SECTION

SECTION 09 29 00 - GYPSUM BOARD

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.
 - 1. Division 01 Section 017419 – Construction Waste Management.

1.2 SUMMARY

- A. Section Includes:
 - 1. Interior gypsum board.
- B. Related Requirements:
 - 1. Division 09 Section "Non-Structural Metal Framing" for non-structural framing and suspension systems that support gypsum board panels.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Samples: For the following products:
 - 1. Trim Accessories: Full-size Sample in 12-inch- (300-mm-) long length for each trim accessory indicated.

1.4 QUALITY ASSURANCE

- A. Mockups: Before beginning gypsum board installation, install mockups of at least 100 sq. ft. (9 sq. m) in surface area to demonstrate aesthetic effects and set quality standards for materials and execution.
 - 1. Install mockups for the following:
 - a. Each level of gypsum board finish indicated for use in exposed locations.
 - 2. Apply or install final decoration indicated, including painting and wallcoverings, on exposed surfaces for review of mockups.
 - 3. Simulate finished lighting conditions for review of mockups.
 - 4. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.5 DELIVERY, STORAGE AND HANDLING

- A. Store materials inside under cover and keep them dry and protected against weather, condensation, direct sunlight, construction traffic, and other potential causes of damage. Stack panels flat and supported on risers on a flat platform to prevent sagging.

1.6 FIELD CONDITIONS

- A. Environmental Limitations: Comply with ASTM C 840 requirements or gypsum board manufacturer's written recommendations, whichever are more stringent.
- B. Do not install paper-faced gypsum panels until installation areas are enclosed and conditioned.
- C. Do not install panels that are wet, those that are moisture damaged, and those that are mold damaged.
 - 1. Indications that panels are wet or moisture damaged include, but are not limited to, discoloration, sagging, or irregular shape.
 - 2. Indications that panels are mold damaged include, but are not limited to, fuzzy or splotchy surface contamination and discoloration.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Fire-Resistance-Rated Assemblies: For fire-resistance-rated assemblies, provide materials and construction identical to those tested in assembly indicated according to ASTM E 119 by an independent testing agency.
- B. STC-Rated Assemblies: For STC-rated assemblies, provide materials and construction identical to those tested in assembly indicated according to ASTM E 90 and classified according to ASTM E 413 by an independent testing agency.
- C. Low Emitting Materials: For ceiling and wall assemblies, provide materials and construction identical to those tested in assembly and complying with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers."

2.2 GYPSUM BOARD, GENERAL

- A. Recycled Content of Gypsum Panel Products: Postconsumer recycled content plus one-half of preconsumer recycled content not less than 25 percent.
- B. Regional Materials: Gypsum panel products shall be manufactured within 500 miles (800 km) of Project site.
- C. Size: Provide maximum lengths and widths available that will minimize joints in each area and that correspond with support system indicated.

2.3 INTERIOR GYPSUM BOARD

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. American Gypsum.
 2. CertainTeed Corp.
 3. Georgia-Pacific Gypsum LLC.
 4. Lafarge North America Inc.
 5. National Gypsum Company.
 6. USG Corporation.
- B. Gypsum Wallboard: ASTM C 1396/C 1396M.
1. Thickness: 5/8 inch (15.9 mm).
 2. Long Edges: Tapered.
- C. Gypsum Board, Type X: ASTM C 1396/C 1396M.
1. Thickness: 5/8 inch (15.9 mm).
 2. Long Edges: Tapered.
- D. Flexible Gypsum Board: ASTM C 1396/C 1396M. Manufactured to bend to fit radii and to be more flexible than standard regular-type gypsum board of same thickness.
1. Thickness: 1/4 inch (6.4 mm).
 2. Long Edges: Tapered.
- E. Gypsum Ceiling Board: ASTM C 1396/C 1396M.
1. Thickness: 5/8 inch (15.9 mm).
 2. Long Edges: Tapered.
- F. Abuse-Resistant Gypsum Board: ASTM C 1629/C 1629M, Level 3.
1. Core: 5/8 inch (15.9 mm), Type X.
 2. Long Edges: Tapered.
 3. Mold Resistance: ASTM D 3273, score of 10.
 4. Basis of Design: National Gypsum Co, Gold Bond Brand XP Gypsum Board.
- G. Moisture- and Mold-Resistant Gypsum Board: ASTM C 1396/C 1396M. With moisture- and mold-resistant core and paper surfaces.
1. Core: 5/8 inch (15.9 mm), Type X.
 2. Long Edges: Tapered.
 3. Mold Resistance: ASTM D 3273, score of 10.

2.4 BULLET RESISTANT PANEL

- A. Manufacturers: Subject to compliance with requirements, provide Armorcore UL752 Level 2 bullet resistant fiberglass panel, or a comparable product by one of the following:
 - 1. Bullet Guard, a Division of Total Security Solutions, Inc.
 - 2. Armortex, Inc.
 - 3. Covenant Security Equipment
- B. Nominal Weight: 3.6 lbs per square foot
- C. Nominal Thickness: 5/16"
- D. Performance Level:
 - 1. UL752 Standard for Bullet Resisting Equipment – Level 2 Paragraph 4.4
 - 2. National Institute of Ballistic Standards NIJ0108.01 – Level II-A
 - 3. One Hour Fire Rating per ASTM E119-98
- E. Ammunition Tested: .357 magnum jacketed lead soft point – 158 grain, 10.2 grams, minimum 1250 feet per second.
- F. Product Information: The panels are made of multiple layers of woven roving ballistic grade fiberglass cloth impregnated with a thermoset polyester resin and compressed into flat rigid sheets. The production technique and materials used provide the controlled internal delamination to permit the capture of a penetrating projectile.
- G. Product Installation: As recommended by manufacturer.

2.5 TRIM ACCESSORIES

- A. Interior Trim: ASTM C 1047.
 - 1. Material: Galvanized or aluminum-coated steel sheet, rolled zinc, plastic, or paper-faced galvanized steel sheet.
 - 2. Shapes:
 - a. Cornerbead.
 - b. Bullnose bead.
 - c. LC-Bead: J-shaped; exposed long flange receives joint compound.
 - d. L-Bead: L-shaped; exposed long flange receives joint compound.
 - e. U-Bead: J-shaped; exposed short flange does not receive joint compound.
 - f. Expansion (control) joint.
 - g. Curved-Edge Cornerbead: With notched or flexible flanges.
- B. Exterior Trim: ASTM C 1047.
 - 1. Material: Hot-dip galvanized steel sheet, plastic, or rolled zinc.
 - 2. Shapes:
 - a. Cornerbead.

- b. LC-Bead: J-shaped; exposed long flange receives joint compound.
- c. Expansion (Control) Joint: One-piece, rolled zinc with V-shaped slot and removable strip covering slot opening.

C. Aluminum Trim: Extruded accessories of profiles and dimensions indicated.

- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Fry Reglet Corp.
 - b. Gordon, Inc.
 - c. Pittcon Industries.
- 2. Aluminum: Alloy and temper with not less than the strength and durability properties of ASTM B 221 (ASTM B 221M), Alloy 6063-T5.
- 3. Finish: Corrosion-resistant primer compatible with joint compound and finish materials specified.

2.6 JOINT TREATMENT MATERIALS

A. General: Comply with ASTM C 475/C 475M.

B. Joint Tape:

- 1. Interior Gypsum Board: Paper.
- 2. Exterior Gypsum Soffit Board: Paper.
- 3. Glass-Mat Gypsum Sheathing Board: 10-by-10 glass mesh.
- 4. Tile Backing Panels: As recommended by panel manufacturer.

C. Joint Compound for Interior Gypsum Board: For each coat use formulation that is compatible with other compounds applied on previous or for successive coats.

- 1. Prefilling: At open joints, rounded or beveled panel edges, and damaged surface areas, use setting-type taping compound.
- 2. Embedding and First Coat: For embedding tape and first coat on joints, fasteners, and trim flanges, use drying-type, all-purpose compound.
 - a. Use setting-type compound for installing paper-faced metal trim accessories.
- 3. Fill Coat: For second coat, use drying-type, all-purpose compound.
- 4. Finish Coat: For third coat, use drying-type, all-purpose compound.
- 5. Skim Coat: For final coat of Level 5 finish, use high-build interior coating product designed for application by airless sprayer and to be used instead of skim coat to produce Level 5 finish.

D. Joint Compound for Exterior Applications:

- 1. Exterior Gypsum Soffit Board: Use setting-type taping compound and setting-type, sandable topping compound.

2. Glass-Mat Gypsum Sheathing Board: As recommended by sheathing board manufacturer.

E. Joint Compound for Tile Backing Panels:

1. Glass-Mat, Water-Resistant Backing Panel: As recommended by backing panel manufacturer.
2. Cementitious Backer Units: As recommended by backer unit manufacturer.
3. Water-Resistant Gypsum Backing Board: Use setting-type taping compound and setting-type, sandable topping compound.

2.7 AUXILIARY MATERIALS

A. General: Provide auxiliary materials that comply with referenced installation standards and manufacturer's written recommendations.

B. Laminating Adhesive: Adhesive or joint compound recommended for directly adhering gypsum panels to continuous substrate.

1. Laminating adhesive shall have a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
2. Laminating adhesive shall comply with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers."

C. Steel Drill Screws: ASTM C 1002, unless otherwise indicated.

1. Use screws complying with ASTM C 954 for fastening panels to steel members from 0.033 to 0.112 inch (0.84 to 2.84 mm) thick.
2. For fastening cementitious backer units, use screws of type and size recommended by panel manufacturer.

D. Sound Attenuation Blankets: ASTM C 665, Type I (blankets without membrane facing) produced by combining thermosetting resins with mineral fibers manufactured from glass, slag wool, or rock wool.

1. Fire-Resistance-Rated Assemblies: Comply with mineral-fiber requirements of assembly.
2. Recycled Content of Blankets: Postconsumer recycled content plus one-half of preconsumer recycled content not less than 25 percent.

E. Acoustical Joint Sealant: Manufacturer's standard nonsag, paintable, nonstaining latex sealant complying with ASTM C 834. Product effectively reduces airborne sound transmission through perimeter joints and openings in building construction as demonstrated by testing representative assemblies according to ASTM E 90.

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Accumetric LLC; BOSS 824 Acoustical Sound Sealant.

- b. Grabber Construction Products; Acoustical Sealant GSC.
 - c. Pecora Corporation; AC-20 FTR or AIS-919.
 - d. Specified Technologies, Inc.; Smoke N Sound Acoustical Sealant.
 - e. USG Corporation; SHEETROCK Acoustical Sealant.
 - 2. Acoustical joint sealant shall have a VOC content of 250 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
 - 3. Acoustical joint sealant shall comply with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers."
- F. Thermal Insulation: As specified in Division 07 Section "Thermal Insulation."
- G. Vapor Retarder: As specified in Division 07 Section "Thermal Insulation."

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas and substrates including welded hollow-metal frames and framing, with Installer present, for compliance with requirements and other conditions affecting performance.
- B. Examine panels before installation. Reject panels that are wet, moisture damaged, and mold damaged.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 APPLYING AND FINISHING PANELS, GENERAL

- A. Comply with ASTM C 840.
- B. Install ceiling panels across framing to minimize the number of abutting end joints and to avoid abutting end joints in central area of each ceiling. Stagger abutting end joints of adjacent panels not less than one framing member.
- C. Install panels with face side out. Butt panels together for a light contact at edges and ends with not more than 1/16 inch (1.5 mm) of open space between panels. Do not force into place.
- D. Locate edge and end joints over supports, except in ceiling applications where intermediate supports or gypsum board back-blocking is provided behind end joints. Do not place tapered edges against cut edges or ends. Stagger vertical joints on opposite sides of partitions. Do not make joints other than control joints at corners of framed openings.
- E. Form control and expansion joints with space between edges of adjoining gypsum panels.
- F. Cover both faces of support framing with gypsum panels in concealed spaces (above ceilings, etc., except in chases braced internally).

1. Unless concealed application is indicated or required for sound, fire, air, or smoke ratings, coverage may be accomplished with scraps of not less than 8 sq. ft. (0.7 sq. m) in area.
 2. Fit gypsum panels around ducts, pipes, and conduits.
 3. Where partitions intersect structural members projecting below underside of floor/roof slabs and decks, cut gypsum panels to fit profile formed by structural members; allow 1/4- to 3/8-inch- (6.4- to 9.5-mm-) wide joints to install sealant.
- G. Isolate perimeter of gypsum board applied to non-load-bearing partitions at structural abutments, except floors. Provide 1/4- to 1/2-inch- (6.4- to 12.7-mm-) wide spaces at these locations and trim edges with edge trim where edges of panels are exposed. Seal joints between edges and abutting structural surfaces with acoustical sealant.
- H. Attachment to Steel Framing: Attach panels so leading edge or end of each panel is attached to open (unsupported) edges of stud flanges first.
- I. Wood Framing: Install gypsum panels over wood framing, with floating internal corner construction. Do not attach gypsum panels across the flat grain of wide-dimension lumber, including floor joists and headers. Float gypsum panels over these members or provide control joints to counteract wood shrinkage.
- J. STC-Rated Assemblies: Seal construction at perimeters, behind control joints, and at openings and penetrations with a continuous bead of acoustical sealant. Install acoustical sealant at both faces of partitions at perimeters and through penetrations. Comply with ASTM C 919 and with manufacturer's written recommendations for locating edge trim and closing off sound-flanking paths around or through assemblies, including sealing partitions above acoustical ceilings.
- K. Install sound attenuation blankets before installing gypsum panels unless blankets are readily installed after panels have been installed on one side.

3.3 APPLYING INTERIOR GYPSUM BOARD

- A. Install interior gypsum board in the following locations:
1. Wallboard Type: Vertical surfaces unless otherwise indicated.
 2. Type X: Where required for fire-resistance-rated assembly.
 3. Flexible Type: Apply in double layer at curved assemblies.
 4. Ceiling Type: As indicated on Drawings.
 5. Abuse-Resistant Type: As indicated on Drawings.
 6. Moisture- and Mold-Resistant Type: As indicated on Drawings.
 7. Glass-Mat Interior Type: As indicated on Drawings.
- B. Single-Layer Application:
1. On ceilings, apply gypsum panels before wall/partition board application to greatest extent possible and at right angles to framing unless otherwise indicated.
 2. On partitions/walls, apply gypsum panels vertically (parallel to framing) unless otherwise indicated or required by fire-resistance-rated assembly, and minimize end joints.

- a. Stagger abutting end joints not less than one framing member in alternate courses of panels.
 - b. At stairwells and other high walls, install panels horizontally unless otherwise indicated or required by fire-resistance-rated assembly.
3. On Z-furring members, apply gypsum panels vertically (parallel to framing) with no end joints. Locate edge joints over furring members.
4. Fastening Methods: Apply gypsum panels to supports with steel drill screws.
- C. Multilayer Application:
 1. On ceilings, apply gypsum board indicated for base layers before applying base layers on walls/partitions; apply face layers in same sequence. Apply base layers at right angles to framing members and offset face-layer joints one framing member, 16 inches (400 mm) minimum, from parallel base-layer joints, unless otherwise indicated or required by fire-resistance-rated assembly.
 2. On partitions/walls, apply gypsum board indicated for base layers and face layers vertically (parallel to framing) with joints of base layers located over stud or furring member and face-layer joints offset at least one stud or furring member with base-layer joints, unless otherwise indicated or required by fire-resistance-rated assembly. Stagger joints on opposite sides of partitions.
 3. On Z-furring members, apply base layer vertically (parallel to framing) and face layer either vertically (parallel to framing) or horizontally (perpendicular to framing) with vertical joints offset at least one furring member. Locate edge joints of base layer over furring members.
 4. Fastening Methods: Fasten base layers and face layers separately to supports with screws.
- D. Laminating to Substrate: Where gypsum panels are indicated as directly adhered to a substrate (other than studs, joists, furring members, or base layer of gypsum board), comply with gypsum board manufacturer's written recommendations and temporarily brace or fasten gypsum panels until fastening adhesive has set.
- E. Curved Surfaces:
 1. Install panels horizontally (perpendicular to supports) and unbroken, to extent possible, across curved surface plus 12-inch- (300-mm-) long straight sections at ends of curves and tangent to them.
 2. For double-layer construction, fasten base layer to studs with screws 16 inches (400 mm) o.c. Center gypsum board face layer over joints in base layer, and fasten to studs with screws spaced 12 inches (300 mm) o.c.

3.4 INSTALLING TRIM ACCESSORIES

- A. General: For trim with back flanges intended for fasteners, attach to framing with same fasteners used for panels. Otherwise, attach trim according to manufacturer's written instructions.

- B. Control Joints: Install control joints according to ASTM C 840 and per Gypsum Construction Handbook as published by United State Gypsum Company (Latest Edition) and in specific locations approved by Architect for visual effect.
 - 1. Control joints shall be employed in long expanses of gypsum board partitions at 30 foot intervals, from floor to ceiling. Additional control joints shall be provided at all door jambs and window frames in accordance with ASTM C 840 and per Gypsum Construction Handbook.
- C. Interior Trim: Install in the following locations:
 - 1. Cornerbead: Use at outside corners unless otherwise indicated.
 - 2. Bullnose Bead: Use at outside corners or where indicated.
 - 3. LC-Bead: Use at exposed panel edges.
 - 4. L-Bead: Use where indicated.
 - 5. U-Bead: Use at exposed panel edges or where indicated.
 - 6. Curved-Edge Cornerbead: Use at curved openings.
- D. Exterior Trim: Install in the following locations:
 - 1. Cornerbead: Use at outside corners.
 - 2. LC-Bead: Use at exposed panel edges.
- E. Aluminum Trim: Install in locations indicated on Drawings.

3.5 FINISHING GYPSUM BOARD

- A. General: Treat gypsum board joints, interior angles, edge trim, control joints, penetrations, fastener heads, surface defects, and elsewhere as required to prepare gypsum board surfaces for decoration. Promptly remove residual joint compound from adjacent surfaces.
- B. Prefill open joints, rounded or beveled edges, and damaged surface areas.
- C. Apply joint tape over gypsum board joints, except for trim products specifically indicated as not intended to receive tape.
- D. Gypsum Board Finish Levels: Finish panels to levels indicated below and according to ASTM C 840:
 - 1. Level 1: Ceiling plenum areas, concealed areas, and where indicated.
 - 2. Level 2: Panels that are substrate for tile.
 - 3. Level 3: Where indicated on Drawings.
 - 4. Level 4: At panel surfaces that will be exposed to view unless otherwise indicate.
 - a. Primer and its application to surfaces are specified in other Division 09 Sections.
 - 5. Level 5: Where indicated on drawings.
 - a. Primer and its application to surfaces are specified in other Division 09 Sections.

- E. Glass-Mat Gypsum Sheathing Board: Finish according to manufacturer's written instructions for use as exposed soffit board.
- F. Glass-Mat Faced Panels: Finish according to manufacturer's written instructions.
- G. Cementitious Backer Units: Finish according to manufacturer's written instructions.

3.6 PROTECTION

- A. Protect adjacent surfaces from drywall compound and promptly remove from floors and other non-drywall surfaces. Repair surfaces stained, marred, or otherwise damaged during drywall application.
- B. Protect installed products from damage from weather, condensation, direct sunlight, construction, and other causes during remainder of the construction period.
- C. Remove and replace panels that are wet, moisture damaged, and mold damaged.
 - 1. Indications that panels are wet or moisture damaged include, but are not limited to, discoloration, sagging, or irregular shape.
 - 2. Indications that panels are mold damaged include, but are not limited to, fuzzy or splotchy surface contamination and discoloration.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 09 51 13 - ACOUSTICAL PANEL CEILINGS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes acoustical panels and exposed suspension systems for ceilings.
- B. Products furnished, but not installed under this Section, include anchors, clips, and other ceiling attachment devices to be cast in concrete.

1.3 DEFINITIONS

- A. AC: Articulation Class.
- B. CAC: Ceiling Attenuation Class.
- C. LR: Light Reflectance coefficient.
- D. NRC: Noise Reduction Coefficient.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Samples: For each component indicated and for each exposed finish required, prepared on Samples of size indicated below.
 - 1. Acoustical Panel: Set of 6-inch (150-mm) square Samples of each type, color, pattern, and texture.
 - 2. Exposed Suspension-System Members, Moldings, and Trim: Set of 6-inch- (150-mm-) long Samples of each type, finish, and color.
- C. Shop Drawings: Submit shop drawings showing how panels are to be laid out on the walls, details of trim members and width of panels. Width of panels and location of vertical seams are critical.

1.5 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Reflected ceiling plans, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of the items involved:
1. Suspended ceiling components.
 2. Structural members to which suspension systems will be attached.
 3. Size and location of initial access modules for acoustical panels.
 4. Items penetrating finished ceiling including the following:
 - a. Lighting fixtures.
 - b. Air outlets and inlets.
 - c. Sprinklers.
 - d. Access panels.
 - e. Surveillance Cameras: Power/Data
 5. Perimeter moldings.
 6. Minimum Drawing Scale: 1/8 inch = 1 foot (1:96)
- B. Qualification Data: For testing agency.
- C. Product Test Reports: For each acoustical panel ceiling, for tests performed by a qualified testing agency
- D. Evaluation Reports: For each acoustical panel ceiling suspension system and anchor and fastener type, from ICC-ES.
- E. Field quality-control reports.

1.6 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For finishes to include in maintenance manuals.

1.7 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
1. Acoustical Ceiling Panels: Full-size panels equal to 2.0 percent of quantity installed.
 2. Suspension System Components: Quantity of each exposed component equal to 1.0 percent of quantity installed.
 3. Hold-Down Clips: Equal to 2.0 percent of quantity installed.
 4. Impact Clips: Equal to 2.0 percent of quantity installed.

1.8 QUALITY ASSURANCE

- A. Testing Agency Qualifications: Qualified according to NVLAP for testing indicated.
- B. Acoustical Testing Agency Qualifications: An independent testing laboratory, or an NVLAP-accredited laboratory, with the experience and capability to conduct the testing indicated. NVLAP-accredited laboratories must document accreditation, based on a "Certificate of Accreditation" and a "Scope of Accreditation" listing the test methods specified.

1.9 DELIVERY, STORAGE, AND HANDLING

- A. Deliver acoustical panels, suspension-system components, and accessories to Project site in original, unopened packages and store them in a fully enclosed, conditioned space where they will be protected against damage from moisture, humidity, temperature extremes, direct sunlight, surface contamination, and other causes.
- B. Before installing acoustical panels, permit them to reach room temperature and a stabilized moisture content.
- C. Handle acoustical panels carefully to avoid chipping edges or damaging units in any way.

1.10 FIELD CONDITIONS

- A. Environmental Limitations: Do not install acoustical panel ceilings until spaces are enclosed and weatherproof, wet work in spaces is complete and dry, work above ceilings is complete, and ambient temperature and humidity conditions are maintained at the levels indicated for Project when occupied for its intended use.
 - 1. Pressurized Plenums: Operate ventilation system for not less than 48 hours before beginning acoustical panel ceiling installation.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Seismic Standard: Provide acoustical panel ceilings designed and installed to withstand the effects of earthquake motions according to the following:
 - 1. Standard for Ceiling Suspension Systems Requiring Seismic Restraint: Comply with ASTM E 580.
 - 2. UBC Standard 25-2, "Metal Suspension Systems for Acoustical Tile and for Lay-in Panel Ceilings."

- B. Surface-Burning Characteristics: Provide acoustical panels with the following surface-burning characteristics complying with ASTM E 1264 for Class A materials as determined by testing identical products per ASTM E 84:
 - a. Smoke-Developed Index: 450 or less.
- C. Fire-Test-Response Characteristics: Provide acoustical panel ceilings that comply with the following requirements:
 - 1. Fire-Resistance Characteristics: Where indicated, provide acoustical panel ceilings identical to those of assemblies tested for fire resistance per ASTM E 119 by UL or another testing and inspecting agency acceptable to authorities having jurisdiction.
 - a. Fire-Resistance Ratings: Indicated by design designations from UL's "Fire Resistance Directory" or from the listings of another testing and inspecting agency.
 - b. Identify materials with appropriate markings of applicable testing and inspecting agency.

2.2 ACOUSTICAL PANELS, GENERAL

- A. Source Limitations:
 - 1. Acoustical Ceiling Panel: Obtain each type from single source from single manufacturer.
 - 2. Suspension System: Obtain each type from single source from single manufacturer.
- B. Acoustical Panel Standard: Provide manufacturer's standard panels of configuration indicated that comply with ASTM E 1264 classifications as designated by types, patterns, acoustical ratings, and light reflectance unless otherwise indicated.
 - 1. Mounting Method for Measuring NRC: Type E-400; plenum mounting in which face of test specimen is 15-3/4 inches (400 mm) away from test surface according to ASTM E 795.
- C. Acoustical Panel Colors and Patterns: Match appearance characteristics indicated for each product type.
 - 1. Where appearance characteristics of acoustical panels are indicated by referencing pattern designations in ASTM E 1264 and not manufacturers' proprietary product designations, provide products selected by Architect from each manufacturer's full range that comply with requirements indicated for type, pattern, color, light reflectance, acoustical performance, edge detail, and size.

2.3 ACOUSTICAL CEILING TILE – ACT-1

- A. Basis-of-Design Product: Armstrong “Calla High NRC” 1754. Manufacturer’s meeting the specifications and design intent that may be acceptable include, but are not limited to:
 - 1. BPB USA.
 - 2. Chicago Metallic Corporation.
 - 3. Tectum Inc.
 - 4. USG Interiors, Inc.; Subsidiary of USG Corporation.
- B. Color: White
- C. LR: Not less than 0.85.
- D. NRC: Not less than 0.90.
- E. CAC: Not less than 35.
- F. Edge/Joint Detail: Square Lay-in 15/16
- G. Thickness: 1-3/4”.
- H. Modular Size: 24 by 24 inches (610 by 610 mm).
- I. Broad Spectrum Antimicrobial Fungicide and Bactericide Treatment: Provide acoustical panels treated with manufacturer's standard antimicrobial formulation that inhibits fungus, mold, mildew, and gram-positive and gram-negative bacteria and showing no mold, mildew, or bacterial growth when tested according to ASTM D 3273 and evaluated according to ASTM D 3274 or ASTM G 21.

2.4 ACOUSTICAL WALL PANELS – AWP-1-2

- A. Basis-of-Design Product: Armstrong “Soundscapes Shapes”. Manufacturer’s meeting the specifications and design intent that may be acceptable include, but are not limited to:
 - 1. BPB USA.
 - 2. Chicago Metallic Corporation.
 - 3. Tectum Inc.
 - 4. USG Interiors, Inc.; Subsidiary of USG Corporation.
- B. Surface Texture: Fine
- C. Composition: Fiberglass
- D. Color: Custom. Refer to Finish Legend and Interior Elevations A431
- E. Shape Design: Custom Square and Rectangle

- F. Edge Profile: Square
- G. Recycled Content: 51%
- H. Acoustics: Sound absorption up to 1.00 Noise Reduction Coefficient (NRC) ASTM C 423
- I. Flame Spread: ASTM E 1264; Class A (UL)
- J. Dimensional Stability: BioBlock; Anti-Microbial, inherent.
- K. Broad Spectrum Antimicrobial Fungicide and Bactericide Treatment: Provide acoustical panels treated with manufacturer's standard antimicrobial formulation that inhibits fungus, mold, mildew, and gram-positive and gram-negative bacteria and showing no mold, mildew, or bacterial growth when tested according to ASTM D 3273 and evaluated according to ASTM D 3274 or ASTM G 21.
- L. Mounting: Individual - attachment to Drywall per manufacturer's installation instructions.

2.5 METAL SUSPENSION SYSTEMS, GENERAL

- A. Metal Suspension System Standard: Provide manufacturer's standard direct-hung metal suspension systems of types, structural classifications, and finishes indicated that comply with applicable requirements in ASTM C 635.
- B. Finishes and Colors, General: Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes. Provide manufacturer's standard factory-applied finish for type of system indicated.
- C. Attachment Devices: Size for five times the design load indicated in ASTM C 635/C 635M, Table 1, "Direct Hung," unless otherwise indicated. Comply with seismic design requirements.
- D. Wire Hangers, Braces, and Ties: Provide wires complying with the following requirements:
 - 1. Zinc-Coated, Carbon-Steel Wire: ASTM A 641/A 641M, Class 1 zinc coating, soft temper.
 - 2. Stainless-Steel Wire: ASTM A 580/A 580M, Type 304, nonmagnetic.
 - 3. Nickel-Copper-Alloy Wire: ASTM B 164, nickel-copper-alloy UNS No. N04400.
 - 4. Size: Select wire diameter so its stress at three times hanger design load (ASTM C 635/C 635M, Table 1, "Direct Hung") will be less than yield stress of wire, but provide not less than **0.135-inch** diameter wire.

- E. Hold-Down Clips: Where indicated, provide manufacturer's standard hold-down clips spaced 24 inches (610 mm) o.c. on all cross tees.
- F. Impact Clips: Where indicated, provide manufacturer's standard impact-clip system designed to absorb impact forces against acoustical panels.

2.6 METAL SUSPENSION SYSTEM

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Armstrong World Industries, Inc.
 - 2. CertainTeed Corp.
 - 3. Chicago Metallic Corporation.
 - 4. USG Interiors, Inc.; Subsidiary of USG Corporation.
- B. Wide-Face, Capped, Double-Web Steel Suspension System: Main and cross runners roll formed from cold-rolled steel sheet; prepainted, electrolytically zinc coated, or hot-dip galvanized according to ASTM A 653/A 653M, not less than G30 (Z90) coating designation; with prefinished 15/16-inch- (24-mm-) wide metal caps on flanges.
 - 1. Structural Classification: Intermediate-duty system.
 - 2. End Condition of Cross Runners: Override (stepped type).
 - 3. Face Design: Flat, flush.
 - 4. Cap Material: Steel cold-rolled sheet.
 - 5. Cap Finish: Painted white.

2.7 METAL EDGE MOLDINGS AND TRIM

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Armstrong World Industries, Inc.
 - 2. CertainTeed Corp.
 - 3. Chicago Metallic Corporation.
 - 4. Fry Reglet Corporation.
 - 5. Gordon, Inc.
 - 6. USG Interiors, Inc.; Subsidiary of USG Corporation.
- B. Roll-Formed, Sheet-Metal Edge Moldings and Trim: Type and profile indicated or, if not indicated, manufacturer's standard moldings for edges and penetrations that comply with seismic design requirements; formed from sheet metal of same material, finish, and color as that used for exposed flanges of suspension-system runners.

1. Provide manufacturer's standard edge moldings that fit acoustical panel edge details and suspension systems indicated and that match width and configuration of exposed runners unless otherwise indicated.
2. Reveal edge moldings at not permitted as a substitute for trimming and fitting tegular tiles at perimeter
3. For circular penetrations of ceiling, provide edge moldings fabricated to diameter required to fit penetration exactly.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, including structural framing to which acoustical panel ceilings attach or abut, with Installer present, for compliance with requirements specified in this and other Sections that affect ceiling installation and anchorage and with requirements for installation tolerances and other conditions affecting performance of acoustical panel ceilings.
- B. Examine acoustical panels before installation. Reject acoustical panels that are wet, moisture damaged, or mold damaged.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Measure each ceiling area and establish layout of acoustical panels to balance border widths at opposite edges of each ceiling. Avoid using less-than-half-width panels at borders, and comply with layout shown on reflected ceiling plans.

3.3 INSTALLATION

- A. General: Install acoustical panel ceilings to comply with ASTM C 636/C 636M and seismic design requirements indicated, according to manufacturer's written instructions and CISCA's "Ceiling Systems Handbook."
- B. Suspend ceiling hangers from building's structural members and as follows:
 1. Install hangers plumb and free from contact with insulation or other objects within ceiling plenum that are not part of supporting structure or of ceiling suspension system.
 2. Splay hangers only where required and, if permitted with fire-resistance-rated ceilings, to miss obstructions; offset resulting horizontal forces by bracing, countersplaying, or other equally effective means.

3. Where width of ducts and other construction within ceiling plenum produces hanger spacings that interfere with location of hangers at spacings required to support standard suspension-system members, install supplemental suspension members and hangers in form of trapezes or equivalent devices.
 4. Secure wire hangers to ceiling-suspension members and to supports above with a minimum of three tight turns. Connect hangers directly either to structures or to inserts, eye screws, or other devices that are secure and appropriate for substrate and that will not deteriorate or otherwise fail due to age, corrosion, or elevated temperatures.
 5. Secure flat, angle, channel, and rod hangers to structure, including intermediate framing members, by attaching to inserts, eye screws, or other devices that are secure and appropriate for both the structure to which hangers are attached and the type of hanger involved. Install hangers in a manner that will not cause them to deteriorate or fail due to age, corrosion, or elevated temperatures.
 6. .
 7. When framing does not permit installation of hanger wires at spacing required, install carrying channels or other supplemental support for attachment of hanger wires.
 8. Space hangers not more than 48 inches (1200 mm) o.c. along each member supported directly from hangers unless otherwise indicated; provide hangers not more than 8 inches (200 mm) from ends of each member.
 9. Size supplemental suspension members and hangers to support ceiling loads within performance limits established by referenced standards and publications.
- C. Secure bracing wires to ceiling suspension members and to supports with a minimum of four tight turns. Suspend bracing from building's structural members as required for hangers, without attaching to permanent metal forms, steel deck, or steel deck tabs. Fasten bracing wires into concrete with cast-in-place or postinstalled anchors.
- D. Install edge moldings and trim of type indicated at perimeter of acoustical ceiling area and where necessary to conceal edges of acoustical panels.
1. Screw attach moldings to substrate at intervals not more than 16 inches (400 mm) o.c. and not more than 3 inches (75 mm) from ends, leveling with ceiling suspension system to a tolerance of 1/8 inch in 12 feet (3.2 mm in 3.6 m). Miter corners accurately and connect securely.
 2. Do not use exposed fasteners, including pop rivets, on moldings and trim.
- E. Install suspension-system runners so they are square and securely interlocked with one another. Remove and replace dented, bent, or kinked members.
- F. Install acoustical panels with undamaged edges and fit accurately into suspension-system runners and edge moldings. Scribe and cut panels at borders and penetrations to provide a neat, precise fit.
1. Arrange directionally patterned acoustical panels as follows:
 - a. As indicated on reflected ceiling plans.

2. For square-edged panels, install panels with edges fully hidden from view by flanges of suspension-system runners and moldings.
3. For reveal-edged panels on suspension-system runners, install panels with bottom of reveal in firm contact with top surface of runner flanges.
4. For reveal-edged panels on suspension-system members with box-shaped flanges, install panels with reveal surfaces in firm contact with suspension-system surfaces and panel faces flush with bottom face of runners.
5. Paint cut edges of panel remaining exposed after installation; match color of exposed panel surfaces using coating recommended in writing for this purpose by acoustical panel manufacturer.
6. Install hold-down ~~[impact]~~ clips in areas indicated, in areas required by authorities having jurisdiction, and for fire-resistance ratings; space as recommended by panel manufacturer's written instructions unless otherwise indicated.
7. Install clean-room gasket system in areas indicated, sealing each panel and fixture as recommended by panel manufacturer's written instructions.
8. Protect lighting fixtures and air ducts to comply with requirements indicated for fire-resistance-rated assembly.

3.4 FIELD QUALITY CONTROL

- A. Special Inspections: Engage a qualified special inspector to perform the following special inspections:
1. Suspended ceiling system.
 2. Hangers, anchors and fasteners.
- B. Testing Agency: Engage a qualified testing agency to perform tests and inspections and prepare test reports.
- C. Tests and Inspections: Testing and inspecting of completed installations of acoustical panel ceiling hangers and anchors and fasteners shall take place in successive stages, in areas of extent and using methods as follows. Do not proceed with installations of acoustical panel ceiling hangers for the next area until test results for previously completed installations of acoustical panel ceiling hangers show compliance with requirements.
1. Extent of Each Test Area: When installation of ceiling suspension systems on each floor has reached 20 percent completion but no panels have been installed.
 - a. Within each test area, testing agency will select one of every 10 power-actuated fasteners and postinstalled anchors used to attach hangers to concrete and will test them for 200 lbf (890 N) of tension; it will also select one of every two postinstalled anchors used to attach bracing wires to concrete and will test them for 440 lbf (1957 N) of tension.
 - b. When testing discovers fasteners and anchors that do not comply with requirements, testing agency will test those anchors not previously tested until 20 pass consecutively and then will resume initial testing frequency.

- D. Acoustical panel ceiling hangers and anchors and fasteners will be considered defective if they do not pass tests and inspections.
- E. Remove and replace acoustical panel ceiling hangers and anchors and fasteners that do not pass tests and inspections and retest as specified above.

3.5 CLEANING

- A. Clean exposed surfaces of acoustical panel ceilings, including trim, edge moldings, and suspension-system members. Comply with manufacturer's written instructions for cleaning and touchup of minor finish damage. Remove and replace ceiling components that cannot be successfully cleaned and repaired to permanently eliminate evidence of damage.

END OF SECTION 095113

SECTION 09 54 36 - SUSPENDED DECORATIVE GRIDS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes rigid, open-frame, suspended grids and suspension systems for ceilings.
- B. Related Requirements:
 - 1. Section 095113 "Acoustical Panel Ceilings" for ceilings consisting of mineral-base and glass-fiber-base acoustical panels and exposed suspension systems.
- C. Products furnished, but not installed, under this Section include anchors, clips, and other ceiling attachment devices to be cast in concrete.

1.3 PREINSTALLATION MEETINGS

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Samples: For each exposed product and for each color and texture specified, 6 inches (150 mm) in size.
- C. Samples for Initial Selection: For units with factory-applied finishes.
- D. Samples for Verification: For each component indicated and for each exposed finish required, prepared on Samples of sizes indicated below:
 - 1. Cell Grids: Set of 12-inch (300-mm) square module Samples of each type, finish, and color.
 - 2. Beam Grids: Set of 12-inch (300-mm) long Samples of each type, finish, and color; a 12-inch (300-mm) long spliced section; and a 6-inch (150-mm) long per leg corner section.
- E. Delegated-Design Submittal: For design of attachment devices.
- F. Shop Drawings: Layout and details of ceilings. Show locations of items that are to be coordinated with or supported by the ceilings.

1.5 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Reflected ceiling plans, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of the items involved:
 - 1. Lighting fixtures.
 - 2. Air outlets and inlets.
 - 3. Speakers.
 - 4. Sprinklers.
 - 5. Ceiling suspension system members.
 - 6. Method of attaching hangers to building structure.
 - a. Furnish layouts for cast-in-place anchors, clips, and other ceiling attachment devices whose installation is specified in other Sections.
- B. Field quality-control reports.

1.6 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For finishes to include in maintenance manuals.

1.7 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Suspended Decorative Grids: Quantity of each suspended decorative grid component, exposed molding, and trim equal to 2 percent of quantity installed.

1.8 DELIVERY, STORAGE, AND HANDLING

- A. Deliver suspended decorative grid components to Project site in original, unopened packages and store them in a fully enclosed, conditioned space where they are protected against damage from moisture, humidity, temperature extremes, direct sunlight, surface contamination, and other causes.
- B. Handle suspended decorative grids and accessories carefully to avoid damaging units and finishes in any way.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design attachment devices.

- B. Surface-Burning Characteristics: Comply with ASTM E 84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - 1. Flame-Spread Index: 25 or less.
 - 2. Smoke-Developed Index: 450 or less.

2.2 SUSPENDED DECORATIVE GRIDS, GENERAL

- A. Sheet Metal Characteristics: Provide sheet metal selected for surface flatness, smoothness, and freedom from surface blemishes where exposed to view in finished unit. Do not use materials whose exposed surfaces exhibit pitting, seam marks, roller marks, variations in flatness exceeding those permitted by referenced standards for stretcher-leveled metal sheet, stains, discolorations, or other imperfections.
 - 1. Aluminum Sheet: Roll-formed aluminum sheet, complying with ASTM B 209 (ASTM B 209M); alloy and temper recommended by aluminum producer and finisher for type of use and finish indicated.
 - 2. Steel Sheet: Commercial-quality, cold-rolled, carbon-steel sheet; stretcher leveled; with protective coating complying with ASTM C 635/C 635M.
 - a. Painted Finishes: Electrolytic zinc-coated steel complying with ASTM A 879/A 879M, 13Z (40G) coating, surface treatment as recommended by finish manufacturer for type of use and finish indicated.
 - b. Chemical/Mechanical Finishes: Uncoated steel sheet complying with ASTM A 1008/A 1008M with luster or bright finish as required by finisher for applying electroplating or other metallic-finishing processes.
- B. Grid Fabrication: Components are formed from metal indicated. Manufacturer's standard units of size, shape, and profile indicated; finished to comply with requirements indicated.
- C. Cover Profiles and Trim: Provide manufacturer's standard cover profiles and trim for exposed members, and as indicated or required, for edges of grids, at changes in ceiling height, and for other conditions, of same metal and finish as suspended decorative grids.
- D. Metal Suspension-System Standard: Provide ceiling manufacturer's standard metal suspension systems of types and finishes indicated that comply with applicable ASTM C 635/C 635M requirements. Provide systems complete with runners or beams, splice sections, connector clips, alignment clips, leveling clips, hangers, molding, trim, web covers, load-resisting struts, fixture filler pans, clips and adapters, and other suspension components required to support ceiling units and other ceiling-supported construction.
- E. Attachment Devices: Size for 5 times the design load indicated in ASTM C 635/C 635M, Table 1, Direct Hung, unless otherwise indicated.
- F. Wire Hangers, Braces, and Ties: Provide wires complying with the following requirements:
 - 1. Zinc-Coated, Carbon-Steel Wire: ASTM A 641/A 641M, Class 1 zinc coating, soft temper.

2. Size: Select wire diameter so its stress at 3 times hanger design load indicated in ASTM C 635/C 635M, Table 1, Direct Hung, is less than yield stress of wire, but provide not less than 0.106-inch (2.69-mm) diameter wire.
- G. Flat Hangers: Mild steel, zinc coated or protected with rust-inhibitive paint.
- H. Angle Hangers: Angles with legs not less than 7/8 inch (22 mm) wide; formed with 0.04-inch- (1.0-mm-) thick, galvanized-steel sheet complying with ASTM A 653/A 653M, G90 (Z275) coating designation; with bolted connections and 5/16-inch- (8-mm-) diameter bolts.
- I. Seismic Struts: Manufacturer's standard compression struts designed to accommodate seismic forces.
- J. Exposed Metal Edge Moldings, Covers, Trim, and Fixture Filler Panels: Provide exposed members as indicated or required to conceal edges of and penetrations through ceiling, to conceal edges of beams, to cover runner webs, for fixture trim and adapters, for fasciae at changes in ceiling height, and for other conditions; of metal and finish matching suspended decorative grids unless otherwise indicated.
 1. For Circular Penetrations of Ceiling: Fabricate edge moldings to diameter required to fit penetration exactly.

2.3 SUSPENDED DECORATIVE GRIDS – **SDG-1**

- A. Basis-of-Design Product: Subject to compliance with requirements, provide Armstrong Industries Woodworks Linear Veneered Open Ceiling 6440F01W1 or a comparable product by one of the following:
 1. BPB USA.
 2. Chicago Metallic Corporation.
 3. Ecophon CertainTeed, Inc.
 4. Tectum Inc.
 5. USG Interiors Inc.
- B. Plank Spacing: 4" O.C. (3-3/4" Plank with 3/4" Reveal)
- C. Plank Dimensions: 3-3/4" W x 96" L x 3/4" H
- D. Veneer Cut: Rift Sliced
- E. Surface Texture: Smooth
- F. Composition: Real wood veneer on fire rated particle board
- G. Acoustical: Provide BOD: Black BioAcoustic™ Infill Panel 5823 for 3-3/4" Module meeting min. NRC = 0.60
- H. Suspension Systems: 12' Concealed Linear Carriers with Integral Clips with 1-1/2" Angle Molding
- I. Finish Range: Architect to select from Manufacturer's full range of standard and custom colors

2.4 ALUMINUM FINISHES

- A. Clear Anodic Finish: AAMA 611, AA-M12C22A31, Class II, 0.010 mm or thicker.
- B. Color-Coated Finish: Manufacturer's standard baked paint complying with coating manufacturer's written instructions for surface preparation, pretreatment, application, baking, and minimum dry film thickness.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, including structural framing and substrates to which suspended decorative grids attach or abut, with Installer present, for compliance with requirements specified in this and other Sections that affect ceiling installation and anchorage and with requirements for installation tolerances and other conditions affecting performance of suspended decorative grids.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Measure each ceiling area and establish layout of suspended decorative grids to balance border widths at opposite edges of each space. Comply with layout shown on reflected ceiling plans.

3.3 INSTALLATION

- A. General: Install suspended decorative grids to comply with ASTM C 636/C 636M and seismic design requirements indicated, according to manufacturer's written instructions and CISCA's "Ceiling Systems Handbook."
- B. Suspend ceiling hangers from building's structural members and as follows:
 - 1. Install hangers plumb and free from contact with insulation or other objects within ceiling plenum that are not part of supporting structure or of ceiling suspension system.
 - 2. Splay hangers only where required to miss obstructions; offset resulting horizontal forces by bracing, countersplaying, or other equally effective means.
 - 3. Where width of ducts and other construction within ceiling plenum produces hanger spacings that interfere with location of hangers at spacings required to support standard suspension-system members, install supplemental suspension members and hangers in form of trapezes or equivalent devices.
 - 4. Secure hangers to structure, including intermediate framing members, by attaching to inserts, eye screws, or other devices that are secure and appropriate for structure to which hangers are attached and for hanger type involved.
 - 5. Do not support grids directly from permanent metal forms or floor deck. Fasten hangers to cast-in-place hanger inserts, postinstalled mechanical or adhesive anchors, or power-actuated fasteners that extend through forms into concrete.
 - 6. Do not attach hangers to steel deck tabs.

- C. Use of Reveal Angle / Shadow Molding is not an acceptable alternative to trimming ceiling panels in field.
- D. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
- E. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.
- F. Secure bracing wires to ceiling suspension members and to supports with a minimum of four tight turns. Suspend bracing from building's structural members as required for hangers, without attaching to permanent metal forms, steel deck, or steel deck tabs. Fasten bracing wires into concrete with cast-in-place or postinstalled anchors.
- G. Install edge moldings and trim of type indicated at perimeter of each suspended decorative grid and where necessary to conceal edges of grids.
 - 1. Screw attach moldings to substrate at intervals not more than 16 inches (400 mm) o.c. and not more than 3 inches (75 mm) from ends, level with ceiling system to a tolerance of 1/8 inch in 12 feet (3 mm in 3.6 m). Miter corners accurately and connect securely.
 - 2. Do not use exposed fasteners, including pop rivets, on moldings and trim.
- H. Install suspended decorative grids in coordination with suspension system and exposed moldings and trim. Comply with installation tolerances according to Cisca's "Metal Ceilings Technical Guidelines."
 - 1. Align joints in adjacent courses to form uniform, straight joints parallel to room axis in both directions unless otherwise indicated.
 - 2. Fit adjoining units to form flush, tight joints.
 - 3. Where grid edges are visible, install cover profiles unless other trim is indicated.

3.4 FIELD QUALITY CONTROL

- A. Perform the following tests and inspections of completed installations of grid hangers, anchors, and fasteners in successive stages. Do not proceed with installations of grid hangers for the next area until test results for previously completed installations show compliance with requirements.
 - 1. Extent of Each Test Area: When installation of grid systems on each floor has reached 20 percent completion but no panels have been installed.
 - a. Within each test area, testing agency selects one of every 10 power-actuated fasteners and postinstalled anchors used to attach hangers to concrete and tests them for 200 lbf (890 N) of tension; it also selects one of every two postinstalled anchors used to attach bracing wires to concrete and tests them for 440 lbf (1957 N) of tension.
 - b. When tested fasteners and anchors do not comply with requirements, testing agency tests those fasteners and anchors not previously tested until 20 pass consecutively and then resumes initial testing frequency.

- B. Suspended decorative grid hangers, anchors, and fasteners will be considered defective if they do not pass tests and inspections.
- C. Prepare tests and inspection reports.

3.5 CLEANING

- A. Clean exposed surfaces of suspended decorative grids, including trim and edge moldings, after removing strippable, temporary protective covering if any. Comply with manufacturer's written instructions for stripping of temporary protective covering, cleaning, and touchup of minor finish damage. Remove and replace grid components that cannot be successfully cleaned and repaired to permanently eliminate evidence of damage, including dented and deformed grids.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 09 65 13 - RESILIENT BASE AND ACCESSORIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Resilient rubber bases. (B & MB)
- B. Related Sections:
 - 1. Division 09 Section "Resilient Tile Flooring" for resilient floor tile.

1.3 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Samples for Initial Selection: For each type of product indicated.
- C. Samples for Verification: For each type of product indicated, in manufacturer's standard-size Samples but not less than 12 inches (300 mm) long, of each resilient product color, texture, and pattern required.
- D. Product Schedule: For resilient products: Use same designations indicated on Drawings.
- E. Samples for Initial Selection: For each type of product indicated.
- F. Samples for Verification: For each type of product indicated, in manufacturer's standard-size Samples but not less than 12 inches (300 mm) long, of each resilient product color, texture, and pattern required.
- G. Product Schedule: For resilient products. Use same designations indicated on Drawings.

1.4 QUALITY ASSURANCE

- A. Fire-Test-Response Characteristics: As determined by testing identical products according to ASTM E 648 or NFPA 253 by a qualified testing agency.
 - 1. Critical Radiant Flux Classification: Class I, not less than 0.45 W/sq. cm.

- B. Mockups: Provide resilient products with mockups specified in other Sections.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Store resilient products and installation materials in dry spaces protected from the weather, with ambient temperatures maintained within range recommended by manufacturer, but not less than 50 deg F (10 deg C) or more than 90 deg F (32 deg C).

1.6 PROJECT CONDITIONS

- A. Maintain ambient temperatures within range recommended by manufacturer, but not less than 70 deg F (21 deg C) or more than 95 deg F (35 deg C), in spaces to receive resilient products during the following time periods:
 - 1. 48 hours before installation.
 - 2. During installation.
 - 3. 48 hours after installation.
- B. Until Substantial Completion, maintain ambient temperatures within range recommended by manufacturer, but not less than 55 deg F (13 deg C) or more than 95 deg F (35 deg C)
- C. Install resilient products after other finishing operations, including painting, have been completed.

1.7 EXTRA MATERIALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Furnish not less than 10 linear feet (3 linear m) > for every 500 linear feet (150 linear m) or fraction thereof, of each type, color, pattern, and size of resilient product installed.

PART 2 - PRODUCTS

2.1 RESILIENT BASE (B-1)

- A. Resilient Base:
 - 1. Basis of Design Manufacturers: Subject to compliance with requirements, provide Roppe Pinnacle Rubber Base – Standard Toe or a comparable product by one of the following:
 - a. Endura Rubber Flooring; Division of Burke Industries, Inc.
 - b. Estrie Products International; American Biltrite (Canada) Ltd.
 - c. Flexco, Inc.
 - d. Mondo Rubber International, Inc.
 - e. Nora Rubber Flooring; Freudenberg Building Systems, Inc.
 - f. Johnsonite, Inc.

- B. Wall Base: ASTM F 1861.
 - 1. Roppe; Pinnacle Rubber Base – Standard Toe.
 - 2. Approved Equal.
- C. Type (Material Requirement): TS (rubber, vulcanized thermoset).
- D. Group (Manufacturing Method): I (solid, homogeneous).
- E. Style: B – Cove (Standard Toe) unless noted otherwise.
- F. Minimum Thickness: 1/8 inch (3.175mm).
- G. Height: 4 inches (101.6mm) typical.
- H. Lengths: Coils in manufacturer's standard length.
- I. Outside Corners: Premolded.
- J. Inside Corners: Premolded.
- K. Surface: Smooth.
- L. Color: As indicated on Finish Legend.

2.2 RESILIENT BASE (MB-1)

- A. Resilient Base:
 - 1. Basis of Design Manufacturers: Subject to compliance with requirements, provide Roppe Contours Wall Base or a comparable product by one of the following:
 - a. Endura Rubber Flooring; Division of Burke Industries, Inc.
 - b. Estrie Products International; American Biltrite (Canada) Ltd.
 - c. Flexco, Inc.
 - d. Mondo Rubber International, Inc.
 - e. Nora Rubber Flooring; Freudenberg Building Systems, Inc.
 - f. Johnsonite, Inc.
- B. Resilient Base Standard: ASTM F 1861.
 - 1. Material Requirement: Type TP (rubber, thermoplastic).
 - 2. Manufacturing Method: Group II (layered).
 - 3. Style: Cove - Fashion
- C. Minimum Thickness: 1/4 inch (6.35 mm).
- D. Height: 6 – 1/4 inches high.
- E. Lengths: Coils in manufacturer's standard length.

- F. Outside Corners: Premolded
- G. Inside Corners: Premolded
- H. Color: As indicated on Finish legend

2.3 INSTALLATION MATERIALS

- A. Trowelable Leveling and Patching Compounds: Latex-modified, portland cement based or blended hydraulic-cement-based formulation provided or approved by manufacturer for applications indicated.
- B. Adhesives: Water-resistant type recommended by manufacturer to suit resilient products and substrate conditions indicated.
 - 1. Use adhesives that comply with the following limits for VOC content when calculated according to 40 CFR 59, Subpart D (EPA Method 24):
 - a. Cove Base Adhesives: Not more than 50 g/L.
 - b. Rubber Floor Adhesives: Not more than 60 g/L.
- C. finish of width shown, of height required to protect exposed edges of tiles, and in maximum available lengths to minimize running joints.
- D. Floor Polish: Provide protective liquid floor polish products as recommended by resilient stair tread manufacturer.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, with Installer present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.
- B. Verify that finishes of substrates comply with tolerances and other requirements specified in other Sections and that substrates are free of cracks, ridges, depressions, scale, and foreign deposits that might interfere with adhesion of resilient products.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Prepare substrates according to manufacturer's written instructions to ensure adhesion of resilient products.
- B. Concrete Substrates for Resilient Stair Treads and Accessories: Prepare according to ASTM F 710.

1. Verify that substrates are dry and free of curing compounds, sealers, and hardeners.
2. Remove substrate coatings and other substances that are incompatible with adhesives and that contain soap, wax, oil, or silicone, using mechanical methods recommended by manufacturer. Do not use solvents.
3. Alkalinity and Adhesion Testing: Perform tests recommended by manufacturer.
4. Moisture Testing: Perform tests recommended by manufacturer[and as follows]. Proceed with installation only after substrates pass testing.
 - a. Perform anhydrous calcium chloride test, ASTM F 1869. Proceed with installation only after substrates have maximum moisture-vapor-emission rate of 3 lb of water/1000 sq. ft. (1.36 kg of water/92.9 sq. m) in 24 hours.
 - b. Perform relative humidity test using in situ probes, ASTM F 2170. Proceed with installation only after substrates have maximum 75 percent relative humidity level measurement.
- C. Fill cracks, holes, and depressions in substrates with trowelable leveling and patching compound and remove bumps and ridges to produce a uniform and smooth substrate.
- D. Do not install resilient products until they are same temperature as the space where they are to be installed.
 1. Move resilient products and installation materials into spaces where they will be installed at least 48 hours in advance of installation.
- E. Sweep and vacuum clean substrates to be covered by resilient products immediately before installation.

3.3 RESILIENT BASE INSTALLATION

- A. Comply with manufacturer's written instructions for installing resilient base.
- B. Apply resilient base to walls, columns, pilasters, casework and cabinets in toe spaces, and other permanent fixtures in rooms and areas where base is required.
- C. Install resilient base in lengths as long as practicable without gaps at seams and with tops of adjacent pieces aligned.
- D. Tightly adhere resilient base to substrate throughout length of each piece, with base in continuous contact with horizontal and vertical substrates.
- E. Do not stretch resilient base during installation.
- F. On masonry surfaces or other similar irregular substrates, fill voids along top edge of resilient base with manufacturer's recommended adhesive filler material.
- G. Preformed Corners: Install preformed corners before installing straight pieces.
- H. Job-Formed Corners:
 1. Outside Corners: Use straight pieces of maximum lengths possible. Form without producing discoloration (whitening) at bends.

2. Inside Corners: Use straight pieces of maximum lengths possible.

3.4 CLEANING AND PROTECTION

- A. Comply with manufacturer's written instructions for cleaning and protection of resilient products.
- B. Perform the following operations immediately after completing resilient product installation:
 1. Remove adhesive and other blemishes from exposed surfaces.
 2. Sweep and vacuum surfaces thoroughly.
 3. Damp-mop surfaces to remove marks and soil.
- C. Protect resilient products from mars, marks, indentations, and other damage from construction operations and placement of equipment and fixtures during remainder of construction period.
- D. Floor Polish: Remove soil, visible adhesive, and surface blemishes from resilient stair treads before applying liquid floor polish.
 1. Apply three coat(s).
- E. Cover resilient products until Substantial Completion.

END OF SECTION 09 65 13

SECTION 09 65 19 - RESILIENT TILE FLOORING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

- 1. Luxury vinyl floor tile. (LVT)
- 2. Vinyl composition floor tile. (VCT)

B. Related Sections:

- 1. Division 09 Section "Resilient Base and Accessories" for resilient base, reducer strips, and other accessories installed with resilient floor coverings.
- 2. Division 09 Section "Resilient Sheet Flooring" for resilient sheet floor coverings.

1.3 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: For each type of floor tile. Include floor tile layouts, edges, columns, doorways, enclosing partitions, built-in furniture, cabinets, and cutouts.
 - 1. Show details of special patterns.
- C. Samples for Initial Selection: For each type of floor tile indicated.
- D. Samples for Verification: Full-size units of each color and pattern of floor tile required.
 - 1. For heat-welding bead, manufacturer's standard-size Samples, but not less than 9 inches (230 mm) long, of each color required.
- E. Seam Samples: For seamless-installation technique indicated and for each flooring product, color, and pattern required; with seam running lengthwise and in center of 6-by-9-inch (150-by-230-mm) Sample applied to a rigid backing and prepared by Installer for this Project.
- F. Product Schedule: For floor tile. Use same designations indicated on Drawings.
- G. Qualification Data: For qualified Installer.
- H. Maintenance Data: For each type of floor tile to include in maintenance manuals.

1.4 QUALITY ASSURANCE

- A. Installer Qualifications: A qualified installer who employs workers for this Project who are competent in techniques required by manufacturer for floor tile installation and seaming method indicated.
 - 1. Engage an installer who employs workers for this Project who are trained or certified by manufacturer for installation techniques required.
- B. Fire-Test-Response Characteristics: As determined by testing identical products according to ASTM E 648 or NFPA 253 by a qualified testing agency.
 - 1. Critical Radiant Flux Classification: Class I, not less than 0.45 W/sq. cm.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Store floor tile and installation materials in dry spaces protected from the weather, with ambient temperatures maintained within range recommended by manufacturer, but not less than 50 deg F (10 deg C) or more than 90 deg F (32 deg C). Store floor tiles on flat surfaces.

1.6 PROJECT CONDITIONS

- A. Maintain ambient temperatures within range recommended by manufacturer, but not less than 70 deg F (21 deg C) or more than 95 deg F (35 deg C), in spaces to receive floor tile during the following time periods:
 - 1. 48 hours before installation.
 - 2. During installation.
 - 3. 48 hours after installation.
- B. Until Substantial Completion, maintain ambient temperatures within range recommended by manufacturer, but not less than 55 deg F (13 deg C) or more than 95 deg F (35 deg C).
- C. Close spaces to traffic during floor tile installation.
- D. Close spaces to traffic for 48 hours after floor tile installation.
- E. Install floor tile after other finishing operations, including painting, have been completed.

1.7 EXTRA MATERIALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Floor Tile: Furnish 1 box for every 50 boxes or fraction thereof, of each type, color, and pattern of floor tile installed.

PART 2 - PRODUCTS

2.1 LUXURY VINYL TILE (LVT-1)

- A. Basis of Design: Subject to compliance with requirements, provide Shaw Contract; Cultura; Crossing Paths 5.0 - 4392V Luxury Vinyl Tile or a comparable product by one of the following:
 - 1. Milliken Floor Covering, a Division of Milliken & Company.
 - 2. J+J Flooring, a Division of Engineered Floors, LLC
 - 3. Tarkett, S.A
- B. Reference specification - ASTM F 1700, "Standard Specification for Solid Vinyl Tile", Class III, Type B – Embossed Surface. Meets requirements for size, squareness, thickness, thickness of wear layer, residual indentation, resistance to chemicals, resistance to light and resistance to heat.
- C. Construction: Heavy Commercial Luxury Vinyl Tile with Fiberglass
- D. Class: III, Type B ASTM F1700
- E. Size: [18 in. x 18 in. (46 cm x 46 cm)]
- F. Wear layer thickness: 20 mil (0.02 in.) (0.51 mm).
- G. Thickness: 0.197 in. (5 mm).
- H. Edge Profile: Squared Edge
- I. Installation Type: Dry Back
- J. Installation: Direct Glue
- K. Pattern and Color: Refer to Finish Legend.

2.2 VINYL COMPOSITION FLOOR TILE (VCT-1).

- A. Basis of Design: Subject to compliance with requirements, provide Armstrong Flooring; Standard Excelon Imperial Texture Vinyl Composition Tile or a comparable product by one of the following:
 - 1. Azrock.
 - 2. Tarkett, Inc.
 - 3. Mannington Mills, Inc.
- B. Description: Tile composed of polyvinyl chloride resin, plasticizers, fillers, stabilizers and pigments with colors and texture dispersed uniformly throughout its entire thickness.
- C. Tile Standard: ASTM F 1066, Class 2, through-pattern tile.
- D. Thickness: 0.125 inch (3.2 mm).

- E. Size: 12 by 12 inches (305 by 305 mm).
- F. Colors and Patterns: Architect to select from Manufacturer's full range of colors.

2.3 INSTALLATION MATERIALS AND ACCESSORIES

- A. Trowelable Leveling and Patching Compounds: Latex-modified, portland cement based or blended hydraulic-cement-based formulation provided or approved by manufacturer for applications indicated.
- B. Adhesives: Water-resistant type recommended by manufacturer to suit floor tile and substrate conditions indicated.
 - 1. Use adhesives that comply with the following limits for VOC content when calculated according to 40 CFR 59, Subpart D (EPA Method 24):
 - a. VCT and Asphalt Tile Adhesives: Not more than 50 g/L.
 - b. Rubber Floor Adhesives: Not more than 60 g/L.
- C. Seamless-Installation Accessories:
 - 1. Heat-Welding Bead: Manufacturer's solid-strand product for heat welding seams.
 - a. Color: Match floor tile.
 - 2. Chemical-Bonding Compound: Manufacturer's product for chemically bonding seams.
 - a. Use chemical-bonding compound that has a VOC content of 350 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
- D. Floor Polish: Provide protective liquid floor polish products as recommended by manufacturer.
 - 1. Use sealant that has a VOC content of not more than 250 g/L when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
 - 2. Joint-Sealant Color: Match floor tile.
- E. Non-Ceramic Trim, TR-1-2
 - 1. Basis of Design: Subject to compliance with requirements, provide Schluter Systems; Vinpro-U or a comparable product by one of the following:
 - a. Fry Reglet Corporation
 - b. Laticrete International, Inc.
 - 2. Size: To suit application
 - 3. Finish: Architect to select from manufacturer's full range of colors.
 - 4. Applications:
 - a. Flooring Transition. Refer to Finish Plan

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, with Installer present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.
- B. Verify that finishes of substrates comply with tolerances and other requirements specified in other Sections and that substrates are free of cracks, ridges, depressions, scale, and foreign deposits that might interfere with adhesion of floor tile.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Prepare substrates according to manufacturer's written instructions to ensure adhesion of resilient products.
- B. Concrete Substrates: Prepare according to ASTM F 710.
 - 1. Verify that substrates are dry and free of curing compounds, sealers, and hardeners.
 - 2. Remove substrate coatings and other substances that are incompatible with adhesives and that contain soap, wax, oil, or silicone, using mechanical methods recommended by manufacturer. Do not use solvents.
 - 3. Alkalinity and Adhesion Testing: Perform tests recommended by manufacturer. Proceed with installation only after substrates pass testing.
 - 4. Moisture Testing: Perform tests recommended by manufacturer and as follows. Proceed with installation only after substrates pass testing.
 - a. Perform anhydrous calcium chloride test, ASTM F 1869. Proceed with installation only after substrates have maximum moisture-vapor-emission rate of 3 lb of water/1000 sq. ft. (1.36 kg of water/92.9 sq. m) in 24 hours.
 - b. Perform relative humidity test using in situ probes, ASTM F 2170. Proceed with installation only after substrates have a maximum 75% relative humidity level measurement.
- C. Access Flooring Panels: Remove protective film of oil or other coating using method recommended by access flooring manufacturer.
- D. Fill cracks, holes, and depressions in substrates with trowelable leveling and patching compound and remove bumps and ridges to produce a uniform and smooth substrate.
- E. Do not install floor tiles until they are same temperature as space where they are to be installed.
 - 1. Move resilient products and installation materials into spaces where they will be installed at least 48 hours in advance of installation.
- F. Sweep and vacuum clean substrates to be covered by resilient products immediately before installation.

3.3 FLOOR TILE INSTALLATION

- A. Comply with manufacturer's written instructions for installing floor tile.
- B. Lay out floor tiles from center marks established with principal walls, discounting minor offsets, so tiles at opposite edges of room are of equal width. Adjust as necessary to avoid using cut widths that equal less than one-half tile at perimeter.
 - 1. Lay tiles square with room axis and in pattern indicated.
- C. Match floor tiles for color and pattern by selecting tiles from cartons in the same sequence as manufactured and packaged, if so numbered. Discard broken, cracked, chipped, or deformed tiles.
 - 1. Lay tiles with grain running in one direction.
- D. Scribe, cut, and fit floor tiles to butt neatly and tightly to vertical surfaces and permanent fixtures including built-in furniture, cabinets, pipes, outlets, and door frames.
- E. Extend floor tiles into toe spaces, door reveals, closets, and similar openings. Extend floor tiles to center of door openings.
- F. Maintain reference markers, holes, and openings that are in place or marked for future cutting by repeating on floor tiles as marked on substrates. Use chalk or other nonpermanent, nonstaining marking device.
- G. Install floor tiles on covers for telephone and electrical ducts, building expansion-joint covers, and similar items in finished floor areas. Maintain overall continuity of color and pattern between pieces of tile installed on covers and adjoining tiles. Tightly adhere tile edges to substrates that abut covers and to cover perimeters.
- H. Adhere floor tiles to flooring substrates using a full spread of adhesive applied to substrate to produce a completed installation without open cracks, voids, raising and puckering at joints, telegraphing of adhesive spreader marks, and other surface imperfections.
- I. Seamless Installation:
 - 1. Heat-Welded Seams: Comply with ASTM F 1516. Rout joints and heat weld with welding bead to permanently fuse sections into a seamless floor covering. Prepare, weld, and finish seams to produce surfaces flush with adjoining floor covering surfaces.
 - 2. Chemically Bonded Seams: Bond seams with chemical-bonding compound to permanently fuse sections into a seamless floor covering. Prepare seams and apply compound to produce tightly fitted seams without gaps, overlays, or excess bonding compound on floor covering surfaces.

3.4 CLEANING AND PROTECTION

- A. Comply with manufacturer's written instructions for cleaning and protection of floor tile.
- B. Perform the following operations immediately after completing floor tile installation:

1. Remove adhesive and other blemishes from exposed surfaces.
 2. Sweep and vacuum surfaces thoroughly.
 3. Damp-mop surfaces to remove marks and soil.
- C. Protect floor tile products from mars, marks, indentations, and other damage from construction operations and placement of equipment and fixtures during remainder of construction period.
- D. Floor Polish: Remove soil, visible adhesive, and surface blemishes from floor tile surfaces before applying liquid floor polish.
1. Apply three coat(s).
- E. Joint Sealant: Apply sealant to resilient terrazzo floor tile perimeter and around columns, at door frames, and at other joints and penetrations.
- F. Sealers and Finish Coats: Remove soil, visible adhesive, and surface blemishes from resilient terrazzo floor tile surfaces before applying liquid cleaners, sealers, and finish products.
1. Sealer: Apply two base coats of liquid sealer.
 2. Finish: Apply three coats of liquid floor finish.
- G. Cover floor tile until Substantial Completion.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 09 68 13 - CARPET TILE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes modular, tufted carpet tile. (CPT)
- B. Related Sections include the following:
 - 1. Division 9 Section "Resilient Tile Flooring, Resilient Base and Accessories" for resilient wall base and accessories installed with carpet tile.

1.3 SUBMITTALS

- A. Product Data: For each type of product indicated. Include manufacturer's written data on physical characteristics, durability, and fade resistance. Include installation recommendations for each type of substrate.
- B. Shop Drawings: Show the following:
 - 1. Columns, doorways, enclosing walls or partitions, built-in cabinets, and locations where cutouts are required in carpet tiles.
 - 2. Existing flooring materials to be removed.
 - 3. Existing flooring materials to remain.
 - 4. Carpet tile type, color, and dye lot.
 - 5. Type of subfloor.
 - 6. Type of installation.
 - 7. Pattern of installation.
 - 8. Pattern type, location, and direction.
 - 9. Pile direction.
 - 10. Type, color, and location of insets and borders.
 - 11. Type, color, and location of edge, transition, and other accessory strips.
 - 12. Transition details to other flooring materials.
- C. Samples: For each of the following products and for each color and texture required. Label each Sample with manufacturer's name, material description, color, pattern, and designation indicated on Drawings and in schedules.
 - 1. Carpet Tile: Full-size Sample.
 - 2. Exposed Edge, Transition, and other Accessory Stripping: 12-inch- (300-mm-) long Samples.

- D. Product Schedule: For carpet tile. Use same designations indicated on Drawings.
- E. Qualification Data: For Installer.
- F. Product Test Reports: Based on evaluation of comprehensive tests performed by a qualified testing agency.
- G. Maintenance Data: For carpet tiles to include in maintenance manuals. Include the following:
 - 1. Methods for maintaining carpet tile, including cleaning and stain-removal products and procedures and manufacturer's recommended maintenance schedule.
 - 2. Precautions for cleaning materials and methods that could be detrimental to carpet tile.
- H. Warranty: Special warranty specified in this Section.

1.4 QUALITY ASSURANCE

- A. Installer Qualifications: An experienced installer who is certified by the Floor Covering Installation Board or who can demonstrate compliance with its certification program requirements.
- B. Fire-Test-Response Characteristics: Provide products with the critical radiant flux classification indicated in Part 2, as determined by testing identical products per ASTM E 648 by an independent testing and inspecting agency acceptable to authorities having jurisdiction.
- C. Mockups: Before installing carpet tile, build mockups to verify selections made under sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.
 - 1. Approved mockups may become part of the completed Work if undamaged at time of Substantial Completion.
- D. Preinstallation Conference: Conduct conference at Project site to comply with requirements in Division 1 Section "Project Management and Coordination."

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Comply with CRI 104, Section 5, "Storage and Handling."

1.6 PROJECT CONDITIONS

- A. Comply with CRI 104, Section 7.2, "Site Conditions; Temperature and Humidity" and Section 7.12, "Ventilation."
- B. Environmental Limitations: Do not install carpet tiles until wet work in spaces is complete and dry, and ambient temperature and humidity conditions are maintained at the levels indicated for Project when occupied for its intended use.

- C. Do not install carpet tiles over concrete slabs until slabs have cured and are sufficiently dry to bond with adhesive and concrete slabs have pH range recommended by carpet tile manufacturer.
- D. Where demountable partitions or other items are indicated for installation on top of carpet tiles, install carpet tiles before installing these items.

1.7 WARRANTY

- A. Special Warranty for Carpet Tiles: Manufacturer's standard form in which manufacturer agrees to repair or replace components of carpet tile installation that fail in materials or workmanship within specified warranty period.
 - 1. Warranty does not include deterioration or failure of carpet tile due to unusual traffic, failure of substrate, vandalism, or abuse.
 - 2. Failures include, but are not limited to, more than 10 percent loss of face fiber, edge raveling, snags, runs, loss of tuft bind strength, dimensional stability, excess static discharge, and delamination.
 - 3. Warranty Period: 10 years from date of Substantial Completion.

1.8 EXTRA MATERIALS

- A. Furnish extra materials described below, before installation begins, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Carpet Tile: Full-size units equal to 5 percent of amount installed for each type indicated, but not less than 10 sq. yd. (8.3 sq. m).

PART 2 - PRODUCTS

2.1 CARPET TILE – CPT-1 (WALK-OFF CARPET)

- A. Manufacturers: Basis-of-Design Product: Subject to compliance with requirements, provide Shaw Carpet Tile, "Bon Jour II Tile" 5T032 or a comparable product by one of the following:
 - 1. Mannington Commercial, a Division of Mannington Mills, Inc.
 - 2. Interface, Inc.
 - 3. Bently Mills. Inc.
- B. Construction: Needlebond Rib
- C. Fiber: Pet Polyester
- D. Dye Method: 100% Solution Dyed
- E. Primary Backing: Polypropylene
- F. Secondary Backing: Ecoworx Tile
- G. Protective Treatments: Manufacturer's Standard
- H. Size: 24" x 24" (61 cm x 61 cm)
- I. Stitches: 0.0 per inch (0.5 per 10 cm)

- J. Density: 5284 oz/yd³ (0.196 g/cm³)
- K. Thickness: 0.451 in (11.46 mm)
- L. Tufted Weight: 50.5 oz/yd² (1,712.24 g/m²)
- M. Color: Refer to Finish Legend

2.2 CARPET TILE – CPT-2

- A. Manufacturers: Basis-of-Design Product: Subject to compliance with requirements, provide Shaw Carpet Tile, “Daydreamer” 5T593 or a comparable product by one of the following:
 - 1. Mannington Commercial, a Division of Mannington Mills, Inc.
 - 2. Interface, Inc.
 - 3. Bently Mills. Inc.
- B. Construction: Multi-Level Pattern Loop
- C. Fiber: Ecosolution Q100 Nylon
- D. Dye Method: 100% Solution Dyed
- E. Primary Backing: Non Woven
- F. Secondary Backing: Ecworx Tile
- G. Protective Treatments: Manufacturer’s Standard
- H. Size: 24” x 24” (61 cm x 61 cm)
- I. Gauge: 1/12” (47.2 per 10 cm)
- J. Stitches: 9.0 per inch (36.0 per 10 cm)
- K. Density: 6545 oz/yd³ (0.242 g/cm³)
- L. Thickness: 0.244 in (6.2 mm)
- M. Tufted Weight: 18 oz/yd² (610.3 g/m²)
- N. Color: Refer to Finish Legend

2.3 CARPET TILE – CPT-3

- A. Manufacturers: Basis-of-Design Product: Subject to compliance with requirements, provide Shaw Carpet Tile, “Hand in Hand Tile” 5T450 or a comparable product by one of the following:
 - 1. Mannington Commercial, a Division of Mannington Mills, Inc.
 - 2. Interface, Inc.
 - 3. Bently Mills. Inc.
- B. Construction: Multi-Level Pattern Loop
- C. Fiber: Ecosolution Q100 Nylon
- D. Dye Method: 100% Solution Dyed
- E. Primary Backing: Synthetic
- F. Secondary Backing: Ecworx Tile
- G. Protective Treatments: Manufacturer’s Standard
- H. Size: 18” x 36” (46 cm x 91 cm)
- I. Gauge: 1/10” (39.4 per 10 cm)
- J. Stitches: 9.0 per inch (36.5 per 10 cm)
- K. Density: 7448 oz/yd³ (0.276 g/cm³)
- L. Thickness: 0.286 in (7.26 mm)
- M. Tufted Weight: 24 oz/yd² (813.7 g/m²)
- N. Color: Refer to Finish Legend

2.4 INSTALLATION ACCESSORIES

- A. Trowelable Leveling and Patching Compounds: Latex-modified, hydraulic-cement-based formulation provided or recommended by carpet tile manufacturer.
- B. Adhesives: Water-resistant, mildew-resistant, non-staining, pressure-sensitive type to suit products and subfloor conditions indicated, that complies with flammability requirements for installed carpet tile and is recommended by carpet tile manufacturer for releasable installation.
 - 1. VOC Limits: Provide adhesives with VOC content not more than 50 g/L when calculated according to 40 CFR 59, Subpart D (EPA method 24).

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for maximum moisture content, alkalinity range, installation tolerances, and other conditions affecting carpet tile performance. Examine carpet tile for type, color, pattern, and potential defects.
- B. Concrete Subfloors: Verify that concrete slabs comply with ASTM F 710 and the following:
 - 1. Slab substrates are dry and free of curing compounds, sealers, hardeners, and other materials that may interfere with adhesive bond. Determine adhesion and dryness characteristics by performing bond and moisture tests recommended by carpet tile manufacturer.
 - 2. Subfloor finishes comply with requirements specified in Division 3 Section "Cast-in-Place Concrete" for slabs receiving carpet tile.
 - 3. Subfloors are free of cracks, ridges, depressions, scale, and foreign deposits.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. General: Comply with CRI 104, Section 6.2, "Site Conditions; Floor Preparation," and with carpet tile manufacturer's written installation instructions for preparing substrates indicated to receive carpet tile installation.
- B. Use trowelable leveling and patching compounds, according to manufacturer's written instructions, to fill cracks, holes, depressions, and protrusions in substrates. Fill or level cracks, holes and depressions 1/8 inch (3 mm) wide or wider and protrusions more than 1/32 inch (0.8 mm), unless more stringent requirements are required by manufacturer's written instructions.
- C. Remove coatings, including curing compounds, and other substances that are incompatible with adhesives and that contain soap, wax, oil, or silicone, without using solvents. Use mechanical methods recommended in writing by carpet tile manufacturer.

- D. Clean metal substrates of grease, oil, soil and rust, and prime if directed by adhesive manufacturer. Rough sand painted metal surfaces and remove loose paint. Sand aluminum surfaces, to remove metal oxides, immediately before applying adhesive.
- E. Broom and vacuum clean substrates to be covered immediately before installing carpet tile.

3.3 INSTALLATION

- A. General: Comply with CRI 104, Section 14, "Carpet Modules," and with carpet tile manufacturer's written installation instructions.
- B. Installation Method: As recommended in writing by carpet tile manufacturer.
- C. Maintain dye lot integrity. Do not mix dye lots in same area.
- D. Cut and fit carpet tile to butt tightly to vertical surfaces, permanent fixtures, and built-in furniture including cabinets, pipes, outlets, edgings, thresholds, and nosings. Bind or seal cut edges as recommended by carpet tile manufacturer.
- E. Extend carpet tile into toe spaces, door reveals, closets, open-bottomed obstructions, removable flanges, alcoves, and similar openings.
- F. Maintain reference markers, holes, and openings that are in place or marked for future cutting by repeating on finish flooring as marked on subfloor. Use nonpermanent, nonstaining marking device.
- G. Install pattern parallel to walls and borders.
- H. Stagger joints of carpet tiles so carpet tile grid is offset from access flooring panel grid. Do not fill seams of access flooring panels with carpet adhesive; keep seams free of adhesive.

3.4 CLEANING AND PROTECTION

- A. Perform the following operations immediately after installing carpet tile:
 - 1. Remove excess adhesive, seam sealer, and other surface blemishes using cleaner recommended by carpet tile manufacturer.
 - 2. Remove yarns that protrude from carpet tile surface.
 - 3. Vacuum carpet tile using commercial machine with face-beater element.
- B. Protect installed carpet tile to comply with CRI 104, Section 16, "Protection of Indoor Installations."
- C. Protect carpet tile against damage from construction operations and placement of equipment and fixtures during the remainder of construction period. Use protection methods indicated or recommended in writing by carpet tile manufacturer.

END OF SECTION

SECTION 09 91 00 - PAINTING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.
- B. This Section includes surface preparation and the application of paint systems on the following exterior substrates:
 - 1. Gypsum Board.
 - 2. Hollow metal door frames.
 - 3. Mechanical and electrical work (MEP)
- C. Related Sections include the following:
 - 1. Division 5 Sections for shop priming of metal substrates with primers specified in this Section.
 - 2. Division 6 Sections for shop priming carpentry with primers specified in this Section.

1.4 SUBMITTALS

- A. Product Data: For each type of product indicated.
- C. Samples for Initial Selection: Upon request, for each type of topcoat product indicated.
- D. Samples for Verification: For each type of paint system and each color and gloss of topcoat indicated.
 - 1. Submit Samples on rigid backing, 8 inches (200 mm) square.
 - 2. Step coats on Samples to show each coat required for system.
 - 3. Label each coat of each Sample.
 - 4. Label each Sample for location and application area.
 - 5. Label each sample as to date painted.
- E. Product List: For each product indicated, include the following:
 - 1. Cross-reference to paint system and locations of application areas. Use same designations indicated on Drawings and in schedules.
 - 2. Printout of current "MPI Approved Products List" for each product category specified in Part 2, with the proposed product highlighted.

1.5 QUALITY ASSURANCE

A. MPI Standards:

1. Products: Complying with MPI standards indicated and listed in "MPI Approved Products List."
2. Preparation and Workmanship: Comply with requirements in "MPI Architectural Painting Specification Manual" for products and paint systems indicated.

B. Mockups: Apply benchmark samples of each paint system indicated and each color and finish selected to verify preliminary selections made under sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Store materials not in use in tightly covered containers in well-ventilated areas with ambient temperatures continuously maintained at not less than 45 deg F (7 deg C).

1. Maintain containers in clean condition, free of foreign materials and residue.
2. Remove rags and waste from storage areas daily.

1.7 PROJECT CONDITIONS

A. Apply paints only when temperature of surfaces to be painted and ambient air temperatures are between 50 and 95 deg F (10 and 35 deg C).

B. Do not apply paints in snow, rain, fog, or mist; when relative humidity exceeds 85 percent; at temperatures less than 5 deg F (3 deg C) above the dew point; or to damp or wet surfaces.

1.8 EXTRA MATERIALS

A. Furnish extra materials described below that are from same production run (batch mix) as materials applied and that are packaged for storage and identified with labels describing contents. Furnish an additional 2 percent, but not less than 1 gal. of each material and color applied.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Basis of Manufacturers (Interior Gypsum Wall and Hollow Metal Frames Finishes): Subject to compliance with requirements, provide products by one of the following:

1. Sherwin-Williams Company (Basis of Design).
2. Benjamin Moore & Co.
3. Duron, Inc.
4. Finnaren & Haley Inc (F&H)
5. M.A.B. Paints.

6. Architect approved equal.

2.2 PAINT, GENERAL

A. Material Compatibility:

1. Provide materials for use within each paint system that are compatible with one another and substrates indicated, under conditions of service and application as demonstrated by manufacturer, based on testing and field experience.
2. For each coat in a paint system, provide products recommended in writing by manufacturers of topcoat for use in paint system and on substrate indicated.

B. VOC Content of Field-Applied Interior Paints and Coatings: Provide products that comply with the following limits for VOC content, exclusive of colorants added to a tint base, when calculated according to 40 CFR 59, Subpart D (EPA Method 24); these requirements do not apply to paints and coatings that are applied in a fabrication or finishing shop:

1. Flat Paints, Coatings, and Primers: VOC content of not more than 50 g/L.
2. Non-flat Paints, Coatings, and Primers: VOC content of not more than 150 g/L.
3. Anti-Corrosive and Anti-Rust Paints Applied to Ferrous Metals: VOC not more than 250 g/L.
4. Floor Coatings: VOC not more than 100 g/L.
5. Shellacs, Clear: VOC not more than 730 g/L.
6. Shellacs, Pigmented: VOC not more than 550 g/L.

C. Colors: Match Architect's samples or as indicated in a color schedule.

- P-1: Sherwin Williams #SW Color as indicated on Finish Legend.
- P-2: Sherwin Williams #SW Color as indicated on Finish Legend.
- P-3: Sherwin Williams #SW Color as indicated on Finish Legend.
- P-4: Sherwin Williams #SW Color as indicated on Finish Legend.
- P-5: Sherwin Williams #SW Color as indicated on Finish Legend.

2.3 PRIMERS/SEALERS

A. Alkali-Resistant Primer: MPI #3: Factory-formulated water based, alkali-resistant acrylic-latex interior primer for interior plaster applications.

1. VOC Content: E Range of E2.

B. Interior Latex Primer/Sealer: MPI #50.

1. VOC Content: E Range of E2.
2. Environmental Performance Rating: EPR 2.

C. Interior Alkyd Primer/Sealer: MPI #45.

1. VOC Content: E Range of E2.

- D. Wood-Knot Sealer: Sealer recommended in writing by topcoat manufacturer for use in paint systems indicated.

2.4 METAL PRIMERS

- A. Alkyd Anticorrosive Metal Primer: MPI #79.
 - 1. VOC Content: E Range of E2.
- B. Waterborne Galvanized-Metal Primer: MPI #134.
 - 1. VOC Content: E Range of E2.
- C. Quick-Drying Primer for Aluminum: MPI #95.
 - 1. VOC Content: E Range of E2.
- D. Rust-Inhibitive Primer (Water Based): MPI #107.
 - 1. VOC Content: E Range of E2.
 - 2. Environmental Performance Rating: EPR 2.
- E. Vinyl Wash Primer: MPI #80.

2.5 WOOD PRIMERS

- A. Interior Latex-Based Wood Primer: MPI #39.
 - 1. VOC Content: E Range of E2.
 - 2. Environmental Performance Rating: EPR 2.

2.6 LATEX PAINTS

- A. Interior Latex (Flat): MPI #53 (Gloss Level 1).
 - 1. VOC Content: E Range of E1.
 - 2. Environmental Performance Rating: EPR 1.5.
- B. Interior Latex (Eggshell): MPI #52 (Gloss Level 3).
 - 1. VOC Content: E Range of E1.
 - 2. Environmental Performance Rating: EPR 2.
- C. Interior Latex (Semi-gloss): MPI #54 (Gloss Level 5).
 - 1. VOC Content: E Range of E1.
 - 2. Environmental Performance Rating: EPR 2.
- D. Interior Latex (Gloss): MPI #114 (Gloss Level 6, except minimum gloss of 65 units at 60 deg).

1. VOC Content: E Range of E1.
2. Environmental Performance Rating: EPR 2.

2.7 DRY FOG/FALL COATINGS

- A. Flat, Latex Dry Fog/Fall (MPI #118): Provide a water-based, emulsion-type, fast-drying coating used on overhead metal and other surfaces for application methods by airless and/or conventional spray equipment. Overspray will dry to a sweepable powder over a short distance for easier clean up.

1. VOC Content: E Range of E1.

- B. Flat Dry-Fall for Galvanized Steel (water based) MPI # 133: Provide a waterborne coating, designed for direct application to cleaned, interior overhead galvanized metal surfaces, for application methods by airless and/or conventional spray equipment. Overspray will dry to a sweepable powder over a short distance for easier clean up.

1. VOC Content: E Range of E1.

2.8 WOOD STAINS

- A. Basis of Manufacturers (Wood Stains): Subject to compliance with requirements, provide products by one of the following:

1. Minwax, a Division of Sherwin-Williams Company (Basis of Design).
2. BEHR
3. Vararhane.
4. Architect approved equal.

- B. Interior Oil based Wood Stain: Minwax Performance Series Tintable Wood Stain 250 VOC MPI #90

1. VOC Content: <250 g/L; ,2.08 lb/gal

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Applicator present, for compliance with requirements for maximum moisture content and other conditions affecting performance of work.

- B. Maximum Moisture Content of Substrates: When measured with an electronic moisture meter as follows:

1. Concrete: 12 percent.
2. Masonry (Clay and CMU): 12 percent.
3. Wood: 15 percent.
4. Plaster: 12 percent.
5. Gypsum Board: 12 percent.

- C. Verify suitability of substrates, including surface conditions and compatibility with existing finishes and primers.
- D. Begin coating application only after unsatisfactory conditions have been corrected and surfaces are dry.
 - 1. Beginning coating application constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Comply with manufacturer's written instructions and recommendations in "MPI Architectural Painting Specification Manual" applicable to substrates and paint systems indicated.
- B. Remove plates, machined surfaces, and similar items already in place that are not to be painted. If removal is impractical or impossible because of size or weight of item, provide surface-applied protection before surface preparation and painting.
 - 1. After completing painting operations, use workers skilled in the trades involved to reinstall items that were removed. Remove surface-applied protection if any.
 - 2. Do not paint over labels of independent testing agencies or equipment name, identification, performance rating, or nomenclature plates.
- C. Clean substrates of substances that could impair bond of paints, including dirt, oil, grease, and incompatible paints and encapsulants.
 - 1. Remove incompatible primers and re-prime substrate with compatible primers as required to produce paint systems indicated.
 - 2. Use abrasive blast-cleaning methods if recommended by paint manufacturer.
 - 3. Determine alkalinity and moisture content of surfaces by performing appropriate tests. If surfaces are sufficiently alkaline to cause the finish paint to blister and burn, correct this condition before application. Do not paint surfaces if moisture content exceeds that permitted in manufacturer's written instructions.
- D. Steel Substrates: Remove rust and loose mill scale. Clean using methods recommended in writing by paint manufacturer.
- E. Ferrous Metals: Clean un-galvanized ferrous-metal surfaces that have not been shop coated; remove oil, grease, dirt, loose mill scale, and other foreign substances. Use solvent or mechanical cleaning methods that comply with SSPC's recommendations.
 - 1. Blast steel surfaces clean as recommended by paint system manufacturer and according to SSPC-SP 6/NACE No. 3.
 - 2. Treat bare and sandblasted or pickled clean metal with a metal treatment wash coat before priming.

3. Touch up bare areas and shop-applied prime coats that have been damaged. Wire-brush, clean with solvents recommended by paint manufacturer, and touch up with same primer as the shop coat.

F. Wood Substrates:

1. Scrape and clean knots, and apply coat of knot sealer before applying primer.
2. Sand surfaces that will be exposed to view, and dust off.
3. Prime edges, ends, faces, undersides, and backsides of wood.
4. After priming, fill holes and imperfections in the finish surfaces with stainable wood filler. Sand smooth when dried.

3.3 APPLICATION

A. Apply paints according to manufacturer's written instructions.

1. Use applicators and techniques suited for paint and substrate indicated.
2. Paint surfaces behind movable items same as similar exposed surfaces. Before final installation, paint surfaces behind permanently fixed items with prime coat only.

B. Tint each undercoat a lighter shade to facilitate identification of each coat if multiple coats of same material are to be applied. Tint undercoats to match color of topcoat, but provide sufficient difference in shade of undercoats to distinguish each separate coat.

C. If undercoats or other conditions show through topcoat, apply additional coats until cured film has a uniform paint finish, color, and appearance.

D. Apply paints to produce surface films without cloudiness, spotting, holidays, laps, brush marks, roller tracking, runs, sags, ropiness, or other surface imperfections. Cut in sharp lines and color breaks.

E. Application Procedures: Apply paints and coatings by brush, roller, spray, or other applicators according to manufacturer's written instructions.

1. Brushes: Use brushes best suited for type of material applied. Use brush of appropriate size for surface or item being painted.
2. Rollers: Use rollers of carpet, velvet-back, or high-pile sheep's wool as recommended by manufacturer for material and texture required.
3. Spray Equipment: Use airless spray equipment with orifice size as recommended by manufacturer for material and texture required.

F. Minimum Coating Thickness: Apply paint materials no thinner than manufacturer's recommended spreading rate to achieve dry film thickness indicated. Provide total dry film thickness of the entire system as recommended by manufacturer.

G. Overhead Structure and Exposed Ceiling Steel and Galvanized-Metal Substrates:

1. Prep substrate as required minimum. Repair existing primed surfaces.

2. Galvanized surface shall be prepared by either solvent cleaning and test for chromate passivation, with an SSPC SP 7 Brush-off blast cleaning if required or chemical-etching cleaners may be substituted for solvent washing and SSPC-SP 7 cleaning.
3. Apply primer coat to unprimed surfaces.
4. Paint exposed metal deck, structural steel, conduit, un-insulated ductwork and piping, and other mechanical and electrical work in finish and occupied rooms. Protect surfaces not to be painted. Dry-Fall painting shall not be required in mechanical-electrical equipment, custodial, storage and similar rooms.

3.4 CLEANING AND PROTECTION

- A. At end of each workday, remove rubbish, empty cans, rags, and other discarded materials from Project site.
- B. After completing paint application, clean spattered surfaces. Remove spattered paints by washing, scraping, or other methods. Do not scratch or damage adjacent finished surfaces.
- C. Protect work of other trades against damage from paint application. Correct damage to work of other trades by cleaning, repairing, replacing, and refinishing, as approved by Architect, and leave in an undamaged condition.
- D. At completion of construction activities of other trades, touch up and restore damaged or defaced painted surfaces.

3.5 INTERIOR PAINTING SCHEDULE

- A. Wood Substrates: Including wood trim, architectural woodwork and windows.
 1. Latex System:
 - a. Prime Coat: Primer, latex, for interior wood, MPI #39.
 - b. Intermediate Coat: Latex, interior, matching topcoat.
 - c. Topcoat: Latex, interior, semi-gloss, (Gloss Level 5), MPI #54.
 2. Institutional Low-Odor/VOC Latex System:
 - a. Prime Coat: Primer, latex, for interior wood, MPI #39.
 - b. Intermediate Coat: Latex, interior, institutional low odor/VOC, matching topcoat.
 - c. Topcoat: Latex, interior, institutional low odor/VOC, semi-gloss (Gloss Level 5), MPI #147.
- B. Dressed Lumber Substrates: Including architectural woodwork.
 1. Latex System: MPI INT 6.3T.
 - a. Prime Coat: Interior latex-based wood primer.
 - b. Intermediate Coat: Interior latex matching topcoat.
 - c. Topcoat: Interior latex (semi-gloss).

C. Gypsum Board Substrates:

1. Latex System: MPI INT 9.2A.
 - a. Prime Coat: Interior latex primer/sealer
 - b. Intermediate Coat: Interior latex matching topcoat.
 - c. Topcoat: Interior latex. (Refer to finish schedule for gloss level.)

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 10 14 19 - DIMENSIONAL LETTER SIGNAGE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Cast dimensional characters.

1.3 DEFINITIONS

- A. Illuminated: Illuminated by lighting source integrally constructed as part of the sign unit.

1.4 COORDINATION

- A. Furnish templates for placement of electrical service embedded in permanent construction by other installers.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: For dimensional letter signs
 - 1. Include fabrication and installation details and attachments to other work.
 - 2. Show sign mounting heights, locations of supplementary supports to be provided by others, and accessories.
 - 3. Show message list, typestyles, graphic elements, and layout for each sign at least half size
 - 4. Show locations of electrical service connections.
- C. Samples for Initial Selection: For each type of sign assembly, exposed component, and exposed finish.
 - 1. Include representative Samples of available typestyles and graphic symbols.
- D. Mock-Up
 - 1. A Full-Size mockup of 2 signs minimum will be created for review and acceptance by DTCC prior to fabrication and installation.

1.6 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer and manufacturer.
- B. Sample Warranty: For special warranty.

1.7 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For signs to include in maintenance manuals.

1.8 FIELD CONDITIONS

- A. Field Measurements: Verify locations of electrical service embedded in permanent construction by other installers by field measurements before fabrication, and indicate measurements on Shop Drawings.

1.9 WARRANTY

- A. Special Warranty: Manufacturer agrees to repair or replace components of signs that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Deterioration of finishes beyond normal weathering.
 - b. Separation or delamination of sheet materials and components.
 - 2. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 DIMENSIONAL CHARACTERS

- A. Cutout Characters: Characters with uniform faces; square-cut, smooth, eased edges; precisely formed lines and profiles; and as follows:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ACE Sign Systems, Inc.
 - b. APCO Graphics, Inc.
 - c. A. R. K. Ramos Signage Systems.
 - d. ASI Sign Systems, Inc.
 - e. Charleston Industries, Inc.
 - f. Diskey Sign Company.
 - g. Gemini Incorporated.
 - h. InPro Corporation.
 - i. Matthews International Corporation; Bronze Division.
 - j. Metal Arts; Division of L & H Mfg. Co.

- k. Metallic Arts.
- l. Nelson-Harkins Industries.
- m. Southwell Company (The).
- n. Steel Art Company.

- 2. Character Material: Sheet or plate stainless steel. Refer to Drawings for Locations.
- 3. Character Height: Refer to Drawings – Interior Elevations A431 and Casework Elevations A441
- 4. Thickness: Manufacturer's standard for size of character
- 5. Finishes:
 - a. Stainless-Steel Finish: Directional Satin Finish: No. 4.
- 6. Mounting: Concealed studs or back bar assembly
- 7. Typeface: Myriad Pro unless noted otherwise
 - a. Delaware Technical Community College logo to be coordinated and approved by DTCC Marketing team.

2.2 DIMENSIONAL CHARACTER MATERIALS

- A. Stainless-Steel Sheet: ASTM A 240/A 240M or ASTM A 666, Type 304 stretcher-leveled standard of flatness.

2.3 ACCESSORIES

- A. Fasteners and Anchors: Manufacturer's standard as required for secure anchorage of signage, noncorrosive and compatible with each material joined, and complying with the following:
 - 1. Use concealed fasteners and anchors unless indicated to be exposed.
 - 2. Exposed Metal-Fastener Components, General:
 - a. Fabricated from same basic metal and finish of fastened metal unless otherwise indicated.
 - b. Fastener Heads: For nonstructural connections, use flathead or oval countersunk screws and bolts with tamper-resistant Allen-head, spanner-head or one-way-head slots unless otherwise indicated.
 - 3. Sign Mounting Fasteners:
 - a. Concealed Studs: Concealed (blind), threaded studs welded or brazed to back of sign material, screwed into back of sign assembly, or screwed into tapped lugs cast integrally into back of cast sign material, unless otherwise indicated.
 - b. Through Fasteners: Exposed metal fasteners matching sign finish, with type of head indicated, installed in predrilled holes.
- B. Two-Face Tape: Manufacturer's standard high-bond, foam-core tape, 0.045 inch (1.14 mm) thick, with adhesive on both sides.

2.4 FABRICATION

- A. General: Provide manufacturer's standard sign assemblies according to requirements indicated.
1. Preassemble signs and assemblies in the shop to greatest extent possible. Disassemble signs and assemblies only as necessary for shipping and handling limitations. Clearly mark units for reassembly and installation; apply markings in locations concealed from view after final assembly.
 2. Mill joints to a tight, hairline fit. Form assemblies and joints exposed to weather to resist water penetration and retention.
 3. Comply with AWS for recommended practices in welding and brazing. Provide welds and brazes behind finished surfaces without distorting or discoloring exposed side. Clean exposed welded and brazed connections of flux, and dress exposed and contact surfaces.
 4. Conceal connections if possible; otherwise, locate connections where they are inconspicuous.
 5. Internally brace signs for stability and for securing fasteners.
 6. Provide rebates, lugs, and brackets necessary to assemble components and to attach to existing work. Drill and tap for required fasteners. Use concealed fasteners where possible; use exposed fasteners that match sign finish.
 7. Castings: Fabricate castings free of warp, cracks, blowholes, pits, scale, sand holes, and other defects that impair appearance or strength. Grind, wire brush, sandblast, and buff castings to remove seams, gate marks, casting flash, and other casting marks before finishing.
- B. Brackets: Fabricate brackets, fittings, and hardware for bracket-mounted signs to suit sign construction and mounting conditions indicated. Modify manufacturer's standard brackets as required.
1. Stainless-Steel Brackets: Factory finish brackets to match sign background finish unless otherwise indicated.

2.5 GENERAL FINISH REQUIREMENTS

- A. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
- B. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.
- C. Directional Finishes: Run grain with long dimension of each piece and perpendicular to long dimension of finished trim or border surface unless otherwise indicated.

2.6 STAINLESS-STEEL FINISHES

- A. Surface Preparation: Remove tool and die marks and stretch lines, or blend into finish.
- B. Polished Finishes: Grind and polish surfaces to produce uniform finish, free of cross scratches.
1. When polishing is completed, passivate and rinse surfaces. Remove embedded foreign matter and leave surfaces chemically clean.

2. Directional Satin Finish: No. 4.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of signage work.
- B. Verify that sign-support surfaces are within tolerances to accommodate signs without gaps or irregularities between backs of signs and support surfaces unless otherwise indicated.
- C. Verify that electrical service is correctly sized and located to accommodate signs.
- D. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. General: Install signs using mounting methods indicated and according to manufacturer's written instructions.
 1. Install signs level, plumb, true to line, and at locations and heights indicated, with sign surfaces free of distortion and other defects in appearance.
 2. Before installation, verify that sign surfaces are clean and free of materials or debris that would impair installation.
- B. Mounting Methods:
 1. Concealed Studs: Using a template, drill holes in substrate aligning with studs on back of sign. Remove loose debris from hole and substrate surface.
 - a. Thin or Hollow Surfaces: Place sign in position and flush to surface, install washers and nuts on studs projecting through opposite side of surface, and tighten.
 2. Through Fasteners: Drill holes in substrate using predrilled holes in sign as template. Countersink holes in sign if required. Place sign in position and flush to surface. Install through fasteners and tighten.
 3. Back Bar and Brackets: Remove loose debris from substrate surface and install backbar or bracket supports in position so that signage is correctly located and aligned.

3.3 ADJUSTING AND CLEANING

- A. Remove and replace damaged or deformed characters and signs that do not comply with specified requirements. Replace characters with damaged or deteriorated finishes or components that cannot be successfully repaired by finish touchup or similar minor repair procedures.
- B. Remove temporary protective coverings and strippable films as signs are installed.

- C. On completion of installation, clean exposed surfaces of signs according to manufacturer's written instructions, and touch up minor nicks and abrasions in finish. Maintain signs in a clean condition during construction and protect from damage until acceptance by Owner.

END OF SECTION

NOT FOR BIDDING PURPOSES

DIVISION 21 SECTION 21 05 00
COMMON WORK RESULTS FOR FIRE PROTECTION
TABLE OF CONTENTS

PART 1 - GENERAL	1
1.1. SUMMARY	1
1.2. PERMITS AND FEES	2
1.3. EXAMINATION OF SITE	2
1.4. CONTRACTOR QUALIFICATION	2
1.5. MATERIALS AND EQUIPMENT	2
1.6. FIRE SAFE MATERIALS.....	3
1.7. REFERENCED STANDARDS, CODES AND SPECIFICATIONS	3
1.8. SUBMITTALS, REVIEW AND ACCEPTANCE.....	4
1.9. SHOP DRAWINGS	5
1.10. SUPERVISION AND COORDINATION.....	6
1.11. CUTTING AND PATCHING.....	6
1.12. CONNECTIONS AND ALTERATIONS TO EXISTING WORK	6
1.13. DEMOLITION	7
1.14. ALTERNATES.....	8
1.15. DEFINITIONS.....	9
PART 2 - ELECTRICAL REQUIREMENTS.....	9
2.1. GENERAL ELECTRICAL REQUIREMENTS.....	9
2.2. ENCLOSURES.....	10
PART 3 - EXECUTION	10
3.1. EQUIPMENT INSTALLATION - COMMON REQUIREMENTS.....	10
3.2. SUPPORTS, HANGERS AND FOUNDATIONS	10
3.3. DEMONSTRATION AND TRAINING VIDEO RECORDINGS	11
3.4. PROVISIONS FOR ACCESS	11
3.5. PAINTING AND FINISHES.....	12
3.6. CLEANING OF SYSTEMS	12
3.7. COLOR SELECTION	13
3.8. PROTECTION OF WORK.....	13
3.9. OPERATION OF EQUIPMENT	13
3.10. IDENTIFICATIONS, FLOW DIAGRAMS, ELECTRICAL DIAGRAMS AND OPERATING INSTRUCTIONS.....	13
3.11. WALL AND FLOOR PENETRATION	14
3.12. RECORD DRAWINGS	14
3.13. WARRANTY	15
3.14. OPERATION AND MAINTENANCE MANUALS.....	15
3.15. INSTALLATION AND COORDINATION DRAWINGS	16
3.16. PIPING SYSTEMS TESTING	17
3.17. OUTAGES.....	17
END OF SECTION	17

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 21 05 00 - COMMON WORK RESULTS FOR FIRE PROTECTION

PART 1 - GENERAL

1.1. SUMMARY

- A. All work under Division 21 is subject to the Division 01, General Conditions and Special Requirements for the entire contract.
- B. Provide all labor, materials, equipment, and services necessary for and incidental to the complete installation and operation of all mechanical work.
- C. Unless otherwise specified, all submissions shall be made to, and acceptances and approvals made by the Architect.
- D. Contract Drawings are generally diagrammatic and all offsets, fittings, transitions and accessories are not necessarily shown. Furnish and install all such items as may be required to fit the work to the conditions encountered. Arrange piping, equipment, and other work generally as shown on the contract drawings, providing proper clearance and access. Where departures are proposed because of field conditions or other causes, prepare and submit detailed shop drawings for approval in accordance with Submittals specified below. The right is reserved to make reasonable changes in location of equipment, and piping up to the time of rough-in or fabrication.
- E. Conform to the requirements of all rules, regulations and codes of local, state and federal authorities having jurisdiction.
- F. Coordinate the work under Division 21 with the work of all other construction trades.
- G. Be responsible for all construction means, methods, techniques, procedures, and phasing sequences used in the work. Furnish all tools, equipment and materials necessary to properly perform the work in first class, substantial, and workmanlike manner, in accordance with the full intent and meaning of the contract documents.
- H. Modify sprinkler piping, sprinkler head locations, and extend fire protection system as required to accommodate wall changes, ceiling changes, and M/E/P changes. Hydraulically calculate all pipe sizes based on NFPA-13.
- I. The existing fire protection system shall remain unless otherwise noted. Re-located fire protection piping, hangers, valves, sprinkler heads, and fire alarm wiring as required to accommodate demolition and new work as shown on the Contract Documents. Install new heads, piping, and hangers as required.
- J. Existing fire protection system, piping, sprinkler heads, and fittings shall be modified to accommodate demolition and installation of new systems.
- K. Provide new sprinkler heads where new ceilings and bulkheads are provided. Extend sprinkler piping to coordinate with new ceiling heights, bulkheads, and ductwork, piping and equipment installation. Refer to architectural reflected ceiling plans.

- L. Fire protection contractor shall survey existing fire suppression system and submit hydraulic drawings and calculations to State Fire Marshal for review and approval.
- M. The original fire protection drawings have been provided as "Information Available to Bidders." Relocate sprinkler heads, piping, etc. as required to accommodate the renovations.

1.2. PERMITS AND FEES

- A. Obtain all permits and pay taxes, fees and other costs in connection with the work. File necessary plans, prepare documents, give proper notices and obtain necessary approvals. Deliver inspection and approval certificates to Owner prior to final acceptance of the work.
- B. Permits and fees shall comply with the Division 01, General Requirements of the specification.

1.3. EXAMINATION OF SITE

- A. Examine the site, determine all conditions and circumstances under which the work must be done, and make all necessary allowances for same. No additional cost to the Owner will be permitted for Contractors failure to do so.
- B. Examine and verify specific conditions described in individual specifications sections.
- C. Verify that utility services are available, of the correct characteristics, and in the correct locations.

1.4. CONTRACTOR QUALIFICATION

- A. Any Contractor or Subcontractor performing work under Division 21 shall be fully qualified and acceptable to the Architect and Owner. Submit the following evidence when requested:
 - 1. A list of not less than five comparable projects which the Contractor completed.
 - 2. Letter of reference from not less than three registered professional engineers, general contractors or building owners.
 - 3. Local and/or State License, where required.
 - 4. Membership in trade or professional organizations where required.
- B. A Contractor is any individual, partnership, or corporation, performing work by contract or subcontract on this project.
- C. Acceptance of a Contractor or Subcontractor will not relieve the Contractor or subcontractor of any contractual requirements or his responsibility to supervise and coordinate the work, of various trades.

1.5. MATERIALS AND EQUIPMENT

- A. Materials and equipment installed as a permanent part of the project shall be new, unless otherwise indicated or specified, and of the specified type and quality.
- B. Where material or equipment is identified by proprietary name, model number and/or manufacturer, furnish named item, or its equal, subject to approval by Engineer. Substituted items shall be equal or better in quality and performance and must be suitable for available space, required arrangement, and application. Submit all data necessary to determine suitability of substituted items, for approval.
- C. The suitability of named item only has been verified. Where more than one item is named, only the first named item has been verified as suitable. Substituted items, including items other than first named shall be equal or better in quality and performance to that of specified items, and must be suitable for available space, required arrangement and application. Contractor, by providing other than the first named manufacturer, assumes responsibility for all necessary adjustments and modifications necessary for a satisfactory installation. Adjustments and modifications shall include but not be limited to electrical, structural, support, and architectural work.
- D. Substitution will not be permitted for specified items of material or equipment where noted.
- E. All items of equipment furnished shall have a service record of at least five (5) years.

1.6. FIRE SAFE MATERIALS

- A. Unless otherwise indicated, materials and equipment shall conform to UL, NFPA and ASTM standards for fire safety with smoke and fire hazard rating not exceeding flame spread of 25 and smoke developed of 50.

1.7. REFERENCED STANDARDS, CODES AND SPECIFICATIONS

- A. Specifications, Codes and Standards listed below are included as part of this specification, latest edition.
- B. ASTM - American Society for Testing and Materials
- C. FM - Factory Mutual
- D. IBC - International Building Code
- E. IEEE - Institute of Electrical and Electronics Engineers
- F. MSSP - Manufacturers Standards Society of the Valve and Fittings Industry
- G. NEC - National Electrical Code
- H. NEMA - National Electrical Manufacturers Association
- I. NFPA - National Fire Protection Association

- J. UL - Underwriters' Laboratories
- K. State of Delaware Fire Protection Requirements.
- L. All equipment materials, piping and installation shall comply with the codes and standards listed in the enforceable edition of the Applicable National Fire Protection Association Pamphlets.
- M. Fire Protection Systems design, equipment and installation shall comply with the Delaware State Fire Prevention Regulations, latest edition including all Annexes and Addendums.

1.8. SUBMITTALS, REVIEW AND ACCEPTANCE

- A. Equipment, materials, installation, workmanship and arrangement of work are subject to review and acceptance. No substitution will be permitted after acceptance of equipment or materials except where such substitution is considered by the Architect to be in best interest of Owner.
- B. After acceptance of Material and Equipment List, submit three (3) copies or more as required under General Conditions of complete descriptive data for all items. Data shall consist of specifications, data sheets, samples, capacity ratings, performance curves, operating characteristics, catalog cuts, dimensional drawings, wiring diagrams, installation instructions, and any other information necessary to indicate complete compliance with Contract Documents. Edit submittal data specifically for application to this project.
- C. Thoroughly review and stamp all submittals to indicate compliance with contract requirements prior to submission. Coordinate installation requirements and any electrical requirements for equipment submitted. Contractor shall be responsible for correctness of all submittals.
- D. Submittals will be reviewed for general compliance with design concept in accordance with contract documents, but dimensions, quantities, or other details will not be verified.
- E. Identify submittals, indicating intended application, location and service of submitted items. Refer to specification sections or paragraphs and drawings where applicable. Clearly indicate exact type, model number, style, size and special features of proposed item. Submittals of a general nature will not be acceptable. For substituted items, clearly list on the first page of the submittal all differences between the specified item and the proposed item. The contractor shall be responsible for corrective action and maintaining the specification requirements if differences have not been clearly indicated in the submittal.
- F. Submit actual operating conditions or characteristics for all equipment where required capacities are indicated. Factory order forms showing only required capacities will not be acceptable. Call attention, in writing, to deviation from contract requirements.
- G. Acceptance will not constitute waiver of contract requirements unless deviations are specifically indicated and clearly noted. Use only final or corrected submittals and data prior to fabrication and/or installation.

- H. For any submittal requiring more than two (2) reviews by the Engineer (including those caused by a change in subcontractor or supplier) the Owner will withhold contractor's funds by a change order to the contract to cover the cost of additional reviews. One review is counted for each action including rejection or return of any reason.
- I. For resubmissions, the Contractor must address in writing all of the Engineer's comments on the original submission to verify compliance.

1.9. SHOP DRAWINGS

- A. Prepare and submit shop drawings for all mechanical equipment, specially fabricated items, modifications to standard items, specially designed systems where detailed design is not shown on the contract drawings, or where the proposed installation differs from that shown on contract drawings.
- B. Submit data and shop drawings including but not limited to the list below, in addition to provisions of the paragraph above. Identify all shop drawings by the name of the item and system and the applicable specification paragraph number and drawing number.
- C. Every submittal including, but not limited to the list below, shall be forwarded with its own transmittal as a separate, distinct shop drawing. Grouping of items/systems that are not related shall be unacceptable.
- D. Items and Systems
 - 1. Access Doors/Panels including layout and location
 - 2. Alarm Check Valves
 - 3. Coordinated Drawings
 - 4. Fire Protection System including Hydraulic Calculations, Equipment and Devices
 - 5. Fire Stopping - Methods and Materials
 - 6. Identification System
 - 7. Material and Equipment List
 - 8. Operations and Maintenance Manuals
 - 9. Pipe Materials Including Itemized Schedule
 - 10. Preliminary and Final Pipe Pressure Tests
 - 11. Pressure Gauges
 - 12. Sprinkler Heads
 - 13. Test Certificates
 - 14. Valves
 - 15. Wiring Diagrams, Flow Diagrams and Operating Instructions
- E. Contractor, additionally, shall submit for review any other shop drawings as required by the Architect. No item shall be delivered to the site, or installed, until the Contractor has received a submittal from the Engineer marked Reviewed or Comments Noted. After the proposed materials have been reviewed, no substitution will be permitted except where approved by the Architect.
- F. For any shop drawing requiring more than two (2) reviews by the Engineer (including those caused by a change in subcontractor or supplier) the Owner will withhold contractor's funds by a change order to the contract to cover the cost of additional reviews. One review is

counted for each action including rejection or return of any reason.

1.10. SUPERVISION AND COORDINATION

- A. Provide complete supervision, direction, scheduling, and coordination of all work under the Contract, including that of subcontractors.
- B. Coordinate rough-in of all work and installation of sleeves, anchors, and supports for piping, equipment, and other work performed under Division 21.
- C. Arrange for pipe spaces, chases, slots, and openings in building structure during progress of construction to allow for fire protection installations.
- D. Coordinate electrical work required under Division 21 with that under Division 26. Coordinate all work under Division 21 with work under all other Divisions.
- E. Supply services of an experienced (10 years minimum) and competent Project Manager to be in constant charge of work at site.
- F. Where a discrepancy exists within the specifications or drawings or between the specifications and drawings, the more stringent (or costly) requirement shall apply until clarification can be obtained from the Engineer. Failure to clarify such discrepancies with the Engineer will not relieve the Contractor of the responsibility of conforming to the requirements of the Contract.
- G. Failure of contractor to obtain a full and complete set of contract documents (either before or after bidding) will not relieve the contractor of the responsibility of complying with the intent of the contract documents.

1.11. CUTTING AND PATCHING

- A. Accomplish all cutting and patching necessary for the installation of work under Division 21. Damage resulting from this work to other work already in place, shall be repaired at Contractor's expense. Where cutting is required, perform work in neat and workmanlike manner. Restore disturbed work to match and blend with existing construction and finish, using materials compatible with the original. Use mechanics skilled in the particular trades required.
- B. Do not cut structural members without approval from the Architect.

1.12. CONNECTIONS AND ALTERATIONS TO EXISTING WORK

- A. Unless otherwise noted on the drawings, where existing fire protection work is removed, pipes, valves, etc., shall be removed, including hangers, to a point below finished floors or behind finished walls and capped. Such point shall be far enough behind finished surfaces to allow for installation of normal thickness of required finish material.
- B. Where work specified in Division 21 connects to existing equipment and piping, etc.,

Contractor shall perform all necessary alterations, cuttings, fittings, etc., of existing work as may be necessary to make satisfactory connections between new and existing work, and to leave completed work in a finished and workmanlike condition.

- C. Where the work specified under Division 21, or under other Divisions, requires relocation of existing equipment, piping, etc., Contractor shall perform all work and make necessary changes to existing work as may be required to leave completed work in a finished and workmanlike condition.
- D. Where the relocation of existing equipment is required for access or the installation of new equipment, the contractor shall temporarily remove and/or relocate and re-install as required to leave the existing and new work in a finished and workman like condition.
- E. Fire suppression system will remain active throughout the duration of the project. Contractor shall provide temporary wire baskets to protect sprinkler heads during construction. Include all provisions for fire watch as determined by the Fire Marshal.

1.13. DEMOLITION

- A. Unless otherwise noted all existing equipment, piping, etc., shall remain.
- B. Where existing equipment is indicated to be removed, all associated piping, conduit, power, controls, insulation, hangers, supports and housekeeping pads, etc. Patch, paint and repair walls/roof/floor to match existing and/or new finishes.
- C. Provide necessary piping, valves, temporary feeds, etc., as required. Drain and refill piping systems as often as necessary to accommodate phasing and to minimize time lengths of outages.
- D. The Contractor shall be responsible for visiting the site and determining the existing conditions in which the work is to be performed.
- E. Where any abandoned pipes in existing floors, walls, pipe tunnels, ceilings, etc., conflict with new work, remove abandoned pipes as necessary to accommodate new work.
- F. The location of all existing equipment, piping, etc., indicated is approximate only and shall be checked and verified. Install all new fire protection work to connect to or clear existing work as applicable.
- G. Maintain egress at all times. Coordinate egress requirements with the State Fire Marshal, the Owner and the authorities having jurisdiction.
- H. Make provisions and include in bid all costs associated with confined entry/space requirements in and all other applicable OSHA regulations.
- I. Where required to maintain the existing systems in operation, temporarily backfeed existing systems from new equipment. Contractor shall temporarily extend existing piping systems to new piping systems with the appropriate shut-off valves and tamper switches.
- J. At completion of project all temporary piping, valves, controls, etc., shall be removed in

their entirely.

- K. Existing piping, equipment, materials, etc., not required for re-use or re-installation in this project, shall be removed from the project site.
- L. Deliver to the Owner, on the premises where directed, existing equipment and materials which are removed and which are desired by the Owner or are indicated to remain the property of the Owner.
- M. All other materials and equipment which are removed shall become property of the Contractor and shall be promptly removed, from the premises, and disposed of by the Contractor, in an approved manner.
- N. Where piping is removed, remove all pipe hangers which were supporting the removed piping. Patch the remaining penetration voids with like materials and paint to match existing construction.
- O. Where required, provide and coordinate removal and re-installation of existing equipment. Take care to protect materials and equipment indicated for reuse. Contractor shall repair or replace items which are damaged. Contractor shall have Owner's representative present to confirm condition of equipment prior to demolition.
- P. Before demolition begins, and in the presence of the Owners representative, test and note all deficiencies in all existing systems affected by demolition but not completely removed by demolition. Provide a copy of the list of system deficiencies to the Owner and the Engineer. Videotape existing conditions in each space prior to beginning demolition work.
- Q. The Owner shall have the first right of refusal for all devices and equipment removed by the Contractor.
- R. All devices and equipment designated by the Owner to remain the property of the Owner shall be moved and stored by the Contractor at a location on site as designated by the Owner. It shall be the Contractor's responsibility to store all devices and equipment in a safe manner to prevent damage while stored.
- S. All existing equipment refused by the Owner shall become the property of the Contractor and shall be removed from the site by the Contractor in a timely manner and disposed of in a legal manner.
- T. Temporary Disconnection: Remove, store, clean, reinstall, reconnect, and make operational equipment indicated for relocation.
- U. Terminate services and utilities in accordance with local laws, ordinances, rules and regulations.
- V. After demolition of ceilings install aluminum inverted pie plates above each sprinkler head. Maintain throughout construction phase. Remove with the installation of new ceilings.

1.14. ALTERNATES

- A. Refer to Division 01 Section, "Alternates" for description of work under this section affected by alternates.

1.15. DEFINITIONS

- A. Approve - to permit use of material, equipment or methods conditional upon compliance with contract documents requirements.
- B. Furnish and install or provide means to supply, erect, install, and connect to complete for readiness for regular operation, the particular work referred to.
- C. Contractor means the mechanical contractor and any of his subcontractors, vendors, suppliers, or fabricators.
- D. Piping includes pipe, all fittings, valves, hangers, insulation, identification, and other accessories relative to such piping.
- E. Concealed means hidden from sight in chases, formed spaces, shafts, hung ceilings, or embedded in construction.
- F. Exposed means not installed underground or concealed as defined above.
- G. Invert Elevation means the elevation of the inside bottom of pipe.
- H. Finished Spaces: Spaces other than mechanical and electrical equipment rooms, furred spaces, pipe and duct shafts, unheated spaces immediately below roof, spaces above ceiling, unexcavated spaces, crawl spaces, and tunnels.
- I. Review - limited observation or checking to ascertain general conformance with design concept of the work and with information given in contract documents. Such action does not constitute a waiver or alteration of the contract requirements.
- J. Building Line: Exterior wall of building.

PART 2 - ELECTRICAL REQUIREMENTS

2.1. GENERAL ELECTRICAL REQUIREMENTS

- A. Furnish and install control and interlock wiring for the equipment furnished. In general, power wiring and motor starting equipment will be provided under Division 26. Carefully review the contract documents to coordinate the electrical work under Division 21 with the work under Division 26. Where the electrical requirements of the equipment furnished differ from the provisions made under Division 26, make the necessary allowances under Division 21. Where no electrical provisions are made under Division 26, include all necessary electrical work under Division 21.
- B. All electrical work performed under Division 21 shall conform to the applicable requirements of Division 26 and conforming to the National Electrical Code. All wiring, conduit, etc., installed in ceiling plenums must be plenum rated per NFPA and the IBC.

- C. Provide wiring diagrams with electrical characteristics and connection requirements.
- D. Where equipment under this Division is specified with integral disconnecting means, the same shall be a single disconnecting means for disconnecting all ungrounded main power supply conductors that is capable of being locked in the open ("off") position in accordance with the National Electrical Code and the local electrical inspector.

2.2. ENCLOSURES

- A. Electrical enclosures including factory provided enclosures, field provided and installed enclosures, and automatic temperature control system enclosures shall be as follows:
 - 1. Dry Interior Locations: NEMA 1.
 - 2. Damp/Wet Locations, Including Exterior Locations: NEMA 3R.

PART 3 - EXECUTION

3.1. EQUIPMENT INSTALLATION - COMMON REQUIREMENTS

- A. Install equipment to provide maximum possible headroom, if mounting heights are not indicated.
- B. Install equipment according to approved submittal data. Portions of the work are shown only in diagrammatic form. Refer conflicts to Architect.
- C. Install equipment level and plumb, parallel and perpendicular to other building systems and components in exposed interior spaces, unless otherwise indicated.
- D. Install fire protection equipment to facilitate service, maintenance, and repair or replacement of components. Connect equipment for ease of disconnecting, with minimum interference to other installations. Extend grease fittings to accessible locations.
- E. Install equipment giving right of way to piping installed at required slope.
- F. Do not install equipment or piping over electrical gear, electrical panels, motor controllers, and similar electrical equipment. Install equipment and piping to maintain clear space above and in front of all electrical components per the National Electric Code.

3.2. SUPPORTS, HANGERS AND FOUNDATIONS

- A. Provide supports, hangers, braces, attachments and foundations required for the work. Support and set the work in a thoroughly substantial and workmanlike manner without placing strains on materials, equipment, or building structure, submit shop drawings for approval. Coordinate all work with the requirements of the structural division.
- B. Supports, hangers, braces, and attachments shall be standard manufactured items or fabricated structural steel shapes. All interior hangers shall be galvanized or steel with rust

inhibiting paint. For un-insulated copper piping provide copper hanger to prevent contact of dissimilar metals.

3.3. DEMONSTRATION AND TRAINING VIDEO RECORDINGS

- A. General: Record demonstration and training video recordings. Record each training module separately.
 - 1. At beginning of each training module, record each chart containing learning objective and lesson outline.
- B. Video Recording Format: Provide high-quality color video recordings with menu navigation in format acceptable to Engineer
- C. Recording: Mount camera on tripod before starting recording, unless otherwise necessary to show area of demonstration and training. Display continuous running time.
- D. Narration: Describe scenes on video recording by audio narration by microphone while video recording is recorded. Include description of items being viewed.
- E. Transcript: Provide a transcript of the narration. Display images and running time captured from videotape opposite the corresponding narration segment.

3.4. PROVISIONS FOR ACCESS

- A. The contractor shall provide access panels and doors for all concealed equipment, valves, and other devices requiring maintenance, service, adjustment, balancing or manual operation.
- B. Where access doors are necessary, furnish and install manufactured painted steel door assemblies consisting of hinged door, key locks, and frame designed for the particular wall or ceiling construction. Properly locate each door. Door sizes shall be a minimum of 12 inches x 12 inches for hand access, 18 inches x 18 inches for shoulder access and 20 inches x 30 inches for full body access where required. Review locations and sizes with Architect prior to fabrication. Provide U.L. approved and labeled access doors where installed in fire rated walls or ceilings. Doors shall be Milcor Metal Access Doors as manufactured by Inland-Ryerson, Mifab, or approved equal.
 - 1. Acoustical or Cement Plaster: Style B
 - 2. Hard Finish Plaster: Style K or L
 - 3. Masonry or Dry Wall: Style M
- C. Where access is by means of liftout ceiling tiles or panels, mark each ceiling grid using small color-coded and numbered tabs. Provide a chart or index for identification. Place markers within ceiling grid not on ceiling tiles.
- D. Access panels, doors, etc. described herein shall be furnished under the section of specifications providing the particular service and to be turned over to the pertinent trade

for installation. Coordinate installation with installing contractor. All access doors shall be painted in baked enamel finish to match ceiling or wall finish.

- E. Submit shop drawings indicating the proposed location of all access panels/doors. Access doors in finished spaces shall be coordinated with air devices, lighting and sprinklers to provide a neat and symmetrical appearance.

3.5. PAINTING AND FINISHES

- A. Provide protective finishes on all materials and equipment. Use coated or corrosion-resistant materials, hardware and fittings throughout the work. Paint bare, untreated ferrous surfaces with rust-inhibiting paint. All exterior components including supports, hangers, nuts, bolts, washers, vibration isolators, etc. shall be stainless steel.
- B. Clean surfaces prior to application of insulation, adhesives, coatings, paint, or other finishes.
- C. Provide factory-applied finishes where specified. Unless otherwise indicated factory-applied paints shall be baked enamel with proper pretreatment.
- D. Protect all finishes and restore any finishes damaged as a result of work under Division 21 to their original condition.
- E. The preceding requirements apply to all work, whether exposed or concealed.
- F. Remove all construction marking and writing from exposed equipment, piping and building surfaces. Do not paint manufacturer's labels or tags.
- G. All exposed piping, equipment, etc. shall be painted. Colors shall be as stated in this division or as selected by the Architect in Division 09 and conform to ANSI Standards.
- H. All exposed piping, equipment, etc. in finished spaces shall be painted. Colors shall be as selected by the Architect and conform to ANSI Standards.
- I. Refer to Division 09 for additional painting requirements.

3.6. CLEANING OF SYSTEMS

- A. Thoroughly clean systems after satisfactory completion of pressure tests and before permanently connecting equipment, and other accessory items. Blow out and flush piping until interior surfaces are free of foreign matter.
- B. Flush piping to remove cutting oil, excess pipe joint compound, solder slag and other foreign materials. Do not use system pumps until after cleaning and flushing has been accomplished to the satisfaction of the Engineer. Employ chemical cleaners, including a non-foaming detergent, not harmful to system components. After cleaning operation, final flushing and refilling, the residual alkalinity shall not exceed 300 parts per million. Submit a certificate of completion to Engineer stating the name of service company used.

- C. Pay for labor and materials required to locate and remove obstructions from systems that are clogged with construction refuse after acceptance. Replace and repair work disturbed during removal of obstructions.
- D. Leave systems clean, and in complete running order.

3.7. COLOR SELECTION

- A. Color of finishes shall be as selected by the Architect.
- B. Submit color of factory-finished equipment for acceptance prior to ordering.

3.8. PROTECTION OF WORK

- A. Protect work, material and equipment from weather and construction operations before and after installation. Properly store and handle all materials and equipment.
- B. Cover temporary openings in piping and equipment to prevent the entrance of water, dirt, debris, or other foreign matter. Deliver pipes and tubes with factory applied end caps.
- C. Cover or otherwise protect all finishes.
- D. Replace damaged materials, devices, finishes and equipment.
- E. Protect stored pipes and tubes from moisture and dirt. Elevate above grade. Do not exceed structural capacity of floor, where stored inside.

3.9. OPERATION OF EQUIPMENT

- A. Clean all systems and equipment prior to initial operation for testing, or other purposes. Lubricate, adjust, and test all equipment in accordance with manufacturer's instructions. Do not operate equipment unless all proper safety devices or controls are operational. Provide all maintenance and service for equipment that is authorized for operation during construction.
- B. Where specified, or otherwise required, provide the services of the manufacturer's factory-trained servicemen or technicians to start up the equipment. Where factory start-up of equipment is not specified, provide field start-up by qualified technician.
- C. Submit factory start-up sheets or field start-ups sheets for all equipment.

3.10. IDENTIFICATIONS, FLOW DIAGRAMS, ELECTRICAL DIAGRAMS AND OPERATING INSTRUCTIONS

- A. Contractor shall submit for approval working fire protection drawings of each piping system installed in the building. Diagrams shall indicate the location and the identification number of each valve in the particular system. Following approval by all authorities, the diagrams shall be framed, mounted under safety glass and hung in each Mechanical Room

where directed. Contractor shall deliver the tracing or sepia from which the diagrams were reproduced to the Owner.

- B. All valves shall be plainly tagged. For any bypass valves, install sign indicating valve position as "Normally Open" or "Normally Closed" as required.
- C. Provide three (3) hard copies and one (1) electronic copy of operating and maintenance instructions for all principal items of equipment furnished. This material shall be bound as a volume of the Operation and Maintenance Booklet as hereinafter specified.
- D. All piping installed under this contract shall be stenciled with direction of flow arrows and with stenciled letters naming each pipe and service. Refer to Division 21 Section, "Fire Suppression System Piping, Fittings, Valves, Etc". Color code all direction of flow arrows and labels. In finished spaces omit labeling and direction of flow arrows. Paint in color as selected by Architect.
- E. Submit list of wording, symbols, letter size, and color coding for fire protection identification. Submit samples of equipment identification cards, piping labels, and valve tags to Engineer for review prior to installation.
- F. Provide at least two (2) hours of straight time instruction to the operating personnel. Time of instruction shall be designated by the Owner.

3.11. WALL AND FLOOR PENETRATION

- A. All penetrations of partitions, ceilings, roofs and floors by piping or conduit under Division 21 shall be sleeved, sealed, and caulked airtight for sound and air transfer control.
- B. All penetration of fire rated assemblies shall be sleeved, sealed, caulked and protected to maintain the rating of the wall, roof, or floor. Fire Marshal approved U.L. assemblies shall be utilized. See Division 07 Section, "Fire Protection, HVAC and Plumbing Protection Firestopping".
- C. Where piping extends through exterior walls or below grade, provide waterproof pipe penetration seals, as specified in another division of these specifications.
- D. Provide pipe escutcheons for sleeved pipes in finished areas.
- E. Piping sleeves:
 - 1. Galvanized steel pipe, standard weight where pipes are exposed and roofs and concrete and masonry walls. On exterior walls provide anchor flange welded to perimeter.
 - 2. Twenty-two (22) gauge galvanized steel elsewhere.

3.12. RECORD DRAWINGS

- A. Upon completion of the mechanical installations, the Contractor shall deliver to the Architect one complete set of prints of the fire protection drawings which shall be legibly

marked in red pencil to show all changes and departures of the installation as compared with the original design. They shall be suitable for use in preparation of Record Drawings.

- B. Contractor shall incorporate all sketches, addendums, value engineering, change orders, etc., into record drawings prior to delivering to Architect.

3.13. WARRANTY

- A. Contractor's attention is directed to warranty obligations contained in the GENERAL CONDITIONS.
- B. The above shall not in any way void or abrogate equipment manufacturer's guarantee or warranty. Certificates of equipment manufacturer's warranties shall be included in the operations and maintenance manuals.
- C. The contractor guarantees for a two (2) year period from the time of final acceptance by the Owner.
 - 1. That the work contains no faulty or imperfect material or equipment or any imperfect, careless, or unskilled workmanship.
 - 2. That all work, equipment, machines, devices, etc. shall be adequate for the use to which they are intended, and shall operate with ordinary care and attention in a satisfactory and efficient manner.
 - 3. That the contractor will re-execute, correct, repair, or remove and replace with proper work, without cost to the Owner, any work found to be deficient. The contractor shall also make good all damages caused to their work or materials in the process of complying with this section.
 - 4. That the entire work shall be water-tight and leak-proof.

3.14. OPERATION AND MAINTENANCE MANUALS

- A. The Contractor shall have prepared three (3) hardcopies and one (1) electronic copy of the Operation and Maintenance Manuals and deliver these copies of the manuals to the Owner. The manuals shall be as specified herein. The manuals must be approved and will not be accepted as final until so stamped.
- B. The manuals shall be bound in a three ring loose-leaf binder similar to National No. 3881 with the following title lettered on the front: Operations and Maintenance Manuals – Delaware Technical and Community College – Owens Campus – Student Services Center – Corridor/Atrium Renovations – Fire Protection. No sheets larger than 8-1/2 inches x 11 inches shall be used, except sheets that are neatly folded to 8-1/2 inches x 11 inches and used as a pull-out. Provide divider tabs and table of contents for organizing and separating information.
- C. Electronic copies of the manual shall be saved on USB flash drives, and shall be in searchable PDF format with interactive index tabs. Approved electronic copies shall be stored in flash drive zipper cases in front of Volume 1 (if applicable) of hard copies of the manual.

- D. Provide the following data in the booklet:
1. As first entry, an approved letter indicating the starting/ending time of Contractor's warranty period.
 2. Maintenance and operation instructions on each piece of equipment furnished.
 3. Manufacturer's extended limited warranties on equipment.
 4. Chart form indicating frequency and type of routine maintenance for all fire protection equipment. The chart shall also indicate model number of equipment, location and service.
 5. Provide sales and authorized service representatives names, address, and phone numbers of all equipment and subcontractors.
 6. Provide supplier and subcontractor's names, address, and phone number.
 7. Catalog data of all equipment, valves, etc. shall include wiring diagrams, parts list and assembly drawing.
 8. Provide and install in locations as directed by the Owner, valve charts including valve tag number, valve type, valve model number, valve manufacturer, style, service and location. Each valve chart shall be enclosed in a durable polymer based frame with a cover safety glass.
 9. Access panel charts with index illustrating the location and purpose of access panels.
 10. Approved Fire Suppression System Certificates.
 11. NFPA Test Reports.
- E. Electronic copies of the manual shall be saved on USB flash drives, and shall be in searchable PDF format with interactive index tabs. Approved electronic copies shall be stored in flash drive zipper cases in front of volume 1 (if applicable) of hard copies of the manual.
- F. Submit Operations and Maintenance Manuals prior to anticipated date of substantial completion for Engineer review and approval. Substantial completion requires that Operations and Maintenance Manuals be reviewed and approved.

3.15. INSTALLATION AND COORDINATION DRAWINGS

- A. Prepare, submit, and use composite installation and coordination drawings to assure proper coordination and installation of work. Drawings shall include, but not be limited, to the following:
1. Complete Sprinkler and HVAC Drawings showing coordination with lights, electrical equipment, HVAC equipment and structural amenities.
- B. Draw plans to a scale not less than 3/8-inch equals one foot. Include plans, sections, and elevations of proposed work, showing all equipment, and piping in areas involved. Fully dimension all work including lighting fixtures, conduits, pullboxes, panelboards, and other electrical work, walls, doors, ceilings, columns, beams, joists and other architectural and structural work.
- C. Identify all equipment and devices on wiring diagrams and schematics. Where field connections are shown to factory-wired terminals, include manufacturer's literature showing internal wiring.

3.16. PIPING SYSTEMS TESTING

- A. The entire new fire protection piping systems shall be tested hydrostatically before insulation covering is applied and proven tight under the following gauge pressures for a duration of twenty-four (24) hours. Testing to be witnessed by Owner's representative and documented in writing.

SYSTEM	TEST PRESSURE
Fire Suppression Piping (Refer to NFPA)	200 psi

- B. Testing and acceptance thereof shall be in accordance with local requirements and shall meet approval of authority having jurisdiction. Submit certificates and approved permits and insert one (1) copy in the Operations and Maintenance Manuals.

3.17. OUTAGES

- A. Provide a minimum of fourteen (14) days notice to schedule outages. The Contractor shall include in their bid outages and/or work in occupied areas to occur on weekends, holidays, or at night. Coordinate and get approval of all outages with the Owner.
- B. Submit Outage Request form, attached at end of this Section, to Owner for approval.

END OF SECTION

OUTAGE REQUEST

DATE APPLIED: _____ BY: _____

DATE FOR OUTAGE: _____ FIRM: _____

START OUTAGE-TIME: _____ DATE: _____

END OUTAGE -- TIME: _____ DATE: _____

AREAS AND ROOMS: _____

FLOOR(S): _____

AREA(S): _____

ROOM(S): _____

WORK TO BE PERFORMED: _____

SYSTEM(S): _____

REQUEST APPROVED BY: _____

(FOREMAN OR OTHER PERSON IN CHARGE)

(FOR OWNER'S USE ONLY):

APPROVED: _____

YES ____ NO ____ BY: _____ DATE: _____

DATE/TIME-AS REQUESTED: _____ OTHER: _____

OWNER'S PRESENCE REQUIRED: _____

YES: ____ NO: ____ NAME: _____

POINT OF CONTACT: _____ PHONE: _____

DIVISION 21 SECTION 21 05 05
FIRE SUPPRESSION SYSTEM PIPING, FITTINGS & VALVES
TABLE OF CONTENTS

PART 1 - GENERAL	1
1.1. SUMMARY.....	1
1.2. SYSTEM DESCRIPTION CONDITIONS.....	1
1.3. QUALITY ASSURANCE.....	1
1.4. DELIVERY, STORAGE AND HANDLING.....	2
1.5. ALTERNATES	2
PART 2 - PRODUCTS	2
2.1. PIPE MATERIALS	2
2.2. PIPE HANGERS	4
2.3. VALVES	6
2.4. PRESSURE GAUGES	6
2.5. ESCUTCHEONS.....	6
2.6. DIELECTRIC CONNECTIONS:.....	6
2.7. SLEEVES	7
PART 3 - EXECUTION	7
3.1. GENERAL PIPING INSTALLATION REQUIREMENTS	7
3.2. PRESSURE GAGE INSTALLATION REQUIREMENTS.	8
3.3. VALVE INSTALLATION REQUIREMENTS	8
3.4. PIPE JOINTS INSTALLATION REQUIREMENTS	9
3.5. HANGERS AND SUPPORTS INSTALLATION REQUIREMENTS	10
3.6. PIPING IDENTIFICATION INSTALLATION REQUIREMENTS	11
3.7. VALVE IDENTIFICATION REQUIREMENTS	12
END OF SECTION	12

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 21 05 05 - FIRE SUPPRESSION SYSTEM PIPING, FITTINGS & VALVES

PART 1 - GENERAL

1.1. SUMMARY

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2. SYSTEM DESCRIPTION CONDITIONS

- A. Provide all labor and materials necessary to furnish and install all piping systems on this project as herein specified and/or shown on the drawings.
- B. All piping and insulation installed in ceiling plenums must be plenum rated and comply with NFPA and the authority having jurisdiction.
- C. Where more than one piping system material is specified, ensure system components are compatible and joined to ensure the integrity of the system is not jeopardized. Provide necessary joining fittings. Ensure flanges, union, and couplings for servicing are consistently provided.
- D. Use unions, flanges, and couplings downstream of valves and at equipment or apparatus connections. Do not use direct welded or threaded connections to valves, equipment or other apparatus.
- E. Use non-conducting dielectric connections whenever jointing dissimilar metals in open systems.
- F. Provide pipe hangers and supports in accordance with ASTM B31.9, MSS SP69 and NFPA-13 unless indicated otherwise.
- G. Use 3/4 inch (20 mm) ball valves with cap and chain for drains at main shut-off valves, low points of piping, bases of vertical risers, and at equipment. Pipe to nearest floor drain.

1.3. QUALITY ASSURANCE

- A. Valves: Manufacturer's name and pressure rating marked on valve body.
- B. To assure uniformity and compatibility of piping components in grooved piping systems, all grooved products utilized shall be supplied by a single manufacturer. Grooving tools shall be of the same manufacturer as the grooved components.
- C. If the product is available domestically it shall be supplied as such.

1.4. DELIVERY, STORAGE AND HANDLING

- A. Deliver, store, protect and handle products to site under as hereinbefore specified.
- B. Accept valves on site in shipping containers with labeling in place. Inspect for damage.
- C. Provide temporary protective coating on cast iron and steel valves.
- D. Provide temporary end caps and closures on piping and fittings. Maintain in place until installation.
- E. Protect piping systems from entry of foreign materials by temporary covers, completing sections of the work, and isolating parts of completed systems.

1.5. ALTERNATES

- A. Refer to Division 01 Section, "Alternates" for description of work under this section affected by alternates.

PART 2 - PRODUCTS

2.1. PIPE MATERIALS

- A. All materials, unless otherwise specified, shall be new and of the best quality of their respective kinds, and shall conform to the requirements and ordinances of local, state and insurance authorities having jurisdiction.
 - 1. Fire Suppression System Piping (NFPA-13):
 - a. Piping: Steel, schedule 40, ASTM A53, black pipe. Piping 4 inches and smaller shall be ASTM A120, black steel pipe. Sizes 4-inches and above shall be standard weight, black, cast iron with screwed fittings, schedule 10 steel piping shall be acceptable when approved by the authority having jurisdiction.
 - b. Wet Pipe Fittings: Steel fittings shall be ASME B16.9, wrought steel, butt welded. Cast iron fittings shall be ASME 16.1, flanges and flanged fittings. Malleable iron fittings shall be ASME B16.3, threaded fittings. Mechanical grooved couplings shall be malleable iron housing clamps to engage and lock C shaped elastomeric sealing gasket, steel bolts, nuts, and washers; galvanized for galvanized pipe. Mechanical formed fittings shall be carbon steel housing with integral pipe stop and O-ring and O-ring uniformity compressed into permanent mechanical engagement onto pipe.
 - c. Victaulic, Grinnell, or approved equal, grooved end fittings and mechanical couplings shall be used for wet pipe and dry pipe systems 2" and larger. Couplings and fitting shall be UL listed and FM approved. Fittings shall be ASTM A536 ductile iron, ASTM A234 forged steel or ASTM A53 fabricated steel with factory grooved ends designed to accept Victaulic couplings.

- d. Victaulic, Grinnell, or approved equal, mechanical couplings shall consist of two ASTM A536 ductile iron housings, pressure-responsive, synthetic rubber gasket and plated steel bolts and nuts.
 - i. Rigid Type: Housings shall be cast with offsetting, angle-pattern bolt pads to provide system rigidity and support and hanging in accordance with NFPA-13. Tongue and recess rigid type couplings shall only be used if the contractor uses a torque wrench for installation. Required torque shall be in accordance with the manufacturer's latest recommendation.
 - 1) 1-1/4" through 8": "Installation Ready" stab-on rigid coupling, designed for direct 'stab' installation onto grooved end pipe without prior field disassembly and no loose part. Victaulic FireLock EZ Style 009H (1-1/4" – 4") and Victaulic QuickVic Style 107H (2"-8").
 - 2) 2" and Larger: Standard rigid coupling design. Victaulic Style 07 Zero-Flex.
 - ii. Flexible Type: use in seismic areas and where required by NFPA-13.
 - 1) 2" through 8": "Installation Ready" stab-on flexible coupling, designed for direct 'stab' installation onto grooved end pipe without prior field disassembly and no loose parts. Victaulic QuickVic Style 177.
 - 2) 2" and Larger: Standard flexible coupling design. Victaulic Style 75 or 77.

Fire Suppression System Service	Temperature Range	Gasket Recommendation
Water/Wet Systems	Ambient	Grade EPDM, Type A-C Shaped, FireLock EZ, or QuickVic Design

- e. Gate Valves: 2-1/2 inches & larger - listed 175 lb. OS&Y, flanged. 2 inches & smaller - UL/FM listed 175 lb., bronze, screwed. Furnish all sprinkler control valves with slow close manual operator and position indicator. Tamper switches furnish under Division 21.
- f. Grooved End Gate Valves: 2-1/2inches and Larger – UL listed/FM approved, 250 psi maximum pressure rating, OS&Y, ductile iron body, bronze mounted, grooved ends. Victaulic FireLock Series 771.
- g. Grooved End Butterfly Valves: 2 inches & Larger: UL listed/FM approved, up to 365 psi maximum pressure rating, ductile iron body, nickel-plated ductile iron disc, Nitrile seat, weather-proof actuator with two pre-wired supervisory switches. Victaulic FireLock Series 765 or Series 705.
- h. Globe Valves: 2 inches & smaller - 175 lb., bronze, screwed, UL/FM listed.
- i. Check Valves: 2-1/2 inches & smaller - UL/FM listed 175 lb., flanged swing check. 2 inches & smaller - listed 175 lb., bronze swing check, screwed.
- j. Grooved End Check Valves: 2 inches and Larger: UL listed/FM approved, up to 365 psi maximum pressure rating, ductile iron body, spring-loaded

stainless steel or EPDM coated ductile iron disc, nickel-plated or welded-in nickel seat. Victaulic FireLock Series 717H or Series 717.

- k. Finish: All exposed fire suppression piping shall be primed and painted with epoxy red paint. White letters shall indicate pipe and indicate direction of flow. Painting shall be provided under Division 09.
 - l. Special Requirements: All fire suppression piping, valves, fittings and joints shall comply with applicable National Fire Protection Pamphlets (NFPA) local codes, building codes, Fire Marshal, Owner's Insurance Underwriter, and the authority having jurisdiction.
- B. Steel pipe shall be similar and equal to National Allied Tube or Wheatland black or zinc-coated (galvanized) as hereinafter specified. Pipe shall be free from all defects which may affect the durability for the intended use. Each length of pipe shall be stamped with the manufacturer's name.
- C. Copper pipe shall be Revere, Anaconda or Chase with approved solder fittings.

2.2. PIPE HANGERS

- A. All hangers for metallic piping shall be adjustable, wrought clevis type, or adjustable malleable split ring swivel type, having rods with machine threads. Hangers shall be Grinnell Company's Figure 260 for pipe $\frac{3}{4}$ -inch and larger, and Figure 65 for pipe 2-inches and smaller, or approved equal. Adjustable pipe stanchion with U-bolt shall be Grinnell Company's Figure 191. Pipe roller supports shall be Grinnell's Figure 181 or Figure 271. Exterior pipe hangers shall be galvanized or stainless steel construction. For copper piping in direct contact with the hanger, hanger construction shall be copper coated to prevent contact of dissimilar metals similar to Grinnell's Figure CT-65. Hanger spacing and rod sizes for steel and copper pipe shall not be less than the following:

NOMINAL PIPE SIZE IN	STD. STEEL PIPE	MAXIMUM SPAN FT. COPPER TUBE	MINIMUM ROD DIAMETER INCHES OF ASTM A36 STEEL THREADED RODS
$\frac{3}{4}$ & 1	6	5	$\frac{3}{8}$
1 - $\frac{1}{2}$	6	8	$\frac{3}{8}$
2	8	8	$\frac{3}{8}$
2 - $\frac{1}{2}$	10	9	$\frac{1}{2}$
3	12	10	$\frac{1}{2}$
4	14	12	$\frac{5}{8}$
5	14	12	$\frac{5}{8}$

NOMINAL PIPE SIZE IN	STD. STEEL PIPE	MAXIMUM SPAN FT. COPPER TUBE	MINIMUM ROD DIAMETER INCHES OF ASTM A36 STEEL THREADED RODS
6	16	14	3/4
8	18	16	7/8
10	20	18	7/8
12	20	18	7/8

- B. Anchors, guides, and roller supports shall be installed in accordance with the contract drawings and manufacturer's recommendations to provide pipe support and control pipe movement for all piping systems. Anchors and guides shall be securely attached to the pipe support structure. Submit shop drawing for proposed pipe support structure for guides and anchors for approval of the Structural Engineer. Pipe alignment guides shall be Fig. 255 Grinnell, or as approved equal. Guides shall be sized to accommodate the pipe with insulation. Guides shall be steel factory, fabricated, with bolted two section outer cylinder and base for alignment of piping and two section guiding spider for bolting to pipe.
- C. Hangers for pipe sizes ½ to 1 ½ inch (13 to 38 mm): Carbon steel, adjustable swivel, split ring, comply with NFPA-13.
- D. Hangers for pipe sizes 2 to 4 inches (50 to 100 mm): Carbon steel, adjustable, clevis. Comply with NFPA-13.
- E. Multiple or Trapeze hangers: Steel channels with welded spacers and hanger rods.
- F. Wall support for pipe sizes to 3 inches (76 mm): cast iron hook, comply with NFPA-13.
- G. Wall support for pipe sizes 4 inches (100 mm) and over: Welded steel bracket and wrought steel clamp, comply with NFPA-13.
- H. Vertical Support: Steel riser clamp, comply with NFPA-13.
- I. Floor support for pipe: Cast iron adjustable pipe saddle, lock nut, nipple, floor flange, and concrete pier or steel support, comply with NFPA-13.
- J. Copper pipe support: Carbon steel ring, adjustable, copper plated, comply with NFPA-13.
- K. Hanger rods: Mild steel threaded both ends, threaded one end, or continuous threaded, comply with NFPA-13.
- L. Inserts: Malleable iron case of galvanized steel shell and expander plug for threaded connection with lateral adjustment, top slot for reinforcing rods, lugs for attaching to forms; size inserts to suit threaded hanger rods.

- M. Victaulic Style 009H, 107H, and 07, Grinnell, or approved equal, rigid couplings may be used with IPS steel piping systems, which meet the support and hanging requirements of NFPA-13. An adequate number of Victaulic Style 177, 75, and 77, Grinnell, or approved equal, flexible couplings shall also be used to compensate for thermal expansion/contraction of the pipe.

2.3. VALVES

- A. Provide parts list and assembly drawings (exploded view) for all valves in shop drawing submittals. Provide valves of the same type by the same manufacturer. All valves shall be provided with tamper switches and coordinated with Division 28.

2.4. PRESSURE GAUGES

- A. Unless otherwise indicated, pressure gauges shall be the bronze bourdon tube type, 4-1/2-inch dial, stem mounting, cast aluminum adjustable pointer, 1 percent accuracy over middle half of scale range, 1-1/2 percent over balance: Trerice Model 600C; Weksler Instruments, Ernst Gage Co., Miljoco, or as approved equal.
- B. Gauges shall have pressure, vacuum, compound, or retard ranges as required, select ranges so that the normal readings are at the approximate midpoint and maximum system pressures do not exceed full scale.
- C. Furnish and install a gauge valve at each pressure gauge. Gauge valves shall be Crane Model No. 88, Needle Valve, Ernst Gage Co. FLG 200, Wexler Instrument Corp. Type BBV4, or approved equal, rated for pressure intended.
- D. Gauge connections for pressure gauges or control instruments shall be made using tee fittings, except that gauge connections up to 1-inch size in steel may be using threaded extra heavy pipe couplings welded directly to the main, provided that the main is at least 2-inch size for 2-inch connections, 3-inch size for 3/4-inch connections, and 4-inch size for 1-inch connections. Minimum gauge connection shall be 2-inch ips.
- E. Provide snubbers on all gauges. Snubbers shall be No. 872 by Trerice, RS1/RS6 by Wexler Instruments, Miljoco or as approved equal.

2.5. ESCUTCHEONS

- A. Provide chromium plated escutcheons properly fitted and secured with set screws on all exposed piping which passes through walls, floors or ceilings of finished spaces.
- B. All escutcheon plates shall be chrome plated spun brass of plain pattern, and shall be set tight on the pipe and to the building surface. Plastic escutcheon plates will not be accepted.

2.6. DIELECTRIC CONNECTIONS:

- A. Furnish and install electrically insulated dielectric waterway fittings, unions or flanges, as

manufactured by EPCO Sales, Inc., or Victaulic Co. at the following locations:

1. Where steel piping systems join copper piping.
2. Avoid the installation of steel nipples, cast iron or steel valves and specialties, or other ferrous components in predominately copper piping systems. Where such installation is necessary, isolate the component with dielectric connections. Do not mix steel pipe and copper tube in the same run of pipe or in the same section of a piping system.

2.7. SLEEVES

- A. Sleeves shall be provided around all pipes through walls, floors, ceilings, partitions, roof structure members or other building parts. Sleeves shall be standard weight galvanized iron pipe two sizes larger than the pipe or insulation so that pipe or insulation shall pass through masonry or concrete walls or floors. Provide 20 gauge galvanized steel sheet or galvanized pipe sleeves for all piping passing through frame walls.
- B. Sleeves through floors shall be flush with the floor except for sleeves passing through Equipment Rooms which shall extend $\frac{3}{4}$ -inch above the floor. Space between the pipe and sleeve shall be caulked. Escutcheon plates shall be constructed to conceal the ends of sleeves. Each trade shall be responsible for drilling existing floors and walls for necessary sleeve holes. Drilling methods and tools shall be as hereinbefore specified.
- C. Sleeves through walls and floors shall be sealed with with a waterproof caulking compound.
- D. Firestop at sleeves that penetrate smoke barriers smoke partitions and/or rated walls/floors.

PART 3 - EXECUTION

3.1. GENERAL PIPING INSTALLATION REQUIREMENTS

- A. All pipes shall be cut accurately to measurements established at the building, and shall be worked into place without springing or forcing, properly clearing all windows, doors and other openings. Excessive cutting or other weakening of the building structure to facilitate piping installation will not be permitted. All pipes shall be so installed as to permit free expansion and contraction without causing damage. All open ends of pipe lines, equipment, etc., shall be properly capped or plugged during installation to keep dirt or other foreign material out of the system. All pipes shall be run parallel with the lines of the building and as close to walls, columns and ceilings as may be practical, with proper pitch. All piping shall be arranged so as not to interfere with removal of other equipment or devices and not to block access to doors, windows, manholes, or other access openings. Flanges or unions, as applicable for the type of piping specified, shall be provided in the piping at connections to all items of equipment, and installed so that there will be no interference with the installation of the equipment. All valves and specialties shall be placed to permit easy operation and access and all valves shall be regulated, packed and glands adjusted at the completion of the work before final acceptance. All piping shall be installed so as to avoid air or liquid pockets throughout the work. Ends of pipe shall be

reamed so as to remove all burrs.

- B. All piping shall be run to provide a minimum clearance of 2-inches between finished covering on such piping and all adjacent work. Group piping wherever practical at common elevations.
- C. All valves and other fittings shall be readily accessible.
- D. Drain valves with hose connections shall be provided at low points for drainage of piping systems. Blow down valves shall be provided at the ends of all mains and branches so as to properly clean by blowing down the lines throughout in the direction of normal flow.
- E. Spring clamp plates (escutcheons) shall be provided where pipes are exposed in the building and run through walls, floors, or ceilings. Plates shall be chrome plated spun brass of plain pattern, and shall be set tight on the pipe and to the building surface.
- F. Install all valves with stem upright or horizontal, not inverted.
- G. Where pipe support members are welded to structural building framing, scrape, brush clean, weld and apply one coat of zinc rich primer.
- H. Protect piping systems from entry of foreign materials by temporary covers, completing sections of the work, and isolating parts of completed system.

3.2. PRESSURE GAGE INSTALLATION REQUIREMENTS.

- A. Install pressure gages in piping tees with pressure-gage valve located on a pipe at most readable location.
- B. Adjust faces of pressure gauges to proper angle for best visibility.
- C. Clean windows of gages and clean factory-finished surfaces. Replace cracked and broken window, and repair scratched and marred surfaces with manufacturer's touch up paint.

3.3. VALVE INSTALLATION REQUIREMENTS

- A. Examine piping system for compliance with requirements for installation tolerances and other conditions affecting performance of valves. Do not proceed with installation until unsatisfactory conditions have been corrected.
- B. Examine valve interior for cleanliness, freedom from foreign matter, and corrosion. Remove special packing materials, such as blocks, used to prevent disc movement during shipping and handling.
- C. Operate valves from fully open to fully closed positions. Examine guides and seats made accessible by such operation.
- D. Examine threads on valve and mating pipe for form and cleanliness.
- E. Examine mating flange faces for conditions that might cause leakage. Check bolting for

proper size, length, and material. Check gasket material for proper size, material composition suitable for service, and freedom from defects and damage.

- F. Do not attempt to repair defective valves; replace with new valves.
- G. Install valves as indicated, according to manufacturer's written instructions.
- H. Piping installation requirements are specified in other Division 21 Sections. Drawings indicate the general arrangement of piping, fittings, and specialties.
- I. Install valves with unions or flanges at each piece of equipment arranged to allow servicing, maintenance, and equipment removal without system shutdown.
- J. Locate valves for easy access and provide separate support where necessary.
- K. Install valves in horizontal piping with stem at or above the center of the pipe.
- L. Install valves in a position to allow full stem movement.
- M. Adjust or replace packing after piping systems have been tested and put into service, but before final adjusting and balancing. Replace valves if leak persists.

3.4. PIPE JOINTS INSTALLATION REQUIREMENTS

- A. Screwed Joints: All screwed joints shall be made with tapered threads properly cut. Screwed joints shall be made perfectly tight with a stiff mixture of graphite and oil, applied with a brush to the male threads on the fittings.
- B. Grooved Joints: Install in accordance with the manufacturer's (Victaulic, Grinnell, or approved equal) guidelines and recommendations. All grooved couplings, fittings, valves, and specialties shall be the products of a single manufacturer. Grooving tools shall be of the same manufacturer as the grooved components. The gasket style and elastomeric material (grade) shall be verified as suitable for the intended service as specified. Gaskets shall be molded and produced by Victaulic. Grooved end shall be clean and free from indentations, projections, and roll marks in the area from pipe end to groove for proper gasket sealing. A Victaulic factory-trained field representative shall provide on-site training for contractor's field personnel in the proper use of grooving tools and installation of grooved piping products. Factory-trained representative shall periodically review the product installation. Contractor shall remove and replace any improperly installed products.
- C. Soldered Joints and Copper Piping: Joints in copper piping shall conform to the following minimum standards.
 - 1. The pipes shall be cut to a length making certain that the ends are square, using a fins hacksaw blade or tube cutter. The ends of all pipes shall be reamed and all burrs removed.
 - 2. The outside end of the pipe and the cut end of the fitting shall be cleaned with steel wool, sand cloth, or steel wire brush. All dark spots shall be removed.
 - 3. The flux shall be applied evenly and sparingly to the outside end of the pipe and

the inside of the outer end of the fitting until all surfaces to be jointed are completely covered. The piping and fitting shall be slipped together and reworked several times to insure an even distribution of the flux.

4. The correct amount of solder per joint for each size pipe shall be used in accordance with the manufacturer's recommendations.
 5. Solder joints shall be made by using a direct flame from a torch.
 6. On pipe sizes larger than ¼-inch, the fittings and valves in the pipe shall be moved or tapped with a hammer when the solder starts to melt to insure an even distribution of the solder.
 7. The excess solder shall be removed while it is still in the plastic state leaving a fillet around the cup of the fitting.
 8. Solder joints shall be suitable for working pressure of 100 psig and for working temperature of not less than 250 degrees F. The type of solder and flux used will be submitted for approval. Type 95-5 shall be the minimum standard.
- D. Where copper piping joins steel piping, approved bronze adapters shall be used.
- E. Prohibited Connections: No direct weld, soldered, or brazed connections, without unions or flanges, shall be made to valves, strainers, apparatus, or related equipment. Right and left couplings, long threads, or caulking of pipe threads or gasket joints will not be permitted.

3.5. HANGERS AND SUPPORTS INSTALLATION REQUIREMENTS

- A. General: All hangers shall be of an approved type arranged to maintain the required grading and pitching of lines to prevent vibration and to provide for expansion and contraction. Saddles shall be Grinnells Figure 173/273 or approved equal. Provide approved spacers between saddles and pipe where flexible insulation is specified. Provide insulation protection shields for insulated piping without saddles. Shield shall be Grinnell Figure 167 or as approved equal. Comply with NFPA-13.
- B. Spacing: Regardless of spacing, hangers shall be provided at or near all changes in direction, both vertical and horizontal, for all piping.
- C. Vertical Lines: Shall be supported at their bases, using either a suitable hanger placed in a horizontal line near the riser, or a base type fitting set on a pedestal, foundation or support. All vertical lines extending through more than one floor level shall be supported at each floor with a riser clamp. Riser clamp shall be Grinnell Co.'s Figure 261, or approved equal. All vertical drops to pump suction elbows shall be supported by floor posts.
- D. Racks and Brackets: All horizontal piping on vertical walls shall be properly supported by suitable racks securely anchored into the wall construction. Where not practical to obtain ceiling anchorage, all piping near walls shall be supported by approved brackets securely anchored into the wall construction. Washer plates (Fib. 60, 60L) and other miscellaneous attachments, fasteners, etc., shall be Grinnell or as approved equal. All exterior hanger and bracket systems in their entirety shall be galvanized.
- E. Pipe Hangers and supports shall be attached to the panel point at the top chord of bar joist.
- F. Select hangers and components for loads imposed. Secure rods with double nuts.

- G. Support of horizontal piping shall allow for vertical adjustment after installation of piping.
- H. Support overhead piping with clevis hangers.
- I. Do not support all parallel piping from the same joist. Stagger all supports in accordance with the engineer's recommendations.
- J. Fabricate and install steel anchors by welding steel shapes, plates, and bars to piping and to structure. Comply with ASME B31.9 and AWS D1.1.
- K. Construct concrete anchors of poured in place concrete of dimensions indicated and include embedded fasteners.
- L. Fire protection pipes shall be supported independently of other building trade supports per NFPA-13.

3.6. PIPING IDENTIFICATION INSTALLATION REQUIREMENTS

- A. All piping shall be identified with painted background marked with the name of the service with arrows to indicate flow direction. Color code and system identification shall comply with ANSI Standards and piping identification system shall comply with ASME A13.1-81., scheme for the identification of piping systems and NFPA pamphlets, latest edition.
- B. Markings shall be plain block letters, stenciled on pipes, and shall be located near each branch connection, near each valve, and at least every 10 feet on straight runs of pipe. Where pipes are adjacent to each other, markings shall be neatly lined up. All markings shall be located in such manner as to be easily legible from the floor. Pipe identification schedule shall be as follows:

OUTSIDE DIAMETER OF PIPE OR COVERING (INCHES)	LENGTH OF COLOR FIELD (INCHES)	SIZE OF LETTERS (INCHES)
1/2 to 1-1/4	8	1/2
1-1/2 to 2	8	3/4
2-1/2 to 6	12	1-1/4
8 to 10	24	2-1/2
Over 10	32	3-1/2

3.7. VALVE IDENTIFICATION REQUIREMENTS

- A. All valves shall be tagged with a numbered tag.
- B. The tags shall be made of 1-inch diameter brass tags fastened to the valve by means of brass chains. Numbers shall agree with valve numbers on diagrammatic herein before specified.
- C. Provide a minimum of three (3) valve charts with valve numbers indicating valve type, size, manufacturer and service.
- D. Additional valve charts shall be mounted behind glazed wooden frames and be hung in the main fire protection riser room. Additional copies shall be provided in each copy of the O&M manuals.

END OF SECTION

DIVISION 21 SECTION 21 10 03
WATER BASED FIRE SUPPRESSION SYSTEM – SPRINKLERS
TABLE OF CONTENTS

PART 1 - GENERAL	1
1.1. REFERENCE.....	1
1.2. DESCRIPTION.....	1
1.3. DELIVERY, STORAGE AND PROTECTION	2
1.4. EXTRA MATERIALS.....	3
1.5. PERMITS FROM THE AUTHORITY HAVING JURISDICTION AND FEES	3
1.6. HYDRANT FLOW TESTS	3
1.7. ALTERNATES.....	3
PART 2 - PRODUCTS	4
2.1. SPECIALTIES.....	4
2.2. SPRINKLER HEADS.....	4
2.3. FLEXIBLE SPRINKLER DROPS	5
2.4. SIGNS	6
2.5. DRAINS.....	6
2.6. ALARM DEVICES	6
2.7. GAUGES	7
2.8. VALVES.....	7
PART 3 - EXECUTION	8
3.1. GENERAL INSTALLATION REQUIREMENTS	8
3.2. INTERFACE WITH OTHER PRODUCTS.....	9
3.3. LAYOUT	9
3.4. WET PIPE SPRINKLER SYSTEM.....	9
3.5. VALVE INSTALLATION	9
3.6. CONNECTIONS	9
3.7. COMMISSIONING	9
3.8. DRAINS.....	10
3.9. TESTS.....	10
3.10. AS-BUILT DRAWINGS & PROJECT CLOSEOUT	10
3.11. WARRANTY	11
3.12. OWNER TRAINING.....	11
END OF SECTION	11

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 21 10 03 - WATER BASED FIRE SUPPRESSION SYSTEM - SPRINKLERS

PART 1 - GENERAL

1.1. REFERENCE

- A. The conditions of the Contract and General Requirements apply to the work specified in this section. All work under this section shall also be subject to the requirements of Division 21 Section, Common Work Results for Fire Protection and Division 01 Section, General Requirements.
- B. Submit complete shop drawings of all equipment utilized with the system in accordance with Division 21 Section, Common Work Results for Fire Protection. Submittals shall include but not be limited to the following fire protection system and accessories:
 - 1. Pressure Sensing Devices, Valves
 - 2. Alarm Check Valves
 - 3. Pressure/Vacuum Gauges
 - 4. Inspector's Test Station
 - 5. Eccentric Reducers
 - 6. Pressure Switches
 - 7. Valves and Piping
 - 8. Flow Switches
 - 9. Tamper Switches
 - 10. Auxiliary Drains
- C. Provide sprinklers, piping and associated equipment complete and ready for operation. Equipment materials, installation, workmanship, fabrication, assembly, erection, examination, inspection, and testing shall be in accordance with NFPA-13, NFPA-70, NFPA-72E, and NFPA-101. Devices and equipment for fire protection service shall be U.L listed or FM approved.
- D. All of the equipment and devices shall be included within the project Operations and Maintenance Manuals.
- E. Refer to Division 21 Section, Fire Protection Pipes, Valves, and Fittings for pipe materials.
- F. Fire Protection Systems design, equipment and installation shall comply with the Delaware State Fire Prevention Regulations, latest edition including all Annexes and Addendums.

1.2. DESCRIPTION

- A. Provide all facilities, labor, materials, tools, equipment, appliances, transportation, supervision, and related work necessary to complete the work specified in this Section and as shown on the drawings. The work shall be performed by a licensed sprinkler contractor only. All equipment, piping, devices, and valves shall be sized based on hydraulic calculations. Include a 10 psig safety factor with hydraulic calculations.

- B. Layout sprinkler system complete and size all fire protection piping in accordance with requirements of the National Fire Protection Association and the State Fire Marshal. System shall be designed for occupancy as required by applicable codes. Conceal fire protection piping in finished spaces unless indicated otherwise. System drains and inspector's test shall not be located in finished spaces.
- C. Sprinkler equipment and work shall conform to requirements of National Fire Protection Association Standard No. 13, and No. 24. In addition, all work shall conform to requirements of all codes and regulations of authorities having jurisdiction over this work, including, but not limited to, State Fire Marshal, County Fire Marshal, Life Safety Codes and International Code, and Insurance Underwriter.
- D. Preliminary Shop Drawing: Prior to preparing detailed working drawings for submission to State Fire Marshal, submit preliminary sprinkler system layout to the Architect for review and approval. Show all finished ceilings, light fixtures, air diffusers and other ceiling mounted devices. Coordinate sprinkler head types and locations with ceiling types. All sprinkler heads in acoustic tile ceilings shall be centered in the tile.
- E. The fire protection contractor shall prepare dimensioned and detailed working drawings, specifications, and hydraulic calculations and submit same to the State Fire Marshal and/or County Fire Marshal for review and approval. Prior to submission to the Fire Marshal, the Fire Protection Contractor shall have all fire protection drawings, submittals, calculations reviewed and approved by a registered Fire Protection Engineer or a level III Nicet Technician. One set of these approved documents shall be provided to the Engineer for record purposes. All costs related to changes required to obtain the Fire Marshal's or Insurance Underwriters' approval shall be the responsibility of the contractor.
- F. Manufactured equipment and materials shall be submitted to the Engineer for review and approval, in accordance with the requirements of Division 21 Section, Common Work Results for Fire Protection.
- G. Hydraulic calculations shall include a 10 psig safety factor to account for pipe aging and deterioration of water supply.
- H. Where combustible construction materials are located above ceilings, provide above ceiling fire protection in accordance with N.F.P.A-13.
- I. Where the architectural documents indicate ceiling "clouds" provide sprinklers above and below the same per NFPA-13. Coordinate exact locations of sprinkler heads and piping with Architect. Submit to Architect for review/approval sprinkler head/piping layout in these areas prior to submitting working drawings.

1.3. DELIVERY, STORAGE AND PROTECTION

- A. Refer to Division 01 Section, General Requirements: Transport, handle, store, and protect products.
- B. Accept equipment and devices on site in factory packing. Inspect for damage. Comply with manufacturer's rigging and installation instructions for all equipment.

- C. Protect components from physical damage including effects of weather, water, and construction debris.
- D. Provide temporary inlet and outlet caps, and maintain in place until installation.

1.4. EXTRA MATERIALS

- A. Provide extra sprinklers under provisions of NFPA-13. Provide suitable wrenches for each sprinkler type and metal storage cabinet.

1.5. PERMITS FROM THE AUTHORITY HAVING JURISDICTION AND FEES

- A. Pay all permits, fees, and charges required for this work.

1.6. HYDRANT FLOW TESTS

- A. The Fire Protection Contractor shall perform a hydrant flow test.
- B. The hydrant flow test shall be performed by the Fire Protection Contractor in the vicinity of each building at no additional cost to the Owner.
- C. Where practical, tests shall be performed between 9:00 a.m. and 5:00 p.m. on a normal working day during summer. If conducting the test is impractical during these hours, then a local Fire Department representative shall be present to "observe" the test during "off peak" hours and to acknowledge the correctness of results.
- D. The tests shall be submitted for review prior to submitting any hydraulic calculations. The test data shall contain the following:
 - 1. Date of the test
 - 2. Who performed the test and who was present.
 - 3. Site plan indicating locations and diameters of water mains and locations of the hydrants tests.
 - 4. Grade elevation of the hydrant tests
 - 5. Static pressure in psig
 - 6. Flow in GPM
 - 7. Residual pressure in psig
 - 8. Hydrant butt size in inches
 - 9. Hydrant coefficient

1.7. ALTERNATES

- A. Refer to Division 01 Section, Alternates - Alternates for description of work under this section affected by alternates.

PART 2 - PRODUCTS

2.1. SPECIALTIES

- A. All sprinkler heads shall be U.L. listed and shall be of the same manufacturer throughout the building.
- B. Piping shall be in accordance with Division 21 Section, Fire Suppression System Piping, Fittings, and Valves, etc. All exposed fire protection piping in unfinished areas shall be painted with red epoxy paint. White letters shall identify piping and indicate direction of flow. Exposed fire protection piping within finished areas shall be painted in color as determined by the Architect/Engineer.
- C. Shut-off valves shall be UL approved O.S. and Y. double disc gate valves or UL/FM approved grooved end butterfly valves.
- D. Check valves shall be swing check type or spring-loaded type UL approved for the application.
- E. Coordinate the fire protection systems with the fire alarm system specified under Division 26. Provide alarm initiating devices with proper contact arrangement. All electrical wiring shall be furnished and installed under Division 26.
- F. Flow control valve, alarm switches and valve supervision shall be furnished and installed under this Division. All wiring shall be accomplished by the electrical contractor, under Division 26. Provide any additional flow control valves, alarm switches, tamper switches and flow switches required by NFPA-13, but not indicated on contract drawings. Coordinate with the alarm system and electrical subcontractor.
- G. Pipe and fittings shall meet the requirements of NFPA 13 and NFPA-24.
- H. Wet pipe alarm check valve shall be Victaulic FireLock Series 750, Reliable Automatic Sprinkler Co., Tyco Fire Products, or approved equal. Valve shall be UL listed and FM approved for sprinkler systems with 175 psig maximum working pressure. Provide complete valve trim package including all necessary valves, gauges, fittings, nipples and alarm test. Valve internal components shall be replaceable without removing the valve from the installed position. Valve shall be installed in the vertical position only.

2.2. SPRINKLER HEADS

- A. Suspended or Drywall Ceilings:
 - 1. Manufacturer: Victaulic, Viking, Grinnell, Reliable, or approved equal.
 - 2. All sprinkler heads installed in suspended ceilings and drywall ceilings including bulkheads shall be Victaulic Model V38 concealed quick response sprinkler or approved equal. Cover plate shall be finished with a polyester baked enamel finish. Color selection by Architect. Provide cover assembly with each head. Frangible glass bulb shall be temperature rated for specific area hazard.

B. Exposed Area Type:

1. Manufacturers: Victaulic, Viking, Grinnell, Reliable, or approved equal.
2. Sprinkler heads in unfinished or exposed areas shall be Victaulic Model V27, or approved equal. These sprinklers shall be standard, ½ inch upright, pendant or conventional where required. Provide guards where hereinafter indicated. Sprinklers shall be brass with frangible glass bulb temperature rated for specific area hazard. Provide standard brass, screw on flat escutcheon plate.

C. Sidewall type:

1. Manufacturers: Victaulic, Viking, Grinnell, Reliable, or approved equal.
2. Sidewall sprinklers shall be Victaulic Model V27 semi-recessed horizontal sidewall type with matching screw on escutcheon plate. Sprinkler and escutcheon plate finish shall be chrome plated. Frangible glass bulb shall be temperature rated for specific area hazard.

D. The temperature rating of the sprinklers shall be as required by N.F.P.A.-13 and or the authority having jurisdiction.

E. All sprinkler heads installed in lay-in ceiling tiles shall be located in the center of the tile to provide a symmetrical, aesthetic and neat appearance. All sprinkler heads installed in bulkheads, recesses, and soffits shall be centered to provide a symmetrical, aesthetic and neat appearance.

F. Provide extended escutcheons in rooms with surface mounted lighting fixtures.

G. Additional heads shall be furnished as required by NFPA-13. The heads shall be in a cabinet designed to hold the heads and include one sprinkler head wrench for each type of sprinkler. Cabinet shall be mounted where indicated in the field.

H. Head guards shall be provided in mechanical spaces, janitors' closets, electrical rooms, storage areas. Finish for head guards in finished spaces shall be selected by Architect.

I. Sprinkler escutcheons and guards shall be listed, supplied, and approved for use with the sprinkler, by the sprinkler manufacturer.

J. Provide high temperature sprinkler heads for use adjacent to skylights, heaters, lights, or other high temperature areas.

2.3. FLEXIBLE SPRINKLER DROPS

A. Stainless Steel Sprinkler Fittings

1. Manufacturer: Victaulic AquaFlex® or Grinnell.
2. In lieu of rigid pipe offsets for concealed locations only, or return bends for sprinkler drops, the Victaulic AquaFlex® stainless steel, multiple-use, sprinkler fitting system may be used to locate sprinklers as required by final finished ceiling tiles and walls. The drop system shall consist of a braided or unbraided (corrugated) type 304 stainless steel flexible tube, a zinc-plated steel 1" NPT male

threaded nipple for connection to branch-line piping, and a zinc-plated steel reducer with ½" or ¾" NPT female thread for connection to the sprinkler head. Union joints shall be provided for ease of installation. The flexible drop shall attach to the ceiling grid using a one-piece open gate bracket. The braided drop system is FM approved for sprinkler services to 200 psi and can be installed without the use of tools, and the unbraided system is UL listed for sprinkler services to 175 psi.

2.4. SIGNS

- A. Provide 9 inch x 7 inch signs suspended from control valves which indicate the purpose of the valve and its normal position, Central Type A or approved equal.
- B. All control, drain, and test connection valves shall be provided with signs indicating purpose.
- C. Signs shall be fabricated of an approved material, painted red with white lettering.
- D. Signs shall have typed labels. Handwritten labels shall not be acceptable.

2.5. DRAINS

- A. The sprinkler systems shall be arranged to be completely drainable. Means of drainage shall be provided with adequate protection from freezing.
- B. Drain valve may be combined with sprinkler alarm test valve and sight glass, G/J Innovations Sure-Test, Reliable Automatic Sprinkler Co., Tyco Fire Products, Victaulic, or approved equal. Valve shall be UL listed with positive off handle for off, test or drain, integral sight glass, orifice size equal to smallest sprinkler orifice and full 1 inch drain.

2.6. ALARM DEVICES

- A. Approved water flow switches shall be installed to activate the fire alarm, and annunciate sprinkler flow at a minimum on each floor, each system riser, where indicated on the contract documents and where required by N.F.P.A. or the authority having jurisdiction. Conductors shall be provided under the electric division to provide fire alarm, and annunciation. Activation of the sprinkler system by one sprinkler or equivalent test shall cause the fire alarm system to activate, and the appropriate lamp(s) to activate on the annunciator. An approved test shall be provided for each water flow switch.
- B. All valves controlling water supply for sprinklers shall be electrically supervised in accordance with requirements of NFPA 13 and 72A, and provided under this Division. Provide separate valve chart for all fire protection valve indicating valve type, normal position, size, location and type of supervision insert in O&M manual and mount additional copies in fire pump room and mechanical rooms.
- C. Valve tamper switches shall be Model OSY2 as manufactured by System Sensor or Model OSYSU-A2 as manufactured by Potter Electric Signal Company or approved equal. The

valve tamper switches shall monitor the open position of all OS&Y gate valves. Each tamper switches shall contain two sets of single pole double throw, Form C contacts. All valve tamper switches shall have tamper resistant covers that upon removal of the cover will cause the switches to operate. Tamper switches shall be suitable for 125/250 VAC @ 15 AMPS. All tamper switches shall be U.L. listed and F.M. approved.

- D. Pressure type flow switches shall be Model EPS10 as manufactured by System Sensor or Model PS10-2 as manufactured by Potter Electric Signal Company, Tyco Fire Products, United Electric Controls, Viking Corp., or approved equal. Each pressure type flow switch shall contain two sets of single pole double throw switch contacts. All pressure type flow switches shall have tamper resistant covers that upon removal of the cover will cause the switches to operate. Pressure type flow switches shall be suitable for 125/250 VAC @ 10 AMPS. All pressure type flow switches shall be U.L. listed and F.M. approved.
- E. Vane Type waterflow switch with retard shall be WFD Series as manufactured by System Sensor or Model VSR-F as manufactured by Potter Electric Signal Company, ADT Security Services, McDonnell & Miller, Viking Corp., Watts, or approved equal. The VAC type waterflow switches shall contain two single pole, double throw form C, snap return switches. All Vane type waterflow switches shall have tamper resistant covers that upon removal of the cover will cause the switches to operate. Vane type waterflow switches shall be suitable for 125/250 VAC @ 10 AMPS. All vane type waterflow switches shall be U.L. listed and F.M. approved.

2.7. GAUGES

- A. A listed 3 ½ inch dial spring pressure gauge shall be connected to the top of each standpipe. Gauges shall be located in a suitable place to prevent freezing. Each gauge shall be controlled by a valve having arrangement for draining.
- B. Listed pressure gauges with connections not smaller than ¼ inch shall be installed at the system main drain, at each main drain associated with a floor control valve, and above and below each alarm check-valve.
- C. All pressure gauges shall be listed and shall have a maximum limit not less than twice the normal working pressure at the point where installed. They shall be installed to permit removal and shall be located where they will not be subject to freezing.

2.8. VALVES

- A. Provide and install control valves as indicated on contract drawings and as required by N.F.P.A.-13. Gate valves shall be listed O.S. & Y. type. All control valves shall be supervised open. Supervision shall be as required by N.F.P.A.-13. Victaulic Series 705 and 765 grooved end butterfly valves shall be supervised in the open position.

PART 3 - EXECUTION

3.1. GENERAL INSTALLATION REQUIREMENTS

- A. Install equipment in accordance with manufacturer's instructions.
- B. Place pipe runs to minimize obstruction to other work.
- C. Place piping in concealed spaces above finished ceilings.
- D. Center sprinklers in two directions in ceiling tile and provided piping offsets as required.
- E. Apply masking tape or paper cover to ensure concealed sprinklers, cover plates, and sprinkler escutcheons do not receive field paint finish. Remove after painting. Replace painted sprinklers.
- F. Flush entire piping system of foreign matter.
- G. Install guards on sprinklers where subject to abuse and where specified.
- H. Hydrostatically test entire system.
- I. Test must be witnessed by Fire Marshal/authority having jurisdiction/ Owner's insurance underwriter/ Architect/Engineer.
- J. Locate inspectors test stations for sprinkler zones per NFPA-13. Provide and install drain piping from all approved terminations. Provide splash blocks for terminations outside. Splash block locations shall be approved by the Architects.
- K. The fire protection contractor shall hydraulically prove the most remote area per NFPA-13.
- L. Coordinate locations of sprinkler heads with lights, diffusers, ceiling types, etc.
- M. Hydrostatically test system at 200 PSI for 4 hours, per NFPA-13.
- N. The sprinkler bulb protector must remain in place until the sprinkler is completely installed and before the system is placed in service. Remove bulb protectors carefully by hand after installation. Do not use any tools to remove bulb protectors.
- O. Refer to Architectural Drawings for exact location and extent of all fire rated walls and smoke barriers.
- P. Grooved joint piping systems shall be installed in accordance with the manufacturer's (Victaulic) guidelines and recommendations. All grooved couplings, fittings, valves, and specialties shall be the products of a single manufacturer. Grooving tools shall be of the same manufacturer as the grooved components. The gasket style and elastomeric material (grade) shall be verified as suitable for the intended service as specified. Gaskets shall be molded and produced by Victaulic. Grooved end shall be clean and free from indentations, projections, and roll marks in the area from pipe end to groove for proper gasket sealing.

3.2. INTERFACE WITH OTHER PRODUCTS

- A. Ensure required devices are installed and connected as required to fire alarm system.

3.3. LAYOUT

- A. Coordinate layout and installation of fire protection system with all other buildings structural, mechanical and electrical work. Locate sprinkler heads symmetrically with respect to ceiling tiles, lighting fixtures, registers, grilles, diffusers, etc. Provide piping offsets as required to maintain symmetry. Note that a preliminary sprinkler layout is to be submitted for review. Contractor is cautioned that sprinkler mains must be located to prevent conflict with other work and in any case, sprinkler contractor shall be responsible for coordination of his work with work of other trades.
- B. Unless otherwise indicated, the entire building shall be protected throughout with a wet pipe sprinkler system. Where required by NFPA-13 and/or the authority having jurisdiction, install sprinkler heads above and below ceilings.

3.4. WET PIPE SPRINKLER SYSTEM

- A. System components shall include, but not be limited to flow control valves, electrical connections to central fire alarm system, check valves, main piping, branch piping, inspector's test, drains, sprinkler heads, signs, etc. and all other incidental appurtenances as required.

3.5. VALVE INSTALLATION

- A. Gate Valves: Install fire-protection-service valves supervised-open, located to control sources of water supply. Provide permanent identification signs indicating portion of system controlled by each valve.
- B. Alarm Check Valves: Install valves in vertical position for proper direction of flow, including bypass check valve and retard chamber drain-line connection.

3.6. CONNECTIONS

- A. Connect water supplies to sprinklers.
- B. Connect piping to specialty valves, specialties, and accessories.
- C. Connect alarm devices to fire alarm.

3.7. COMMISSIONING

- A. Verify that specialty valves, trim, fittings, controls, and accessories are installed and operate correctly.

- B. Verify that specified tests of piping are complete.
- C. Verify that damaged sprinklers and sprinklers with paint or coating not specified are replaced with new, correct type.
- D. Verify that sprinklers are correct types, have correct finishes and temperature ratings, and have guards as required for each application.
- E. Fill wet-pipe sprinkler piping with water.
- F. Energize circuits to electrical equipment and devices.
- G. Adjust operating controls and pressure settings.
- H. Coordinate with fire alarm tests. Operate as required.

3.8. DRAINS

- A. The sprinkler system shall be arranged to be completely drainable. Means of drainage shall be provided with adequate protection from freezing.

3.9. TESTS

- A. The sprinkler systems installation shall be hydrostatically tested, inspected, and approved, in accordance with NFPA Standard No. 13, and NFPA Standard No. 25. Test certificate shall be forwarded to the Office of the State Fire Marshal and the Architect as proof of compliance.
- B. Tests shall be performed in accordance with the requirements of the Office of the State Fire Marshal and shall prove the systems to be adequate and satisfactory in every respect. All tests shall be performed in the presence of the State Fire Marshal or his representative.
- C. Any deficiencies revealed by these tests shall be corrected and the systems shall be retested until acceptable results are obtained.

3.10. AS-BUILT DRAWINGS & PROJECT CLOSEOUT

- A. Provide separate as-built drawings of all fire protection systems meeting requirements of General Mechanical Requirements hereinbefore specified.
- B. At the completion of the work, provide a sealed plan of the building indicating the locations of all control valves, low point drains, flow switches, and Inspectors Test Stations. The plan shall be neatly drawn and color coded to indicate the portion of the building protected by each system, framed under glass and permanently mounted on the wall adjacent to the system header.
- C. Include manufacturers literature, cleaning procedures, replacement parts, lists, and repair data for equipment.

- D. Include manufacturers' instructions, start-up data, troubleshooting, check lists for all equipment.

3.11. WARRANTY

- A. The Contractor's attention is directed to the warranty obligations contained in the Article of the General Conditions of the specifications entitled "warranty".

3.12. OWNER TRAINING

- A. Upon completion of the project, furnish a complete copy of NFPA-25 to Owner. Provide correspondence indicating that the pamphlet has been turned over to the Owner.
 - 1. Contractor shall provide at least two (2) hours of training to the Owner on the proper inspection, testing, and maintenance of the installed fire protection system.
 - 2. Schedule training with the Owner through the Architect and/or Engineer with at least seven (7) days prior notice.
 - 3. A Victaulic factory-trained field representative shall provide on-site training for contractor's field personnel in the proper use of grooving tools and installation of grooved piping products. Factory-trained representative shall periodically review the product installation. Contractor shall remove and replace any improperly installed products.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

DIVISION 23 SECTION 23 05 00
COMMON WORK RESULTS FOR HVAC
TABLE OF CONTENTS

PART 1 - GENERAL	1
1.1. SUMMARY.....	1
1.2. PERMITS AND FEES.....	1
1.3. EXAMINATION OF SITE.....	1
1.4. CONTRACTOR QUALIFICATION	2
1.5. MATERIALS AND EQUIPMENT	2
1.6. FIRE SAFE MATERIALS	3
1.7. REFERENCED STANDARDS, CODES AND SPECIFICATIONS	3
1.8. SUBMITTALS, REVIEW AND ACCEPTANCE	3
1.9. SHOP DRAWINGS.....	4
1.10. SUPERVISION AND COORDINATION	5
1.11. CUTTING AND PATCHING	6
1.12. CONNECTIONS AND ALTERATIONS TO EXISTING WORK.....	6
1.13. DEMOLITION	6
1.14. ALTERNATES	8
1.15. DEFINITIONS	8
PART 2 - NOT USED	9
PART 3 - EXECUTION	9
3.1. EQUIPMENT INSTALLATION - COMMON REQUIREMENTS	9
3.2. SUPPORTS, HANGERS AND FOUNDATIONS	9
3.3. PROVISIONS FOR ACCESS	9
3.4. PAINTING AND FINISHES.....	10
3.5. CLEANING OF SYSTEMS	11
3.6. COLOR SELECTION	11
3.7. PROTECTION OF WORK	11
3.8. OPERATION OF EQUIPMENT.....	12
3.9. DEMONSTRATION AND TRAINING VIDEO RECORDINGS.....	12
3.10. IDENTIFICATIONS, FLOW DIAGRAMS, ELECTRICAL DIAGRAMS AND OPERATING INSTRUCTIONS	13
3.11. WALL AND FLOOR PENETRATION	13
3.12. RECORD DRAWINGS.....	14
3.13. WARRANTY	14
3.14. OPERATIONS AND MAINTENANCE MANUALS	15
3.15. INSTALLATION AND COORDINATION DRAWINGS	16
3.16. EQUIPMENT BY OTHERS	16
3.17. OUTAGES.....	16
END OF SECTION.....	16

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 23 05 00 - COMMON WORK RESULTS FOR HVAC

PART 1 - GENERAL

1.1. SUMMARY

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.
- B. Provide all labor, materials, equipment, and services necessary for and incidental to the complete installation and operation of all mechanical work.
- C. Unless otherwise specified, all submissions shall be made to, and acceptances and approvals made by the Architect and the Engineer.
- D. Contract Drawings are generally diagrammatic and all offsets, fittings, transitions and accessories are not necessarily shown. Furnish and install all such items as may be required to fit the work to the conditions encountered. Arrange piping, ductwork, equipment, and other work generally as shown on the contract drawings, providing proper clearance and access. Where departures are proposed because of field conditions or other causes, prepare and submit detailed shop drawings for approval in accordance with Submittals specified below. The right is reserved to make reasonable changes in location of equipment, piping, and ductwork, up to the time of rough-in or fabrication.
- E. Conform to the requirements of all rules, regulations and codes of local, state and federal authorities having jurisdiction.
- F. Coordinate the work under Division 23 with the work of all other construction trades.
- G. Be responsible for all construction means, methods, techniques, procedures, and phasing sequences used in the work. Furnish all tools, equipment and materials necessary to properly perform the work in first class, substantial, and workmanlike manner, in accordance with the full intent and meaning of the contract documents.

1.2. PERMITS AND FEES

- A. Obtain all permits and pay taxes, fees and other costs in connection with the work. File necessary plans, prepare documents, give proper notices and obtain necessary approvals. Deliver inspection and approval certificates to Owner prior to final acceptance of the work.
- B. Permits and fees shall comply with the Division 01, General Requirements of the specification.

1.3. EXAMINATION OF SITE

- A. Examine the site, determine all conditions and circumstances under which the work must be done, and make all necessary allowances for same. No additional cost to the Owner will be permitted for contractors' failure to do so.

- B. Examine and verify specific conditions described in individual specifications sections.
- C. Verify that utility services are available, of the correct characteristics, and in the correct locations.

1.4. CONTRACTOR QUALIFICATION

- A. Any Contractor or Subcontractor performing work under Division 23 shall be fully qualified and acceptable to the Architect/Engineer and Owner. Submit the following evidence when requested:
 - 1. A list of not less than five comparable projects which the Contractor completed.
 - 2. Letter of reference from not less than three registered professional engineers, general contractors or building owners.
 - 3. Local and/or State License, where required.
 - 4. Membership in trade or professional organizations where required.
- B. A Contractor is any individual, partnership, or corporation, performing work by contract or subcontract on this project.
- C. Acceptance of a Contractor or Subcontractor will not relieve the Contractor or subcontractor of any contractual requirements or his responsibility to supervise and coordinate the work, of various trades.

1.5. MATERIALS AND EQUIPMENT

- A. Materials and equipment installed as a permanent part of the project shall be new, unless otherwise indicated or specified, and of the specified type and quality.
- B. Where material or equipment is identified by proprietary name, model number and/or manufacturer, furnish named item, or its equal, subject to approval by Engineer. Substituted items shall be equal or better in quality and performance and must be suitable for available space, required arrangement, and application. Submit all data necessary to determine suitability of substituted items, for approval.
- C. The suitability of named item only has been verified. Where more than one item is named, only the first named item has been verified as suitable. Substituted items, including items other than first named shall be equal or better in quality and performance to that of specified items, and must be suitable for available space, required arrangement and application. Contractor, by providing other than the first named manufacturer, assumes responsibility for all necessary adjustments and modifications necessary for a satisfactory installation. Adjustments and modifications shall include but not be limited to electrical, structural, support, and architectural work.
- D. Substitution will not be permitted for specified items of material or equipment where noted.
- E. All items of equipment furnished shall have a service record of at least five (5) years.

1.6. FIRE SAFE MATERIALS

- A. Unless otherwise indicated, materials and equipment shall conform to UL, NFPA and ASTM standards for fire safety with smoke and fire hazard rating not exceeding flame spread of 25 and smoke developed of 50.

1.7. REFERENCED STANDARDS, CODES AND SPECIFICATIONS

- A. Specifications, Codes and Standards listed below are included as part of this specification, latest edition.
- B. AABC - Associated Air Balance Council
- C. ADC - Air Diffusion Council
- D. AMCA - Air Movement and Control Association
- E. ASHRAE - American Society of Heating, Refrigerating and Air Conditioning Engineers
- F. NEC - National Electrical Code
- G. NEMA - National Electrical Manufacturers Association
- H. NFPA - National Fire Protection Association
- I. SMACNA - Sheet Metal and Air Conditioning Contractors National Association
- J. UL - Underwriters' Laboratories
- K. State of Delaware Fire Protection Regulations.
- L. All mechanical equipment and materials shall comply with the codes and standards listed in the latest edition of ASHRAE HVAC Applications Handbook, Chapter entitled Codes and Standards.

1.8. SUBMITTALS, REVIEW AND ACCEPTANCE

- A. Equipment, materials, installation, workmanship and arrangement of work are subject to review and acceptance. No substitution will be permitted after acceptance of equipment or materials except where such substitution is considered by the Architect to be in best interest of Owner.
- B. After acceptance of Material and Equipment List, submit three (3) copies or more as required under General Conditions of complete descriptive data for all items. Data shall consist of specifications, data sheets, samples, capacity ratings, performance curves, operating characteristics, catalog cuts, dimensional drawings, wiring diagrams, installation instructions, and any other information necessary to indicate complete compliance with Contract Documents. Edit submittal data specifically for application to this project.

- C. Thoroughly review and stamp all submittals to indicate compliance with contract requirements prior to submission. Coordinate installation requirements and any electrical requirements for equipment submitted. Contractor shall be responsible for correctness of all submittals.
- D. Submittals will be reviewed for general compliance with design concept in accordance with contract documents, but dimensions, quantities, or other details will not be verified.
- E. Identify submittals, indicating intended application, location and service of submitted items. Refer to specification sections or paragraphs and drawings where applicable. Clearly indicate exact type, model number, style, size and special features of proposed item. Submittals of a general nature will not be acceptable. For substituted items, clearly list on the first page of the submittal all differences between the specified item and the proposed item. The contractor shall be responsible for corrective action and maintaining the specification requirements if differences have not been clearly indicated in the submittal.
- F. Submit actual operating conditions or characteristics for all equipment where required capacities are indicated. Factory order forms showing only required capacities will not be acceptable. Call attention, in writing, to deviation from contract requirements.
- G. Acceptance will not constitute waiver of contract requirements unless deviations are specifically indicated and clearly noted. Use only final or corrected submittals and data prior to fabrication and/or installation.
- H. For any submittal requiring more than two (2) reviews by the Engineer (including those caused by a change in subcontractor or supplier) the Owner will withhold contractor's funds by a change order to the contract to cover the cost of additional reviews. One review is counted for each action including rejection or return of any reason.
- I. For resubmissions, the Contractor must address in writing all of the Engineer's comments on the original submission to verify compliance.

1.9. SHOP DRAWINGS

- A. Prepare and submit shop drawings for all mechanical equipment, specially fabricated items, modifications to standard items, specially designed systems where detailed design is not shown on the contract drawings, or where the proposed installation differs from that shown on contract drawings.
- B. Submit data and shop drawings including but not limited to the list below, in addition to provisions of the paragraph above. Identify all shop drawings by the name of the item and system and the applicable specification paragraph number and drawing number.
- C. Every submittal including, but not limited to the list below, shall be forwarded with its own transmittal as a separate, distinct shop drawing. Grouping of items/systems that are not related shall be unacceptable.

D. Items and Systems

1. Access Doors/Panels including layouts and locations
2. Air Devices
3. Air Distribution Systems
4. Coordinated Drawings
5. Drip Pans
6. Duct Materials
7. Fire Stopping - Methods and Materials
8. Grilles, Registers, Diffusers, Linear Slot Diffusers
9. Identification Systems
10. Material and Equipment Lists
11. Operations and Maintenance Manuals
12. Thermal Insulation Materials Include Table Summaries
13. Wiring Diagrams, Flow Diagrams and Operating Instructions

E. Contractor, additionally, shall submit for review any other shop drawings as required by the Architect. No item shall be delivered to the site, or installed, until the Contractor has received a submittal from the Engineer marked Reviewed or Comments Noted. After the proposed materials have been reviewed, no substitution will be permitted except where approved by the Architect.

F. For any shop drawing requiring more than two (2) reviews by the Engineer (including those caused by a change in subcontractor or supplier) the Owner will withhold contractor's funds by a change order to the contract to cover the cost of additional reviews. One review is counted for each action including rejection or return of any reason.

1.10. SUPERVISION AND COORDINATION

- A. Provide complete supervision, direction, scheduling, and coordination of all work under the Contract, including that of subcontractors.
- B. Coordinate rough-in of all work and installation of sleeves, anchors, and supports for piping, ductwork, equipment, and other work performed under Division 23.
- C. Arrange for pipe spaces, chases, slots, and openings in building structure during progress of construction to allow for mechanical installations.
- D. Coordinate electrical work required under Division 23 with that under Division 26. Coordinate all work under Division 23 with work under all other Divisions.
- E. Supply services of an experienced (10 year minimum) and competent Project Manager to be in constant charge of work at site.
- F. Where a discrepancy exists within the specifications or drawings or between the specifications and drawings, the more stringent (or costly) requirement shall apply until clarification can be obtained from the Engineer. Failure to clarify such discrepancies with the Engineer will not relieve the Contractor of the responsibility of conforming to the requirements of the Contract.

- G. Failure of contractor to obtain a full and complete set of contract documents (either before or after bidding) will not relieve the contractor of the responsibility of complying with the intent of the contract documents.

1.11. CUTTING AND PATCHING

- A. Accomplish all cutting and patching necessary for the installation of work under Division 23. Damage resulting from this work to other work already in place, shall be repaired at Contractor's expense. Where cutting is required, perform work in neat and workmanlike manner. Restore disturbed work to match and blend with existing construction and finish, using materials compatible with the original. Use mechanics skilled in the particular trades required.
- B. Do not cut structural members without approval from the Architect or Engineer.

1.12. CONNECTIONS AND ALTERATIONS TO EXISTING WORK

- A. Unless otherwise noted on the drawings, where existing mechanical work is removed, pipes, valves, ductwork, etc., shall be removed, including hangers, to a point below finished floors or behind finished walls and capped. Such point shall be far enough behind finished surfaces to allow for installation of normal thickness of required finish material.
- B. Where work specified in Division 23 connects to existing equipment, piping, ductwork, etc., Contractor shall perform all necessary alterations, cuttings, fittings, etc., of existing work as may be necessary to make satisfactory connections between new and existing work, and to leave completed work in a finished and workmanlike condition.
- C. Where the work specified under Division 23, or under other Divisions, requires relocation of existing equipment, piping, ductwork, etc., Contractor shall perform all work and make necessary changes to existing work as may be required to leave completed work in a finished and workmanlike condition. Where existing insulation is disturbed, replace insulation where removed or damaged equal to existing, in type, thickness, density, finish and thermal resistance (R-value) value.
- D. Where the relocation of existing equipment is required for access or the installation of new equipment, the contractor shall temporarily remove and/or relocate and re-install as required to leave the existing and new work in a finished and workman like condition.

1.13. DEMOLITION

- A. Unless otherwise noted all existing equipment, piping, ductwork, etc., shall remain.
- B. Where existing equipment is indicated to be removed, all associated piping, conduit, power, controls, control panels, sensors, tubing, insulation, hangers, ductwork, supports and housekeeping pads, etc., patch, paint and repair walls/roof/floor to match existing and/or new finishes.

- C. The Contractor shall be responsible for visiting the site and determining the existing conditions in which the work is to be performed.
- D. Where any abandoned pipes in existing floors, walls, pipe tunnels, ceilings, etc., conflict with new work, remove abandoned pipes as necessary to accommodate new work.
- E. The location of all existing equipment, piping, ductwork, etc., indicated is approximate only and shall be checked and verified. Install all new mechanical/plumbing/fire protection work to connect to or clear existing work as applicable.
- F. Maintain egress at all times. Coordinate egress requirements with the State Fire Marshal, the Owner and the authorities having jurisdiction.
- G. Make provisions and include in bid all costs associated with confined entry/space requirements and all other applicable OSHA regulations.
- H. Where required to maintain the existing systems in operation, temporarily backfeed existing systems from new equipment. Contractor shall temporarily extend existing piping systems to new piping systems with the appropriate shut-off valves.
- I. At completion of project all temporary piping, valves, controls, etc., shall be removed in their entirety.
- J. Existing piping, equipment, ductwork, materials, etc., not required for re-use or re-installation in this project, shall be removed from the project site.
- K. Deliver to the Owner, on the premises where directed, existing equipment and materials which are removed and which are desired by the Owner or are indicated to remain the property of the Owner.
- L. All other materials and equipment which are removed shall become property of the Contractor and shall be promptly removed, from the premises, and disposed of by the Contractor, in an approved manner.
- M. Where piping and/or ductwork is removed, remove all pipe or ductwork hangers which were supporting the removed piping or ductwork. Patch the remaining penetration voids with like materials and paint to match existing construction.
- N. Where required, provide and coordinate removal and re-installation of existing equipment. Take care to protect materials and equipment indicated for reuse. Contractor shall repair or replace items which are damaged. Contractor shall have Owner's representative present to confirm condition of equipment prior to demolition.
- O. Before demolition begins, and in the presence of the Owners representative, test and note all deficiencies in all existing systems affected by demolition but not completely removed by demolition. Provide a copy of the list of system deficiencies to the Owner and the Engineer. Videotape existing conditions in each space prior to beginning demolition work.
- P. The Owner shall have the first right of refusal for all fixtures, devices and equipment removed by the Contractor.

- Q. All devices and equipment designated by the Owner to remain the property of the Owner shall be moved and stored by the Contractor at a location on site as designated by the Owner. It shall be the Contractor's responsibility to store all devices and equipment in a safe manner to prevent damage while stored.
- R. All existing equipment refused by the Owner shall become the property of the Contractor and shall be removed from the site by the Contractor in a timely manner and disposed of in a legal manner.
- S. Work Abandoned in Place: Cut and remove underground pipe a minimum of 2 inches beyond face of adjacent construction. Cap and patch surface to match existing finish.
- T. Temporary Disconnection: Remove, store, clean, reinstall, reconnect, and make operational equipment indicated for relocation.
- U. Terminate services and utilities in accordance with local laws, ordinances, rules and regulations.

1.14. ALTERNATES

- A. Refer to Division 01 Section, "Alternates" for description of work under this section affected by alternates.

1.15. DEFINITIONS

- A. Approve - to permit use of material, equipment or methods conditional upon compliance with contract documents requirements.
- B. Furnish and install or provide means to supply, erect, install, and connect to complete for readiness for regular operation, the particular work referred to.
- C. Contractor means the mechanical contractor and any of his subcontractors, vendors, suppliers, or fabricators.
- D. Piping includes pipe, all fittings, valves, hangers, insulation, identification, and other accessories relative to such piping.
- E. Ductwork includes duct material, fittings, hangers, insulation, sealant, identification and other accessories
- F. Concealed means hidden from sight in chases, formed spaces, shafts, hung ceilings, or embedded in construction.
- G. Exposed means not installed underground or concealed as defined above.
- H. Invert Elevation means the elevation of the inside bottom of pipe.
- I. Finished Spaces: Spaces other than mechanical and electrical equipment rooms, furred spaces, pipe and duct shafts, unheated spaces immediately below roof, spaces above ceiling, and unexcavated spaces.

- J. Review - limited observation or checking to ascertain general conformance with design concept of the work and with information given in contract documents. Such action does not constitute a waiver or alteration of the contract requirements.

PART 2 - NOT USED

PART 3 - EXECUTION

3.1. EQUIPMENT INSTALLATION - COMMON REQUIREMENTS

- A. Install equipment to provide maximum possible headroom, if mounting heights are not indicated.
- B. Install equipment according to approved submittal data. Portions of the work are shown only in diagrammatic form. Refer conflicts to Architect.
- C. Install equipment level and plumb, parallel and perpendicular to other building systems and components in exposed interior spaces, unless otherwise indicated.
- D. Install mechanical equipment to facilitate service, maintenance, and repair or replacement of components. Connect equipment for ease of disconnecting, with minimum interference to other installations. Extend grease fittings to accessible locations.
- E. Install equipment giving right of way to piping installed at required slope.
- F. Do not install equipment, ductwork, or piping over electrical gear, electrical panels, motor controllers, and similar electrical equipment. Install equipment, ductwork, and piping to maintain clear space above and in front of all electrical components per the National Electric Code.

3.2. SUPPORTS, HANGERS AND FOUNDATIONS

- A. Provide supports, hangers, braces, attachments and foundations required for the work. Support and set the work in a thoroughly substantial and workman-like manner without placing strains on materials, equipment, or building structure, submit shop drawings for approval. Coordinate all work with the requirements of the structural division.
- B. Supports, hangers, braces, and attachments shall be standard manufactured items or fabricated structural steel shapes. All interior hangers shall be galvanized or steel with rust inhibiting paint. For un-insulated copper piping provide copper hanger to prevent contact of dissimilar metals. All exterior hangers shall be constructed of stainless steel utilizing stainless steel rods, nuts, washers, bolts, etc.

3.3. PROVISIONS FOR ACCESS

- A. The contractor shall provide access panels and doors for all concealed equipment, valves, strainers, dampers, filters, damper operators, and other devices requiring maintenance,

service, adjustment, balancing or manual operation.

- B. Where access doors are necessary, furnish and install manufactured painted steel door assemblies consisting of hinged door, key locks, and frame designed for the particular wall or ceiling construction. Properly locate each door. Door sizes shall be a minimum of 12 inches x 12 inches for hand access, 18 inches x 18 inches for shoulder access and 20 inches x 30 inches for full body access where required. Review locations and sizes with Architect prior to fabrication. Provide U.L. approved and labeled access doors where installed in fire rated walls or ceilings. Doors shall be Milcor Metal Access Doors as manufactured by Inland-Ryerson, Mifab, or approved equal.
 - 1. Acoustical or Cement Plaster: Style B
 - 2. Hard Finish Plaster: Style K or L
 - 3. Masonry or Dry Wall: Style M
- C. Where access is by means of liftout ceiling tiles or panels, mark each ceiling grid using small color-coded and numbered tabs. Provide a chart or index for identification. Place markers within ceiling grid not on ceiling tiles.
- D. Access panels, doors, etc. described herein shall be furnished under the section of specifications providing the particular service and to be turned over to the pertinent trade for installation. Coordinate installation with installing contractor. All access doors shall be painted in baked enamel finish to match ceiling or wall finish. Label inside of access door as to what it serves.
- E. Submit shop drawings indicating the proposed location of all access panels/doors. Access doors in finished spaces shall be coordinated with air devices, lighting and sprinklers to provide a neat and symmetrical appearance.

3.4. PAINTING AND FINISHES

- A. Provide protective finishes on all materials and equipment. Use coated or corrosion-resistant materials, hardware and fittings throughout the work. Paint bare, untreated ferrous surfaces with rust-inhibiting paint.
- B. Clean surfaces prior to application of insulation, adhesives, coatings, paint, or other finishes.
- C. Provide factory-applied finishes where specified. Unless otherwise indicated factory-applied paints shall be baked enamel with proper pretreatment.
- D. Protect all finishes and restore any finishes damaged as a result of work under Division 23 to their original condition.
- E. The preceding requirements apply to all work, whether exposed or concealed.
- F. Remove all construction marking and writing from exposed equipment, ductwork, piping and building surfaces. Do not paint manufacturer's labels or tags.
- G. All exposed ductwork, piping, equipment, etc. shall be painted. Colors shall be as stated

in this division or as selected by the Architect and conform to ANSI Standards.

- H. All exposed ductwork, piping, equipment, etc. in finished spaces shall be painted. Colors shall be as selected by the Architect and conform to ANSI Standards.

3.5. CLEANING OF SYSTEMS

- A. Thoroughly clean systems after satisfactory completion of pressure tests and before permanently connecting fixtures, equipment, traps, strainers, and other accessory items. Blow out and flush piping until interior surfaces are free of foreign matter.
- B. Flush piping in re-circulating water systems to remove cutting oil, excess pipe joint compound, solder slag and other foreign materials. Do not use system pumps until after cleaning and flushing has been accomplished to the satisfaction of the Engineer. Employ chemical cleaners, including a non-foaming detergent, not harmful to system components. After cleaning operation, final flushing and refilling, the residual alkalinity shall not exceed 300 parts per million. Submit a certificate of completion to Engineer stating name of Service Company used.
- C. Maintain strainers and dirt pockets in clean condition.
- D. Clean ductwork, registers, grilles, and diffusers at completion of work.
- E. Install filters of equal efficiency to those specified in permanent air systems operated for temporary heating during construction. Replace with clean filters as specified prior to acceptance and after cleaning of system.
- F. Pay for labor and materials required to locate and remove obstructions from systems that are clogged with construction refuse after acceptance. Replace and repair work disturbed during removal of obstructions.
- G. Leave systems clean, and in complete running order.

3.6. COLOR SELECTION

- A. Color of finishes shall be as selected by the Architect.
- B. Submit color of factory-finished equipment for acceptance prior to ordering.

3.7. PROTECTION OF WORK

- A. Protect work, material and equipment from weather and construction operations before and after installation. Properly store and handle all materials and equipment.
- B. Cover temporary openings in ductwork, and equipment to prevent the entrance of water, dirt, debris, or other foreign matter. Deliver pipes and tubes with factory applied end caps.
- C. Cover or otherwise protect all finishes.

- D. Replace damaged materials, devices, finishes and equipment.
- E. Provide moisture protection for ductwork in areas which are not under roof or where ductwork would be exposed to rainwater.

3.8. OPERATION OF EQUIPMENT

- A. Clean all systems and equipment prior to initial operation for testing, balancing, or other purposes. Lubricate, adjust, and test all equipment in accordance with manufacturer's instructions. Do not operate equipment unless all proper safety devices or controls are operational. Provide all maintenance and service for equipment that is authorized for operation during construction.
- B. Where specified, or otherwise required, provide the services of the manufacturer's factory-trained servicemen or technicians to start up the equipment. Where factory start-up of equipment is not specified, provide field start-up by qualified technician.
- C. Submit factory start-up sheets or field start-ups sheets for all equipment prior to the commencement of testing and balancing work. Testing and balancing work shall not commence until start-up reports have been completed, reviewed by Engineer and forwarded to Testing and Balancing Agency.
- D. Do not use mechanical systems for temporary services or temporary conditioning during construction, unless approved by Owner in writing. Refer to Division 01 Section "Temporary Facilities and Controls" for temporary heating/cooling during construction.
- E. Upon completion of work, clean and restore all equipment to new conditions; replace expendable items such as filters.

3.9. DEMONSTRATION AND TRAINING VIDEO RECORDINGS

- A. General: Record demonstration and training video recordings. Record each training module separately.
 - 1. At beginning of each training module, record each chart containing learning objective and lesson outline.
- B. Video Recording Format: Provide high-quality color video recordings with menu navigation in format acceptable to Engineer
- C. Recording: Mount camera on tripod before starting recording, unless otherwise necessary to show area of demonstration and training. Display continuous running time.
- D. Narration: Describe scenes on video recording by audio narration by microphone while video recording is recorded. Include description of items being viewed.
- E. Transcript: Provide a transcript of the narration. Display images and running time captured from videotape opposite the corresponding narration segment.

3.10. IDENTIFICATIONS, FLOW DIAGRAMS, ELECTRICAL DIAGRAMS AND OPERATING INSTRUCTIONS

- A. Contractor shall submit for approval schematic piping diagrams of each piping system installed in the building. Diagrams shall indicate the location and the identification number of each valve in the particular system. Following approval by all authorities, the diagrams shall be framed, mounted under safety glass and hung in each Mechanical Room where directed. Contractor shall deliver the tracing or sepia from which the diagrams were reproduced to the Owner.
- B. All valves shall be plainly tagged. For any bypass valves, install sign indicating valve position as “Normally Open” or “Normally Closed” as required.
- C. All items of equipment, including motor starters, disconnects and ATC panels shall be furnished with white on black plastic permanent identification cards. Lettering shall be a minimum of ¼ inch high. Identification plates shall be secured, affixed to each piece of equipment, starters, disconnects, panels by screw or adhesive (tuff bond #TB2 or as approved equal).
- D. Provide three (3) copies of operating and maintenance instructions for all principal items of equipment furnished. This material shall be bound as a volume of the Record and Information Booklet as hereinafter specified.
- E. All lines ductwork installed under this contract shall be stenciled with direction of flow arrows and with stenciled letters naming each pipe and ductwork and service. Refer to Division 23 Section, “HVAC Piping, Fittings, Valves, Etc.” and Division 23 Section, “HVAC Air Distribution”. Color-code all direction of flow arrows and labels. In finished spaces omit labeling and direction of flow arrows. Paint in color as selected by Architect.
- F. Submit list of wording, symbols, letter size, and color coding for mechanical identification. Submit samples of equipment identification cards, piping labels, ductwork labels, and valve tags to Engineer for review prior to installation.
- G. Provide at least 2 hours of straight time instruction to the operating personnel. Time of instruction shall be designated by the Owner. Additional instruction time for the automatic temperature control (ATC) system is specified in Division 23 Section, “Instrumentation & Controls of HVAC & Plumbing Systems”.

3.11. WALL AND FLOOR PENETRATION

- A. All penetrations of partitions, ceilings, roofs and floors by ducts, piping or conduit under Division 23 shall be sleeved, sealed, and caulked airtight for sound and air transfer control. Penetrations of mechanical room partitions, ceilings, and floors shall be as specified in Division 23 Section, “Vibration Control for HVAC, Plumbing and Fire Protection Equipment”.
- B. All penetration of fire rated assemblies shall be sleeved, sealed, caulked and protected to maintain the rating of the wall, roof, or floor. Fire Marshal approved U.L. assemblies shall be utilized. See Division 07 Section, “Fire Protection, HVAC & Plumbing Penetration Firestopping”.

- C. Provide pipe escutcheons and duct flanges for sleeved pipes and ducts in finished areas.
- D. Piping sleeves:
 - 1. Galvanized steel pipe, standard weight where pipes are exposed and roofs and concrete and masonry walls. On exterior walls provide anchor flange welded to perimeter.
 - 2. Twenty-two (22) gauge galvanized steel elsewhere.
- E. Ductwork sleeves: 20 gauge galvanized steel.

3.12. RECORD DRAWINGS

- A. Upon completion of the mechanical installations, the Contractor shall deliver to the Architect one complete set of prints of the mechanical contract drawings which shall be legibly marked in red pencil to show all changes and departures of the installation as compared with the original design. They shall be suitable for use in preparation of Record Drawings.
- B. Contractor shall incorporate all sketches, addendums, value engineering, change orders, etc., into record drawings prior to delivering to Architect.

3.13. WARRANTY

- A. Contractor's attention is directed to warranty obligations contained in the GENERAL CONDITIONS.
- B. The above shall not in any way void or abrogate equipment manufacturer's guarantee or warranty. Certificates of equipment manufacturer's warranties shall be included in the operations and maintenance manuals.
- C. The Contractor guarantees for a two (2) year period from the time of final acceptance by the Owner.
 - 1. That the work contains no faulty or imperfect material or equipment or any imperfect, careless, or unskilled workmanship.
 - 2. That all work, equipment, machines, devices, etc. shall be adequate for the use to which they are intended, and shall operate with ordinary care and attention in a satisfactory and efficient manner.
 - 3. That the contractor will re-execute, correct, repair, or remove and replace with proper work, without cost to the Owner, any work found to be deficient. The contractor shall also make good all damages caused to their work or materials in the process of complying with this section. Contractor shall repair and/or replace any/all damage to finishes and furniture resulting from their corrective work.
 - 4. That the entire work shall be water-tight and leak-proof.

3.14. OPERATIONS AND MAINTENANCE MANUALS

- A. The Contractor shall have prepared three (3) hardcopies and one (1) electronic copy of the Operations and Maintenance Manuals and deliver these copies of the booklet to the Owner. The booklet shall be as specified herein. The booklet must be approved and will not be accepted as final until so stamped.
- B. The booklet shall be bound in a three ring loose-leaf binder similar to National No. 3881 with the following title lettered on the front: Operations and Maintenance Manuals – Delaware Technical and Community College – Owens Campus – Student Services Center – Corridor/Atrium Renovations - HVAC. No sheets larger than 8-1/2 inches x 11 inches shall be used, except sheets that are neatly folded to 8-1/2 inches x 11 inches and used as a pull-out. Provide divider tabs and table of contents for organizing and separating information.
- C. Electronic copies of the manual shall be saved on USB flash drives, and shall be in searchable PDF format with interactive index tabs. Approved electronic copies shall be stored in flash drive zipper cases in front of Volume 1 (if applicable) of hard copies of the manual.
- D. Provide the following data in the booklet:
 - 1. As first entry, an approved letter indicating the starting/ending time of Contractor's warranty period.
 - 2. Maintenance and operation instructions on each piece of equipment furnished.
 - 3. Complete catalog data on each piece of heating and air conditioning equipment furnished including approved shop drawing.
 - 4. Chart form indicating frequency and type of routine maintenance for all mechanical equipment. The chart shall also indicate model number of equipment, location and service.
 - 5. Provide sales and authorized service representatives names, address, and phone numbers of all equipment and subcontractors.
 - 6. Provide supplier and subcontractor's names, address, and phone number.
 - 7. Copy of the approved balancing report.
 - 8. Access panel charts with index illustrating the location and purpose of access panels.
 - 9. Approved HVAC Inspector Certificates.
 - 10. Provide and install in locations as directed by Owner, filter charts, including filter type, size, model number, manufacturer, quantity and size for each filter utilized on the project. Filter charts shall be enclosed in a durable polymer based frame with a cover safety glass.
- E. Electronic copies of the manual shall be saved on USB flash drives, and shall be in searchable PDF format with interactive index tabs. Approved electronic copies shall be stored in flash drive zipper cases in front of volume 1 (if applicable) of hard copies of the manual.
- F. Submit Record and Information Booklets prior to anticipated date of substantial completion for Engineer review and approval. Substantial completion requires that Record and Information booklets be reviewed and approved.

3.15. INSTALLATION AND COORDINATION DRAWINGS

- A. Prepare, submit, and use composite installation and coordination drawings to assure proper coordination and installation of work. Drawings shall include, but not be limited, to the following:
 - 1. Complete Ductwork, Plumbing, Sprinkler and HVAC Piping Drawings showing coordination with lights, electrical equipment, HVAC equipment and structural amenities.
- B. Draw plans to a scale not less than 3/8-inch equals one foot. Include plans, sections, and elevations of proposed work, showing all equipment, piping and ductwork in areas involved. Fully dimension all work including lighting fixtures, conduits, pullboxes, panelboards, and other electrical work, walls, doors, ceilings, columns, beams, joists and other architectural and structural work.
- C. Identify all equipment and devices on wiring diagrams and schematics. Where field connections are shown to factory-wired terminals, include manufacturer's literature showing internal wiring.
- D. Refer to Division 01 Section "Project Management and Coordination" for additional requirements related to coordination drawings.

3.16. EQUIPMENT BY OTHERS

- A. This Contractor shall make all system connections required to equipment furnished and installed under other divisions or furnished by the Owner. Connections shall be complete in all respects to render this equipment functional to its fullest intent.
- B. It shall be the responsibility of the supplier of this equipment to furnish complete instructions for connections. Failure to do so will not relieve this contractor of any responsibility for improper equipment operation.

3.17. OUTAGES

- A. Provide a minimum of fourteen (14) days notice to schedule outages. The Contractor shall include in their bid outages and/or work in occupied areas to occur on weekends, holidays, or at night. Coordinate and get approval of all outages with the Owner.
- B. Submit Outage Request form, attached at end of this Section, to Owner for approval.

END OF SECTION

OUTAGE REQUEST

DATE APPLIED: _____ BY: _____

DATE FOR OUTAGE: _____ FIRM: _____

START OUTAGE-TIME: _____ DATE: _____

END OUTAGE -- TIME: _____ DATE: _____

AREAS AND ROOMS: _____

FLOOR(S): _____

AREA(S): _____

ROOM(S): _____

WORK TO BE PERFORMED: _____

SYSTEM(S): _____

REQUEST APPROVED BY: _____

(FOREMAN OR OTHER PERSON IN CHARGE)

(FOR OWNER'S USE ONLY):

APPROVED: _____

YES ____ NO ____ BY: _____ DATE: _____

DATE/TIME-AS REQUESTED: _____ OTHER : _____

OWNER'S PRESENCE REQUIRED: _____

YES: ____ NO: ____ NAME: _____

POINT OF CONTACT: _____ PHONE: _____

THIS PAGE INTENTIONALLY LEFT BLANK

DIVISION 23 SECTION 23 05 93
TESTING, ADJUSTING & BALANCING FOR HVAC & PLUMBING
TABLE OF CONTENTS

PART 1 - GENERAL	1
1.1. GENERAL.....	1
1.2. ALTERNATES	3
1.3. PRELIMINARY EXAMINATION.....	3
1.4. QUALIFICATIONS OF THE BALANCE AGENCY	3
1.5. PERSONNEL	3
1.6. WARRANTY	4
1.7. PRE-BALANCING CONFERENCE	4
1.8. STANDARDS	4
1.9. COORDINATION.....	4
1.10. INSTALLATION TOLERANCE.....	5
1.11. RESPONSIBILITIES OF THE TAB AGENCY	5
1.12. REPORTS.....	8
1.13. TAB FINAL ACCEPTANCE INSPECTION.....	8
1.14. RESPONSIBILITIES OF THE MECHANICAL CONTRACTOR	9
1.15. CONTRACTOR SUPPLIED ITEMS	10
1.16. NOTIFICATION FOR TESTING AND BALANCING WORK TO BEGIN	11
1.17. DEFICIENCIES	11
1.18. ADJUSTING	11
PART 2 - PRODUCTS (NOT APPLICABLE)	12
PART 3 - EXECUTION	12
3.1. GENERAL.....	12
3.2. EXAMINATION.....	13
3.3. AIR SYSTEM PROCEDURES	13
3.4. TESTING AND BALANCING OF EXISTING SYSTEMS	15
3.5. VERIFICATION OF TEMPERATURE CONTROL	15
3.6. TEST AND BALANCE REPORTS	15
3.7. TEST REPORT FORMS	16
END OF SECTION	18

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 23 05 93 - TESTING, ADJUSTING, AND BALANCING FOR HVAC AND PLUMBING

PART 1 - GENERAL

1.1. GENERAL

- A. This section covers performance testing, adjusting and balancing of heating, ventilating, air conditioning as specified in Division 23 Section, Heating, Ventilating, and Air Conditioning Equipment.
- B. For Common Work Results of HVAC, See Division 23. See Division 01 for General Requirements.
- C. The mechanical contractor shall select and employ an impartial, independent balancing agency to provide testing and balancing services for the heating, ventilating and air conditioning (HVAC) systems and other specified systems of this project.
- D. The work included in this section consists of furnishing labor, instruments, and tools required in testing, adjusting and balancing the HVAC systems, as described in these specifications or shown on accompanying drawings. Services shall include checking equipment performance, taking the specified measurements, and recording and reporting the results.
 - 1. Perform all work required to prepare the building HVAC systems for testing, adjusting, and balancing indicated by the Contract Documents as follows:
 - a. Verify the air systems are ready for balancing.
 - b. Verify the control systems are ready for balancing.
 - c. Notify appropriate parties the system is ready for balancing.
 - 2. Scope of work.
 - a. Testing, adjusting, and balancing (TAB) of the HVAC systems, Plumbing Systems, and related ancillary equipment will be performed by an independent, third party, AABC Certified Agency, selected and employed directly by the Contractor. The preparation and corrections necessary for the testing and balancing of these systems, as described herein, are the responsibility of the Contractor.
 - b. As part of the project Construction Contract, the Contractor shall make any changes or replacements to the sheaves, belts, dampers, valves, or other components required for correct balance as advised by the TAB Agency, at no additional cost to the Owner.
 - c. The Contractor shall provide and coordinate the services of qualified, responsible subcontractors, suppliers and personnel as required to correct, repair, and/or replace any and all deficient items or conditions found during the course of this project, including the testing, adjusting, and balancing period.
 - d. In order that all systems may be properly tested, adjusted and balanced as required herein by these Specifications, the Contractor shall operate the

systems at their expense for the length of time necessary to properly verify their completion and readiness for TAB, and the entire duration required for the TAB process.

- e. Project Contract completion schedules shall allow for sufficient time to permit the completion of TAB services prior to Owner occupancy. The Contractor shall allow adequate time for the testing and balancing activities of the Owner-provided services during the construction period and prior to Substantial Completion, as defined in the AIA General Conditions and Supplementing Condition of this Construction Document.
- f. The Drawings and Specifications indicate valves, dampers, and miscellaneous adjustment devices to be adjusted to obtain optimum operating conditions. It is the responsibility of the Contractor to install these devices in a manner that will leave them accessible and readily adjustable. Should any such device not be readily accessible, the Contractor shall provide access, as requested by the TAB Agency. Any malfunction encountered by TAB personnel and reported to the Contractor shall be corrected by the Contractor immediately so that the balancing work can proceed with a minimum of delays.
- g. The scope of work, as defined herein, is to advise the Contractor of the coordination, adjustment, and system modifications that will be required under the project work to complete Owner requirements for final TAB. The Contractor's original bid shall allow for the costs of all work which may be required in the TAB phases, and which may be necessary for the completion of the TAB work as defined by the TAB Agency.

3. Submittals. The TAB Agency shall submit an agenda that will include:

- a. Field observation reports.
- b. An overview of system TAB procedures.
- c. System testing which will include where ducts will be traversed, which instrumentation will be used, how correction factors for grille and diffuser will be obtained, how measurements will be verified at maximum and minimum, and how control components will be verified.
- d. Report forms with each system's components identified and numbered.

E. The items requiring testing, adjusting, and balancing include, but are not limited to, the following:

Air Systems:

- 1. Coils (Air Temperatures, Fluid Temperatures, Fluid Pressure Drops, Fluid Flow Rates, & Static Pressure Drops)
- 2. Diffusers, Registers, Linear Slot Diffusers, and Grilles
- 3. Fans
- 4. Fan Coil Units
- 5. Supply Fan AHU
- 6. Zone Branch and Main Ducts
- 7. In addition, any existing fans, or air devices specified to be re-used under this project shall be tested and balanced, similar to new fans.

1.2. ALTERNATES

- A. Refer to Division 01 Section, Alternates for description of work under this section affected by alternates.

1.3. PRELIMINARY EXAMINATION

- A. Verify that systems are complete and operable before commencing work. Ensure the following conditions:
 - 1. Systems are started and operating in a safe and normal condition.
 - 2. Temperature control systems are installed complete and operable.
 - 3. Proper thermal overload protection is in place for electrical equipment.
 - 4. Final filters are clean and in place. If required, install temporary media in addition to final filters.
 - 5. Duct systems are clean of debris.
 - 6. Fans are rotating correctly.
 - 7. Volume dampers are in place and open.
 - 8. Air coil fins are cleaned and combed.
 - 9. Access doors are closed and duct end caps are in place.
 - 10. Air outlets are installed and connected.
 - 11. Duct system leakage is minimized.
- B. Submit field reports. Report defects and deficiencies noted during performance of services which prevent system balance.
- C. Beginning of work means acceptance of exiting conditions.

1.4. QUALIFICATIONS OF THE BALANCE AGENCY

- A. The balancing agency shall be a member of the Associated Air Balance Council (AABC).
- B. The certified test and balance engineer shall be responsible for supervision and certification for the total work herein specified.
- C. All final reports shall be signed by the certified test and balance engineer.
- D. All personnel used on the project will be employees of an AABC Certified Agency. All work will be performed under the direct supervision of the AABC Certified Test and Balance Engineer (TBE). All work will be performed with AABC Certified Test and Balance Technicians (TBT) Resumes including education, experience, and certification of each person on the project shall be submitted.
- E. Warranty. The AABC Agency shall submit a National Project Performance Guaranty.

1.5. PERSONNEL

- A. All personnel used on the project will be employees of an AABC Certified Agency. All

work will be performed under the direct supervision of the AABC Certified Test and Balance Engineer (TBE). All work will be performed with AABC Certified Test and Balance Technicians (TBT). Resumes including education, experience, and certification of each person on the project shall be submitted as informational submittals.

1.6. WARRANTY

- A. The AABC Agency shall submit a National Project Performance Guaranty.

1.7. PRE-BALANCING CONFERENCE

- A. Convene a conference one week prior to commencing work of this Section with all appropriate individuals.

1.8. STANDARDS

- A. The balancing agency shall perform the services specified herein in accordance with the Associated Air Balance Council's National Standards, including revisions, to the date of the contract.
- B. All terms in this specification shall have their meaning defined as stated in the National Standards.
- C. ADC: Test Code for grilles, registers, and diffusers.
- D. ASHRAE III: Practice for measurement, testing, adjusting and balancing of building heating, ventilation, air conditioning, and refrigeration systems.
- E. NEBB: Procedure standards for testing, adjusting, and balancing of environmental systems.
- F. SMACNA: HVAC systems testing, adjusting, and balancing.
- G. AABC: Associated Air Balance Council

1.9. COORDINATION

- A. It will be necessary for the balancing agency to perform its services in close coordination with the mechanical contractor.
- B. The plans and specifications have indicated meters, valves, dampers, and other devices for the purpose of adjusting the system to obtain optimum operating conditions. It will be the responsibility of the mechanical contractor to install these devices in a manner that will leave them accessible and readily adjustable. The balancing agency shall provide guidance if there is a questionable arrangement of a control or balancing device.
- C. The general contractor, mechanical contractor, temperature control contractor and suppliers of the HVAC equipment shall all cooperate with the balancing agency to provide

all necessary data on the design and proper application of the system components.

1.10. INSTALLATION TOLERANCE

- A. Unless otherwise indicated, all air devices shall be adjusted to within plus or minus 10 percent of design. All fans shall be adjusted to within plus or minus 5 percent of design. All pumps and Hydronic equipment shall be adjusted to within plus or minus 5 percent of design.

1.11. RESPONSIBILITIES OF THE TAB AGENCY

- A. Liaison and Early Inspection. The following reviews, observations, and tests shall be performed by the TAB Agency:
1. Review the mechanical drawings and specifications for balanceability and provide commentary. Verify proper types and locations of all Test and Balance devices.
 2. During construction, review all approved HVAC submittals such as control diagrams, air handling devices, hydronic devices, and other components that pertain to TAB work and balanceability. Assist the commissioning agent with all Functional Performance Testing.
 3. Perform construction observations and submit a written report:
 - a. On the ductwork prior to insulation and/or ceiling cover-up.
 4. Witness duct pressure test as defined in the specifications, and submit a written report.
 5. Perform a pre-balance site review, and submit a written report.
 6. During the balancing process, abnormalities and malfunctions of equipment or components may be discovered by the TAB personnel. The Construction Inspector, Architect, Engineer, and Owner shall be advised in writing so that the condition(s) can be corrected by the Contractor. The written document need not be formal, but shall be understandable and legible. The TAB Agency shall not instruct or direct the Contractor in any of the work, but will make reports to the appropriate parties.
- B. Final Air Balance. When systems are complete and ready for operation, the TAB Agency will perform a final air balance for all air systems and record the results. The volume of air for the supply, return, exhaust, and outside air equipment and terminals will be tested and balanced within the tolerances of the AABC Standard, or as specified, whichever is more stringent. Air handling unit and fan volumes shall be adjusted by changing fan speed. Air distribution device volumes shall be adjusted using the duct dampers and not the grille face. Air distribution devices shall be balanced with air patterns as specified. Duct volume dampers shall be adjusted to provide air volume to branch ducts where such dampers are shown. The general scope of balancing by the TAB Agency will include, but is not limited to, the following:
1. Filters: Check air filters and filter media. Balance systems with essentially clean filters and filter media.
 2. Fan Speed: Measure and record RPM for each fan. Provide Controls Contractor

- with drive parameters for variable speed drives.
3. Voltage and Amperage Readings: Measure and record the final operating voltage and amperage for each motor.
 4. Static Pressure Profile: Static pressure profiles shall be measured and recorded across each supply fan, cooling coil, heating coil, heat of rejection equipment fans, return air fan, air handling unit filter, exhaust fan, and at the furthest air device or terminal unit from the air handler supplying that device.
 5. Equipment Air Flow: Adjust and record supply, return, outside and exhaust air CFM and temperatures, as applicable, at each fan and coil.
 6. Coil and/or Heat Exchanger Temperatures: Set controls for full cooling and for full heating loads. Read and record entering and leaving dry bulb and wet bulb (cooling only) temperatures at each cooling coil, heating coil, and HVAC terminal unit. At the time of reading, record water flow and entering and leaving water temperatures and pressure drops. In variable flow systems, adjust the air and water flow to design for all the above readings.
 7. Zone Air Flow: Adjust each HVAC terminal unit and each air-handling unit for design CFM.
 8. Outlet Air Flow: Adjust each supply diffuser, register and grille, and each exhaust inlet to within the tolerance per the AABC Standard.
 9. Pitot Tube Traverses: For use in future troubleshooting by maintenance personnel, all main supply, return, outside air, and exhaust ducts shall have air velocity and volume measured and recorded by the Pitot tube traverse method shown in the AABC Standard. Locations of these traverse test stations shall be described on the sheet containing the data. All Pitot tube traverses shall be clearly identified on the outside of the duct insulation with the traverse identified and duct size. Submit half scale drawings showing the locations of all duct traverses.
 10. Terminal Boxes: Maximum and minimum airflow on terminal boxes shall be adjusted, measured, and recorded.

C. Testing of Temperature Control Systems as applicable to the project.

1. Air Handling Units

a. Start each air handling unit; verify and document:

- Dampers modulate properly and in the correct sequence.
- Fan(s) VFD ramps to design speed or proper controlled speed.
- All terminal boxes open and/or start in the correct sequence.
- All coil valves operate in response to the controlled temperature.
- All interlocked fans and/or devices energize.
- All alarms and safeties are operational and will alarm or shut down the unit.
- All operating scenarios are tested; e.g.: minimum/maximum airflows, outside airflows at unit minimum/maximum volume, and special sequences.
- All end switches and positioners are properly set.
- All pressure controllers respond to increases or decreases in system pressure.
- All temperature and pressure sensors are calibrated.
- Reset control sequences operate in response to changes in system temperatures, flows, or pressures.

- Test all static pressure sensors and controls and calibrate the same.
 - b. Shut down each air handling unit; verify and document:
 - Dampers respond properly (open, close, or modulate), and in the correct sequence.
 - All fan systems ramp down and stop.
 - Correct operation of fan sequences when multiple fans are installed.
 - Interlocked devices turn off.
 - System starts for setback temperature control.
 - System starts on a temporary occupancy override.
 - All coil valves go to their specified position.
 - All alarms and safeties remain operational.
2. Fan Systems
- a. Start each fan or fan system; verify and document:
 - Interlocks and lockouts operate in accordance with the sequence.
 - Fan(s) VFD ramps to design speed or proper controlled speed.
 - All alarms and safeties are operational and will alarm or shut down the fan.
 - Dampers modulate properly and in the correct sequence.
 - All interlocked fans and/or devices energize.
 - All end switches and positioners are properly set.
 - All pressure controllers respond to increases or decreases in system pressure.
 - All temperature and pressure sensors are calibrated.
 - b. Shut down each fan or fan system; verify and document:
 - Dampers respond properly (open, close, or modulate) and in the correct sequence.
 - All fan systems ramp down and stop.
 - Correct operation of fan sequences when multiple fans are installed.
 - Interlocked devices turn off.
 - All alarms and safeties remain operational.
3. Component Calibration
- All temperature, airflow, pressure, and flow measuring components shall be measured and compared to the control system readout; verify and document:
- The air temperature sensors for each coil. If the temperature is not reading within tolerance, the sensor will be reported to the control contractor for calibration.
 - The room temperature sensors. If the sensors are not reading within tolerance, the sensors shall be reported to the control contractor for calibration.
 - The water temperature sensors for each coil. If the temperature is not reading within tolerance, the sensors shall be reported to the control contractor for calibration.
 - All air pressure sensor readouts. If the pressure is not reading within

tolerance, the sensor shall be reported to the control contractor for calibration.

- All flow measuring device readouts. If the flow readout is not recording within tolerance, the sensor shall be reported to the control contractor for calibration.

4. Dynamic Testing

- Dynamic testing involves making a change of value at the sensor in order to observe the system's reaction and how it regains the original setpoint. Verify and document the system's response.

1.12. REPORTS

- A. The report shall be a complete record of the HVAC system performance, including conditions of operation, items outstanding, and any deviations found during the process. The final report also provides a reference of actual operating conditions for the owner and/or operations personnel. The report summary is a project narrative describing the outcome of the testing and balancing and shall include a list of items that document all system variations deviating from design tolerances. Information can also be included that suggests possible resolutions.
- B. All measurements and recorded readings that appear in the reports shall be certified by the Agency's Test and Balance Engineer.
- C. Submit reports on forms approved by the Engineer. Hard and/or electronic copies of the final report shall be submitted in accordance with the Contract Requirements. The report shall indicate a summary of actual operating data and any abnormal operating conditions. The report shall contain all required information as described within this specification, including the information formatted and shown in the AABC Standard.
- D. When the Engineer reviews TAB reports and provides comments, address each comment in writing for all re-submitted TAB reports.

1.13. TAB FINAL ACCEPTANCE INSPECTION

- A. At the time of TAB final acceptance inspection, the TAB agency shall recheck, in the presence of the Owner's representative, specific and random selections of data recorded in the certified test and balance report.
- B. Points and areas for recheck shall be selected by the Owner's representative.
- C. Measurements shall be verified at the same test conditions as the submitted and approved test and balance agenda.
- D. Selections for verification shall not exceed 10% of the total number tabulated in the report, except where special air systems require a complete recheck for safety reasons.
- E. If 10% of the random verification tests demonstrate a measured flow deviation of 10%, or

more from that recorded in the certified test and balance report, the report shall be automatically rejected. In the event the report is rejected, all systems shall be readjusted and tested, new data recorded, a new certified test and balance submitted, and a new inspection test made. There shall be no additional cost to the Owner for this work.

- F. Final acceptance shall occur after successful completion of the TAB verification process.

1.14. RESPONSIBILITIES OF THE MECHANICAL CONTRACTOR

- A. The mechanical contractor shall sufficiently complete the installation and start all HVAC and plumbing systems to insure they are working properly and shall perform all other items as described hereinafter to assist the balancing agency in performing the testing and balancing of the HVAC system.
- B. Record equipment manufacturer's standard start-up information and submit to Engineer for review. Testing and balancing work shall not commence on any equipment until start-up reports have been completed, reviewed by Engineer, and forwarded to Testing and Balancing Agency.
- C. The Contractor shall:
1. Have the building, air conditioning systems, and heating systems in complete operational readiness for TAB work to begin.
 2. The Contractor shall allow sufficient time for the TAB Agency to perform their contracted work within the construction schedule. The Contractor shall complete work by systems or floors, whichever is the most efficient for testing systems. After award of the contract and the completion of the construction schedule by the Contractor, a TAB coordination meeting shall be held with the TAB Agency, the Contractor and primary subcontractors, including but not limited to mechanical, electrical, and building automation subcontractors to develop a testing schedule for the project. The Contractor shall submit copies of the proposed schedule to the TAB Agency two weeks prior to this meeting.
 3. Promptly correct deficiencies of materials and workmanship identified as delaying completion of TAB work.
 4. Be responsible for any added costs to the Owner resulting from the Contractor's failure to have the building air conditioning systems and plumbing systems ready for TAB when scheduled, or from the Contractor's failure to correct deficiencies promptly.
- D. Facility Operational Readiness
1. Complete operational readiness of the building requires that the building envelope be complete. This includes the installation of doors, windows, and ceilings to obtain simulated or projected operating conditions.
- E. Air Distribution Systems
1. Verify installation for conformity to design.
 2. Ensure that all volume dampers, are properly located and functional. Dampers serving requirements of minimum and maximum outside - return - relief, and

exhaust air shall provide tight closure and full opening, with a smooth and free operation.

3. Verify that all supply - return - exhaust and transfer grilles; registers, and diffusers are installed, operational, and sealed tightly.
4. Ensure that air-handling systems, units, and associated apparatus, such as heating and cooling coils, filter sections, access doors, etc., are blanked and/or sealed to eliminate excessive bypass or leakage of air.
5. Ensure that all fans are operating and free of vibration. All fans and drives shall be checked for proper fan rotation and belt tension. Overload protection shall be of proper size and rating. A record of motor current and voltage shall be made to verify that the motors do not exceed nameplate rating. Record thermal overload ratings for all motors in the Test and Balance Report.
6. Make any necessary changes to the sheaves, belts, and dampers, as required by the balancing agency, at no additional cost to the owner.
7. Install clean filters.
8. Coils shall be clean with fins straightened, bearings shall be properly greased, belts shall be aligned and tightened, and the system shall be completely operational. The Contractor shall verify that all systems are operating within the design pressure limits of the piping and ductwork.
9. All supply, return, exhaust, and relief fans shall be operating and verified for: freedom from vibration, proper fan rotation and belt tension; heater elements in motor starters to be of proper size and rating, as the as per the starter manufacturer. Record motor amperage and voltage on each phase at start-up, verifying they do not exceed nameplate ratings.

F. Notification of System Readiness

1. After completion of the work, the Contractor shall notify the Owner and TAB Agency, in writing, certifying that the work has been accomplished and that the building, air conditioning, and plumbing systems are ready for testing, adjusting, and balancing. The Contractor shall include a copy of the tabulated data of the start-up reports.
2. The Contractor shall notify the TAB Agency of the readiness for balancing and forward copies of the Contractor's certification and the tabulated data.
3. Should the TAB Agency be notified as described above and the inspection reveal the TAB services notification to have been premature, all costs of the inspection by the TAB Agency shall be reimbursed by the Contractor.

1.15. CONTRACTOR SUPPLIED ITEMS

A. As a requirement of the TAB contract, the Contractor's Project Manager shall compile and provide the TAB Agency the following:

1. One set of mechanical specifications.
2. All pertinent change orders.
3. All Request(s) for Information (RFI).
4. One complete set of MEP Drawings.
5. One copy of approved submittal data on equipment installed and controls submittal with sequences of operation.
6. All HVAC Control Communications software with the appropriate licenses and

hardware interfaces.

7. All Addendums and RFI's (Requests for Information).

1.16. NOTIFICATION FOR TESTING AND BALANCING WORK TO BEGIN

- A. The mechanical contractor shall notify the balancing agency in writing when all heating, ventilating, and air conditioning and plumbing systems are complete and ready for testing and balancing. The mechanical contractor shall attest that he has completed all items as herein described.
- B. The following must be completed prior to start of system balancing:
 1. All duct work and associated grilles/registers/diffusers installed and completed.
 2. Piping systems completed, flushed and filled.
 3. Equipment properly started by qualified personnel or start-up technicians.
 4. Ceiling tiles installed.
 5. Automation system (temperature controls) installed and completed for both air and water systems.
 6. All equipment controlled in automatic ("Auto") mode.
 7. Access granted to the balancing contractor to the automation/controls system provided.
- C. Mechanical Contractor shall notify the Construction Manager or General Contractor of the start date of this portion of the work.

1.17. DEFICIENCIES

- A. Any deficiencies in the installation or performance of a system or component observed by the TAB agency shall be brought to the attention of the appropriate responsible person.
- B. The work necessary to correct items on the deficiency listing shall be performed and verified by the affected Contractor before the TAB Agency returns to retest. Unresolved deficiencies shall be noted in the final report.
- C. TAB Agency shall notify Construction Manager or General Contractor of all deficiencies found during initial survey.

1.18. ADJUSTING

- A. Ensure recorded data represents actual measured observed conditions.
- B. Permanently mark settings of valves, dampers, and other adjustment devices allowing settings to be restored. Set and lock memory stops.
- C. After adjustment, take measurements to verify balance has not been disrupted or that such disruption has been rectified.
- D. Leave systems in proper working order, replacing belt guards, closing access doors, closing

doors to electrical switch boxes, and restoring all sensors to specified settings.

- E. At final inspection, recheck random selections of data recorded in report. Recheck points or areas as selected and witnessed by the Owner.
- F. Check and adjust systems approximately six months after final acceptance and submit report.
- G. Permanently mark the locations of all duct traverses on the exterior surface of the duct insulation.

PART 2 - PRODUCTS (NOT APPLICABLE)

PART 3 - EXECUTION

3.1. GENERAL

- A. Perform all testing and balancing in complete accordance with AABC National Standards for Field Measurements and Instrumentation.
- B. Furnish all test instruments and equipment. All instruments must have been calibrated within twelve (12) months prior to use and shall be checked for accuracy prior to and during the work. Submit certificate for calibration of all equipment utilized on project with date of calibration clearly identified.
- C. Review all systems designs and equipment, manufacturers' data, and be completely familiar with the work before proceeding.
- D. Report all malfunctions or deficiencies to the contractor so that corrective action can be taken. Test and Balance Report shall not be submitted for review until all malfunctions or deficiencies are corrected. Repeat tests where required until design conditions are achieved.
- E. Where systems or equipment cannot be balanced or adjusted to design conditions, determine the cause and submit a complete report to the Engineer.
- F. Retest or rebalance the system as required during the warranty period.
- G. Test and balance all systems under adequate load condition. If, in the opinion of the Engineer, there is insufficient load to properly test and balance the systems, perform sufficient preliminary balancing and adjustment to permit operation of the systems until such time as final testing and balancing can be done. Provide in writing the future date when systems shall be tested under sufficient load.
- H. At project completion provide a complete set of 1/2 scale drawings indicating the locations of all duct traverses.

3.2. EXAMINATION

- A. Examine the Contract Documents to become familiar with Project requirements and to discover conditions in systems' designs that may preclude proper TAB of systems and equipment.
- B. Examine systems for installed balancing devices, such as test ports, gage cocks, thermometer wells, flow-control devices, balancing valves and fittings, and manual volume dampers. Verify that locations of these balancing devices are accessible.
- C. Examine the approved submittals for HVAC systems and equipment.
- D. Examine design data including HVAC system descriptions, statements of design assumptions for environmental conditions and systems' output, and statements of philosophies and assumptions about HVAC/plumbing system and equipment controls.
- E. Examine equipment performance data including fan curves.
 - 1. Relate performance data to Project conditions and requirements, including system effects that can create undesired or unpredicted conditions that cause reduced capacities in all or part of a system.
 - 2. Calculate system-effect factors to reduce performance ratings of HVAC equipment when installed under conditions different from the conditions used to rate equipment performance. To calculate system effects for air systems, use tables and charts found in AMCA 201, "Fans and Systems," or in SMACNA's "HVAC Systems – Duct Design". Compare results with the design data and installed conditions.
- F. Examine system and equipment installations and verify that field quality-control testing, cleaning and adjusting specified in individual Sections have been performed.
- G. Examine test reports specified in individual system and equipment Sections.
- H. Examine HVAC equipment and filters and verify that bearings are greased, belts are aligned and tight, and equipment with functioning controls is ready for operation.
- I. Examine terminal units, and verify that they are accessible and their controls are connected and functioning.
- J. Examine operating safety interlocks and controls on HVAC equipment.
- K. Report deficiencies discovered before and during performance of TAB procedures. Observe and record system reactions to changes in conditions. Record default set points if different from indicated values.

3.3. AIR SYSTEM PROCEDURES

- A. The balancing agency shall perform the following testing and balancing functions in accordance with the Associated Air Balance Council's National Standards:

1. Fan Speeds - Test and adjust fan RPM to achieve design CFM requirements.
2. Current and Voltage - Measure and record motor current and voltage. Check and record thermal overload ratings for all motors.
3. Pitot-Tube Traverse - Perform a Pitot-tube traverse of main supply, return and exhaust ducts to obtain total CFM. If a Pitot-tube traverse is not practical, the summation of the outlets or inlets may be used. An explanation why a traverse was not made must appear on the appropriate data sheet.
4. Outside Air - Test and adjust system minimum outside air by Pitot-tube traverse. If a Pitot-tube traverse is not practical, the percentage of outside air may be determined by calculations from the return air, outside air, and mixed air temperatures. Make allowances for heat of compression and motor heat where applicable.
5. Static Pressure - Test and record system static pressures, including suction and discharge static pressure of each fan. Measure static air pressure conditions on air supply units, including filter and coil pressure drops, and total pressure across the fan. Make fan RPM allowances for 50 percent loading of filters.
6. Air Temperature - Take wet-bulb and dry-bulb air temperatures on the entering and leaving side of each cooling coil and/or heat recovery coil. Dry-bulb temperature shall be taken on the entering and leaving side of each heating coil.
7. Zone Ducts - Adjust zone ducts to within design CFM requirements. At least one zone balancing damper shall be completely open.
8. Main Ducts - Adjust main ducts to within design CFM requirements and traverse for total CFM quantities.
9. Branch Ducts - Adjust branch ducts to within design CFM requirements. Multi-diffuser branch ducts shall have at least one outlet or inlet volume damper completely open.
10. Tolerances - Test and balance each diffuser, grille, and register to within 10 percent of design requirements. Test and balance all fans to within 5 percent of design requirements.
11. Identification - Identify the location and area of each grille, diffuser, register, and terminal box. This information shall be recorded on air outlet data sheets.
12. Description - Record the size, type, and manufacturer of each diffuser, grille, and register on air outlet data sheets.
13. Minimizing Drafts - Adjust all diffusers, grilles, and registers to minimize drafts in all areas.
14. Test and Balance Engineer shall witness and record all leakage testing of ductwork. Leakage test data shall be included in final Test and Balance Reports.
15. Where modulating dampers are provided, take measurements and balance at extreme conditions. Balance variable air volume systems at maximum air flow rate, full cooling, and at minimum airflow rate, full heating.
16. Measure temperature conditions across outside air, return air, and exhaust dampers to check leakage.
17. Outside air and exhaust/relief air measurements must be measured and submitted in all modes of operation including the following:
 - a. Min Outside Air.
18. For all outside air modes of operation record and submit full static pressure profiles, amperage, BHP, air flow rates, external static pressure, and internal static pressure. Verify airflow rates with air flow monitoring stations and record results.

3.4. TESTING AND BALANCING OF EXISTING SYSTEMS

- A. The balancing agency shall perform testing and balancing of existing air handling systems to the extent indicated. Existing air devices and terminals shall be tested and balanced where effected by new ductwork modifications.
- B. Test and Balance Agency shall assist the mechanical contractor in selection of new sheaves and belts, if required. Re-sheaving of existing air handling units or fans shall be done at no additional cost to owner. Where required, new sheave and belt size calculations shall be forwarded to the Engineer for review and approval.
- C. The Test and Balance Agency shall perform air system procedures (here-in before specified) on the following existing systems.
 - 1. Existing fan coil units impacted by the renovations. (Air and Fluid Side.)

3.5. VERIFICATION OF TEMPERATURE CONTROL

- A. The balancing agency shall be assisted by the temperature control contractor in verifying the operation and calibration of all temperature control systems. The following tests shall be conducted:
 - 1. Verify that all control components are installed in accordance with project requirements and are functional, including all electrical interlocks, damper sequences, air and water reset.
 - 2. Verify that all controlling instruments are calibrated and set for design operating conditions.
 - 3. Verify the accuracy of the final settings by taking temperature readings. The readings shall be in a typical conditioned space for each separately controlled zone.

3.6. TEST AND BALANCE REPORTS

- A. The test and balance report shall be complete with logs, data, and records as required herein. All logs, data, and records shall be typed on white bond paper and bound. The report shall be certified accurate and complete by the balancing agency's certified test and balance engineer.
- B. Three (3) hardcopies and one (1) electronic copy of the test and balance report are required and shall be submitted to the Engineer. If, in the opinion of the Engineer, test results or portions thereof are incomplete or inconclusive, repeat necessary portions of the work to the satisfaction of the Engineer.
- C. The report shall contain the following general data in a format selected by the balancing agency:
 - 1. Project Number
 - 2. Contract Number
 - 3. Project Title

4. Project Location
 5. Project Architect
 6. Project Mechanical Engineer
 7. Test & Balance Agency
 8. Test & Balance Engineer
 9. General Contractor/Construction Manager
 10. Mechanical Contractor
 11. Commissioning Agent
 12. Dates tests were performed
 13. Certification
 14. Phone Numbers of all Individuals Listed Above
- D. The test and balance report shall be recorded on report forms conforming to the recommended forms in the AABC National Standards.
- E. The test and balance report shall include a table of contents with numbered pages.

3.7. TEST REPORT FORMS

- A. Air Moving Equipment and Fan Test Forms - Submit fan curve showing design and operating points of operation. Also, record the following on each air-handling equipment test form:
1. Manufacturer, model number, serial number, arrangement.
 2. All design and manufacturer-rated data.
 3. Total actual CFM by traverse if practical. If not practical, the sum of the outlets may be used, or a combination of each of these procedures. For specific systems, such as ones with diversity, see the AABC National Standards.
 4. Suction and discharge static pressure of each fan, as applicable. Include pressure drops across coils, dampers, filters, mixing boxes, and similar devices.
 5. Outside-air, return-air, and exhaust air total CFM.
 6. Actual operating current, voltage and brake horsepower of each fan motor. For packaged equipment, this includes supply fans, relief air fans, and condenser fans.
 7. Final RPM of each fan.
 8. Fan and motor sheave manufacturer, model, size, number of grooves, bore, and center distance.
 9. Belt size, quantity and make.
 10. Static-pressure controls final operating set points (if applicable).
 11. Total and external static pressure.
- B. Heating and Cooling-Coil Test Forms - Record the following items on each test form:
1. Manufacturer, location, service.
 2. All design and manufacturer's rated data.
 3. Rated and actual static pressure drop across each coil.
 4. Wet-bulb and dry-bulb temperatures entering and leaving each cooling coil; dry-bulb temperatures entering and leaving each heating coil.
 5. Air flow (Design and Actual).

- C. Electric Motors Test Forms: (Applies to all motors, including pumps, fans and HVAC equipment)
1. Manufacturer.
 2. Model/Frame.
 3. HP/BHP.
 4. Phase, voltage, amperage; nameplate, actual, no load.
 5. RPM.
 6. Service factor.
 7. Starter size, rating, heater elements.
 8. Sheave Make/Size/Bore.
 9. Thermal overload settings
- D. Duct Traverse Test Forms:
1. System zone/branch.
 2. Duct size.
 3. Area.
 4. Design velocity.
 5. Design air flow.
 6. Test velocity.
 7. Test airflow.
 8. Duct static pressure.
 9. Air temperature.
 10. Air correction factor.
- E. Air Distribution Test Forms:
1. Air terminal number.
 2. Room number/location.
 3. Terminal type.
 4. Terminal size.
 5. Area factor.
 6. Design velocity.
 7. Design air flow.
 8. Test (final) velocity.
 9. Test (final) air flow.
 10. Percent of design air flow.
- F. Fan Coil Unit Data Test Forms:
1. Manufacturer.
 2. Type.
 3. Identification/number.
 4. Location.
 5. Model number.
 6. Size.
 7. Water Pressure drops (all coils).
 8. Static pressure
 9. Test amperage
 10. Entering coil conditions (wet bulb and dry bulb).

11. Leaving coil conditions (wet bulb and dry bulb).
12. Test voltage.
13. Supply, return, and outside air flow rates.

END OF SECTION

NOT FOR BIDDING PURPOSES

DIVISION 23 SECTION 23 07 01
HVAC INSULATION
TABLE OF CONTENTS

PART 1 - GENERAL	1
1.1. REFERENCE	1
1.2. DESCRIPTION	1
1.3. SCOPE	1
1.4. STANDARDS	1
1.5. SYSTEM PERFORMANCE	2
1.6. QUALITY ASSURANCE	2
1.7. DELIVERY AND STORAGE OF MATERIALS	2
1.8. ALTERNATES	3
PART 2 - PRODUCTS	3
2.1. GENERAL	3
2.2. DUCTWORK INSULATION MATERIALS AND THICKNESSES	3
2.3. ACCESSORY MATERIALS	4
2.4. FIELD-APPLIED JACKET	4
PART 3 - EXECUTION	5
3.1. WORKMANSHIP	5
3.2. SITE INSPECTION	5
3.3. PREPARATION	5
3.4. INSTALLATION	6
3.5. FIELD QUALITY ASSURANCE	7
3.6. PROTECTION	7
3.7. SAFETY PRECAUTIONS	8
3.8. INSULATION COVERING	8
END OF SECTION	8

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 23 07 01 – HVAC INSULATION

PART 1 - GENERAL

1.1. REFERENCE

- A. The Conditions of the Contract and other General Requirements apply to the work specified in this Section. All work under this Section shall be subject to the requirements of Division 23 Section, Common Work Results for HVAC.
- B. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section

1.2. DESCRIPTION

- A. All ductwork installed under this Contract shall be covered as specified.

1.3. SCOPE

- A. The work covered by this specification consists of furnishing all labor, equipment, materials and accessories, and performing all operations required, for the correct fabrication and installation of thermal insulation applied to all piping, equipment, and duct systems, in accordance with applicable project specifications and drawings, subject to the terms and conditions of the contract.

1.4. STANDARDS

- A. Thermal insulation materials shall meet the property requirements of one or more of the following specifications as applicable to the specific product or use:
 - 1. American Society for Testing of Materials Specifications:
 - a. ASTM C 547, "Standard Specification for Mineral Fiber Preformed Pipe Insulation".
 - b. ASTM C 533, "Standard Specification for Calcium Silicate Pipe & Block Insulation".
 - c. ASTM C 55, "Standard Specification for Mineral Fiber Blanket and Felt Insulation".
 - d. ASTM E 96, "Standard Test Methods for Water Vapor Transmission of Material".
 - e. ASTM C 585, "Recommended Practice for Inner and Outer Diameters of Rigid Pipe Insulation for Nominal Sizes of Pipe and Tubing (NPS System)".
 - f. ASTM C 612, "Standard Specification for Mineral Fiber Block and Board Thermal Insulation".
 - g. ASTM C 1136, "Standard Specification for Barrier Material, Vapor,

"Type 1 or 2 (Jacket only).

2. ASHRAE 90.1 "Energy efficient design of new buildings except low-rise residential buildings", latest edition.
 3. International Energy Conservation Code, latest edition.
- B. Insulation materials, including all weather and vapor barrier materials, closures, hangers, supports, fitting covers, and other accessories, shall be furnished and installed in strict accordance with project drawings, plans, and specifications.

1.5. SYSTEM PERFORMANCE

- A. Insulation materials furnished and installed hereunder should meet the minimum economic insulation thickness requirements of the North American Insulation Manufacturers' Association (NAIMA) (formerly known as TIMA), to ensure cost-effective energy conservation performance. Alternatively, materials should meet the minimum thickness requirements of National Voluntary Consensus Standard 90.1, (latest edition) and "Energy Efficient Design of New Buildings," of the American Society of Heating, Refrigeration, and Air-Conditioning Engineers (ASHRAE), latest edition. However, if other factors such as condensation control or personnel protection are to be considered, the selection of the thickness of insulation should satisfy the controlling factor. As minimum, all insulation thicknesses shall be as hereinafter specified.
- B. Insulation materials furnished and installed hereunder shall meet the fire hazard requirements of any one of the following specifications:
1. American Society for Testing of Materials ASTM E 84
 2. Underwriters' Laboratories, Inc. UL 723
 3. National Fire Protection Association NFPA 255
 4. ASTM E 96, "Standard Test Methods for Water Vapor Transmission of Materials".
- C. Calcium silicate products shall include a visual identification system to permit positive field determination of their asbestos-free characteristics.

1.6. QUALITY ASSURANCE

- A. Insulation materials and accessories furnished and installed hereunder shall, where required, be accompanied by manufacturers' current submittal or data sheets showing compliance with applicable specifications listed in Section 1.4 above.
- B. Insulation materials and accessories shall be installed in a workmanlike manner by skilled and experienced workers who are regularly engaged in commercial insulation work.

1.7. DELIVERY AND STORAGE OF MATERIALS

- A. All of the insulation materials and accessories covered by this specification shall be delivered to the job site and stored in a safe, dry place with appropriate labels and/or other product identification.

- B. The Contractor shall use whatever means are necessary to protect the insulation materials and accessories before, during, and after installation. No insulation material shall be installed that has become damaged in any way. The Contractor shall also use all means necessary to protect work and materials installed by other trades.
- C. If any insulation material has become wet because of transit or job site exposure to moisture or water, the Contractor shall not install such material, and shall remove it from the job site. An exception may be allowed in cases where the Contractor is able to demonstrate that wet insulation when fully dried out (either before installation, or afterward following exposure to system operating temperatures) will provide installed performance that is equivalent in all respects to new, completely dry insulation. In such cases, consult the insulation manufacturer in writing for technical assistance.
- D. Maintain ambient temperatures and conditions required by manufacturers of adhesives, mastics, and insulation cements. Protect all insulation from water, construction traffic, dirt, chemical and mechanical damage.

1.8. ALTERNATES

- A. Refer to Division 01 Section, "Alternates" for description of work under this section affected by alternates.

PART 2 - PRODUCTS

2.1. GENERAL

- A. All materials to be insulated shall be thoroughly cleaned, after completion of successful tests, and shall be covered as specified below. Fiberglass insulation shall be Owens-Corning, Manville, Armstrong, or P.P.G, or as approved equal.

2.2. DUCTWORK INSULATION MATERIALS AND THICKNESSES

- A. Insulate all ductwork with fiberglass exterior duct insulation with factory-applied foil facing. All exposed fiberglass duct insulation shall be 2-inch rigid or non-flexible board type 3.0 pcf minimum density, 0.23 max. "K" factor at 75 degrees F mean temperature, with white vinyl A.S.J. max, polymer coating vapor barrier facing. All concealed fiberglass duct insulation shall be 2-inch flexible blanket type, 1.0 pcf minimum density. All concealed insulation shall be 0.27 max. "K" factor at 75 degrees F mean temperature with reinforced foil-scrim Kraft vapor barrier facing. Unless otherwise noted, the minimum installed R-value shall be 6.0 HR x ft² x °F/btu.
- B. Where a vapor barrier is required, all joints, seams, tears, punctures, and other penetrations shall be closed with 3-inch (7.5cm) pressure-sensitive tape matching the facing or with vapor barrier coating reinforced with 3-inch (7.5cm) glass scrim tape.
- C. Contractor-applied internal linings shall be as specified and installed as hereinafter

specified.

- D. For exposed Fiberglass duct insulation, tightly butt all edges and seams. Secure insulation with flush mechanical fasteners spaced not less than one per square foot. Insulation may be secured with 100 percent coverage of adhesive with mechanical fasteners on the underside of the duct only, in addition to adhesive. Adhesive shall be water based Foster 85-60 or Childers CP-127. Cover all seams, joints and fasteners with not less than 3-inch wide tape matching the insulation facing. Pre-finished white fastener caps may be left exposed if the spacing and pattern is uniform in appearance. Staples will not be permitted.
- E. All disturbed ductwork insulation in existing areas shall be re-insulated with insulation type and thickness as specified for new ductwork. Duct insulation damaged due to installation of new work and demolition only shall be replaced.
- F. All supply air diffusers, linear slot diffusers, and supply air registers shall be fully insulated on the rear exposed surface to prevent condensation. Insulation shall be 1 ½" inch flexible blanket type 1 ½ pcf minimum density with reinforced foil-scrim-Kraft vapor barrier facing, .25 max "k" factor.
- G. Clean, seal, and insulate all existing ductwork that is impacted by the renovations. Insulate and jacket all existing ductwork.

2.3. ACCESSORY MATERIALS

- A. Accessory materials installed as part of insulation work under this section shall include, but not be limited to:
 - 1. Closure Materials - Butt strips, bands, wires, staples, mastics, adhesives; pressure-sensitive tapes.
 - 2. Field-applied jacketing materials - sheet metal, plastic, canvas, fiber glass cloth, insulating cement; PVC fitting covers, PVC jacketing.
 - 3. Support Materials - Hanger straps, hanger rods, saddles.
 - 4. Fasteners, weld pins/studs, speed clips, insulation washers.
 - 5. Metal mesh or expanded metal lagging.
- B. All accessory materials shall be installed in accordance with project drawings and specifications, manufacturer's instructions, and/or in conformance with the current edition of the Midwest Insulation Contractors Association (MICA) "Commercial & Industrial Insulation Standards."

2.4. FIELD-APPLIED JACKET

- A. Field-applied jackets shall comply with ASTM C 921, Type I, unless otherwise indicated.
- B. PVC Jacket: High-impact-resistant, UV-resistant PVC complying with ASTM D 1784, Class 16354-C; thickness as scheduled; roll stock ready for shop or field cutting and forming. Thickness is indicated in field-applied jacket schedules.
 - 1. Products: Subject to compliance with requirements, available products that may

be incorporated into the Work include, but are not limited to, the following:

- a. Johns Manville; Zeston.
 - b. P.I.C. Plastics, Inc.; FG Series.
 - c. Proto PVC Corporation; LoSmoke.
 - d. Speedline Corporation; SmokeSafe.
2. Adhesive: As recommended by jacket material manufacturer.
 3. Color: High gloss white.
 4. Factory-fabricated fitting covers to match jacket if available; otherwise, field fabricate.
 - a. Shapes: 45- and 90-degree, short- and long-radius elbows, tees, valves, flanges, unions, reducers, end caps, soil-pipe hubs, traps, mechanical joints, and P-trap and supply covers for lavatories.

PART 3 - EXECUTION

3.1. WORKMANSHIP

- A. The Contractor shall take special care to prevent soiling equipment below or adjacent to areas being insulated. He shall be completely responsible for removing insulation cement splashes and smears and all surfaces that he mars or otherwise soils or defaces, and he will be totally responsible for restoring these damaged surfaces to their like-new condition when delivered to the site.

3.2. SITE INSPECTION

- A. Before starting work under this section, carefully inspect the site and installed work of other trades and verify that such work is complete to the point where installation of materials and accessories under this section can begin.
- B. Verify that all materials and accessories can be installed in accordance with project drawings and specifications and material manufacturers' recommendations.
- C. Verify, by inspecting product labeling, submittal data, and/or certifications which may accompany the shipments, that all materials and accessories to be installed on the project comply with applicable specifications and standards and meet specified thermal and physical properties.

3.3. PREPARATION

- A. Ensure that insulation is clean, dry, and in good mechanical condition with all factory-applied vapor or weather barriers intact and undamaged. Wet, dirty, or damaged insulation shall not be acceptable for installation.
- B. Ensure that pressure testing duct systems has been completed prior to installing insulation.

3.4. INSTALLATION

A. Ductwork Insulation:

1. General:

- a. Before installing insulation, ensure that all seams and joints in ductwork have been sealed and leak tested by the contractor responsible for the duct system. Before applying duct insulation, air ducts shall be clean and dry.
- b. Install insulation in accordance with manufacturer's published instructions and recognized industry practice to ensure that it will serve its intended purpose.
- c. Install insulation materials with smooth and even surfaces. Butt joints firmly together to ensure complete and tight fit over surfaces to be covered.
- d. Maintain the integrity of factory-applied vapor barrier jacketing on all insulation, protecting it against puncture, tears or other damage. All staples used on ductwork insulation shall be coated with suitable sealant to maintain vapor barrier integrity and covered with pressure sensitive vapor barrier tape and vapor barrier coating as specified.
- e. Insulate entire system including fittings, joints, flanges, fire dampers, flexible connections, and exposed joints. All portions of duct designated to receive duct wrap shall be completely covered with duct wrap.
- f. To ensure installed thermal performance, duct wrap insulation shall be cut to "stretch-out" dimensions. Maintain specified duct insulation thickness and vapor barrier at all fittings, obstructions, and duct flanges.
- g. A 2-inch (50mm) piece of insulation shall be removed from the facing at the end of the piece of duct wrap to form an overlapping stapling and taping flap.
- h. Install duct wrap insulation with facing outside so that the tape flap overlaps the insulation and facing at the other end of the piece of duct wrap. Adjacent sections of duct wrap insulation shall be tightly butted with the 2-inch (50mm) stapling and taping flap overlapping. If ducts are rectangular or square, install so insulation is not excessively compressed at corners. Seams shall be stapled approximately 6-inches (150mm) on center with 2-inch (13mm) (min) steel outward clinching staples.
- i. Seams, joints and staples shall be sealed with pressure-sensitive tape matching the insulation facing (either plain foil or FRK backing stock) and glass fabric and vapor barrier coating. Cloth duct tape of any color or finish using reclaimed rubber adhesives shall not be utilized on duct wrap insulation. Adjacent sections of duct wrap shall be tightly butted with the 2-inch (50mm) tape flap overlapping.
- j. Where rectangular ducts are 24-inch (600mm) in width or greater, duct wrap insulation shall be additionally secured to the bottom of the duct with mechanical fasteners such as pins and speed clip washers, spaced on 18-inch (425mm) centers (maximum) to prevent sagging of insulation.
- k. Seal all tears, punctures and other penetrations of the duct wrap facing using one of the above methods to provide a vapor tight system.
- l. Upon completion of installation of duct wrap and before operation is to commence, visually inspect the system and verify that it has been correctly installed.

- m. Open all system dampers and turn on fans to blow all scraps and other loose pieces of material out of the duct system. Allow for a means for removal of such material.
 - n. Check the duct system to ensure that there are no air leaks through joints.
 - o. No ductwork insulation shall be supported utilizing tie wire or bailing wire. Penetrations of ductwork insulation vapor barrier are prohibited.
 - p. Bevel and terminate insulation at access doors. Paint edges with vapor barrier mastic.
 - q. Install insulation board between volume dampers and sheet metal standoffs.
 - r. Provide removable insulation section at all pitot tube traverse points. Insulation section shall contain tether that attaches to adjacent ductwork.
2. Penetrations: Extend ductwork insulation without interruption through walls, floors and similar ductwork penetrations, except where otherwise specified.
3. Rigid Insulation:
- a. Rigid duct insulation may be impaled over welded pins and secured with insulation caps and washers matching the color of the vapor barrier facing. All seams shall be firmly butted and sealed with pressure-sensitive vapor barrier tape matching the facing and vapor barrier coating.
 - b. Corner angles shall be installed on all external corners of rigid duct insulation in exposed finished areas before jacketing, except oven and hood exhaust duct insulation, which shall have no corner angles.
4. Duct Wrap Insulation: Duct wrap insulation shall be applied with all joints butted firmly together. All joints in the insulation covering shall be sealed with adhesive. Duct wrap insulation shall be secured to bottom of rectangular or oval ducts over 24 inches (60 cm) wide with mechanical fasteners on 16-inch (40 cm) (approx.) centers to prevent sagging.
5. Duct Lining Insulation: Duct liner insulation shall be applied with all joints tightly butted using 90 percent coverage of adhesive meeting the requirements of ASTM C 916 plus mechanical fasteners spaced according to the liner manufacturer's schedule for the interior width of the plenum, housing, or air shaft. (Also refer to Division 23 Section, HVAC Air Distribution System.)

3.5. FIELD QUALITY ASSURANCE

- A. Upon completion of all insulation work covered by this specification, visually inspect the work and verify that it has been correctly installed. This may be done while work is in progress, to assure compliance with requirements herein to cover and protect insulation materials during installation.

3.6. PROTECTION

- A. Replace damaged insulation which cannot be satisfactorily repaired, including insulation with vapor barrier damage and moisture-saturated insulation.

- B. The insulation contractor shall advise the general and/or the mechanical contractor as to requirements for protection of the insulation work during the remainder of the construction period, to avoid damage and deterioration of the finished insulation work.

3.7. SAFETY PRECAUTIONS

- A. Insulation contractor's employees shall be properly protected during installation of all insulation. Protection shall include proper attire when handling and applying insulation materials, and shall include (but not be limited to) disposable dust respirators, gloves, hard hats, and eye protection.
- B. The insulation contractor shall conduct all job site operations in compliance with applicable provisions of the Occupational Safety and Health Act, as well as with all state and/or local safety and health codes and regulations that may apply to the work.

3.8. INSULATION COVERING

- A. Unless otherwise noted, all exposed duct insulation shall have a field applied PVC jacket cover neatly cut and pasted over ductwork insulation. PVC shall be high gloss white and shall be 20 mils thick.
- B. Exposed areas include, but are not limited to, all mechanical equipment rooms, electric rooms, storage rooms, janitor closets, ductwork exposed in an occupied space.
- C. Where PVC jackets are indicated, install with 1 inch overlap at longitudinal seams and end joints, for horizontal applications, install with longitudinal seams along top and bottom of tanks and vessels. Seal with manufacturers recommended adhesive.
 - 1. Apply two continuous beads of adhesive to seams and joints, one bead under lap and the finish bead along seam and joint edge.

END OF SECTION

DIVISION 23 SECTION 23 30 00
HVAC AIR DISTRIBUTION
TABLE OF CONTENTS

PART 1 - GENERAL	1
1.1. SUMMARY	1
1.2. REFERENCES.....	1
1.3. QUALIFICATIONS.....	2
1.4. REGULATORY REQUIREMENTS	2
1.5. ENVIRONMENTAL REQUIREMENTS.....	2
1.6. ALTERNATES	2
PART 2 - PRODUCTS	3
2.1. DUCTWORK.....	3
2.2. DUCT SYSTEMS	4
2.3. DUCT CONSTRUCTION	4
2.4. AIR VOLUME CONTROLS	5
2.5. INSTRUMENT TEST PORTS.....	6
2.6. FLEXIBLE DUCT	6
2.7. DUCT ACCESS DOORS.....	6
2.8. SPIN-IN FITTINGS	6
2.9. AIR DEVICE REQUIREMENTS.....	7
2.10. SUPPLY AIR DEVICES.....	7
2.11. RETURN/EXHAUST/TRANSFER GRILLES	9
2.12. OPEN END DUCTS (OED).....	10
2.13. DRIP PANS.....	10
2.14. DUCT SEALANTS AND ADHESIVES	10
2.15. FILTER MEDIA DURING CONSTRUCTION	12
PART 3 - EXECUTION	12
3.1. DUCT INSTALLATION REQUIREMENTS	12
3.2. ACCESSORY INSTALLATION REQUIREMENTS	13
3.3. CLEANING	14
3.4. DUCTWORK IDENTIFICATION	14
END OF SECTION	15

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 23 30 00 - HVAC AIR DISTRIBUTION

PART 1 - GENERAL

1.1. SUMMARY

- A. For General Mechanical Requirements, see Division 23 Section, "Common Work Results for HVAC" and Division 01, "General Requirements".
- B. The fabrication and installation of all ductwork, together with related equipment, shall comply with the standards of the National Fire Protection Association, as set forth in NFPA Standard No. 90A, as well as with the requirements of the Sheet Metal and Air Conditioning Contractors' National Association, Inc., and the latest edition of the ASHRAE Guide.
- C. All duct sizes shown are net inside clear dimensions. Where internal duct lining is used, increase duct sizes accordingly to provide the indicated net free area. Unless otherwise indicated size runouts, drops, and connections to air handling equipment, grilles, registers, diffusers, fans, coils, filters, and other equipment to the full size of the equipment connection.
- D. Minor changes may be made in duct sizes where required to fit the available space, provided the indicated net free area and approximate aspect ratio are maintained. Size round ducts installed in place of rectangular ducts in accordance with ASHRAE/SMACNA Table of equivalent rectangular and round ducts.
- E. Smoothly transition all ductwork to prevent excessive or unnecessary turbulence or pressure loss.
- F. All exposed ductwork in finished areas shall be painted in color as indicated by Architect. All ductwork requiring paint shall be constructed of paint grade galvanized sheet steel with a paintable finish.

1.2. REFERENCES

- A. ASTM A 36 - Structural Steel
- B. ASTM A 90 - Weight of coating on Zinc-Coated (Galvanized) Iron or Steel Articles
- C. ASTM A 167 - Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
- D. ASTM C 916 Type II – Standard Specification for Adhesives for Duct Thermal Insulation
- E. ASTM A 366 - Steel, Sheet, Carbon, Cold Rolled, Commercial Quality
- F. ASTM A 480 - General Requirements for Flat-Rolled Stainless and Heat-Resisting Steel Plate, Sheet, and Strip

- G. ASTM A 525 - General Requirements for Steel Sheet, Zinc-Coated (Galvanized) by the Hot-Dip Process
- H. ASTM A 527 - Steel Sheet, Zinc-Coated (Galvanized) by Hot-Dip Process, Lock Forming Quality
- I. ASTM A 568 - Steel, Sheet, Carbon, and High-Strength, Low-Alloy, Hot-Rolled and Cold-Rolled
- J. ASTM A 569 - Steel, Carbon (0.15 Maximum, Percent), Hot-Rolled Sheet and Strip, Commercial Quality
- K. NFPA 90A - Installation of Air Conditioning and Ventilating Systems
- L. NFPA 90B - Installation of Warm Air Heating and Air Conditioning Systems
- M. SMACNA - HVAC Air Duct Leakage Test Manual
- N. UL 181 - Factory-Made Air Ducts and Connectors.
- O. NFPA 90A - Installation of Air Conditioning and Ventilating Systems
- P. NFPA 70 - National Electrical Code
- Q. SMACNA - HVAC Duct Construction Standards - Metal and Flexible

1.3. QUALIFICATIONS

- A. Manufacturer: Company specializing in manufacturing the projects specified in this section with minimum five (5) years documented experience.
- B. Installer: Company specializing in performing the work of this section with minimum five (5) years' experience.

1.4. REGULATORY REQUIREMENTS

- A. Construct ductwork to NFPA- 90A and NFPA-90B.

1.5. ENVIRONMENTAL REQUIREMENTS

- A. Do not install duct sealants when temperatures are less than those recommended by sealant manufacturer.
- B. Maintain temperatures during and after installation of duct sealants.

1.6. ALTERNATES

- A. Refer to Division 01 Section, "Alternates" for description of work under this section

affected by alternates.

PART 2 - PRODUCTS

2.1. DUCTWORK

- A. Unless otherwise indicated or specified, fabricate ductwork of galvanized sheet steel, stainless steel, or aluminum conforming to Commercial Designation 3003 Temper H14 and Duct Sheet. Duct gages, jointing and reinforcement shall conform to Tables 4, 5, 6 and 7, as applicable, Chapter I of the latest ASHRAE Guide and Data Book. Construction details shall conform to Section I and Section II, as applicable, of Duct Manual and Sheet Metal Construction for Ventilation and Air Conditioning Systems as published by Sheet Metal and Air Conditioning Contractors' Association, Inc.
- B. Erect sheet metal ductwork in a first-class, workmanlike manner secured in place rigidly and permanently. Provide suitable hangers, securely attached to building construction with bolts, clips or inserts. Hangers shall be structural shapes, unistrut, kindorf or channel; strap hangers or the use of wire will not be permitted. All thread hangers shall not pass through or be inside duct. Hangers shall not penetrate the duct insulation vapor barrier. Support vertical ducts passing through floors by angles riveted to duct and resting either on floor or on brackets secured to building construction. All space around ducts where they pass through any walls, floors, ceilings, or roofs shall be sealed tight with incombustible inert material. Do not arrange ducts so as to impair the effectiveness of fireproofing around structural members. Provide sheet metal flanged collars around exposed ducts passing through walls, floors, or ceilings to provide finished appearance. Seal all duct joints and seams including supply, return, outside air, combustion air, relief air, ventilation air and exhaust ductwork with Hardcast Sealing System as manufactured by Hardcast, Inc., Foster, Childers, or approved equal.
- C. Flexible connections of neoprene, excelon, or other NFPA approved non-inflammable fabric shall be provided in the duct system at all fan inlet and outlet connections. Flexible duct connectors shall be Durodyne or approved equal.
- D. Provide cut turning vanes in all duct turns where centerline radius is located. Turning vanes shall be air-foil type with extended trailing edges. Fabricate to comply with SMACNA Sheet Metal Construction for Ventilation and Air Conditioning Systems Manual.
- E. Provide duct collars and angle iron framework for mounting of automatic dampers.
- F. Fabricate and support in accordance with SMACNA HVAC Duct Construction Standards - Metal and Flexible, and as indicated. Provide duct material, gauges, reinforcing, and sealing for operating pressures indicated.
- G. Construct T's, bends, and elbows with radius of not less than 1-1/2 times width of duct on centerline. Where not possible and where rectangular elbows are used, provide air foil turning vanes. Where acoustical lining is indicated, provide turning vanes of perforated metal with glass fiber insulation.

- H. Increase duct sizes gradually, not exceeding 15 degrees divergence wherever possible; maximum 30 degrees divergence upstream of equipment and 45 degrees convergence downstream.
- I. Fabricate continuously welded round and oval duct fittings two gauges heavier than duct gauges indicated in SMACNA Standard. Joints shall be minimum 4-inch (100 mm) cemented slip joint, brazed or electric welded. Prime coat welded joints.
- J. Provide standard 45 degree lateral wye takeoffs unless otherwise indicated where 90 degree conical tee connections may be used.
- K. Fasteners: Rivets, bolts, or sheet metal screws.
- L. Hanger Rods: ASTM A36 - Galvanized steel; threaded both ends, threaded one end, or continuously threaded.

2.2. DUCT SYSTEMS

- A. All ductwork shall be constructed for low pressure service (2 inch W.G.).

2.3. DUCT CONSTRUCTION

- A. Rectangular and/or Round Ductwork (Low Pressure):
 - 1. Galvanized Steel Ducts: ASTM A525 and ASTM A527 galvanized steel sheet, lock-forming quality, having G-90 Zinc coating in conformance with ASTM A90.
 - 2. Make allowance for internal duct lining where required. Sizes shown on the drawings are inside clear dimensions.
 - 3. Determine duct gauges for the longest duct side and use for all four sides. Joints and reinforcing requirements apply to the longest duct side.
 - 4. Reinforce all ducts to prevent buckling, vibration, or noise as recommended in the referenced construction standards, and as required to suit the installed conditions.
 - 5. Do not cross break duct which will receive rigid insulation covering.
 - 6. Where tap sizes of divided-flow fittings are not indicated, make branch and main/connection sizes proportional to their respective air flows and maintain uniform transverse velocities in the fitting.
 - 7. Make radius elbows and radius tee connection with throat radius equal to or greater than the width of the duct. Use vaned elbows where shown and where radius elbows will not fit the space, and in all square bends.
 - 8. Turning vanes shall be the air-foil type with extended trailing edges, 36-inch maximum vane length. Where longer vanes are required, use two or more sets of

vanes with intermediate runners securely fastened together.

9. Bolt, screw, rivet, or spot weld reinforcing members securely to the duct on not less than 6-inch centers.
10. Where ducts are open-ended without grilles, registers, or other means of stiffening, reinforce and stiffen the open end with standing seams or an angle frame. Provide rolled edges to prevent any exposed sharp edges.
11. Paint all cut ends on galvanized angles, rods, and other uncoated surfaces with aluminum paint.
12. Where ductwork is not painted or otherwise finished, remove all exposed traces of joint sealers, manufacturer's identification and other markings.
13. Determine duct gauges per SMACNA based on duct size and pressure indicated.

2.4. AIR VOLUME CONTROLS

- A. Furnish and install air volume control devices where indicated and where required to adjust and balance air flow in the systems, whether indicated or not. Volume dampers shall be provided in all branch ducts serving air outlets and inlets. For existing air devices install a new volume damper and where required for access, a new access door to allow access and adjustment.
- B. Manual volume dampers in ductwork shall be factory-assembled units with rigid frame, opposed-blade action, and locking quadrant operator. Mark the extended damper shaft and align the operating handle to indicate the blade position. Dampers shall be as manufactured by Ruskin, American Warming and Ventilating, Inc., Arrow, Vent Products Company, or approved equal. Rectangular dampers shall be Type MD35, with steel channel frame, 16 gauge steel blades, 9 inch maximum blade spacing, low pressure, nylon bearings, galvanized finish with aluminum paint touch up. Round manual balancing dampers shall be Type MDRS25 manufactured by Ruskin, Arrow, American Warming and Ventilating, Inc., or as approved equal. When external insulation is to be applied, provide sheet metal standoffs on all manual volume dampers. Provide blade stops to minimize air gaps around damper blades when closed.
- C. Motor-operated dampers shall be as hereinafter specified under Division 23 Section, "Instrumentation and Controls of HVAC & Plumbing System".
- D. Duct turning vanes shall be Tuttle & Bailey Ducturns, or approved equal.
- E. Furnish and install duct collars and angle iron frames for the installation of ATC dampers.
- F. Where volume dampers are installed in exposed finished spaces locate damper handle on top of duct.
- G. Where volume dampers are installed above ceilings attach a colored piece of tape so that Test and Balance Engineer can easily locate for air flow adjustment.

- H. Where existing air devices do not contain manual volume dampers in the run-out ductwork, install manual volume damper at each existing air device duct runout.

2.5. INSTRUMENT TEST PORTS

Furnish and install instrument test ports in the ductwork to allow use of pitot tube length. Equip holes with Ventlok #699 instrument ports. Fittings shall extend beyond duct covering and insulation.

2.6. FLEXIBLE DUCT

- A. Where indicated, flexible ductwork shall be Type SLR-25C as manufactured by General Flex Corporation, or as approved equal, insulated fully, UL listed as Class 1 Air Ducts, Standard 181, NFPA 90A and NFPA 90B with scuff-resistant polyethylene connector jacket and suitable for use in return air plenums. Flex duct tape shall be UL-181 listed and marked "181B-FX".
- B. Limit flexible duct runs to 5 feet maximum. Install flexible ducts, using all recommended fittings, couplings, and accessories. Support ducts with wide straps spaced so that horizontal runs do not sag more than 2-1/2 inches in 5 feet. Internally seal all joints and connections, cover with duct tape, and fasten with metal duct strap clamps. Bends of 180 degrees in flexible duct are prohibited.

2.7. DUCT ACCESS DOORS

- A. Furnish and install adequately sized duct access doors at air measuring devices, motor-operated dampers, duct coils and other locations where indicated and required for duct access. Doors shall be the continuous piano-hinged type with approved latches and neoprene compression-type gaskets with 1 inch thick fiberglass double skin and shall be Ruskin Model ADH22, Air Balance, Inc., FSA-100 or as approved equal. Stiffen ductwork at door openings. Where doors are installed in insulated ductwork, provide equivalent insulation in the door assembly. Where access doors are installed in the fire-rated partitions, provide Fire Seal access doors as manufactured by Air Balance, Inc., or approved equal, UL approved, meeting the rating of the enclosure in which the access door is installed.
- B. Seal around frame attachment to duct and door to frame with neoprene or foam rubber.

2.8. SPIN-IN FITTINGS

- A. Furnish and install spin-in fittings where indicated on the contract drawings, Model SM-20G, as manufactured by General Environment Corporation, or an approved equal.

2.9. AIR DEVICE REQUIREMENTS

- A. Furnish and install air supply, return, exhaust devices of sizes and capacities as scheduled on the drawings. Catalog numbers shown are Titus, Inc., products for equipment which have been found suitable for the application. Other manufacturers listed below or approved equal will be considered only if performance characteristics including throw, drop, pressure loss, sound pressure level, etc., are equal to or better than the performance characteristics of the specified products. All air devices shall be ADC certified. Ductwork behind registers, grilles, open ended ducts, and diffusers shall be given two coats of flat black paint. Perimeter of all ceiling diffusers shall be caulked to provide a neat, aesthetic appearance.
- B. Where air terminal devices are installed in duct collars or branches, furnish and install air extractors. Furnish and install control grids, volume dampers, and/or other accessories necessary to ensure uniform air flow across the terminal devices. Accessories shall be of the same material as the terminal device. Install fixed blade terminals so that blades block the normal line of vision. Furnish three (3) of each type of removable key operators.
- C. Contractor shall determine frame and mounting type as per type of ceiling as shown on Architectural drawings.
- D. Air devices and accessories that are installed in a finished, non-white ceiling shall be of a color as selected by the Architect.
- E. Noise Criteria: All air devices shall be sized and selected to limit maximum NC (Noise Criteria) levels to 30.

2.10. SUPPLY AIR DEVICES

- A. LSD1 Diffuser, Linear Slot, Supply
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Titus Model ML
 - b. Metal-Aire
 - c. Price
 - d. Tuttle & Bailey
 - e. Anemostat
 - f. Carnes
 - g. Nailor
 - h. Krueger
 - i. Greenheck
 - 2. Construction:
 - a. Material: Aluminum
 - b. Finish: Baked enamel, color selected by Architect
 - c. Face Style: Linear Slots

- d. Mounting: Surface
 - e. Pattern: Fully adjustable 180-degree pattern controllers
 - f. Damper: Integral, Opposed Blade type
 - 3. Accessories:
 - a. Plenum; Insulated
 - 4. The diffuser shall be tested in accordance with ANSI/ASHRAE Standard 70-1991.
- B. SD1 Diffuser, Square/Rectangular
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Titus Model TDCA-AA
 - b. Metal-Aire
 - c. Price
 - d. Tuttle & Bailey
 - e. Anemostat
 - f. Carnes
 - g. Nailor
 - h. Krueger
 - i. Greenheck
 - 2. Construction:
 - a. Material: Aluminum
 - b. Finish: Baked enamel, color selected by Architect
 - c. Face Style: Louvered
 - d. Mounting: Lay-in or Gypboard
 - e. Pattern: Adjustable core style
 - f. Damper: Integral, Opposed Blade type
 - 3. Accessories:
 - a. Square to round neck adaptor
 - b. Adjustable pattern vanes
 - 4. Provide auxiliary panel for lay-in tile installation.
 - 5. The diffuser shall be tested in accordance with ANSI/ASHRAE Standard 70-1991.
- C. SG1 Grille, Square/Rectangular
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Titus Model 300FS
 - b. Metal-Aire

- c. Price
- d. Tuttle & Bailey
- e. Anemostat
- f. Carnes
- g. Nailor
- h. Krueger
- i. Greenheck

2. Construction:

- a. Material: Aluminum
- b. Finish: Baked enamel, color selected by Architect
- c. Face Style: Grille
- d. Mounting: Surface
- e. Pattern: Double Deflection; spaced 3/4 inch apart.
- f. Damper: Integral, Opposed Blade type

3. Accessories:

- a. Drop control

4. The grille shall be tested in accordance with ANSI/ASHRAE Standard 70-1991.

2.11. RETURN/EXHAUST/TRANSFER GRILLES

A. RG1 Return/Exhaust/Transfer Grille, Square/Rectangular

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

- a. Titus Model 350FS
- b. Metal-Aire
- c. Price
- d. Tuttle & Bailey
- e. Anemostat
- f. Carnes
- g. Nailor
- h. Krueger
- i. Greenheck

2. Construction:

- a. Material: Aluminum
- b. Finish: Baked enamel, color selected by Architect
- c. Ceiling Type: Lay-in, Gypboard, Sidewall
- d. Blades: Fixed, 35° Angle, 3/4" Spacing

3. Accessories:

- a. Face: Grille

- b. Damper: Integral, Opposed Blade type
- 4. Provide auxiliary panel for lay-in tile installation.
- 5. The register shall be tested in accordance with ANSI/ASHRAE Standard 70-1991.

2.12. OPEN END DUCTS (OED)

- A. Whether indicated on plans or not, all open-ended ducts shall be provided with a protective screen.
- B. All open-ended ducts shall be furnished with a 12 gauge $\frac{1}{2}$ inch x $\frac{1}{2}$ inch aluminum mesh screen. Screens shall be permanently installed in a removable frame, and the frame shall be attached to the open-ended duct in a neat, workmanship-like manner without any exposed edges or sharp surfaces.
- C. Screen shall be attached to a $\frac{3}{4}$ inch x $\frac{1}{8}$ inch continuous galvanized perimeter frame. Install duct stiffeners greater than 16 inches in any direction at open-ended ducts.
- D. Behind all open end ducts, paint ductwork and dampers with two (2) coats of flat black paint.

2.13. DRIP PANS

- A. Furnish and install suitable watertight, aluminum drip pans where water or drain piping is routed over electrical switchgear, transformers, computers, elevator machine equipment, dry storage rooms, etc. Each drip pan shall have a 1 inch copper type M drain piped to discharge where shown on drawings; or, if not shown, to discharge over nearest available open drain. Size and arrangement shall be as approved by Engineer. Sides shall be minimum 1.5 inches deep.
- B. Drain pans shall be of 16 gauge welded construction. Provide drawings of typical drain pan construction for approval before construction. See Submittals in Division 01 Section, "Product Requirements".

2.14. DUCT SEALANTS AND ADHESIVES

- A. All ductwork shall be sealed, including low pressure exhaust systems. Transverse joints and longitudinal seams in duct systems shall be sealed with a duct sealant of the type specified hereinafter in Section 1, 2, or 3, or with a tape sealing system as specified in Section 4. Spiral lockseams are not longitudinal seams and do not require duct sealant. All seams and joints shall require duct sealant suitable for the pressure rating and installation application. All sealants shall exceed 500 hours without becoming brittle under ASTM-D572 test conditions (oxygen bomb), unless specified otherwise. No surface preparation or solvent cleaning shall be necessary to remove light coatings of oil and dust before applying sealant unless specified otherwise. Flanged joints shall be sealed according to Section 5. Construction joints that are not fully welded shall be

sealed according to Section 6. Adhesive to secure insulation to metal surfaces shall be that specified in Section 7.

1. Assembly joints to be installed indoors or outdoors shall be sealed with Foster 32-19, Childers CP-146, United Duct Sealer WB, or equivalent, which is a water-based sealant formulated to withstand service temperatures from 20 degrees F to +200 degrees F. Sealant shall have a UL Classification marking with a flame spread of 15 and smoke developed of 0 when applied to inorganic reinforced cement board, both at a coverage of 31 square feet per gallon. Store and apply between 40°F (4°C) and 100°F (38°C); protect from freezing.
2. Assembly joints to be installed indoors shall be sealed with Foster 32-19, Childers CP-146, UNI-GRIP™ duct sealer or equivalent, which is a water-based (vinyl-acrylic polymer) sealant formulated to withstand temperatures from -20 degrees to +200 degrees Fahrenheit. Surfaces to be sealed should be clean, dry, and free from oil, grease, and dirt. Sealant shall be nonflammable (wet) and fire retardant. Sealant shall have a UL Classification marking with a flame spread of 5 and smoke developed of 5 when applied to 18-gauge galvanized steel and a flame spread of 0 and smoke developed of 0 when applied to inorganic reinforced cement board, both at a coverage of 40 square feet per gallon.
3. Assembly joints shall be sealed with UNI-CAST® tape sealing system or equivalent, which is a combination of an adhesive activator and woven-fiber tape impregnated with a gypsum mineral compound. Modified acrylic/silicone activator (MTA-20 for indoor use) reacts exothermically with the tape to form a hard, airtight seal. Sealant shall be formulated to withstand temperatures from -40 degrees F to +200 degrees Fahrenheit. Combination of tape and MTA-20 adhesive shall have a flame spread and smoke developed of 0. Do not use for outdoors.
4. Flanged joints to be installed indoors shall be sealed with UNI-GASKET™ flange sealer or equivalent, which has a synthetic elastomer base and is formulated to withstand temperatures from -20 degrees F to +150 degrees F. Sealant shall have a UL Classification marking with a flame spread of 5 and smoke developed of 5 when applied to 18-gauge galvanized steel and a flame spread of 0 and smoke developed of 5 when applied to inorganic reinforced cement board, both at a coverage of 80 square feet per gallon.
5. Where duct fittings are constructed with standing seam or spot-welded techniques, all construction joints shall be sealed with UNI-WELD™ metal cement or equivalent, which is composed of neoprene rubber, resins, and inert reinforcing material dispersed in a petroleum distillate. Sealant shall be formulated to withstand temperatures from -20 degrees F to +225 degrees F. Sealant shall have a UL Classification marking with a flame spread of 0 and smoke developed of 0 when applied to 18-gauge galvanized steel and a flame spread of 0 and smoke developed of 0 when applied to inorganic reinforced cement board, tested as applied in two 1/8 inch beads 8 inches on center.
6. Where insulation is to be secured to metal surfaces, the adhesive used shall be Foster 85-60, Childers CP-127, UNI-TACK™ duct liner adhesive or equivalent, which are water-based, vinyl-acrylic copolymer adhesives formulated to

withstand temperatures from -20 degrees Fahrenheit to +200 degrees Fahrenheit. Adhesive shall have a UL Classification marking with a flame spread of 0 and smoke developed of 0 when applied to 18-gauge galvanized steel and a flame spread of 0 and smoke developed of 0 when applied to inorganic reinforced cement board, both at a coverage of 267 square feet per gallon. Adhesive shall conform to ASTM C916, Type II.

- B. Manufacturers: Duct Mate, United McGill, MKT Metal Manufacturers, Semco, Elgen, Childers, Foster, or as approved equal.

2.15. FILTER MEDIA DURING CONSTRUCTION

- A. Filter media installed during construction: Minimum MERV 8.

PART 3 - EXECUTION

3.1. DUCT INSTALLATION REQUIREMENTS

- A. Coordinate ductwork with other work and install ducts at proper elevations and locations to maintain indicated ceiling heights and clearances. Provide all elbows, transitions, offsets, connections, and other fittings necessary to fit the work into place or to connect to equipment or diffusers. Method of duct support connection to structure and slabs shall be approved by Structural Engineer, and Shop Drawings shall be submitted.
- B. Substantially support ductwork with structural shapes, flat bars, or formed strap hangers securely attached to the building structure by means of bolts, clamps, or inserts. Support vertical ducts by angles attached to the duct and resting on the floor or supported by brackets or hangers attached to the building structure. Strap hangers shall be 16-gauge minimum galvanized steel formed under the bottom edge of duct. Use square ¼ inch thick washers tight against the bend on upper strap attachments to horizontal surfaces. Place all supports external to the ductwork and out of the air stream. Provide additional supports at coils and other concentrated loads. Arrange supports so that duct weight is not transmitted to ceilings, fans or other equipment.
- C. Prevent direct contact between ductwork and building surfaces or other equipment. Where ducts pass through walls, partitions, floors, ceilings, or roofs, pack and seal the space around the duct with an approved fire-safe inert material. Provide flanged duct escutcheons at all exposed ducts that pass through walls, partitions, floors, and ceilings.
- D. Use galvanized (compatible) corrosion-resistant hangers, supports, brackets, and hardware.
- E. Furnish and install NFPA-approved duct connections where shown and at all connections to fans, air handling units, and similar rotating equipment. Use glass-reinforced neoprene fabric, roll-formed to sheet metal strips or flanges. Support adjacent ductwork to provide sufficient slack in the connection.
- F. See NFPA 90A, and latest publication of SMACNA. Prevent direct contact between

ductwork and building surfaces or other equipment. The opening in the construction around the duct shall not exceed one-inch average clearance on all sides. Where ducts pass through walls, partitions, floors, ceilings, or roofs, pack and seal the space around the duct with an approved fire-safe inert material capable of preventing the passage of flame and hot gases sufficiently to ignite cotton waste when subjected to the same NFPA 251 Time-Temperature Conditions required for fire barrier penetration. All exposed duct penetrations shall be finished with a sheet metal field erected flange escutcheon to form a neat appearance.

- G. Coordinate duct installation with the requirements of Division 23 Section, "Vibration Controls for HVAC, Plumbing & Fire Protection Equipment".
- H. Install in accordance with manufacturer's instructions.
- I. Install and seal ducts in accordance with SMACNA HVAC Duct Construction Standards - Metal and Flexible.
- J. Duct Sizes are inside clear dimensions. For lined ducts, maintain sizes inside lining.
- K. Provide openings in ductwork where required to accommodate thermometers and controllers. Provide pitot tube openings where required for testing of systems, complete with metal can with spring device or screw to ensure against air leakage. Where openings are provided in insulated ductwork, install insulation material inside a metal ring.
- L. Locate ducts with sufficient space around equipment to allow normal operating and maintenance activities.
- M. Use crimp joints, with or without bead, for joining round duct sizes eight (8) inches and smaller with crimp in direction of air flow.
- N. Use double nuts and lock washers on threaded rod supports.
- O. During construction, provide temporary closures of metal or taped polyethylene on open ductwork to prevent construction dust from entering ductwork systems. Also provide temporary closures of metal or taped polyethylene at all air handling equipment openings to prevent dust from entering equipment openings.
- P. Paint behind all new air devices and open end ducts with 2 coats of flat black paint.

3.2. ACCESSORY INSTALLATION REQUIREMENTS

- A. Install accessories in accordance with manufacturer's instruction, NFPA 90A, and SMACNA HVAC Duct Construction Standards - Metal and Flexible. Also provide temporary closures of metal or taped polyethylene at all air handling equipment openings to prevent dust from entering equipment openings.
- B. Provide duct access doors for inspection and cleaning before and after filters, coils, fans, automatic dampers, duct-mounted equipment, and elsewhere as indicated. Provide minimum 10 x 10 inch size for hand access, and 18 x 18 inch size for shoulder access. Review locations prior to fabrication.

- C. Provide duct test holes where required for testing and balancing purposes. Review locations with Test and Balance Engineer prior to installation.
- D. Provide fire dampers, combination fire and smoke dampers and smoke dampers at locations indicated, where ducts and outlets pass through fire-rated components, and where required by authorities having jurisdiction. Install with required perimeter mounting angles, sleeves, breakaway duct connections, corrosion-resistant springs, bearings, bushings and hinges.
- E. Provide balancing dampers at points on supply, return, and exhaust systems where branches are taken from larger ducts as required for air balancing. Install minimum duct widths from duct take-off.
- F. Use splitter dampers only where indicated.
- G. Provide balancing dampers on duct take-off to diffusers, grilles, and registers, regardless of whether dampers are specified as part of the diffuser, grille, or register assembly.
- H. Install diffusers, registers, and grilles to ductwork with airtight construction.
- I. Check location of all air outlets and inlets and make necessary adjustments in position to conform with architectural features, symmetry, and lighting arrangements.
- J. Install duct accessories according to applicable details shown in SMACNA's HVAC Duct Construction Standards Metal and Flexible for metal ducts.
- K. Install volume dampers in lined duct; avoid damage to and erosion of duct liner.
- L. Provide test holes at fan inlet and outlet and elsewhere as indicated.
- M. Adjust duct accessories for proper settings.
- N. Adjust fire dampers for proper action.

3.3. CLEANING

- A. Clean duct system and force air at high velocity through ducts to remove accumulated dust. To obtain sufficient air, clean half the system at a time. Protect equipment which may be harmed by excessive dirt with temporary filters, or bypass during cleaning.
- B. Clean duct systems with high power vacuum machines. Protect equipment which may be harmed by excessive dirt with filters, or bypass during cleaning. Provide adequate access into ductwork for cleaning purposes.
- C. Ductwork shall be cleaned in accordance with "Duct Cleanliness for New Construction (SMACNA 2000)", and shall achieve a "Basic" cleanliness level.

3.4. DUCTWORK IDENTIFICATION

- A. Degrease and clean surfaces to receive adhesive for identification materials.

- B. All ductwork shall be identified with painted background marked with the name of the service with arrows to indicate flow direction. Color Code and System Identification shall comply with ANSI Standards.
- C. Marking shall be plain block letters, stenciled on ductwork (above and below ceilings) and shall be located near each branch connection and at least every ten feet on straight runs of ductwork. Where ductwork is aligned adjacent to each other, markings shall be neatly lined up. All markings shall be located in such a manner as to be easily legible from the floor.
- D. Identify ductwork with plastic nameplates or stenciled painting. Identify with air handling unit/fan identification and area served.
- E. Length of fan color field for ductwork shall be 32 inches. Lettering shall be minimum 3-1/2 inches high.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

DIVISION 26 SECTION 26 05 01
COMMON WORK RESULTS FOR ELECTRICAL
TABLE OF CONTENTS

PART 1 - GENERAL	1
1.1 GENERAL.....	1
1.2 PERMITS, INSPECTIONS, AND FEES.....	1
1.3 ELECTRICAL WORK UNDER OTHER DIVISIONS	2
1.4 CONTRACTOR QUALIFICATION	3
1.5 FIRE SAFE MATERIALS.....	3
1.6 REFERENCED STANDARDS, CODES, ORDINANCES AND SPECIFICATIONS.....	3
1.7 INTERPRETATION OF DOCUMENTS	5
1.8 COORDINATION.....	6
PART 2 - PRODUCTS	6
2.1 MATERIALS AND EQUIPMENT	6
2.2 SUBSTITUTIONS	7
2.3 SUBMITTALS, REVIEW, AND ACCEPTANCE	7
2.4 RECORD DRAWINGS.....	11
2.5 DEMONSTRATION AND OPERATING INSTRUCTIONS	12
2.6 SLEEVES FOR RACEWAYS AND CABLES	13
2.7 SLEEVE SEALS	13
2.8 GROUT	14
PART 3 - EXECUTION	14
3.1 EXAMINATION OF SITE, SURVEYS, AND MEASUREMENTS.....	14
3.2 GENERAL RESPONSIBILITIES	15
3.3 STORAGE AND PROTECTION OF EQUIPMENT	16
3.4 ELECTRICAL INSTALLATIONS	16
3.5 SUPERVISION AND COORDINATION.....	17
3.6 GUARANTEE	19
3.7 TEMPORARY FACILITIES	20
3.8 SCHEDULING OF WORK.....	21
3.9 DEMONSTRATION.....	21
3.10 PAINTING AND FINISHES.....	21
3.11 PROTECTION OF WORK.....	21
3.12 OPERATION OF EQUIPMENT	22
3.13 TESTING AND ADJUSTMENT.....	22
3.14 IDENTIFICATIONS, ELECTRICAL DIAGRAMS AND OPERATING INSTRUCTIONS.....	22
3.15 RECORD DRAWINGS AND SPECIFICATIONS	23
3.16 RECORD AND INFORMATION BOOKLET.....	23
3.17 INSTALLATION AND COORDINATION DRAWINGS.....	25
3.18 CUTTING AND PATCHING	25
3.21 SLEEVE-SEAL INSTALLATION.....	27
3.22 FIRESTOPPING	27
END OF SECTION.....	27

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 05 01 - COMMON WORK RESULTS FOR ELECTRICAL

PART 1 - GENERAL

1.1 GENERAL

- A. Provide all labor, materials, equipment and services necessary for and incidental to the complete installation and operation of all electrical work.
- B. All work under this Division is subject to the General Conditions and Special Requirements for the entire contract.
- C. Unless otherwise specified, all shop drawings and submissions required under Division 26 shall be made to, and acceptances and approvals made by, the ENGINEER.
- D. Conform to the requirements of all rules, regulations, and codes of local, state, and federal authorities having jurisdiction. Conform to the National Electrical Code and all NECA – National Electrical Installation Standards (NEIS).
- E. Perform the work in a first-class, substantial, and workmanlike manner. Any materials installed which do not present an orderly and neat workmanlike appearance shall be removed and replaced when so directed by the Engineer, at the Contractor's expense.
- F. Coordinate the work of all trades.
- G. Arrange conduit, wiring, equipment, and other work generally as shown, providing proper clearances and access. Carefully examine all contract drawings and fit the work in each location without substantial alteration. Where departures are proposed because of field conditions or other causes, prepare and submit detailed drawings for approval in accordance with "Submittals" specified below. The right is reserved to make reasonable changes in location of equipment, conduit, and wiring up to the time of rough-in or fabrication.
- H. The contract drawings are generally diagrammatic and all offsets, bends, fittings, and accessories are not necessarily shown. Provide all such items as may be required to fit the work to the conditions.
- I. Be responsible for all construction means, methods, techniques, procedures, and phasing sequences used in the work. Furnish all tools, equipment and materials necessary to properly perform the work in a first class, substantial, and workmanlike manner, in accordance with the full intent and meaning of the Contract Documents.
- J. The Contractor shall provide other work and services not otherwise included in the Contract Documents that are customarily forwarded in accordance with generally-accepted construction practices.

1.2 PERMITS, INSPECTIONS, AND FEES

- A. The Contractor shall obtain and pay for all charges and fees, and deliver all permits, licenses, certificates of inspection, etc., required by the authorities having jurisdiction. Deliver

inspection, approval, and other certificates to the Owner prior to final acceptance of the work.

- B. File necessary plans, prepare documents, give proper notices, and obtain necessary approvals.
- C. Permits and fees shall comply with the General Requirements of the Specification.
- D. Notify Inspection Authorities to schedule inspections of work. All work shall be subject to field inspections.
- E. Notify Engineer in advance of scheduled inspections.
- F. An electrical foreman, superintendent or other supervisor shall be in attendance for all scheduled inspections.
- G. The Contractor shall provide an electrical certificate from an independent electrical inspection agency approved by the Owner and the State of Delaware Fire Marshal. The Contractor shall submit certificate prior to final payment invoice. The Contractor shall pay all fees, including filing fees.

1.3 ELECTRICAL WORK UNDER OTHER DIVISIONS

- A. Mechanical Equipment and Systems
 - 1. In general, power wiring and motor starting equipment for mechanical equipment and systems are furnished and installed under Electrical Division 26.
 - 2. Certain mechanical units contain starters, contacts, transformers, fuses, wiring, etc., required for fans, pumps, etc., furnished with the equipment from the factory. When this equipment is supplied from the factory, the Contractor must supply power circuit(s) to the unit and a disconnecting means. Coordinate with Contractor so that one, and only one, set of starters, fuses, switches, etc., is provided and installed.
 - 3. In general, control and interlock equipment for HVAC systems (including associated wiring, conduit, transformers, relays, contacts, etc.) is furnished under Mechanical Divisions. Contractor shall install and connect all such equipment as necessary.
 - 4. Controls, wiring, conduit, transformers, etc., for smoke, fire, and motor-operated dampers are provided by Mechanical. Electrical shall install and connect all such equipment.
- B. Architectural Equipment: In general, any electrically operated or controlled equipment furnished under architectural divisions shall be supplied with control wiring, transformers, contacts, etc. Contractor shall provide power circuits to such equipment and install all electrical control equipment related thereto.
- C. Carefully review the contract documents and coordinate the electrical work under the various Divisions.

1.4 CONTRACTOR QUALIFICATION

- A. Any Contractor performing work under this Division shall be fully qualified and acceptable to the Engineer. Submit the following evidence for approval:
1. A list of not less than five (5) comparable projects that the Contractor completed.
 2. Letters of reference from not less than three (3) registered professional engineers, contractors, or building owners, explaining Contractor proficiency, quality of work, or other attribute on projects of similar size or substance.
 3. Local or State license.
 4. Membership in trade or professional organization where required.
 5. Copy of Master Electrician's License.
- B. Contractor is any individual, partnership, corporation, or firm performing work by Contract or subcontract on this project.
- C. Acceptance of a subcontractor will not relieve the Contractor of any contractual requirements or his responsibility to supervise and coordinate the various trades.
- D. Supervisory Qualifications: The electrical work on the project shall be under the direct supervision of a licensed Master Electrician.
- E. Qualifications of Installers:
1. For the actual fabrication, installation, and testing of the work, the Contractor shall use only thoroughly trained and experienced personnel who are completely familiar with the requirements of this work and with the installation recommendations of the manufacturers of the specified items.
 2. The Electrical Installer shall utilize a full time project foreman in charge of all electrical work. This person shall be fully qualified and experienced in such work and shall be available, on site, at all times during Construction. All problems, questions, coordination, etc., relating to electrical work shall take place through this person to the Architect.

1.5 FIRE SAFE MATERIALS

- A. Unless otherwise indicated, materials and equipment shall conform to UL, NFPA, or ASTM Standards for Fire Safety with Smoke and Fire Hazard Rating not exceeding flame spread of 25 and smoke developed of 50.

1.6 REFERENCED STANDARDS, CODES, ORDINANCES AND SPECIFICATIONS

- A. Specifications, Codes and Standards listed below are included as part of this specification, latest edition.

ADA	Americans with Disabilities Act

ANSI	American National Standards Institute
ASHRAE	American Society of Heating, Refrigerating and Air Conditioning Engineers
ASME	American Society of Mechanical Engineers
ASTM	American Society for Testing and Materials
IBC	International Building Code
CABO	Council of American Building Officials
FM	Factory Mutual
IEEE	Institute of Electrical and Electronics Engineers
NEC	National Electrical Code
NECA	National Electrical Contractors Association
NEMA	National Electrical Manufacturers Association
NFPA	National Fire Protection Association
OSHA	Occupational Safety & Health Administration
UL	Underwriters Laboratories
	Applicable State and Local Codes

- B. All electrical equipment and materials shall comply with the Codes and Standards listed in the latest edition of IEEE Standard 241, Electric Power Systems in Commercial Buildings, Chapter 1, Section 1.6, entitled "Codes and Standards".
- C. Comply with all Codes applicable to the work:
1. Bidders shall inform themselves of all local and state codes and regulations.
 2. In case of conflict between Contract Documents and governing Codes, the most stringent shall take precedence. Where, in any specific case, different sections of any applicable codes or when Drawings and Specifications specify different materials, methods of Construction, or other requirements, the most restrictive shall govern.
 3. Where Contract Documents exceed minimum Code requirements, and are permitted under the Code, the Contract Documents take precedence and shall govern.
 4. No extra payment will be allowed for work or changes required by local Code enforcement authorities.

- D. Underwriters Laboratories Labels shall apply to all materials and devices, etc., except specified items not covered by existing UL Standards.
- E. Conflicts with applicable regulations:
 - 1. Resolve at Contractor's expense.
 - 2. Prepare and submit details of alternate construction:
 - a. Acceptable solution of conflict.
 - b. List of substitute materials:

For approval of inspecting authorities.
For approval of Engineer.
- F. Comply with all NECA's National Electrical Installation Standards (NEIS), including NECA 1-2000 "Standard Practices for Good Workmanship in Electrical Contracting".

1.7 INTERPRETATION OF DOCUMENTS

- A. Any discrepancies between Drawings, Specifications, Drawings and Specifications, or within Drawing and Specifications shall be promptly brought to the attention of the Owner during the bidding period. No allowance shall subsequently be made to the Contractor by reason of his failure to have brought said discrepancies to the attention of the Owner during the bidding period or of any error on the Contractor's part.
- B. The locations of products shown on Drawings are approximate. The Contractor shall place the devices to eliminate all interference with above-ceiling ducts, piping, etc. Where any doubt exists, the exact location shall be determined by the Owner.
- C. All general trades and existing conditions shall be checked before installing any outlets, power wiring, etc.
- D. Equipment sizes shown on the Drawings are estimated. Before installing any wire or conduit, the Contractor shall obtain the exact equipment requirements and install wire, conduit, or other item of the correct size for the equipment actually installed. However, wire and conduit sizes shown on the Drawings shall be taken as a minimum and shall not be reduced without written approval from the Owner.
- E. Where variances occur between the drawings and specifications or within either document itself, the item or arrangement of better quality, greater quality, or higher cost shall be included in the Contract Price. The Engineer will decide on the item and manner in which the work shall be installed.
- F. Contract Drawings are generally diagrammatic and all offsets, fittings, transitions, and accessories are not necessarily shown. Furnish and install all such items as may be required to fit the work to the conditions encountered. Arrange conduits, equipment, and other work generally as shown on the Contract Drawings, providing proper clearance and access. Where departures are proposed because of field conditions or other causes, prepare and submit detailed Shop Drawings for approval in accordance with "submittals" specified below. The right is reserved to make reasonable changes in location of equipment, piping, and ductwork, up to the time of rough-in or fabrication.

- G. Work not specifically outlined, but reasonably incidental to the completion of the work, shall be included without additional compensation from the Owner.

1.8 COORDINATION

- A. Coordinate arrangement, mounting, and support of electrical equipment:
 - 1. To allow maximum possible headroom unless specific mounting heights that reduce headroom are indicated.
 - 2. To provide for ease of disconnecting the equipment with minimum interference to other installations.
 - 3. To allow right of way for piping and conduit installed at required slope.
 - 4. So connecting raceways, cables, wireways, cable trays, and busways will be clear of obstructions and of the working and access space of other equipment.
- B. Coordinate installation of required supporting devices and set sleeves in cast-in-place concrete, masonry walls, and other structural components as they are constructed.
- C. Coordinate sleeve selection and application with selection and application of firestopping specified in Division 07 Section "Penetration Firestopping."

PART 2 - PRODUCTS

2.1 MATERIALS AND EQUIPMENT

- A. Material and equipment installed as a part of the permanent installation shall be new, unless otherwise indicated or specified, and shall be approved by the Underwriters' Laboratories, Inc., for installation in each particular case where standards have been established.
- B. Where material or equipment is identified by proprietary name, model number, and/or manufacturer, furnish the named item or equivalent thereof, subject to acceptance.
- C. Material submissions shall conform to requirements outlined in SUBMITTALS, REVIEW, AND ACCEPTANCE.
- D. The suitability of named item only has been verified. Where more than one Manufacturer is named, only the first named Manufacturer has been verified as suitable. Manufacturers and items other than the first named shall be equal or better in quality and performance to that of specified items, and must be suitable for available space, required arrangement, and application. The Contractor, by providing other than the first named Manufacturer, assumes responsibility for all necessary adjustments and modifications necessary for a satisfactory installation.
- E. The Contractor shall only submit those manufacturers indicated in the Specification. Proposed alternate manufacturers will not be considered unless the specific item indicates "or as approved equal". Submit all data necessary to determine suitability of substituted items for approval.

- F. All items of equipment furnished shall have a service record of at least five (5) years.

2.2 SUBSTITUTIONS

- A. Substituted items or items other than those named shall be equal or better in quality and performance and must be suitable for the available space, required arrangement, and application. Submit any and all data necessary to determine the suitability of substituted items. The Contractor shall be responsible for correct application, placement, and installation of substituted equipment. Cost savings data shall also be submitted with submittal data for substituted items. Total cost savings or a per-unit saving to the Owner shall be clearly indicated. If a substituted item is accepted, all cost savings shall be returned to the Owner as a credit.
- B. Substitutions will not be permitted for specific items of material or equipment where specifically indicated.
- C. For substituted items, clearly list on the first page of the submittal all differences between the specified item and the proposed item. The Contractor shall be responsible for corrective action (or replacement with the specified item) while maintaining the specification requirements if differences have not been clearly indicated in the submittal.
- D. Where the Contractor proposes to use an item of equipment or application other than that specified or detailed on the Drawings, which requires any redesign of the structure, partitions, foundation, HVAC, piping, wiring, or any other part of the mechanical, electrical, or architectural layout, all such redesign and all new drawings and detailing required thereafter shall be prepared by the Contractor at his own expense for review by the Owner representative before any such work is implemented.
- E. All Contractor-proposed changes and revisions shall be at the Contractor's risk and expense. The Contractor shall fully coordinate all revisions, substitutions and changes with other trades. The Contractor shall provide all necessary provisions, including HVAC, ventilation, foundations, access, etc., for a complete, code compliant, and fully functional installation.
- F. Where the Contractor elects to submit a substitution for equipment or materials, he shall:
1. Submit Shop Drawings that show complete compliance to each statement or requirement of the Specifications.
 2. Submit certified test data from an independent testing laboratory for each product.
 3. Submit one complete working sample of the equipment or materials to be furnished. In cases involving large or heavy items of equipment, the Owner may waive the requirement to submit the sample.
- G. Failure to comply with the above-required submissions shall constitute an automatic rejection of the substitution.

2.3 SUBMITTALS, REVIEW, AND ACCEPTANCE

- A. General:

1. The equipment, material, installation, workmanship, arrangement of work, final instruction, and final documentation is subject to review and acceptance. No substitution will be permitted after acceptance of equipment or materials except where such substitution is considered by the Engineer to be in the best interest of the Owner. Submit for review in clear and legible form the following documents:
 - a. Material and Equipment List
 - b. Descriptive Data
 - c. Shop Drawings
 - d. Installation and Coordination Drawings
 - e. Contractor As-Built Drawings
 - f. Owner Instructions and Manuals
 - g. Construction Phasing and Outage Schedule
 2. Prepare all submittals specifically for this project and stamp each submittal in a form indicating that the documents have been Contractor reviewed, are complete, and are in compliance with the requirements of the plans and specifications. Each submittal item shall be clearly identified and numbered. Each submittal shall contain a complete schedule of Manufacturer's part numbers and quantity listings of all supplied components. Each proposed item shall be highlighted and tagged with a star, an arrow, etc., including all options and accessories.
 3. Coordinate the installation requirements and any mechanical requirements for the equipment submitted. Submittals will be reviewed for general compliance with design concept in accordance with the contract documents. The Contractor is responsible for the correctness of all submittals. Reviews will not verify dimensions, quantities, or other details.
 4. Identify all submittals, indicating the intended application, location, or service of the submitted item. Refer to specification sections or paragraphs where applicable. Clearly indicate the exact type, model number, size, and special features of the proposed item. Clearly list on the first page of the Submittal all differences between the specified item and the proposed item. The Contractor shall be responsible for corrective action (or replacement with the specified item) while maintaining the specification requirements, if differences have not been clearly indicated in the submittal. Submittals of a general nature will not be acceptable.
 5. Submit actual operating conditions or characteristics for all equipment where required capacities are indicated. Factory order forms showing only required capacities will not be acceptable. Indicate all options used to meet the specifications. It is not the responsibility of the Engineer or Owner to make selections of factory options other than colors. Submittals lacking proper selection of factory options or special features required by the specification shall be RETURNED WITHOUT REVIEW.
 6. Acceptance will not constitute waiver of contract requirements unless deviations are specifically indicated and clearly noted.
 7. Documents of general form indicating options shall be clearly marked to show what is specifically proposed for this project.
 8. Submittals NOT IN COMPLIANCE with the requirements of this section will be RETURNED WITHOUT REVIEW.
- B. Material, Equipment, Manufacturer and Subcontractor List: Within 30 calendar days after the award of contract, submit a complete MATERIAL, EQUIPMENT, MANUFACTURER AND SUBCONTRACTOR LIST for preliminary review. List all proposed materials and equipment, the associated proposed Manufacturer, and any proposed subcontractors. After

the receipt of reviewed Material and Equipment List, submit complete Shop Drawings for approval. List all materials and equipment, indicating manufacturer, type, class, model, curves, and other general identifying information. Submittals shall be specific for each building as contained in the individual building Specifications and Drawings.

- D. Upon approval of the List of Materials, the Contractor shall prepare a complete Master Submittal Register, listing all products and materials that will be submitted for approval. Items shall be listed by referenced specification paragraph in ascending order. This master list shall be included with each submittal, updated to reflect the status of approval for each item, and shall highlight the items pertaining to the submittal. A suggested Submittal Register Format is shown below:

SUBMITTAL REGISTER					
Item/Material	Ref'd Spec. Paragraph	Specified or Substitute	Submittal Date	Status	Remarks

- D. No Shop Drawing Submittals will be considered for approval until the complete List of Subcontractors and the complete List of Materials/Manufacturers and Equipment have been approved.
- E. Descriptive Data: After acceptance of the MATERIAL and EQUIPMENT LIST, submit additional DESCRIPTIVE DATA for all items. Data shall consist of specifications, data sheets, samples, capacity ratings, performance curves, operating characteristics, catalog cuts, dimensional drawings, installation instructions, and any other information necessary to indicate complete compliance with the contract documents. Where several ratings or sizes are shown or available, clearly indicate the exact size or rating relating to the particular device being proposed.
- F. Submit complete descriptive data for all items. Data shall consist of Specifications, data sheets, samples, capacity ratings, performance curves, operating characteristics, catalog cuts, dimensional drawings, wiring diagrams, specific electrical/wiring requirements and connections including control and interlock wiring, installation instructions, and any other information necessary to indicate complete compliance with the Contract Documents. Edit submittal data specifically for application to this project.
- G. Shop Drawings shall be submitted and approved for all materials and equipment prior to installation. If any material and/or equipment is installed prior to receipt by the Contractor of approved Shop Drawings, the Contractor is liable for its replacement at no additional cost to the Owner.
- H. Data submitted shall include information on all materials and equipment to demonstrate compliance with the Contract Drawings and Specifications. Where installation procedures or any part thereof are required to be in accordance with manufacturer's recommendations, furnish printed copies of the recommendations prior to installation. Installation of the item

shall not proceed until recommendations are received. Failure to furnish recommendations shall be cause for rejection of the equipment or material.

- I. Any deviation of submitted material or equipment from the Contract Drawings or Specifications shall be clearly marked in red ink on Submittals, and itemized in a transmittal letter, in order to receive consideration for approval.
- J. Approval of material or equipment submittals containing deviations not specifically identified by Contractor shall not relieve the Contractor from compliance with specified requirements.
- K. All major items of mechanical equipment shall be the latest standard catalog products of reputable manufacturers. Where two (2) or more items of the same kind of equipment are required, they shall be the products of a single manufacturer.
- L. Thoroughly review and stamp all submittals to indicate compliance with Contract requirements prior to submission. Coordinate installation requirements and any electrical requirements for equipment submitted. Contractor shall be responsible for correctness of all submittals.
- M. Submittals will be reviewed for general compliance with design concept in accordance with Contract Documents, but dimensions, quantities, or other details will not be verified.
- N. Increase, by the quantity listed below, the number of electrical related Shop Drawings, product data, and samples submitted, to allow for required distribution plus two copies of each submittal required, which will be retained by the Electrical Consulting Engineer.
 - 1. Shop Drawings - Initial Submittal: 1 additional blue- or black-line print.
 - 2. Shop Drawings - Final Submittal: 1 additional blue- or black-line print.
 - 3. Product Data: 1 additional copy of each item.
- O. Additional copies may be required by individual sections of these Specifications.
- P. Shop Drawings:
 - 1. Prepare and submit SHOP DRAWINGS AND/OR DIAGRAMS for all specially fabricated items, modifications to standard items, specially designed systems where detailed design is not shown on the contract drawings, or where the proposed installation differs from that shown on the contract drawings.
 - 2. Shop drawings shall include plans, elevations, sections, mounting details of component parts, point to point interconnection diagrams, elementary diagrams, single line diagrams, and any other drawings necessary to show the fabrication and connection of the complete item or system.
 - 3. Shop drawings shall be provided for, but not limited to the following items:
 - Basic Electrical Materials
 - Cable - 600 volt
 - Circuit Breakers
 - Conduit and Surface Raceway
 - Contractor and Subcontractor Qualifications

Controllers & Control Devices
Electrical Connection Coordination Schedule
Equipment Connections
Fire Alarm System
Firestopping
Fuses
Ground Conductors
Identification System
Lighting Control System
Lighting Fixtures
Material and Equipment List
Outlet Boxes
Receptacles
Record and Information Booklet
Safety Switches
Schedule of Values
Sleeves, Hangers, Supports
Submittal Schedule
Telecommunications Systems
Tests and Reports
Wiring Devices
Wiring Diagrams

- Q. The Contractor, additionally, shall submit for approval any other shop drawings as required by the Engineer. No item listed above shall be delivered to the site, or installed, until approved. After the proposed materials have been approved, no substitution will be permitted except where approved by the Engineer.
- R. The Contractor shall prepare and submit a Detail Schedule of Values indicating the Contract costs for the major work items. The Contractor shall provide additional detail and information as requested by the Engineer.
- S. The Contractor shall prepare and submit a complete Submittal Schedule. The Schedule shall include a listing of all Submittals, Shop Drawings, and Coordination Drawings.

2.4 RECORD DRAWINGS

- A. As the work progresses, record on a set of white prints the installed locations, sizes of electric feeders, equipment, etc. Upon completion of the work, submit one (1) complete set of white prints with "As-Built" information neatly recorded thereon in red ink. Use other colors to distinguish between variations in separate categories of the work. Note related change-order numbers where applicable.
- B. Write step-by-step detailed instructions for turn-on, turn-off, seasonal changeover, and periodic checks of all systems and equipment. Include all precautions and warnings.
- C. Prepare a list of the manufacturers of all major equipment, their local service representative and procedures for obtaining service.
- D. Post one (1) copy of all instructions, lists, charts, and diagrams at the equipment or where indicated, mounted under glass or approved plastic cover.

- E. Furnish to the Owner two (2) copies of the Manufacturer's installation and operations instructions. Include replacement parts lists where applicable. Also include copies of all posted instructions, lists and charts. Assemble the material in one or more heavy duty 8-1/2" x 11" loose leaf binders with tab separators. Submit for approval before final delivery. Binder shall be labeled on spine and on cover with Project Name.
- F. Deliver all instruction materials to the Owner prior to the formal instruction period.
- G. Deliver two (2) complete sets of all approved submittals to the Owner for filing.
- H. Prepare record documents in accordance with the requirements in the specifications. In addition to the requirements specified, indicate installed conditions for:
 - 1. Major raceway systems, size and location, for both exterior and interior; locations of control devices; distribution and branch electrical circuitry; and circuit breaker size and arrangements.
 - 2. Approved Substitutions, Contract Modifications, and actual equipment and materials installed.
- I. The Contractor shall keep at the site at all times during construction, one set of up-to-date Contract prints for the express purpose of showing any and all changes made during construction. The Contractor shall make the prints showing each change and shall incorporate all changes in "Record/As-Built Drawings" to be submitted to the Engineer upon completion of the project.
- J. The Contractor shall show proof of up-to-date record drawings to the Owner prior to submitting monthly invoice.
- K. The Contractor shall conform to all drawings, including all revisions, addendums, alternates, change orders, deletions, existing conditions, and as-built conditions without extra cost to the Owner.

2.5 DEMONSTRATION AND OPERATING INSTRUCTIONS

- A. Furnish the necessary technicians, skilled workers, and helpers to operate the electrical systems and equipment of the entire project. The Contractor shall provide a minimum of eight (8) hours of system demonstration and eight (8) hours of system operation for each system.
- B. Where specified in technical sections, provide longer periods required for specialized equipment.
- C. Contractor shall provide start-up of all systems in an orderly, organized, and coordinated manner to ensure that all systems are functioning as designed. The Contractor shall provide a detailed start-up, testing, and demonstration plan for all systems in a coordinated manner that is documented in writing at least 45 days prior to system start-up. Start-up, testing and demonstration plans shall include detailed point-by-point checklists that clearly show that systems are, in fact, functioning as designed. Instruct the Owner or designated personnel in operation, maintenance, lubrication, and adjustment of systems and equipment.

- D. The Operating and Maintenance Manual shall be available at the time of the instructions, for use by Instructors and Owner personnel.
- E. Videotape each instruction session, including both the sessions specified above and added sessions required in technical sections for specialized equipment. Provide one complete set of DVD video disks with each Operating and Maintenance Manual.
- F. Schedule the general and specialized instruction periods for a time agreed upon by the Owner and Engineer. All operation training and demonstrations shall be complete prior to Owner acceptance of any given system.

2.6 SLEEVES FOR RACEWAYS AND CABLES

- A. Steel Pipe Sleeves: ASTM A 53/A 53M, Type E, Grade B, Schedule 40, galvanized steel, plain ends.
- B. Sleeves for Rectangular Openings: Galvanized sheet steel.
 - 1. Minimum Metal Thickness:
 - a. For sleeve cross-section rectangle perimeter less than 50 inches (1270 mm) and no side more than 16 inches (400 mm), thickness shall be 0.052 inch (1.3 mm).
 - b. For sleeve cross-section rectangle perimeter equal to, or more than, 50 inches (1270 mm) and 1 or more sides equal to, or more than, 16 inches (400 mm), thickness shall be 0.138 inch (3.5 mm).

2.7 SLEEVE SEALS

- A. Description: Modular sealing device, designed for field assembly, to fill annular space between sleeve and raceway or cable.
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide product by one of the following:
 - a. Advance Products & Systems, Inc.
 - b. Calpico, Inc.
 - c. Metraflex Co.
 - d. Pipeline Seal and Insulator, Inc.
 - 2. Sealing Elements: EPDM interlocking links shaped to fit surface of cable or conduit. Include type and number required for material and size of raceway or cable.
 - 3. Pressure Plates: Carbon steel. Include two for each sealing element.
 - 4. Connecting Bolts and Nuts: Carbon steel with corrosion-resistant coating of length required to secure pressure plates to sealing elements. Include one for each sealing element.

2.8 GROUT

- A. Nonmetallic, Shrinkage-Resistant Grout: ASTM C 1107, factory-packaged, nonmetallic aggregate grout, noncorrosive, nonstaining, mixed with water to consistency suitable for application and a 30-minute working time.

PART 3 - EXECUTION

3.1 EXAMINATION OF SITE, SURVEYS, AND MEASUREMENTS

- A. Examine the site, determine all conditions and circumstances under which the work must be performed, and make all necessary allowances for same. No additional cost to the Owner shall be permitted for Contractor's failure to do so.
- B. Examine the site and observe the conditions under which the work will be done or other circumstances which will affect the contemplated work. Special attention shall be given to areas where work is to be done in existing buildings. No allowance will be made subsequently in this connection for any error or negligence on the Contractor's part.
- C. The Contractor shall base all measurements, both horizontal and vertical, from established benchmarks. All work shall agree with these established lines and levels. Verify all measurements at the site and check the correctness of same as related to the work.
- D. Any discovery of discrepancy between actual measurements and those indicated which prevents following good practice or the intent of the Drawings and Specifications shall be brought to the attention of the Owner's Representative. Work shall not proceed until receiving instructions from the Owner's Representative.
- E. The Contractor shall follow Drawings in laying out the work and check Drawings of other trades to verify spaces in which work will be installed. Maintain maximum headroom and space conditions at all points. Where headroom or space conditions appear inadequate, the Owner's Representative shall be notified before proceeding with the installation.
- F. To prevent conflict with the work of other trades and for proper execution of the work, the Contractor, as directed by the Owner's Representative, shall make the necessary modifications in the layout as needed, at no extra charge to the Owner.
- G. The Contractor shall be solely responsible for the proper arrangement of his conduit and equipment.
- H. The Engineer shall make all final decisions as to any conditions that require the changing of any work.
- I. The Contractor shall have competent supervision on the site at all times to lay out, check, coordinate, and supervise the installation of all electrical work and be responsible for the accuracy thereof. He shall plan the installation of all electrical work, giving consideration to the work of other trades, to prevent interference.
- J. The Contractor shall determine the location, size, etc., of all chases, sleeve openings, etc., required for the proper installation of the electrical work and see that such are provided. All

chases, sleeves, openings, etc., shall be set prior to erection of new work to prevent delay in the progress of other work or trades.

- K. Conditions and/or situations that prevent the proper installation of any equipment or item where shown on the Drawings shall be called to the attention of the Engineer for instructions.
- L. The Contractor shall have equipment shipped or fabricated in sections of suitable size for entering the building and being removed from the finished building in the future, if necessary.
- M. The Contractor shall fully investigate all peculiarities and space limitations for all materials and equipment.
- N. Outlet, pull, and junction boxes and other appliances that require operation, examination, adjustment, servicing or maintenance shall be readily accessible.
- O. The Contractor shall take all field measurements necessary for this work and shall assume responsibility for their accuracy.
- P. The Contractor shall coordinate the electrical work with all other sub-contractors. All work shall be so arranged that there will be no delay in the proper installation and completion of any part or parts of electrical equipment. All electrical work shall be installed in proper sequence with other trades without any unnecessary delay.
- Q. The Drawings are to some extent diagrammatic and indicate the general arrangement of the equipment, the runs of conduit, and the manner of connection.
- R. The Contractor shall confer with all sub-contractors engaged in the construction of the project, regarding the work that may, in any way, affect his installation. Whenever interference occurs, before installing any of the work in question, the Contractor shall consult with all sub-contractors and shall come to an agreement with them as to the exact location and level of his conduit parts of his equipment.

3.2 GENERAL RESPONSIBILITIES

- A. The Contractor shall be responsible for systems and related damages possible, and shall hold harmless the Owner, the Architect and his consultants from malfunction of systems and equipment installed under this Contract as defined in the laws of the State of Delaware pertaining to real property for the period of time as defined by such laws.
- B. It is the intent of these Specifications to fully cover without exception all required labor and materials so that the finished work will be delivered to the Owner in a complete and satisfactory working installation. Excavation, wiring, distribution, etc., shall be performed in compliance with the Contract Documents.
- C. Work not specifically outlined, but reasonably incidental to the completion of the work, shall be included without additional compensation from the Owner.
- D. Conflicting points in the Specifications or on the Drawings shall be called to the attention of the Architect prior to the execution of the Contract.

3.3 STORAGE AND PROTECTION OF EQUIPMENT

- A. All electrical equipment to be used in the construction shall be properly stored and protected against the elements. All equipment shall be stored under cover, and shall not be stored at the construction site on the ground, in mud, water, snow, rain, sleet or dust. Large diameter cables may be stored on reels with weatherproof materials. Such weatherproof materials shall be heavy-duty, securely fastened and made impervious to the elements.
- B. Conventional electrical construction materials such as building wire, outlet and junction boxes, wiring devices, conduit, lighting fixtures, fittings, etc., shall be stored in construction buildings, covered trailers or portable covered warehouses. Any equipment subject to damage or corrosion from excessive moisture shall be stored in dry, heated areas. Any equipment containing plastic or material subject to damage caused by excessive heat or sunlight shall be stored to prevent such damage. This includes plastic ducts and lenses.
- C. Motor controllers, breakers, emergency lighting, and supervisory equipment, if delivered to the construction site before the building is under cover, shall be warehoused and protected as follows: All gear and equipment shall be covered and protected from the elements and other damage and shall be stored in a clean, dry, heated atmosphere, under cover.
- D. All gear and equipment delivered to the construction site after the building is under cover shall be protected as described above and in addition shall be provided with auxiliary heat to prevent condensation damage. The gear shall also be protected against damage caused by installation of any building systems and equipment; or damage caused by carelessness of workmen who are installing equipment connected to or adjacent to the above electrical equipment.
- E. Equipment damaged as a result of the above conditions shall be properly repaired at the Contractor's expense or shall be replaced at the Contractor's expense, if, in the opinion of the Engineer the equipment has been damaged to such an extent it cannot operate properly after repairs are made.
- F. All electrical enclosures exposed to construction damages such as paint spots, spackling or plaster spatter, grout splashes, waterproofing compound, tar spots or runs and pipe covering compound splashes, shall be completely covered and protected against damage.
- G. In the event leakage into the building of any foreign material or fluid occurs or may occur, the Contractor shall take all steps as described above to protect any and all equipment.
- H. After connections to electrical equipment are complete and the equipment is ready for operation, all construction debris shall be removed from all enclosures. Such debris includes dust, dirt, wire clippings, tape and insulation removed in order to make the connection.

3.4 ELECTRICAL INSTALLATIONS

- A. General: Sequence, coordinate, and integrate the various elements of electrical systems, materials, and equipment. Comply with the following requirements:
 - 1. Coordinate electrical systems, equipment, materials, and installation with landscape/irrigation contractor(s).
 - 2. Verify all dimensions by field measurements.

3. Install systems, materials, and equipment to conform with approved submittal data, including coordination drawings, to greatest extent possible. Conform to arrangements indicated by the Contract Documents, recognizing that portions of the Work are shown only in diagrammatic form. Where coordination requirements conflict with individual system requirements, refer conflict to the Engineer.
4. Install systems, materials, and equipment level and plumb, parallel and perpendicular to other building systems and components where installed exposed in finished spaces.
5. Install electrical equipment to facilitate servicing, maintenance, and repair or replacement of equipment components. As much as practical, connect equipment for ease of disconnecting, with minimum of interference with other installations. All equipment and disconnects shall maintain proper working space to conform to NEC.
6. Install systems, materials, and equipment giving right-of-way priority to systems that require installation at a specified slope.
7. Arrange for chases, slots and openings in other building components during progress of construction, to allow for electrical installation.
8. Space, coordinate, and integrate installations of electrical materials and equipment for efficient flow of the work.

3.5 SUPERVISION AND COORDINATION

- A. Provide complete supervision, direction, scheduling and coordination of all work under the contract, including that of subcontractors, using full attention and the best skill. Be responsible for all work and make all subcontractors, suppliers and manufacturers fully aware of all requirements of the contract.
- B. Coordinate the rough-in of all work performed under Divisions Mechanical and Electrical Divisions.
- C. The Contractor shall coordinate all electrical rough-ins with approved shop drawings and coordination drawings. Any rough-in installed without complete coordination shall be at the Contractor's risk and expense.
- D. Coordinate the installation of all necessary rough-in of work, sleeves, anchors and supports for conduit, wiring, and other work performed under Mechanical and Electrical Divisions. Coordinate Division 26 work with all trades.
- E. Where a discrepancy exists within the Specifications or drawings or between the Specifications and Drawings, the more stringent (or costly) requirement shall apply until a clarification can be obtained from the Engineer. Failure to clarify such discrepancies with the Engineer will not relieve the Contractor of the responsibility of conforming to the requirements of the Contract.
- F. Failure of the Contractor to obtain a full and complete set of Contract Documents (either before or after bidding) will not relieve the Contractor of the responsibility of complying with the intent of the Contract Documents.
- G. To ensure proper electrical coordination between the electrical components supplied under the Electrical Divisions and the equipment supplied under the Mechanical Divisions, a schedule shall be submitted, prior to start of work, for review by the Engineer with the following column headings:

1.Equip or Item	2. HP or KVA	3.Voltage and Phase	4. Power Factor	5. Capacitor	6.Motor Starter	7.Discon.	8.Controls	9.Remarks

Description of Column Headings:

1. List all the approved equipment furnished under Mechanical Division that requires electrical connections and designate the equipment as it appears in the Mechanical Divisions. Indicate the quantity, if more than one, in parentheses of identical equipment being supplied.
 2. Indicate the supplied horsepower of the equipment listed under Column No. 1. If equipment listed has more than one motor, indicate each motor and its respective horsepower. Indicate the kVA rating for all other equipment requiring an electrical connection, unless the electrical connection is for a control circuit only.
 3. Indicate the voltage and phase requirements for equipment listed under Column No. 1. If more than one electrical circuit or voltage is required for the listed equipment, it shall be so indicated. Indicate wiring required for connection, including all phase, neutral, and ground conductors.
 4. Indicate the power factor rating for all motors listed under Column No. 2.
 5. Where a capacitor is to be provided, indicate specification it is supplied under and indicate the KVAR size for any capacitor provided under Division 26.
 6. Where a motor starter is required, indicate the specification division it is supplied under and the type of motor starter; across-the-line, reversible, variable speed, two speed-single winding, etc. Indicate in Column No. 9 if the motor starter provided under Division 26 is not compatible with the motor specified.
 7. Where a disconnect switch is required by the National Electric Code or by the contract documents for the equipment listed under Column No. 1, indicate under which Division the disconnect switch is supplied.
 8. Indicate the Division under which the controls for the equipment listed under Column No. 1 are provided.
 9. Indicate any discrepancies between what is indicated in the contract documents and what is actually being provided.
- H. The Contractor shall fully coordinate the electrical connections to all equipment prior to installations, with the approved Shop Drawings and the trades involved. Coordination shall include voltage, phases, quantity and size of wiring, device sizes, terminations, rough-in work, and other coordination for a complete installation.
- I. Coordinate the spacing and arrangement of lighting fixtures, diffusers, grilles and access panels in ceilings to establish a symmetrical pattern.
- J. Coordinate light switch locations with door swings prior to rough-in. No switches permitted behind doors.
- K. Coordinate electrical work with architectural items and equipment. Typical equipment refers to, but is not limited to, the following:
1. Countertops, Casework and Cabinets.

- L. This Contractor shall make all system connections required to equipment furnished and installed under other divisions. Connections shall be complete in all respects to render this equipment functional to its fullest intent. The Contractor shall make all system connections required to equipment furnished under other Divisions. Circuits shall be extended to all equipment which is incidental to, but not necessarily shown, for equipment specified under other divisions such as magnetic flow meters, ATC panels, liquid level controls, leak detection systems, etc. Connections shall be complete in all respects to render this equipment functional to its fullest extent.
- M. Install work with proper clearances and access. Carefully examine all contract drawings and fit the work in each location without substantial alteration. Where departures are proposed or required, submit detailed drawings for acceptance. The right is reserved to make reasonable changes in location of equipment, conduit and wiring up to the time of rough-in or fabrication.
- N. It shall be the responsibility of the Contractor to obtain complete instructions for connections.

3.6 GUARANTEE

- A. Guarantee obligations shall be as hereinbefore specified in the GENERAL AND SPECIAL CONDITIONS of these specifications, except as follows:
 - 1. Guarantee the complete electrical system free from all mechanical and electrical defects for the period of two (2) years beginning from the day of final acceptance of the work by the Owner.
 - 2. Also, during the guarantee period, be responsible for the proper adjustments of all systems, equipment and apparatus installed by the Contractor and do all work necessary to ensure efficient and proper functioning of the systems and equipment.
 - 3. Upon receipt of notice from the Owner of failure of any part of the electrical installation during the guarantee period, new replacement parts shall be furnished and installed promptly at no cost.
 - 4. Warranty From the Manufacturer: Contractor shall obtain all warranty papers and records from the Original Equipment Manufacturer according to their warranty policy and deliver the same to the Owner. Contractor shall fulfill all the Original Manufacturer's requirements to validate the warranty as offered by the Original Equipment Manufacturer.
- B. Provide 24-hour service for any and all warranty problems experience in the operation of the equipment provided.
- C. Any equipment or system in need of warranty work whether during regular hours or on an emergency basis, shall be immediately serviced and repaired. The warranty work and guarantee shall include all parts and labor and shall be furnished at no cost to the .
- D. The Contractor shall guarantee to make good any and all defects in his work, exclusive of lamps, which may develop due to defective workmanship or materials, within one year from the date of final acceptance of the work by the Owner.

- E. In addition to the warranty and correction of work obligations contained in the General and supplementary Conditions, correct the work of the system as embraced by the Specification, free from Mechanical and Electrical defects for the warranty.
- F. During the warranty period, take responsibility for the proper adjustments of systems, equipment and apparatus installed and perform work necessary to ensure the efficient and proper functioning of the systems and equipment.
- G. Certain items of equipment hereinafter specified shall be guaranteed for a longer time than the general warranty period. These guarantees shall be strictly adhered to and the Contractor shall be responsible for service or replacement required in connection with guarantee of these items. These guarantees shall commence on the same date as the final acceptance by the Engineer.
- H. Submission of a bid proposal for this Project warrants that the Contractor has reviewed the Contract Documents and has found them free from ambiguities and sufficient for the construction and proper operation of systems installed for this project. If discrepancies are found, have them clarified by Addendum.
- I. It is possible that certain areas of the building or certain systems will be accepted at a time different than as specified. The date of acceptance by the Architect for beneficial use of the Owner for these building areas or systems will be adjusted accordingly.

3.7 TEMPORARY FACILITIES

- A. General: Refer to the Division 01 Sections for general requirements of temporary facilities.
- B. Description: Furnish and install the necessary metering and distribution equipment for an adequate, 3-phase, 4-wire temporary electrical service and all temporary wiring and lighting, including step-down or step-up dry-type transformers as required. Exact requirements for temporary service will be determined by the General Contractor.
- C. Attention is directed to the Occupational Safety and Health Act (OSHA), Americans with Disabilities Act (ADA) and National Electrical Code (NEC) requirements for electrical work on construction sites.
- D. Materials:
 - 1. One 20-ampere circuit with ground fault protection for each 7500 square feet of gross floor area per floor to which various trades may attach their cords.
- E. Installation: Temporary lighting shall provide minimum foot candle levels for construction as follows:

AREA	FOOT CANDLE LEVEL
General construction area lighting, corridors, hallways and exit ways.	5

- F. The Contractor shall pay for all energy charges for temporary service. Provide temporary construction power. Remove all temporary power installations and connections after permanent power is established and/or prior to completion of the project.

3.8 SCHEDULING OF WORK

- A. The Contractor shall not be permitted to do any work in any area of any occupied building during normal hours, except in areas specifically assigned.
- B. Coordination of work by the Contractor is essential such that power outages are kept to a minimum in quantity and duration. All required outages shall be approved by the Owner for optimum time scheduling. Written notice of not less than 15 calendar days shall precede all power outages.

3.9 DEMONSTRATION

- A. As a part of this contract, the Contractor shall provide for the services of equipment manufacturers or their established representatives to demonstrate to selected maintenance personnel the correct operation, safety and maintenance of all electrical equipment under this contract.

3.10 PAINTING AND FINISHES

- A. Provide protective finishes on all materials and equipment. Use coated or corrosion-resistant materials, hardware and fittings throughout the work. Paint bare, untreated ferrous surfaces with rust-inhibiting paint. All exterior components including supports, hangers, nuts, bolts, washers, vibration isolators, etc., shall be galvanized or stainless steel.
- B. Clean surfaces prior to application of coatings, paint, or other finishes.
- C. Provide factory-applied finishes where specified. Unless otherwise indicated factory-applied paints shall be baked enamel with proper pre-treatment.
- D. Protect all finishes and restore any finishes damaged as a result of work under Division 26 to their original condition.
- E. The preceding requirements apply to all work, whether exposed or concealed.
- F. Remove all construction marking and writing from exposed equipment, conduit, and building surfaces. Do not paint manufacturer's labels or tags.
- G. All exposed conduit, raceway, boxes, etc., shall be painted, except in electrical rooms, mechanical rooms, storage rooms, and crawl spaces. Colors shall be selected by the Architect and conform to ANSI Standards.
- H. Submit color of factory-finished equipment for approval prior to ordering.

3.11 PROTECTION OF WORK

- A. Protect work, material and equipment from weather and construction operations before and after installation. Properly store and handle all materials and equipment.

- B. Cover temporary openings in conduit and equipment to prevent the entrance of water, dirt, debris, or other foreign matter.
- C. Cover or otherwise protect all finishes.
- D. Replace damaged materials, devices, finishes and equipment.

3.12 OPERATION OF EQUIPMENT

- A. Clean all systems and equipment prior to initial operation for testing, retesting, or other purposes. Set, adjust, and test all equipment in accordance with manufacturer's instructions. Do not operate equipment unless all proper safety devices or controls are operational. Provide all maintenance and service for equipment that is authorized for operation during construction.
- B. Where specified, or otherwise required, provide the services of the manufacturer's factory-trained servicemen or technicians to start up the equipment.
- C. Do not use electrical systems for temporary services during construction unless authorized in writing by the Owner. Where such authorization is granted, temporary use of equipment shall in no way limit or otherwise affect warranties or guaranty period of the work.
- D. Upon completion of work, clean and restore all equipment to new conditions; replace expendable items such as filters.

3.13 TESTING AND ADJUSTMENT

- A. Perform all tests which are specified or required to demonstrate that the work is installed and operating properly. Where formal tests are required, give proper notices and perform all necessary preliminary tests to assure that the work is complete and ready for final test.
- B. Adjust all systems, equipment and controls to operate in a safe, efficient and stable manner.
- C. On all circuits, 600 volts or less, provide circuits that are free from ground faults, short circuits and open circuits.
- D. Other tests of a specific nature for special equipment shall be as specified under the respective equipment.

3.14 IDENTIFICATIONS, ELECTRICAL DIAGRAMS AND OPERATING INSTRUCTIONS

- A. Contractor shall submit for approval schematic diagrams of each electrical system installed in the building. Diagrams shall indicate device location, service, type, make, model number and the identification number of each device in the particular system. Following approval by all authorities, the diagrams shall be framed, mounted under glass and hung in each Main Equipment Room where directed. Contractor shall deliver the tracing or sepia from which the diagrams were reproduced to the Owner.
- B. All equipment shall be plainly tagged.

- C. All items of equipment, including motor starters, panels, etc., shall be furnished with white letters and numbers on black plastic identification plates or aluminum letters and numbers on black engraved aluminum identification plates. Lettering shall be a minimum of 1/4" high. Identification plates shall be securely affixed to each piece of equipment, starters, panels, etc., by screws or adhesive (Tuff-Bond #TB2 or as approved equal). Pressure sensitive tape backing is prohibited.
- D. Provide three (3) copies of operating and maintenance instructions for all principal items of equipment furnished. This material shall be bound as a volume of the "Record and Information Booklet" as hereinafter specified.
- E. Provide at least 24 hours of straight time instruction to the operating personnel. This instruction period shall consist of not less than three (3) consecutive 8-hour days. Time of instruction shall be designated by the Owner. Provide two DVD copies of all instructional periods/demonstrations.

3.15 RECORD DRAWINGS AND SPECIFICATIONS

- A. Upon completion of the Electrical installations, the Contractor shall deliver to the Engineer one complete set of prints of the Electrical Contract Drawings which shall be legibly marked in red pencil to show all Addenda, approved Shop Drawings, Change Orders, changes and departures of the installation as compared with the original design. They shall be suitable for use in preparation of Record Drawings.
- B. The Contractor shall provide a record specification including all Addenda and other modifications. Record substantial variations in actual work performed. Identify all substitutions.

3.16 RECORD AND INFORMATION BOOKLET

- A. The Contractor shall have prepared three (3) copies of the Record and Information Booklet and deliver these copies of the booklet to the Owner. The booklet shall be as specified herein. The booklet must be approved and will not be accepted as final until so stamped.
- B. The booklet shall be bound in a three-ring loose-leaf binder similar to "National" No. 3881 with the following title lettered on the front and on the spine of the binder: "Record and Information Booklet (insert name of the project)". No sheets larger than 8-1/2" x 11" shall be used, except sheets that may be neatly folded to 8-1/2" x 11" and used as a pull-out. An Index will include the section tabs for each subject included. If more than one binder is required, print covers and spines with Volume numbers. Include in the front of every binder an index to all binders.
 - 1. Internally subdivide the binder contents with permanent page dividers, logically organized as described below; with tab titling clearly printed under reinforced laminated plastic tabs.
 - 2. Contents: Prepare a Table of Contents for each volume, with each product or system description identified, typed on white paper.
 - 3. Part 1: Directory, listing names, addresses, and telephone numbers of Electrical Engineers; Contractor; Electrical Subcontractors; and major Electrical equipment

- suppliers. Provide sales and service representative names and phone numbers of all equipment.
4. Part 2: Operation and Maintenance Instructions, arranged by Specification Section. For each category, identify names, addresses, and telephone numbers of Subcontractors and suppliers. Identify the following:
- a. Significant design criteria.
 - b. List of equipment. Complete record of material list. Catalog brochures and product data for all components. Include all submittal comments, and corrected catalog data and shop drawings on each piece of equipment and each system.
 - c. Parts list for each component, including recommended spare parts list. Include motor starter overload schedules.
 - d. Operating instructions, including sequence of operation.
 - 1) Description of function, normal operating characteristics and limitations, engineering data and tests, and complete nomenclature and commercial numbers of replacement parts. Provide a description of each system installed.
 - 2) Manufacturer's printed operating procedures to include start-up, break-in, and routine and normal operating instructions; control, stopping.
 - e. Maintenance instructions for equipment and systems. Detailed checkout procedures to ensure operation of systems and gear, including recommended cleaning methods and materials and special precautions identifying detrimental agents.
 - f. Servicing, diagnostic and troubleshooting instructions and procedures for systems and major equipment.
 - g. Recommended preventative maintenance program, including a list of items requiring inspection and servicing. Provide Chart Form indicating time and type of routine and preventative maintenance of electrical equipment, etc. The chart shall also indicate tag number, model number of equipment, location and service.
 - 1) For replacement items, indicate type, size and quantity of the replaceable items.
 - 2) Provide lubrication schedule, including type, grade, temperature range and frequency.
 - 3) Provide a list of each type of lighting fixture lamp used, lamp fixture used, and source.
 - 4) Include estimated mean time between failures for major parts.
 - h. Wiring Diagrams, Block Diagrams, and Assembly Drawings.
 - i. Panelboard Circuit Directory for each panelboard, including Panel Name, Panel Location, Panel Ratings, spare circuit breakers, spaces for additional circuit breakers.
 - j. List of equipment keys turned over to the Owner.
5. Part 3: Project Documents and Certificates, including the following:
- a. Shop Drawings and Product Data. Record Documents of the systems.

- b. Photocopies of certificates.
 - c. Photocopies of Manufacturers' and Contractors' warranties, guarantees.
 - d. Test Reports: Copies of the approved results of all tests required under all sections of specifications.
 - e. Inspection Certificates.
 - f. Manufacturer's Conformance Certificates.
6. Provide one copy (DVD video disk) of video instruction session with each booklet set. Label video disk with all pertinent information.
7. Submit one copy of completed volumes in final form 15 days prior to final Inspection. This copy will be returned with Engineer comments. Revise content of documents as required prior to final submittal.
8. Submit final volumes revised, within ten days after final inspection.
- C. Upon completion of the project, the Contractor shall furnish the Owner a complete list of suppliers of equipment for parts and maintenance purposes. The list shall include the name, address, and telephone number of the parts and maintenance firm on a single 8-1/2" x 11" sheet of paper.
- D. This item shall include the furnishing of a complete list of equipment installed on the project, including the Manufacturer's name, the make and model number of the equipment, and address and telephone number of the nearest supplier who stocks maintenance and/or replacement parts. The list should be submitted along with as-built drawings and be typed in an organized manner.

3.17 INSTALLATION AND COORDINATION DRAWINGS

- A. In congested areas, prepare, submit, and use composite installation and coordination drawings to assure proper coordination and installation of work. Drawings shall include, but not be limited, to the following: Complete Electrical Drawings showing coordination with lights, electrical equipment, mechanical, plumbing, HVAC, structural, and architectural elements and provision for access.
- B. Draw plans to a scale not less than 3/8-inch equals one foot. Include plans, sections, and elevations of proposed work, showing all equipment and conduit in areas involved. Fully dimension all work including lighting fixtures, conduits, pullboxes, panelboards, and other electrical work, walls, doors, ceilings, columns, beams, joists, mechanical equipment, and other architectural and structural work.
- C. Identify all equipment and devices on wiring diagrams and schematics. Where field connections are shown to factory-wired terminals, include manufacturer's literature showing internal wiring.

3.18 CUTTING AND PATCHING

- A. The cutting of walls, floors, partitions, etc., for the passage and/or accommodation of conduits, etc., the closing of superfluous openings and the removal of all debris caused by said work under this contract shall be performed by and at the expense of the Contractor.

- B. No cutting of any structure or finishes shall be done until the condition requiring such cutting has been examined and approved by the Architect.
- C. All surfaces disturbed as a result of such cutting shall be restored under this division to match original work and all materials used for any patching, mending or finishing must conform to the class of materials originally installed.
- D. Openings through precast planks for the passage of hanger rods, conduits, outlet boxes, etc., shall be drilled with power driven carbide tip drills. This drilling shall be done by the trades needing the openings and shall be in accordance with Architect's instructions. No reinforcing bars shall be cut without specific approval of the Structural Engineer.

3.19 WATERPROOFING

- A. Coordinate the work to minimize penetration of waterproof construction, including roofs, exterior walls and interior waterproof construction. Where such penetrations are necessary, furnish and install all necessary sleeves, flashings, fittings, and caulking to make penetrations absolutely watertight.
- B. Where conduits or other openings penetrate roofs, flash pipe with Stoneman "Stormtite", or approved equal, roof flashing assemblies, with 4-pound lead, 6 inch skirt, and caulked counterflashing sleeve similar to No. 1000-4.
- C. Furnish and install pitch pockets where required.
- D. Furnish and install conduit sleeves specifically designed for application to the particular roof construction, and install in accordance with the manufacturer's instructions, the National Roofing Contractors' Association, and as required by other divisions of this specification. The Contractor shall be responsible for sleeve sizes and locations.

3.20 SLEEVE INSTALLATION FOR ELECTRICAL PENETRATIONS

- A. Electrical penetrations occur when raceways, cables, wireways, cable trays, or busways penetrate concrete slabs, concrete or masonry walls, or fire-rated floor and wall assemblies.
- B. Concrete Slabs and Walls: Install sleeves for penetrations unless core-drilled holes or formed openings are used. Install sleeves during erection of slabs and walls.
- C. Use pipe sleeves unless penetration arrangement requires rectangular sleeved opening.
- D. Fire-Rated Assemblies: Install sleeves for penetrations of fire-rated floor and wall assemblies unless openings compatible with firestop system used are fabricated during construction of floor or wall.
- E. Cut sleeves to length for mounting flush with both surfaces of walls.
- F. Extend sleeves installed in floors 2 inches (50 mm) above finished floor level.
- G. Size pipe sleeves to provide 1/4-inch (6.4-mm) annular clear space between sleeve and raceway or cable, unless indicated otherwise.

- H. Seal space outside of sleeves with grout for penetrations of concrete and masonry.
 - 1. Promptly pack grout solidly between sleeve and wall so no voids remain. Tool exposed surfaces smooth; protect grout while curing.
- I. Interior Penetrations of Non-Fire-Rated Walls and Floors: Seal annular space between sleeve and raceway or cable, using joint sealant appropriate for size, depth, and location of joint. Comply with requirements in Division 07 Section "Joint Sealants".
- J. Fire-Rated-Assembly Penetrations: Maintain indicated fire rating of walls, partitions, ceilings, and floors at raceway and cable penetrations. Install sleeves and seal raceway and cable penetration sleeves with firestop materials. Comply with requirements in Division 07 Section "Through-Penetration Firestop Systems."
- K. Roof-Penetration Sleeves: Seal penetration of individual raceways and cables with flexible boot-type flashing units applied in coordination with roofing work.
- L. Aboveground, Exterior-Wall Penetrations: Seal penetrations using steel or cast-iron pipe sleeves and mechanical sleeve seals. Select sleeve size to allow for 1-inch (25-mm) annular clear space between pipe and sleeve for installing mechanical sleeve seals.

3.21 SLEEVE-SEAL INSTALLATION

- A. Install to seal exterior wall penetrations.
- B. Use type and number of sealing elements recommended by manufacturer for raceway or cable material and size. Position raceway or cable in center of sleeve. Assemble mechanical sleeve seals and install in annular space between raceway or cable and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make watertight seal.

3.22 FIRESTOPPING

- A. Apply firestopping to penetrations of fire-rated floor and wall assemblies for electrical installations to restore original fire-resistance rating of assembly. Firestopping materials and installation requirements are specified in Division 26 Section "Electrical Firestopping."

END OF SECTION

THIS PAGE LEFT INTENTIONALLY BLANK

DIVISION 26 SECTION 26 05 02
ELECTRICAL DEMOLITION FOR REMODELING
TABLE OF CONTENTS

PART 1. GENERAL.....	1
1.1 RELATED DOCUMENTS.....	1
1.2 SCOPE	1
PART 2. PRODUCTS	1
2.1 MATERIALS AND EQUIPMENT	1
PART 3. EXECUTION	1
3.2 PREPARATION	2
3.3 CONNECTIONS AND ALTERATIONS TO EXISTING SYSTEMS.....	2
3.4 PROTECTION.....	3
3.5 ELECTRICAL DEMOLITION	3
3.6 EXISTING CONDUIT WORK.....	3
3.7 EXISTING WIRING AND CABLING WORK.....	4
3.9 CLEANING AND REPAIR	5
3.10 INSTALLATION	5
END OF SECTION.....	5

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 05 02 - ELECTRICAL DEMOLITION FOR REMODELING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections apply to this Section.

1.2 SCOPE

- A. Electrical demolition shall be carried out per the Contract Documents.
- B. Provide all cutting and patching for electrical construction.
- C. Provide temporary service and provisions to maintain existing systems.

PART 2 - PRODUCTS

2.1 MATERIALS AND EQUIPMENT

- A. Materials and equipment for patching and extending work: As specified in individual sections.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. The Contractor shall examine the site, determine all conditions and circumstances and gather all data and information required for the work. Field investigations include, but are not limited to, performing surveys, opening of equipment enclosures, and other work as required to maintain existing systems.
- B. The Contractor shall survey all new and existing wiring, circuitry, cabling, equipment and devices. Data gathering shall include, but not be limited to, equipment nameplate information, ratings, voltage, wiring configurations, conductor lengths, conductor routing, conductor sizes, equipment connections, and other information as required to maintain existing systems.
- C. The Contractor shall provide complete field investigations to determine existing and new conductor, cable, and conduit routing, points of connections, and tracing of existing systems.
- D. Verify that field measurements and circuiting arrangements are as shown on the Drawings.

- E. Verify that abandoned wiring and equipment serve only abandoned facilities.
- F. Demolition Drawings are based on casual field observation. Report discrepancies to the Owner, Engineer before disturbing existing installation.
- G. Beginning of demolition means installer accepts existing conditions.

3.2 PREPARATION

- A. Disconnect electrical systems in walls, floors, and ceilings scheduled for removal.

3.3 CONNECTIONS AND ALTERATIONS TO EXISTING SYSTEMS

- A. Keep all existing electrical systems in operation during the progress of the work. Provide temporary electrical connections to systems of equipment, etc., where necessary to maintain continuous operation until the new systems and equipment are ready for operation.
- B. When existing electrical work is removed, remove all conduit, ducts, supports, etc. to a point below the finished floors or behind finished walls and cap. Such points shall be far enough behind finished surfaces to allow for the installation of the normal thickness of finished material.
- C. When the work specified hereunder connects to any existing equipment, conduit, wiring, etc., perform all necessary alterations, cuttings, fittings, etc., of the existing work as may be necessary or required to make satisfactory connections between the new and existing work and leave the complete work in a finished and workmanlike condition.
- D. When the work specified under other divisions necessitates relocation of existing equipment, conduits, wiring, etc., perform all work and make all necessary changes to existing work as may be required to leave the completed work in a finished and workmanlike condition.
- E. Contractor shall be responsible for removing and replacing existing ceiling tile within the lay-in ceiling areas as required. Contractor shall provide all necessary cutting and fitting of bushed holes for cable passage through tiles. Any tiles damaged during the Contract shall be replaced with like kind at no cost to the Owner.
- F. Provide temporary wiring and connections to maintain existing systems in service during construction. When work must be performed on energized equipment or circuits, use personnel experienced in such operations. In particular, all security and safety systems must be maintained in operation at all times as required by the Owner. This includes security and safety lighting.
- G. Existing Electrical Service: Disable system only to make switchovers and connections. Obtain permission from Owner, Architect/Engineer and other trades at the site at least 24 hours before partially or completely disabling system. Minimize outage duration. Make temporary connections to maintain service in areas adjacent to work area.
- H. Trace all circuits and controls to be disconnected to ensure that vital services to other areas are not interrupted.

3.4 PROTECTION

- A. Provide protection for all existing and new cabling. Provide inner duct, conduit or other suitable means of protection to prevent damage to cables located in renovated areas.
- B. Damage to wiring, cabling or equipment shall be repaired by skilled mechanics for the trade involved at no additional contract amount.
- C. Fixtures, materials and equipment shall be protected at all times. The Contractor shall make good any damage caused either directly or indirectly by his workmen. Conduit openings shall be closed with caps or plugs during installation. Fixtures and equipment shall be tightly covered and protected against dirt, water and chemical or other injury. At the completion of all work, the fixtures, materials and equipment shall be thoroughly cleaned and turned over in a condition satisfactory to the Owner.
- D. Damage: Where wiring, raceways, lighting fixtures, devices or equipment to remain is inadvertently damaged or disturbed, cut out and remove damaged section and provide new of equal or capacity or quality.

3.5 ELECTRICAL DEMOLITION

- A. Remove from the premises and dispose of all existing wiring, conduit, material, fixtures, devices, equipment, etc., not required for re-use or re-installation.
- B. Deliver on the premises where directed existing material and equipment which is removed and is desired by the Owner or is indicated to remain the property of the Owner.
- C. All other equipment and materials which are removed shall become the property of the Contractor and shall be removed by him from the premises.
- D. Where electrical equipment is removed, also remove all wiring back to source panelboard or switch or to last remaining device on the same circuit. All conduit, hangers, supports, etc., shall also be removed unless otherwise noted. Such conduit may remain to be reused for new work provided said conduit is of the proper size and type as that specified and in a condition acceptable to Engineer and Owner.
- E. Any conduit abandoned in concrete slabs, walls, or other inaccessible locations shall be left empty except for a nylon pull wire. Ends shall be capped with push plugs for future use.
- F. Where an existing system is indicated to be removed, the Contractor shall provide complete removal of entire system including all wiring, conduit, and connected/associated fixtures and devices. The system shall be removed in its entirety unless otherwise noted.

3.6 EXISTING CONDUIT WORK

- A. Remove all abandoned raceway, including abandoned raceway above accessible ceiling finishes. Cut raceway flush with walls and floors, and patch surfaces. Remove conduit back to point of penetration/exposure.

- B. Remove concealed abandoned raceway to its source.
- C. Abandoned Work: buried electrical work abandoned in place, shall be cut out approximately 2 inches beyond the face of adjacent construction, capped and the adjacent surface patched to match the existing finish.
- D. Disconnect abandoned outlets and remove devices. Remove abandoned outlets if raceway servicing them is abandoned and removed. Provide blank cover for abandoned outlets that are not removed.
- E. Ensure access to existing boxes and other installations which remain active and which require access. Modify installation or provide access panel as appropriate.
- F. Extend existing raceway and box installations using materials and methods compatible with existing electrical installations, or as specified.
- G. Clean and repair existing raceway and boxes that remain or are to be reinstalled.
- H. Remove all abandoned wiring from exiting conduits. Abandoned wiring that cannot be removed shall be tagged at each end as "Abandoned".
- I. Contractor shall provide all cutting and patching required to connect to and extend existing conduits, wiring, circuits, etc.

3.7 EXISTING WIRING AND CABLING WORK

- A. Remove all abandoned and unused wire and cable, including abandoned wire and cable above accessible ceiling finishes. Patch surfaces where removed cables pass through building finishes. Remove abandoned and unused cabling and wiring back to the source.
- B. Disconnect abandoned circuits and remove circuit wire and cable. Remove abandoned boxes if wire and cable servicing them is abandoned and removed. Provide blank cover for abandoned boxes that are not removed.
- C. Ensure access to existing wiring connections which remain active and which require access. Modify installation or provide access panel as appropriate.
- D. Extend existing circuits using materials and methods compatible with existing electrical installations or as specified.
- E. Clean and repair existing wire and cable that remain or is to be reinstalled.
- F. Provide supports for all wiring and cabling to remain as required by NEC.
- G. Contractor shall provide field services for racing out of all existing circuits to be maintained. Contractor shall locate, trace and label, all existing circuits being re-used.

3.8 DEMOLITION AND EXTENSION OF EXISTING ELECTRICAL WORK

- A. Demolish and extend existing electrical work to meet all requirements of these specifications.
- B. If certain raceways and boxes are abandoned but not scheduled for removal, those items must be shown on the As-Built Drawings.
- C. Remove, relocate, and extend existing installations to accommodate new construction.
- D. Remove abandoned wiring to source of supply.
- E. Disconnect and remove abandoned luminaires. Remove brackets, stems, hangers, and other accessories.
- F. Repair adjacent construction and finishes damaged during demolition and extension work.
- G. Maintain access to existing electrical installations which remain active. Modify installation or provide access panel as appropriate.
- H. Extend existing installations using materials and methods (compatible with existing electrical installations, or) as specified. This includes the extension of the circuit from the last active device to the next device in the system to be activated.

3.9 CLEANING AND REPAIR

- A. The Consultant shall show, on the drawings, all items to be cleaned or repaired.
- B. Clean and repair existing equipment and materials that remain or are to be reused.
- C. Panelboards: Clean exposed surfaces and check tightness of electrical connections. Replace damaged circuit breakers and provide closure plates for vacant positions. Provide typed circuit directory showing revised circuiting arrangement. Trace existing circuits to determine exact location and type of load served by each circuit breaker.
- D. Provide new labels on all existing electrical equipment being re-used.

3.10 INSTALLATION

- A. Install relocated materials and equipment under the provisions of other sections.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

DIVISION 26 SECTION 26 05 19
LOW-VOLTAGE ELECTRICAL POWER
CONDUCTORS AND CABLES
TABLE OF CONTENTS

PART 1. GENERAL.....	1
1.1 RELATED DOCUMENTS.....	1
1.2 SUMMARY.....	1
1.3 SUBMITTALS	1
PART 2. PRODUCTS	1
2.1 CONDUCTORS AND CABLES.....	1
2.2 CONNECTORS AND SPLICES.....	2
2.3 SYSTEM DESCRIPTION.....	3
PART 3. EXECUTION	3
3.1 CONDUCTOR MATERIAL APPLICATIONS.....	3
3.2 CONDUCTOR INSULATION AND MULTICONDUCTOR CABLE APPLICATIONS AND WIRING METHODS	3
3.3 INSTALLATION OF CONDUCTORS AND CABLES	3
3.4 CONNECTIONS	4
3.5 SLEEVE INSTALLATION FOR ELECTRICAL PENETRATIONS	4
3.6 SLEEVE-SEAL INSTALLATION	4
3.7 FIRESTOPPING.....	5
3.8 FIELD QUALITY CONTROL.....	5
END OF SECTION.....	5

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 05 19 - LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Building wires and cables rated 600 V and less.
 - 2. Connectors, splices, and terminations rated 600 V and less.

1.3 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Qualification Data: For testing agency.
- C. Field quality-control test reports.

PART 2 - PRODUCTS

2.1 CONDUCTORS AND CABLES

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Alcan Products Corporation; Alcan Cable Division.
 - 2. American Insulated Wire Corp.; a Leviton Company.
 - 3. General Cable Corporation.
 - 4. Senator Wire & Cable Company.
 - 5. Southwire Company.
- B. Copper Conductors: Comply with NEMA WC 70.
- C. Conductor Insulation: Comply with NEMA WC 70 for Types THHN-THWN, XHHW, USE, and SO.
- D. Multiconductor Cable: Comply with NEMA WC 70/ICEA S-95-658 for metal-clad cable, Type MC, with ground wire.

2.2 CONNECTORS AND SPLICES

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
1. AFC Cable Systems, Inc.
 2. Hubbell Power Systems, Inc.
 3. O-Z/Gedney; EGS Electrical Group LLC.
 4. 3M; Electrical Products Division.
 5. Tyco Electronics Corp.
- B. UL-listed, factory-fabricated wiring connectors of size, ampacity rating, material, type, and class for application and service indicated. Comply with Project's installation requirements and as specified in Part 3 "Wire and Insulation Applications" Article.
- C. Split Bolt Connectors: Not Acceptable.
- D. Solderless Pressure Connectors: High copper alloy terminal. May be used only for cable termination to equipment pads or terminals. Not approved for splicing.
- E. Spring Wire Connectors: Solderless spring type pressure connector with insulating covers for copper wire splices and taps. Use for conductor sizes 10 AWG and smaller.
- F. All wire connectors used in underground or exterior pull boxes shall be gel-filled twist connectors or a connector designed for damp and wet locations.
- G. Mechanical Connectors: Bolted type tin-plated; high conductivity copper alloy; spacer between conductors; beveled cable entrances.
- H. Compression (crimp) Connectors: Long barrel; seamless, tin-plated electrolytic high conductivity copper tubing, internally beveled barrel ends. Connector shall be clearly marked with the wire size and type and proper number and location of crimps.
- I. Heat shrinkable tubing shall meet the requirements of ANSI C119.1-1986 for buried connections to 90°C and shall be material flame-retarded per IEEE 383 "Vertical Tray Flame Test". Motor connection kits shall consist of heat-shrinkable, polymeric insulating material over the connection area and a high dielectric strength mastic to seal the ends against ingress of moisture and contamination. Motor connection kits shall accommodate a range of cable sizes for both in-line and stub-type configurations. Connection kits shall be independent of cable manufacturer's tolerances.
- J. Wire Nut Connectors:
1. Wire nuts install in wet locations, exterior, etc., shall be self-contained, waterproof and corrosion-proof units incorporating prefilled silicone grease to block out moisture and air.
 2. Connectors shall be UL listed appropriately sized according to manufacturer's recommendation for the suitable wire sizes and voltage rating (600 volt minimum).
 3. Connectors body shall have a color-coded outer shell.

4. Connectors shall be as manufactured by King Technology or approved equal.

2.3 SYSTEM DESCRIPTION

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. Comply with NFPA 70.

PART 3 - EXECUTION

3.1 CONDUCTOR MATERIAL APPLICATIONS

- A. Feeders: Copper. Solid for No. 10 AWG and smaller; stranded for No. 8 AWG and larger.
- B. Branch Circuits: Copper. Solid for No. 10 AWG and smaller; stranded for No. 8 AWG and larger.

3.2 CONDUCTOR INSULATION AND MULTICONDUCTOR CABLE APPLICATIONS AND WIRING METHODS

- A. Feeders Concealed in Ceilings, Walls, and Partitions: Type THHN-THWN, single conductors in raceway.
- B. Exposed Branch Circuits: Type THHN-THWN, single conductors in raceway.
- C. Branch Circuits Concealed in Ceilings, Walls, and Partitions: Type THHN-THWH, single conductors in raceway, or type MC cable where permitted by NEC.
- D. Branch Circuits Concealed in Concrete, below Slabs-on-Grade, and Underground: Type THHN-THWN, single conductors in raceway.
- E. Conductors shall be rated 75 deg C in wet locations and 90 deg C in dry locations.

3.3 INSTALLATION OF CONDUCTORS AND CABLES

- A. Conceal cables in finished walls, ceilings, and floors, unless otherwise indicated.
- B. Complete raceway installation between conductor and cable termination points according to Division 26 "Raceways and Boxes for Electrical Systems" prior to pulling conductors and cables.
- C. Use manufacturer-approved pulling compound or lubricant where necessary; compound used must not deteriorate conductor or insulation. Do not exceed manufacturer's recommended maximum pulling tensions and sidewall pressure values.

- D. Use pulling means, including fish tape, cable, rope, and basket-weave wire/cable grips, that will not damage cables or raceway.
- E. Install exposed cables parallel and perpendicular to surfaces of exposed structural members, and follow surface contours where possible.
- F. Support cables according to Section 26 04 29, "Hangers and Supports for Electrical Systems."
- G. Identify and color-code conductors and cables according to Section 26 05 53, "Identification for Electrical Systems."

3.4 CONNECTIONS

- A. Tighten electrical connectors and terminals according to manufacturer's published torque-tightening values. If manufacturer's torque values are not indicated, use those specified in UL 486A and UL 486B.
- B. Make splices and taps that are compatible with conductor material and that possess equivalent or better mechanical strength and insulation ratings than unspliced conductors.
- C. Wiring at Outlets: Install conductor at each outlet, with at least 12 inches (300 mm) of slack.
- A. Joints of #10 AWG and smaller shall be made with properly insulated solderless type pressure connectors. Where stranded conductors or multiple solid conductors are connected to terminals, solderless lugs manufactured by Thomas and Betts Company or equivalent shall be used.
- B. Joints of #8 AWG and larger in power and lighting circuits shall be of the type indented into the conductor by means of a hand or hydraulic pressure tool. Connectors shall be Burndy "Hy-dent", T&B "St-Kon", or equivalent. Connectors for control wiring shall be Burndy "Hy-Lug", or equivalent.
- C. All circuits for exterior electric work shall be #10 AWG (minimum) and contain an extra #10 AWG (minimum) copper ground conductor. All exterior wiring shall be installed in conduit as specified above, unless otherwise noted as larger on the Drawings.

3.5 SLEEVE INSTALLATION FOR ELECTRICAL PENETRATIONS

- A. Coordinate sleeve selection and application with selection and application of firestopping specified in Division 26 Section "Electrical Firestopping." and "Common Work Results for Electrical".

3.6 SLEEVE-SEAL INSTALLATION

- A. Install to seal underground exterior-wall penetrations according to Division 26 Section, "Common Work Results for Electrical".

3.7 FIRESTOPPING

- A. Apply firestopping to electrical penetrations of fire-rated floor and wall assemblies to restore original fire-resistance rating of assembly according to Division 7 Section "Through Penetration Firestop System."

3.8 FIELD QUALITY CONTROL

- A. Perform tests and inspections and prepare test reports.
- B. Tests and Inspections:
 - 1. After installing conductors and cables and before electrical circuitry has been energized, test service entrance and feeder conductors, and conductors feeding the mechanical equipment and services for compliance with requirements.
 - 2. Perform each visual and mechanical inspection and electrical test stated in NETA Acceptance Testing Specification. Certify compliance with test parameters.
- C. Measure tightness of bolted connections and compare torque measurements with manufacturer's recommended values.
- D. Verify continuity of each branch circuit conductor.
- E. Demonstration: Subsequent to wire and cable hook-ups, energize circuit and demonstrate functioning in accordance with requirements. Where necessary, correct malfunctioning units, and then retest to demonstrate compliance.
- F. Test Reports: Prepare a written report to record the following:
 - 1. Test procedures used.
 - 2. Test results that comply with requirements.
 - 3. Test results that do not comply with requirements and corrective action taken to achieve compliance with requirements.
- G. Remove and replace malfunctioning units and retest as specified above.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

DIVISION 26 SECTION 26 05 26
GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS
TABLE OF CONTENTS

PART 1. GENERAL.....	1
1.1 RELATED DOCUMENTS.....	1
1.2 SUMMARY.....	1
1.3 ACTION SUBMITTALS	1
1.4 INFORMATIONAL SUBMITTALS	1
1.5 CLOSEOUT SUBMITTALS.....	1
1.6 QUALITY ASSURANCE	1
PART 2. PRODUCTS	2
2.1 MANUFACTURERS	2
2.2 SYSTEM DESCRIPTION	2
2.3 CONDUCTORS	2
2.4 CONNECTORS.....	2
PART 3. EXECUTION	3
3.1 APPLICATIONS	3
3.2 EQUIPMENT GROUNDING	3
3.3 INSTALLATION	3
3.4 FIELD QUALITY CONTROL.....	3
END OF SECTION.....	4

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 05 26 - GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes grounding and bonding systems and equipment.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.

1.4 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For testing agency and testing agency's field supervisor.
- B. Field quality-control reports.

1.5 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For grounding to include in emergency, operation, and maintenance manuals.

1.6 QUALITY ASSURANCE

- A. Testing Agency Qualifications: Member company of NETA or an NRTL.
 - 1. Testing Agency's Field Supervisor: Certified by NETA to supervise on-site testing.
- B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- C. Comply with UL 467 for grounding and bonding materials and equipment.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
1. Burndy; Part of Hubbell Electrical Systems.
 2. Dossert; AFL Telecommunications LLC.
 3. ERICO International Corporation.
 4. Fushi Copperweld Inc.
 5. Galvan Industries, Inc.; Electrical Products Division, LLC.
 6. Harger Lightning and Grounding.
 7. ILSCO.
 8. O-Z/Gedney; A Brand of the EGS Electrical Group.
 9. Robbins Lightning, Inc.

2.2 SYSTEM DESCRIPTION

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. Comply with UL 467 for grounding and bonding materials and equipment.

2.3 CONDUCTORS

- A. Insulated Conductors: Copper wire or cable insulated for 600 V unless otherwise required by applicable Code or authorities having jurisdiction.
- B. Bare Copper Conductors:
1. Solid Conductors: ASTM B 3.
 2. Stranded Conductors: ASTM B 8.
 3. Tinned Conductors: ASTM B 33.
 4. Bonding Cable: 28 kcmil, 14 strands of No. 17 AWG conductor, 1/4 inch (6 mm) in diameter, unless otherwise noted.
 5. Bonding Conductor: No. 4 or No. 6 AWG, stranded conductor, unless otherwise noted.
 6. Bonding Jumper: Copper tape, braided conductors terminated with copper ferrules; 1-5/8 inches (41 mm) wide and 1/16 inch (1.6 mm) thick.

2.4 CONNECTORS

- A. Listed and labeled by an NRTL acceptable to authorities having jurisdiction for applications in which used and for specific types, sizes, and combinations of conductors and other items connected.
- B. Bolted Connectors for Conductors and Pipes: Copper or copper alloy.

- C. Welded Connectors: Exothermic-welding kits of types recommended by kit manufacturer for materials being joined and installation conditions.
- D. Bus-Bar Connectors: Mechanical type, cast silicon bronze, solderless exothermic-type wire terminals, and long-barrel, two-bolt connection to ground bus bar.

PART 3 - EXECUTION

3.1 APPLICATIONS

- A. Conductors: Install solid conductor for No. 10 AWG and smaller, and stranded conductors for No. 8 AWG and larger unless otherwise indicated.
- B. Conductor Terminations and Connections:
 - 1. Pipe and Equipment Grounding Conductor Terminations: Bolted connectors.
 - 2. Connections to Structural Steel: Welded connectors.

3.2 EQUIPMENT GROUNDING

- A. Install insulated equipment grounding conductors with all feeders and branch circuits.

3.3 INSTALLATION

- A. Grounding Conductors: Route along shortest and straightest paths possible unless otherwise indicated or required by Code. Avoid obstructing access or placing conductors where they may be subjected to strain, impact, or damage.
- B. Bonding Straps and Jumpers: Install in locations accessible for inspection and maintenance except where routed through short lengths of conduit.
 - 1. Bonding to Structure: Bond straps directly to basic structure, taking care not to penetrate any adjacent parts.
 - 2. Bonding to Equipment Mounted on Vibration Isolation Hangers and Supports: Install bonding so vibration is not transmitted to rigidly mounted equipment.

3.4 FIELD QUALITY CONTROL

- A. Perform tests and inspections.
- B. Tests and Inspections:
 - 1. After installing grounding system but before permanent electrical circuits have been energized, test for compliance with requirements.
 - 2. Inspect physical and mechanical condition. Verify tightness of accessible, bolted, electrical connections with a calibrated torque wrench according to manufacturer's written instructions.
 - 3. Test completed grounding system at each location where a maximum ground-resistance level is specified.

- C. Grounding system will be considered defective if it does not pass tests and inspections.
- D. Prepare test and inspection reports.

END OF SECTION

NOT FOR BIDDING PURPOSES

DIVISION 26 SECTION 26 05 28
ELECTRICAL FIRESTOPPING
TABLE OF CONTENTS

PART 1. GENERAL.....	1
1.1 SUMMARY	1
1.2 REFERENCES	1
1.3 DEFINITIONS.....	1
1.4 SYSTEM DESCRIPTION.....	2
1.5 SUBMITTALS	2
1.6 QUALITY ASSURANCE	2
1.7 DELIVERY, STORAGE, AND HANDLING.....	3
1.8 PROJECT CONDITIONS	3
1.9 GUARANTEE	3
PART 2. PRODUCTS	3
2.1 MANUFACTURERS	3
2.2 THROUGH-PENETRATION FIRESTOPPING OF FIRE-RATED CONSTRUCTION	4
2.3 SMOKE-STOPPING AT SMOKE PARTITIONS.....	4
2.4 ACCESSORIES.....	4
PART 3. EXECUTION	4
3.1 EXAMINATION	4
3.2 PREPARATION	5
3.3 INSTALLATION	5
3.4 FIELD QUALITY CONTROL.....	5
3.5 ADJUSTING AND CLEANING.....	5
3.6 SYSTEMS AND APPLICATION SCHEDULES*	5
END OF SECTION.....	8

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 05 28 - ELECTRICAL FIRESTOPPING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes:
 - 1. Through-penetration firestopping in fire rated construction.
 - 2. Through-penetration smoke-stopping in smoke partitions.
- B. Related items: Raceway seals and manufactured electrical devices: Refer to Section 26 05 01.

1.2 REFERENCES

- A. Underwriters Laboratories
 - 1. UL Fire Resistance Directory
 - a. Through-penetration firestop devices (XHCR)
 - b. Fire resistance rating (BXUV)
 - c. Through-penetration firestop systems (XHEZ)
 - d. Fill, void, or cavity material (XHHW)
- B. American Society for Testing and Materials Standards: ASTM E 814-88: Standard Test Method for Fire Tests of Through-Penetration Firestops.

1.3 DEFINITIONS

- A. Assembly: Particular arrangement of materials specific to given type of construction described or detailed in referenced documents.
- B. Barriers: Time-rated fire walls, smoke barrier walls, time rated ceiling/floor assemblies and structural floors.
- C. Firestopping: Methods and materials applied in penetrations and unprotected openings to limit spread of heat, fire, gasses and smoke.
- D. Penetration: Opening or foreign material passing through or into barrier or structural floor such that full thickness of rated materials is not obtained.
- E. System: Specific products and applications classified and numbered by Underwriters Laboratories, Inc. to close specific barrier penetrations.
- F. Sleeve: Metal fabrication or pipe section extended through thickness of barrier and used to permanently guard penetration. Sleeves are described as part of penetrating system in other Sections and may or may not be required.

1.4 SYSTEM DESCRIPTION

A. Design Requirements

1. Fire-rated construction: Maintain barrier and structural floor fire resistance ratings including resistance to cold smoke at all penetrations, connections with other surfaces or types of construction, at separations required to permit building movement and sound or vibration absorption.
2. Smoke barrier construction: Maintain barrier and structural floor resistance to cold smoke at all penetrations, connections with other surfaces and types of construction and at all separations required to permit building movement and sound or vibration absorption.

1.5 SUBMITTALS

- A. Submit in accordance with Division 01, unless otherwise indicated.
- B. Product Data: Manufacturer's specifications and technical data including the following:
1. Detailed specification of construction and fabrication.
 2. Manufacturer's installation instructions.
- C. Shop Drawings: Indicate dimensions, description of materials and finishes, general construction, specific modifications, component connections, anchorage methods, hardware, and installation procedures, plus the following specific requirements.
1. Details of each proposed assembly identifying intended products and applicable UL system number, or UL classified devices.
 2. Manufacturer or manufacturer's representative shall provide qualified engineering judgment and drawings relating to non-standard applications as needed.
- D. Quality control submittals: Statement of qualifications.
- E. Applicators' qualifications statement: List past projects indicating required experience.

1.6 QUALITY ASSURANCE

- A. Installer's qualifications: Firm experienced in installation or application of systems similar in complexity to those required for this project, plus the following:
1. Acceptable to or licensed by manufacturer, State or local authority where applicable.
 2. At least 2 years' experience with systems.
 3. Successfully completed at least 5 comparable scale projects using this system.
- B. Local and State regulatory requirements: Submit forms or acceptance for proposed assemblies not conforming to specific UL Firestop System numbers, or UL classified devices.

- C. Materials shall have been tested to provide fire rating at least equal to that of the construction.
- D. Manufacturer shall be a member of the International Firestop Council (IFC).

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Packing and shipping:
 - 1. Deliver products in original unopened packaging with legible manufacturer's identification.
 - 2. Coordinate delivery with scheduled installation date, allow minimum storage at site.
- B. Storage and protection: Store materials in a clean, dry, ventilated location. Protect from soiling, abuse, moisture and freezing when required. Follow manufacturer's instructions.

1.8 PROJECT CONDITIONS

- A. Existing conditions:
 - 1. Verify existing conditions and substrates before starting work. Correct unsatisfactory conditions before proceeding.
 - 2. Proceed with installation only after penetrations of the substrate and supporting brackets have been installed.
- B. Environmental requirements:
 - 1. Furnish adequate ventilation if using solvent.
 - 2. Furnish forced air ventilation during installation if required by manufacturer.
 - 3. Keep flammable materials away from sparks or flame.
 - 4. Provide masking and drop cloths to prevent contamination of adjacent surfaces by firestopping materials.

1.9 GUARANTEE

- A. Submit copies of written guarantee agreeing to repair or replace joint sealers which fall in joint adhesion, extrusion resistance, migration resistance, or general durability or appear to deteriorate in any other manner not clearly specified by submitted manufacturer's data as an inherent quality of the material for the exposure indicated. The guarantee period shall be two years from date of substantial completion unless otherwise noted.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Subject to compliance with requirements, manufacturers offering products that may be incorporated into the work include, but are not limited to, the following:
 - 1. Hilti.

2. Nelson.

2.2 THROUGH-PENETRATION FIRESTOPPING OF FIRE-RATED CONSTRUCTION

- A. Systems of devices listed in the UL Fire Resistance Directory under categories XHCR and XHEZ may be used, providing that it conforms to the construction type, penetrate type, annular space requirements and fire rating involved in each separate instance, and that the system be symmetrical for wall applications. Systems or devices must be asbestos-free.
 1. Additional requirements: Withstand the passage of cold smoke either as an inherent property of the system, or by the use of a separate product included as a part of the UL system or device, and designed to perform this function.
 2. Acceptable manufacturers and products.
 - a. Those listed in the UL Fire Resistance directory for the UL System involved and as further defined in the "System and Applications Schedule" in Part 3 of this Section.
 - b. All firestopping products must be from a single manufacturer. All trades shall use products from the same manufacturer unless otherwise noted.

2.3 SMOKE-STOPPING AT SMOKE PARTITIONS

- A. Through-penetration smoke-stopping: Any system complying with the requirements for through-penetration firestopping in fire-rated construction, as specified in "The Systems and Applications Schedule" in Part 3 of this Section, is acceptable, provided that the system includes the specified smoke seal or will provide a smoke seal. The length of time of the fire resistance may be disregarded.

2.4 ACCESSORIES

- A. Fill, void or cavity materials: As classified under category XHHW in the UL Fire Resistance Directory.
- B. Forming materials: As classified under category XHKU in the UL Fire Resistance Directory.
- C. Sleeves: Minimum 24 MSG galvanized steel, 12-inch diameter or smaller steel pipe. Sleeve shall project 1/2-inch from each surface of the floor/wall. Size as recommended by firestop manufacturer.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verification of conditions: Examine areas and conditions under which work is to be performed and identify conditions detrimental to proper or timely completion.
 1. Verify barrier penetrations are properly sized and in suitable condition for application of materials.

2. Do not proceed until unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Clean surfaces to be in contact with penetration seal materials of dirt, grease, oil, loose materials, rust, or other substances that may affect proper fitting, adhesion, or the required fire resistance.

3.3 INSTALLATION

- A. Install penetration seal materials in accordance with printed instructions of the UL Fire Resistance Directory and in accordance with manufacturer's instruction.
- B. Seal holes or voids made by penetrations to ensure an effective smoke barrier.
- C. Protect materials from damage on surfaces subject to traffic.
- D. When large openings are created in walls or floors to permit installation of conduits, cable tray, or other items, close unused portions of opening with firestopping materials tested for the application. See UL Fire Resistance Directory of Paragraph 2.2 of this document.
- E. Install smoke stopping as specified for firestopping.
- F. Provide sleeves the full thickness of the assembly being penetrated and cut sleeves to a length of 1-inch more than the over-all thickness of the penetration, or as recommended by the firestop manufacturer.
- G. All holes and voids shall be sealed the same day they are made.

3.4 FIELD QUALITY CONTROL

- A. Examine penetration sealed areas to ensure proper installation before concealing or enclosing areas.
- B. Keep areas of work accessible until inspection by applicable code authorities.
- C. Perform under this section patching and repairing of firestopping caused by cutting or penetration by other trades.

3.5 ADJUSTING AND CLEANING

- A. Clean up spills of liquid components.
- B. Neatly cut and trim materials as required.
- C. Remove equipment, materials and debris, leaving area in undamaged, clean condition.

3.6 SYSTEMS AND APPLICATION SCHEDULES*

SEE NEXT PAGE.

PENETRA TING ITEM	CONCRETE	GYPSUM	WOOD FLOOR/ CEILING
Metal Pipe	CAJ1001 CP25S/L, CP25N/S CAJ1006 CS-195+, FS-195+ CAJ1007 FS-195+, 1"& 2" Wide CAJ1009 2000, 2000+, 2003 CAJ1010 2000, 2000+, 2003 CAJ1012 2000, 2000+, 2003 CAJ1013 2000, 2000+, 2003 CAJ1014 2000, 2000+, 2003 CAJ1015 2000, 2000+, 2003 CAJ1017 FD 150 CAJ1021 FD 150 CAJ1027 MPS-2+ CAJ1044 CP 25WB+ CAJ1052 CP 25S/L, CP 25N/S CAJ1058 2000, 2000+, 2003 CAJ1060 2000, 2000+, 2003 CAJ1063 2000, 2000+, 2003 CAJ1066 CP 25N/S, CP 25S/L, CP 25WB+ CAJ1091 CP 25N/S, CP 25S/L, CP 25WB+ CAJ1092 CP 25WB+ CAJ1112 FS-195+ CAJ1160 CP 25S/L, CP 25N/S CAJ1175 CP 25WB+ CAJ1176 CP 25WB+ CAJ1188 2000+ CBJ1020 CS-195+, FS-195+ CBJ1021 CS-195+, MPS-2+ CBJ1031 2001 CBJ1032 2001 FA1002 CP 25WB+ WJ1010 CP 25WB+ WJ1023 2001	WL1001 CP 25 WL1002 FS-195+ WL1003 CP 25WB+, CP 25N/S WL1008 2000+ WL1009 2000+ WL1010 2000+ WL1016 CP 25WB+ WL1017 CP 25WB+, CP 25N/S WL1032 CP 25WB+, CP 25N/S WL1036 FD 150 WL1037 CS-195+, FS- 195+ WL1067 CP 25N/S WL1073 CP 25WB+ WL1080 MPS-2+ WL1082 2000+	FC1002 CP 25 FC1003 2000, 2000+, 20003 FC1006 CP 25WB+
Non- Metallic	CAJ2001 FS-195+, 1"& 2" WIDE, PPD'S CAJ2002 FS-195+	WL2002 FS-195+, PPD'S WL2003 FS-195+ WL2004 FS-195+	FC2002 FS-195+, PPD'S FC2007 FS-195+,

PENETRA TING ITEM	CONCRETE	GYPSUM	WOOD FLOOR/ CEILING
	CAJ2003 CS-195+, FS-195+ CAJ2005 FS-195+ CAJ2006 FS-195+ CAJ2013 FS-195+ CAJ2019 2000, 2000+, 2003 CAJ2027 FS-195+, CP 25N/S, CP 25S/L, CP 25WB+ CAJ2028 FS-195, MPS-2+ CAJ2029 FS-195+, PPD'S CAJ2030 CS-195+, FS-195+ CAJ2040 FS-195+, CP 25WB+ CAJ2044 FS-195+, CP 25N/S, CP 25S/L CP 25 WB+ CAJ2090 FS-195+ CAJ2177 FS-195+, PPD'S FA2001 FS-195+, PPD'S FS2002 CS-195+, FS-195+, MPS-2+, PPD'S FA2011 FS-195+ WJ2012 FS-195+ 1" WIDE	WL2005 FS-195+ 4' WIDE WL2006 FS-195+ WL2013 FS-195+ WL2031 CS-195+, FS- 195+ WL2032 CS-195+, FS- 195+ WL2033 FS-195+ WL2073 FS-195+ 1" WIDE	PPD'S FC2008 FS-195+ FC2009 FS-195+, PPD'S FC2024 FS-195+ FC2026 FS-195+ FC2028 FS-195+, 1' & 2" WIDE, PPD'S
Insulated Cable	CAJ3001 CP 25N/S, CP 25S/L CAJ3005 CS 195+, FS-195+ CAJ3007 2001 CAJ3009 2000, 2000+, 2003 CAJ3010 2000, 2000+, 2003 CAJ3011 2001 CAJ3014 FD 150 CAJ3015 FD 150 CAJ3021 MPS-2+ CAJ3029 2000, 2000+, 2003 CAJ3030 CP 25WB+ CAJ3031 CP 25N/S, CP 25S/L CAJ3041 2000, 2000+, 2003 CAJ3044 CS-195+, FS-195+ CAJ3058 FS-195+, MPS-2+ CAJ3071 CP 25N/S, CP 25S/L CAJ3074 CP 25N/S, CP 25S/L CAJ3075 2001 CAJ3080 CP 25WB+	WL3001 CP 25, MPS-2+ WL3008 2000+ WL3009 2000+ WL3015 CP 25WB+, CP 25N/S WL3022 2000+ WL3030 FS-195+ WL3031 MPS-2+ WL3032 CP 25WB+ WL3041 2000+ WL3051 CP 25N/S WL3056 CP25N/S WL3062 CP 25WB+	FC3001 CP 25S/L, CP 25N/S FC3002 2000+ FC3003 2000, 2000+, 2003 FC3007 CP 25WB+, MPS-2+ FC3008 FS-195+

PENETRA TING ITEM	CONCRETE	GYPSUM	WOOD FLOOR/ CEILING
	CBJ3016 CS-195+, FS-195+ CBJ3017 CS-195+, MPS-2+ FA3001 CP 25WB+ FB3004 CS-195+, MP WJ3015 2001 WJ3016 2001		
Mixed Penetrating Items Combos	CAJ8001 CS-195+ FS-195+ CAJ8003 2000, 2000+, 20003 CAJ8004 2000, 2000+, 20003 CAJ8006 2001 CAJ8013 FS-195+, CP 25 CBJ8004 CS-195, FS-195+ CBJ8005 CS-195+, MPS-2+ CBJ8008 2001 FA8001 FS-195+, CP 25WB+	WL8002 CS-195+, FS- 195+	

* Underwriter's Laboratories, Inc., Fire Resistance Directory.

END OF SECTION

DIVISION 26 SECTION 26 05 29
HANGERS AND SUPPORTS FOR ELECTRICAL SYSTEMS
TABLE OF CONTENTS

PART 1 - GENERAL	1
1.1 RELATED DOCUMENTS	1
1.2 SUMMARY	1
1.3 DEFINITIONS	1
1.4 PERFORMANCE REQUIREMENTS.....	1
1.5 SUBMITTALS.....	1
1.6 QUALITY ASSURANCE.....	1
PART 2 - PRODUCTS	2
2.1 SUPPORT, ANCHORAGE, AND ATTACHMENT COMPONENTS	2
2.2 FABRICATED METAL EQUIPMENT SUPPORT ASSEMBLIES	3
PART 3 - EXECUTION	3
3.1 APPLICATION.....	3
3.2 SUPPORT INSTALLATION.....	3
3.3 INSTALLATION OF FABRICATED METAL SUPPORTS.....	4
3.4 PAINTING	4
END OF SECTION.....	5

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 05 29 - HANGERS AND SUPPORTS FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Hangers and supports for electrical equipment and systems.
- B. Related Sections include the following:
 - 1. Metal Fabrications – For requirements for miscellaneous metal items involved in supports and fastenings.
 - 2. Joint Sealants – For requirements for firestopping at sleeves through walls and floors that are fire barriers.

1.3 DEFINITIONS

- A. EMT: Electrical metallic tubing.
- B. IMC: Intermediate metal conduit.
- C. RMC: Rigid metal conduit.

1.4 PERFORMANCE REQUIREMENTS

- A. Design supports for multiple raceways capable of supporting combined weight of supported systems and its contents.
- B. Design equipment supports capable of supporting combined operating weight of supported equipment and connected systems and components.
- C. Rated Strength: Adequate in tension, shear, and pullout force to resist maximum loads calculated or imposed for this Project, with a minimum structural safety factor of five times the applied force.

1.5 SUBMITTALS

- A. Product Data: For the following:
 - 1. Steel slotted support systems.

1.6 QUALITY ASSURANCE

- A. Comply with NFPA 70.

PART 2 - PRODUCTS

2.1 SUPPORT, ANCHORAGE, AND ATTACHMENT COMPONENTS

- A. Steel Slotted Support Systems: Comply with MFMA-4, factory-fabricated components for field assembly.
1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
- Allied Tube & Conduit.
 - Cooper B-Line, Inc.; a division of Cooper Industries.
 - ERICO International Corporation.
 - GS Metals Corp.
 - Thomas & Betts Corporation.
 - Unistrut; Tyco International, Ltd.
 - Wesanco, Inc.
2. Metallic Coatings: Hot-dip galvanized after fabrication and applied according to MFMA-4.
3. Painted Coatings: Manufacturer's standard painted coating applied according to MFMA-4.
4. Channel Dimensions: Selected for applicable load criteria.
- B. Raceway and Cable Supports: As described in NECA 1 and NECA 101.
- C. Conduit and Cable Support Devices: Steel and malleable-iron hangers, clamps, and associated fittings, designed for types and sizes of raceway or cable to be supported.
- D. Structural Steel for Fabricated Supports and Restraints: ASTM A 36/A 36M, steel plates, shapes, and bars; black and galvanized.
- E. Mounting, Anchoring, and Attachment Components: Items for fastening electrical items or their supports to building surfaces include the following:
1. Powder-Actuated Fasteners: Threaded-steel stud, for use in hardened portland cement concrete, steel, or wood, with tension, shear, and pullout capacities appropriate for supported loads and building materials where used.
- a. Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
- 1) Hilti Inc.
 - 2) ITW Ramset/Red Head; a division of Illinois Tool Works, Inc.
 - 3) MKT Fastening, LLC.
 - 4) Simpson Strong-Tie Co., Inc.; Masterset Fastening Systems Unit.
2. Mechanical-Expansion Anchors: Insert-wedge-type, zinc-coated steel, for use in hardened portland cement concrete with tension, shear, and pullout capacities appropriate for supported loads and building materials in which used.

- a. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

- 1) Cooper B-Line, Inc.; a division of Cooper Industries.
- 2) Empire Tool and Manufacturing Co., Inc.
- 3) Hilti Inc.
- 4) ITW Ramset/Red Head; a division of Illinois Tool Works, Inc.
- 5) MKT Fastening, LLC.

3. Concrete Inserts: Steel or malleable-iron, slotted support system units similar to MSS Type 18; complying with MFMA-4 or MSS SP-58.
4. Clamps for Attachment to Steel Structural Elements: MSS SP-58, type suitable for attached structural element.
5. Through Bolts: Structural type, hex head, and high strength. Comply with ASTM A 325.
6. Toggle Bolts: All-steel springhead type.
7. Hanger Rods: Threaded steel.

2.2 FABRICATED METAL EQUIPMENT SUPPORT ASSEMBLIES

- A. Description: Welded or bolted, structural-steel shapes, shop or field fabricated to fit dimensions of supported equipment.
- B. Materials: Comply with requirements in Division 05 Section "Metal Fabrications" for steel shapes and plates.
- C. Submit structural calculations for load and strength of each component and detailing of each assembly.

PART 3 - EXECUTION

3.1 APPLICATION

- A. Comply with NECA 1 and NECA 101 for application of hangers and supports for electrical equipment and systems except if requirements in this Section are stricter.
- B. Maximum Support Spacing and Minimum Hanger Rod Size for Raceway: Space supports for EMT, IMC, and RMC as required by NFPA 70. Minimum rod size shall be 1/4 inch (6 mm) in diameter.
- C. Multiple Raceways or Cables: Install trapeze-type supports fabricated with steel slotted or other support system, sized so capacity can be increased by at least 25 percent in future without exceeding specified design load limits.
 1. Secure raceways and cables to these supports with two-bolt conduit clamps.

3.2 SUPPORT INSTALLATION

- A. Comply with NECA 1 and NECA 101 for installation requirements except as specified in this Article.

- B. Strength of Support Assemblies: Where not indicated, select sizes of components so strength will be adequate to carry present and future static loads within specified loading limits. Minimum static design load used for strength determination shall be weight of supported components plus 200 lb (90 kg).
- C. Mounting and Anchorage of Surface-Mounted Equipment and Components: Anchor and fasten electrical items and their supports to building structural elements by the following methods unless otherwise indicated by code:
 - 1. To Wood: Fasten with lag screws or through bolts.
 - 2. To New Concrete: Bolt to concrete inserts.
 - 3. To Masonry: Approved toggle-type bolts on hollow masonry units and expansion anchor fasteners on solid masonry units.
 - 4. To Existing Concrete: Expansion anchor fasteners.
 - 5. To Steel: Beam clamps (MSS Type 19, 21, 23, 25, or 27) complying with MSS SP-69.
 - 6. To Light Steel: Sheet metal screws.
 - 7. Items Mounted on Hollow Walls and Nonstructural Building Surfaces: Mount cabinets, panelboards, disconnect switches, control enclosures, pull and junction boxes, transformers, and other devices on slotted-channel racks attached to substrate.
- D. Drill holes for expansion anchors in concrete at locations and to depths that avoid reinforcing bars.

3.3 INSTALLATION OF FABRICATED METAL SUPPORTS

- A. Comply with installation requirements in Division 05 Section "Metal Fabrications" for site-fabricated metal supports.
- B. Cut, fit, and place miscellaneous metal supports accurately in location, alignment, and elevation to support and anchor electrical materials and equipment.
- C. Field Welding: Comply with AWS D1.1/D1.1M.

3.4 PAINTING

- A. Touchup: Clean field welds and abraded areas of shop paint. Paint exposed areas immediately after erecting hangers and supports. Use same materials as used for shop painting. Comply with SSPC-PA 1 requirements for touching up field-painted surfaces.
 - 1. Apply paint by brush or spray to provide minimum dry film thickness of 2.0 mils (0.05 mm).
- B. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas and apply galvanizing-repair paint to comply with ASTM A 780.

END OF SECTION

DIVISION 26 SECTION 26 05 33
RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS
TABLE OF CONTENTS

PART 1. GENERAL.....	1
1.1 RELATED DOCUMENTS.....	1
1.2 SUMMARY.....	1
1.3 DEFINITIONS.....	1
1.4 SUBMITTALS	1
1.5 QUALITY ASSURANCE	1
PART 2. PRODUCTS	2
2.1 METAL CONDUIT AND TUBING	2
2.2 NONMETALLIC CONDUIT AND TUBING	2
2.3 METAL WIREWAYS AND AUXILIARY GUTTERS	3
2.4 SURFACE RACEWAYS	3
2.5 BOXES, ENCLOSURES, AND CABINETS.....	4
PART 3. EXECUTION	4
3.1 RACEWAY APPLICATION	4
3.2 INSTALLATION	5
3.3 SLEEVE AND SLEEVE-SEAL INSTALLATION FOR ELECTRICAL PENETRATIONS	7
3.4 FIRESTOPPING.....	7
3.5 PROTECTION.....	8
END OF SECTION.....	8

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 05 33 - RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes raceways, fittings, boxes, enclosures, and cabinets for electrical wiring.

1.3 DEFINITIONS

- A. EMT: Electrical metallic tubing.
- B. FMC: Flexible metal conduit.
- C. IMC: Intermediate metal conduit.
- D. LFMC: Liquidtight flexible metal conduit.
- E. LFNC: Liquidtight flexible nonmetallic conduit.
- F. RNC: Rigid nonmetallic conduit.

1.4 SUBMITTALS

- A. Product Data: For surface raceways, wireways and fittings, floor boxes, hinged-cover enclosures, and cabinets.
- B. Shop Drawings: For the following raceway components. Include plans, elevations, sections, details, and attachments to other work.
 - 1. Custom enclosures and cabinets.
- C. Source quality-control test reports.

1.5 QUALITY ASSURANCE

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.
- B. Comply with NFPA 70.

PART 2 - PRODUCTS

2.1 METAL CONDUIT AND TUBING

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
1. AFC Cable Systems, Inc.
 2. Allied Tube & Conduit; a Tyco International Ltd. Co.
 3. Electri-Flex Co.
- B. Rigid Steel Conduit: ANSI C80.1.
- C. IMC: ANSI C80.6.
- D. EMT: ANSI C80.3.
- E. FMC: Zinc-coated steel.
- F. LFMC: Flexible steel conduit with PVC jacket.
- G. Fittings for Conduit (Including all Types and Flexible and Liquidtight), EMT, and Cable: NEMA FB 1; listed for type and size raceway with which used, and for application and environment in which installed.
1. Conduit Fittings for Hazardous (Classified) Locations: Comply with UL 886.
 2. Fittings for EMT: Steel or die-cast or compression type.
 3. Expansion Fittings: PVC or steel to match conduit type, complying with UL 651, rated for environmental conditions where installed, and including flexible external bonding jumper.
- H. Joint Compound for Rigid Steel Conduit or IMC: Listed for use in cable connector assemblies, and compounded for use to lubricate and protect threaded raceway joints from corrosion and enhance their conductivity.

2.2 NONMETALLIC CONDUIT AND TUBING

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
1. AFC Cable Systems, Inc.
 2. Anamet Electrical, Inc.; Anaconda Metal Hose.
 3. Arnco Corporation.
 4. Electri-Flex Co.
- B. RNC: NEMA TC 2, Type EPC-40-PVC, unless otherwise indicated.
- C. LFNC: UL 1660.

- D. Fittings for RNC: NEMA TC 3; match to conduit or tubing type and material.
- E. Fittings for LFNC: UL 514B.

2.3 METAL WIREWAYS AND AUXILIARY GUTTERS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Cooper B-Line, Inc.
 - 2. Hoffman.
 - 3. Mono-Systems, Inc.
 - 4. Square D.
- B. Description: Sheet metal, complying with UL 870 and NEMA 250, Type 1 unless otherwise indicated, and sized according to NFPA 70.
 - 1. Metal wireways installed outdoors shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- C. Fittings and Accessories: Include covers, couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, and other fittings to match and mate with wireways as required for complete system.
- D. Wireway Covers: Hinged type unless otherwise indicated.
- E. Finish: Manufacturer's standard enamel finish.

2.4 SURFACE RACEWAYS

- A. Listing and Labeling: Surface raceways shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. Surface Metal Raceways: Galvanized steel with snap-on covers Finish with manufacturer's standard prime coating. Provide size and all components, fittings, etc. required for a complete installation.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Wiremold / Legrand
 - b. Mono-Systems, Inc.
 - c. Panduit Corp.
 - d. Hubbell.

2.5 BOXES, ENCLOSURES, AND CABINETS

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
1. Cooper Crouse-Hinds; Div. of Cooper Industries, Inc.
 2. Erickson Electrical Equipment Company.
 3. Hoffman.
 4. O-Z/Gedney; a unit of General Signal.
 5. Spring City Electrical Manufacturing Company.
 6. Thomas & Betts Corporation.
 7. Walker Systems, Inc.; Wiremold Company (The).
- B. Sheet Metal Outlet and Device Boxes: NEMA OS 1.
- C. Cast-Metal Outlet and Device Boxes: NEMA FB 1, aluminum, Type FD, with gasketed cover.
- D. Nonmetallic Outlet and Device Boxes: NEMA OS 2.
- E. Small Sheet Metal Pull and Junction Boxes: NEMA OS 1.
- F. Cast-Metal Access, Pull, and Junction Boxes: NEMA FB 1, cast aluminum with gasketed cover.
- G. Box extensions used to accommodate new building finishes shall be of same material as recessed box.
- H. Device Box Dimensions: 4 inches square by 2-1/8 inches deep (100 mm square by 60 mm deep).
- I. Gangable boxes are allowed.

PART 3 - EXECUTION

3.1 RACEWAY APPLICATION

- A. Outdoors: Apply raceway products as specified below, unless otherwise indicated:
1. Exposed Conduit: Rigid steel conduit.
 2. Concealed Conduit, Aboveground: Rigid steel conduit.
 3. Connection to Vibrating Equipment (Including Transformers and Hydraulic, Pneumatic, Electric Solenoid, or Motor-Driven Equipment): LFMC
 4. Boxes and Enclosures, Aboveground: NEMA 250, Type 3R.
- B. Comply with the following indoor applications, unless otherwise indicated:
1. Exposed, Not Subject to Physical Damage: EMT.

2. Exposed, Not Subject to Severe Physical Damage: EMT.
 3. Exposed and Subject to Severe Physical Damage: Rigid steel conduit. Includes raceways in the following locations:
 - a. Mechanical rooms to 8' AFF.
 4. Concealed in Ceilings and Interior Walls and Partitions: EMT.
 5. Connection to Vibrating Equipment (Including Transformers and Hydraulic, Pneumatic, Electric Solenoid, or Motor-Driven Equipment): LFMC.
 6. Damp or Wet Locations: Rigid steel conduit.
 7. Boxes and Enclosures: NEMA 250, Type 1, except use NEMA 250, Type 4X, stainless steel in damp or wet locations.
- C. Minimum Raceway Size: 3/4-inch (21-mm) trade size.
- D. Raceway Fittings: Compatible with raceways and suitable for use and location.
1. Rigid and Intermediate Steel Conduit: Use threaded rigid steel conduit fittings, unless otherwise indicated.
 2. EMT: Use compression, steel fittings. Comply with NEMA FB 2.10.
 3. Flexible Conduit: Use only fittings listed for use with flexible conduit. Comply with NEMA FB 2.20.
- E. Install surface raceways only in finished spaces where conduit/cabling cannot be installed concealed.

3.2 INSTALLATION

- A. Comply with NECA 1 for installation requirements applicable to products specified in Part 2 except where requirements on Drawings or in this Article are stricter.
- B. Keep raceways at least 6 inches (150 mm) away from parallel runs of flues and steam or hot-water pipes. Install horizontal raceway runs above water and steam piping.
- C. Complete raceway installation before starting conductor installation.
- D. Support raceways as specified in Division 26 Section "Hangers and Supports for Electrical Systems."
- E. Arrange stub-ups so curved portions of bends are not visible above the finished slab.
- F. Install no more than the equivalent of three 90-degree bends in any conduit run except for communications conduits, for which fewer bends are allowed.
- G. Conceal conduit and EMT within accessible ceilings space unless otherwise indicated. Install conduits parallel or perpendicular to building lines.
- H. Support conduit within 12 inches (300 mm) of enclosures to which attached.
- I. Stub-ups to Above Recessed Ceilings:

1. Use EMT, or RMC for raceways.
 2. Use a conduit bushing or insulated fitting to terminate stub-ups not terminated in hubs or in an enclosure.
- J. Threaded Conduit Joints, Exposed to Wet, Damp, Corrosive, or Outdoor Conditions: Apply listed compound to threads of raceway and fittings before making up joints. Follow compound manufacturer's written instructions.
- K. Raceway Terminations at Locations Subject to Moisture or Vibration: Use insulating bushings to protect conductors, including conductors smaller than No. 4 AWG.
- L. Install raceways square to the enclosure and terminate at enclosures with locknuts. Install locknuts hand tight plus 1/4 turn more.
- M. Do not rely on locknuts to penetrate nonconductive coatings on enclosures. Remove coatings in the locknut area prior to assembling conduit to enclosure to assure a continuous ground path.
- N. Cut conduit perpendicular to the length. For conduits 2-inch (53-mm) trade size and larger, use roll cutter or a guide to make cut straight and perpendicular to the length.
- O. Install pull wires in empty raceways. Use polypropylene or monofilament plastic line with not less than 200-lb (90-kg) tensile strength. Leave at least 12 inches (300 mm) of slack at each end of pull wire. Cap underground raceways designated as spare above grade alongside raceways in use.
- P. Surface Raceways:
1. Surface metal raceway shall only be utilized where devices and/or wiring cannot be concealed in existing walls in finished areas, such as classrooms, offices, corridors, toilets, etc. unless otherwise indicated on the Contract Documents.
 - a. New devices installed in existing metal stud/GWB walls shall be cut in with conduit/wiring concealed within the wall.
 - b. New devices installed in existing CMU walls may be installed in surface-mounted outlet boxes served by surface metal raceway as specified in this Section.
 2. Exposed raceways shall be run in corners, beneath chalk and tackboard frames, adjacent to door trims, and in other ways to be as inconspicuous as possible, even when requiring additional lengths.
 3. Horizontal runs of raceways shall be kept to an absolute minimum. Exposed raceway shall be run vertically into ceiling spaces above and below.
 4. All exposed raceways shall be installed in a manner approved by the Architect/Engineer.
 5. Install surface raceway with a minimum 2-inch (50-mm) radius control at bend points.
 6. Secure surface raceway with screws or other anchor-type devices at intervals not exceeding 48 inches (1200 mm) and with no less than two supports per straight

raceway section. Support surface raceway according to manufacturer's written instructions. Tape and glue are not acceptable support methods.

7. Two-hole straps are required.

Q. Install raceway sealing fittings at suitable, approved, and accessible locations and fill them with listed sealing compound. For concealed raceways, install each fitting in a flush steel box with a blank cover plate having a finish similar to that of adjacent plates or surfaces. Install raceway sealing fittings at the following points:

1. Where conduits pass from warm to cold locations, such as boundaries of refrigerated spaces.
2. Where otherwise required by NFPA 70.

R. Expansion-Joint Fittings for RNC: Install in each run of aboveground conduit that is located where environmental temperature change may exceed 30 deg F (17 deg C), and that has straight-run length that exceeds 25 feet (7.6 m).

1. Install expansion-joint fittings for each of the following locations, and provide type and quantity of fittings that accommodate temperature change listed for location:
 - a. Outdoor Locations Not Exposed to Direct Sunlight: 125 deg F (70 deg C) temperature change.
 - b. Outdoor Locations Exposed to Direct Sunlight: 155 deg F (86 deg C) temperature change.
 - c. Indoor Spaces: Connected with the Outdoors without Physical Separation: 125 deg F (70 deg C) temperature change.
 - d. Attics: 135 deg F (75 deg C) temperature change.
2. Install fitting(s) that provide expansion and contraction for at least 0.00041 inch per foot of length of straight run per deg F (0.06 mm per meter of length of straight run per deg C) of temperature change.
3. Install each expansion-joint fitting with position, mounting, and piston setting selected according to manufacturer's written instructions for conditions at specific location at the time of installation.

3.3 SLEEVE AND SLEEVE-SEAL INSTALLATION FOR ELECTRICAL PENETRATIONS

- A. Install sleeves and sleeve seals at penetrations of exterior floor and wall assemblies. Comply with requirements in Division 26 Section "Common Work Results for Electrical."

3.4 FIRESTOPPING

- A. Apply firestopping to electrical penetrations of fire-rated floor and wall assemblies to restore original fire-resistance rating of assembly. Firestopping materials and installation requirements are specified in Division 26 Section "Electrical Firestopping."

3.5 PROTECTION

- A. Provide final protection and maintain conditions that ensure coatings, finishes, and cabinets are without damage or deterioration at time of Substantial Completion.
 - 1. Repair damage to galvanized finishes with zinc-rich paint recommended by manufacturer.
 - 2. Repair damage to PVC or paint finishes with matching touchup coating recommended by manufacturer.

END OF SECTION

DIVISION 26 SECTION 26 05 53
IDENTIFICATION FOR ELECTRICAL SYSTEMS
TABLE OF CONTENTS

PART 1. GENERAL.....	1
1.1 RELATED DOCUMENTS.....	1
1.2 SUMMARY	1
1.3 SUBMITTALS	1
1.4 QUALITY ASSURANCE	1
1.5 COORDINATION	1
PART 2. PRODUCTS	2
2.1 POWER RACEWAY IDENTIFICATION MATERIALS.....	2
2.2 POWER AND CONTROL CABLE IDENTIFICATION MATERIALS	2
2.3 CONDUCTOR IDENTIFICATION MATERIALS	2
2.4 WARNING LABELS AND SIGNS	2
2.5 EQUIPMENT IDENTIFICATION LABELS.....	3
2.6 CABLE TIES	3
2.7 MISCELLANEOUS IDENTIFICATION PRODUCTS.....	4
PART 3. EXECUTION	4
3.1 INSTALLATION	4
3.2 IDENTIFICATION SCHEDULE.....	4
END OF SECTION.....	7

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 05 53 - IDENTIFICATION FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

1. Identification for raceways.
2. Identification of power and control cables.
3. Identification for conductors.
4. Warning labels and signs.
5. Instruction signs.
6. Equipment identification labels.
7. Miscellaneous identification products.

1.3 SUBMITTALS

- A. Product Data: For each electrical identification product indicated.

1.4 QUALITY ASSURANCE

- A. Comply with ANSI A13.1 and IEEE C2.
- B. Comply with NFPA 70.
- C. Comply with 29 CFR 1910.144 and 29 CFR 1910.145.
- D. Comply with ANSI Z535.4 for safety signs and labels.
- E. Adhesive-attached labeling materials, including label stocks, laminating adhesives, and inks used by label printers, shall comply with UL 969.

1.5 COORDINATION

- A. Coordinate identification names, abbreviations, colors, and other features with requirements in other Sections requiring identification applications, Drawings, Shop Drawings, manufacturer's wiring diagrams, and the Operation and Maintenance Manual; and with those required by codes, standards, and 29 CFR 1910.145. Use consistent designations throughout Project.
- B. Coordinate installation of identifying devices with completion of covering and painting of surfaces where devices are to be applied.
- C. Coordinate installation of identifying devices with location of access panels and doors.

- D. Install identifying devices before installing acoustical ceilings and similar concealment.

PART 2 - PRODUCTS

2.1 POWER RACEWAY IDENTIFICATION MATERIALS

- A. Comply with ANSI A13.1 for minimum size of letters for legend and for minimum length of color field for each raceway size.
- B. Colors for Raceways Carrying Circuits at 600 V or Less:
 - 1. Black letters on an orange field for normal feeders, black letters on a yellow field for emergency feeders.
 - 2. Legend: Indicate voltage and system or service type.
- C. Snap-Around Labels for Raceways Carrying Circuits at 600 V or Less: Slit, pretensioned, flexible, preprinted, color-coded acrylic sleeve, with diameter sized to suit diameter of raceway or cable it identifies and to stay in place by gripping action.

2.2 POWER AND CONTROL CABLE IDENTIFICATION MATERIALS

- A. Comply with ANSI A13.1 for minimum size of letters for legend and for minimum length of color field for each cable size.
- B. Snap-Around Labels: Slit, pretensioned, flexible, preprinted, color-coded acrylic sleeve, with diameter sized to suit diameter of cable it identifies and to stay in place by gripping action.

2.3 CONDUCTOR IDENTIFICATION MATERIALS

- A. Color-Coding Conductor Tape: Colored, self-adhesive vinyl tape not less than 3 mils (0.08 mm) thick by 1 to 2 inches (25 to 50 mm) wide.

2.4 WARNING LABELS AND SIGNS

- A. Comply with NFPA 70 and 29 CFR 1910.145.
- B. Baked-Enamel Warning Signs:
 - 1. Preprinted aluminum signs, punched or drilled for fasteners, with colors, legend, and size required for application.
 - 2. 1/4-inch (6.4-mm) grommets in corners for mounting.
 - 3. Nominal size, 7 by 10 inches (180 by 250 mm).
- C. Metal-Backed, Butyrate Warning Signs:
 - 1. Weather-resistant, nonfading, preprinted, cellulose-acetate butyrate signs with 0.0396-inch (1-mm) galvanized-steel backing; and with colors, legend, and size required for application.

2. 1/4-inch (6.4-mm) grommets in corners for mounting.
3. Nominal size, 10 by 14 inches (250 by 360 mm).

D. Warning label and sign shall include, but are not limited to, the following legends:

1. Multiple Power Source Warning: "DANGER - ELECTRICAL SHOCK HAZARD - EQUIPMENT HAS MULTIPLE POWER SOURCES."
2. Workspace Clearance Warning: "WARNING - OSHA REGULATION - AREA IN FRONT OF ELECTRICAL EQUIPMENT MUST BE KEPT CLEAR FOR 36 INCHES (915 MM)."

2.5 EQUIPMENT IDENTIFICATION LABELS

- A. Engraved, Laminated Acrylic or Melamine Label: Punched or drilled for screw mounting. White letters on a dark-gray background. Minimum letter height shall be 3/8 inch (10 mm).
- B. Stenciled Legend: In nonfading, waterproof, black ink or paint. Minimum letter height shall be 1 inch (25 mm).

2.6 CABLE TIES

- A. General-Purpose Cable Ties: Fungus inert, self extinguishing, one piece, self locking, Type 6/6 nylon.
 1. Minimum Width: 3/16 inch (5 mm).
 2. Tensile Strength at 73 deg F (23 deg C), According to ASTM D 638: 12,000 psi (82.7 MPa).
 3. Temperature Range: Minus 40 to plus 185 deg F (Minus 40 to plus 85 deg C).
 4. Color: Black except where used for color-coding.
- B. UV-Stabilized Cable Ties: Fungus inert, designed for continuous exposure to exterior sunlight, self extinguishing, one piece, self locking, Type 6/6 nylon.
 1. Minimum Width: 3/16 inch (5 mm).
 2. Tensile Strength at 73 deg F (23 deg C), According to ASTM D 638: 12,000 psi (82.7 MPa).
 3. Temperature Range: Minus 40 to plus 185 deg F (Minus 40 to plus 85 deg C).
 4. Color: Black.
- C. Plenum-Rated Cable Ties: Self extinguishing, UV stabilized, one piece, self locking.
 1. Minimum Width: 3/16 inch (5 mm).
 2. Tensile Strength at 73 deg F ((23 deg C)), According to ASTM D 638: 7000 psi (48.2 MPa).
 3. UL 94 Flame Rating: 94V-0.
 4. Temperature Range: Minus 50 to plus 284 deg F (Minus 46 to plus 140 deg C).
 5. Color: Black.

2.7 MISCELLANEOUS IDENTIFICATION PRODUCTS

- A. Paint: Comply with requirements in painting Sections for paint materials and application requirements. Select paint system applicable for surface material and location (exterior or interior).
- B. Fasteners for Labels and Signs: Self-tapping, stainless-steel screws or stainless-steel machine screws with nuts and flat and lock washers.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Verify identity of each item before installing identification products.
- B. Location: Install identification materials and devices at locations for most convenient viewing without interference with operation and maintenance of equipment.
- C. Apply identification devices to surfaces that require finish after completing finish work.
- D. Self-Adhesive Identification Products: Clean surfaces before application, using materials and methods recommended by manufacturer of identification device.
- E. Attach signs and plastic labels that are not self-adhesive type with mechanical fasteners appropriate to the location and substrate.
- F. System Identification Color-Coding Bands for Raceways and Cables: Each color-coding band shall completely encircle cable or conduit. Place adjacent bands of two-color markings in contact, side by side. Locate bands at changes in direction, at penetrations of walls and floors, at 50-foot (15-m) maximum intervals in straight runs, and at 25-foot (7.6-m) maximum intervals in congested areas.
- G. Cable Ties: For attaching tags. Use general-purpose type, except as listed below:
 - 1. Outdoors: UV-stabilized nylon.
 - 2. In Spaces Handling Environmental Air: Plenum rated.
- H. Painted Identification: Comply with requirements in painting Sections for surface preparation and paint application.

3.2 IDENTIFICATION SCHEDULE

- A. Accessible Raceways and Metal-Clad Cables, 600 V or Less, for Service, Feeder, and Branch Circuits More Than 50A, and 120 V to ground: Identify with snap around label applied in bands. Install labels at 10-foot (3-m) maximum intervals.
- B. Accessible Raceways and Cables within Buildings: Identify the covers of each junction and pull box of the following systems with self-adhesive vinyl labels with the wiring system legend and system voltage. System legends shall match the existing identification scheme, or otherwise be as follows:

1. Power - Orange.
 2. Fire Alarm System – Red.
 3. Security System – Blue and Yellow.\
 4. Mechanical and Electrical Supervisory System – Green and Blue.
 5. Telecommunications Systems – Green and Yellow.
 6. Control Wiring – Green and Red.
- C. Power-Circuit Conductor Identification, 600 V or Less: For conductors in vaults, pull and junction boxes, manholes, and handholes, use color-coding conductor tape to identify the phase.
1. Color-Coding for Phase and Voltage Level Identification, 600 V or Less: Use colors listed below for ungrounded service, feeder, and branch-circuit conductors.
 - a. Color shall be factory applied or field applied for sizes larger than No. 8 AWG, if authorities having jurisdiction permit.
 - b. Colors for 208/120-V Circuits:
 - 1) Phase A: Black.
 - 2) Phase B: Red.
 - 3) Phase C: Blue.
 - 4) Neutral: White.
 - c. Colors for 480/277-V Circuits:
 - 1) Phase A: Brown.
 - 2) Phase B: Orange.
 - 3) Phase C: Yellow.
 - 4) Neutral: Grey.
 - d. All control wiring shall be color coded when using wires of different color from the type used to designate phase wires.
 - e. Field-Applied, Color-Coding Conductor Tape: Apply in half-lapped turns for a minimum distance of 6 inches (150 mm) from terminal points and in boxes where splices or taps are made. Apply last two turns of tape with no tension to prevent possible unwinding. Locate bands to avoid obscuring factory cable markings.
- D. Power-Circuit Conductor Identification, More than 600 V: For conductors in vaults, pull and junction boxes, manholes, and handholes, use nonmetallic plastic tag holder with adhesive-backed phase tags, and a separate tag with the circuit designation.
- E. Install instructional sign including the color-code for grounded and ungrounded conductors using adhesive-film-type labels.
- F. Control-Circuit Conductor Identification: For conductors and cables in pull and junction boxes, use self-adhesive vinyl labels with the conductor or cable designation, origin, and destination.

- G. Control-Circuit Conductor Termination Identification: For identification at terminations provide self-adhesive vinyl labels with the conductor designation.
- H. Conductors to Be Extended in the Future: Attach marker tape to conductors and list source.
- I. Auxiliary Electrical Systems Conductor Identification: Identify field-installed alarm, control, and signal connections.
 - 1. Identify conductors, cables, and terminals in enclosures and at junctions, terminals, and pull points. Identify by system and circuit designation.
 - 2. Use system of marker tape designations that is uniform and consistent with system used by manufacturer for factory-installed connections.
 - 3. Coordinate identification with Project Drawings, manufacturer's wiring diagrams, and the Operation and Maintenance Manual.
- J. Warning Labels for Indoor Cabinets, Boxes, and Enclosures for Power and Lighting: Baked-enamel warning signs or Metal-backed, butyrate warning signs.
 - 1. Comply with 29 CFR 1910.145.
 - 2. Identify system voltage with black letters on an orange background.
 - 3. Apply to exterior of door, cover, or other access.
 - 4. For equipment with multiple power or control sources, apply to door or cover of equipment including, but not limited to, the following:
 - a. Controls with external control power connections.
- K. Operating Instruction Signs: Install instruction signs to facilitate proper operation and maintenance of electrical systems and items to which they connect. Install instruction signs with approved legend where instructions are needed for system or equipment operation.
- L. Equipment Identification Labels: On each unit of equipment, install unique designation label that is consistent with wiring diagrams, schedules, and the Operation and Maintenance Manual. Apply labels to disconnect switches and protection equipment, central or master units, control panels, control stations, terminal cabinets, and racks of each system. Systems include power, lighting, control, communication, signal, monitoring, and alarm systems unless equipment is provided with its own identification.
 - 1. Labeling Instructions:
 - a. Indoor Equipment: Engraved, laminated acrylic or melamine label. Unless otherwise indicated, provide a single line of text with 1/2-inch- (13-mm-) high letters on 1-1/2-inch- (38-mm-) high label; where two lines of text are required, use labels 2 inches (50 mm) high.
 - b. Outdoor Equipment: Engraved, laminated acrylic or melamine label.
 - c. Elevated Components: Increase sizes of labels and letters to those appropriate for viewing from the floor.

- d. Unless provided with self-adhesive means of attachment, fasten labels with appropriate mechanical fasteners that do not change the NEMA or NRTL rating of the enclosure.
- 2. Equipment to Be Labeled:
 - a. Enclosures and electrical cabinets.
 - b. Access doors and panels for concealed electrical items.
 - c. Enclosed switches.
 - d. Enclosed circuit breakers.
 - e. Push-button stations.
 - f. Contactors.
 - g. Remote-controlled switches and control devices.
 - h. Monitoring and control equipment.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

DIVISION 26 SECTION 26 08 00
COMMISSIONING OF ELECTRICAL SYSTEMS
TABLE OF CONTENTS

PART 1 - GENERAL	1
1.1. RELATED DOCUMENTS.....	1
1.2. SUMMARY.....	1
1.3. DEFINITIONS.....	1
1.4. CONTRACTOR'S RESPONSIBILITIES.....	1
1.5. COMMISSIONING DOCUMENTATION	2
1.6. SUBMITTALS	2
PART 2 – PRODUCTS (NOT USED)	2
PART 3 - EXECUTION	3
3.1. TESTING PREPARATION.....	3
3.2. TESTING.....	3
END OF SECTION	4

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 08 00 – COMMISSIONING OF ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1. RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2. SUMMARY

- A. This Section includes requirements for commissioning the electrical system and its subsystems and equipment. This Section supplements the general requirements specified in Division 01 Section "General Commissioning Requirements."
- B. Related Sections include the following:
 - 1. Division 01 Section "General Commissioning Requirements" for general requirements for commissioning processes that apply to this Section.
- C. The following systems and/or equipment shall be commissioned:
 - 1. Lighting Control System(s)

1.3. DEFINITIONS

- A. Architect: Includes Architect identified in the Contract for Construction between Owner and Contractor, plus consultant/design professionals responsible for design of electrical systems, electrical, communications, and other related systems.
- B. CxA: Commissioning Authority.
- C. Systems, Subsystems, and Equipment: Where these terms are used together or separately, they shall mean "as-built" systems, subsystems, and equipment.

1.4. CONTRACTOR'S RESPONSIBILITIES

- A. The following responsibilities are in addition to those specified in Division 01 Section "General Commissioning Requirements."
- B. Electrical Contractor:
 - 1. Provide certified and calibrated measuring instruments and logging devices to record test data, and data acquisition equipment to record data for the complete range of testing for the required test period.

1.5. COMMISSIONING DOCUMENTATION

- A. The following are in addition to documentation specified in Division 01 Section "General Commissioning Requirements."
- B. Test Checklists: CxA with assistance of Contractor shall develop test checklists for electrical systems, subsystems, and equipment, including interfaces and interlocks with other systems. CxA shall prepare separate checklists for each mode of operation and provide space to indicate whether the mode under test responded as required. In addition to the requirements specified in Division 01 Section "General Commissioning Requirements," checklists shall include, but not be limited to, the following:
 - 1. Calibration of sensors and sensor function.
 - 2. Testing conditions under which test was conducted, including (as applicable) ambient conditions, set points, override conditions, and status and operating conditions that impact the results of test.
 - 3. Control sequences for electrical and emergency systems.
 - 4. Sequence of response(s) to control signals at specified conditions.
 - 5. Expected performance of systems, subsystems, and equipment at each step of test.
 - 6. Interaction of auxiliary equipment.
 - 7. Issues log.

1.6. SUBMITTALS

- A. The following submittals are in addition to those specified in Division 01 Section "General Commissioning Requirements."
- B. Testing Procedures: CxA shall submit detailed testing plan, procedures, and checklists for each series of tests. Submittals shall include samples of data reporting sheets that will be part of the reports.
- C. Certificate of Readiness: CxA shall compile certificates of readiness from Contractor certifying that systems, subsystems, equipment, and associated controls are ready for testing.
- D. Certificate of Completion of Installation, Prestart, and Startup: CxA shall certify that installation, prestart, and startup activities have been completed.
- E. Test and Inspection Reports: CxA shall compile and submit test and inspection reports and certificates, and shall include them in systems manual and commissioning report.
- F. Corrective Action Documents: CxA shall submit corrective action documents.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1. TESTING PREPARATION

A. Prerequisites for Testing:

1. Certify that electrical systems, subsystems, and equipment have been completed, calibrated, and started; are operating according to the Contract Documents; and that Certificates of Readiness are signed and submitted.
2. Certify that electrical instrumentation and control systems have been completed and calibrated; are operating according to the Contract Documents; and that pretest set points have been recorded.
3. Test systems and intersystem performance after approval of test checklists for systems, subsystems, and equipment.
4. Set systems, subsystems, and equipment into operating mode to be tested (e.g., normal shut down, normal auto position, normal manual position, unoccupied cycle, emergency power, and alarm conditions).
5. Verify each operating cycle after it has been running for a specified period and is operating in a steady-state condition.
6. Inspect and verify the position of each device and interlock identified on checklists. Sign off each item as acceptable, or failed. Repeat this test for each operating cycle that applies to system being tested.
7. Check safety cutouts, alarms, and interlocks with life-safety systems during each mode of operation.
8. Annotate checklist or data sheet when a deficiency is observed.
9. Verify proper responses of monitoring and control system controllers and sensors to include the following:
 - a. For each controller or sensor, record the indicated monitoring and control system reading and the test instrument reading. If initial test indicates that the test reading is outside of the control range of the installed device, check calibration of the installed device and adjust as required. Retest malfunctioning devices and record results on checklist or data sheet.
 - b. Report deficiencies and prepare an issues log entry.

3.2. TESTING

- A. Test systems and intersystem performance after test checklists for systems, subsystems, and equipment have been approved.
- B. Perform tests using design conditions whenever possible.
 1. Simulate conditions by imposing an artificial load when it is not practical to test under design conditions and when written approval for simulated conditions is received from CxA. Before simulating conditions, calibrate testing instruments. Set and document simulated conditions and methods of simulation. After tests, return settings to normal operating conditions.

- C. Scope of Electrical Contractor Testing:
1. Test all operating modes, interlocks, control responses, responses to abnormal or emergency conditions, and verify proper response of building automation system controllers and sensors.
- D. Detailed Testing Procedures: CxA, with Electrical Contractor shall prepare detailed testing plans, procedures, and checklists for electrical systems, subsystems, and equipment.
- E. Electrical System Testing: Electrical Contractor shall prepare a testing plan to verify performance of systems identified in Part 1 of this section. Plan shall include the following:
1. Sequence of testing and testing procedures for each item of equipment and section of wiring to be tested, identified by identification marker. Markers shall be keyed to Drawings for each wiring sector showing the physical location of each item of equipment and electrical wiring test section. Drawings shall be formatted to allow each item of equipment and section of wiring to be physically located and identified when referred to in the system testing plan.
 2. Tracking checklist for managing and ensuring that all wiring systems have been tested.
- F. Deferred Testing:
1. If tests cannot be completed because of a deficiency outside the scope of the electrical system, the deficiency shall be documented and reported to Owner. Deficiencies shall be resolved and corrected by appropriate parties and test rescheduled.
 2. If the testing plan indicates specific seasonal testing, appropriate initial performance tests shall be completed and documented and additional tests scheduled.
- G. Testing Reports:
1. Reports shall include measured data, data sheets, and a comprehensive summary describing the operation of systems at the time of testing.
 2. Include data sheets for each electrical systems to verify proper operation of the electrical systems, the system it serves, the service it provides, and its location. Provide space for testing personnel to sign off on each data sheet.
 3. Prepare a preliminary test report. Deficiencies will be evaluated by Architect to determine corrective action. Deficiencies shall be corrected and test repeated.

END OF SECTION

DIVISION 26 SECTION 26 09 23
LIGHTING CONTROL DEVICES
TABLE OF CONTENTS

PART 1 - GENERAL	1
1.1 RELATED DOCUMENTS.....	1
1.2 SUMMARY	1
1.3 DEFINITIONS.....	1
1.4 SUBMITTALS	1
1.5 QUALITY ASSURANCE	2
1.6 SUBSTITUTIONS.....	2
1.7 COORDINATION	2
PART 2 - PRODUCTS	3
2.1 GENERAL.....	3
2.2 TIME SWITCHES.....	3
2.3 DAYLIGHT-HARVESTING DIMMING CONTROLS.....	3
2.4 INDOOR OCCUPANCY/VACANCY SENSORS	4
2.5 SWITCHBOX-MOUNTED LOW VOLTAGE OCCUPANCY/VACANCY SENSORS.....	6
2.6 LOW VOLTAGE SWITCHES.....	7
2.7 DIGITAL ROOM CONTROLLERS.....	8
2.8 CONFIGURATION TOOL	10
2.9 CONDUCTORS AND CABLES.....	11
PART 3 - EXECUTION	11
3.1 SENSOR INSTALLATION	11
3.2 CONTACTOR INSTALLATION	11
3.3 WIRING INSTALLATION.....	11
3.4 IDENTIFICATION.....	11
3.5 FIELD QUALITY CONTROL.....	12
3.6 ADJUSTING.....	12
3.7 DEMONSTRATION	12
END OF SECTION.....	12

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 09 23 - LIGHTING CONTROL DEVICES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Provide lighting controls that can operate as standalone local room network(s) and have the capability to expand to a central building wide network. The building wide network shall provide control, monitoring, adjustment and scheduling functionality. The system shall be PC based with software and historical data storage. The system shall support third party integration with the building management system through BACnet/IP.
- B. This Section includes the following lighting control devices:
 - 1. Time switches.
 - 2. Photoelectric switches.
 - 3. Daylight-harvesting controls.
 - 4. Indoor occupancy/vacancy sensors.
 - 5. Low voltage switches.
 - 6. Contactors.
- C. Related Sections include the following:
 - 1. Division 26 Section 262726, *Wiring Devices* for snap switches.
 - 2. Section 260943 "Network Lighting Controls".

1.3 DEFINITIONS

- A. LED: Light-emitting diode.
- B. PIR: Passive infrared.

1.4 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Coverage Plans: Provide full scale plans showing locations and coverage patterns for all occupancy/vacancy sensors.

- C. Location Plans: Provide full scale plans showing locations and coverage patterns for all devices.
- D. Shop Drawings: Show installation details for occupancy and light-level sensors.
 - 1. Interconnection diagrams showing field-installed wiring.
 - 2. Include diagrams for power, signal, and control wiring.
 - 3. Include riser diagrams showing all devices and wiring.
- E. Field quality-control test reports.
- F. Operation and Maintenance Data: For each type of product to include in emergency, operation, and maintenance manuals.

1.5 QUALITY ASSURANCE

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.

1.6 SUBSTITUTIONS

- A. The lighting control specification and lighting control details represent the basis of design. Acceptable manufacturers must meet the criteria listed in the system requirements as well as intent demonstrated through control details. Compliant systems are required to achieve the design intent and are not required to have all the parts and pieces listed.
- B. Manufacturers not listed in the list of Acceptable Manufacturers must submit for approval within 10 days prior to bid.
- C. Acceptable Manufacturers
 - 1. Basis of Design
 - a. Acuity Brand Controls; nLight.
 - 2. Alternative Manufacturers
 - a. Wattstopper; Digital Lighting Management
 - b. Hubbell NX
 - c. Eaton; Room Controller System

1.7 COORDINATION

- A. Coordinate layout and installation of ceiling-mounted devices with other construction that penetrates ceilings or is supported by them, including light fixtures, HVAC equipment, smoke detectors, fire-suppression system, and partition assemblies.

PART 2 - PRODUCTS

2.1 GENERAL

- A. Provide a wired digital networked lighting control system as indicated on the drawings. The system shall include, but not be limited to, occupancy/vacancy sensor(s), photo sensor(s), digital room controller(s), digital switches, and all interconnecting wiring required for a complete operational system. The Basis-of-Design System is the Acuity Brand Controls; nLight.

2.2 TIME SWITCHES

- A. Basis-of-Design product: Subject to compliance with requirements, provide Acuity or a comparable product by one of the following:
1. Wattstopper.
 2. Leviton Manufacturing Company, Inc.
 3. Pass & Seymour.
 4. Cooper Industries, Inc.
 5. Intermatic, Inc.
- B. Digital Time Switches: Wall switch style, electroluminescent back-lit LCD display shows timer countdown, time-out adjustments from 5 minutes to 12 hours, compatible with electronic ballasts; UL listed, five-year warranty.

2.3 DAYLIGHT-HARVESTING DIMMING CONTROLS

- A. Basis-of-Design Product: Subject to compliance with requirements, provide nLight nCm ADCX RJB or comparable product by one of the following:
1. Wattstopper DLM
 2. Hubbell NX
 3. Eaton
- B. System Description: Sensing daylight and electrical lighting levels, the system adjusts the indoor electrical lighting levels. As daylight increases, the lights are dimmed.
1. Lighting control set point is based on two lighting conditions:
 - a. When no daylight is present (target level).
 - b. When significant daylight is present.
 2. System programming is done with a hand held digital configuration tool or a PC with appropriate software.

- a. Initial setup tool: a hand held digital configuration tool. Sensor adjustments may also be made using configuration pushbuttons on the sensors.
 - b. USB interface and PC software: capability to program, read, store, modify and document device and system configuration.
- C. Ceiling-Mounted Dimming Controls: Solid-state, digital light-level sensor unit, with separate controller unit, to detect changes in lighting levels that are perceived by the eye in order to automatically dim a lighting zone.
- D. Electrical Components, Devices, and Accessories:
 - 1. Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
 - 2. Operating Ambient Conditions: Dry interior conditions, 32 to 104 deg F (0 to 40 deg C).
 - 3. Sensor Output: Digitally communicates with room controller to dim loads based on lighting conditions. Sensor is powered from the room controller.
- E. Light-Level Sensor Set-Point Adjustment Range: 10 to 200 fc (108 to 2152 lux)
- F. Provide unit suitable for Low Temp/High Humidity environments in SHOPS and other unconditioned spaces.
- G. Provide single or dual zone control capability, as applicable.

2.4 INDOOR OCCUPANCY/VACANCY SENSORS

- A. Basis-of-Design Product: Subject to compliance with requirements, provide nLight nCM PDT RJB, nWV PDT, or comparable product by one of the following:
 - 1. Wattstopper DLM
 - 2. Hubbell NX
 - 3. Eaton
- B. General Requirements for Sensors: Wall- or ceiling-mounted, solid-state digital indoor occupancy/vacancy sensors with a separate controller unit.
 - 1. Systems programming is done with a hand held digital configuration tool or a PC with appropriate software.
 - a. Initial setup tool: a hand held digital configuration tool. Sensor adjustments may also be made using configuration pushbuttons on the sensors.
 - b. USB interface and PC software: capability to program, read, store, modify and document device and system configuration.

2. Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
 3. Operation:
 - a. Occupancy Sensor: Automatic-on when coverage area is occupied, and automatic-off when unoccupied.
 - b. Vacancy Sensor: Manual-on when coverage area is occupied, and automatic-off when unoccupied.
 - c. Time Delay for turning lights off adjustable over a minimum range of 1 to 30 minutes in 1-minute increments. Default setting: 20 minutes.
 4. Sensor Output: Digitally communicates with room controller to turn loads on and off based on occupancy. Sensor is powered from the room controller.
 5. Mounting:
 - a. Sensor: Suitable for mounting, ceiling mounting and corner mounting.
 - b. Time-Delay and Sensitivity Adjustments: Recessed and concealed behind removable cover.
 6. Indicator: Digital display, to show when motion is detected during testing and normal operation of sensor.
- C. PIR Type: Ceiling mounted; detect occupants in coverage area by their heat and movement.
1. Detector Sensitivity: Detect occurrences of 6-inch- (150-mm-) minimum movement of any portion of a human body that presents a target of not less than 36 sq. in. (232 sq. cm).
 2. Detection Coverage (Standard Room): Detect occupancy anywhere in a circular area of 1000 sq. ft. (93 sq. m) when mounted on a 96-inch- (2440-mm-) high ceiling.
 3. Detection Coverage Large Room): Detect occupancy anywhere in a circular area of 2000 sq.ft. (186 sq.m) when mounted on a 96-inch-(2440-mm) high ceiling.
- D. Ultrasonic/Microphonic Type: Ceiling mounted; detect occupants in coverage area through pattern changes of reflected ultrasonic energy.
1. Detector Sensitivity: Detect a person of average size and weight moving not less than 12 inches (305 mm) in either a horizontal or a vertical manner at an approximate speed of 12 inches/s (305 mm/s).
 2. Detection Coverage (Standard Room): Detect occupancy anywhere within a circular area of 1000 sq. ft. (93 sq. m) when mounted on a 96-inch- (2440-mm-) high ceiling.
- E. Dual-Technology Type: Ceiling mounted; detect occupants in coverage area using PIR and ultrasonic detection methods. The particular technology or combination of

technologies that control on-off functions is selectable in the field by operating controls on unit.

1. Sensitivity Adjustment: Separate for each sensing technology.
2. Detector Sensitivity: Detect occurrences of 6-inch- (150-mm-) minimum movement of any portion of a human body that presents a target of not less than 36 sq. in. (232 sq. cm), and detect a person of average size and weight moving not less than 12 inches (305 mm) in either a horizontal or a vertical manner at an approximate speed of 12 inches/s (305 mm/s).
3. Detection Coverage (Corridor): Detect occupancy anywhere within 48 feet (18.0 m) when mounted on a 10-foot- (3-m-) high ceiling in a corridor not wider than 12 feet (3.7 m).
4. Detection Coverage (Standard Room): Detect occupancy anywhere within a circular area of 1000 sq. ft. (93 sq. m) when mounted on a 96-inch- (2440-mm-) high ceiling.
5. Detection Coverage (corner mount): Detect occupancy anywhere within a 30 foot (9145 mm) radius when corner mounted at ceiling or on wall at 120-inches (3058 mm) above the finished floor. Provide stem mount as required to maintain manufacturer's recommended mounting height.
6. Detection Coverage (high bay): Detect occupancy anywhere within a 20 foot (6096 mm) radius when mounted at ceiling at 180-inches (4572 mm) above the finished floor. Provide stem mount as required to maintain manufacturer's recommended mounting height.

2.5 SWITCHBOX-MOUNTED LOW VOLTAGE OCCUPANCY/VACANCY SENSORS

- A. Subject to compliance with requirements, provide Sensor Switch nWSX-PDT-LV or nWSX-PDT-LV-DX (On/Off or Dimming to match function indicated on the drawings) or comparable product by one of the following:
 1. Wattstopper DLM
 2. Hubbell NX
 3. Eaton
- B. General Description: Wall-mounting, solid-state units suitable for mounting in a single-gang switchbox.
 1. Operation:
 - a. Occupancy Sensor Mode: Automatic-on when coverage area is occupied, and automatic-off when unoccupied.
 - b. Vacancy Sensor Mode: Manual-on when coverage area is occupied, and automatic-off when unoccupied.

- c. Time Delay for turning lights off, adjustable over a minimum range of 1 to 30 minutes in 1-minute increments. Default setting: 15 minutes.
 2. Sensor Output: Contacts rated to operate the connected relay, complying with UL 773A.
 3. Mounting:
 - a. Sensor: Suitable for mounting in a standard outlet box.
 - b. Time-Delay and Sensitivity Adjustments: Recessed and concealed.
 4. Indicator: LED, to show when motion is being detected during testing and normal operation of the sensor.
 5. Bypass Switch: Override the on function in case of sensor failure.
 - C. Dual-Technology Type: Wall mounting; detect occupancy by using a combination of PIR and ultrasonic or microphonic detection methods in area of coverage. Particular technology or combination of technologies that controls on-off functions shall be selectable in the field by operating controls on unit.
 1. Sensitivity Adjustment: separate for each sensing technology.
 2. Detector Sensitivity: Detect occurrences of 6-inch (150 mm) minimum movement of any portion of a human body that presents a target of not less than 36 sq. in. (232 sq. cm), and detect a person of average size and weight moving not less than 12-inches (305 mm) in either a horizontal or a vertical manner at an approximate speed of 12-inches/s (305 mm/s).
 3. Detection Coverage: (Standard Room): Detect occupancy anywhere within a 15 foot radius (4572 mm) when wall mounted at 48-inches (1220 mm) above finished floor.
- 2.6 LOW VOLTAGE SWITCHES
- A. Basis-of-Design Product: Subject to compliance with requirements, provide nLight PODM, or comparable product by one of the following:
 1. Wattstopper DLM
 2. Hubbell NX
 3. Eaton
 - B. General Description: Low-voltage, momentary pushbutton switches in 1, 2, 3, 4, 5, and 8 button configuration with the following features.
 1. Two-way infrared (IR) transceiver for use with personal, and configuration remote controls.

2. Removable buttons for field replacement with engraved buttons and/or alternate color buttons. Button replacement may be completed without removing the switch from the wall.
 3. Configuration LED on each switch that blinks to indicate data transmission.
 4. Load/Scene Status LED on each switch button with the following characteristics:
 - a. Bi-level LED
 - b. Dim locator level indicates power to switch
 - c. Bright status level indicates that load or scene is active
 5. Dimming switches shall include seven bi-level LEDs to indicate load levels using 14 steps.
- C. Two RJ-45 ports for connection to local network.
- D. Multiple digital wall switches may be installed in a room by simply connecting them to the free topology local network. No additional configuration will be required to achieve multi-way switching.
- E. The following switch attributes may be changed or selected using a wireless configuration tool:
1. Load and Scene button function may be reconfigured for individual buttons (from Load to Scene, and vice versa).
 2. Individual button function may be configured to Toggle, On only, or Off only.
 3. Individual scenes may be locked to prevent unauthorized change.
 4. Fade Up and Fade Down times for individual scenes may be adjusted from 0 seconds to 18 hours.
 5. Ramp rate may be adjusted for each dimmer switch.
 6. Switch buttons may be bound to any load on a room controller and are not load type dependent; each button may be bound to multiple loads.

2.7 DIGITAL ROOM CONTROLLERS

- A. Basis-of-Design Product: Subject to compliance with requirements, provide nLight nPP16 or comparable product by one of the following:
1. Wattstopper DLM
 2. Hubbell NX
 3. Eaton
- B. Description: Self configuring, digitally addressable one, two or three relay controllers with 0-10 volt control for drivers and single relay application-specific plug load

controllers (if applicable) Room controllers shall be provided to match room lighting load and control requirements and have the following features:

1. Automatic room configuration to the most energy-efficient sequence of operation based upon the devices in the room.
2. Simple replacement – Using the default automatic configuration capabilities, a room controller may be replaced with an off-the-shelf unit without requiring any configuration or setup.
3. Device Status LEDs to indicate:
 - a. Data transmission.
 - b. Device has power.
 - c. Status for each load.
 - d. Configuration status.
4. Quick installation features including:
 - a. Standard junction box mounting.
 - b. Quick low voltage connections using standard RJ-45 patch
5. Plenum rated.
6. Manual override and LED indication for each load.
7. Dual voltage (120/277 VAC, 60 Hz)
8. Zero cross circuitry for each load.
9. Controllers shall be equipped for fail-safe operation and shall be evaluated for this purpose.
10. Controllers shall be activated by activation of the building fire alarm system.
11. Controllers shall be equipped for activation by the building security system.

C. On/Off/Dimming enhanced room controllers shall include:

1. Real time current monitoring.
2. One, two or three relay configuration.
3. Efficient 250 mA switching power supply.
4. Four RJ-45 local network ports.
5. One 0-10 volt analog output per relay for control of compatible LED drivers.
6. Optional Network Bridge for BACnet MS/TP communications (LMRC-3xx).

7. The following dimming attributes may be changed or selected using a wireless configuration tool:
 - a. Establish preset level for each load from 0-100%.
 - b. Set high and low trim for each load.
 - c. Set lamp burn in time for each load up to 100 hours.
8. Discrete model listed for connection to receptacles, for occupancy-based control of plug loads within the space.
 - a. One relay configuration only.
 - b. Automatic-ON/OFF configuration.

2.8 CONFIGURATION TOOL

- A. Basis-of-Design Product: Subject to compliance with requirements, provide nLight, or comparable products by one of the following:
 1. Wattstopper DLM
 2. Hubbell NX
 3. Eaton
- B. A configuration tool facilitates customization of local networks, and is used to set up open loop daylighting sensors. A wireless configuration tool features infrared communications, while PC software connects to each local network via a USB interface. Features and functionality of the wireless configuration tool shall include:
 1. Two-way infrared (IR) communication with IR-enabled devices within a range of approximately 30 feet.
 2. High visibility organic LED (OLED) display, pushbutton user interface and menu-driven operation.
 3. Read, modify and send parameters for occupancy sensors, daylighting sensors, room controllers and buttons on digital wall switches.
 4. Save up to nine occupancy sensor setting profiles, and apply profiles to selected sensors.
 5. Temporarily adjust light level of any load(s) on the local network, and incorporate those levels in scene setting.
 6. Adjust or fine-tune daylighting settings established during auto-commissioning, and input light level data to complete commissioning of open loop daylighting controls.

2.9 CONDUCTORS AND CABLES

- A. Power Wiring to Supply Side of Remote-Control Power Sources: Not smaller than No. 12 AWG. Comply with requirements in Division 26 Section, Low-Voltage Electrical Power Conductors and Cables.
- B. Classes 2 and 3 Control Cable: Multiconductor cable with stranded-copper conductors not smaller than No. 24 AWG. Comply with requirements in Division 26 Section 260519, *Low-Voltage Electrical Power Conductors and Cables*.
- C. Class 1 Control Cable: Multiconductor cable with stranded-copper conductors not smaller than No. 18 AWG. Comply with requirements in Division 26 Section 260519, *Low-Voltage Electrical Power Conductors and Cables*."

PART 3 - EXECUTION

3.1 SENSOR INSTALLATION

- A. Coordinate layout and installation of ceiling-mounted devices with other construction that penetrates ceilings or is supported by them, including light fixtures, HVAC equipment, smoke detectors, fire-suppression systems, and partition assemblies.
- B. Install and aim sensors in locations to achieve not less than 90 percent coverage of areas indicated. Do not exceed coverage limits specified in manufacturer's written instructions.

3.2 CONTACTOR INSTALLATION

- A. Mount electrically held lighting contactors with elastomeric isolator pads, to eliminate structure-borne vibration, unless contactors are installed in an enclosure with factory-installed vibration isolators.

3.3 WIRING INSTALLATION

- A. Wiring Method: Comply with Division 26 Section 260519, *Low-Voltage Electrical Power Conductors and Cables*. Minimum conduit size shall be 1/2 inch (13 mm).
- B. Wiring within Enclosures: Comply with NECA 1. Separate power-limited and nonpower-limited conductors according to conductor manufacturer's written instructions.
- C. Size conductors according to lighting control device manufacturer's written instructions, unless otherwise indicated.
- D. Splices, Taps, and Terminations: Make connections only on numbered terminal strips in junction, pull, and outlet boxes; terminal cabinets; and equipment enclosures.

3.4 IDENTIFICATION

- A. Identify components and power and control wiring according to Division 26 Section 260553, *Electrical Identification*.
 - 1. Identify controlled circuits in lighting contactors.

2. Identify circuits or luminaries controlled by photoelectric and occupancy sensors at each sensor.

B. Label time switches and contactors with a unique designation.

3.5 FIELD QUALITY CONTROL

A. Perform the following field tests and inspections and prepare test reports:

1. After installing time switches and sensors, and after electrical circuitry has been energized, adjust and test for compliance with requirements.
2. Operational Test: Verify operation of each lighting control device, and adjust time delays.

B. Lighting control devices that fail tests and inspections are defective work.

C. Prepare test and inspection reports.

3.6 ADJUSTING

A. Occupancy Adjustments: When requested within 12 months of date of Substantial Completion, provide on-site assistance in adjusting sensors to suit occupied conditions. Provide up to two visits to Project during other-than-normal occupancy hours for this purpose.

1. For occupancy and motion sensors, verify operation at outer limits of detector range. Set time delay to suit Owner's operations.
2. For daylighting controls, adjust set points and deadband controls to suit Owner's operations.

3.7 DEMONSTRATION

A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain lighting control devices. Refer to Division 01 Section 017900, *Demonstration and Training*.

END OF SECTION

DIVISION 26 SECTION 26 27 26
WIRING DEVICES
TABLE OF CONTENTS

PART 1 - GENERAL	1
1.1 RELATED DOCUMENTS	1
1.2 SUMMARY	1
1.3 DEFINITIONS	1
1.4 ADMINISTRATIVE REQUIREMENTS	1
1.5 ACTION SUBMITTALS	1
1.6 INFORMATIONAL SUBMITTALS	2
1.7 CLOSEOUT SUBMITTALS	2
1.8 MAINTENANCE MATERIAL SUBMITTALS	2
PART 2 - PRODUCTS	2
2.1 MANUFACTURERS	2
2.2 STRAIGHT-BLADE RECEPTACLES	2
2.3 TOGGLE SWITCHES	3
2.4 WALL PLATES	4
2.5 FINISHES	4
PART 3 - EXECUTION	4
3.1 INSTALLATION	4
3.2 IDENTIFICATION	6
3.3 FIELD QUALITY CONTROL	6
3.4 CLEANING	6
END OF SECTION	6

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 27 26 - WIRING DEVICES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

- 1. Receptacles and associated device plates.
- 2. Wall-switch.

- B. Related sections include the following:

- 1. Section 260923 – Lighting Control Devices

1.3 DEFINITIONS

- A. EMI: Electromagnetic interference.
- B. GFCI: Ground-fault circuit interrupter.
- C. Pigtail: Short lead used to connect a device to a branch-circuit conductor.
- D. RFI: Radio-frequency interference.
- E. SPD: Surge suppression device.
- F. UTP: Unshielded twisted pair.

1.4 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:

- 1. Receptacles for Owner-Furnished Equipment: Match plug configurations.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: List of legends and description of materials and process used for premarking wall plates.

1.6 INFORMATIONAL SUBMITTALS

- A. Field quality-control reports.

1.7 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For wiring devices to include in all manufacturers' packing-label warnings and instruction manuals that include labeling conditions.

1.8 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers' Names: Shortened versions (shown in parentheses) of the following manufacturers' names are used in other Part 2 articles:
1. Hubbell Incorporated; Wiring Device-Kellems (Hubbell).
 2. Leviton Mfg. Company Inc. (Leviton).
 3. Pass & Seymour/Legrand (Pass & Seymour).
- B. Source Limitations: Obtain each type of wiring device and associated wall plate from single source from single manufacturer.

2.2 STRAIGHT-BLADE RECEPTACLES

- A. General Requirements
1. Straight blade receptacles shall have the following basic features:
 - a. One-piece brass mounting strap with integral ground for low resistance of fault currents.
 - b. Auto-ground clip to assure positive ground.
 - c. Impact-resistant nylon/thermoplastic face and base housing.
 - d. #10 large head brass terminal and ground screws.
- B. Duplex Convenience Receptacles
1. Duplex convenience receptacles shall be extra heavy-duty, specification grade, 20A, 125V.
 2. Comply with NEMA WD-1, NEMA WD-6 configuration 5-20R, UL 498 and Federal Specification W-C-596.

3. Hubbell HBL5362, or approved equal by acceptable manufacturer.

C. Single Convenience Receptacles

1. Single convenience receptacles shall be extra heavy-duty, specification grade, 20A, 125V.
2. Comply with NEMA WD-1, NEMA WD-6 configuration 5-20R, UL 498 and Federal Specification W-C-596.
3. Hubbell HBL5361, or approved equal by acceptable manufacturer.

D. Special Purpose Receptacles

1. Special purpose receptacles shall have ratings and NEMA configurations as indicated on the Drawings, or as required to match equipment plug configuration, and shall be black with device plate to match outlet type.

E. Controlled/Switched Receptacle

1. Controlled/Switched Receptacles shall be 125 V, 20 A and comply with NEMA WD 1, NEMA WD 6 Configuration 5-20R, UL 498 Supplement sd, and FS W-C-596.
2. Hubbell; BR20* or approved equal by acceptable manufacturer.
3. Provide with controlled receptacle marking with custom engraving/pad printing on device plate device with the words "Controlled Receptacle."

2.3 TOGGLE SWITCHES

A. General Requirements

1. Switches shall have the following basic features:
 - a. Heavy-gauge one-piece copper alloy contact arm.
 - b. Fast "make" and positive "break" to minimize arcing.
 - c. Heavy-duty bumper pads for quiet operation.
 - d. High strength thermoplastic polycarbonate toggle.
 - e. Oversized silvery alloy contacts for long life and heat dissipation.
 - f. Nickel-plated steel strap with integral ground.
 - g. Auto-ground clip to assure positive ground.

B. Toggle Switches

1. Toggle switches shall be quiet-type, extra heavy-duty, industrial grade, 120/277V, 20A: Comply with NEMA WD 1, UL 20 and Federal Specification W-S-896.

2. Hubbell HBL1221 (single-pole), HBL1222 (two-pole), HBL1223 (three-way), HBL1224 (four-way), or approved equal by acceptable manufacturer.

C. Key (Locking) Switches

1. Key (locking) switches shall be quiet-type, extra heavy-duty, industrial grade, 120/277V, 20A with the following features:
 - a. Furnished with key for locking switch.
2. Comply with NEMA WD 1, UL 20 and Federal Specification W-S-896.
3. Hubbell HBL1221L (single-pole), HBL1222L (two-pole), HBL1223L (three-way), HBL1224L (four-way), or approved equal by acceptable manufacturer.

2.4 WALL PLATES

- A. Device plates shall be provided for all switches and receptacles. Device plates shall be as manufactured to fit each type of single device, to fit devices which are ganged together, and they shall be same manufacturer as wiring devices with finish as follows:
1. Material for Finished Spaces: 0.04-inch thick, Type 430 satin finished stainless steel.
 2. Material for Unfinished Spaces: Galvanized steel.
 3. Color: Matches wiring device, except as otherwise indicated. To match existing device plates.
 4. Plate-Securing Screws: Metal with heads colored to match plate finish.
- B. Provide jumbo size plates for outlets installed in masonry walls.

2.5 FINISHES

- A. Device Color:
1. Wiring Devices Connected to Normal Power System: White unless otherwise indicated or required by NFPA 70 or device listing.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Comply with NECA 1, including mounting heights listed in that standard, unless otherwise indicated.
- B. Coordination with Other Trades:
1. Protect installed devices and their boxes. Do not place wall finish materials over device boxes and do not cut holes for boxes with routers that are guided by riding against outside of boxes.

2. Keep outlet boxes free of plaster, drywall joint compound, mortar, cement, concrete, dust, paint, and other material that may contaminate the raceway system, conductors, and cables.
3. Install device boxes in brick or block walls so that the cover plate does not cross a joint unless the joint is troweled flush with the face of the wall.
4. Install wiring devices after all wall preparation, including painting, is complete.

C. Conductors:

1. Do not strip insulation from conductors until right before they are spliced or terminated on devices.
2. Strip insulation evenly around the conductor using tools designed for the purpose. Avoid scoring or nicking of solid wire or cutting strands from stranded wire.
3. The length of free conductors at outlets for devices shall meet provisions of NFPA 70, Article 300, without pigtails.
4. Existing Conductors:
 - a. Cut back and pigtail, or replace all damaged conductors.
 - b. Straighten conductors that remain and remove corrosion and foreign matter.
 - c. Pigtailing existing conductors is permitted, provided the outlet box is large enough.

D. Device Installation:

1. Replace devices that have been in temporary use during construction and that were installed before building finishing operations were complete.
2. Keep each wiring device in its package or otherwise protected until it is time to connect conductors.
3. Do not remove surface protection, such as plastic film and smudge covers, until the last possible moment.
4. Connect devices to branch circuits using pigtails that are not less than 6 inches (152 mm) in length.
5. When there is a choice, use side wiring with binding-head screw terminals. Wrap solid conductor tightly clockwise, two-thirds to three-fourths of the way around terminal screw.
6. Use a torque screwdriver when a torque is recommended or required by manufacturer.
7. When conductors larger than No. 12 AWG are installed on 15- or 20-A circuits, splice No. 12 AWG pigtails for device connections.
8. Tighten unused terminal screws on the device.
9. When mounting into metal boxes, remove the fiber or plastic washers used to hold device-mounting screws in yokes, allowing metal-to-metal contact.

E. Receptacle Orientation:

1. Install ground pin of vertically mounted receptacles up, and on horizontally mounted receptacles to the left.

- F. Device Plates: Do not use oversized or extra-deep plates. Repair wall finishes and remount outlet boxes when standard device plates do not fit flush or do not cover rough wall opening.
- G. Arrangement of Devices: Unless otherwise indicated, mount flush, with long dimension vertical and with grounding terminal of receptacles on top. Group adjacent switches under single, multigang wall plates.

3.2 IDENTIFICATION

- A. Comply with Division 26 Section "Identification for Electrical Systems."
- B. Identify each receptacle with panelboard identification and circuit number. Use hot, stamped, or engraved machine printing with black-filled lettering on face of plate, and durable wire markers or tags inside outlet boxes.

3.3 FIELD QUALITY CONTROL

- A. Perform the following tests and inspections:
 - 1. Test Instruments: Use instruments that comply with UL 1436.
 - 2. Test Instrument for Convenience Receptacles: Digital wiring analyzer with digital readout or illuminated digital-display indicators of measurement.
- B. Tests for Convenience Receptacles:
 - 1. Line Voltage: Acceptable range is 105 to 132 V.
 - 2. Percent Voltage Drop under 15-A Load: A value of 6 percent or higher is unacceptable.
 - 3. Ground Impedance: Values of up to 2 ohms are acceptable.
 - 4. Using the test plug, verify that the device and its outlet box are securely mounted.
 - 5. Tests shall be diagnostic, indicating damaged conductors, high resistance at the circuit breaker, poor connections, inadequate fault current path, defective devices, or similar problems. Correct circuit conditions, remove malfunctioning units and replace with new ones, and retest as specified above.
- C. Wiring device will be considered defective if it does not pass tests and inspections.
- D. Prepare test and inspection reports.

3.4 CLEANING

- A. Internally clean devices, device outlet boxes, and enclosures. Replace stained or improperly painted wall plates or devices.

END OF SECTION

DIVISION 26 SECTION 26 51 00
INTERIOR LIGHTING
TABLE OF CONTENTS

PART 1 - GENERAL	1
1.1 RELATED DOCUMENTS.....	1
1.2 SUMMARY	1
1.3 DEFINITIONS.....	1
1.4 SUBMITTALS	1
1.5 QUALITY ASSURANCE.....	2
1.6 COORDINATION.....	3
1.7 WARRANTY	3
1.8 EXTRA MATERIALS	3
PART 2 - PRODUCTS	4
2.1 MANUFACTURERS	4
2.2 GENERAL REQUIREMENTS FOR LIGHTING FIXTURES AND COMPONENTS.....	4
2.3 EXIT SIGNS.....	5
2.4 EMERGENCY LIGHTING UNITS.....	5
2.5 LED LAMPS/LUMINAIRES.....	6
2.6 INTEGRAL EMERGENCY LIGHTING POWER UNITS	6
2.7 LIGHTING FIXTURE SUPPORT COMPONENTS.....	7
2.8 GENERAL:.....	8
2.9 INSTALLATION	8
2.10 IDENTIFICATION.....	9
2.11 FIELD QUALITY CONTROL.....	9
2.12 STARTUP SERVICE	9
2.13 ADJUSTING.....	9
END OF SECTION.....	9

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 51 00 - INTERIOR LIGHTING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Interior lighting fixtures.
2. LED lamps and drivers.
3. Emergency lighting units.
4. Exit signs.
5. Integral Emergency Lighting Power Units.
6. Lighting fixture supports.

B. Related Sections:

1. Division 26 Section "Lighting Control Devices" for automatic control of lighting, including time switches, photoelectric relays, occupancy sensors, and multipole lighting relays and contactors.
2. Division 26 Section "Wiring Devices" for snap switches and wall switches.

1.3 DEFINITIONS

- A. CCT: Correlated color temperature.
- B. CRI: Color-rendering index.
- C. Fixture: See "Luminaire."
- D. IP: Ingress Protection or International Protection Rating.
- E. LED: Light emitting diode.
- F. Lumen: Measured output of lamp and luminaire, or both.
- G. Luminaire: Complete lighting unit, including lamp, driver, reflector, and housing.

1.4 SUBMITTALS

- A. Product Data: For each type of lighting fixture, arranged in order of fixture designation. Include data on features, accessories, finishes, and the following:
 1. Physical description of lighting fixture including dimensions.
 2. Emergency lighting units including battery and charger.

3. Drivers, including energy-efficiency data.
4. Energy-efficiency data.
5. Life, output (lumens, CCT, and CRI), and energy-efficiency data for lamps.
6. Photometric data and adjustment factors based on laboratory tests, complying with IESNA Lighting Measurements Testing & Calculation Guides, for each lighting fixture type. The adjustment factors shall be for lamps, ballasts, and accessories identical to those indicated for the lighting fixture as applied in this Project. Comply with IES LM-79, IES LM-80.
 - a. Manufacturer Certified Data: Photometric data shall be certified by a manufacturer's laboratory with a current accreditation under the National Voluntary Laboratory Accreditation Program for Energy Efficient Lighting Products.
- B. Shop Drawings: For nonstandard or custom lighting fixtures. Include plans, elevations, sections, and mounting and attachment details.
 1. Detail equipment assemblies and indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
 2. Wiring Diagrams: For power, signal, and control wiring.
- C. Samples: For each lighting fixture indicated in the Interior Lighting Fixture Schedule. Each Sample shall include the following:
 1. Lamps and drivers, installed.
 2. Cords and plugs.
- D. Installation instructions.
- E. Product Certificates: For each type of driver for bi-level and dimmer-controlled fixtures, from manufacturer.
- F. Field quality-control reports.
- G. Operation and Maintenance Data: For lighting equipment and fixtures to include in emergency, operation, and maintenance manuals.
 1. Provide a list of all lamp types used on Project; use ANSI and manufacturers' codes.
- H. Warranty: Sample of special warranty.

1.5 QUALITY ASSURANCE

- A. Luminaire Photometric Data Testing Laboratory Qualifications: Provided by manufacturers' laboratories that are accredited under the National Volunteer Laboratory Accreditation Program for Energy Efficient Lighting Products and complying with applicable IES testing standards.
- B. Provide luminaires from a single manufacturer for each luminaire type.

- C. Each luminaire type shall be binned within a three-step MacAdam Ellipse to ensure color consistency among luminaires.
- D. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- E. Comply with NFPA 70.

1.6 COORDINATION

- A. Coordinate layout and installation of lighting fixtures and suspension system with other construction that penetrates ceilings or is supported by them, including HVAC equipment, fire-suppression system, and partition assemblies.

1.7 WARRANTY

- A. Special Warranty for Emergency Lighting Batteries: Manufacturer's standard form in which manufacturer of battery-powered emergency lighting unit agrees to repair or replace components of rechargeable batteries that fail in materials or workmanship within specified warranty period.
 - 1. Warranty Period for Emergency Lighting Unit Batteries: 10 years from date of Substantial Completion. Full warranty shall apply for first year, and prorated warranty for the remaining nine years.
 - 2. Warranty Period for Emergency Battery Pack and Self-Powered Exit Sign Batteries: Seven years from date of Substantial Completion. Full warranty shall apply for first year, and prorated warranty for the remaining six years.
- B. Special Warranty for Drivers: Manufacturer's standard form in which driver manufacturer agrees to repair or replace drivers that fail in materials or workmanship within specified warranty period.
 - 1. Warranty Period for Electronic Drivers: Five years from date of Substantial Completion.

1.8 EXTRA MATERIALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Lamps: 10 for every 100 of each type and rating installed. Furnish at least one of each type.
 - 2. Plastic Diffusers and Lenses: One for every 100 of each type and rating installed. Furnish at least one of each type.
 - 3. Battery and Charger Data: One for each emergency lighting unit.
 - 4. Globes and Guards: One for every 20 of each type and rating installed. Furnish at least one of each type.
 - 5. LED Modules (light engine and driver): Furnish at least (1) of each type.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. In Interior Lighting Fixture Schedule where titles below are column or row headings that introduce lists, the following requirements apply to product selection.
 - 1. Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are limited to manufacturers specified, or equal per Lighting Fixture Schedule.

2.2 GENERAL REQUIREMENTS FOR LIGHTING FIXTURES AND COMPONENTS

- A. Luminaires shall comply with UL 1598 and be listed and labeled for installation in wet locations by an NRTL acceptable to authorities having jurisdiction.
- B. Metal Parts: Free of burrs and sharp corners and edges.
- C. Sheet Metal Components: Steel unless otherwise indicated. Form and support to prevent warping and sagging.
- D. Doors, Frames, and Other Internal Access: Smooth operating, free of light leakage under operating conditions, and designed to permit relamping without use of tools. Designed to prevent doors, frames, lenses, diffusers, and other components from falling accidentally during relamping and when secured in operating position.
- E. Diffusers and Globes:
 - 1. Acrylic Lighting Diffusers: 100 percent virgin acrylic plastic. High resistance to yellowing and other changes due to aging, exposure to heat, and UV radiation.
 - a. Lens Thickness: At least 0.125-inch (3.175 mm) minimum unless otherwise indicated.
 - b. UV stabilized.
 - 2. Glass: Annealed crystal glass unless otherwise indicated.
- F. Factory-Applied Labels: Comply with UL 1598. Include recommended lamps and ballasts. Labels shall be located where they will be readily visible to service personnel, but not seen from normal viewing angles when lamps are in place.
 - 1. Label shall include the following lamp and ballast characteristics:
 - a. "USE ONLY" and include specific lamp type.
 - b. Lamp diameter, shape, size, wattage and coating.
 - c. CCT and CRI for all luminaires.
- G. Recessed luminaires shall comply with NEMA LE 4.

2.3 EXIT SIGNS

- A. General Requirements for Exit Signs: Comply with UL 924; for sign colors, visibility, luminance, and lettering size, comply with authorities having jurisdiction.
- B. Internally Lighted Signs:
 - 1. Lamps for AC Operation: LEDs, 70,000 hours minimum rated lamp life.
 - 2. Self-Powered Exit Signs (Battery Type): Integral automatic charger in a self-contained power pack.
 - a. Battery: Sealed, maintenance-free, nickel-metal hydride type.
 - b. Charger: Fully automatic, solid-state type with sealed transfer relay.
 - c. Operation: Relay automatically energizes lamp from battery when circuit voltage drops to 80 percent of nominal voltage or below. When normal voltage is restored, relay disconnects lamps from battery, and battery is automatically recharged and floated on charger.
 - d. Test Push Button: Push-to-test type, in unit housing, simulates loss of normal power and demonstrates unit operability.
 - e. LED Indicator Light: Indicates normal power on. Normal glow indicates trickle charge; bright glow indicates charging at end of discharge cycle.
 - f. Integral Self-Test: Factory-installed electronic device automatically initiates code-required test of unit emergency operation at required intervals. Test failure is annunciated by an integral audible alarm and a flashing red LED.

2.4 EMERGENCY LIGHTING UNITS

- A. General Requirements for Emergency Lighting Units: Self-contained units complying with UL 924.
 - 1. Battery: Sealed, maintenance-free, nickel-cadmium type.
 - 2. Charger: Fully automatic, solid-state, constant-current type with sealed power transfer relay.
 - 3. Operation: Relay automatically turns lamp on when power-supply circuit voltage drops to 80 percent of nominal voltage or below. Lamp automatically disconnects from battery when voltage approaches deep-discharge level. When normal voltage is restored, relay disconnects lamps from battery, and battery is automatically recharged and floated on charger.
 - 4. Test Push Button: Push-to-test type, in unit housing, simulates loss of normal power and demonstrates unit operability.
 - 5. LED Indicator Light: Indicates normal power on. Normal glow indicates trickle charge; bright glow indicates charging at end of discharge cycle.
 - 6. Wire Guard: Heavy-chrome-plated wire guard protects lamp heads or fixtures.
 - 7. Integral Time-Delay Relay: Holds unit on for fixed interval of 15 minutes when power is restored after an outage.
 - 8. Integral Self-Test: Factory-installed electronic device automatically initiates code-required test of unit emergency operation at required intervals. Test failure is annunciated by an integral audible alarm and a flashing red LED.

2.5 LED LAMPS/LUMINAIRES

- A. LED Luminaires: A LED luminaire consists of LED light engine and driver, heat-sink, fixture housing, and optic assembly where applicable.
1. Temperature: Minimum starting temperature of -30 deg C (-22 deg F), minimum 40 deg C (104 deg F) ambient temperature rating.
 2. Life and Lumen Maintenance: L70 lamp life of 50,000 hours.
 3. CRI and CCT: 3500 deg K (+/- 275 K) CCT and greater than 80 CRI.
 4. Transient Voltage Protection: Rated to withstand 2.5 kV of transient line surge.
 5. Photometric Data and Test Reports: Comply with IESNA LM-79-19, IESNA LM-80-15, and ANSI C78.377-17.
 6. Radio Frequency Interference: Comply with CAP 106B Telecommunications (Control of Interference) Regulations.
 7. Luminaires and components thereof shall comply with UL 8750 Standard of Safety.
 8. Five-year warranty on luminaire including LED light engine and driver.
 9. Power Factor: 90 percent minimum.
 10. Total Harmonic Distortion Rating: Less than 20 percent.
 11. RoHS compliant.
 12. Sound Rating: Class A.
 13. Overload, short circuit, and thermal protection.
 14. Comply with UL 1598-14 NMX-J-307/1-ANCE/C22.2 NO.250-0-14, *Luminaires, LEDs*.

2.6 INTEGRAL EMERGENCY LIGHTING POWER UNITS

- A. Provide emergency lighting power supply units for fixtures indicated on the drawings with integral emergency battery unit as specified herein.
1. Each fixture indicated to be provided with an emergency ballast shall be provided with an emergency power supply unit which consists of a package assembly containing a rechargeable sealed, maintenance-free nickel-cadmium battery, a rectifier/battery charger, a DC to AC inverter, and an electronic fluorescent ballast as specified elsewhere in these specifications. The battery shall have a normal life expectancy of 10 to 15 years with sufficient capacity to operate the lamp load at full normal brightness for 90 minutes. The float type charger shall be configured for operation at 120 volts. Units shall be UL approved for compliance with UL Standard 924 "Emergency Lighting and Power Equipment."
 2. Each unit shall be unconditionally guaranteed for a period of three years, with an additional three year pro-rated guarantee on the storage battery.
- B. Operating Modes
1. Each emergency power supply unit shall automatically operate the lamp in the event of an AC power system failure for 90 minutes. When AC power is restored, the emergency power supply unit shall automatically return to the charging mode.

- a. MODE 1: Lamp is controlled by a switched AC ON/OFF circuit. Lamp automatically turns ON when AC power is lost. The unit is shipped from the factory connected for this mode of operation.
 - b. MODE 2: Same as MODE 1 except lamp does not automatically turn ON when AC power is lost. This mode is established by adding a jumper between the AUTO and GND terminals.
 - c. MODE 3: The unit can be used to provide continuous unswitched, uninterruptible light. A switched AC circuit is not used for this mode. To establish this mode of operation, connect a jumper between the OVER and GND terminals.
 - d. MODE 4: The unit can be used to provide an unswitched light which is normally OFF but which automatically turns on when AC power is lost. This mode of operation is established by connecting only the unswitched AC circuit to the power supply unit.
 - e. MODE 5: Lamp is turned on by external switch or relay contacts. The switched AC ON/OFF circuit is optional in this mode. The switch contacts "override" the (optional) switched AC circuit to turn the lamp on. In order for the lamp to be OFF, the external switch contacts must be open AND the switched AC circuit (if used) must be OFF. This mode is established by connecting the switch contacts to OVER and GND. In this mode, the lamp will also be automatically turned ON in the event of AC power failure, unless this feature is disabled by connecting a jumper between the AUTO and GROUND terminals.
- C. Power supply units for emergency lighting shall be provided with remote test switch to be mounted flush in ceiling adjacent to fixture. Power supply units shall be Lithonia Power Sentry PS3000, equal by Bodine, Emergi-Lite, or the same manufacturer of the lighting fixture as noted in the Lighting Fixture Schedule.

2.7 LIGHTING FIXTURE SUPPORT COMPONENTS

- A. Comply with Division 26 Section "Hangers and Supports for Electrical Systems" for channel- and angle-iron supports and nonmetallic channel and angle supports.
- B. Single-Stem Hangers: 1/2-inch (13-mm) steel tubing with swivel ball fittings and ceiling canopy. Finish same as fixture.
- C. Twin-Stem Hangers: Two, 1/2-inch (13-mm) steel tubes with single canopy designed to mount a single fixture. Finish same as fixture.
- D. Wires: ASTM A 641/A 641M, Class 3, soft temper, zinc-coated steel, 12 gauge (2.68 mm).
- E. Wires for Humid Spaces: ASTM A 580/A 580M, Composition 302 or 304, annealed stainless steel, 12 gauge (2.68 mm).
- F. Rod Hangers: 3/16-inch (5-mm) minimum diameter, cadmium-plated, threaded steel rod.
- G. Hook Hangers: Integrated assembly matched to fixture and line voltage and equipped with threaded attachment, cord, and locking-type plug.

2.8 GENERAL:

- A. Comply with NECA/IESNA 500-2006 "Standard for Installing Indoor Commercial Lighting systems."

2.9 INSTALLATION

A. Lighting fixtures:

- 1. Set level, plumb, and square with ceilings and walls unless otherwise indicated.
- 2. Install lamps in each luminaire.

- B. Temporary Lighting: If it is necessary, and approved by Architect, to use permanent luminaires for temporary lighting, install and energize the minimum number of luminaires necessary. When construction is sufficiently complete, remove the temporary luminaires, disassemble, clean thoroughly, install new lamps, and reinstall.

- C. Remote Mounting of Drivers: Distance between the driver and fixture shall not exceed that recommended by driver manufacturer. Verify, with driver manufacturers, maximum distance between driver and luminaire.

D. Integral Emergency Lighting Power Units:

- 1. Power supply units for emergency lighting shall be mounted on the top of the fixture housing as recommended by the manufacturer. If required, the units shall be permitted to be remote mounted up to 50 feet from the fixture per manufacturer's distant limitations, mounted on the building structure above the ceiling space. Where units are remote mounted, the final four-foot length of connecting raceway shall be Greenfield flexible metallic conduit to facilitate fixture removal.
- 2. Note that wherever an emergency lighting power supply unit is used in a circuit controlled by a light switch, a four wire connection to the AC power source is required - the switched wire, the hot wire, the neutral and ground.

E. Lay-in Ceiling Luminaire Supports: Use grid as a support element.

- 1. Install ceiling support system wires (Solid#12AWG safety wire), independent of the ceiling suspension devices, for each fixture. Locate not more than 6 inches (150 mm) from lighting fixture corners.
- 2. Support Clips: Fasten to lighting fixtures and to ceiling grid members at or near each fixture corner with clips that are UL listed for the application.
- 3. Fixtures of Sizes Less Than Ceiling Grid: Install as indicated on reflected ceiling plans or center in acoustical panel, and support fixtures independently with at least two 3/4-inch (20-mm) metal channels spanning and secured to ceiling tees.

F. Suspended Luminaire Support:

- 1. Pendants and Rods: Where longer than 48 inches (1200 mm), brace to limit swinging.
- 2. Stem-Mounted, Single-Unit Luminaires: Suspend with twin-stem hangers. Support with approved outlet box and accessories that hold stem and provide

damping of luminaire oscillations. Support outlet box vertically to building structure using approved devices.

3. Continuous Rows: Use tubing or stem for wiring at one point and tubing or rod for suspension for each unit length of fixture chassis, including one at each end.
4. Do not use grid as support for pendant luminaires. Connect support wires or rods to building structure.

- G. Connect wiring according to Division 26 Section "Low-Voltage Electrical Power Conductors and Cables."

2.10 IDENTIFICATION

- A. Install labels with panel and circuit numbers on concealed junction and outlet boxes. Comply with requirements for identification specified in Division 26 Section "Identification for Electrical Systems."

2.11 FIELD QUALITY CONTROL

- A. Operational Test: After installing luminaires, switches, and accessories, and after electrical circuitry has been energized, test units to confirm proper operation.
- B. Test for Emergency Lighting: Interrupt power supply to demonstrate proper operation. Verify transfer from normal power to battery and retransfer to normal.
- C. Luminaire will be considered defective if it does not pass operation tests and inspections.
- D. Prepare a written report of tests, inspections, observations, and verifications indicating and interpreting results. If adjustments are made to lighting system, retest to demonstrate compliance with standards.

2.12 STARTUP SERVICE

- A. Comply with requirements for startup specified in Section 26 09 23 "Lighting Control Devices."

2.13 ADJUSTING

- A. Occupancy Adjustments: When requested within 12 months of date of Substantial Completion, provide on-site assistance in adjusting aimable luminaires to suit actual occupied conditions. Provide up to two visits to Project during other-than-normal occupancy hours for this purpose. Some of this work may be required after dark.
 1. During adjustment visits, inspect all luminaires. Replace lamps or luminaires that are defective.
 2. Parts and supplies shall be manufacturer's authorized replacement parts and supplies.
 3. Adjust aimable luminaires in the presence of Architect.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

DIVISION 27 SECTION 27 15 13
DATA, VOICE AND VIDEO SYSTEMS
TABLE OF CONTENTS

PART 1. GENERAL.....	1
1.1 RELATED DOCUMENTS.....	1
1.2 SUMMARY.....	1
1.3 DEFINITIONS.....	1
1.4 COPPER HORIZONTAL CABLING DESCRIPTION.....	1
1.5 ACTION SUBMITTALS.....	2
1.6 INFORMATIONAL SUBMITTALS.....	2
1.7 CLOSEOUT SUBMITTALS.....	3
1.8 QUALITY ASSURANCE.....	3
1.9 DELIVERY, STORAGE, AND HANDLING.....	3
1.10 PROJECT CONDITIONS.....	3
1.11 COORDINATION.....	3
PART 2. PRODUCTS.....	3
2.1 PERFORMANCE REQUIREMENTS.....	3
2.2 GENERAL CABLE CHARACTERISTICS.....	4
2.3 CATEGORY 6 TWISTED PAIR CABLE.....	4
2.4 TWISTED PAIR CABLE HARDWARE.....	4
2.5 IDENTIFICATION PRODUCTS.....	5
2.6 SOURCE QUALITY CONTROL.....	5
PART 3. EXECUTION.....	6
3.1 WIRING METHODS.....	6
3.2 INSTALLATION OF PATHWAYS.....	6
3.3 INSTALLATION OF TWISTED-PAIR HORIZONTAL CABLES.....	6
3.4 FIRESTOPPING.....	8
3.5 IDENTIFICATION.....	8
3.6 FIELD QUALITY CONTROL.....	9
END OF SECTION.....	10

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 27 15 13 – DATA, VOICE AND VIDEO SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes an extension of the existing data, voice and video systems.:
 - 1. Category 6 twisted pair cable.
 - 2. Twisted pair cable hardware, including plugs and jacks.
 - 3. Cabling identification products.
 - 4. Source quality control requirements for twisted pair cable.
 - 5. A/V cabling and jacks.
- B. Related Sections include the following:
 - 1. Division 26 Section 26 05 01 "Common Work Results for Electrical" for general materials and installation methods.
 - 2. Division 26 Section 26 05 53 "Identification for Electrical Systems" for labeling materials.

1.3 DEFINITIONS

- A. Cross-Connect: A facility enabling the termination of cable elements and their interconnection or cross-connection.
- B. EMI: Electromagnetic interference.
- C. LAN: Local area network.
- D. Jack: Also commonly called an "outlet," it is the fixed, female connector.
- E. Plug: Also commonly called a "connector," it is the removable, male telecommunications connector.
- F. RCDD: Registered Communications Distribution Designer.
- G. UTP: Unscreened (unshielded) twisted pair.

1.4 COPPER HORIZONTAL CABLING DESCRIPTION

- A. Horizontal cable cabling system shall provide interconnections between Distributor A, Distributor B, or Distributor C, and the equipment outlet, otherwise known as "Cabling

Subsystem 1," in the telecommunications cabling system structure. Cabling system consists of horizontal cables, intermediate and main cross-connects, mechanical terminations, and patch cords or jumpers used for horizontal-to-horizontal cross-connection.

1. TIA-568-C.1 requires that a minimum of two equipment outlets be installed for each work area.
 2. Horizontal cabling shall contain no more than one transition point or consolidation point between the horizontal cross-connect and the telecommunications equipment outlet.
 3. Bridged taps and splices shall not be installed in the horizontal cabling.
- B. A work area is approximately 100 sq. ft. (9.3 sq. m), and includes the components that extend from the equipment outlets to the station equipment.
- C. The maximum allowable horizontal cable length is 295 feet (90 m). This maximum allowable length does not include an allowance for the length of 16 feet (4.9 m) to the workstation equipment or in the horizontal cross-connect.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: Reviewed and stamped by RCDD.
1. System Labeling Schedules: Electronic copy of labeling schedules, in software and format selected by Owner.
 2. Cabling administration Drawings and printouts.
 3. Wiring diagrams and installation details of telecommunications equipment, to show location and layout of telecommunications equipment, including the following:
 - a. Telecommunications pathways.
 - b. Telecommunications conductor drop locations.
 - c. Typical telecommunications details.
- C. Twisted pair cable testing plan.

1.6 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer, installation supervisor, and field inspector.
- B. Product Certificates: For each type of product.
- C. Source quality-control reports.
- D. Field quality-control reports.

1.7 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For splices and connectors to include in maintenance manuals.

1.8 QUALITY ASSURANCE

- A. Installer Qualifications: Cabling Installer must have personnel certified by BICSI on staff.
1. Layout Responsibility: Preparation of Shop Drawings by an RCDD.
 2. Installation Supervision: Installation shall be under the direct supervision of Technician who shall be present at all times when Work of this Section is performed at Project site.

1.9 DELIVERY, STORAGE, AND HANDLING

- A. Test cables upon receipt at Project site.
1. Test each pair of twisted pair cable for open and short circuits.

1.10 PROJECT CONDITIONS

- A. Environmental Limitations: Do not deliver or install cables and connecting materials until wet work in spaces is complete and dry, and temporary HVAC system is operating and maintaining ambient temperature and humidity conditions at occupancy levels during the remainder of the construction period.

1.11 COORDINATION

- A. Coordinate layout and installation of telecommunications pathways and cabling with Owner's telecommunications and LAN equipment and service suppliers.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. General Performance: Horizontal cabling system shall comply with transmission standards in TIA-568-C.1, when tested according to test procedures of this standard.
- B. Telecommunications Pathways and Spaces: Comply with TIA-569-D.
- C. Grounding: Comply with TIA-607-B.

2.2 MANUFACTURERS

- A. Acceptable manufacturers for cables, connectors, patch panels and patch cords include the following:
1. AMP

2. Hubbell
3. Leviton
4. Ortronics
5. Superior Essex
6. Corning

2.3 GENERAL CABLE CHARACTERISTICS

- A. Listed and labeled by an NRTL acceptable to authorities having jurisdiction as complying with the applicable standard and NFPA 70 for the following types:
 1. Communications, Plenum Rated: Type CMP complying with UL 1685 or Type CMP in listed plenum communications raceway or Type CMP in listed cable routing assembly.
- B. Surface-Burning Characteristics: Comply with ASTM E84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 1. Flame-Spread Index: 25 or less.
 2. Smoke-Developed Index: 50 or less.
- C. RoHS compliant.

2.4 CATEGORY 6 TWISTED PAIR CABLE

- A. Description: Four-pair, balanced-twisted pair cable, certified to meet transmission characteristics of Category 6 cable at frequencies up to 100 MHz.
- B. Standard: Comply with ICEA S-90-661, NEMA WC 63.1, and TIA-568-C.2 for Category 6 cables.
- C. Conductors: 100-ohm, 24 AWG solid copper.
- D. Shielding/Screening: Unshielded twisted pairs (UTP).
- E. Cable Rating: Plenum.
- F. Jacket: Colored thermoplastic to match the existing building systems. (Blue for data)

2.5 TWISTED PAIR CABLE HARDWARE

- A. Description: Hardware designed to connect, splice, and terminate twisted pair copper communications cable.
- B. General Requirements for Twisted Pair Cable Hardware:
 1. Comply with the performance requirements of Category 6.
 2. Comply with TIA-568-C.2, IDC type, with modules designed for punch-down caps or tools.
 3. Cables shall be terminated with connecting hardware of same category or higher.

- C. Source Limitations: Obtain twisted pair cable hardware from same manufacturer as twisted pair cable, from single source.
- D. Patch Cords: Factory-made, four-pair cables in 48-inch (1200-mm) lengths; terminated with an eight-position modular plug at each end.
 - 1. Patch cords shall have color-coded boots for circuit identification.
- E. Plugs and Plug Assemblies:
 - 1. Male; eight position; color-coded modular telecommunications connector designed for termination of a single four-pair, 100-ohm, unshielded or shielded twisted pair cable.
 - 2. Standard: Comply with TIA-568-C.2.
- F. Jacks and Jack Assemblies:
 - 1. Female; eight position; modular; fixed telecommunications connector designed for termination of a single four-pair, 100-ohm, unshielded or shielded twisted pair cable.
 - 2. Designed to snap-in to a patch panel or faceplate.
 - 3. Standard: Comply with TIA-568-C.2.
- G. Faceplate:
 - 1. Six port, vertical single gang faceplates designed to mount to single gang wall boxes.
 - 2. Metal Faceplate: Stainless steel, complying with requirements in Section 26 27 26 "Wiring Devices."
- H. Legend:
 - 1. Machine printed, in the field, using adhesive-tape label.
 - 2. Snap-in, clear-label covers and machine-printed paper inserts.

2.6 IDENTIFICATION PRODUCTS

- A. Comply with TIA-606-B and UL 969 for a system of labeling materials, including label stocks, laminating adhesives, and inks used by label printers.

2.7 SOURCE QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to evaluate cables.
- B. Factory test cables on reels according to TIA-568-C.1.
- C. Factory test twisted pair cables according to TIA-568-C.2.
- D. Cable will be considered defective if it does not pass tests and inspections.
- E. Prepare test and inspection reports.

PART 3 - EXECUTION

3.1 WIRING METHODS

- A. Wiring Method: Install cables in raceways and cable trays, except within consoles, cabinets, desks, and counters and except in accessible ceiling spaces, attics, and gypsum board partitions where unenclosed wiring method may be used. Conceal raceway and cables, except in unfinished spaces.
 - 1. Install plenum cable in environmental air spaces, including plenum ceilings.
 - 2. Comply with requirements for raceways and boxes specified in Section 26 05 33 "Raceways and Boxes for Electrical Systems."
- B. Wiring Method: Conceal conductors and cables in accessible ceilings, walls, and floors where possible.
- C. Wiring within Enclosures: Bundle, lace, and train cables within enclosures. Connect to terminal points with no excess and without exceeding manufacturer's limitations on bending radii. Provide and use lacing bars and distribution spools. Install conductors parallel with or at right angles to sides and back of enclosure.

3.2 INSTALLATION OF PATHWAYS

- A. Comply with Section 26 05 33 "Raceways and Boxes for Electrical Systems."
- B. Comply with Section Section 26 05 29 "Hangers and Supports for Electrical Systems."

3.3 INSTALLATION OF TWISTED-PAIR HORIZONTAL CABLES

- A. Comply with NECA 1 and NECA/BICSI 568.
- B. General Requirements for Cabling:
 - 1. Comply with TIA-568-C.0, TIA-568-C.1, and TIA-568-C.2.
 - 2. Comply with BICSI's "Information Transport Systems Installation Methods Manual (ITSIMM), Ch. 5, "Copper Structured Cabling Systems," "Cable Termination Practices" Section.
 - 3. Install 110-style IDC termination hardware unless otherwise indicated.
 - 4. Do not untwist twisted pair cables more than 1/2 inch (12 mm) from the point of termination to maintain cable geometry.
 - 5. Terminate all conductors; no cable shall contain unterminated elements. Make terminations only at indicated outlets, terminals, cross-connects, and patch panels.
 - 6. MUTOA shall not be used as a cross-connect point.
 - 7. Consolidation points may be used only for making a direct connection to equipment outlets:
 - a. Do not use consolidation point as a cross-connect point, as a patch connection, or for direct connection to workstation equipment.

- b. Locate consolidation points for twisted-pair cables at least 49 feet (15 m) from communications equipment room.
 - 8. Cables may not be spliced. Secure and support cables at intervals not exceeding 30 inches (760 mm) and not more than 6 inches (150 mm) from cabinets, boxes, fittings, outlets, racks, frames, and terminals.
 - 9. Install lacing bars to restrain cables, prevent straining connections, and prevent bending cables to smaller radii than minimums recommended by manufacturer.
 - 10. Bundle, lace, and train conductors to terminal points without exceeding manufacturer's limitations on bending radii, but not less than radii specified in BICSI Information Transport Systems Installation Methods Manual, Ch. 5, "Copper Structured Cabling Systems," "Cable Termination Practices" Section. Use lacing bars and distribution spools.
 - 11. Do not install bruised, kinked, scored, deformed, or abraded cable. Do not splice cable between termination, tap, or junction points. Remove and discard cable if damaged during installation, and replace it with new cable.
 - 12. Cold-Weather Installation: Bring cable to room temperature before dereeling. Heat lamps shall not be used for heating.
 - 13. In the communications equipment room, install a 10-foot- (3-m-) long service loop on each end of cable.
 - 14. Pulling Cable: Comply with BICSI Information Transport Systems Installation Methods Manual, Ch. 5, "Copper Structured Cabling Systems," "Pulling and Installing Cable" Section. Monitor cable pull tensions.
- C. Open-Cable Installation:
- 1. Install cabling with horizontal and vertical cable guides in telecommunications spaces with terminating hardware and interconnection equipment.
 - 2. Suspend twisted pair cabling, not in a wireway or pathway, a minimum of 8 inches (200 mm) above ceilings by cable supports not more than 48 inches (1200 mm) apart.
 - 3. Cable shall not be run through structural members or in contact with pipes, ducts, or other potentially damaging items.
- D. Group connecting hardware for cables into separate logical fields.
- E. Separation from EMI Sources:
- 1. Comply with recommendations from BICSI's "Telecommunications Distribution Methods Manual" and TIA-569-D for separating unshielded copper communication cable from potential EMI sources, including electrical power lines and equipment.
 - 2. Separation between open communications cables or cables in nonmetallic raceways and unshielded power conductors and electrical equipment shall be as follows:
 - a. Electrical Equipment Rating Less Than 2 kVA: A minimum of 5 inches (127 mm).
 - b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 12 inches (300 mm).

- c. Electrical Equipment Rating More Than 5 kVA: A minimum of 24 inches (600 mm).
- 3. Separation between communications cables in grounded metallic raceways and unshielded power lines or electrical equipment shall be as follows:
 - a. Electrical Equipment Rating Less Than 2 kVA: A minimum of 2-1/2 inches (64 mm).
 - b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 6 inches (150 mm).
 - c. Electrical Equipment Rating More Than 5 kVA: A minimum of 12 inches (300 mm).
- 4. Separation between communications cables in grounded metallic raceways, power lines, and electrical equipment located in grounded metallic conduits or enclosures shall be as follows:
 - a. Electrical Equipment Rating Less Than 2 kVA: No requirement.
 - b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 3 inches (76 mm).
 - c. Electrical Equipment Rating More Than 5 kVA: A minimum of 6 inches (150 mm).
- 5. Separation between Communications Cables and Electrical Motors and Transformers, 5 kVA or HP and Larger: A minimum of 48 inches (1200 mm).
- 6. Separation between Communications Cables and Fluorescent Fixtures: A minimum of 5 inches (127 mm).

3.4 FIRESTOPPING

- A. Comply with requirements in Section 078413 "Penetration Firestopping" and Section 26 05 28 "Electrical Firestopping."
- B. Comply with TIA-569-D, Annex A, "Firestopping."
- C. Comply with "Firestopping Systems" Article in BISC's "Telecommunications Distribution Methods Manual."

3.5 IDENTIFICATION

- A. Identify system components, wiring, and cabling complying with TIA-606-B.
 - 1. Color-code cross-connect fields and apply colors to voice and data service backboards, connections, covers, and labels to match existing.
- B. Cable and Wire Identification:

1. Label each cable within 4 inches (100 mm) of each termination and tap, where it is accessible in a cabinet or junction or outlet box, and elsewhere as indicated.
 2. Each wire connected to building-mounted devices is not required to be numbered at the device if wire color is consistent with associated wire connected and numbered within panel or cabinet.
 3. Exposed Cables and Cables in Cable Trays and Wire Troughs: Label each cable at intervals not exceeding 15 feet (4.5 m).
 4. Label each terminal strip, and screw terminal in each cabinet, rack, or panel.
 - a. Individually number wiring conductors connected to terminal strips, and identify each cable or wiring group, extended from a panel or cabinet to a building-mounted device, with the name and number of a particular device.
 - b. Label each unit and field within distribution racks and frames.
 5. Identification within Connector Fields in Equipment Rooms and Wiring Closets: Label each connector and each discrete unit of cable-terminating and -connecting hardware. Where similar jacks and plugs are used for both voice and data communication cabling, use a different color for jacks and plugs of each service.
- C. Labels shall be preprinted or computer-printed type, with a printing area and font color that contrast with cable jacket color but still comply with TIA-606-B requirements for the following:
1. Cables use flexible vinyl or polyester that flexes as cables are bent.

3.6 FIELD QUALITY CONTROL

- A. Perform tests and inspections with the assistance of a factory-authorized service representative.
- B. Tests and Inspections:
1. Visually inspect jacket materials for NRTL certification markings. Inspect cabling terminations in communications equipment rooms for compliance with color-coding for pin assignments, and inspect cabling connections for compliance with TIA-568-C.1.
 2. Visually inspect cable placement, cable termination, grounding and bonding, equipment and patch cords, and labeling of all components.
 3. Test twisted pair cabling for DC loop resistance, shorts, opens, intermittent faults, and polarity between conductors. Test operation of shorting bars in connection blocks. Test cables after termination but not cross-connection.
 - a. Test instruments shall meet or exceed applicable requirements in TIA-568-C.2. Perform tests with a tester that complies with performance requirements in "Test Instruments (Normative)" Annex, complying with measurement accuracy specified in "Measurement Accuracy (Informative)" Annex. Use only test cords and adapters that are qualified by test equipment manufacturer for channel or link test configuration.

- C. Data for each measurement shall be documented. Data for submittals shall be printed in a summary report that is formatted similarly to Table 10.1 in BICSI's "Telecommunications Distribution Methods Manual," or shall be transferred from the instrument to the computer, saved as text files, printed, and submitted.
- D. Remove and replace cabling where test results indicate that they do not comply with specified requirements.
- E. End-to-end cabling will be considered defective if it does not pass tests and inspections.
- F. Prepare test and inspection reports.

END OF SECTION

DIVISION 28 SECTION 28 31 11
FIRE ALARM SYSTEM
TABLE OF CONTENTS

PART 1 - GENERAL	1
1.1 RELATED DOCUMENTS.....	1
1.2 SUMMARY	1
1.3 REFERENCES	1
1.4 DEFINITIONS.....	2
1.5 ACTION SUBMITTALS	2
1.6 INFORMATIONAL SUBMITTALS	3
1.7 WARRANTY	4
1.8 CLOSEOUT SUBMITTALS.....	4
1.9 QUALITY ASSURANCE	4
1.10 PROJECT CONDITONS.....	5
1.11 WARRANTY	5
PART 2 - PRODUCTS	5
2.1 SYSTEM DESCRIPTION.....	5
2.2 NOTIFICATION APPLIANCES	5
2.3 ADDRESSABLE INTERFACE DEVICE	6
PART 3 - EXECUTION	7
3.1 EXAMINATION	7
3.2 EQUIPMENT INSTALLATION.....	7
3.3 PATHWAYS	8
3.4 CONNECTIONS	8
3.5 IDENTIFICATION.....	8
3.6 GROUNDING	8
3.8 MAINTENANCE SERVICE.....	9
3.9 DEMONSTRATION	10
END OF SECTION.....	10

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 28 31 11 – FIRE ALARM SYSTEM

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This specification provides the requirements for the installation, programming and configuration of an extension of the existing Fire Alarm System. The system shall include, but not be limited to: Fire Alarm Control Panel, Automatic and Manually activated alarm Initiating and Indicating Peripheral Devices and Appliances, conduit, wire and accessories required to furnish a complete and operational Fire Alarm System. System shall include, but not be limited to, the following:

- 1. Notification appliances.

- B. The system shall include all wiring, raceways, pull boxes, terminal cabinets, outlet and mounting boxes, alarm initiating devices, alarm indicating devices, and control equipment, and all other accessories and miscellaneous items required for an operating system.
- C. The Fire Alarm System supplied under this specification shall be a microprocessor-based network system. All Control Panel Assemblies and connected Field Appliances shall be both designed and manufactured by the same company, and shall be tested and cross-listed as compatible to ensure that a fully functioning Life Safety System is designed and Fire installed.
- D. Existing system devices shall be re-used and maintained fully operational unless otherwise noted. Reconnect and reprogram existing system circuits/devices as required, for a fully functional system.

Test system prior to performing any modifications and report any defects, etc. to the owner in writing. Any defects, malfunctions of the system not reported in advance of performing work shall be the responsibility of the contractor to correct.

- E. All related work specified in other sections shall be properly coordinated with the fire alarm equipment.

1.3 REFERENCES

- A. The system, equipment, installation, and operation shall comply with the current provisions of the following standards and publications.
 - 1. National Electric Code, Article 70.
 - 2. National Fire Protection Association Standards:

- a. NFPA72 National Fire Alarm Code
 - b. NFPA 90A Air Conditioning & Ventilation Systems
 - c. NFPA101 Life Safety Code
3. Local and State Building Codes.
4. Local Authorities Having Jurisdiction.
5. Underwriters Laboratories Inc.: The system and all components shall be listed by Underwriters Laboratories Inc. for use in fire protective signaling system under the following standards as applicable:
 - a. UL 864/UOJZ, APOU - Control Units for Fire Protective Signaling Systems.
 - b. UL 268 - Smoke Detectors for Fire Protective Signaling Systems.
 - c. UL 268A - Smoke Detectors for Duct Applications.
 - d. UL 217 - Smoke Detectors Single Station.
 - e. UL 521 - Heat Detectors for Fire Protective Signaling Systems.
 - f. UL 228 - Door Holders for Fire Protective Signaling Systems.
 - g. UL 464 - Audible Signaling Appliances.
 - h. UL 1638 - Visual Signaling Appliances.
 - i. UL 38 - Manually Activated Signaling Boxes.
 - j. UL 346 - Waterflow Indicators for Fire Protective Signaling Systems.
 - k. UL 1971 - Standard for Signaling Devices for the Hearing Impaired.
 - l. UL 1481 - Power Supplies for Fire Protective Signaling Systems.
 - m. UL 1711 - Amplifiers for Fire Protective Signaling Systems.
 - n. UL Fire Protection Equipment Directory.
 - o. UL Electrical Construction Materials Directory.
6. Americans with Disabilities Act (ADA)
7. International Standards Organization (ISO)
 - a. ISO-9000
 - b. ISO-9001
8. Factory Mutual Approval Guide.
9. State of Delaware Fire Prevention Code.
10. American Insurance Association Fire Protection Code (Article 14).
11. Delaware Occupational Safety & Health Act.
12. International Building Code (IBC).

1.4 DEFINITIONS

- A. FACP: Fire Alarm Control Panel.
- B. HLI: High Level Interface.
- C. NICET: National Institute for Certification in Engineering Technologies.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product, including furnished options and accessories:

1. Include construction details, material descriptions, dimensions, profiles, and finishes.
 2. Include rated capacities, operating characteristics, and electrical characteristics.
- B. Shop Drawings: For fire-alarm system.
1. Comply with recommendations and requirements in the "Documentation" section of the "Fundamentals" chapter in NFPA 72.
 2. Include plans, elevations, sections, details, and attachments to other work.
 3. Include details of equipment assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and locations. Indicate conductor sizes, indicate termination locations and requirements, and distinguish between factory and field wiring.
 4. Detail assembly and support requirements.
 5. Include voltage drop calculations for notification-appliance circuits.
 6. Include battery-size calculations.
 7. Include input/output matrix.
 8. Include statement from manufacturer that all equipment and components have been tested as a system and meet all requirements in this Specification and in NFPA 72.
 9. Include performance parameters and installation details for each detector.
 10. Include floor plans to indicate final outlet locations showing address of each addressable device. Show size and route of cable and conduits and point-to-point wiring diagram
 11. Submit wiring diagrams for all new equipment connected to fire alarm system.
- C. General Submittal Requirements:
1. Submittals shall be approved by authorities having jurisdiction prior to submitting them to Architect.
 - a. Secure permits and approvals prior to installation.
 - b. Prior to commencement and after completion of work, notify Authorities Having Jurisdiction.
 - c. Submit letter of approval for installation before requesting acceptance of system.
 2. Shop Drawings shall be prepared by persons with the following qualifications:
 - a. Trained and certified by manufacturer in fire-alarm system design.
 - b. NICET-certified, fire-alarm technician; Level III minimum.
 - c. Licensed or certified by authorities having jurisdiction.

1.6 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer.
- B. Field quality-control reports.

1.7 WARRANTY

- A. For materials and workmanship for a period of two years from final system acceptance.

1.8 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For fire-alarm systems and components to include in emergency, operation, and maintenance manuals.
1. In addition to items specified in Division 01 "Operation and Maintenance Data," include the following and deliver copies to authorities having jurisdiction:
- a. Comply with the "Records" section of the "Inspection, Testing and Maintenance" chapter in NFPA 72.
 - b. Provide "Fire Alarm and Emergency Communications System Record of Completion Documents" according to the "Completion Documents" Article in the "Documentation" section of the "Fundamentals" chapter in NFPA 72.
 - c. Complete wiring diagrams showing connections between all devices and equipment. Each conductor shall be numbered at every junction point with indication of origination and termination points.
 - d. Riser diagram.
 - e. Device addresses.
 - f. Record copy of site-specific software.
 - g. Provide "Inspection and Testing Form" according to the "Inspection, Testing and Maintenance" chapter in NFPA 72, and include the following:
 - 1) Equipment tested.
 - 2) Frequency of testing of installed components.
 - 3) Frequency of inspection of installed components.
 - 4) Requirements and recommendations related to results of maintenance.
 - 5) Manufacturer's user training manuals.
 - h. Manufacturer's required maintenance related to system warranty requirements.
 - i. Abbreviated operating instructions for mounting at fire-alarm control unit and each annunciator unit.

1.9 QUALITY ASSURANCE

- A. Installer Qualifications: Personnel shall be trained and certified by manufacturer for installation of units required for this Project.
- B. NFPA Certification: Obtain certification according to NFPA 72 by a UL-listed alarm company.

1.10 PROJECT CONDITIONS

- A. Use of Devices during Construction: Protect devices during construction unless devices are placed in service to protect the facility during construction.

1.11 WARRANTY

- A. Special Warranty: Manufacturer agrees to repair or replace new fire-alarm system equipment and components that fail in materials or workmanship within specified warranty period.
 - 1. Warranty Extent: All equipment and components not covered in the Maintenance Service Agreement.
 - 2. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

- A. Source Limitations for Fire-Alarm System and Components: Components shall be compatible with, and operate as one system. Provide system manufacturer's certification that all components provided have been tested as, and will operate as, a system.
- B. Noncoded, UL-certified addressable system, with multiplexed signal transmission and horn/strobe evacuation.
- C. Automatic sensitivity control of certain smoke detectors.
- D. All components provided shall be listed for use with the selected systems:
- E. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

2.2 NOTIFICATION APPLIANCES

- A. General Requirements for Notification Appliances: Connected to notification-appliance signal circuits, zoned as indicated, equipped for mounting as indicated, and with screw terminals for system connections.
 - A. Combination Devices: Factory-integrated audible and visible devices in a single-mounting assembly, equipped for mounting as indicated, and with screw terminals for system connections.
- B. Horns: Electric-vibrating-polarized type, 24-V dc; with provision for housing the operating mechanism behind a grille. Comply with UL 464. Horns shall produce a sound-pressure level of 90 dBA, measured 10 feet (3 m) from the horn, using the coded signal prescribed in UL 464 test protocol.

- C. Visible Notification Appliances: Xenon strobe lights complying with UL 1971, with clear or nominal white polycarbonate lens mounted on an aluminum faceplate. The word "FIRE" is engraved in minimum 1-inch- (25-mm-) high letters on the lens.
 - A. Rated Light Output:
 - a. 15/30/75/110 cd, selectable in the field.
 - B. Mounting: Wall or ceiling mounted as noted on the drawings.
 - C. For units with guards to prevent physical damage, light output ratings shall be determined with guards in place.
 - D. Flashing shall be in a temporal pattern, synchronized with other units.
 - E. Strobe Leads: Factory connected to screw terminals.
 - F. Mounting Faceplate: Factory finished, red for wall mounted devices; white for ceiling mounted devices.

2.3 ADDRESSABLE INTERFACE DEVICE

- A. General:
 - 1. Include address-setting means on the module.
 - 2. Store an internal identifying code for control panel use to identify the module type.
 - 3. Listed for controlling HVAC fan motor controllers.
- B. Monitor Module: Microelectronic module providing a system address for alarm-initiating devices for wired applications with normally open contacts. Provide for all sprinkler flow and tamper switches, and as required.
- C. Integral Relay: Capable of providing a direct signal to elevator controller to initiate elevator recall, to circuit-breaker shunt trip for power shutdown, etc.
 - 1. Allow the control panel to switch the relay contacts on command.
 - 2. Have a minimum of two normally open and two normally closed contacts available for field wiring.
- D. Control Module:
 - 1. Operate notification devices.
 - 2. Operate solenoids for use in sprinkler service.
 - 3. Mute sound system(s).
 - 4. Unlock sound system(s).

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas and conditions for compliance with requirements for ventilation, temperature, humidity, and other conditions affecting performance of the Work.
 - 1. Verify that manufacturer's written instructions for environmental conditions have been permanently established in spaces where equipment and wiring are installed, before installation begins.
- B. Examine roughing-in for electrical connections to verify actual locations of connections before installation.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 EQUIPMENT INSTALLATION

- A. Comply with NFPA 72, NFPA 101, and requirements of authorities having jurisdiction for installation and testing of fire-alarm equipment. Install all electrical wiring to comply with requirements in NFPA 70 including, but not limited to, Article 760, "Fire Alarm Systems."
 - 1. Devices placed in service before all other trades have completed cleanup shall be replaced.
 - 2. Devices installed but not yet placed in service shall be protected from construction dust, debris, dirt, moisture, and damage according to manufacturer's written storage instructions.
- B. Connecting to Existing Equipment: Verify that existing fire-alarm system is operational before making changes or connections.
 - 1. Connect new equipment to existing control panel in existing part of the building.
 - 2. Connect new equipment to existing monitoring equipment at the supervising station.
 - 3. Expand, modify, and supplement existing control and monitoring equipment as necessary to extend existing functions to the new points. New components shall be capable of merging with existing configuration without degrading the performance of either system.
- C. Audible Alarm-Indicating Devices: Install not less than 6 inches (150 mm) below the ceiling. Install bells and horns on flush-mounted back boxes with the device-operating mechanism concealed behind a grille. Install all devices at the same height unless otherwise indicated.
- D. Visible Alarm-Indicating Devices: Install adjacent to each alarm bell or alarm horn and at least 6 inches (150 mm) below the ceiling. Install all devices at the same height unless otherwise indicated.

3.3 PATHWAYS

- A. Pathways above recessed ceilings and in non-accessible locations may be routed exposed.
 - 1. Exposed pathways located less than 96 inches (2440 mm) above the floor shall be installed in EMT
- B. Exposed EMT shall be painted red enamel

3.4 CONNECTIONS

- A. For fire-protection systems related to doors in fire-rated walls and partitions and to doors in smoke partitions, comply with requirements in Division 08 "Door Hardware." Connect hardware and devices to fire-alarm system.
 - 1. Verify that hardware and devices are listed for use with installed fire-alarm system before making connections
- B. Make addressable connections with a supervised interface device to the following devices and systems. Install the interface device less than 36 inches (910 mm) from the device controlled. Make an addressable confirmation connection when such feedback is available at the device or system being controlled.
 - 1. Magnetically held-open doors.
 - 2. Electronically locked doors and access gates.
- C. Where it is necessary to interface conventional initiating devices, provide intelligent input modules to supervise Class B zone wiring.

3.5 IDENTIFICATION

- A. Identify system components, wiring, cabling, and terminals. Comply with requirements for identification specified in Division 26 Section "Identification for Electrical Systems."

3.6 GROUNDING

- A. Ground shielded cables at the control panel location only. Insulate shield at device location.

3.7 FIELD QUALITY CONTROL

- A. Field tests shall be witnessed by authorities having jurisdiction.
- B. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect components, assemblies, and equipment installations, including connections.
- C. Perform the following tests and inspections with the assistance of a factory-authorized service representative:
 - 1. Visual Inspection: Conduct visual inspection prior to testing.

- a. Inspection shall be based on completed record Drawings and system documentation that is required by the "Completion Documents, Preparation" table in the "Documentation" section of the "Fundamentals" chapter in NFPA 72.
 - b. Comply with the "Visual Inspection Frequencies" table in the "Inspection" section of the "Inspection, Testing and Maintenance" chapter in NFPA 72; retain the "Initial/Reacceptance" column and list only the installed components.
 2. System Testing: Comply with the "Test Methods" table in the "Testing" section of the "Inspection, Testing and Maintenance" chapter in NFPA 72.
 3. Test audible appliances for the public operating mode according to manufacturer's written instructions. Perform the test using a portable sound-level meter complying with Type 2 requirements in ANSI S1.4.
 4. Test audible appliances for the private operating mode according to manufacturer's written instructions.
 5. Test visible appliances for the public operating mode according to manufacturer's written instructions.
 6. Factory-authorized service representative shall prepare the "Fire Alarm System Record of Completion" in the "Documentation" section of the "Fundamentals" chapter in NFPA 72 and the "Inspection and Testing Form" in the "Records" section of the "Inspection, Testing and Maintenance" chapter in NFPA 72.
- D. Reacceptance Testing: Perform reacceptance testing to verify the proper operation of added or replaced devices and appliances.
- E. Fire-alarm system will be considered defective if it does not pass tests and inspections.
- F. Prepare test and inspection reports.
- G. Maintenance Test and Inspection: Perform tests and inspections listed for weekly, monthly, quarterly, and semiannual periods. Use forms developed for initial tests and inspections.
- H. Annual Test and Inspection: One year after date of Substantial Completion, test fire-alarm system complying with visual and testing inspection requirements in NFPA 72. Use forms developed for initial tests and inspections.

3.8 MAINTENANCE SERVICE

- A. Initial Maintenance Service: Beginning at Substantial Completion, maintenance service shall include 12 months' full maintenance by skilled employees of manufacturer's designated service organization. Include preventive maintenance, repair or replacement of worn or defective components, lubrication, cleaning, and adjusting as required for proper operation. Parts and supplies shall be manufacturer's authorized replacement parts and supplies.
1. Include visual inspections according to the "Visual Inspection Frequencies" table in the "Testing" paragraph of the "Inspection, Testing and Maintenance" chapter in NFPA 72.
 2. Perform tests in the "Test Methods" table in the "Testing" paragraph of the "Inspection, Testing and Maintenance" chapter in NFPA 72.

3. Perform tests per the "Testing Frequencies" table in the "Testing" paragraph of the "Inspection, Testing and Maintenance" chapter in NFPA 72.

3.9 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain fire-alarm system.

END OF SECTION