


Project Manual

**Polytech School District
Polytech High School Roof Replacement
PSD25001 – PHS_ROOF
March 17, 2025**

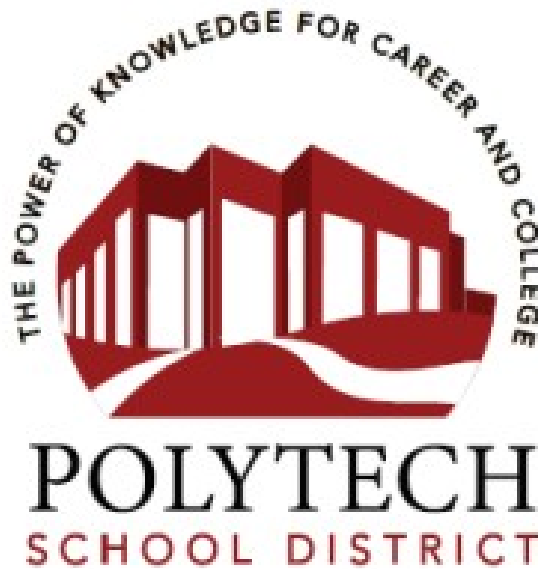

**EDiS Company
110 South Poplar Street, Suite 400
Wilmington, DE 19801**

SECTION 000110 - TABLE OF CONTENTS

Division 0 - Procurement and Contract Requirements

000110	Table of Contents
000115	List of Drawings
001116	Advertisement for Bid
002113	Instructions to Bidders
004100	Bid Forms and Attachments: · Subcontractor List · Non-Collusion Statement · Bid Bond Consent of Surety · Affidavit of Employee Drug Testing Program · Affidavit of Contractor Qualifications · DBS Subcontractor List
005200	Agreement Forms · AIA Document A132-2019 Standard Form of Agreement Between Owner and Contractor · AIA Document A132-2019 Exhibit A - Insurance and Bonds
005413	Supplement to Agreement Between Owner and Contractor A132-2019
005414	Supplement to A132-2019 – Exhibit A - Insurance and Bonds
006113	Performance and Payment Bond Forms
006216	Certificate of Insurance
007200	General Conditions AIA Document A232 - 2019
007300	Supplementary General Conditions A232-2019
007343	Wage Rate Requirements
008113	General Requirements
008114	Drug Testing Program and Forms
008115	Affidavit of Craft Training

Division 1 - General Requirements

011100	Summary of Work - Work Covered by Contract Documents
012100	Allowances · Allowance Authorization Form
012200	Unit Prices
012300	Alternates
012600	Change Order Procedures · Change Order Detail Form · Labor Detail Form
012613	Contractor Compensation
012900	Payment Procedures
013113	Project Coordination Meetings
013119	Preinstallation Meetings
013125	Web-Based Project Management System
013216	Construction Progress Schedule
013219	Submittals Register

013226	Contractor Daily Reports
	· Contractor's Daily Report Form
013300	Submittal Procedures
013500	Contractor Employee Background Check
013523	Safety Program
	· Competent/Qualified Person Designation Log
	· Certificate of Training Documents
	· Job Hazard/Risk Analysis
014500	Quality Control
015200	Construction Facilities & Temporary Controls
016200	Material and Equipment
017123	Field Engineering
017329	Cutting and Patching
017419	Construction Waste Management
017700	Contract Closeout

Division 2 – Existing Conditions

024119	Selective Demolition

Division 6 – Wood, Plastics, and Composites

061053	Rough Carpentry

Division 7 – Thermal and Moisture Protection

075300	EPDM Thermoset Single-Ply Roofing
076201	Sheet Metal Flashing & Trim
077113	Manufactured Copings
079200	Joint Sealants

Division 8 – Openings

086300	Metal Framed Skylights

Division 26 – Electrical

264115	Lightning Protection Systems for Reroofing

END OF SECTION

[illegible]

LIST OF DRAWINGS
PU19, Revised 07/2021

000115-1

SECTION 001116 - ADVERTISEMENT FOR BID

Receipt of Bids

Public notice is hereby given that sealed bids for the following prime contracts will be received for the construction of Polytech High School Roof Replacement located in Woodside, Delaware. Bids will be received at the District Office of the Polytech School District, 823 Walnut Shade Road, Woodside, DE 19980 until 10:00AM local time on April 24, 2025, at which time they will be publicly opened and read aloud. ***Bidder bears the risk of late delivery. Any bids received after the stated time will be returned unopened.*** The time and location of the bid opening may be extended with a minimum of two calendar day notice to the Bidders.

Contract: No. A-01 – Roof Replacement

Bidding Documents

1. It is the responsibility of each bidder to review and coordinate all Project Documents. This includes plans, specifications, and addendums.
2. Non-biddable documents, for review only, may be examined on the State of Delaware Online Bid Solicitation Directory, <http://bids.delaware.gov>, or at the office of the Construction Manager, EDIS Company, 110 S. Poplar Street, Suite 400, Wilmington, Delaware 19801; on or after April 2, 2025.
3. Bid documents will be available on the EDiS FTP site. In order to obtain access to biddable documents on the EDiS FTP site, bidders must download and complete the Plans Request form from <http://bids.delaware.gov>, and submit to: planrequests@delaware.gov for approval. Once the plans request is approved and you want to receive the biddable plans submit your request for access to the FTP site via email to Jackie Mckee, jmckee@ediscompany.com. Your request should include the following information: your company name, contact name, contracts you are bidding, email address, and phone number.

Bid Security

A bid security in the amount of 10% of the bid, plus a consent of surety must accompany each bid. Bid Security shall specify the Owner as the obligee. Owner: Polytech School District.

Pre-Bid Meeting

A pre-bid meeting will be held at the Board Room of **Polytech School District**, 823 Walnut Shade Rd, Woodside, DE 19980, on April 9, 2025 at 10:00AM local time. A site visit will be conducted immediately following the pre-bid meeting. A second site visit will be conducted on April 14, 2025 at 10:00AM. These site visits will be the only opportunities for the bidders to visit the existing building and review existing conditions affecting the work. Attendance is highly suggested but not mandatory.

Questions

Please contact EDiS Company, Joe Kott, RA at jkott@ediscompany.com or 302-229-5000, with questions.

Conformance to the Delaware Architectural Accessibility Act and the standards of the Architectural Accessibility Board is required on the Project.

Prevailing Wage Rates

Prevailing Wage Rates, as directed by Delaware Law, must be adhered to where applicable.

Pursuant to the Office of Management and Budget (OMB) "4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects" required that Contractors and Subcontractors who work on Large Public Works Contracts funded all or in part with public funds implement a Mandatory Drug Testing Program. The latest regulation can be downloaded from the following website:

<http://regulations.delaware.gov/AdminCode/title19/4000/4100/4104.pdf>

Drug Testing Requirements

Pursuant to the Office of Management and Budget (OMB) "4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects" required that Contractors and Subcontractors who work on Large Public Works Contracts funded all or in part with public funds implement a Mandatory Drug Testing Program. The latest regulation can be downloaded from the following website: <http://regulations.delaware.gov/AdminCode/title19/4000/4100/4104.pdf>

Craft Training for Public Works Procurement

In accordance with Delaware Code, Title 29, Chapter 69, Section 6962, requires: A public works contract must include a requirement that the contractor provide craft training for journeyman and apprentice levels if all of the following apply:

- A. The project requires prevailing wages and,
- B. The contractor or subcontractor employs 10 or more people and,
- C. It is not a federal highway project, except for the Route 301 project.

The craft training may be provided by any of the following:

- A. The contractor, or
- B. The subcontractor, or
- C. A program registered pursuant under Section 1101-4.0 of Title 19 of the Delaware Administrative Code.

Subsection 6902 defines "Craft Training" as "an apprenticeship program approved by and registered with

any state apprenticeship agency or the United States Department of Labor. The Secretary of the Department of Labor shall maintain a list of crafts for which there are approved and registered training programs.”

DELAWARE'S CONTRACTOR REGISTRATION ACT IS EFFECTIVE JULY 1, 2021

<https://labor.delaware.gov/divisions/industrial-affairs/labor-law/contractor-registration-act/>

END OF SECTION

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

SECTION 00 21 13

INSTRUCTIONS TO BIDDERS

TABLE OF ARTICLES

1. GENERAL
2. BIDDER'S REPRESENTATION
3. BIDDING DOCUMENTS
4. BIDDING PROCEDURES
5. CONSIDERATION OF BIDS
6. POST-BID INFORMATION
7. PERFORMANCE BOND AND PAYMENT BOND
8. FORM OF AGREEMENT BETWEEN OWNER AND CONTRACTOR

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

ARTICLE 1: GENERAL

1.1 DEFINITIONS

1.1.1 Whenever the following terms are used, their intent and meaning shall be interpreted as follows:

1.2 STATE: The State of Delaware.

1.3 AGENCY: Contracting State Agency as noted on cover sheet.

1.4 DESIGNATED OFFICIAL: The agent authorized to act for the Agency.

1.5 BIDDING DOCUMENTS: Bidding Documents include the Bidding Requirements and the proposed Contract Documents. The Bidding Requirements consist of the Advertisement for Bid, Invitation to Bid, Instructions to Bidders, Supplementary Instructions to Bidders (if any), General Conditions, Supplementary General Conditions, General Requirements, Special Provisions (if any), the Bid Form (including the Non-collusion Statement), and other sample bidding and contract forms. The proposed Contract Documents consist of the form of Agreement between the Owner and Contractor, as well as the Drawings, Specifications (Project Manual) and all Addenda issued prior to execution of the Contract.

1.6 CONTRACT DOCUMENTS: The Contract Documents consist of the, Instructions to Bidders, Supplementary Instructions to Bidders (if any), General Conditions, Supplementary General Conditions, General Requirements, Special Provisions (if any), the form of agreement between the Owner and the Contractor, Drawings (if any), Specifications (Project Manual), and all addenda.

1.7 AGREEMENT: The form of the Agreement shall be AIA Document A101, Standard Form of Agreement between Owner and Contractor where the basis of payment is a STIPULATED SUM. In the case of conflict between the instructions contained therein and the General Requirements herein, these General Requirements shall prevail.

1.8 GENERAL REQUIREMENTS (or CONDITIONS): General Requirements (or conditions) are instructions pertaining to the Bidding Documents and to contracts in general. They contain, in summary, requirements of laws of the State; policies of the Agency and instructions to bidders.

1.9 SPECIAL PROVISIONS: Special Provisions are specific conditions or requirements peculiar to the bidding documents and to the contract under consideration and are supplemental to the General Requirements. Should the Special Provisions conflict with the General Requirements, the Special Provisions shall prevail.

1.10 ADDENDA: Written or graphic instruments issued by the Owner/Architect prior to the execution of the contract which modify or interpret the Bidding Documents by additions, deletions, clarifications or corrections.

1.11 BIDDER OR VENDOR: A person or entity who formally submits a Bid for the material or Work contemplated, acting directly or through a duly authorized representative who meets the requirements set forth in the Bidding Documents.

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

- 1.12 SUB-BIDDER: A person or entity who submits a Bid to a Bidder for materials or labor, or both for a portion of the Work.
- 1.13 BID: A complete and properly executed proposal to do the Work for the sums stipulated therein, submitted in accordance with the Bidding Documents.
- 1.14 BASE BID: The sum stated in the Bid for which the Bidder offers to perform the Work described in the Bidding Documents as the base, to which Work may be added or from which Work may be deleted for sums stated in Alternate Bids (if any are required to be stated in the bid).
- 1.15 ALTERNATE BID (or ALTERNATE): An amount stated in the Bid, where applicable, to be added to or deducted from the amount of the Base Bid if the corresponding change in the Work, as described in the Bidding Documents is accepted.
- 1.16 UNIT PRICE: An amount stated in the Bid, where applicable, as a price per unit of measurement for materials, equipment or services or a portion of the Work as described in the Bidding Documents.
- 1.17 SURETY: The corporate body which is bound with and for the Contract, or which is liable, and which engages to be responsible for the Contractor's payments of all debts pertaining to and for his acceptable performance of the Work for which he has contracted.
- 1.18 BIDDER'S DEPOSIT: The security designated in the Bid to be furnished by the Bidder as a guaranty of good faith to enter into a contract with the Agency if the Work to be performed or the material or equipment to be furnished is awarded to him.
- 1.19 CONTRACT: The written agreement covering the furnishing and delivery of material or work to be performed.
- 1.20 CONTRACTOR: Any individual, firm or corporation with whom a contract is made by the Agency.
- 1.21 SUBCONTRACTOR: An individual, partnership or corporation which has a direct contract with a contractor to furnish labor and materials at the job site, or to perform construction labor and furnish material in connection with such labor at the job site.
- 1.22 CONTRACT BOND: The approved form of security furnished by the contractor and his surety as a guaranty of good faith on the part of the contractor to execute the work in accordance with the terms of the contract.
- 1.23 CUSTOM FABRICATION: As defined in 29 Del. C. § 6902, the term "custom fabrication" means the offsite fabrication, assembly, or other production of non-standard goods or materials, including components, fixtures or parts thereof, specifically for a public works project. Such goods and materials shall include those used in the following trades or systems: (1) Plumbing or pipe fitting systems, including heating, ventilating, air-conditioning, refrigeration systems, sheet metal or other duct systems; (2) Electrical systems; (3) Mechanical insulation work; (4) Ornamental iron work; and (5) Commercial signage that does not attempt or appear to direct the movement of traffic on highways or roadways or interfere with, imitate, or resemble any official traffic sign, signal or device.

ARTICLE 2: BIDDER'S REPRESENTATION

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

2.1 PRE-BID MEETING

2.1.1 A pre-bid meeting for this project will be held at the time and place designated. Attendance at this meeting is a pre-requisite for submitting a Bid, unless this requirement is specifically waived elsewhere in the Bid Documents.

2.2 By submitting a Bid, the Bidder represents that:

2.2.1 The Bidder has read and understands the Bidding Documents and that the Bid is made in accordance therewith.

2.2.2 The Bidder has visited the site, become familiar with existing conditions under which the Work is to be performed, and has correlated the Bidder's personal observations with the requirements of the proposed Contract Documents.

2.2.3 The Bid is based upon the materials, equipment, and systems required by the Bidding Documents without exception.

2.3 JOINT VENTURE REQUIREMENTS

2.3.1 For Public Works Contracts, each Joint Venturer shall be qualified and capable to complete the Work with their own forces.

2.3.2 Included with the Bid submission, and as a requirement to bid, a copy of the executed Joint Venture Agreement shall be submitted and signed by all Joint Venturers involved.

2.3.3 All required Bid Bonds, Performance Bonds, Material and Labor Payment Bonds must be executed by both Joint Venturers and be placed in both of their names.

2.3.4 All required insurance certificates shall name both Joint Venturers.

2.3.5 Both Joint Venturers shall sign the Bid Form.

2.3.6 Both Joint Venturers shall include their Federal E.I. Number with the Bid.

2.3.7 In the event of a mandatory Pre-bid Meeting, each Joint Venturer shall have a representative in attendance.

2.3.8 Due to exceptional circumstances and for good cause shown, one or more of these provisions may be waived at the discretion of the State.

2.4 ASSIGNMENT OF ANTITRUST CLAIMS

2.4.1 As consideration for the award and execution by the Owner of this contract, the Contractor hereby grants, conveys, sells, assigns and transfers to the State of Delaware all of its right, title and interests in and to all known or unknown causes of action it presently has or may now or hereafter acquire under the antitrust laws of the United States and the State of Delaware, relating to the particular goods or services purchased or acquired by the Owner pursuant to this contract.

ARTICLE 3: BIDDING DOCUMENTS

3.1 COPIES OF BID DOCUMENTS

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

- 3.1.1 Bidders may obtain complete sets of the Bidding Documents from the Architectural/Engineering firm designated in the Advertisement or Invitation to Bid in the number and for the deposit sum, if any, stated therein.
- 3.1.2 Bidders shall use complete sets of Bidding Documents for preparation of Bids. The issuing Agency nor the Architect assumes no responsibility for errors or misinterpretations resulting from the use of incomplete sets of Bidding Documents.
- 3.1.3 Any errors, inconsistencies or omissions discovered shall be reported to the Architect immediately.
- 3.1.4 The Agency and Architect may make copies of the Bidding Documents available on the above terms for the purpose of obtaining Bids on the Work. No license or grant of use is conferred by issuance of copies of the Bidding Documents.
- 3.2 INTERPRETATION OR CORRECTION OF BIDDING DOCUMENTS
- 3.2.1 The Bidder shall carefully study and compare the Bidding Documents with each other, and with other work being bid concurrently or presently under construction to the extent that it relates to the Work for which the Bid is submitted, shall examine the site and local conditions, and shall report any errors, inconsistencies, or ambiguities discovered to the Architect.
- 3.2.2 Bidders or Sub-bidders requiring clarification or interpretation of the Bidding Documents shall make a written request to the Architect at least seven days prior to the date for receipt of Bids. Interpretations, corrections and changes to the Bidding Documents will be made by written Addendum. Interpretations, corrections, or changes to the Bidding Documents made in any other manner shall not be binding.
- 3.2.3 The apparent silence of the specifications as to any detail, or the apparent omission from it of detailed description concerning any point, shall be regarded as meaning that only the best commercial practice is to prevail and only material and workmanship of the first quality are to be used. Proof of specification compliance will be the responsibility of the Bidder.
- 3.2.4 Unless otherwise provided in the Contract Documents, the Contractor shall provide and pay for all permits, labor, materials, equipment, tools, construction equipment and machinery, water, heat, utilities, transportation, and other facilities and services necessary for the proper execution and completion of the Work.
- 3.2.5 The Owner will bear the costs for all impact and user fees associated with the project.
- 3.3 SUBSTITUTIONS
- 3.3.1 The materials, products and equipment described in the Bidding Documents establish a standard of quality, required function, dimension, and appearance to be met by any proposed substitution. The specification of a particular manufacturer or model number is not intended to be proprietary in any way. Substitutions of products for those named will be considered, providing that the Vendor certifies that the function, quality, and performance characteristics of the material offered is equal or superior to that specified. It shall be the Bidder's responsibility to assure that the proposed substitution will not affect the intent of the design, and to make any installation modifications required to accommodate the substitution.

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

3.3.2 Requests for substitutions shall be made in writing to the Architect at least ten days prior to the date of the Bid Opening. Such requests shall include a complete description of the proposed substitution, drawings, performance and test data, explanation of required installation modifications due the substitution, and any other information necessary for an evaluation. The burden of proof of the merit of the proposed substitution is upon the proposer. The Architect's decision of approval or disapproval shall be final. The Architect is to notify Owner prior to any approvals.

3.3.3 If the Architect approves a substitution prior to the receipt of Bids, such approval shall be set forth in an Addendum. Approvals made in any other manner shall not be binding.

3.3.4 The Architect shall have no obligation to consider any substitutions after the Contract award.

3.4 ADDENDA

3.4.1 Addenda will be mailed or delivered to all who are known by the Architect to have received a complete set of the Bidding Documents.

3.4.2 Copies of Addenda will be made available for inspection wherever Bidding Documents are on file for that purpose.

3.4.3 No Addenda will be issued later than 2 calendar days prior to the date for receipt of Bids except an Addendum withdrawing the request for Bids or one which extends the time or changes the location for the opening of bids.

3.4.4 Each bidder shall ascertain prior to submitting his Bid that they have received all Addenda issued, and shall acknowledge their receipt in their Bid in the appropriate space. Not acknowledging an issued Addenda could be grounds for determining a bid to be non-responsive.

ARTICLE 4: BIDDING PROCEDURES

4.1 PREPARATION OF BIDS

4.1.1 Submit the bids on the Bid Forms included with the Bidding Documents.

4.1.2 Submit the original Bid Form for each bid. Bid Forms may be removed from the project manual for this purpose.

4.1.3 Execute all blanks on the Bid Form in a non-erasable medium (typewriter or manually in ink).

4.1.4 Where so indicated by the makeup on the Bid Form, express sums in both words and figures, in case of discrepancy between the two, the written amount shall govern.

4.1.5 Interlineations, alterations or erasures must be initialed by the signer of the Bid.

4.1.6 BID ALL REQUESTED ALTERNATES AND UNIT PRICES, IF ANY. If there is no change in the Base Bid for an Alternate, enter "No Change". The Contractor is responsible for verifying that they have received all addenda issued during the bidding period. Work required by Addenda shall automatically become part of the Contract.

4.1.7 Make no additional stipulations on the Bid Form and do not qualify the Bid in any other manner.

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

- 4.1.8 Each copy of the Bid shall include the legal name of the Bidder and a statement whether the Bidder is a sole proprietor, a partnership, a corporation, or any legal entity, and each copy shall be signed by the person or persons legally authorized to bind the Bidder to a contract. A Bid by a corporation shall further give the state of incorporation and have the corporate seal affixed. A Bid submitted by an agent shall have a current Power of Attorney attached, certifying agent's authority to bind the Bidder.
- 4.1.9 Bidder shall complete the Non-Collusion Statement form included with the Bid Forms and include it with their Bid.
- 4.1.10 In the construction of all Public Works projects for the State of Delaware or any agency thereof, preference in employment of laborers, workers or mechanics shall be given to bona fide legal citizens of the State who have established citizenship by residence of at least 90 days in the State.
- 4.1.11 Each bidder shall include a signed Affidavit for the Bidder certifying compliance with OMB Regulation 4104 - "Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on "Large Public Works Projects." "Large Public Works" is based upon the current threshold required for bidding Public Works as set by the Purchasing and Contracting Advisory Council.
- 4.2 BID SECURITY
- 4.2.1 All bids shall be accompanied by a deposit of either a good and sufficient bond to the agency for the benefit of the agency, with corporate surety authorized to do business in this State, the form of the bond and the surety to be approved by the agency, or a security of the bidder assigned to the agency, for a sum equal to at least 10% of the bid plus all add alternates, or in lieu of the bid bond a security deposit in the form of a certified check, bank treasurer's check, cashier's check, money order, or other prior approved secured deposit assigned to the State. The bid bond need not be for a specific sum, but may be stated to be for a sum equal to 10% of the bid plus all add alternates to which it relates and not to exceed a certain stated sum, if said sum is equal to at least 10% of the bid. The Bid Bond form used shall be the standard OMB form (attached).
- 4.2.2 The Agency has the right to retain the bid security of Bidders to whom an award is being considered until either a formal contract has been executed and bonds have been furnished or the specified time has elapsed so the Bids may be withdrawn or all Bids have been rejected.
- 4.2.3 In the event of any successful Bidder refusing or neglecting to execute a formal contract and bond within 20 days of the awarding of the contract, the bid bond or security deposited by the successful bidder shall be forfeited.
- 4.3 SUBCONTRACTOR LIST
- 4.3.1 In accordance with Title 29, Chapter 69, Section 6962(d)(10)b of the Delaware Code, each Bidder shall submit with their Bid a completed List of Sub-Contractors included with the Bid Form. NAME ONLY ONE SUBCONTRACTOR FOR EACH TRADE. The bidder must list **in each category** the full name and address (City & State) of the sub-contractor that the Bidder will be using to perform the work and provide material for that subcontractor category. Should the Bidder's listed subcontractor intend to provide any of their subcontractor category of work through a third-tier contractor, the Bidder shall list

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

that third-tier contractor's full name and address (City & State). **If the Bidder intends to perform any category of work itself, it must list its full name and address.** For clarification, if the Bidder intends to perform the work themselves, the Bidder **may not** insert "not applicable", "N/A", "self" or anything other than its own full name and address (City & State). To do so shall cause the bid to be rejected. In addition, the failure to produce a completed subcontractor list with the bid submittal shall cause the bid to be rejected. If you have more than three (3) third-tier contractors to report in any subcontractor category, print out additional page(s) containing the appropriate category, complete the rest of your list of third-tier contractors for that category, notate the addition in parentheses as (CONTINUATION) next to the subcontractor category and an asterisk (*) next to any additional third-tier contractors, and submit it with your bid.

- 4.3.2 It is the responsibility of the Contractor to ensure that their Subcontractors are in compliance with the provisions of this law. Also, if a Contractor elects to list themselves as a Subcontractor for any category, they must specifically name themselves on the Bid Form and be able to document their capability to act as Subcontractor in that category in accordance with this law.

4.4 AFFIDAVIT OF CONTRACTOR QUALIFICATIONS

- 4.4.1 In accordance with Title 29, Chapter 69, Section 6962(d)(10)b.3 of the Delaware Code, each Bidder shall submit with their Bid the Affidavit of Contractor Qualifications certifying that the Bidder will abide by the contractor's qualifications outlined in the construction bid specifications for the duration of the contract term. After a contract has been awarded the successful bidder shall not substitute another subcontractor whose name was submitted on the Subcontractor Form except for the reasons in the statute and not without written consent from the awarding agency. Failure to utilize the subcontractors on the list will subject the successful bidder to penalties as outlined in the General Requirements Section 5.2 of the contract.

4.5 AFFIDAVIT OF CRAFT TRAINING COMPLIANCE

- 4.5.1 In accordance with Title 29, Chapter 69, Section 6962(c)(13) of the Delaware Code, contractors and subcontractors must provide craft training for journeyman and apprentice levels if **all** of the following apply:

- A. A project meets the prevailing wage requirement under Title 29, Chapter 69, Section 6960 of the Delaware Code.
- B. The contractor employs 10 or more total employees.
- C. The project is not a federal highway project

Failure to provide required craft training on the project may subject the successful contractor and/or subcontractor(s) to penalties as outlined in Title 29, Chapter 69, Section 6962(c)(13) of the Delaware Code.

Bidders shall submit the Affidavit of Craft Training Compliance prior to contract execution.

4.6 EQUALITY OF EMPLOYMENT OPPORTUNITY ON PUBLIC WORKS

- 4.6.1 During the performance of this contract, the contractor agrees as follows:

- A. The Contractor will not discriminate against any employee or applicant for employment because of race, creed, sex, color, sexual orientation, gender identity

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

or national origin. The Contractor will take affirmative action to ensure the applicants are employed, and that employees are treated during employment, without regard to their race, creed, sex, color, sexual orientation, gender identity or national origin. Such action shall include, but not be limited to, the following: Employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship. The Contractor agrees to post in conspicuous places available to employees and applicants for employment notices to be provided by the contracting agency setting forth this nondiscrimination clause.

- B. The Contractor will, in all solicitations or advertisements for employees placed by or on behalf of the Contractor, state that all qualified applicants will receive consideration for employment without regard to race, creed, sex, color, sexual orientation, gender identity or national origin."

4.7 PREVAILING WAGE REQUIREMENT

- 4.7.1 Wage Provisions: For renovation and new construction projects whose costs exceed the thresholds contained in Delaware Code, Title 29, Section 6960, the minimum wage rates for various classes of laborers and mechanics shall be as determined by the Department of Labor, Division of Industrial Affairs of the State of Delaware.

- 4.7.2 The employer shall pay all mechanics and labors employed directly upon the site of work, or engaged in custom fabrication work, as that term is defined in Article 1.23 herein and as also as defined in 29 Del. C. § 6902 and described in 29 Del. C. § 6960(b), regardless of where the work is performed, unconditionally and not less often than once a week and without subsequent deduction or rebate on any account, the full amounts accrued at time of payment, computed at wage rates not less than those stated in the specifications, regardless of any contractual relationship which may be alleged to exist between the employer and such laborers and mechanics.

- 4.7.3 As per 29 Del. C. § 6960(b), the scale of the wages to be paid must be posted by the employer in a prominent and easily accessible place at the site of the work. There may be withheld from the employer so much of accrued payments as may be considered necessary by the Department of Labor to pay laborers and mechanics employed by the employer the difference between the rates of wages required by the contract to be paid laborers and mechanics on the work and rates of wages received by such laborers and mechanics to be remitted to the Department of Labor for distribution upon resolution of any claims.

- 4.7.4 Every contract based upon these specifications shall contain a stipulation that sworn payroll information, as required by the Department of Labor, be furnished weekly. The Department of Labor shall keep and maintain the sworn payroll information for a period of 6 months from the last day of the work week covered by the payroll.

4.8 SUBMISSION OF BIDS

- 4.8.1 Enclose the Bid, the Bid Security, and any other documents required to be submitted with the Bid in a sealed opaque envelope. Address the envelope to the party receiving the Bids. Identify with the project name, project number, and the Bidder's name and address. If the Bid is sent by mail, enclose the sealed envelope in a separate mailing envelope with the notation "BID ENCLOSED" on the face thereof. The State is not responsible for the opening of bids prior to bid opening date and time that are not properly marked.

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

- 4.8.2 Deposit Bids at the designated location prior to the time and date for receipt of bids indicated in the Advertisement for Bids. Bids received after the time and date for receipt of bids will be marked "LATE BID" and returned.
- 4.8.3 Bidder assumes full responsibility for timely delivery at location designated for receipt of bids.
- 4.8.4 Oral, telephonic or telegraphic bids are invalid and will not receive consideration.
- 4.8.5 Withdrawn Bids may be resubmitted up to the date and time designated for the receipt of Bids, provided that they are then fully in compliance with these Instructions to Bidders.
- 4.9 MODIFICATION OR WITHDRAW OF BIDS
- 4.9.1 Prior to the closing date for receipt of Bids, a Bidder may withdraw a Bid by personal request and by showing proper identification to the Architect. A request for withdraw by letter or fax, if the Architect is notified in writing prior to receipt of fax, is acceptable. A fax directing a modification in the bid price will render the Bid informal, causing it to be ineligible for consideration of award. Telephone directives for modification of the bid price shall not be permitted and will have no bearing on the submitted proposal in any manner.
- 4.9.2 Bidders submitting Bids that are late shall be notified as soon as practicable and the bid shall be returned.
- 4.9.3 A Bid may not be modified, withdrawn or canceled by the Bidder during a thirty (30) day period following the time and date designated for the receipt and opening of Bids, and Bidder so agrees in submitting their Bid. Bids shall be binding for 30 days after the date of the Bid opening.

ARTICLE 5: CONSIDERATION OF BIDS

5.1 OPENING/REJECTION OF BIDS

- 5.1.1 Unless otherwise stated, Bids received on time will be publicly opened and will be read aloud. An abstract of the Bids will be made available to Bidders.
- 5.1.2 The Agency shall have the right to reject any and all Bids. A Bid not accompanied by a required Bid Security or by other data required by the Bidding Documents, or a Bid which is in any way incomplete or irregular is subject to rejection.
- 5.1.3 If the Bids are rejected, it will be done within thirty (30) calendar day of the Bid opening.

5.2 COMPARISON OF BIDS

- 5.2.1 After the Bids have been opened and read, the bid prices will be compared and the result of such comparisons will be made available to the public. Comparisons of the Bids may be based on the Base Bid plus desired Alternates. The Agency shall have the right to accept Alternates in any order or combination.
- 5.2.2 The Agency reserves the right to waive technicalities, to reject any or all Bids, or any portion thereof, to advertise for new Bids, to proceed to do the Work otherwise, or to abandon the Work, if in the judgment of the Agency or its agent(s), it is in the best interest of the State.

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

- 5.2.3 An increase or decrease in the quantity for any item is not sufficient grounds for an increase or decrease in the Unit Price.
- 5.2.4 The prices quoted are to be those for which the material will be furnished F.O.B. Job Site and include all charges that may be imposed during the period of the Contract.
- 5.2.5 No qualifying letter or statements in or attached to the Bid, or separate discounts will be considered in determining the low Bid except as may be otherwise herein noted. Cash or separate discounts should be computed and incorporated into Unit Bid Price(s).
- 5.3 DISQUALIFICATION OF BIDDERS
- 5.3.1 An agency shall determine that each Bidder on any Public Works Contract is responsible before awarding the Contract. Factors to be considered in determining the responsibility of a Bidder include:
- A. The Bidder's financial, physical, personnel or other resources including Subcontracts;
 - B. The Bidder's record of performance on past public or private construction projects, including, but not limited to, defaults and/or final adjudication or admission of violations of the Prevailing Wage Laws in Delaware or any other state;
 - C. The Bidder's written safety plan;
 - D. Whether the Bidder is qualified legally to contract with the State;
 - E. Whether the Bidder supplied all necessary information concerning its responsibility; and,
 - F. Any other specific criteria for a particular procurement, which an agency may establish; provided however, that, the criteria be set forth in the Invitation to Bid and is otherwise in conformity with State and/or Federal law.
- 5.3.2 If an agency determines that a Bidder is nonresponsive and/or nonresponsible, the determination shall be in writing and set forth the basis for the determination. A copy of the determination shall be sent to the affected Bidder within five (5) working days of said determination.
- 5.3.3 In addition, any one or more of the following causes may be considered as sufficient for the disqualification of a Bidder and the rejection of their Bid or Bids.
- 5.3.3.1 More than one Bid for the same Contract from an individual, firm or corporation under the same or different names.
- 5.3.3.2 Evidence of collusion among Bidders.
- 5.3.3.3 Unsatisfactory performance record as evidenced by past experience.
- 5.3.3.4 If the Unit Prices are obviously unbalanced either in excess or below reasonable cost analysis values.

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

5.3.3.5 If there are any unauthorized additions, interlineation, conditional or alternate bids or irregularities of any kind which may tend to make the Bid incomplete, indefinite or ambiguous as to its meaning.

5.3.3.6 If the Bid is not accompanied by the required Bid Security and other data required by the Bidding Documents.

5.3.3.7 If any exceptions or qualifications of the Bid are noted on the Bid Form.

5.4 ACCEPTANCE OF BID AND AWARD OF CONTRACT

5.4.1 A formal Contract shall be executed with the successful Bidder within twenty (20) calendar days after the award of the Contract.

5.4.2 Per Section 6962(d)(13)a., Title 29, Delaware Code, "The contracting agency shall award any public works contract within thirty (30) days of the bid opening to the lowest responsive and responsible Bidder, unless the Agency elects to award on the basis of best value, in which case the election to award on the basis of best value shall be stated in the Invitation To Bid. Any public school district and its board shall award public works contracts in accordance with this section's requirements except it shall award the contract within 60 days of the bid opening."

5.4.3 Each Bid on any Public Works Contract must be deemed responsive by the Agency to be considered for award. A responsive Bid shall conform in all material respects to the requirements and criteria set forth in the Contract Documents and specifications.

5.4.4 The Agency shall have the right to accept Alternates in any order or combination, and to determine the low Bidder on the basis of the sum of the Base Bid, plus accepted Alternates.

5.4.5 The successful Bidder shall execute a formal contract, submit the required Insurance Certificate, and furnish good and sufficient bonds, unless specifically waived in the General Requirements, in accordance with the General Requirement, within twenty (20) days of official notice of contract award. The successful Bidder shall provide, at least two business days prior to contract execution, copies of the Employee Drug Testing Program for the Bidder and all listed Subcontractors. Bonds shall be for the benefit of the Agency with surety in the amount of 100% of the total contract award. Said Bonds shall be conditioned upon the faithful performance of the contract. Bonds shall remain in affect for period of two (2) years after the date of the Certificate of Final Payment.

5.4.6 If the successful Bidder fails to execute the required Contract, Bond and all required information, as aforesaid, within twenty (20) calendar days after the date of official Notice of the Award of the Contract, their Bid guaranty shall immediately be taken and become the property of the State for the benefit of the Agency as liquidated damages, and not as a forfeiture or as a penalty. Award will then be made to the next lowest qualified Bidder of the Work or readvertised, as the Agency may decide.

5.4.7 Each bidder shall supply with its bid its taxpayer identification number (i.e., federal employer identification number or social security number) and should the vendor be awarded a contract, such vendor shall provide to the agency the taxpayer identification license numbers of such subcontractors. Such numbers shall be provided on the later of the date on which such subcontractor is required to be identified or the time the contract is executed. The successful Bidder shall provide to the agency to which it is contracting, within 30 days of entering into such public works contract, copies of all Delaware Business licenses of

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

subcontractors and/or independent contractors that will perform work for such public works contract. However, if a subcontractor or independent contractor is hired or contracted more than 20 days after the Bidder entered the public works contract the Delaware Business license of such subcontractor or independent contractor shall be provided to the agency within 10 days of being contracted or hired.

- 5.4.8 The Bid Security shall be returned to the successful Bidder upon the execution of the formal contract. The Bid Securities of unsuccessful bidders shall be returned within thirty (30) calendar days after the opening of the Bids.

ARTICLE 6: POST-BID INFORMATION

6.1 CONTRACTOR'S QUALIFICATION STATEMENT

- 6.1.1 Bidders to whom an award of a Contract is under consideration shall, if requested by the Agency, submit a properly executed AIA Document A305, Contractor's Qualification Statement, unless such a statement has been previously required and submitted.

- 6.2 Bidders to whom an award of a Contract has been made must produce their Delaware Business License before the Contract can be executed.

ARTICLE 7: PERFORMANCE BOND AND PAYMENT BOND

7.1 BOND REQUIREMENTS

- 7.1.1 The cost of furnishing the required Bonds, that are stipulated in the Bidding Documents, shall be included in the Bid.

- 7.1.2 If the Bidder is required by the Agency to secure a bond from other than the Bidder's usual sources, changes in cost will be adjusted as provide in the Contract Documents.

- 7.1.3 The Performance and Payment Bond forms used shall be the standard OMB forms (attached).

7.2 TIME OF DELIVERY AND FORM OF BONDS

- 7.2.1 The bonds shall be dated on or after the date of the Contract.

- 7.2.2 The Bidder shall require the attorney-in-fact who executes the required bonds on behalf of the surety to affix a certified and current copy of the power of attorney.

ARTICLE 8: FORM OF AGREEMENT BETWEEN OWNER AND CONTRACTOR

- 8.1 Unless otherwise required in the Bidding Documents, the Agreement for the Work will be written on AIA Document A101, Standard Form of Agreement Between Owner and Contractor Where the Basis of Payment is a Stipulated Sum.

END OF SECTION

Contract No. A-01 Roofing Replacement

BID FORM

For Bids Due: _____

To: Polytech School District
Nick Johnson
823 Walnut Shade Rd,
Woodside, DE 19980

Name of Bidder: _____

Bidder Address: _____

Contact Name: _____ E-Mail Address: _____

Delaware Business License No.: _____ Taxpayer ID No.: _____

(Other License Nos.): _____

(A copy of Bidder's Delaware Business License must be attached to this form.)

Phone No.: () _____ - _____ Fax No.: () _____

The undersigned, representing that he has read and understands the Bidding Documents and that this bid is made in accordance therewith, that he has visited the site and has familiarized himself with the local conditions under which the Work is to be performed, and that his bid is based upon the materials, systems and equipment described in the Bidding Documents without exception, hereby proposes and agrees to provide all labor, materials, plant, equipment, supplies, transport and other facilities required to execute the work described by the aforesaid documents for the lump sum itemized below:

\$ _____ (\$ _____)

ALTERNATES

Alternate prices conform to applicable project specification section. Refer to specifications for a complete description of the following Alternates. An "ADD" or "DEDUCT" amount is indicated by the crossed out part that does not apply.

Alternate No. 1: RA-04 - ROOF RECOVER

1. The Contractor shall furnish and install a complete EPDM fully-adhered roofing system with a manufacturer's 20-year warranty. This system shall include:
 - a. 60-mil Sure-Seal black EPDM membrane with factory-applied tape seam
 - b. Bonding adhesive as required by manufacturer for full adherence
 - c. All necessary flashings, termination bars, and accessory materials for a complete installation

2. Contractor shall install ½" protection board mechanically fastened as required over the existing EPDM and insulation. Protection board fasteners shall:
 - a. Provide minimum ¾" penetration through the existing concrete roof deck
 - b. Be of appropriate type for concrete applications
 - c. Be verified by Contractor for proper length based on actual roof thickness
3. Existing roof assembly shall remain in place and be prepared to receive the new roof recover system. Preparation shall include:
 - a. Coordination with demolition sheets and other project documents
 - b. Repair of any damaged or deteriorated areas of the existing roof
 - c. Removal of loose or unsecured material from the existing surface
4. Prior to application of adhesive, Contractor shall thoroughly clean the substrate using:
 - a. Compressed air
 - b. Vacuum equipment
 - c. Hand or power brooms
5. Following cleaning and prior to adhesive application, Contractor shall:
 - a. Remove all dust, loose dirt, and debris from the roof surface
 - b. Prime the substrate as required by the manufacturer
 - c. Verify substrate is dry and suitable for adhesive application
6. All installation work shall be performed in strict accordance with:
 - a. Manufacturer's written installation instructions
 - b. Approved shop drawings and project details
 - c. Industry standards and best practices for EPDM roofing systems
7. Upon completion, Contractor shall:
 - a. Arrange for manufacturer's inspection of the installed system
 - b. Provide Owner with manufacturer's 20-year warranty documentation
 - c. Remove all construction debris and excess materials from the project site
8. See Detail 3/A11-3 and RA-04/A10-1 for description of roof recovery installation

Add/Deduct _____ (\$ _____)

UNIT PRICES

Unit prices conform to applicable project specification section. Refer to the specifications for a complete description of the following Unit Prices:

	<u>Add</u>	<u>Deduct</u>
1. RA-01 EPDM Roofing & Insulation (per square foot)	_____	_____
2. RA-02 EPDM Roofing & Insulation (per square foot)	_____	_____

3.	RA-03 EPDM Roofing & Insulation (per square foot)	_____	_____
4.	RA-04 EPDM Roofing & Protection Board (per square foot)	_____	_____
5.	Continuous 2x Pressure Treated Wood Blocking (per linear foot)	_____	_____
6.	Roof Hatch (per unit)	_____	_____
7.	Metal deck replacement (per square foot).	_____	_____

NOTE: The difference in price between Add and Deduct in the above Unit Prices should not exceed fifteen percent (15%).

I/We acknowledge Addendums numbered _____ and the price(s) submitted include any cost/schedule impact they may have.

This bid shall remain valid and cannot be withdrawn for sixty (60) days from the date of opening of bids, and the undersigned shall abide by the Bid Security forfeiture provisions. Bid Security is attached to this Bid (if required).

The Owner shall have the right to reject any or all bids, and to waive any informality or irregularity in any bid received.

This bid is based upon work being accomplished by the Sub-Contractors named on the list attached to this bid.

Should I/We be awarded this contract, I/We pledge to achieve substantial completion of all the work within _ calendar days of the Notice to Proceed.

The undersigned represents and warrants that he has complied and shall comply with all requirements of local, state, and national laws; that no legal requirement has been or shall be violated in making or accepting this bid, in awarding the contract to him or in the prosecution of the work required; that the bid is legal and firm; that he has not, directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken action in restraint of free competitive bidding.

Upon receipt of written notice of the acceptance of this Bid, the Bidder shall, within twenty (20) calendar days, execute the agreement in the required form and deliver the Contract Bonds, and Insurance Certificates, required by the Contract Documents.

I am / We are an Individual / a Partnership / a Corporation

By _____ Trading as _____
(Individual's / General Partner's / Corporate Name)

(State of Corporation)

Business Address: _____

Witness: _____ By: _____
(SEAL) (Authorized Signature)

(Title)
Date: _____

ATTACHMENTS

Sub-Contractor List
Non-Collusion Statement
Bid Bond
Consent of Surety
Affidavit of Employee Drug Testing Program
Affidavit of Contractor Qualifications
Affidavit of Craft Training Compliance
Bid Security
Delaware Business License
Kent County Contractor's License
(Others as Required by Project Manuals)

SUBCONTRACTOR LIST

In accordance with Title 29, Chapter 69, Section 6962(d)(10)b of the Delaware Code, the following subcontractor listing must accompany any bid submittal. The bidder must list **in each category** the full name and address (City & State) of the sub-contractor that the bidder will be using to perform the work and provide material for that subcontractor category. Should the bidder's listed subcontractor intend to provide any of their subcontractor category of work through a third-tier contractor, the bidder shall list that third-tier contractor's full name and address (City & State). **If the bidder intends to perform any category of work itself, it must list its full name and address.** For clarification, if the bidder intends to perform the work themselves, the bidder **may not** insert "not applicable", "N/A", "self" or anything other than its own full name and address (City & State). To do so shall cause the bid to be rejected. In addition, the failure to produce a completed subcontractor list with the bid submittal shall cause the bid to be rejected. If you have more than three (3) third-tier contractors to report in any subcontractor category, print out additional page(s) containing the appropriate category, complete the rest of your list of third-tier contractors for that category, notate the addition in parentheses as (CONTINUATION) next to the subcontractor category and an asterisk (*) next to any additional third-tier contractors, and submit it with your bid.

	<u>Subcontractor Category</u>	<u>Subcontractor</u>	<u>Address (City & State)</u>	<u>Subcontractors tax-payer ID # or Delaware Business license #</u>
1.	<u>Roofing</u>			
2.	<u>Rough Carpentry</u>			
3.				
4.				
5.				

NON-COLLUSION STATEMENT

This is to certify that the undersigned bidder has neither directly nor indirectly, entered into any agreement, participated in any collusion or otherwise taken any action in restraint of free competitive bidding in connection with this proposal submitted this date to Polytech School District.

All the terms and conditions of Contract No. A-01 Roof Replacement have been thoroughly examined and are understood.

NAME OF BIDDER: _____

AUTHORIZED REPRESENTATIVE
(TYPED): _____

AUTHORIZED REPRESENTATIVE
(SIGNATURE): _____

TITLE: _____

ADDRESS OF BIDDER: _____

E-MAIL: _____

PHONE NUMBER: _____

Sworn to and Subscribed before me this _____ day of _____ 20____.

My Commission expires _____. NOTARY PUBLIC _____.

THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.

BID BOND

TO ACCOMPANY PROPOSAL
(Not necessary if security is used)

KNOW ALL MEN BY THESE PRESENTS That: _____ of
_____ in the County of _____ and State of _____ as
Principal, and _____ of _____ in the County of _____
_____ and State of _____ as Surety, legally authorized to do business in the State of Delaware
("State"), are held and firmly unto the Polytech School District in the sum of _____ Dollars
(S _____), or percent not to exceed _____
Dollars (S _____) of amount of bid on Contract No. _____ to be paid to the Polytech
School district for the use and benefit of the Polytech School District for which payment well and truly to be made, we do
bind ourselves, our and each of our heirs, executors, administrators, and successors, jointly and severally for and in the
whole firmly by these presents.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH That if the above bonded Principal who has submitted to the
Polytech School District a certain proposal to enter into this contract for the furnishing of certain material and/or services
within the State, shall be awarded this Contract, and if said Principal shall well and truly enter into and execute this
Contract as may be required by the terms of this Contract and approved by the Polytech School District, this Contract to
be entered into within twenty days after the date of official notice of the award thereof in accordance with the terms of
said proposal, then this obligation shall be void or else to be and remain in full force and virtue.

Sealed with _____ seal and dated this _____ day of _____ in the year of our Lord two thousand
and _____ (20__).

SEALED, AND DELIVERED IN THE PRESENCE OF

Name of Bidder (Organization)

Corporate
Seal
Attest _____

By: _____
Authorized Signature

Title

Name of Surety

Witness _____

Title

CONSENT OF SURETY

DATE _____

To: Polytech School District
Nick Johnson
823 Walnut Shade Rd,
Woodside, DE 19980

Gentlemen:

We, the _____

(Surety Company's Address)

a Surety Company authorized to do business in the State of Delaware hereby agrees that if

(Contractor)

(Address)

is awarded the Contract No. _____

We will write the required Performance and/or Labor and Material Bond required by Paragraph 9 of the Instructions to Bidders.

(Surety Company)

By _____
(Attorney-in-Fact)

AFFIDAVIT
OF
EMPLOYEE DRUG TESTING PROGRAM

4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects requires that Contractors and Subcontractors implement a program of mandatory drug testing for Employees who work on Large Public Works Contracts funded all or in part with public funds.

We hereby certify that we have in place or will implement during the entire term of the contract a Mandatory Drug Testing Program for our employees on the jobsite, including subcontractors, that complies with this regulation:

Contractor/Subcontractor Name: _____

Contractor/Subcontractor Address: _____

Authorized Representative (typed or printed): _____

Authorized Representative (signature): _____

Title: _____

Sworn to and Subscribed before me this _____ day of _____ 20____.

My Commission expires _____. NOTARY PUBLIC _____.

THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.

**AFFIDAVIT
OF
CONTRACTOR QUALIFICATIONS**

We hereby certify that we will abide by the contractor's qualifications outlined in the construction bid specifications for the duration of the contract term.

In accordance with Title 29, Chapter 69, Section 6962(d)(10)b.3 of the Delaware Code, after a contract has been awarded the successful bidder shall not substitute another subcontractor whose name was submitted on the Subcontractor Form except for the reasons in the statute and not without written consent from the awarding agency. Failure to utilize the subcontractors on the list will subject the successful bidder to penalties as outlined in the General Requirements Section 5.2 of the contract.

Contractor Name: _____

Contractor Address: _____

Authorized Representative (typed or printed): _____

Authorized Representative (signature): _____

Title: _____

Sworn to and Subscribed before me this _____ day of _____ 20____.

My Commission expires _____. NOTARY PUBLIC _____.

THIS PAGE MUST BE SIGNED AND NOTARIZED FOR YOUR BID TO BE CONSIDERED.

END OF SECTION

SECTION 005200 - AGREEMENT

1. SUMMARY

A. The Agreement Form for this Project is the American Institute of Architects Standard Form of Agreement Between Owner and Contractor, Construction Manager as Adviser Edition, AIA Document A132 – 2019

B. A copy of AIA Document A132 - 2019 Edition is bound into this Project Manual following this page.

1. Under Article 5.1.4.5 add the following:

“Upon completion of the work under the Contract, the Owner may release 60% of the amount then retained. The balance of the amount retained will be held until:

- a. All reports required of the Contract are received;
- b. All Subcontractors in trades listed on the Bid Form are paid by the Contractor, unless the amount owed to the Subcontractor is disputed, in which case the Owner may withhold 150% of the amount withheld by the Contractor in its dispute with the Subcontractor; and
- c. Final payment is authorized by the Owner.”

END OF SECTION

DRAFT AIA® Document A132® – 2019

Standard Form of Agreement Between Owner and Contractor, Construction Manager as Adviser Edition

AGREEMENT made as of the « » day of « » in the year « »
(In words, indicate day, month, and year.)

BETWEEN the Owner:
(Name, legal status, address, and other information)

Polytech School District
823 Walnut Shade Road
Woodside, DE 19980

and the Contractor:
(Name, legal status, address, and other information)

« »« »
« »
« »
« »

for the following Project:
(Name, location, and detailed description)

Polytech High School Renovations & Improvements

The Construction Manager:
(Name, legal status, address, and other information)

EDiS Company, Inc.
110 S. Poplar Street, Suite 400
Wilmington, DE 19801

The Architect:
(Name, legal status, address, and other information)

RG Architects, LLC
200 West Main Street
Middletown, DE 19709

The Owner and Contractor agree as follows.

ADDITIONS AND DELETIONS: The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

This document is intended to be used in conjunction with AIA Documents A232™-2019, General Conditions of the Contract for Construction, Construction Manager as Adviser Edition; B132™-2019, Standard Form of Agreement Between Owner and Architect, Construction Manager as Adviser Edition; and C132™-2019, Standard Form of Agreement Between Owner and Construction Manager as Adviser. AIA Document A232™-2019 is adopted in this document by reference. Do not use with other general conditions unless this document is modified.

ELECTRONIC COPYING of any portion of this AIA® Document to another electronic file is prohibited and constitutes a violation of copyright laws as set forth in the footer of this document.

TABLE OF ARTICLES

1	THE CONTRACT DOCUMENTS
2	THE WORK OF THIS CONTRACT
3	DATE OF COMMENCEMENT AND DATES OF SUBSTANTIAL COMPLETION
4	CONTRACT SUM
5	PAYMENTS
6	DISPUTE RESOLUTION
7	TERMINATION OR SUSPENSION
8	MISCELLANEOUS PROVISIONS
9	ENUMERATION OF CONTRACT DOCUMENTS

EXHIBIT A INSURANCE AND BONDS

EXHIBIT B DETERMINATION OF THE COST OF THE WORK

ARTICLE 1 THE CONTRACT DOCUMENTS

The Contract Documents consist of this Agreement, Conditions of the Contract (General, Supplementary, and other Conditions), Drawings, Specifications, Addenda issued prior to execution of this Agreement, other documents listed in this Agreement, and Modifications issued after execution of this Agreement, all of which form the Contract, and are as fully a part of the Contract as if attached to this Agreement or repeated herein. The Contract represents the entire and integrated agreement between the parties hereto and supersedes prior negotiations, representations, or agreements, either written or oral. An enumeration of the Contract Documents, other than Modifications, appears in Article 9.

ARTICLE 2 THE WORK OF THIS CONTRACT

The Contractor shall fully execute the Work described in the Contract Documents, except as specifically indicated in the Contract Documents to be the responsibility of others.

ARTICLE 3 DATE OF COMMENCEMENT AND DATES OF SUBSTANTIAL COMPLETION

§ 3.1 The date of commencement of the Work shall be:

(Check one of the following boxes.)

☐ The date of this Agreement.

☐ A date set forth in a notice to proceed issued by the Owner.

☐ Established as follows:

(Insert a date or a means to determine the date of commencement of the Work.)

« »

If a date of commencement of the Work is not selected, then the date of commencement shall be the date of this Agreement.

§ 3.2 The Contract Time shall be measured from the date of commencement of the Work.

§ 3.3 Substantial Completion of the Project or Portions Thereof

§ 3.3.1 Subject to adjustments of the Contract Time as provided in the Contract Documents, the date of Substantial Completion of the Work of all of the Contractors for the Project will be:

(Insert the date of Substantial Completion of the Work of all Contractors for the Project.)

§ 3.3.2 Subject to adjustments of the Contract Time as provided in the Contract Documents, if portions of the Work of all of the Contractors for the Project are to be completed prior to Substantial Completion of the entire Work of all of the Contractors for the Project, the Contractors shall achieve Substantial Completion of such portions by the following dates:

Portion of Work

Substantial Completion Date

§ 3.4 When the Work of this Contract, or any Portion Thereof, is Substantially Complete

§ 3.4.1 Subject to adjustments of the Contract Time as provided in the Contract Documents, the Contractor shall substantially complete the entire Work of this Contract:

(Check one of the following boxes and complete the necessary information.)

[☐] Not later than () calendar days from the date of commencement of the Work.

[☐] By the following date:

§ 3.4.2 Subject to adjustments of the Contract Time as provided in the Contract Documents, if portions of the Work of this Contract are to be substantially complete prior to when the entire Work of this Contract shall be substantially complete, the Contractor shall substantially complete such portions by the following dates:

Portion of Work

Date to be substantially complete

§ 3.4.3 If the Contractor fails to substantially complete the Work of this Contract, or portions thereof, as provided in this Section 3.4, liquidated damages, if any, shall be assessed as set forth in Section 4.5.

ARTICLE 4 CONTRACT SUM

§ 4.1 The Owner shall pay the Contractor the Contract Sum in current funds for the Contractor's performance of the Contract. The Contract Sum shall be one of the following:

(Check the appropriate box.)

[☐] Stipulated Sum, in accordance with Section 4.2 below

[☐] Cost of the Work plus the Contractor's Fee, in accordance with Section 4.3 below

[☐] Cost of the Work plus the Contractor's Fee with a Guaranteed Maximum Price, in accordance with Section 4.4 below

(Based on the selection above, complete Section 4.2, 4.3 or 4.4 below.)

§ 4.2 Stipulated Sum

§ 4.2.1 The Contract Sum shall be (\$), subject to additions and deductions as provided in the Contract Documents.

§ 4.2.2 Alternates

§ 4.2.2.1 Alternates, if any, included in the Contract Sum:

Item

Price

§ 4.2.2.2 Subject to the conditions noted below, the following alternates may be accepted by the Owner following execution of this Agreement. Upon acceptance, the Owner shall issue a Modification to this Agreement.

(Insert below each alternate and the conditions that must be met for the Owner to accept the alternate.)

Item	Price	Conditions for Acceptance

§ 4.2.3 Allowances, if any, included in the Contract Sum:
(Identify each allowance.)

Item	Price

§ 4.2.4 Unit prices, if any:
(Identify the item and state the unit price, and quantity limitations, if any, to which the unit price will be applicable.)

Item	Units and Limitations	Price per Unit (\$0.00)

§ 4.3 Cost of the Work Plus Contractor's Fee without a Guaranteed Maximum Price

§ 4.3.1 The Cost of the Work is as defined in Exhibit B, Determination of the Cost of the Work.

§ 4.3.2 The Contractor's Fee:

(State a lump sum, percentage of Cost of the Work or other provision for determining the Contractor's Fee.)

<< >>

§ 4.3.3 The method of adjustment of the Contractor's Fee for changes in the Work:

<< >>

§ 4.3.4 Limitations, if any, on a Subcontractor's overhead and profit for increases in the cost of its portion of the Work:

<< >>

§ 4.3.5 Rental rates for Contractor-owned equipment shall not exceed <> percent (<> %) of the standard rental rate paid at the place of the Project.

§ 4.3.6 Unit prices, if any:

(Identify the item and state the unit price and quantity limitations, if any, to which the unit price will be applicable.)

Item	Units and Limitations	Price per Unit (\$0.00)

§ 4.3.7 The Contractor shall prepare and submit to the Construction Manager, within 14 days of executing this Agreement, a written Control Estimate for the Owner's review and approval. The Control Estimate shall include the items in Section B.1 of Exhibit B, Determination of the Cost of the Work.

§ 4.4 Cost of the Work Plus Contractor's Fee with a Guaranteed Maximum Price

§ 4.4.1 The Cost of the Work is as defined in Exhibit B, Determination of the Cost of the Work.

§ 4.4.2 The Contractor's Fee:

(State a lump sum, percentage of Cost of the Work or other provision for determining the Contractor's Fee.)

<< >>

§ 4.4.3 The method of adjustment of the Contractor's Fee for changes in the Work:

<< >>

§ 4.4.4 Limitations, if any, on a Subcontractor's overhead and profit for increases in the cost of its portion of the Work:

<< >>

§ 4.4.5 Rental rates for Contractor-owned equipment shall not exceed <> percent (<> %) of the standard rental rate paid at the place of the Project.

§ 4.4.6 Unit Prices, if any:

(Identify the item and state the unit price and quantity limitations, if any, to which the unit price will be applicable.)

Item	Units and Limitations	Price per Unit (\$0.00)

§ 4.4.7 Guaranteed Maximum Price

§ 4.4.7.1 The Contract Sum is guaranteed by the Contractor not to exceed <> (\$ <>), subject to additions and deductions by Change Order as provided in the Contract Documents. This maximum sum is referred to in the Contract Documents as the Guaranteed Maximum Price. Costs which would cause the Guaranteed Maximum Price to be exceeded shall be paid by the Contractor without reimbursement by the Owner.

§ 4.4.7.2 Alternates

§ 4.4.7.2.1 Alternates, if any, included in the Guaranteed Maximum Price:

Item	Price

§ 4.4.7.2.2 Subject to the conditions noted below, the following alternates may be accepted by the Owner following execution of this Agreement. Upon acceptance, the Owner shall issue a Modification to this Agreement.

(Insert below each alternate and the conditions that must be met for the Owner to accept the alternate.)

Item	Price	Conditions for Acceptance

§ 4.4.7.3 Allowances, if any, included in the Guaranteed Maximum Price:

(Identify each allowance.)

Item	Price

§ 4.4.7.4 Assumptions, if any, upon which the Guaranteed Maximum Price is based:

(Identify each assumption.)

<< >>

§ 4.4.8 To the extent that the Contract Documents are anticipated to require further development, the Guaranteed Maximum Price includes the costs attributable to such further development consistent with the Contract Documents and reasonably inferable therefrom. Such further development does not include changes in scope, systems, kinds and quality of materials, finishes, or equipment, all of which, if required, shall be incorporated by Change Order.

§ 4.4.9 The Owner shall authorize preparation of revisions to the Contract Documents that incorporate the agreed-upon assumptions contained in Section 4.4.7.4. The Owner shall promptly furnish such revised Contract Documents to the Contractor. The Contractor shall notify the Owner and Architect of any inconsistencies between the agreed-upon assumptions contained in Section 4.4.7.4 and the revised Contract Documents.

§ 4.5 Liquidated damages, if any:

(Insert terms and conditions for liquidated damages, if any, to be assessed in accordance with Section 3.4.)

<< >>

§ 4.6 Other:

(Insert provisions for bonus, cost savings or other incentives, if any, that might result in a change to the Contract Sum.)

« »

ARTICLE 5 PAYMENTS

§ 5.1 Progress Payments

§ 5.1.1 Based upon Applications for Payment submitted to the Construction Manager by the Contractor, and Certificates for Payment issued by the Construction Manager and Architect, the Owner shall make progress payments on account of the Contract Sum, to the Contractor, as provided below and elsewhere in the Contract Documents.

§ 5.1.2 The period covered by each Application for Payment shall be one calendar month ending on the last day of the month, or as follows:

« »

§ 5.1.3 Provided that an Application for Payment is received by the Construction Manager not later than the « » day of a month, the Owner shall make payment of the amount certified to the Contractor not later than the « » day of the « » month. If an Application for Payment is received by the Construction Manager after the application date fixed above, payment of the amount certified shall be made by the Owner not later than « » (« ») days after the Construction Manager receives the Application for Payment.

(Federal, state or local laws may require payment within a certain period of time.)

§ 5.1.4 Progress Payments Where the Contract Sum is Based on a Stipulated Sum

§ 5.1.4.1 Each Application for Payment shall be based on the most recent schedule of values submitted by the Contractor in accordance with the Contract Documents. The schedule of values shall allocate the entire Contract Sum among the various portions of the Work. The schedule of values shall be prepared in such form, and supported by such data to substantiate its accuracy, as the Construction Manager and Architect may require. This schedule of values shall be used as a basis for reviewing the Contractor's Applications for Payment.

§ 5.1.4.2 Applications for Payment shall show the percentage of completion of each portion of the Work as of the end of the period covered by the Application for Payment.

§ 5.1.4.3 In accordance with AIA Document A232™–2019, General Conditions of the Contract for Construction, Construction Manager as Adviser Edition, and subject to other provisions of the Contract Documents, the amount of each progress payment shall be computed as follows:

§ 5.1.4.3.1 The amount of each progress payment shall first include:

- .1 That portion of the Contract Sum properly allocable to completed Work;
- .2 That portion of the Contract Sum properly allocable to materials and equipment delivered and suitably stored at the site for subsequent incorporation in the completed construction, or, if approved in advance by the Owner, suitably stored off the site at a location agreed upon in writing; and
- .3 That portion of Construction Change Directives that the Architect determines, in the Architect's professional judgment, to be reasonably justified.

§ 5.1.4.3.2 The amount of each progress payment shall then be reduced by:

- .1 The aggregate of any amounts previously paid by the Owner;
- .2 The amount, if any, for Work that remains uncorrected and for which the Architect has previously withheld a Certificate for Payment as provided in Article 9 of AIA Document A232–2019;
- .3 Any amount for which the Contractor does not intend to pay a Subcontractor or material supplier, unless the Work has been performed by others the Contractor intends to pay;
- .4 For Work performed or defects discovered since the last payment application, any amount for which the Architect may withhold payment, or nullify a Certificate of Payment in whole or in part, as provided in Article 9 of AIA Document A232–2019; and
- .5 Retainage withheld pursuant to Section 5.1.7.

§ 5.1.5 Progress Payments Where the Contract Sum is Based on the Cost of the Work without a Guaranteed Maximum Price

§ 5.1.5.1 With each Application for Payment, the Contractor shall submit the cost control information required in Exhibit B, Determination of the Cost of the Work, along with payrolls, petty cash accounts, receipted invoices, or invoices with check vouchers attached, and any other evidence required by the Owner, Construction Manager or Architect to demonstrate that payments already made by the Contractor on account of the Cost of the Work equal or exceed progress payments already received by the Contractor, plus payrolls for the period covered by the present Application for Payment, less that portion of the payments attributable to the Contractor's Fee.

§ 5.1.5.2 Applications for Payment shall show the Cost of the Work actually incurred by the Contractor through the end of the period covered by the Application for Payment and for which the Contractor has made or intends to make actual payment prior to the next Application for Payment.

§ 5.1.5.3 In accordance with AIA Document A232-2019 and subject to other provisions of the Contract Documents, the amount of each progress payment shall be computed as follows:

§ 5.1.5.3.1 The amount of each progress payment shall first include:

- .1 The Cost of the Work as described in Exhibit B, Determination of the Cost of the Work;
- .2 That portion of Construction Change Directives that the Architect determines, in the Architect's professional judgment, to be reasonably justified; and
- .3 The Contractor's Fee computed upon the Cost of the Work described in the preceding Section 5.1.5.3.1.1 at the rate stated in Section 4.3.2; or if the Contractor's Fee is stated as a fixed sum in Section 4.3.2 an amount which bears the same ratio to that fixed-sum Fee as the Cost of the Work included in Section 5.1.5.3.1.1 bears to a reasonable estimate of the probable Cost of the Work upon its completion.

§ 5.1.5.3.2 The amount of each progress payment shall then be reduced by:

- .1 The aggregate of any amounts previously paid by the Owner;
- .2 The amount, if any, for Work that remains uncorrected and for which the Architect has previously withheld a Certificate for Payment as provided in Article 9 of AIA Document A232-2019;
- .3 Any amount for which the Contractor does not intend to pay a Subcontractor or material supplier, unless the Work has been performed by others the Contractor intends to pay;
- .4 For Work performed or defects discovered since the last payment application, any amount for which the Architect may withhold payment, or nullify a Certificate of Payment in whole or in part, as provided in Article 9 of AIA Document A232-2019;
- .5 The shortfall, if any, indicated by the Contractor in the documentation required by Section 5.1.5.1 to substantiate prior Applications for Payment, or resulting from errors subsequently discovered by the Owner's auditors in such documentation; and
- .6 Retainage withheld pursuant to Section 5.1.7.

§ 5.1.5.4 The Owner, Construction Manager and Contractor shall agree upon a mutually acceptable procedure for review and approval of payments to Subcontractors and the percentage of retainage held on Subcontracts, and the Contractor shall execute subcontracts in accordance with those agreements.

§ 5.1.5.5 In taking action on the Contractor's Applications for Payment, the Construction Manager and Architect shall be entitled to rely on the accuracy and completeness of the information furnished by the Contractor, and such action shall not be deemed to be a representation that (1) the Construction Manager and Architect have made a detailed examination, audit or arithmetic verification of the documentation submitted in accordance with Article 5 or other supporting data; (2) that the Construction Manager and Architect have made exhaustive or continuous on-site inspections; or (3) that the Construction Manager and Architect have made examinations to ascertain how or for what purposes the Contractor has used amounts previously paid on account of the Contract. Such examinations, audits and verifications, if required by the Owner, will be performed by the Owner's auditors acting in the sole interest of the Owner.

§ 5.1.5.6 Except with the Owner's prior approval, the Contractor shall not make advance payments to suppliers for materials or equipment which have not been delivered and stored at the site.

§ 5.1.5.7 If final completion of the Work is materially delayed through no fault of the Contractor, then the Owner shall pay the Contractor any additional amounts in accordance with Article 9 of AIA Document A232-2019.

§ 5.1.6 Progress Payments Where the Contract Sum is Based on the Cost of the Work with a Guaranteed Maximum Price

§ 5.1.6.1 With each Application for Payment, the Contractor shall submit payrolls, petty cash accounts, receipted invoices or invoices with check vouchers attached, and any other evidence required by the Owner, Construction Manager or Architect to demonstrate that payments already made by the Contractor on account of the Cost of the Work equal or exceed progress payments already received by the Contractor plus payrolls for the period covered by the present Application for Payment, less that portion of the progress payments attributable to the Contractor's Fee.

§ 5.1.6.2 Each Application for Payment shall be based on the most recent schedule of values submitted by the Contractor in accordance with the Contract Documents. The schedule of values shall allocate the entire Guaranteed Maximum Price among: (1) the various portions of the Work; (2) any contingency for costs that are included in the Guaranteed Maximum Price but not otherwise allocated to another line item or included in a Change Order; and (3) the Contractor's Fee.

§ 5.1.6.2.1 The schedule of values shall be prepared in such form, and supported by such data to substantiate its accuracy, as the Construction Manager and Architect may require. This schedule of values shall be used as a basis for reviewing the Contractor's Applications for Payment.

§ 5.1.6.2.2 The allocation of the Guaranteed Maximum Price under this Section 5.1.6.2 shall not constitute a separate guaranteed maximum price for the Cost of the Work of each individual line item in the schedule of values.

§ 5.1.6.2.3 When the Contractor allocates costs from a contingency to another line item in the schedule of values, the Contractor shall submit supporting documentation to the Architect and Construction Manager.

§ 5.1.6.3 Applications for Payment shall show the percentage of completion of each portion of the Work as of the end of the period covered by the Application for Payment. The percentage of completion shall be the lesser of (1) the percentage of that portion of the Work which has actually been completed; or (2) the percentage obtained by dividing (a) the expense that has actually been incurred by the Contractor on account of that portion of the Work and for which the Contractor has made payment or intends to make payment prior to the next Application for Payment by (b) the share of the Guaranteed Maximum Price allocated to that portion of the Work in the schedule of values.

§ 5.1.6.4 In accordance with AIA Document A232-2019, and subject to other provisions of the Contract Documents, the amount of each progress payment shall be computed as follows:

§ 5.1.6.4.1 The amount of each progress payment shall first include:

- .1 That portion of the Guaranteed Maximum Price properly allocable to completed Work as determined by multiplying the percentage of completion of each portion of the Work by the share of the Guaranteed Maximum Price allocated to that portion of the Work in the most recent schedule of values;
- .2 That portion of the Guaranteed Maximum Price properly allocable to materials and equipment delivered and suitably stored at the site for subsequent incorporation in the completed construction or, if approved in writing in advance by the Owner, suitably stored off the site at a location agreed upon in writing;
- .3 That portion of Construction Change Directives that the Architect determines, in the Architect's professional judgment, to be reasonably justified; and
- .4 The Contractor's Fee, computed upon the Cost of the Work described in the preceding Sections 5.1.6.4.1.1 and 5.1.6.4.1.2 at the rate stated in Section 4.4.2 or, if the Contractor's Fee is stated as a fixed sum in that Section, an amount that bears the same ratio to that fixed-sum fee as the Cost of the Work included in Sections 5.1.6.4.1.1 and 5.1.6.4.1.2 bears to a reasonable estimate of the probable Cost of the Work upon its completion.

§ 5.1.6.4.2 The amount of each progress payment shall then be reduced by:

- .1 The aggregate of any amounts previously paid by the Owner;
- .2 The amount, if any, for Work that remains uncorrected and for which the Architect has previously withheld a Certificate for Payment as provided in Article 9 of AIA Document A232-2019;
- .3 Any amount for which the Contractor does not intend to pay a Subcontractor or material supplier, unless the Work has been performed by others the Contractor intends to pay;

- .4 For Work performed or defects discovered since the last payment application, any amount for which the Architect may withhold payment, or nullify a Certificate of Payment in whole or in part, as provided in Article 9 of AIA Document A232–2019;
- .5 The shortfall, if any, indicated by the Contractor in the documentation required by Section 5.1.6.1 to substantiate prior Applications for Payment, or resulting from errors subsequently discovered by the Owner’s auditors in such documentation; and
- .6 Retainage withheld pursuant to Section 5.1.7.

§ 5.1.6.5 The Owner and the Contractor shall agree upon a mutually acceptable procedure for review and approval of payments to Subcontractors and the percentage of retainage held on Subcontracts, and the Contractor shall execute subcontracts in accordance with those agreements.

§ 5.1.6.6 In taking action on the Contractor’s Applications for Payment, the Construction Manager and Architect shall be entitled to rely on the accuracy and completeness of the information furnished by the Contractor and such action shall not be deemed to be a representation that (1) the Construction Manager or Architect have made a detailed examination, audit, or arithmetic verification of the documentation submitted in accordance with Section 5.1.6.1 or other supporting data; (2) that the Construction Manager or Architect have made exhaustive or continuous on-site inspections; or (3) that the Construction Manager or Architect have made examinations to ascertain how or for what purposes the Contractor has used amounts previously paid on account of the Contract. Such examinations, audits, and verifications, if required by the Owner, will be performed by the Owner’s auditors acting in the sole interest of the Owner.

§ 5.1.6.7 Except with the Owner’s prior approval, the Contractor shall not make advance payments to suppliers for materials or equipment which have not been delivered and stored at the site.

§ 5.1.6.8 If final completion of the Work is materially delayed through no fault of the Contractor, then the Owner shall pay the Contractor any additional amounts in accordance with Article 9 of AIA Document A232-2019.

§ 5.1.7 Retainage

§ 5.1.7.1 For each progress payment made prior to when the Work of this Contract is substantially complete, the Owner may withhold the following amount, as retainage, from the payment otherwise due:

(Insert a percentage or amount to be withheld as retainage from each Application for Payment. The amount of retainage may be limited by governing law.)

« »

§ 5.1.7.1.1 The following items are not subject to retainage:

(Insert any items not subject to the withholding of retainage, such as general conditions, insurance, etc.)

« »

§ 5.1.7.2 Reduction or limitation of retainage, if any, shall be as follows:

(If the retainage established in Section 5.1.7.1 is to be modified prior to when the entire Work of this Contract is substantially complete, including modifications for completion of portions of the Work as provided in Section 3.4.2, insert provisions for such modifications.)

« »

§ 5.1.7.3 Except as set forth in this Section 5.1.7.3, when the Work of this Contract is substantially complete, the Contractor may submit an Application for Payment that includes the retainage withheld from prior Applications for Payment pursuant to this Section 5.1.7. The Application for Payment submitted when the Work of this Contract is substantially complete shall not include retainage as follows:

(Insert any other conditions for release of retainage when the Work of this Contract is substantially complete, or upon Substantial Completion of the Work of all Contractors on the Project or portions thereof.)

« »

§ 5.2 Final Payment

§ 5.2.1 Final Payment Where the Contract Sum is Based on a Stipulated Sum

§ 5.2.1.1 Final payment, constituting the entire unpaid balance of the Contract Sum, shall be made by the Owner to the Contractor when

- .1 the Contractor has fully performed the Contract except for the Contractor's responsibility to correct Work as provided in Article 12 of AIA Document A232–2019, and to satisfy other requirements, if any, which extend beyond final payment; and
- .2 a final Certificate for Payment or Project Certificate for Payment has been issued by the Architect.

§ 5.2.1.2 The Owner's final payment to the Contractor shall be made no later than 30 days after the issuance of the final Certificate for Payment or Project Certificate for Payment, or as follows:

<< >>

§ 5.2.2 Final Payment Where the Contract Sum is Based on the Cost of the Work with or without a Guaranteed Maximum Price

§ 5.2.2.1 Final payment, constituting the entire unpaid balance of the Contract Sum, shall be made by the Owner to the Contractor when

- .1 the Contractor has fully performed the Contract except for the Contractor's responsibility to correct Work as provided in Article 12 of AIA Document A232–2019, and to satisfy other requirements, if any, which extend beyond final payment;
- .2 the Contractor has submitted a final accounting for the Cost of the Work, pursuant to Exhibit B, Determination of the Cost of the Work and a final Application for Payment; and
- .3 a final Certificate for Payment or Project Certificate for Payment has been issued by the Architect in accordance with Exhibit B, Determination of the Cost of the Work.

§ 5.2.2.2 The Owner's final payment to the Contractor shall be made no later than 30 days after the issuance of the final Certificate for Payment or Project Certificate for Payment, or as follows:

<< >>

§ 5.3 Payments due and unpaid under the Contract shall bear interest from the date payment is due at the rate stated below, or in the absence thereof, at the legal rate prevailing from time to time at the place where the Project is located.
(Insert rate of interest agreed upon, if any.)

<< >> % << >>

ARTICLE 6 DISPUTE RESOLUTION

§ 6.1 Initial Decision Maker

The Architect will serve as Initial Decision Maker pursuant to Article 15 of AIA Document A232–2019, unless the parties appoint below another individual, not a party to this Agreement, to serve as Initial Decision Maker.

(If the parties mutually agree, insert the name, address and other contact information of the Initial Decision Maker, if other than the Architect.)

<< >>

<< >>

<< >>

<< >>

§ 6.2 Binding Dispute Resolution

For any Claim subject to, but not resolved by, mediation pursuant to Article 15 of AIA Document A232–2019, the method of binding dispute resolution shall be as follows:

(Check the appropriate box.)

[☐] Arbitration pursuant to Article 15 of AIA Document A232–2019.

[☐] Litigation in a court of competent jurisdiction.

[« »] Other: *(Specify)*

« »

If the Owner and Contractor do not select a method of binding dispute resolution, or do not subsequently agree in writing to a binding dispute resolution method other than litigation, Claims will be resolved by litigation in a court of competent jurisdiction.

ARTICLE 7 TERMINATION OR SUSPENSION

§ 7.1 Where the Contract Sum is a Stipulated Sum

§ 7.1.1 The Contract may be terminated by the Owner or the Contractor as provided in Article 14 of AIA Document A232–2019.

§ 7.1.1.1 If the Contract is terminated for the Owner’s convenience in accordance with Article 14 of AIA Document A232–2019, then the Owner shall pay the Contractor a termination fee as follows:

(Insert the amount of, or method for determining, the fee, if any, payable to the Contractor following a termination for the Owner’s convenience.)

« »

§ 7.1.2 The Work may be suspended by the Owner as provided in Article 14 of AIA Document A232–2019.

§ 7.2 Where the Contract Sum is Based on the Cost of the Work with or without a Guaranteed Maximum Price

§ 7.2.1 Termination

§ 7.2.1.1 The Contract may be terminated by the Owner or the Contractor as provided in Article 14 of AIA Document A232–2019.

§ 7.2.1.2 Termination by the Owner for Cause

§ 7.2.1.2.1 If the Owner terminates the Contract for cause as provided in Article 14 of AIA Document A232–2019, the Owner shall then only pay the Contractor an amount as follows:

- .1** Take the Cost of the Work incurred by the Contractor to the date of termination;
- .2** Add the Contractor’s Fee, computed upon the Cost of the Work to the date of termination at the rate stated in Section 4.3.2 or 4.4.2, as applicable, or, if the Contractor’s Fee is stated as a fixed sum in that Section, an amount that bears the same ratio to that fixed-sum Fee as the Cost of the Work at the time of termination bears to a reasonable estimate of the probable Cost of the Work upon its completion;
- .3** Subtract the aggregate of previous payments made by the Owner; and
- .4** Subtract the costs and damages incurred, or to be incurred, by the Owner under Article 14 of AIA Document A232–2019.

§ 7.2.1.2.2 When the Contract Sum is based on the Cost of the Work with a Guaranteed Maximum Price, if the Owner terminates the Contract for cause as provided in Article 14 of AIA Document A232–2019, the amount, if any, to be paid to the Contractor under Article 14 of AIA Document A232–2019 shall not cause the Guaranteed Maximum Price to be exceeded, nor shall it exceed the amount calculated in Section 7.2.1.2.1.

§ 7.2.1.2.3 The Owner shall also pay the Contractor fair compensation, either by purchase or rental at the election of the Owner, for any equipment owned by the Contractor that the Owner elects to retain and that is not otherwise included in the Cost of the Work under Section 7.2.1.2.1.1. To the extent that the Owner elects to take legal assignment of subcontracts and purchase orders (including rental agreements), the Contractor shall, as a condition of receiving the payments referred to in this Article 7, execute and deliver all such papers and take all such steps, including the legal assignment of such subcontracts and other contractual rights of the Contractor, as the Owner may require for the purpose of fully vesting in the Owner the rights and benefits of the Contractor under such subcontracts or purchase orders. All Subcontracts, purchase orders and rental agreements entered into by the Contractor will contain provisions allowing for assignment to the Owner as described above.

§ 7.2.1.3 Termination by the Owner for Convenience

If the Owner terminates the Contract for convenience in accordance with Article 14 of AIA Document A232–2019, then the Owner shall pay the Contractor a termination fee as follows:

(Insert the amount of or method for determining the fee, if any, payable to the Contractor following a termination for the Owner's convenience.)

« »

§ 7.3 Suspension

The Work may be suspended by the Owner as provided in Article 14 of AIA Document A232–2019; in such case, the Contract Sum and Contract Time shall be increased as provided in Article 14 of AIA Document A232–2019, except that the term “profit” shall be understood to mean the Contractor’s Fee as described in Section 4.3.2 or 4.4.2, as applicable, of this Agreement.

ARTICLE 8 MISCELLANEOUS PROVISIONS

§ 8.1 Where reference is made in this Agreement to a provision of AIA Document A232–2019 or another Contract Document, the reference refers to that provision as amended or supplemented by other provisions of the Contract Documents.

§ 8.2 The Owner’s representative:

(Name, address, email address, and other information)

« »
« »
« »
« »
« »
« »

§ 8.3 The Contractor’s representative:

(Name, address, email address, and other information)

« »
« »
« »
« »
« »
« »

§ 8.4 Neither the Owner’s nor the Contractor’s representative shall be changed without ten days’ prior notice to the other party.

§ 8.5 Insurance and Bonds

§ 8.5.1 The Owner and the Contractor shall purchase and maintain insurance as set forth in AIA Document A132™–2019, Standard Form of Agreement Between Owner and Contractor, Construction Manager as Adviser Edition, Exhibit A, Insurance and Bonds, and elsewhere in the Contract Documents.

§ 8.5.2 The Contractor shall provide bonds as set forth in AIA Document A132™–2019, Exhibit A, and elsewhere in the Contract Documents.

§ 8.6 Notice in electronic format, pursuant to Article 1 of AIA Document A232–2019, may be given in accordance with a building information modeling exhibit, if completed, or as otherwise set forth below:

(If other than in accordance with a building information modeling exhibit, insert requirements for delivering notice in electronic format such as name, title, and email address of the recipient and whether and how the system will be required to generate a read receipt for the transmission.)

« »

§ 8.7 Relationship of the Parties

Where the Contract is based on the Cost of the Work plus the Contractor's Fee, with or without a Guaranteed Maximum Price, the Contractor accepts the relationship of trust and confidence established by this Agreement and covenants with the Owner to cooperate with the Architect and exercise the Contractor's skill and judgment in furthering the interests of the Owner; to furnish efficient business administration and supervision; to furnish at all times an adequate supply of workers and materials; and to perform the Work in an expeditious and economical manner consistent with the Owner's interests. The Owner agrees to furnish and approve, in a timely manner, information required by the Contractor and to make payments to the Contractor in accordance with the requirements of the Contract Documents.

§ 8.8 Other provisions:

« »

ARTICLE 9 ENUMERATION OF CONTRACT DOCUMENTS

§ 9.1 This Agreement is comprised of the following documents:

- .1 AIA Document A132™–2019, Standard Form of Agreement Between Owner and Contractor, Construction Manager as Adviser Edition
- .2 AIA Document A132™–2019, Exhibit A, Insurance and Bonds Exhibit
- .3 AIA Document A232™–2019, General Conditions of the Contract for Construction, Construction Manager as Adviser Edition
- .4 Building Information Modeling Exhibit, if completed:

« »

- .5 Drawings

Number	Title	Date

- .6 Specifications

Section	Title	Date	Pages

- .7 Addenda, if any:

Number	Date	Pages

Portions of Addenda relating to bidding or proposal requirements are not part of the Contract Documents unless the bidding or proposal requirements are also enumerated in this Article 9.

- .8 Other Exhibits:
(Check all boxes that apply and include appropriate information identifying the exhibit where required.)

[« »] AIA Document A132™–2019, Exhibit B, Determination of the Cost of the Work

[« »] AIA Document E235™–2019, Sustainable Projects Exhibit, Construction Manager as Adviser Edition, dated as indicated below:
(Insert the date of the E235-2019 incorporated into this Agreement.)

« »

[« »] The Sustainability Plan:

Title	Date	Pages

- [**«X»**] Supplementary and other Conditions of the Contract:
- Supplement to Agreement Between Owner and Contractor A132-2019
 - Supplement to A132-2019 – Exhibit A - Insurance and Bonds
 - Supplementary General Conditions A232-2019

Document	Title	Date	Pages

.9 Other documents, if any, listed below:

(List here any additional documents that are intended to form part of the Contract Documents. AIA Document A232–2019 provides that the advertisement or invitation to bid, Instructions to Bidders, sample forms, the Contractor’s bid or proposal, portions of Addenda relating to bidding or proposal requirements, and other information furnished by the Owner in anticipation of receiving bids or proposals, are not part of the Contract Documents unless enumerated in this Agreement. Any such documents should be listed here only if intended to be part of the Contract Documents.)

- Bid Form dated TBD, excluding any attachments not specifically required by contract documents
- Bid Bond
- TBD Scope of work
- Subcontractor Post Bid Review Checklist dated TBD
- Letter of intent dated TBD
- Performance and Payment Bonds
- Certification of Insurance

This Agreement is entered into as of the day and year first written above.

Polytech School District

TBD

OWNER (Signature)

« »« »

(Printed name and title)

CONTRACTOR (Signature)

« »« »

(Printed name and title)

DRAFT AIA® Document A132® – 2019

Exhibit A

Insurance and Bonds

This Insurance and Bonds Exhibit is part of the Agreement, between the Owner and the Contractor, dated the « » day of « » in the year « »
(In words, indicate day, month, and year.)

for the following **PROJECT**:
(Name and location or address)

Polytech High School Renovations & Improvements

THE OWNER:
(Name, legal status, and address)

Polytech School District
823 Walnut Shade Road
Woodside, DE 19980

THE CONTRACTOR:
(Name, legal status, and address)

« »« »
« »

TABLE OF ARTICLES

- A.1 GENERAL
- A.2 OWNER'S INSURANCE
- A.3 CONTRACTOR'S INSURANCE AND BONDS
- A.4 SPECIAL TERMS AND CONDITIONS

ARTICLE A.1 GENERAL

The Owner and Contractor shall purchase and maintain insurance, and provide bonds, as set forth in this Exhibit. As used in this Exhibit, the term General Conditions refers to AIA Document A232™–2019, General Conditions of the Contract for Construction.

ARTICLE A.2 OWNER'S INSURANCE – NOT USED

ARTICLE A.3 CONTRACTOR'S INSURANCE AND BONDS

§ A.3.1 General

§ A.3.1.1 **Certificates of Insurance.** The Contractor shall provide certificates of insurance acceptable to the Owner evidencing compliance with the requirements in this Article A.3 at the following times: (1) prior to commencement of the Work; (2) upon renewal or replacement of each required policy of insurance; and (3) upon the Owner's written request. An additional certificate evidencing continuation of commercial liability coverage, including coverage for completed operations, shall be submitted with the final Application for Payment and thereafter upon renewal or replacement of such coverage until the expiration of the periods required by Section A.3.2.1 and Section A.3.3.1. The

ADDITIONS AND DELETIONS: The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

This document is intended to be used in conjunction with AIA Document A232™–2019, General Conditions of the Contract for Construction. Article 11 of A232™–2019 contains additional insurance provisions

ELECTRONIC COPYING of any portion of this AIA® Document to another electronic file is prohibited and constitutes a violation of copyright laws as set forth in the footer of this document.

certificates will show the Owner as an additional insured on the Contractor's Commercial General Liability and excess or umbrella liability policy or policies.

§ A.3.1.2 Deductibles and Self-Insured Retentions. The Contractor shall disclose to the Owner any deductible or self-insured retentions applicable to any insurance required to be provided by the Contractor.

§ A.3.1.3 Additional Insured Obligations. To the fullest extent permitted by law, the Contractor shall cause the commercial general liability coverage to include (1) the Owner, the Architect and the Architect's consultants, and the Construction Manager and the Construction Manager's consultants, as additional insureds for claims caused in whole or in part by the Contractor's negligent acts or omissions during the Contractor's operations; and (2) the Owner as an additional insured for claims caused in whole or in part by the Contractor's negligent acts or omissions for which loss occurs during completed operations. The additional insured coverage shall be primary and non-contributory to any of the Owner's general liability insurance policies and shall apply to both ongoing and completed operations. To the extent commercially available, the additional insured coverage shall be no less than that provided by Insurance Services Office, Inc. (ISO) forms CG 20 10 07 04, CG 20 37 07 04, and, with respect to the Architect and the Architect's consultants, and the Construction Manager and the Construction Manager's consultants, CG 20 32 07 04.

§ A.3.2 Contractor's Required Insurance Coverage

§ A.3.2.1 The Contractor shall purchase and maintain the following types and limits of insurance from an insurance company or insurance companies lawfully authorized to issue insurance in the jurisdiction where the Project is located. The Contractor shall maintain the required insurance until the expiration of the period for correction of Work as set forth in Section 12.2.2 of the General Conditions, unless a different duration is stated below:

(If the Contractor is required to maintain insurance for a duration other than the expiration of the period for correction of Work, state the duration.)

« »

§ A.3.2.2 Commercial General Liability

§ A.3.2.2.1 Commercial General Liability insurance for the Project written on an occurrence form with policy limits of not less than «One Million Dollars» (\$ «1,000,000») each occurrence, «Three Million Dollars» (\$ «3,000,000») general aggregate, and «Three Million Dollars» (\$ «3,000,000») aggregate for products-completed operations hazard, providing coverage for claims including

- .1 damages because of bodily injury, sickness or disease, including occupational sickness or disease, and death of any person;
- .2 personal injury and advertising injury;
- .3 damages because of physical damage to or destruction of tangible property, including the loss of use of such property;
- .4 bodily injury or property damage arising out of completed operations; and
- .5 the Contractor's indemnity obligations under Section 3.18 of the General Conditions.

§ A.3.2.2.2 The Contractor's Commercial General Liability policy under this Section A.3.2.2 shall not contain an exclusion or restriction of coverage for the following:

- .1 Claims by one insured against another insured, if the exclusion or restriction is based solely on the fact that the claimant is an insured, and there would otherwise be coverage for the claim.
- .2 Claims for property damage to the Contractor's Work arising out of the products-completed operations hazard where the damaged Work or the Work out of which the damage arises was performed by a Subcontractor.
- .3 Claims for bodily injury other than to employees of the insured.
- .4 Claims for indemnity under Section 3.18 of the General Conditions arising out of injury to employees of the insured.
- .5 Claims or loss excluded under a prior work endorsement or other similar exclusionary language.
- .6 Claims or loss due to physical damage under a prior injury endorsement or similar exclusionary language.
- .7 Claims related to residential, multi-family, or other habitational projects, if the Work is to be performed on such a project.
- .8 Claims related to roofing, if the Work involves roofing.

- .9 Claims related to exterior insulation finish systems (EIFS), synthetic stucco or similar exterior coatings or surfaces, if the Work involves such coatings or surfaces.
- .10 Claims related to earth subsidence or movement, where the Work involves such hazards.
- .11 Claims related to explosion, collapse and underground hazards, where the Work involves such hazards.

§ A.3.2.3 Automobile Liability covering vehicles owned, and non-owned vehicles used, by the Contractor, with policy limits of not less than «One Million Dollars» (\$ «1,000,000») per accident, for bodily injury, death of any person, and property damage arising out of the ownership, maintenance and use of those motor vehicles along with any other statutorily required automobile coverage.

§ A.3.2.4 The Contractor may achieve the required limits and coverage for Commercial General Liability and Automobile Liability through a combination of primary and excess or umbrella liability insurance, provided such primary and excess or umbrella insurance policies result in the same or greater coverage as the coverages required under Section A.3.2.2 and A.3.2.3, and in no event shall any excess or umbrella liability insurance provide narrower coverage than the primary policy. The excess policy shall not require the exhaustion of the underlying limits only through the actual payment by the underlying insurers.

§ A.3.2.5 Workers' Compensation at statutory limits.

§ A.3.2.6 Employers' Liability with policy limits not less than «Five Hundred Thousand Dollars» (\$ «500,000») each accident, «Five Hundred Thousand Dollars» (\$ «500,000») each employee, and «Five Hundred Thousand Dollars» (\$ «500,000») policy limit.

§ A.3.2.7 Jones Act, and the Longshore & Harbor Workers' Compensation Act, as required, if the Work involves hazards arising from work on or near navigable waterways, including vessels and docks

§ A.3.2.8 If the Contractor is required to furnish professional services as part of the Work, the Contractor shall procure Professional Liability insurance covering performance of the professional services, with policy limits of not less than «One Million Dollars» (\$ «1,000,000») per claim and «Three Million Dollars» (\$ «3,000,000») in the aggregate.

§ A.3.2.9 If the Work involves the transport, dissemination, use, or release of pollutants, the Contractor shall procure Pollution Liability insurance, with policy limits of not less than «One Million Dollars» (\$ «1,000,000») per claim and «Three Million Dollars» (\$ «3,000,000») in the aggregate.

§ A.3.2.10 Coverage under Sections A.3.2.8 and A.3.2.9 may be procured through a Combined Professional Liability and Pollution Liability insurance policy, with combined policy limits of not less than «Two Million Dollars» (\$ «2,000,000») per claim and «Four Million Dollars» (\$ «4,000,000») in the aggregate.

§ A.3.2.11 Insurance for maritime liability risks associated with the operation of a vessel, if the Work requires such activities, with policy limits of not less than « » (\$ « ») per claim and « » (\$ « ») in the aggregate.

§ A.3.2.12 Insurance for the use or operation of manned or unmanned aircraft, if the Work requires such activities, with policy limits of not less than « » (\$ « ») per claim and « » (\$ « ») in the aggregate.

§ A.3.3 Contractor's Other Insurance Coverage

§ A.3.3.1 Insurance selected and described in this Section A.3.3 shall be purchased from an insurance company or insurance companies lawfully authorized to issue insurance in the jurisdiction where the Project is located. The Contractor shall maintain the required insurance until the expiration of the period for correction of Work as set forth in Section 12.2.2 of the General Conditions, unless a different duration is stated below:

(If the Contractor is required to maintain any of the types of insurance selected below for a duration other than the expiration of the period for correction of Work, state the duration.)

« »

§ A.3.3.2 The Contractor shall purchase and maintain the following types and limits of insurance in accordance with Section A.3.3.1.

(Select the types of insurance the Contractor is required to purchase and maintain by placing an X in the box(es) next to the description(s) of selected insurance. Where policy limits are provided, include the policy limit in the appropriate fill point.)

- [☐] **§ A.3.3.2.1** If there is only one Contractor performing the Work on the Project, property insurance of the same type and scope satisfying the requirements identified in Section A.2.3, which, if selected in this section A.3.3.2.1, relieves the Owner of the responsibility to purchase and maintain such insurance except insurance required by Section A.2.3.1.3 and Section A.2.3.3. The Contractor shall comply with all obligations of the Owner under Section A.2.3 except to the extent provided below. The Contractor shall disclose to the Owner the amount of any deductible, and the Owner shall be responsible for losses within the deductible. Upon request, the Contractor shall provide the Owner with a copy of the property insurance policy or policies required. The Owner shall adjust and settle the loss with the insurer and be the trustee of the proceeds of the property insurance in accordance with Article 11 of the General Conditions unless otherwise set forth below:

(Where the Contractor's obligation to provide property insurance differs from the Owner's obligations as described under Section A.2.3, indicate such differences in the space below. Additionally, if a party other than the Owner will be responsible for adjusting and settling a loss with the insurer and acting as the trustee of the proceeds of property insurance in accordance with Article 11 of the General Conditions, indicate the responsible party below.)

« »

- [☐] **§ A.3.3.2.2 Railroad Protective Liability Insurance**, with policy limits of not less than « » (\$ « ») per claim and « » (\$ « ») in the aggregate, for Work within fifty (50) feet of railroad property.

- [☐] **§ A.3.3.2.3 Asbestos Abatement Liability Insurance**, with policy limits of not less than «One Million Dollars» (\$ «1,000,000») per claim and «Three Million Dollars» (\$ «3,000,000») in the aggregate, for liability arising from the encapsulation, removal, handling, storage, transportation, and disposal of asbestos-containing materials.

- [☐] **§ A.3.3.2.4** Insurance for physical damage to property while it is in storage and in transit to the construction site on an "all-risks" completed value form.

- [☐] **§ A.3.3.2.5** Property insurance on an "all-risks" completed value form, covering property owned by the Contractor and used on the Project, including scaffolding and other equipment.

- [☐] **§ A.3.3.2.6 Other Insurance**

(List below any other insurance coverage to be provided by the Contractor and any applicable limits.)

Coverage

Limits

§ A.3.4 Performance Bond and Payment Bond

The Contractor shall provide surety bonds, from a company or companies lawfully authorized to issue surety bonds in the jurisdiction where the Project is located, as follows:

(Specify type and penal sum of bonds.)

Type

Payment Bond

Performance Bond

Penal Sum (\$0.00)

100% of the Contract Sum

100% of the Contract Sum

Payment and Performance Bonds shall be on the Owner's form as provided in specification section 006113 – Performance and Payment Bonds, current as of the date of this Agreement.

ARTICLE A.4 SPECIAL TERMS AND CONDITIONS

Special terms and conditions that modify this Insurance and Bonds Exhibit, if any, are as follows:

« »



DRAFT AIA® Document A132® – 2019

Exhibit B

Determination of the Cost of the Work

for the following Project:

(Name, location, and brief description)

«Polytech HS 2024»

« »
« »

THE OWNER:

(Name, legal status, address, and other information)

« »« »
« »
« »
« »

THE CONTRACTOR:

(Name, legal status, address, and other information)

« »« »
« »
« »
« »

THE CONSTRUCTION MANAGER:

(Name, legal status, address, and other information)

« »« »
« »
« »
« »

THE ARCHITECT:

(Name, legal status, address, and other information)

« »« »
« »
« »
« »

ARTICLE B.1 CONTROL ESTIMATE

§ B.1.1 Where the Contract Sum is based on the Cost of the Work, plus the Contractor's Fee without a Guaranteed Maximum Price pursuant to Section 4.1 of the Agreement, the Contractor shall prepare and submit to the Construction Manager, within 14 days of executing this Agreement, a written Control Estimate, for the Owner's review and acceptance. The Control Estimate shall include the estimated Cost of the Work plus the Contractor's Fee. The Control Estimate shall be used to monitor actual costs and the timely performance of the Work. The Contractor shall update the Control Estimate with each Application for Payment as needed to reflect Changes in the Work.

ADDITIONS AND DELETIONS: The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

This document is intended to be used in conjunction with AIA Documents A232™-2019, General Conditions of the Contract for Construction, Construction Manager as Adviser Edition; B132™-2019, Standard Form of Agreement Between Owner and Architect, Construction Manager as Adviser Edition; and C132™-2019, Standard Form of Agreement Between Owner and Construction Manager as Adviser. AIA Document A232™-2019 is adopted in this document by reference. Do not use with other general conditions unless this document is modified.

ELECTRONIC COPYING of any portion of this AIA® Document to another electronic file is prohibited and constitutes a violation of copyright laws as set forth in the footer of this document.

§ B.1.2 The Control Estimate shall include

- .1 the documents enumerated in Article 1 of the Agreement, including all Modifications thereto;
- .2 a list of the assumptions made by the Contractor in the preparation of the Control Estimate, including assumptions under B.1.4, to supplement the information provided by the Owner and contained in the Contract Documents;
- .3 a statement of the estimated Cost of the Work organized by trade categories or systems and the Contractor's Fee;
- .4 schedules, upon which the Control Estimate is based, indicating proposed Subcontractors, activity sequences and durations, milestone dates for receipt and approval of pertinent information, schedule of shop drawings and samples, procurement and delivery of materials or equipment, and the Owner's occupancy requirements; and
- .5 contingencies for further development of design and construction as required by Section B.1.4.

§ B.1.3 The Contractor shall meet with the Owner and Construction Manager to review the Control Estimate. In the event that the Owner or Construction Manager discovers any inconsistencies or inaccuracies in the information presented, they shall promptly notify the Contractor, who shall make appropriate adjustments to the Control Estimate. When the Control Estimate is acceptable to the Owner, the Owner shall acknowledge it in writing. The Owner's acceptance of the Control Estimate does not imply that the Control Estimate constitutes a Guaranteed Maximum Price.

§ B.1.4 To the extent that the Contract Documents are anticipated to require further development, the Contractor shall provide in the Control Estimate for such further development consistent with the Contract Documents and reasonably inferable therefrom. Such further development does not include changes in scope, systems, kinds and quality of materials, finishes or equipment, all of which, if required, shall be incorporated in a revised Control Estimate by mutual agreement of the parties.

§ B.1.5 The Contractor shall develop and implement a detailed system of cost control that will provide the Owner and Construction Manager with timely information as to the anticipated total Cost of the Work. The cost control system shall compare the Control Estimate with the actual cost for activities in progress and estimates for uncompleted tasks and proposed changes. This information shall be reported to the Owner in writing, through the Construction Manager, no later than the Contractor's first Application for Payment and shall be revised and submitted with each Application for Payment.

§ B.1.6 The Owner shall authorize preparation of revisions to the Contract Documents that incorporate the agreed-upon assumptions contained in the Control Estimate. The Owner shall promptly furnish such revised Contract Documents to the Contractor. The Contractor shall notify the Owner, Architect, and Construction Manager of any inconsistencies between the Control Estimate and the revised Contract Documents.

ARTICLE B.2 COSTS TO BE REIMBURSED

§ B.2.1 Cost of the Work

§ B.2.1.1 The term Cost of the Work shall mean costs necessarily incurred by the Contractor in the proper performance of the Work. The Cost of the Work shall include only the items set forth in this Article B.2.

§ B.2.1.2 Where, pursuant to the Contract Documents, any cost is subject to the Owner's prior approval, the Contractor shall obtain such approval in writing prior to incurring the cost.

§ B.2.1.3 Costs shall be at rates not higher than the standard paid at the place of the Project, except with prior approval of the Owner.

§ B.2.2 Labor Costs

§ B.2.2.1 Wages or salaries of construction workers directly employed by the Contractor to perform the construction of the Work at the site or, with the Owner's prior approval, at off-site workshops.

§ B.2.2.2 Wages or salaries of the Contractor's supervisory and administrative personnel when stationed at the site and performing Work, with the Owner's prior approval.

§ B.2.2.2.1 Wages or salaries of the Contractor's supervisory and administrative personnel when performing Work and stationed at a location other than the site, but only for that portion of time required for the Work, and limited to the personnel and activities listed below:

(Identify the personnel, type of activity and, if applicable, any agreed upon percentage of time to be devoted to the Work.)

« »

§ B.2.2.3 Wages or salaries of the Contractor's supervisory or administrative personnel engaged at factories or workshops, or while traveling, in expediting the production or transportation of materials or equipment required for the Work, but only for that portion of their time required for the Work.

§ B.2.2.4 Costs paid or incurred by the Contractor, as required by law or collective bargaining agreements, for taxes, insurance, contributions, assessments, and benefits and, for personnel not covered by collective bargaining agreements, customary benefits such as sick leave, medical and health benefits, holidays, vacations and pensions, provided such costs are based on wages and salaries included in the Cost of the Work under Sections B.2.2.1 through B.2.2.3.

§ B.2.2.5 If agreed rates for labor costs, in lieu of actual costs, are provided in this Agreement, the rates shall remain unchanged throughout the duration of this Agreement, unless the parties execute a Modification.

§ B.2.3 Subcontract Costs

Payments made by the Contractor to Subcontractors in accordance with the requirements of the subcontracts and this Agreement.

§ B.2.4 Costs of Materials and Equipment Incorporated in the Completed Construction

§ B.2.4.1 Costs, including transportation and storage at the site, of materials and equipment incorporated, or to be incorporated, in the completed construction.

§ B.2.4.2 Costs of materials described in the preceding Section B.2.4.1 in excess of those actually installed to allow for reasonable waste and spoilage. Unused excess materials, if any, shall become the Owner's property at the completion of the Work or, at the Owner's option, shall be sold by the Contractor. Any amounts realized from such sales shall be credited to the Owner as a deduction from the Cost of the Work.

§ B.2.5 Costs of Other Materials and Equipment, Temporary Facilities and Related Items

§ B.2.5.1 Costs of transportation, storage, installation, dismantling, maintenance, and removal of materials, supplies, temporary facilities, machinery, equipment, and hand tools not customarily owned by construction workers that are provided by the Contractor at the site and fully consumed in the performance of the Work. Costs of materials, supplies, temporary facilities, machinery, equipment, and tools that are not fully consumed, shall be based on the cost or value of the item at the time it is first used on the Project site less the value of the item when it is no longer used at the Project site. Costs for items not fully consumed by the Contractor shall mean fair market value.

§ B.2.5.2 Rental charges for temporary facilities, machinery, equipment, and hand tools not customarily owned by construction workers that are provided by the Contractor at the site and the costs of transportation, installation, dismantling, minor repairs, and removal of such temporary facilities, machinery, equipment, and hand tools. Rates and quantities of equipment owned by the Contractor, or a related party as defined in Section B.2.8, shall be subject to the Owner's prior approval. The total rental cost of any such equipment may not exceed the purchase price of any comparable item.

§ B.2.5.3 Costs of removal of debris from the site of the Work and its proper and legal disposal.

§ B.2.5.4 Costs of the Contractor's site office, including general office equipment and supplies.

§ B.2.5.5 Costs of materials and equipment suitably stored off the site at a mutually acceptable location, subject to the Owner's prior approval.

§ B.2.6 Miscellaneous Costs

§ B.2.6.1 Premiums for that portion of insurance and bonds required by the Contract Documents that can be directly attributed to this Contract.

§ B.2.6.1.1 Costs for self-insurance, for either full or partial amounts of the coverages required by the Contract Documents, with the Owner's prior approval.

§ B.2.6.1.2 Costs for insurance through a captive insurer owned or controlled by the Contractor, with the Owner's prior approval.

§ B.2.6.2 Sales, use, or similar taxes, imposed by a governmental authority, that are related to the Work and for which the Contractor is liable.

§ B.2.6.3 Fees and assessments for the building permit, and for other permits, licenses, and inspections, for which the Contractor is required by the Contract Documents to pay.

§ B.2.6.4 Fees of laboratories for tests required by the Contract Documents; except those related to defective or nonconforming Work for which reimbursement is excluded under Article 13 of AIA Document A232™-2019, or by other provisions of the Contract Documents, and which do not fall within the scope of Section B.2.7.3.

§ B.2.6.5 Royalties and license fees paid for the use of a particular design, process, or product, required by the Contract Documents.

§ B.2.6.5.1 The cost of defending suits or claims for infringement of patent rights arising from requirements of the Contract Documents, payments made in accordance with legal judgments against the Contractor resulting from such suits or claims, and payments of settlements made with the Owner's consent, unless the Contractor had reason to believe that the required design, process, or product was an infringement of a copyright or a patent, and the Contractor failed to promptly furnish such information to the Architect, as required by Article 3 of AIA Document A232™-2019. The costs of legal defenses, judgments, and settlements, shall not be included in the Cost of the Work used to calculate the Contractor's Fee or subject to the Guaranteed Maximum Price.

§ B.2.6.6 Costs for communications services, electronic equipment, and software, directly related to the Work and located at the site, with the Owner's prior approval.

§ B.2.6.7 Costs of document reproductions and delivery charges.

§ B.2.6.8 Deposits lost for causes other than the Contractor's negligence or failure to fulfill a specific responsibility in the Contract Documents.

§ B.2.6.9 Legal, mediation, and arbitration costs, including attorneys' fees, other than those arising from disputes between the Owner and Contractor, reasonably incurred by the Contractor after the execution of this Agreement in the performance of the Work and with the Owner's prior approval, which shall not be unreasonably withheld.

§ B.2.6.10 Expenses incurred in accordance with the Contractor's standard written personnel policy for relocation and temporary living allowances of the Contractor's personnel required for the Work, with the Owner's prior approval.

§ B.2.6.11 That portion of the reasonable expenses of the Contractor's supervisory or administrative personnel incurred while traveling in discharge of duties connected with the Work.

§ B.2.7 Other Costs and Emergencies

§ B.2.7.1 Other costs incurred in the performance of the Work, with the Owner's prior approval.

§ B.2.7.2 Costs incurred in taking action to prevent threatened damage, injury, or loss, in case of an emergency affecting the safety of persons and property as provided in article 10 of AIA Document A232-2019.

§ B.2.7.3 Costs of repairing or correcting damaged or nonconforming Work executed by the Contractor, Subcontractors, or suppliers, provided that such damaged or nonconforming Work was not caused by negligence of, or

failure to fulfill a specific responsibility by, the Contractor, and only to the extent that the cost of repair or correction is not recovered by the Contractor from insurance, sureties, Subcontractors, suppliers, or others.

§ B.2.8 Related Party Transactions

§ B.2.8.1 For purposes of this Section B.2.8, the term “related party” shall mean (1) a parent, subsidiary, affiliate, or other entity having common ownership of, or sharing common management with, the Contractor; (2) any entity in which any stockholder in, or management employee of, the Contractor holds an equity interest in excess of ten percent in the aggregate; (3) any entity which has the right to control the business or affairs of the Contractor; or (4) any person, or any member of the immediate family of any person, who has the right to control the business or affairs of the Contractor.

§ B.2.8.2 If any of the costs to be reimbursed arise from a transaction between the Contractor and a related party, the Contractor shall notify the Owner and the Construction Manager of the specific nature of the contemplated transaction, including the identity of the related party and the anticipated cost to be incurred, before any such transaction is consummated or cost incurred. If the Owner, after such notification, authorizes the proposed transaction in writing, then the cost incurred shall be included as a cost to be reimbursed, and the Contractor shall procure the Work, equipment, goods, or service, from the related party, as a Subcontractor, according to the terms of Article B.5. If the Owner fails to authorize the transaction in writing, the Contractor shall procure the Work, equipment, goods, or service from some person or entity other than a related party according to the terms of Article B.5.

ARTICLE B.3 COSTS NOT TO BE REIMBURSED

§ B.3.1 The Cost of the Work shall not include the items listed below:

- .1 Salaries and other compensation of the Contractor’s personnel stationed at the Contractor’s principal office or offices other than the site office, except as specifically provided in Section B.2.2.2;
- .2 Bonuses, profit sharing, incentive compensation, and any other discretionary payments, paid to anyone hired by the Contractor or paid to any Subcontractor or vendor, unless the Owner has provided prior approval;
- .3 Expenses of the Contractor’s principal office and offices other than the site office;
- .4 Overhead and general expenses, except as may be expressly included in Article B.2;
- .5 The Contractor’s capital expenses, including interest on the Contractor’s capital employed for the Work;
- .6 Except as provided in Section B.2.7.3 of this Agreement, costs due to the negligence of, or failure to fulfill a specific responsibility of the Contract by, the Contractor, Subcontractors, and suppliers, or anyone directly or indirectly employed by any of them or for whose acts any of them may be liable;
- .7 Any cost not specifically and expressly described in Article B.2; and
- .8 Where a Guaranteed Maximum Price is part of the Agreement, costs, other than costs included in Change Orders approved by the Owner, that would cause the Guaranteed Maximum Price to be exceeded.

ARTICLE B.4 DISCOUNTS, REBATES AND REFUNDS

§ B.4.1 Cash discounts obtained on payments made by the Contractor shall accrue to the Owner if (1) before making the payment, the Contractor included the amount to be paid, less such discount, in an Application for Payment and received payment from the Owner, or (2) the Owner has deposited funds with the Contractor with which to make payments; otherwise, cash discounts shall accrue to the Contractor. Trade discounts, rebates, refunds, and amounts received from sales of surplus materials, and equipment shall accrue to the Owner, and the Contractor shall make provisions so that they can be obtained.

§ B.4.2 Amounts that accrue to the Owner in accordance with Section B.4.1 shall be credited to the Owner as a deduction from the Cost of the Work.

ARTICLE B.5 SUBCONTRACTS AND OTHER AGREEMENTS

§ B.5.1 Those portions of the Work that the Contractor does not customarily perform with the Contractor’s own personnel shall be performed under subcontracts or other appropriate agreements with the Contractor. The Owner may designate specific persons from whom, or entities from which, the Contractor shall obtain bids. The Contractor shall obtain bids from Subcontractors, and from suppliers of materials or equipment fabricated especially for the Work, who are qualified to perform that portion of the Work in accordance with the requirements of the Contract Documents. The Contractor shall deliver such bids to the Construction Manager, Architect, and Owner, with an indication as to which

bids the Contractor intends to accept. The Owner then has the right to review the Contractor's list of proposed subcontractors and suppliers and, in consultation with the Construction Manager and Architect, object to any subcontractor or supplier. Any advice of the Construction Manager or Architect, or approval or objection by the Owner, shall not relieve the Contractor of its responsibility to perform the Work in accordance with the Contract Documents. The Contractor shall not be required to contract with anyone to whom the Contractor has reasonable objection.

§ B.5.2 When a Contractor has provided a Guaranteed Maximum Price, and a specific subcontractor or supplier (1) is recommended to the Owner by the Contractor; (2) is qualified to perform that portion of the Work; and (3) has submitted a bid that conforms to the requirements of the Contract Documents without reservations or exceptions, but the Owner requires that another bid be accepted, then the Contractor may require that a Change Order be issued to adjust the Guaranteed Maximum Price by the difference between the bid of the person or entity recommended to the Owner by the Contractor and the amount of the subcontract or other agreement actually signed with the person or entity designated by the Owner.

§ B.5.3 Subcontracts or other agreements shall conform to the applicable payment provisions of this Agreement, and shall not be awarded on the basis of cost plus a fee without the Owner's prior written approval. If a subcontract is awarded on the basis of cost-plus a fee, the Contractor shall provide in the subcontract for the Owner to receive the same audit rights with regard to the Subcontractor as the Owner receives with regard to the Contractor in Article B.6, below.

§ B.5.4 Where the Contract Sum is based upon the Cost of the Work Plus a Fee without a Guaranteed Maximum Price, the Contractor shall prepare, for the Construction Manager and Architect's review and the Owner's acceptance, a procurement schedule for items that must be ordered well in advance of construction. The Contractor shall expedite and coordinate the ordering and delivery of materials that must be ordered well in advance of construction. If the Owner agrees to procure any items prior to the Owner's approval of the Control Estimate, the Owner shall procure the items on terms and conditions acceptable to the Contractor. Upon the Owner's approval of the Control Estimate, the Owner shall assign all contracts for these items to the Contractor and the Contractor shall thereafter accept responsibility for them.

ARTICLE B.6 ACCOUNTING RECORDS

§ B.6.1 The Contractor shall keep full and detailed records and accounts related to the Cost of the Work, and exercise such controls as may be necessary for proper financial management under this Contract and to substantiate all costs incurred. The accounting and control systems shall be satisfactory to the Owner and the Construction Manager. The Owner and the Owner's auditors shall, during regular business hours and upon reasonable notice, be afforded access to, and shall be permitted to audit and copy, the Contractor's records and accounts, including complete documentation supporting accounting entries, books, job cost reports, correspondence, instructions, drawings, receipts, subcontracts, Subcontractor's proposals, Subcontractor's invoices, purchase orders, vouchers, memoranda, and other data relating to this Contract. The Contractor shall preserve these records, for a period of three years after final payment, or for such longer period as may be required by law.

§ B.6.2 When the Contractor believes that all the Work required by the Agreement has been fully performed, the Contractor shall deliver to the Owner, through the Construction Manager, a final accounting of the Cost of the Work.

§ B.6.3 Within 30 days after the Owner's receipt of the Contractor's final accounting for the Cost of the Work, the Owner shall conduct an audit of the Cost of the Work or notify the Construction Manager and Architect that it will not conduct an audit.

§ B.6.3.1 If the Owner conducts an audit of the Cost of the Work, the Owner shall, within 10 days after completion of the audit, submit a written report based upon the auditor's findings to the Construction Manager and Architect.

§ B.6.3.2 Within seven days after receipt of the written report described in Section B.6.3.1, or receipt of notice that the Owner will not conduct an audit, and provided that the other conditions of Section 5.2 of the Agreement have been met, the Architect will either issue to the Owner, through the Construction Manager, a final Certificate for Payment, with a copy to the Contractor, or notify the Contractor, Construction Manager, and Owner, in writing, of the Architect's reasons for withholding a certificate as provided in Article 9 of AIA Document A232-2019. The time periods stated in this Section B.6.3.2 supersede those stated in Article 9 of AIA Document A232-2019. Neither the

Architect, nor the Construction Manager, is responsible for verifying the accuracy of the Contractor's final accounting.

§ B.6.3.3 If the Owner's auditors' report concludes that the Cost of the Work, as substantiated by the Contractor's final accounting, is less than claimed by the Contractor, the Contractor shall be entitled to request mediation of the disputed amount without seeking an initial decision pursuant to Article 15 of AIA Document A232-2019. A request for mediation shall be made by the Contractor within 30 days after the Contractor's receipt of a copy of the final Certificate for Payment. Failure to request mediation within this 30-day period shall result in the substantiated amount reported by the Owner's auditors becoming binding on the Contractor. Pending a final resolution of the disputed amount, the Owner shall pay the Contractor the amount certified in the final Certificate for Payment.

§ B.6.4 If, subsequent to final payment, and at the Owner's request, the Contractor incurs costs, described in Article B.2, and not excluded by Article B.3, to correct defective or nonconforming Work, the Owner shall reimburse the Contractor for such costs and the Contractor's Fee applicable thereto, on the same basis as if such costs had been incurred prior to final payment, but not in excess of the Guaranteed Maximum Price, if any. If adjustments to the Contract Sum are provided for in Section 4.6 of the Agreement, the amount of those adjustments shall be recalculated, taking into account any reimbursements made pursuant to this Section B.6.4 in determining the net amount to be paid by the Owner to the Contractor.

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

SECTION 00 54 13

SUPPLEMENT TO AGREEMENT BETWEEN OWNER AND CONTRACTOR A132-2019

The following supplements modify the "Standard Form of Agreement Between Owner and Contractor, Construction Manager as Advisor Edition" AIA Document A132-2019. Where a portion of the Standard Form of Agreement is modified or deleted by the following, the unaltered portions of the Standard Form of Agreement shall remain in effect.

ARTICLE 3: DATE OF COMMENCEMENT AND DATES OF SUBSTANTIAL COMPLETION

3.1 Delete paragraph 3.1 in its entirety and replace with the following:

"The date of Commencement of the Work shall be a date set forth in a notice to proceed issued by the Owner."

3.3.1 In the space provided, insert "As defined in Article 9.8 of AIA Document A232-2019 and amended by the Owner's 'Supplementary General Conditions A232-2019'"

ARTICLE 4: CONTRACT SUM

4.1 Delete paragraph 4.1 in its entirety and replace with the following:

"The Owner shall pay the Contractor the Contract Sum in current funds for the Contractor's performance of the Contract. The Contract Sum shall be a Stipulated Sum, in accordance with Section 4.2 below.

4.3 Delete paragraph 4.3 in its entirety.

4.4 Delete paragraph 4.4 in its entirety.

ARTICLE 5: PAYMENTS

5.1 PROGRESS PAYMENTS

5.1.3 Delete paragraph 5.1.3 in its entirety and replace with the following:

"Provided that a valid Application for Payment is received by the Architect that meets all requirements of the Contract, payment shall be made by the Owner not later than 30 days after the Owner receives the valid Application for Payment."

5.1.5 Delete paragraph 5.1.5 in its entirety.

5.1.6 Delete paragraph 5.1.6 in its entirety.

5.2.2 Delete paragraph 5.2.2 in its entirety.

5.3 Insert the interest rate of "1% per month not to exceed 12% per annum."

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

ARTICLE 6: DISPUTE RESOLUTION

6.2 BINDING DISPUTE RESOLUTION

Check the box "Other" – and add the following sentence:

"Any remedies available in law or in equity."

ARTICLE 7: TERMINATION or SUSPENSION

7.1.1.1 Delete paragraph 7.1.1.1 in its entirety.

7.2 Delete paragraph 7.2 in its entirety.

ARTICLE 8: MISCELLANEOUS PROVISIONS

8.4 Delete paragraph 8.4 in its entirety and replace with the following:

"The Contractor's representative shall not be changed without ten days written notice to the Owner."

8.7 Delete paragraph 8.7 in its entirety.

ARTICLE 9: ENUMERATION OF CONTRACT DOCUMENTS

9.1.9 Insert "Supplement to Agreement Between Owner and Contractor A132-2019"

9.1.9 Insert "Supplementary General Conditions A232-2019"

END OF SECTION

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

SECTION 00 54 14

SUPPLEMENT TO A132-2019 – EXHIBIT A - INSURANCE AND BONDS

The following supplements modify the "Standard Form of Agreement Between Owner and Contractor, *Construction Manager as Adviser Edition*" AIA Document A132-2019 Exhibit A Insurance and Bonds. Where a portion of the Standard Form of Agreement, Exhibit A is modified or deleted by the following, the unaltered portions of the Standard Form of Agreement, Exhibit A shall remain in effect.

ARTICLE A.2 OWNER'S INSURANCE

A.2.1 General

Delete paragraph A.2.1 in its entirety.

A.2.2 Liability Insurance

Delete paragraph A.2.2 in its entirety, except in the case of school projects this paragraph shall remain.

A.2.3 Required Property Insurance

Delete paragraph A.2.3 in its entirety.

A.2.4 Optional Extended Property Insurance

Delete paragraph A.2.4 in its entirety.

A.2.5 Other Optional Insurance

Delete paragraph A.2.5 in its entirety.

ARTICLE A.3 CONTRACTORS INSURANCE AND BONDS

A.3.1.1 Strike the last sentence of the paragraph.

A.3.1.3 Additional Insured Obligations

In the first sentence after "coverage to include (1)" delete "(1) the Owner,".

Strike the remainder of the first sentence beginning at the semicolon "; and (2) the Owner" through the end of the sentence.

Delete the second sentence in its entirety.

- A.3.2.2.1** Insert "\$1,000,000.00" in the blank for each occurrence.
Insert "\$3,000,000.00" in the blank for general aggregate.
Insert "\$3,000,000.00" in the blank for aggregate for products-completed operations hazard.

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

A.3.2.3 Insert "\$1,000,000.00" in the blank for per accident.

A.3.2.6 Insert "\$500,000.00" in the blank for each accident.
Insert "\$500,000.00" in the blank for each employee.
Insert "\$500,000.00" in the blank for policy limit.

A.3.2.8 Insert "\$1,000,000.00" in the blank for per claim.
Insert "\$3,000,000.00" in the blank for in the aggregate.

A.3.2.9 Insert "\$1,000,000.00" in the blank for per claim.
Insert "\$3,000,000.00" in the blank for in the aggregate.

A.3.2.10 Insert "\$2,000,000.00" in the blank for per claim.
Insert "\$4,000,000.00" in the blank for in the aggregate.

A.3.2.11 Strike in its entirety.

A.3.2.12 Strike in its entirety.

A.3.3.2.1 Delete paragraph 3.3.2.1 in its entirety

A.3.3.2.2 Strike in its entirety.

A.3.3.2.3 Insert "\$1,000,000.00" in the blanks for per claim.
Insert "\$3,000,000.00" in the blanks for in the aggregate.

A.3.4 Insert the actual contract price in both the Payment Bond and the Performance Bond Penal Sum blanks. It must be 100% of the contract price.

Strike the last sentence in this section and replace with "Payment and Performance Bonds shall be in the standard form issued by the Delaware Office of Management and Budget."

END OF SECTION

SECTION 006113 – PERFORMANCE AND PAYMENT BONDS

1. PERFORMANCE AND PAYMENT BONDS

A. Bonds must be in the following form:

1. Form of Performance Bond (attached).
2. Form of Payment Bond (attached).

SECTION 006113 - FORM OF PAYMENT BOND

Bond Number:

KNOW ALL PERSONS BY THESE PRESENTS, that we, _____, as principal ("Principal"), and _____, a _____ corporation, legally authorized to do business in the State of Delaware, as surety ("Surety"), are held and firmly bound unto the State of Delaware, Polytech School District ("Owner"), in the amount of _____ (\$_____), to be paid to Owner, for which payment well and truly to be made, we do bind ourselves, our and each and every of our heirs, executors, administrations, successors and assigns, jointly and severally, for and in the whole firmly by these presents.

Sealed with our seals and dated this _____ day of _____, 20____.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH, that if Principal, who has been awarded by Owner that certain contract known as Contract No. _____ dated the _____ day of _____, 20____ (the "Contract"), which Contract is incorporated herein by reference, shall well and truly pay all and every person furnishing materials or performing labor or service in and about the performance of the work under the Contract, all and every sums of money due him, her, them or any of them, for all such materials, labor and service for which Principal is liable, shall make good and reimburse Owner sufficient funds to pay such costs in the completion of the Contract as Owner may sustain by reason of any failure or default on the part of Principal, and shall also indemnify and save harmless Owner from all costs, damages and expenses arising out of or by reason of the performance of the Contract and for as long as provided by the Contract; then this obligation shall be void, otherwise to be and remain in full force and effect.

Surety, for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of Surety and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition or change in or to the Contract or the work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any work to be performed or any monies due or to become due thereunder; and Surety hereby waives notice of any and all such extensions, modifications, omissions, additions, changes, payments, waivers, assignments, subcontracts and transfers and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to assignees, subcontractors, and other transferees shall have the same effect as to Surety as though done or omitted to be done by or in relation to Principal.

Surety hereby stipulates and agrees that no modifications, omission or additions in or to the terms of the Contract shall in any way whatsoever affect the obligation of Surety and its bond. Any proceeding, legal or equitable, under this Bond may be brought in any court of competent jurisdiction in the State of Delaware. Notices to Surety or Contractor may be mailed or delivered to them at their respective addresses shown below.

IN WITNESS WHEREOF, Principal and Surety have hereunto set their hand and seals, and such of them as are corporations have caused their corporate seal to be hereto affixed and these presents to be signed by their duly authorized officers, the day and year first above written.

Witness or Attest: PRINCIPAL

By: _____ (Seal) _____

Name: _____

Address: _____

Title: _____

(Corporate Seal)

Witness or Attest: SURETY

By: _____ (Seal) _____

Name: _____

Address: _____

Title: _____

(Corporate Seal)

SECTION 00 61 13 - FORM OF PERFORMANCE BOND

Bond Number: _____

KNOW ALL PERSONS BY THESE PRESENTS, that we, _____, as principal ("Principal"), and _____, a _____ corporation, legally authorized to do business in the State of Delaware, as surety ("Surety"), are held and firmly bound unto the State of Delaware, Polytech School District ("Owner"), in the amount of _____ (\$_____) to be paid to Owner, for which payment well and truly to be made, we do bind ourselves, our and each and every of our heirs, executors, administrations, successors and assigns, jointly and severally, for and in the whole, firmly by these presents.

Sealed with our seals and dated this _____ day of _____, 20__.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH, that if Principal, who has been awarded by Owner that certain contract known as Contract No. _____ dated the _____ day of _____, 20__ (the "Contract"), which Contract is incorporated herein by reference, shall well and truly provide and furnish all materials, appliances and tools and perform all the work required under and pursuant to the terms and conditions of the Contract and the Contract Documents (as defined in the Contract) or any changes or modifications thereto made as therein provided, shall make good and reimburse Owner sufficient funds to pay the costs of completing the Contract that Owner may sustain by reason of any failure or default on the part of Principal, and shall also indemnify and save harmless Owner from all costs, damages and expenses arising out of or by reason of the performance of the Contract and for as long as provided by the Contract; then this obligation shall be void, otherwise to be and remain in full force and effect.

Surety, for value received, hereby stipulates and agrees, if requested to do so by Owner, to fully perform and complete the work to be performed under the Contract pursuant to the terms, conditions and covenants thereof, if for any cause Principal fails or neglects to so fully perform and complete such work

Surety, for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of Surety and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition or change in or to the Contract or the work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any work to be performed or any monies due or to become due thereunder; and Surety hereby waives notice of any and all such extensions, modifications, omissions, additions, changes, payments, waivers, assignments, subcontracts and transfers and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to assignees, subcontractors, and other transferees shall have the same effect as to Surety as though done or omitted to be done by or in relation to Principal.

Surety hereby stipulates and agrees that no modifications, omissions or additions in or to the terms of the Contract shall in any way whatsoever affect the obligation of Surety and its bond.

Any proceeding, legal or equitable, under this Bond may be brought in any court of competent jurisdiction in the State of Delaware. Notices to Surety or Contractor may be mailed or delivered to them at their respective addresses shown below.

IN WITNESS WHEREOF, Principal and Surety have hereunto set their hand and seals, and such of them as are corporations have caused their corporate seal to be hereto affixed and these presents to be signed by their duly authorized officers, the day and year first above written.

Witness or Attest: PRINCIPAL

By: _____ (Seal) _____

Name: _____

Title: _____

(Corporate Seal)

Witness or Attest: SURETY

By: _____ (Seal) _____

Name: _____

Title: _____

(Corporate Seal)

END OF SECTION

SECTION 006216 – CERTIFICATE OF INSURANCE

In conjunction with Insurance Requirements AIA General Conditions, Article 11, the Contractor shall be bound by the following limits of liability insurance (for Contracts under this Bid Pac). The Contractor shall use the standard "ACCORD" for titled "Certificate of Insurance" in submitting his liability insurance limits. The required limits to be inserted in accordance with the sample "ACCORD" form in this section:

GENERAL NOTES

1. Other Insurance
 - A. Contractor shall carry any necessary insurance required to cover Owned and Rental equipment that may be necessary for them to use in the performance of the Work.
2. Contractor shall have the following additional items added to his required "ACCORD" form Certificate of Insurance:
 - A. Name and Address of Insured (Contractor).
 - B. Description of Operations/Locations – Polytech High School Renovations & Improvements
3. Added Insured – Polytech School District, EDiS Company, R G Architects, LLC.
4. Certificate Holder – Polytech School District

Contractors shall note that although not a part of AIA Document A232 - 2019 Edition, these additional articles apply as noted to this Project.

A sample certificate is bound into the Project Manual immediately following this Document.

END OF SECTION

ACORD		CERTIFICATE OF LIABILITY INSURANCE		Date (MM/DD/YYYY)	
THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.					
IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).					
PRODUCER		CONTACT NAME:			
		PHONE (A/C, No, Ext):		FAX (A/C, No):	
		E-MAIL ADDRESS:			
		PRODUCER CUSTOMER ID #:			
		INSURER(S) AFFORDING COVERAGE		NAIC #	
INSURED		INSURER A:			
		INSURER B:			
		INSURER C:			
		INSURER D:			

COVERAGES				CERTIFICATE NUMBER:			REVISION NUMBER:				
THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.											
INSR LTR	TYPE OF INSURANCE				ADDL INSR	SUBR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS	
X	GENERAL LIABILITY				X	X	XXXXXXX	XX/XX/XXXX	XX/XX/XXXX	EACH OCCURENCE	\$1,000,000
	X	COMMERCIAL GENERAL LIABILITY								DAMAGE TO RENTED PREMISES (Ea occurrence)	\$100,000
		CLAIMS-MADE		X OCCUR						MED EXP (Any one person)	\$10,000
										PERSONAL & ADV INJURY	\$1,000,000
										GENERAL AGGREGATE	\$3,000,000
	GEN'L AGGREGATE LIMIT APPLIES PER:									PRODUCTS – COMP/OP AGG	\$3,000,000
		POLICY	X	PROJECT		LOC					
X	AUTOMOBILE LIABILITY				X	X	XXXXXXX	XX/XX/XXXX	XX/XX/XXXX	COMBINED SINGLE LIMIT (Ea accident)	\$1,000,000
	X	ANY AUTO								BODILY INJURY (Per person)	
		ALL OWNED AUTOS								BODILY INJURY (Per accident)	
		SCHEDULED AUTOS								PROPERTY DAMAGE (Per accident)	
	X	HIRED AUTOS									
	X	NON-OWNED AUTOS									
X	X	UMBRELLA LIAB	X	OCCUR	X	X	XXXXXXXX	XX/XX/XXXX	XX/XX/XXXX	EACH OCCURRENCE	\$5,000,000
		EXCESS LIAB		CLAIMS-MADE						AGGREGATE	\$5,000,000
		DEDUCTIBLE								EACH OCCURRENCE	
		RETENTION \$								AGGREGATE	
X	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY Y / N					X	XXXXXXXX	XX/XX/XXXX	XX/XX/XXXX	X WC STATUTORY LIMITS	OTH-ER
	ANY PROPRIETOR / PARTNER / EXECUTIVE OFFICER / MEMBER EXCLUDED? Y / N									E.L. EACH ACCIDENT	\$500,000
	If yes, describe under DESCRIPTION OF OPERATIONS below									E.L. DISEASE - EACH EMPLOYEE	\$500,000
										E.L. DISEASE - POLICY LIMIT	\$500,000
X	POLLUTION LIABILITY (For Hazardous material, site excavation/utility, and building envelope subcontractors)				X	X	XXXXXXXX	XX/XX/XXXX	XX/XX/XXXX	EACH CLAIM	\$1,000,000
	X	CLAIMS MADE FORM								POLICY AGGREGATE	\$3,000,000
X	PROFESSIONAL LIABILITY (for all Design and Professional Service subcontractors)						XXXXXXXX	XX/XX/XXXX	XX/XX/XXXX	EACH CLAIM	\$1,000,000
	X	CLAIMS MADE FORM								POLICY AGGREGATE	\$3,000,000

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (Attach ACORD 101, Additional Remarks Schedule, if more space is required)

Project: Polytech High School Renovations & Improvements
Added Insured: Polytech School District, EDiS Company, RG Architects, LLC, as well as any other party as required by contract are listed as additional insureds under all policies (except Workers Compensation and Professional Liability) for all work performed by the named insured. The General Liability and Umbrella/Excess Liability aggregate shall apply on a per-project basis and all policies shall be primary and non-contributing with respects to any insurance maintained by the additional insureds. Umbrella policy follows form as respects to Additional Insured status on the CGL, Employers Liability and Automobile Liability policies. A waiver of subrogation applies in favor of the additional insureds under all policies.

Asbestos Abatement Contractor's Pollution/Professional coverage must include coverage for asbestos abatement.

In addition to the above language, please provide the General Liability, On-going and Completed Operations Additional Insured endorsements with all required additional insureds listed in the Schedule box (if not a blanket policy), the Primary and Non-Contributory Endorsements, and the Waiver of Subrogation endorsements for all policies with all required additional insured entities listed (if not a blanket policy). Provide evidence of no EIFS exclusions, if within scope of work.

CERTIFICATE HOLDER	CANCELLATION
Polytech School District 823 Walnut Shade Road Woodside, DE 19980	SHOULD ANY OF THE ABOVE-DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.

***** If Subs Pollution and Professional Policy is combined and not
seperate, Sub must show the follow :

Contractor Pollution/Professional:

\$2,000,000 Each Claim / \$4,000,000 Aggregate

SAMPLE

Professional Liability and Pollution Insurance Requirements			
Contract Number	Contract Name	Professional Liability Insurance	Pollution Insurance
Contract A-01:	Roof Replacement	No	Yes

SECTION 007200 – GENERAL CONDITIONS

1. SUMMARY

- A. The General Conditions for this Project are the American Institute of Architects General Conditions of the Contract for Construction, Construction Manager as Advisor Edition, AIA Document A232 - 2019 Edition.
- B. A copy of AIA Document A232 - 2019 Edition is bound into this Project Manual following this page

END OF SECTION

AIA® Document A232® – 2019

General Conditions of the Contract for Construction, Construction Manager as Adviser Edition

for the following PROJECT:

(Name, and location or address)

Polytech High School Renovations & Improvements

THE CONSTRUCTION MANAGER:

(Name, legal status, and address)

EDiS Company, Inc.
110 S. Poplar Street, Suite 400
Wilmington, DE 19801

THE OWNER:

(Name, legal status, and address)

Polytech School District
823 Walnut Shade Road
Woodside, DE 19980

THE ARCHITECT:

(Name, legal status, and address)

RG Architects, LLC
200 West Main Street
Middletown, DE 19709

ADDITIONS AND DELETIONS:

The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added necessary information and where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

This document is intended to be used in conjunction with AIA Documents A132™–2019, Standard Form of Agreement Between Owner and Contractor, Construction Manager as Adviser Edition; B132™–2019, Standard Form of Agreement Between Owner and Architect, Construction Manager as Adviser Edition; and C132™–2019, Standard Form of Agreement Between Owner and Construction Manager as Adviser.

TABLE OF ARTICLES

1	GENERAL PROVISIONS
2	OWNER
3	CONTRACTOR
4	ARCHITECT AND CONSTRUCTION MANAGER
5	SUBCONTRACTORS
6	CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS
7	CHANGES IN THE WORK
8	TIME
9	PAYMENTS AND COMPLETION
10	PROTECTION OF PERSONS AND PROPERTY
11	INSURANCE AND BONDS
12	UNCOVERING AND CORRECTION OF WORK
13	MISCELLANEOUS PROVISIONS
14	TERMINATION OR SUSPENSION OF THE CONTRACT
15	CLAIMS AND DISPUTES

ARTICLE 1 GENERAL PROVISIONS

§ 1.1 Basic Definitions

§ 1.1.1 The Contract Documents. The Contract Documents are enumerated in the Agreement between the Owner and Contractor (hereinafter the Agreement) and consist of the Agreement, Conditions of the Contract (General, Supplementary and other Conditions), Drawings, Specifications, Addenda issued prior to execution of the Contract, other documents listed in the Agreement, and Modifications issued after execution of the Contract. A Modification is (1) a written amendment to the Contract signed by both parties, (2) a Change Order, (3) a Construction Change Directive, or (4) a written order for a minor change in the Work issued by the Architect. Unless specifically enumerated in the Agreement, the Contract Documents do not include the advertisement or invitation to bid, Instructions to Bidders, sample forms, other information furnished by the Owner in anticipation of receiving bids or proposals, the Contractor's bid or proposal, or portions of addenda relating to bidding or proposal requirements.

§ 1.1.2 The Contract. The Contract Documents form the Contract for Construction. The Contract represents the entire and integrated agreement between the parties hereto and supersedes prior negotiations, representations, or agreements, either written or oral. The Contract may be amended or modified only by a Modification. The Contract Documents shall not be construed to create a contractual relationship of any kind (1) between the Contractor and the Architect or the Architect's consultants, (2) between the Owner and the Construction Manager or the Construction Manager's consultants, (3) between the Owner and the Architect or the Architect's consultants, (4) between the Contractor and the Construction Manager or the Construction Manager's consultants, (5) between the Owner and a Subcontractor or Sub-subcontractor (6) between the Construction Manager and the Architect, or (7) between any persons or entities other than the Owner and Contractor. The Construction Manager and Architect shall, however, be entitled to performance and enforcement of obligations under the Contract intended to facilitate performance of their duties.

§ 1.1.3 The Work. The term "Work" means the construction and services required by the Contract Documents, whether completed or partially completed, and includes all other labor, materials, equipment, and services provided or to be provided by the Contractor to fulfill the Contractor's obligations. The Work may constitute the whole or a part of the Project.

§ 1.1.4 The Project. The Project is the total construction of which the Work performed under the Contract Documents may be the whole or a part and which may include construction by other Contractors, and by the Owner's own forces and Separate Contractors.

§ 1.1.5 Contractors. Contractors are persons or entities, other than the Contractor or Separate Contractors, who perform Work under contracts with the Owner that are administered by the Architect and Construction Manager.

§ 1.1.6 Separate Contractors. Separate Contractors are persons or entities who perform construction under separate contracts with the Owner not administered by the Architect and Construction Manager.

§ 1.1.7 The Drawings. The Drawings are the graphic and pictorial portions of the Contract Documents showing the design, location and dimensions of the Work, generally including plans, elevations, sections, details, schedules, and diagrams.

§ 1.1.8 The Specifications. The Specifications are that portion of the Contract Documents consisting of the written requirements for materials, equipment, systems, standards and workmanship for the Work, and performance of related services.

§ 1.1.9 Instruments of Service. Instruments of Service are representations, in any medium of expression now known or later developed, of the tangible and intangible creative work performed by the Architect and the Architect's consultants under their respective professional services agreements. Instruments of Service may include, without limitation, studies, surveys, models, sketches, drawings, specifications, and other similar materials.

§ 1.1.10 Initial Decision Maker. The Initial Decision Maker is the person identified in the Agreement to render initial decisions on Claims in accordance with Section 15.2. The Initial Decision Maker shall not show partiality to the Owner or Contractor and shall not be liable for results of interpretations or decisions rendered in good faith.

§ 1.2 Correlation and Intent of the Contract Documents

§ 1.2.1 The intent of the Contract Documents is to include all items necessary for the proper execution and completion of the Work by the Contractor. The Contract Documents are complementary, and what is required by one shall be as binding as if required by all; performance by the Contractor shall be required only to the extent consistent with the Contract Documents and reasonably inferable from them as being necessary to produce the indicated results.

§ 1.2.1.1 The invalidity of any provision of the Contract Documents shall not invalidate the Contract or its remaining provisions. If it is determined that any provision of the Contract Documents violates any law, or is otherwise invalid or unenforceable, then that provision shall be revised to the extent necessary to make that provision legal and enforceable. In such case the Contract Documents shall be construed, to the fullest extent permitted by law, to give effect to the parties' intentions and purposes in executing the Contract.

§ 1.2.2 Organization of the Specifications into divisions, sections and articles, and arrangement of Drawings shall not control the Contractor in dividing the Work among Subcontractors or in establishing the extent of Work to be performed by any trade.

§ 1.2.3 Unless otherwise stated in the Contract Documents, words that have well-known technical or construction industry meanings are used in the Contract Documents in accordance with such recognized meanings.

§ 1.3 Capitalization

Terms capitalized in these General Conditions include those that are (1) specifically defined, (2) the titles of numbered articles, or (3) the titles of other documents published by the American Institute of Architects.

§ 1.4 Interpretation

In the interest of brevity the Contract Documents frequently omit modifying words such as "all" and "any" and articles such as "the" and "an," but the fact that a modifier or an article is absent from one statement and appears in another is not intended to affect the interpretation of either statement.

§ 1.5 Ownership and Use of Drawings, Specifications, and Other Instruments of Service

§ 1.5.1 The Architect and the Architect's consultants shall be deemed the authors and owners of their respective Instruments of Service, including the Drawings and Specifications, and retain all common law, statutory, and other reserved rights in their Instruments of Service, including copyrights. The Contractor, Subcontractors, sub-subcontractors, and suppliers shall not own or claim a copyright in the Instruments of Service. Submittal or distribution to meet official regulatory requirements or for other purposes in connection with the Project is not to be construed as publication in derogation of the Architect's or Architect's consultants' reserved rights.

§ 1.5.2 The Contractor, Subcontractors, Sub-subcontractors, and suppliers are authorized to use and reproduce the Instruments of Service provided to them, subject to any protocols established pursuant to Sections 1.7 and 1.8, solely and exclusively for execution of the Work. All copies made under this authorization shall bear the copyright notice, if any, shown on the Instruments of Service. The Contractor, Subcontractors, Sub-subcontractors, and suppliers may not use the Instruments of Service on other projects or for additions to the Project outside the scope of the Work without the specific written consent of the Owner, Architect, and the Architect's consultants.

§ 1.6 Notice

§ 1.6.1 Except as otherwise provided in Section 1.6.2, where the Contract Documents require one party to notify or give notice to the other party, such notice shall be provided in writing to the designated representative of the party to whom the notice is addressed and shall be deemed to have been duly served if delivered in person, by mail, by courier, or by electronic transmission if a method for electronic transmission is set forth in the Agreement.

§ 1.6.2 Notice of Claims as provided in Section 15.1.3 shall be provided in writing and shall be deemed to have been duly served only if delivered to the designated representative of the party to whom the notice is addressed by certified or registered mail, or by courier providing proof of delivery.

§ 1.7 Digital Data Use and Transmission

The parties shall agree upon written protocols governing the transmission and use of, and reliance on, Instruments of Service or any other information or documentation in digital form.

§ 1.8 Building Information Models Use and Reliance

Any use of, or reliance on, all or a portion of a building information model without agreement to written protocols governing the use of, and reliance on, the information contained in the model shall be at the using or relying party's sole risk and without liability to the other party and its contractors or consultants, the authors of, or contributors to, the building information model, and each of their agents and employees.

ARTICLE 2 OWNER

§ 2.1 General

§ 2.1.1 The Owner is the person or entity identified as such in the Agreement and is referred to throughout the Contract Documents as if singular in number. The Owner shall designate in writing a representative who shall have express authority to bind the Owner with respect to all matters requiring the Owner's approval or authorization. Except as otherwise provided in Section 4.2.1, the Construction Manager and the Architect do not have such authority. The term "Owner" means the Owner or the Owner's authorized representative.

§ 2.1.2 The Owner shall furnish to the Contractor, within fifteen days after receipt of a written request, information necessary and relevant for the Contractor to evaluate, give notice of, or enforce mechanic's lien rights. Such information shall include a correct statement of the record legal title to the property on which the Project is located, usually referred to as the site, and the Owner's interest therein.

§ 2.2 Evidence of the Owner's Financial Arrangements

§ 2.2.1 Prior to commencement of the Work, and upon written request by the Contractor, the Owner shall furnish to the Contractor reasonable evidence that the Owner has made financial arrangements to fulfill the Owner's obligations under the Contract. The Contractor shall have no obligation to commence the Work until the Owner provides such evidence. If commencement of the Work is delayed under this Section 2.2.1, the Contract Time shall be extended appropriately.

§ 2.2.2 Following commencement of the Work and upon written request by the Contractor, the Owner shall furnish to the Contractor reasonable evidence that the Owner has made financial arrangements to fulfill the Owner's obligations under the Contract only if (1) the Owner fails to make payments to the Contractor as the Contract Documents require; (2) the Contractor identifies in writing a reasonable concern regarding the Owner's ability to make payment when due; or (3) a change in the Work materially changes the Contract Sum. If the Owner fails to provide such evidence, as required, within fourteen days of the Contractor's request, the Contractor may immediately stop the Work and, in that event, shall notify the Owner that the Work has stopped. However, if the request is made because a change in the Work materially changes the Contract Sum under (3) above, the Contractor may immediately stop only that portion of the Work affected by the change until reasonable evidence is provided. If the Work is stopped under this Section 2.2.2, the Contract Time shall be extended appropriately and the Contract Sum shall be increased by the amount of the Contractor's reasonable costs of shutdown, delay and start-up, plus interest as provided in the Contract Documents.

§ 2.2.3 After the Owner furnishes evidence of financial arrangements under this Section 2.2, the Owner shall not materially vary such financial arrangements without prior notice to the Contractor.

§ 2.2.4 Where the Owner has designated information furnished under this Section 2.2 as "confidential," the Contractor shall keep the information confidential and shall not disclose it to any other person. However, the Contractor may disclose "confidential" information, after seven (7) days' notice to the Owner, where disclosure is required by law, including a subpoena or other form of compulsory legal process issued by a court or governmental entity, or by court or arbitrator(s) order. The Contractor may also disclose "confidential" information to its employees, consultants, sureties, Subcontractors and their employees, Sub-subcontractors, and others who need to know the content of such information solely and exclusively for the Project and who agree to maintain the confidentiality of such information.

§ 2.3 Information and Services Required of the Owner

§ 2.3.1 Except for permits and fees that are the responsibility of the Contractor under the Contract Documents, including those required under Section 3.7.1, the Owner shall secure and pay for necessary approvals, easements, assessments and charges required for construction, use or occupancy of permanent structures or for permanent changes in existing facilities. Unless otherwise provided under the Contract Documents, the Owner, assisted by the Construction Manager, shall secure and pay for the building permit.

§ 2.3.2 The Owner shall retain an architect lawfully licensed to practice architecture, or an entity lawfully practicing architecture, in the jurisdiction where the Project is located. That person or entity is identified as the Architect in the Agreement and is referred to throughout the Contract Documents as if singular in number.

§ 2.3.3 The Owner shall retain a construction manager adviser lawfully practicing construction management in the jurisdiction where the Project is located. That person or entity is identified as the Construction Manager in the Agreement and is referred to throughout the Contract Documents as if singular in number.

§ 2.3.4 If the employment of the Construction Manager or Architect terminates, the Owner shall employ a successor construction manager or architect to whom the Contractor has no reasonable objection and whose status under the Contract Documents shall be that of the Construction Manager or Architect, respectively.

§ 2.3.5 The Owner shall furnish surveys describing physical characteristics, legal limitations and utility locations for the site of the Project, and a legal description of the site. The Contractor shall be entitled to rely on the accuracy of information furnished by the Owner but shall exercise proper precautions relating to the safe performance of the Work.

§ 2.3.6 The Owner shall furnish information or services required of the Owner by the Contract Documents with reasonable promptness. The Owner shall also furnish any other information or services under the Owner's control and relevant to the Contractor's performance of the Work with reasonable promptness after receiving the Contractor's written request for such information or services.

§ 2.3.7 Unless otherwise provided in the Contract Documents, the Owner shall furnish to the Contractor one copy of the Contract Documents for purposes of making reproductions pursuant to Section 1.5.2.

§ 2.3.8 The Owner shall forward all communications to the Contractor through the Construction Manager. Other communication shall be made as set forth in Section 4.2.6.

§ 2.4 Owner's Right to Stop the Work

If the Contractor fails to correct Work that is not in accordance with the requirements of the Contract Documents as required by Section 12.2 or repeatedly fails to carry out Work in accordance with the Contract Documents, the Owner may issue a written order to the Contractor to stop the Work, or any portion thereof, until the cause for such order has been eliminated; however, the right of the Owner to stop the Work shall not give rise to a duty on the part of the Owner to exercise this right for the benefit of the Contractor or any other person or entity, except to the extent required by Section 6.1.3.

§ 2.5 Owner's Right to Carry Out the Work

If the Contractor defaults or neglects to carry out the Work in accordance with the Contract Documents and fails within a ten-day period after receipt of notice from the Owner to commence and continue correction of such default or neglect with diligence and promptness, the Owner may, without prejudice to other remedies the Owner may have, correct such default or neglect. Such action by the Owner and amounts charged to the Contractor are both subject to review by the Construction Manager and prior approval of the Architect, and the Construction Manager or Architect may, pursuant to Section 9.5.1, withhold or nullify a Certificate for Payment in whole or in part, to the extent reasonably necessary to reimburse the Owner for the reasonable cost of correcting such deficiencies, including Owner's expenses and compensation for the Construction Manager's and Architect's and their respective consultants' additional services made necessary by such default, neglect, or failure. If current and future payments are not sufficient to cover such amounts, the Contractor shall pay the difference to the Owner. If the Contractor disagrees with the actions of the Owner or the Architect, or the amounts claimed as costs to the Owner, the Contractor may file a Claim pursuant to Article 15.

ARTICLE 3 CONTRACTOR

§ 3.1 General

§ 3.1.1 The Contractor is the person or entity identified as such in the Agreement and is referred to throughout the Contract Documents as if singular in number. The Contractor shall be lawfully licensed, if required in the jurisdiction where the Project is located. The Contractor shall designate in writing a representative who shall have express authority to bind the Contractor with respect to all matters under this Contract. The term "Contractor" means the Contractor or the Contractor's authorized representative.

§ 3.1.2 The Contractor shall perform the Work in accordance with the Contract Documents.

§ 3.1.3 The Contractor shall not be relieved of its obligations to perform the Work in accordance with the Contract Documents either by activities or duties of the Construction Manager or Architect in their administration of the Contract, or by tests, inspections or approvals required or performed by persons or entities other than the Contractor.

§ 3.2 Review of Contract Documents and Field Conditions by Contractor

§ 3.2.1 Execution of the Contract by the Contractor is a representation that the Contractor has visited the site, become generally familiar with local conditions under which the Work is to be performed, and correlated personal observations with requirements of the Contract Documents.

§ 3.2.2 Because the Contract Documents are complementary, the Contractor shall, before starting each portion of the Work, carefully study and compare the various Contract Documents relative to that portion of the Work, as well as the information furnished by the Owner pursuant to Section 2.3.5, shall take field measurements of any existing conditions related to that portion of the Work, and shall observe any conditions at the site affecting it. These obligations are for the purpose of facilitating coordination and construction by the Contractor and are not for the purpose of discovering errors, omissions, or inconsistencies in the Contract Documents; however, the Contractor shall promptly report to the Construction Manager and Architect any errors, inconsistencies or omissions discovered by or made known to the Contractor as a request for information submitted to the Construction Manager in such form as the Construction Manager and Architect may require. It is recognized that the Contractor's review is made in the Contractor's capacity as a contractor and not as a licensed design professional, unless otherwise specifically provided in the Contract Documents.

§ 3.2.3 The Contractor is not required to ascertain that the Contract Documents are in accordance with applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of public authorities, but the Contractor shall promptly report to the Construction Manager and Architect any nonconformity discovered by or made known to the Contractor as a request for information submitted to Construction Manager in such form as the Construction Manager and Architect may require.

§ 3.2.4 If the Contractor believes that additional cost or time is involved because of clarifications or instructions the Architect issues in response to the Contractor's notices or requests for information pursuant to Sections 3.2.2 or 3.2.3, the Contractor shall submit Claims as provided in Article 15. If the Contractor fails to perform the obligations of Sections 3.2.2 or 3.2.3, the Contractor shall pay such costs and damages to the Owner, subject to section 15.1.7, as would have been avoided if the Contractor had performed such obligations. If the Contractor performs those obligations, the Contractor shall not be liable to the Owner or Architect for damages resulting from errors, inconsistencies or omissions in the Contract Documents, for differences between field measurements or conditions and the Contract Documents, or for nonconformities of the Contract Documents to applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities.

§ 3.3 Supervision and Construction Procedures

§ 3.3.1 The Contractor shall supervise and direct the Work, using the Contractor's best skill and attention. The Contractor shall be solely responsible for, and have control over, construction means, methods, techniques, sequences, and procedures, and for coordinating all portions of the Work under the Contract. If the Contract Documents give specific instructions concerning construction means, methods, techniques, sequences, or procedures, the Contractor shall evaluate the jobsite safety thereof and shall be solely responsible for the jobsite safety of such means, methods, techniques, sequences, or procedures. If the Contractor determines that such means, methods, techniques, sequences or procedures may not be safe, the Contractor shall give timely notice to the Owner, the Construction Manager, and the Architect, and shall propose alternative means, methods, techniques, sequences, or procedures. The Architect shall evaluate the proposed alternative solely for conformance with the design intent for the completed construction. The Construction Manager shall review the proposed alternative for sequencing, constructability, and coordination impacts on the other Contractors. Unless the Architect or the Construction Manager objects to the Contractor's proposed alternative, the Contractor shall perform the Work using its alternative means, methods, techniques, sequences, or procedures.

§ 3.3.2 The Contractor shall be responsible to the Owner for acts and omissions of the Contractor's employees, Subcontractors and their agents and employees, and other persons or entities performing portions of the Work for, or on behalf of, the Contractor or any of its Subcontractors.

§ 3.3.3 The Contractor shall be responsible for inspection of portions of the Project already performed to determine that such portions are in proper condition to receive subsequent Work.

§ 3.4 Labor and Materials

§ 3.4.1 Unless otherwise provided in the Contract Documents, the Contractor shall provide and pay for labor, materials, equipment, tools, construction equipment and machinery, water, heat, utilities, transportation, and other facilities and services necessary for proper execution and completion of the Work, whether temporary or permanent and whether or not incorporated or to be incorporated in the Work.

§ 3.4.2 Except in the case of minor changes in the Work approved by the Architect in accordance with Section 3.12.8 or ordered by the Architect in accordance with Section 7.4, the Contractor may make substitutions only with the consent of the Owner, after evaluation by the Architect, in consultation with the Construction Manager, and in accordance with a Change Order or Construction Change Directive.

§ 3.4.3 The Contractor shall enforce strict discipline and good order among the Contractor's employees and other persons carrying out the Work. The Contractor shall not permit employment of unfit persons or persons not properly skilled in tasks assigned to them.

§ 3.5 Warranty

§ 3.5.1 The Contractor warrants to the Owner, Construction Manager, and Architect that materials and equipment furnished under the Contract will be of good quality and new unless the Contract Documents require or permit otherwise. The Contractor further warrants that the Work will conform to the requirements of the Contract Documents and will be free from defects, except for those inherent in the quality of the Work the Contract Documents require or permit. Work, materials, or equipment not conforming to these requirements may be considered defective. The Contractor's warranty excludes remedy for damage or defect caused by abuse, alterations to the Work not executed by the Contractor, improper or insufficient maintenance, improper operation, or normal wear and tear and normal usage. If required by the Construction Manager or Architect, the Contractor shall furnish satisfactory evidence as to the kind and quality of materials and equipment.

§ 3.5.2 All material, equipment, or other special warranties required by the Contract Documents shall be issued in the name of the Owner, or shall be transferable to the Owner, and shall commence in accordance with Section 9.8.4.

§ 3.6 Taxes

The Contractor shall pay sales, consumer, use and similar taxes for the Work or portions thereof provided by the Contractor that are legally enacted when bids are received or negotiations concluded, whether or not yet effective or merely scheduled to go into effect.

§ 3.7 Permits, Fees, Notices, and Compliance with Laws

§ 3.7.1 Unless otherwise provided in the Contract Documents, the Owner, assisted by the Construction Manager, shall secure and pay for the building permit. The Contractor shall secure and pay for other permits, fees, licenses, and inspections by government agencies necessary for proper execution and completion of the Work that are customarily secured after execution of the Contract and legally required at the time bids are received or negotiations concluded.

§ 3.7.2 The Contractor shall comply with and give notices required by applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities applicable to performance of the Work.

§ 3.7.3 If the Contractor performs Work knowing it to be contrary to applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of public authorities, the Contractor shall assume appropriate responsibility for such Work and shall bear the costs attributable to correction.

§ 3.7.4 **Concealed or Unknown Conditions.** If the Contractor encounters conditions at the site that are (1) subsurface or otherwise concealed physical conditions that differ materially from those indicated in the Contract Documents or (2) unknown physical conditions of an unusual nature that differ materially from those ordinarily found to exist and generally recognized as inherent in construction activities of the character provided for in the Contract Documents, the Contractor shall promptly provide notice to the Owner, Construction Manager, and the Architect before conditions are disturbed and in no event later than 14 days after first observance of the conditions. The Architect and Construction

Manager will promptly investigate such conditions and, if the Architect, in consultation with the Construction Manager, determines that they differ materially and cause an increase or decrease in the Contractor's cost of, or time required for, performance of any part of the Work, will recommend that an equitable adjustment be made in the Contract Sum or Contract Time, or both. If the Architect, in consultation with the Construction Manager, determines that the conditions at the site are not materially different from those indicated in the Contract Documents and that no change in the terms of the Contract is justified, the Architect shall promptly notify the Owner, Construction Manager, and Contractor, stating the reasons. If the Owner or Contractor disputes the Architect's determination or recommendation, either party may submit a Claim as provided in Article 15.

§ 3.7.5 If, in the course of the Work, the Contractor encounters human remains or recognizes the existence of burial markers, archaeological sites or wetlands not indicated in the Contract Documents, the Contractor shall immediately suspend any operations that would affect them and shall notify the Owner, Construction Manager, and Architect. Upon receipt of such notice, the Owner shall promptly take any action necessary to obtain governmental authorization required to resume the operations. The Contractor shall continue to suspend such operations until otherwise instructed by the Owner but shall continue with all other operations that do not affect those remains or features. Requests for adjustments in the Contract Sum and Contract Time arising from the existence of such remains or features may be made as provided in Article 15.

§ 3.8 Allowances

§ 3.8.1 The Contractor shall include in the Contract Sum all allowances stated in the Contract Documents. Items covered by allowances shall be supplied for such amounts and by such persons or entities as the Owner may direct, but the Contractor shall not be required to employ persons or entities to whom the Contractor has reasonable objection.

§ 3.8.2 Unless otherwise provided in the Contract Documents:

- .1 allowances shall cover the cost to the Contractor of materials and equipment delivered at the site and all required taxes, less applicable trade discounts;
- .2 Contractor's costs for unloading and handling at the site, labor, installation costs, overhead, profit, and other expenses contemplated for stated allowance amounts shall be included in the Contract Sum but not in the allowances; and
- .3 whenever costs are more than or less than allowances, the Contract Sum shall be adjusted accordingly by Change Order. The amount of the Change Order shall reflect (1) the difference between actual costs and the allowances under Section 3.8.2.1 and (2) changes in Contractor's costs under Section 3.8.2.2.

§ 3.8.3 Materials and equipment under an allowance shall be selected by the Owner with reasonable promptness.

§ 3.9 Superintendent

§ 3.9.1 The Contractor shall employ a competent superintendent and necessary assistants who shall be in attendance at the Project site during performance of the Work. The superintendent shall represent the Contractor, and communications given to the superintendent shall be as binding as if given to the Contractor.

§ 3.9.2 The Contractor, as soon as practicable after award of the Contract, shall notify the Owner and Architect, through the Construction Manager, of the name and qualifications of a proposed superintendent. Within 14 days of receipt of the information, the Construction Manager may notify the Contractor, stating whether the Owner, the Construction Manager, or the Architect (1) has reasonable objection to the proposed superintendent or (2) require additional time for review. Failure of the Construction Manager to provide notice within the 14-day period shall constitute notice of no reasonable objection.

§ 3.9.3 The Contractor shall not employ a proposed superintendent to whom the Owner, Construction Manager, or Architect has made reasonable and timely objection. The Contractor shall not change the superintendent without the Owner's consent, which shall not unreasonably be withheld or delayed.

§ 3.10 Contractor's Construction and Submittal Schedules

§ 3.10.1 The Contractor, promptly after being awarded the Contract, shall submit for the Owner's and Architect's information, and the Construction Manager's use in developing the Project schedule, a Contractor's construction schedule for the Work. The schedule shall contain detail appropriate for the Project, including (1) the date of commencement of the Work, interim schedule milestone dates, and the date of Substantial Completion; (2) an apportionment of the Work by construction activity; and (3) the time required for completion of each portion of the

Work. The schedule shall provide for the orderly progression of the Work to completion and shall not exceed time limits current under the Contract Documents. The schedule shall be revised at appropriate intervals as required by the conditions of the Work and Project. The Contractor shall cooperate with the Construction Manager in scheduling and performing the Contractor's Work to avoid conflict with, and as to cause no delay in, the work or activities of other Contractors, or the construction or operations of the Owner's own forces or Separate Contractors.

§ 3.10.2 The Contractor, promptly after being awarded the Contract and thereafter as necessary to maintain a current submittal schedule, shall submit a submittal schedule for the Construction Manager's and Architect's approval. The Architect and Construction Manager's approval shall not be unreasonably delayed or withheld. The submittal schedule shall (1) be coordinated with the Contractor's construction schedule, and (2) allow the Construction Manager and Architect reasonable time to review submittals. If the Contractor fails to submit a submittal schedule, or fails to provide submittals in accordance with the approved submittal schedule, the Contractor shall not be entitled to any increase in Contract Sum or extension of Contract Time based on the time required for review of submittals.

§ 3.10.3 The Contractor shall participate with other Contractors, the Construction Manager, and the Owner in reviewing and coordinating all schedules for incorporation into the Project schedule that is prepared by the Construction Manager. The Contractor shall make revisions to the construction schedule and submittal schedule as deemed necessary by the Construction Manager to conform to the Project schedule.

§ 3.10.4 The Contractor shall perform the Work in general accordance with the most recent schedules submitted to the Owner, Construction Manager, and Architect, and incorporated into the approved Project schedule.

§ 3.11 Documents and Samples at the Site

The Contractor shall make available, at the Project site, the Contract Documents, including Change Orders, Construction Change Directives, and other Modifications, in good order and marked currently to indicate field changes and selections made during construction, and the approved Shop Drawings, Product Data, Samples, and similar required submittals. These shall be in electronic form or paper copy, available to the Construction Manager, Architect, and Owner, and delivered to the Construction Manager for submittal to the Owner upon completion of the Work as a record of the Work as constructed.

§ 3.12 Shop Drawings, Product Data, and Samples

§ 3.12.1 Shop Drawings are drawings, diagrams, schedules, and other data specially prepared for the Work by the Contractor or a Subcontractor, Sub-subcontractor, manufacturer, supplier, or distributor to illustrate some portion of the Work.

§ 3.12.2 Product Data are illustrations, standard schedules, performance charts, instructions, brochures, diagrams, and other information furnished by the Contractor to illustrate materials or equipment for some portion of the Work.

§ 3.12.3 Samples are physical examples that illustrate materials, equipment, or workmanship, and establish standards by which the Work will be judged.

§ 3.12.4 Shop Drawings, Product Data, Samples, and similar submittals are not Contract Documents. Their purpose is to demonstrate how the Contractor proposes to conform to the information given and the design concept expressed in the Contract Documents for those portions of the Work for which the Contract Documents require submittals. Review by the Architect and Construction Manager is subject to the limitations of Sections 4.2.10 through 4.2.12. Informational submittals upon which the Construction Manager and Architect are not expected to take responsive action may be so identified in the Contract Documents. Submittals that are not required by the Contract Documents may be returned by the Construction Manager or Architect without action.

§ 3.12.5 The Contractor shall review for compliance with the Contract Documents, approve, and submit to the Construction Manager, Shop Drawings, Product Data, Samples, and similar submittals required by the Contract Documents, in accordance with the Project submittal schedule approved by the Construction Manager and Architect or, in the absence of an approved Project submittal schedule, with reasonable promptness and in such sequence as to cause no delay in the Work or in the activities of other Contractors, Separate Contractors, or the Owner's own forces. The Contractor shall cooperate with the Construction Manager in the coordination of the Contractor's Shop Drawings, Product Data, Samples, and similar submittals with related documents submitted by other Contractors.

§ 3.12.6 By submitting Shop Drawings, Product Data, Samples, and similar submittals, the Contractor represents to the Owner, Construction Manager, and Architect, that the Contractor has (1) reviewed and approved them, (2) determined and verified materials, field measurements and field construction criteria related thereto, or will do so, and (3) checked and coordinated the information contained within such submittals with the requirements of the Work and of the Contract Documents.

§ 3.12.7 The Contractor shall perform no portion of the Work for which the Contract Documents require submittal and review of Shop Drawings, Product Data, Samples, or similar submittals, until the respective submittal has been reviewed and approved by the Architect.

§ 3.12.8 The Work shall be in accordance with approved submittals except that the Contractor shall not be relieved of responsibility for deviations from the requirements of the Contract Documents by the Architect's approval of Shop Drawings, Product Data, Samples, or similar submittals, unless the Contractor has specifically notified the Construction Manager and Architect of such deviation at the time of submittal and (1) the Architect has given written approval to the specific deviation as a minor change in the Work, or (2) a Change Order or Construction Change Directive has been issued authorizing the deviation. The Contractor shall not be relieved of responsibility for errors or omissions in Shop Drawings, Product Data, Samples, or similar submittals, by the Architect's approval thereof.

§ 3.12.9 The Contractor shall direct specific attention, in writing or on resubmitted Shop Drawings, Product Data, Samples, or similar submittals, to revisions other than those requested by the Construction Manager and Architect on previous submittals. In the absence of such notice, the Architect's approval of a resubmission shall not apply to such revisions.

§ 3.12.10 The Contractor shall not be required to provide professional services that constitute the practice of architecture or engineering unless such services are specifically required by the Contract Documents for a portion of the Work or unless the Contractor needs to provide such services in order to carry out the Contractor's responsibilities for construction means, methods, techniques, sequences, and procedures. The Contractor shall not be required to provide professional services in violation of applicable law.

§ 3.12.10.1 If professional design services or certifications by a design professional related to systems, materials, or equipment are specifically required of the Contractor by the Contract Documents, the Owner and the Architect will specify all performance and design criteria that such services must satisfy. The Contractor shall be entitled to rely upon the adequacy and accuracy of the performance and design criteria provided in the Contract Documents. The Contractor shall cause such services or certifications to be provided by an appropriately licensed design professional, whose signature and seal shall appear on all drawings, calculations, specifications, certifications, Shop Drawings, and other submittals prepared by such professional. Shop Drawings, and other submittals related to the Work, designed or certified by such professional, if prepared by others, shall bear such professional's written approval when submitted to the Architect. The Owner, the Architect, and the Construction Manager shall be entitled to rely upon the adequacy and accuracy of the services, certifications, and approvals performed or provided by such design professionals, provided the Owner and Architect have specified to the Contractor the performance and design criteria that such services must satisfy. Pursuant to this Section 3.12.10, the Architect will review and approve or take other appropriate action on submittals only for the limited purpose of checking for conformance with information given and the design concept expressed in the Contract Documents. The Construction Manager shall review submittals for sequencing, constructability, and coordination impacts on other Contractors.

§ 3.12.10.2 If the Contract Documents require the Contractor's design professional to certify that the Work has been performed in accordance with the design criteria, the Contractor shall furnish such certifications to the Construction Manager and Architect at the time and in the form specified by the Architect.

§ 3.13 Use of Site

§ 3.13.1 The Contractor shall confine operations at the site to areas permitted by applicable laws, statutes, ordinances, codes, rules and regulations, lawful orders of public authorities, and the Contract Documents and shall not unreasonably encumber the site with materials or equipment.

§ 3.13.2 The Contractor shall coordinate the Contractor's operations with, and secure the approval of, the Construction Manager before using any portion of the site.

§ 3.14 Cutting and Patching

§ 3.14.1 The Contractor shall be responsible for cutting, fitting, or patching required to complete the Work or to make its parts fit together properly. All areas requiring cutting, fitting, or patching shall be restored to the condition existing prior to the cutting, fitting, or patching, unless otherwise required by the Contract Documents.

§ 3.14.2 The Contractor shall not damage or endanger a portion of the Work or fully or partially completed construction of the Owner, Separate Contractors, or of other Contractors by cutting, patching, or otherwise altering such construction, or by excavation. The Contractor shall not cut or otherwise alter construction by the Owner, Separate Contractors, or by other Contractors except with written consent of the Construction Manager, Owner, and such other Contractors or Separate Contractors. Consent shall not be unreasonably withheld. The Contractor shall not unreasonably withhold, from the Separate Contractors, other Contractors, or the Owner, its consent to cutting or otherwise altering the Work.

§ 3.15 Cleaning Up

§ 3.15.1 The Contractor shall keep the premises and surrounding area free from accumulation of waste materials and rubbish caused by operations under the Contract. At completion of the Work, the Contractor shall remove waste materials, rubbish, the Contractor's tools, construction equipment, machinery, and surplus materials from and about the Project.

§ 3.15.2 If the Contractor fails to clean up as provided in the Contract Documents, the Owner, or Construction Manager with the Owner's approval, may do so and the Owner shall be entitled to reimbursement from the Contractor.

§ 3.16 Access to Work

The Contractor shall provide the Owner, Construction Manager, and Architect with access to the Work in preparation and progress wherever located.

§ 3.17 Royalties, Patents and Copyrights

The Contractor shall pay all royalties and license fees. The Contractor shall defend suits or claims for infringement of copyrights and patent rights and shall hold the Owner, Construction Manager, and Architect harmless from loss on account thereof, but shall not be responsible for defense or loss when a particular design, process, or product of a particular manufacturer or manufacturers is required by the Contract Documents, or where the copyright violations are contained in Drawings, Specifications, or other documents prepared by the Owner, Architect, or Construction Manager. However, if an infringement of a copyright or patent is discovered by, or made known to, the Contractor, the Contractor shall be responsible for the loss unless the information is promptly furnished to the Architect through the Construction Manager.

§ 3.18 Indemnification

§ 3.18.1 To the fullest extent permitted by law, the Contractor shall indemnify and hold harmless the Owner, Construction Manager, Architect, Construction Manager's and Architect's consultants, and agents and employees of any of them from and against claims, damages, losses, and expenses, including but not limited to attorneys' fees, arising out of or resulting from performance of the Work, provided that such claim, damage, loss, or expense is attributable to bodily injury, sickness, disease or death, or to injury to or destruction of tangible property (other than the Work itself), but only to the extent caused by the negligent acts or omissions of the Contractor, a Subcontractor, anyone directly or indirectly employed by them, or anyone for whose acts they may be liable, regardless of whether or not such claim, damage, loss, or expense is caused in part by a party indemnified hereunder. Such obligation shall not be construed to negate, abridge, or reduce other rights or obligations of indemnity that would otherwise exist as to a party or person described in this Section 3.18.

§ 3.18.2 In claims against any person or entity indemnified under this Section 3.18 by an employee of the Contractor, a Subcontractor, anyone directly or indirectly employed by them, or anyone for whose acts they may be liable, the indemnification obligation under Section 3.18.1 shall not be limited by a limitation on amount or type of damages, compensation, or benefits payable by or for the Contractor or a Subcontractor under workers' compensation acts, disability benefit acts, or other employee benefit acts.

ARTICLE 4 ARCHITECT AND CONSTRUCTION MANAGER

§ 4.1 General

§ 4.1.1 The Architect is the person or entity retained by the Owner pursuant to Section 2.3.2 and identified as such in the Agreement.

§ 4.1.2 The Construction Manager is the person or entity retained by the Owner pursuant to Section 2.3.3 and identified as such in the Agreement.

§ 4.1.3 Duties, responsibilities, and limitations of authority of the Construction Manager and Architect as set forth in the Contract Documents shall not be restricted, modified, or extended without written consent of the Owner, Construction Manager, Architect, and Contractor. Consent shall not be unreasonably withheld.

§ 4.2 Administration of the Contract

§ 4.2.1 The Construction Manager and Architect will provide administration of the Contract as described in the Contract Documents and will be the Owner's representatives during construction until the date the Architect issues the final Certificate for Payment. The Construction Manager and Architect will have authority to act on behalf of the Owner only to the extent provided in the Contract Documents.

§ 4.2.2 The Architect will visit the site at intervals appropriate to the stage of construction, or as otherwise agreed with the Owner, to become generally familiar with the progress and quality of the portion of the Work completed, and to determine in general if the Work observed is being performed in a manner indicating that the Work, when fully completed, will be in accordance with the Contract Documents. However, the Architect will not be required to make exhaustive or continuous on-site inspections to check the quality or quantity of the Work. On the basis of the site visits, the Architect will keep the Owner and the Construction Manager reasonably informed about the progress and quality of the portion of the Work completed, and promptly report to the Owner and Construction Manager known deviations from the Contract Documents and defects and deficiencies observed in the Work.

§ 4.2.3 The Construction Manager shall provide one or more representatives who shall be in attendance at the Project site whenever the Work is being performed. The Construction Manager will determine in general if the Work observed is being performed in accordance with the Contract Documents, will keep the Owner and Architect reasonably informed of the progress of the Work, and will promptly report to the Owner and Architect known deviations from the Contract Documents and the most recent Project schedule, and defects and deficiencies observed in the Work.

§ 4.2.4 The Construction Manager will schedule and coordinate the activities of the Contractor and other Contractors in accordance with the latest approved Project schedule.

§ 4.2.5 The Construction Manager, except to the extent required by Section 4.2.4, and Architect will not have control over, charge of, or responsibility for, the construction means, methods, techniques, sequences or procedures, or for the safety precautions and programs in connection with the Work, since these are solely the Contractor's rights and responsibilities under the Contract Documents, and neither will be responsible for the Contractor's failure to perform the Work in accordance with the requirements of the Contract Documents. Neither the Construction Manager nor the Architect will have control over or charge of, or be responsible for acts or omissions of, the Contractor, Subcontractors, or their agents or employees, or of any other persons or entities performing portions of the Work.

§ 4.2.6 **Communications.** The Owner shall communicate with the Contractor and the Construction Manager's consultants through the Construction Manager about matters arising out of or relating to the Contract Documents. The Owner and Construction Manager shall include the Architect in all communications that relate to or affect the Architect's services or professional responsibilities. The Owner shall promptly notify the Architect of the substance of any direct communications between the Owner and the Construction Manager otherwise relating to the Project. Communications by and with the Architect's consultants shall be through the Architect. Communications by and with Subcontractors and suppliers shall be through the Contractor. Communications by and with other Contractors shall be through the Construction Manager. Communications by and with the Owner's own forces and Separate Contractors shall be through the Owner. The Contract Documents may specify other communication protocols.

§ 4.2.7 The Construction Manager and Architect will review and certify all Applications for Payment by the Contractor, in accordance with the provisions of Article 9.

§ 4.2.8 The Architect and Construction Manager have authority to reject Work that does not conform to the Contract Documents, and will notify each other about the rejection. Whenever the Construction Manager considers it necessary or advisable, the Construction Manager will have authority to require inspection or testing of the Work in accordance with Sections 13.4.2 and 13.4.3, upon written authorization of the Owner, whether or not the Work is fabricated, installed or completed. The foregoing authority of the Construction Manager will be subject to the provisions of Sections 4.2.18 through 4.2.20 inclusive, with respect to interpretations and decisions of the Architect. However, neither the Architect's nor the Construction Manager's authority to act under this Section 4.2.8 nor a decision made by either of them in good faith either to exercise or not to exercise such authority shall give rise to a duty or responsibility of the Architect or the Construction Manager to the Contractor, Subcontractors, suppliers, their agents or employees, or other persons performing any of the Work.

§ 4.2.9 Utilizing the submittal schedule provided by the Contractor, the Construction Manager shall prepare, and revise as necessary, a Project submittal schedule incorporating information from other Contractors, the Owner, Owner's consultants, Owner's Separate Contractors and vendors, governmental agencies, and participants in the Project under the management of the Construction Manager. The Project submittal schedule and any revisions shall be submitted to the Architect for approval.

§ 4.2.10 The Construction Manager will receive and promptly review for conformance with the submittal requirements of the Contract Documents, all submittals from the Contractor such as Shop Drawings, Product Data, and Samples. Where there are other Contractors, the Construction Manager will also check and coordinate the information contained within each submittal received from the Contractor and other Contractors, and transmit to the Architect those recommended for approval. By submitting Shop Drawings, Product Data, Samples, and similar submittals, the Construction Manager represents to the Owner and Architect that the Construction Manager has reviewed and recommended them for approval. The Construction Manager's actions will be taken in accordance with the Project submittal schedule approved by the Architect or, in the absence of an approved Project submittal schedule, with reasonable promptness while allowing sufficient time to permit adequate review by the Architect.

§ 4.2.11 The Architect will review and approve, or take other appropriate action upon, the Contractor's submittals such as Shop Drawings, Product Data, and Samples, but only for the limited purpose of checking for conformance with information given and the design concept expressed in the Contract Documents. The Architect's action will be taken in accordance with the submittal schedule approved by the Architect or, in the absence of an approved submittal schedule, with reasonable promptness while allowing sufficient time in the Architect's professional judgment to permit adequate review. Upon the Architect's completed review, the Architect shall transmit its submittal review to the Construction Manager.

§ 4.2.12 Review of the Contractor's submittals by the Construction Manager and Architect is not conducted for the purpose of determining the accuracy and completeness of other details such as dimensions and quantities, or for substantiating instructions for installation or performance of equipment or systems, all of which remain the responsibility of the Contractor as required by the Contract Documents. The Construction Manager and Architect's review of the Contractor's submittals shall not relieve the Contractor of the obligations under Sections 3.3, 3.5, and 3.12. The Construction Manager and Architect's review shall not constitute approval of safety precautions or of any construction means, methods, techniques, sequences, or procedures. The Architect's approval of a specific item shall not indicate approval of an assembly of which the item is a component.

§ 4.2.13 The Construction Manager will prepare Change Orders and Construction Change Directives.

§ 4.2.14 The Construction Manager and the Architect will take appropriate action on Change Orders or Construction Change Directives in accordance with Article 7, and the Architect will have authority to order minor changes in the Work as provided in Section 7.4. The Architect, in consultation with the Construction Manager, will investigate and make determinations and recommendations regarding concealed and unknown conditions as provided in Section 3.7.4.

§ 4.2.15 Utilizing the documents provided by the Contractor, the Construction Manager will maintain at the site for the Owner one copy of all Contract Documents, approved Shop Drawings, Product Data, Samples, and similar required submittals, in good order and marked currently to record all changes and selections made during construction. These will be available to the Architect and the Contractor, and will be delivered to the Owner upon completion of the Project.

§ 4.2.16 The Construction Manager will assist the Architect in conducting inspections to determine the date or dates of Substantial Completion and the date of final completion; issue Certificates of Substantial Completion in conjunction with the Architect pursuant to Section 9.8; and receive and forward to the Owner written warranties and related documents required by the Contract and assembled by the Contractor pursuant to Section 9.10. The Construction Manager will forward to the Architect a final Application and Certificate for Payment or final Project Application and Project Certificate for Payment upon the Contractor's compliance with the requirements of the Contract Documents.

§ 4.2.17 If the Owner and Architect agree, the Architect will provide one or more Project representatives to assist in carrying out the Architect's responsibilities at the site. The Owner shall notify the Construction Manager of any change in the duties, responsibilities and limitations of authority of the Project representatives.

§ 4.2.18 The Architect will interpret and decide matters concerning performance under, and requirements of, the Contract Documents on written request of the Construction Manager, Owner, or Contractor through the Construction Manager. The Architect's response to such requests will be made in writing within any time limits agreed upon or otherwise with reasonable promptness.

§ 4.2.19 Interpretations and decisions of the Architect will be consistent with the intent of, and reasonably inferable from, the Contract Documents and will be in writing or in the form of drawings. When making such interpretations and decisions, the Architect will endeavor to secure faithful performance by both Owner and Contractor, will not show partiality to either, and will not be liable for results of interpretations or decisions so rendered in good faith.

§ 4.2.20 The Architect's decisions on matters relating to aesthetic effect will be final if consistent with the intent expressed in the Contract Documents.

§ 4.2.21 The Construction Manager will receive and review requests for information from the Contractor, and forward each request for information to the Architect, with the Construction Manager's recommendation. The Architect will review and respond in writing, through the Construction Manager, to requests for information about the Contract Documents. The Construction Manager's recommendation and the Architect's response to each request will be made in writing within any time limits agreed upon or otherwise with reasonable promptness. If appropriate, the Architect will prepare and issue supplemental Drawings and Specifications in response to the requests for information.

ARTICLE 5 SUBCONTRACTORS

§ 5.1 Definitions

§ 5.1.1 A Subcontractor is a person or entity who has a direct contract with the Contractor to perform a portion of the Work at the site. The term "Subcontractor" is referred to throughout the Contract Documents as if singular in number and means a Subcontractor or an authorized representative of the Subcontractor. The term "Subcontractor" does not include other Contractors or Separate Contractors or the subcontractors of other Contractors or Separate Contractors.

§ 5.1.2 A Sub-subcontractor is a person or entity who has a direct or indirect contract with a Subcontractor to perform a portion of the Work at the site. The term "Sub-subcontractor" is referred to throughout the Contract Documents as if singular in number and means a Sub-subcontractor or an authorized representative of the Sub-subcontractor.

§ 5.2 Award of Subcontracts and Other Contracts for Portions of the Work

§ 5.2.1 Unless otherwise stated in the Contract Documents, the Contractor, as soon as practicable after award of the Contract, shall notify the Construction Manager, for review by the Owner, Construction Manager and Architect, of the persons or entities proposed for each principal portion of the Work, including those who are to furnish materials or equipment fabricated to a special design. Within 14 days of receipt of the information, the Construction Manager may notify the Contractor whether the Owner, the Construction Manager or the Architect (1) has reasonable objection to any such proposed person or entity or, (2) requires additional time for review. Failure of the Construction Manager to provide notice within the 14-day period shall constitute notice of no reasonable objection.

§ 5.2.2 The Contractor shall not contract with a proposed person or entity to whom the Owner, Construction Manager or Architect has made reasonable and timely objection. The Contractor shall not be required to contract with anyone to whom the Contractor has made reasonable objection.

§ 5.2.3 If the Owner, Construction Manager or Architect has reasonable objection to a person or entity proposed by the Contractor, the Contractor shall propose another to whom the Owner, Construction Manager or Architect has no reasonable objection. If the proposed but rejected Subcontractor was reasonably capable of performing the Work, the Contract Sum and Contract Time shall be increased or decreased by the difference, if any, occasioned by such change, and an appropriate Change Order shall be issued before commencement of the substitute Subcontractor's Work. However, no increase in the Contract Sum or Contract Time shall be allowed for such change unless the Contractor has acted promptly and responsively in submitting names as required.

§ 5.2.4 The Contractor shall not substitute a Subcontractor, person, or entity for one previously selected if the Owner, Construction Manager or Architect makes reasonable objection to such substitution.

§ 5.3 Subcontractual Relations

By appropriate written agreement, the Contractor shall require each Subcontractor, to the extent of the Work to be performed by the Subcontractor, to be bound to the Contractor by terms of the Contract Documents, and to assume toward the Contractor all the obligations and responsibilities, including the responsibility for safety of the Subcontractor's Work, that the Contractor, by these Contract Documents, assumes toward the Owner, Construction Manager and Architect. Each subcontract agreement shall preserve and protect the rights of the Owner, Construction Manager and Architect under the Contract Documents with respect to the Work to be performed by the Subcontractor so that subcontracting thereof will not prejudice such rights, and shall allow to the Subcontractor, unless specifically provided otherwise in the subcontract agreement, the benefit of all rights, remedies, and redress against the Contractor that the Contractor, by the Contract Documents, has against the Owner. Where appropriate, the Contractor shall require each Subcontractor to enter into similar agreements with Sub-subcontractors. The Contractor shall make available to each proposed Subcontractor, prior to the execution of the subcontract agreement, copies of the Contract Documents to which the Subcontractor will be bound, and, upon written request of the Subcontractor, identify to the Subcontractor terms and conditions of the proposed subcontract agreement that may be at variance with the Contract Documents. Subcontractors will similarly make copies of applicable portions of such documents available to their respective proposed Sub-subcontractors.

§ 5.4 Contingent Assignment of Subcontracts

§ 5.4.1 Each subcontract agreement for a portion of the Work is assigned by the Contractor to the Owner, provided that

- .1 assignment is effective only after termination of the Contract by the Owner for cause pursuant to Section 14.2 and only for those subcontract agreements that the Owner accepts by notifying the Subcontractor and Contractor; and
- .2 assignment is subject to the prior rights of the surety, if any, obligated under bond relating to the Contract.

When the Owner accepts the assignment of a subcontract agreement, the Owner assumes the Contractor's rights and obligations under the subcontract.

§ 5.4.2 Upon such assignment, if the Work has been suspended for more than 30 days, the Subcontractor's compensation shall be equitably adjusted for increases in cost resulting from the suspension.

§ 5.4.3 Upon assignment to the Owner under this Section 5.4, the Owner may further assign the subcontract to a successor Contractor or other entity. If the Owner assigns the subcontract to a successor Contractor or other entity, the Owner shall nevertheless remain legally responsible for all of the successor Contractor's obligations under the subcontract.

ARTICLE 6 CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS

§ 6.1 Owner's Right to Perform Construction with Own Forces and to Award Other Contracts

§ 6.1.1 The Owner reserves the right to perform construction or operations related to the Project with the Owner's own forces, and with Separate Contractors retained under Conditions of the Contract substantially similar to those of this Contract, including those provisions of the Conditions of the Contract related to insurance and waiver of subrogation.

§ 6.1.2 When the Owner performs construction or operations with the Owner's own forces or Separate Contractors, the Owner shall provide for coordination of such forces and Separate Contractors with the Work of the Contractor, who shall cooperate with them.

§ 6.1.3 Unless otherwise provided in the Contract Documents, when the Owner performs construction or operations related to the Project with the Owner's own forces or with Separate Contractors, the Owner or its Separate Contractors shall have the same obligations and rights that the Contractor has under the Conditions of the Contract, including, without excluding others, those stated in Article 3, this Article 6, and Articles 10, 11, and 12.

§ 6.2 Mutual Responsibility

§ 6.2.1 The Contractor shall afford the Owner's own forces, Separate Contractors, Construction Manager and other Contractors reasonable opportunity for introduction and storage of their materials and equipment and performance of their activities, and shall connect and coordinate the Contractor's construction and operations with theirs as required by the Contract Documents.

§ 6.2.2 If part of the Contractor's Work depends for proper execution or results upon construction or operations by the Owner's own forces, Separate Contractors or other Contractors, the Contractor shall, prior to proceeding with that portion of the Work, promptly notify the Construction Manager and Architect of apparent discrepancies or defects in the construction or operations by the Owner or Separate Contractor or other Contractors that would render it unsuitable for proper execution and results of the Contractor's Work. Failure of the Contractor to notify the Construction Manager and the Architect of apparent discrepancies or defects prior to proceeding with the Work shall constitute an acknowledgment that the Owner's or Separate Contractor's or other Contractors' completed or partially completed construction is fit and proper to receive the Contractor's Work. The Contractor shall not be responsible for discrepancies or defects in the construction or operations by the Owner or Separate Contractors or other Contractors that are not apparent.

§ 6.2.3 The Contractor shall reimburse the Owner for costs the Owner incurs, including costs that are payable to a Separate Contractors or to other Contractors, because of the Contractor's delays, improperly timed activities or defective construction. The Owner shall be responsible to the Contractor for costs the Contractor incurs because of delays, improperly timed activities, damage to the Work or defective construction by the Owner's own forces, Separate Contractors, or other Contractors.

§ 6.2.4 The Contractor shall promptly remedy damage that the Contractor wrongfully causes to completed or partially completed construction, or to property of the Owner, Separate Contractors, or other Contractors as provided in Section 10.2.5.

§ 6.2.5 The Owner, Separate Contractors, and other Contractors shall have the same responsibilities for cutting and patching as are described for the Contractor in Section 3.14.

§ 6.3 Owner's Right to Clean Up

If a dispute arises among the Contractor, Separate Contractors, other Contractors, and the Owner as to the responsibility under their respective contracts for maintaining the premises and surrounding area free from waste materials and rubbish, the Owner may clean up and the Construction Manager, with notice to the Architect, will allocate the cost among those responsible.

ARTICLE 7 CHANGES IN THE WORK

§ 7.1 General

§ 7.1.1 Changes in the Work may be accomplished after execution of the Contract, and without invalidating the Contract, by Change Order, Construction Change Directive or order for a minor change in the Work, subject to the limitations stated in this Article 7 and elsewhere in the Contract Documents.

§ 7.1.2 A Change Order shall be based upon agreement among the Owner, Construction Manager, Architect and Contractor. A Construction Change Directive requires agreement by the Owner, Construction Manager and Architect and may or may not be agreed to by the Contractor. An order for a minor change in the Work may be issued by the Architect alone.

§ 7.1.3 Changes in the Work shall be performed under applicable provisions of the Contract Documents. The Contractor shall proceed promptly with changes in the Work, unless otherwise provided in the Change Order, Construction Change Directive, or order for a minor change in the Work.

§ 7.2 Change Orders

A Change Order is a written instrument prepared by the Construction Manager and signed by the Owner, Construction Manager, Architect, and Contractor, stating their agreement upon all of the following:

- .1 The change in the Work;
- .2 The amount of the adjustment, if any, in the Contract Sum; and
- .3 The extent of the adjustment, if any, in the Contract Time.

§ 7.3 Construction Change Directives

§ 7.3.1 A Construction Change Directive is a written order prepared by the Construction Manager and signed by the Owner, Construction Manager and Architect, directing a change in the Work prior to agreement on adjustment, if any, in the Contract Sum or Contract Time, or both. The Owner may by Construction Change Directive, without invalidating the Contract, order changes in the Work within the general scope of the Contract consisting of additions, deletions, or other revisions, the Contract Sum and Contract Time being adjusted accordingly.

§ 7.3.2 A Construction Change Directive shall be used in the absence of total agreement on the terms of a Change Order.

§ 7.3.3 If the Construction Change Directive provides for an adjustment to the Contract Sum, the adjustment shall be based on one of the following methods:

- .1 Mutual acceptance of a lump sum properly itemized and supported by sufficient substantiating data to permit evaluation;
- .2 Unit prices stated in the Contract Documents or subsequently agreed upon;
- .3 Cost to be determined in a manner agreed upon by the parties and a mutually acceptable fixed or percentage fee; or
- .4 As provided in Section 7.3.4.

§ 7.3.4 If the Contractor does not respond promptly or disagrees with the method for adjustment in the Contract Sum, the Construction Manager shall determine the adjustment on the basis of reasonable expenditures and savings of those performing the Work attributable to the change, including, in case of an increase in the Contract Sum, an amount for overhead and profit as set forth in the Agreement, or if no such amount is set forth in the Agreement, a reasonable amount. In such case, and also under Section 7.3.3.3, the Contractor shall keep and present, in such form as the Construction Manager may prescribe, an itemized accounting together with appropriate supporting data. Unless otherwise provided in the Contract Documents, costs for the purposes of this Section 7.3.4 shall be limited to the following:

- .1 Costs of labor, including applicable payroll taxes, fringe benefits required by agreement or custom, workers' compensation insurance, and other employee costs approved by the Construction Manager and Architect;
- .2 Costs of materials, supplies, and equipment, including cost of transportation, whether incorporated or consumed;
- .3 Rental costs of machinery and equipment, exclusive of hand tools, whether rented from the Contractor or others;
- .4 Costs of premiums for all bonds and insurance, permit fees, and sales, use, or similar taxes, directly related to the change; and
- .5 Costs of supervision and field office personnel directly attributable to the change.

§ 7.3.5 If the Contractor disagrees with the adjustment in the Contract Time, the Contractor may make a Claim in accordance with applicable provisions of Article 15.

§ 7.3.6 Upon receipt of a Construction Change Directive, the Contractor shall promptly proceed with the change in the Work involved and advise the Construction Manager of the Contractor's agreement or disagreement with the method, if any, provided in the Construction Change Directive for determining the proposed adjustment in the Contract Sum or Contract Time.

§ 7.3.7 A Construction Change Directive signed by the Contractor indicates the Contractor's agreement therewith, including adjustment in Contract Sum and Contract Time or the method for determining them. Such agreement shall be effective immediately and shall be recorded as a Change Order.

§ 7.3.8 The amount of credit to be allowed by the Contractor to the Owner for a deletion or change that results in a net decrease in the Contract Sum shall be actual net cost as confirmed by the Construction Manager and Architect. When both additions and credits covering related Work or substitutions are involved in a change, the allowance for overhead and profit shall be figured on the basis of net increase, if any, with respect to that change.

§ 7.3.9 Pending final determination of the total cost of a Construction Change Directive to the Owner, the Contractor may request payment for Work completed under the Construction Change Directive in Applications for Payment. The Construction Manager and Architect will make an interim determination for purposes of monthly certification for payment for those costs and certify for payment the amount that the Construction Manager and Architect determine to be reasonably justified. The interim determination of cost shall adjust the Contract Sum on the same basis as a Change Order, subject to the right of either party to disagree and assert a Claim in accordance with Article 15.

§ 7.3.10 When the Owner and Contractor agree with a determination made by the Construction Manager and Architect concerning the adjustments in the Contract Sum and Contract Time, or otherwise reach agreement upon the adjustments, such agreement shall be effective immediately and the Construction Manager shall prepare a Change Order. Change Orders may be issued for all or any part of a Construction Change Directive.

§ 7.4 Minor Changes in the Work

The Architect may order minor changes in the Work that are consistent with the intent of the Contract Documents and do not involve an adjustment in the Contract Sum or an extension of the Contract Time. The Architect's order for minor changes shall be in writing. If the Contractor believes that the proposed minor change in the Work will affect the Contract Sum or Contract Time, the Contractor shall notify the Construction Manager and shall not proceed to implement the change in the Work. If the Contractor performs the Work set forth in the Architect's order for a minor change without prior notice to the Construction Manager that such change will affect the Contract Sum or Contract Time, the Contractor waives any adjustment to the Contract Sum or extension of the Contract Time.

ARTICLE 8 TIME

§ 8.1 Definitions

§ 8.1.1 Unless otherwise provided, Contract Time is the period of time, including authorized adjustments, allotted in the Contract Documents for Substantial Completion of the Work.

§ 8.1.2 The date of commencement of the Work is the date established in the Agreement.

§ 8.1.3 The date of Substantial Completion is the date certified by the Architect in accordance with Section 9.8.

§ 8.1.4 The term "day" as used in the Contract Documents shall mean calendar day unless otherwise specifically defined.

§ 8.2 Progress and Completion

§ 8.2.1 Time limits stated in the Contract Documents are of the essence of the Contract. By executing the Agreement, the Contractor confirms that the Contract Time is a reasonable period for performing the Work.

§ 8.2.2 The Contractor shall not knowingly, except by agreement or instruction of the Owner in writing, commence the Work prior to the effective date of insurance required to be furnished by the Contractor and Owner.

§ 8.2.3 The Contractor shall proceed expeditiously with adequate forces and shall achieve Substantial Completion within the Contract Time.

§ 8.3 Delays and Extensions of Time

§ 8.3.1 If the Contractor is delayed at any time in the commencement or progress of the Work by (1) an act or neglect of the Owner, Architect, Construction Manager, or an employee of any of them, or of the Owner's own forces, Separate Contractors, or other Contractors; (2) by changes ordered in the Work; (3) by labor disputes, fire, unusual delay in deliveries, unavoidable casualties, adverse weather conditions documented in accordance with Section 15.1.6.2, or other causes beyond the Contractor's control; (4) by delay authorized by the Owner pending mediation and binding dispute resolution; or (5) by other causes that the Contractor asserts and the Architect, based on the recommendation of the Construction Manager, determines justify delay, then the Contract Time shall be extended for such reasonable time as the Architect may determine.

§ 8.3.2 Claims relating to time shall be made in accordance with applicable provisions of Article 15.

§ 8.3.3 This Section 8.3 does not preclude recovery of damages for delay by either party under other provisions of the Contract Documents.

ARTICLE 9 PAYMENTS AND COMPLETION

§ 9.1 Contract Sum

§ 9.1.1 The Contract Sum is stated in the Agreement and, including authorized adjustments, is the total amount payable by the Owner to the Contractor for performance of the Work under the Contract Documents.

§ 9.1.2 If unit prices are stated in the Contract Documents or subsequently agreed upon, and if quantities originally contemplated are materially changed so that application of such unit prices to the actual quantities causes substantial inequity to the Owner or Contractor, the applicable unit prices shall be equitably adjusted.

§ 9.2 Schedule of Values

Where the Contract is based on a stipulated sum or Guaranteed Maximum Price, the Contractor shall submit a schedule of values to the Construction Manager, before the first Application for Payment, allocating the entire Contract Sum to the various portions of the Work. The schedule of values shall be prepared in the form, and supported by the data to substantiate its accuracy, required by the Construction Manager and the Architect. This schedule, unless objected to by the Construction Manager or Architect, shall be used as a basis for reviewing the Contractor's Applications for Payment. The Construction Manager shall forward to the Architect the Contractor's schedule of values. Any changes to the schedule of values shall be submitted to the Construction Manager and supported by such data to substantiate its accuracy as the Construction Manager and the Architect may require, and unless objected to by the Construction Manager or the Architect, shall be used as a basis for reviewing the Contractor's subsequent Applications for Payment.

§ 9.3 Applications for Payment

§ 9.3.1 At least fifteen days before the date established for each progress payment, the Contractor shall submit to the Construction Manager an itemized Application for Payment prepared in accordance with the schedule of values, if required under Section 9.2, for completed portions of the Work. The application shall be notarized, if required, and supported by all data substantiating the Contractor's right to payment that the Owner, Construction Manager or Architect require, such as copies of requisitions, and releases of waivers of lien from Subcontractors and suppliers, and shall reflect retainage if provided for in the Contract Documents.

§ 9.3.1.1 As provided in Section 7.3.9, such applications may include requests for payment on account of changes in the Work that have been properly authorized by Construction Change Directives, or by interim determinations of the Construction Manager and Architect, but not yet included in Change Orders.

§ 9.3.1.2 Applications for Payment shall not include requests for payment for portions of the Work for which the Contractor does not intend to pay a Subcontractor or supplier, unless such Work has been performed by others whom the Contractor intends to pay.

§ 9.3.2 Unless otherwise provided in the Contract Documents, payments shall be made on account of materials and equipment delivered and suitably stored at the site for subsequent incorporation in the Work. If approved in advance by the Owner, payment may similarly be made for materials and equipment suitably stored off the site at a location agreed upon in writing. Payment for materials and equipment stored on or off the site shall be conditioned upon compliance by the Contractor with procedures satisfactory to the Owner to establish the Owner's title to such materials and equipment or otherwise protect the Owner's interest, and shall include the costs of applicable insurance, storage, and transportation to the site, for such materials and equipment stored off the site.

§ 9.3.3 The Contractor warrants that title to all Work covered by an Application for Payment will pass to the Owner no later than the time of payment. The Contractor further warrants that upon submittal of an Application for Payment all Work for which Certificates for Payment have been previously issued and payments received from the Owner shall, to the best of the Contractor's knowledge, information, and belief, be free and clear of liens, claims, security interests, or encumbrances, in favor of the Contractor, Subcontractors, suppliers, or other persons or entities that provided labor, materials and equipment relating to the Work.

§ 9.4 Certificates for Payment

§ 9.4.1 Where there is only one Contractor, the Construction Manager will, within seven days after the Construction Manager's receipt of the Contractor's Application for Payment, review the Application, certify the amount the Construction Manager determines is due the Contractor, and forward the Contractor's Application and Certificate for Payment to the Architect. Within seven days after the Architect receives the Contractor's Application for Payment from the Construction Manager, the Architect will either (1) issue to the Owner a Certificate for Payment, in the full amount of the Application for Payment, with a copy to the Construction Manager; or (2) issue to the Owner a Certificate for Payment for such amount as the Architect determines is properly due, and notify the Construction Manager and Owner of the Architect's reasons for withholding certification in part as provided in Section 9.5.1; or (3) withhold certification of the entire Application for Payment, and notify the Construction Manager and Owner of the Architect's reason for withholding certification in whole as provided in Section 9.5.1. The Construction Manager will promptly forward to the Contractor the Architect's notice of withholding certification.

§ 9.4.2 Where there is more than one Contractor performing portions of the Project, the Construction Manager will, within seven days after the Construction Manager receives all of the Contractors' Applications for Payment: (1) review the Applications and certify the amount the Construction Manager determines is due each of the Contractors; (2) prepare a Summary of Contractors' Applications for Payment by combining information from each Contractor's application with information from similar applications for progress payments from the other Contractors; (3) prepare a Project Application and Certificate for Payment; (4) certify the amount the Construction Manager determines is due all Contractors; and (5) forward the Summary of Contractors' Applications for Payment and Project Application and Certificate for Payment to the Architect.

§ 9.4.2.1 Within seven days after the Architect receives the Project Application and Project Certificate for Payment and the Summary of Contractors' Applications for Payment from the Construction Manager, the Architect will either (1) issue to the Owner a Project Certificate for Payment, with a copy to the Construction Manager; or (2) issue to the Owner a Project Certificate for Payment for such amount as the Architect determines is properly due, and notify the Construction Manager and Owner of the Architect's reasons for withholding certification in part as provided in Section 9.5.1; or (3) withhold certification of the entire Project Application for Payment, and notify the Construction Manager and Owner of the Architect's reason for withholding certification in whole as provided in Section 9.5.1. The Construction Manager will promptly forward the Architect's notice of withholding certification to the Contractors.

§ 9.4.3 The Construction Manager's certification of an Application for Payment or, in the case of more than one Contractor, a Project Application and Certificate for Payment, shall be based upon the Construction Manager's evaluation of the Work and the data in the Application or Applications for Payment. The Construction Manager's certification will constitute a representation that, to the best of the Construction Manager's knowledge, information, and belief, the Work has progressed to the point indicated, the quality of the Work is in accordance with the Contract Documents, and that the Contractor is, or Contractors are, entitled to payment in the amount certified.

§ 9.4.4 The Architect's issuance of a Certificate for Payment or, in the case of more than one Contractor, Project Application and Certificate for Payment, shall be based upon the Architect's evaluation of the Work, the recommendation of the Construction Manager, and data in the Application for Payment or Project Application for Payment. The Architect's certification will constitute a representation that, to the best of the Architect's knowledge, information, and belief, the Work has progressed to the point indicated, the quality of the Work is in accordance with the Contract Documents, and that the Contractor is, or Contractors are, entitled to payment in the amount certified.

§ 9.4.5 The representations made pursuant to Sections 9.4.3 and 9.4.4 are subject to an evaluation of the Work for conformance with the Contract Documents upon Substantial Completion, to results of subsequent tests and inspections, to correction of minor deviations from the Contract Documents prior to completion, and to specific qualifications expressed by the Construction Manager or Architect.

§ 9.4.6 The issuance of a Certificate for Payment or a Project Certificate for Payment will not be a representation that the Construction Manager or Architect has (1) made exhaustive or continuous on-site inspections to check the quality or quantity of the Work; (2) reviewed construction means, methods, techniques, sequences, or procedures; (3) reviewed copies of requisitions received from Subcontractors and suppliers and other data requested by the Owner to substantiate the Contractor's right to payment; or (4) made examination to ascertain how or for what purpose the Contractor has used money previously paid on account of the Contract Sum.

§ 9.5 Decisions to Withhold Certification

§ 9.5.1 The Construction Manager or Architect may withhold a Certificate for Payment or Project Certificate for Payment in whole or in part, to the extent reasonably necessary to protect the Owner, if in the Construction Manager's or Architect's opinion the representations to the Owner required by Section 9.4.3 and 9.4.4 cannot be made. If the Construction Manager or Architect is unable to certify payment in the amount of the Application, the Construction Manager will notify the Contractor and Owner as provided in Section 9.4.1 and 9.4.2. If the Contractor, Construction Manager and Architect cannot agree on a revised amount, the Architect will promptly issue a Certificate for Payment or a Project Certificate for Payment for the amount for which the Architect is able to make such representations to the Owner. The Construction Manager or Architect may also withhold a Certificate for Payment or, because of subsequently discovered evidence, may nullify the whole or a part of a Certificate for Payment or Project Certificate for Payment previously issued, to such extent as may be necessary in the Construction Manager's or Architect's opinion to protect the Owner from loss for which the Contractor is responsible, including loss resulting from the acts and omissions described in Section 3.3.2 because of

- .1 defective Work not remedied;
- .2 third party claims filed or reasonable evidence indicating probable filing of such claims, unless security acceptable to the Owner is provided by the Contractor;
- .3 failure of the Contractor to make payments properly to Subcontractors or suppliers for labor, materials or equipment;
- .4 reasonable evidence that the Work cannot be completed for the unpaid balance of the Contract Sum;
- .5 damage to the Owner or a Separate Contractor or other Contractor;
- .6 reasonable evidence that the Work will not be completed within the Contract Time, and that the unpaid balance would not be adequate to cover actual or liquidated damages for the anticipated delay; or
- .7 repeated failure to carry out the Work in accordance with the Contract Documents.

§ 9.5.2 When either party disputes the Architect's decision regarding a Certificate for Payment under Section 9.5.1, in whole or in part, that party may submit a Claim in accordance with Article 15.

§ 9.5.3 When the reasons for withholding certification are removed, certification will be made for amounts previously withheld.

§ 9.5.4 If the Architect or Construction Manager withholds certification for payment under Section 9.5.1, the Owner may, at its sole option, issue joint checks to the Contractor and to any Subcontractor or supplier to whom the Contractor failed to make payment for Work properly performed or material or equipment suitably delivered. If the Owner makes payments by joint check, the Owner shall notify the Architect and the Construction Manager, and both will reflect such payment on the next Certificate for Payment.

§ 9.6 Progress Payments

§ 9.6.1 After the Architect has issued a Certificate for Payment or Project Certificate for Payment, the Owner shall make payment in the manner and within the time provided in the Contract Documents, and shall so notify the Construction Manager and Architect.

§ 9.6.2 The Contractor shall pay each Subcontractor, no later than seven days after receipt of payment from the Owner, the amount to which the Subcontractor is entitled, reflecting percentages actually retained from payments to the Contractor on account of the Subcontractor's portion of the Work. The Contractor shall, by appropriate agreement with each Subcontractor, require each Subcontractor to make payments to Sub-subcontractors in a similar manner.

§ 9.6.3 The Construction Manager will, on request, furnish to a Subcontractor, if practicable, information regarding percentages of completion or amounts applied for by the Contractor and action taken thereon by the Owner, Construction Manager and Architect on account of portions of the Work done by such Subcontractor.

§ 9.6.4 The Owner has the right to request written evidence from the Contractor that the Contractor has properly paid Subcontractors and suppliers amounts paid by the Owner to the Contractor for subcontracted Work. If the Contractor fails to furnish such evidence within seven days, the Owner shall have the right to contact Subcontractors and suppliers to ascertain whether they have been properly paid. Neither the Owner, Construction Manager nor Architect shall have an obligation to pay, or to see to the payment of money to, a Subcontractor or supplier, except as may otherwise be required by law.

§ 9.6.5 The Contractor's payments to suppliers shall be treated in a manner similar to that provided in Sections 9.6.2, 9.6.3 and 9.6.4.

§ 9.6.6 A Certificate for Payment, a progress payment, or partial or entire use or occupancy of the Project by the Owner shall not constitute acceptance of Work not in accordance with the Contract Documents.

§ 9.6.7 Unless the Contractor provides the Owner with a payment bond in the full penal sum of the Contract Sum, payments received by the Contractor for Work properly performed by Subcontractors or provided by suppliers shall be held by the Contractor for those Subcontractors or suppliers who performed Work or furnished materials, or both, under contract with the Contractor for which payment was made by the Owner. Nothing contained herein shall require money to be placed in a separate account and not commingled with money of the Contractor, create any fiduciary liability or tort liability on the part of the Contractor for breach of trust, or entitle any person or entity to an award of punitive damages against the Contractor for breach of the requirements of this provision.

§ 9.6.8 Provided the Owner has fulfilled its payment obligations under the Contract Documents, the Contractor shall defend and indemnify the Owner from all loss, liability, damage or expense, including reasonable attorney's fees and litigation expenses, arising out of any lien claim or other claim for payment by any Subcontractor or supplier of any tier. Upon receipt of notice of a lien claim or other claim for payment, the Owner shall notify the Contractor. If approved by the applicable court, when required, the Contractor may substitute a surety bond for the property against which the lien or other claim for payment has been asserted.

§ 9.7 Failure of Payment

If the Construction Manager and Architect do not issue a Certificate for Payment or a Project Certificate for Payment, through no fault of the Contractor, within fourteen days after the Construction Manager's receipt of the Contractor's Application for Payment, or if the Owner does not pay the Contractor within seven days after the date established in the Contract Documents, the amount certified by the Construction Manager and Architect or awarded by binding dispute resolution, then the Contractor may, upon seven additional days' notice to the Owner, Construction Manager and Architect, stop the Work until payment of the amount owing has been received. The Contract Time shall be extended appropriately and the Contract Sum shall be increased by the amount of the Contractor's reasonable costs of shutdown, delay and start-up, plus interest as provided for in the Contract Documents.

§ 9.8 Substantial Completion

§ 9.8.1 Substantial Completion is the stage in the progress of the Work when the Work or designated portion thereof is sufficiently complete in accordance with the Contract Documents so the Owner can occupy or utilize the Work for its intended use.

§ 9.8.2 When the Contractor considers that the Work, or a portion thereof which the Owner agrees to accept separately, is substantially complete, the Contractor shall notify the Construction Manager, and the Contractor and Construction Manager shall jointly prepare and submit to the Architect a comprehensive list of items to be completed or corrected prior to final payment. Failure to include an item on such list does not alter the responsibility of the Contractor to complete all Work in accordance with the Contract Documents.

§ 9.8.3 Upon receipt of the list, the Architect, assisted by the Construction Manager, will make an inspection to determine whether the Work or designated portion thereof is substantially complete. If the Architect's inspection discloses any item, whether or not included on the list, which is not sufficiently complete in accordance with the Contract Documents so that the Owner can occupy or utilize the Work or designated portion thereof for its intended use, the Contractor shall, before issuance of the Certificate of Substantial Completion, complete or correct such item upon notification by the Architect. In such case, the Contractor shall then submit a request for another inspection by the Architect, assisted by the Construction Manager, to determine Substantial Completion.

§ 9.8.4 When the Architect, assisted by the Construction Manager, determines that the Work of all of the Contractors, or designated portion thereof, is substantially complete, the Construction Manager will prepare, and the Construction Manager and Architect shall execute, a Certificate of Substantial Completion that shall establish the date of Substantial Completion; establish responsibilities of the Owner and Contractor for security, maintenance, heat, utilities, damage to the Work and insurance; and fix the time within which the Contractor shall finish all items on the list accompanying the Certificate. Warranties required by the Contract Documents shall commence on the date of

Substantial Completion of the Work or designated portion thereof unless otherwise provided in the Certificate of Substantial Completion.

§ 9.8.5 The Certificate of Substantial Completion shall be submitted to the Owner and Contractor for their written acceptance of responsibilities assigned to them in the Certificate. Upon such acceptance, and consent of surety if any, the Owner shall make payment of retainage applying to the Work or designated portion thereof. Such payment shall be adjusted for Work that is incomplete or not in accordance with the requirements of the Contract Documents.

§ 9.9 Partial Occupancy or Use

§ 9.9.1 The Owner may occupy or use any completed or partially completed portion of the Work at any stage when such portion is designated by separate agreement with the Contractor, provided such occupancy or use is consented to by the insurer and authorized by public authorities having jurisdiction over the Project. Such partial occupancy or use may commence whether or not the portion is substantially complete, provided the Owner and Contractor have accepted in writing the responsibilities assigned to each of them for payments, retainage if any, security, maintenance, heat, utilities, damage to the Work and insurance, and have agreed in writing concerning the period for correction of the Work and commencement of warranties required by the Contract Documents. When the Contractor considers a portion substantially complete, the Contractor and Construction Manager shall jointly prepare and submit a list to the Architect as provided under Section 9.8.2. Consent of the Contractor to partial occupancy or use shall not be unreasonably withheld. The stage of the progress of the Work shall be determined by written agreement between the Owner and Contractor or, if no agreement is reached, by decision of the Architect after consultation with the Construction Manager.

§ 9.9.2 Immediately prior to such partial occupancy or use, the Owner, Construction Manager, Contractor, and Architect shall jointly inspect the area to be occupied or portion of the Work to be used in order to determine and record the condition of the Work.

§ 9.9.3 Unless otherwise agreed upon, partial occupancy or use of a portion or portions of the Work shall not constitute acceptance of Work not complying with the requirements of the Contract Documents.

§ 9.10 Final Completion and Final Payment

§ 9.10.1 Upon completion of the Work, the Contractor shall forward to the Construction Manager a notice that the Work is ready for final inspection and acceptance, and shall also forward to the Construction Manager a final Contractor's Application for Payment. Upon receipt, the Construction Manager shall perform an inspection to confirm the completion of Work of the Contractor. The Construction Manager shall make recommendations to the Architect when the Work of all of the Contractors is ready for final inspection, and shall then forward the Contractors' notices and Application for Payment or Project Application for Payment, to the Architect, who will promptly make such inspection. When the Architect finds the Work acceptable under the Contract Documents and the Contract fully performed, the Construction Manager and Architect will promptly issue a final Certificate for Payment or Project Certificate for Payment stating that to the best of their knowledge, information and belief, and on the basis of their on-site visits and inspections, the Work has been completed in accordance with the Contract Documents and that the entire balance found to be due the Contractor and noted in the final Certificate is due and payable. The Construction Manager's and Architect's final Certificate for Payment or Project Certificate for Payment will constitute a further representation that conditions listed in Section 9.10.2 as precedent to the Contractor's being entitled to final payment have been fulfilled.

§ 9.10.2 Neither final payment nor any remaining retained percentage shall become due until the Contractor submits to the Architect through the Construction Manager (1) an affidavit that payrolls, bills for materials and equipment, and other indebtedness connected with the Work for which the Owner or the Owner's property might be responsible or encumbered (less amounts withheld by Owner) have been paid or otherwise satisfied, (2) a certificate evidencing that insurance required by the Contract Documents to remain in force after final payment is currently in effect, (3) a written statement that the Contractor knows of no reason that the insurance will not be renewable to cover the period required by the Contract Documents, (4) consent of surety, if any, to final payment (5) documentation of any special warranties, such as manufacturers' warranties or specific Subcontractor warranties, and (6), if required by the Owner, other data establishing payment or satisfaction of obligations, such as receipts and releases and waivers of liens, claims, security interests, or encumbrances arising out of the Contract, to the extent and in such form as may be designated by the Owner. If a Subcontractor refuses to furnish a release or waiver required by the Owner, the Contractor may furnish a bond satisfactory to the Owner to indemnify the Owner against such lien, claim, security interest, or encumbrance. If a

lien, claim, security interest, or encumbrance remains unsatisfied after payments are made, the Contractor shall refund to the Owner all money that the Owner may be compelled to pay in discharging the lien, claim, security interest, or encumbrance, including all costs and reasonable attorneys' fees.

§ 9.10.3 If, after Substantial Completion of the Work, final completion thereof is materially delayed through no fault of the Contractor or by issuance of Change Orders affecting final completion, and the Construction Manager and Architect so confirm, the Owner shall, upon application by the Contractor and certification by the Construction Manager and Architect, and without terminating the Contract, make payment of the balance due for that portion of the Work fully completed, corrected, and accepted. If the remaining balance for Work not fully completed or corrected is less than retainage stipulated in the Contract Documents, and if bonds have been furnished, the written consent of the surety to payment of the balance due for that portion of the Work fully completed and accepted shall be submitted by the Contractor to the Architect through the Construction Manager prior to certification of such payment. Such payment shall be made under terms and conditions governing final payment, except that it shall not constitute a waiver of Claims.

§ 9.10.4 The making of final payment shall constitute a waiver of Claims by the Owner except those arising from

- .1 liens, Claims, security interests, or encumbrances arising out of the Contract and unsettled;
- .2 failure of the Work to comply with the requirements of the Contract Documents;
- .3 terms of special warranties required by the Contract Documents; or
- .4 audits performed by the Owner, if permitted by the Contract Documents, after final payment.

§ 9.10.5 Acceptance of final payment by the Contractor, a Subcontractor, or a supplier, shall constitute a waiver of claims by that payee except those previously made in writing and identified by that payee as unsettled at the time of final Application for Payment.

ARTICLE 10 PROTECTION OF PERSONS AND PROPERTY

§ 10.1 Safety Precautions and Programs

The Contractor shall be responsible for initiating, maintaining, and supervising all safety precautions and programs in connection with the performance of the Contract. The Contractor shall submit the Contractor's safety program to the Construction Manager for review and coordination with the safety programs of other Contractors. The Construction Manager's responsibilities for review and coordination of safety programs shall not extend to direct control over or charge of the acts or omissions of the Contractors, Subcontractors, agents or employees of the Contractors or Subcontractors, or any other persons performing portions of the Work and not directly employed by the Construction Manager.

§ 10.2 Safety of Persons and Property

§ 10.2.1 The Contractor shall take reasonable precautions for safety of, and shall provide reasonable protection to prevent damage, injury, or loss to

- .1 employees on the Work and other persons who may be affected thereby;
- .2 the Work and materials and equipment to be incorporated therein, whether in storage on or off the site, under care, custody, or control of the Contractor, a Subcontractor, or a Sub-subcontractor;
- .3 other property at the site or adjacent thereto, such as trees, shrubs, lawns, walks, pavements, roadways, structures, and utilities not designated for removal, relocation, or replacement in the course of construction; and
- .4 construction or operations by the Owner, Separate Contractors, or other Contractors.

§ 10.2.2 The Contractor shall comply with, and give notices required by applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities, bearing on safety of persons or property or their protection from damage, injury, or loss.

§ 10.2.3 The Contractor shall implement, erect, and maintain, as required by existing conditions and performance of the Contract, reasonable safeguards for safety and protection, including posting danger signs and other warnings against hazards; promulgating safety regulations; and notifying the owners and users of adjacent sites and utilities of the safeguards.

§ 10.2.4 When use or storage of explosives or other hazardous materials or equipment or unusual methods are necessary for execution of the Work, the Contractor shall exercise utmost care and carry on such activities under supervision of properly qualified personnel.

§ 10.2.5 The Contractor shall promptly remedy damage and loss (other than damage or loss insured under property insurance required by the Contract Documents) to property referred to in Sections 10.2.1.2, 10.2.1.3 and 10.2.1.4 caused in whole or in part by the Contractor, a Subcontractor, a Sub-subcontractor, or anyone directly or indirectly employed by any of them, or by anyone for whose acts they may be liable and for which the Contractor is responsible under Sections 10.2.1.2, 10.2.1.3 and 10.2.1.4. The Contractor may make a Claim for the cost to remedy the damage or loss to the extent such damage or loss is attributable to acts or omissions of the Owner, Construction Manager or Architect or anyone directly or indirectly employed by any of them, or by anyone for whose acts any of them may be liable, and not attributable to the fault or negligence of the Contractor. The foregoing obligations of the Contractor are in addition to the Contractor's obligations under Section 3.18.

§ 10.2.6 The Contractor shall designate a responsible member of the Contractor's organization at the site whose duty shall be the prevention of accidents. This person shall be the Contractor's superintendent unless otherwise designated by the Contractor in writing to the Owner, Construction Manager and Architect.

§ 10.2.7 The Contractor shall not permit any part of the construction or site to be loaded so as to cause damage or create an unsafe condition.

§ 10.2.8 Injury or Damage to Person or Property

If either party suffers injury or damage to person or property because of an act or omission of the other party, or of others for whose acts such party is legally responsible, notice of the injury or damage, whether or not insured, shall be given to the other party within a reasonable time not exceeding 21 days after discovery. The notice shall provide sufficient detail to enable the other party to investigate the matter.

§ 10.3 Hazardous Materials

§ 10.3.1 The Contractor is responsible for compliance with any requirements included in the Contract Documents regarding hazardous materials or substances. If the Contractor encounters a hazardous material or substance not addressed in the Contract Documents and if reasonable precautions will be inadequate to prevent foreseeable bodily injury or death to persons resulting from a material or substance, including but not limited to asbestos or polychlorinated biphenyl (PCB), encountered on the site by the Contractor, the Contractor shall, upon recognizing the condition, immediately stop Work in the affected area and notify the Owner, Construction Manager and Architect of the condition.

§ 10.3.2 Upon receipt of the Contractor's notice, the Owner shall obtain the services of a licensed laboratory to verify the presence or absence of the material or substance reported by the Contractor and, in the event such material or substance is found to be present, to cause it to be rendered harmless. Unless otherwise required by the Contract Documents, the Owner shall furnish in writing to the Contractor, Construction Manager and Architect the names and qualifications of persons or entities who are to perform tests verifying the presence or absence of the material or substance or who are to perform the task of removal or safe containment of the material or substance. The Contractor, the Construction Manager and the Architect will promptly reply to the Owner in writing stating whether or not any of them has reasonable objection to the persons or entities proposed by the Owner. If the Contractor, Construction Manager or Architect has an objection to a person or entity proposed by the Owner, the Owner shall propose another to whom the Contractor, the Construction Manager and the Architect have no reasonable objection. When the material or substance has been rendered harmless, Work in the affected area shall resume upon written agreement of the Owner and Contractor. By Change Order, the Contract Time shall be extended appropriately and the Contract Sum shall be increased by the amount of the Contractor's reasonable additional costs of shutdown, delay, and start-up.

§ 10.3.3 To the fullest extent permitted by law, the Owner shall indemnify and hold harmless the Contractor, Subcontractors, Construction Manager, Architect, their consultants, and agents and employees of any of them from and against claims, damages, losses, and expenses, including but not limited to attorneys' fees, arising out of or resulting from performance of the Work in the affected area if in fact the material or substance presents the risk of bodily injury or death as described in Section 10.3.1 and has not been rendered harmless, provided that such claim, damage, loss, or expense is attributable to bodily injury, sickness, disease or death, or to injury to or destruction of tangible property (other than the Work itself), except to the extent that such damage, loss, or expense is due to the fault or negligence of the party seeking indemnity.

§ 10.3.4 The Owner shall not be responsible under this Section 10.3 for hazardous materials or substances the Contractor brings to the site unless such materials or substances are required by the Contract Documents. The Owner shall be responsible for hazardous materials or substances required by the Contract Documents, except to the extent of the Contractor's fault or negligence in the use and handling of such materials or substances.

§ 10.3.5 The Contractor shall reimburse the Owner for the cost and expense the Owner incurs (1) for remediation of hazardous materials or substances the Contractor brings to the site and negligently handles, or (2) where the Contractor fails to perform its obligations under Section 10.3.1, except to the extent that the cost and expense are due to the Owner's fault or negligence.

§ 10.3.6 If, without negligence on the part of the Contractor, the Contractor is held liable by a government agency for the cost of remediation of a hazardous material or substance solely by reason of performing Work as required by the Contract Documents, the Owner shall reimburse the Contractor for all cost and expense thereby incurred.

§ 10.4 Emergencies

In an emergency affecting safety of persons or property, the Contractor shall act, at the Contractor's discretion, to prevent threatened damage, injury, or loss. Additional compensation or extension of time claimed by the Contractor on account of an emergency shall be determined as provided in Article 15 and Article 7.

ARTICLE 11 INSURANCE AND BONDS

§ 11.1 Contractor's Insurance and Bonds

§ 11.1.1 The Contractor shall purchase and maintain insurance of the types and limits of liability, containing the endorsements, and subject to the terms and conditions, as described in the Agreement or elsewhere in the Contract Documents. The Contractor shall purchase and maintain the required insurance from an insurance company or insurance companies lawfully authorized to issue insurance in the jurisdiction where the Project is located. The Owner, Construction Manager and Construction Manager's consultants, and the Architect and Architect's consultants, shall be named as additional insureds under the Contractor's commercial general liability policy or as otherwise described in the Contract Documents.

§ 11.1.2 The Contractor shall provide surety bonds of the types, for such penal sums, and subject to such terms and conditions as required by the Contract Documents. The Contractor shall purchase and maintain the required bonds from a company or companies lawfully authorized to issue surety bonds in the jurisdiction where the Project is located.

§ 11.1.3 Upon the request of any person or entity appearing to be a potential beneficiary of bonds covering payment of obligations arising under the Contract, the Contractor shall promptly furnish a copy of the bonds or shall authorize a copy to be furnished.

§ 11.1.4 **Notice of Cancellation or Expiration of Contractor's Required Insurance.** Within three (3) business days of the date the Contractor becomes aware of an impending or actual cancellation or expiration of any insurance required by the Contract Documents, the Contractor shall provide notice directly to the Owner, and separately to the Construction Manager, of such impending or actual cancellation or expiration. Upon receipt of notice from the Contractor, the Owner shall, unless the lapse in coverage arises from an act or omission of the Owner, have the right to stop the Work until the lapse in coverage has been cured by the procurement of replacement coverage by the Contractor. The furnishing of notice by the Contractor shall not relieve the Contractor of any contractual obligation to provide any required coverage.

§ 11.2 Owner's Insurance

§ 11.2.1 The Owner shall purchase and maintain insurance of the types and limits of liability, containing the endorsements, and subject to the terms and conditions, as described in the Agreement or elsewhere in the Contract Documents. The Owner shall purchase and maintain the required insurance from an insurance company or insurance companies lawfully authorized to issue insurance in the jurisdiction where the Project is located.

§ 11.2.2 **Failure to Purchase Required Property Insurance.** If the Owner fails to purchase and maintain the required property insurance, with all of the coverages and in the amounts described in the Agreement or elsewhere in the Contract Documents, the Owner shall inform both the Contractor and the Construction Manager, separately and in writing, prior to commencement of the Work. Upon receipt of notice from the Owner, the Contractor may delay commencement of the Work and may obtain insurance that will protect the interests of the Contractor, Subcontractors,

and Sub-Subcontractors in the Work. When the failure to provide coverage has been cured or resolved, the Contract Sum and Contract Time shall be equitably adjusted. In the event the Owner fails to procure coverage, the Owner waives all rights against the Contractor, Subcontractors, and Sub-subcontractors to the extent the loss to the Owner would have been covered by the insurance to have been procured by the Owner. The cost of the insurance shall be charged to the Owner by a Change Order. If the Owner does not provide written notice, and the Contractor is damaged by the failure or neglect of the Owner to purchase or maintain the required insurance, the Owner shall reimburse the Contractor for all reasonable costs and damages attributable thereto.

§ 11.2.3 Notice of Cancellation or Expiration of Owner's Required Property Insurance. Within three (3) business days of the date the Owner becomes aware of an impending or actual cancellation or expiration of any property insurance required by the Contract Documents, the Owner shall provide notice directly to the Contractor, and separately to the Construction Manager, of such impending or actual cancellation or expiration. Unless the lapse in coverage arises from an act or omission of the Contractor: (1) the Contractor, upon receipt of notice from the Owner, shall have the right to stop the Work until the lapse in coverage has been cured by the procurement of replacement coverage by either the Owner or the Contractor; (2) the Contract Time and Contract Sum shall be equitably adjusted; and (3) the Owner waives all rights against the Contractor, Subcontractors, and Sub-subcontractors to the extent any loss to the Owner would have been covered by the insurance had it not expired or been cancelled. If the Contractor purchases replacement coverage, the cost of the insurance shall be charged to the Owner by an appropriate Change Order. The furnishing of notice by the Owner shall not relieve the Owner of any contractual obligation to provide required insurance.

§ 11.3 Waivers of Subrogation

§ 11.3.1 The Owner and Contractor waive all rights against (1) each other and any of their subcontractors, sub-subcontractors, agents, and employees, each of the other; (2) the Construction Manager and Construction Manager's consultants; (3) the Architect and Architect's consultants; (4) other Contractors and any of their subcontractors, sub-subcontractors, agents, and employees; and (5) Separate Contractors, if any, and any of their subcontractors, sub-subcontractors, agents, and employees, for damages caused by fire, or other causes of loss, to the extent those losses are covered by property insurance required by the Agreement or other property insurance applicable to the Project, except such rights as they have to proceeds of such insurance. The Owner or Contractor, as appropriate, shall require similar written waivers in favor of the individuals and entities identified above from the Construction Manager, Construction Manager's consultants, Architect, Architect's consultants, other Contractors, Separate Contractors, subcontractors, and sub-subcontractors. The policies of insurance purchased and maintained by each person or entity agreeing to waive claims pursuant to this Section 11.3.1 shall not prohibit this waiver of subrogation. This waiver of subrogation shall be effective as to a person or entity (1) even though that person or entity would otherwise have a duty of indemnification, contractual or otherwise, (2) even though that person or entity did not pay the insurance premium directly or indirectly, or (3) whether or not the person or entity had an insurable interest in the damaged property.

§ 11.3.2 If during the Project construction period the Owner insures properties, real or personal or both, at or adjacent to the site by property insurance under policies separate from those insuring the Project, or if after final payment property insurance is to be provided on the completed Project through a policy or policies other than those insuring the Project during the construction period, to the extent permissible by such policies, the Owner waives all rights in accordance with the terms of Section 11.3.1 for damages caused by fire or other causes of loss covered by this separate property insurance.

§ 11.4 Loss of Use, Business Interruption, and Delay in Completion Insurance

The Owner, at the Owner's option, may purchase and maintain insurance that will protect the Owner against loss of use of the Owner's property, or the inability to conduct normal operations, due to fire or other causes of loss. The Owner waives all rights of action against the Contractor, Architect, and Construction Manager for loss of use of the Owner's property, due to fire or other hazards however caused.

§ 11.5 Adjustment and Settlement of Insured Loss

§ 11.5.1 A loss insured under the property insurance required by the Agreement shall be adjusted by the Owner as fiduciary and made payable to the Owner as fiduciary for the insureds, as their interests may appear, subject to requirements of any applicable mortgagee clause and of Section 11.5.2. The Owner shall pay the Construction Manager, Architect and Contractor their just shares of insurance proceeds received by the Owner, and by appropriate

agreements the Construction Manager, Architect and Contractor shall make payments to their consultants and Subcontractors in similar manner.

§ 11.5.2 Prior to settlement of an insured loss, the Owner shall notify the Contractor of the terms of the proposed settlement as well as the proposed allocation of the insurance proceeds. The Contractor shall have 14 days from receipt of notice to object to the proposed settlement or allocation of the proceeds. If the Contractor does not object, the Owner shall settle the loss and the Contractor shall be bound by the settlement and allocation. Upon receipt, the Owner shall deposit the insurance proceeds in a separate account and make the appropriate distributions. Thereafter, if no other agreement is made or the Owner does not terminate the Contract for convenience, the Owner and Contractor shall execute a Change Order for reconstruction of the damaged or destroyed Work in the amount allocated for that purpose. If the Contractor timely objects to either the terms of the proposed settlement or the allocation of the proceeds, the Owner may proceed to settle the insured loss, and any dispute between the Owner and Contractor arising out of the settlement or allocation of the proceeds shall be resolved pursuant to Article 15. Pending resolution of any dispute, the Owner may issue a Construction Change Directive for the reconstruction of the damaged or destroyed Work.

ARTICLE 12 UNCOVERING AND CORRECTION OF WORK

§ 12.1 Uncovering of Work

§ 12.1.1 If a portion of the Work is covered contrary to the Construction Manager's or Architect's request or to requirements specifically expressed in the Contract Documents, it must, if requested in writing by either, be uncovered for their examination and be replaced at the Contractor's expense without change in the Contract Time.

§ 12.1.2 If a portion of the Work has been covered that the Construction Manager or Architect has not specifically requested to examine prior to its being covered, the Construction Manager or Architect may request to see such Work and it shall be uncovered by the Contractor. If such Work is in accordance with the Contract Documents, the Contractor shall be entitled to an equitable adjustment to the Contract Sum and Contract Time as may be appropriate. If such Work is not in accordance with the Contract Documents, the costs of uncovering the Work, and the cost of correction, shall be at the Contractor's expense.

§ 12.2 Correction of Work

§ 12.2.1 Before Substantial Completion

The Contractor shall promptly correct Work rejected by the Construction Manager or Architect or failing to conform to the requirements of the Contract Documents, discovered before Substantial Completion, and whether or not fabricated, installed or completed. Costs of correcting such rejected Work, including additional testing and inspections, the cost of uncovering and replacement, and compensation for the Construction Manager's and Architect's services and expenses made necessary thereby, shall be at the Contractor's expense.

§ 12.2.2 After Substantial Completion

§ 12.2.2.1 In addition to the Contractor's obligations under Section 3.5, if, within one year after the date of Substantial Completion of the Work or designated portion thereof, or after the date for commencement of warranties established under Section 9.9.1, or by terms of any applicable special warranty required by the Contract Documents, any of the Work is found to be not in accordance with the requirements of the Contract Documents, the Contractor shall correct it promptly after receipt of notice from the Owner to do so, unless the Owner has previously given the Contractor a written acceptance of such condition. The Owner shall give such notice promptly after discovery of the condition. During the one-year period for correction of Work, if the Owner fails to notify the Contractor and give the Contractor an opportunity to make the correction, the Owner waives the rights to require correction by the Contractor and to make a claim for breach of warranty. If the Contractor fails to correct nonconforming Work within a reasonable time during that period after receipt of notice from the Owner, Construction Manager or Architect, the Owner may correct it in accordance with Section 2.5.

§ 12.2.2.2 The one-year period for correction of Work shall be extended with respect to portions of Work first performed after Substantial Completion by the period of time between Substantial Completion and the actual completion of that portion of the Work.

§ 12.2.2.3 The one-year period for correction of Work shall not be extended by corrective Work performed by the Contractor pursuant to this Section 12.2.

§ 12.2.3 The Contractor shall remove from the site portions of the Work that are not in accordance with the requirements of the Contract Documents and are neither corrected by the Contractor nor accepted by the Owner.

§ 12.2.4 The Contractor shall bear the cost of correcting destroyed or damaged construction of the Owner, Separate Contractors, or other Contractors, whether completed or partially completed, caused by the Contractor's correction or removal of Work that is not in accordance with the requirements of the Contract Documents.

§ 12.2.5 Nothing contained in this Section 12.2 shall be construed to establish a period of limitation with respect to other obligations the Contractor has under the Contract Documents. Establishment of the one-year period for correction of Work as described in Section 12.2.2 relates only to the specific obligation of the Contractor to correct the Work, and has no relationship to the time within which the obligation to comply with the Contract Documents may be sought to be enforced, nor to the time within which proceedings may be commenced to establish the Contractor's liability with respect to the Contractor's obligations other than specifically to correct the Work.

§ 12.3 Acceptance of Nonconforming Work

If the Owner prefers to accept Work that is not in accordance with the requirements of the Contract Documents, the Owner may do so instead of requiring its removal and correction, in which case the Contract Sum will be reduced as appropriate and equitable. Such adjustment shall be effected whether or not final payment has been made.

ARTICLE 13 MISCELLANEOUS PROVISIONS

§ 13.1 Governing Law

The Contract shall be governed by the law of the place where the Project is located excluding that jurisdiction's choice of law rules. If the parties have selected arbitration as the method of binding dispute resolution, the Federal Arbitration Act shall govern Section 15.4.

§ 13.2 Successors and Assigns

§ 13.2.1 The Owner and Contractor respectively bind themselves, their partners, successors, assigns, and legal representatives to covenants, agreements, and obligations contained in the Contract Documents. Except as provided in Section 13.2.2, neither party to the Contract shall assign the Contract as a whole without written consent of the other. If either party attempts to make an assignment without such consent, that party shall nevertheless remain legally responsible for all obligations under the Contract.

§ 13.2.2 The Owner may, without consent of the Contractor, assign the Contract to a lender providing construction financing for the Project, if the lender assumes the Owner's rights and obligations under the Contract Documents. The Contractor shall execute all consents reasonably required to facilitate the assignment.

§ 13.3 Rights and Remedies

§ 13.3.1 Duties and obligations imposed by the Contract Documents and rights and remedies available thereunder shall be in addition to and not a limitation of duties, obligations, rights, and remedies otherwise imposed or available by law.

§ 13.3.2 No action or failure to act by the Owner, Construction Manager, Architect, or Contractor shall constitute a waiver of a right or duty afforded them under the Contract, nor shall such action or failure to act constitute approval of or acquiescence in a breach thereunder, except as may be specifically agreed upon in writing.

§ 13.4 Tests and Inspections

§ 13.4.1 Tests, inspections, and approvals of portions of the Work shall be made as required by the Contract Documents and by applicable laws, statutes, ordinances, codes, rules, and regulations or lawful orders of public authorities. Unless otherwise provided, the Contractor shall make arrangements for such tests, inspections, and approvals with an independent testing laboratory or entity acceptable to the Owner, or with the appropriate public authority, and shall bear all related costs of tests, inspections, and approvals. The Contractor shall give the Construction Manager and Architect timely notice of when and where tests and inspections are to be made so that the Construction Manager and Architect may be present for such procedures. The Owner shall bear costs of tests, inspections, or approvals that do not become requirements until after bids are received or negotiations concluded. The Owner shall directly arrange and pay for tests, inspections, or approvals where building codes or applicable laws or regulations so require.

§ 13.4.2 If the Construction Manager, Architect, Owner, or public authorities having jurisdiction determine that portions of the Work require additional testing, inspection, or approval not included under Section 13.4.1, the Construction Manager and Architect will, upon written authorization from the Owner, instruct the Contractor to make arrangements for such additional testing, inspection, or approval, by an entity acceptable to the Owner, and the Contractor shall give timely notice to the Construction Manager and Architect of when and where tests and inspections are to be made so that the Construction Manager and Architect may be present for such procedures. Such costs, except as provided in Section 13.4.3, shall be at the Owner's expense.

§ 13.4.3 If procedures for testing, inspection, or approval under Sections 13.4.1 and 13.4.2 reveal failure of the portions of the Work to comply with requirements established by the Contract Documents, all costs made necessary by such failure, including those of repeated procedures and compensation for the Construction Manager's and Architect's services and expenses, shall be at the Contractor's expense.

§ 13.4.4 Required certificates of testing, inspection, or approval shall, unless otherwise required by the Contract Documents, be secured by the Contractor and promptly delivered to the Construction Manager for transmittal to the Architect.

§ 13.4.5 If the Construction Manager or Architect is to observe tests, inspections, or approvals required by the Contract Documents, the Construction Manager or Architect will do so promptly and, where practicable, at the normal place of testing.

§ 13.4.6 Tests or inspections conducted pursuant to the Contract Documents shall be made promptly to avoid unreasonable delay in the Work.

§ 13.5 Interest

Payments due and unpaid under the Contract Documents shall bear interest from the date payment is due at the rate the parties agree upon in writing or, in the absence thereof, at the legal rate prevailing from time to time at the place where the Project is located.

ARTICLE 14 TERMINATION OR SUSPENSION OF THE CONTRACT

§ 14.1 Termination by the Contractor

§ 14.1.1 The Contractor may terminate the Contract if the Work is stopped for a period of 30 consecutive days through no act or fault of the Contractor, a Subcontractor, a Sub-subcontractor, their agents or employees, or any other persons or entities performing portions of the Work, for any of the following reasons:

- .1 Issuance of an order of a court or other public authority having jurisdiction that requires all Work to be stopped;
- .2 An act of government, such as a declaration of national emergency, that requires all Work to be stopped;
- .3 Because the Construction Manager has not certified or the Architect has not issued a Certificate for Payment and has not notified the Contractor of the reason for withholding certification as provided in Section 9.4, or because the Owner has not made payment on a Certificate for Payment within the time stated in the Contract Documents; or
- .4 The Owner has failed to furnish to the Contractor reasonable evidence as required by Section 2.2.

§ 14.1.2 The Contractor may terminate the Contract if, through no act or fault of the Contractor, a Subcontractor, a Sub-subcontractor, their agents or employees, or any other persons or entities performing portions of the Work, repeated suspensions, delays, or interruptions of the entire Work by the Owner as described in Section 14.3, constitute in the aggregate more than 100 percent of the total number of days scheduled for completion, or 120 days in any 365-day period, whichever is less.

§ 14.1.3 If one of the reasons described in Section 14.1.1 or 14.1.2 exists, the Contractor may, upon seven days' notice to the Owner, Construction Manager and Architect, terminate the Contract and recover from the Owner payment for Work executed, as well as reasonable overhead and profit on Work not executed, and costs incurred by reason of such termination.

§ 14.1.4 If the Work is stopped for a period of 60 consecutive days through no act or fault of the Contractor, a Subcontractor, a Sub-subcontractor, or their agents or employees, or any other persons performing portions of the

Work because the Owner has repeatedly failed to fulfill the Owner's obligations under the Contract Documents with respect to matters important to the progress of the Work, the Contractor may, upon seven additional days' notice to the Owner, Construction Manager and Architect, terminate the Contract and recover from the Owner as provided in Section 14.1.3.

§ 14.2 Termination by the Owner for Cause

§ 14.2.1 The Owner may terminate the Contract if the Contractor

- .1 repeatedly refuses or fails to supply enough properly skilled workers or proper materials;
- .2 fails to make payment to Subcontractors or suppliers in accordance with the respective agreements between the Contractor and the Subcontractors or suppliers;
- .3 repeatedly disregards applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of a public authority; or
- .4 otherwise is guilty of substantial breach of a provision of the Contract Documents.

§ 14.2.2 When any of the reasons described in Section 14.2.1 exist, after consultation with the Construction Manager, and upon certification by the Architect that sufficient cause exists to justify such action, the Owner may, without prejudice to any other rights or remedies of the Owner and after giving the Contractor and the Contractor's surety, if any, seven days' notice, terminate employment of the Contractor and may, subject to any prior rights of the surety:

- .1 Exclude the Contractor from the site and take possession of all materials, equipment, tools, and construction equipment and machinery thereon owned by the Contractor;
- .2 Accept assignment of subcontracts pursuant to Section 5.4; and
- .3 Finish the Work by whatever reasonable method the Owner may deem expedient. Upon written request of the Contractor, the Owner shall furnish to the Contractor a detailed accounting of the costs incurred by the Owner in finishing the Work.

§ 14.2.3 When the Owner terminates the Contract for one of the reasons stated in Section 14.2.1, the Contractor shall not be entitled to receive further payment until the Work is finished.

§ 14.2.4 If the unpaid balance of the Contract Sum exceeds costs of finishing the Work, including compensation for the Construction Manager's and Architect's services and expenses made necessary thereby, and other damages incurred by the Owner and not expressly waived, such excess shall be paid to the Contractor. If such costs and damages exceed the unpaid balance, the Contractor shall pay the difference to the Owner. The amount to be paid to the Contractor or Owner, as the case may be, shall, upon application, be certified by the Initial Decision Maker after consultation with the Construction Manager, and this obligation for payment shall survive termination of the Contract.

§ 14.3 Suspension by the Owner for Convenience

§ 14.3.1 The Owner may, without cause, order the Contractor in writing to suspend, delay or interrupt the Work, in whole or in part for such period of time as the Owner may determine.

§ 14.3.2 The Contract Sum and the Contract Time shall be adjusted for increases in the cost and time caused by suspension, delay, or interruption under Section 14.3.1. Adjustment of the Contract Sum shall include profit. No adjustment shall be made to the extent:

- .1 that performance is, was, or would have been, so suspended, delayed, or interrupted, by another cause for which the Contractor is responsible; or
- .2 that an equitable adjustment is made or denied under another provision of this Contract.

§ 14.4 Termination by the Owner for Convenience

§ 14.4.1 The Owner may, at any time, terminate the Contract for the Owner's convenience and without cause.

§ 14.4.2 Upon receipt of notice from the Owner of such termination for the Owner's convenience, the Contractor shall

- .1 cease operations as directed by the Owner in the notice;
- .2 take actions necessary, or that the Owner may direct, for the protection and preservation of the Work; and
- .3 except for Work directed to be performed prior to the effective date of termination stated in the notice, terminate all existing subcontracts and purchase orders and enter into no further subcontracts and purchase orders.

§ 14.4.3 In case of such termination for the Owner's convenience, the Owner shall pay the Contractor for Work properly executed; costs incurred by reason of the termination, including costs attributable to termination of Subcontracts; and the termination fee, if any, set forth in the Agreement.

ARTICLE 15 CLAIMS AND DISPUTES

§ 15.1 Claims

§ 15.1.1 **Definition.** A Claim is a demand or assertion by one of the parties seeking, as a matter of right, payment of money, a change in the Contract Time, or other relief with respect to the terms of the Contract. The term "Claim" also includes other disputes and matters in question between the Owner and Contractor arising out of or relating to the Contract. The responsibility to substantiate Claims shall rest with the party making the Claim. This Section 15.1.1 does not require the Owner to file a Claim in order to impose liquidated damages in accordance with the Contract Documents.

§ 15.1.2 Time Limits on Claims

The Owner and Contractor shall commence all Claims and causes of action against the other and arising out of or related to the Contract, whether in contract, tort, breach of warranty or otherwise, in accordance with the requirements of the binding dispute resolution method selected in the Agreement and within the period specified by applicable law, but in any case not more than 10 years after the date of Substantial Completion of the Work. The Owner and Contractor waive all Claims and causes of action not commenced in accordance with this Section 15.1.2.

§ 15.1.3 Notice of Claims

§ 15.1.3.1 Claims by either the Owner or Contractor, where the condition giving rise to the Claim is first discovered prior to expiration of the period for correction of the Work set forth in Section 12.2.2, shall be initiated by notice to the other party and to the Initial Decision Maker with a copy sent to the Construction Manager and Architect, if the Architect is not serving as the Initial Decision Maker. Claims by either party under this Section 15.1.3.1 shall be initiated within 21 days after occurrence of the event giving rise to such Claim or within 21 days after the claimant first recognizes the condition giving rise to the Claim, whichever is later.

§ 15.1.3.2 Claims by either the Owner or Contractor, where the condition giving rise to the Claim is first discovered after expiration of the period for correction of the Work set forth in Section 12.2.2, shall be initiated by notice to the other party. In such event, no decision by the Initial Decision Maker is required.

§ 15.1.4 Continuing Contract Performance

§ 15.1.4.1 Pending final resolution of a Claim, except as otherwise agreed in writing or as provided in Section 9.7 and Article 14, the Contractor shall proceed diligently with performance of the Contract and the Owner shall continue to make payments in accordance with the Contract Documents.

§ 15.1.4.2 The Contract Sum and Contract Time shall be adjusted in accordance with the Initial Decision Maker's decision, subject to the right of either party to proceed in accordance with this Article 15. The Architect will issue Certificates for Payment in accordance with the decision of the Initial Decision Maker.

§ 15.1.5 **Claims for Additional Cost.** If the Contractor wishes to make a Claim for an increase in the Contract Sum, notice as provided in Section 15.1.3 shall be given before proceeding to execute the portion of the Work that is the subject of the Claim. Prior notice is not required for Claims relating to an emergency endangering life or property arising under Section 10.4.

§ 15.1.6 Claims for Additional Time

§ 15.1.6.1 If the Contractor wishes to make a Claim for an increase in the Contract Time, notice as provided in Section 15.1.3 shall be given. The Contractor's Claim shall include an estimate of cost and of probable effect of delay on progress of the Work. In the case of a continuing delay only one Claim is necessary.

§ 15.1.6.2 If adverse weather conditions are the basis for a Claim for additional time, such Claim shall be documented by data substantiating that weather conditions were abnormal for the period of time, could not have been reasonably anticipated and had an adverse effect on the scheduled construction.

§ 15.1.7 **Waiver of Claims for Consequential Damages.** The Contractor and Owner waive Claims against each other for consequential damages arising out of or relating to this Contract. This mutual waiver includes

- .1 damages incurred by the Owner for rental expenses, for losses of use, income, profit, financing, business and reputation, and for loss of management or employee productivity or of the services of such persons; and
- .2 damages incurred by the Contractor for principal office expenses including the compensation of personnel stationed there, for losses of financing, business and reputation, and for loss of profit except anticipated profit arising directly from the Work.

This mutual waiver is applicable, without limitation, to all consequential damages due to either party's termination in accordance with Article 14. Nothing contained in this Section 15.1.7 shall be deemed to preclude assessment of liquidated damages, when applicable, in accordance with the requirements of the Contract Documents.

§ 15.2 Initial Decision

§ 15.2.1 Claims, excluding those where the condition giving rise to the Claim is first discovered after expiration of the period for correction of the Work set forth in Section 12.2.2 or arising under Sections 10.3, 10.4, and 11.5, shall be referred to the Initial Decision Maker for initial decision. The Architect will serve as the Initial Decision Maker, unless otherwise indicated in the Agreement. Except for those Claims excluded by this Section 15.2.1, an initial decision shall be required as a condition precedent to mediation of any Claim. If an initial decision has not been rendered within 30 days after the Claim has been referred to the Initial Decision Maker, the party asserting the Claim may demand mediation and binding dispute resolution without a decision having been rendered. Unless the Initial Decision Maker and all affected parties agree, the Initial Decision Maker will not decide disputes between the Contractor and persons or entities other than the Owner.

§ 15.2.2 The Initial Decision Maker will review Claims and within ten days of the receipt of a Claim take one or more of the following actions: (1) request additional supporting data from the claimant or a response with supporting data from the other party, (2) reject the Claim in whole or in part, (3) approve the Claim, (4) suggest a compromise, or (5) advise the parties that the Initial Decision Maker is unable to resolve the Claim if the Initial Decision Maker lacks sufficient information to evaluate the merits of the Claim or if the Initial Decision Maker concludes that, in the Initial Decision Maker's sole discretion, it would be inappropriate for the Initial Decision Maker to resolve the Claim.

§ 15.2.3 In evaluating Claims, the Initial Decision Maker may, but shall not be obligated to, consult with or seek information from either party or from persons with special knowledge or expertise who may assist the Initial Decision Maker in rendering a decision. The Initial Decision Maker may request the Owner to authorize retention of such persons at the Owner's expense.

§ 15.2.4 If the Initial Decision Maker requests a party to provide a response to a Claim or to furnish additional supporting data, such party shall respond, within ten days after receipt of the request, and shall either (1) provide a response on the requested supporting data, (2) advise the Initial Decision Maker when the response or supporting data will be furnished, or (3) advise the Initial Decision Maker that no supporting data will be furnished. Upon receipt of the response or supporting data, if any, the Initial Decision Maker will either reject or approve the Claim in whole or in part.

§ 15.2.5 The Initial Decision Maker will render an initial decision approving or rejecting the Claim, or indicating that the Initial Decision Maker is unable to resolve the Claim. This initial decision shall (1) be in writing; (2) state the reasons therefor; and (3) notify the parties, the Construction Manager, and the Architect, if the Architect is not serving as the Initial Decision Maker, of any change in the Contract Sum or Contract Time or both. The initial decision shall be final and binding on the parties but subject to mediation and, if the parties fail to resolve their dispute through mediation, to binding dispute resolution.

§ 15.2.6 Either party may file for mediation of an initial decision at any time, subject to the terms of Section 15.2.6.1.

§ 15.2.6.1 Either party may, within 30 days from the date of receipt of an initial decision, demand in writing that the other party file for mediation. If such a demand is made and the party receiving the demand fails to file for mediation within 30 days of receipt thereof, then both parties waive their rights to mediate or pursue binding dispute resolution proceedings with respect to the initial decision.

§ 15.2.7 In the event of a Claim against the Contractor, the Owner may, but is not obligated to, notify the surety, if any, of the nature and amount of the Claim. If the Claim relates to a possibility of a Contractor's default, the Owner may, but is not obligated to, notify the surety and request the surety's assistance in resolving the controversy.

§ 15.2.8 If a Claim relates to or is the subject of a mechanic's lien, the party asserting such Claim may proceed in accordance with applicable law to comply with the lien notice or filing deadlines.

§ 15.3 Mediation

§ 15.3.1 Claims, disputes, or other matters in controversy arising out of or related to the Contract, except those waived as provided for in Sections 9.10.4, 9.10.5, and 15.1.7, shall be subject to mediation as a condition precedent to binding dispute resolution.

§ 15.3.2 The parties shall endeavor to resolve their Claims by mediation which, unless the parties mutually agree otherwise, shall be administered by the American Arbitration Association in accordance with its Construction Industry Mediation Procedures in effect on the date of the Agreement. A request for mediation shall be made in writing, delivered to the other party to the Contract, and filed with the person or entity administering the mediation. The request may be made concurrently with the filing of binding dispute resolution proceedings but, in such event, mediation shall proceed in advance of binding dispute resolution proceedings, which shall be stayed pending mediation for a period of 60 days from the date of filing, unless stayed for a longer period by agreement of the parties or court order. If an arbitration is stayed pursuant to this Section 15.3.2, the parties may nonetheless proceed to the selection of the arbitrator(s) and agree upon a schedule for later proceedings.

§ 15.3.3 Either party may, within 30 days from the date that mediation has been concluded without resolution of the dispute or 60 days after mediation has been demanded without resolution of the dispute, demand in writing that the other party file for binding dispute resolution. If such a demand is made and the party receiving the demand fails to file for binding dispute resolution within 60 days after receipt thereof, then both parties waive their rights to binding dispute resolution proceedings with respect to the initial decision.

§ 15.3.4 The parties shall share the mediator's fee and any filing fees equally. The mediation shall be held in the place where the Project is located, unless another location is mutually agreed upon. Agreements reached in mediation shall be enforceable as settlement agreements in any court having jurisdiction thereof.

§ 15.4 Arbitration

§ 15.4.1 If the parties have selected arbitration as the method for binding dispute resolution in the Agreement, any Claim subject to, but not resolved by, mediation shall be subject to arbitration which, unless the parties mutually agree otherwise, shall be administered by the American Arbitration Association in accordance with its Construction Industry Arbitration Rules in effect on the date of the Agreement. The Arbitration shall be conducted in the place where the Project is located, unless another location is mutually agreed upon. A demand for arbitration shall be made in writing, delivered to the other party to the Contract, and filed with the person or entity administering the arbitration. The party filing a notice of demand for arbitration must assert in the demand all Claims then known to that party on which arbitration is permitted to be demanded.

§ 15.4.1.1 A demand for arbitration shall be made no earlier than concurrently with the filing of a request for mediation, but in no event shall it be made after the date when the institution of legal or equitable proceedings based on the Claim would be barred by the applicable statute of limitations. For statute of limitations purposes, receipt of a written demand for arbitration by the person or entity administering the arbitration shall constitute the institution of legal or equitable proceedings based on the Claim.

§ 15.4.2 The award rendered by the arbitrator or arbitrators shall be final, and judgment may be entered upon it in accordance with applicable law in any court having jurisdiction thereof.

§ 15.4.3 The foregoing agreement to arbitrate and other agreements to arbitrate with an additional person or entity duly consented to by parties to the Agreement, shall be specifically enforceable under applicable law in any court having jurisdiction thereof.

§ 15.4.4 Consolidation or Joinder

§ 15.4.4.1 Subject to the rules of the American Arbitration Association or other applicable arbitration rules, either party may consolidate an arbitration conducted under this Agreement with any other arbitration to which it is a party provided that (1) the arbitration agreement governing the other arbitration permits consolidation, (2) the arbitrations to

be consolidated substantially involve common questions of law or fact, and (3) the arbitrations employ materially similar procedural rules and methods for selecting arbitrator(s).

§ 15.4.4.2 Subject to the rules of the American Arbitration Association or other applicable arbitration rules, either party may include by joinder persons or entities substantially involved in a common question of law or fact whose presence is required if complete relief is to be accorded in arbitration, provided that the party sought to be joined consents in writing to such joinder. Consent to arbitration involving an additional person or entity shall not constitute consent to arbitration of any claim, dispute or other matter in question not described in the written consent.

§ 15.4.4.3 The Owner and Contractor grant to any person or entity made a party to an arbitration conducted under this Section 15.4, whether by joinder or consolidation, the same rights of joinder and consolidation as those of the Owner and Contractor under this Agreement.

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

SECTION 00 73 13

SUPPLEMENTARY GENERAL CONDITIONS A232-2019

The following supplements modify the "General Conditions of the Contract for Construction, Construction Manager as Advisor Edition." AIA Document A232-2019. Where a portion of the General Conditions is modified or deleted by the Supplementary Conditions, the unaltered portions of the General Conditions shall remain in effect.

TABLE OF ARTICLES

1. GENERAL PROVISIONS
2. OWNER
3. CONTRACTOR
4. ARCHITECT AND CONSTRUCTION MANAGER
5. SUBCONTRACTORS
6. CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS
7. CHANGES IN THE WORK
8. TIME
9. PAYMENTS AND COMPLETION
10. PROTECTION OF PERSONS AND PROPERTY
11. INSURANCE AND BONDS
12. UNCOVERING AND CORRECTION OF WORK
13. MISCELLANEOUS PROVISIONS
14. TERMINATION OR SUSPENSION OF THE CONTRACT
15. CLAIMS AND DISPUTES

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

ARTICLE 1: GENERAL PROVISIONS

1.1 BASIC DEFINITIONS

1.1.1 THE CONTRACT DOCUMENTS

Delete the last sentence in its entirety and replace with the following:

“The Contract Documents also include Advertisement for Bid, Instructions to Bidder, sample forms, the Bid Form, the Contractor’s completed Bid and the Award Letter.”

1.2 CORRELATION AND INTENT OF THE CONTRACT DOCUMENTS

Add the following Paragraphs:

1.2.4 In the case of an inconsistency between the Drawings and the Specifications, or within either document not clarified by addendum, the better quality or greater quantity of work shall be provided in accordance with the Architect’s interpretation.

1.2.5 The word “PROVIDE” as used in the Contract Documents shall mean “FURNISH AND INSTALL” and shall include, without limitation, all labor, materials, equipment, transportation, services and other items required to complete the Work.

1.2.6 The word “PRODUCT” as used in the Contract Documents means all materials, systems and equipment.

1.5 OWNERSHIP AND USE OF DRAWINGS, SPECIFICATIONS AND OTHER INSTRUMENTS OF SERVICE

Delete Paragraph 1.5.1 in its entirety and replace with the following:

“All pre-design studies, drawings, specifications and other documents, including those in electronic form, prepared by the Architect under this Agreement are, and shall remain, the property of the Owner whether the Project for which they are made is executed or not. As for the Project for which the Architect is hired, the Architect still remain liable for any claim relating to the design that arises from the Project.

However, such documents may be used by the Owner to construct one or more like projects without the approval of, or additional compensation to, the Architect. The Contractor, Subcontractors, Sub-subcontractors and Material or Equipment Suppliers are authorized to use and reproduce applicable portions of the Drawings, Specifications and other documents prepared by the Architect and the Architect’s consultants appropriate to and for use in the execution of their Work under the Contract Documents. They are not to be used by the Contractor or any Subcontractor, Sub-subcontractor or Material and Equipment Supplier on other Projects or for additions to this Project outside the scope of the Work without the specific written consent of the Owner, Architect and Architect’s consultants.

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

The Architect shall not be liable for injury or damage resulting from the re-use of drawings and specifications if the Architect is not involved in the re-use Project.”

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

1.6 NOTICE

1.6.1 Insert the following sentence at the end of the paragraph:

“Electronic mail, also known as email, is an acceptable form of electronic transmission of notices under this Agreement.”

ARTICLE 2: OWNER

2.1 General

2.1.2 Delete Paragraph 2.1.2 in its entirety.

2.2 INFORMATION AND SERVICES REQUIRED OF THE OWNER

2.2.1 Delete the second sentence in this paragraph and replace with the following: “The Contractor shall have no obligation to commence the Work until the Owner issues a Purchase Order for the Project.”

2.2.2 Delete the last three sentences in this paragraph.

ARTICLE 3: CONTRACTOR

3.2 REVIEW OF CONTRACT DOCUMENTS AND FIELD CONDITIONS BY CONTRACTOR

3.2.4 Delete the third sentence in Paragraph 3.2.4.

3.3 SUPERVISION AND CONSTRUCTION PROCEDURES

Add the following Paragraphs:

3.3.2.1 The Contractor shall immediately remove from the Work, whenever requested to do so by the Owner, any person who is considered by the Owner or Architect to be incompetent or disposed to be disorderly, or who for any reason is not satisfactory to the Owner, and that person shall not again be employed on the Work without the consent of the Owner or the Architect.

3.3.4 The Contractor must provide suitable storage facilities at the Site, or an alternative site as approved by the Owner, for the proper protection and safe storage of their materials. Consult the Owner and the Architect before storing any materials.

3.3.5 When any room is used as a shop, storeroom, office, etc., by the Contractor or Subcontractor(s) during the construction of the Work, the Contractor making use of these areas will be held responsible for any repairs, patching or cleaning arising from such use.

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

3.4 LABOR AND MATERIALS

3.4.1.1 Add a new section 3.4.1.1:

“The Contractor, at their expense shall bear the costs to accurately identify the location of all underground utilities in the area of their excavation and shall bear all cost for any repairs required, out of failure to accurately identify said utilities.”

Add the Following Paragraphs:

3.4.4 Before starting the Work, each Contractor shall carefully examine all preparatory Work that has been executed to receive their Work. Check carefully, by whatever means are required, to insure that its Work and adjacent, related Work, will finish to proper contours, planes and levels. Promptly notify the General Contractor/Construction Manager of any defects or imperfections in preparatory Work which will in any way affect satisfactory completion of its Work. Absence of such notification will be construed as an acceptance of preparatory Work and later claims of defects will not be recognized.

3.4.5 Under no circumstances shall the Contractor's Work proceed prior to preparatory Work having been completely cured, dried and/or otherwise made satisfactory to receive this Work. Responsibility for timely installation of all materials rests solely with the Contractor responsible for that Work, who shall maintain coordination at all times.

3.5 WARRANTY

Add the following Paragraphs:

3.5.3 The Contractor will warrant all materials and workmanship against original defects, except injury from proper and usual wear when used for the purpose intended, for two years after Substantial Completion of the project in accordance with Section 9.8.4 of this Agreement, and will maintain all items in condition that conforms with the Contract Documents during the period of warranty.

3.5.4 Non-conforming work during the period of warranty will be corrected by the Contractor at its expense upon demand of the Owner, it being required that the Work conforms to the Contract Documents at the expiration of the warranty period.

3.5.5 In addition to the General Warranty there are other warranties required for certain items for different periods of time than the two years as above and are particularly so stated in that part of the specifications referring to same. The said warranties will commence at the same time as the General Warranty.

3.5.6 If the Contractor fails to remedy any failure, defect or damage within a reasonable time after receipt of notice, the Owner will have the right to replace, repair, or otherwise remedy the failure, defect or damage at the Contractor's expense.

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

3.11 DOCUMENTS AND SAMPLES AT THE SITE

Add the following Paragraphs:

- 3.11.1 During the course of the Work, the Contractor shall maintain a record set of drawings on which the Contractor shall mark the actual physical location of all piping, valves, equipment, conduit, outlets, access panels, controls, actuators, including all appurtenances that will be concealed once construction is complete, etc., including all invert elevations.
- 3.11.2 At the completion of the project, the Contractor shall obtain a set of reproducible drawings from the Architect, and neatly transfer all information outlined in 3.11.1 to provide a complete record of the as-built conditions.
- 3.11.3 The Contractor shall provide two (2) prints of the as-built conditions, along with the reproducible drawings themselves, to the Owner and one (1) set to the Architect. In addition, attach one complete set to each of the Operating and Maintenance Instructions/Manuals.

3.15 CLEANING UP

3.15.2 Strike sentence in its entirety and replace with the following:

"If the Contractor fails to clean up as provided in the Contract Documents, the Owner, or Construction Manager with the Owner's approval, may do so and the Owner shall withhold the amount that reflects the cost of the cleanup from any moneys owed the Contractor. If the cost of cleanup exceeds the moneys owed to the Contractor, the Owner shall be entitled to reimbursement from the Contractor for the amount exceeding what is withheld.

3.17 In the second sentence of 3.17, insert "indemnify and" between "shall" and "hold".

ARTICLE 4: ARCHITECT AND CONSTRUCTION MANAGER

4.2 Administration of the Contract

Delete the first sentence of Paragraph 4.2.11 and replace with the following:

The Architect will review and approve or take other appropriate action upon the Contractor's submittals such as Shop Drawings, Product Data and Samples for the purpose of checking for conformance with the Contract Documents.

Delete the second sentence of Paragraph 4.2.11 and replace with the following:

The Architect's action will be taken with such reasonable promptness as to cause no delay in the Work in the activities of the Owner, Contractor or separate Contractors, while allowing sufficient time in the Owner's professional judgment to permit adequate review.

Add the following to Paragraph 4.2.17:

There will be no full-time Project representative provided by the Owner or Architect on site for this Project.

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

Add to Paragraph 4.2.20 “and in compliance with all applicable codes, regulations and ordinances.” to the end of the sentence.

ARTICLE 5: SUBCONTRACTORS

5.2 AWARD OF SUBCONTRACTS AND OTHER CONTRACTS FOR PORTIONS OF THE WORK

Delete Paragraph 5.2.3 in its entirety and replace with the following:

5.2.3 If the Owner, Architect or Construction Manager has reasonable objection to a person or entity proposed by the Contractor, the Contractor shall propose another to whom the Owner, Architect or Construction Manager has no reasonable objection, subject to the statutory requirements of 29 Delaware Code § 6962(d)(10)b.3 and 4.

ARTICLE 6: CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS

6.1 OWNER'S RIGHT TO PERFORM CONSTRUCTION AND TO AWARD SEPARATE CONTRACTS

6.1.1 Delete “and waiver of subrogation” from the last sentence.

6.1.3 Delete Paragraph 6.1.3 in its entirety and replace with the following:

“When separate contracts are awarded for different portions of the Project or other construction or operations on the site, the term “Contractor” in the Contract Documents in each case shall mean the Constructor who executes each separate Owner-Contractor Agreement.”

6.2 MUTUAL RESPONSIBILITY

6.2.3 In the second sentence, strike the word “shall” and insert the word “may”.

ARTICLE 7: CHANGES IN THE WORK

(SEE ARTICLE 7: CHANGES IN WORK IN THE GENERAL REQUIREMENTS)

ARTICLE 8: TIME

8.2 PROGRESS AND COMPLETION

Add the following Paragraphs:

8.2.1.1 Refer to Specification Section SUMMARY OF WORK for Contract time requirements.

8.2.4 If the Work falls behind the Progress Schedule as submitted by the Contractor, the Contractor shall employ additional labor and/or equipment necessary to

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

bring the Work into compliance with the Progress Schedule at no additional cost to the Owner.

8.3 DELAYS AND EXTENSION OF TIME

8.3.1 Strike "binding dispute resolution" and insert "remedies at law or in equity".

Add the following Paragraph:

8.3.2.1 The Contractor shall update the status of the suspension, delay, or interruption of the Work with each Application for Payment. (The Contractor shall report the termination of such cause immediately upon the termination thereof.) Failure to comply with this procedure shall constitute a waiver for any claim for adjustment of time or price based upon said cause.

Delete Paragraph 8.3.3 in its entirety and replace with the following:

8.3.3 Except in the case of a suspension of the Work directed by the Owner, an extension of time under the provisions of Paragraph 8.3.1 shall be the Contractor's sole remedy in the progress of the Work and there shall be no payment or compensation to the Contractor for any expense or damage resulting from the delay.

Add the following Paragraph:

8.3.4 By permitting the Contractor to work after the expired time for completion of the project, the Owner does not waive its rights under the Contract.

8.3.5 The parties agree that Paragraph 8.3.3 of the Supplementary General Conditions does not apply to the Construction Manager in the event of a delay caused by a party other than the Construction Manager.

ARTICLE 9: PAYMENTS AND COMPLETION

9.1 CONTRACT SUM

9.1.2 Strike Section 9.1.2 in its entirety.

9.2 SCHEDULE OF VALUES

Add the following Paragraphs:

9.2.1 The Schedule of Values shall be submitted using AIA Document G732, Continuation Sheet to G703.

9.3 APPLICATIONS FOR PAYMENT

Add the following Paragraph:

9.3.1.3 Application for Payment shall be submitted on AIA Document G732 "Application and Certificate for Payment", supported by AIA Document G703 "Continuation Sheet". Said Applications shall be fully executed and notarized.

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

Add the following Paragraphs:

9.3.4 Until Closeout Documents have been received and outstanding items completed the Owner will pay 95% (ninety-five percent) of the amount due the Contractor on account of progress payments.

9.3.5 The Contractor shall provide a current and updated Progress Schedule to the Architect with each Application for Payment. Failure to provide Schedule will be just cause for rejection of Application for Payment.

9.5 DECISIONS TO WITHHOLD CERTIFICATION

Add the following to 9.5.1:

- .8 failure to provide a current Progress Schedule;
- .9 a lien or attachment is filed;
- .10 failure to comply with mandatory requirements for maintaining Record Documents.

9.6 PROGRESS PAYMENTS

Delete Paragraph 9.6.1 in its entirety and replace with the following:

9.6.1 After the Architect and the Construction Manager have approved and issued a Certificate for Payment, payment shall be made by the Owner within 30 days after Owner's receipt of the Certificate for Payment.

9.6.8 Strike "Provided the Owner has fulfilled its payment obligations under the Contract Documents, the" and replace with "The".

9.7 FAILURE OF PAYMENT

In first sentence, strike the first reference to "seven" and insert "thirty (30)". Also strike "binding dispute resolution" and insert "remedies at law or in equity".

9.8 SUBSTANTIAL COMPLETION

9.8.5 In the second sentence, strike "shall" and insert "may".

ARTICLE 10: PROTECTION OF PERSONS AND PROPERTY

10.1 SAFETY PRECAUTIONS AND PROGRAMS

Add the following Paragraphs:

10.1.1 Each Contractor shall develop a safety program in accordance with the Occupational Safety and Health Act of 1970. A copy of said plan shall be furnished to the Owner and Architect prior to the commencement of that Contractor's Work.

10.1.2 Each Contractor shall appoint a Safety Representative. Safety Representatives shall be someone who is on site on a full-time basis. If deemed necessary by the Owner or Architect, Contractor Safety meetings will be scheduled. The attendance of all Safety

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

Representatives will be required. Minutes will be recorded of said meetings by the Contractor and will be distributed to all parties as well as posted in all job offices/trailers etc.

10.2 SAFETY OF PERSONS AND PROPERTY

Add the following Paragraph:

10.2.4.1 As required in the Hazardous Chemical Act of June 1984, all vendors supplying any material that may be defined as hazardous must provide Material Safety Data Sheets for those products. Any chemical product should be considered hazardous if it has a caution warning on the label relating to a potential physical or health hazard, if it is known to be present in the workplace, and if employees may be exposed under normal conditions or in foreseeable emergency situations. Material Safety Data Sheets shall be provided directly to the Owner or its designee, along with the shipping slips that include those products.

10.3 HAZARDOUS MATERIALS

Delete Paragraph 10.3.3 in its entirety.

Delete Paragraphs 10.3.6 in its entirety.

ARTICLE 11: INSURANCE AND BONDS

11.1 CONTRACTOR'S INSURANCE AND BONDS

11.1.1 Strike "Owner," at the beginning of the third sentence.

11.1.2 Add the following sentence at the end of the paragraph: "The bonds will conform to those forms approved by the Office of Management and Budget."

11.2 OWNER'S INSURANCE

Delete Paragraph 11.2 in its entirety and replace with the following:

11.2 The Owner will not provide Builder's All Risk Insurance for the Project. The Construction Manager will provide Builder's All Risk Insurance for the Project. The Contractor and all Subcontractors shall provide coverage for materials, fixtures and/or equipment being used in the construction or renovation of a building or structure should those items sustain physical loss or damage from a covered cause.

11.3 WAIVERS OF SUBROGATION

Delete Paragraph 11.3 and its subparagraphs in their entirety. Substitute the following:
The Construction Manager and Contractor waive all rights against (1) each other and any of their subcontractors, sub-subcontractors, agents, consultants and employees, each of the other; (2) the Architect and Architect's consultants; (3) other Contractors and any of their subcontractors, sub-subcontractors, agents, and employees; and (4) Separate Contractors, if any, and any of their subcontractors, sub-subcontractors, agents, and employees, for damages caused by fire, or other causes of loss, to the extent those losses are covered by property insurance required by the Agreement or other property insurance applicable to the Project, except such rights as they have to proceeds of such insurance. The policies of

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

insurance purchased and maintained by each person or entity agreeing to waive claims pursuant to this Article shall not prohibit this waiver of subrogation. This waiver of subrogation shall be effective as to a person or entity (1) even though that person or entity would otherwise have a duty of indemnification, contractual or otherwise, (2) even though that person or entity did not pay the insurance premium directly or indirectly, or (3) whether or not the person or entity had an insurable interest in the damaged property. For clarity, the Owner does not waive any of its subrogation rights.

11.4 LOSS OF USE, BUSINESS INTERRUPTION, AND DELAY IN COMPLETION INSURANCE

Delete Paragraph 11.4 in its entirety.

11.5 ADJUSTMENT AND SETTLEMENT OF INSURED LOSS

Delete Paragraph 11.5 in its entirety. Substitute the following:

A loss insured under the property insurance required by the Agreement shall be adjusted by the Construction Manager and made payable to the Construction Manager. The Construction Manager shall pay the Architect and Contractor their just shares of insurance proceeds received by the Construction Manager, and by appropriate agreements the Architect and Contractor shall make payments to their consultants and Subcontractors in similar manner. Prior to settlement of an insured loss, the Construction Manager shall notify the Contractor of the terms of the proposed settlement as well as the proposed allocation of the insurance proceeds. The Contractor shall have 14 days from receipt of notice to object to the proposed settlement or allocation of the proceeds. If the Contractor does not object, the Construction Manager shall settle the loss and the Contractor shall be bound by the settlement and allocation. If the Contractor timely objects to either the terms of the proposed settlement or the allocation of the proceeds, the Construction Manager may proceed to settle the insured loss, and any dispute between the Construction Manager and Contractor arising out of the settlement or allocation of the proceeds shall be resolved pursuant to remedies at law and in equity. For clarity, the Owner shall be listed as an Additional Insured to protect the Owner's property interest on the Project under the Builder's Risk Insurance.

ARTICLE 12: UNCOVERING AND CORRECTION OF WORK

12.2.2 AFTER SUBSTANTIAL COMPLETION

12.2.2.1 In the first sentence, strike "within one year after the date of Substantial Completion of the Work or designated portion thereof" and replace with "within two years after the date of Substantial Completion of the Project in accordance with Section 9.8.4 of this Agreement or designated portion thereof".

12.2.2.1 In the third sentence of the paragraph, strike "one year period" and replace it with "two year period".

Add the following Paragraph:

12.2.2.1.1 At any time during the progress of the Work, or in any case where the nature of the defects will be such that it is not expedient to have corrected, the Owner, at its option, will have the right to deduct such sum, or sums, of money from the amount of the Contract as it considers justified to adjust the difference in value between the defective work and that required under contract including any damage to the structure.

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

12.2.2.2 Strike "one" and insert "two".

12.2.2.3 Strike "one" and insert "two".

12.2.5 In second sentence, strike "one" and insert "two".

ARTICLE 13: MISCELLANEOUS PROVISIONS

13.1 GOVERNING LAW

13.1 Strike the second sentence in its entirety.

13.5 INTEREST

13.5 Strike 13.5 in its entirety and replace with the following:
"Payments are due 30 days after receipt of a valid Application for Payment. After that 30 day period, interest may be charged at the rate of 1% per month not to exceed 12% per annum."

Add the following Paragraph:

13.6 CONFLICTS WITH FEDERAL STATUTES OR REGULATIONS

13.6.1 If any provision, specifications or requirement of the Contract Documents conflict or is inconsistent with any statute, law or regulation of the government of the United State of America, the Contractor shall notify the Architect and Owner immediately upon discovery.

ARTICLE 14: TERMINATION OR SUSPENSION OF THE CONTRACT

14.4 TERMINATION BY THE OWNER FOR CONVENIENCE

Delete Paragraph 14.4.3 in its entirety and replace with the following:

14.4.3 In case of such termination for the Owner's convenience, the Contractor shall be entitled to receive payment for Work executed, and cost incurred by reason of such termination along with reasonable overhead.

ARTICLE 15: CLAIMS AND DISPUTES

15.1.2 TIME LIMITS ON CLAIMS.

15.1.2 Strike "in accordance with the requirements of the binding dispute resolution method selected in the Agreement and" from the first sentence.
Strike the second sentence in its entirety.

15.1.4 CONTINUING CONTRACT PERFORMANCE

15.1.4.2 Strike in its entirety.

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

15.1.7 CLAIMS FOR CONSEQUENTIAL DAMAGES

Delete Paragraph 15.1.7 and its subparagraphs in their entirety.

15.2 INITIAL DECISION

15.2.1 Delete “and binding dispute resolution”

15.2.5 Delete in its entirety and replace with the following:

15.2.5 The Architect will approve or reject Claims by written decision, which shall state the reasons therefore and shall notify the parties of any change in the Contract Sum or Contract Time or both. The approval or rejection of a Claim by the Architect shall be subject to mediation and other remedies at law or in equity.

Delete Paragraph 15.2.6 and its subparagraphs in their entirety.

15.3 MEDIATION

15.3.1 Strike “binding dispute resolution” and insert “any or all remedies at law or in equity”.

15.3.2 In the first sentence, delete “administered by the American Arbitration Association in accordance with its Construction Industry Mediation Procedure in effect on the date of the Agreement,”. Also strike “binding dispute resolution” and insert “remedies at law and in equity”.

15.3.3 Strike in its entirety.

15.4 ARBITRATION

Delete Paragraph 15.4 and its subparagraphs in their entirety.

END OF SECTION

SECTION 007343 – WAGE RATE REQUIREMENTS

1. SUMMARY

- A. In accordance with Delaware Code, Title 29, Subchapter IV, Section 6960, all laborers and mechanics of the Contractor and all subcontractors employed to perform work directly upon the site of the work shall be paid unconditionally and not less often than once a week and without subsequent deduction or rebate on any account the full amounts accrued at the time of payment computed at wage rates not less than those determined by the Division of Industrial Affairs, Department of Labor, State of Delaware, as the prevailing rates in this area.
- B. This approved scale of wages must be posted by the Contractor in a prominent and easily accessible place at the site of the work.
- C. It is further stipulated that there may be withheld from the Contractor such accrued payment as may be considered necessary by the contracting officer to pay laborers and mechanics employed by the Contractor or any subcontractors on the work the difference between the rates of wages required and the rate of wages received by such laborers and mechanics and not refunded to the Contractor, subcontractor or their agents.
- D. Where wage rates are published in this Manual they are issued by the State Department of Labor on the date indicated and are included for the convenience of Bidders. The Owner, the Architect, and the Construction Manager, accept no responsibility for the accuracy or applicability of any rates included herein. The actual wage rate determinations which will apply to the work will be those in effect on the first day of public advertisement for bids as determined by the State Department of Labor. It will be the responsibility of each bidder to contact the State Department of Labor and to incorporate these rates in his bid.
- E. In accordance with Delaware Code, Title 29, Subchapter IV, Section 6960, as amended January 11, 2024, contractors shall furnish sworn payroll information to the Department of Labor on a weekly basis for each contract which exceeds \$45,000 for renovation work and/or \$500,000 for new construction. The construction contract amount is based on a cumulative total of all contracts bid for a specific project. Payroll forms for submission may be obtained from the Department of Labor.
 - 1. A Payroll Report, available from the Department of Labor is to be used to provide this information.
- F. A copy of the Prevailing Wages for the project is attached hereto.

END OF SECTION

STATE OF DELAWARE
DEPARTMENT OF LABOR
DIVISION OF INDUSTRIAL AFFAIRS
OFFICE OF LABOR LAW ENFORCEMENT
PHONE: (302) 318-2769

Mailing Address:
252 Chapman Road
Suite 210
Newark, DE 19702

Located at:
252 Chapman Road
Suite 210
Newark, DE 19702

PREVAILING WAGES FOR BUILDING CONSTRUCTION EFFECTIVE MARCH 14, 2025

CLASSIFICATION	NEW CASTLE	KENT	SUSSEX
ASBESTOS WORKERS	29.89	36.79	53.56
BOILERMAKERS	89.46	45.39	66.72
BRICKLAYERS	66.79	66.79	66.79
CARPENTERS	62.56	62.56	50.80
CEMENT FINISHERS	94.36	67.11	52.04
ELECTRICAL LINE WORKERS	59.42	50.96	38.85
ELECTRICIANS	83.92	83.92	83.92
ELEVATOR CONSTRUCTORS	117.63	84.30	100.06
GLAZIERS	85.50	85.50	74.04
INSULATORS	69.12	69.12	69.12
IRON WORKERS	77.73	77.73	77.73
LABORERS	57.65	57.65	57.65
MILLWRIGHTS	88.35	88.35	70.97
PAINTERS	59.63	59.63	59.63
PILEDRIVERS	91.12	51.44	41.60
PLASTERERS	39.01	39.01	28.91
PLUMBERS/PIPEFITTERS/STEAMFITTERS	79.55	82.95	73.71
POWER EQUIPMENT OPERATORS	83.29	83.29	83.29
ROOFERS-COMPOSITION	32.40	30.53	32.76
ROOFERS-SHINGLE/SLATE/TILE	24.03	28.59	22.47
SHEET METAL WORKERS	86.84	86.84	86.84
SOFT FLOOR LAYERS	61.68	61.68	47.74
SPRINKLER FITTERS	73.13	73.13	73.13
TERRAZZO/MARBLE/TILE FNRS	70.79	70.79	81.89
TERRAZZO/MARBLE/TILE STRS	78.73	78.73	90.82
TRUCK DRIVERS	56.88	35.86	27.91

CERTIFIED:

3-14-2025

BY

Salina Choudhary
ADMINISTRATOR, OFFICE OF LABOR LAW ENFORCEMENT


NOTE: THESE RATES ARE PROMULGATED AND ENFORCED PURSUANT TO THE PREVAILING WAGE REGULATIONS ADOPTED BY THE DEPARTMENT OF LABOR ON APRIL 3, 1992.

CLASSIFICATIONS OF WORKERS ARE DETERMINED BY THE DEPARTMENT OF LABOR. FOR ASSISTANCE IN CLASSIFYING WORKERS, OR FOR A COPY OF THE REGULATIONS OR CLASSIFICATIONS, PHONE (302) 318-2769.

NON-REGISTERED APPRENTICES MUST BE PAID THE MECHANIC'S RATE.

THESE RATES ARE BEING PROVIDED IN ACCORDANCE WITH DELAWARE'S FREEDOM OF INFORMATION ACT.

THEY ARE NOT INTENDED TO APPLY TO ANY SPECIFIC PROJECT.

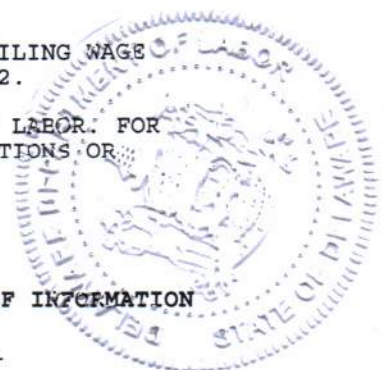

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

SECTION 00 81 13
GENERAL REQUIREMENTS

TABLE OF ARTICLES

1. GENERAL
2. OWNER
3. CONTRACTOR
4. ADMINISTRATION OF THE CONTRACT
5. SUBCONTRACTORS
6. CONSTRUCTION BY OWNER OR SEPARATE CONTRACTORS
7. CHANGES IN THE WORK
8. TIME
9. PAYMENTS AND COMPLETION
10. PROTECTION OF PERSONS AND PROPERTY
11. INSURANCE AND BONDS
12. UNCOVERING AND CORRECTION OF WORK
13. MISCELLANEOUS PROVISIONS
14. TERMINATION OR SUSPENSION OF THE CONTRACT

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

ARTICLE 1: GENERAL

1.1 CONTRACT DOCUMENTS

1.1.1 The intent of the Contract Documents is to include all items necessary for the proper execution and completion of the Work by the Contractor. The Contract Documents are complementary and what is required by one shall be as binding as if required by all. Performance by the Contractor shall be required to an extent consistent with the Contract Documents and reasonably inferable from them as being necessary to produce the intended results.

1.1.2 Work including material purchases shall not begin until the Contractor is in receipt of a bonafide State of Delaware Purchase Order. Any work performed or material purchases prior to the issuance of the Purchase Order is done at the Contractor's own risk and cost.

1.2 EQUALITY OF EMPLOYMENT OPPORTUNITY ON PUBLIC WORKS

1.2.1 For Public Works Projects financed in whole or in part by state appropriation the Contractor agrees that during the performance of this contract:

1. The Contractor will not discriminate against any employee or applicant for employment because of race, creed, sex, color, sexual orientation, gender identity or national origin. The Contractor will take positive steps to ensure that applicants are employed and that employees are treated during employment without regard to their race, creed, sex, color, sexual orientation, gender identity or national origin. Such action shall include, but not be limited to, the following: employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship. The Contractor agrees to post in conspicuous places available to employees and applicants for employment notices to be provided by the contracting agency setting forth this nondiscrimination clause.
2. The Contractor will, in all solicitations or advertisements for employees placed by or on behalf of the Contractor, state that all qualified applicants will receive consideration for employment without regard to race, creed, sex, color, sexual orientation, gender identity or national origin."

1.3 PILOT PROGRAM FOR DISADVANTAGED BUSINESS ENTITIES (DBE)

This is a pilot project in which goals are set to increase the participation of DBEs in capital projects. A DBE is a for-profit business in which at least 51% of the business is owned by one or more individuals who are both socially and economically disadvantaged; and whose daily operations are managed by one or more individuals who are both socially and economically disadvantaged. OMB has developed the DBE goals based on an analysis of the opportunities available on the project and qualified DBE firms available for participation. The DBE pilot has a cooperative program ("coop") requirement which will allow students in the Vo-Tech School District to work on the project.

ARTICLE 2: OWNER

(NO ADDITIONAL GENERAL REQUIREMENTS – SEE SUPPLEMENTARY GENERAL CONDITIONS A232-2019)

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

ARTICLE 3: CONTRACTOR

- 3.1 Schedule of Values: The successful Bidder shall within twenty (20) days after receiving notice to proceed with the work, furnish to the Owner a complete schedule of values on the various items comprising the work, including a list of all subcontractors and materialmen and their DBE status.
- 3.2 Subcontracts: Upon approval of Subcontractors, the Contractor shall award their Subcontracts as soon as possible after the signing of their own contract and see that all material, their own and those of their Subcontractors, are promptly ordered so that the work will not be delayed by failure of materials to arrive on time.
- 3.3 Before commencing any work or construction, the General Contractor is to consult with the Owner as to matters in connection with access to the site and the allocation of Ground Areas for the various features of hauling, storage, etc.
- 3.4 The Contractor shall supervise and direct the Work, using the Contractor's best skill and attention. The Contractor shall be solely responsible for and have control over construction means, methods, techniques, sequences and procedures and for coordinating all portions of the Work under the Contract, unless the Contract Documents give other specific instructions.
- 3.5 The Contractor shall enforce strict discipline and good order among the Contractor's employees and other persons carrying out the Contract. The Contractor shall not permit employment of unfit persons or persons not skilled in tasks assigned to them.
- 3.6 The Contractor warrants to the Owner that materials and equipment furnished will be new and of good quality, unless otherwise permitted, and that the work will be free from defects and in conformance with the Contract Documents. Work not conforming to these requirements, including substitutions not properly approved, may be considered defective. If required by the Owner, the Contractor shall furnish evidence as to the kind and quality of materials and equipment provided.
- 3.7 Unless otherwise provided, the Contractor shall pay all sales, consumer, use and other similar taxes, and shall secure and pay for required permits, fees, licenses, and inspections necessary for proper execution of the Work.
- 3.8 The Contractor shall comply with and give notices required by laws, ordinances, rules, regulations, and lawful orders of public authorities bearing on performance of the Work. The Contractor shall promptly notify the Owner if the Drawings and Specifications are observed to be at variance therewith.
- 3.9 The Contractor shall be responsible to the Owner for the acts and omissions of the Contractor's employees, Subcontractors and their agents and employees, and other persons performing portions of the Work under contract with the Contractor.
- 3.10 The Contractor shall keep the premises and surrounding area free from accumulation of waste materials or rubbish caused by operations under the Contract. At completion of the Work the Contractor shall remove from and about the Project all waste materials, rubbish, the Contractor's tools, construction equipment, machinery and surplus materials. The Contractor shall be responsible for returning all damaged areas to their original conditions.
- 3.11 STATE LICENSE AND TAX REQUIREMENTS

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

- 3.11.1 Each Contractor and Subcontractor shall be licensed to do business in the State of Delaware and shall pay all fees and taxes due under State laws. In conformance with Section 2503, Chapter 25, Title 30, Delaware Code, "the Contractor shall furnish the Delaware Department of Finance within ten (10) days after entering into any contract with a contractor or subcontractor not a resident of this State, a statement of total value of such contract or contracts together with the names and addresses of the contracting parties."
- 3.12 The Contractor shall comply with all requirements set forth in Section 6962, Chapter 69, Title 29 of the Delaware Code.
- 3.13 During the contract Work, the Contractor and each Subcontractor, shall implement an Employee Drug Testing Program in accordance with OMB Regulation 4104 - "Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on "Large Public Works Projects". "Large Public Works" is based upon the current threshold required for bidding Public Works as set by the Purchasing and Contracting Advisory Council.

ARTICLE 4: ADMINISTRATION OF THE CONTRACT

4.1 CONTRACT SURETY

4.1.1 PERFORMANCE BOND AND LABOR AND MATERIAL PAYMENT BOND

- 4.1.2 All bonds will be required as follows unless specifically waived elsewhere in the Bidding Documents.

- 4.1.3 Contents of Performance Bonds – The bond shall be in the form approved by the Office of Management and Budget. The bond shall be conditioned upon the faithful compliance and performance by the successful bidder of each and every term and condition of the contract and the proposal, plans, specifications, and bid documents thereof. Each term and condition shall be met at the time and in the manner prescribed by the Contract, Bid documents and the specifications, including the payment in full to every person furnishing material or performing labor in the performance of the Contract, of all sums of money due the person for such labor and material. (The bond shall also contain the successful bidder's guarantee to indemnify and save harmless the State and the agency from all costs, damages and expenses growing out of or by reason of the Contract in accordance with the Contract.)

- 4.1.4 Invoking a Performance Bond – The agency may, when it considers that the interest of the State so requires, cause judgement to be confessed upon the bond.

- 4.1.5 Within twenty (20) days after the date of notice of award of contract, the Bidder to whom the award is made shall furnish a Performance Bond and Labor and Material Payment Bond, each equal to the full amount of the Contract price to guarantee the faithful performance of all terms, covenants and conditions of the same. The bonds are to be issued by an acceptable Bonding Company licensed to do business in the State of Delaware and shall be issued in duplicate.

- 4.1.6 Performance and Payment Bonds shall be maintained in full force (warranty bond) for a period of two (2) years after the date of the Certificate for Final Payment. The Performance Bond shall guarantee the satisfactory completion of the Project and that the Contractor will make good any faults or defects in his work which may develop during the period of said

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

guarantees as a result of improper or defective workmanship, material or apparatus, whether furnished by themselves or their Sub-Contractors. The Payment Bond shall guarantee that the Contractor shall pay in full all persons, firms or corporations who furnish labor or material or both labor and material for, or on account of, the work included herein. The bonds shall be paid for by this Contractor. The Owner shall have the right to demand that the proof parties signing the bonds are duly authorized to do so.

4.2 FAILURE TO COMPLY WITH CONTRACT

- 4.2.1 If any firm entering into a contract with the State, or Agency that neglects or refuses to perform or fails to comply with the terms thereof, the Agency which signed the Contract may terminate the Contract and proceed to award a new contract in accordance with this Chapter 69, Title 29 of the Delaware Code or may require the Surety on the Performance Bond to complete the Contract in accordance with the terms of the Performance Bond. Nothing herein shall preclude the Agency from pursuing additional remedies as otherwise provided by law.

4.3 CONTRACT INSURANCE AND CONTRACT LIABILITY

- 4.3.1 In addition to the bond requirements stated in the Bid Documents, each successful Bidder shall purchase adequate insurance for the performance of the Contract and, by submission of a Bid, agrees to indemnify and save harmless and to defend all legal or equitable actions brought against the State, any Agency, officer and/or employee of the State, for and from all claims of liability which is or may be the result of the successful Bidder's actions during the performance of the Contract.

- 4.3.2 The purchase or nonpurchase of such insurance or the involvement of the successful Bidder in any legal or equitable defense of any action brought against the successful Bidder based upon work performed pursuant to the Contract will not waive any defense which the State, its agencies and their respective officers, employees and agents might otherwise have against such claims, specifically including the defense of sovereign immunity, where applicable, and by the terms of this section, the State and all agencies, officers and employees thereof shall not be financially responsible for the consequences of work performed, pursuant to said contract.

4.4 RIGHT TO AUDIT RECORDS

- 4.4.1 The Owner shall have the right to audit the books and records of a Contractor or any Subcontractor under any Contract or Subcontract to the extent that the books and records relate to the performance of the Contract or Subcontract.
- 4.4.2 Said books and records shall be maintained by the Contractor for a period of seven (7) years from the date of final payment under the Prime Contract and by the Subcontractor for a period of seven (7) years from the date of final payment under the Subcontract.

ARTICLE 5: SUBCONTRACTORS

5.0 PILOT PROGRAM REQUIREMENTS

The goal set for this pilot program is for 7% of the contract value shall be provided by DBEs. To achieve that goal, the Contractor shall use best efforts to hire subcontractors or purchase material from DBEs to reflect at least 7% of the contract value.

5.1 SUBCONTRACTING REQUIREMENTS

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

- 5.1.1 All contracts for the construction, reconstruction, alteration or repair of any public building (not a road, street or highway) shall be subject to the following provisions:
1. A contract shall be awarded only to a Bidder whose Bid is accompanied by a statement containing, for each Subcontractor category, the name and address (city or town and State only – street number and P.O. Box addresses not required) of the subcontractor whose services the Bidder intends to use in performing the Work and providing the material for such Subcontractor category.
 2. A Bid will not be accepted nor will an award of any Contract be made to any Bidder which, as the Prime Contractor, has listed itself as the Subcontractor for any Subcontractor unless:
 - A. It has been established to the satisfaction of the awarding Agency that the Bidder has customarily performed the specialty work of such Subcontractor category by artisans regularly employed by the Bidder's firm;
 - B. That the Bidder is duly licensed by the State to engage in such specialty work, if the State requires licenses; and
 - C. That the Bidder is recognized in the industry as a bona fide Subcontractor or Contractor in such specialty work and Subcontractor category.
- 5.1.2 The decision of the awarding Agency as to whether a Bidder who list itself as the Subcontractor for a Subcontractor category shall be final and binding upon all Bidders, and no action of any nature shall lie against any awarding agency or its employees or officers because of its decision in this regard.
- 5.1.3 After such a Contract has been awarded, the successful Bidder shall not substitute another Subcontractor for any Subcontractor whose name was set forth in the statement which accompanied the Bid without the written consent of the awarding Agency.
- 5.1.4 No Agency shall consent to any substitution of Subcontractors unless the Agency is satisfied that the Subcontractor whose name is on the Bidders accompanying statement:
- A. Is unqualified to perform the work required;
 - B. Has failed to execute a timely reasonable Subcontract;
 - C. Has defaulted in the performance on the portion of the work covered by the Subcontract; or
 - D. Is no longer engaged in such business.
- 5.1.5 Should a Bidder be awarded a contract, such successful Bidder shall provide to the agency the taxpayer identification license numbers of such subcontractors. Such numbers shall be provided on the later of the date on which such subcontractor is required to be identified or the time the contract is executed. The successful Bidder shall provide to the agency to which it is contracting, within 30 days of entering into such public works contract, copies of all Delaware Business licenses of subcontractors and/or independent contractors that will

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

perform work for such public works contract. However, if a subcontractor or independent contractor is hired or contracted more than 20 days after the Bidder entered the public works contract the Delaware Business license of such subcontractor or independent contractor shall be provided to the agency within 10 days of being contracted or hired.

- 5.1.6 The Contractor may employ additional Subcontractors on the jobsite only after submitting a copy of the Subcontractor's Employee Drug Testing Program to the Owner for approval. A Contractor or Subcontractor shall not commence work until the Owner has concluded its review and determined that the submitted Employee Drug Testing Program complies with OMB Regulation 4104.

5.2 PENALTY FOR SUBSTITUTION OF SUBCONTRACTORS

- 5.2.1 Should the Contractor fail to utilize any or all of the Subcontractors in the Contractor's Bid statement in the performance of the Work on the public bidding, the Contractor shall be penalized in the amount of (project specific amount*). The Agency may determine to deduct payments of the penalty from the Contractor or have the amount paid directly to the Agency. Any penalty amount assessed against the Contractor may be remitted or refunded, in whole or in part, by the Agency awarding the Contract, only if it is established to the satisfaction of the Agency that the Subcontractor in question has defaulted or is no longer engaged in such business. No claim for the remission or refund of any penalty shall be granted unless an application is filed within one year after the liability of the successful Bidder accrues. All penalty amounts assessed and not refunded or remitted to the contractor shall be reverted to the State.

For the purpose of this pilot project, any substitution of a listed subcontractor whether requested in compliance with Title 29, Chapter 69, Section 6962(d)(10)b.3 of the Delaware Code or in violation of that statute will not change the DBE requirement. It remains at 7% of the contract value.

*one (1) percent of contract amount not to exceed \$10,000

5.3 ASBESTOS ABATEMENT

- 5.3.1 The selection of any Contractor to perform asbestos abatement for State-funded projects shall be approved by the Office of Management and Budget, Division of Facilities Management pursuant to Chapter 78 of Title 16.

5.4 STANDARDS OF CONSTRUCTION FOR THE PROTECTION OF THE PHYSICALLY HANDICAPPED

- 5.4.1 All Contracts shall conform with the standard established by the Delaware Architectural Accessibility Board unless otherwise exempted by the Board.

5.5 CONTRACT PERFORMANCE

- 5.5.1 Any firm entering into a Public Works Contract that neglects or refuses to perform or fails to comply with its terms, the Agency may terminate the Contract and proceed to award a new Contract or may require the Surety on the Performance Bond to complete the Contract in accordance with the terms of the Performance Bond.

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

ARTICLE 6: CONSTRUCTION BY OWNER OR SEPARATE CONTRACTORS

- 6.1 The Owner reserves the right to simultaneously perform other construction or operations related to the Project with the Owner's own forces, and to award separate contracts in connection with other portions of the Project or other Projects at the same site.
- 6.2 The Contractor shall afford the Owner and other Contractors reasonable opportunity for access and storage of materials and equipment, and for the performance of their activities, and shall connect and coordinate their activities with other forces as required by the Contract Documents.

ARTICLE 7: CHANGES IN THE WORK

- 7.1 The Owner, without invalidating the Contract, may order changes in the Work consisting of Additions, Deletions, Modifications or Substitutions, with the Contract Sum and Contract completion date being adjusted accordingly. Such changes in the Work shall be authorized by written Change Order signed by the Professional, as the duly authorized agent, the Contractor and the Owner.
- 7.2 The Contract Sum and Contract Completion Date shall be adjusted only by a fully executed Change Order.
- 7.3 The additional cost, or credit to the Owner resulting from a change in the Work shall be by mutual agreement of the Owner, Contractor and the Architect. In all cases, this cost or credit shall be based on the 'DPE' wages required and the "invoice price" of the materials/equipment needed.
- 7.3.1 "DPE" shall be defined to mean "direct personnel expense". Direct payroll expense includes prevailing wage rates plus a maximum multiplier of 1.35 times DPE. For example, if the prevailing wage rate is \$50/hour, the DPE would be \$67.50/hour (50 x 1.35).
- 7.3.2 "Invoice price" of materials/equipment shall be defined to mean the actual cost of materials and/or equipment that is paid by the Contractor, (or subcontractor), to a material distributor, direct factory vendor, store, material provider, or equipment leasing entity. Rates for equipment that is leased and/or owned by the Contractor or subcontractor(s) shall not exceed those listed in the latest version of the "Means Building Construction Cost Data" publication.
- 7.3.3 In addition to the above, the General Contractor is allowed a fifteen percent (15%) markup for overhead and profit for additional work performed by the General Contractor's own forces. For additional subcontractor work, the Subcontractor is allowed a fifteen (15) percent overhead and profit on change order work above and beyond the direct costs stated previously. To this amount, the General Contractor will be allowed a mark-up not exceeding seven and one half percent (7.5%) on the subcontractors work. These mark-ups shall include all costs including, but not limited to: overhead, profit, bonds, insurance, supervision, etc. No markup is permitted on the work of the subcontractors subcontractor. No additional costs shall be allowed for changes related to the Contractor's onsite superintendent/staff, or project manager, unless a change in the work changes the project duration and is identified by the CPM schedule. There will be no other costs associated with the change order.

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

ARTICLE 8: TIME

- 8.1 Time limits, if any, are as stated in the Project Manual. By executing the Agreement, the Contractor confirms that the stipulated limits are reasonable, and that the Work will be completed within the anticipated time frame.
- 8.2 If progress of the Work is delayed at any time by changes ordered by the Owner, by labor disputes, fire, unusual delay in deliveries, abnormal adverse weather conditions, unavoidable casualties or other causes beyond the Contractor's control, the Contract Time shall be extended for such reasonable time as the Owner may determine.
- 8.3 Any extension of time beyond the date fixed for completion of the construction and acceptance of any part of the Work called for by the Contract, or the occupancy of the building by the Owner, in whole or in part, previous to the completion shall not be deemed a waiver by the Owner of his right to annul or terminate the Contract for abandonment or delay in the matter provided for, nor relieve the Contractor of full responsibility
- 8.4 **SUSPENSION AND DEBARMENT**
- 8.4.1 Per Section 6962(d)(14), Title 29, Delaware Code, "Any Contractor who fails to perform a public works contract or complete a public works project within the time schedule established by the Agency in the Invitation To Bid, may be subject to Suspension or Debarment for one or more of the following reasons: a) failure to supply the adequate labor supply ratio for the project; b) inadequate financial resources; or, c) poor performance on the Project."
- 8.4.2 "Upon such failure for any of the above stated reasons, the Agency that contracted for the public works project may petition the Director of the Office of Management and Budget for Suspension or Debarment of the Contractor. The Agency shall send a copy of the petition to the Contractor within three (3) working days of filing with the Director. If the Director concludes that the petition has merit, the Director shall schedule and hold a hearing to determine whether to suspend the Contractor, debar the Contractor or deny the petition. The Agency shall have the burden of proving, by a preponderance of the evidence, that the Contractor failed to perform or complete the public works project within the time schedule established by the Agency and failed to do so for one or more of the following reasons: a) failure to supply the adequate labor supply ratio for the project; b) inadequate financial resources; or c) poor performance on the project. Upon a finding in favor of the Agency, the Director may suspend a Contractor from Bidding on any project funded, in whole or in part, with public funds for up to 1 year for a first offense, up to 3 years for a second offense and permanently debar the Contractor for a third offense. The Director shall issue a written decision and shall send a copy to the Contractor and the Agency. Such decision may be appealed to the Superior Court within thirty (30) days for a review on the record."
- 8.5 **RETAINAGE**
- 8.5.1 Per Section 6962(d)(5) a.3, Title 29, Delaware Code: The Agency may at the beginning of each public works project establish a time schedule for the completion of the project. If the project is delayed beyond the completion date due to the Contractor's failure to meet their responsibilities, the Agency may forfeit, at its discretion, all or part of the Contractor's retainage.

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

- 8.5.2 This forfeiture of retainage also applies to the timely completion of the punchlist. A punchlist will only be prepared upon the mutual agreement of the Owner, Architect and Contractor. Once the punchlist is prepared, all three parties will by mutual agreement, establish a schedule for its completion. Should completion of the punchlist be delayed beyond the established date due to the Contractor's failure to meet their responsibilities, the Agency may hold permanently, at its discretion, all or part of the Contractor's retainage.

ARTICLE 9: PAYMENTS AND COMPLETION

9.1 APPLICATION FOR PAYMENT

- 9.1.1 Applications for payment shall be made upon AIA Document G702. There will be a five percent (5%) retainage on all Contractor's monthly invoices until completion of the project. This retainage may become payable upon receipt of all required closeout documentation, provided all other requirements of the Contract Documents have been met.
- 9.1.2 A date will be fixed for the taking of the monthly account of work done. Upon receipt of Contractor's itemized application for payment, such application will be audited, modified, if found necessary, and approved for the amount. Statement shall be submitted to the Owner.
- 9.1.3 Section 6516, Title 29 of the Delaware Code annualized interest is not to exceed 12% per annum beginning thirty (30) days after the "presentment" (as opposed to the date) of the invoice.

9.2 PARTIAL PAYMENTS

- 9.2.1 Any public works Contract executed by any Agency may provide for partial payments at the option of the Owner with respect to materials placed along or upon the sites or stored at secured locations, which are suitable for use in the performance of the contract.
- 9.2.2 When approved by the agency, partial payment may include the values of tested and acceptable materials of a nonperishable or noncontaminative nature which have been produced or furnished for incorporation as a permanent part of the work yet to be completed, provided acceptable provisions have been made for storage.
- 9.2.2.1 Any allowance made for materials on hand will not exceed the delivered cost of the materials as verified by invoices furnished by the Contractor, nor will it exceed the contract bid price for the material complete in place.
- 9.2.3 If requested by the Agency, receipted bills from all Contractors, Subcontractors, and material, men, etc., for the previous payment must accompany each application for payment. Following such a request, no payment will be made until these receipted bills have been received by the Owner.

9.3 SUBSTANTIAL COMPLETION

- 9.3.1 When the building has been made suitable for occupancy, but still requires small items of miscellaneous work, the Owner will determine the date when the project has been substantially completed.
- 9.3.2 If, after the Work has been substantially completed, full completion thereof is materially delayed through no fault of the Contractor, and without terminating the Contract, the Owner

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

may make payment of the balance due for the portion of the Work fully completed and accepted. Such payment shall be made under the terms and conditions governing final payment that it shall not constitute a waiver of claims.

- 9.3.3 On projects where commissioning is included, the commissioning work as defined in the specifications must be complete prior to the issuance of substantial completion.

9.4 FINAL PAYMENT

- 9.4.1 Final payment, including the five percent (5%) retainage if determined appropriate, shall be made within thirty (30) days after the Work is fully completed and the Contract fully performed and provided that the Contractor has submitted the following closeout documentation (in addition to any other documentation required elsewhere in the Contract Documents):

- 9.4.1.1 Evidence satisfactory to the Owner that all payrolls, material bills, and other indebtedness connected with the work have been paid,

- 9.4.1.2 An acceptable RELEASE OF LIENS,

- 9.4.1.3 Copies of all applicable warranties,

- 9.4.1.4 As-built drawings,

- 9.4.1.5 Operations and Maintenance Manuals,

- 9.4.1.6 Instruction Manuals,

- 9.4.1.7 Consent of Surety to final payment.

- 9.4.1.8 The Owner reserves the right to retain payments, or parts thereof, for its protection until the foregoing conditions have been complied with, defective work corrected and all unsatisfactory conditions remedied.

ARTICLE 10: PROTECTION OF PERSONS AND PROPERTY

- 10.1 The Contractor shall be responsible for initiating, maintaining, and supervising all safety precautions and programs in connection with the performance of the Contract. The Contractor shall take all reasonable precautions to prevent damage, injury or loss to: workers, persons nearby who may be affected, the Work, materials and equipment to be incorporated, and existing property at the site or adjacent thereto. The Contractor shall give notices and comply with applicable laws ordinances, rules regulations, and lawful orders of public authorities bearing on the safety of persons and property and their protection from injury, damage, or loss. The Contractor shall promptly remedy damage and loss to property at the site caused in whole or in part by the Contractor, a Subcontractor, or anyone directly or indirectly employed by any of them, or by anyone for whose acts they may be liable.

- 10.2 The Contractor shall notify the Owner in the event any existing hazardous material such as lead, PCBs, asbestos, etc. is encountered on the project. The Owner will arrange with a qualified specialist for the identification, testing, removal, handling and protection against exposure or environmental pollution, to comply with applicable regulation laws and ordinances. The Contractor and Architect will not be required to participate in or to perform this operation. Upon completion of this work, the Owner will notify the Contractor and

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

Architect in writing the area has been cleared and approved by the authorities in order for the work to proceed. The Contractor shall attach documentation from the authorities of said approval.

- 10.3 As required in the Hazardous Chemical Information Act of June 1984, all vendors supplying any materials that may be defined as hazardous, must provide Material Safety Data Sheets for those products. Any chemical product should be considered hazardous if it has a warning caution on the label relating to a potential physical or health hazard, if it is known to be present in the workplace, and if employees may be exposed under normal conditions or in any foreseeable emergency situation. Material Safety Data Sheets must be provided directly to the Owner along with the shipping slips that include those products.
- 10.4 The Contractor shall certify to the Owner that materials incorporated into the Work are free of all asbestos. This certification may be in the form of Material Safety Data Sheet (MSDS) provided by the product manufacturer for the materials used in construction, as specified or as provided by the Contractor.

ARTICLE 11: INSURANCE AND BONDS

- 11.1 The Contractor shall carry all insurance required by law, such as Unemployment Insurance, etc. The Contractor shall carry such insurance coverage as they desire on their own property such as a field office, storage sheds or other structures erected upon the project site that belong to them and for their own use. The Subcontractors involved with this project shall carry whatever insurance protection they consider necessary to cover the loss of any of their personal property, etc.
- 11.2 Upon being awarded the Contract, the Contractor shall obtain a minimum of two (2) copies of all required insurance certificates called for herein, and submit one (1) copy of each certificate, to the Owner, within 20 days of contract award.
- 11.3 Bodily Injury Liability and Property Damage Liability Insurance shall, in addition to the coverage included herein, include coverage for injury to or destruction of any property arising out of the collapse of or structural injury to any building or structure due to demolition work and evidence of these coverages shall be filed with and approved by the Owner.
- 11.4 The Contractor's Property Damage Liability Insurance shall, in addition to the coverage noted herein, include coverage on all real and personal property in their care, custody and control damaged in any way by the Contractor or their Subcontractors during the entire construction period on this project.
- 11.5 Builders Risk (including Standard Extended Coverage Insurance) on the existing building during the entire construction period, may be provided by the Contractor under this contract. The Owner shall insure the existing building and all of its contents and all this new alteration work under this contract during entire construction period for the full insurable value of the entire work at the site. Note, however, that the Contractor and their Subcontractors shall be responsible for insuring building materials (installed and stored) and their tools and equipment whenever in use on the project, against fire damage, theft, vandalism, etc.
- 11.6 Certificates of the insurance company or companies stating the amount and type of coverage, terms of policies, etc., shall be furnished to the Owner, within 20 days of contract award.

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

11.7 The Contractor shall, at their own expense, (in addition to the above) carry the following forms of insurance:

11.7.1 Contractor's Contractual Liability Insurance

Minimum coverage to be:

Bodily Injury	\$1,000,000	for each occurrence
	\$3,000,000	aggregate
Property Damage	\$1,000,000	for each occurrence
	\$3,000,000	aggregate

11.7.2 Contractor's Protective Liability Insurance

Minimum coverage to be:

Bodily Injury	\$1,000,000	for each occurrence
	\$3,000,000	aggregate
Property Damage	\$1,000,000	for each occurrence
	\$3,000,000	aggregate

11.7.3 Automobile Liability Insurance

Minimum coverage to be:

Bodily Injury	\$1,000,000	for each person
	\$1,000,000	for each occurrence
Property Damage	\$500,000	per accident

11.7.4 Prime Contractor's and Subcontractors' policies shall include contingent and contractual liability coverage in the same minimum amounts as 11.7.1 above.

11.7.5 Workmen's Compensation (including Employer's Liability):

11.7.5.1 Minimum Limit on employer's liability to be as required by law.

11.7.5.2 Minimum Limit for all employees working at one site.

11.7.6 Certificates of Insurance must be filed with the Owner guaranteeing fifteen (15) days prior notice of cancellation, non-renewal, or any change in coverages and limits of liability shown as included on certificates.

11.7.7 Social Security Liability

11.7.7.1 With respect to all persons at any time employed by or on the payroll of the Contractor or performing any work for or on their behalf, or in connection with or arising out of the Contractor's business, the Contractor shall accept full and exclusive liability for the payment of any and all contributions or taxes or unemployment insurance, or old age retirement benefits, pensions or annuities now or hereafter imposed by the Government of the United

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

States and the State or political subdivision thereof, whether the same be measured by wages, salaries or other remuneration paid to such persons or otherwise.

11.7.7.2 Upon request, the Contractor shall furnish Owner such information on payrolls or employment records as may be necessary to enable it to fully comply with the law imposing the aforesaid contributions or taxes.

11.7.7.3 If the Owner is required by law to and does pay any and/or all of the aforesaid contributions or taxes, the Contractor shall forthwith reimburse the Owner for the entire amount so paid by the Owner.

ARTICLE 12: UNCOVERING AND CORRECTION OF WORK

12.1 The Contractor shall promptly correct Work rejected by the Owner or failing to conform to the requirements of the Contract Documents, whether observed before or after Substantial Completion and whether or not fabricated, installed or completed, and shall correct any Work found to be not in accordance with the requirements of the Contract Documents within a period of two years from the date of Substantial Completion, or by terms of an applicable special warranty required by the Contract Documents. The provisions of this Article apply to work done by Subcontractors as well as to Work done by direct employees of the Contractor.

12.2 At any time during the progress of the work, or in any case where the nature of the defects shall be such that it is not expedient to have them corrected, the Owner, at their option, shall have the right to deduct such sum, or sums, of money from the amount of the contract as they consider justified to adjust the difference in value between the defective work and that required under contract including any damage to the structure.

ARTICLE 13: MISCELLANEOUS PROVISIONS

13.1 CUTTING AND PATCHING

13.1.1 The Contractor shall be responsible for all cutting and patching. The Contractor shall coordinate the work of the various trades involved.

13.2 DIMENSIONS

13.2.1 All dimensions shown shall be verified by the Contractor by actual measurements at the project site. Any discrepancies between the drawings and specifications and the existing conditions shall be referred to the Owner for adjustment before any work affected thereby has been performed.

13.3 LABORATORY TESTS

13.3.1 Any specified laboratory tests of material and finished articles to be incorporated in the work shall be made by bureaus, laboratories or agencies approved by the Owner and reports of such tests shall be submitted to the Owner. The cost of the testing shall be paid for by the Contractor.

13.3.2 The Contractor shall furnish all sample materials required for these tests and shall deliver same without charge to the testing laboratory or other designated agency when and where directed by the Owner.

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

13.4 ARCHAEOLOGICAL EVIDENCE

13.4.1 Whenever, in the course of construction, any archaeological evidence is encountered on the surface or below the surface of the ground, the Contractor shall notify the authorities of the State Historic Preservation Office and suspend work in the immediate area for a reasonable time to permit those authorities, or persons designated by them, to examine the area and ensure the proper removal of the archaeological evidence for suitable preservation by the Division of Historical and Cultural Affairs.

13.5 GLASS REPLACEMENT AND CLEANING

13.5.1 The General Contractor shall replace without expense to the Owner all glass broken during the construction of the project. If job conditions warrant, at completion of the job the General Contractor shall have all glass cleaned and polished.

13.6 WARRANTY

13.6.1 For a period of two (2) years from the date of substantial completion, as evidenced by the date of final acceptance of the work, the contractor warrants that work performed under this contract conforms to the contract requirements and is free of any defect of equipment, material or workmanship performed by the contractor or any of his subcontractors or suppliers. However, manufacturer's warranties and guarantees, if for a period longer than two (2) years, shall take precedence over the above warranties. The contractor shall remedy, at his own expense, any such failure to conform or any such defect. The protection of this warranty shall be included in the Contractor's Performance Bond.

ARTICLE 14: TERMINATION OR SUSPENSION OF THE CONTRACT

14.1 If the Contractor defaults or persistently fails or neglects to carry out the Work in accordance with the Contract Documents or fails to perform a provision of the Contract, the Owner, after seven days written notice to the Contractor, may make good such deficiencies and may deduct the cost thereof from the payment then or thereafter due the Contractor. Alternatively, at the Owner's option, and the Owner may terminate the Contract and take possession of the site and of all materials, equipment, tools, and machinery thereon owned by the Contractor and may finish the Work by whatever method the Owner may deem expedient. If the costs of finishing the Work exceed any unpaid compensation due the Contractor, the Contractor shall pay the difference to the Owner.

14.2 "If the continuation of this Agreement is contingent upon the appropriation of adequate state, or federal funds, this Agreement may be terminated on the date beginning on the first fiscal year for which funds are not appropriated or at the exhaustion of the appropriation. The Owner may terminate this Agreement by providing written notice to the parties of such non-appropriation. All payment obligations of the Owner will cease upon the date of termination. Notwithstanding the foregoing, the Owner agrees that it will use its best efforts to obtain approval of necessary funds to continue the Agreement by taking appropriate action to request adequate funds to continue the Agreement."

END OF SECTION

SECTION 008114 – DRUG TESTING PROGRAM AND FORMS

1. SUMMARY

- A. Pursuant to 4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects requires that Contractors and Subcontractors who work on Large Public Works Contracts funded all or in part with public funds submit with their bid an Affidavit of Employee Drug Testing Program. A copy of the current Regulation is attached hereto.
- B. Each Contractor shall provide two (2) business days prior to contract execution, copies of the Employee Drug Testing Program for the Contractor and all Subcontractors.
- C. Initial Drug Testing - Employees commencing work on a Jobsite must be tested within the past 180 days from the date of commencing work, with the exception that an Employee who has passed a random or scheduled drug test within that time frame, or an Employee who passed a pre-employment drug test administered pursuant to a Contractor's or Subcontractor's Program and is subject to testing as part of a Contractor's or Subcontractor's ongoing Program or as part of a Consortium shall be permitted to work at the Jobsite without further testing; however, the Employee is still subject to random testing.
- D. A Contractor or Subcontractor's Program shall provide that no less than 5% of a Contractor's or Subcontractor's employees shall be randomly selected each month for drug testing and no less than 2.5% of a Contractor or Subcontractor's employees be randomly selected for alcohol testing. Test results must be kept by a Contractor or Subcontractor for a minimum of 1 year subsequent to the date of close out of the Public Works project. See the form attached hereto.
- E. The Contractor will notify the Owner in writing of any positive results of random drug testing. See the form attached hereto. The results must be reported to the Owner within 24 hours of receipt of the test results.

EMPLOYEE DRUG TESTING REPORT FORM

Period Ending: _____

4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects requires that Contractors and Subcontractors who work on Large Public Works Contracts funded all or in part with public funds maintain testing data that includes but is not limited to the data elements below.

Project Number: _____

Project Name: _____

Contractor/Subcontractor Name: _____

Contractor/Subcontractor Address: _____

Number of employees who worked on the jobsite during the report period: _____

Number of employees subject to random testing during the report period: _____

Number of Negative Results _____ Number of Positive Results _____

Action taken on employee(s) in response to a failed or positive random test:

Authorized Representative of Contractor/Subcontractor: _____
(typed or printed)

Authorized Representative of Contractor/Subcontractor: _____
(signature)

Date: _____

This form is not required to be submitted to the Owner. Included as a reference to show information required to be maintained by the Contractor. The Owner shall have the right to periodically audit all Contractor and Subcontractor test results at the Contractor's or Subcontractor's offices (or by other means to make the data available for inspection by the Owner).

**EMPLOYEE DRUG TESTING
REPORT OF POSITIVE RESULTS**

4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects requires that Contractors and Subcontractors who work on Large Public Works Contracts funded all or in part with public funds to notify the Owner in writing of a positive random drug test.

Project Number: _____

Project Name: _____

Contractor/Subcontractor Name: _____

Contractor/Subcontractor Address: _____

Name of employee with positive test result: _____

Last 4 digits of employee SSN: _____

Date test results received: _____

Action taken on employee in response to a positive test result:

Authorized Representative of Contractor/Subcontractor: _____
(typed or printed)

Authorized Representative of Contractor/Subcontractor: _____
(signature)

Date: _____

This form shall be sent by mail to the Owner within 24 hours of receipt of test results.

Enclose this test results form in a sealed envelope with the notation "Drug Testing Form – DO NOT OPEN" on the face thereof and place in a separate mailing envelope.

END OF SECTION

OFFICE OF MANAGEMENT AND BUDGET
DIVISION OF FACILITIES MANAGEMENT
4000 Office of Management and Budget
4100 Division of Facilities Management

4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects

1.0 Purpose

The Office of Management and Budget ("Office"), has developed these regulations that require contractors and subcontractors to implement a program of mandatory drug testing for employees who work on large public works contracts funded all or in part with public funds pursuant to 29 **Del.C.** §6908(a)(6). The regulations establish the mechanism, standards and requirements of a Mandatory Drug Testing Program that will be incorporated by reference into all large public works contracts awarded pursuant to 29 **Del.C.** §6962.

2.0 Definitions

"Consortium"/"third party administrator" or "(C/TPA)" means a service agent that provides or coordinates the provision of a variety of drug and alcohol testing services to employers. C/TPAs typically perform administrative tasks concerning the operation of the employers' drug and alcohol testing programs. This term includes, but is not limited to, groups of employers who join together to administer, as a single entity, the drug and alcohol testing programs of its members.

"Contractor" means an entity such as, but not limited to, an individual, firm, partnership or corporation that has a contractual obligation to perform work for contracts awarded pursuant to 29 **Del.C.** §6962.

"Division of Facilities Management" and **"DFM"** means the Division of Facilities Management within the Office of Management and Budget.

"Drug testing firm" is an entity engaged in the business of providing drug testing services for businesses, individuals, governments or any entity that requires drug testing of employees, applicants, licensees, etc., in compliance with these requirements.

"Employee" means an individual employed by a contractor or subcontractor who works on the jobsite of a large public works contract but does not fulfill a clerical or administrative function. For the purpose of this definition, clerical or administrative functions shall refer to job responsibilities that do not generally require an employee to work outside of the contractor's jobsite office, home office or other employer-provided office. For the purposes of this regulation, the term "employee" shall also include supervisors and foremen working on the jobsite. The term "employee" shall also include employees of a contractor or subcontractor working on or delivering materials and equipment to and from a jobsite.

"Impairment" or "impaired" means symptoms that an employee while working may be under the influence of drugs or alcohol that may decrease or lessen the employee's performance of the duties or tasks of the employee's job position, including symptoms of the employee's speech, walking, standing, physical dexterity, agility, coordination, actions, movement, demeanor, appearance, clothing, odor, irrational or unusual behavior, negligence or carelessness in operating equipment, machinery or production or manufacturing processes, disregard for the safety of the employee or others, or other symptoms causing a reasonable suspicion of the use of drugs or alcohol.

"Jobsite" means the site or area directly or indirectly owned, operated or controlled by the owner in which the contractor or subcontractor performs work or delivers services to the owner. For the purpose of this definition, "jobsite" does not mean a remote work site not under the direct or indirect control of the owner in which work is performed to fulfill the contractor's or subcontractor's obligations.

"Large public works contract" means a contract for a public works construction awarded pursuant to 29 **Del.C.** §6962.

"Mandatory drug testing program" and **"program"** means a defined set of basic procedures, requirements and rules that must be used by a contractor or subcontractor to test employees for drugs in compliance with these requirements.

"Owner" is the state agency, school district or entity that awards a large public works contract to a contractor pursuant to 29 **Del.C.** §6962.

TITLE 19 LABOR

DELAWARE ADMINISTRATIVE CODE

“Positive test result” and **“fail a drug test”** means the result reported by a Health and Human Services certified laboratory when a specimen contains a drug or drug metabolite equal to or greater than the cutoff concentration. For purposes of these regulations, an employee shall not be considered to have a positive test result nor shall an employee be considered to “fail a drug test”, unless the employee was impaired by marijuana at the jobsite if:

- The employee is a registered qualifying patient and;
- The drug detected was marijuana, a component of marijuana, or marijuana metabolites.

“Random drug testing” means that an employee is chosen at random for testing without advance notice, from a pool of employees or as a member of a consortium. Specific requirements for random drug testing conducted under these regulations are described in Section 5.0.

“Registered qualifying patient” means a person (1) validly issued and in possession of an unexpired registry identification card as defined by 16 Del.C. §4902A (14), and (2) subject to confirmation through a "verification system" as set forth at 16 Del.C. §4902A(17).

“Subcontractor” means an entity such as, but not limited to, an individual, firm, partnership or corporation that has a contractual obligation to perform work for, or supply services to a contractor as defined in Section 2.0.

21 DE Reg. 503 (12/01/17)

3.0 Employee Drug Testing Documentation Requirements

3.1 The following documentation requirements apply:

3.1.1 At bid submission. A solicitation for a large public works contract must require each contractor that submits a bid for the work to submit with the bid a signed affidavit certifying that the contractor and subcontractor(s) has in place or will implement during the entire term of the contract a mandatory drug testing program that complies with this regulation.

3.1.2 At least 2 business days prior to contract execution. The awarded contractor shall provide to the owner copies of the employee drug testing program for the contractor and for all listed subcontractors.

3.1.3 During contract execution. Contractors that employ additional subcontractors on the jobsite may do so only after submitting a copy of the subcontractor's employee drug testing program. A contractor or subcontractor shall not commence work until the owner has concluded the employee drug testing program complies with this regulation as per subsection 3.2.

3.1.4 In the event of an emergency a contractor may employ additional subcontractors on the jobsite prior to submitting the subcontractor's employee drug testing program provided that said program is submitted to the owner as soon as practicable.

3.2 A contractor or subcontractor shall be treated as having a mandatory drug testing program that complies with this regulation if the program includes the following:

3.2.1 The program meets the minimum standards in Section 4.0 of this regulation.

3.2.2 The program provides for the frequency of testing of employees as per Section 5.0 of this regulation:

3.2.3 The program imposes disciplinary measures on an employee who fails a drug test as per Section 6.0 of this regulation.

3.3 Prequalified contractors and subcontractors. A contractor or subcontractor may meet the provisions of subsection 3.1 if they are prequalified through the DFM prequalification and if the DFM prequalification includes provisions requiring an employee mandatory drug testing program that meet the requirements of Sections 4.0, 5.0 and 6.0 of this regulation

3.4 The State shall not be obligated to pay, and the contractor or subcontractor shall expressly agree that, any portion of work performed by a contractor or subcontractor commenced before that contractor or subcontractor has complied with subsections 3.1 and 3.2, provided however that emergency work as referenced in subsection 3.1.4 may not be subject to this provision.

21 DE Reg. 503 (12/01/17)

4.0 Minimum Standards for a Mandatory Drug Testing Program

4.1 Testing for the presence of drugs in an employee's system and the handling of test specimens shall be conducted in accordance with guidelines for the collection, chain-of-custody procedures, laboratory testing, and Medical Officer Review procedures contained within the Mandatory Guidelines for Federal Workplace

TITLE 19 LABOR

DELAWARE ADMINISTRATIVE CODE

3

Drug Testing Programs published by the Substance Abuse and Mental Health Services Administration (SAMHSA). (49 CFR Part 40).

All tests must be processed by a federal Health and Human Services certified laboratory. Contractors must provide documentation detailing the procedures used in the collection, testing and reporting of drug tests sufficient to show conformance with SAMHSA guidelines.

- 4.2 Contractors and subcontractors subject to these regulations may procure the services of an appropriate drug testing firm to administer their program. A contractor or subcontractor may also participate in a consortium. A contractor or subcontractor may also implement a mandatory drug testing program using in-house personnel and resources.
- 4.3 Employees subject to drug testing shall be tested using at a minimum a seven-panel protocol testing plus alcohol screening for the following:

Initial test analyte	Initial test cutoff concentration	Confirmatory test analyte	Confirmatory test cutoff concentration
Marijuana metabolites	50 ng/mL	THCA	15 ng/mL.
Cocaine metabolites	150 ng/mL	Benzoylecgonine	100 ng/mL.
Opiate metabolites			
Codeine/Morphine	2000 ng/mL	Codeine	2000 ng/mL.
		Morphine	2000 ng/mL.
6-Acetylmorphine	10 ng/mL	6-Acetylmorphine	10 ng/mL.
Phencyclidine	25 ng/mL	Phencyclidine	25 ng/mL.
Amphetamines			
AMP/MAMP	500 ng/mL	Amphetamine	250 ng/mL.
		Methamphetamine	250 ng/mL.
MDMA	500 ng/mL	MDMA	250 ng/mL.
		MDA	250 ng/mL.
		MDEA	250 ng/mL.
Alcohol	0.04%		

- 4.4 The frequency of random drug testing and the methodology for selecting employees to be screened are defined in Section 5.0 and shall be incorporated into contractor and subcontractor mandatory testing procedures. A contractor or subcontractor may incorporate rules or requirements that exceed the requirements defined herein.

21 DE Reg. 503 (12/01/17)

5.0 Drug Testing Requirements – Frequency for the Testing of Employees

- 5.1 Initial drug testing. Employees commencing work on a jobsite must be tested with the exception that an employee who has passed a random or scheduled drug test within the past 180 days from the date of commencing work or an employee who passed a pre-employment drug test administered pursuant to an contractor's or subcontractor's program, or who possesses a certification no more than 6 months old under the then current New Castle County ordinance 2.05.305 - Alcohol and Drug Testing of Employees of Contractors Working on Public Works Projects and Jobsites, and is subject to testing as part of a contractor's or subcontractor's ongoing program or as part of a consortium shall be permitted to work at the jobsite without further testing; however, the employee is still subject to random testing.
- 5.2 Random drug testing. During the course of a project, each contractor and subcontractor with employees on the jobsite shall maintain a program that meets or exceeds the following requirements.
- 5.2.1 All employees will be subject to random, unannounced testing.
- 5.2.2 The selection of employees shall be made by a scientifically valid method of randomly generating an employee identifier from a contractor or subcontractor's entire pool of employees, through those employees working on a public works jobsite or through the contractor or subcontractor's participation in a consortium.
- 5.2.3 A contractor or subcontractor's program shall provide that no less than 5% of a contractor's or subcontractor's employees shall be randomly selected each month for drug testing and no less than 2.5% of a contractor or subcontractor's employees be randomly selected for alcohol testing. Contractors or

TITLE 19 LABOR

DELAWARE ADMINISTRATIVE CODE

subcontractors may participate in a consortium provided that no less than 5% of the consortium's pool shall be subject to drug testing each month and no less than 2.5% of the consortium's pool shall be subject to alcohol testing each month. Contractors or subcontractors with less than 10 employees that do not participate in a consortium shall test at least 1 of their employees, selected randomly per month. Each employee shall have an equal chance of selection each time the selection is made. Because the selection process is random, some employees may not be tested within a year, while others may be tested more than once. Nothing in this regulation shall require an employee of a contractor or subcontractor not working or assigned to a public works jobsite to be subject to random alcohol testing.

- 5.2.4 Employees notified that they have been selected must report within 4 hours for testing to a site specified. Employees so notified must have been given such notification at least 4 hours before the scheduled closing time of the testing facility. Any failure to report for random testing, or to cooperate with the testing procedure shall be considered a positive result.
- 5.2.5 Purposely impeding or delaying an employee's fulfillment of the testing requirements herein by a contractor or subcontractor may subject the contractor or subcontractor to sanctions listed in Section 8.0.
- 5.3 Reasonable suspicion testing. An employee will be required to take a drug and/or alcohol test at any time his or her employing contractor, subcontractor or the owner reasonably believes that he or she has an impairment caused by drugs and/or alcohol. Further, an employee may be required to take a drug and/or alcohol test at any time his or her employing contractor, subcontractor or the owner finds drug paraphernalia and/or open alcohol containers on the jobsite.
- 5.4 Return to duty testing. As required in Section 6.0.
- 5.5 Accident triggered testing. An employee will be required to take a drug test and may be subject to an alcohol breathalyzer test at any time there is a jobsite accident involving loss or significant property damage, injury or death to an employee of the contractor, subcontractor, or owner or member of the public.
 - 5.5.1 As soon as practicable following an accident, the contractor will notify the employee(s) whose performance could have contributed to the accident of the need for the test.
 - 5.5.2 The appropriate contractor shall ensure that an employee, required to be tested under this section, report to a testing center as soon as practicable, but no longer than 4 hours after the accident. Employees so notified must have been given such notification at least 4 hours before the scheduled closing time of the testing facility. If the drug test is not conducted within 4 hours, attempts to conduct the test must cease and the reasons for the failure to test documented.
 - 5.5.3 An employee who is subject to post-accident testing who fails to remain readily available for such testing, including notifying a supervisor of his or her location if he or she leaves the scene of the accident prior to submission to such test, may be deemed to have refused to submit to testing.
 - 5.5.4 If an employee fails or refuses to be tested, he/she must be removed from the jobsite and shall be subject to consequences in Section 6.0.
 - 5.5.5 Nothing in this section shall be construed to require the delay of necessary medical attention for the injured following an accident, or to prohibit an employee from leaving the scene of an accident for the period necessary to obtain assistance in responding to the accident, or to obtain necessary emergency medical care.
- 5.6 All testing required by this section shall be administered according to the standards outlined in Section 4.0.
21 DE Reg. 503 (12/01/17)
28 DE Reg. 228 (09/01/24)

6.0 Consequences of a Positive Test Result

- 6.1 The disciplinary measures contained within a contractor's or subcontractor's program for an employee who tests positive to a mandatory drug test must include at a minimum, all of the following:
 - 6.1.1 The employee is subject to an immediate suspension from any public works jobsite.
 - 6.1.2 The employee is not eligible for reinstatement by the contractor or subcontractor to any public works jobsite until 30 days after the employee tests negative on a seven drug panel plus alcohol test certified by a medical review officer.
 - 6.1.3 The employee is subject to unscheduled monthly random testing as per subsection 5.2.
 - 6.1.4 An employee who has tested positive for more than 1 drug test within a 3-year period shall be permanently banned from working at public works jobsites.

6.1.5 An employee who has tested positive for marijuana, a component of marijuana, or marijuana metabolites and is a registered qualifying patient shall be exempted from the disciplinary actions contained in this section unless:

6.1.5.1 The employee was impaired by marijuana at the jobsite.

6.1.5.2 Employment of the registered qualifying patient would cause the owner to lose monetary or licensing-related benefits under Federal law.

6.2 A contractor or subcontractor shall report the positive test result to the employee's professional licensing board, if applicable.

21 DE Reg. 503 (12/01/17)

7.0 Contractor and Subcontractor Certification of Compliance with Regulations

7.1 During the term of the contract:

7.1.1 During the term of the contract, contractors and subcontractors on the jobsite for more than 30 days shall maintain testing data that includes but is not limited to the data elements contained in subsection 7.1.2:

7.1.1.1 A contractor or subcontractor that is employed on the jobsite for less than 30 days shall not be subject to the reporting requirements contained in subsection 7.1.2 of this regulation, unless the owner specifies that such reporting is required in the invitation to bid or specifications relating to the work to be performed.

7.1.2 The data shall at a minimum contain the following elements:

7.1.2.1 The number of employees who worked on the jobsite during the previous month or quarter.

7.1.2.2 The number of employees subjected to random testing during the previous month or quarter.

7.1.2.3 The number of negative results and the number of positive results.

7.1.2.4 Action taken by the contractor or subcontractor on an employee who failed or tested positive to a random test.

7.1.3 Test results must be kept by a contractor or subcontractor for a minimum of 1 year subsequent to the date of close out of the public works project.

7.1.4 Any positive test result of an employee working on a public works jobsite including the employee name and action taken in response by a contractor or subcontractor must be reported by the contractor or subcontractor to the owner in writing within 24 hours of the contractor or subcontractor receiving the test results.

7.1.5 The owner shall have the right to periodically audit all contractor and subcontractor test results at the contractor or subcontractor's offices or by other means to make the data available for inspection by the owner.

7.1.6 The failure to comply with these reporting requirements may be considered a material breach of any agreement relating to the performance of work by the contractor or subcontractor.

21 DE Reg. 503 (12/01/17)

8.0 Penalties

8.1 A contractor or subcontractor on a large public works contract that fails to implement a mandatory drug testing program in accordance with this regulation or falsifies testing results shall be subject to the following sanctions:

8.1.1 Written warning (1st offense).

8.1.2 Prohibition from bidding on new public works jobs for a period not to exceed 3 months (2nd offense) and 1 year (3rd offense).

8.1.3 For subsequent offenses, debarment or bond revocation.

8.2 Notwithstanding any other provision of this regulation, if any failure to comply with the requirements of this regulation are particularly flagrant or egregious, the owner may seek a termination for cause, a temporary suspension, a determination that the contractor or subcontractor is not responsible, debarment or bond revocation, and any other statutory, common law, or equitable remedy.

19 DE Reg. 207 (09/01/15)

21 DE Reg. 503 (12/01/17)

21 DE Reg. 645 (02/01/18)

TITLE 19 LABOR
DELAWARE ADMINISTRATIVE CODE

28 DE Reg. 228 (09/01/24)

28 DE Reg. 326 (10/01/24)

SECTION 008115 – AFFIDAVIT OF CRAFT TRAINING

1. AFFIDAVIT OF CRAFT TRAINING

- 1.1 Form Affidavit of Craft Training (008115 attached).

(PROJECT NAME),
(PROJECT LOCATION)
(PROJECT OR CONTRACT NUMBER)

**AFFIDAVIT OF
CRAFT TRAINING COMPLIANCE**

We, the contractor, hereby certify that we and all applicable subcontractors will abide by the contractor and subcontractor craft training requirements outlined below for the duration of the contract. Craft training must be provided by a contractor and/or subcontractor for each craft on a project for which there are Delaware Department of Labor approved and registered training programs or, if the contractor and/or subcontractor meets the requirements under Title 29, Chapter 69, Section 6960A.(b)(1)c.1.-3., payment may be made in accordance with Title 29, Chapter 69, Section 6960A.(b)(1)d. A list of crafts for which there are approved and registered training programs is maintained by the Delaware Department of Labor and can be found at:

<https://laborfiles.delaware.gov/main/det/apprenticeship/DE%20Craft%20Training%20Occupation%20List%20Effective%20March%201%202022.pdf>. If you have questions regarding craft training programs, please submit all questions in writing to the Delaware Department of Labor at: apprenticeship@delaware.gov. ***This Affidavit of Craft Training Compliance must be submitted prior to contract execution.***

In accordance with Title 29, Chapter 69, Section 6960A.(a)(1), a contract relating to a public works project under § 6962 of Title 29 must include a craft training program for each craft in the project if at the time the contractor executes a public works contract, all of the following apply:

- a. A project meets the prevailing wage requirement under Section 6960 of Title 29.
- b. The contractor employs 10 or more total employees.
- c. The project is not a federal highway project, except for the project under Section 6962(c)(11) of Title 29.
- d. There is an apprenticeship program for a craft in the project on the list of crafts under Section 204(b)(2) of Title 19.

Pursuant to Title 29, Chapter 69, Section 6960A.(a)(2), ***a contractor must commit that all subcontractors provide craft training*** if paragraph (a)(1) of this section applies to the subcontractor. Failure to provide required craft training or payment on the project may subject the successful contractor and/or subcontractor(s) to penalties as outlined in Title 29, Chapter 69, Section 6960A.(d)(1)-(3).

Craft(s):

Contractor Name:

Contractor Address:

**Contractor Program
Registration Number(s)**

Or

Or

AFFIDAVIT OF CRAFT TRAINING COMPLIANCE (Rev 8/10/22)
00 81 15- Pg 2 of 2

SECTION 011100 - SUMMARY OF WORK

1. RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Sections, apply to work of this Section.

2. CONTRACTS

- A. The work will be performed under separate prime contracts managed by the Construction Manager.

3. ALTERATIONS & COORDINATION

- A. Contractor shall be responsible to coordinate their work with the work of others, including, but not limited to, the preparation of general coordination drawings, diagrams and schedules, and control of site utilization, from the beginning of activity, through project close-out and warranty periods.

4. KNOWLEDGE OF CONTRACT REQUIREMENTS

- A. The Contractor and his Subcontractors, Sub-subcontractors and material men shall consult in detail the Contract Documents for instructions and requirements pertaining to the Work, and at his and their cost, shall provide all labor, materials, equipment and services necessary to furnish, install and complete the work in strict conformance with all provisions thereof.
- B. The Contractor will be held to have examined the site of the Work prior to submitting his proposal and informed himself, his Subcontractors, Sub-subcontractors and material men of all existing conditions affecting the execution of the Work.
- C. The Contractor will be held to have examined the Contract Documents and modifications thereto, as they may affect subdivisions of the Work and informed himself, his Subcontractors, Sub-subcontractors and material men of all conditions thereof affecting the execution of the Work.
- D. The Scope of Work for the Contract is not necessarily limited to the description of each section of the Specifications and the illustrations shown on the Drawings. Include all minor items not expressly indicated in the Contract Documents, or as might be found necessary as a result of field conditions, in order to complete the Work as it is intended, without any gaps between the various subdivisions of work.
- E. The Contractor will be held to be thoroughly familiar with all conditions affecting labor in the area of the Project including, but not limited to, Unions, incentive pay, procurements, living, parking and commuting conditions and to have informed his Subcontractors and Sub-subcontractors thereof.

5. CONTRACT DOCUMENTS INFORMATION

- A. The Contract Documents are prepared in accordance with available information as to existing conditions and locations. If, during construction, conditions are revealed at variance with the Contract Documents, notify the Construction Manager immediately, but no more than three (3) days from the day the variance is first known. Failure to give timely notice shall operate to waive any claim Contractor might otherwise have for an adjustment to Contract Time or Sum as a consequence of such variance.
- B. The Specifications determine the kinds and methods of installation of the various materials, the Drawings establish the quantities, dimensions and details of materials, the schedules on the Drawings give the location, type and extent of the materials.
- C. Dimensions given on the Drawings govern scale measurements and large scale drawings govern small scale drawings, except as to anything omitted unless such omission is expressly noted on the large scale drawings.
- D. The techniques or methods of specifying to record requirements varies throughout text, and may include "prescriptive", "open generic/descriptive", "compliance with standards", "performance", "proprietary", or a combination of these. The methods used for specifying one unit of work has no bearing on requirements for another unit of work.
- E. Whenever a material, article or piece of equipment is referred to in the singular number in the Contract Documents, it shall be the same as referring to it in the plural. As many such materials, articles or pieces of equipment shall be provided as are required to complete the Work.
- F. Whenever a material, article or piece of equipment is specified by reference to a governmental, trade association of similar standard, it shall comply with the requirements of the latest publication thereof and amendments thereto in effect on the bid date.
- G. In addition to the requirements of the Contract Documents, Contractor's work shall also comply with applicable standards of the construction industry and those industry standards are made a part of Contract Documents by reference, as if copied directly into Contract Documents, or as if published copies were bound herein.
- H. Where compliance with two (2) or more industry standards, contract requirements, or sets of requirements is specified, and overlapping of those different standards or requirements establishes different or conflicting minimums or levels of quality, then the most stringent requirements, which are generally recognized to be also the most costly, is intended and will be enforced, unless specifically detailed language written into the Contract Documents clearly indicates that a less stringent requirement is to be fulfilled. Refer apparently equal but different requirements, and uncertainties as to which level of quality is more stringent, to Architect for decision before proceeding.
- I. Reference standards referenced directly in Contract Documents or by governing regulations have precedence over non-reference standards which are recognized in industry for applicability of

work.

- J. Contractor's bid is based on the complete set of Contract Documents including documents not specifically issued as part of the bid pack but referenced in same.

6. SCOPE OF WORK/GENERAL INFORMATION

- A. A Scope of Work for each contract to be awarded on the project follows in this section. When a Contract has been awarded to a Contractor, the successful Contractor will be listed after the title of the Contract. When no Contract has yet been awarded, no Contractor's name will be listed. Previous Scopes of Work include addendum changes.
- B. Contractor is responsible for performing the work listed in the Summary of Work for his contract. Contractor is also responsible for knowing the work that has been assigned to preceding contracts. No additional compensation or extension of time will be allowed a Contractor due to his ignorance of the work assigned to his Contract or to other contracts which may affect his work. The Contractor is responsible, however, for all items which are covered in the Specifications and Drawings relating to their Contract if not specifically mentioned in the Summary of Work.
- C. Roofing Contractor will provide on-site a source for temporary electric, temporary water and portable sanitation facilities only. It is each Contractor's responsibility to make the necessary connections, including all material for temporary electric and water. Please note that utility charges for office trailers will be the responsibility of the individual Contractors.
- D. Roofing Contractor will provide a dumpster on site for free use by Contractors to dispose of non-hazardous, common, work-related refuse. Clean-up is the responsibility of each Contractor. Clean up shall be performed on a daily basis. Contractors not complying will be advised in writing and back charged for all costs associated with the cleanup of their work.
- E. Contractors are reminded that there are limited storage areas available on site. Off-site storage will be the responsibility of each individual Contractor.
- F. Office trailer permits off site will be the responsibility of each individual Contractor. On site Contractor's field offices, one (1) per Contractor, if required, will be located as directed by the Construction Manager.
- G. Contractor will be prepared to discuss and submit a detailed project schedule seven (7) days after receipt of Notice to Proceed and to begin its submittal process. The Project Schedule is an integral part of this contract. Certain construction sequences and priorities must take place in order to meet the target dates. Concentrated work periods will occur and each Contractor is responsible to staff the project as required by the current Construction Schedule or as directed by the Construction Manager. Contractor will cooperate with the Construction Manager in planning and meeting the required sequences of work and Project Schedule as periodically updated by the Construction Manager.

-
- H. All bids must include insurance limits in accordance with Article 11 of the Section 007300 SUPPLEMENTARY CONDITIONS.
 - I. Hoisting, scaffolding and material handling is the responsibility of each Contractor, unless otherwise noted.
 - J. Contractor will be responsible for layout of its own work. The Construction Manager will provide benchmark and layout of the building line.
 - K. Contractor will be responsible to keep clean public roadways soiled by construction traffic on a daily basis. If cleaning is not done, the Construction Manager may perform the cleaning on an overtime basis and backcharge the Contractor responsible.
 - L. Contractor Scopes of Work and Schedule are interrelated. Familiarity with each is required.
 - M. The Construction Manager will provide testing services for soil, concrete and steel. Other testing as required by the Contract Documents will be in accordance with the technical specifications and/or the individual scope of work. Refer to Specification Section 004500 - QUALITY CONTROL.
 - N. Safety is the responsibility of each individual Contractor. The project will be governed under the guidelines of OSHA.
 - O. Inter-Contractor shop drawing distribution will be performed by the Construction Manager. Contractor is individually responsible for either coordinating his work with these distributed drawings or notifying the Construction Manager, in writing, of any discrepancies.
 - P. Coordination with other trades will be required. The Contractor will be required to attend periodic coordination meetings with other trades where requirements, conflicts and coordination issues will be discussed and resolved. Attendance when requested will be mandatory. If inter-Contractor coordination is not satisfactorily performed, the conflicting Contractors shall mutually share the cost to relocate and/or reinstall their work.
 - Q. Contractor shall submit a schedule of values to the Construction Manager prior to the submission of their first invoice for approval through Building Blok.
 - R. Contractor is expected to review and coordinate its Work with the complete set of Contract Documents, including all items noted as by his trade whether or not shown on that particular set of drawings. Documents are available at the site for review.
 - S. Contractor is responsible for obtaining all necessary permits required for his work, including street permits. Unless otherwise noted, building permit shall be secured by the Construction Manager. Any subcontractor who will be restricting access to street, right of way or adjacent property must notify the Construction Manager 48 hours in advance.
 - T. Contractor's License: Submit a copy of all business licenses required by local and state agencies.

- U. Contractor shall absorb, without additional compensation, any and all costs of working beyond normal hours to maintain job progress in accordance with the current construction schedule.
- V. No asbestos or PCB's in or on any material or equipment will be accepted or allowed on this project. All hazardous materials will be treated in accordance with all State and Federal regulations.
- W. Daily cleanup of the work is the responsibility of each individual Contractor which includes broom cleaning of their debris as required. Contractor will be individually back charged by the Construction Manager for clean up not satisfactorily performed by the Contractor.
- X. In the event asbestos is uncovered, the Contractor shall notify the Construction Manager of the areas requiring removal of asbestos. The Construction Manager shall then coordinate the removal with the Owner. Construction Manager to provide report of finding from roof investigation.
- Y. Project is to be constructed adjacent to and in existing buildings. Contractor shall exercise all due precautions to minimize noise, air pollution and any other construction hazards which in any way would cause discomfort or danger to the occupants of the existing building in the area.
- Z. Existing mechanical, electrical, plumbing, sprinkler, medical gas, fire alarm, etc. systems will be shut off and locked out by the Owner as required by the Work. Tie-in's and modifications to those systems will be performed by the specific Contractor associated with the work as indicated in the Contract Documents. Re-energizing and re-startup of all systems should be performed by the Owner.
- AA. The Safety Cable System shall not be altered or removed without a written request submitted to the Project Manager with a copy to the Field Manager. It shall be the responsibility of each and every Contractor that is removing or altering the Safety Cable System to maintain the fall protection safety provided by the safety cable and not leave the area unprotected. Each and every Contractor shall be responsible to re-install the Safety Cable System immediately after work is completed. Each and every Contractor shall be responsible to re-install the Safety Cable System in accordance to OSHA standards.
- AB. Normal work hours for this project are from 7:00 a.m. to 3:30 p.m. Any work to be performed outside of these hours must receive prior approval from the Construction Manager. Requests to work beyond normal work hours shall be submitted at least 48 hours prior.
- AC. Contractor is responsible for having a competent project superintendent/foreman on-site during all work performed under its contract.
- AD. In the event the Contractor has non-English speaking employees or subcontractors on the project, they shall have a superintendent or foreman on site, at all times, who speaks English and can communicate with Contractor's employees. Should the Contractor fail to meet this requirement, at any time, Construction Manager may direct all Work to stop until the proper

supervision is on site. The Contractor will be responsible for maintaining the project work schedule and make up at its own expense, any delay to the Schedule resulting from the work stoppage.

AE. **Punch List Procedures:** Contractor shall be given a copy of the punch list with his appropriate work identified. Contractor shall have nine (9) calendar work days to complete its punch list work. On the 10th day or as determined by the Construction Manager, the Construction Manager shall employ other contractors, as required, to complete any incomplete punch list work and retain from the appropriate Contractors retainage all costs incurred.

AF. Contractor shall provide the necessary safety barricades and railings required to complete their work and comply with all OSHA, local code and contract specifications.

AG. **Liquidated Damages:** Contractors are responsible to provide sufficient manpower and equipment and materials to complete work as shown in the project schedule. Any delays in completing a phase of work due to issues caused by a contractor will be subject to a penalty of \$2,000 per calendar day that the work is not completed following the scheduled completion date of that phase of work.

AH. **Prohibition of Using Photographs on EDiS Projects:** The Contractor and all associated subcontractors agrees to not issue any news release or advertising pertaining to the Work or the Project, including references to the Project on the Contractor's/subcontractor website or other social media outlets, without obtaining EDiS' prior written approval, in each instance. The Contractor, for itself, its employees, vendors and subcontractors, agrees to not use the name of the Owner, the Project, EDiS or any photographs, videos, or other images of the Project in connection with any of Contractor's business promotion activities, advertising, website, social media outlets, or operations, without EDiS' prior written approval in each instance.

CONTRACT NO. A-01 – ROOF REPLACEMENT

A. Work included in this contract consists of, but is not necessarily limited to, all labor, materials and equipment for:

- Technical Specification Sections:

Division 0	Bidding and Contract Requirements
Division 1	General Requirements
Section 024119	Selective Demolition
Section 061053	Rough Carpentry Roofing
Section 075300	EPDM Thermoset Single-Ply Roofing
Section 076201	Sheet Metal Flashing and Trim
Section 077113	Manufactured Copings
Section 079200	Joint Sealants
Section 086300	Metal Framed Skylights
Section 264115	Reroofing Specification for Lightning Protection Systems
Addendums	

This contract also includes, but is not necessarily limited to, all labor, materials and equipment for the following:

1. Provide EPDM roofing system, including rigid and tapered insulation and all related accessories.
2. This contractor shall carefully review the edge of roof details to determine if the roof can be placed before the exterior wall assembly is complete.
3. Caulking related to roofing, flashing and roof accessories.
4. The Contractor shall inspect all existing equipment curbs for rooftop units prior to removal of existing roofing materials. This inspection shall include:
 - a. Documentation of current curb heights (noted to be approximately 6-8 inches)
 - b. Verification of equipment attachment to curbs
 - c. Identification of all conduit, pipe, and other penetrations through curbs
5. During removal of existing roofing materials down to the metal deck, Contractor shall:
 - a. Exercise caution around all equipment curbs and associated penetrations
 - b. Remove all deteriorated sealant at conduit penetration points
 - c. Document any damaged or deteriorated conditions of the curbs or penetrations
 - d. Notify Owner's representative of any conditions requiring structural repair
6. Following insulation replacement and prior to new roofing installation, Contractor shall:
 - a. Verify that new insulation height combined with existing curb height meets code requirements (minimum 12 inches above finished roof surface)
 - b. Install additional curb height extensions if required to meet minimum height requirements
 - c. Repair or replace any damaged flashing or sheet metal components

7. For all conduit penetrations entering the roof membrane, Contractor shall:
 - a. Install proper flashing boots and sealants per manufacturer's specifications
 - b. Ensure watertight conditions at all penetration points
 - c. Pay particular attention to conduits penetrating curbs near the roof line
8. The Contractor shall comply with all roofing manufacturer's requirements for penetration flashings to maintain warranty coverage.
9. The Contractor shall coordinate the temporary shut-off and safe disconnection of the existing natural gas service to all connected appliances prior to commencing roof work. This coordination shall include:
 - a. Notification to Owner at least 72 hours prior to planned gas service interruption
 - b. Scheduling work to minimize disruption to building operations
 - c. Compliance with all applicable gas utility company requirements for service interruption
10. Contractor shall temporarily remove and safely store existing gas piping as necessary to facilitate the installation of the new roof system. All removal and reinstallation work shall be performed by qualified personnel in accordance with all applicable codes and regulations.
11. Following roof installation, Contractor shall reinstall gas piping with proper support blocks that maintain a minimum clearance of 6 inches above the finished roof surface. Support blocks shall be spaced according to code requirements and manufacturer recommendations to prevent sagging or deflection.
12. The Contractor shall document all gas piping modifications with as-built drawings to be provided to the Owner upon completion of the work.
13. All gas piping work shall comply with local building codes, the International Fuel Gas Code, and NFPA 54 (National Fuel Gas Code).
14. Flashing of the roof drains shall be by the Roofing Contractor. Openings for the roof drains in the roofing materials shall be cut by the Roofing Contractor.
15. The Contractor shall address all drainage issues identified on the existing roof surface prior to installation of the new roofing system. This shall include:
 - a. Removal of all existing ballast material, with particular attention to areas where ballast migration has occurred
 - b. Documentation of all exposed membrane areas for review by the Owner's representative
 - c. Identification and marking of all low points, ponding areas, and inadequate slope conditions
16. Contractor shall implement corrective measures to ensure proper drainage on the new roof system, including:
 - a. Installation of tapered insulation to create positive drainage toward roof drains
 - b. Proper slope (minimum 1/4" per foot) throughout the roof area to eliminate ponding
 - c. Reinforcement of areas around mechanical curbs to prevent recurring water accumulation

-
17. The Contractor shall inspect all existing roof drains and associated components for damage or deterioration and shall:
 - a. Clean all drains, strainers, and piping to ensure unrestricted water flow
 - b. Replace damaged drain components as directed by the Owner's representative
 - c. Ensure proper integration of new roofing membrane with existing drain assemblies
 18. The Contractor shall coordinate with the Owner's roof consultant regarding findings from infrared assessment of the roof, though such findings are not anticipated to materially impact this scope.
 19. Upon completion of the new roof installation, Contractor shall demonstrate proper drainage by water testing all roof sections to verify positive drainage and the absence of ponding.
 20. Furnish and Install blocking and metal parapet coping.
 21. Existing roof hatches to be removed and reinstalled after necessary continuous blocking is installed, see detail 2 on A30-2, are the responsibility of the roofing contractor.
 22. Furnish and installation of walk pads are the responsibility of this contractor, see detail 3 on A30-2 for typical details.
 23. Perform cutting, patching and maintenance of temporary patch for work performed on existing roofs intended to be re-roofed as part of this work.
 24. Furnish and install all metal drip edges necessary for roofing replacement.
 25. Furnish and install new roof curbs and continuous blocking where needed and required by contract documents. Roof top units and other equipment to be lifted out of the way of work being completed.
 26. Provide expansion joints that are integral to the roof.
 27. Provide permanent patching of existing roofing systems at areas of demolition. Demolition of roof drains, mechanical and electrical equipment shall be performed by others. All patching shall conform to original warranty requirements and documents.
 28. The Contractor shall remove and replace all existing skylights, including:
 - a. Documentation of existing dimensions and specifications
 - b. Coordination with roofing work
 - c. Interior protection during work
 29. Removal shall include:
 - a. Complete removal of glazing, framing, and flashings
 - b. Proper disposal of materials
 - c. Temporary weatherproofing if needed

30. New skylight installation shall include:
 - a. Angled continuous blocking around existing curbs for proper drainage
 - b. Modification of existing curbs as needed for watertight integration
 - c. New skylights of similar size and configuration
 - d. Double-glazed, tempered safety glass with thermal break framing
31. Waterproofing requirements:
 - a. Ice and water shield membrane at all curb locations
 - b. Counterflashing per manufacturer specifications
 - c. Reinforced corners to prevent stress cracks
32. Contractor shall:
 - a. Submit product data, samples, and shop drawings for approval
 - b. Provide multiple skylight manufacturer options for consideration
 - c. Supply minimum 10-year warranty documentation
 - d. Perform water testing after installation.
33. Visual inspection of Gutters, downspouts and splash pans and repair to any damage or necessary replacement is the responsibility of this contractor.
34. Metal scuppers and related work necessary for roof replacement is the responsibility of this contractor.
35. Continuous wood blocking shall be provided by this contractor.
36. Flashing and sheet metal is the responsibility of this contractor.
37. Flashing Summary:
 - a. Thru wall and cavity flashing shown on drawings and needed repair after inspection shall be by the Roofing Contractor.
38. Provide labor and materials to perform the work related to all carpentry.
39. All rough carpentry related to the exterior skin of the building including wood nailers and continuous blocking and exterior sheathing.
40. All field trimming required to adjust to existing conditions.
41. Anchoring devices, fasteners, inserts and other related items associated with the installation of the above items.
42. Provide all labor, material, trucking, equipment, hoisting, scaffolding, power, temporary facilities, supervision, layout, clean up, etc. for the complete performance of all demolition work related to roof replacement scope here in.
43. This Contractor shall notify the Construction Manager immediately if hazardous materials (i.e. asbestos, lead, PCB's, etc.) are uncovered. At that time, all work in the affected area will be

stopped until proper removal can be completed by others (i.e. hazardous material abatement contractor).

44. This Project is to be constructed adjacent to existing buildings, this Contractor shall exercise all due precautions to minimize noise, air pollution and any other construction hazards which in any way would cause discomfort or danger to the occupants of the existing buildings in the area.
45. This Contractor shall clean and make presentable the job site daily. This Contractor shall collect and remove from the site daily all rubbish, scrap and other debris resulting from its operations.
46. This Contractor shall comply with all Federal, State and local laws requiring noise control and hours which work is to be conducted. Mufflers, "whisperized" compressors, etc., shall be used as required for compliance with laws and ordinances throughout the course of the Work.
47. This Contractor is aware of the structural capacities of various portions of the structure. Cranes, materials, deliveries and material storage, shall not exceed rated capacities without this Contractor taking appropriate steps to compensate for the imposition of loads which may exceed the design criteria and which are imposed solely by this Contractor's operations.
48. This Contractor shall visit the site of the proposed work, fully acquaint and familiarize himself with the conditions as they exist and the character of the operations to be carried out under the proposed Contract, and make such investigation as he may see fit so that he shall fully understand the facilities, physical conditions and restrictions affecting the work under the Contract. Claims for additional compensation and/or extensions of time because of Contractor's failure to familiarize himself with all conditions which might affect the work shall not be allowed.
49. This Contractor, in the performance of the Work under his subcontractor, shall maintain all required means of egress from the existing buildings and alter such stairs, platforms and fire escapes as required to satisfy all agencies having jurisdiction.
50. Any damage to public property, private property, or to utilities due to this contractors operations, or the Contractor's neglect, shall be corrected by this Contractor, in a manner approved by the Owner and the parties whose property has been damaged, all at no additional cost to the Owner.
51. All equipment, materials and debris shall be regularly removed by this Contractor from the Site as work progresses in such manner as not to create a nuisance, and shall be disposed of by this Contractor at his own expense, at locations to be determined by this Contractor. Permits required in connection with the disposal of the materials shall be obtained by this Contractor. Disposal shall be in accordance with all Federal, State and local laws, rules, codes, orders and regulations.
52. CONTRACT ALLOWANCE: An allowance of \$5,000 is established for potential installation of supplemental curb flashing details where conduits penetrate curbs near the roof line.
53. CONTRACT ALLOWANCE: An allowance of \$15,000 is established for potential modifications to the existing gas piping network that may be required due to changes in roof elevation resulting

from the new tapered insulation layout.

- 54. CONTRACT ALLOWANCE: An allowance of \$7,500 is established for potential replacement of deteriorated metal deck.
- 55. CONTRACT ALLOWANCE: An allowance of \$7,500 is established for pressure treated wood blocking installation above and beyond the contract scope here in.
- 56. CONTRACT ALLOWANCE: An allowance of \$15,000 is established for removal and reset of select mechanical equipment.

END OF SECTION

SECTION 012100 - ALLOWANCES

1. RELATED DOCUMENTS

- A. The general provisions of the Contract, including the Conditions of the Contract (General, Supplementary and other Conditions, if any) and Division 1 as appropriate, apply to the Work specified in this Section.
- B. Refer to provisions in AIA Document A232 – 2019 EDITION, GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION, CONSTRUCTION MANAGER AS ADVISOR EDITION, for requirements in addition to those specified in Division 1.
- C. Refer to Scope Information Sheets for all contracts bound in the Project Manual under Section 011100 - SUMMARY OF WORK. The Scope Information Sheets describe generally the work included in each contract, but the work is not necessarily limited to that described.
- D. For work being constructed under separate prime contracts, provisions of this Section apply to each contract being bid.
- E. Include in the Contract Sum all lump sum and unit cost allowances stated in the Contract Documents.
- F. Designate in the construction progress schedule the delivery dates for products specified under each allowance.
- G. Designate in the Schedule of Values the quantities of materials required under each unit cost allowance.

2. ALLOWANCES FOR PRODUCTS

- A. The amount of each allowance includes:
 - 1. The cost of the product or labor to the Contractor or Subcontractor, less any applicable trade discounts.
 - 2. Delivery to the site.
 - 3. Labor required under the allowance, only when labor is specified to be included in the allowance. If labor is not specified to be included in the allowance, it shall be included in the Contractor's bid and in the resulting Contract Sum.
 - 4. Applicable taxes.
 - 5. Profit and overhead.
- B. In addition to the amount of each allowance, include in the Contract Sum the Contractor's costs for:

1. Handling at the site; including unloading, uncrating and storage.
 2. Protection from the elements and from damage.
 3. Labor for installation and finishing, except where labor is specified to be a part of the allowance.
 4. Other expenses required to complete the installation.
 5. Contractor's and Subcontractor's overhead and profit.
- C. Refer to Scope Information Sheets under Section 011100 - SUMMARY OF WORK for the amount of each lump sum allowance and for work specified in the specification sections listed below.

Contract A-01 Roof Replacement:

024119	SELECTIVE DEMOLITION
061053	ROUGH CARPENTRY ROOFING
075300	EPDM THERMOSET SINGLE-PLY ROOFING
076201	SHEET METAL FLASHING AND TRIM
077113	MANUFACTURED COPINGS
079200	JOINT SEALANTS
086300	METAL FRAMED SKYLIGHTS
264115	REROOFING SPECIFICATION FOR LIGHTNING PROTECTION SYSTEMS

1. CONTRACT ALLOWANCE: An allowance of \$5,000 is established for potential installation of supplemental curb flashing details where conduits penetrate curbs near the roof line.
 2. CONTRACT ALLOWANCE: An allowance of \$15,000 is established for potential modifications to the existing gas piping network that may be required due to changes in roof elevation resulting from the new tapered insulation layout.
 3. CONTRACT ALLOWANCE: An allowance of \$7,500 is established for potential replacement of deteriorated metal deck.
 4. CONTRACT ALLOWANCE: An allowance of \$7,500 is established for pressure treated wood blocking installation above and beyond the contract scope here in.
 5. CONTRACT ALLOWANCE: An allowance of \$15,000 is established for removal and reset of select mechanical equipment.
3. ADJUSTMENT OF COSTS
- A. Should the net cost be more or less than the specified amount of the allowance, the Contract Sum will be adjusted accordingly by Change Order.

1. For products and labor specified under a unit cost allowance, the unit cost shall apply to the quantities actually used with a nominal allowance for waste, as determined by receipted invoices, or by field measurement.
- B. At Contract closeout, reflect all approved changes in Contract amounts in the final statement of accounting.

END OF SECTION

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

ALLOWANCE AUTHORIZATION

Project:

Architect:

Project No.

Contractor:

AAA No.:

Initiation Date:

The Allowance is allocated as follows:

Total original Contract Allowance was:	\$
Amount of Contract Allowance Access previously authorized:	\$
Adjusted Contract Allowance prior to this authorization is:	\$
The amount of available Allowance will Decrease by this Access Authorization:	\$
The remaining Contract Allowance, after this Access Authorization will be:	\$

Recommended by:

Architect

By (Signature): _____

Date: _____

Accepted by:

Contractor

Approved by:

Owner

By (Signature): _____

Date: _____

By (Signature): _____

Date: _____

SECTION 012200 - UNIT PRICES

1. GENERAL PROVISIONS

- A. The general provision of the Contract, including the Conditions of the Contract (General, Supplementary and other conditions, if any) and Division 1 as appropriate, apply to the Work specified in this Section.
- B. Refer to provisions in AIA Document A232 – 2019 EDITION, GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION, CONSTRUCTION MANAGER AS ADVISOR EDITION, for requirements in addition to those specified in Division 1.
- C. For work being constructed under separate prime contract, provisions of this Section apply to each contract being bid.

2. BASE BID

- A. The Base Bid shall consist of all work shown or specified in the Contract Documents, exclusive of any Additive Unit Prices specified herein.
- B. The Base Bid shall include all work in any Subtractive Unit Prices specified herein.

3. UNIT PRICES

- A. State in the Bid Form the amount to be added to (or subtracted from) the Base Bid per unit of measurement for each Unit Price specified. State this amount to include all overhead and profit. No surcharge in addition to the Unit Price listed will be permitted.
- B. See Section 002113, INSTRUCTIONS TO BIDDERS for related information.
- C. For description of Unit Prices requested, refer to the specification. The method of stating the Unit Prices is described in the Bid Form.
- D. Where both add and deduct unit prices are requested, there shall not be more than a 10% variation between the two.

4. APPLICATION OF UNIT PRICES

- A. Unit prices stated in the Bid Form will apply from the time the Bid is submitted until Contract completion.

5. MEASUREMENT OF QUANTITIES

- A. Quantities shall be determined by field measurement by contractor personnel and as verified by the Construction Manager.

- B. At the Contractor's option, and at his expense, measurement may be made by a registered surveyor.

6. LIST AND DESCRIPTION OF UNIT PRICES

- Unit Price No. 1: RA-01 EPDM Roofing & Insulation (per square foot)
- Unit Price No. 2: RA-02 EPDM Roofing & Insulation (per square foot)
- Unit Price No. 3: RA-03 EPDM Roofing & Insulation (per square foot)
- Unit Price No. 4: RA-04 EPDM Roofing & Protection Board (per square foot)
- Unit Price No. 5: Continuous 2x Pressure Treated Wood Blocking (per linear foot)
- Unit Price No. 6: Roof Hatch (per unit)
- Unit Price No. 7: Metal deck replacement (per square foot)

END OF SECTION

SECTION 012300 - ALTERNATES

1. GENERAL PROVISIONS

- A. The general provisions of the Contract, including the Conditions of the Contract (General, Supplementary and other conditions, if any) and Division 1 as appropriate, apply to the Work specified in this Section.
- B. Refer to provisions in AIA Document A232 – 2019 Edition, GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION, CONSTRUCTION MANAGER AS ADVISOR EDITION, for requirements in addition to those specified in Division 1.
- C. For work being constructed under separate prime contracts, provisions of this Section apply to each contract being bid.

2. BASE BID

- A. The Base Bid shall consist of all Work shown or specified in the Contract Documents, to which Work may be added or from which Work may be deleted for sums stated in Alternate Bids (if any are required to be stated in the bid).
- B. The Base Bid shall include all work in any Subtractive Alternates specified herein.

3. ALTERNATES

- A. State in the Bid Form, where applicable, the amount to be added to or deducted from the amount of the Base Bid for each Alternate specified.
- B. See Section 002113 - INSTRUCTIONS TO BIDDERS for related information.
- C. The description of Alternates contained herein is in summary form. Detailed requirements for materials and execution shall be as specified in other sections and as shown on drawings.

Alternate No. 1: RA-04 - ROOF RECOVER

State on the Bid Proposal Form a price to be added to the Base Bid for all work related to this alternate.

Name of Contract: Roofing Replacement
Contract No. A-01

- 1. The Contractor shall furnish and install a complete EPDM fully-adhered roofing system with a manufacturer's 20-year warranty. This system shall include:
 - a. 60-mil Sure-Seal black EPDM membrane with factory-applied tape seam
 - b. Bonding adhesive as required by manufacturer for full adherence
 - c. All necessary flashings, termination bars, and accessory materials for a complete installation

2. Contractor shall install ½" protection board mechanically fastened as required over the existing EPDM and insulation. Protection board fasteners shall:
 - a. Provide minimum ¾" penetration through the existing concrete roof deck
 - b. Be of appropriate type for concrete applications
 - c. Be verified by Contractor for proper length based on actual roof thickness
3. Existing roof assembly shall remain in place and be prepared to receive the new roof recover system. Preparation shall include:
 - a. Coordination with demolition sheets and other project documents
 - b. Repair of any damaged or deteriorated areas of the existing roof
 - c. Removal of loose or unsecured material from the existing surface
4. Prior to application of adhesive, Contractor shall thoroughly clean the substrate using:
 - a. Compressed air
 - b. Vacuum equipment
 - c. Hand or power brooms
5. Following cleaning and prior to adhesive application, Contractor shall:
 - a. Remove all dust, loose dirt, and debris from the roof surface
 - b. Prime the substrate as required by the manufacturer
 - c. Verify substrate is dry and suitable for adhesive application
6. All installation work shall be performed in strict accordance with:
 - a. Manufacturer's written installation instructions
 - b. Approved shop drawings and project details
 - c. Industry standards and best practices for EPDM roofing systems
7. Upon completion, Contractor shall:
 - a. Arrange for manufacturer's inspection of the installed system
 - b. Provide Owner with manufacturer's 20-year warranty documentation
 - c. Remove all construction debris and excess materials from the project site
8. See Detail 3/A11-3 and RA-04/A10-1 for description of roof recovery installation

END OF SECTION

SECTION 012600 - CHANGE ORDER PROCEDURES

1. GENERAL

- A. The general provisions of the Contract, including the Conditions of the Contract (General, Supplementary and other Conditions, if any) and Division 1 as appropriate, apply to the Work specified in this Section.
- B. Refer to provisions in AIA Document A232 – 2019 EDITION, GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION, CONSTRUCTION MANAGER AS ADVISOR EDITION, for requirements in addition to those specified in Division 1.
- C. The Construction Manager is responsible for processing all change orders. Each request will be assigned a change order request (COR) number. The Change Order Request & Execution Form will be initiated via the web-based project management system (Building Blok) used by the CM.
- D. It is to be clearly understood that no extra work shall commence without an approved written and executed change order from the Owner.

2. INITIATING A CHANGE ORDER

- A. Specific changes initiated by the Owner, Architect, Construction Manager (CM) or Contractor will be processed as follows:
 - 1. The Owner will authorize the Architect to prepare sufficient documents to establish an accurate price. These documents to be forwarded to the Construction Manager and Owner “for pricing only, not authorized for construction.” The Construction Manager will develop the estimate (within 2 weeks) showing a breakdown by trades with all trade contractor quotes. The Owner will approve or reject the change request within two (2) weeks. If the Owner elects to proceed with the change, the Construction Manager will prepare formal change orders to the various trade contractors involved in the change and reference in all formal change orders the original change order request number.
 - 2. Field Change: Contractor shall immediately notify the Construction Manager of a change due to field conditions or site conditions. If documents cannot be prepared for pricing due to schedule constraints, the Construction Manager will make every effort in estimating the field change. If the Owner and Construction Manager agree that certain field changes should be handled on a time and material basis, the Construction Manager will closely monitor the Contractor's labor and material affecting this change. At the completion of the work a formal change order will be issued.
 - 3. Contractor Change: If a Contractor initiates a change order for work not included in the Contract, the Construction Manager and Architect will research the validity of the request, verify quantities and pricing and submit to the Owner for approval on a change order request.

-
- B. The additional cost, or credit to the Owner resulting from a change in the Work shall be by mutual agreement of the Owner, Contractor, Construction Manager and the Architect.

3. PROCESSING A CHANGE ORDER

- A. The Contractor will fill in the Change Order Request & Execution Form (COREF) with a brief description of the change, any time extension, and cost changes.
- B. The Contractor will attach to the COREF copies of the written quotations from the trade contractors, Contractors, and suppliers. The Labor Detail Sheet and the Change Order Detail forms must be added as an attachment to the COREF. The Contractor and each sub-tier contractor (as applicable) must fill out the Labor Detail Sheet and Change Order Detail Sheet. Samples of these forms are attached.
- C. In all cases, this cost or credit shall be based on the "DPE" wages required and the "invoice price" of the materials/equipment needed.
- D. "DPE" shall be defined to mean "direct personnel expense". Direct payroll expense includes direct salary plus customary fringe benefits (prevailing wage rates) and documented statutory costs such as workman's compensation insurance, FICA, and unemployment insurance.
1. "Fringe Benefit" is any medical, life or disability insurance, paid time off, etc.
 2. "Worker's Compensation" is the insurance required for injuries including medical leave, etc.
 3. "FICA" is the costs association with Social Security and Medicare insurance.
 4. "Unemployment insurance" is the cost associated with the governmental assessment for employee's unemployment benefits.
- E. "Invoice price" of materials/equipment shall be defined to mean the actual cost of materials and/or equipment that is paid by the Contractor (or Subcontractor) to a material distributor, direct factory vendor, store, material provider, or equipment leasing entity.
- F. In addition to the above, the Contractor is allowed markup for overhead and profit on additional work performed as outlined in Specification Section 012613, Contractor Compensation.
- G. Building Blok Procedures: The Contractor will submit all change order requests and supporting documentation via the Building Blok web-based project management system. Each Contractor will be issued a unique login and password. Each contractor must submit the information as follows:
1. Create a new change order, from your "To-Do List" by clicking on the "Create Issue" tab in the upper right corner and select "Change Order Request".
 2. The Contractor will enter a brief description of the change in the "Summary" block. A

detailed description of the change will be entered in the "Description of Change" block, to include any changes to documents or time extension. The cost of the change will be entered in the "Total Cost Change" block.

3. The Labor Detail Sheet and the Change Order Detail forms must be added as an attachment to the request. The Contractor and each sub-tier contractor (as applicable) must fill out the Labor Detail Sheet and Change Order Detail Sheet. Samples of these forms are included behind this section. In addition to these forms, the Contractor also must attach any material and equipment rental quotations. All of these documents should be scanned and saved as a PDF file. Click on the "Browse" box to upload the file. Be sure to wait until Building Blok tells you the file was "Uploaded Successfully".
4. Once the information is entered on the form and the proper attachments are uploaded, the contractor will click "Save". The Contractor will be prompted to enter their password to approve an electronic signature. Once you save the request you will have an opportunity to check it before submitting it to the CM. After you verify the COREF is correct click "Recommend Approval" to submit the change request to the CM. The Contractor will then be prompted to re-enter the password to approve an electronic signature and complete the submission request. Click on "Home" in the upper left corner to make sure the change order does not appear on your To-Do List.
5. The Change Order Request will then be reviewed by the CM Project Manager and Recommended for Approval, Rejected, or returned to the Contractor for additional information. Once the Construction Manager, Owner, and Architect have approved the request all parties will receive an email from Building Blok notifying them that a fully executed Change Order and Contract Recalculation Form can be downloaded from Building Blok. Hard copies of the executed change order and recalculation form will not be provided by the CM.

It is to be clearly stated that no extra work shall commence without an approval from the Owner or Construction Manager or Owner's representative.

END OF SECTION



CHANGE ORDER REQUEST & EXECUTION FORM

110 South Poplar Street
Suite 400
Wilmington, DE 19801

Tel. 302-421-5700
Fax 302-421-5715

DATE:
CONTRACT:
CONTRACTOR:

PROJECT NAME:
REQUEST NUMBER:
CHANGE ORDER NUMBER:
STATE PO NUMBER:

The following is a summary of the request submitted by the contractor as described above. All supporting documents have been attached and described herewith. This summary shall contain a total amount of compensation requested by the contractor as well as any request for an extension in contract time. It shall be understood that the amounts described below shall remain valid for a period of sixty days from the date described above unless otherwise stated.

A detailed breakdown of Labor, material, equipment, and subcontract costs must be attached to be considered for review.

1. Summary Description(s):
2. Changes to the Contract Drawings:
3. Changes to the Project Manual:
4. Total Cost Change:
5. Total Time Change:

REVIEWED																						
This request has been reviewed and ____approval____disapproval is recommended by:																						
Name	Title	Date																				
APPROVED																						
This change order request is not approved until executed by all parties bound by a contractual relationship. Upon execution it shall represent a modification to the agreement and is subject to all terms and conditions of the contract documents.																						
<table style="width: 100%; border: none;"><tr><td style="width: 50%; vertical-align: top; border-bottom: 1px solid black; padding-bottom: 5px;">Contractor:</td><td style="width: 50%; vertical-align: top; border-bottom: 1px solid black; padding-bottom: 5px;">Architect:</td></tr><tr><td style="vertical-align: top; padding-bottom: 5px;">Signed By:</td><td style="vertical-align: top; padding-bottom: 5px;">Signed By:</td></tr><tr><td style="vertical-align: top; padding-bottom: 5px;">Title:</td><td style="vertical-align: top; padding-bottom: 5px;">Title:</td></tr><tr><td style="vertical-align: top; padding-bottom: 5px;">Date:</td><td style="vertical-align: top; padding-bottom: 5px;">Date:</td></tr><tr><td colspan="2" style="border-top: 1px solid black; padding-top: 5px;">EDiS Company</td><td style="border-top: 1px solid black; padding-top: 5px;">Owner:</td></tr><tr><td style="vertical-align: top; padding-bottom: 5px;">Signed By:</td><td colspan="2" style="vertical-align: top; padding-bottom: 5px;">Signed By:</td></tr><tr><td style="vertical-align: top; padding-bottom: 5px;">Title:</td><td colspan="2" style="vertical-align: top; padding-bottom: 5px;">Title:</td></tr><tr><td style="vertical-align: top; padding-bottom: 5px;">Date:</td><td colspan="2" style="vertical-align: top; padding-bottom: 5px;">Date:</td></tr></table>			Contractor:	Architect:	Signed By:	Signed By:	Title:	Title:	Date:	Date:	EDiS Company		Owner:	Signed By:	Signed By:		Title:	Title:		Date:	Date:	
Contractor:	Architect:																					
Signed By:	Signed By:																					
Title:	Title:																					
Date:	Date:																					
EDiS Company		Owner:																				
Signed By:	Signed By:																					
Title:	Title:																					
Date:	Date:																					



CHANGE ORDER DETAIL FORM

(Provided by contractor, subcontractor or sub tier contractor)

DATE SUBMITTED:

CONTRACT:

CONTRACTOR:

PROJECT NAME: Polytech School High School

CHANGE ORDER REQUEST #:

LABOR SECTION

TRADESMAN(s):	LABOR HOURS	RATE (per schedule)	SUBTOTAL
Subtotal			

MATERIAL SECTION

MATERIAL:	QUANTITY	UNIT COST	SUBTOTAL
Subtotal			

EQUIPMENT SECTION

EQUIPMENT:	QUANTITY	UNIT COST	SUBTOTAL
Subtotal			

SUBTOTAL	
SUBCONTRACTOR/ SUB TIER*	
OH & PROFIT (10% on sub/sub tier only))	
BOND COST	
OH & PROFIT (15% on own work)	
GRAND TOTAL	



LABOR DETAIL FORM

(Provided by contractor, subcontractor, or sub-tier contractor)

DATE:

CONTRACT:

CONTRACTOR:

PROJECT NAME: Polytech High School

CHANGE ORDER REQUEST #:

CLASSIFICATION:			
Base Wage Rate:			
Health Insurance			
Holidays			
Sick Days			
Life Insurance			
Disability Insurance			
Dental Insurance			
Company Vehicle			
401K			
Education			
Other (<i>specify below</i>)			
Subtotal			
Posted Prevailing Rate			
FICA (Social Security & Medicare)			
SUTA (State Unemployment)			
FUTA (Federal Unemployment)			
General Liability Insurance			
Worker's Compensation			
Total Wage Rate			

SECTION 012613 - CONTRACTOR COMPENSATION

1. GENERAL

- A. The Contractor agrees to perform any additional Work, for the net cost of materials and labor (including wages paid, payroll taxes, and all insurance) plus the following percentage for all of his overhead and profit, which includes Field Supervision:

The percentages to be added or allowed for any Work change involving both added Work and omitted Work shall be applied only to the net difference in cost.

1. 15% mark-up (10% overhead and 5% profit) by the Contractor on Work performed by his own forces.
 2. For work done by a Subcontractor, 10% for subcontractor overhead and 5% for subcontractor profit to which the Contractor may add 7.5% for his overhead and profit combined.
 3. Contractor mark-up shall include supervision, home and field overhead, all self-owned small tools and equipment.
- B. When the Contractor is directed to perform overtime work at the CM (Owner) expense to accelerate contractual work, the cost for same shall only be the actual premium costs incurred by the Contractor.

END OF SECTION

SECTION 012900 - PAYMENT PROCEDURES

1. GENERAL PROVISIONS

- A. The general provisions of the Contract, including the Conditions of the Contract (General, Supplementary and other conditions, if any) and Division 1 as appropriate, apply to the Work specified in this Section.
- B. Refer to provisions in AIA Document A232 - 2019 Edition, GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION, CONSTRUCTION MANAGER AS ADVISOR EDITION, for requirements in addition to those specified in Division 1.
- C. For work being constructed under separate prime contracts, provisions of this Section apply to each contract being bid.

2. REQUIREMENTS INCLUDED

- A. Submit Applications for Payment to Construction Manager in accordance with the schedule and procedures established in the Contract Documents.

3. RELATED REQUIREMENTS

- A. Owner-Contractor Agreement.
- B. Conditions of the Contract: Article 9 PAYMENTS AND COMPLETION.
- C. Section 01 31 13: Project Coordination Meetings
- D. Section 01 33 00: Submittal Procedures
- E. Section 01 77 00: Closeout Procedures

4. FORMAT AND DATA REQUIRED

- A. Submit itemized applications typed on AIA Document G702/CMA, Application and Certificate for Payment, and Continuation Sheet G703, examples of which will be furnished to the Contractor at the Pre-Construction meeting.
- B. Provide itemized data on Continuation Sheet
 - 1. Format, schedules, line items and values: Duplicates of those of the schedule of values previously accepted by the Construction Manager.

5. PREPARATION OF APPLICATIONS FOR PROGRESS PAYMENTS

- A. Form: AIA Document G702/CMA

1. Fill in required information, including that for Change Orders executed prior to date of submittal of application.
2. Fill in summary of dollar values to agree with respective totals indicated on Continuation Sheets.

B. Continuation Sheets

1. Line items of components of Work will be subject to Owner's review and approval under the Provisions of Section 013300 - SUBMITTALS, and the General Conditions. Continuation Sheets shall follow Schedule of Values submitted at the start of the job.
2. Fill in total list of all scheduled components of Work, with item number and scheduled dollar value for each item. Fill in values of work completed in the period.
3. Fill in dollar value in each column for each scheduled line item when work has been performed or products stored; round off values to nearest dollar.
4. List each Change Order executed prior to date of submission, at the end of the Continuation Sheets; list by Change Order Number, and description, as for an original component item of work.
5. Contractor is to include a line item for "Closeout Documents" equaling 3.5% of their contract value.

6. PREPARATION OF APPLICATION FOR FINAL PAYMENT

- A. Fill in Application form as specified in progress payments.

7. SUBMITTAL PROCEDURES

A. Complete Invoice:

1. Submit completed Application to the Construction Manager by the date stipulated in the Project Manual.

- B. Number: Submit 3 copies of each invoice.

END OF SECTION

SECTION 013113 - PROJECT COORDINATION MEETING

1. PROJECT COORDINATION MEETING

- A. An on-site project coordination meeting will be held on a biweekly basis throughout the project construction period.

2. ATTENDANCE

- A. Attendance at the project coordination meeting is mandatory of each Contractor or major supplier on the project.
- B. The representative of the Contractor shall be the Project Manager and field superintendent unless a substitute representative has been approved by the Construction Manager.
- C. Contractor will begin attending the Project Coordination Meetings at least 4 weeks prior to mobilization on site and will continue until the Contractor has fulfilled the obligations of his Contract.

3. AGENDA

- A. The Construction Manager will set the agenda for the biweekly Project Coordination Meeting.
- B. At a minimum, the Contractor shall be prepared to discuss the following:
 - 1. Actual vs. as planned progress for the prior two-week period.
 - 2. Planned construction activities for the next four weeks.
 - 3. Contract document clarifications.
 - 4. Coordination items with other contractors.
 - 5. Quality Control.
 - 6. Recently issued change orders.
 - 7. Potential change orders.
 - 8. Submittals and shop drawings.
 - 9. Other items requiring Construction Manager's attention.

END OF SECTION

SECTION 013119 – PRE-INSTALLATION MEETINGS

1. PRE-INSTALLATION MEETINGS

- A. An on-site pre-installation meeting will be held at least two weeks prior to commencement of installation of work.

2. ATTENDANCE

- A. Attendance at the pre-installation meeting is mandatory of each Contractor and/or major supplier as required for each specific meeting listed below.
- B. The following individuals shall attend these meetings:
- Contractors' Project Manager
 - Contractors' Field Superintendent
 - Contractors' Safety Representative (as needed)
 - Key Subcontractors, Suppliers, and Vendors
 - EDiS Project Manager
 - EDiS Field Manager
 - EDiS Safety Director (as needed)
 - EDiS MEP Specialist (as needed)
 - Owner's Representative (as needed)
 - Architect/Engineer (as needed)
 - Governmental Agency Representatives (as needed)
 - Testing/Inspection Agency Representatives (as needed)
 - Utility Company Representatives (as needed)

3. SUBMITTALS

- A. Each contractor is responsible to have all submittals and mock-ups, as related to the pre-installation meeting scope of work, submitted and approved prior to commencement of the pre-installation meeting.

4. LIST OF REQUIRED MEETINGS

- Roofing OSHA mandated Safety Meeting

5. AGENDA

- A. At a minimum, the Contractor shall be prepared to discuss the items as listed on the agenda template shown on the following page:

PROJECT: _____

PRE-INSTALLATION MEETING: Roofing

A. ATTENDEES:

NAME	COMPANY	WORK ITEM	CONTRACT

B. TESTING & INSPECTION REQUIREMENTS

(THESE REQUIREMENTS COME FROM THE PROJECT MANUAL)

C. REVIEW CONTRACT DRAWINGS AND SPECIFICATIONS

Drawing / Spec No.	Comments / Conflicts

D. REVIEW SCOPES OF WORK (SEE SECTION 011100 IN THE PROJECT MANUAL)

E. REVIEW RELEVANT RFI'S

F. REVIEW SUBMITTALS (SEE THE SUBMITTAL REGISTER)

G. REVIEW MATERIALS AND DELIVERIES

H. REVIEW SCHEDULE AND SEQUENCE OF WORK

I. JOB SITE SAFETY (*SEE THE CONTRACTOR'S SAFETY PROGRAM OR OSHA*)

- Safety Plans must be submitted before the start of work
- Certificates of Insurance need to be submitted before the start of work
- Minimum PPE – Hardhats, steel toe boots, safety glasses
- Lock-out, Tag, Test and Try ALL utilities is critical before the start of demolition
- Signage & HAZCOM Requirements
- Potential Hazards
 - Excavations >4 ft
 - Slips/trips/falls
 - Existing utilities to remain and protected
 - Overhead debris
 - Power tools
 - Heavy equipment

J. COORDINATION WITH OTHER TRADES

K. ACTION ITEMS AND RESPONSIBILITY

END OF SECTION

SECTION 013125- WEB-BASED PROJECT MANAGEMENT SYSTEM

1. GENERAL PROVISIONS

- A. The general provisions of the Contract, including the Conditions of the Contract (General, Supplementary and other Conditions, if any) and Division 1 as appropriate, apply to the Work specified in this Section.
- B. Refer to provisions in AIA Document A232 – 2019 EDITION, GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION, for requirements in addition to those specified in Division 1.
- C. Refer to Scope Information Sheets for all contracts bound in the Project Manual under Section 011100 - SUMMARY OF WORK. The Scope Information Sheets describe generally the work included in each contract, but the work is not necessarily limited to that described.
- D. All Contractors shall use Internet/Web-based project management software to transmit documents, track, and otherwise manage this project.
- E. Use of this project management software will not change any contractual responsibilities of the construction team members.

2. DEFINITIONS

- A. System: A real time web-based software that shares data, translates data, organizes data, facilitates communication, archives actions, and offers scheduling prompts to identified Users.
- B. Users: Authorized participants of this project furnished with a unique password and authorized to access the system to view/input/export data. Owner, Construction Manager, Architect, and the Contractors are all Users. Other Users may be added as necessary.
- C. Contacts: Entities identified to automatically receive specific transmissions or entities selected to receive specific information sent by the system through to an e-mail address.
- D. Signees: Those individuals identified, by the Contractors, authorized to sign change orders and payment applications via electronic signature. This electronic signature is as contractually binding as an original signature on paper.

3. USE OF SYSTEM

- A. The use of the system is mandatory for the documentation of the transmittal of all non-oral information, even if the actual transmission of the information is by another means.
- B. The use of the system will be mandatory by the Contractors to send, retrieve, and respond to data.

- C. In addition to this web-based project management system, the Contractors will be required to use electronic mail (email) for day-to-day communication and correspondence. Email will be the primary means of transmitting written communication (i.e. meeting minutes, draft pay applications, etc.).

4. QUALITY ASSURANCE

- A. A three-hour training session in the use of the software for this project will be offered by the Construction Manager at a location convenient to the project site. Attendance by one member of each Contractor's organization is mandatory. Additional attendees may enroll based on availability of training space. All attendees must have a working knowledge of computers. Training can not begin until three working days after the receipt of the submittals indicated below.
- B. Technical assistance will be provided by on-line help, email, or telephone for all Users throughout the life of the project.

5. SUBMITTALS

- A. Submit to the Construction Manager, within 5 days following the receipt of the letter of intent to award, in an electronic template, the following:
 - 1. Electronic logo of organization (as needed)
 - 2. Names, mailing address and electronic address of its Users and Contacts.
 - 3. Designation the role/responsibility for each User

6. SOFTWARE AND HARDWARE REQUIREMENTS

- A. Each User shall provide and maintain a computer with high-speed internet access and an email address. The computer shall have a high-speed internet browser (Internet Explorer 8.0 or higher, Firefox version 3.6.12 or higher, Google Chrome or Safari version 5.0 or higher) and a high speed cable Internet access, high speed DSL or T1 line.
- B. License(s) to Use System - Each Contractor will be provided unlimited licenses to use the system for this project. Each license will allow secure unlimited usage from the notice to proceed until the original contract completion date.

7. SYSTEM DESCRIPTION

- A. The web-based project management system is a "secure, real-time, interactive, centralized database" specifically established and maintained for the management of this construction project. The product is designed to facilitate communication and improve the time management of its users by facilitating the sharing of information. Information will be available 24/7, from any computer meeting the specifications listed above. The information is fully protected. The electronic platform allows information to be transmitted across the internet reducing printing and postage costs and the time associated with such activities.

- B. The system contains a directory of the project participants.
 - C. The system includes templates, with the CM's letterhead, for each document created inside the system. The template allows the use of "pull down" menus to complete significant portions of each document.
 - D. The system allows the templates (and attached documents created outside the system) to be distributed to Users and Contacts.
 - E. The System contains "translation software" to permit the viewing (and marking) of documents created outside the system. The system can view documents created by different software programs and can deliver images of its translation to any computer meeting the criteria listed above.
 - F. The system can be personalized by the Construction Manager to automatically send e-mail notices upon issuance of certain documents if such a practice facilitates the User's business needs.
 - G. The system is the product of *Building Blok, LLC* (www.buildingblok.com) and will be continuously updated.
 - H. The Construction Manager will administer the Building Blok User accounts for this project.
8. DOCUMENTS CREATED INSIDE THE SYSTEM
- A. The following documents shall be created on templates inside the system.
 - 1. Transmittals for submittals processed in the system. The transmittals are automatically created by the system when the submittal is uploaded.
 - 2. Submittal Register showing all of the submittals required of the contract, assigned to each Contractor.
 - 3. Submittal Log: The CM will maintain submittal log after it is initialized.
 - 4. RFI (Requests for Information)
 - 5. Change Orders
 - 6. RFP (Requests for Proposal)
 - 7. ASI (Architect's Supplemental Instructions)
 - 8. Tasks & Memos as determined by the CM
 - 9. Payment Applications
 - 10. Closeout Tracking Log
 - B. The following documents may, at each Users option, be created on the system.
 - 1. Morning & Afternoon Activity Reports generated by the system
 - 2. E-mails: Contacts that do not have access to the system may be sent information from the system, by the system.
 - 3. Reports of information on the system

4. Project Notices: "Broadcast" messages can be sent to other Users system entry screen.
9. DOCUMENTS CREATED OUTSIDE THE SYSTEM AND DISTRIBUTED BY THE SYSTEM
- A. The following documents are expected to be created outside the system and distributed through the system. The actual documents may be scanned or electronically attached to the transmittal.
1. Technical Submittals: Shop drawings, product data, testing reports, certifications, installation instructions, operation & maintenance manuals, will be submitted and distributed through the system. The Architect will return all submissions through the system electronically. The Construction Manager will distribute submittals (after Architect's action) electronically. Contractors may download and distribute submittals to their subcontractors and suppliers or elect to print paper copies for distribution, or both.
 2. Photographs: Digital photographs and scanned images can be loaded onto the system and shared.
 3. Schedule of Values/ Payment Applications: (The "pencil" review of these documents can occur inside the system).
 4. Change Orders: (The "pencil" review of these documents can occur inside the system.)
 5. Schedules: The schedule document(s) will be available for review on the system.
 6. Data created in other software may be uploaded to the system electronically.
10. DOCUMENTS CREATED OUTSIDE THE SYSTEM AND DISTRIBUTED OUTSIDE THE SYSTEM
- A. The following documents are expected to be created outside the system and distributed outside the system. The actual documents may be scanned or electronically attached to the transmittal.
1. Schedules: The Construction Manager will develop the Master Schedule through Microsoft Project 2003. The schedule will be distributed either through hard copies at meetings or through email.
 2. Product samples, color samples, physical samples are still required to be provided per the technical specifications, however, the transmittal documenting the distribution shall be done inside the system and submitted electronically and printed to accompany the actual submission.
 3. Meeting minutes will be created using Microsoft Word 2003 and distributed through hard copies at meetings or through email.
 4. AIA closeout documents, which require an "original" signature, will created and distributed outside the system.

END OF SECTION

SECTION 013216 - CONSTRUCTION SCHEDULE

1. PRE-BID CONSTRUCTION SCHEDULE

- A. Time is a critical element of this Project. By entering a bid, the Contractor agrees to adhere to the intermediate Milestone Dates and Dates of Substantial and Final Completion established herein. The Contractor also understands that all work must be performed in an orderly and closely coordinated sequence in order to achieve the specified Milestones and Completion Dates, and the Contractor hereby agrees to perform his work in conformance with the Pre-Bid Construction Schedule established herein, or with the then current and approved Project Construction Schedule as amended from time to time by the Construction Manager.
- B. The Pre-Bid Construction Schedule is a milestone schedule with durations that identify portions of the project that must be completed. This schedule includes allowances for time lost due to adverse and abnormal weather conditions, other than floods, hurricanes, tornadoes, lightening and other like acts of God. The Contractor understands and agrees that it shall not be entitled to any extensions of the Contract Time or adjustment to the Contract Sum, except as allowed in the General Conditions of the Contract for Construction. The Contractor further acknowledges that the Work may be required to be performed during the winter season, that conditions during this season may be adverse and abnormal, but that such conditions will not be the basis for an extension of the Contract Time or adjustment to the Contract Sum. By submitting a bid, each Contractor is certifying that they can complete their work within the durations, or less time, outlined in the milestone schedule and its bid includes any and all costs associated with the schedule. This includes one Contractor completing their work in conjunction with another Contractor's work (i.e. electrical conduits installed in CMU walls). Each Contractor agrees to provide sufficient labor, crew size, equipment and/or work overtime, weekends, or shiftwork as necessary to meet the activity durations on this schedule and subsequently the latest coordinated Project Construction Schedule.

2. SCHEDULING OF THE WORK AFTER AWARD OF CONTRACT

- A. After award of Contract, or issuance of a Notice to Proceed, the Contractor will meet with the Construction Manager to review the Pre-Bid Construction Schedule, and the overall project plan for construction. Following the above review, the Contractor will meet with each subcontractor and supplier to view the detailed plans for performing his Work. Following these meetings and within fourteen (14) days after award of the Contract or issuance of a Notice to Proceed, the Contractor shall prepare and submit for the Construction Manager's approval a Work Schedule providing for the expeditious, timely and practical execution of the Work. The Contractor's Work Schedule shall include activity descriptions and durations for shop drawings, fabrication, delivery, and installation. The Contractor's Work Schedule shall be organized by Area, Building, Phase, and/or Floor as required by the Construction Manager. If the Construction Manager so requests, the Contractor shall provide adequate explanation regarding crew sizes, production rates and similar data used to arrive at the durations and sequences. If the Contractor fails to provide a work schedule for their activities then they will be held to the Project Construction Schedule developed and updated by the Construction Manager.
- B. The Construction Manager shall review the Contractor's Work Schedule, coordinate it with the

separate work by other contractors, the Owner, and the Construction Manager, and after coordination, shall incorporate it into the approved Project Construction Schedule.

- C. After all Contractors submit their Work Schedules and the schedules have been incorporated into the overall Project Construction Schedule a Schedule Charrette will be held by the Construction Manager. Each Contractor is required to participate in the Schedule Charrette in order to produce a coordinated Project Construction Schedule. The Construction Manager will have the final authority concerning the sequence of work, priorities or work, and activity durations. The approved coordinated Project Construction Schedule shall be issued to the Contractors and each Contractor shall perform their Work in conformity therewith.
- C. The Contractor shall submit proposed schedule revisions and obtain the written approval of the Construction Manager therefore before deviating from the Project Construction Schedule.
- D. The Construction Manager will incorporate approved schedule revisions into the Project Construction Schedule and shall otherwise update and revise the Project Construction Schedule as the Construction Manager, at his sole discretion, deems necessary. Each Contractor acknowledges that Construction Manager may modify, change, or alter the sequence, duration, start dates, completion dates to maintain the progress of the work. Contractor agrees to perform the work in accordance with the revised schedules and that modification of the schedule or sequence of the work by the Construction Manager shall not be the basis of any claim by the Contractor for damages or costs.
- E. Weather Delays: The project substantial completion date, shall only be adjusted due to extreme weather conditions that are above and beyond the following "Adverse Weather Days" already accounted for in the Pre-Bid Construction Schedule. These adverse weather days are based on a seven day week and come from the DelDOT Standards:
 - a. January (12), February (10), March (5), April (5), May (4), June (2), July (4), August (3), September (4), October (3), November (2), and December (6).
 - b. Time extension due to weather must be related to critical path activities.
 - c. Delays due to weather must be reported by the Contractor on the day they occur on the Contractor's daily report.
 - d. Any time lost during the work week must be made up the same week by overtime and/or working weekends. The Owner will not be responsible for additional costs for overtime.

3. ADHERENCE TO THE SCHEDULE

- A. The Contractor shall start each part of its Work on the date designated for start in the approved Project Construction Schedule unless advised by the Construction Manager. The Contractor shall carry the Work forward expeditiously with adequate forces, equipment, and materials, and shall complete each part of his work on or before the date designated in the approved Project Construction Schedule.
- B. If the Construction Manager determines that the Contractor is behind schedule, the Construction Manager shall have the right to require that the Contractor take steps, at the Contractor's expense,

to accelerate its Work. Such steps shall include increases in manpower, equipment, and materials and/or overtime as the Construction Manager may deem necessary. If any work is not started or completed within five (5) calendar days of the schedule date in the latest Project Construction Schedule, the Construction Manager shall have the right to direct the Contractor to expedite their work by whatever means the Construction Manager deems necessary to regain the schedule, without additional compensation to the Contractor. If any work falls behind schedule more than ten (10) days, the Construction Manager shall have the right to perform the work or have the work performed by whatever means the Construction Manager deems necessary. The costs incurred by the Construction Manager in order to "maintain the Project Construction Schedule" shall be reimbursed by the Contractor or Contractors causing the delay. If the Contractor fails to comply with the Construction Manager's instructions relating to improved rate of progress, the Contractor may be held in default under the appropriate provisions of the General Conditions of the Contract.

- C. Each Contractor shall, if directed by the Construction Manager, provide the Construction Manager a two-week look ahead of anticipated manpower showing the number of men, classification, and anticipated work.
- D. Each Contractor must schedule their manpower to work on all available work at a given time. Contractors must not assume that they have an entire work area available at one time or exclusive to their work. Working simultaneously in and around other trades is required. Therefore, if an area of the building is ready for the Contractor's work to begin or continue the Contractor must have manpower onsite working.
- E. If a Contractor misses any portion of a workday due to weather, manpower, lack of materials, failure to plan, or scheduling conflicts, they must make-up this lost time on overtime or Saturday. If two or more days are lost in the same work week, the Contractor must work overtime, the immediate Saturday and the Saturdays following the week to make up the lost days. Failure to provide sufficient manpower during the normal week days may result in charges for supervision by EDiS Company, at the discretion of EDiS Company.
- F. All punchlist work and project closeout documentation shall be completed within twenty-one (21) calendar days of the Substantial Completion date. Any open punchlist items after this date will be completed by EDiS Company and back charged to the responsible Contractor.

END OF SECTION

Polytech School District
2025-2026 Roof Renovation
Preliminary Construction Schedule

ID	Task Name	Duration	Start	Finish	Qtr 1, 2025			Qtr 2, 2025			Qtr 3, 2025			Qtr 4, 2025			Qtr 1, 2026			Qtr 2, 2026			Qtr 3, 2026						
					Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep				
1	ROOF REPLACEMENT:	356 days	Mon 4/7/25	Wed 8/26/26																									
2	OMB BIDDING PROCESS	19 days	Mon 4/7/25	Fri 5/2/25																									
3	Pre-Bid Conference	0 days	Mon 4/7/25	Mon 4/7/25																									
4	Bid Period	13 days	Mon 4/7/25	Thu 4/24/25																									
5	Open Bids	0 days	Mon 4/28/25	Mon 4/28/25																									
6	Evaluate Bids	5 days	Mon 4/28/25	Fri 5/2/25																									
7	BID PACK 3 – BOARD APPROVAL	0 days	Tue 5/13/25	Tue 5/13/25																									
8	AWARD AND EXECUTE CONTRACT	2 wks	Tue 5/13/25	Tue 5/27/25																									
9	MATERIAL APPROVAL/LEAD TIME	3 wks	Wed 5/28/25	Tue 6/17/25																									
10	LAST STUDENT DAY	1 day	Wed 6/11/25	Wed 6/11/25																									
11	CONTRACTOR MOBILIZES TO SITE	0 days	Mon 6/9/25	Mon 6/9/25																									
12	ROOF REPLACEMENT WORK-PHASE 1	9 wks	Thu 6/12/25	Wed 8/13/25																									
13	PHASE 1 COMPLETE	0 days	Wed 8/13/25	Wed 8/13/25																									
14	9TH GRADE ACADEMY (SCHOOL IN SESSION)	1 day	Thu 8/14/25	Thu 8/14/25																									
15	FIRST STUDENT DAY (SCHOOL IN SESSION)	1 day	Mon 8/25/25	Mon 8/25/25																									
16	LAST STUDENT DAY	1 day	Tue 6/16/26	Tue 6/16/26																									
17	CONTRACTOR RE-MOBILIZES TO SITE	0 days	Mon 6/15/26	Mon 6/15/26																									
18	ROOF REPLACEMENT WORK-PHASE 2	10 wks	Wed 6/17/26	Tue 8/25/26																									
19	PHASE 2 COMPLETE	0 days	Wed 8/26/26	Wed 8/26/26																									
20	CONTRACT CLOSEOUT PERIOD	1 mon	Wed 8/26/26	Tue 9/22/26																									

SECTION 013219 - SUBMITTAL REGISTER

1. SUBMITTALS/SUBMITTAL REGISTER

- A. The Contractor shall submit all items listed or specified within the sections of the Specifications included in its Work. Submittals shall include such items as: contractor's, manufacturer's or fabricator's drawings; descriptive literature including, but not limited to, catalog cuts, diagrams, operation charts or curves; test reports; samples, operations and maintenance manuals, including parts lists; certifications; warranties and other required submittals. Submittals pertinent to materials and equipment which are subject to advance approval shall be scheduled and made prior to the acquisition or the delivery thereof.
- B. The Contractor shall carefully control procurement operations to assure that each individual submittal is made on or before the dates required for timely performance of its Work.
- C. Within seven (7) days after award of Contract or issuance of Notice to Proceed, the Contractor shall execute and submit to the Construction Manager, seven (7) copies of the Submittal Register, on a form to be provided by the Construction Manager, on which shall be listed each item of equipment and material of each type for which fabricator's drawings and/or related descriptive data, test reports, samples, spare parts, operation and maintenance manuals, or other types of submittals required by the Specifications. The Submittal Register form shall be reproduced by the Contractor. The order of listing of items on the Register shall conform to the sequence of the items as they occur within the divisions. Drawings of component items forming a system or that are interrelated shall be scheduled to be correlated and submitted concurrently. Certifications to be submitted with the pertinent drawings shall be so scheduled. Adequate time shall be allowed for review and approval and possible resubmittal of any item subject to approval, because no delay damages or time extensions will be allowed for time lost in late submittals or resubmittals. The Construction Manager and Architect/Engineer will review the Submittal Register for approval action. The approved Register will become a part of the Contract and Contractor will be subject to requirements thereof. The Contractor shall revise and/or update the Register monthly to take into account all changes in the Contract. Each such revised edition and/or revision to the Register shall be resubmitted to the Construction Manager. This Register shall be coordinated with related submittals of other Contractors.

2. SAMPLES

- A. Submit tagged or labeled samples in triplicate, unless another quantity is otherwise specified by the Construction Manager.
- B. Tags or labels shall be securely affixed and contain as a minimum the following information: Project Name, Contractor's Name, Contract Title and Number, Date, Transmittal Number, Product Manufacturer's or Fabricator's Name and Product Identifier.

END OF SECTION

SECTION 013226 - SUBCONTRACTOR DAILY REPORTS

1. SUBCONTRACTOR DAILY REPORTS

- A. The Subcontractor shall submit a Daily Report to the Construction Manager on the forms provided covering the following subjects:
 - 1. Work in Progress, including areas where work is being performed, nature of the operations in progress, and the manpower assigned.
 - 2. Extra Work (Time and Material) in progress.
 - 3. Materials Received.
 - 4. Trade labor breakdown including identification of all workers on site and the number of hours (or portions thereof) worked by each.
 - 5. Inspection Checklist (performed daily).
- B. The Subcontractor shall submit the Daily Report to the Construction Manager by 9:00 AM on the next workday following the workday covered in the Daily Report.

2. DAILY EXTRA WORK REPORT

- A. The Subcontractor shall submit on the form provided a Daily Extra Work Report on each day he performs authorized Extra Work on a time and material basis.
- B. A separate Daily Extra Work Report shall be submitted for each separate authorized Extra Work item done on a time and material basis.
- C. The Subcontractor shall submit his Daily Extra Work Report as an attachment to his Daily Report by 9:00 AM on the next workday following the workday covered in the Daily Extra Work Report.

3. SAMPLE DAILY REPORT

- A. A sample daily report follows this section for your reference.

END OF SECTION



SAFETY FORM: Contractors Daily Report

Project Name:

Date:

Contractor:

Contract No. & Description:

Weather:

Foreman's Name:

TRADE	CLASS	MANPOWER COUNT	TOTAL MAN HOURS	TODAY'S DESCRIPTION / LOCATION OF WORK
	TOTAL			

** INDICATE: F = FOREMAN; J = JOURNEYMAN; A = APPRENTICE*

Work Status/Work Planned:

Construction Equipment:

Deliveries or Materials:

Machinery, tools, material, and equipment to be used:

Inspection of work area, machinery, tools, material, or equipment:

The use of any machinery, tool, material, or equipment which is not in compliance with any applicable requirements is prohibited. Such machine, tool, material or equipment shall either be identified as unsafe by tagging or locking the controls to render them inoperable or shall be physically removed from its place of operation.

Below is a general checklist of requirements for this project. Contractors must check off items that pertain to their contract and project tasks. Notify the EDiS Superintendent of any questionable conditions.

This checklist is not meant to be all inclusive. Please refer to OSHA regulations for compliance.

House Keeping

- ☐ Material Storage area orderly
- ☐ Lighting and ventilation sufficient
- ☐ Exits and Stairs have clear passage
- ☐ Walkways, corridors have clear passage
- ☐ Daily debris /trash removal

Personal Protective Equipment

- ☐ Hard Hats being worn
- ☐ Safety Glasses with side shields being worn
- ☐ Additional Eye/Face protection
- ☐ Respirators as required
- ☐ Hand protection as required
- ☐ Ear protection as required
- ☐ Inspected & Maintained
- ☐ Stored properly

Fire Prevention

- ☐ Fire extinguishers inspected / available
- ☐ Flammable / Combustibles properly stored
- ☐ Approved Fuel cans used and labeled
- ☐ Oxygen / Acetylenes stored properly
- ☐ Hot work permit (as necessary)
- ☐ Fire watch (as necessary)

Electrical

- ☐ GFI in use
- ☐ Three prong / double insulated tools
- ☐ Flexible cords in good condition
- ☐ Tools / Cords inspected before use

Excavations

- ☐ Miss Utility / locating service contacted
- ☐ Underground utilities visibly marked
- ☐ Properly Barricaded / covered
- ☐ Proper access / egress
- ☐ Ladders every 25'-0" distance
- ☐ Shored, sloped, benched as required
- ☐ Hazardous atmospheres tested (as necessary)
- ☐ Soil type determined
- ☐ Inspected by competent person
- ☐ Spoils/equipment 2 ft away
- ☐ Dewatering as needed

Ladders

- ☐ Inspected in good condition
- ☐ Correct pitch
- ☐ Extends 3'-0" above landing
- ☐ Opened, locked and secured / tied off
- ☐ Non-aluminum ladders used

Scaffolds

- ☐ Qualified Scaffold erector
- ☐ Guardrails, toe boards, and planking secured
- ☐ Appropriate signage provided
- ☐ Adequate cross bracing
- ☐ Scaffold training completed as required
- ☐ Free of debris
- ☐ Falling object protection in place
- ☐ Plumb/ level and on firm foundation
- ☐ Inspected as required per OSHA

Cranes

- ☐ Rated Load Capacity available in cab
- ☐ Swing Radius barricaded
- ☐ Appropriate certificates/decals/hand signals
- ☐ Daily inspection log completed
- ☐ Rigging inspected
- ☐ Electrical powerlines identified
- ☐ Ground condition reviewed
- ☐ Hazards below ground identified
- ☐ Fall Zone Monitored / identified

Fall Protection

- ☐ Fall protection plan available
- ☐ Harness / shock absorbing lanyard used
- ☐ Anchoring points adequate
- ☐ Perimeter barrier (as necessary)
- ☐ No holes observed
- ☐ 6'-0" Fall Protection utilized
- ☐ PFAS inspected
- ☐ Fall protection training completed

Paperwork

- ☐ SDS Information available
- ☐ Contractors Safety Policy provided & available
- ☐ Training Documentation as required

Other

- ☐ Drinking water provided
- ☐ CPR trained person on-site
- ☐ Trained operators utilizing equipment
- ☐ Working audible alarms on vehicles as required

Competent Person:

Print Name _____

SECTION 013300 – SUBMITTAL PROCEDURES

1. GENERAL PROVISIONS

- A. The general provisions of the Contract, including the Conditions of the Contract (General, Supplementary and other Conditions, if any) and Division 1 as appropriate, apply to the Work specified in this Section.

2. ITEMS TO BE SUBMITTED AT START OF WORK

- A. Performance/Labor and Material Payment Bond(s): One (1) copy of each bond simultaneously with the signed Agreement. See General Conditions Article 11.4 and Supplementary Conditions.
- B. Policies or Certificates of Insurance: Two (2) copies simultaneously with the signed Agreement. See General Conditions Article 11 and Supplementary Conditions.
- C. Contractor's License: Submit a copy of all business licenses required by local and state agencies.
- D. Contractor's Schedule of Values: Two (2) copies for approval within 21 days after the Agreement is signed. See General Conditions Article 9.2 and provisions in this Section.
- E. Contractor's Progress Schedule: Two (2) copies for review and reference within 21 days after the Agreement is signed. See General Conditions Article 3.10 and provisions in this Section.
- F. Submittal Schedule: Two (2) copies for review and reference within 21 days after the Agreement is signed. See provisions in this Section.
- G. Products List: Two (2) copies for approval within 30 days after the Agreement is signed. See provisions in Section 016200 - MATERIAL AND EQUIPMENT.

3. NON-RESIDENT CONTRACTOR & SUBCONTRACTORS BONDS

- A. Refer to requirements in Section 011100 - INSTRUCTIONS TO BIDDERS for filing of Surety Bonds with the Division of Revenue.
- B. If such bonds are required on this project, it will be the responsibility of the Contractor to produce evidence to the Construction Manager that they have been filed, or if not required, to supply a notarized statement that they are not required. This must be done within seven (7) days after award of Contract and in any event before construction starts.

4. RELATED REQUIREMENTS

- A. See Section 017700 - CONTRACT CLOSE OUT: for submittal requirements for Contract Close out.

5. SUBMITTALS

- A. All submittals shall be directed to the Construction Manager in the manner directed by the Construction Manager, and paragraph 9 of this section. Contractor shall use the Contractor Submittal Form appended to this section.
- B. Prepare a Submittal's Schedule for Shop Drawings, Product Data and Samples. Show:
 - 1. The dates for Contractor's submittals.
 - 2. The dates submittals will be required for Owner-furnished products.
 - 3. The date approved submittals will be required from the Architect.
- C. Should the Architect or Construction Manager elect to omit any items from the list of items to be reviewed, it shall not relieve the Contractor from compliance with the Contract Documents with regard to that item. In such instance, the Contractor may still elect to have submittals prepared for his own use without review by the Architect or Construction Manager.

6. SHOP DRAWINGS

- A. Conform to provisions in General Conditions applying to Shop Drawings.
- B. Present in a clear and thorough manner.
 - 1. Identify details by reference to sheet and details, schedule or room numbers shown on Contract Drawings.
 - 2. Maximum sheet size: 30" x 42".

7. PRODUCT DATA

- A. Conform to provisions in General Conditions applying to Product Data.
- B. Preparation:
 - 1. Clearly mark each copy to specifically identify products or models pertinent to project.
 - 2. Show performance characteristics and capacities.
 - 3. Show dimensions and clearances required.
 - 4. Show wiring or piping diagrams and controls.
- C. Manufacturer's standard schematic drawings and diagrams:

1. Modify drawings and diagrams to delete information which is not applicable to the Work.
2. Supplement standard information to provide information specifically applicable to the Work.

8. SAMPLES

- A. Conform to provisions in General Conditions applying to Samples.
- B. Provide samples of sufficient size and quantity to clearly illustrate:
 1. Functional characteristics of the project, with integrally related parts and attachment devices.
 2. Full range of color, texture and pattern.
- C. Field samples and mock-ups; See requirements, if any, in other specification Sections.

9. SUBMITTAL REQUIREMENTS

- A. Make submittals promptly through the Construction Manager in accordance with published schedule, and in such sequence as to cause no delay in the Work or in the Work of any other contractor.
- B. Number of submittals required.
 1. Shop drawings: Submit eight (8) copies for each submittal. Copies will be marked up with corrections and comments, stamped and returned. Any additional copies required by the Contractor shall be made by him.
 2. Product Data: Submit eight (8) copies. Four (4) will be retained by the Architect, the Construction Manager and the Consultants. Four (4) will be reviewed, marked and stamped by the Architect and returned to the Contractor by the Construction Manager. Any additional copies required by the Contractor shall be made by him from the stamped copy.
 3. Samples: Submit four (4) each. When approved it will be returned to the Construction Manager to be retained at the site for reference use.
- C. Submittals shall contain:
 1. The date of submission and the dates of any previous submissions.
 2. The Project title and number.
 3. Contract identification.
 4. The names of the Contractor, Supplier and Manufacturer.

5. Identification of the product, with the specification section number.
 6. Field dimensions, clearly identified as such.
 7. Relation to adjacent or critical features of the Work or materials.
 8. Applicable standards, such as ASTM or Federal Specification numbers.
 9. Identification of deviations from Contract Documents.
 10. Identification of revisions on resubmittals.
 11. An 8 inch x 3 inch blank space for Contractor and Architect's stamps.
 12. Contractor's stamp, initialed or signed, certifying review of submittal, verification of products, field measurements and field construction criteria, and coordination of the information within the submittal with requirements of the Work and of Contract Documents. Submittals which have not been stamped with this stamp or its approved equivalent will be returned without being reviewed.
- D. Shop Drawing coordination and interface with work of other Contracts and adjacent work is the responsibility of each individual Contractor.
- E. All submittals shall be accompanied by the contractor's submittal form, a copy of which is part of this section. The contractor's submittal form must be completed in its entirety by the contractor.

10. RESUBMISSION REQUIREMENTS

- A. Make any corrections or changes in the submittals required by the Architect and resubmit until approved.
- B. Shop drawings and Product Data:
 1. Revise initial drawings or data, and resubmit as specified for the initial submittal.
 2. Indicate any changes which have been made other than those requested by the Architect.
- C. Samples: Submit new samples as required for initial submittal.

11. FINAL DISTRIBUTION OF APPROVED SUBMITTALS

- A. The Construction Manager will receive and log submittals and forward to Architect after processing.
- B. The Construction Manager will distribute copies of Shop Drawings and Product Data which carry the Architect's stamp to:

1. Contractor that made submittal.
2. Jobsite File.
3. Record Document File.
4. Other Contractors, as required for coordination.

C. The Construction Manager will distribute samples as required.

D. The Contractor will distribute copies of Shop Drawings and Product Data which carry the Architect's stamp to:

1. Subcontractors.
2. Suppliers.
3. Fabricators.

12. SCHEDULE OF VALUES

A. Use AIA Document G703, Continuation Sheet to G702.

13. PROGRESS SCHEDULE

A. Prepare schedules in the form of a horizontal bar chart.

1. Provide separate horizontal bar chart for each trade or operation.
2. Horizontal time scale: Identify the first work day of each week.
3. Scale and spacing: To allow space for notations and future revisions.
4. Minimum sheet size 11 inches by 17 inches.

B. Format of listings: The chronological order of the start of each item of work.

C. Show the complete sequence of construction by activity.

D. Show the dates for the beginning, and completion of, each major element of construction such as:

1. Site clearing.
2. Site utilities.

3. Foundation work.
 4. Structural framing.
 5. Subcontractor work.
 6. Equipment installation.
- E. Show projected percentage of completion for each item as of the first day of each month.
- F. Update Progress Schedule monthly and submit with Application for Payment and Schedule of values.
- G. Indicate progress of each activity to date of submission.
- H. Show changes occurring since previous submission of schedule:
1. Major changes in scope.
 2. Activities modified since previous submission.
 3. Revised projections of progress and completion.
 4. Other identifiable changes.
- I. Provide a narrative report as needed to define:
1. Problem areas, anticipated delays and the impact of the schedule.
 2. Corrective action recommended, and its effect.
 3. The effect of changes on schedules of other prime contractors.
- J. Submit one reproducible transparency.
- K. After review, distribute copies of the schedule to:
1. Jobsite File.
 2. Subcontractors.
 3. Architect.
 4. Owner.

- L. Instruct recipients to report promptly to the Contractor, in writing, any problems anticipated by the projections shown in the schedules.

END OF SECTION

EDiS COMPANY**CONTRACTOR SUBMITTAL FORM****Contractor:****Contract #:**_____**Project Name:****To:**

The following submittal (s) for the Architect's Review and Approval:

[☐] Shop Drawings [☐] Product Data [☐] Samples [☐] Samples [☐] Other (Identify)_____[☐] Design Data [☐] Calculations [☐] Certificates [☐] Coordination Drawings [☐] Reports[☐] Qualification Statements [☐] Other (Identify)_____

No. of Copies	Date	Submittal Number	Spec. Section #	Description of Submittal Items	Requested Return Date	EDIS Submittal Number (by EDIS)

Deviations from Contract Documents requirements are identified as follows:_____**Remarks:**_____

We hereby certify that _____ (Contractor) _____ has reviewed and approved submittals transmitted herewith for compliance and conformance with requirements of the Contract Documents.

Signed:_____ **Date:**_____

SECTION 013500 – CONTRACTOR EMPLOYEE BACKGROUND CHECK

1. It is the Contractor's responsibility to perform background checks and screen all employees working onsite. The background check must include checking for a previous history of Child Abuse Convictions, Child Molestation Convictions, Felony Convictions, and Drug Convictions within the last 5 years. Any employee with any of these convictions may not enter the job site or school campus. This background check must be completed and screened by the contractor prior to an employee entering the job site. The background check cannot be any older than 1 year prior to the date of the contract between the Contractor and the Owner. The Construction Manager, the Owner's representative and the Owner have the right to request that the screening data be submitted on a case-by-case basis.
2. The contractor is required to provide the Construction Manager written notice verifying background checks were completed and screened by the contractor prior to an employee entering the job site. This notice will contain the individual's name and the last four digits of their social security numbers. Notices must be received no later than two (2) working days before access is required. Notices will be forwarded electronically to the Construction Manager. A sample notice follows this section for your reference.

END OF SECTION

Date

Project Manager
EDiS Company
110 South Poplar Street
Wilmington, DE 19805

RE: Poly Tech Roof Replacement - Certification of Background Checks

Dear _____:

This letter is to certify that background checks have been completed in accordance with Section 013500 Contractor Employee Background Check. The following individuals are certified as having met the requirements of the specification:

<u>Name</u>	<u>Last 4 SSN</u>
Mr. John Smith	1234

If you require any additional information you may contact **INSERT POINT OF CONTACT, PHONE NUMBER AND EMAIL ADDRESS.**

Sincerely,

Company

NAME
TITLE

SECTION 013523 - SAFETY PROGRAM

1. GENERAL

- A. The Contractor shall be responsible for initiating, maintaining, and supervising all safety activities and programs in connection with their Work.
- B. Contractor shall be responsible for the safety of their personnel as well as their subcontractors.
- C. Hard hats and safety glasses must be worn by all personnel on the jobsite, except in contractor's administrative office/trailer. All equipment must comply with OSHA standards. All job site personnel shall wear long pants, shirts (no tank tops), high visibility garments worn on the outer layer of clothing, and work boots.

2. SAFETY PROGRAM

- A. Prior to commencing the work, the Contractor shall submit to the Construction Manager (1) electronic copy and (1) bound copy of its safety program and one (1) copy of SDS information in a 2" ringed notebook. One paper copy of the safety program and SDS will be retained by the Construction Manager in the field office.
- B. The safety program shall outline those hazards peculiar to the Contractor's Work, and the steps to be taken to eliminate or reduce the risk of injury or loss due to those hazards. The program shall be project and site specific. Every Contractor shall implement and enforce its safety program, in accordance with all OSHA, Federal, State, and local laws.
- C. Crystalline Silica Exposure Control Plan - Affected Contractors must provide a Written Exposure Control Plan for Respirable Crystalline Silica, meeting Subpart Z of the OSHA Construction Industry Regulations, that ensures each employee covered by this section of the Regulations can demonstrate knowledge and understanding meeting the requirements of the regulation, identify the competent person designated by the employer in accordance with the section, and otherwise comply with the requirements of this section of the Regulations.
- D. Every Contractor shall designate a qualified Safety Supervisor and Alternate to implement the safety program. If during the progress of the work the Safety Supervisor is not performing their duties in a manner satisfactory to the Construction Manager the Contractor will designate a new qualified Safety Supervisor.
- E. Every Contractor shall furnish the names and qualifications of the Primary and Alternate competent persons and qualified persons who may be required for their scope of work by the Contractor's safety procedures, and by federal, state and/or local regulations. Examples include competent persons and/or qualified persons for steel erection, excavation, scaffold erection, confined space entry, crane and rigging operations, annual crane inspections, fall protection including horizontal lifeline systems, etc.

-
- F. The employer shall verify compliance by preparing a written certification record. The written certification record shall contain the name or other identity of the employee trained, the date(s) of the training and the signature of the person who conducted the training or the signature of the employer. If the employer relies on training conducted by another employer or completed prior to the effective date of this section, the certification record shall include the date the employer determined the prior training was adequate rather than the date of actual training.
- G. Copies of any and all documents, including information stored electronically, such as safety and health program handbooks and training certification records shall be provided when necessary.
1. The employer shall instruct each employee in the recognition and avoidance of unsafe conditions and the regulations applicable to his work environment to control or eliminate any hazards or other exposure to illness or injury. Please forward certification (document) of training for each employee on an EDiS project. The latest training certificate shall be maintained.
- H. Contractor Daily Reports with Safety Inspection Checklist will be submitted daily to the Superintendent, verifying inspection of work area, machinery, equipment, and tools.
- I. Prior to starting work on-site, the Contractor shall arrange with the on-site Superintendent to have their employees complete the EDiS Company Zero Accidents Safety Orientation program.
- J. Every Contractor shall hold, at a minimum, weekly safety toolbox talks with all its employees every Monday at 12:30 PM. Every Contractor shall designate a responsible, qualified, and capable person to conduct these meetings. Contractor's safety supervisor or superintendent must submit to the Construction Manager weekly toolbox talks attendance sheets and the topics discussed.

3. SUBSTANCE ABUSE POLICY STATEMENT

- A. The Construction Manager is committed to providing a safe work site environment for its employees and Contractors' employees. The Construction Manager does not condone or permit employees and Contractors' employees to use or be under the influence of drugs or alcohol while they are on any of the Construction Manager work sites. The Policy is as follows:
1. It is a violation of the Construction Manager's policy for employees and Contractors' employees to use, possess, sell, trade, or otherwise engage in the use of illegal drugs and alcohol.
 2. It is a violation for employees and Contractors' employees to report to work while influenced by illegal drugs or alcohol.
 3. It is a violation for employees and Contractors' employees to use prescription drugs illegally (i.e., to use prescription drugs that have not been legally obtained) and to use prescription drugs in a manner other than the prescribed intentions.

4. Employees and Contractors' employees who are taking medication, which is prescribed by their physician, are expected to discuss potential side effects with their prescribing physician, as it relates to the work requirements.
- B. Violations of this policy will require disciplinary action. If any employees or Contractors' employees are observed or suspected of being influenced by drugs or alcohol, they will be instructed to stop work and may be required to leave the work site.

4. EXECUTION

- A. Every Contractor shall comply with all applicable federal, state and local laws, regulations and orders relating to occupational safety and health, and related procedures, and shall, to the extent permitted by law, indemnify and hold Construction Manager, Owner and Architect, and their respective directors, officers, or agents and employees, harmless from any and all liability, public or private, penalties, contractual or otherwise, losses, damages, costs, attorney's fees, expenses, causes of action, claims or judgments resulting from a claim filed by anyone in connection with the aforementioned acts, or any rule, regulation or order promulgated thereunder, arising out of the Contractor's Work, this Agreement or any subcontract executed in prosecution of the Work. Every Contractor further agrees in the event of a claim of violation of any such laws, regulations, orders, or procedures arising out of or in any way connected with the performance of this agreement, Construction Manager may immediately take whatever action is deemed necessary by Owner and/or Construction Manager to remedy the claim or violation. Any and all costs or expenses paid or incurred by Owner and/or Construction Manager in taking such action shall be borne by the Contractor and may be deducted from any payments due Contractor.
- B. The Contractor agrees to (1) take all necessary steps to promote safety and health on the job site; (2) cooperate with Owner and/or Construction Manager and other Contractors in preventing and eliminating safety and health hazards; (3) train, instruct and provide adequate supervision to ensure that its employees are aware of, and comply with, applicable Federal and State safety and health laws, standards, regulations and rules, safe healthful work practices and all applicable safety rules, regulations and work practices and procedures (4) not create any hazards or expose any of its employees, employees of the Owner and/or Construction Manager or employees of Contractors to any hazards; and (5) where the Contractor is aware of the existence of a hazard not within its control, notify the Construction Manager of the hazard as well as warn exposed persons to avoid the hazard.
- C. The Contractor / Sub-contractor shall prepare a written Job Hazard Analysis (JHA) common to the construction industry for any work of a high risk nature. This JHA will be prepared and signed by each work crew each day prior to starting work on a specific area of work and any time a crew is re-assigned to a new work task. The JHA form is generally in table form and simply describes tasks to be performed, potential hazards and mitigating measures. The form is used to identify, analyze, understand and mitigate potential hazards associated with repetitive or potentially hazardous work operations. Each employee associated with the work to be performed shall be instructed by their companies designated Competent Person of the safety measures listed on the form and shall sign the document prior to the commencement of work.

(examples of "high risk": pre-cast concrete, scaffold activities, steel erection, work at heights, work at depths, road work, etc.) If the contractor prepares a similar assessment form it must be reviewed to meet the criteria of a Job Hazard Analysis (JHA) as described by the U.S. Department of Labor (OSHA 3071 2002 Revised).

- D. The Contractor's Superintendent or Safety Supervisor shall immediately, verbally report, and promptly thereafter confirm in writing to the Construction Manager any unsafe conditions or practices that are observed, or violations of job safety which are not within the Contractor's control.
- E. Contractors shall immediately, verbally report, and promptly thereafter confirm in writing, to the Construction Manager any unsafe practices or conditions that are observed which are not under the Contractor's control.
- F. The Contractor's Superintendent or Safety Supervisor shall ensure that adequate first aid supplies are available, and that personnel are qualified to administer first aid/CPR, as required by State and/or Federal regulations.
- G. Every Contractor shall promptly notify Construction Manager of any personal injury requiring medical treatment of any of the Contractor's employees at the Project site; or of significant damage to property arising in connection with Contractor's performance, as promptly as possible after the occurrence of such injury or damage. Within twenty-four hours of such occurrence, Contractor shall furnish to Construction Manager a complete written report of such injury or damage.
- H. Contractor certifies that the forgoing terms shall be made applicable to all Contractors' subcontractors, suppliers, materialmen, or anyone furnishing labor and/or materials to the site.
- I. Every Contractor shall continue to educate their job Safety Supervisor or Superintendent of their responsibilities, which shall include:
 - 1. Instructing workers and subcontractors under its supervision in safe work practices and work methods at the time they are given work assignments.
 - 2. Ensuring that its workers and subcontractors have and use the proper protective equipment and suitable tools for the job.
 - 3. Continuously checking to see that no unsafe practices or conditions are allowed to exist on any part of his job.
 - 4. Acquainting its workers and subcontractors with all applicable safety requirements and ensuring that they are enforced.
 - 5. Setting a good example for their workers.

6. Making a complete investigation of incidents to determine facts necessary to take corrective action.
 7. Promptly completing an "Incident Investigation Form" with his Supervisor's assistance and distributing as required.
 8. Holding weekly "tool box" safety meetings with their employees to:
 - a. Discuss observed unsafe work practices or conditions including a review of current foreman meeting and progress meeting reports.
 - b. Review each incident with their employees and discuss correction of incident root causes.
 - c. Encourage safety suggestions from his men.
 9. Seeing that prompt medical treatment is administered to an injured employee.
 10. Correcting or reporting immediately to project superintendent any observed unsafe conditions, practices or violations of job safety or security.
 11. Making all reports required by these Contract Documents to the Construction Manager in a full and timely fashion.
5. SAFETY MEETINGS
- A. The Contractor's Project Manager or Superintendent shall attend weekly or biweekly supervisory job meetings. The first topic of these meetings will be job site safety. The weekly safety reports will be reviewed, and violations must be corrected immediately. Contractors will be encouraged to participate in the on-going jobsite safety.
6. TOOL BOX SAFETY MEETINGS
- A. The Contractor shall schedule weekly "tool box" safety sessions to be held by their project safety supervisor or competent person / superintendent for all their employees.
 - B. A member of the Contractor's management staff shall periodically attend "tool box" safety sessions to evaluate their effectiveness and offer any appropriate suggestions for improvement.
7. REPORTS
- A. Contractors shall report all accidents or injuries on a timely basis in accordance with all applicable regulations.
 - B. Contractors shall promptly complete an incident investigation report of all incidents.

- C. A record of all "tool box" safety sessions shall be made and submitted to the Construction Manager.

8. SAFETY REPRESENTATIVE

- A. The Construction Manager (CM) may employ the services of a Safety Representative on the project.
- B. The CM Safety Representative will visit the job site on a weekly basis, or as necessary, to determine if the work is being performed in a safe manner and in accordance with OSHA, State and Local safety regulations. The CM Safety Representative is not responsible for observing and documenting all possible safety violations. The Contractors' Safety Representatives, Safety Supervisors, or Superintendents shall attend job site safety inspections with the CM Safety Representative.
- C. The CM Safety Representative will prepare a written report at the end of each inspection listing the safety violations observed during the inspection. This report will be distributed to all Contractors. Contractors will immediately correct all safety violations and provide written documentation to the CM verifying that all hazards have been corrected.

9. RIGHT TO STOP THE WORK DUE TO SAFETY VIOLATIONS

- A. The Construction Manager, in its sole discretion, may order the Contractor to stop the work due to safety violations under the following circumstances:
 - 1. If the Construction Manager observes the Contractor is violating safety regulations and the Contractor takes no immediate action to correct the violation.
 - 2. If the Contractor has been notified by the Construction Manager in writing that he is in violation of safety regulations and fails to take action to correct the violation within 24 hours of the notice.
- B. If the Construction Manager directs the Contractor to stop the work due to safety violation, it will be done in accordance with the General Conditions of the Contract. Contractor shall not be permitted an adjustment of the Contract Time or Sum for the days lost to any suspension of work.
- C. If the Construction Manager or Safety Representative observes Contractor's employee violating this safety program or OSHA Standards in a habitual manner, or creating a serious life safety violation, the Construction Manager or Safety Representative may instruct the Contractor's superintendent or foreman to remove the violator from the work site for failure to comply with the safety program and the contract.

10. EMERGENCY PROCEDURES

- A. The Construction Manager shall establish a central meeting location for the assembly of all Contractors' employees in the event of a job site emergency.

- B. Contractors shall assemble all their personnel and account for all employees. Contractors must immediately report to the Project Superintendent with the status of their employees.

11. FALL PROTECTION PROCEDURES

- A. Contractors are responsible, in accordance with federal, state, local laws and regulations including OSHA, to provide and enforce their own site specific fall protection program and equipment. The following fall protection procedures shall be enforced by all Contractors as a minimum standard.
1. All workers on walking/working surfaces with unprotected sides or edges six feet (6') or higher above the next lower level must be protected from falls by the use of guardrail systems, net systems, fall arrest systems or control access zone programs. It is intended that when fall protection is required, it is required 100% of the time. All contractors are reminded that relevant industry regulations require that contractors comply with the following standards.
 - a. Workers constructing or working near leading edges must be protected.
 - b. Workers on the face of formwork or reinforcing steel must be protected at a height of 6 feet (6') or greater.
 - c. Employees working from scaffolds shall be guarded / protected from falling 6 feet (6') above next lower level.
 - d. Brick layers performing overhand bricklaying and related work six feet (6') or higher above lower levels must be protected from falls.
 - e. Roofers must comply with OSHA regulations for roof work.
 - f. The Contractor's controlled access zone plan shall be included in their site-specific safety program and shall be submitted prior to the start of work. Contractors are responsible for assuring programs are OSHA compliant.
 - g. Guidelines for Residential Construction or any interpretations will not be accepted in lieu of 1926 Standards.
 - h. Contractors must provide certification per OSHA CFR29 § 1926.503(b) of employee training and retraining on fall protection upon request.
 - B. Contractor shall provide their own fall protection. Fall protection may be provided by guardrail systems, net systems, or personal fall arrest systems. All fall protection systems must comply with OSHA regulations.
 - C. Stepladders, exposed to shafts or edges of the building, greater than six feet (6') above the next lower level, must be tied off or otherwise secured. Employee must wear fall protection, i.e., harness/lanyard.

- D. The Safety Cable System shall not be altered or removed without a written request submitted to the Project Manager with a copy to the Superintendent. It shall be the responsibility of each Contractor that is removing or altering the Safety Cable System to maintain the fall protection safety provided by the safety cable and not leave the area unprotected. Each Contractor shall be responsible to re-install the Safety Cable System immediately after work is completed. Each Contractor shall be responsible to re-install the Safety Cable System in accordance with OSHA regulations.
- E. Fall protection will be enforced for Structural Steel Erectors.
 - 1. Contractors engaged in structural steel erection are specifically advised that structural steel erectors shall comply with all protection requirements for all work at a height of six feet (6') or greater above the next lower level, 100 percent of the time, by any of the following means.
 - a. Standard guardrail system.
 - b. Personal Fall Arrest System (PFAS) – full body harness with shock absorbing lanyard. PFAS must meet the requirements of CFR 1926 subpart M.
 - c. Access to work area shall be provided by ladders or other safe methods. There shall be sufficient number of ladders, or other safe methods, available to reduce the amount of “beam walking.” When it is absolutely necessary to traverse a beam, 100% fall protection must be utilized.
 - d. Steel erection Contractors must, at all times, be able to certify in writing that each of their employees have been properly trained in both OSHA fall protection standards and the Contractor’s site specific project fall protection procedures.
 - e. Prior to the erection of the steel, the Contractor shall meet with the Project Manager and Safety Representatives to review and document site specific procedures.

12. AIRBORNE CONTAMINENTS PROCEDURES

- A. Contractors must provide and use equipment furnished with Exhaust Purifiers / Scrubbers when any equipment produces airborne containments and will be used in an enclosed building.
- B. The Contractor shall verify air quality by the use of air monitoring equipment and document such verified air quality on the daily report. The monitoring equipment shall, at a minimum, be designed with an auditory alarm and shall provide continuous monitoring of these four gases: Oxygen, Hydrogen Sulfide, Carbon Monoxide and Combustible gases.
- C. The Contractor must provide administrative or engineering controls to protect its workers from exposure to occupational health, environmental or other hazards to be implemented whenever feasible. When such controls are not feasible to achieve full compliance, protective equipment or

other protective measures shall be used to keep the exposure of employees to air contaminants within the limits prescribed by local, state, and federal regulations. Any equipment and technical measures used for this purpose must first be approved for each particular use by a competent industrial hygienist or other technically qualified person. Whenever respirators are used, their use shall comply with 1926.103.

13. CELL PHONE AND RADIO USE POLICY

- A. Use of cell phones on EDiS Company projects should be limited to non-construction type activity areas and away from active construction areas (i.e., project office). This includes both cell phone use and the review of data, information, texts, and the internet. Except in an emergency circumstance, phones should only be used in the designated areas. Anyone observed using a cell phone outside of these designated areas without regard to maintaining a safe focus on their surroundings can be subject to discipline, up to and including removal from the project. Use of ear buds, ear phones, and portable radios are absolutely prohibited on EDiS Company project sites. Anyone using ear buds, ear phones, or any other device that would prevent the wearer from receiving auditory cues about the surrounding environment will be subject to discipline, up to and including removal from the project.

14. EXCAVATION PROCEDURES

- A. Before ANY excavation work is to commence, the Contractor/Excavator shall contact the utility companies or utility owners and advise them of the proposed work and ask them to mark the location of the underground utility installations. This notification shall be done within established or customary local response times. If the work is on private property and the utility company will not mark out the utilities, the Contractor/Excavator will hire a private locating service to mark the utilities. Once the utilities are located and marked, the Contractor/Excavator will excavate by hand or use a vacuum truck to expose the utilities and record the exact location and elevation of the utilities.
- B. The Contractor/Excavator must submit the Excavation Permit to EDiS Company verifying their assurance of communication with the utility companies or utility owners. The Contractor/Excavator must follow State, Local, and Federal Guidelines prior to proceeding with excavations. The Contractor/Excavator will have these marks restored as long as there is work to perform.
- C. Once the Contractor has installed new utilities, they will provide to EDiS Company an as-built drawing, within 7 days, showing the exact location and elevation of the utilities. The installing Contractor will be responsible for locating and marking these utilities for other contractors that may have work in the same area.
- D. Definition: "Excavator" shall mean any person, including those acting either as an employer or employee, intending to perform or performing excavation or demolition work.
- E. Definition: "Excavate" or "Excavation" shall mean any operation in which earth, rock or other material in the ground is moved, removed, or otherwise displaced or disturbed by means of any

tools, equipment or explosives and includes, without limitation, grading, trenching, digging, dredging, ditching, drilling, auguring, tunneling, boring, backfilling, post pounding, driving objects into the ground, installation of form pins, hammering, scraping, cable or pipe plowing or driving.

15. TRAFFIC CONTROL PROCEDURES: Manual on Uniform Traffic Control Devices (MUTCD)

- A. Traffic control plan(s) for the work may be required by the Authorities Having Jurisdiction (AHJ). Traffic control plans, if required, shall be prepared per AHJ standards, at the Contractor's expense, for review and approval by the AHJ. (Note: anything on a public right of way controlled by the state will require an engineer's stamp.) The implementation of the traffic control plan and any associated maintenance shall be performed at the Contractor's expense in accordance with the requirements of the AHJ. All warning signs and safety devices used by the Contractor to perform the work shall conform to the requirements contained in the State where the work is being performed, and the Department of Transportation's current edition of "Manual on Uniform Traffic Control Devices". The Contractor shall also be responsible for all traffic control required by the AHJ over the Project on the intersecting streets.
- B. Contractors must submit a traffic control plan to the AHJ over the project for approval within fourteen (14) calendar days of Contract award. The approved traffic plan must be submitted prior to the commencement of work in a public street. The Contractor's representative on the site responsible for traffic control shall produce evidence that he/she has completed training acceptable to the Department of Transportation for safety through construction zones. All of the streets in which the work will occur shall remain open to traffic and one lane of traffic maintained at all times unless otherwise directed by the AHJ. Businesses and residences adjacent to the work shall be notified forty- eight (48) hours in advance of closing of streets, roadways, driveways, etc. The Contractor shall make every effort to minimize the amount of public parking temporarily eliminated due to construction in areas fronting businesses. No stockpiles of pipe or other material will be allowed in traveled right-of- ways unless otherwise approved. These requirements shall not authorize any extension of time for performance of this Contract.

16. SCAFFOLDING PROCEDURES

- A. A written project specific scaffold inspection checklist must be completed by the Contractor's competent person responsible for inspecting the scaffolding before each work shift, and after any occurrence which could affect a scaffold's structural integrity. A copy of the documented scaffold inspection checklist must be maintained by each company performing work on a scaffold and a second copy provided for record to the EDiS project office.
- B. Contractors are required to ensure that all employees working on or around scaffolding are properly trained. Contractors shall provide documented verification of scaffold training upon request.
- C. Scaffold erectors and dismantlers are required to wear fall protection during the erecting, modifying and dismantling scaffolds. In cases where fall protection is infeasible or creates a

greater hazard, the competent person shall document their decision at each specific location of scaffold assembly. At minimum, the scaffold erectors and dismantlers shall wear a fall protection harness during the erection, modification and dismantling of scaffolds.

- D. Contractors shall utilize a scaffold tag system. The scaffold tag system shall be color coded and visible. The competent person shall sign and date the scaffold tag.
1. Green tags are reserved for complete systems.
 2. Red tags are reserved for erection/dismantling activities and for scaffolds with deficiencies in the system.
 3. Yellow tags are reserved for systems that require the use of both PFAS and guardrail systems for incomplete scaffold systems or platforms.

END OF SECTION

CONTRACTOR

COMPETENT / QUALIFIED PERSON DESIGNATION LOG

Project:

Field Manager:

Contract: Contractor:	Applicable to Subcontractor (yes / no)		Foreman	Competent Person (if not foreman)
Subpart C-General Provisions				
1926-20 General Safety				
Subpart D - Health and Environmental Controls				
1926-53 Ionizing Radiation				
1926-55 Gases, Vapors, Fumes, Dusts, Mists				
1926-57 Ventilation				
1926.59 Hazard Communication				
1926.62 Lead				
Subpart E - Personal Protective Equipment				
1926.101 Hearing				
1926.103 Respirator Protection				
Subpart H - Materials Handling, Storage				
1926.251 Rigging Equipment for Material Handling				
Subpart J - Welding and Cutting				
1926.354 Welding, Cutting and Heating				
Subpart K - Electrical				
1926.404 Wiring Design and Protection				
Subpart L - Scaffolding				
1926.451 Scaffolding				
Subpart M - Fall Protection				
1926.502 Fall Protection Criteria and Practices				
1926.503 Training				
Subpart N - Cranes, Derrick -Redesignated 1926.1501				
Subpart O - Motor Vehicles and Equipment				
1926.601 Motor Vehicles				
Subpart P - Excavations				
1926.651 Specific Excavation Requirements				
1926.652 Requirements to Protective Systems				
Subpart S - Tunnels, Shafts, Caissons				
1926.800 Tunnels, Shafts, Caissons				
1926.803 Compressed Air				
Subpart T - Demolition				
1926.850 Preparatory Operations				
1926.852 Chutes				
1926.859 Mechanical Demolition				
Subpart V - Power Transmission and Distribution				
1926.955 Overhead Lines				

Contract: Contractor:	Applicable to Subcontractor (yes / no)		Foreman	Competent Person (if not foreman)
Subpart X - Stairways and Ladders				
1926.1053 Ladders				
1926.1060 Training Requirements				
Subpart Z - Toxic and Hazardous Substances				
1926.1101 Asbestos				
1926.1101 thru 1926.1148 Toxic and Hazardous Substances				

I certify that the listed employees are competent persons, as defined and required by specific OSHA standards. They are capable of identifying existing and predictable hazards in the surroundings or working conditions which are unsanitary, hazardous or dangerous to employees, and who has authorization to take prompt corrective measures to eliminate them.

Name (print)

Contractor Signature

Date

Certification of Training Documents to be Submitted with Safety Policy/Program

Provide a certification of training for employees on your safety program.

Certification of training must include: Employee's name, date of training, person conducting the training, topics covered, and a statement that the student has successfully completed the course.

In addition, Contractor shall provide certification of training on the following programs, as they pertain to your contract and project tasks. This list is not meant to be all inclusive: please refer to OSHA regulations for applicable safety requirements.

- a. ☐ Scaffold: 1926.454
- b. ☐ Fall Protection 1926.503
- c. ☐ Crane Operator: 1926.1427
- d. ☐ Signal person (this is for any persons connecting material or equipment for lifting): 1926.1428
- e. ☐ Crane maintenance: 1926.1429
- f. ☐ Steel erection fall protection: 1926.761
- g. ☐ Respiratory protection (medical clearance and training records complying with 1910.134
- h. ☐ Powder-actuated tools: 1926.302
- i. ☐ Motor Vehicles (are those vehicles that operate within an off-highway jobsite, not open to public traffic): 1926.21

Work Area:		JOB HAZARD/RISK ANALYSIS
	Site:	
	Company:	

Describe Activity:		Date:	
Completed By:			

Work Process and Tasks <i>Describe the tasks / steps involved</i>	Hazards Identified for each Task / Step	Risk Level <i>High – Medium</i>	Control / Safe Work Procedures for each Task <i>Controls to be implemented (consider the hierarchy of hazard controls)</i>

Checklist for Guidance			
• Does Task effect other trades?	• Any overhead and / or underground utilities?	• What type of PPE will be used?	
• Any Fall Conditions greater than 6 feet?	• What are the potential “hazards”?	• How can the “hazard” be eliminated?	
• Have employees been trained in the assignment? (e.g. fall protection, scaffold, excavation, etc..)	• What “hazards” are present?	• Excavation Safety System to be used?	

Competent Person / Supervisors Comments			Date:	
Employee Name:			Competent Person Signature:	

SECTION 014500 - QUALITY CONTROL

1. DESCRIPTION

- A. Quality control services include inspections and tests performed by independent agencies and governing authorities, as well as by the Contractor. Inspection and testing services are intended to determine compliance of the work with requirements specified. Specific quality control requirements are specified in individual specification sections.

2. RESPONSIBILITIES

- A. Contractor Responsibilities: Except where indicated as being the Owner's responsibility, quality control services are the Contractor's responsibility, including those specified to be performed by an independent agency and not by the Contractor. The Contractor shall employ and pay an independent agency, testing laboratory or other qualified firm to perform quality control services specified.

1. The Owner will engage and pay for services of an independent agency to perform the inspections and tests that are specified as Owner's responsibilities.

- B. Retest Responsibility: Where results of inspections or test do not indicate compliance with Contract Documents, retests are the Contractor's responsibility.

- C. Responsibility for Associated Services: The Contractor shall cooperate with independent agencies performing inspections or test. Provide auxiliary services as are reasonable. Auxiliary services include:

1. Provide access to the Work.
2. Assist taking samples.
3. Deliver samples to test laboratory.

- D. Coordination: The Contractor and independent test agency shall coordinate the sequence of their activities and shall avoid removing and replacing work to accommodate inspections and test. The Contractor is responsible for scheduling time for inspections and tests.

- E. Qualifications for Service Agencies: Contractor shall engage only inspection and test service agencies which are pre-qualified as complying with "Recommended Requirements for Independent Laboratory Qualification" by the American Council of Independent Laboratories.

- F. Submittals: Contractor shall submit a certified written report of each test, Inspection or similar service, in duplicate to the Construction Manager. Contractor shall submit additional copies of each report to any governing authority, when the authority so directs.

- G. Report Data: Written inspection or test reports shall include:

1. Name of testing agency or test laboratory.
 2. Dates and locations of samples, tests or inspections.
 3. Names of individual present.
 4. Complete inspection of test data.
 5. Test results.
 6. Interpretations.
 7. Recommendations.
- H. Repair and Protection: Upon completion of inspection or testing, Contractor shall repair damaged work and restore substrates and finishes. Contractor shall comply with requirements for "Cutting and Patching."
- I. Special Instructions:
1. Structural tests and special inspections must be conducted by an approved agency (an agency or firm regularly engaged in conducting tests or furnishing inspection services, approved by the authority having jurisdiction.) This means that contractors will no longer be allowed to cast their own test cylinders for example.
 2. Continuous special inspection (the full-time observation of work by an approved special inspector who is present until completion of the work) is required for any steel welds and connections. Critical elements may include: all slip critical bolted connections, complete and partial groove welds, multi-pass fillet welds and single pass fillet welds greater than 5/16".
 3. Continuous special inspection is required during the placement of all concrete and shotcrete for the proper application techniques with a few exceptions.
 4. Periodic special inspection (the part-time observation by an approved special inspector) is required for any steel welds and connections. Critical elements may include: all slip critical bolted connections, complete and partial groove welds, multi-pass fillet welds and single pass fillet welds greater than 5/16".
 5. Spray applied fireproofing requires periodic special inspection for the structural member surface conditions, application, thickness, density and bond strength.
 6. Based on the classification, occupancy, and design of the structure, the code requires periodic special inspection for placement of masonry units and reinforcing steel and continuous special inspection of grout placement.

END OF SECTION

SECTION 015200 - CONSTRUCTION FACILITIES & TEMPORARY CONTROLS

1. GENERAL

A. DESCRIPTION

1. Construction Manager and Contractors shall provide all temporary facilities throughout the construction period unless otherwise indicated in the Contract Documents.
2. Construction Manager and Contractors shall pay all costs for providing, maintaining and removing of all temporary facilities unless otherwise indicated in the Contract Documents.

B. RELATED WORK SPECIFIED ELSEWHERE

1. Temporary Electric: Section 015113.

2. FACILITIES

A. TEMPORARY SANITATION FACILITIES

1. Construction Manager will provide and maintain sanitary facilities for all personnel on the project.
2. The number of sanitary facilities required shall be based on the total number of workers employed on the site and shall be in accordance with the provisions of the applicable code.
3. Construction Manager will maintain sanitary facilities in a sanitary and clean condition at all times.

B. TEMPORARY WATER

1. Drinking Water: Contractor shall provide potable water for drinking purposes for all his personnel on the site. He shall furnish disposable drinking cups at water stations. Each water station shall be equipped with a suitable trash container for disposal of the drinking cups.
2. Construction Water: Construction Manager will provide and maintain tap locations for construction water of sufficiently pure and potable quality to avoid deleterious effect on any materials used. Location of construction water tap locations will be determined by the Construction Manager depending on the stage of construction of the incoming water service. Contractor shall provide and maintain all hoses, piping and valves as required for obtaining construction water from taps provided by the Construction Manager.

C. TEMPORARY TELEPHONES

1. Construction Manager will not provide any telephones or fax machines for Contractor's personnel. Each Contractor is responsible for its own phones and fax machines.

D. FIELD OFFICE

1. During the period of the Work and until final acceptance of the project, the Construction Manager will provide a weatherproof building for the Construction Manager's Field Project Manager(s) and Superintendent(s). Contractor shall make provisions for its own field office, subject to approval by the Construction Manager.

E. FIRE PROTECTION

1. The Roofing contractor will provide and maintain portable fire extinguishers on each floor level and building area. Number to conform to applicable codes.
2. Contractor shall provide additional fire extinguishers as required by OSHA regulations for its work.
3. Fire extinguishers shall be 10lb, Multi-Purpose (ABC) dry chemical, UL labeled, with a rating of 3a:40bc.

F. ACCESS ROADS AND PARKING AREAS

1. The Construction Manager will provide and maintain access roads on the site.
2. Neither the Construction Manager nor the Owner will provide parking for Contractor's personnel on or about the project site. All parking provisions required for Contractors will be solely the responsibility of the Contractors or their personnel.

G. STORAGE AREAS

1. The Construction Manager will assign storage areas on the site. Storage areas are extremely limited and will be assigned in a manner which will best facilitate the work.
2. Contractor shall provide all other storage space required for its work at off-site locations.
3. All combustible or flammable materials must be safely stored in a secured area in strict accordance with regulations, codes and laws enforced by local, State or Federal agencies, whichever is the most stringent.

H. FIRST AID STATION

1. The Contractor's Superintendent or Safety Supervisor shall insure that adequate first aid supplies are available, and that personnel are qualified to administer first aid/CPR, as required by State and/or Federal regulations.

I. SECURITY

1. The Construction Manager will provide the following security measures at the site: security lighting will be provided.
2. All other safety and security measures shall be the responsibility of each Contractor. These measures shall include but are not limited to the provision of secured storage for tools, construction equipment, and materials and equipment scheduled for installation in the building.

J. BENCH MARKS AND BASELINE

1. The Construction Manager will lay out and establish and maintain bench marks and baselines.
2. The Contractor shall lay out his own work and shall be responsible for the accuracy of same.
3. Contractor shall check grades, lines, levels and dimensions as shown on the drawings and shall promptly report errors or inconsistencies in same to the Construction Manager before Work proceeds.
4. The Contractor is responsible for damaging or altering the bench marks and baselines established by the Construction Manager and shall bear the costs of replacing same.

K. FIELD OFFICE AND STORAGE TRAILERS

1. Contractor shall provide and maintain its own field office and storage trailers as required.
2. Contractor shall provide temporary heat and power for its field office and storage trailer.
3. Contractor's field offices and storage trailers shall be located as directed by the Construction Manager.

L. PROJECT SIGN

1. The Construction Manager will provide a Project Sign naming the major participants, as determined by the Owner.

M. TRASH DISPOSAL

1. Each Contractor shall be responsible for daily clean up and depositing its common trash in the dumpsters provided by the Construction Manager.
2. The Construction Manager will not provide a trash chute.
3. The Construction Manager will provide dumpsters, and will arrange for disposal of common, non-hazardous, work-related trash deposited in these dumpsters.

N. HOISTING

1. Contractor shall provide its own materials hoists and cranes. No personnel hoist will be provided.

O. SCAFFOLDING AND WORKING PLATFORMS

1. No scaffolding shall be provided by the Construction Manager. Each Contractor shall provide all scaffolding required to perform its Work.

P. SAFETY BARRICADES AND RAILINGS

1. The Structural Contractor shall provide barricades **and protective barriers** around elevator, stair, shaft and cut openings in floors and roofs, and edges of floors and roofs. The methods and materials used in barricading shall be in accordance with OSHA and local code regulations. Barricades and protective barriers will be installed immediately after the installation of the floor slab on any level or part of a level on the Building. Until a level has been fully barricaded, the Structural Contractor will be responsible for maintenance of the barricades. When a warning barricade is used to prohibit employees from entering a restricted work area. The "warning barricade" shall meet the requirements of CFR 1926.502 (f)(2). The supported rope, wire, or chain shall be flagged at not more than 6-foot (1.8 m) intervals with high-visibility material and maintain between 34 and 39 inches above the walking/working surface; Warning signs and tags shall be used in accordance with Subpart G of CFR OSHA Construction Industry Regulations.
2. After the barricades and protective barriers are no longer needed, the Structural Contractor will remove the barricades from the site. The Construction Manager will determine the location and scheduling of barriers to be removed.
3. Contractor shall provide for its own barricades at all other trenches, excavations, and locations not specifically identified in Paragraph 1 above.
4. Contractors who remove barricades shall be responsible for replacing them. If, after proper notification, in writing, from the Construction Manager the responsible Contractor does not correct his deficiencies in safety barricade placement, the Construction Manager reserves the right to undertake this work and backcharge the responsible Contractor(s).

5. During the execution of his work, Contractor will provide daily maintenance of, and upon completion of same, restore all barricades in a manner acceptable to prevailing safety standards enforced by local, State or Federal ordinance, whichever is most stringent. The intent is to leave no floor penetration or perimeter opening in an unsafe condition.
6. The Construction Manager shall arrange for temporary ladders required for access to each of the floor levels after the completion of floor slab work, and until the final stairs are ready for use.

Q. PUMPING AND DRAINAGE

1. Contractor shall provide its own pumping and drainage.
2. When an area is released by one Contractor to another, the Contractor releasing an area shall be responsible for leaving it in a drained condition. The incoming Contractor shall assume responsibility for drainage on the day that he is scheduled to start work in the area. If the incoming Contractor is late in starting work, he shall assume responsibility for pumping and drainage arising as a result.

R. TEMPORARY BUILDING ENCLOSURES

1. The Construction Manager will equip all temporary exterior doors of the building with self-closing hardware and padlocks.
2. All other temporary enclosures and protection shall be provided by the Contractor requiring the protection.
3. Temporary enclosures required due to late delivery of materials or untimely installation of work shall be the responsibility of the Contractor responsible for the delay.

S. TEMPORARY POWER AND LIGHTING

1. Contractor shall provide all extension cords and outlets as required for obtaining electric power from power centers provided by the Electrical Contractor. Refer to Section 015113 - TEMPORARY ELECTRIC.
2. Contractor shall provide its own additional temporary lighting of sufficient lighting levels to properly install his work.

T. TEMPORARY HEAT

1. Contractor shall provide temporary heat as required for its operations. Once a building has reached the "Permanent Enclosure" stage, temporary heat will be provided as specified in Section 015123 - TEMPORARY HEAT AND VENTILATION.

2. Equipment and methods of temporary heating shall be reported to the Construction Manager.

U. PROTECTION OF ADJACENT MATERIALS

1. Contractor shall protect adjacent materials and finishes from damage as a result of its work.

V. CLEAN UP

1. Contractor shall arrange for clean up and removal of debris resulting from its operations, and shall dispose of debris in accordance with the provisions of Paragraph 2.13 above. Clean up shall be on a continual basis to ensure that building, grounds and public properties are maintained free from accumulations of waste materials and trash.
2. The Contractor will limit use of and ensure that all materials, including waste, that are combustible or flammable will be removed from the building continually, as work progresses, **and at a minimum** at the end of each work day. All trash which is potentially edible or may attract rodents or insects will be disposed of in metal containers and removed by the end of the work day.
3. At completion of its Work, each Contractor shall remove waste materials, rubbish, tools, equipment, and clean up all exposed surfaces in preparation for final cleaning.
4. If, after notification in writing from the Construction Manager, the Contractor does not correct its deficiencies in housekeeping within twenty four (24) hours, the Construction Manager reserves the right to undertake the Work and to backcharge the Contractor.
5. Final clean up prior to Owner occupancy shall be arranged for by the Construction Manager.

W. DUST PROTECTION

1. Contractor shall erect and maintain dust proof protection whenever its operations will produce dust and dirt that might filter through the building into occupied or finished areas. Contractor shall be responsible for all cleaning required due to its failure to provide adequate dust protection.

X. PROTECTION OF EXISTING CONSTRUCTION

1. Contractor shall be responsible for all damage that it may cause to materials and equipment stored or installed by other Contractors.

Y. OTHER

1. Contractor shall provide any other Temporary Facilities and services that it requires and which are not specifically identified above.

3. PERMITS

- 3.1 The Construction Manager will obtain the Building Permit. All other permits are to be obtained and paid for by the Contractor requiring them.

4. EXECUTION

A. GENERAL

1. Contractor shall install all temporary facilities in accordance with applicable codes.
2. Contractor shall maintain temporary facilities for which it is responsible throughout the construction period.
3. Contractor shall remove all temporary facilities for which it is responsible when they are no longer required or when the Construction Manager directs the removal of same.
4. Contractor shall repair all damage to the Project Site caused by the installation of its temporary facilities.

END OF SECTION

SECTION 016200 - MATERIAL AND EQUIPMENT

1. GENERAL CONDITIONS

- A. The general provisions of the Contract, including the Conditions of the Contract (General, Supplementary and other Conditions, if any) and Division 1 as appropriate apply to the Work specified in this Section.
- B. Where work is to be executed under Separate Prime Contracts, the provisions of this Section apply to each Contract.

2. REQUIREMENTS INCLUDED

- A. All materials and equipment incorporated into the Work shall:
 - 1. be new;
 - 2. conform to applicable specifications and standards; and
 - 3. comply with size, make, type and quality specified, or as specifically approved in writing by the Architect.
- B. Manufactured and Fabricated Products shall conform to the following requirements:
 - 1. Designed, fabricated and assembled in accord with the best engineering and shop practices.
 - 2. Manufactured like parts of duplicate units to standard sizes and gauges, to be interchangeable.
 - 3. Two or more items of the same kind shall be identical, by the same manufacturer.
 - 4. Products shall be suitable for service conditions.
 - 5. Equipment capacities, sizes and dimensions shown or specified shall be adhered to unless variations are specifically approved in writing.
- C. Contractor shall not use materials or equipment for any purpose other than that for which it is designated or is specified.
- D. Materials removed from existing structures shall not be reused in the completed work unless specifically indicated or specified.
- E. For materials and equipment specifically indicated or specified to be reused in the Work:
 - 1. Contractor shall use special care on removal, handling storage and reinstallation, to assure proper function in the completed Work.

2. Arrange for transportation, storage and handling of products which require off-site storage, restoration or renovation. Pay all costs for such work.

3. MANUFACTURER'S INSTRUCTIONS

- A. When Contract Documents require that installation of work shall comply with manufacturer's printed instructions, Contractor shall obtain and distribute copies of such instructions to parties involved in the installation, including two copies to Construction Manager.
 1. Maintain one set of complete instructions at the job site during installation and until completion.
- B. Contractor shall handle, install, connect, clean, condition and adjust products in strict accord with such instructions and in conformity with specified requirements.
 1. Should job conditions or specified requirements conflict with manufacturer's instructions, Contractor shall consult with Construction Manager for further instructions.
 2. Contractor shall perform work in accord with manufacturer's instructions. Contractor shall not omit any preparatory step or installation procedure unless specifically modified or exempted by Contract Documents.

4. TRANSPORTATION AND HANDLING

- A. Contractor shall arrange deliveries of Products in accord with construction schedules, coordinate to avoid conflict with work and conditions at the site.
 1. Deliver Products in undamaged condition, in manufacturer's original containers or packaging, with identifying labels intact and legible.
 2. Contractor shall immediately on delivery, inspect shipments to assure compliance with requirements of Contract Documents and approved submittals, and that Products are properly protected and undamaged.
- B. Contractor shall provide equipment and personnel to handle Products by methods to prevent soiling or damage to Products or packaging.

5. STORAGE AND PROTECTION

- A. Contractor shall store Products in accord with manufacturer's instructions, with seals and labels intact and legible.
 1. Contractor shall store Products subject to damage by the elements in weathertight enclosures.
 2. Contractor shall maintain temperature and humidity within the ranges required by

manufacturer's instructions.

B. Exterior Storage

1. Contractor shall store fabricated Products above the ground, on blocking or skids, to prevent soiling or staining. Cover Products which are subject to deterioration with impervious sheet coverings; provide adequate ventilation to avoid condensation.
2. Contractor shall store loose granular materials in a well-drained area on soiled surfaces to prevent mixing with foreign matter.

C. Contractor shall arrange storage in a manner to provide easy access for inspection. Contractor shall make periodic inspections of stored Products to assure that Products are maintained under specified conditions, and free from damage or deterioration.

D. Contractor shall store flammable materials so as to prevent contact with flames and fire. Conform with manufacturer's recommendations and local laws. Pay particular attention to storage of:

1. Roof insulation.
2. Roofing materials, including solvents.
3. Paint materials.
4. Cleaning and other solvents.
5. Fuels.

E. Protection after Installation:

1. Contractor shall provide substantial coverings as necessary to protect installed Products from damage from traffic and subsequent construction operations. Remove when no longer needed.

6. SUBSTITUTIONS AND PRODUCT OPTIONS

A. Product List.

1. Within 30 days after Contract Date, Contractor shall submit to Construction Manager a complete list of major products proposed to be used, with the name of the manufacturer and the installing Contractor.

B. Contractor's Options.

1. For Products specified only by reference standard, Contractor shall select any Product

meeting that standard.

2. For Products specified by naming several Products or manufacturers, Contractor shall select any one of the Products or manufacturers named which complies with the specifications.
3. For Products specified by naming one or more Products or manufacturers and "or equal", Bidders must, during the bidding period, submit a request for substitutions for any Product or manufacturer not specifically named. See provisions in Paragraph 6.C, below.
4. For Products specified by naming only one Product and manufacturer, there is no option; and Contractor shall provide the precise Product specified.

C. Substitutions.

1. The materials, products and equipment described in the Bidding Documents establish a standard of quality, required function, dimension, and appearance to be met by any proposed substitution. The specification of a particular manufacturer or model number is not intended to be proprietary in any way. Substitutions of products for those named will be considered, providing that the Vendor certified that the function, quality, and performance characteristics of the material offered is equal or superior to that specified. It shall be the Bidder's responsibility to assure that the proposed substitution will not affect the intent of the design, and to make any installation modifications required to accommodate the substitution.
2. Requests for substitutions shall be made in writing to the Architect at least ten (10) days prior to the date of the Bid Opening. Such requests shall include a complete description of the proposed substitution, drawings, performance and test data, explanation of required installation modifications due the substitution, and any other information necessary for an evaluation. The burden of proof of the merit of the proposed substitution is upon the proposer. The Architect's decision of approval or disapproval shall be final. The Architect is to notify Owner prior to any approvals.
3. Until a date no later than ten (10) days before the date Bids are due, Architect will consider written requests from bidders for substitution of Products. **The contractor will submit any substitution requests to the Construction Manager for transmittal to the Architect. The architect will review requests and will notify Bidders in an Addendum if the requested substitution is acceptable.**
4. Should the Bidder desire a substitution, it shall submit a separate request for each Product, supported with complete data, with drawings and samples as appropriate, including:
 - a. Comparison of the qualities of the proposed substitution with that specified.
 - b. Changes required in other elements of the Work because of the substitution.
 - c. Effect on the construction schedule.

- d. Cost data comparing the proposed substitution with the Product specified.
 - e. Any required license fees or royalties.
 - f. Availability of maintenance service, and source of replacement materials.
- 5. Architect, in its sole discretion, shall be the judge of the acceptability of the proposed substitution.
- 6. A request for a substitution constitutes a representation that Bidder:
 - a. has investigated the proposed Product and determined that it is equal to or superior in all respects to that specified;
 - b. will provide the same warranties or bonds for the substitution as for the Product specified;
 - c. will coordinate the installation of an accepted substitution into the Work, and make such other changes as may be required to make the Work complete in all respects; and
 - d. waives all claims for additional costs, under his responsibility, which may subsequently become apparent.
- D. Architect will review requests for substitutions with reasonable promptness, and notify Bidders, in writing, through the Construction Manager, of the decision to accept or reject the requested substitution. Any decision to accept a substitution must be confirmed in an Addendum issued during the bidding period in order to be valid. Oral approvals will not be binding.
- E. The Architect shall have no obligation to consider any substitutions after the Contract award.

END OF SECTION

SECTION 017123 - FIELD ENGINEERING

1. GENERAL PROVISIONS

- A. The general provisions of the Contract, including the Conditions of the Contract, (General, Supplementary and other Conditions, if any) and Division 1 as appropriate, apply to the Work specified in this Section.
- B. The provisions of the section apply to all contracts.

2. SURVEY

- A. The Owner has had a site survey prepared and will be furnished upon request. This information has not been included in this Bid Pac.

3. CONSTRUCTION MANAGER

- A. The Construction Manager will establish a bench mark and base line from which structures and grades shall be laid out by Contractors as designated in this section. The total extent of this layout is shown on the site drawings. One bench elevation shall be provided.

END OF SECTION

SECTION 017329 - CUTTING AND PATCHING

1. GENERAL

- A. Definition: "Cutting and Patching" includes cutting into existing construction to provide for the installation or performance of other work and subsequent fitting and patching required to restore surfaces to their original condition.
- B. Refer to Other Sections of these specifications for specific cutting and patching requirements and limitations applicable to individual units of work.
- C. Structural Work: Do not cut and patch structural work in a manner resulting in a reduction of load carrying capacity or load deflection ratio. Submit proposal and request and obtain Architect's/Engineer's approval before proceeding with cut and patch of structural work.
- D. Operational/Safety Limitations: Do not cut and patch operational elements and safety components in a manner resulting in decreased performance, shortened useful life, or increased maintenance. Submit proposals and requests and obtain Architect's/Engineer's approval before proceeding with cut and patches of structural work.
- E. Visual/Quality Limitations: Do not cut and patch work exposed to view (exterior and interior) in manner resulting in noticeable reduction of aesthetic qualities and similar qualities, as judged by Architect/Engineer.
 - 1. Engage the original Installer/Fabricator, or (if not available) an acceptable equivalent entity, to cut and patch the following categories of exposed work but not limited to
 - 2. Exterior wall materials, ie., curtain wall
 - 3. Finish floor materials, ie., substrate, carpet, ceramic tile
 - 4. Walls
 - 5. Ceilings
- F. Limitation on Approvals: Architect's/Engineer's approval to proceed with cutting and patching does not waive right to later acquire removal/replacement of work found to be cut and patched in an unsatisfactory manner, as judged by Architect/Engineer.

2. MATERIALS

- A. General: Use materials for cutting and patching that are identical to existing materials. If identical materials are not available, or cannot be used, use materials that match existing adjacent surfaces to the fullest extent possible with regard to visual effect. Use materials for cutting and patching that will result in equal or better performance characteristics.

3. EXECUTION

- A. Inspection: Before cutting, examine surfaces to be cut and patched and conditions under which the work is to be performed. If unsafe or otherwise unsatisfactory conditions are encountered, take corrective action before proceeding with the work.
- B. Temporary Support: To prevent failure provide temporary support of work to be cut.
- C. Protection: Protect other work during cutting and patching to prevent damage. Provide protection from adverse weather conditions for that part of the project that may be exposed during cutting and patching operations.
 - 1. Avoid interference with use of adjoining areas or interruption of free passage to adjoining areas.
 - 2. Take precautions not to cut existing pipe, conduit or duct serving the building but scheduled to be relocated until provisions have been made to bypass them.
- D. Cutting: Cut the work using methods that are least likely to damage work to be retained or adjoining work. Where possible review proposed procedures with the original installer; comply with original installer's recommendations.
 - 1. Where cutting is required use hand or small power tools designed for sawing or grinding, not hammering and chopping. Cut through concrete and masonry using a cutting machine such as a carborundum saw or core drill. Cut holes and slots neatly to size required with minimum disturbance of adjacent work. To avoid marring existing finished surfaces, cut and drill from the exposed or finished side into concealed surfaces. Temporarily cover openings when not in use.
- E. Patching: Patch with seams which are durable and as invisible as possible. Comply with specified tolerances for the work.
 - 1. Restore exposed finishes of patched areas and where necessary extend finish restoration into retained adjoining work in a manner which will eliminate evidence of patching and finishing.

END OF SECTION

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

SECTION 01 74 19

CONSTRUCTION WASTE MANAGEMENT

PART 1 – GENERAL

1.1 SUMMARY

- A. Section includes: Administrative and procedural requirements for construction waste management activities.

1.2 DEFINITIONS

- A. Construction, Demolition, and Land clearing (CDL) Waste: Includes all non-hazardous solid wastes resulting from construction, remodeling, alterations, repair, demolition and land clearing. Includes material that is recycled, reused, salvaged or disposed as garbage.
- B. Salvage: Recovery of materials for on-site reuse, sale or donation to a third party.
- C. Reuse: Making use of a material without altering its form. Materials can be reused on-site or reused on other projects off-site. Examples include, but are not limited to the following: Crushing or grinding of concrete for use as sub-base material. Chipping of land clearing debris for use as mulch.
- D. Recycling: The process of sorting, cleaning, treating, and reconstituting materials for the purpose of using the material in the manufacture of a new product.
- E. Source-Separated CDL Recycling: The process of separating recyclable materials in separate containers as they are generated on the job-site. The separated materials are hauled directly to a recycling facility or transfer station.
- F. Co-mingled CDL Recycling: The process of collecting mixed recyclable materials in one container on-site. The container is taken to a material recovery facility where materials are separated for recycling.
- G. Approved Recycling Facility: Any of the following:
 - 1. A facility that can legally accept CDL waste materials for the purpose of processing the materials into an altered form for the manufacture of a new product.
 - 2. Material Recovery Facility: A general term used to describe a waste-sorting facility. Mechanical, hand-separation, or a combination of both procedures, are used to recover recyclable materials.
- H. Universal waste components (UWC) are as follows: electric motors, PCB ballasts, non PCB ballasts, capacitors, contactors, circuit breakers, elemental and liquid mercury containing articles, transformers, lead acid batteries, fluorescent light bulbs, and all HID light bulbs.

1.3 SUBMITTALS

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

- A. Contractor shall develop a Waste Management Plan: Submit 3 copies of plan within 14 days of date established for the **Notice to Proceed**.
- B. Contractor shall provide Waste Management Report: Concurrent with each Application for Payment, submit **3** copies of report.

1.4 PERFORMANCE REQUIREMENTS

- A. General: Divert a minimum of **75%** CDL waste, by weight, from the landfill by one, or a combination of the following activities:
 - 1. Salvage
 - 2. Reuse
 - 3. Source-Separated CDL Recycling
 - 4. Co-mingled CDL Recycling
- B. CDL waste materials that can be salvaged, reused or recycled include, but are not limited to, the following:
 - 1. Acoustical ceiling tiles
 - 2. Asphalt
 - 3. Asphalt shingles
 - 4. Cardboard packaging
 - 5. Carpet and carpet pad
 - 6. Concrete
 - 7. Drywall
 - 8. Fluorescent lights and ballasts
 - 9. Land clearing debris (vegetation, stumpage, dirt)
 - 10. Metals
 - 11. Paint (through hazardous waste outlets)
 - 12. Wood
 - 13. Plastic film (sheeting, shrink wrap, packaging)
 - 14. Window glass
 - 15. Wood
 - 16. Field office waste, including office paper, aluminum cans, glass, plastic, and office cardboard.

1.5 QUALITY ASSURANCE

- A. Waste Management Coordinator Qualifications: Experienced firm, with a record of successful waste management coordination of projects with similar requirements, that employs a LEED Accredited Professional, certified by the USGBC as waste management coordinator.
- B. Refrigerant Recovery Technician Qualifications: Certified by EPA-approved certification program.
- C. Regulatory Requirements: Conduct construction waste management activities in accordance with hauling and disposal regulations of all authorities having jurisdiction and all other applicable laws and ordinances.
- D. Preconstruction Conference: Schedule and conduct meeting at Project site prior to construction activities.

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

1. Attendees: Inform the following individuals, whose presence is required, of date and time of meeting.
 - a. Owner
 - b. Architect
 - c. Contractor's superintendent
 - d. Major subcontractors
 - e. Waste Management Coordinator
 - f. Other concerned parties.
2. Agenda Items: Review methods and procedures related to waste management including, but not limited to, the following:
 - a. Review and discuss waste management plan including responsibilities of Waste Management Coordinator.
 - b. Review requirements for documenting quantities of each type of waste and its disposition.
 - c. Review and finalize procedures for materials separation and verify availability of containers and bins needed to avoid delays.
 - d. Review procedures for periodic waste collection and transportation to recycling and disposal facilities.
 - e. Review waste management requirements for each trade.
3. Minutes: Record discussion. Distribute meeting minutes to all participants.
Note: If there is a Project Architect, they will perform this role.

1.6 WASTE MANAGEMENT PLAN – Contactor shall develop and document the following:

- A. Develop a plan to meet the requirements listed in this section at a minimum. Plan shall consist of waste identification, waste reduction plan and cost/revenue analysis. Distinguish between demolition and construction waste. Indicate quantities by weight throughout the plan.
- B. Indicate anticipated types and quantities of demolition, site-cleaning and construction waste generated by the project. List all assumptions made for the quantities estimates.
- C. List each type of waste and whether it will be salvaged, recycled, or disposed of in an landfill. The plan should included the following information:
 1. Types and estimated quantities, by weight, of CDL waste expected to be generated during demolition and construction.
 2. Proposed methods for CDL waste salvage, reuse, recycling and disposal during demolition including, but not limited to, one or more of the following:
 - a. Contracting with a deconstruction specialist to salvage materials generated,
 - b. Selective salvage as part of demolition contractor's work,
 - c. Reuse of materials on-site or sale or donation to a third party.
 3. Proposed methods for salvage, reuse, recycling and disposal during construction including, but not limited to, one or more of the following:
 - a. Requiring subcontractors to take their CDL waste to a recycling facility;

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

- b. Contracting with a recycling hauler to haul recyclable CDL waste to an approved recycling or material recovery facility;
 - c. Processing and reusing materials on-site;
 - d. Self-hauling to a recycling or material recovery facility.
- 4. Name of recycling or material recovery facility receiving the CDL wastes.
- 5. Handling and Transportation Procedures: Include method that will be used for separating recyclable waste including sizes of containers, container labeling, and designated location on project site where materials separation will be located.
- D. Cost/Revenue Analysis: Indicate total cost of waste disposal as if there was no waste management plan and net additional cost or net savings resulting from implementing waste management plan. Include the following:
 - 1. Total quantity of waste.
 - 2. Estimated cost of disposal (cost per unit). Include hauling and tipping fees and cost of collection containers for each type of waste.
 - 3. Total cost of disposal (with no waste management).
 - 4. Revenue from salvaged materials.
 - 5. Revenue from recycled materials.
 - 6. Savings in hauling and tipping fees by donating materials.
 - 7. Savings in hauling and tipping fees that are avoided.
 - 8. Handling and transportation costs. Including cost of collection containers for each type of waste.
 - 9. Net additional cost or net savings from waste management plan.

PART 2 - PRODUCTS (Not Used)

PART 3 – EXECUTION

3.1 CONSTRUCTION WASTE MANAGEMENT, GENERAL

- A. Provide containers for CDL waste that is to be recycled clearly labeled as such with a list of acceptable and unacceptable materials. The list of acceptable materials must be the same as the materials recycled at the receiving material recovery facility or recycling processor.
- B. The collection containers for recyclable CDL waste must contain no more than 10% non-recyclable material, by volume.
- C. Provide containers for CDL waste that is disposed in a landfill clearly labeled as such.
- D. Use detailed material estimates to reduce risk of unplanned and potentially wasteful cuts.
- E. To the greatest extent possible, include in material purchasing agreements a waste reduction provision requesting that materials and equipment be delivered in packaging made of recyclable material, that they reduce the amount of packaging, that packaging be taken back for reuse or recycling, and to take back all unused product. Insure that subcontractors require the same provisions in their purchase agreements.
- F. Conduct regular visual inspections of dumpsters and recycling bins to remove contaminants.

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

3.2 SOURCE SEPARATION

- A. General: Contractor shall separate recyclable materials from CDL waste to the maximum extent possible.

Separate recyclable materials by type.

1. Provide containers, clearly labeled, by type of separated materials or provide other storage method for managing recyclable materials until they are removed from Project site.
2. Stockpile processed materials on-site without intermixing with other materials. Place, grade, and shape stockpiles to drain surface water and to minimize pest attraction. Cover to prevent windblown dust.
3. Stockpile materials away from demolition area. Do not store within drip line of remaining trees.
4. Store components off the ground and protect from weather.

3.3 CO-MINGLED RECYCLING

- A. General: Do not put CDL waste that will be disposed in a landfill into a co-mingled CDL waste recycling container.

3.4 REMOVAL OF CONSTRUCTION WASTE MATERIALS

- A. Remove CDL waste materials from project site on a regular basis. Do not allow CDL waste to accumulate on-site.
- B. Transport CDL waste materials off Owner's property and legally dispose of them.
- C. Burning of CDL waste is not permitted.

3.5 UNIVERSAL WASTE DIVERSION

- A. Remove all universal waste from fixtures, panels, and related devices for proper diversion and reclamation.
- B. Store all universal waste in containers provided by contact person within facilities operations.
- C. Store all universal waste in a secured location and request periodic removal from assigned contact person.
- D. Exemption: electric motors, circuit breakers, transformers and lighting contactors are exempt from this provision provided the contractor chooses to salvage or reuse the components.
- E. No identified universal waste will be discarded into the waste stream.
- F.

END OF SECTION

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

WASTE MANAGEMENT PROGRESS REPORT				
MATERIAL CATEGORY	DISPOSED IN MUNICIPAL SOLID WASTE LANDFILL	DIVERTED FROM LANDFILL BY RECYCLING, SALVAGE OR REUSE		
		Recycled	Salvaged	Reused
1. Acoustical Ceiling Tiles				
2. Asphalt				
3. Asphalt Shingles				
4. Cardboard Packaging				
5. Carpet and Carpet Pad				
6. Concrete				
7. Drywall				
8. Fluorescent Lights and Ballasts				
9. Land Clearing Debris (vegetation, stumpage, dirt)				
10. Metals				
11. Paint (through hazardous waste outlets)				
12. Wood				
13. Plastic Film (sheeting, shrink wrap, packaging)				
14. Window Glass				
15. Field Office Waste (office paper, aluminum cans, glass, plastic, and coffee cardboard)				
16. Other (insert description)				
17. Other (insert description)				
Total (In Weight)		(TOTAL OF ALL ABOVE VALUES – IN WEIGHT)		
		Percentage of Waste Diverted	(TOTAL WASTE DIVIDED BY TOTAL DIVERTED)	

STATE OF DELAWARE

DIVISION OF FACILITIES MANAGEMENT

SECTION 017700 – CONTRACT CLOSEOUT

1. DESCRIPTION OF REQUIREMENTS

- A. Provisions of this section apply to the procedural requirements for the actual close out of the Work, not to the administrative matters such as final payment or the change over of insurance. Close out requirements relate to both substantial and final completion of the Work; they also apply to individual portions of completed work as well as the Total work. Specific requirements contained in other sections have precedence over the general requirements contained in this section.

2. PROCEDURES AT SUBSTANTIAL COMPLETION

- A. Prerequisites: Contractor shall comply with the General Conditions and complete the following before requesting inspection of the Work, or a designated portion of the Work, for certification of substantial completion:
1. submit executed warranties, workmanship bonds, maintenance agreements, inspection certificates, releases of liens, tax certification and similar required documentation for specific units of work, and documents needed to enable Owner's unrestricted occupancy and use;
 2. submit record documentation, maintenance manuals, tools, spare parts, keys and similar operational items;
 3. complete instructions of Owner's operating personnel, and start up of systems; and
 4. complete final cleaning and remove temporary facilities and tools.
- B. Inspection Procedures: Upon receipt of Contractor's request, Architect/Engineer will either proceed with inspection or advise Construction Manager of prerequisites not fulfilled. Following initial inspection, Architect/Engineer will either prepare certificate of substantial completion, or advise Construction Manager of work which must be performed prior to issuance of certificate. The Architect/Engineer will repeat the inspection when requested and assure that the work has been substantially completed. Results of the completed inspection will form the initial "punch list" for final acceptance.
- C. Punch List Procedures: Each Contractor shall be given a copy of the punch list with its appropriate work identified. Each Contractor shall be given 9 (nine) calendar work days to complete their punch list work. On the 10th day or as determined by the Construction Manager the Construction Manager shall employ other Contractors, as required, to complete any incomplete punch list work and retain from the appropriate Contractors retainage all costs incurred.

3. PROCEDURES AT FINAL ACCEPTANCE

- A. Reinspection Procedure: The Architect/Engineer will reinspect the Work upon receipt of the

Contractor's notice that, except for those items whose completion has been delayed due to circumstances that are acceptable to the Architect/Engineer, the Work has been completed, including punch list items from earlier inspections. Upon completion of reinspection, the Architect/Engineer will either recommend final acceptance and final payment, or will advise the Contractor of work not completed or obligations not fulfilled as required for final acceptance. If necessary, this procedure will be repeated.

4. RECORD DOCUMENTATION

- A. Record Drawings: Contractor shall maintain a complete set of either blue or black line prints of the contract documents and shop drawings for record mark-up purposes throughout the Contract Time. Contractor shall mark up these drawings during the course of the Work to show both changes and the actual installation, in sufficient detail to form a complete record for Owner's purposes giving particular attention to work that will be concealed and difficult to measure and record at a later date, and Work which may require servicing or replacement during the life of the project. Require the entities marking prints to sign and date each mark up. Bind prints into manageable sets, with durable paper cover, appropriately labeled.
- B. Installation, Operation and Maintenance Manual: Contractor shall provide 3-ring vinyl covered binders containing required maintenance manuals, properly identified and indexed and including operating and maintenance instructions extended to cover emergencies, spare parts, warranties, inspection procedures, diagrams, safety, security, and similar appropriate data for each system of equipment item.
- C. State Tax Certification: Contractor shall provide recent Delaware State Tax Certification form as issued by State of Delaware, Department of Finance, Division of Revenue, Carvel State Office Building, 820 N. French Street, Wilmington, Delaware 19801. To obtain this certificate, the contractor will be required to provide the Division of Revenue with the completed State Form 8821 DE along with a processing fee of \$40.
- D. AIA Documents: Contractors shall provide the following AIA documents with their final payment application submission:
- AIA G732, Application for Payment for 100% Complete
 - AIA G732, Final Application for Payment for Retainage
 - AIA G704-CMA, Certificate of Substantial Completion – 4 originals
 - AIA G706, Affidavit of Payment of Debts & Claims
 - AIA G706A, Affidavit of Release of Liens
 - AIA G707, Consent of Surety
- E. Release of Liens: Contractors shall provide the following release of liens with their final payment application submission:
- Prime Contractor's Release of Liens
 - Subcontractors' & Suppliers' Release of Liens (major subs and suppliers)

5. GENERAL CLOSE OUT REQUIREMENTS

A. Operator Instruction: Contractor shall require each Installer of systems requiring continued operation and maintenance by Owner's operating personnel, to provide on location instruction to Owner's personnel, sufficient to ensure safe, secure, efficient, non-failing utilization and operation of systems. Contractor shall provide instructions for the following categories of work:

1. Mechanical/electrical/electronic systems (not limited to work of Division 15 and 16).
2. Roofing, flashing, joint sealers.
3. Floor finishes.
4. Door hardware

6. FINAL CLEANING

A. At the time of project close out Contractor shall clean or re-clean the Work to the condition expected from a normal, commercial building cleaning and maintenance program. Complete the following cleaning operations before requesting the Architect/Engineer's inspection for certification of substantial completion:

1. Remove non-permanent protections and labels.
2. Polish glass.
3. Clean exposed finishes.
4. Touch up minor finish damage.
5. Clean or replace mechanical systems filters.
6. Remove debris.
7. Broom clean unoccupied spaces.
8. Sanitize plumbing and food service facilities.
9. Clean light fixtures and replace burned out lamps.
10. Sweep and wash paved areas.
11. Police yards and grounds.

END OF SECTION

**DELAWARE
FORM 8821DE****Authorization to Release Tax Information****Page 1**

Completion and submission of this form authorizes the Delaware Division of Revenue to release confidential information of the Taxpayer(s) named below to the authorized person(s) or organization named below for the tax type(s) specified below. This form does not give Power of Attorney and does not grant the authorized person(s) or organization any powers of representation. Unauthorized disclosure of tax information is a criminal offense.

Read the instructions below before completing this form.

Social Security or Federal Employer ID number

Your name or name of entity

Spouse's name, if joint (or corporate officer, partner or fiduciary if a business)

Spouse's Social Security number (if a joint return)

Street address

City

State

ZIP Code

-

I authorize the following person or organization to inspect and/or receive private and non-public information in regard to the tax types and periods provided below.

Name of person or organization to receive tax information

Name of firm (if applicable)

Street address

City

State

ZIP Code

-

Phone Number

Fax Number

The above person or organization is authorized to receive the following tax information (check all that apply):

Type of Tax

Year(s) or Period(s)

☐	Individual Income	from	MM	DD	YY	to	MM	DD	YY
☐	Corporate Income	from	MM	DD	YY	to	MM	DD	YY
☐	Pass-through Return	from	MM	DD	YY	to	MM	DD	YY
☐	Gross Receipts	from	MM	DD	YY	to	MM	DD	YY
☐	Withholding	from	MM	DD	YY	to	MM	DD	YY
☐	Other (please specify):	from	MM	DD	YY	to	MM	DD	YY

The authorization to release tax information is not valid until it is signed and dated. It will expire 60 days after the information is released. By signing this form, I hereby certify that the Delaware Division of Revenue is authorized to release any and all confidential information concerning the above mentioned release any and all confidential information concerning the above mentioned Taxpayer under penalty of law. A copy of this form will be mailed to the individual(s) authorizing the release.

Your Signature	Date	Spouse's Signature (if joint)	Date
	MM DD YY		MM DD YY
Print Name		Print Spouse's Name (if joint)	
Print Title (if applicable)		Phone	
Phone			

Mail to: Delaware Division of Revenue, 820 North French Street, Wilmington, DE 19801

Form 8821DE Instructions**Purpose of this form**

You must complete, sign and return this form if you want to authorize a person or organization to inspect and/or receive certain private or nonpublic information concerning your state taxes. By completing and signing this form, you are authorizing the Division of Revenue to release tax information to the person or organization you have indicated. Revenue will accept copies of the form, including those from a FAX machine. This authorization will expire 60 days after the information is released to the person or organization you have indicated.

Your Signature

The authorization to release tax information is not valid until it is signed and dated. Your spouse must also sign if joint returns are listed. Your signature at the bottom of this form authorizes the individual or organization you designate to only be able to inspect and/or receive confidential tax information on your behalf.

Questions?

If you have questions on how to complete this form or to fax this form, call (302) 577-8200 for a staff contact who will provide you with a fax number. You must include a Division of Revenue contact name on all faxed authorization forms.

SECTION 02 41 19
SELECTIVE DEMOLITION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
1. Demolition and removal of selected portions of a building or structure in order to allow the installation of new work, including, but not limited to, new security hollow metal doors, frames, hardware, windows, etc...
 2. Repair procedures for selective demolition operations.
- B. Related Sections include the following:
1. Division 01 Section 01 10 00 "Summary of Work" for use of the premises and phasing requirements.
 2. Division 01 Section 01 32 00 "Construction Progress Documentation" for preconstruction photographs taken before selective demolition.
 3. Division 01 Section 01 50 00 "Temporary Facilities and Controls" for temporary construction and environmental-protection measures for selective demolition operations.
 4. Division 01 Section 01 73 29 "Cutting and Patching" for cutting and patching procedures for selective demolition operations.

1.3 DEFINITIONS

- A. Remove: Detach items from existing construction and legally dispose of them off-site, unless indicated to be removed and salvaged or removed and reinstalled.
- B. Remove and Salvage: Detach items from existing construction and deliver them to Owner.
- C. Remove and Reinstall: Detach items from existing construction, prepare them for reuse, and reinstall them where indicated.
- D. Existing to Remain: Existing items of construction that are not to be removed and that are not otherwise indicated to be removed, removed and salvaged, or removed and reinstalled.

1.4 MATERIALS OWNERSHIP

- A. Except for items or materials indicated to be reused, salvaged, reinstalled, or otherwise indicated to remain Owner's property, demolished materials shall become Contractor's property and shall be removed from Project site.

1.5 SUBMITTALS

- A. Qualification Data: For firms and persons specified in “Quality Assurance” Article to demonstrate their capabilities and experience. Include lists of completed projects with project names and addresses, names and addresses of architects and owners, and other information specified.
- B. Proposed Dust-Control and Noise-Control Measures: Submit statement or drawing that indicates the measures proposed for use, proposed locations, and proposed time frame for their operation. Identify options if proposed measures are later determined to be inadequate.
- C. Schedule of Selective Demolition Activities - indicate the following:
 - 1. Detailed sequence of selective demolition and removal work, with starting and ending dates for each activity.
 - 2. Interruption of utility services.
 - 3. Coordination for shutoff, capping, and continuation of utility services.
 - 4. Use of elevator and stairs.
 - 5. Locations of temporary partitions and means of egress, including for other tenants affected by selective demolition operations.
 - 6. Coordination of Owner’s continuing occupancy of portions of existing building and of Owner’s partial occupancy of completed Work.
- D. Inventory: After selective demolition is complete, submit a list of items that have been removed and salvaged.
- E. Predemolition Photographs or Videotape: Show existing conditions of adjoining construction and site improvements, including finish surfaces that might be misconstrued as damage caused by selective demolition operations. Submit before Work begins.

1.6 QUALITY ASSURANCE

- A. Demolition Firm Qualifications: An experienced firm that has specialized in demolition work similar in material and extent to that indicated for this Project.
- B. Regulatory Requirements: Comply with governing EPA notification regulations before beginning selective demolition. Comply with hauling and disposal regulations of authorities having jurisdiction.
- C. Standards: Comply with ANSI A10.6 and NFPA 241.

1.7 PROJECT CONDITIONS

- A. Conduct selective demolition so Owner’s operations will not be disrupted.
- B. Maintain access to existing walkways, corridors, and other adjacent occupied or used facilities.
 - 1. Do not close or obstruct walkways, corridors, or other occupied or used facilities without written permission from authorities having jurisdiction.
- C. Owner assumes no responsibility for condition of areas to be selectively demolished.

1. Conditions existing at the time of inspection for bidding purpose will be maintained by Owner as far as practical.
 - D. Hazardous Materials: It is not expected that hazardous materials will be encountered in the Work.
 1. Hazardous materials will be removed by Owner before start of the Work.
 2. If materials suspected of containing hazardous materials are encountered, do not disturb; immediately notify Architect and Owner. Hazardous materials will be removed by Owner under a separate contract.
 - E. Storage or sale of removed items or materials on-site will not be permitted.
 - F. Utility Service: Maintain existing utilities indicated to remain in service and protect them against damage during selective demolition operations.
- 1.8 WARRANTY
- A. Existing Warranties: Remove, replace, patch, and repair materials and surfaces cut or damaged during selective demolition, by methods and with materials so as not to void existing warranties.
 1. If possible, retain original Installer or fabricator to patch the exposed Work listed below that is damaged during selective demolition. If it is impossible to engage original Installer or fabricator, engage another recognized experienced and specialized firm.

PART 2 - PRODUCTS

2.1 REPAIR MATERIALS

- A. Use repair materials identical to existing materials.
 1. If identical materials are unavailable or cannot be used for exposed surfaces, use materials that visually match existing adjacent surfaces to the fullest extent possible.
 2. Use materials with an installed performance that equals or surpasses that of existing materials.
- B. Comply with material and installation requirements specified in individual Specification Sections.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verify that utilities have been disconnected and capped.
- B. Survey existing conditions and correlate with requirements indicated to determine extent of selective demolition required.
 1. This project requires the installation of new products through openings in existing exterior walls that extend from the first floor to the roof above. All cutting of existing

walls to allow the installation of new services and products shall be by the Contractors. Reinforcement of the wall by the construction of steel lintels above the new penetrations shall be provided by the Contractor.

- C. Inventory and record the condition of items to be removed and reinstalled and items to be removed and salvaged.
- D. When unanticipated mechanical, electrical, or structural elements that conflict with intended function or design are encountered, investigate and measure the nature and extent of conflict. Promptly submit a written report to the Architect.
- E. Engage a professional engineer to survey condition of building to determine whether removing any element might result in structural deficiency or unplanned collapse of any portion of structure or adjacent structures during selective demolition operations.
- F. Perform surveys as the Work progresses to detect hazards resulting from selective demolition activities.

3.2 UTILITY SERVICES

- A. Existing Utilities: Maintain services indicated to remain and protect them against damage during selective demolition operations.
- B. Utility Requirements: Locate, identify, disconnect, and seal or cap off indicated utilities serving areas to be selectively demolished.
 - 1. Arrange to shut off indicated utilities with utility companies.
 - 2. If utility services are required to be removed, relocated, or abandoned, before proceeding with selective demolition provide temporary utilities that bypass area of selective demolition and that maintain continuity of service to other parts of building.
 - 3. Cut off pipe or conduit in walls or partitions to be removed. Cap, valve, or plug and seal remaining portion of pipe or conduit after bypassing.

3.3 PREPARATION

- A. Site Access and Temporary Controls: Conduct selective demolition and debris-removal operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.
 - 1. Do not close or obstruct streets, walks, walkways, or other adjacent occupied or used facilities without permission from Owner and authorities having jurisdiction. Provide alternate routes around closed or obstructed traffic ways if required by governing regulations.
 - 2. Erect temporary protection, such as walks, fences, railings, canopies, and covered passageways, where required by authorities having jurisdiction.
 - 3. Protect existing site improvements, appurtenances, and landscaping to remain.
 - 4. Erect a plainly visible fence around drip line of individual trees or around perimeter drip line of groups of trees to remain.
- B. Temporary Enclosures: Provide temporary enclosures for protection of existing building and construction, in progress and completed, from exposure, foul weather, other construction

operations, and similar activities. Provide temporary weathertight enclosure for building exterior.

1. Where heating or cooling is needed and permanent enclosure is not complete, provide insulated temporary enclosures. Coordinate enclosure with ventilating and material drying or curing requirements to avoid dangerous conditions and effects.
- C. Temporary Partitions: Erect and maintain dustproof partitions and temporary enclosures to limit dust and dirt migration and to separate areas from fumes and noise.
- D. Temporary Shoring: Provide and maintain shoring, bracing, or structural support to preserve stability and prevent movement, settlement, or collapse of construction to remain, and to prevent unexpected or uncontrolled movement or collapse of construction being demolished.
 1. Strengthen or add new supports when required during progress of selective demolition.

3.4 POLLUTION CONTROLS

- A. Dust Control: Use water mist, temporary enclosures, and other suitable methods to limit spread of dust and dirt. Comply with governing environmental-protection regulations.
 1. Do not use water when it may damage existing construction or create hazardous or objectionable conditions, such as ice, flooding, and pollution.
 2. Wet mop floors to eliminate trackable dirt and wipe down walls and doors of demolition enclosure. Vacuum carpeted areas.
- B. Disposal: Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
 1. Remove debris from elevated portions of building by chute, hoist, or other device that will convey debris to grade level in a controlled descent.
- C. Cleaning: Clean adjacent structures and improvements of dust, dirt, and debris caused by selective demolition operations. Return adjacent areas to condition existing before selective demolition operations began.

3.5 SELECTIVE DEMOLITION

- A. General: Demolish and remove existing construction only to the extent required by new construction and as indicated. Use methods required to complete the Work within limitations of governing regulations and as follows:
 1. Proceed with selective demolition systematically, from higher to lower level. Complete selective demolition operations above each floor or tier before disturbing supporting members on the next lower level.
 2. Neatly cut openings and holes plumb, square, and true to dimensions required. Use cutting methods least likely to damage construction to remain or adjoining construction. Use hand tools or small power tools designed for sawing or grinding, not hammering and chopping, to minimize disturbance of adjacent surfaces. Temporarily cover openings to remain.
 3. Cut or drill from the exposed or finished side into concealed surfaces to avoid marring existing finished surfaces.

4. Do not use cutting torches until work area is cleared of flammable materials. At concealed spaces, such as duct and pipe interiors, verify condition and contents of hidden space before starting flame-cutting operations. Maintain fire watch and portable fire-suppression devices during flame-cutting operations.
 5. Maintain adequate ventilation when using cutting torches.
 6. Remove decayed, vermin-infested, or otherwise dangerous or unsuitable materials and promptly dispose of off-site.
 7. Locate selective demolition equipment and remove debris and materials so as not to impose excessive loads on supporting walls, floors, or framing.
 8. Dispose of demolished items and materials promptly.
 9. Return elements of construction and surfaces that are to remain to condition existing before selective demolition operations began.
- B. Existing Facilities: Comply with building manager's requirements for using and protecting elevators, stairs, walkways, loading docks, building entries, and other building facilities during selective demolition operations.
- C. Removed and Salvaged Items: Comply with the following:
1. Clean salvaged items.
 2. Pack or crate items after cleaning. Identify contents of containers.
 3. Store items in a secure area until delivery to Owner.
 4. Transport items to Owner's storage area designated by Owner.
 5. Protect items from damage during transport and storage.
- D. Removed and Reinstalled Items: Comply with the following:
1. Clean and repair items to functional condition adequate for intended reuse. Paint equipment to match new equipment.
 2. Pack or crate items after cleaning and repairing. Identify contents of containers.
 3. Protect items from damage during transport and storage.
 4. Reinstall items in locations indicated. Comply with installation requirements for new materials and equipment. Provide connections, supports, and miscellaneous materials necessary to make item functional for use indicated.
- E. Existing Items to Remain: Protect construction indicated to remain against damage and soiling during selective demolition. When permitted by Architect, items may be removed to a suitable, protected storage location during selective demolition and cleaned and reinstalled in their original locations after selective demolition operations are complete.
- F. Concrete: Demolish in small sections. Cut concrete to a depth of at least 3/4 inch (19 mm) at junctures with construction to remain, using power-driven saw. Dislodge concrete from reinforcement at perimeter of areas being demolished, cut reinforcement, and then remove remainder of concrete indicated for selective demolition. Neatly trim openings to dimensions indicated.
- G. Concrete: Demolish in sections. Cut concrete full depth at junctures with construction to remain and at regular intervals, using power-driven saw, then remove concrete between saw cuts.
- H. Masonry: Demolish in small sections. Cut masonry at junctures with construction to remain, using power-driven saw, then remove masonry between saw cuts.

- I. Concrete Slabs-on-Grade: Saw-cut perimeter of area to be demolished, and then break up and remove.
- J. Resilient Floor Coverings: Remove floor coverings and adhesive according to recommendations in RFCI-WP and its Addendum.
 - 1. Remove residual adhesive and prepare substrate for new floor coverings by one of the methods recommended by RFCI.

3.6 PATCHING AND REPAIRS

- A. General: Promptly repair damage to adjacent construction caused by selective demolition operations.
- B. Patching: Comply with Division 1 Section “Cutting and Patching.”
- C. Repairs: Where repairs to existing surfaces are required, patch to produce surfaces suitable for new materials.
 - 1. Completely fill holes and depressions in existing masonry walls that are to remain with an approved masonry patching material applied according to manufacturer’s written recommendations.
- D. Finishes: Restore exposed finishes of patched areas and extend restoration into adjoining construction in a manner that eliminates evidence of patching and refinishing.
- E. Floors and Walls: Where walls or partitions that are demolished extend one finished area into another, patch and repair floor and wall surfaces in the new space. Provide an even surface of uniform finish color, texture, and appearance. Remove existing floor and wall coverings and replace with new materials, if necessary, to achieve uniform color and appearance.
 - 1. Patch with durable seams that are as invisible as possible. Provide materials and comply with installation requirements specified in other Sections of these Specifications.
 - 2. Where patching occurs in a painted surface, apply primer and intermediate paint coats over patch and apply final paint coat over entire unbroken surface containing patch. Provide additional coats until patch blends with adjacent surfaces.
 - 3. Where feasible, test and inspect patched areas after completion to demonstrate integrity of installation.
- F. Ceilings: Patch, repair, or rehang existing ceilings as necessary to provide an even-plane surface of uniform appearance.

3.7 DISPOSAL OF DEMOLISHED MATERIALS

- A. General: Promptly dispose of demolished materials. Do not allow demolished materials to accumulate on-site.
- B. Burning: Do not burn demolished materials.
- C. Disposal: Transport demolished materials off Owner’s property and legally dispose of them.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 06 10 53
ROUGH CARPENTRY

PART 1 - GENERAL

1.01 DESCRIPTION OF WORK

- A. Work included: Installation of new wood blocking and plywood as indicated on the drawings.
- B. Removal of existing wood blocking and nailers and replacement with new treated wood blocking unless otherwise specified or shown on the drawings.
- C. New blocking and nailers for roofing system and related metal flashings and any additional nailers needed for additional insulation thickness and raised perimeters.
- D. New blocking and nailers required for raising roof mounted mechanical items.
- E. Installation of new plywood on walls and parapets as maybe noted on the drawings.

1.02 SUBMITTALS

- A. Material Safety Data Sheets on all products installed as part of this Section.

- 1. Submit fastener products and samples.

1.03 QUALITY ASSURANCE

- A. Qualifications of Workmen: Provide sufficient workmen and supervisors who shall be present at all times during execution of this portion of the work and who shall be thoroughly familiar with the type of construction involved and the materials and techniques specified.
- B. Rejections: In the acceptance or rejection of rough carpentry, the owner will make no allowance for lack of skill on the part of the workmen.
- C. Installation of all work shall conform to pertinent standards of Factory Mutual.

1.04 DELIVERY, STORAGE AND HANDLING

- A. Store all materials up, off of the roof deck or ground, and keep materials dry and covered with a weatherproof covering anchored sufficiently to resist wind blow-off.
- B. Keep all materials clearly identified with all grade marks legible. Keep all damaged material clearly identified as damaged and stored separately to prevent its inadvertent use.
- C. Do not allow installation of damaged or otherwise non-complying material.
- D. Replacement: In the event of damage, immediately make all necessary repairs and replacements to the approval of the owner and at no additional cost to the owner.

PART 2 - PRODUCTS

2.01 LUMBER

A. All wood nailers, blocking and cants:

1. Species and Grade for nailers and blocking: Douglas Fir or Southern Yellow Pine; WWPA Structural Joist and Plank Class, No. 2 Grade.
2. Preservative treatment: Treatment conforming with AWPB (American Wood Preservers Bureau) Specification LP-2 Standard for lumber and timber. This treatment is commonly referred to as pressure treated or "Wolmanized".
3. Each piece of treated lumber delivered to the site must bear the stamp of the AWPI (American Wood Preservers Institute), Quality Mark, indicating compliance with the requirements of the AWPI Quality Control Program.
4. Each piece of treated lumber must bear a stamp that it is dry before the delivery of product, and indicating conformance with AWPB Specifications, Section 3.1.2.
5. Treated lumber shall be air dried by supplier after treatment. Provide documentation from treatment supplier that the lumber has been air dried after treatment, back to 19% or less moisture content by weight.
6. Dimensions: As required by conditions encountered and as shown on project details.

B. Plywood

1. Standards: Comply with PS 1/ANSI A199.1 for plywood panels. All panels shall be 5-ply (min). For products not manufactured under PS 1 provisions, comply with American Plywood Association "Performance Standard and Policies for Structural-Use Panels", Form E445.
2. Trademark: Factory-mark each construction panel with APA trademark evidencing compliance with grade requirements and AWPI trademark evidencing compliance with treatment requirements.
3. Preservative treated with waterborne preservative with minimum .25 lb/ft.³ retention. Treated plywood shall be air dried by supplier after treatment. Provide documentation by treated plywood supplier that plywood dried back to 18% or less moisture content by weight.
4. Grades:
 - a) Plywood shall be thickness as noted on the drawings for parapet wall sheathing, and for installation on top of indicated parapet walls and APA (American Plywood Association) Rated Sheathing Exterior Exposure (C-C Exterior). Note: "CDX" and Exposure 1 plywood do not comply with this specification and are not approved for use on low slope roofing details where treated plywood noted. For steep sloped roof sheathing, Exposure 1 plywood shall be used. Additional plywood thicknesses as may be noted on the drawings.

C. Channel Siding for Venting Details for Lightweight Concrete Deck Areas.

1. Grade/Thickness: APA Rated Siding, 303-18-W, Texture T-1-11, with channels 4-inches on center. Preservative treated with waterborne preservative. Treated plywood shall be dried after treatment to moisture content of 18% or less by weight. Thickness shall be 19/32 inch.

2.02 FASTENERS

- A. All fasteners shall be corrosion resistant or have corrosion-resistant coating and shall meet or exceed minimum required pull out resistant values for the substrates for each fastener type.
1. Powder actuated fasteners shall not be used.
 2. If bottom side of deck exposed to interior space below, pilot holes and fasteners shall not penetrate through the bottom side of the deck, unless prior written approval provided by Owner's Representative.
 3. Fastener types other than those noted below may be required to provide minimum required pullout resistance values. Consult Engineer if alternate fastener types necessary.
- B. Masonry fasteners shall be threaded type (not expansion type sleeve)
1. Threaded masonry fasteners into predrilled pilot holes
 2. Corrosion-resistant, threaded fastener with a low profile head.
 3. Screw fastener shall be (FM) Factory Mutual approved.
 4. Minimum pull out resistance of 600 pounds per fastener.
 5. Minimum embedment depth of 1-1/2 inches – Increase embedment depth and/or fastener diameter as necessary to provide minimum required pullout resistance values.
- C. Concrete fasteners into predrilled pilot holes
1. Corrosion resistant with low profile head
 2. Minimum pullout resistance of 600 pounds per fastener.
 3. Minimum embedment depth of 1-1/2 inches – Increase embedment depth and/or fastener diameter as necessary to provide minimum required pullout resistance values.
- D. Steel Fasteners
1. Corrosion-resistant, self-tapping, self-drilling screw with flat profile head.
 2. Screw type fastener shall be (FM) Factory Mutual approved.
 3. Fasteners shall penetrate through metal 1 inch minimum.
 4. Minimum pull-out resistance of 425 pounds per fastener.
- E. Wood fasteners shall be threaded type (do not use nails)
1. Screws
 - a. Number 10, 300 series stainless steel or corrosion resistant coated.
 - b. Minimum pullout resistance of 360 pounds per fastener.
 - c. Minimum embedment to base substrate shall be 1-1/2 inch. Increase embedment depth and/or fastener diameter as necessary to provide minimum required pullout resistance values.
- F. Gypsum, Cementitious Wood Fiber (Tectum) or Lightweight Concrete
1. Corrosion resistant metal and coated or nylon fastener.
 2. Approved Products (where minimum required pullout values achieved)
 - a. Peel Rivet by Creative Construction Components, Inc.
 - b. Toggle Bolt by Olympic Fasteners.

- c. Lite-Deck by Olympic Fasteners
- d. NTB-1H by Olympic Fasteners

3. Minimum pullout resistance of 300 pounds per fastener.

2.03 MISCELLANEOUS

- A. Plywood sheathing end joint cover strip: For installation over all unsupported plywood sheathing joints on top of parapet walls which exceeds 12 inches in length, 20 ga. galvanized steel, 3-inches in width, full length of joint. Center cover strip over end (butt) joints and secure 3-inches o.c. along each side with flat/pan head threaded fasteners.

PART 3 - EXECUTION

3.01 LUMBER

- A. Provide and install new wood blocking where required as shown on project details. The cost for all new wood blocking and cant, as required by the project drawings and this section, shall be included in the base bid.
- B. Blocking depicted in the Drawings is typically shown generically, to indicate the intended purpose. Contractor is responsible for selecting proper thickness of each piece or pieces to allow blocking to be placed in a configuration to achieve the intent indicated by the drawings.
- C. Where threaded fasteners are indicated, fasteners shall be sized of sufficient length to penetrate into wood, concrete and masonry substrate a minimum of 1-1/2 inch. Pilot holes shall be predrilled into masonry and concrete in strict accordance with manufacturers recommendations. Predrill holes in wood blocking which is less than 3-inches in width to help prevent splitting of the blocking during fastener securement. Wood split prior to or during installation shall be removed and replaced by the Contractor at no additional expense to the Owner. At locations where deck exposed to finished interior space below, ensure that fastener does not extend through the bottom surface of the deck.
- D. Predrill holes in wood blocking which is less than 3-inches in width to help prevent splitting of the blocking during fastener securement. Wood split prior to or during installation shall be removed and replaced by the Contractor at no additional expense to the Owner.
- E. At locations where multiple sections of wood blocking are to be installed, stagger all end joints a minimum of 24-inches.
- F. In addition to fastener spacing pattern indicated on project details, ensure that fasteners are secured within 6-inches of the end of each section of wood blocking.
- G. Install and secure additional wood blocking on top of existing equipment curbs as necessary to ensure that all curb heights are a minimum of 10-inches above the finished height of the new roof system. The cost for this blocking, including installation, shall be included in the base bid.
- H. Blocking shall not be run continuous over expansion joints in the building structure. Provide gaps in the blocking equal to the expansion joint openings in the building at these locations.
- I. Unsupported openings in wood or plywood deck shall be framed with 2 by 6 cross bracing which ties into existing deck framing.

- J. Install 3-inch wide 20 ga. galvanized steel sheet metal continuous over all unsupported and unsecured joints in plywood (i.e. on top of parapet walls) which exceed 12 inches in width. Secure 3-inches o.c. each side with flat head threaded fasteners.
- K. Fasteners shall not be installed within 2-inches of outside edge/termination of concrete or masonry units to help prevent damage to these units.

3.02 PLYWOOD

- A. Provide and install new plywood where required as shown on project details. The cost for all new plywood, as required by the project drawings and this section, shall be included in the base bid.
- B. Where threaded fasteners are indicated, fasteners shall be sized of sufficient length to penetrate into wood, concrete and masonry substrate a minimum of 1-1/2-inch.
- C. In addition to fastener spacing pattern indicated on project details, ensure that fasteners are secured within 2-inches of the end of each section of plywood, 12-inches on-center (max.) along all edges with a minimum of 2 fasteners per edge, and located within 2 to 4 inches of edges of plywood.
- D. Plywood roof deck sheathing shall be secured with the long dimension of a sheet installed perpendicular to the support joists/rafters.
- E. Stagger end joints between adjacent plywood panels 4 feet.
- F. Install plywood sheathing clips mid span on unsupported panel edges.
- G. Provide 1/8 inch spacing at panel ends.
- H. Panel end joints shall occur over framing. Secure end joints of plywood sheathing 6-inches on-center and secure midspan portions of plywood to midspan supports 12-inches on center.

3.03 CLEANING AND PROTECTION

- A. Clean up of all debris, sawdust, loose fasteners, cuttings, scraps, wood treatments or preservatives, as soon as work is completed to help prevent damage to the new roof system and to allow for subsequent operations to proceed.
- B. Cutting or dipping in preservative shall not be performed on any new roofing without providing sufficient protection of new roofing. Work shall not be performed on adjacent existing roofing not included in the scope of work for this project.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 07 53 00**EPDM THERMOSET SINGLE-PLY ROOFING****PART 1 – GENERAL****1.1. SECTION INCLUDES**

- A. EPDM thermoset single-ply roofing.
- B. Membrane flashings.
- C. Metal flashings.
- D. Roof insulation.

1.2. RELATED SECTIONS

- A. Division 06 Section 06 10 00 "Rough Carpentry."
- B. Division 07 Section 07 62 01 "Sheet Metal Flashing and Trim."
- C. Division 08 Section 08 63 00 "Metal Framed Skylights."
- D. Division 22 Section 22 30 00 "Plumbing Roofing."

1.3. REFERENCES

- A. American Society of Civil Engineers (ASCE) - ASCE 7 - Minimum Design Loads for Buildings and Other Structures, Current Revision.
- B. ANSI/SPRI RP-4 "Wind Design Standard For Ballasted Single-ply Roofing Systems".
- C. ANSI/SPRI WD-1 "Wind Design Standard for Roofing Assemblies".
- D. ASTM International (ASTM):
 - 1. ASTM C 208 - Standard Specification for Cellulosic Fiber Insulating Board.
 - 2. ASTM C 578 - Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation.
 - 3. ASTM C 1289 - Standard Specification for Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board.
 - 4. ASTM D 41 - Standard Specification for Asphalt Primer Used in Roofing, Dampproofing, and Waterproofing.
 - 5. ASTM D 412 - Standard Test Methods for Vulcanized Rubber and Thermoplastic Elastomers-Tension.
 - 6. ASTM D 624 - Standard Test Method for Tear Strength of Conventional Vulcanized Rubber and Thermoplastic Elastomers.
 - 7. ASTM D 816 - Standard Test Methods for Rubber Cements.
 - 8. ASTM D 4263 - Standard Test Method for Indicating Moisture in Concrete by the Plastic Sheet Method.

9. ASTM D 4637 - Standard Specification for EPDM Sheet Used In Single-Ply Roof Membrane.
10. ASTM E 96 - Standard Test Methods for Water Vapor Transmission of Materials.
- E. Factory Mutual (FM Global):
 1. Approval Guide.
- F. International Code Council (ICC):
 1. International Building Code (IBC).
- G. National Roofing Contractors Association (NRCA) - Low Slope Roofing and Waterproofing Manual, Current Edition.
- H. Sheet Metal and Air Conditioning Contractors National Association, Inc. (SMACNA) - Architectural Sheet Metal Manual.
- I. Underwriters Laboratories (UL):
 1. TGFU R1306 - "Roofing Systems and Materials Guide".
 2. UL-790 - Standard Test Method for Fire Tests of Roof Coverings.
- J. ANSI/ASHRAE/IESNA Standard 90.1 (2007): Energy Standard for Buildings Except Low-Rise Residential Buildings

1.4. DESIGN CRITERIA

- A. Wind Uplift Performance:
 1. Roof system is designed to withstand wind uplift forces as calculated using the current revision of ASCE-7.
 2. Carlisle; standard 72 MPH wind speed warranty.
- B. Fire Resistance Performance:
 1. Roof system will achieve a UL Class A rating when tested in accordance with UL-790.
- C. Thermal Performance: Roof system will achieve a minimum R value not less than 30.
- D. Drainage: Provide a roof system with positive drainage where all standing water dissipates within 48 hours after precipitation ends.
- E. Building Codes:
 1. Roof system will meet the requirements of all federal, state and local code bodies having jurisdiction.

1.5. SUBMITTALS

- A. Submit under provisions of Section 01 3300.

- B. Product Data: Manufacturer's data sheets on each product to be used, including:
 - 1. Preparation instructions and recommendations.
 - 2. Storage and handling requirements and recommendations.
 - 3. Installation methods.
- C. Detail Drawings:
 - 1. Submit approved plan, section, elevation or isometric drawings which detail the appropriate methods for all flashing conditions found on the project.
 - 2. Coordinate approved drawings with locations found on the Contract Drawings.
- D. Selection Samples: For each finish product specified, two complete sets of chips representing manufacturer's full range of available colors, membranes, and thicknesses.
- E. Verification Samples: For each finish product specified, two samples, minimum size 4 inches (100 mm) square representing actual product, color, and patterns.

1.6. QUALITY ASSURANCE

- A. Manufacturer Qualifications: All products specified in this section will be supplied by a single manufacturer with a minimum of twenty (20) years' experience.
- B. Installer Qualifications:
 - 1. All products listed in this section are to be installed by a single installer with a minimum of five (5) years demonstrated experience in installing products of the same type and scope as specified.
- C. Mock-Up: Provide a mock-up for evaluation of surface preparation, installation techniques and workmanship.

1.7. DELIVERY, STORAGE, AND HANDLING

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Store and dispose of hazardous materials, and materials contaminated by hazardous materials, in accordance with requirements of local authorities having jurisdiction.

1.8. PROJECT CONDITIONS

- A. Maintain environmental conditions (temperature, humidity, and ventilation) within limits recommended by manufacturer for optimum results. Do not install products under environmental conditions outside manufacturer's absolute limits.
- B. Refer to Carlisle's Roofing System specification, Part II - Application, for General Job Site Considerations.
- C. Material Safety Data Sheets (MSDS) must be on location at all times during the transportation, storage and application of materials.

- D. When positioning membrane sheets, exercise care to locate all field splices away from low spots and out of drain sumps. All field splices should be shingled to prevent bucking of water.
- E. When loading materials onto the roof, the Carlisle Authorized Roofing Applicator must comply with the requirements of the building owner to prevent overloading and possible disturbance to the building structure.
- F. Proceed with roofing work only when weather conditions are in compliance with the manufacturer's recommended limitations, and when conditions will permit the work to proceed in accordance with the manufacturer's requirements and recommendations.
- G. Proceed with work so new roofing materials are not subject to construction traffic. When necessary, new roof sections shall be protected and inspected upon completion for possible damage.
- H. Provide protection, such as 3/4 inch thick plywood, for all roof areas exposed to traffic during construction. Plywood must be smooth and free of fasteners and splinters.
- I. The surface on which the insulation or roofing membrane is to be applied shall be clean, smooth, dry, and free of projections or contaminants that would prevent proper application of or be incompatible with the new installation, such as fins, sharp edges, foreign materials, oil and grease.
- J. New roofing shall be complete and weathertight at the end of the work day.
- K. Contaminants such as grease, fats and oils shall not be allowed to come in direct contact with the roofing membrane.

2.PRODUCTS

2.1. MANUFACTURERS

- A. Basis of Design: Carlisle SYNTECS Systems 60 EPDM Roof System or Approved Equal.
- B. Requests for substitutions will be considered in accordance with provisions of Section 01 60 00.

2.2. SCOPE / APPLICATION

- A. Roof System: Provide a waterproof roof system, capable of withstanding uplift forces as specified in Design Criteria.
 - 1. Membrane Attachment: Fully Adhered.
- B. Base Flashing: Provide a waterproof, fully adhered base flashing system at all penetrations, plane transitions and terminations.
- C. Insulation: Provide a roof insulation system beneath the finish membrane.

2.3. VAPOR BARRIER

- A. Carlisle VapAir Seal 725TR Air & Vapor Barrier / Temporary Roof: 725TR is a 40-mil composite consisting of 35-mils of self-adhering rubberized asphalt factory laminated to a 5-mil polyethylene

film with an adhesion textured surface.

2.4. INSULATION

- A. Composite Board: Composite insulation panel comprised of 1/2 inch (13 mm) high-density Polyiso cover board laminated during the manufacturing process to SecurShield rigid Polyiso roof insulation meeting ASTM C1289 Type II, Class 2. Carlisle SecurShield HD Composite.
 - 1. Compressive Strength: Grade 2 (20 psi) (138 kPa).
- B. SecureShield Rigid Polyiso Roof Insulation 2" meeting ASTM C1289 Type II Polyiso

2.5. INSULATION ADHESIVE

- A. FAST Box Set: A two-component, polyurethane construction grade, low-rise expanding adhesive designed for bonding insulation to various substrates using a portable applicator.
- B. FAST Bag in a Box: A two-component, polyurethane construction grade, low-rise expanding adhesive designed for bonding insulation to various substrates, packaged for use with the PaceCart 2.

2.6. ETHYLENE, PROPYLENE, DIENE TERPOLYMER (EPDM) MEMBRANE

- A. Sure-Seal Membrane: Cured, non-reinforced 60 mil EPDM membrane. Meets the requirements of ASTM D 4637 Type I.
 - 1. Color: Black.
 - 2. Membrane Thickness: 60 mil nominal
 - 3. Sheet Dimensions:
 - a. Width: 10 feet (3.04 m) maximum.
 - b. Length: 100 feet (30.5 m) maximum.
 - 4. Performance:
 - a. Tear Strength: 35 lbf (200 N) minimum.
 - b. Elongation: 465 percent.

2.7. FLASHING ACCESSORIES

- A. Sure-Seal (black) Pressure-Sensitive Pipe Seals with Factory-Applied TAPE on the deck flange are available for use with Sure-Seal/Sure-White Roofing systems.
- B. Sure-Seal Pressure-Sensitive Overlayment Strip: A nominal 40-mil black, semi-cured EPDM membrane laminated to a nominal 35-mil cured, Factory-Applied TAPE for flashing gravel stops, metal edgings and Seam Fastening Plates.
- C. Sure-Seal Fully Pressure Sensitive Curb Flashing: 60 mil Sure-Seal cured EPDM Membrane laminated to a 35 mil 6 inch (152mm) and 12 inch (305mm) SecurTape.
- D. Sure-Seal Pressure-Sensitive RUSS (Reinforced Universal Securement Strip):
 - 1. 6 inch (152 mm) RUSS: A nominal 6 inch (152 mm) wide, 45-mil thick reinforced EPDM membrane with a nominal 3 inch (76mm) wide 30-mil thick cured synthetic

rubber pressure-sensitive adhesive laminated to one edge. This product provides perimeter securement, and additional membrane securement at angle changes for Adhered, Ballasted, and Mechanically Fastened Roofing Systems.

2.8. CLEANERS, PRIMERS, ADHESIVES AND SEALANTS

- A. FAST Adhesive Box Sets: A spray applied, two-component, polyurethane construction grade, low-rise expanding adhesive used to securely bond membranes to a variety of substrates.
- B. FAST Bag in a Box: A two-component, polyurethane construction grade, low-rise expanding adhesive designed for bonding insulation to various substrates, packaged for use with the PaceCart 2.

3.EXECUTION

3.1. EXAMINATION

- A. Do not begin installation until substrates have been properly prepared.
- B. If substrate preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.

3.2. PREPARATION

- A. Clean surfaces thoroughly prior to installation.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.
- C. Do not commence work until all other work trades have completed jobs that require them to traverse the deck on foot or with equipment.
- D. A vapor retarder / temporary roof (Carlisle 725 TR Air & Vapor Barrier/Temporary Roof) may be applied to protect the inside of the structure prior to the roof system installation.

3.3. INSULATION - SYSTEM DESIGN

- A. Base Layer:
 - 1. Type: __SecureShield PolyISO____.
 - 2. Thickness: __3__ inches
 - 3. Attachment Method: __Fast Adhesive____.
- B. Top Layer:
 - 1. Type: __1/2" HD Composite w/ 2 1/2" SecureShield ISO____.
 - 2. Thickness: __3"____ inches
 - 3. Attachment Method: __Fast Adhesive____.

3.4. INSULATION PLACEMENT

- A. Install insulation or membrane underlayment in multiple layers over the substrate with boards butted tightly together with no joints or gaps greater than 1/4 inch (6 mm). Stagger joints both horizontally and vertically.
- B. Secure insulation to the substrate with the required mechanical fasteners or insulation adhesive in accordance with the manufacturer's current application guidelines.
- C. Do not install wet, damaged or warped insulation boards.
- D. Stagger joints in one direction unless joints are to be taped. Install insulation boards snug. Gaps between board joints shall not exceed 1/4 inch (6 mm). Fill all gaps in excess of 1/4 inch (6 mm) with same insulation material.
- E. Wood nailers must be at least 3 1/2 inches (89 mm) wide or 1 inch (25 mm) wider than adjacent metal flange. Thickness must equal that of insulation but not less than 1 inch (25 mm) thickness.
- F. Miter and fill the edges of the insulation boards at ridges, valleys and other changes in plane to prevent open joints or irregular surfaces. Avoid breaking or crushing of the insulation at the corners.
- G. Do not install any more insulation than will be completely waterproofed each day.

3.5. INSULATION ATTACHMENT

- A. Securely attach insulation to the roof deck for Adhered Roofing Systems. Attachment must have been successfully tested to meet or exceed the calculated uplift pressure required by the International Building Code (ASCE-7) or ANSI/SPRI WD-1.
- B. Enhance the perimeter and corner areas in accordance with the International Building Code (ASCE-7) or ANSI/SPRI WD-1.
- C. Install insulation layers, maximum 4 feet by 4 feet (1220 mm by 1220 mm), applied with adhesive, coverage rate as necessary to achieve the specified attachment and uplift rating. Press each board firmly into place after adhesive develops strings when touched, typically 1-1/2 to 2 minutes after adhesive was applied, and roll with a weighted roller. Add temporary weight and use relief cuts to ensure boards are well adhered. Stagger the joints of additional layers by a minimum of 6 inches (152 mm).

3.6. MEMBRANE PLACEMENT AND ATTACHMENT (Fully Adhered)

- A. Position and unroll successive sheets and align to provide for a minimum 3 inch (76 mm) wide splice.
- B. Fold adjacent sheets in half lengthwise to expose an approximate 10 foot (3046 mm) wide substrate area.
- C. Membrane which will have the adjacent sheet spliced over it should be adhered to the substrate first. In this fashion, selvage edge splice area will not be contaminated by setting splice edge into the FAST Adhesive.

- D. Spray or extrude FAST Adhesive onto the substrate and allow to foam up approximately 1/8 inch (3mm). Wait for the adhesive to achieve "string" when a small object is lifted out of the adhesive.
- E. Place the membrane into adhesive after adhesive develops strings when touched, typically 1-1/2 to 2 minutes after adhesive was applied, and roll with a weighted roller.
- F. Apply FAST Adhesive to the substrate and continue process described above until all sheets are fully bonded, allowing for necessary splice overlaps at selvage edges. At end laps (along the width of the sheet) membrane shall be butted together which will be overlaid with 6 inch wide Pressure-Sensitive Cured Cover Strip or Pressure-Sensitive Overlayment Strip.

3.7. MEMBRANE SPLICING (Tape Splice)

- A. Overlap adjacent sheets and mark a line 1/2 inch out from the top sheet.
- B. Fold the top sheet back and clean the dry splice area (minimum 2 1/2 inches (64 mm wide) of both membrane sheets with Sure-Seal Primer as required by the membrane manufacturer.
- C. Where Splice Tape is not Factory-Applied, apply Splice Tape to bottom sheet with the edge of the release film along the marked line. Press tape onto the sheet using hand pressure. Overlap tape roll ends a minimum of 1 inch (13mm).
- D. Remove the release film and press the top sheet onto the tape using hand pressure.
- E. Roll the seam toward the splice edge with a 2 inch (51 mm) wide steel roller.
- F. Install Pressure-Sensitive "T" Joint Cover, a 6 inch wide (152 mm) section of Pressure-Sensitive Flashing or Elastoform Flashing over all field splice intersections.
- G. When using non-Pressure-Sensitive Elastoform Flashing, seal edges of flashing with Lap Sealant.
- H. The use of Lap Sealant with tape splices is optional except at tape overlaps and cut edges of reinforced membrane where Lap Sealant is required.

3.8. FLASHING

- A. Wall and curb flashing shall be cured EPDM membrane. Continue the deck membrane as wall flashing where practicable.
- B. Follow manufacturer's typical flashing procedures for all wall, curb, and penetration flashing including metal edging/coping and roof drain applications.

3.9. WALKWAYS

- A. Install walkways at all traffic concentration points (such as roof hatches, access doors, rooftop ladders, etc.) and all locations as identified on the Contract Drawings.
- B. Adhere walkways pads to the EPDM membrane in accordance with the manufacturer's current application guidelines.

3.10. DAILY SEALS

- A. On phased roofing, when the completion of flashings and terminations is not achieved by the

end of the work day, a daily seal must be performed to temporarily close the membrane to prevent water infiltration.

- B. Use Sure-Seal Pourable Sealer or other acceptable membrane seal in accordance with the manufacturer's requirements.

3.11. CLEAN UP

- A. Perform daily clean-up to collect all wrappings, empty containers, paper, and other debris from the project site. Upon completion, all debris must be disposed of in a legally acceptable manner.
- B. Prior to the manufacturer's inspection for warranty, the applicator must perform a pre-inspection to review all work and to verify all flashing has been completed as well as the application of all caulking.

3.12. PROTECTION

- A. Protect installed products until completion of project.
- B. Touch-up, repair or replace damaged products before Substantial Completion.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 07 62 01
SHEET METAL FLASHING & TRIM

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following sheet metal flashing and trim:
1. Manufactured through-wall flashing.
 2. Manufactured reglets.
 3. Formed roof drainage system.
 4. Formed low-slope roof flashing and trim.
 5. Formed wall flashing and trim.
- B. Related Sections include the following:
1. Division 6 Section 06 10 53 "Rough Carpentry" for wood nailers, curbs, and blocking.
 2. Division 7 Section 07 92 00 "Joint Sealants" for field-applied sheet metal flashing and trim sealants.

1.3 PERFORMANCE REQUIREMENTS

- A. General: Install sheet metal flashing and trim to withstand wind loads, structural movement, thermally induced movement, and exposure to weather without failing, rattling, leaking, and fastener disengagement.
- B. Fabricate and install roof edge flashing and copings capable of resisting the following forces according to recommendations in FMG Loss Prevention Data Sheet 1-49:
1. Wind Zone 3: For velocity pressures of 46 to 104 lbf/sq. ft.: 208-lbf/sq. ft. perimeter uplift force, 312-lbf/sq. ft. corner uplift force, and 104-lbf/sq. ft. outward force.
- C. Thermal Movements: Provide sheet metal flashing and trim that allow for thermal movements resulting from the following maximum change (range) in ambient and surface temperatures by preventing buckling, opening of joints, hole elongation, overstressing of components, failure of joint sealants, failure of connections, and other detrimental effects. Provide clips that resist rotation and avoid shear stress as a result of sheet metal and trim thermal movements. Base engineering calculation on surface temperatures of materials due to both solar heat gain and nighttime-sky heat loss.
1. Temperature Change (Range): 120 deg F, ambient; 180 deg F, material surfaces.

- D. Water Infiltration: Provide sheet metal flashing and trim that do not allow water infiltration to building interior.

1.4 SUBMITTALS

- A. Product Data: For each type of product indicated. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
- B. Shop Drawings: Show layouts of sheet metal flashing and trim, including plans and elevations. Distinguish between shop- and field-assembled work. Include the following:
 - 1. Identify material, thickness, weight, and finish for each item and location in Project.
 - 2. Details for forming sheet metal flashing and trim, including profiles, shapes, seams, and dimensions.
 - 3. Details for fastening, joining, supporting, and anchoring sheet metal flashing and trim, including fasteners, clips, cleats, and attachments to adjoining work.
 - 4. Details of expansion-joint covers, including showing direction of expansion and contraction.
- C. Samples for Initial Selection: For each type of sheet metal flashing and trim indicated with factory-applied color finishes.
 - 1. Include similar Samples of trim and accessories involving color selection.
- D. Samples for Verification: For each type of exposed finish required, prepared on Samples of size indicated below:
 - 1. Sheet Metal Flashing: 12 inches long. Include fasteners, cleats, clips, closures, and other attachments.
 - 2. Trim: 12 inches long. Include fasteners and other exposed accessories.
 - 3. Accessories: Full-size Sample.

1.5 QUALITY ASSURANCE

- A. Sheet Metal Flashing and Trim Standard: Comply with SMACNA's "Architectural Sheet Metal Manual." Conform to dimensions and profiles shown unless more stringent requirements are indicated.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Deliver sheet metal flashing materials and fabrications undamaged. Protect sheet metal flashing and trim materials and fabrications during transportation and handling.
- B. Unload, store, and install sheet metal flashing materials and fabrications in a manner to prevent bending, warping, twisting, and surface damage.
- C. Stack materials on platforms or pallets, covered with suitable weathertight and ventilated covering. Do not store sheet metal flashing and trim materials in contact with other materials that might cause staining, denting, or other surface damage.

1.7 COORDINATION

- A. Coordinate installation of sheet metal flashing and trim with interfacing and adjoining construction to provide a leakproof, secure, and noncorrosive installation.

PART 2 - PRODUCTS

2.1 SHEET METALS

- A. Aluminum Sheet: ASTM B 209, Alloy 3003, 3004, 3105, or 5005, Temper suitable for forming and structural performance required, but not less than H14, finished as follows:
 - 1. Fluoropolymer 3-Coat System: Manufacturer's standard 3-coat, thermocured system consisting of specially formulated inhibitive primer, fluoropolymer color coat, and clear fluoropolymer topcoat, with both color coat and clear topcoat containing not less than 70 percent polyvinylidene fluoride resin by weight, with a minimum total dry film thickness of 1.5 mil; complying with AAMA 2605.
 - a. Color: As selected by Architect from manufacturer's full range.
- B. Prepainted, Metallic-Coated Steel Sheet: Steel sheet metallic coated by the hot-dip process and prepainted by the coil-coating process to comply with ASTM A 755/A 755M.
 - 1. Aluminum-Zinc Alloy-Coated Steel Sheet: ASTM A 792/A 792M, Class AZ50 coating designation, Grade 40 (Class AZM150 coating designation, Grade 275); structural quality.

2.2 UNDERLAYMENT MATERIALS

- A. Polyethylene Sheet: 6-mil-thick polyethylene sheet complying with ASTM D 4397.
- B. Felts: ASTM D 226, Type II (No. 30), asphalt-saturated organic felt, nonperforated.

2.3 MISCELLANEOUS MATERIALS

- A. General: Provide materials and types of fasteners, solder, welding rods, protective coatings, separators, sealants, and other miscellaneous items as required for complete sheet metal flashing and trim installation.
- B. Fasteners: Wood screws, annular threaded nails, self-tapping screws, self-locking rivets and bolts, and other suitable fasteners designed to withstand design loads.
 - 1. Nails for Copper Sheet: Copper or hardware bronze, 0.109 inch minimum and not less than 7/8 inch long, barbed with large head.
 - 2. Exposed Fasteners: Heads matching color of sheet metal by means of plastic caps or factory-applied coating.
 - 3. Fasteners for Flashing and Trim: Blind fasteners or self-drilling screws, gasketed, with hex washer head.
 - 4. Blind Fasteners: High-strength aluminum or stainless-steel rivets.
- C. Solder for Copper: ASTM B 32, Grade Sn50, 50 percent tin and 50 percent lead.
- D. Solder for Lead-Coated Copper: ASTM B 32, Grade Sn60, 60 percent tin and 40 percent lead.

- E. Solder for Stainless Steel: ASTM B 32, Grade Sn60, with acid flux of type recommended by stainless-steel sheet manufacturer.
- F. Solder for Zinc-Tin Alloy-Coated Stainless Steel: ASTM B 32, 100 percent tin.
- G. Solder for Zinc: ASTM B 32, 60 percent lead and 40 percent tin with low antimony, as recommended by manufacturer.
- H. Sealing Tape: Pressure-sensitive, 100 percent solids, polyisobutylene compound sealing tape with release-paper backing. Provide permanently elastic, nonsag, nontoxic, nonstaining tape.
- I. Elastomeric Sealant: ASTM C 920, elastomeric polyurethane polymer sealant; of type, grade, class, and use classifications required to seal joints in sheet metal flashing and trim and remain watertight.
- J. Butyl Sealant: ASTM C 1311, single-component, solvent-release butyl rubber sealant, polyisobutylene plasticized, heavy bodied for hooked-type expansion joints with limited movement.
- K. Epoxy Seam Sealer: Two-part, noncorrosive, aluminum seam-cementing compound, recommended by aluminum manufacturer for exterior nonmoving joints, including riveted joints.
- L. Bituminous Coating: Cold-applied asphalt mastic, SSPC-Paint 12, compounded for 15-mil dry film thickness per coat. Provide inert-type noncorrosive compound free of asbestos fibers, sulfur components, and other deleterious impurities.
- M. Asphalt Roofing Cement: ASTM D 4586, asbestos free, of consistency required for application.

2.4 FABRICATION, GENERAL

- A. General: Custom fabricate sheet metal flashing and trim to comply with recommendations in SMACNA's "Architectural Sheet Metal Manual" that apply to design, dimensions, metal, and other characteristics of item indicated. Shop fabricate items where practicable. Obtain field measurements for accurate fit before shop fabrication.
- B. Fabricate sheet metal flashing and trim in thickness or weight needed to comply with performance requirements, but not less than that specified for each application and metal.
- C. Fabricate sheet metal flashing and trim without excessive oil canning, buckling, and tool marks and true to line and levels indicated, with exposed edges folded back to form hems. All outside corners shall be shop welded.
 - 1. Seams for Aluminum: Fabricate nonmoving seams with flat-lock seams. Form seams and seal with epoxy seam sealer. Rivet joints for additional strength.
 - 2. Seams for Other Than Aluminum: Fabricate nonmoving seams in accessories with flat-lock seams. Tin edges to be seamed, form seams, and solder.
- D. Sealed Joints: Form nonexpansion but movable joints in metal to accommodate elastomeric sealant to comply with SMACNA recommendations.

- E. Expansion Provisions: Where lapped or bayonet-type expansion provisions in the Work cannot be used, form expansion joints of intermeshing hooked flanges, not less than 1 inch (25 mm) deep, filled with elastomeric sealant concealed within joints.
- F. Conceal fasteners and expansion provisions where possible on exposed-to-view sheet metal flashing and trim, unless otherwise indicated.
- G. Fabricate cleats and attachment devices from same material as accessory being anchored or from compatible, noncorrosive metal.
 - 1. Thickness: As recommended by SMACNA's "Architectural Sheet Metal Manual" for application but not less than thickness of metal being secured.

2.5 LOW-SLOPE ROOF SHEET METAL FABRICATIONS

- A. Roof to Wall Transition Expansion-Joint Cover: Fabricate from the following material:
 - 1. Aluminum: 0.050 inch thick.
- B. Base Flashing: Fabricate from the following material:
 - 1. Aluminum: 0.040 inch thick.
- C. Counterflashing: Fabricate from the following material:
 - 1. Aluminum: 0.0320 inch thick.
- D. Flashing Receivers: Fabricate from the following material:
 - 1. Aluminum: 0.0320 inch thick.
- E. Roof-Penetration Flashing: Fabricate from the following material:
 - 1. Aluminum-Zinc Alloy-Coated Steel: 0.0276 inch thick.
- F. Splash Pans: Fabricate from the following material:
 - 1. Aluminum: 0.040 inch thick.
- G. Roof-Drain Flashing: Fabricate from the following material:
 - 1. Stainless Steel: 0.0156 inch thick.
- H. Expansion Joint Cover (for use only where sheet metal covers not indicated on drawings): Flexible bellows with integral aluminum flange, bellow width and flange configuration sized to accommodate existing conditions as recommended by the expansion joint cover manufacturer. Expansion joint cover shall be included in roof membrane manufacturers full system warranty.
 - 1. Manufacturer:
 - a. GAF - Metalistic
 - b. Johns Manville - Expand-O-Flash

- c. Should specific manufacturer's require materials, which differ from the materials referenced above in item a. and b., to comply with requirements for inclusion in specified full system warranty, manufacturer's requirements shall prevail.
 2. Prefabricated corners, transitions, terminations and intersections as necessary to accommodate existing conditions.
 3. Modify existing curbs at end terminations as may be recommended by cover manufacturer.
- I. Provide concrete splash blocks for installation below all downspouts which discharge onto grade and onto lower low slope roof areas.

2.6 WALL SHEET METAL FABRICATIONS

- A. Through-Wall Flashing: Fabricate continuous flashings in minimum 96-inch- (2400-mm-) long, but not exceeding 12 foot (3.6 m) long, sections, under copings, at shelf angles, and where indicated. Fabricate discontinuous lintel, sill, and similar flashings to extend 6 inches (150 mm) beyond each side of wall openings. Form with 2-inch- (50-mm-) high end dams. Fabricate from the following material:
 1. Lead-Coated Copper: 17.2 oz./sq. ft.
 2. Stainless Steel: 0.0156 inch thick.

2.7 MISCELLANEOUS SHEET METAL FABRICATIONS

- A. Equipment Support Flashing: Fabricate from the owe of following material:
 1. Lead-Coated Copper: 17.2 oz./sq. ft.
 2. Stainless Steel: 0.0187 inch thick.
 3. Aluminum-Zinc Alloy-Coated Steel: 0.0276 inch thick.
- B. Overhead-Piping Safety Pans: Fabricate from the following material:

2.8 FINISHES

- A. Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.
- B. Protect mechanical and painted finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
- C. Appearance of Finished Work: Variations in appearance of abutting or adjacent pieces are acceptable if they are within one-half of the range of approved Samples. Noticeable variations in the same piece are not acceptable. Variations in appearance of other components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, to verify actual locations, dimensions and other conditions affecting performance of work.
 - 1. Verify that substrate is sound, dry, smooth, clean, sloped for drainage, and securely anchored.
 - 2. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION, GENERAL

- A. General: Anchor sheet metal flashing and trim and other components of the Work securely in place, with provisions for thermal and structural movement. Use fasteners, solder, welding rods, protective coatings, separators, sealants, and other miscellaneous items as required to complete sheet metal flashing and trim system.
 - 1. Torch cutting of sheet metal flashing and trim is not permitted.
- B. Metal Protection: Where dissimilar metals will contact each other or corrosive substrates, protect against galvanic action by painting contact surfaces with bituminous coating or by other permanent separation as recommended by fabricator or manufacturers of dissimilar metals.
 - 1. Coat side of uncoated aluminum sheet metal flashing and trim with bituminous coating where flashing and trim will contact wood, ferrous metal, or cementitious construction.
 - 2. Underlayment: Where installing metal flashing directly on cementitious or wood substrates, install a course of felt underlayment and cover with a slip sheet or install a course of polyethylene underlayment.
 - 3. Bed flanges in thick coat of asphalt roofing cement where required for waterproof performance.
- C. Install exposed sheet metal flashing and trim without excessive oil canning, buckling, and tool marks.
- D. Install sheet metal flashing and trim true to line and levels indicated. Provide uniform, neat seams with minimum exposure of solder, welds, and elastomeric sealant.
- E. Install sheet metal flashing and trim to fit substrates and to result in watertight performance. Verify shapes and dimensions of surfaces to be covered before fabricating sheet metal.
 - 1. Space cleats not more than 12 inches apart. Anchor each cleat with two fasteners. Bend tabs over fasteners.
- F. Expansion Provisions: Provide for thermal expansion of exposed flashing and trim. Space movement joints at a maximum of 10 feet with no joints allowed within 24 inches of corner or intersection. Where lapped or bayonet-type expansion provisions cannot be used or would not be sufficiently watertight, form expansion joints of intermeshing hooked flanges, not less than 1 inch deep, filled with elastomeric sealant concealed within joints.
- G. Fasteners: Use fasteners of sizes that will penetrate substrate not less than 1-1/4 inches for nails and not less than 3/4 inch for wood screws.

1. Aluminum: Use aluminum or stainless-steel fasteners.
2. Stainless Steel: Use stainless-steel fasteners.

H. Seal joints with elastomeric sealant as required for watertight construction.

1. Where sealant-filled joints are used, embed hooked flanges of joint members not less than 1 inch into sealant. Form joints to completely conceal sealant. When ambient temperature at time of installation is moderate, between 40 and 70 deg F, set joint members for 50 percent movement either way. Adjust setting proportionately for installation at higher ambient temperatures. Do not install sealant-type joints at temperatures below 40 deg F.
2. Prepare joints and apply sealants to comply with requirements in Division 7 Section "Joint Sealants."

I. Soldered Joints: Clean surfaces to be soldered, removing oils and foreign matter. Prein edges of sheets to be soldered to a width of 1-1/2 inches except where pretinned surface would show in finished Work.

1. Do not solder prepainted, metallic-coated steel and aluminum sheet.
2. Stainless-Steel Soldering: Prein edges of uncoated sheets to be soldered using solder recommended for stainless steel and phosphoric acid flux. Promptly wash off acid flux residue from metal after soldering.
3. Do not use open-flame torches for soldering. Heat surfaces to receive solder and flow solder into joints. Fill joints completely. Completely remove flux and spatter from exposed surfaces.

J. Aluminum Flashing: Rivet or weld joints in uncoated aluminum where necessary for strength.

3.3 ROOF DRAINAGE SYSTEM INSTALLATION

- A. General: Install sheet metal roof drainage items to produce complete roof drainage system according to SMACNA recommendations and as indicated. Coordinate installation of roof perimeter flashing with installation of roof drainage system.

3.4 ROOF FLASHING INSTALLATION

- A. General: Install sheet metal roof flashing and trim to comply with performance requirements, sheet metal manufacturer's written installation instructions, and SMACNA's "Architectural Sheet Metal Manual." Provide concealed fasteners where possible, set units true to line, and level as indicated. Install work with laps, joints, and seams that will be permanently watertight.
- B. Copings: Anchor to resist uplift and outward forces according to recommendations in FMG Loss Prevention Data Sheet 1-49 for specified wind zone and as indicated.
1. Interlock exterior bottom edge of coping with continuous cleats anchored to substrate at 16-inch centers.
 2. Anchor interior leg of coping with screw fasteners and washers at 18-inch centers.
- C. Pipe or Post Counterflashing: Install counterflashing umbrella with close-fitting collar with top edge flared for elastomeric sealant, extending a minimum of 4 inches over base flashing. Install stainless-steel draw band and tighten.

- D. Counterflashing: Coordinate installation of counterflashing with installation of base flashing. Insert counterflashing in reglets or receivers and fit tightly to base flashing. Extend counterflashing 4 inches over base flashing. Lap counterflashing joints a minimum of 4 inches and bed with elastomeric sealant.
1. Secure in a waterproof manner by means of one of the following:
 - a. Snap-in installation and sealant or lead wedges and sealant.
 - b. Interlocking folded seam or blind rivets and sealant.
 - c. Anchor and washer at 36-inch centers.
- E. Roof-Penetration Flashing: Coordinate installation of roof-penetration flashing with installation of roofing and other items penetrating roof. Install flashing as follows:
1. Turn lead flashing down inside vent piping, being careful not to block vent piping with flashing.
 2. Seal with elastomeric sealant and clamp flashing to pipes penetrating roof except for lead flashing on vent piping.

3.5 WALL FLASHING INSTALLATION

- A. General: Install sheet metal wall flashing to intercept and exclude penetrating moisture according to SMACNA recommendations and as indicated. Coordinate installation of wall flashing with installation of wall-opening components such as windows, doors, and louvers.

3.6 MISCELLANEOUS FLASHING INSTALLATION

- A. Overhead-Piping Safety Pans: Suspend pans from pipe and install drain line to plumbing waste or drain line.
- B. Equipment Support Flashing: Coordinate installation of equipment support flashing with installation of roofing and equipment. Weld or seal flashing with elastomeric sealant to equipment support member.

3.7 CLEANING AND PROTECTION

- A. Clean exposed metal surfaces of substances that interfere with uniform oxidation and weathering.
- B. Clean and neutralize flux materials. Clean off excess solder and sealants.
- C. Remove temporary protective coverings and strippable films as sheet metal flashing and trim are installed. On completion of installation, clean finished surfaces, including removing unused fasteners, metal filings, pop rivet stems, and pieces of flashing. Maintain in a clean condition during construction.
- D. Replace sheet metal flashing and trim that have been damaged or that have deteriorated beyond successful repair by finish touchup or similar minor repair procedures.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 07 71 13**MANUFACTURED COPINGS****PART 1 GENERAL****1.1 SECTION INCLUDES**

- A. Copings.

1.2 RELATED REQUIREMENTS

- A. Division 07 Section 07 92 00 "Joint Sealants."

1.3 REFERENCE STANDARDS

- A. Factory Mutual (FM).
- B. Single Ply Roofing Industry (SPRI) (www.spri.org):
 - 1. ANSI/SPRI/FM 4435/ES-1 – Wind Design Standard for Edge Systems Used with Low Slope Roofing Systems.

1.4 PREINSTALLATION MEETINGS

- A. Require attendance of parties directly affecting Work of this Section, including Contractor, Architect, installer, and manufacturer's representative.
- B. Review the Following:
 - 1. Materials.
 - 2. Installation.
 - 3. Adjusting.
 - 4. Cleaning.
 - 5. Protection.
 - 6. Coordination with other Work.

1.5 SUBMITTALS

- A. Comply with Division 01.

- B. Product Data: Submit manufacturer's product data, including installation instructions.
- C. Shop Drawings: Submit manufacturer's shop drawings, including plans, elevations, sections, and details, indicating dimensions, materials, components, fasteners, finish, and accessories.
- D. Samples: Submit manufacturer's sample of materials.
 - 1. Sample Length: Minimum 5-1/2 inches (140 mm).
- E. Color Samples: Submit manufacturer's color samples of materials, consisting of complete color chart representing manufacturer's full range of available colors.
 - 1. Submit metal chips of specific colors as requested by the Architect.
- F. Manufacturer's Certification: Submit manufacturer's certification that materials comply with specified requirements and are suitable for intended application.
- G. Warranty Documentation: Submit manufacturer's standard warranty.

1.6 QUALITY ASSURANCE

- A. Manufacturer's Qualifications: Manufacturer regularly engaged in the manufacturing of materials of similar type to that specified for a minimum of 10 years.
- B. Installer's Qualifications:
 - 1. Installer regularly engaged in installation of materials of similar type to that specified for a minimum of 5 years.
 - 2. Use persons trained for installation of materials of similar type to that specified following manufacturer's installation instructions.
- C. Testing: Meet specified testing requirements.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Delivery Requirements: Deliver materials to site in manufacturer's original, unopened containers and packaging.
- B. Storage and Handling Requirements:
 - 1. Store and handle materials in accordance with manufacturer's instructions.
 - 2. Keep materials in manufacturer's original, unopened containers and packaging until installation.
 - 3. Store materials in clean, dry area indoors.
 - 4. Do not store materials directly on floor or ground.
 - 5. Protect materials and finish during storage, handling, and installation to prevent damage.

1.8 WARRANTY

A. Warranty Period, Product:

1. Wind, 120 mph: 20 years.
2. Five-year workmanship warranty covering replacement or repair of products that are defective in material or workmanship.

B. Warranty Period, Finish: Limited 30-year warranty for prefinished coil-coated steel and aluminum coated with Kynar 500 standard colors covering fade, chalk, and film integrity.

PART 2 PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturer: Metal-Era, Inc., 1600 Airport Road, Waukesha, Wisconsin 53188. Phone 800-558-2162. Fax 800-373-9156. www.metalera.com. info@metalera.com or Approved Equal.
- B. Substitutions: Requests for substitutions will be considered in accordance with provisions of Section 01 16 31

2.2 MANUFACTURED COPINGS

A. Coping: Basis of design: Metal-Era "Perma-Tite" coping or approve equal.

1. Version: Tapered
2. Tested: ANSI/SPRI/FM 4435/ES-1 to design pressure of 272 psf.
3. Approvals:
 - a. FM: 150 perimeter rating and 105 corner rating for wind uplift protection.

Perma-Tite Coping	Inside Face	Wall Width	Outside Face	Material	Perimeter FM Rating	Corner FM Rating	ES-1 Rating	Wind Warranty
Perma-Tite Coping	4	10	6	.050, .063	1-240	1-150	403	120 mph
Perma-Tite Coping	4	12	6	.050, .063	1-225	1-150	393	120 mph
Perma-Tite Coping	4	16	6	.050, .063	1-150	1-105	272	120 mph
Perma-Tite Coping	4	16	12	.050, .063	1-120	1-75	202	120 mph
Perma-Tite Coping	4	24	6	.050, .063	1-105	1-60	186	120 mph
Perma-Tite Coping	4	24	12	.050, .063	1-105	1-75	191	120 mph
Perma-Tite Coping	4	32	6	.050, .063	1-90	1-60	152	120 mph
Perma-Tite Coping	4	10	6	24ga, 22ga, .040	1-210	1-135	363	120 mph
Perma-Tite Coping	4	12	6	24ga, 22ga, .040	1-150	1-90	263	120 mph
Perma-Tite Coping	4	16	6	24ga, 22ga, .040	1-135	1-90	231	120 mph
Perma-Tite Coping	4	16	12	24ga, 22ga, .040	1-75	NA	147	120 mph
Perma-Tite Coping	4	24	6	24ga, 22ga, .040	1-75	NA	131	120 mph

4. Cover Material 0.050-inch (1.27-mm) aluminum

5. Cover Formed Lengths: 12'-0" (3.65 m).
6. Concealed Splice Plates: 8 inches (203 mm) wide; with factory-applied, dual, non-curing, isocryl butyl sealant strips at each joint.
7. Anchor Clips: Galvanized steel, 12 inches (305 mm) wide.

B. Requests for substitutions will be considered in accordance with provisions of Section 01 25 00.

2.3 FINISHES

1. Finish: Hylar 5000/Kynar 500. Specify color. Consult Metal-Era, Inc. for standard and custom colors.
2. Color: TBD by Architect.

2.4 ACCESSORIES

A. Factory-Fabricated Accessories:

1. Miters:
 - a. Outside Miters: 90 degrees
 - b. Inside Miters: 90 degrees
 - c. Transition miters.
 - d. Straight transition miters.
 - e. T-miters.
 - f. Z-miters.
 - g. Step-up miters.
 - h. Peak/valley miters.
2. Endcaps:
 - a. Right endcaps.
 - b. Left endcaps.
3. Endwall Flashings, Coping Version:
 - a. Right endwall flashings.
 - b. Left endwall flashings.
4. Endwall Flashings, Splice-Plate Version:
 - a. Right endwall flashings.
 - b. Left endwall flashings.
5. Pilaster caps.
6. Accessory Type: Welded

- B. Joint Sealants: Specified in Section 07 92 00.
- C. Fasteners: Appropriate for intended substrate.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Examine areas to receive materials.
- B. Verify surfaces to support materials are clean, dry, straight, secure, and of proper dimensions.
- C. Notify Architect of conditions that would adversely affect installation.
- D. Do not begin installation until unacceptable conditions are corrected.

3.2 INSTALLATION

- A. Install materials in accordance with manufacturer's instructions at locations indicated on the Drawings.
- B. Remove protective vinyl film immediately before installation.
- C. Install materials to provide watertight termination at leading edge of roofing material.
- D. Install materials to allow for thermal movement.
- E. Joint Sealants: Apply joint sealants in accordance with manufacturer's instructions.

3.3 ADJUSTING

- A. Repair minor damages to finish in accordance with manufacturer's instructions and as approved by Architect.
- B. Remove and replace with new material, damaged components that cannot be successfully repaired, as determined by Architect.

3.4 CLEANING

- A. Clean materials promptly after installation in accordance with manufacturer's instructions.
- B. Do not use harsh cleaning materials or methods that could damage finish.

3.5 PROTECTION

- A. Protect installed materials to ensure that, except for normal weathering, materials will be without damage or deterioration at time of Substantial Completion.

END OF SECTION

SECTION 07 92 00
JOINT SEALANTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes joint sealants for the applications indicated in the Joint-Sealant Schedule at the end of Part 3, and the following applications:
 - 1. Exterior joints in the following vertical surfaces and horizontal nontraffic surfaces:
 - a. Joints between different materials listed above.
 - b. Perimeter joints between materials listed above and louvers.

1.3 PERFORMANCE REQUIREMENTS

- A. Provide elastomeric joint sealants that establish and maintain watertight and airtight continuous joint seals without staining or deteriorating joint substrates.

1.4 SUBMITTALS

- A. Product Data: For each joint-sealant product indicated.
- B. Samples for Initial Selection: Manufacturer's color charts consisting of strips of cured sealants showing the full range of colors available for each product exposed to view.
- C. Samples for Verification: For each type and color of joint sealant required, provide Samples with joint sealants in 1/2-inch-wide joints formed between two 6-inch-long strips of material matching the appearance of exposed surfaces adjacent to joint sealants.
- D. Product Certificates: For each type of joint sealant and accessory, signed by product manufacturer.
- E. Preconstruction Field Test Reports: Indicate which sealants and joint preparation methods resulted in optimum adhesion to joint substrates based on preconstruction testing specified in "Quality Assurance" Article.
- F. Compatibility and Adhesion Test Reports: From sealant manufacturer, indicating the following:
 - 1. Materials forming joint substrates and joint-sealant backings have been tested for compatibility and adhesion with joint sealants.
 - 2. Interpretation of test results and written recommendations for primers and substrate preparation needed for adhesion.

- G. Field Test Report Log: For each elastomeric sealant application.
- H. Product Test Reports: Based on comprehensive testing of product formulations performed by a qualified testing agency, indicating that sealants comply with requirements.
- I. Warranties: Special warranties specified in this Section.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications: Manufacturer's authorized Installer who is approved or licensed for installation of elastomeric sealants required for this Project.
- B. Source Limitations: Obtain each type of joint sealant through one source from a single manufacturer.
- C. Product Testing: Obtain test results for "Product Test Reports" Paragraph in "Submittals" Article from a qualified testing agency based on testing current sealant formulations within a 36-month period preceding the commencement of the Work.
 - 1. Test elastomeric joint sealants for compliance with requirements specified by reference to ASTM C 920, and where applicable, to other standard test methods.
 - 2. Test elastomeric joint sealants according to SWRI's Sealant Validation Program for compliance with requirements specified by reference to ASTM C 920 for adhesion and cohesion under cyclic movement, adhesion-in-peel, and indentation hardness.
 - 3. Test other joint sealants for compliance with requirements indicated by referencing standard specifications and test methods.
- D. Preconstruction Field-Adhesion Testing: Before installing elastomeric sealants, field test their adhesion to Project joint substrates as follows:
 - 1. Locate test joints where indicated on Project or, if not indicated, as directed by Architect.
 - 2. Conduct field tests for each application indicated below:
 - a. Each type of elastomeric sealant and joint substrate indicated.
 - b. Each type of nonelastomeric sealant and joint substrate indicated.
 - 3. Notify Architect seven days in advance of dates and times when test joints will be erected.
- E. Mockups: Build mockups incorporating sealant joints, as follows, to verify selections made under sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution:
 - 1. Joints in mockups of assemblies specified in other Sections that are indicated to receive elastomeric joint sealants, which are specified by reference to this Section.

1.6 PROJECT CONDITIONS

- A. Do not proceed with installation of joint sealants under the following conditions:
 - 1. When ambient and substrate temperature conditions are outside limits permitted by joint-sealant manufacturer.

2. When joint substrates are wet or dirty.
3. Where joint widths are less than those allowed by joint-sealant manufacturer for applications indicated.
4. Contaminants capable of interfering with adhesion have not yet been removed from joint substrates.

1.7 WARRANTY

- A. Special Installer's Warranty: Installer's standard form in which Installer agrees to repair or replace elastomeric joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.
 1. Warranty Period: Two years from date of Substantial Completion.
- B. Special Manufacturer's Warranty: Manufacturer's standard form in which elastomeric sealant manufacturer agrees to furnish elastomeric joint sealants to repair or replace those that do not comply with performance and other requirements specified in this Section within specified warranty period.

PART 2 - PRODUCTS

2.1 SEALANTS

- A. Type A Sealant:
 1. Manufacturers:
 - a. Euclid Chemical Company "Eucolastic I or II – Gun Grade".
 - b. Mameco International "Vulkem 921 or 922".
 - c. Pecora Corp. "Dynaflex"
 - d. Sika Corp. "Sikaflex 1A or 2C-NS".
 - e. Sonneborn Building Products "Sonolastic NP I or NP II".
 - f. Tremco "Dymonic or Dymeric".
 - g. Substitution under provisions of Division 1.
 2. Single or multiple component, non-sag, polyurethane-based sealant conforming to ASTM C 920, Type S or M, Grade NS, Class 25.
- B. Type B Sealant:
 1. Manufacturers:
 - a. Adco Seal "No. B-100".
 - b. Pecora Corp. "BC-158".
 - c. PTI Sealants "No. 707".
 - d. Tremco "Butyl Sealant".
 - e. Substitution under provisions of Division 1.
 2. Butyl rubber-based sealant conforming to ASTM C920, Type S, Grade NS, Class 7.5.
- C. Type C Sealant:

1. Manufacturers:
 - a. Dow Corning Corp. "No. 795".
 - b. General Electric Co. "Silpruf".
 - c. Sonneborn Building Products "Omniseal".
 - d. Tremco "Spectrum 1".
 - e. Substitution under provisions of Division 1.
2. Low-modulus silicone sealant conforming to ASTM C920, Type S, Grade NS, Class 50.

D. Type D Sealant:

1. Manufacturers:
 - a. Sika Chemical Corp. "51NS".
 - b. Substitution under provisions of Division 1.
2. Flexiblized Epoxy Sealant: ASTM D 2240 Shore A hardness, 75 minimum; ASTM D732 shear strength, minimum 800 psi at 14 days; ASTM C82 bond strength, 800 psi minimum.

G. JOINT-SEALANT BACKING

- E. General: Provide sealant backings of material and type that are nonstaining; are compatible with joint substrates, sealants, primers, and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.
- F. Elastomeric Tubing Sealant Backings: Neoprene, butyl, EPDM, or silicone tubing complying with ASTM D 1056, nonabsorbent to water and gas, and capable of remaining resilient at temperatures down to minus 26 deg F (minus 32 deg C). Provide products with low compression set and of size and shape to provide a secondary seal, to control sealant depth, and to otherwise contribute to optimum sealant performance.
- G. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint where such adhesion would result in sealant failure. Provide self-adhesive tape where applicable.

2.2 MISCELLANEOUS MATERIALS

- A. Primer: Material recommended by joint-sealant manufacturer where required for adhesion of sealant to joint substrates indicated, as determined from preconstruction joint-sealant-substrate tests and field tests.
- B. Cleaners for Nonporous Surfaces: Chemical cleaners acceptable to manufacturers of sealants and sealant backing materials, free of oily residues or other substances capable of staining or harming joint substrates and adjacent nonporous surfaces in any way, and formulated to promote optimum adhesion of sealants to joint substrates.
- C. Masking Tape: Nonstaining, nonabsorbent material compatible with joint sealants and surfaces adjacent to joints.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine joints indicated to receive joint sealants, with Installer present, for compliance with requirements for joint configuration, installation tolerances, and other conditions affecting joint-sealant performance.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Surface Cleaning of Joints: Clean out joints immediately before installing joint sealants to comply with joint-sealant manufacturer's written instructions and the following requirements:
 - 1. Remove all foreign material from joint substrates that could interfere with adhesion of joint sealant, including dust, paints (except for permanent, protective coatings tested and approved for sealant adhesion and compatibility by sealant manufacturer), old joint sealants, oil, grease, waterproofing, water repellents, water, surface dirt, and frost.
 - 2. Clean porous joint substrate surfaces by brushing, grinding, blast cleaning, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants. Remove loose particles remaining after cleaning operations above by vacuuming or blowing out joints with oil-free compressed air. Porous joint substrates include the following:
 - a. Concrete.
 - b. Masonry.
 - 3. Remove laitance and form-release agents from concrete.
 - 4. Clean nonporous surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants. Nonporous joint substrates include the following:
 - a. Metal.
 - b. Glass.
 - c. Glazed surfaces of ceramic tile.
- B. Joint Priming: Prime joint substrates, where recommended in writing by joint-sealant manufacturer, based on preconstruction joint-sealant-substrate tests or prior experience. Apply primer to comply with joint-sealant manufacturer's written instructions. Confine primers to areas of joint-sealant bond; do not allow spillage or migration onto adjoining surfaces.
- C. Masking Tape: Use masking tape where required to prevent contact of sealant with adjoining surfaces that otherwise would be permanently stained or damaged by such contact or by cleaning methods required to remove sealant smears. Remove tape immediately after tooling without disturbing joint seal.

3.3 INSTALLATION OF JOINT SEALANTS

- A. General: Comply with joint-sealant manufacturer's written installation instructions for products and applications indicated, unless more stringent requirements apply.

- B. Sealant Installation Standard: Comply with recommendations in ASTM C 1193 for use of joint sealants as applicable to materials, applications, and conditions indicated.
- C. Install sealant backings of type indicated to support sealants during application and at position required to produce cross-sectional shapes and depths of installed sealants relative to joint widths that allow optimum sealant movement capability.
 - 1. Do not leave gaps between ends of sealant backings.
 - 2. Do not stretch, twist, puncture, or tear sealant backings.
 - 3. Remove absorbent sealant backings that have become wet before sealant application and replace them with dry materials.
- D. Install bond-breaker tape behind sealants where sealant backings are not used between sealants and backs of joints.
- E. Install sealants using proven techniques that comply with the following and at the same time backings are installed:
 - 1. Place sealants so they directly contact and fully wet joint substrates.
 - 2. Completely fill recesses in each joint configuration.
 - 3. Produce uniform, cross-sectional shapes and depths relative to joint widths that allow optimum sealant movement capability.
- F. Tooling of Nonsag Sealants: Immediately after sealant application and before skinning or curing begins, tool sealants according to requirements specified below to form smooth, uniform beads of configuration indicated; to eliminate air pockets; and to ensure contact and adhesion of sealant with sides of joint.
 - 1. Remove excess sealant from surfaces adjacent to joints.
 - 2. Use tooling agents that are approved in writing by sealant manufacturer and that do not discolor sealants or adjacent surfaces.
 - 3. Provide concave joint configuration per Figure 5A in ASTM C 1193, unless otherwise indicated.
 - 4. Provide flush joint configuration where indicated per Figure 5B in ASTM C 1193.
 - 5. Provide recessed joint configuration of recess depth and at locations indicated per Figure 5C in ASTM C 1193.
 - a. Use masking tape to protect surfaces adjacent to recessed tooled joints.
- G. Installation of Preformed Tapes: Install according to manufacturer's written instructions.
- H. Installation of Preformed Silicone-Sealant System: Comply with the following requirements:
 - 1. Apply masking tape to each side of joint, outside of area to be covered by sealant system.
 - 2. Apply silicone sealant to each side of joint to produce a bead of size complying with preformed silicone-sealant system manufacturer's written instructions and covering a bonding area of not less than 3/8 inch. Hold edge of sealant bead 1/4 inch (6 mm) inside masking tape.
 - 3. Within 10 minutes of sealant application, press silicone extrusion into sealant to wet extrusion and substrate. Use a roller to apply consistent pressure and ensure uniform contact between sealant and both extrusion and substrate.

4. Complete installation of sealant system in horizontal joints before installing in vertical joints. Lap vertical joints over horizontal joints. At ends of joints, cut silicone extrusion with a razor knife.

- I. Installation of Preformed Foam Sealants: Install each length of sealant immediately after removing protective wrapping, taking care not to pull or stretch material, producing seal continuity at ends, turns, and intersections of joints. For applications at low ambient temperatures where expansion of sealant requires acceleration to produce seal, apply heat to sealant in compliance with sealant manufacturer's written instructions.

3.4 FIELD QUALITY CONTROL

- A. Field-Adhesion Testing: Field test joint-sealant adhesion to joint substrates as follows:

1. Extent of Testing: Test completed elastomeric sealant joints as follows:
 - a. Perform two (2) tests for the first 1000 feet of joint length for each type of elastomeric sealant and joint substrate.
2. Inspect joints for complete fill, for absence of voids, and for joint configuration complying with specified requirements. Record results in a field-adhesion-test log.
3. Inspect tested joints and report on the following:
 - a. Whether sealants in joints connected to pulled-out portion failed to adhere to joint substrates or tore cohesively. Include data on pull distance used to test each type of product and joint substrate. Compare these results to determine if adhesion passes sealant manufacturer's field-adhesion hand-pull test criteria.
 - b. Whether sealants filled joint cavities and are free of voids.
 - c. Whether sealant dimensions and configurations comply with specified requirements.
4. Record test results in a field-adhesion-test log. Include dates when sealants were installed, names of persons who installed sealants, test dates, test locations, whether joints were primed, adhesion results and percent elongations, sealant fill, sealant configuration, and sealant dimensions.
5. Repair sealants pulled from test area by applying new sealants following same procedures used originally to seal joints. Ensure that original sealant surfaces are clean and that new sealant contacts original sealant.

- B. Evaluation of Field Test Results: Sealants not evidencing adhesive failure from testing or noncompliance with other indicated requirements will be considered satisfactory. Remove sealants that fail to adhere to joint substrates during testing or to comply with other requirements. Retest failed applications until test results prove sealants comply with indicated requirements.

3.5 CLEANING

- A. Clean off excess sealant or sealant smears adjacent to joints as the Work progresses by methods and with cleaning materials approved in writing by manufacturers of joint sealants and of products in which joints occur.

3.6 PROTECTION

- A. Protect joint sealants during and after curing period from contact with contaminating substances and from damage resulting from construction operations or other causes so sealants are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out and remove damaged or deteriorated joint sealants immediately so installations with repaired areas are indistinguishable from original work.

3.7 SCHEDULE

A. Type A

1. Exterior and interior vertical joints in concrete, except as otherwise specified.
2. Exterior joints in masonry.
3. Around metal door, window and louver vents frames penetrating exterior concrete and masonry.
4. Interior vertical joints between steel column and CMU wall.
5. Do not use single-component sealants when excessive movement is expected within the curing time of the sealant.

B. Type B

1. Interior wall penetrations for pipe and conduit that will be concealed by escutcheons and other trim and plate, and for lap joints in sheet metal.

C. Type C

1. Exterior and interior joints in contact with organically-coated aluminum and for non-resident-accessible joints between concrete masonry.

D. Type D

1. Construction joints, window and hollow metal frame perimeters, furnishings and equipment at wall, ceiling, and floor surfaces adjacent to concrete or masonry.

END OF SECTION

SECTION 08 63 00**METAL FRAMED SKYLIGHTS****PART 1 - GENERAL****1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:

1. Metal Framed Structural Skylights.

- B. Related Sections may include, but are not limited to the following:

1. Division 07 Section 07 92 00 "Joint Sealants" for sealants installed at metal-framed skylight perimeters.

1.3 PERFORMANCE REQUIREMENTS

- A. General: Provide metal-framed skylights capable of withstanding loads and thermal and structural movements indicated without failure. Failure includes the following:

1. Deflection exceeding specified limits.
2. Thermal stresses transferred to the building structure.
3. Skylight framing members transferring stresses, including those caused by thermal and structural movement, to glazing.
4. Weakening of fasteners, attachments, and other components.

- B. Deflection Limits: As follows:

1. Deflection Normal to Glazing Plane: Limited to [edge of glass in a direction perpendicular to glass plane not exceeding $L/175$ of the glass edge length for each individual glazing lite] [$1/175$ of clear span for spans up to 13 feet 6 inches (4.1 m) and to $1/240$ of clear span plus $1/4$ inch (6.35 mm) for spans more than 13 feet 6 inches (4.1 m)] <Insert deflection limit> or an amount that restricts edge deflection of individual glazing lites to $3/4$ inch (19.1 mm), whichever is less.

- C. Structural Loads: Provide metal-framed skylights, including anchorage, capable of withstanding the effects of the following design loads when supporting full dead loads:

1. Roof Loads

- a. Concentrated Load: 300 lbs applied to framing members at location that produces the most severe stress or deflection.
- b. Snow Loads: _____ 15PSF
- c. Roof Loads: _____ 40PSF Total Load (25LL, 15DL)
- d. Wind Loads: _____ V=80 mph with 3 sec gusts to 100 mph

2. Seismic Loads: _____ Site Class D

- D. Structural Performance: Provide metal-framed skylights, including anchorage, capable of withstanding pressures indicated without material and deflection failures and permanent deformation of structural members exceeding 0.2 percent of span when tested according to ASTM E 330.
- E. Air Infiltration: Provide metal-framed skylights with maximum air leakage of 0.06 cfm/sq. ft. (0.03 L/s per sq. m) of surface when tested according to ASTM E 283 at a minimum static-air-pressure differential of 6.24lb/sq. ft. (300 Pa).
- F. Water Penetration: Provide metal-framed skylights that do not evidence water penetration when tested according to ASTM E 331 at a minimum differential static pressure of 20 percent of positive design wind pressure, but not less than 15 lb/sq. ft. (718 Pa).
- G. Condensation Resistance: Provide aluminum-framed systems that when tested with fixed glazing, have a frame condensation-resistance factor (CR) of not less than 46 when tested according to NFRC 500 when clear over clear insulated glass is used.
- H. Thermal Performance: Provide metal-framed skylights that meet current State Energy Code requirements (2015 IECC), including:
- I. Thermal Movement: Provide metal-framed skylights that allow for thermal movements resulting from the following maximum change (range) in ambient temperatures by preventing buckling, sealant failure, and other detrimental effects.
- 1. Temperature Change (Range): 100 degrees F.

1.4 SUBMITTALS

- A. Product Data: Include construction details, material descriptions, dimensions and profiles of components, and finishes for metal-framed skylights.
- B. Shop Drawings: For metal-framed skylights. Include plans, elevations, sections, details, and attachments to other work as required.

- C. Samples for Initial Selection: Manufacturer's color charts consisting of sections of units showing the full range of colors available for factory-finished aluminum.
- D. Samples for Verification: Provide color sample of selected finish on 2"x3" aluminum sheet.
- E. Installer Certificates: If required, signed by manufacturer certifying that installers comply with requirements.
- F. Product Test Reports: From a qualified testing agency indicating skylights comply with requirements, based on comprehensive testing of current products.

1.6 QUALITY ASSURANCE

- A. Installer Qualifications: An experienced installer who has specialized in installing metal-framed skylights similar to those indicated for this Project and who is acceptable to manufacturer.
- B. Professional Engineer Qualifications: A professional engineer who is experienced in providing engineering services of the kind indicated. Engineering services are defined as those performed for installations of skylights that are similar to those indicated for this Project in material, design, and extent.
- C. Testing Agency Qualifications: An independent testing agency with the experience and capability to conduct the testing indicated, as documented according to ASTM E 548.

1.7 PROJECT CONDITIONS

- A. Field Measurements: Where metal-framed skylights are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication and indicate measurements on Shop Drawings. Coordinate fabrication schedule with construction progress to avoid delaying the Work.
 - 1. Established Dimensions: Where field measurements cannot be made without delaying the Work, establish dimensions and proceed with fabricating skylights without field measurements. Coordinate construction to ensure that actual dimensions correspond to established dimensions.

1.8 WARRANTY

- A. Warranty: Written warranty, executed by manufacturer agreeing to repair or replace components of metal-framed skylights that fail in materials or workmanship within specified warranty period. Failures include, but are not limited to, the following:
 - 1. Structural failures.
 - 2. Failure of systems to meet performance requirements.

3. Deterioration of metals, metal finishes, and other materials beyond normal weathering.
 4. Water leakage; defined as uncontrolled water appearing on normally exposed interior surfaces of skylights from sources other than condensation, resulting from defects in skylight materials or workmanship. (Water controlled by flashing and gutters and drained back to the exterior and that cannot damage adjacent materials or finishes is not water leakage). Water leakage resulting from improper installations not part of this warranty.
- B. System Warranty Period: 5 years from date of shipment from the manufacturer.
- C. Finish Warranty: Provide written warranty signed by manufacturer agreeing to repair or replace work with finish defects. "Defects" is defined as peeling, chipping, chalking, fading, abnormal aging or deterioration, and failure to perform as required.
1. Warranty Period for Anodized Finish: 5 year from date of shipment from the manufacturer.
 2. Warranty Period for 2604 Powder Finish: 10 years from date of shipment from the manufacturer.
 3. Warranty Period for 2605 Liquid Finish: 10 years from date of shipment from the manufacturer. (20 years available if specified).
 4. Warranty Period for 2605 Powder Finish: 20 years from the date of shipment from the manufacturer.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, provide Extended Pyramid system by Wasco Part of the VELUX Group, Wells, ME (800-388-0293), **Or Approved Equal.**
- B. Substitutions: Manufacturers shall not be considered without prior approval in writing no later than ten (10) calendar days prior to bid. Substitute manufacturers must have been in the custom skylight business for not less than a period of 15 years and must submit to the Architect the following:
1. List of similar projects successfully completed within the last five years.
 2. Proof of financial capability.
 3. Complete details of proposed skylight.
 4. Complete specifications for Architect's review.

2.2 FRAMING MATERIALS

- A. Framing Members: Extruded aluminum alloy 6063-T5 or T6, ASTM B 221 with minimum effective thickness of 0.109 inches.
- B. Exterior Pressure Caps: Extruded aluminum alloy 6063-T5 or T6, ASTM B 221 with minimum effective thickness of 0.090 inches.
- C. Concealed Flashing: Manufacturer's standard corrosion-resistant, non-staining, non-bleeding flashing; compatible with adjacent materials.
- D. Exposed Flashing and Closures: Aluminum sheet alloy and temper of 1100-H14, thickness as require for proper performance.
 - 1. Minimum Thickness: 0.032 inch Apron Flashing.
 - 2. Minimum Thickness: 0.062 inch Closures.
- E. Fasteners and Accessories: Manufacturer's standard corrosion-resistant, non-staining, non-bleeding fasteners and accessories; compatible with adjacent materials.
 - 1. Aluminum Retaining Cap Fasteners and Framing Members Fasteners: ASTM A 193/A 193M, Series 300 stainless-steel screws; type as recommended by manufacturer.
 - 2. Connections to Supporting Structure: Series 300 Stainless Steel or ASTM A 307, hot dipped galvanized steel fasteners by installer.
- F. Framing-System Sealants: Single-component, non-sag, high performance, non-priming, gun-grade elastomeric polyurethane sealant furnished by skylight manufacturer.
 - 1. Sealant complies with ASTM C920, Type S, Grade NS, Class 25, Use T, NT, M, A, G, and O. Canadian Specification CAN/CGSB-19.13-M87, Classification MCG-2-25-A-N.
 - 2. Sealant conforms to USDA approval standards.
- G. Bituminous Paint: Cold-applied asphalt mastic paint complying with SSPC-Paint 12, except containing no asbestos, and formulated for 30-mil thickness per coat.

2.3 GLAZING MATERIALS

- A. Sloped Glass: Refer to specification Section 08 80 00 Glazing.
 - 1. Glass must meet the requirements of the AAMA Glass Design for Sloped Glazing for the project.

- B. Glazing Gaskets: Manufacturer's proprietary pressure-glazing gaskets of elastomer type and hardness selected by the skylight manufacturer to comply with requirements. Glazing gaskets to be extruded thermoplastic elastomer by the skylight manufacturer.
- C. Spacers, Edge Blocks, and Setting Blocks: Manufacturer's standard permanent non-migrating type of elastomer type and hardness selected to comply with requirements. Spacers, Edge Blocks, and Setting Blocks to be extruded thermoplastic elastomer by the skylight manufacturer.
- D. Glazing Weatherseal Sealant: Neutral-curing silicone sealant recommended by skylight and sealant manufacturers for this use and furnished by skylight manufacturer.
 - 1. Sealant is capable of withstanding 50 percent movement in both extension and compression (total of 100 percent movement) when tested for adhesion and cohesion under maximum cyclic movement according to ASTM C 719.
 - 2. Sealant complies with ASTM C 920 for Type S, Grade NS, Class 25, Uses NT, G, A, and, as applicable to substrates including other sealants with which it comes in contact, O.
 - 3. Color: Black.
- E. Flashing Sealant: Single-component, non-sag, high performance, non-priming, gun-grade elastomeric polyurethane sealant furnished by skylight manufacturer.
 - 1. Sealant complies with ASTM C920, Type S, Grade NS, Class 25, Use T, NT, M, A, G, and O. Canadian Specification CAN/CGSB-19.13-M87, Classification MCG-2-25-A-N.
 - 2. Sealant conforms to USDA approval standards.

2.4 FABRICATION

A. Framing Components: As follows:

- 1. Factory fit and assemble components, where practical.
- 2. Fabricate components that, when assembled, will have accurately fitted joints with ends coped or mitered to produce hairline joints free of burrs and distortion.
- 3. Fabricate components to drain water passing joints and to drain condensation and moisture occurring or migrating within skylight system to the exterior.
- 4. Fabricate components to accommodate expansion, contraction, and field adjustment, and to provide for minimum clearance and shimming at skylight perimeter.
- 5. Fabricate components to ensure that glazing is thermally and physically isolated from framing members.
- 6. Form shapes with sharp profiles, straight and free of defects or deformations, before finishing.

7. Fit and assemble components to greatest extent practicable before finishing.
 8. Reinforce members as required to retain fastener threads.
 9. Attach retainer bars with gasketed stainless steel fasteners spaced at a maximum of 12 inches on center.
 10. Weld components before finishing and in concealed locations to greatest extent practicable to minimize distortion.
 11. Before shipping, shop assemble, mark, and disassemble components that cannot be permanently shop assembled.
- B. Provide continuous aluminum frame with weatherproof splice joints and locked and sealed or fully welded corners. Locate weep holes in the frame at each rafter connection to drain condensation.
- C. Prepare framing to receive anchor and connection devices and fasteners.
- D. Field Glazing: Locate and size extruded elastomeric setting blocks and spacers in accordance with the glazing manufacturer's recommendations. At no point shall the glazing come in contact with the skylight frame or fasteners.

2.5 ALUMINUM FINISHES

- A. General: Comply with NAAMM "Metal Finishes Manual" recommendations for application and designations of finishes.
- B. Finish designations prefixed by AA conform to the system for designations of aluminum finishes established by the Aluminum Association.
1. Mill Finish: Manufacturer's standard mill finish.
 2. 2605 Powder: Powder Coat High-Performance Architectural Coating complying with AAMA 2605. Color: To be selected by owner from full range of standard colors
 3. 2604 Powder: Powder Coat High-Performance Architectural Coating; complying with AAMA 2604. Color: To be selected by owner from full range of standard colors
 4. 2605 Liquid: Kynar Fluoropolymer Two-Coat System (70% PVDF) complying with AAMA 2605. Color: To be selected by owner from full range of standard colors (3coat and 4 coat available)
 5. Anodized: [Clear-Anodized Finish, Class I: AA-C22A41 complying with AAMA 611.] [Color – Anodized Finish Class I: AA-C22A42/A44 complying with AAMA 611. Color: to be selected by owner from full range of standard colors

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting skylight performance.

1. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Metal Protection: As follows:

1. Where aluminum will contact dissimilar metals, protect against galvanic action by painting contact surfaces with primer or by applying sealant or tape recommended by manufacturer for this purpose.
2. Where aluminum will contact concrete or masonry, protect against corrosion by painting contact surfaces with bituminous paint.
3. Where aluminum will contact pressure-treated wood, separate dissimilar materials by methods recommended by manufacturer.

3.3 INSTALLATION

A. General: Comply with manufacturer's written instructions for protecting, handling, and installing skylight components.

1. Fit frame joints to produce hairline joints free of burrs and distortion.
2. Rigidly secure non-movement joints.
3. Accommodate thermal and mechanical movements.
4. Install framing components to drain water passing joints and to drain condensation and moisture occurring or migrating within skylight system to the exterior.
5. Coordinate installation of flashings at skylight perimeters to maintain continuity of water barriers.
6. Set continuous curbs and flashings in a full sealant bed, unless otherwise indicated. Comply with requirements in Division 7 Section "Joint Sealants."

B. Erection Tolerances: Install skylight components true in plane, accurately aligned, and without warp or rack. Adjust framing to comply with the following tolerances:

1. Variation from Plane: Limit variation from plane or location shown to 1/8 inch in 10 feet; 1/4 inch over total length.
2. Alignment: Where surfaces abut in line and at corners and where surfaces are separated by less than 3 inches, limit offset from true alignment to less than 1/32 inch; otherwise, limit offset from true alignment to 1/8 inch.

- C. Field Glazing: Locate and size extruded elastomeric setting blocks and spacers in accordance with the glazing manufacturer's recommendations. At no point shall the glazing come in contact with the skylight frame or fasteners
- D. Install secondary-sealant weatherseal according to sealant manufacturer's written instructions to provide weatherproof joints. Install joint fillers behind sealant as recommended by sealant manufacturer.

3.4 CLEANING

- A. Clean skylights inside and outside, immediately after installation and after sealants have cured, according to manufacturer's written recommendations.
 - 1. Remove temporary protective coverings and strippable coatings from pre-finished metal surfaces. Remove labels and markings from all components.
- B. Remove excess sealant according to sealant manufacturer's written recommendations.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 41 15**LIGHTNING PROTECTION SYSTEMS FOR REROOFING****PART 1 - GENERAL****I. GENERAL:**

A. The Contractor shall remove the existing lightning protection system that is affected by the roof system to be removed and replaced. The Contractor shall then provide and install a complete Lightning Protection System for the building(s) in this project after reroofing is completed. It is expected that components that can be removed and reinstalled safely will be reutilized. Items that cannot be safely reinstalled shall be replaced with new to achieve a safe certified lightning protection system.

B. Compliance Requirements

1. System Design: NFPA 780 Standard, LPI 175, UL96A latest edition.
2. Component Design: UL 96 Standard
3. Certification: LPI Certified Master Installer

C. Submittals – Submit catalog data showing complete description of material components.

D. The contractor shall furnish an LPI Reconditioned Master Certificate or a Limited Scope report upon completion of installation.

II. TECHNICAL COMPLIANCE:

A. Manufacturer – A Manufacturer member in good standing with the Lightning Protection Institute (LPI) listed on their website: <http://www.lightning.org>

B. Installation Contractor – The installation shall be made by a contractor that specializes in the installation of Lightning Protection Systems. The installer shall be a Dealer Contractor member in good standing with the Lightning Protection Institute (LPI) listed on their website: <http://www.lightning.org>

C. Materials listed and labeled in accordance with Underwriters' Laboratories, Inc. (UL) Standard 96, current edition.

III. SYSTEM DESIGN:

A. System to consist of air terminals, interconnecting conductors, down conductors, grounding, bonding, and surge protection complete per current NFPA 780 requirements to appear as a part of the building.

B. Class I materials shall be used for systems on structures not exceeding 75 feet in height and Class II materials shall be used for systems on structures exceeding 75 feet above grade.

C. Copper shall be of the grade ordinarily required for commercial electrical work, generally designated as being 95 percent conductive when annealed. Aluminum conductors shall be of electrical grade aluminum.

D. Lightning protection materials shall be coordinated with building construction materials to assure compatibility. Aluminum lightning protection materials shall not be embedded in concrete or masonry, installed on or below copper surfaces, or used where contact with the earth is possible terminating 18" above grade level minimum. Copper lightning protection materials shall not be installed on aluminum surfaces. Copper system components within 2 feet of chimney exhausts shall be tin coated to protect against deterioration.

E. Strike termination devices shall be provided to place the entire structure under a zone of protection as defined by the Standards. Air terminals shall project a minimum of 10 inches above protected areas or objects. Air terminals shall be located within 2 feet of exposed corners and roof edges.

F. Metallic bodies having a thickness 3/16" or greater may serve as strike termination devices without the addition of air terminals. These bodies shall be made a part of the lightning protection system by connection(s) according to the Standards using main size conductors and bonding fittings with 3 square inches of surface contact area.

G. Cable conductors shall provide a two-way path from strike termination devices horizontally and downward to connections with the ground system. Cable conductors shall be free of excessive splices and sharp bends. No bend of a conductor shall form a final included angle of less than 90 degrees nor have a radius of bend less than 8 inches. Structural elements and design features shall be used whenever possible to minimize the visual impact of exposed conductors.

H. Grounding system and down conductor materials determined to meet the overall design requirements shall remain in place during reroofing and be interconnected with new lightning protection system elements on the roof areas. In the case of structural steel frame construction, roof conductors shall be connected to the structural steel frame at intervals averaging not more than 100 feet around the protected perimeter of the structure.

I. When additional cable down conductors are required, cable down conductors may be concealed within the building construction or enclosed within PVC conduit from roof to grade level. Where exposed down conductors are subject to environmental hazards at grade level, guards shall be used to protect the conductor to a point 6 feet above grade.

J. Ground terminations suitable for the soil conditions shall be provided for each new downlead conductor required to meet design requirements.

K. Exposed cable conductors shall be secured to the structure at intervals not exceeding 3 feet – 0 inches. Fasteners, nails, screws, or bolts shall be of suitable configuration for the intended application and of the same material as the conductor or of electrolytically compatible materials. Galvanized or plated steels are not acceptable.

L. Connectors and splicers shall be of suitable configuration and type for the intended application and of the same material as the conductors or of electrolytically compatible materials.

M. Common interconnection of all grounded systems within the building using main size conductors at grade level shall be verified. Grounded metal bodies located within the calculated bonding distance as determined by the formulas of the Standards shall be bonded to the system using properly sized bonding conductors.

N. The owner shall verify the location and condition of surge protection for each service entrance of power, communication, and antenna systems. Surge protection shall be provided at every system entrance to the structure to prevent massive lightning over voltages from entering the structure. Additional surge protection for internal electronic equipment may be determined through cost-benefit analysis by a trained engineer. Proper protection for communication systems entrances shall be coordinated with the communications system supplier.

IV. INSTALLATION:

A. The installing contractor company shall be listed with the Lightning Protection Institute. The installation contractor shall have personnel on staff Certified by the LPI as a Master Installer or Master Installer – Designer of lightning protection systems. LPI qualified staff shall provide supervision of the installation to the Standards.

B. The installation shall comply with the requirements of NFPA 780, LPI 175, and UL 96A.

C. The installation of the lightning protection system components shall be done in a neat and workmanlike manner.

D. Roof penetrations required for down conductors or for connections to structural steel framework shall be made using through-roof assemblies with solid rods and appropriate roof flashings. The roofing contractor shall furnish the methods and materials required at roofing penetrations of the lightning protection components and any additional roofing materials or preparations required by the roofing manufacturer for lightning conductor runs to assure compatibility with the warranty for the roof.

(Note: The roofing contractor will be responsible for sealing and flashing all lightning protection roof penetrations as per the roof manufacturer's recommendations. The lightning protection roof penetrations and/or method of conductor attachment should be addressed in the roofing section of the specifications.)

V. FINAL ACCEPTANCE/CERTIFICATION:

A. At completion of the project, the Master Installer representing the Dealer Contractor member of the Lightning Protection Institute (LPI) shall submit for third party inspection and certification through the LPI inspection program.

B. When there is an existing LPI-IP Master Certificate or UL Master Label, the project will receive a Reconditioned Master Certificate. If there is no documentation for the concealed work and grounding, the roof system will receive a Limited Scope Certification.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK